

# EMC Test Report

regarding

**USA: CFR Title 47, Part 15.247** (Emissions)

**Canada: IC RSS-247v2/GENv5** (Emissions)

for



## BRFM

**Category: DTS Transceiver**

Judgments:

**Aligns with FCC Part 15.247, ISSED RSS-247v2**

Testing Completed: July 14, 2023



Prepared for:

## Vitesco Technologies GmbH

Siemensstrasse 12, Regensburg 93055 Germany

Phone: +49-9412031-3244, Fax: -

Contact: Stefan Lehmann, stefan.lehmann@vitesco.com

Data Rec./Rev. by:

*John Nantz*  
John Nantz

Rpt. Auth. by:

*Dr. Joseph Brunett*  
Dr. Joseph Brunett, EMC-002790-NE

Rpt. Prep./Rev. by:

*Dr. Joseph Brunett*  
Dr. Joseph Brunett, EMC-002790-NE

Date of Issue:

July 18, 2023

Revision History

| Rev. No. | Date           | Details            | Revised By |
|----------|----------------|--------------------|------------|
| r0       | July 18, 2023  | Initial Release.   | J. Brunett |
| r1       | August 4, 2023 | Channel typo corr. | J. Brunett |

Contents

|                                                                   |    |
|-------------------------------------------------------------------|----|
| Revision History                                                  | 2  |
| Table of Contents                                                 | 2  |
| 1 Test Report Scope and Limitations                               | 4  |
| 1.1 Laboratory Authorization . . . . .                            | 4  |
| 1.2 Report Retention . . . . .                                    | 4  |
| 1.3 Subcontracted Testing . . . . .                               | 4  |
| 1.4 Test Data . . . . .                                           | 4  |
| 1.5 Limitation of Results . . . . .                               | 4  |
| 1.6 Copyright . . . . .                                           | 4  |
| 1.7 Endorsements . . . . .                                        | 4  |
| 1.8 Test Location . . . . .                                       | 5  |
| 1.9 Traceability and Equipment Used . . . . .                     | 5  |
| 2 Test Specifications and Procedures                              | 6  |
| 2.1 Test Specification and General Procedures . . . . .           | 6  |
| 3 Configuration and Identification of the Equipment Under Test    | 7  |
| 3.1 Description and Declarations . . . . .                        | 7  |
| 3.1.1 EUT Configuration . . . . .                                 | 8  |
| 3.1.2 Modes of Operation . . . . .                                | 8  |
| 3.1.3 Variants . . . . .                                          | 8  |
| 3.1.4 Test Samples . . . . .                                      | 8  |
| 3.1.5 Functional Exerciser . . . . .                              | 8  |
| 3.1.6 Modifications Made . . . . .                                | 8  |
| 3.1.7 Production Intent . . . . .                                 | 8  |
| 3.1.8 Declared Exemptions and Additional Product Notes . . . . .  | 8  |
| 4 Emissions                                                       | 9  |
| 4.1 General Test Procedures . . . . .                             | 9  |
| 4.1.1 Radiated Test Setup and Procedures . . . . .                | 9  |
| 4.1.2 Conducted Emissions Test Setup and Procedures . . . . .     | 11 |
| 4.1.3 Power Supply Variation . . . . .                            | 11 |
| 4.2 Intentional Emissions . . . . .                               | 12 |
| 4.2.1 Duty and Transmission Cycle, Pulsed Operation . . . . .     | 12 |
| 4.2.2 Fundamental Emission Bandwidth . . . . .                    | 13 |
| 4.2.3 Effective Isotropic Radiated Power . . . . .                | 15 |
| 4.2.4 Power Spectral Density . . . . .                            | 16 |
| 4.3 Unintentional Emissions . . . . .                             | 18 |
| 4.3.1 Restricted Band Transmit Chain Spurious Emissions . . . . . | 18 |
| 4.3.2 OOB Transmit Chain Spurious Emissions . . . . .             | 19 |
| 5 Measurement Uncertainty and Accreditation Documents             | 20 |

List of Tables

|   |                                                       |    |
|---|-------------------------------------------------------|----|
| 1 | Test Site List. . . . .                               | 5  |
| 2 | Equipment List. . . . .                               | 5  |
| 3 | EUT Declarations. . . . .                             | 7  |
| 4 | Pulsed Emission Characteristics (Duty Cycle). . . . . | 12 |
| 5 | Intentional Emission Bandwidth. . . . .               | 13 |
| 6 | Radiated Power Results. . . . .                       | 15 |
| 6 | Radiated Power Results. . . . .                       | 15 |
| 7 | Power Spectral Density Results. . . . .               | 16 |
| 8 | Transmit Chain Spurious Emissions. . . . .            | 18 |
| 9 | Measurement Uncertainty. . . . .                      | 20 |

List of Figures

|    |                                                               |    |
|----|---------------------------------------------------------------|----|
| 1  | Photos of EUT. . . . .                                        | 7  |
| 2  | EUT Test Configuration Diagram. . . . .                       | 8  |
| 3  | Radiated Emissions Diagram of the EUT. . . . .                | 9  |
| 4  | Radiated Emissions Test Setup Photograph(s). . . . .          | 10 |
| 5  | Conducted RF Test Setup Photograph(s). . . . .                | 11 |
| 6  | Example Pulsed Emission Characteristics (Duty Cycle). . . . . | 12 |
| 7  | Example Intentional Emission Bandwidth Plots. . . . .         | 14 |
| 8  | Power Spectral Density Plots. . . . .                         | 17 |
| 9  | Worst Case Transmitter OOB Emissions Measured. . . . .        | 19 |
| 10 | Accreditation Documents . . . . .                             | 20 |

## **1 Test Report Scope and Limitations**

### **1.1 Laboratory Authorization**

Test Facility description and attenuation characteristics are on file with the FCC Laboratory, Columbia, Maryland (FCC Reg. No: US5348 and US5356) and with ISED Canada, Ottawa, ON (File Ref. No: 3161A and 24249). Amber Helm Development L.C. holds accreditation under NVLAP Lab Code 200129-0.

### **1.2 Report Retention**

For equipment verified to comply with the regulations herein, the manufacturer is obliged to retain this report with the product records for the life of the product, and no less than ten years. A copy of this Report will remain on file with this laboratory until August 2033.

### **1.3 Subcontracted Testing**

This report does not contain data produced under subcontract.

### **1.4 Test Data**

This test report contains data included within the laboratory's scope of accreditation. Any data in this report that is not covered under the laboratory's scope is clearly identified.

### **1.5 Limitation of Results**

The test results contained in this report relate only to the item(s) tested. Any electrical or mechanical modification made to the test item subsequent to the test date shall invalidate the data presented in this report. Any electrical or mechanical modification made to the test item subsequent to this test date shall require reevaluation.

### **1.6 Copyright**

This report shall not be reproduced, except in full, without the written approval of Amber Helm Development L.C.

### **1.7 Endorsements**

This report shall not be used to claim product endorsement by any accrediting, regulatory, or governmental agency.

## 1.8 Test Location

The EUT was fully tested by **Amber Helm Development L.C.**, headquartered at 92723 Michigan Hwy-152, Sister Lakes, Michigan 49047 USA. Table 1 lists all sites employed herein. Specific test sites utilized are also listed in the test results sections of this report where needed.

Table 1: Test Site List.

| Description    | Location                                            | Quality Num. |
|----------------|-----------------------------------------------------|--------------|
| OATS (3 meter) | 3615 E Grand River Rd., Williamston, Michigan 48895 | OATSC        |

## 1.9 Traceability and Equipment Used

Pertinent test equipment used for measurements at this facility is listed in Table 2. The quality system employed at Amber Helm Development L.C. has been established to ensure all equipment has a clearly identifiable classification, calibration expiry date, and that all calibrations are traceable to the SI through NIST, other recognized national laboratories, accepted fundamental or natural physical constants, ratio type of calibration, or by comparison to consensus standards.

Table 2: Equipment List.

| Description          | Manufacturer/Model    | SN        | Quality Num. | Cal/Ver By / Date Due |
|----------------------|-----------------------|-----------|--------------|-----------------------|
| Spectrum Analyzer    | R & S / FSV30         | 101660    | RSFSV30001   | RS / Apr-2024         |
| EMI Receiver         | R & S / ESW26         | 101313    | RSESW2601    | RS / October-2023     |
| Quad Ridge Horn      | Singer / A6100        | C35200    | HQR1TO18S01  | Keysight / Aug-2024   |
| Biconical            | EMCO / 93110B         | 9802-3039 | BICEMCO01    | Keysight / Aug-2023   |
| Log Periodic Antenna | EMCO / 3146           | 9305-3614 | LOGEMCO01    | Keysight / Aug-2023   |
| K-Band Horn          | JEF / NRL Std.        | 001       | HRNK01       | AHD / Jul-2024        |
| BNC-BNC Coax         | WRTL / RG58/U         | 001       | CAB001-BLACK | AHD / Sept-2023       |
| 3.5-3.5MM Coax       | PhaseFlex / PhaseFlex | 001       | CAB015-PURP  | AHD / Sept-2023       |

## 2 Test Specifications and Procedures

### 2.1 Test Specification and General Procedures

The goal of Vitesco Technologies GmbH is to demonstrate that the Equipment Under Test (EUT) complies with the Rules and/or Directives below. Detailed in this report are the results of testing the Vitesco Technologies GmbH BRFM for compliance to:

| Country/Region | Rules or Directive          | Referenced Section(s)     |
|----------------|-----------------------------|---------------------------|
| United States  | Code of Federal Regulations | CFR Title 47, Part 15.247 |
| Canada         | ISED Canada                 | IC RSS-247v2/GENv5        |

It has been determined that the equipment under test is subject to the rules and directives above at the date of this testing. In conjunction with these rules and directives, the following specifications and procedures are followed herein to demonstrate compliance (in whole or in part) with these regulations.

|                       |                                                                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ANSI C63.4:2014       | "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"                                                      |
| ANSI C63.10:2013      | "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"                                                                                            |
| KDB 558074 D01 v05r02 | "GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES " |
| KDB 662911 D01v02r01  | "Emissions Testing of Transmitters with Multiple Outputs in the Same Band"                                                                                                                  |
| KDB 662911 D02 v01    | "MIMO with Cross-Polarized Antenna"                                                                                                                                                         |
| TP0102RA              | "AHD Internal Document TP0102 - Radiated Emissions Test Procedure"                                                                                                                          |

### 3 Configuration and Identification of the Equipment Under Test

#### 3.1 Description and Declarations

The EUT is a proprietary 802.15.4 transceiver used as a network manager to monitor the state of multiple battery cells. The EUT is approximately 16 x 7 x 2 cm in dimension, and is depicted in Figure 1. It is powered by 5.5 VDC vehicular power source. This product is used as a wireless battery health network manager in a motor vehicle. Table 3 outlines provider declared EUT specifications.



Figure 1: Photos of EUT.

Table 3: EUT Declarations.

|                             |                 |
|-----------------------------|-----------------|
| <b>General Declarations</b> |                 |
| <b>Equipment Type:</b>      | DTS Transceiver |
| <b>Country of Origin:</b>   | USA             |
| <b>Nominal Supply:</b>      | 5.5 VDC         |
| <b>Oper. Temp Range:</b>    | Not Declared    |
| <b>Frequency Range:</b>     | 2405 - 2480 MHz |
| <b>Antenna Dimension:</b>   | 2.5 x 0.75 cm   |
| <b>Antenna Type:</b>        | Chip Antenna    |
| <b>Antenna Gain:</b>        | 2.6 dBi max.    |
| <b>Number of Channels:</b>  | 16              |
| <b>Channel Spacing:</b>     | 5 MHz           |
| <b>Alignment Range:</b>     | Not Declared    |
| <b>Type of Modulation:</b>  | GFSK            |
| <b>United States</b>        |                 |
| <b>FCC ID Number:</b>       | 2A6TC-BRFM      |
| <b>Classification:</b>      | DTS             |
| <b>Canada</b>               |                 |
| <b>IC Number:</b>           | 28616-BRFM      |
| <b>Classification:</b>      | Other           |

### 3.1.1 EUT Configuration

The EUT is configured for testing as depicted in Figure 2.



Figure 2: EUT Test Configuration Diagram.

### 3.1.2 Modes of Operation

The EUT can employ both 1Mbps and 2Mbps data rates over 16 operating channels. The manufacturer provided PC software for radio configuration and for monitoring the device performance during testing.

### 3.1.3 Variants

There is only a single variant of the EUT.

### 3.1.4 Test Samples

Three samples of the EUT were provided for testing. Two programmed with a radio test firmware configurable by laptop and UART for radio testing (SN: 1936, 1938) and one normal operating sample (SN:1930), all of which were tested herein.

### 3.1.5 Functional Exerciser

The manufacturer provided a laptop with a special GUI to monitor each port during testing (green light good, red light bad)

### 3.1.6 Modifications Made

Pretesting indicated the radio power level had to be reduced to a setting of 8. Final testing was performed on samples with this power level implemented by the manufacturer.

### 3.1.7 Production Intent

The EUT appears to be a production ready sample.

### 3.1.8 Declared Exemptions and Additional Product Notes

The EUT is permanently installed in a transportation vehicle. As such, digital emissions are exempt from US and Canadian digital emissions regulations (per FCC 15.103(a) and IC correspondence on ICES-003.)

## 4 Emissions

### 4.1 General Test Procedures

#### 4.1.1 Radiated Test Setup and Procedures

Radiated electromagnetic emissions from the EUT are first pre-scanned in our screen room. Spectrum and modulation characteristics of all emissions are recorded. Instrumentation, including spectrum analyzers and other test equipment as detailed in Section 1.8 are employed. After pre-scan, emission measurements are made on the test site of record. If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in relevant test standards are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed if the resulting emissions appear to be worst-case in such a configuration. See Figure 3. All intentionally radiating elements that are not fixed-mounted in use are placed on the test table lying flat, on their side, and on their end (3-axes) and the resulting worst case emissions are recorded. If the EUT is fixed-mounted in use, measurements are made with the device oriented in the manner consistent with installation and then emissions are recorded. If the EUT exhibits spurious emissions due to internal receiver circuitry, such emissions are measured with an appropriate carrier signal applied.

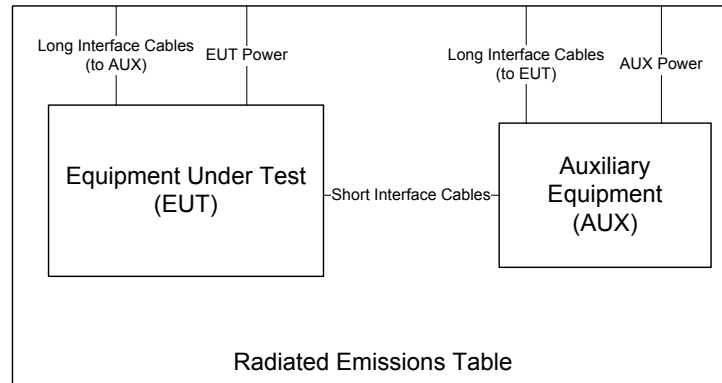


Figure 3: Radiated Emissions Diagram of the EUT.

For devices with intentional emissions below 30 MHz, a shielded loop antenna and/or E-field and H-Field broadband probes are used depending on the regulation. Shielded loops are placed at a 1 meter receive height at the desired measurement distance. For exposure in this band, 10cm diameter single-axis broadband probes meeting the requirements of ISSED SPR-002 section 5.2 are employed. Measurements are repeated and summed over three axes, and the entire frequency range is measured with and without the EUT transmitting.

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. For both horizontal and vertical polarizations, the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected. The EUT is then rotated through 360° in azimuth until the highest emission is detected. The test antenna is then raised and lowered one last time from 1 to 4 m and the worst case value is recorded. Emissions above 1 GHz are characterized using standard gain or broadband ridge-horn antennas on our OATS with a 4 × 5 m rectangle of ECCOSORB absorber covering the OATS ground screen and a 1.5m table height. Care is taken to ensure that test receiver resolution and video bandwidths meet the regulatory requirements, and that the emission bandwidth of the EUT is not reduced. Photographs of the test setup employed are depicted in Figure 4.

Where regulations allow for direct measurement of field strength, power values (dBm) measured on the test receiver / analyzer are converted to dBμV/m at the regulatory distance, using

$$E_{dist} = 107 + P_R + K_A - K_G + K_E - C_F$$

where  $P_R$  is the power recorded on spectrum analyzer, in dBm,  $K_A$  is the test antenna factor in dB/m,  $K_G$  is the combined pre-amplifier gain and cable loss in dB,  $K_E$  is duty correction factor (when applicable) in dB, and  $C_F$  is a distance conversion (employed only if limits are specified at alternate distance) in dB. This field strength value is then compared with the regulatory limit. If effective isotropic radiated power (EIRP) is computed, it is computed as

$$EIRP(dBm) = E_{3m}(dB\mu V/m) - 95.2.$$

When presenting data at each frequency, the highest measured emission under all possible EUT orientations (3-axes) is reported.

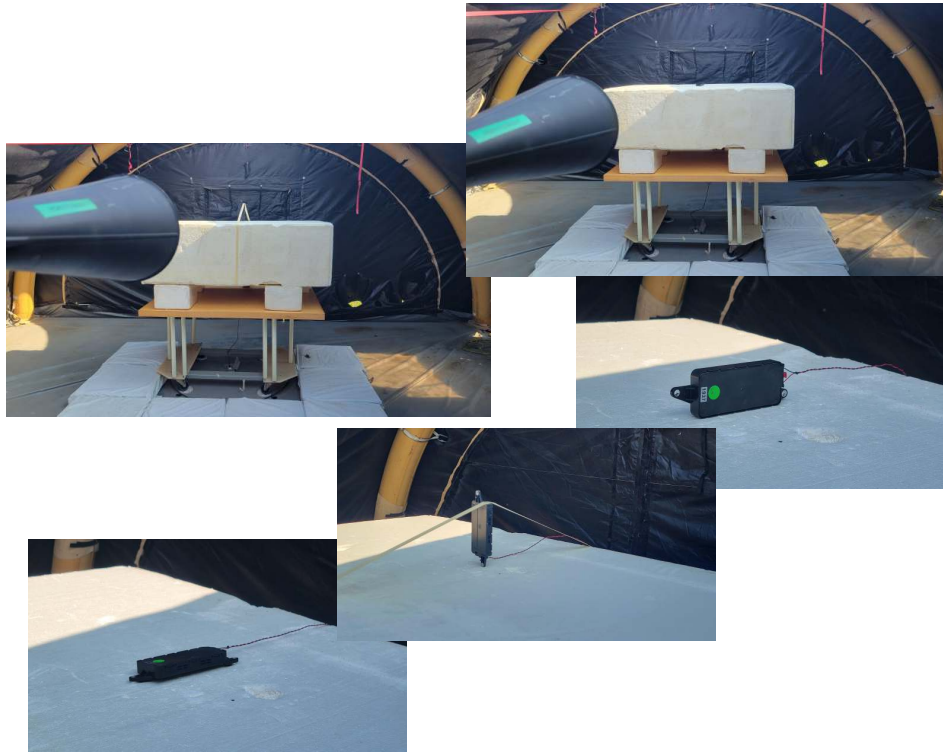


Figure 4: Radiated Emissions Test Setup Photograph(s).

#### 4.1.2 Conducted Emissions Test Setup and Procedures

**Transmit Antenna Port Conducted Emissions** At least one sample EUT supplied for testing was provided with a 50 $\Omega$  antenna port. Conducted transmit chain emissions measurements (where applicable) are made by connecting the EUT antenna port directly to the test receiver port. Photographs of the test setup employed are depicted in Figure 5.

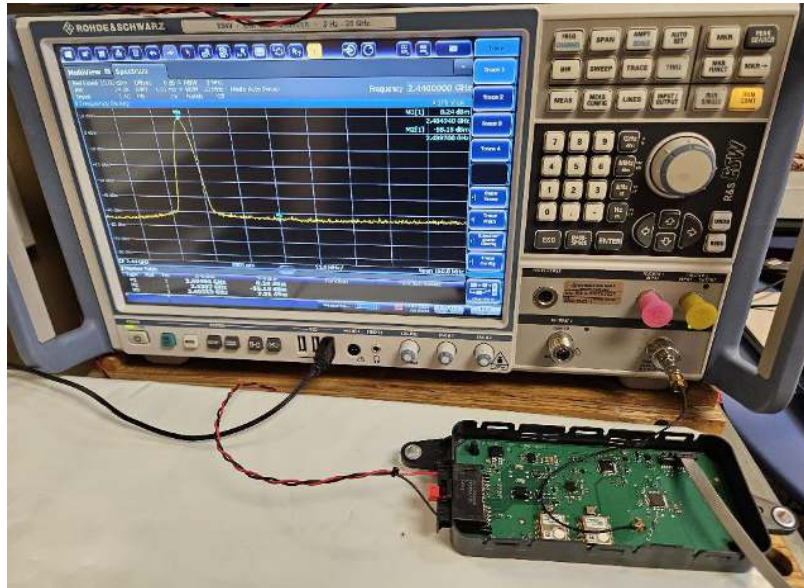


Figure 5: Conducted RF Test Setup Photograph(s).

#### 4.1.3 Power Supply Variation

Tests at extreme supply voltages are made if required by the procedures specified in the test standard, and results of this testing are detailed in this report.

## 4.2 Intentional Emissions

### 4.2.1 Duty and Transmission Cycle, Pulsed Operation

The details and results of testing the EUT for pulsed operation are summarized in Table 4. Plots showing the measurements made to obtain these values are provided in Figure 6.

Table 4: Pulsed Emission Characteristics (Duty Cycle).

Test Date: 13-Jul-23  
 Test Engineer: John Nantz  
 EUT: Vitesco BRFM  
 Meas. Distance: Conducted

| Test Mode Pulsed Operation / Average Measurement Duty Cycle |        |                   |              |                   |              |              |                 |                             |
|-------------------------------------------------------------|--------|-------------------|--------------|-------------------|--------------|--------------|-----------------|-----------------------------|
| R0                                                          | Mode   | Data Rate<br>Mbps | Voltage<br>V | Oper. Freq<br>MHz | Pulse Length | Pulse Period | Duty Cycle<br>% | Power Duty Correction<br>dB |
| R1                                                          | 1 Mbps | 1.0               | 5.5          | 2440.0            | 1.0          | 1.0          | 100.0           |                             |
| R2                                                          | 2 Mbps | 2.0               | 5.5          | 2440.0            | 1.0          | 1.0          | 100.0           |                             |
| #                                                           | C1     | C3                | C4           | C5                | C6           | C7           | C8              | C9                          |

ROW COLUMN NOTE

All C8 Duty Cycle measured in line with DTS guidance 558074 D01 v5 r02 sec 6(b) for averaging only over full-power transmission pulses.

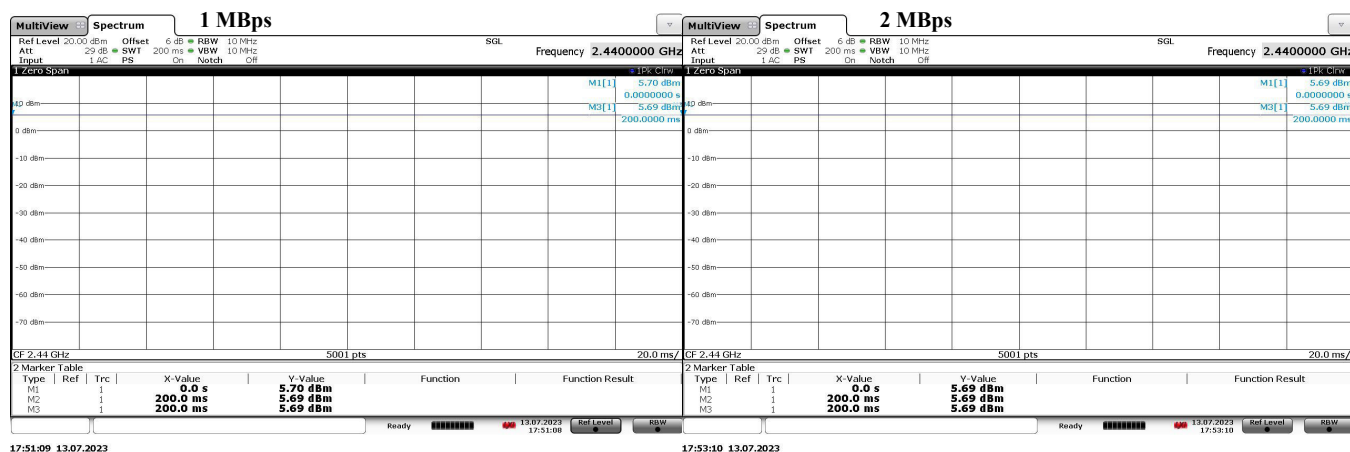


Figure 6: Example Pulsed Emission Characteristics (Duty Cycle).

#### 4.2.2 Fundamental Emission Bandwidth

Emission bandwidth (EBW) of the EUT is measured with the device placed in the test mode(s) with the shortest available packet length and minimum packet spacing. Radiated emissions are recorded following the test procedures listed in Section 2.1. The 6 dB bandwidth is measured for the lowest, middle, and highest channels available. The 99% emission bandwidth per IC test procedures is also reported. The results of this testing are summarized in Table 5. Plots showing measurements employed obtain the emission bandwidths reported are provided in Figure 7.

Table 5: Intentional Emission Bandwidth.

**Test Date:** 13-Jul-23  
**Test Engineer:** John Nantz  
**EUT:** Vitesco BRFM  
**Meas. Distance:** Conducted

| R0 | Transmit Mode | Data Rate (Mbps) | Voltage (V) | Oper. Freq (MHz) | Occupied Bandwidth |                     |               |                | Pass/Fail |
|----|---------------|------------------|-------------|------------------|--------------------|---------------------|---------------|----------------|-----------|
|    |               |                  |             |                  | 6 dB BW (MHz)      | 6 dB BW Limit (MHz) | 99% OBW (MHz) | 20 dB BW (MHz) |           |
| R1 | 1 Mbps        | 1.0              | 5.5         | 2405.0           | 1.394              | 0.50                | 2.048         | 2.373          | Pass      |
| R2 |               |                  |             | 2440.0           | 1.364              | 0.50                | 2.036         | 2.378          | Pass      |
| R3 |               |                  |             | 2480.0           | 1.374              | 0.50                | 2.039         | 2.373          | Pass      |
| R4 | 2 Mbps        | 2.0              | 5.5         | 2405.0           | 1.374              | 0.50                | 2.046         | 2.358          | Pass      |
| R5 |               |                  |             | 2440.0           | 1.399              | 0.50                | 2.036         | 2.358          | Pass      |
| R6 |               |                  |             | 2480.0           | 1.359              | 0.50                | 2.036         | 2.368          | Pass      |
| #  | C1            | C2               | C3          | C4               | C5                 | C6                  | C7            | C8             | C9        |

ROW

COLUMN

NOTE

R0

C5

DTS Bandwidth measured with RBW = 100 kHz per ANSI C63.10 11.8.1

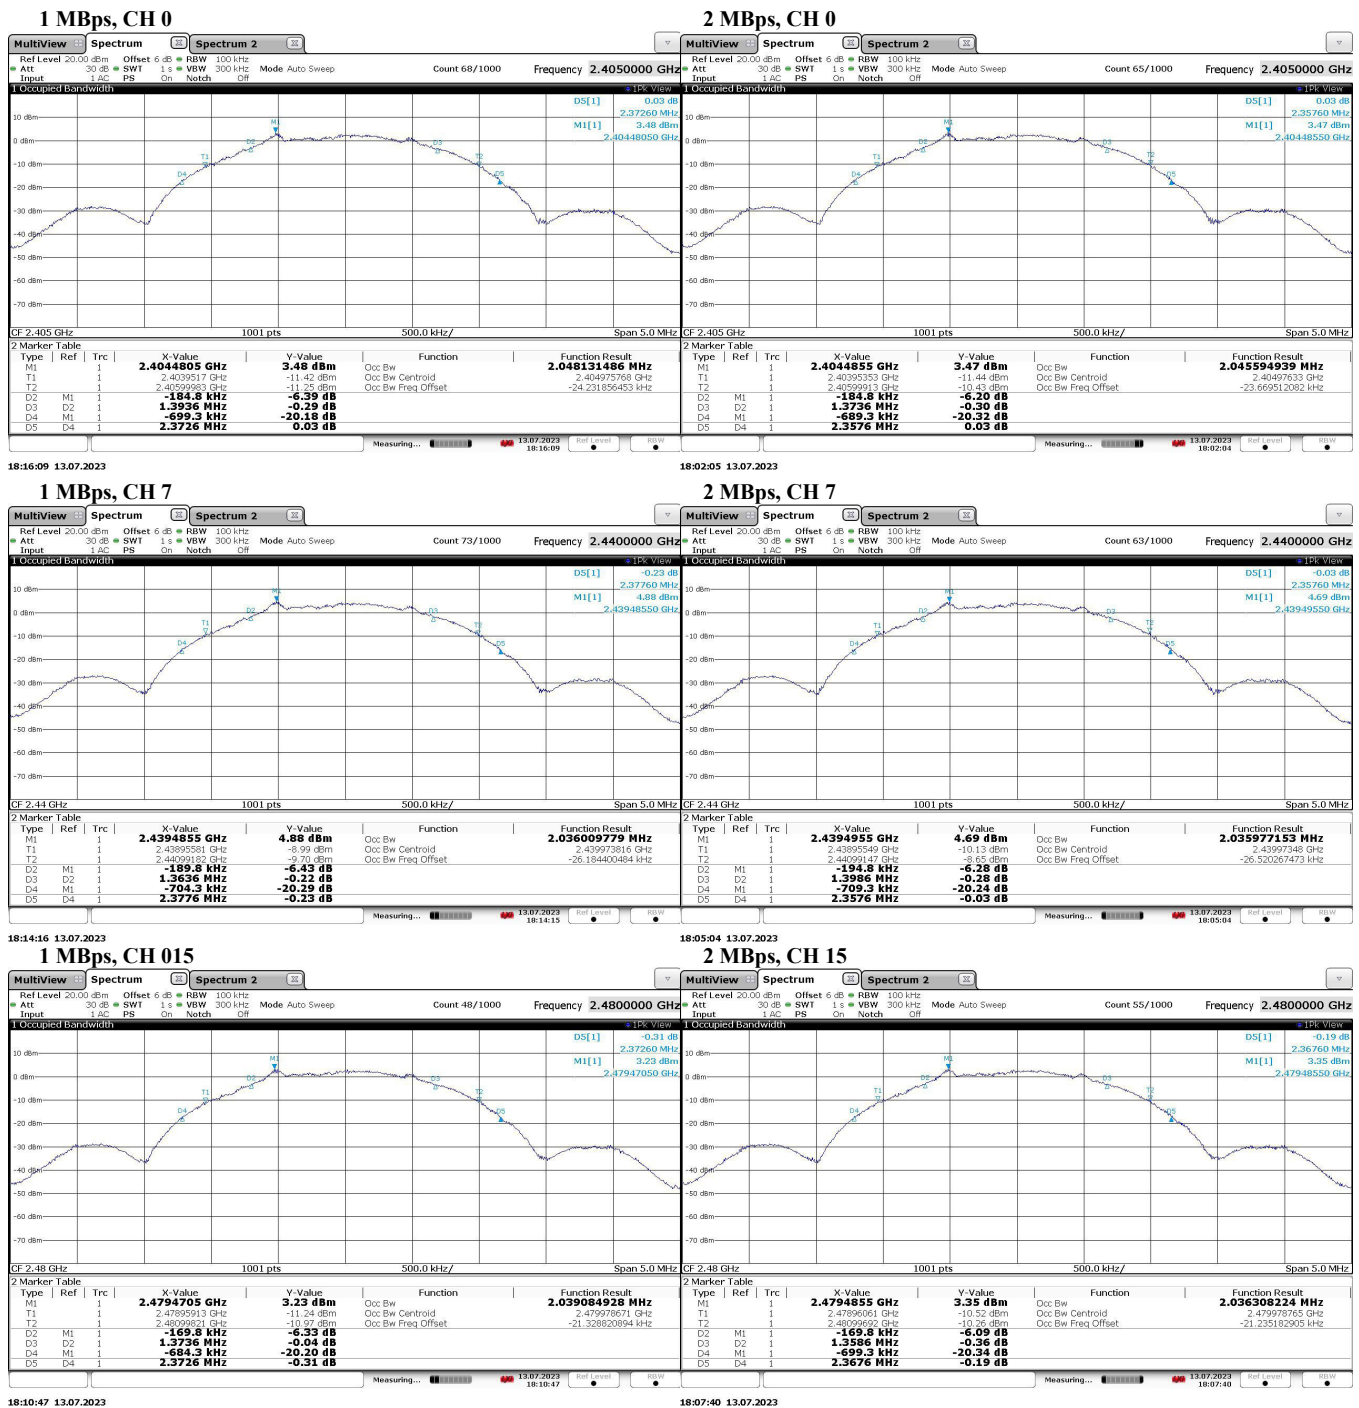


Figure 7: Example Intentional Emission Bandwidth Plots.

### 4.2.3 Effective Isotropic Radiated Power

The EUT's radiated power is computed from antenna port conducted power measurements and the gain of the EUT antenna(s). Where the EUT is not sold with an antenna connector, a modified product has been provided including such. The results of this testing are summarized in Table 6.


Table 6(a): Radiated Power Results.

Test Date: 13-Jul-23  
 Test Engineer: John Nantz  
 EUT: Vitesco BRFM  
 Meas. Distance: Conducted

| R0 | Fundamental Power |         |           |               |         |                 |              |                |                      |         | Comments |
|----|-------------------|---------|-----------|---------------|---------|-----------------|--------------|----------------|----------------------|---------|----------|
|    | Mode              | Channel | Freq. MHz | Pout (Pk) dBm | Duty dB | Pout + Duty dBm | Ant Gain dBi | EIRP (Avg) dBm | EIRP (Avg) Limit dBm | Pass dB |          |
| R1 | 1 Mbps            | L       | 2405.0    | 4.2           | 0.0     | 4.2             | 2.60         | 6.80           | 36.0                 | 29.2    |          |
| R2 |                   | M       | 2440.0    | 5.6           | 0.0     | 5.6             | 2.60         | 8.22           | 36.0                 | 27.8    |          |
| R3 |                   | H       | 2480.0    | 4.2           | 0.0     | 4.2             | 2.60         | 6.82           | 36.0                 | 29.2    |          |
| R4 | 2 Mbps            | L       | 2405.0    | 4.2           | 0.0     | 4.2             | 2.60         | 6.80           | 36.0                 | 29.2    |          |
| R5 |                   | M       | 2440.0    | 5.6           | 0.0     | 5.6             | 2.60         | 8.22           | 36.0                 | 27.8    |          |
| R6 |                   | H       | 2480.0    | 4.2           | 0.0     | 4.2             | 2.60         | 6.82           | 36.0                 | 29.2    |          |
| #  | C1                | C2      | C3        | C4            | C5      | C6              | C7           | C8             | C9                   | C10     | C11      |

(ROW) (COLUMN) NOTE:  
 R0 C5 Measured maximum peak conducted power from the radio using conducted test sample following DTS Guidance 558074 D01 v5 r02 Section 8.3.1.1  
 R0 C7 Worst Case Antenna Gain from Antenna Datasheet – 2.6 dBi.

Table 6(b): Radiated Power Results.

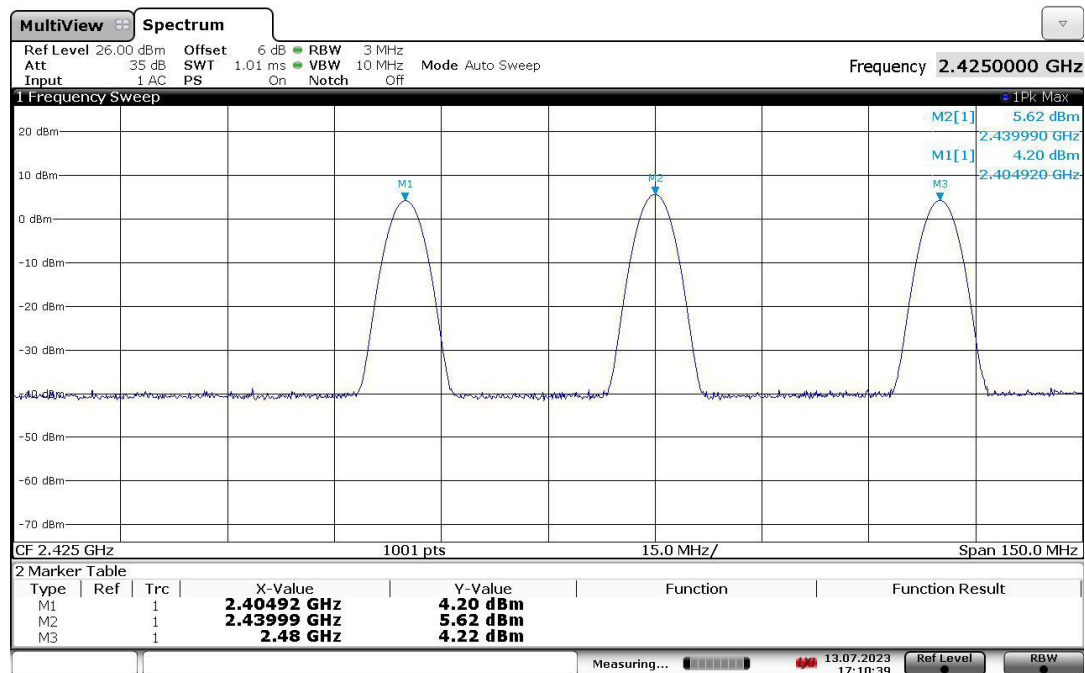

17:10:39 13.07.2023

#### 4.2.4 Power Spectral Density

For this test, the EUT was attached directly to the test receiver. Following FCC DTS measurement procedures, the emission spectrum is first scanned for maximum spectral peaks, the span and receiver bandwidth are then reduced until the power spectral density is measured in the prescribed receiver bandwidth. The results of this testing are summarized in Table 7. Plots showing how these measurements were made are depicted in Figure 8.

Table 7: Power Spectral Density Results.

|                                |                |                                                                                                  |                       |              |                              |                         |                              |
|--------------------------------|----------------|--------------------------------------------------------------------------------------------------|-----------------------|--------------|------------------------------|-------------------------|------------------------------|
| Frequency Range<br>2400-2483.5 |                | Detector<br>Pk                                                                                   | IF Bandwidth<br>3 kHz |              | Video Bandwidth<br>10 kHz    |                         | Test Date:<br>13-Jul-23      |
|                                |                |                                                                                                  |                       |              |                              |                         | Test Engineer:<br>John Nantz |
|                                |                |                                                                                                  |                       |              |                              |                         | EUT:<br>Vitesco BRFM         |
|                                |                |                                                                                                  |                       |              |                              |                         | Meas. Distance:<br>Conducted |
| Power Spectral Density         |                |                                                                                                  |                       |              |                              |                         |                              |
| R0                             | Mode           | Channel                                                                                          | Frequency<br>(MHz)    | Ant.<br>Used | PSDcond (meas)<br>(dBm/3kHz) | PSD Limit<br>(dBm/3kHz) | Pass By<br>(dB)              |
| R1                             | 1 Mbps         | L                                                                                                | 2405.0                | Cond.        | -9.6                         | 8.00                    | 17.6                         |
| R2                             |                | M                                                                                                | 2440.0                | Cond.        | -8.1                         | 8.00                    | 16.1                         |
| R3                             |                | H                                                                                                | 2480.0                | Cond.        | -9.7                         | 8.00                    | 17.7                         |
| R4                             | 2 Mbps         | L                                                                                                | 2405.0                | Cond.        | -9.6                         | 8.00                    | 17.6                         |
| R5                             |                | M                                                                                                | 2440.0                | Cond.        | -8.1                         | 8.00                    | 16.1                         |
| R6                             |                | H                                                                                                | 2480.0                | Cond.        | -9.7                         | 8.00                    | 17.7                         |
| #                              | C1             | C2                                                                                               | C3                    | C4           | C5                           | C6                      | C7                           |
| (ROW)<br>R0                    | (COLUMN)<br>C5 | NOTE:<br>PSD measured conducted out the EUT antenna port following ANSI C63.10, section: 11.10.2 |                       |              |                              |                         |                              |

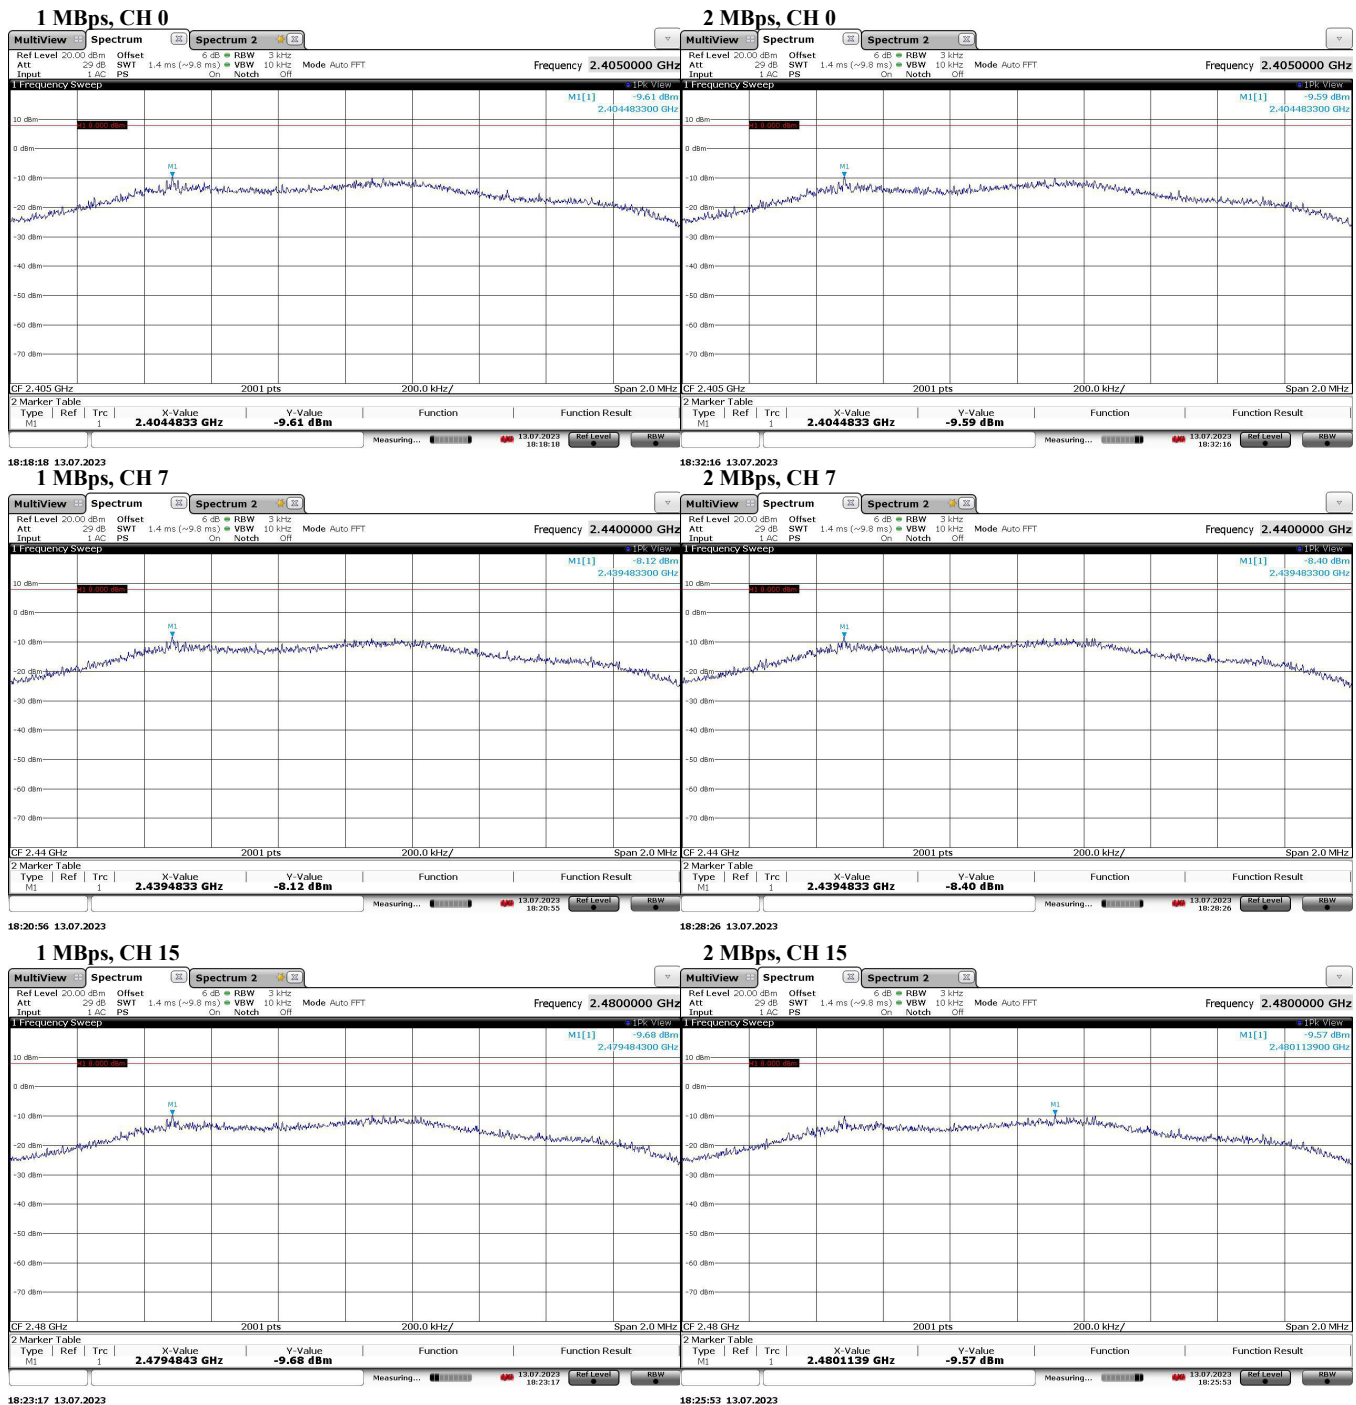



Figure 8: Power Spectral Density Plots.

### 4.3 Unintentional Emissions

#### 4.3.1 Restricted Band Transmit Chain Spurious Emissions

The results for the measurement of transmit chain spurious emissions at the nominal voltage and temperature are provided in Table 8. Measurements are performed to 10 times the highest fundamental operating frequency.

Table 8: Transmit Chain Spurious Emissions.

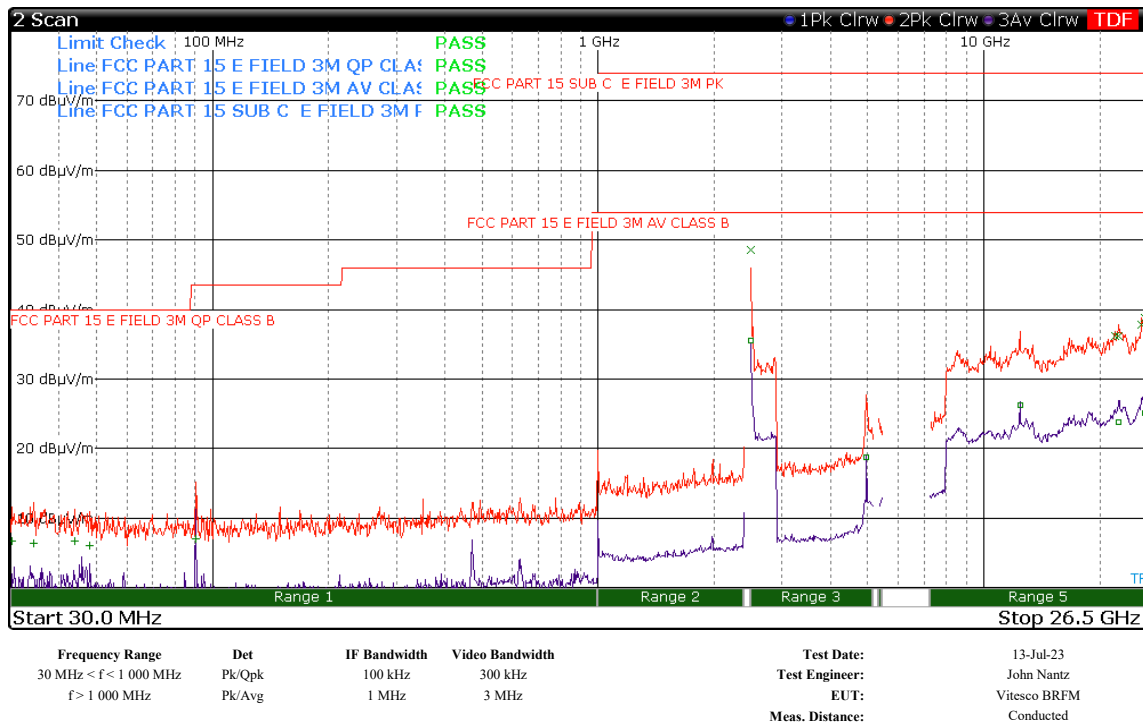


| Transmitter Spurious - RADIO 1 |                                              |           |          |              |         |          |           |           |                     |                 |                  |                  |      | FCC/IC                                    |
|--------------------------------|----------------------------------------------|-----------|----------|--------------|---------|----------|-----------|-----------|---------------------|-----------------|------------------|------------------|------|-------------------------------------------|
|                                | Mode                                         | Frequency |          | Output Power |         | Ant Gain | GR Factor | Avg Duty  | Electric Field @ 3m |                 |                  |                  | Pass |                                           |
| R0                             |                                              | Start MHz | Stop MHz | Pk dBm       | Avg dBm | dBi      | dB        | Factor dB | Meas. Pk dBuV/m     | Limit Pk dBuV/m | Meas. Avg dBuV/m | Limit Avg dBuV/m | dB   | Comments                                  |
| R1                             | Fundamental Restricted Band Edge (Low Side)  |           |          |              |         |          |           |           |                     |                 |                  |                  |      |                                           |
| R2                             | 1M/2M                                        | 2390.0    | 2390.0   | -77.5        | -78.2   | 2.6      |           |           | 20.3                | 74.0            | 19.6             | 54.0             | 34.4 | max all - baud rates/L,M,H channels/noise |
| R3                             | Fundamental Restricted Band Edge (High Side) |           |          |              |         |          |           |           |                     |                 |                  |                  |      |                                           |
| R4                             | 1M/2M                                        | 2483.5    | 2483.5   | -52.9        | -62.4   | 2.6      |           |           | 44.9                | 74.0            | 35.4             | 54.0             | 18.6 | max all - baud rates/L,M,H channels/noise |
| R5                             | Restricted Bands Emissions                   |           |          |              |         |          |           |           |                     |                 |                  |                  |      |                                           |
| R6                             | 1M/2M                                        | 30        | 88       | -87.5        |         | 2.6      | 4.7       |           | 15.0                |                 |                  | 40               | 25.0 | max all - baud rates/L,M,H channels/noise |
| R7                             | 1M/2M                                        | 88        | 216      | -83.2        |         | 2.6      | 4.7       |           | 19.3                |                 |                  | 43               | 23.7 | max all - baud rates/L,M,H channels/noise |
| R8                             | 1M/2M                                        | 216       | 1000     | -81.2        |         | 2.6      | 4.7       |           | 21.3                |                 |                  | 46               | 24.7 | max all - baud rates/L,M,H channels/noise |
| R9                             | 1M/2M                                        | 1000.0    | 2400.0   | -77.5        | -78.2   | 2.6      |           |           | 20.3                | 74.0            | 19.6             | 54.0             | 34.4 | max all - baud rates/L,M,H channels/noise |
| R10                            | 1M/2M                                        | 2483.5    | 4000.0   | -52.9        | -62.4   | 2.6      |           |           | 44.9                | 74.0            | 35.4             | 54.0             | 18.6 | max all - baud rates/L,M,H channels/noise |
| R11                            | 1M/2M                                        | 4810.0    | 4810.0   | -78.7        | -83.2   | 2.6      |           |           | 19.1                | 74.0            | 14.6             | 54.0             | 39.4 | max all - baud rates/L,M,H channels/noise |
| R12                            | 1M/2M                                        | 4870.0    | 4870.0   | -77.5        | -81.0   | 2.6      |           |           | 20.3                | 74.0            | 16.8             | 54.0             | 37.2 | max all - baud rates/L,M,H channels/noise |
| R13                            | 1M/2M                                        | 4950.0    | 4950.0   | -75.3        | -79.5   | 2.6      |           |           | 22.5                | 74.0            | 18.3             | 54.0             | 35.7 | max all - baud rates/L,M,H channels/noise |
| R14                            | 1M/2M                                        | 4000.0    | 6000.0   | -75.0        | -78.8   | 2.6      |           |           | 22.8                | 74.0            | 19.0             | 54.0             | 35.0 | max all - baud rates/L,M,H channels/noise |
| R15                            | 1M/2M                                        | 6000.0    | 8400.0   | -72.0        | -76.5   | 2.6      |           |           | 25.8                | 74.0            | 21.3             | 54.0             | 32.7 | max all - baud rates/L,M,H channels/noise |
| R16                            | 1M/2M                                        | 8400.0    | 12500.0  | -60.2        | -74.2   | 2.6      |           |           | 37.6                | 74.0            | 23.6             | 54.0             | 30.4 | max all - baud rates/L,M,H channels/noise |
| R17                            | 1M/2M                                        | 12500.0   | 25000.0  | -58.6        | -69.6   | 2.6      |           |           | 39.2                | 74.0            | 28.2             | 54.0             | 25.8 | max all - baud rates/L,M,H channels/noise |
| #                              | C1                                           | C2        | C3       | C4           | C5      | C6       | C7        | C8        | C9                  | C10             | C11              | C12              | C13  | C14                                       |

(ROW) (COLUMN) NOTE:


- R0 C4/C5 Conducted measurements were made in line with DTS guidance 558074 D01 v5 r02 sections 8.5, 8.6 and 8.7 respectively.
- R2/R4 C4/C5 Measured using the mode with widest bandwidth and max. output power/PSD according to ANSI C63-10-2013 sections 5.6.2.2 and 6.10.5.2 respectively
- R0 C6 Worst Case Antenna Gain per Datasheet is 2.6 dBi - used for calculation in alignment with ANSI C63.10, section 11.12.2.6
- R0 C7 Ground Reflection Factor as described in ANSI C63.10-2013 section 11.12.2.2 c
- R0 C9 Computed according to ANSI C63.10-2013 section 11.12.2.2 c

### 4.3.2 OOB Transmit Chain Spurious Emissions

The results for the measurement of transmit chain spurious emissions relative to the fundamental in a 100 kHz receiver bandwidth (at the nominal voltage and temperature) in the worst cases are provided in Figure 9 below.

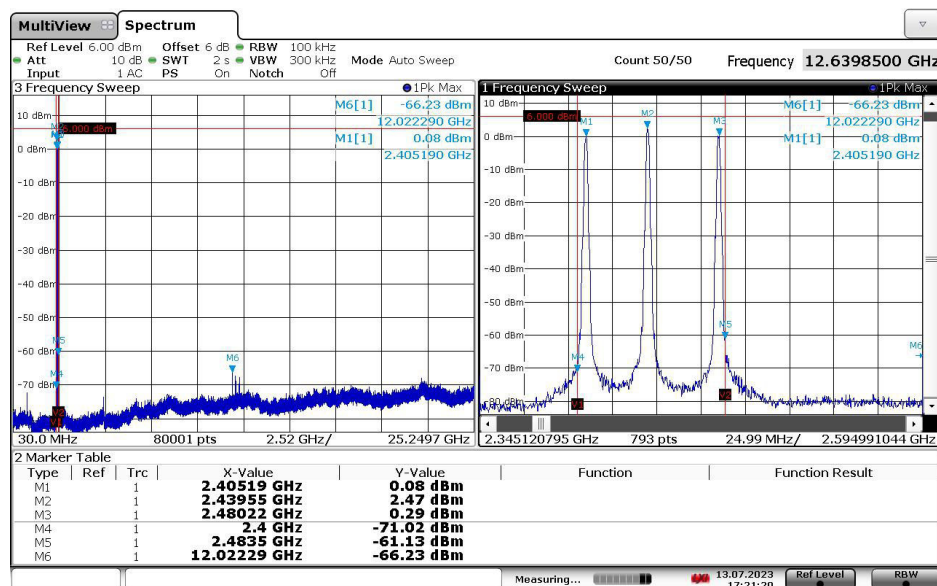

17:21:21 13.07.2023

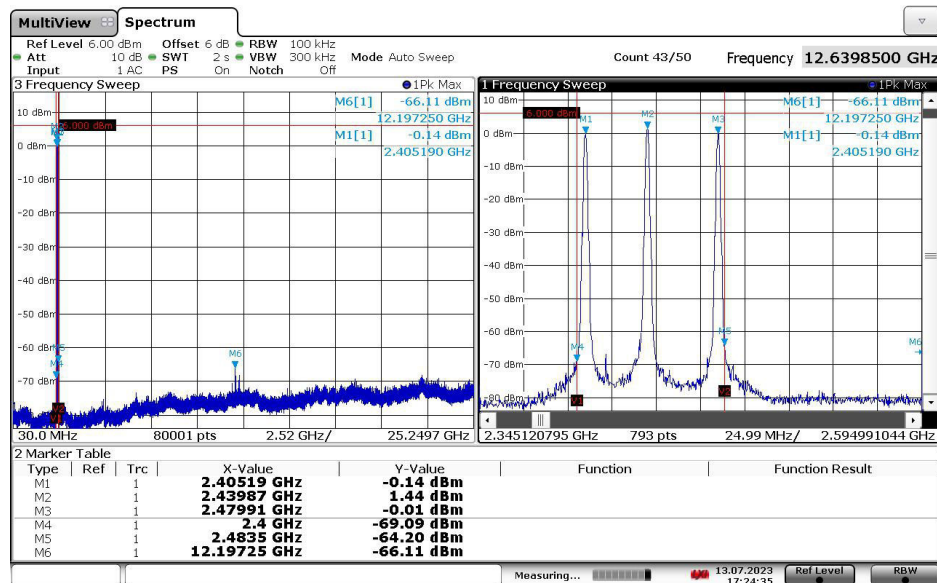

17:24:35 13.07.2023

Figure 9: Worst Case Transmitter OOB Emissions Measured.

## 5 Measurement Uncertainty and Accreditation Documents

The maximum values of measurement uncertainty for the laboratory test equipment and facilities associated with each test are given in the table below. This uncertainty is computed for a 95.45% confidence level based on a coverage factor of  $k = 2$ .

Table 9: Measurement Uncertainty.

| Measured Parameter                                 | Measurement Uncertainty <sup>†</sup>                            |
|----------------------------------------------------|-----------------------------------------------------------------|
| Radio Frequency                                    | $\pm(f_{Mkr}/10^7 + RBW/10 + (SPN/(PTS - 1))/2 + 1 \text{ Hz})$ |
| Conducted Emm. Amplitude                           | $\pm 1.9 \text{ dB}$                                            |
| Radiated Emm. Amplitude ( $f < 30 \text{ MHz}$ )   | $\pm 3.1 \text{ dB}$                                            |
| Radiated Emm. Amplitude (30 – 200 MHz)             | $\pm 4.0 \text{ dB}$                                            |
| Radiated Emm. Amplitude (200 – 1000 MHz)           | $\pm 5.2 \text{ dB}$                                            |
| Radiated Emm. Amplitude ( $f > 1000 \text{ MHz}$ ) | $\pm 3.7 \text{ dB}$                                            |

<sup>†</sup>Ref: CISPR 16-4-2:2011+A1:2014



Figure 10: Accreditation Documents