


INSTRUCTION MANUAL

1 Setup and use your digital video baby monitor


Installing Baby Unit

A. Place Baby Unit on a flat surface, such as a desk or shelf or mount the camera on a wall.

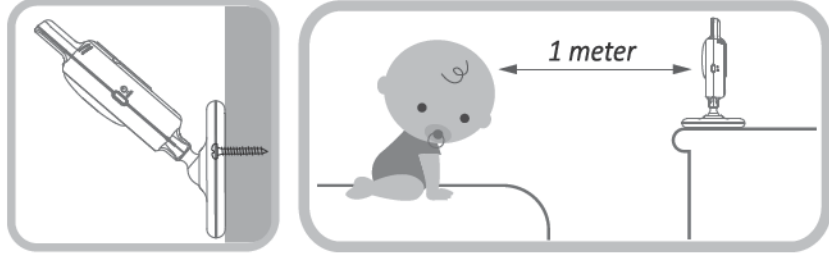


Never place the baby unit or the cord within 1 meter of the crib.

B. Connect the small plug of the power adapter to the Baby Unit and the other end to a suitable electrical outlet. Only use the enclosed adapter (5V DC 1000mA). Slide the switch to "ON" position to turn on baby unit. Green power LED is turned on.

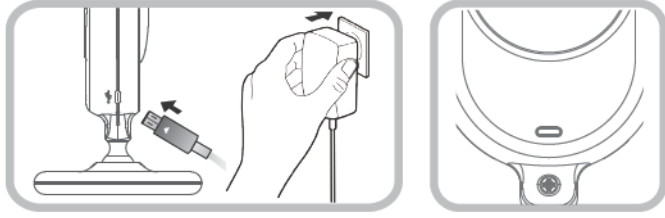


C. Connecting the power supply for the Parent Unit. Connect the small plug of the power adapter to the parent unit and the other end to a electrical outlet. Only use the enclosed adapter (5V DC/1000mA). Recommend charging time of at least 3 hours before first use.

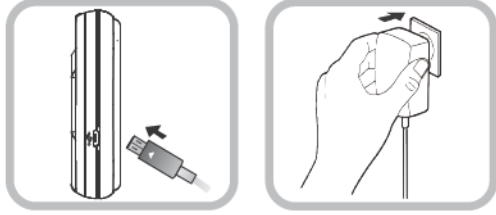

2 **Precaution: use of battery for Parent Unit**
Only charge the battery when the battery life indicator is low. Constant recharging of your battery before the low battery indicator light comes on will decrease the life of your batteries.

When battery is low, the power on off LED (icon) will flash red and on screen display battery icon will flash red indicating that the battery needs to be charged.

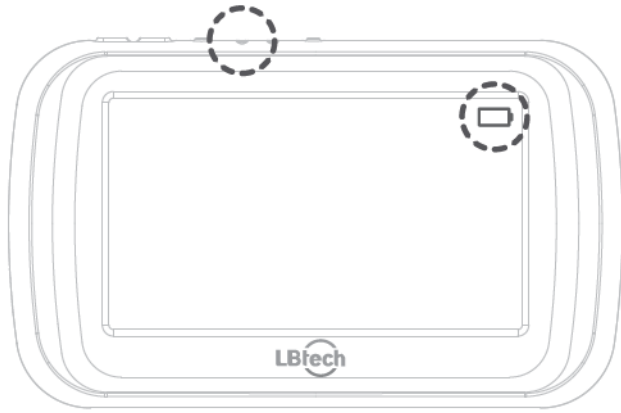

STRANGULATION HAZARD — Children have STRANGLED in cords. Keep this cord out of reach of children (more than 3 feet/1 meter away from the crib). Never use extension cords with AC adapters. Only use the AC Adapters provided.



WARNING
Adult assembly required. Keep small parts away from children when assembling.


Warning Information
* Keep this instruction manual for future reference.
* For adult use only.

3 Function of keys and LED indicators

Video Baby Monitor-Monitor LB55943R
Parent Unit


Power on off status LED
Steady Green: Parent Unit is powered on.
Steady Orange: Charging battery.
Flash Red: Battery Low

Power Saving on off status
Steady Green: Power saving mode is activated.

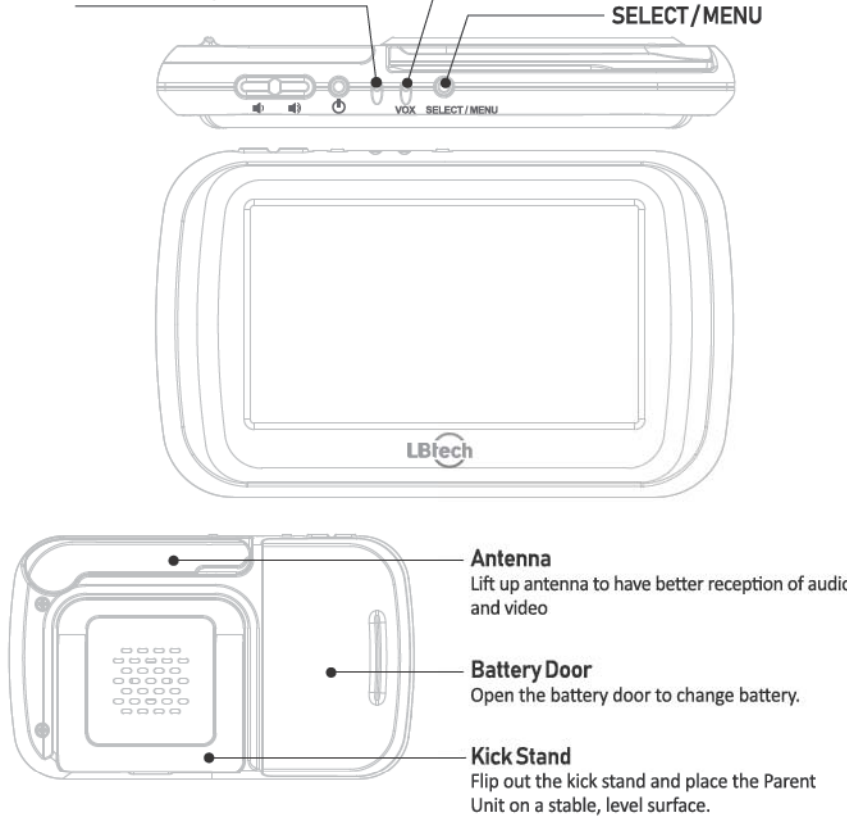

	On/Off	Press and hold to switch "On/Off" the unit.
	Volume up/down	Press to increase and decrease volume.
	Menu	Press to open and select menu options.

Video Baby Monitor-Camera LB55943T
Baby Unit

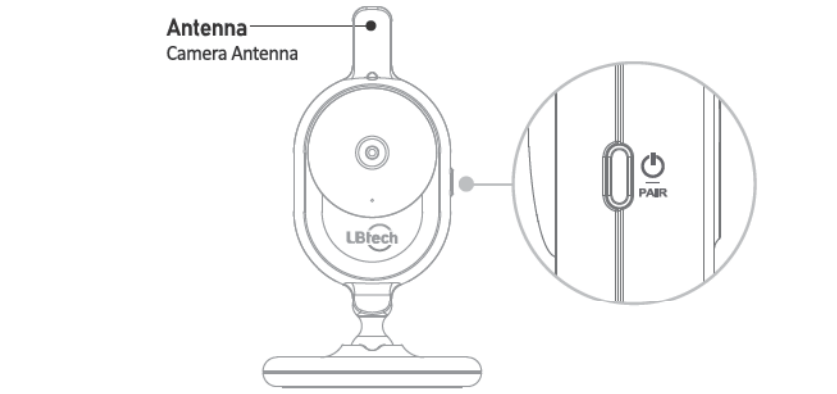

	Power	Press and hold to turn on baby unit. Short press to turn off baby unit.
	Pairing button	When camera is switched on, press and hold till power LED starting to blink.

4 Start to use monitor

Status bar

	Signal strength reference		Monitor is muted
	Battery level		
	VOX - OFF	Switch off power saving mode.	
	VOX - LOUD	Power saving mode is switched on. Loud noise to activate screen.	
	VOX - MEDIUM	Power saving mode is switched on. Medium noise to activate screen.	
	VOX - QUIET	Power saving mode is switched on. Little noise to activate screen.	
	VOX - AUTO	Power saving mode is switched on. Camera set up sound trigger level automatically according to camera surrounding environment. Any louder sound will activate monitor.	



Menu operation

	Power saving mode	To activate Parent unit from Power saving mode.
	Power saving mode off.	
	Power saving mode is switched on. Loud nose to activate screen.	
	Power saving mode is switched on. Medium nose to activate screen.	
	Power saving mode is switched on. Little nose to activate screen.	
	Power saving mode is switched on. Camera set up sound trigger level automatically according to camera surrounding environment. Any louder sound will activate monitor.	
	Audio keeps on or shut off when monitor is set to power saving mode.	
	Audio keeps on when monitor is set to power saving mode.	
	Audio is shut off when monitor is set to power saving mode.	
	Pairing camera	Use only when camera is lost link with monitor.

WARNING THIS PRODUCT CANNOT REPLACE RESPONSIBLE ADULT SUPERVISION

- When an AC Adapter is plugged into an electrical outlet, do not touch the exposed end.
- Test baby monitor before first use, periodically, and when changing location of the baby unit (Camera).
- Do not use monitor near water (Such as bathtub, Sink, etc)
- Keep parent unit away from heat sources (Such as stoves, radiators, etc)
- Make sure there is proper ventilation around baby unit and parent unit.
- This product is not a toy. Do not allow children to play with it.
- The mains plug or an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable.
- The baby monitor should not be considered as a medical device. While using the baby monitor, it is strongly recommended to have an adult directly checking on your baby. Premature babies or children considered at risk must be supervised by your pediatrician or other medical staff.

Battery Warning

- Use only the original rechargeable battery provided.
- Do not short circuit supply terminals.
- Remove battery when product is stored for long periods of time or when battery is exhausted.
- Dispose of exhausted battery properly.
- Keep all batteries away from children.
- Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type.
- Batteries (battery pack or batteries installed) shall not be exposed to excessive heat such as sunshine, fire or the like.

Precautions

- Do not overload wall outlets, extension cords, or integral convenience receptacles as this can result in a risk of fire or electric shock.
- The baby monitor works better in temperature ranging between 0°C and 40°C (32°F and 104°F)
- Do not dismantle the appliance. It does not contain any parts that may be used independently.
- Never expose the baby monitor for long period to sun's direct rays and never place it next to a source of heat, in a damp or very dusty room.
- Never push objects of any kind into this product through openings as they may touch dangerous voltage points or short-out parts that could result in a fire or electric shock. Never spill liquid of any kind on the product.
- Do not attempt to service this product yourself as opening or removing covers may expose you to dangerous voltage or other hazards. Refer all servicing to qualified service personnel.
- The product should be mounted to a wall or ceiling inly as recommended by the manufacturer.

Industry Canada Statement

This device complies with Industry Canada licence-exempt RSS standard. Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IC Radiation Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limit set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

Cet équipement est conforme aux CNR-102 d'Industrie Canada. Cet équipement doit être installé et utilisé avec une distance minimale de 20 centimètres entre le radiateur et votre corps. Cet équipement ne doit pas être co-localisé ou opéré en conjonction avec autre antenne ou émetteur. Les antennes utilisées pour cet émetteur doivent être installées et utilisées à une distance de séparation d'au moins 20 centimètres de toute personne et doit pas être co-située ni fonctionner en conjonction avec une autre antenne ou émetteur.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

FCC Caution

To assure continued compliance, any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. (Example - use only shielded interface cables when connecting to computer or peripheral devices).

FCC Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Moonybaby's baby monitor warranty policy

Moonybaby will repair or replace (at our option) your unit free of charge for 12 months from the date of purchase if the unit is defective in workmanship or materials. To claim your repair/replacement, the product must be returned to Moonybaby together with a copy of the purchase receipt. In the absence of the purchase receipt, the warranty will be 12 months from the date of manufacture. This warranty does not apply to normal wear or damage from misuse, abuse, improper storage and handling, installation, accident, unauthorized repair or alteration. Please contact our Customer service by Facebook Moonybaby or via email for details.