


MOBILE DEVICE PAIRING INSTRUCTIONS

You will need to pair your mobile device with Mobile Connector in order to record videos with audio from your classroom audio system, and play audio from your device through the classroom speaker.



Mobile Connector



1. With your mobile device, visit the Apple App store or Google Play store to download the 'Lightspeed Mobile Connector' app.
2. Ensure that Bluetooth is turned on in your mobile device and open the Mobile Connector app. The app will instruct you to press the Bluetooth pairing button on the side of your Mobile Connector. Then go to the Bluetooth settings on your mobile device. Choose 'Mobile Connector' from the list of unpaired devices.
3. Once you have selected "Mobile Connector" and paired with it, you will return to the Mobile Connector app and press the "Done" button.
4. You are now ready to make recordings and stream audio content. In the Mobile Connector app, press the red record button at the bottom of the screen to start a recording.
5. You can switch between video or audio-only recordings by tapping the VIDEO/AUDIO button at the top of the screen before you start a recording.
6. To view your recordings, tap on the thumbnail image in the lower right corner of the screen to open the Library view. You can share your recordings from the Library view using the Share button.


Note: If you would like to save space on your mobile device and store your recordings in the cloud, you can open Settings in the Mobile Connector app and sign in to your Google Drive account. The app will automatically upload your recordings and delete them from the mobile device.

MOBILE CONNECTOR

DAILY OPERATION INSTRUCTIONS

Mobile Connector is a device that provides a wireless audio connection between your classroom audio system and your phone, tablet, or computer. It uses Bluetooth to send and receive audio, which makes it compatible with almost any mobile device. You can use Mobile Connector to play audio from your mobile device to the classroom audio system, and to record videos with high quality audio from anywhere in the room. To make recordings, you can use the built-in microphone in Mobile Connector by having another person wear it around their neck with the included lanyard, or you can connect Mobile Connector to the classroom audio system using the included dual 3.5mm cable and record your lessons for reference, or for use in a flipped classroom model. Mobile Connector can be used as a stand-alone portable recording device operating on the internal rechargeable battery, or you can leave it plugged into power all the time and never worry about the battery running out.




1. Locate the USB1-NA power adaptor and cable. International customers should locate the USB3DC, cable and 5V power supply. Plug the micro USB end of the power cable into the USB port on the bottom of the Mobile Connector. Plug the other end of the cable into the USB power adaptor. Alternatively, the USB cable can be plugged into a computer to power the Mobile Connector.
2. For classroom audio system recording, locate the DUAL3535 cable and use it to connect the Mobile Connector to an amplifier. At the amplifier, insert the RED 3.5mm plug into the AUDIO OUT (or ALD OUT) and the BLACK 3.5mm plug into the AUDIO IN jack. At the Mobile Connector, insert the RED 3.5mm plug into the INPUT jack and the BLACK 3.4mm plug into the OUTPUT jack. When you press the record button in the app, the audio in your recording will come from the classroom audio system.
3. For use as a stand-alone Bluetooth microphone for recording, disconnect the Mobile Connector from the charging cable and place it around your neck. Ensure the top of the Mobile Connector is at the collarbone. When you press the record button in the app, the audio in your recording will come from the built-in microphone in Mobile Connector.
4. If you need to have a private conversation during a recording session, quickly press the power/mute button. The Mute status light will turn red, indicating the Mobile Connector microphone element is muted. To turn the Mobile Connector on or off, press and hold the Power/Mute button for 3 seconds.



U.S. and Canada




Outside U.S. and Canada

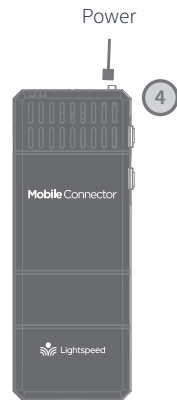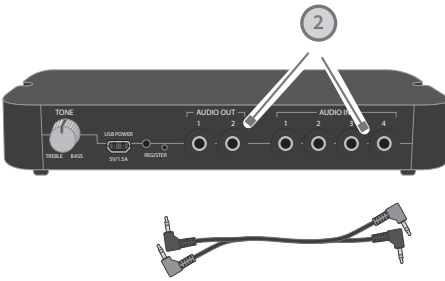


CHARGE MOBILE CONNECTOR

5. Connect the Mobile Connector to the USB charging cable. The power light will turn red for a few seconds to indicate that charging is in progress. After a few seconds, the power light will turn blue to indicate active operation. (For charging outside U.S. and Canada, connect the Mobile Connector USB charging cable to the USB3 charging adaptor. Connect the USB3 adaptor to the 5V power supply and insert the power supply into an outlet.)

6. The optional FMCC cradle charger may also be used to charge the Mobile Connector. Place the Mobile Connector into the cradle. The power light will turn red for a few seconds to indicate that charging is in progress. After a few seconds, the power light will turn blue to indicate active operation.



U.S. and Canada



Outside U.S. and Canada



WARRANTY

Lightspeed's Mobile Connector is covered under warranty against malfunction due to defects in materials and workmanship for a period of FIVE (5) YEARS, beginning at the date of the purchase invoice. If such malfunction occurs, the product will be repaired or replaced (at Lightspeed's option) without charge during the warranty period.

Warranty does not extend to finish, appearance items, or malfunctions due to abuse or operation other than specified conditions, nor does it extend to incidental or consequential damages. Repair by other than Lightspeed or its authorized service agencies will void this warranty. Information on authorized service agencies is available from Lightspeed Technologies, Inc.





SAFETY, WARRANTY AND REGULATORY GUIDE
ACCESS TECHNOLOGY



FIVE-YEAR LIMITED WARRANTY

Lightspeed Classroom Audio Access Systems are guaranteed against malfunction due to defects in materials and workmanship for a period of FIVE (5) YEARS, beginning at the date of the purchase invoice. If such malfunction occurs, the product will be repaired or replaced (at Lightspeed's option) without charge during the warranty period.

Lightspeed's Warranty Exchange Program applies to all classroom audio systems within the five (5) year warranty period. If a classroom audio product or component has an issue that requires service, a refurbished replacement will immediately be sent to the customer to minimize downtime. Customers will receive the exchange product(s) or component(s) within 2-3 days. A prepaid return label will be included with exchanged products so original malfunctioned equipment can be returned to Lightspeed. Any exchanged equipment will remain covered under the original five (5) year warranty.

1. Warranty on Access microphones is FIVE (5) YEARS.
2. Warranty on Lightspeed NiMH microphone rechargeable batteries, Lightspeed LMA lapel and EMA earset microphones is one (1) year.
3. Warranty on the Lightspeed L14V lithium ion battery pack is two (2) years.
4. Prepaid shipping label provided by Lightspeed for warranty repairs within the United States. Customers outside the U.S. should refer to the Lightspeed website (www.lightspeed-tek.com) for warranty repair instructions.
5. Warranty does not extend to finish, appearance items, or malfunctions due to abuse or operation other than specified conditions, nor does it extend to incidental or consequential damages. Repair by other than Lightspeed or its authorized service agencies will void this warranty. Information on authorized service agencies is available from Lightspeed Technologies, Inc.

Our Service Department (800.732.8999, 5 a.m. – 5 p.m., PST) will handle all your repair/replacement needs. *Customers outside the U.S. should contact their local reseller.*

IMPORTANT SAFETY INSTRUCTIONS

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use the apparatus near water.
6. Clean only with dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding-type plug has two blades and a third grounding prong. The wide blade or the third prong is provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
11. Only use attachments/ accessories specified by the manufacturer.
12. Use only with a cart, stand, tripod, bracket or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/ apparatus combination to avoid injury from tip-over.
13. Unplug this apparatus during lightning storms or when unused for long periods of time.
14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.



15. When the mains plug or appliance coupler is used as the disconnect device, it shall remain readily operable.
16. Please keep the unit in a good ventilation environment.
17. **WARNING:** To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.
18. Apparatus shall not be exposed to dripping or splashing and no objects filled with liquids, such as vases, shall be placed on the apparatus.
19. Warning - battery pack shall not be exposed to excessive heat such as sunshine, fire or the like.

SAFETY WARNINGS AND CERTIFICATIONS



CAUTION

RISK OF ELECTRICAL SHOCK
DO NOT OPEN



THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.



The lightning flash with arrowhead symbol inside an equilateral triangle is intended to alert the user to the presence of non insulated "hazardous voltage" within the product's enclosure, which may be of sufficient magnitude to induce a risk of electric shock to persons.



The exclamation mark inside an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instruction in the literature accompanying this product.



**USE A LIGHTSPEED
SUPPLIED BATTERY ONLY**

CERTIFICATIONS



This product is listed to UL standards and requirements for electrical safety by Underwriters Laboratories Inc.



This product conforms with the essential requirements of the following European Union Directives: 2014/30/EU Electromagnetic Compatibility (EMC), 2014/35/EU Low Voltage Directive (LVD) and 2014/53/EU Radio Equipment (RED).



Lightspeed Technologies launched a formal product recycle program in Europe that complies with the European Union Directive 2012/19/EU on Waste Electrical and Electronic Equipment ("WEEE Directive"). Please visit our website at www.Lightspeed-tek.com for more information.



This product is manufactured using lead-free processes and is free of other materials harmful to the environment. It conforms to the most stringent new European guidelines for consumer products (RoHS).

PRÉCAUTIONS DE SÉCURITÉ ET CERTIFICATIONS



ATTENTION
RISQUE D'ÉLECTROCUTION
NE PAS OUVRIR



**CONFORMÉMENT AUX NORMES D'INSTALLATION APPLICABLES,
CE PRODUIT DOIT ÊTRE INSTALLÉ PAR UNE PERSONNE FAMILIARI-
SÉE AVEC LA CONCEPTION ET LE FONCTIONNEMENT DU PRODUIT
ET CONSCIENTE DES RISQUE ENCOURUS.**



L'éclair flèche dans un triangle équilatéral avertit l'utilisateur de la présence d'une "tension dangereuse" non isolée à l'intérieur de l'appareil, qui peut être d'une ampleur suffisante pour constituer un risque d'électrocution.



Le point d'exclamation contenu dans un triangle équilatéral avertit l'utilisateur de la présence d'importantes instructions d'exploitation et de maintenance dans la documentation qui accompagne ce produit.



**UTILISEZ UNIQUEMENT LA BATTERIE
LIGHTSPEED FOURNIE**

CERTIFICATIONS



Ce produit est certifié conforme aux normes et aux exigences UL en matière de sécurité électrique par Underwriters Laboratories Inc.



Ce produit est conforme aux principales exigences des directives de l'Union Européenne suivantes : 2014/30/EU Electromagnetic Compatibility (EMC), 2014/35/EU Low Voltage Directive (LVD) and 2014/53/EU Radio Equipment (RED) .



LightSpeed Technologies a lancé un programme de recyclage de produits en Europe conformément à la directive de l'Union Européenne 2012/19/EU relative aux déchets d'équipements électriques et électroniques (directive « DEEE »). Veuillez visiter notre page Web www.light-speed-tek.com pour plus de renseignements.



Ce produit est fabriqué en utilisant des processus sans plomb ni aucune autre matière nuisible à l'environnement. Il est conforme aux nouvelles règles européennes les plus strictes en matière de biens de consommation (RoHS).

FCC Notice to user

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference; and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna (that is, the antenna for radio or television that is receiving" the interference).
- Reorient or relocate and increase the separation between the telecommunications equipment and receiving antenna.
- Connect the telecommunications equipment into an outlet on a circuit different from that to which the receiving antenna is connected.
- Consult the dealer or an experienced radio/TV technician for help.

English:

IMPORTANT NOTE: To comply with the FCC RF exposure compliance requirements, the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. No change to the antenna or the device is permitted. Any change to the antenna or the device could result in the device exceeding the RF exposure requirements and void user's authority to operate the device.

French:

NOTE IMPORTANTE: Pour se conformer aux règles d'exposition des ondes RF par la FCC, la (ou les) antenne(s) utilisée(s) par ce transmetteur doivent être installées de façon à être séparée d'une distance d'au moins 20 cm de toute personne et ne doit pas être utilisée près ou en conjonction avec aucune autre antenne ou transmetteur. Aucune modification à l'antenne ou à l'appareil n'est permise. Toute modification à l'antenne ou à l'appareil peut résulter que l'appareil excédera l'exposition aux ondes RF réglementaires et ainsi annuler le droit à l'utilisateur d'utiliser l'appareil.

Notice to Canada User

English

This device complies with Industry Canada licence exempt RSS standard(s).

Operation is subject to the following two conditions: