


# *SMP-1000/AT-9100 CORD FORM*

## *1) BIT FORM*

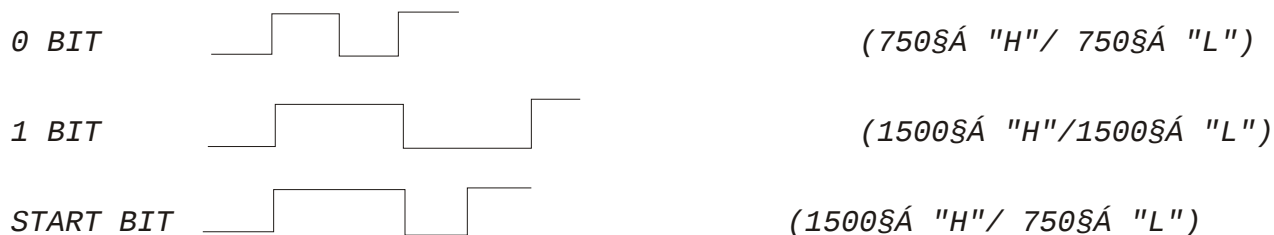

## *2) DATA FORM*

| <i>NULL</i> | <i>START</i> | <i>ID CODE</i> | <i>CHANNEL</i> | <i>CONTROL CODE</i> |
|-------------|--------------|----------------|----------------|---------------------|
|-------------|--------------|----------------|----------------|---------------------|

- \*NULL - 01010101 (8BIT)*
- \*START - START BIT (1BIT)*
- \*ID CODE - RANDOM DATA (20BIT)*
- \*CHANNEL - CHANNEL DATA (8BIT)*
- \*CONTROL CODE - FIXED DATA (8BIT)*

| <i>CONTROL CODE</i> | <i>DATA</i> |
|---------------------|-------------|
| <i>TALK</i>         | <i>F1H</i>  |
| <i>TALK OFF</i>     | <i>41H</i>  |
| <i>RING</i>         | <i>FBH</i>  |
| <i>PAGE</i>         | <i>F2H</i>  |
| <i>REDIAL</i>       | <i>0DH</i>  |
| <i>FLASH</i>        | <i>F6H</i>  |
| <i>CHANNEL</i>      | <i>F4H</i>  |
| <i>DIAL 1</i>       | <i>01H</i>  |
| <i>2</i>            | <i>02H</i>  |
| <i>3</i>            | <i>03H</i>  |
| <i>4</i>            | <i>04H</i>  |
| <i>5</i>            | <i>05H</i>  |
| <i>6</i>            | <i>06H</i>  |
| <i>7</i>            | <i>07H</i>  |
| <i>8</i>            | <i>08H</i>  |
| <i>9</i>            | <i>H 09</i> |
| <i>0</i>            | <i>0AH</i>  |
| <i>*</i>            | <i>0BH</i>  |
| <i>#</i>            | <i>0CH</i>  |