


SMP-1000/AT-9100 CORD FORM

1) BIT FORM

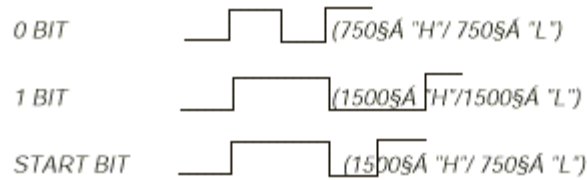

2) DATA FORM

NULL	START	ID	CODE	CHANNEL	CONTROL	CODE
------	-------	----	------	---------	---------	------

- *NULL - 01010101 (8BIT)
- *START - START BIT (1BIT)
- *ID CODE - RANDOM DATA (20BIT)
- *CHANNEL - CHANNEL DATA (8BIT)
- *CONTROL CODE - FIXED DATA (8BIT)

CONTROL CODE	DATA
TALK	F1H
TALK OFF	41H
RING	FBH
PAGE	F2H
REDIAL	0DH
FLASH	F6H
CHANNEL	F4H
DIAL 1	01H
2	02H
3	03H
4	04H
5	05H
6	06H
7	07H
8	08H
9	09 H
0	0AH
*	0BH
#	0CH