

TEST REPORT

Reference No...... : WTF24D02037894W002
FCC ID : 2A6UA-BM03-A
Applicant..... : Hong Kong Lute Technology Co., Limited
Address..... : Room 02, 21/F, Hip Kwan Commercial Building, 38 Pitt Street, Yau Ma Tei, Kowloon, Hong Kong
Manufacturer : Hong Kong Lute Technology Co., Limited
Address..... : Room 02, 21/F, Hip Kwan Commercial Building, 38 Pitt Street, Yau Ma Tei, Kowloon, Hong Kong
Product..... : Video Baby Monitor (Camera)
Model(s) : BM03
Brand Name : momcozy
Standards..... : FCC 47CFR Part 15.247
Date of Receipt sample : 2024-03-07
Date of Test : 2024-03-07 to 2024-03-29
Date of Issue..... : 2024-03-29
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

Estel Qian

Estel Qian / Project Engineer

Approved by:



Deval Qin / Designated Reviewer

2 Contents

	Page
1 COVER PAGE	1
2 CONTENTS	2
3 REVISION HISTORY	4
4 GENERAL INFORMATION	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST.....	5
4.4 TEST FACILITY	6
4.5 SUBCONTRACTED.....	6
4.6 ABNORMALITIES FROM STANDARD CONDITIONS	6
4.7 TEST MODE	7
5 TEST SUMMARY	8
6 EQUIPMENT USED DURING TEST	9
6.1 EQUIPMENTS LIST	9
6.2 DESCRIPTION OF SUPPORT UNITS.....	10
6.3 MEASUREMENT UNCERTAINTY	10
6.4 TEST EQUIPMENT CALIBRATION	10
7 DUTY CYCLE	11
8 CONDUCTED EMISSION	13
8.1 E.U.T. OPERATION.....	13
8.2 EUT SETUP	13
8.3 MEASUREMENT DESCRIPTION	13
8.4 CONDUCTED EMISSION TEST RESULT	14
9 RADIATED EMISSIONS	16
9.1 EUT OPERATION.....	16
9.2 TEST SETUP	17
9.3 SPECTRUM ANALYZER SETUP	18
9.4 TEST PROCEDURE.....	19
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	19
9.6 SUMMARY OF TEST RESULTS.....	20
10 CONDUCTED SPURIOUS EMISSIONS	32
10.1 TEST PROCEDURE	32
10.2 TEST RESULT	33
11 BAND EDGE MEASUREMENT	43
11.1 TEST PROCEDURE	43
11.2 TEST RESULT	44
12 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT	46
12.1 TEST PROCEDURE	46
12.2 TEST RESULT	46
13 MAXIMUM PEAK CONDUCTED OUTPUT POWER	53
13.1 TEST PROCEDURE	53
13.2 TEST RESULT	53
14 POWER SPECTRAL DENSITY	58

14.1	TEST PROCEDURE	58
14.2	TEST RESULT	58
15	ANTENNA REQUIREMENT	63
16	RF EXPOSURE	63
17	PHOTOGRAPHS OF TEST SETUP AND EUT.....	63

3 Revision History

Test Report No.	Date of Receipt Sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTF24D02037894W002	2024-03-07	2024-03-07 to 2024-03-29	2024-03-29	Original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	Video Baby Monitor (Camera)
Model(s):	BM03
Test Sample No.:	1-1/2
Model Description:	N/A
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40
Hardware Version:	BM03-TX-MAIN-01A-2-1, BM03-TX-JB-01A-2, BM03-TX-LED-01A-2
Software Version:	v1.0.0-240321102527

4.2 Details of E.U.T.

Operation Frequency:	802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz
----------------------	--

Max. RF output power:	16.60dBm
Type of Modulation:	DSSS, OFDM
Antenna installation:	Copper pipe
Antenna Gain:	2.62dBi

Note:

#: The antenna gain is provided by the applicant, and the applicant should be responsible for its authenticity, WALTEK lab has not verified the authenticity of its information.

Ratings:	Input: 5V \equiv 2A
Adapter:	Manufacturer: Shenzhen Sunshine Technological Co., Ltd. Model: XSC-0502000SU Input: 100-240V~ 50/60Hz 0.4A Output: 5V \equiv 2000mA

USB cable:	Type A plug to type C plug, length 200cm \pm 5cm, no shield, no ferrite core.
------------	---

4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	-	-

4.4 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

4.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes No

If Yes, list the related test items and lab information:

Test Lab: N/A

Lab address: N/A

Test items: N/A

4.6 Abnormalities from Standard Conditions

None.

4.7 Test Mode

Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Power Spectral Density	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
6dB Bandwidth	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Band Edge	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Transmitter Spurious Emissions	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX

Note: Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product.

5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3), (4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

6 Equipment Used during Test

6.1 Equipments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Calibration Due Date
Conducted Emissions 1#						
1	EMI Test Receiver	R&S	ESCI	100947	2023-07-27	2024-07-26
2	LISN	R&S	ENV216	100115	2023-07-27	2024-07-26
3	Cable	Top	TYPE16(3.5M)	-	2023-07-27	2024-07-26
3m Semi-anechoic Chamber for Radiation Emissions 1#						
1	Spectrum Analyzer	R&S	FSP30	100091	2023-04-24	2024-04-23
2	Amplifier	Agilent	8447D	2944A10178	2023-07-27	2024-07-26
3	Tri-log Broadband Antenna	SCHWARZBECK	VULB9163	336	2023-08-07	2024-08-06
4	Coaxial Cable	Top	TYPE16(13M)	-	2023-04-24	2024-04-23
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120D	667	2024-01-23	2025-01-22
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2023-08-02	2024-08-01
7	Broadband Pre-amplifier	COMPLIANCE	PAP-1G18	2004	2023-08-08	2024-08-07
8	Coaxial Cable	Top	ZT26-NJ-NJ-8M/FA	-	2023-04-24	2024-04-23
9	Microwave Amplifier	SCHWARZBECK	BBV 9721	100472	2023-07-27	2024-07-26
10	Coaxial Cable	Top	ZT40-2.92J-2.92J-2.0M	17100919	2023-04-24	2024-04-23
3m Semi-anechoic Chamber for Radiation Emissions 2#						
1	Test Receiver	R&S	ESCI	101296	2023-04-24	2024-04-23
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2023-11-04	2024-11-03
3	Active Loop Antenna	Com-Power	AL-130R	10160007	2023-05-07	2024-05-06
4	Amplifier	ANRITSU	MH648A	M43381	2023-04-24	2024-04-23
5	Cable	HUBER+SUHNER	CBL2	525178	2023-04-24	2024-04-23
RF Conducted Testing						
1	Spectrum Analyzer	R&S	FSP40	100501	2023-07-27	2024-07-26
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-07-27	2024-07-26

Test Software:

Test Item	Software name	Software version
Conduction disturbance Radiated Emission(3m)	EZ-EMC	EZ-EMC(RA-03A1-1)

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64dB (AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 ⁻⁷ Hz
RF Power	± 0.42 dB
RF Power Density	± 0.7dB
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor: k=2	

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R. China.

7 Duty Cycle

Type of Modulation	On time ms	Period ms	Duty Cycle linear	Duty Cycle %	Duty Cycle Factor(dB)	Average Factor(dB)
802.11b	8.280	8.520	0.97	97.18	0.12	-0.25
802.11g	1.360	1.420	0.96	95.77	0.19	-0.37
802.11n-HT20	1.270	1.330	0.95	95.49	0.20	-0.40
802.11n-HT40	0.635	0.685	0.93	92.70	0.33	-0.66


Remark:

Duty cycle=On Time/period;

Duty cycle factor= $10 \cdot \log(1/\text{Duty cycle})$;


Average factor= $20 \log_{10} \text{Duty cycle}$

Wi-Fi 802.11b

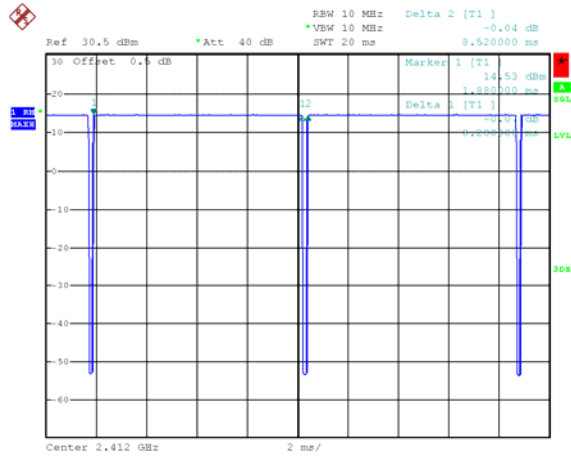


Date: 26.MAR.2024 17:25:01

Wi-Fi 802.11g

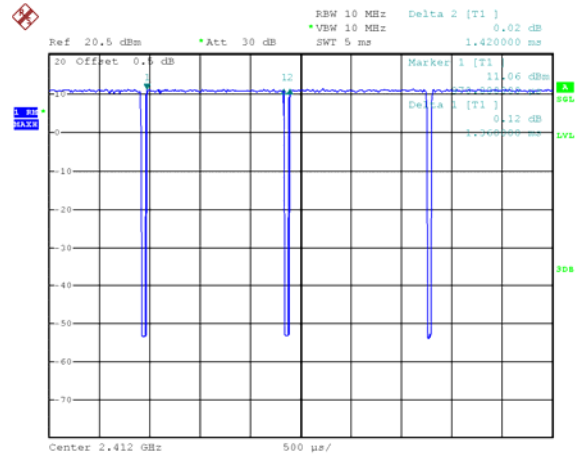


Date: 26.MAR.2024 18:09:50

Wi-Fi 802.11n-HT20

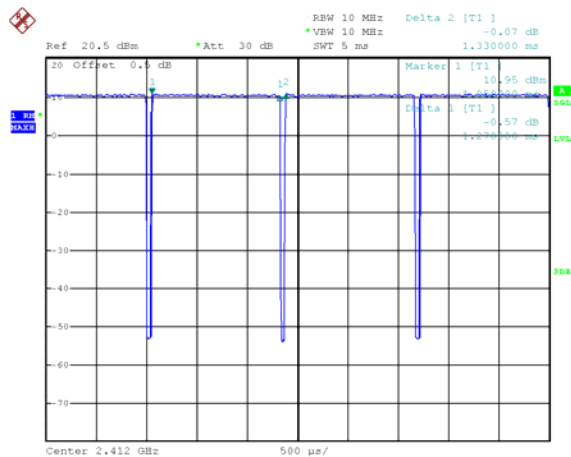

Date: 26.MAR.2024 18:38:27

Wi-Fi 802.11n-HT40

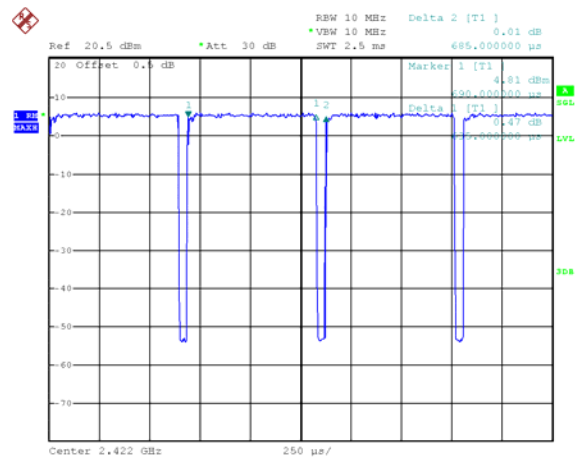

Date: 26.MAR.2024 19:00:44

8 Conducted Emission

Test Requirement:	47CFR FCC Part15 Subpart C §15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Limit:	

Frequency (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5.0	56	46
5.0 to 30	60	50

*Decreases with the logarithm of the frequency.


8.1 E.U.T. Operation

Operating Environment:	
Temperature:	25.4 °C
Humidity:	54.7 % RH
Atmospheric Pressure:	101.6kPa
EUT Operation:	

The test was performed in Transmitting mode, the worst test data were shown in the report.

8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

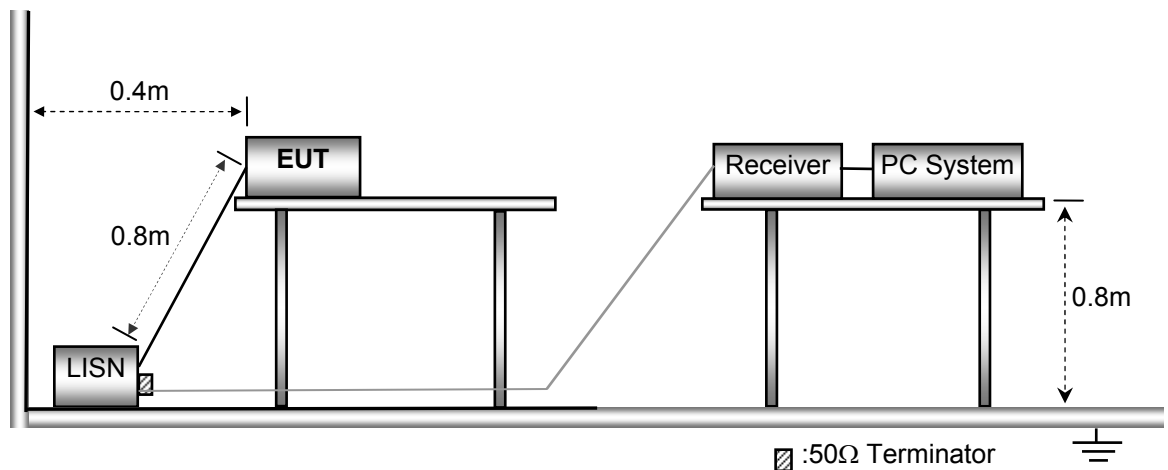


8.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

8.4 Conducted Emission Test Result


Remark: only the worst data (TX 11b mode High channel mode) were reported

Live line:

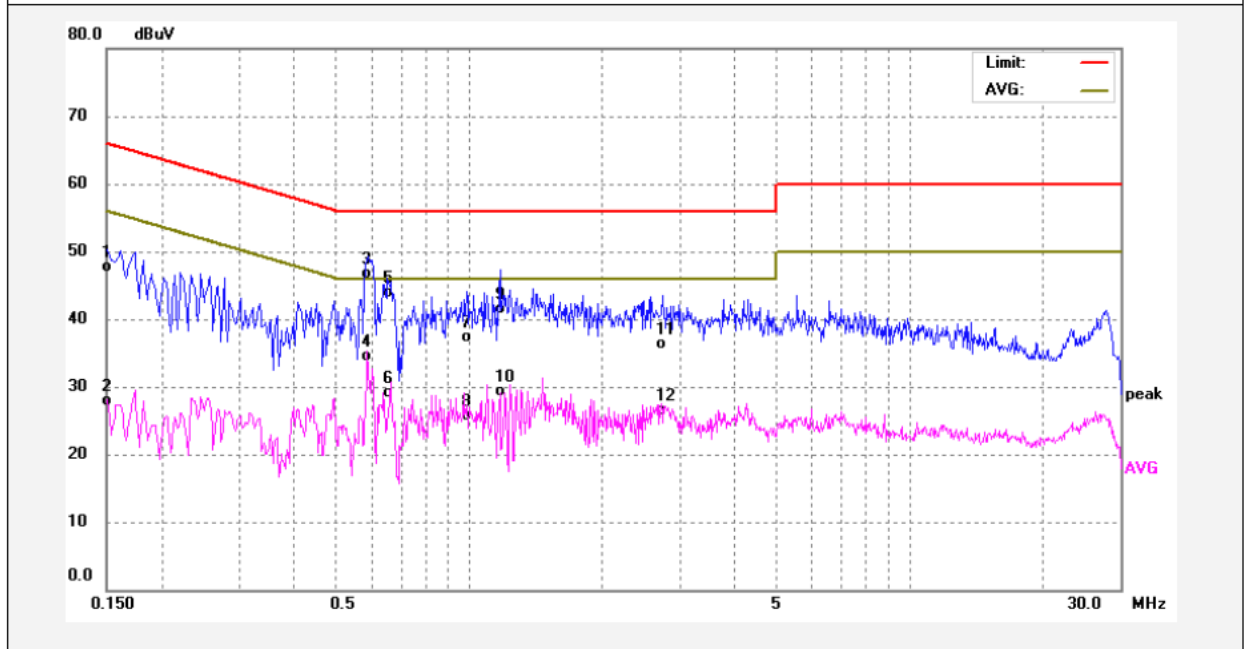

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	36.74	10.92	47.66	65.99	-18.33	QP	
2	0.1500	16.97	10.92	27.89	55.99	-28.10	AVG	
3	0.5899	35.76	10.99	46.75	56.00	-9.25	QP	
4	0.5899	23.57	10.99	34.56	46.00	-11.44	AVG	
5	0.6540	32.94	11.00	43.94	56.00	-12.06	QP	
6	0.6540	18.15	11.00	29.15	46.00	-16.85	AVG	
7	0.9860	26.25	11.05	37.30	56.00	-18.70	QP	
8	0.9860	14.64	11.05	25.69	46.00	-20.31	AVG	
9	1.1740	30.50	11.04	41.54	56.00	-14.46	QP	
10	1.1740	18.36	11.04	29.40	46.00	-16.60	AVG	
11	2.7460	25.09	11.12	36.21	56.00	-19.79	QP	
12	2.7460	15.48	11.12	26.60	46.00	-19.40	AVG	

Neutral line:

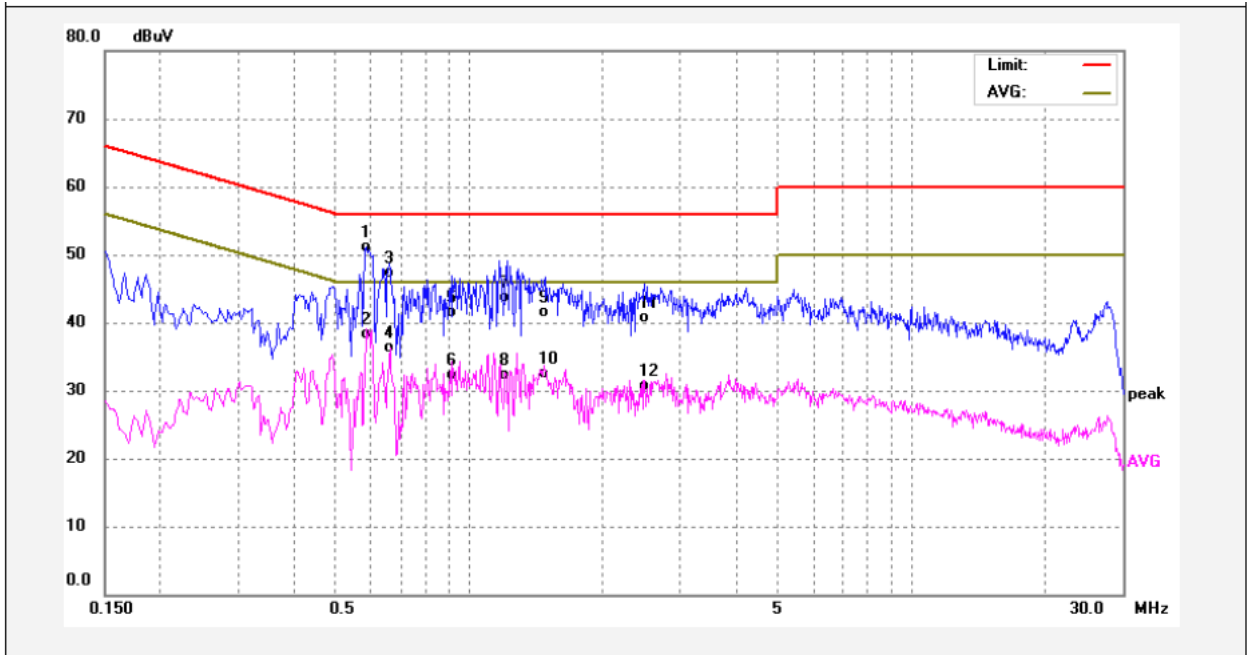

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.5860	39.95	11.11	51.06	56.00	-4.94	QP	
2	0.5860	27.24	11.11	38.35	46.00	-7.65	AVG	
3	0.6580	36.24	11.14	47.38	56.00	-8.62	QP	
4	0.6580	25.10	11.14	36.24	46.00	-9.76	AVG	
5	0.9180	30.13	11.36	41.49	56.00	-14.51	QP	
6	0.9180	21.00	11.36	32.36	46.00	-13.64	AVG	
7	1.2180	32.37	11.26	43.63	56.00	-12.37	QP	
8	1.2180	21.07	11.26	32.33	46.00	-13.67	AVG	
9	1.4860	30.21	11.30	41.51	56.00	-14.49	QP	
10	1.4860	21.27	11.30	32.57	46.00	-13.43	AVG	
11	2.4980	29.41	11.34	40.75	56.00	-15.25	QP	
12	2.4980	19.33	11.34	30.67	46.00	-15.33	AVG	

9 Radiated Emissions

Test Requirement: 47CFR FCC Part15 Subpart C §15.209&15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019;
ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

9.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation:

The test was performed in Transmitting mode, the worst test data were shown in the report.


9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

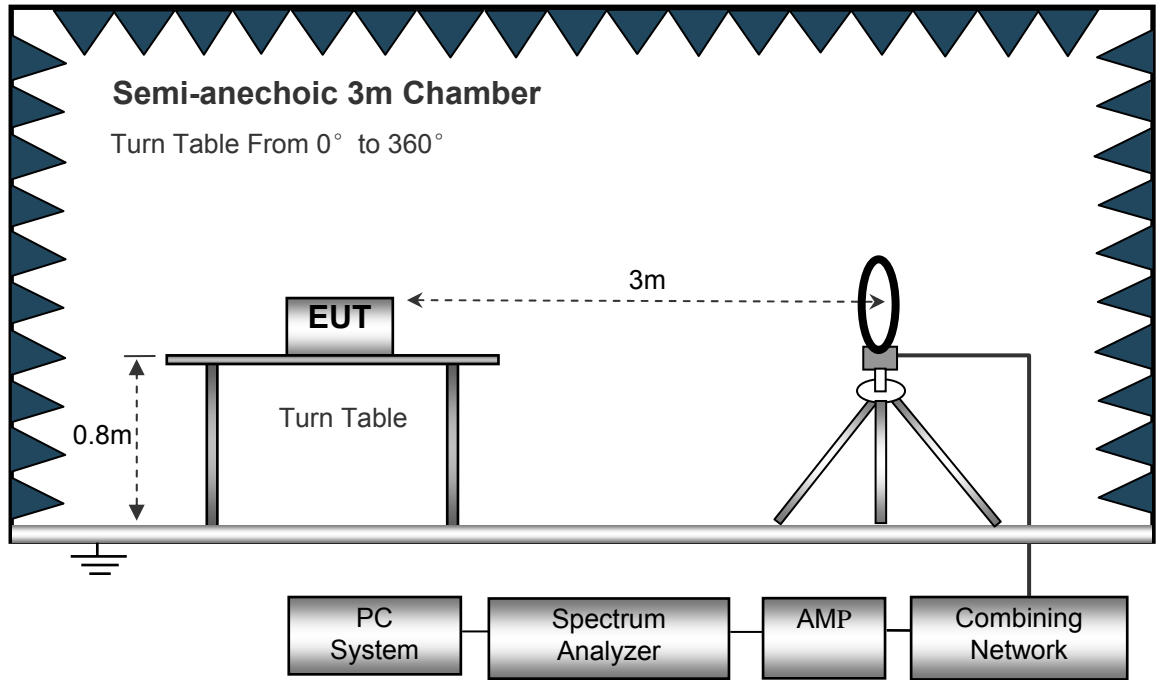

The test setup for emission measurement from 30 MHz to 1 GHz.

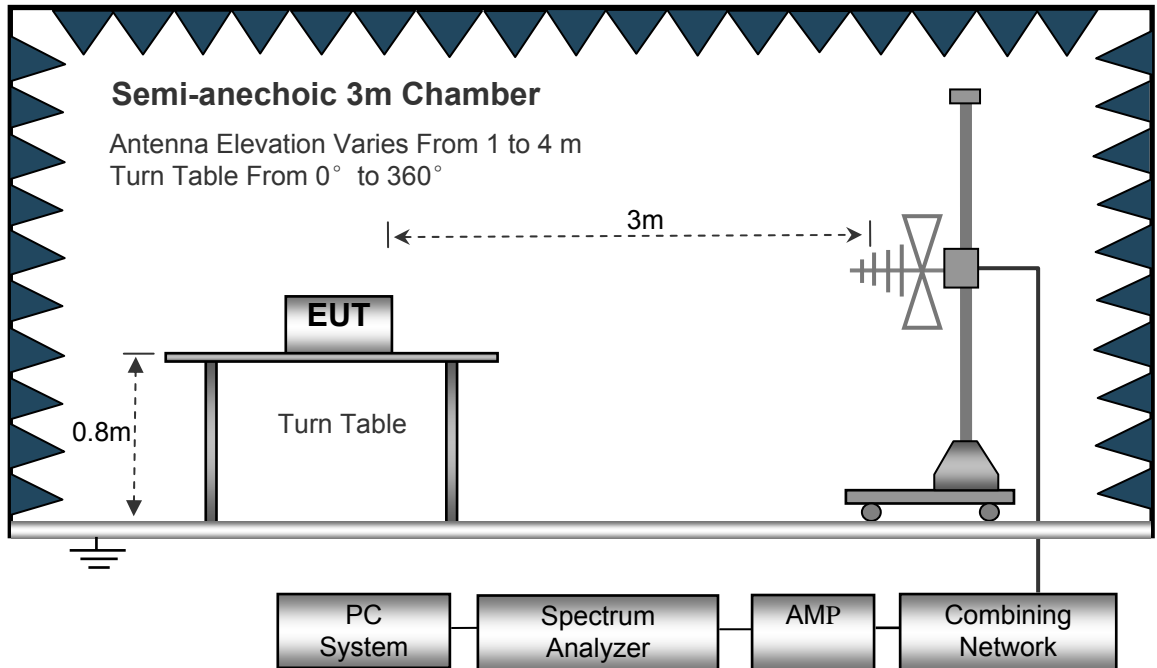

The test setup for emission measurement above 1 GHz.

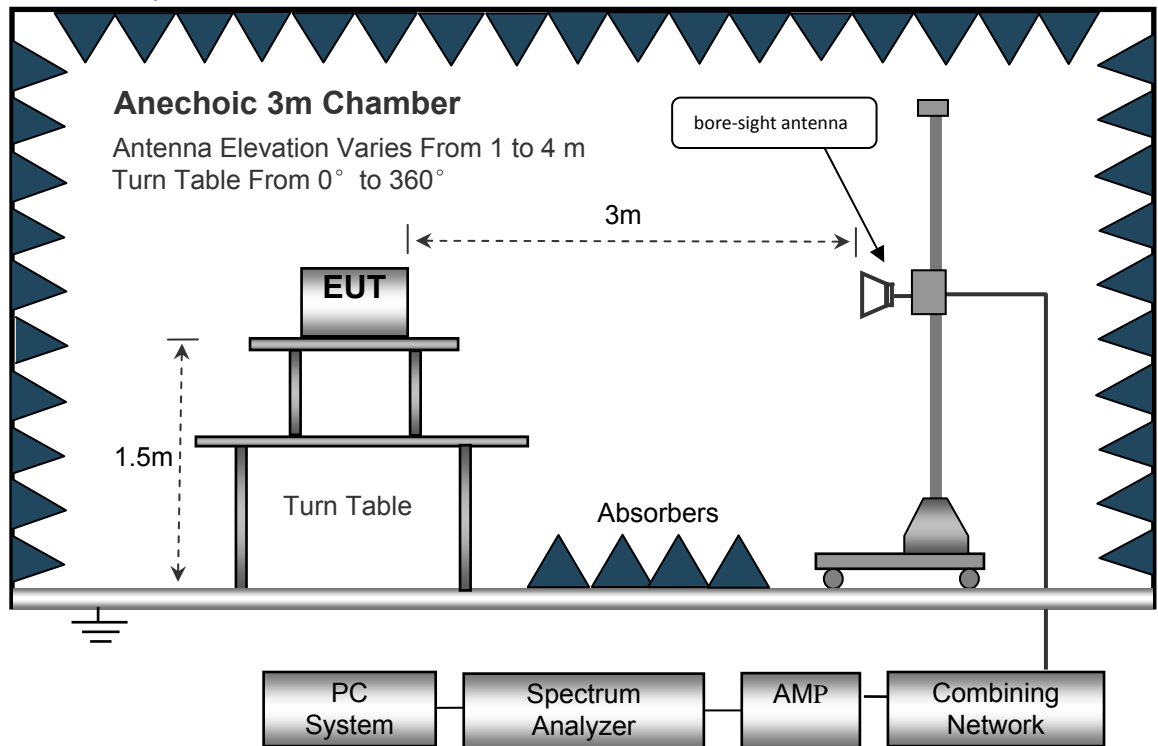

9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used during radiated emissions above 1GHz measurement.

9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

9.6 Summary of Test Results

Test Frequency: 9kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 8GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11b: Low Channel 2412MHz									
424.33	39.68	QP	110	1.7	H	-13.21	26.47	46.00	-19.53
424.33	46.55	QP	262	1.5	V	-13.21	33.34	46.00	-12.66
4824.00	53.12	PK	24	1.3	V	-1.06	52.06	74.00	-21.94
4824.00	40.68	Ave	24	1.3	V	-1.06	39.62	54.00	-14.38
7236.00	49.91	PK	86	1.8	H	1.33	51.24	74.00	-22.76
7236.00	39.19	Ave	86	1.8	H	1.33	40.52	54.00	-13.48
2338.26	47.28	PK	108	1.5	V	-13.19	34.09	74.00	-39.91
2338.26	38.41	Ave	108	1.5	V	-13.19	25.22	54.00	-28.78
2386.30	42.44	PK	83	1.5	H	-13.14	29.30	74.00	-44.70
2386.30	38.57	Ave	83	1.5	H	-13.14	25.43	54.00	-28.57
2488.97	43.48	PK	155	1.2	V	-13.08	30.40	74.00	-43.60
2488.97	38.29	Ave	155	1.2	V	-13.08	25.21	54.00	-28.79

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11b: Middle Channel 2437MHz									
424.33	39.09	QP	73	1.7	H	-13.21	25.88	46.00	-20.12
424.33	45.51	QP	235	1.3	V	-13.21	32.30	46.00	-13.70
4874.00	54.62	PK	172	1.6	V	-0.62	54.00	74.00	-20.00
4874.00	40.16	Ave	172	1.6	V	-0.62	39.54	54.00	-14.46
7311.00	50.56	PK	219	1.1	H	2.21	52.77	74.00	-21.23
7311.00	39.22	Ave	219	1.1	H	2.21	41.43	54.00	-12.57
2323.74	46.50	PK	103	1.7	V	-13.19	33.31	74.00	-40.69
2323.74	39.73	Ave	103	1.7	V	-13.19	26.54	54.00	-27.46
2363.44	44.59	PK	242	1.7	H	-13.14	31.45	74.00	-42.55
2363.44	36.36	Ave	242	1.7	H	-13.14	23.22	54.00	-30.78
2488.91	44.00	PK	66	1.8	V	-13.08	30.92	74.00	-43.08
2488.91	37.41	Ave	66	1.8	V	-13.08	24.33	54.00	-29.67

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11b: High Channel 2462MHz									
424.33	39.80	QP	251	1.3	H	-13.21	26.59	46.00	-19.41
424.33	45.88	QP	200	1.2	V	-13.21	32.67	46.00	-13.33
4924.00	52.51	PK	24	1.8	V	-0.24	52.27	74.00	-21.73
4924.00	41.12	Ave	24	1.8	V	-0.24	40.88	54.00	-13.12
7386.00	50.48	PK	289	1.5	H	2.84	53.32	74.00	-20.68
7386.00	40.19	Ave	289	1.5	H	2.84	43.03	54.00	-10.97
2320.66	46.02	PK	146	1.7	V	-13.19	32.83	74.00	-41.17
2320.66	38.77	Ave	146	1.7	V	-13.19	25.58	54.00	-28.42
2373.32	43.79	PK	66	2.0	H	-13.14	30.65	74.00	-43.35
2373.32	38.03	Ave	66	2.0	H	-13.14	24.89	54.00	-29.11
2490.89	42.37	PK	120	1.9	V	-13.08	29.29	74.00	-44.71
2490.89	36.63	Ave	120	1.9	V	-13.08	23.55	54.00	-30.45

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Correct ed Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11g Low Channel 2412MHz									
424.33	38.35	QP	346	1.1	H	-13.21	25.14	46.00	-20.86
424.33	46.87	QP	25	1.7	V	-13.21	33.66	46.00	-12.34
4824.00	51.76	PK	221	1.5	V	-1.06	50.70	74.00	-23.30
4824.00	41.77	Ave	221	1.5	V	-1.06	40.71	54.00	-13.29
7236.00	49.10	PK	246	1.5	H	1.33	50.43	74.00	-23.57
7236.00	39.98	Ave	246	1.5	H	1.33	41.31	54.00	-12.69
2324.18	46.35	PK	19	2.0	V	-13.19	33.16	74.00	-40.84
2324.18	39.42	Ave	19	2.0	V	-13.19	26.23	54.00	-27.77
2351.48	42.49	PK	60	1.3	H	-13.14	29.35	74.00	-44.65
2351.48	37.50	Ave	60	1.3	H	-13.14	24.36	54.00	-29.64
2493.61	42.87	PK	247	1.8	V	-13.08	29.79	74.00	-44.21
2493.61	37.81	Ave	247	1.8	V	-13.08	24.73	54.00	-29.27

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Correct ed Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11g Middle Channel 2437MHz									
424.33	38.71	QP	15	1.1	H	-13.21	25.50	46.00	-20.50
424.33	46.43	QP	6	1.4	V	-13.21	33.22	46.00	-12.78
4874.00	52.30	PK	207	1.2	V	-0.62	51.68	74.00	-22.32
4874.00	40.28	Ave	207	1.2	V	-0.62	39.66	54.00	-14.34
7311.00	48.58	PK	111	1.6	H	2.21	50.79	74.00	-23.21
7311.00	38.99	Ave	111	1.6	H	2.21	41.20	54.00	-12.80
2310.43	45.89	PK	62	1.7	V	-13.19	32.70	74.00	-41.30
2310.43	38.66	Ave	62	1.7	V	-13.19	25.47	54.00	-28.53
2385.57	43.20	PK	221	1.7	H	-13.14	30.06	74.00	-43.94
2385.57	38.02	Ave	221	1.7	H	-13.14	24.88	54.00	-29.12
2486.29	42.49	PK	120	1.8	V	-13.08	29.41	74.00	-44.59
2486.29	36.52	Ave	120	1.8	V	-13.08	23.44	54.00	-30.56

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11g High Channel 2462MHz									
424.33	39.74	QP	221	1.5	H	-13.21	26.53	46.00	-19.47
424.33	46.74	QP	228	1.6	V	-13.21	33.53	46.00	-12.47
4924.00	51.14	PK	114	1.8	V	-0.24	50.90	74.00	-23.10
4924.00	41.48	Ave	114	1.8	V	-0.24	41.24	54.00	-12.76
7386.00	47.22	PK	164	1.5	H	2.84	50.06	74.00	-23.94
7386.00	39.98	Ave	164	1.5	H	2.84	42.82	54.00	-11.18
2348.25	45.64	PK	112	1.9	V	-13.19	32.45	74.00	-41.55
2348.25	39.63	Ave	112	1.9	V	-13.19	26.44	54.00	-27.56
2388.87	43.75	PK	77	1.8	H	-13.14	30.61	74.00	-43.39
2388.87	38.37	Ave	77	1.8	H	-13.14	25.23	54.00	-28.77
2492.58	44.48	PK	156	1.2	V	-13.08	31.40	74.00	-42.60
2492.58	37.43	Ave	156	1.2	V	-13.08	24.35	54.00	-29.65

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT20) Low Channel 2412MHz									
424.33	40.88	QP	186	1.3	H	-13.21	27.67	46.00	-18.33
424.33	45.42	QP	306	1.4	V	-13.21	32.21	46.00	-13.79
4824.00	50.48	PK	250	1.5	V	-1.06	49.42	74.00	-24.58
4824.00	41.22	Ave	250	1.5	V	-1.06	40.16	54.00	-13.84
7236.00	46.09	PK	46	1.9	H	1.33	47.42	74.00	-26.58
7236.00	39.20	Ave	46	1.9	H	1.33	40.53	54.00	-13.47
2322.69	45.32	PK	259	1.1	V	-13.19	32.13	74.00	-41.87
2322.69	37.61	Ave	259	1.1	V	-13.19	24.42	54.00	-29.58
2373.19	44.66	PK	140	1.7	H	-13.14	31.52	74.00	-42.48
2373.19	36.06	Ave	140	1.7	H	-13.14	22.92	54.00	-31.08
2485.99	43.91	PK	259	1.9	V	-13.08	30.83	74.00	-43.17
2485.99	36.04	Ave	259	1.9	V	-13.08	22.96	54.00	-31.04

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT20) Middle Channel 2437MHz									
424.33	40.01	QP	304	1.7	H	-13.21	26.80	46.00	-19.20
424.33	45.89	QP	257	1.5	V	-13.21	32.68	46.00	-13.32
4874.00	50.64	PK	107	1.4	V	-0.62	50.02	74.00	-23.98
4874.00	40.22	Ave	107	1.4	V	-0.62	39.60	54.00	-14.40
7311.00	47.07	PK	48	1.3	H	2.21	49.28	74.00	-24.72
7311.00	40.48	Ave	48	1.3	H	2.21	42.69	54.00	-11.31
2337.25	45.79	PK	227	1.3	V	-13.19	32.60	74.00	-41.40
2337.25	37.92	Ave	227	1.3	V	-13.19	24.73	54.00	-29.27
2370.26	43.98	PK	96	1.3	H	-13.14	30.84	74.00	-43.16
2370.26	38.99	Ave	96	1.3	H	-13.14	25.85	54.00	-28.15
2487.99	43.03	PK	277	1.4	V	-13.08	29.95	74.00	-44.05
2487.99	38.09	Ave	277	1.4	V	-13.08	25.01	54.00	-28.99

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT20) High Channel 2462MHz									
424.33	39.14	QP	105	1.8	H	-13.21	25.93	46.00	-20.07
424.33	46.30	QP	192	1.1	V	-13.21	33.09	46.00	-12.91
4924.00	51.65	PK	244	1.6	V	-0.24	51.41	74.00	-22.59
4924.00	40.08	Ave	244	1.6	V	-0.24	39.84	54.00	-14.16
7386.00	45.80	PK	48	1.7	H	2.84	48.64	74.00	-25.36
7386.00	41.54	Ave	48	1.7	H	2.84	44.38	54.00	-9.62
2321.69	46.41	PK	313	1.0	V	-13.19	33.22	74.00	-40.78
2321.69	37.91	Ave	313	1.0	V	-13.19	24.72	54.00	-29.28
2364.24	42.25	PK	87	1.8	H	-13.14	29.11	74.00	-44.89
2364.24	38.04	Ave	87	1.8	H	-13.14	24.90	54.00	-29.10
2499.15	43.42	PK	297	1.9	V	-13.08	30.34	74.00	-43.66
2499.15	37.65	Ave	297	1.9	V	-13.08	24.57	54.00	-29.43

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT40) Low Channel 2422MHz									
424.33	37.83	QP	105	1.9	H	-13.21	24.62	46.00	-21.38
424.33	45.42	QP	150	1.3	V	-13.21	32.21	46.00	-13.79
4844.00	49.49	PK	41	1.0	V	-1.06	48.43	74.00	-25.57
4844.00	37.78	Ave	41	1.0	V	-1.06	36.72	54.00	-17.28
7266.00	43.96	PK	253	1.6	H	1.33	45.29	74.00	-28.71
7266.00	39.67	Ave	253	1.6	H	1.33	41.00	54.00	-13.00
2326.96	46.91	PK	348	1.5	V	-13.19	33.72	74.00	-40.28
2326.96	37.89	Ave	348	1.5	V	-13.19	24.70	54.00	-29.30
2370.54	43.72	PK	47	1.1	H	-13.14	30.58	74.00	-43.42
2370.54	38.91	Ave	47	1.1	H	-13.14	25.77	54.00	-28.23
2497.18	44.48	PK	230	1.7	V	-13.08	31.40	74.00	-42.60
2497.18	36.40	Ave	230	1.7	V	-13.08	23.32	54.00	-30.68

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT40) Middle Channel 2437MHz									
424.33	37.06	QP	276	1.5	H	-13.21	23.85	46.00	-22.15
424.33	45.82	QP	24	1.5	V	-13.21	32.61	46.00	-13.39
4874.00	49.67	PK	190	1.8	V	-0.62	49.05	74.00	-24.95
4874.00	38.44	Ave	190	1.8	V	-0.62	37.82	54.00	-16.18
7311.00	43.46	PK	125	1.2	H	2.21	45.67	74.00	-28.33
7311.00	38.94	Ave	125	1.2	H	2.21	41.15	54.00	-12.85
2321.45	46.67	PK	303	1.1	V	-13.19	33.48	74.00	-40.52
2321.45	39.33	Ave	303	1.1	V	-13.19	26.14	54.00	-27.86
2363.79	44.58	PK	85	1.7	H	-13.14	31.44	74.00	-42.56
2363.79	36.16	Ave	85	1.7	H	-13.14	23.02	54.00	-30.98
2486.34	43.86	PK	199	1.2	V	-13.08	30.78	74.00	-43.22
2486.34	37.67	Ave	199	1.2	V	-13.08	24.59	54.00	-29.41

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT40) High Channel 2452MHz									
424.33	36.68	QP	336	1.3	H	-13.21	23.47	46.00	-22.53
424.33	45.14	QP	136	1.3	V	-13.21	31.93	46.00	-14.07
4904.00	49.92	PK	139	1.8	V	-0.24	49.68	74.00	-24.32
4904.00	38.86	Ave	139	1.8	V	-0.24	38.62	54.00	-15.38
7356.00	43.44	PK	191	1.9	H	2.84	46.28	74.00	-27.72
7356.00	39.85	Ave	191	1.9	H	2.84	42.69	54.00	-11.31
2333.43	45.68	PK	233	1.5	V	-13.19	32.49	74.00	-41.51
2333.43	37.44	Ave	233	1.5	V	-13.19	24.25	54.00	-29.75
2353.94	43.76	PK	206	1.8	H	-13.14	30.62	74.00	-43.38
2353.94	37.02	Ave	206	1.8	H	-13.14	23.88	54.00	-30.12
2487.75	43.63	PK	185	1.3	V	-13.08	30.55	74.00	-43.45
2487.75	38.88	Ave	185	1.3	V	-13.08	25.80	54.00	-28.20

Test Frequency: 8GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
ANSI C63.10:2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

10.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to _ 1.5 times the DTS bandwidth.
 - c) Set the RBW = 100 kHz.
 - d) Set the VBW _ [3 × RBW].
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

10.2 Test Result


9KHz – 30MHz

Mode: TX 11b channel 1

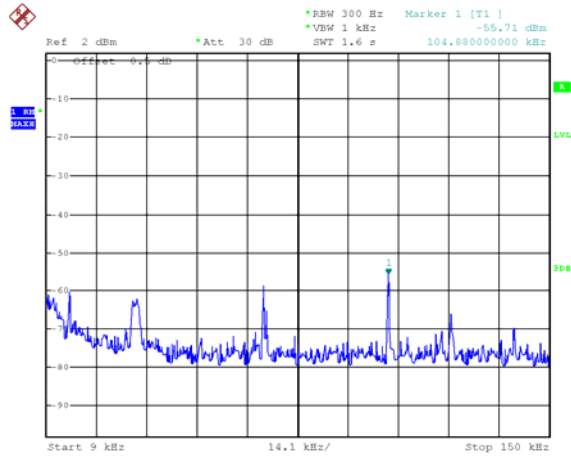


Date: 26.MAR.2024 17:19:01

Mode: TX 11b channel 1

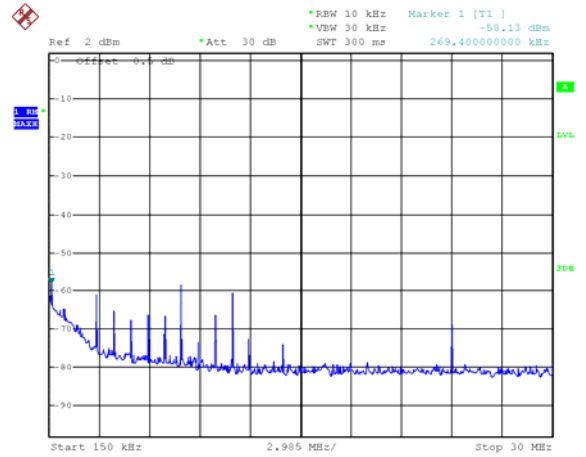


Date: 26.MAR.2024 17:19:22

Mode: TX 11b channel 6

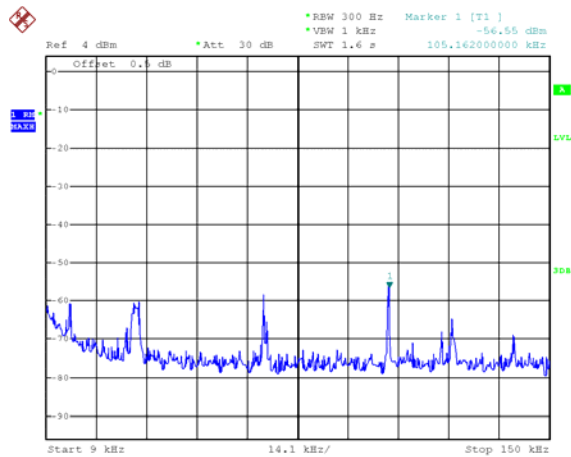


Date: 26.MAR.2024 17:12:08

Mode: TX 11b channel 6

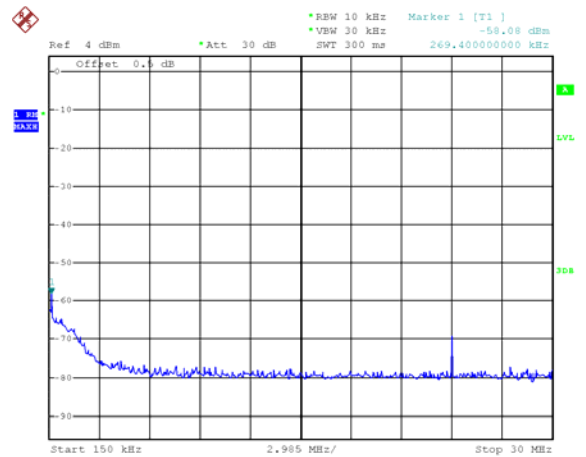


Date: 26.MAR.2024 17:14:35

Mode: TX 11b channel 11

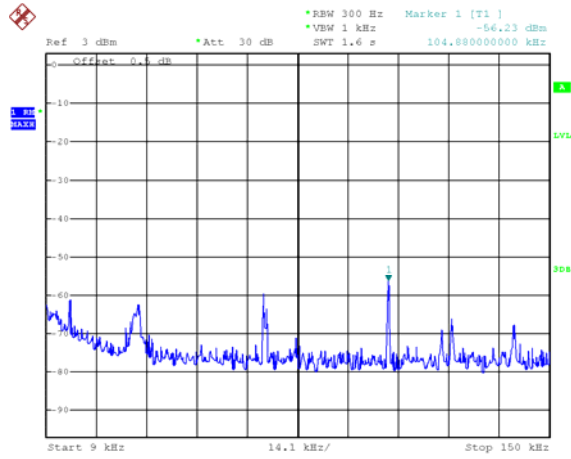


Date: 26.MAR.2024 17:04:16

Mode: TX 11b channel 11

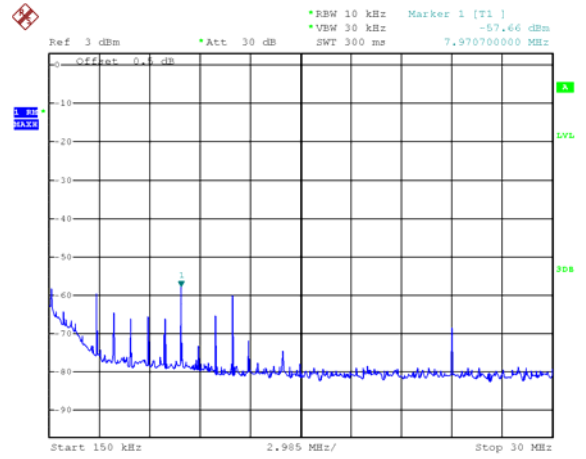


Date: 26.MAR.2024 17:04:36

Mode: TX 11g channel 1

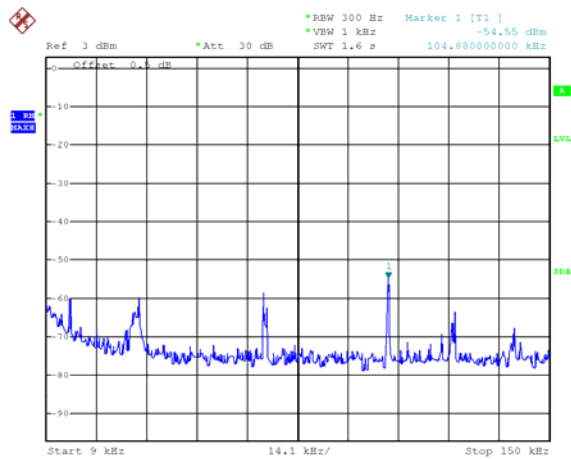


Date: 26.MAR.2024 18:11:12

Mode: TX 11g channel 1

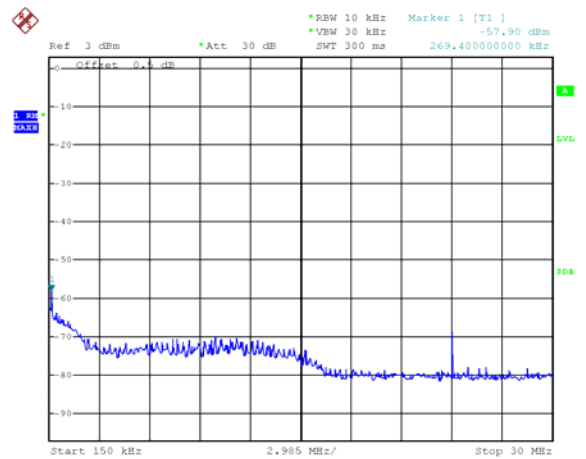


Date: 26.MAR.2024 18:11:37

Mode: TX 11g channel 6

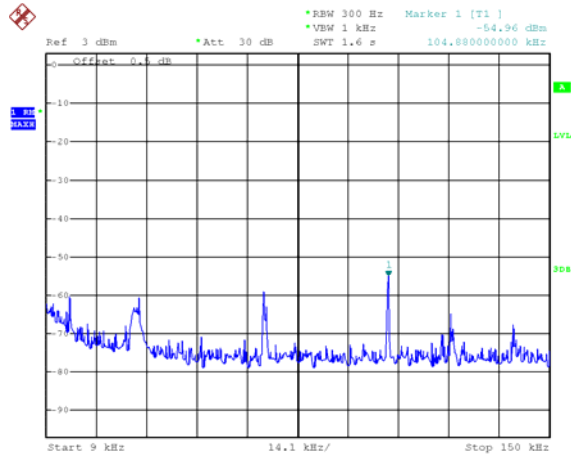


Date: 26.MAR.2024 18:19:31

Mode: TX 11g channel 6

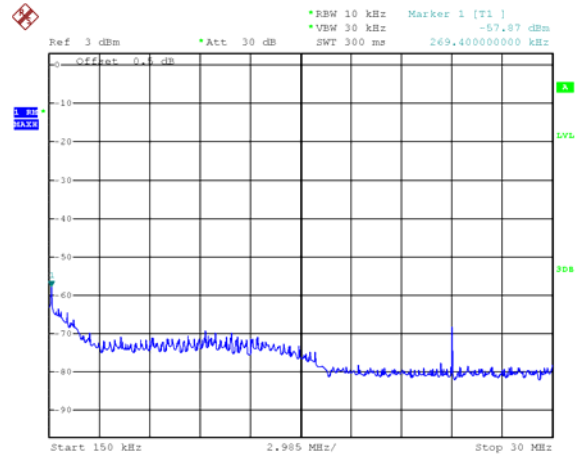


Date: 26.MAR.2024 18:19:55

Mode: TX 11g channel 11

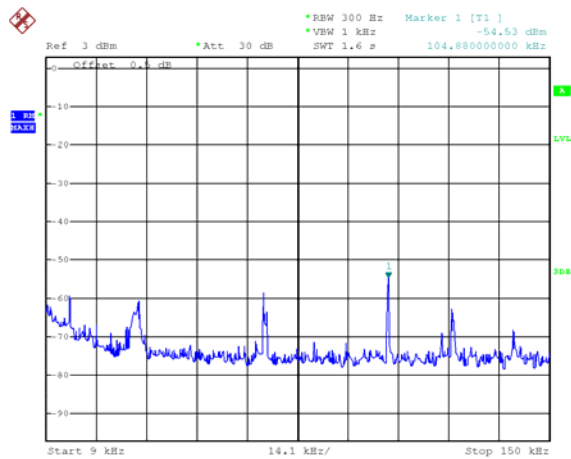


Date: 26.MAR.2024 18:28:07

Mode: TX 11g channel 11

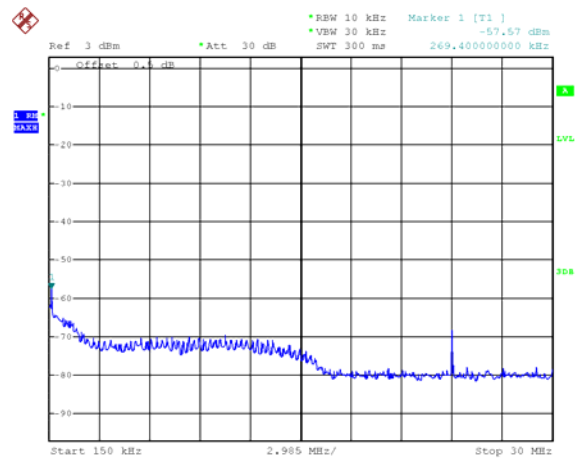


Date: 26.MAR.2024 18:28:36

Mode: TX 11n HT20 channel 1

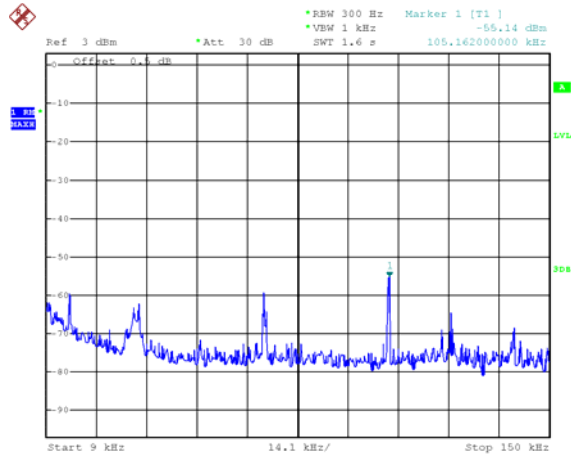


Date: 26.MAR.2024 18:35:52

Mode: TX 11n HT20 channel 1

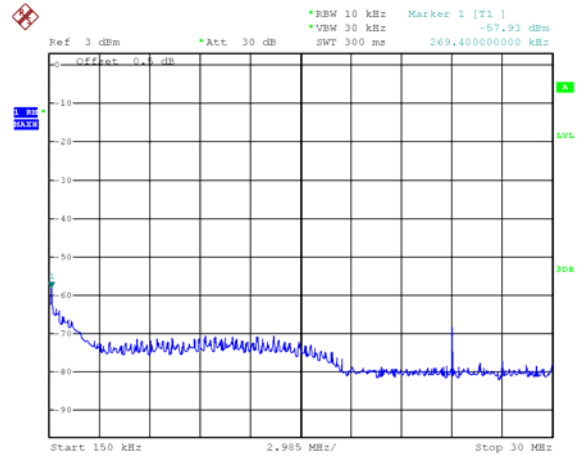


Date: 26.MAR.2024 18:36:23

Mode: TX 11 n HT20 channel 6

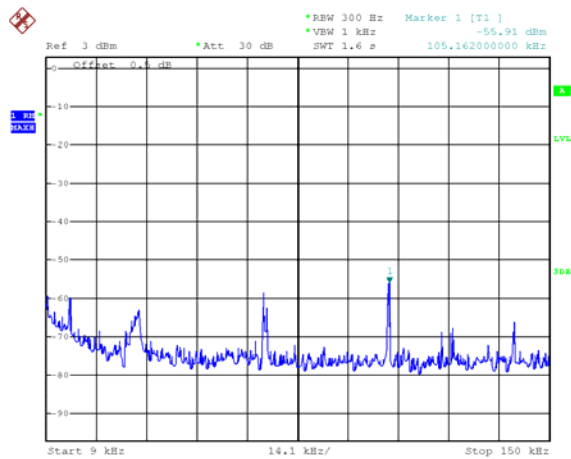


Date: 26.MAR.2024 18:43:17

Mode: TX 11 n HT20 channel 6

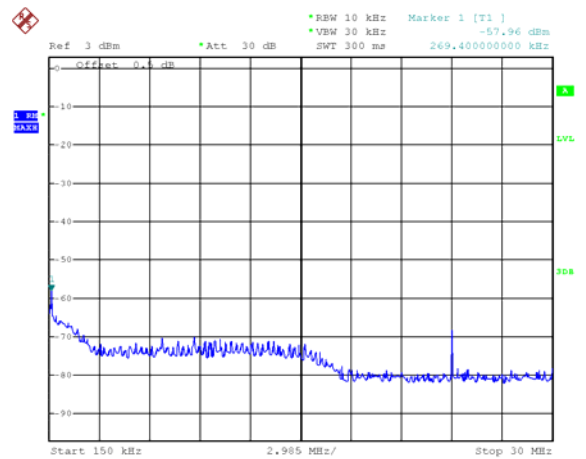


Date: 26.MAR.2024 18:43:45

Mode: TX 11 n HT20 channel 11

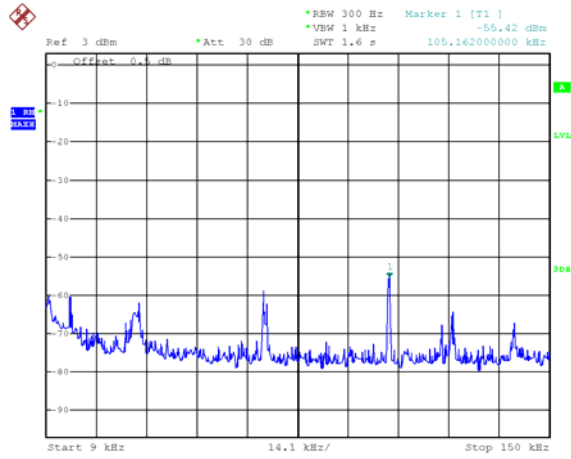


Date: 26.MAR.2024 18:51:41

Mode: TX 11 n HT20 channel 11

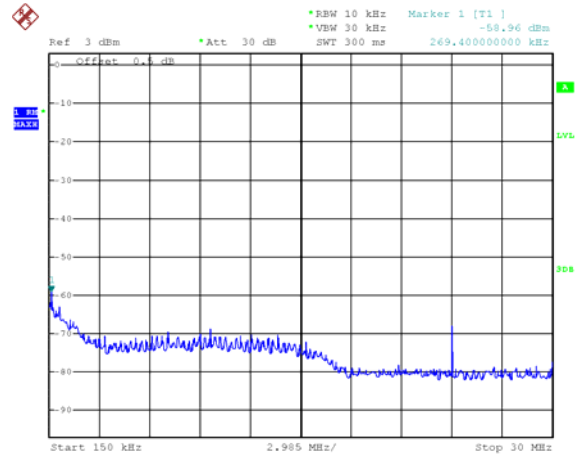


Date: 26.MAR.2024 18:52:08

Mode: TX 11n HT40 channel 3

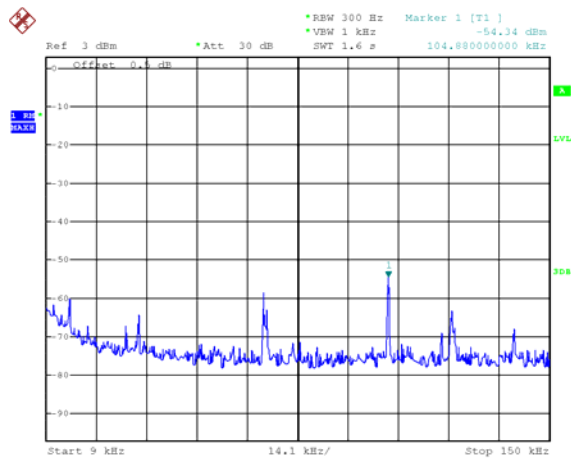


Date: 26.MAR.2024 19:04:39

Mode: TX 11n HT40 channel 3

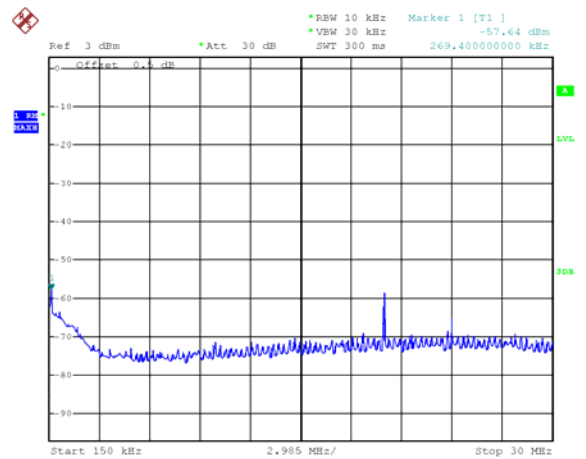


Date: 26.MAR.2024 19:05:48

Mode: TX 11 n HT40 channel 6

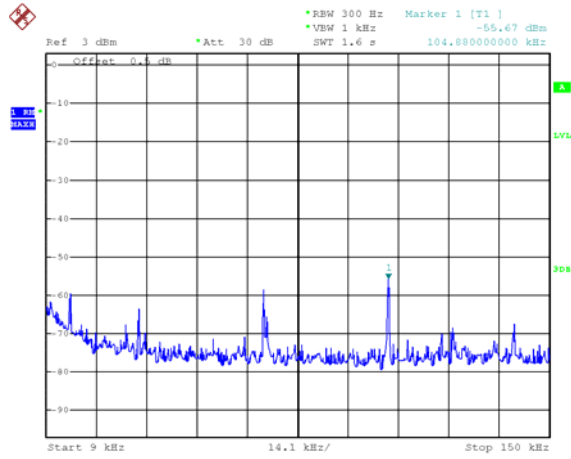


Date: 26.MAR.2024 19:14:29

Mode: TX 11 n HT40 channel 6

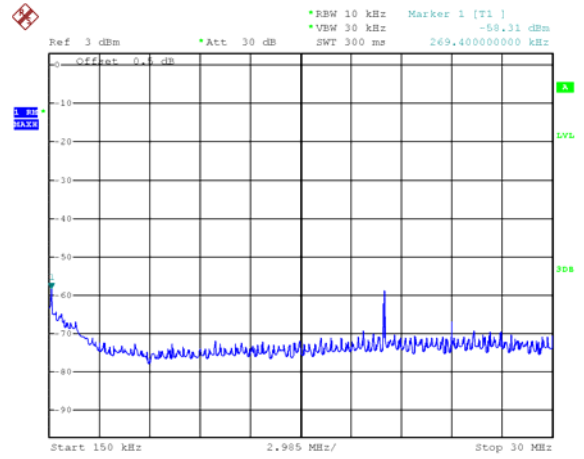


Date: 26.MAR.2024 19:15:04

Mode: TX 11 n HT40 channel 9

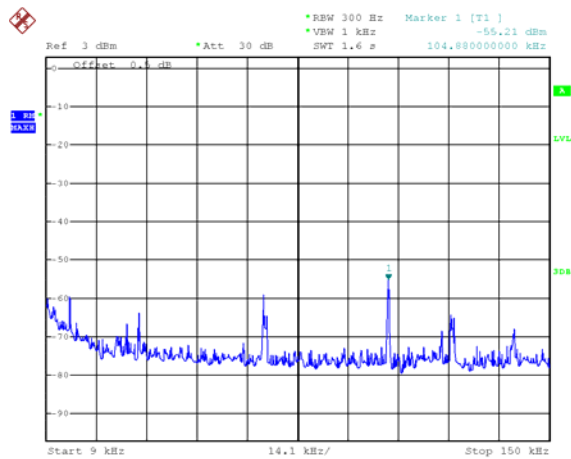

Date: 26.MAR.2024 19:23:10

Mode: TX 11 n HT40 channel 9

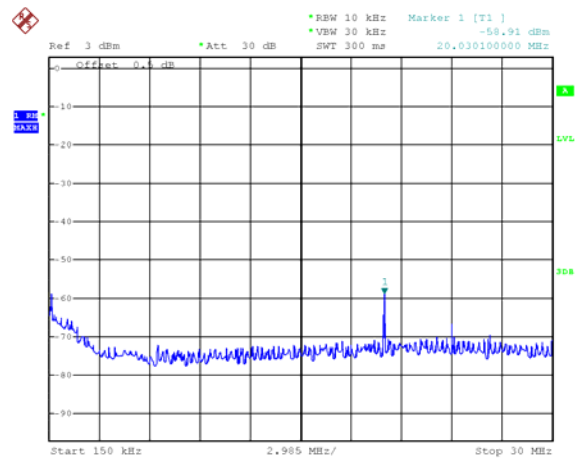

Date: 26.MAR.2024 19:23:29



Above 30MHz

Mode: TX 11b channel 1

Mode: TX 11b channel 6

Fundamental

Fundamental

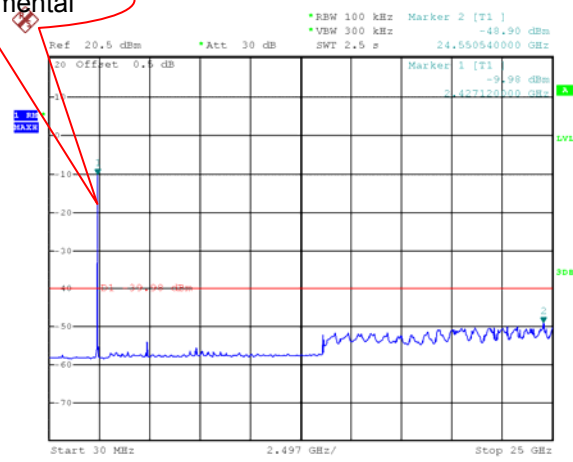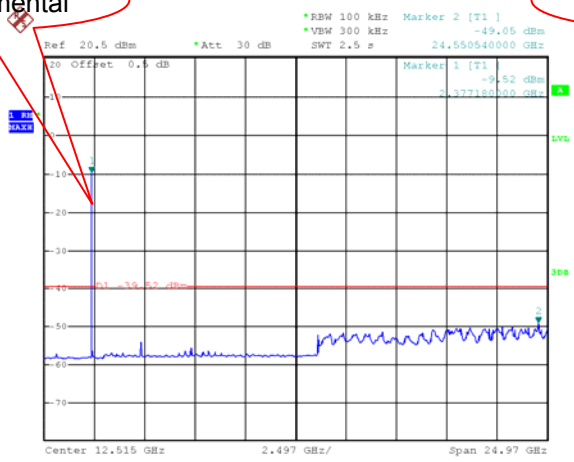


Date: 26.MAR.2024 17:20:20

Date: 26.MAR.2024 17:16:47


Mode: TX 11b channel 11

Fundamental

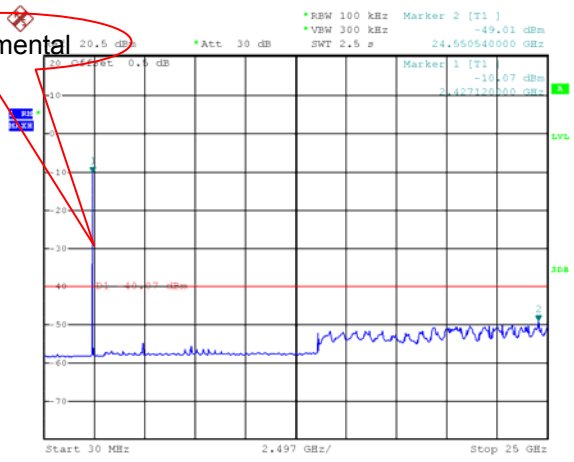


Date: 26.MAR.2024 17:05:55

Mode: TX 11g channel 1

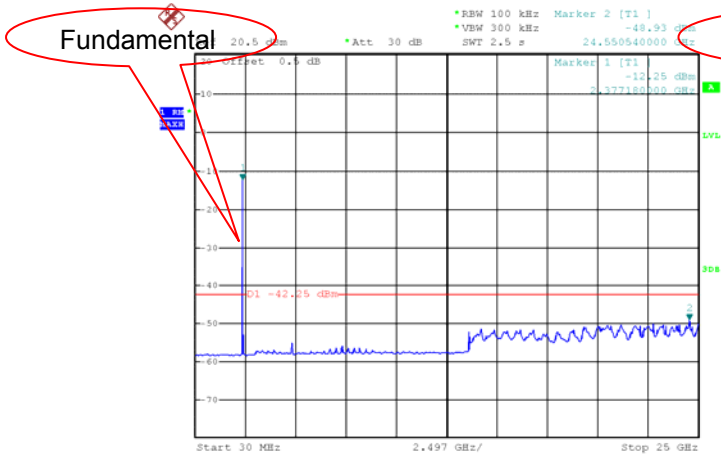


Date: 26.MAR.2024 18:12:24

Mode: TX 11g channel 6

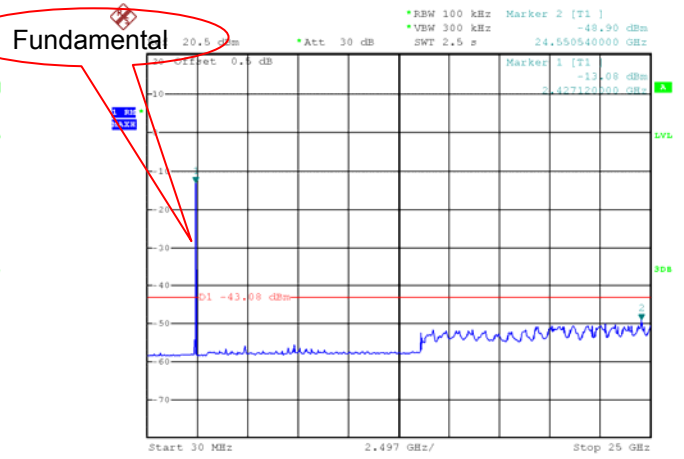


Date: 26.MAR.2024 18:20:38

Mode: TX 11g channel 11

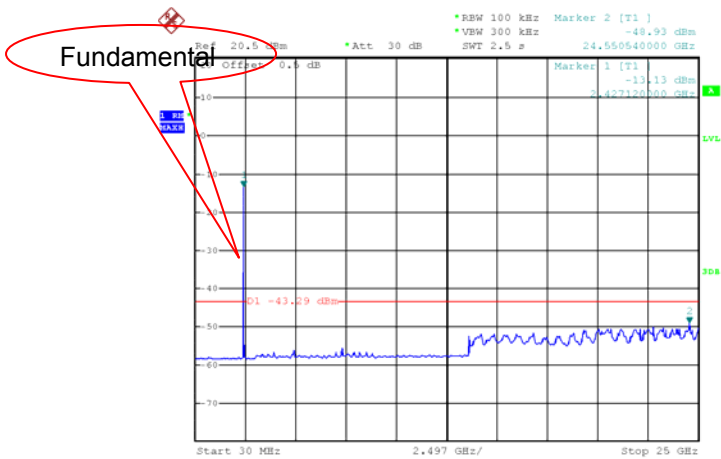


Date: 26.MAR.2024 18:29:16

Mode: TX 11n HT20 channel 1

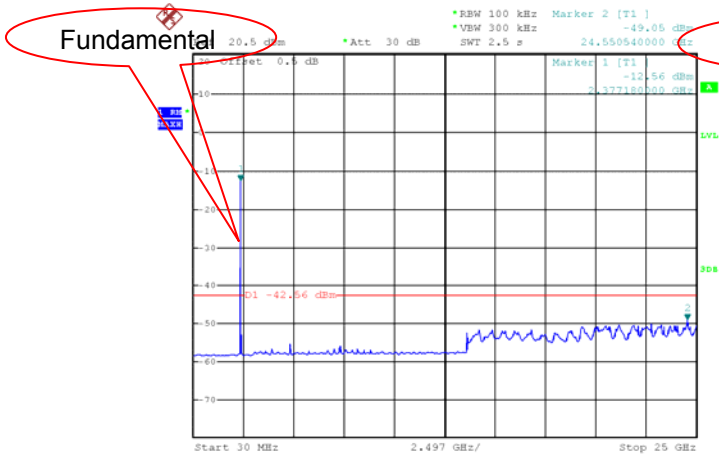


Date: 26.MAR.2024 18:37:00

Mode: TX 11 n HT20 channel 6

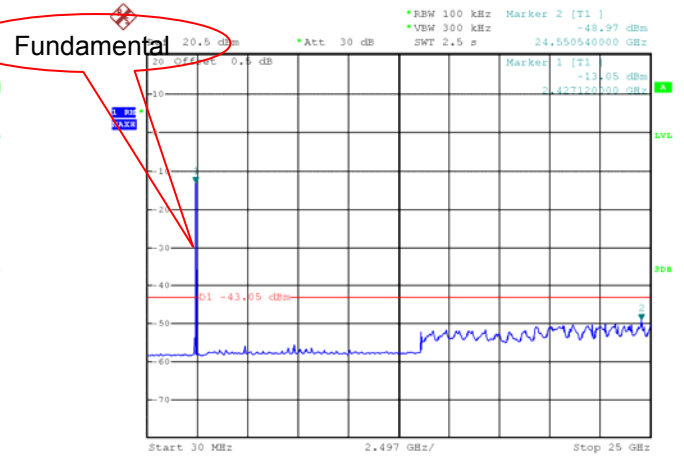


Date: 26.MAR.2024 18:44:29

Mode: TX 11 n HT20 channel 11

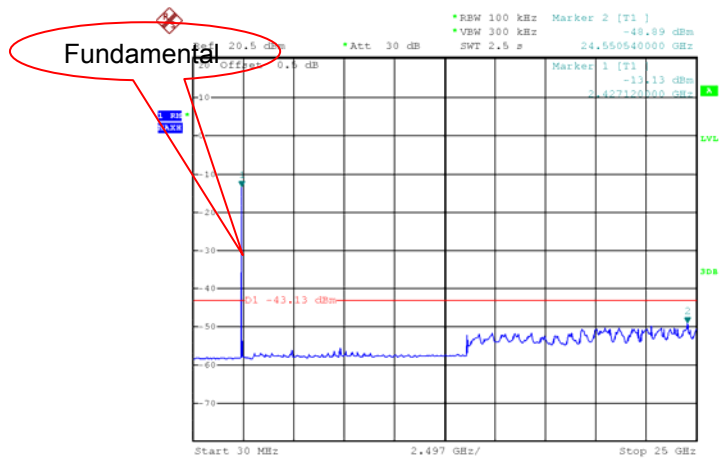


Date: 26.MAR.2024 18:53:09

Mode: TX 11n HT40 channel 3

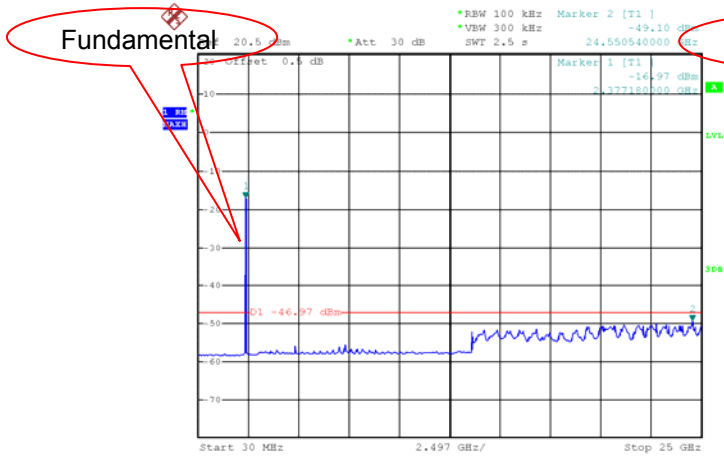


Date: 26.MAR.2024 19:07:54

Mode: TX 11 n HT40 channel 6

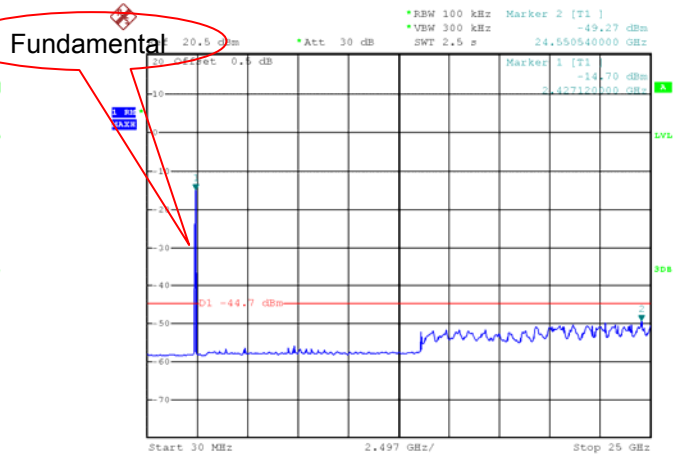

Date: 26.MAR.2024 19:15:43

Mode: TX 11 n HT40 channel 9

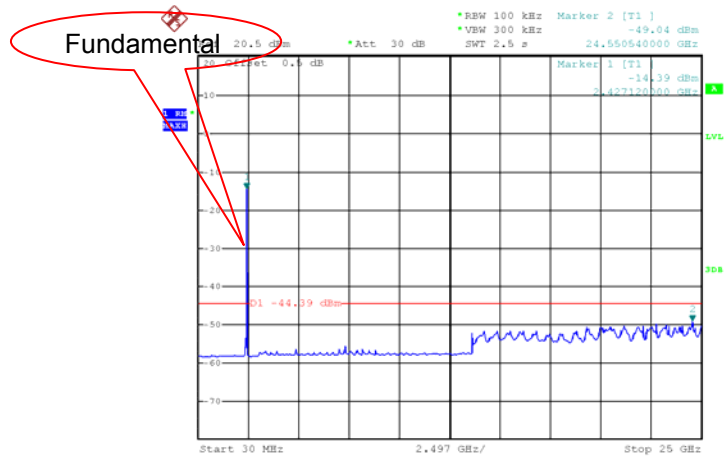

Date: 26.MAR.2024 19:24:33

11 Band Edge Measurement

Test Requirement: 47CFR FCC Part15 Subpart C §15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

Regulation 15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Mode: Transmitting


11.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.2 Test Result


Test result plots shown as follows:

TX 11b: Band edge-left side

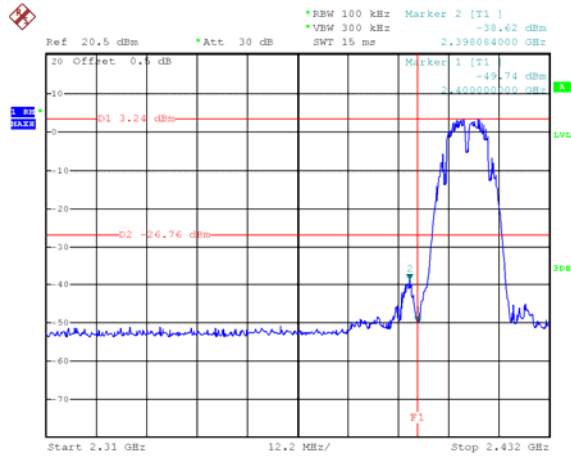


Date: 26.MAR.2024 17:23:43

TX 11b: Band edge-right side

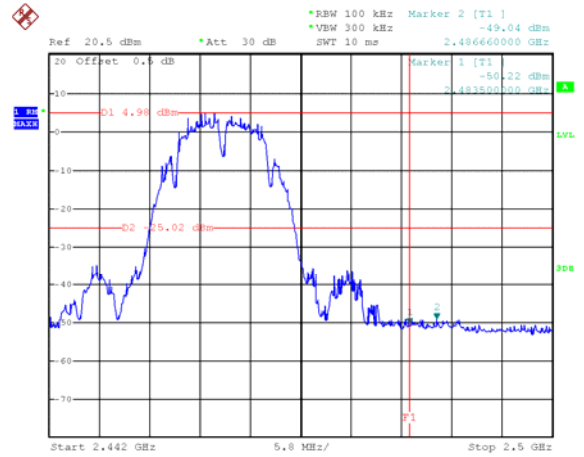


Date: 26.MAR.2024 19:43:09

TX 11g: Band edge-left side

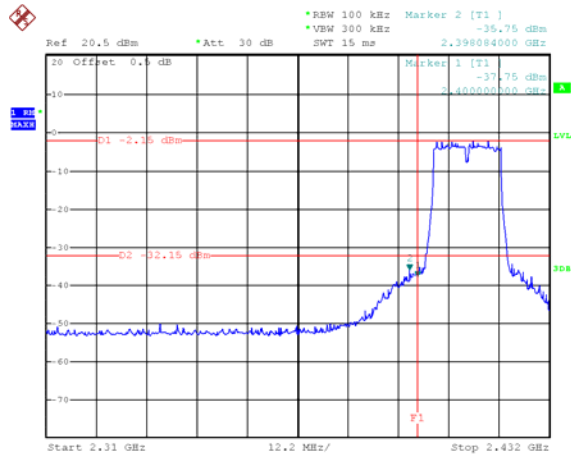


Date: 26.MAR.2024 18:07:02

TX 11g: Band edge-right side

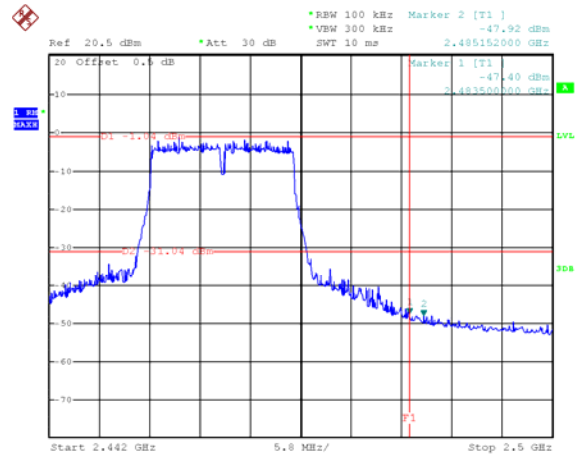


Date: 26.MAR.2024 18:25:49

TX 11n HT20: Band edge-left side

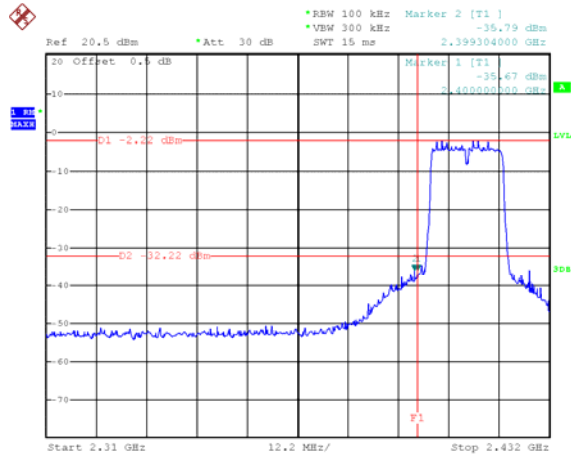


Date: 26.MAR.2024 18:34:30

TX 11n HT20: Band edge-right side

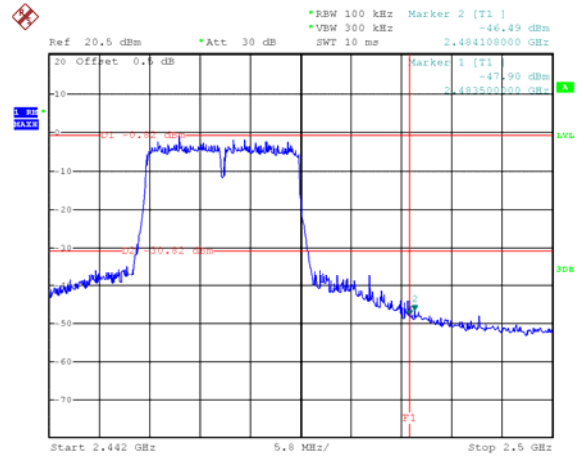


Date: 26.MAR.2024 18:50:33

TX 11n HT40: Band edge-left side

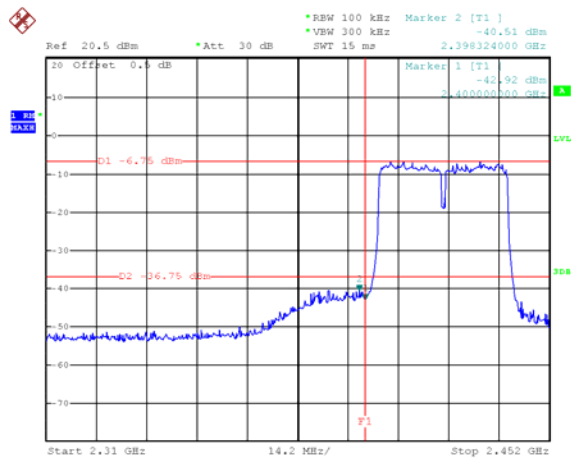

Date: 26.MAR.2024 19:03:23

TX 11n HT40: Band edge-right side

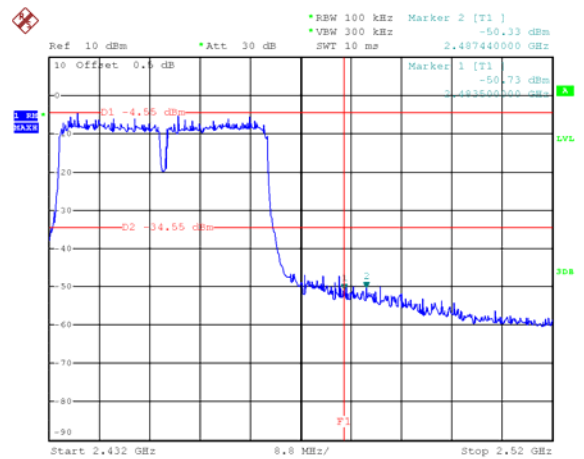

Date: 26.MAR.2024 19:21:54

12 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement:	47CFR FCC Part15 Subpart C §15.247
Test Method:	ANSI C63.10:2013 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
Test Limit:	§15.247(a)(2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Mode:	Transmitting

12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. 6dB Bandwidth Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz
99% Bandwidth Set the spectrum analyzer: 1~5% of the OBW, VBW = 3 times the RBW

12.2 Test Result



Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX 11b	Channel 1	10.080	13.080
	Channel 6	10.080	13.140
	Channel 11	10.140	13.020
TX 11g	Channel 1	16.440	16.920
	Channel 6	16.440	16.920
	Channel 11	16.440	16.800
TX 11n HT20	Channel 1	17.400	17.700
	Channel 6	17.220	17.700
	Channel 11	17.160	17.700
TX 11n HT40	Channel 3	35.760	36.480
	Channel 6	35.640	36.480
	Channel 9	35.640	36.480

Test result plot:

6 dB Bandwidth

99% Bandwidth



Mode: TX 11b channel 1

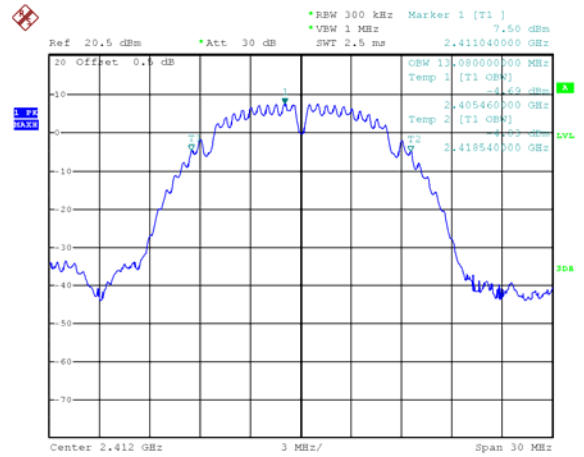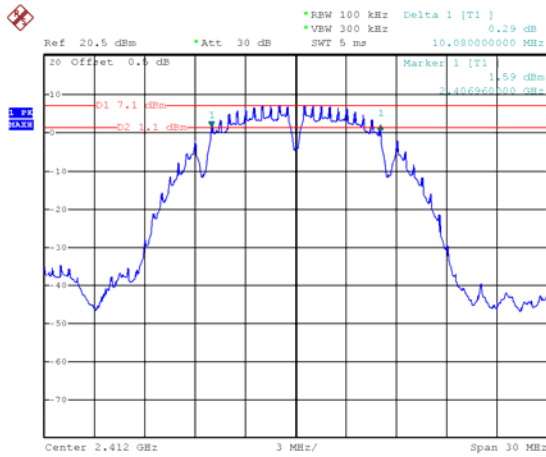

Date: 26.MAR.2024 17:26:34

Date: 26.MAR.2024 17:27:10

Mode: TX 11b channel 6

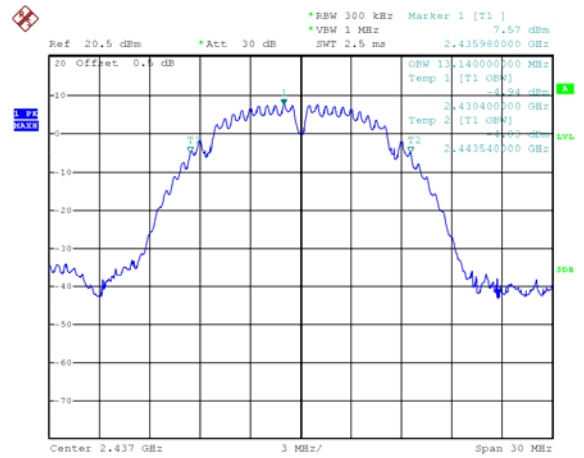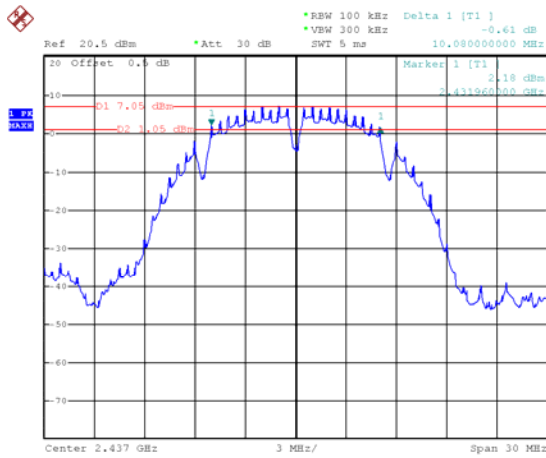



Date: 26.MAR.2024 16:48:22

Date: 26.MAR.2024 16:45:49

6 dB Bandwidth

99% Bandwidth



Mode: TX 11b channel 11

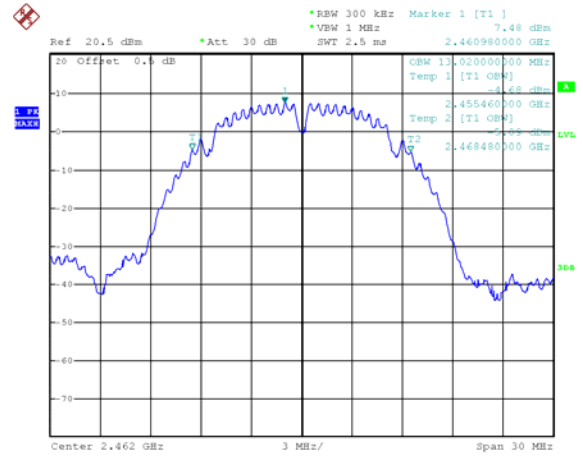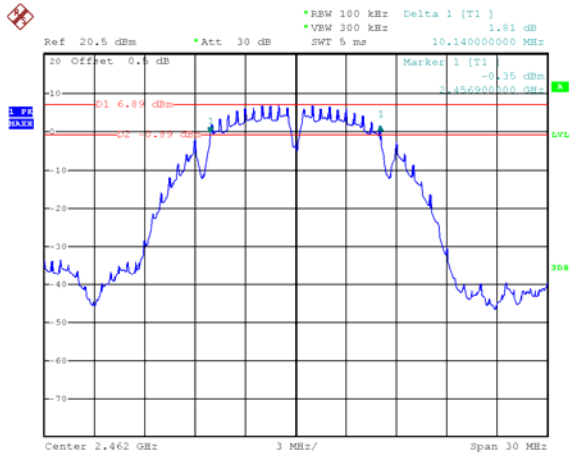

Date: 26.MAR.2024 17:07:19

Date: 26.MAR.2024 17:07:49

Mode: TX 11g channel 1

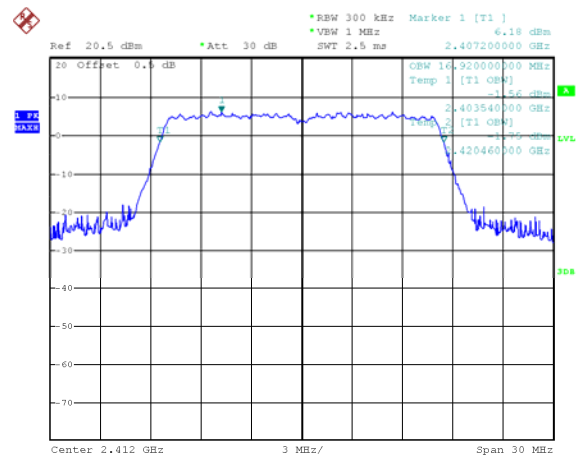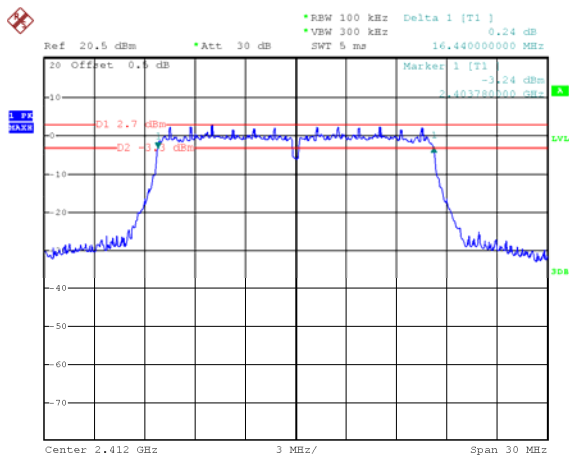



Date: 26.MAR.2024 18:01:13

Date: 26.MAR.2024 17:34:38

6 dB Bandwidth

99% Bandwidth



Mode: TX 11g channel 6

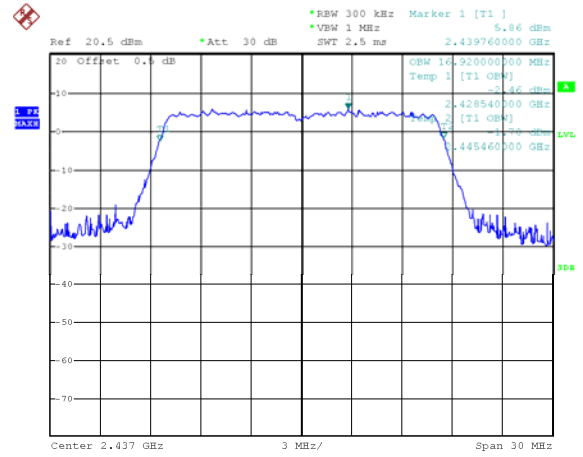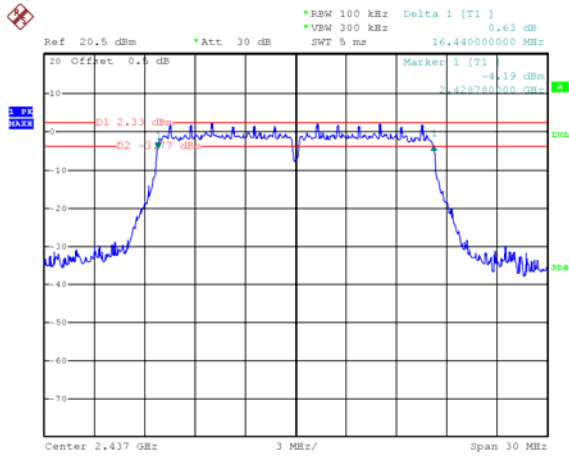

Date: 26.MAR.2024 18:15:29

Date: 26.MAR.2024 18:16:49

Mode: TX 11g channel 11

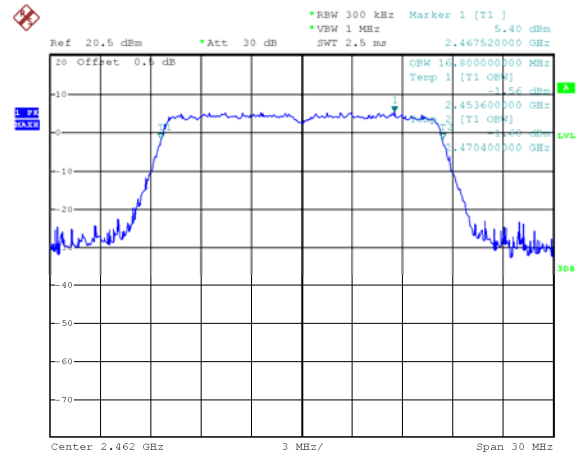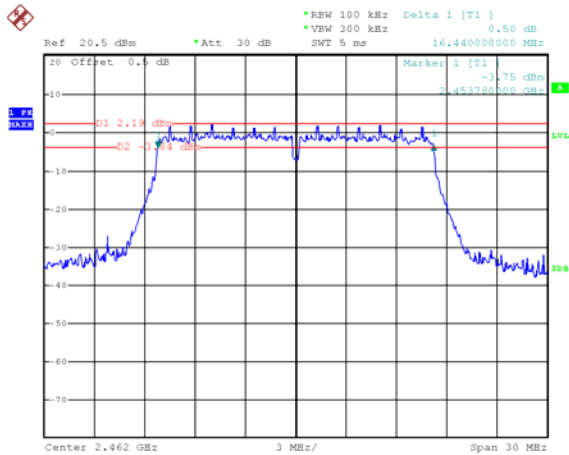



Date: 26.MAR.2024 18:22:30

Date: 26.MAR.2024 18:23:09

6 dB Bandwidth

99% Bandwidth



Mode: TX 11n HT20 channel 1

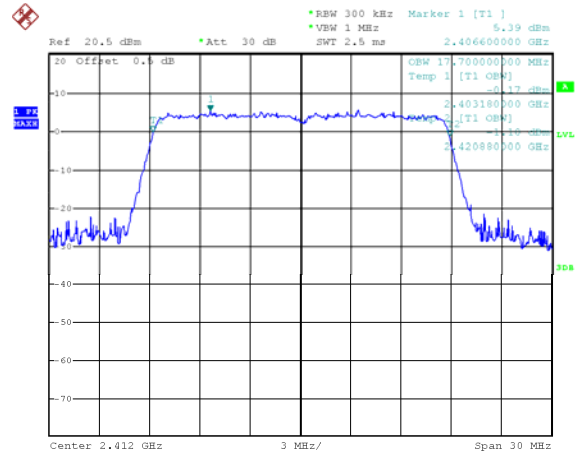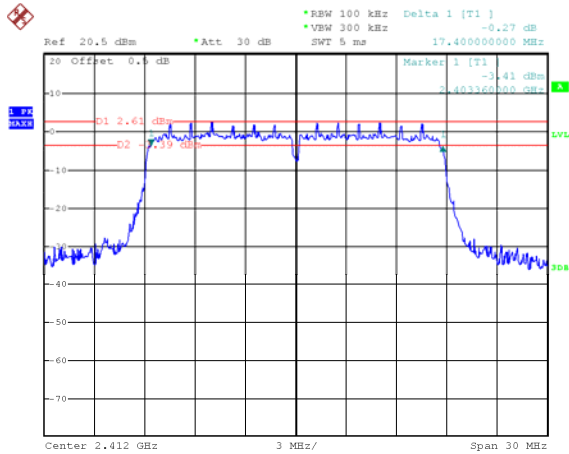

Date: 26.MAR.2024 18:31:24

Date: 26.MAR.2024 18:31:51

Mode: TX 11n HT20 channel 6

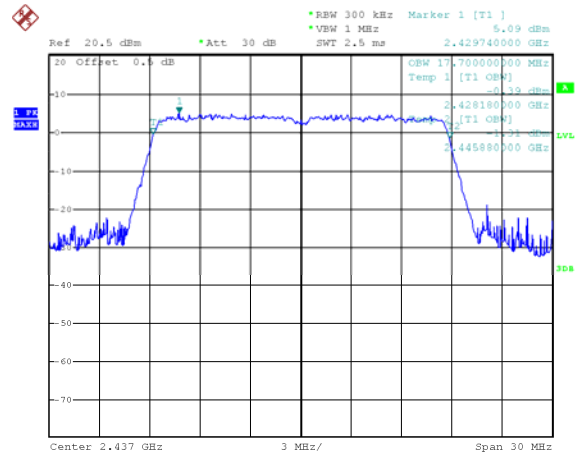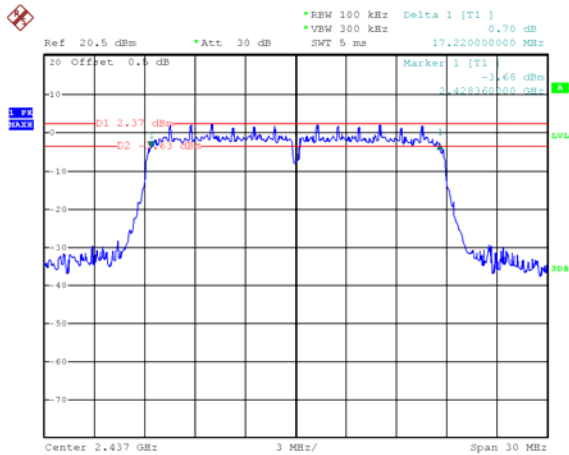



Date: 26.MAR.2024 18:40:33

Date: 26.MAR.2024 18:41:07

6 dB Bandwidth

99% Bandwidth



Mode: TX 11n HT20 channel 11

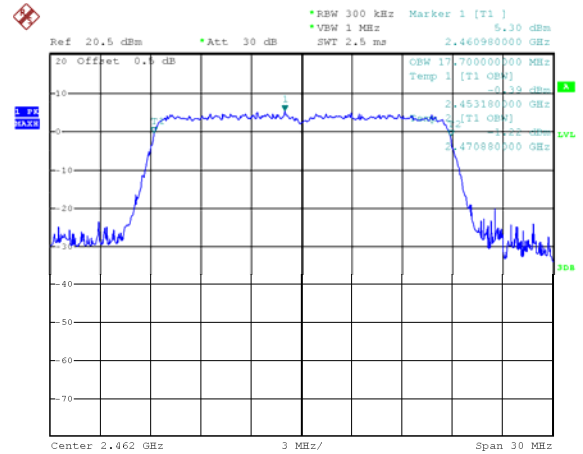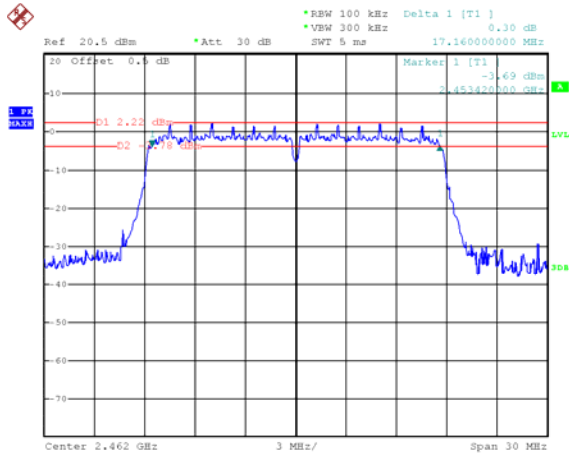

Date: 26.MAR.2024 18:46:12

Date: 26.MAR.2024 18:46:46

Mode: TX 11n HT40 channel 3

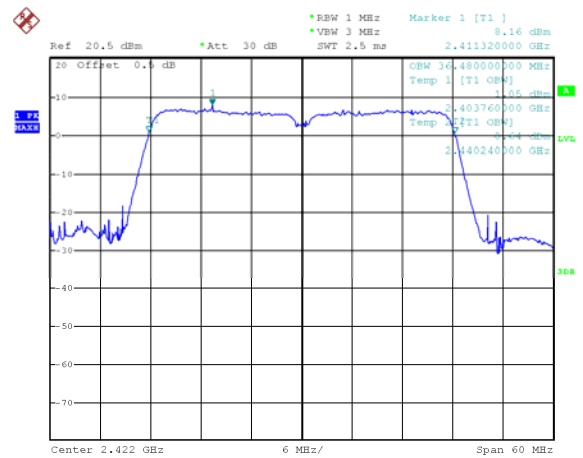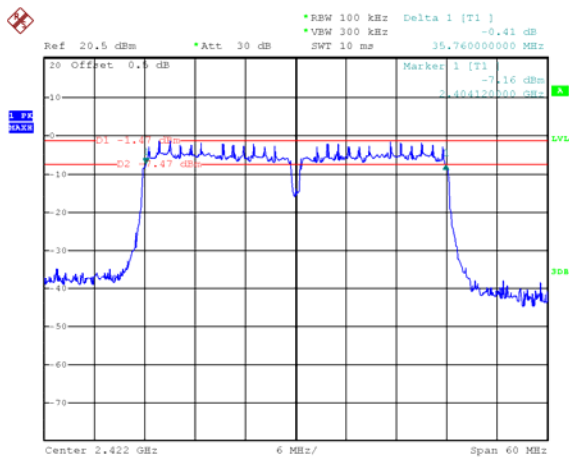



Date: 26.MAR.2024 18:57:13

Date: 26.MAR.2024 18:59:15

6 dB Bandwidth

99% Bandwidth



Mode: TX 11n HT40 channel 6

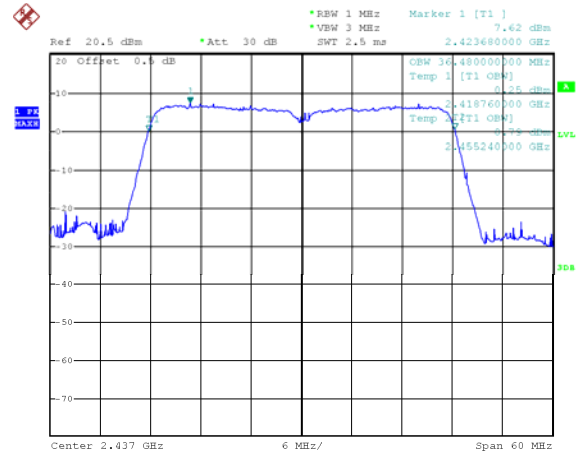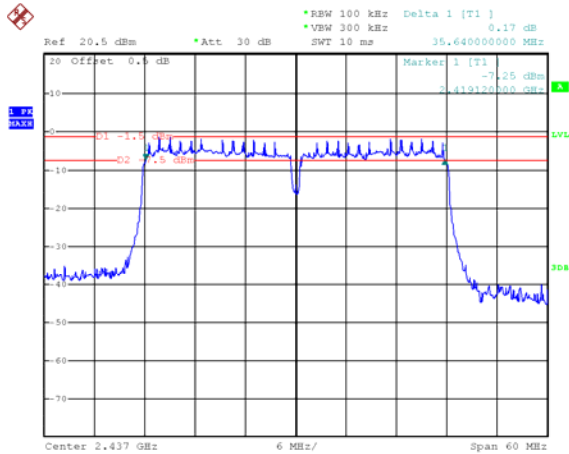

Date: 26.MAR.2024 19:09:44

Date: 26.MAR.2024 19:10:16

Mode: TX 11n HT40 channel 9

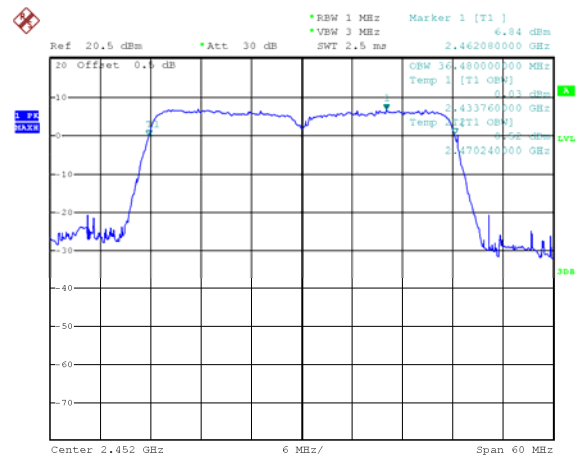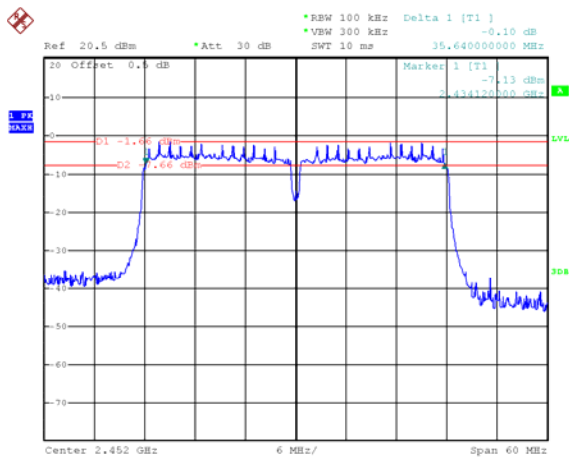

Date: 26.MAR.2024 19:17:36

Date: 26.MAR.2024 19:18:11

13 Maximum Peak conducted Output Power

Test Requirement:	47CFR FCC Part15 Subpart C §15.247
Test Method:	ANSI C63.10:2013 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
Test Limit:	§15.247(b) The maximum peak conducted output power of the intentional radiator shall not exceed 1W.
Test Mode:	Transmitting

13.1 Test Procedure

According to KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

Section 8.3.1.1 RBW \geq DTS bandwidth

Subclause 11.9.1.1 of ANSI C63.10 is applicable.

Section 8.3.1.2 Integrated band power method

For measuring the output power of a device transmitting a wide-band noise-like signal where the peak power amplitude is a statistical parameter, the preferred methodology is to use an integrated average power measurement, as described in 8.3.2. The peak integrated band power method of 11.9.1 in ANSI C63.10 is not applicable.


Subclause 11.9.2 of ANSI C63.10 is applicable.

13.2 Test Result

Operation mode	Channel Frequency (MHz)	Measurements (dBm)	Duty Cycle Factor (dB)	Conducted Output Power (dBm)	Limit
TX 11b	Low-2412	16.33	0.12	16.45	1W/30dBm
	Middle-2437	16.48		16.60	1W/30dBm
	High-2462	16.31		16.43	1W/30dBm
TX 11g	Low-2412	15.65	0.19	15.84	1W/30dBm
	Middle-2437	15.32		15.51	1W/30dBm
	High-2462	15.23		15.42	1W/30dBm
TX 11n HT20	Low-2412	15.44	0.20	15.64	1W/30dBm
	Middle-2437	15.23		15.43	1W/30dBm
	High-2462	15.17		15.37	1W/30dBm
TX 11n HT40	Low-2422	14.27	0.33	14.60	1W/30dBm
	Middle-2437	14.21		14.54	1W/30dBm
	High-2452	14.04		14.37	1W/30dBm


Test Plot:

Mode: TX 11b channel 1

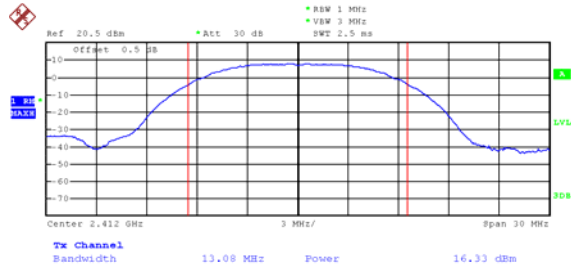


Date: 26.MAR.2024 17:30:13

Mode: TX 11b channel 6

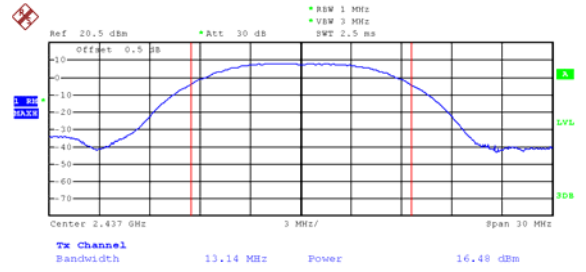


Date: 26.MAR.2024 16:46:38

Mode: TX 11b channel 11

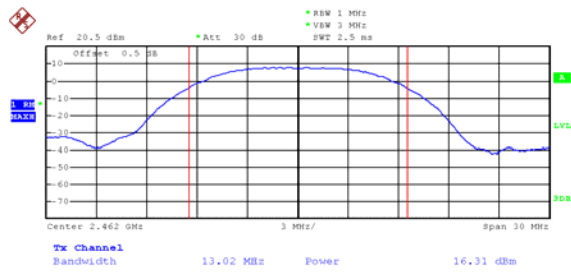


Date: 26.MAR.2024 17:08:28

Mode: TX 11g channel 1

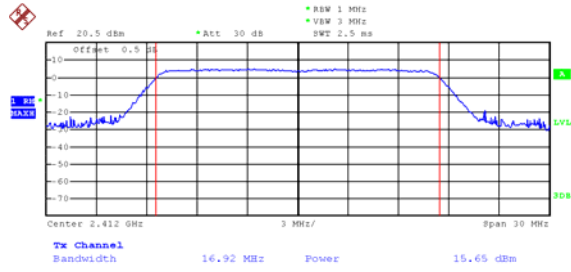


Date: 26.MAR.2024 17:35:20

Mode: TX 11g channel 6

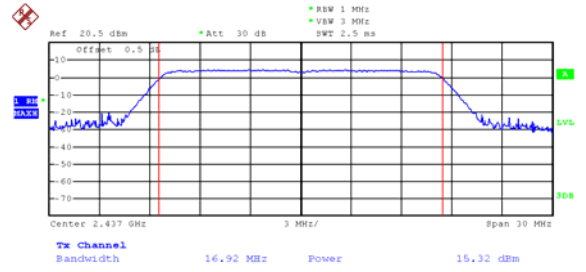


Date: 26.MAR.2024 18:17:32

Mode: TX 11g channel 11

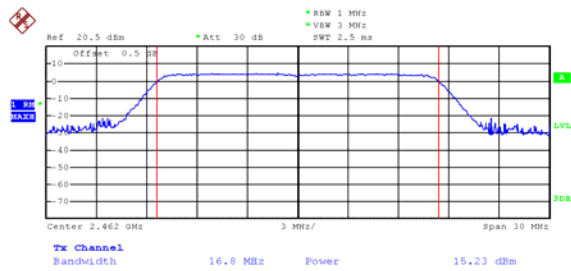


Date: 26.MAR.2024 18:23:43

Mode: TX 11n HT20 channel 1

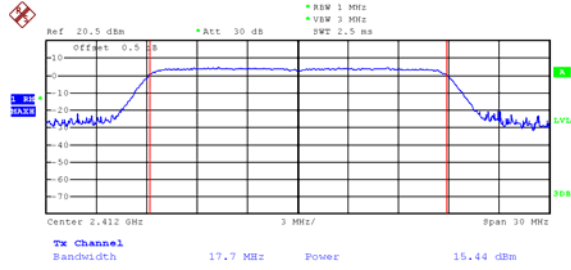


Date: 26.MAR.2024 18:32:28

Mode: TX 11n HT20 channel 6

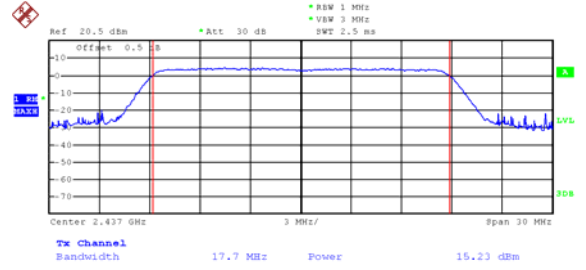


Date: 26.MAR.2024 18:41:43

Mode: TX 11n HT20 channel 11

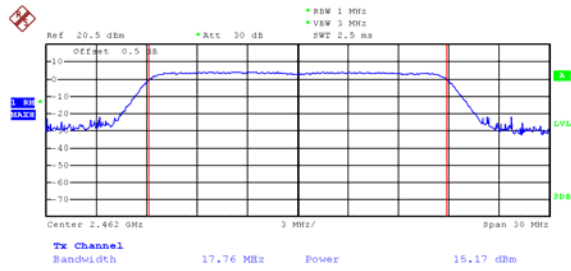


Date: 26.MAR.2024 18:47:38

Mode: TX 11n HT40 channel 3

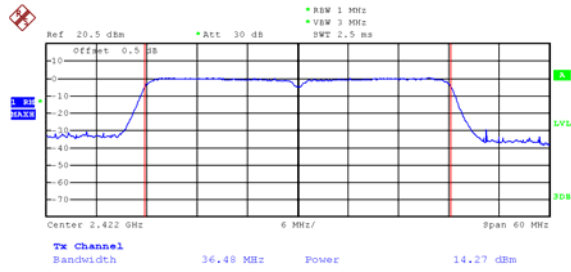


Date: 26.MAR.2024 18:59:43

Mode: TX 11n HT40 channel 6

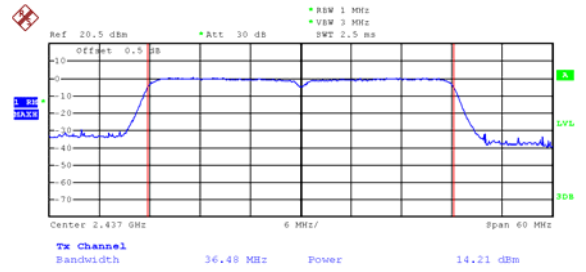

Date: 26.MAR.2024 19:11:10

Mode: TX 11n HT40 channel 9

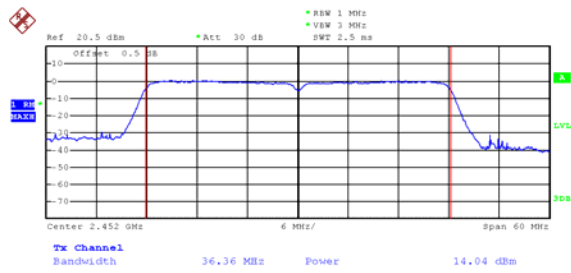

Date: 26.MAR.2024 19:18:53

14 Power Spectral density

Test Requirement:	47CFR FCC Part15 Subpart C §15.247
Test Method:	ANSI C63.10:2013 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
Test Limit:	§15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
Test Mode:	Transmitting

14.1 Test Procedure

According to KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019 section 8.4

Subclause 11.10 of ANSI C63.10 is applicable.

Choose the test procedure according to the product type

Peak PSD

Subclause 11.10.2 of ANSI C63.10 is applicable.

AVG PSD


Subclause 11.10.3/4/5/6/7/8 of ANSI C63.10 is applicable.

14.2 Test Result

Operation mode	Channel Frequency (MHz)	Measurements (dBm per 3kHz)	Duty Cycle Factor (dB)	Power Spectral density (dBm per 3kHz)	Limit
TX 11b	Low-2412	-15.47	0.12	-15.35	8dBm per 3kHz
	Middle-2437	-16.05		-15.93	8dBm per 3kHz
	High-2462	-15.98		-15.86	8dBm per 3kHz
TX 11g	Low-2412	-19.5	0.19	-19.31	8dBm per 3kHz
	Middle-2437	-20.36		-20.17	8dBm per 3kHz
	High-2462	-20.37		-20.18	8dBm per 3kHz
TX 11n HT20	Low-2412	-20.12	0.20	-19.92	8dBm per 3kHz
	Middle-2437	-20.27		-20.07	8dBm per 3kHz
	High-2462	-20.53		-20.33	8dBm per 3kHz
TX 11n HT40	Low-2422	-25.08	0.33	-24.75	8dBm per 3kHz
	Middle-2437	-24.79		-24.46	8dBm per 3kHz
	High-2452	-25.14		-24.81	8dBm per 3kHz


Test Plot:

Mode: TX 11b channel 1

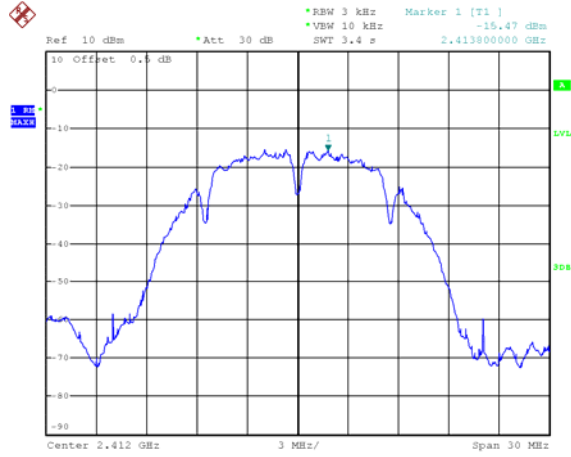


Date: 26.MAR.2024 17:21:43

Mode: TX 11b channel 6

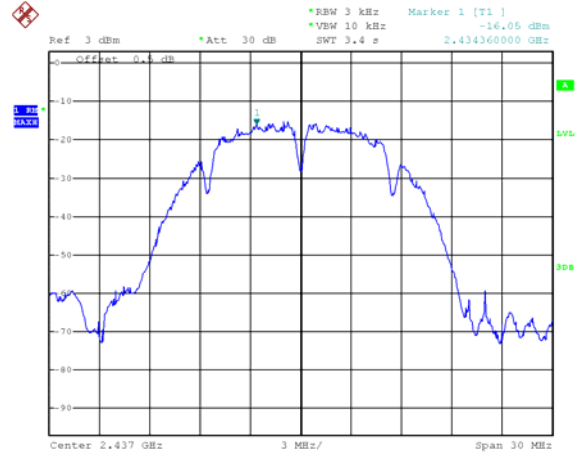


Date: 26.MAR.2024 17:10:53

Mode: TX 11b channel 11

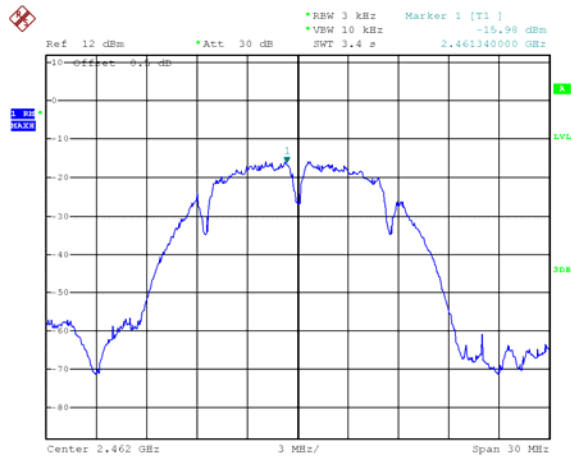


Date: 26.MAR.2024 17:03:34

Mode: TX 11g channel 1

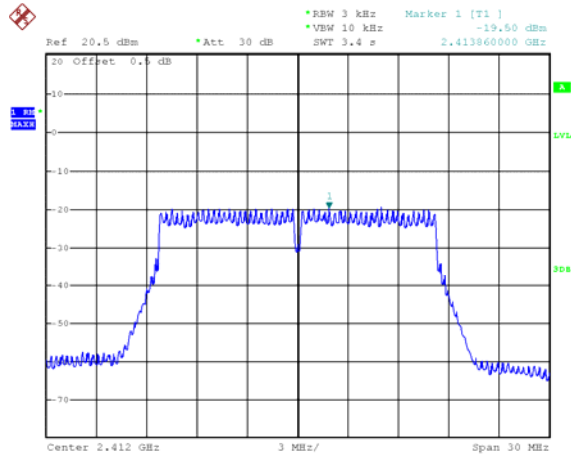


Date: 26.MAR.2024 18:08:32

Mode: TX 11g channel 6

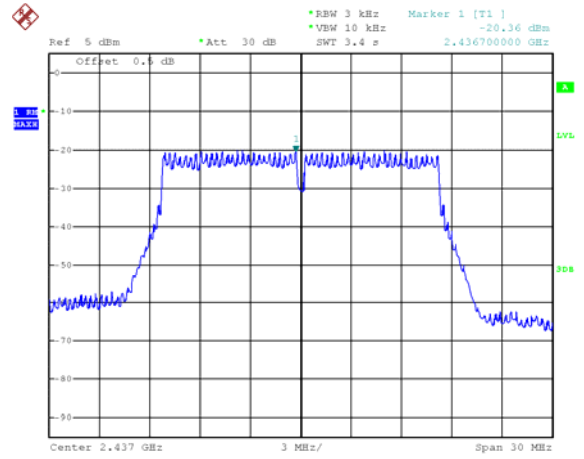


Date: 26.MAR.2024 18:18:26

Mode: TX 11g channel 11

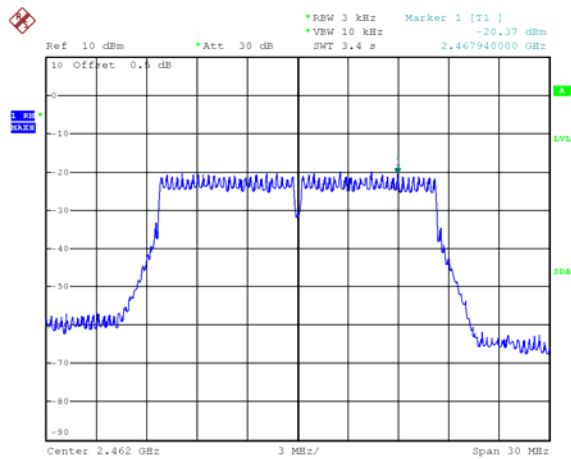


Date: 26.MAR.2024 18:26:31

Mode: TX 11n HT20 channel 1

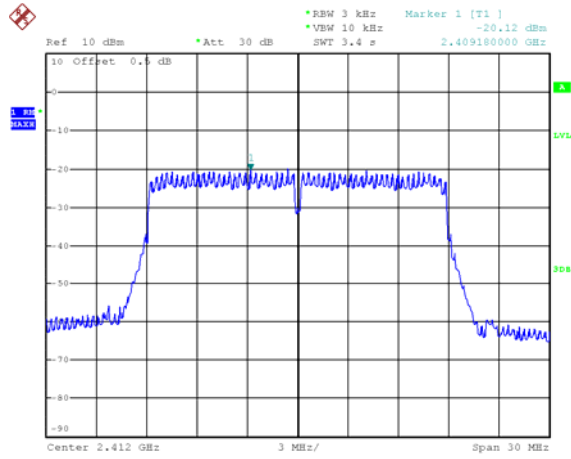


Date: 26.MAR.2024 18:35:10

Mode: TX 11n HT20 channel 6

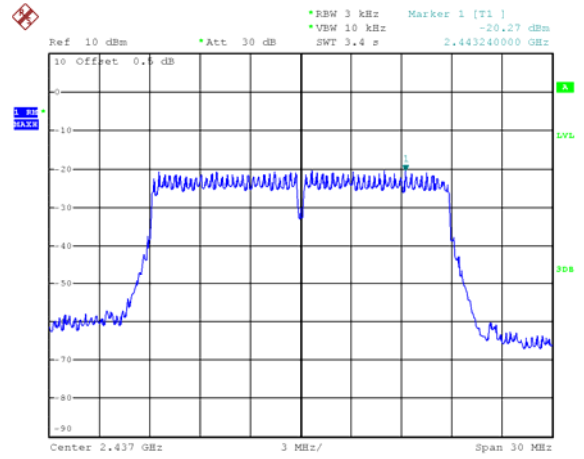


Date: 26.MAR.2024 18:42:34

Mode: TX 11n HT20 channel 11

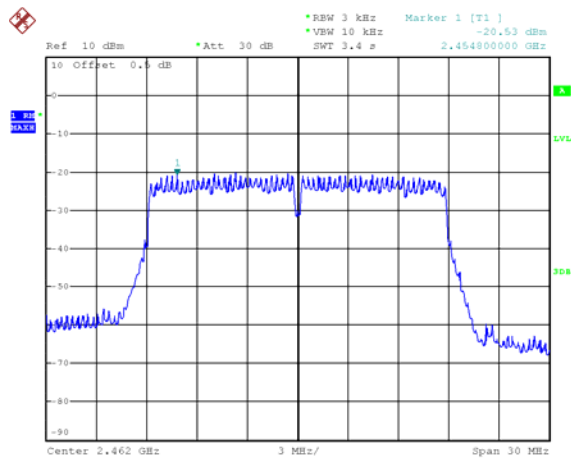


Date: 26.MAR.2024 18:48:25

Mode: TX 11n HT40 channel 3

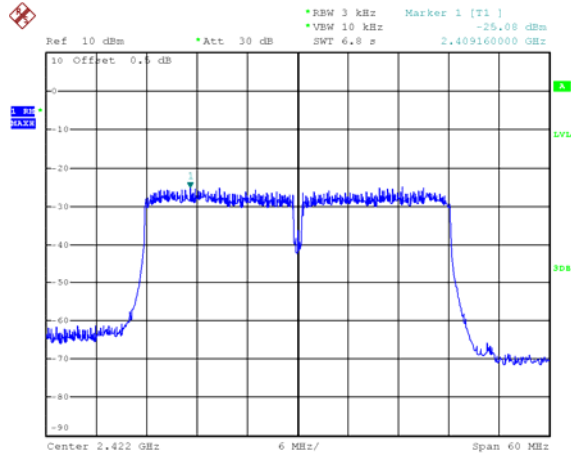


Date: 26.MAR.2024 19:01:45

Mode: TX 11n HT40 channel 6

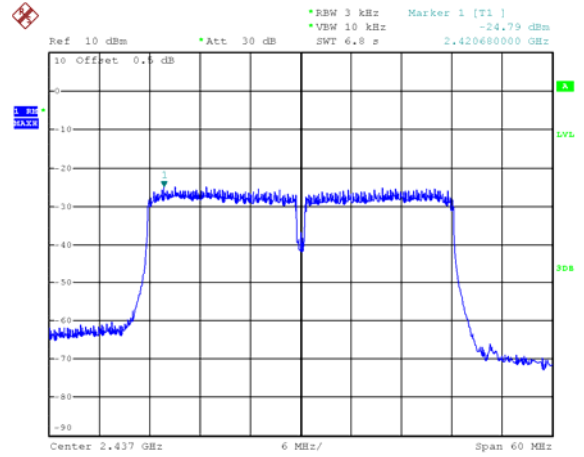

Date: 26.MAR.2024 19:13:31

Mode: TX 11n HT40 channel 9

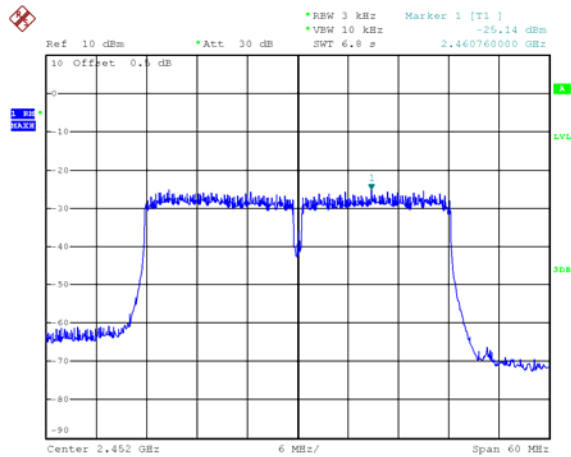

Date: 26.MAR.2024 19:20:01

15 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a non-detachable antenna and fulfil the requirement of this section.

Note: Please refer to EUT photos for more details.

16 RF Exposure

Note: Please refer to RF Exposure Report: WTF24D02037894W003.

17 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix-BM03-Photos.

=====**End of Report**=====