



FCC Part 15 Subpart

TEST REPORT

FOR

Product Name: POS System

Model: tPOS ; tPOSu ; tPOSp; tPOSd ; tPOSw ; v5PAD ; tPOSx ;
(x=0~9;a~z,A~Z or blank)
Trade Name: SENOR

Issued to

SENOR TECH CO.,LTD.

5F., No. 165, Kang Ning Street, Xizhi Dist., New Taipei City 22150, Taiwan

Issued by

Global Certification Corp.

No.146, Sec. 2, Xiangzhang Rd., Xizhi Dist.,New Taipei City 221,
Taiwan (R.O.C.)



Note: This test refers exclusively to the test presented test model and sample. This report shall not be reproduced except in full, without the written approval of Global Certification Corporation. This document may be altered or revised by Global Certification Corporation. Personnel only, and shall be noted in the revision section of the document.



Revision History

Revision	No.	Report Number	Issue Date	Description	Author/ Revised by
1.	FR2B-790101	FR2B-790101	Feb. 27, 2018	Original Report	Michelle



TABLE OF CONTENTS	3
1. GENERAL INFORMATION	5
1.1 DESCRIPTION OF THE TESTED SAMPLES	6
2. TEST METHODOLOGY	9
2.1 GENERAL TEST PROCEDURES	9
2.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	9
2.3 DESCRIPTION OF TEST MODES	10
2.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS	11
3. TEST AND MEASUREMENT EQUIPMENT	12
3.1 CALIBRATION	12
3.2 EQUIPMENT	12
4. ANTENNA REQUIREMENTS	14
4.1 STANDARD APPLICABLE	14
4.2 ANTENNA CONSTRUCTION AND DIRECTIONAL GAIN	14
5. PEAK OUTPUT POWER	15
5.1 TEST SETUP	15
5.2 LIMIT	15
5.3 TEST PROCEDURE	15
5.4 TEST RESULT	15
5.5 TEST DATA	16
6. BAND EDGE	17
6.1 TEST SETUP	17
6.2 LIMIT	18
6.3 RESULT	18
6.4 TEST DATA	19
7. 20DB BANDWIDTH	27
7.1 TEST SETUP	27
7.2 TEST PROCEDURE	27
7.3 LIMIT	27
7.4 RESULT	27
7.5 TEST DATA	27
8. RADIATED EMISSION	32
8.1 TEST SETUP	32
8.2 LIMIT	33
8.3 TEST PROCEDURE	34
8.4 RESULT: PASS	34
8.5 TEST DATA	34
9. CONDUCTED EMISSIONS	50
9.1 TEST SETUP	50
9.2 LIMIT	50
9.3 TEST PROCEDURE	50
9.4 TEST SPECIFICATION	50
9.5 RESULT	51
9.6 TEST DATA	51
10. SPURIOUS EMISSIONS	53



10.1	TEST SETUP -----	53
10.2	LIMIT -----	53
10.3	TEST PROCEDURE-----	53
10.4	TEST RESULTS-----	53
10.5	TEST DATA -----	54
11.	CHANNEL SEPARATION -----	58
11.1	TEST SETUP -----	59
11.2	TEST PROCEDURE-----	59
11.3	LIMIT -----	59
11.4	RESULT -----	59
11.5	TEST DATA -----	59
12.	DWELL TIME OF EACH CHANNEL-----	64
12.1	TEST SETUP -----	64
12.2	TEST PROCEDURE-----	64
12.3	LIMIT -----	64
12.4	RESULT -----	64
12.5	TEST DATA -----	64
13.	NUMBER OF CHANNELS -----	76
13.1	TEST SETUP -----	76
13.2	TEST PROCEDURE-----	76
13.3	LIMIT -----	76
13.4	RESULT -----	76
13.5	TEST DATA -----	76



1. GENERAL INFORMATION

Applicant : SENOR TECH CO.,LTD.

Address : 5F., No. 165, Kang Ning Street, Xizhi Dist., New Taipei City
22150, Taiwan

Manufacturer : SENOR TECH CO.,LTD.

Address : 5F., No. 165, Kang Ning Street, Xizhi Dist., New Taipei City

EUT : POS System

Model No. : tPOS ; tPOSu ; tPOSp; tPOSd ; tPOSw ; v5PAD ; tPOSx ;
(x=0~9;a~z,A~Z or blank)

Trade Name : SENOR

Model Differences : The major electrical and mechanical constructions of series models are identical to the basic model, except different marketing purpose. The model, tPOS is the testing sample, and the final test data are shown on this test report.


Is here with confirmed to comply with the requirements set out in the FCC Rules and Regulations Part 15 Subpart C and the measurement procedures were according to ANSI 63.10:2013. The said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

FCC Part 15 Subpart C 15.247

Tested By:

Approved by:

Feb. 27, 2018
Date


Eason Hsu, Engineer

Feb. 27, 2018
Date


Adam Chou, Manager

Designation Number: TW1640



1.1 DESCRIPTION OF THE TESTED SAMPLES

EUT Name : POS System
Model Number : tPOS
FCC ID : OV5-TPOS
Power From ☒Inside☒Outside
☒Adaptor ☒Battery ☐Power Supply ☐DC Power Source ☐Support Unit PC
Power Rating(Battery) : 3.8Vdc
Power Rating(Adapter) I/P : 100-240Vac 56/60Hz 0.5A
O/P : 5.0Vdc, 3.0A
Operate Frequency : Refer to the channel list as described below
Number of Channels : 79
Channel spacing : ☐N/A ☒ 1 MHz
Modulation Type : FHSS(GFSK)
Antenna Type : ☐integral antenna: ☒PCB Printing ☐a dedicated antenna
Antenna gain 2.38 dBi

Channels	Frequencies (MHz)	Channels	Frequencies (MHz)
0	2402	40	2442
1	2403	41	2443
2	2404	42	2444
3	2405	43	2445
4	2406	44	2446
5	2407	45	2447
6	2408	46	2448
7	2409	47	2449
8	2410	48	2450
9	2411	49	2451
10	2412	50	2452
11	2413	51	2453
12	2414	52	2454
13	2415	53	2455
14	2416	54	2456
15	2417	55	2457
16	2418	56	2458
17	2419	57	2459
18	2420	58	2460
19	2421	59	2461
20	2422	60	2462



21	2423	61	2463
22	2424	62	2464
23	2425	63	2465
24	2426	64	2466
25	2427	65	2467
26	2428	66	2468
27	2429	67	2469
28	2430	68	2470
29	2431	69	2471
30	2432	70	2472
31	2433	71	2473
32	2434	72	2474
33	2435	73	2475
34	2436	74	2476
35	2437	75	2477
36	2438	76	2478
37	2439	77	2479
38	2440	78	2480
39	2441		

1.3 LIST OF MEASUREMENTS AND EXAMINATIONS

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	Pass
15.207	Conducted Emission	Pass
15.209 15.247(d)	Radiated Emission	Pass
15.247(d)	Spurious Emmission	Pass
15.247(b)	Band Edges Measurement Data	Pass
15.247(b)(1)	Peak Output Power Measurement Data	Pass
15.247(a)(1)	Channel Separation	Pass
15.247(a)(1)	Dwell Time of Each Channel	Pass
15.247(a)(1)	Number of Channels	Pass



15.247(a)(1)	20dB Bandwidth Measurement	Pass
--------------	----------------------------	------



2. TEST METHODOLOGY

All testing as described bellowed were performed in accordance with ANSI 63.10:2013 and FCC CFR 47 Part 15 Subpart C.

2.1 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on a wood table, which is at 0.8 m above ground plane acceding to clause 15.207 and requirements of ANSI 63.10:2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz are using CISPR Quasi-Peak / Average detectors.

Radiated Emissions

The EUT is a placed on a turn table, which is 0.8 m above ground plane. The turntable was rotated through 360 degrees to determine the position of maximum emission level. The EUT is placed at 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

2.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
10.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6



(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

2.3 DESCRIPTION OF TEST MODES

The EUT was tested under following modes:

Modes:

1. **Continuous transmitting**

Channels:

1. **2.402GHz** (Lowest Channel)
2. **2.441GHz** (Middle Channel)
3. **2.480GHz** (Highest Channel)



2.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS

Setup Diagram

See test photographs attached in appendix 1 for the actual connections between EUT and support equipment.

Support Equipment

Peripherals Devices:

OUTSIDE SUPPORT EQUIPMENT							
No.	Equipment	Model	Serial No.	FCC ID/ BSMI ID	Trade name	Data Cable	Power Cord
N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Note: All the above equipment /cable were placed in worse case position to maximize emission signals during emission test

Grounding: Grounding was in accordance with the manufacturer's requirement and conditions for the intended use.



3. TEST AND MEASUREMENT EQUIPMENT

3.1 CALIBRATION

The measuring equipment utilized to perform the tests documented in the report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

3.2 EQUIPMENT

The following list contains measurement equipment used for testing. The equipment conforms to the requirement of CISPR 16-1, ANSI C63.2 and. Other required standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy. Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective.

TABLE 1 LIST OF TEST AND MEASUREMENT EQUIPMENT

Instrument	Manufacturer	Model No.	Serial No.	Calibration Due Date	Note
EMC Test Receiver	R&S	ESCI	100438	Dec. 16, 2018	
LISN #1	SCHWARZBECK	NNLK8121	550213	Feb. 02, 2019	For EUT
LISN #2	EMCO	3825/2	9001-1400	N/A	For Support Unit
RF Cable	Huber+Suhner	RG223/U	Cable-001	Dec.17, 2018	
Impedance Stabilization	Teseq GmbH	ISNT800	23334	Nov. 08, 2018	
Absorbing Clamp	COM-POWER	AB-050	421915	Aug. 17,2019	
RF Cable	Huber+Suhner	5D-FB	CABLE-007	Aug. 16,2019	
EMC Test Receiver	R&S	FSV40	101088	Sep. 28, 2018	
Bilog Antenna	SUNOL	JB1	A052204	Feb. 21, 2019	
Pre-Amplifier	WIRELESS	FPA-6592G	60028	Sep. 28, 2018	
RF Cable_NSA_Rx	HUBER + UHNER	RG213/U	Cable-004	Sep. 27, 2018	
Double Ridged Guide HORN ANTENNA	EST.LINDGREN	3117	119028	Apr.18, 2019	
SMA_Cable	HUBER SUHNER	EMC104-SM-SM-1000	170238	Mar. 05, 2019	



RF Cable (sVSWR_TX)	Huber Suhenr	SUCOFLEX 104	293864/4	Mar. 05, 2019	
Microwave Preamplifier	EMCINSTRUMEN T	EMC051845	980059	Apr. 17, 2019	
EMC Test Receiver	R&S	ESCI	100438	Dec. 16, 2018	

※ Calibration interval of instruments listed above is one year



4. ANTENNA REQUIREMENTS

4.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247(b), if transmitting antennas of direction gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


4.2 ANTENNA CONSTRUCTION AND DIRECTIONAL GAIN

Antenna type: PCB Antenna
Antenna Gain: 2.38dBi



5. PEAK OUTPUT POWER

5.1 TEST SETUP

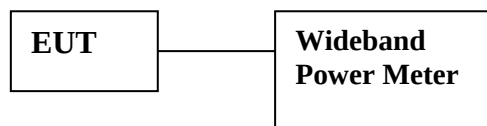

5.2 LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to § 15.247(b)(3) , for systems using digital modulation in the bands of 902 – 928 MHz , 2400 – 2483.5 MHz: 1 Watt.
2. According to § 15.247(b)(4) , the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section , if transmitting antennas of directional gain greater than 6 dBi are used , the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) , (b)(2) , and (b)(3) of this section , as appropriate , by the amount in dB that directional gain of the antenna exceeds 6 dBi.

5.3 TEST PROCEDURE

1. Peak power is measured using the wideband power meter.
2. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.

5.4 TEST RESULT: PASS




5.5 TEST DATA:

Modulation Type	Packet	Frequency	Conducted Power (dBm)	Conducted Power (W)	Max. Limit(dBm)	Max. Limit(W)
GFSK	DH5	2402 MHz	-26.68	0.00000215	30.00	1.00
		2441 MHz	-26.25	0.00000237	30.00	1.00
		2480 MHz	-24.15	0.00000385	30.00	1.00
8-DPSK	3DH5	2402 MHz	-24.2	0.00000380	30.00	1.00
		2441 MHz	-22.7	0.00000537	30.00	1.00
		2480 MHz	-20.84	0.00000824	30.00	1.00



6. BAND EDGE

6.1 TEST SETUP

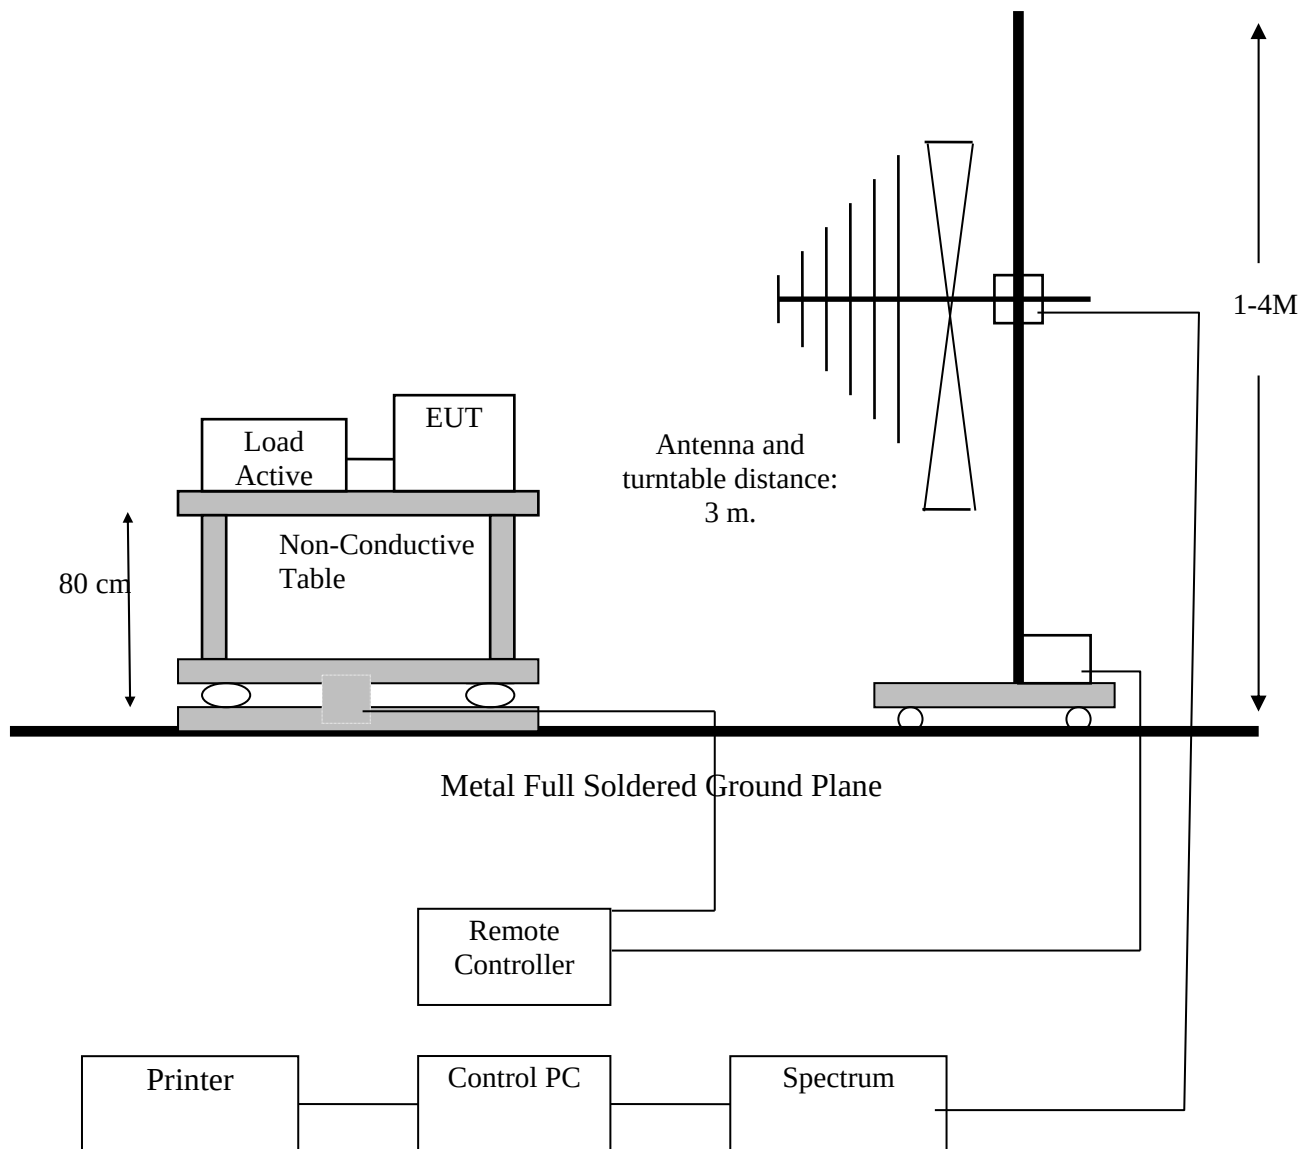



6.2 LIMIT

Restricted Bands:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Operation within the bands:

902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
1.705-30	30 (at 30-meter)	69.54
30-88	100	40
88-216	150	43
216-960	200	46
Above 960	500	54


6.3 RESULT: PASS



6.4 TEST DATA:

BDR 1M

Lowest Channel- Horizontal

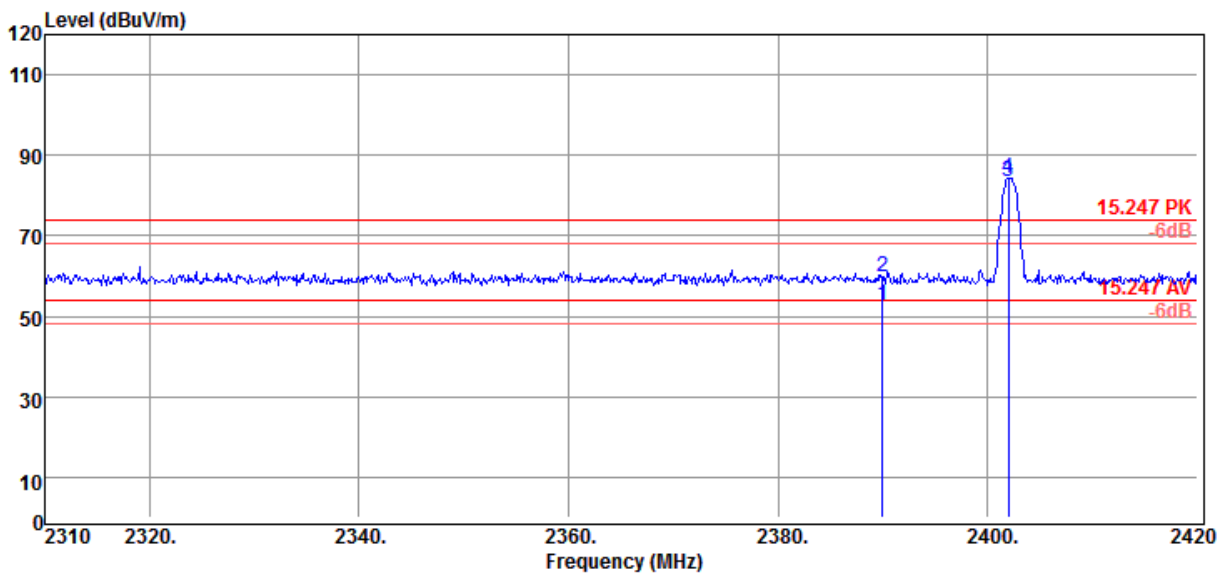

	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2389.97	16.42	36.33	3.83	32.50	0.00	52.75	54.00	-1.25	Average
2	2389.97	23.44	36.33	3.83	32.50	0.00	59.77	74.00	-14.23	Peak
3	2402.00	47.22	36.34	3.82	32.52	0.00	83.56	54.00	29.56	Average
4	2402.00	47.92	36.34	3.82	32.52	0.00	84.26	74.00	10.26	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Lowest Channel-Vertical

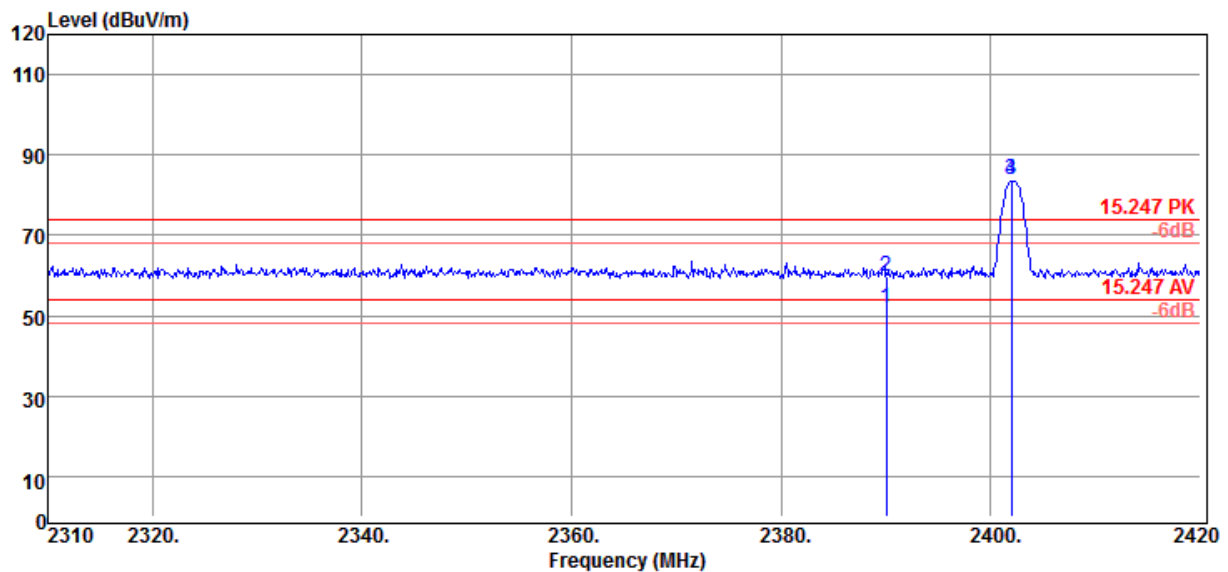

	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2390.00	15.41	36.33	3.83	32.50	0.00	51.74	54.00	-2.26	Average
2	2390.00	23.47	36.33	3.83	32.50	0.00	59.80	74.00	-14.20	Peak
3	2402.00	47.40	36.34	3.82	32.52	0.00	83.74	54.00	29.74	Average
4	2402.00	47.48	36.34	3.82	32.52	0.00	83.82	74.00	9.82	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Highest Channel- Horizontal

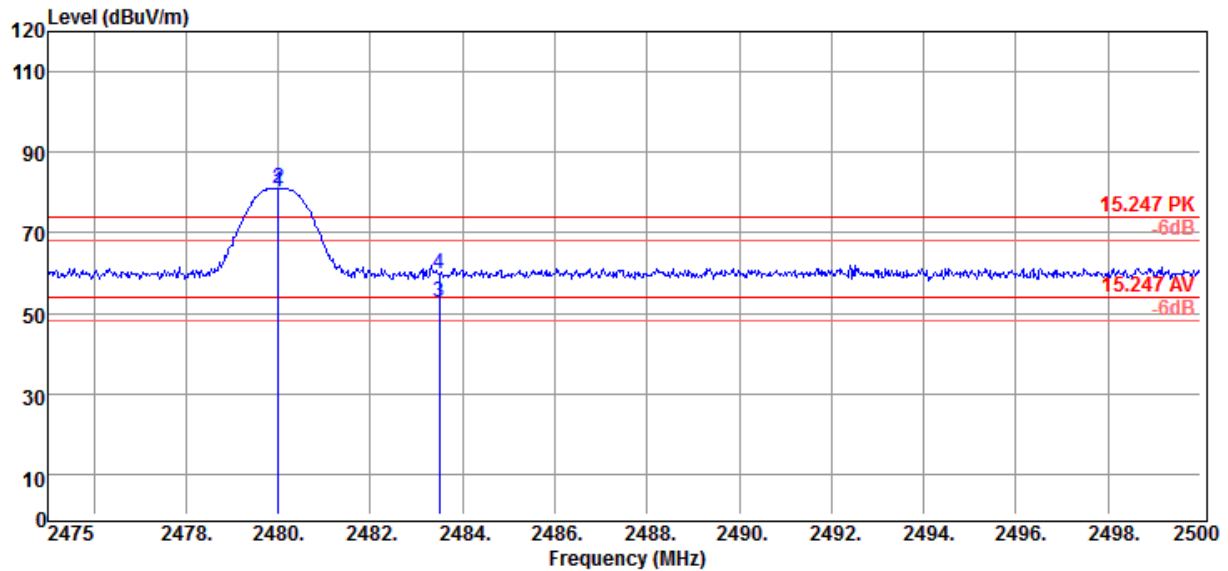

	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2480.00	43.70	36.45	3.79	32.66	0.00	80.15	54.00	26.15	Average
2	2480.00	44.41	36.45	3.79	32.66	0.00	80.86	74.00	6.86	Peak
3	2483.50	16.34	36.46	3.79	32.67	0.00	52.80	54.00	-1.20	Average
4	2483.50	23.48	36.46	3.79	32.67	0.00	59.94	74.00	-14.06	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Highest Channel- Vertical

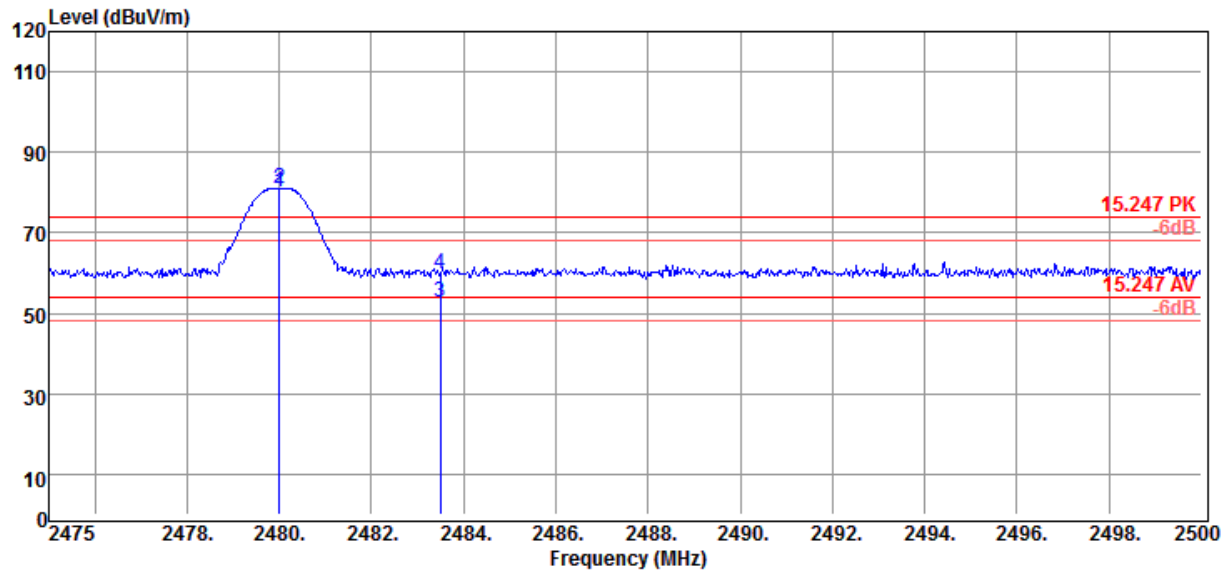

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	2480.00	43.73	36.45	3.79	32.66	0.00	80.18	54.00	26.18	Average
2	2480.00	44.44	36.45	3.79	32.66	0.00	80.89	74.00	6.89	Peak
3	2483.50	16.30	36.46	3.79	32.67	0.00	52.76	54.00	-1.24	Average
4	2483.50	23.27	36.46	3.79	32.67	0.00	59.73	74.00	-14.27	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain


Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



BDR 3M

Lowest Channel- Horizontal

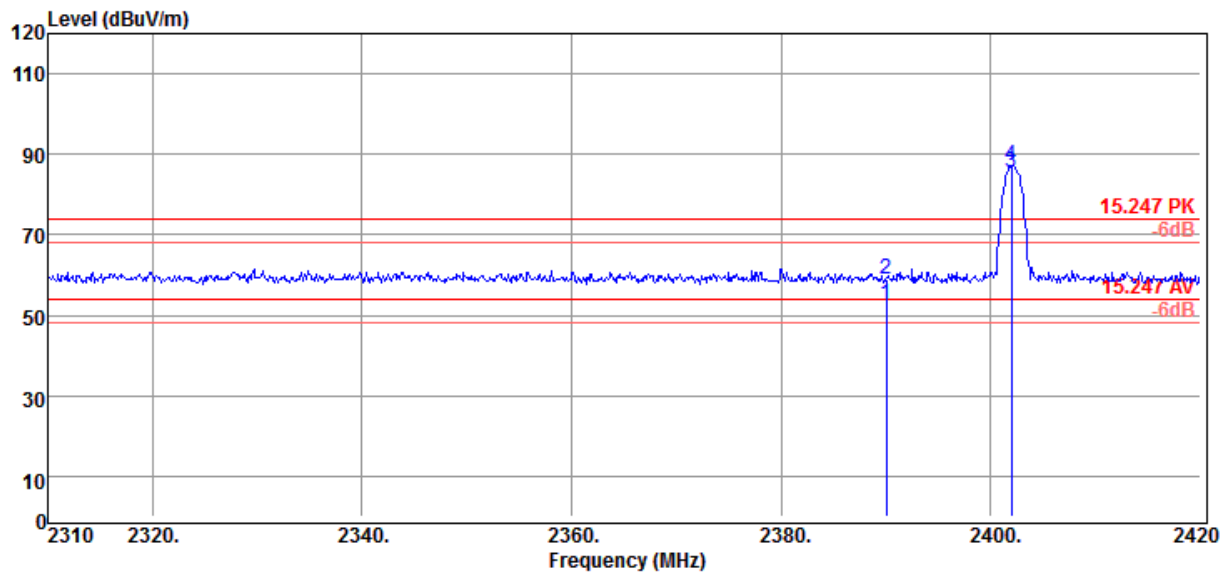

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	2390.00	16.52	36.33	3.83	32.50	0.00	52.85	54.00	-1.15	Average
2	2390.00	22.48	36.33	3.83	32.50	0.00	58.81	74.00	-15.19	Peak
3	2402.00	49.04	36.34	3.82	32.52	0.00	85.38	54.00	31.38	Average
4	2402.00	50.81	36.34	3.82	32.52	0.00	87.15	74.00	13.15	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Lowest Channel-Vertical

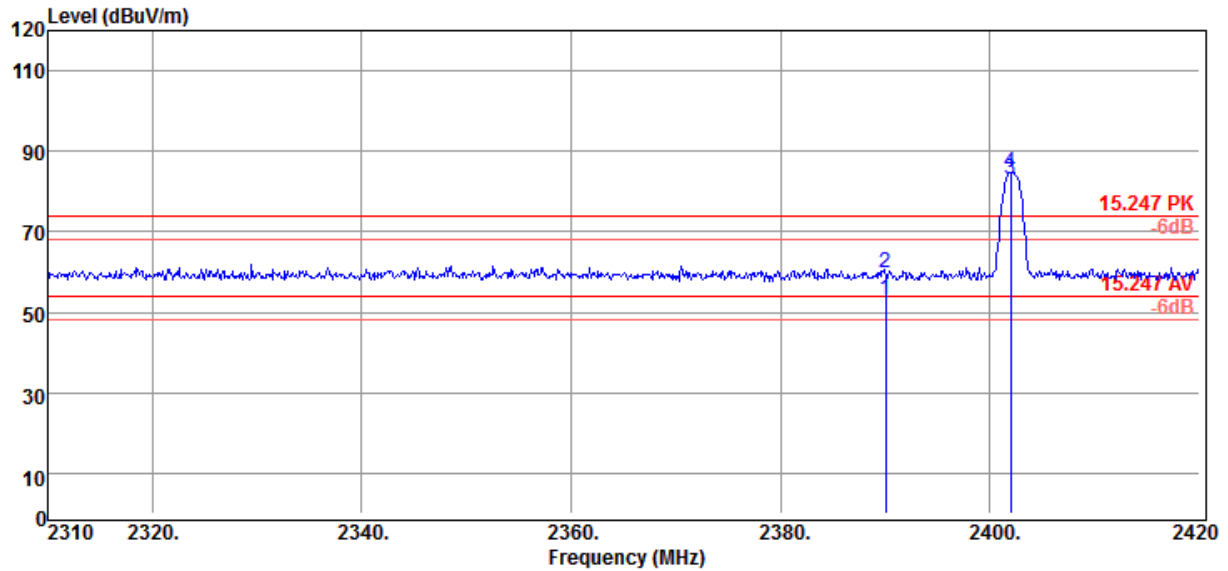

	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2390.00	16.66	36.33	3.83	32.50	0.00	52.99	54.00	-1.01	Average
2	2390.00	23.60	36.33	3.83	32.50	0.00	59.93	74.00	-14.07	Peak
3	2402.00	46.70	36.34	3.82	32.52	0.00	83.04	54.00	29.04	Average
4	2402.00	48.28	36.34	3.82	32.52	0.00	84.62	74.00	10.62	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Highest Channel- Horizontal

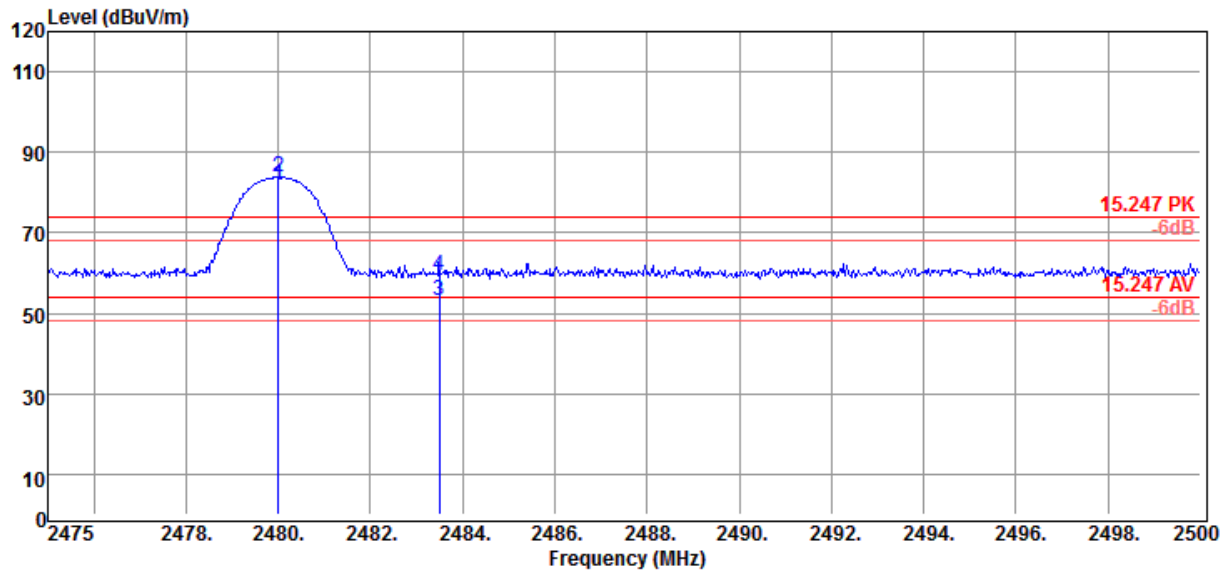

	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2480.00	45.38	36.45	3.79	32.66	0.00	81.83	54.00	27.83	Average
2	2480.00	47.43	36.45	3.79	32.66	0.00	83.88	74.00	9.88	Peak
3	2483.50	16.63	36.46	3.79	32.67	0.00	53.09	54.00	-0.91	Average
4	2483.50	23.08	36.46	3.79	32.67	0.00	59.54	74.00	-14.46	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Highest Channel- Vertical

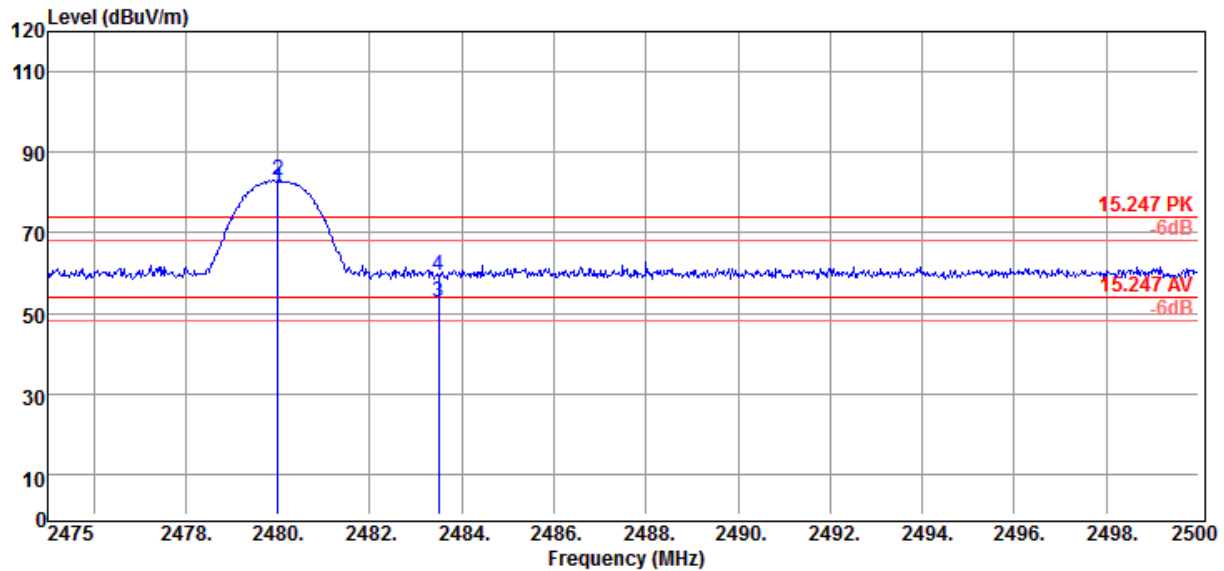

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	2480.00	44.50	36.45	3.79	32.66	0.00	80.95	54.00	26.95	Average
2	2480.00	46.55	36.45	3.79	32.66	0.00	83.00	74.00	9.00	Peak
3	2483.50	16.36	36.46	3.79	32.67	0.00	52.82	54.00	-1.18	Average
4	2483.50	22.81	36.46	3.79	32.67	0.00	59.27	74.00	-14.73	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line


Note:

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, PreAmp, etc.
3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements above 1000 MHz, Peak detector setting: use a 1 MHz RBW, a 3 MHz VBW.
5. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10 Hz VBW.
6. Peak detector measurement data will represent the worst case results.



7. 20DB BANDWIDTH

7.1 TEST SETUP

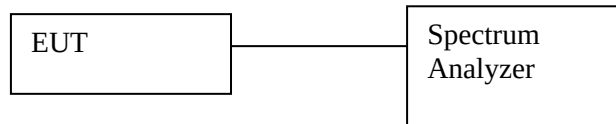

7.2 TEST PROCEDURE

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 30 KHz and VBW to 300KHz.
- c. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

7.3 LIMIT

N/A

7.4 RESULT: PASS


7.5 TEST DATA:

BDR 1M


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.952MHz
39	2441	0.967MHz
78	2480	0.957MHz



Lowest Channel

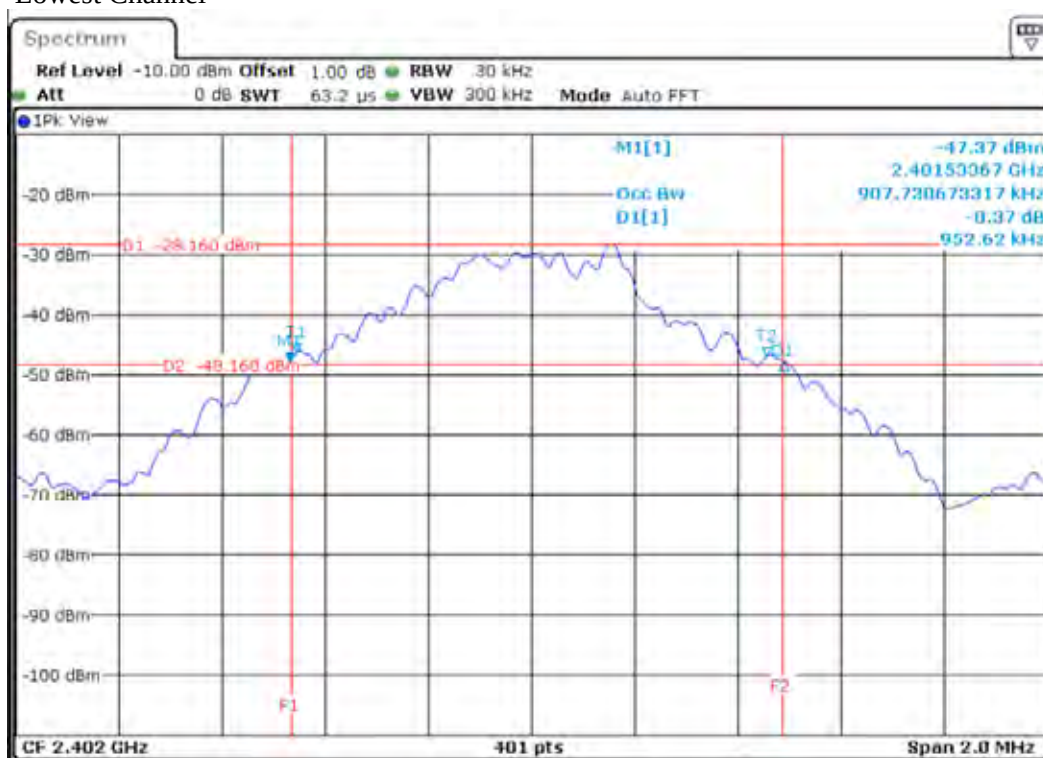

Middle Channel

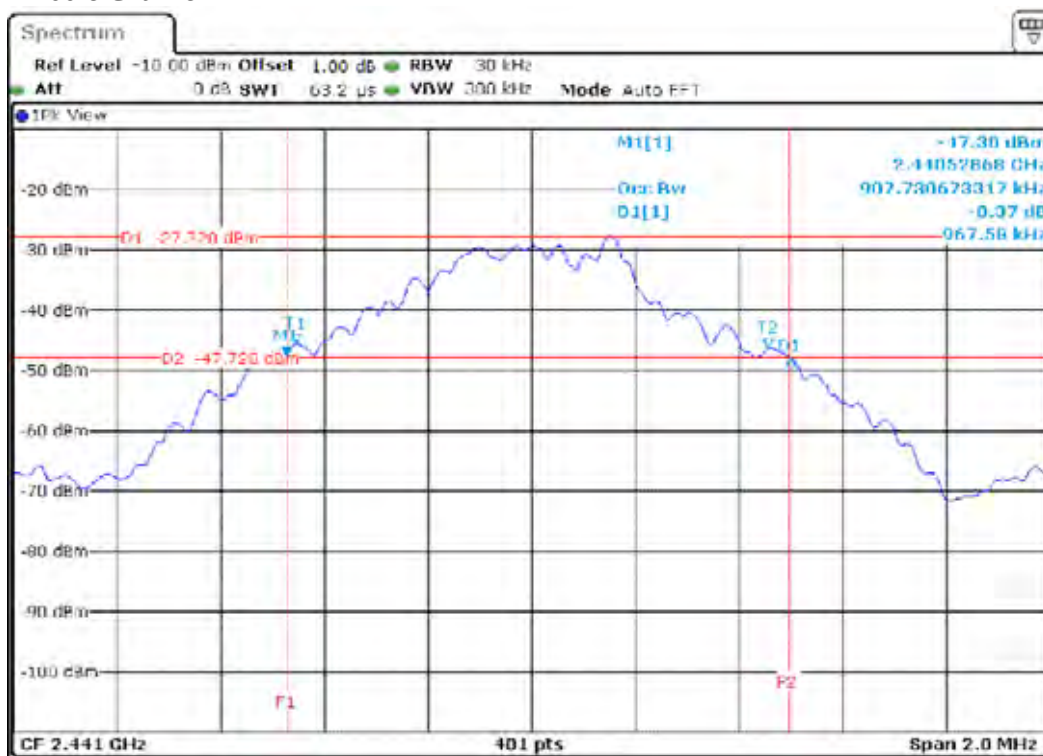



Highest Channel






BDR 3M


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.326MHz
39	2441	1.321MHz
78	2480	1.326MHz

Lowest Channel

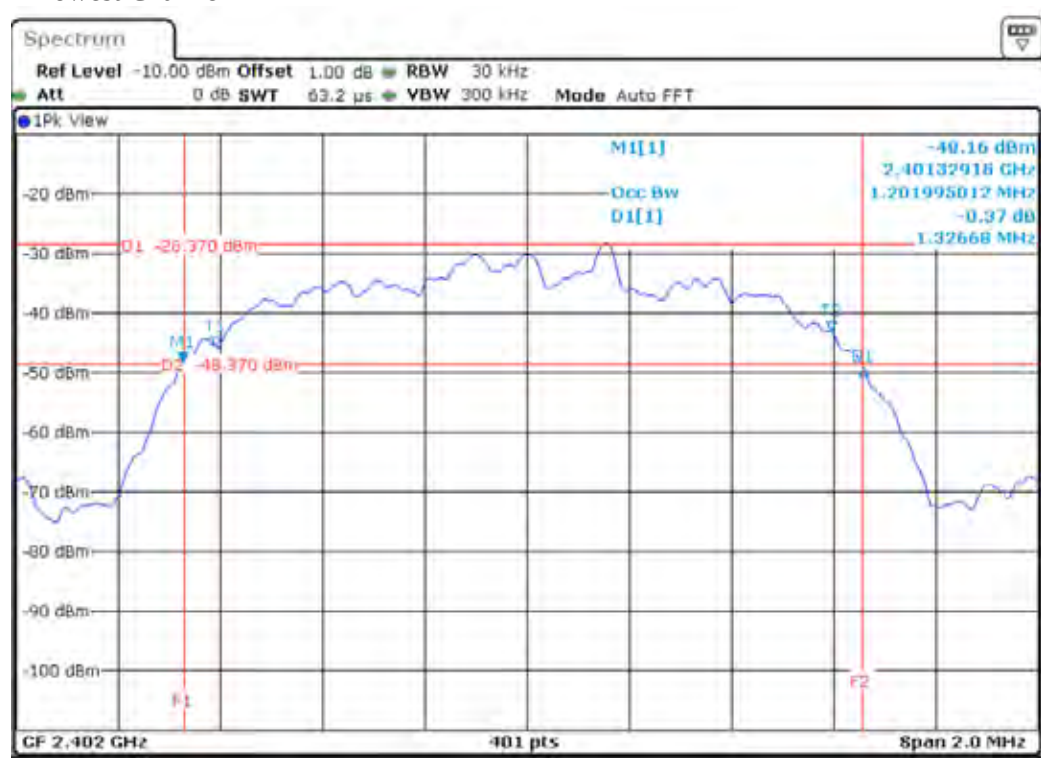




Middle Channel

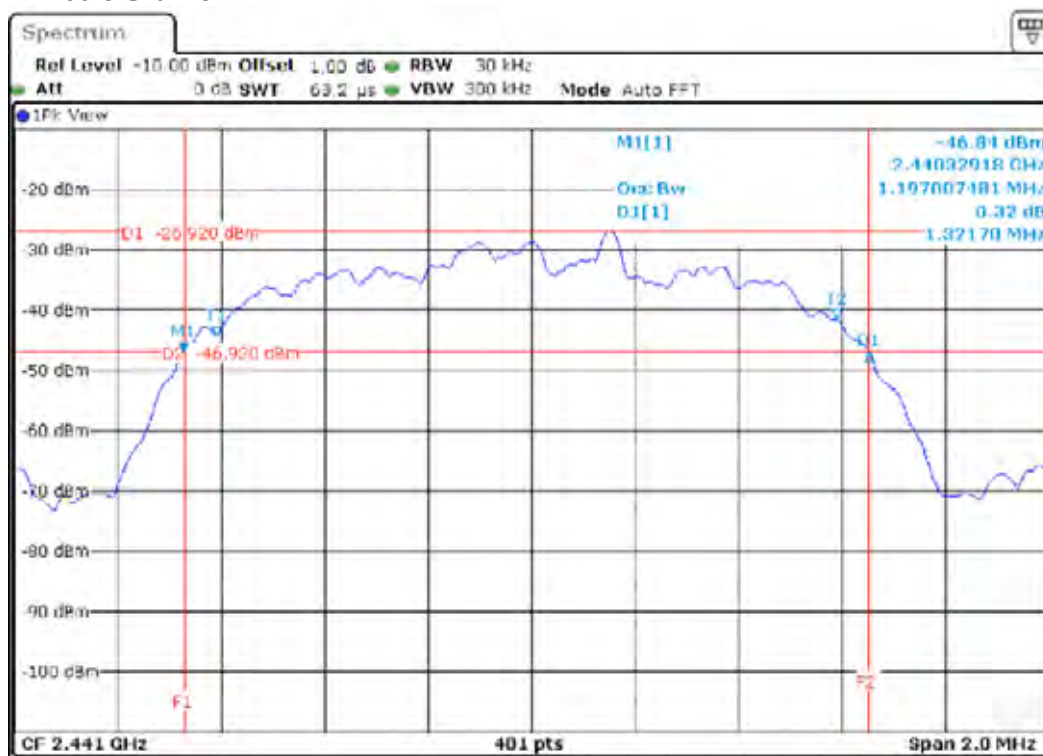


Highest Channel

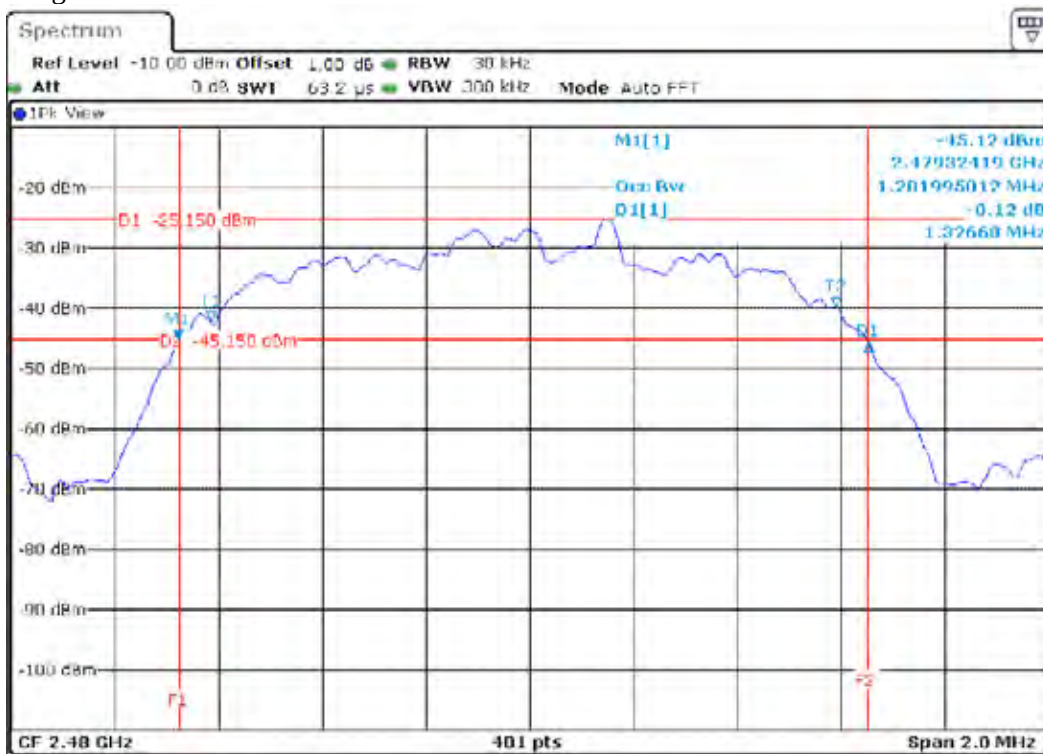

8. RADIATED EMISSION

8.1 TEST SETUP

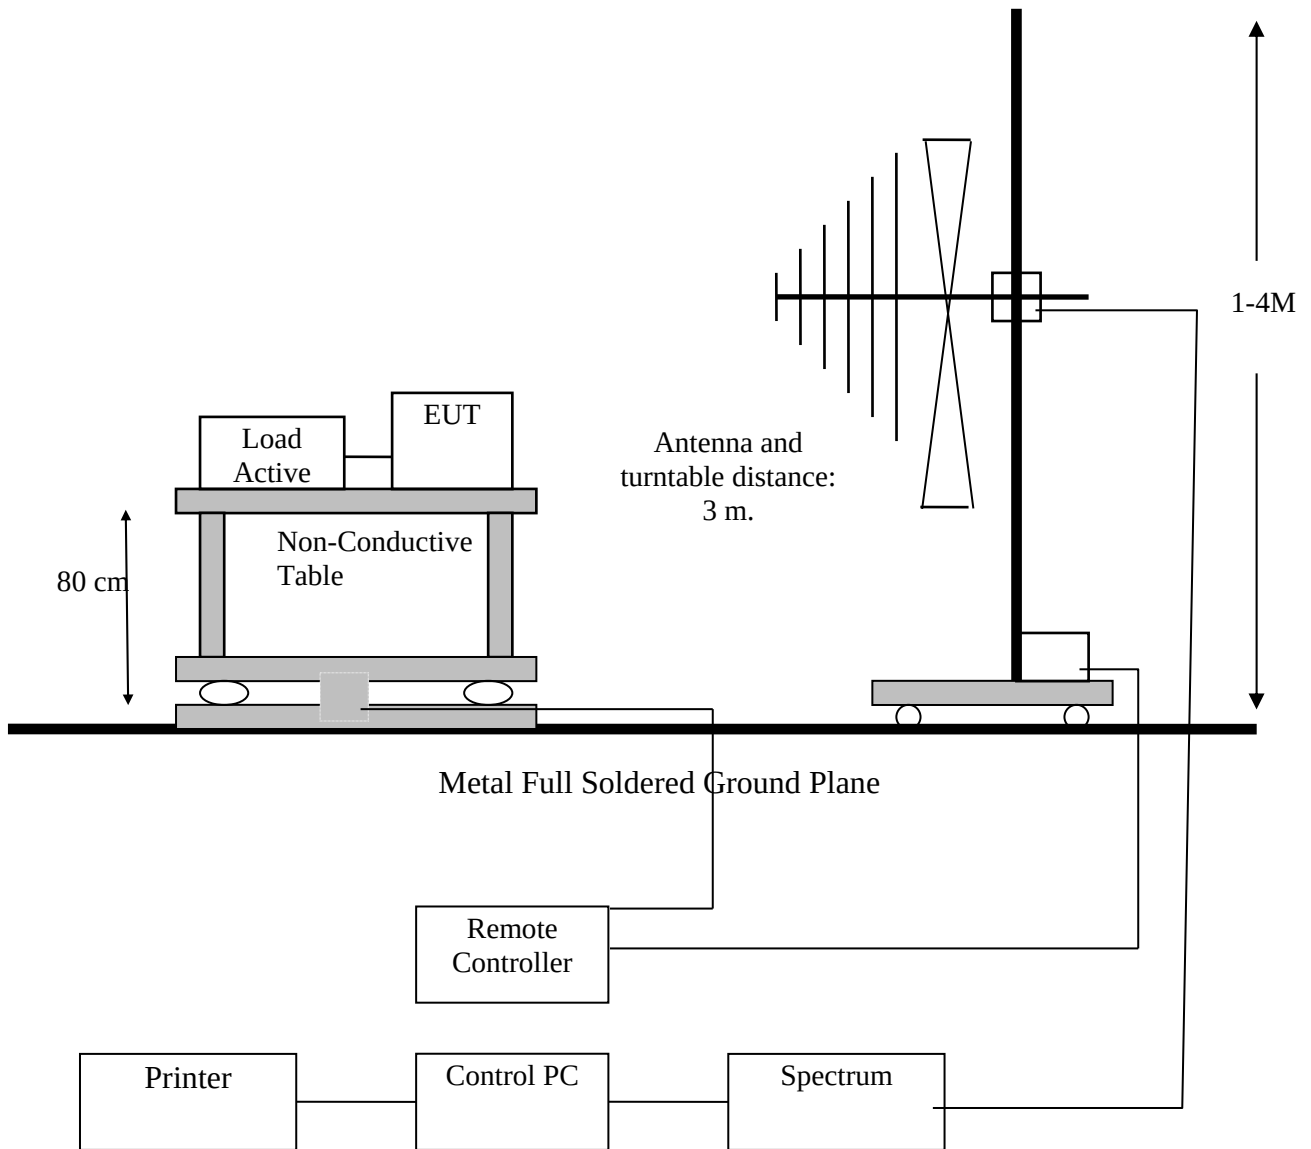



8.2 LIMIT

The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209 as below.

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
1.705-30	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500*	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.*

In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
1.705-30	30 (at 30-meter)	69.54
30-88	100	40
88-216	150	43
216-960	200	46
Above 960	500	54



8.3 TEST PROCEDURE

1. The EUT was placed on a turntable, which was 0.8m above ground plane.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT was set at 3m away from the receiving antenna, which was varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was maximized by changing the polarization of receiving antenna, both horizontal and vertical.
6. Repeated above procedures until the measurements for all frequencies are completed.

8.4 RESULT: PASS


8.5 TEST DATA:

All frequencies not described in this test report and within the range of the general radiated emission limits are not detectable significantly. The table as below is representing worst emissions found.



30MHz ~ 1GMz

Horizontal

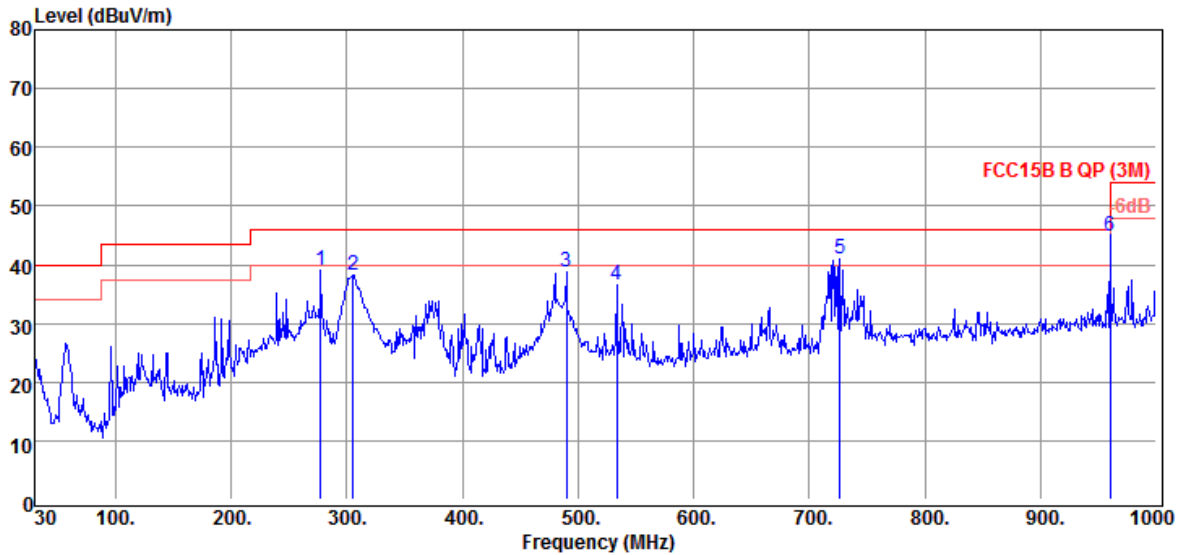

Freq		Meter	System	Cable	Antenna	Preamp	Real	Limit	Margin	Remark
MHz		Level	Factor	Loss	Factor	Gain	Level	Line		
		dBuV	dB/m	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	277.35	46.14	-7.09	1.66	19.75	28.50	39.05	46.00	-6.95	Peak
2	305.48	44.60	-6.43	1.79	20.21	28.43	38.17	46.00	-7.83	Peak
3	489.78	40.04	-1.15	2.59	24.02	27.76	38.89	46.00	-7.11	Peak
4	533.43	36.75	-0.22	2.64	24.67	27.53	36.53	46.00	-9.47	Peak
5	726.46	37.07	4.00	3.13	27.07	26.20	41.07	46.00	-4.93	Peak
6	960.00	36.30	8.54	3.71	29.62	24.79	44.84	46.00	-1.16	QP


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Vertical

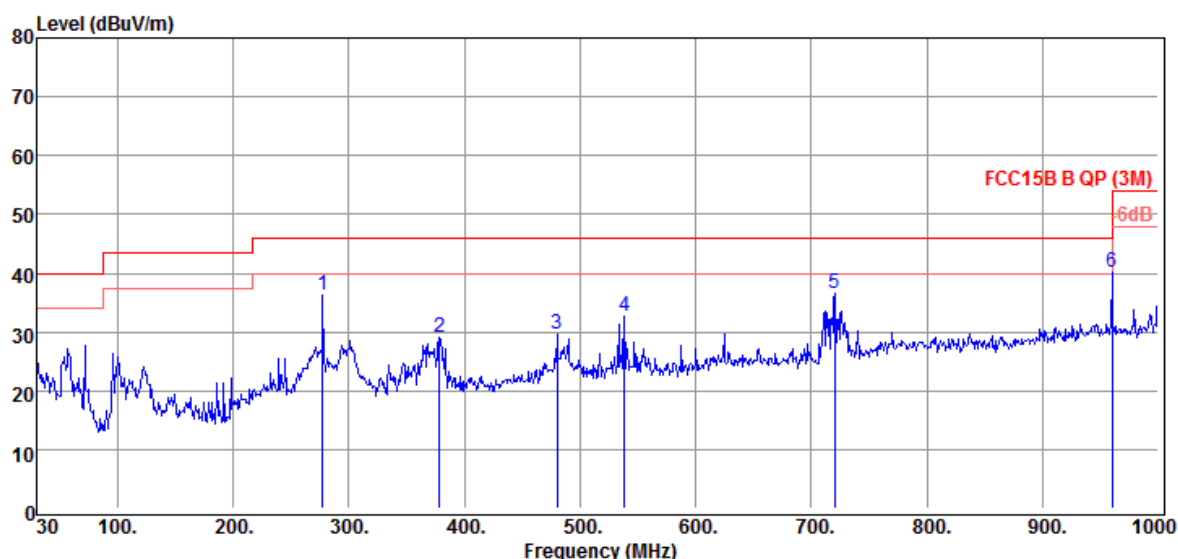

	Freq	Meter	System	Cable	Antenna	Preamp	Real	Limit	Margin	Remark
	MHz	Level	Factor	Loss	Factor	Gain	Level	Line		
		dBuV	dB/m	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	277.35	43.39	-7.09	1.66	19.75	28.50	36.30	46.00	-9.70	Peak
2	378.23	33.28	-4.17	2.22	21.78	28.17	29.11	46.00	-16.89	Peak
3	480.08	31.15	-1.40	2.56	23.84	27.80	29.75	46.00	-16.25	Peak
4	538.28	32.71	-0.11	2.65	24.74	27.50	32.60	46.00	-13.40	Peak
5	720.64	32.64	3.88	3.12	26.99	26.23	36.52	46.00	-9.48	Peak
6	960.23	31.49	8.54	3.71	29.62	24.79	40.03	54.00	-13.97	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line




1GHz ~26.5GHz

BDR 1M

Lowest Channel

Horizontal

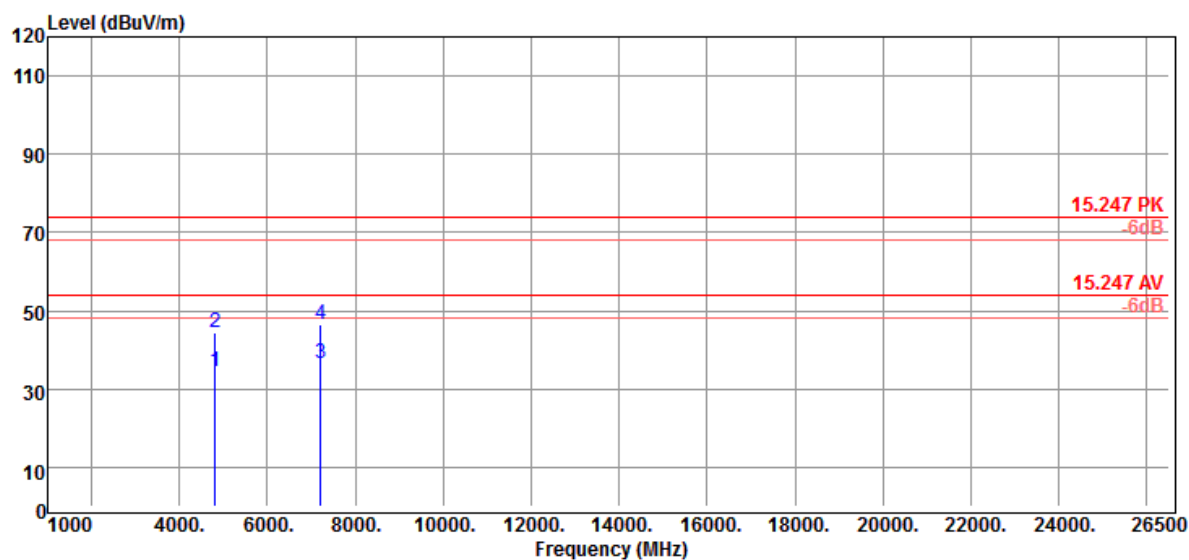

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4804.00	40.27	-6.00	6.26	34.58	46.84	34.27	54.00	-19.73	Average
2	4804.00	50.37	-6.00	6.26	34.58	46.84	44.37	74.00	-29.63	Peak
3	7206.00	38.97	-2.40	8.09	35.99	46.48	36.57	54.00	-17.43	Average
4	7206.00	48.88	-2.40	8.09	35.99	46.48	46.48	74.00	-27.52	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Vertical

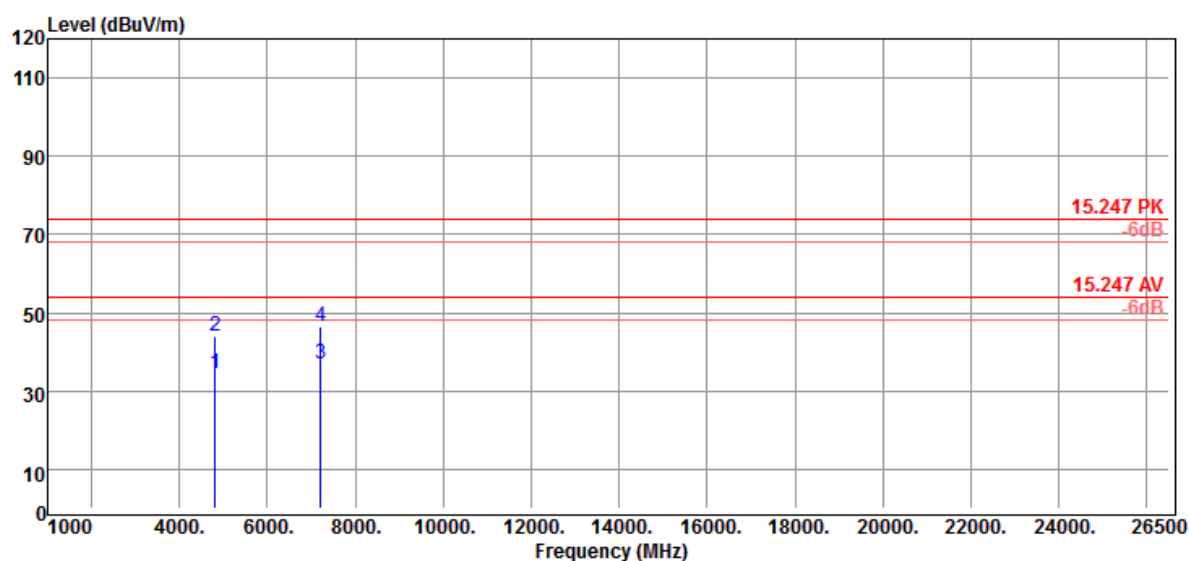

	Freq	Meter	System	Cable	Antenna	Preamp	Real	Limit	Margin	Remark
	MHz	Level	Factor	Loss	Factor	Gain	Level	Line	dB	
		dBuV	dB/m	dB	dB/m	dB	dBuV/m	dBuV/m		
1	4804.00	40.26	-6.00	6.26	34.58	46.84	34.26	54.00	-19.74	Average
2	4804.00	50.19	-6.00	6.26	34.58	46.84	44.19	74.00	-29.81	Peak
3	7206.00	39.17	-2.40	8.09	35.99	46.48	36.77	54.00	-17.23	Average
4	7206.00	48.74	-2.40	8.09	35.99	46.48	46.34	74.00	-27.66	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain


Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Middle Channel

Horizontal

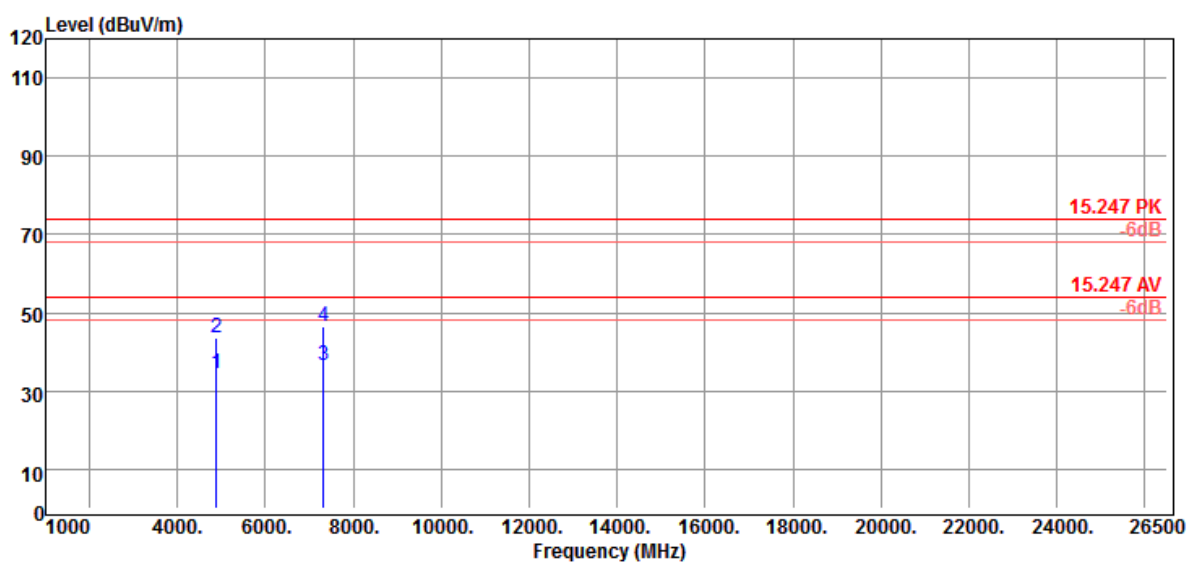

	Freq	Meter	System	Cable	Antenna	Preamp	Real	Limit	Margin	Remark
	MHz	Level	Factor	Loss	Factor	Gain	Level	Line		
		dBuV	dB/m	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	4882.00	40.13	-5.87	6.32	34.63	46.82	34.26	54.00	-19.74	Average
2	4882.00	49.52	-5.87	6.32	34.63	46.82	43.65	74.00	-30.35	Peak
3	7323.00	38.68	-2.08	8.18	36.15	46.41	36.60	54.00	-17.40	Average
4	7323.00	48.77	-2.08	8.18	36.15	46.41	46.69	74.00	-27.31	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Vertical

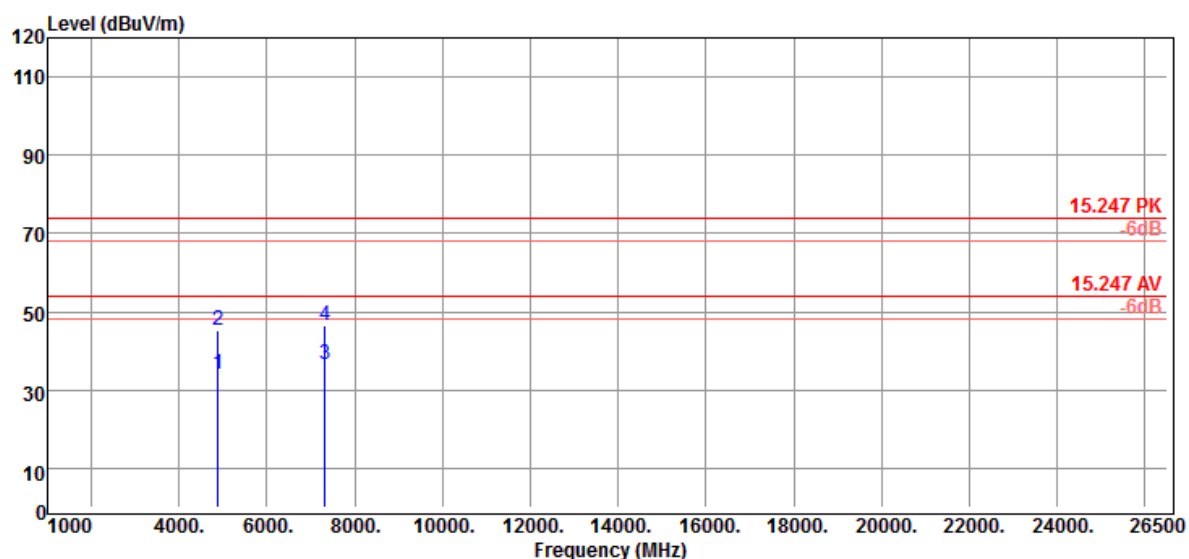

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4882.00	40.04	-5.87	6.32	34.63	46.82	34.17	54.00	-19.83	Average
2	4882.00	51.05	-5.87	6.32	34.63	46.82	45.18	74.00	-28.82	Peak
3	7323.00	38.62	-2.08	8.18	36.15	46.41	36.54	54.00	-17.46	Average
4	7323.00	48.78	-2.08	8.18	36.15	46.41	46.70	74.00	-27.30	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain


Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Highest Channel

Horizontal

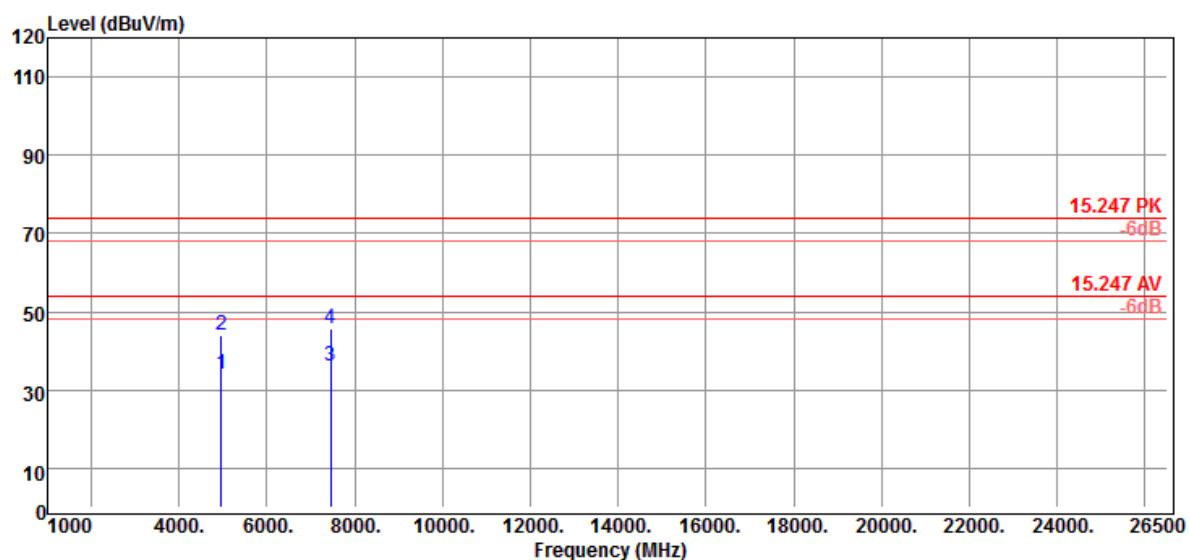

	Freq	Meter	System	Cable	Antenna	Preamp	Real	Limit	Margin	Remark
	MHz	Level	Factor	Loss	Factor	Gain	Level	Line	dB	
		dBuV	dB/m	dB	dB/m	dB	dBuV/m	dBuV/m		
1	4960.00	39.97	-5.75	6.38	34.68	46.81	34.22	54.00	-19.78	Average
2	4960.00	49.80	-5.75	6.38	34.68	46.81	44.05	74.00	-29.95	Peak
3	7440.00	37.95	-1.75	8.27	36.32	46.34	36.20	54.00	-17.80	Average
4	7440.00	47.25	-1.75	8.27	36.32	46.34	45.50	74.00	-28.50	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Vertical

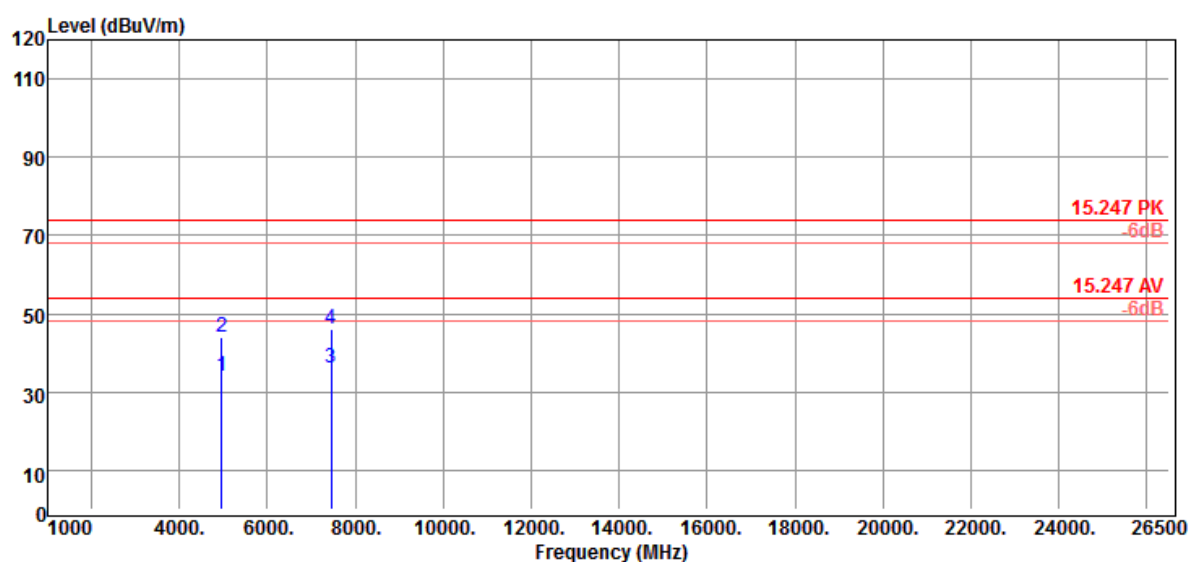

	Freq	Meter	System	Cable	Antenna	Preamp	Real	Limit	Margin	Remark
	MHz	Level	Factor	Loss	Factor	Gain	Level	Line		
		dBuV	dB/m	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	4960.00	39.99	-5.75	6.38	34.68	46.81	34.24	54.00	-19.76	Average
2	4960.00	49.75	-5.75	6.38	34.68	46.81	44.00	74.00	-30.00	Peak
3	7440.00	37.73	-1.75	8.27	36.32	46.34	35.98	54.00	-18.02	Average
4	7440.00	47.73	-1.75	8.27	36.32	46.34	45.98	74.00	-28.02	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor


Margin = Real Level - Limit Line



BDR 3M

Lowest Channel

Horizontal

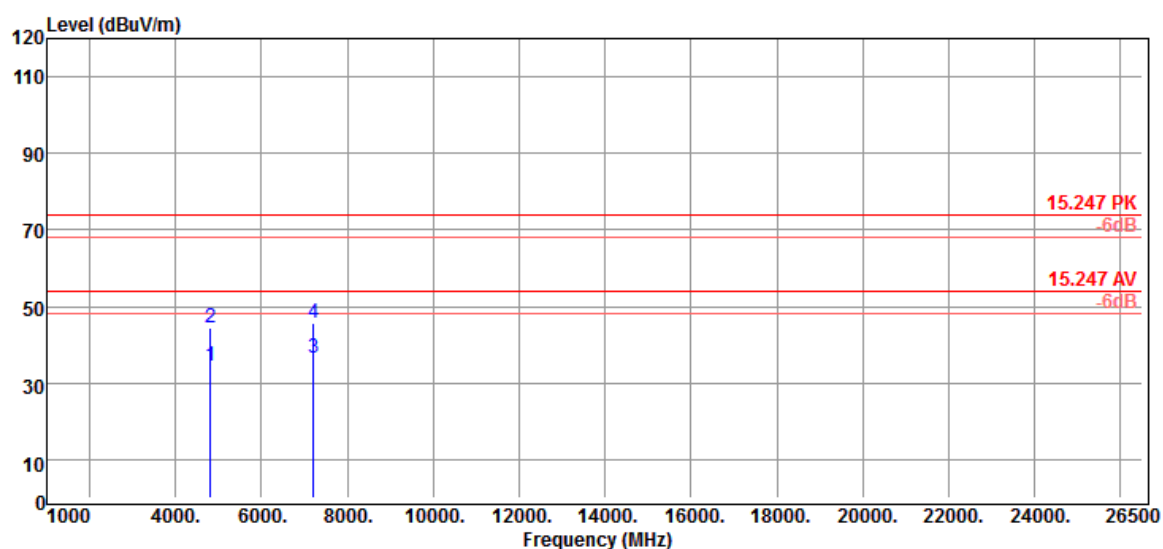

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4804.00	40.30	-6.00	6.26	34.58	46.84	34.30	54.00	-19.70	Average
2	4804.00	50.49	-6.00	6.26	34.58	46.84	44.49	74.00	-29.51	Peak
3	7206.00	38.76	-2.40	8.09	35.99	46.48	36.36	54.00	-17.64	Average
4	7206.00	48.20	-2.40	8.09	35.99	46.48	45.80	74.00	-28.20	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Vertical

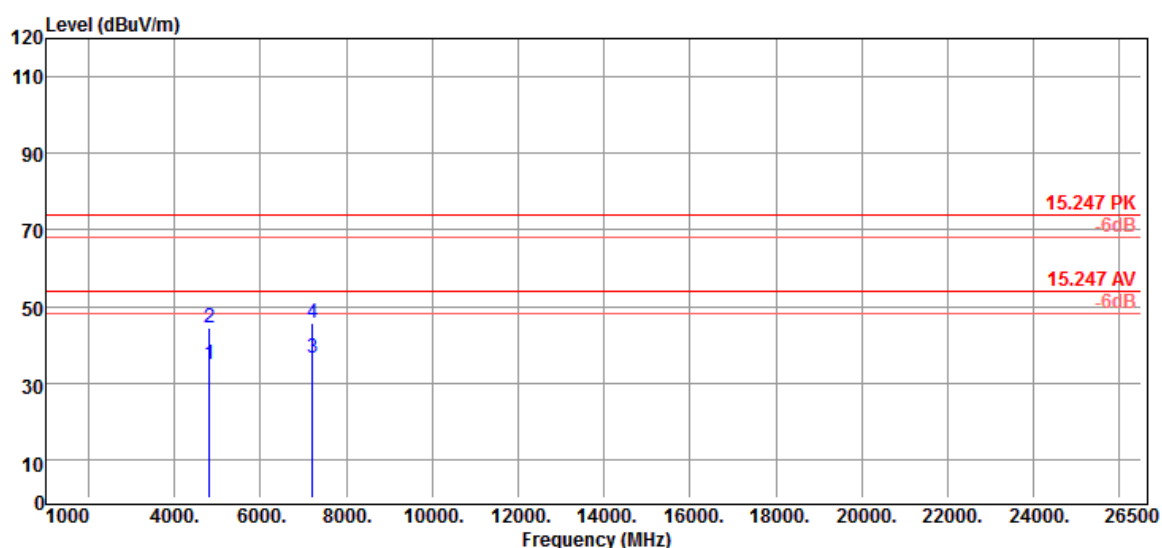

	Freq	Meter	System	Cable	Antenna	Preamp	Real	Limit	Margin	Remark
	MHz	Level	Factor	Loss	Factor	Gain	Level	Line		
		dBuV	dB/m	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	4804.00	40.79	-6.00	6.26	34.58	46.84	34.79	54.00	-19.21	Average
2	4804.00	50.47	-6.00	6.26	34.58	46.84	44.47	74.00	-29.53	Peak
3	7206.00	38.84	-2.40	8.09	35.99	46.48	36.44	54.00	-17.56	Average
4	7206.00	48.14	-2.40	8.09	35.99	46.48	45.74	74.00	-28.26	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain


Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Middle Channel

Horizontal

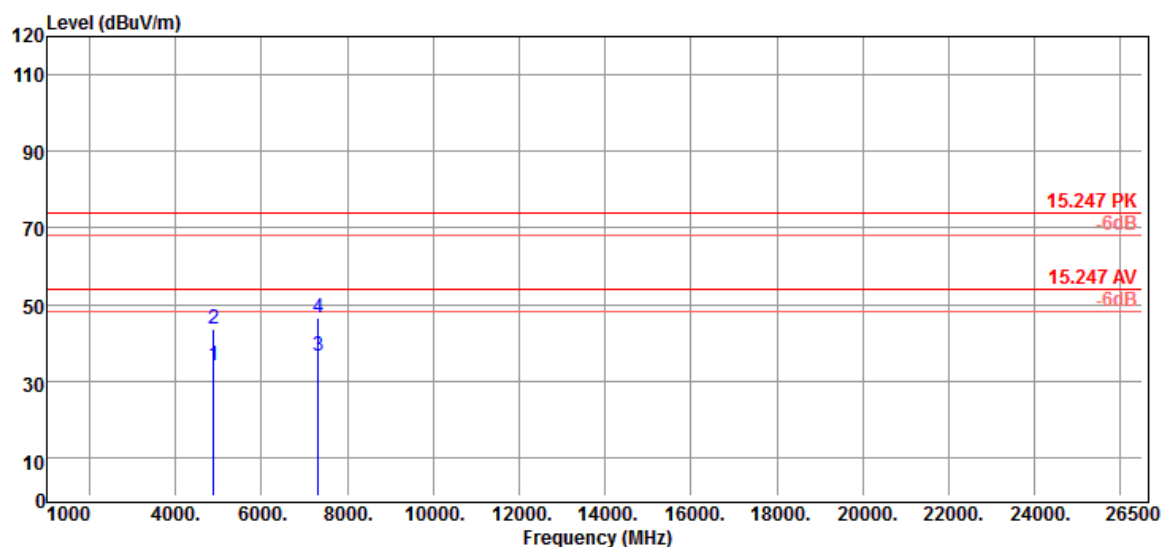

	Freq	Meter	System	Cable	Antenna	Preamp	Real	Limit	Margin	Remark
	MHz	Level	Factor	Loss	Factor	Gain	Level	Line		
		dBuV	dB/m	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	4882.00	40.03	-5.87	6.32	34.63	46.82	34.16	54.00	-19.84	Average
2	4882.00	49.55	-5.87	6.32	34.63	46.82	43.68	74.00	-30.32	Peak
3	7323.00	38.78	-2.08	8.18	36.15	46.41	36.70	54.00	-17.30	Average
4	7323.00	48.52	-2.08	8.18	36.15	46.41	46.44	74.00	-27.56	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor



Margin = Real Level - Limit Line

Vertical

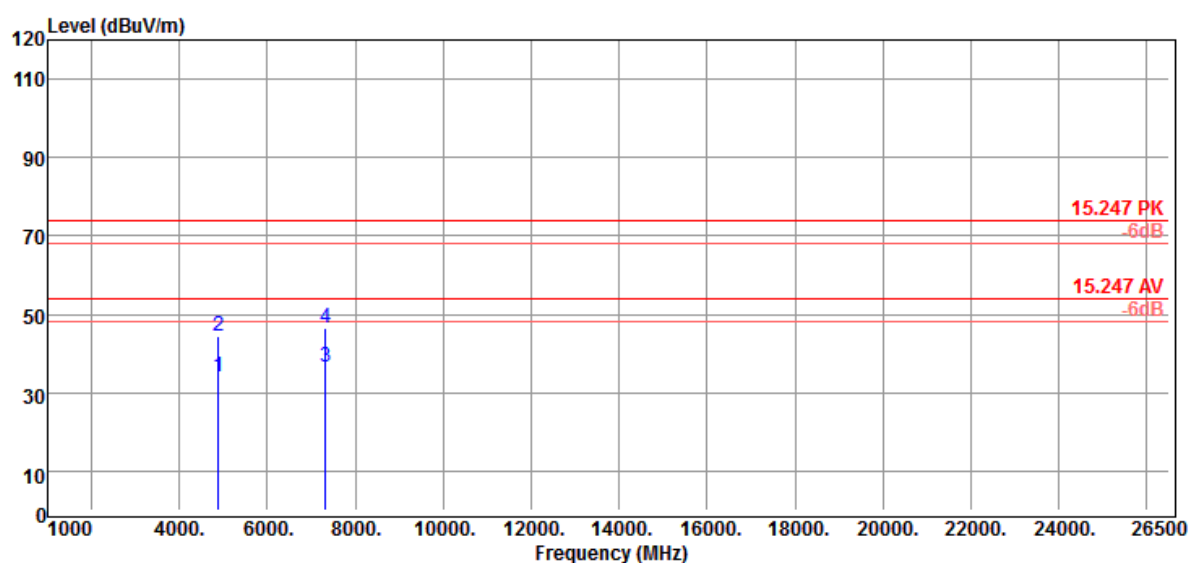

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4882.00	39.98	-5.87	6.32	34.63	46.82	34.11	54.00	-19.89	Average
2	4882.00	50.23	-5.87	6.32	34.63	46.82	44.36	74.00	-29.64	Peak
3	7323.00	38.74	-2.08	8.18	36.15	46.41	36.66	54.00	-17.34	Average
4	7323.00	48.58	-2.08	8.18	36.15	46.41	46.50	74.00	-27.50	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain


Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Highest Channel

Horizontal

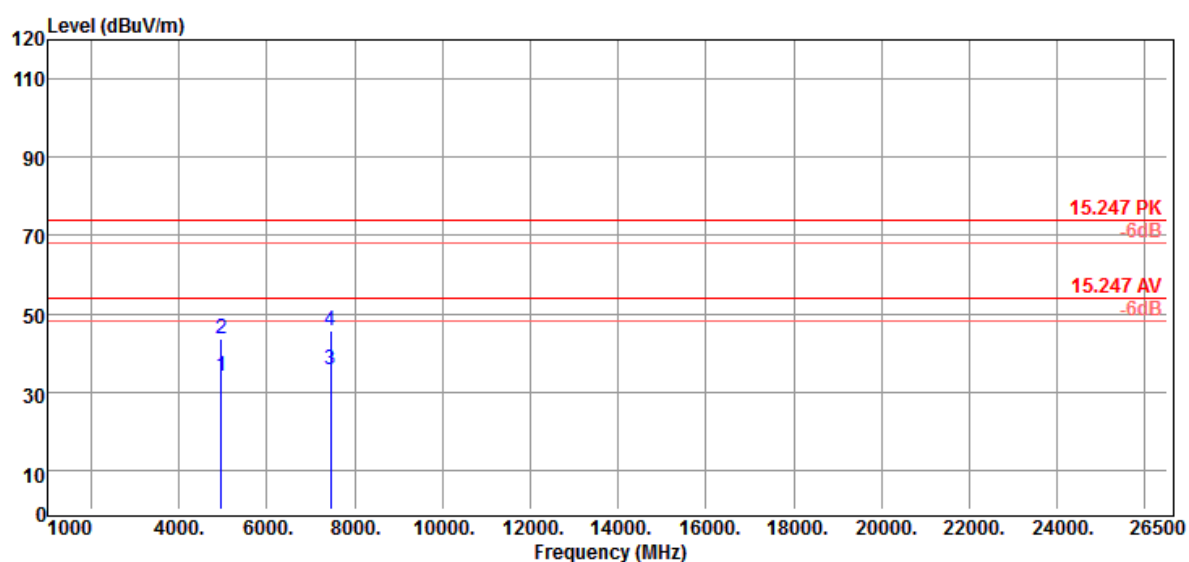

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4960.00	39.90	-5.75	6.38	34.68	46.81	34.15	54.00	-19.85	Average
2	4960.00	49.24	-5.75	6.38	34.68	46.81	43.49	74.00	-30.51	Peak
3	7440.00	37.67	-1.75	8.27	36.32	46.34	35.92	54.00	-18.08	Average
4	7440.00	47.38	-1.75	8.27	36.32	46.34	45.63	74.00	-28.37	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Vertical

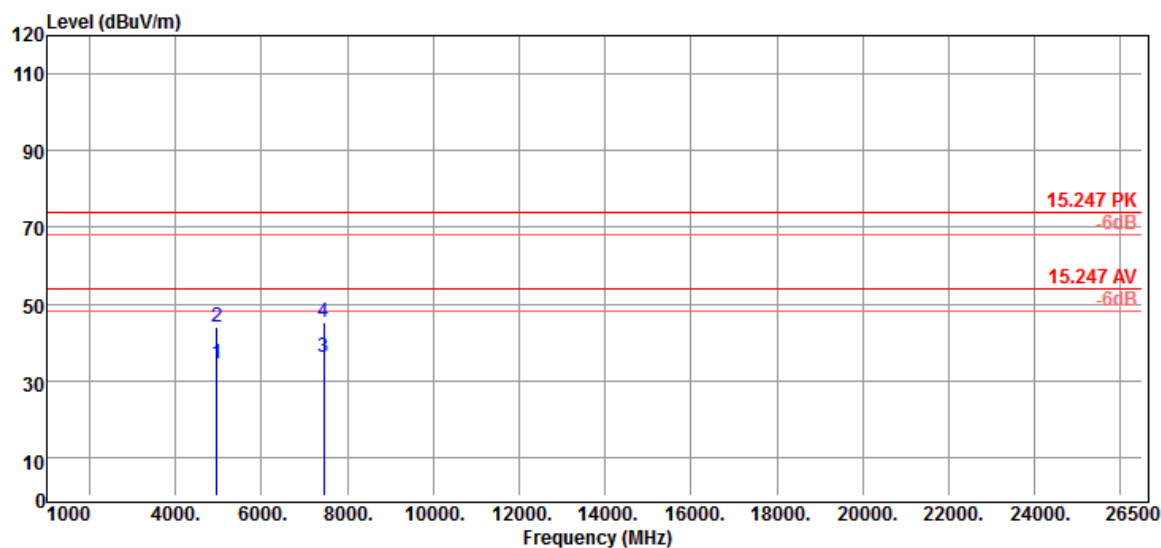

	Freq	Meter	System	Cable	Antenna	Preamp	Real	Limit	Margin	Remark
	MHz	Level	Factor	Loss	Factor	Gain	Level	Line		
		dBuV	dB/m	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	4960.00	40.40	-5.75	6.38	34.68	46.81	34.65	54.00	-19.35	Average
2	4960.00	49.70	-5.75	6.38	34.68	46.81	43.95	74.00	-30.05	Peak
3	7440.00	37.79	-1.75	8.27	36.32	46.34	36.04	54.00	-17.96	Average
4	7440.00	47.22	-1.75	8.27	36.32	46.34	45.47	74.00	-28.53	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line

Note:

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, PreAmp, etc.




3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements from 9 kHz to 150 kHz, Peak detector setting: 100 Hz RBW
5. Measurements from 150 kHz to 30MHz, Peak detector setting: 10 kHz RBW
6. Measurements from 30 MHz to 1000 MHz, Peak detector setting: 100 kHz RBW
7. Measurements from 9 kHz to 150 kHz, CISPR Quasi-Peak detector: 200 Hz RBW
8. Measurements from 150 kHz to 30MHz, CISPR Quasi-Peak detector: 9 kHz RBW
9. Measurements from 30 MHz to 1000 MHz, CISPR Quasi-Peak detector: 120 kHz RBW
10. Peak detector measurement data will represent the worst case results.



9. CONDUCTED EMISSIONS

9.1 TEST SETUP

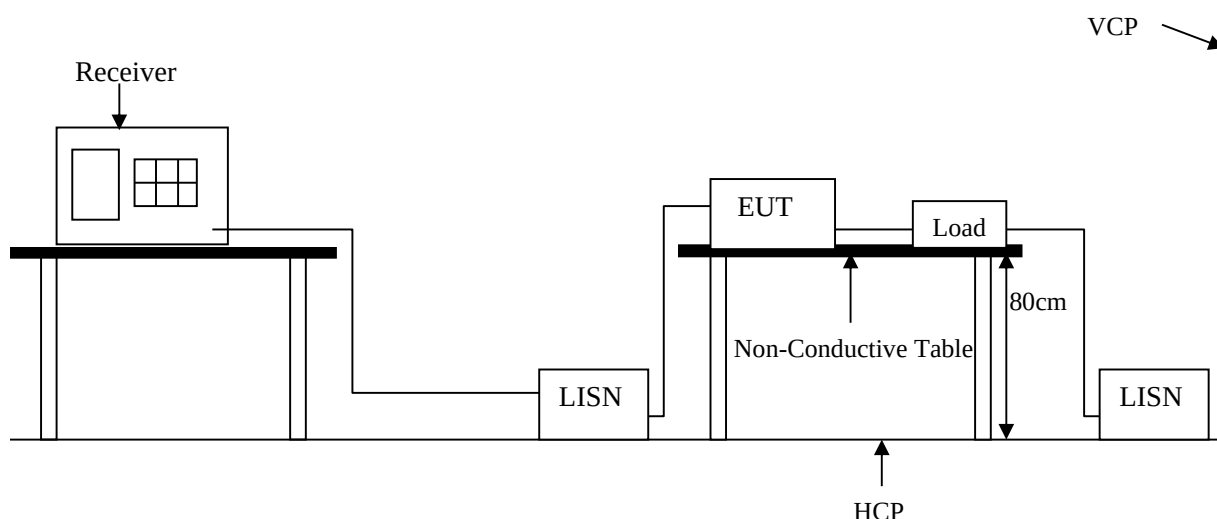

9.2 LIMIT

Frequency range (MHz)	CLASS A		CLASS B	
	QP dB(uV)	Average dB(uV)	QP dB(uV)	Average dB(uV)
0.15-0.5	79 dBuV	66 dBuV	66 - 56 dBuV	56 - 46 dBuV
0.5-5.0	73 dBuV	60 dBuV	56 dBuV	46 dBuV
5.0-30.0	73 dBuV	60 dBuV	60 dBuV	50 dBuV

Remark: In the above table, the tighter limit applies at the band edges.

9.3 TEST PROCEDURE

The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). It provides a 50 ohm / 50 μ H coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50 ohm / 50 μ H coupling impedance with 50 ohm termination. (Please refer to the block diagram of the test setup and photograph.)

Both sides of AC line are checked for the maximum conducted emission interference. In order to find the maximum emissions, the relating positions of equipment and all of the interference cables must be changed according to EN 55022 regulations: The measurement procedure on conducted emission interference.

The resolution bandwidth of the field strength meter is set at 9 KHz.

9.4 TEST SPECIFICATION


According to PART15.207



9.5 RESULT: PASS

9.6 TEST DATA:

LINE

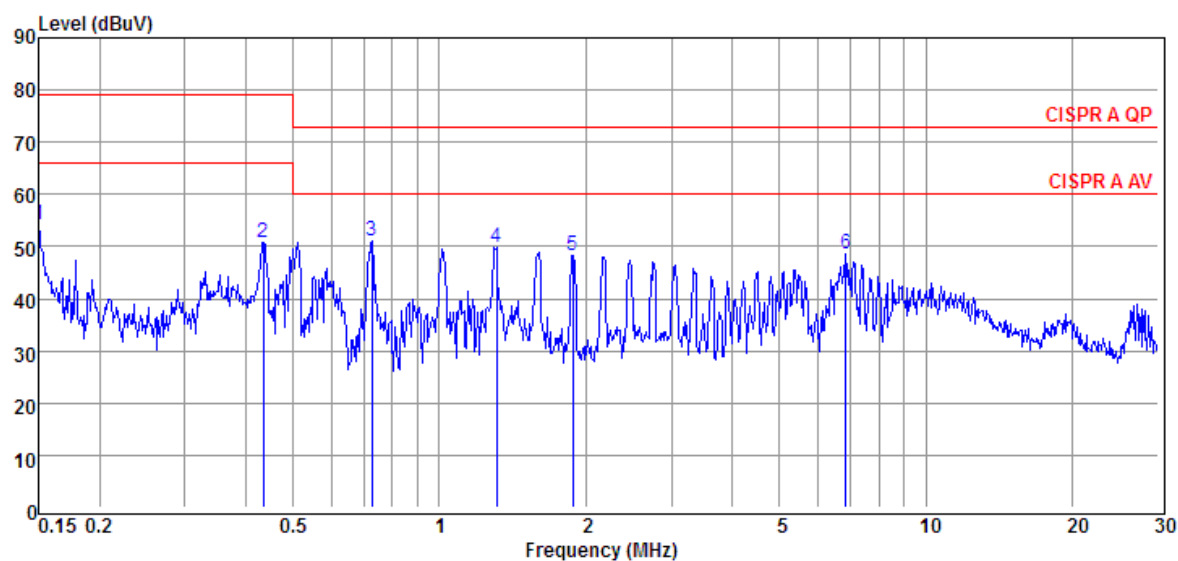


	Freq MHz	Meter Level dBUV	System Factor dB	Cable Loss dB	LISN Factor dB	Real Level dBUV	Limit Line dBUV	Margin dB	Remark
1	0.15	34.23	20.11	20.10	0.01	54.34	79.00	-24.66	Peak
2	0.44	30.64	20.16	20.14	0.02	50.80	79.00	-28.20	Peak
3	0.73	30.77	20.20	20.17	0.03	50.97	73.00	-22.03	Peak
4	1.31	29.68	20.24	20.21	0.03	49.92	73.00	-23.08	Peak
5	1.88	28.05	20.27	20.23	0.04	48.32	73.00	-24.68	Peak
6	6.84	28.05	20.51	20.39	0.12	48.56	73.00	-24.44	Peak

System Factor = Cable Loss + ISN Factor
Cable Loss = Pulse limiter + Insertion Loss
Real Level = Meter Level + System Factor
Margin = Real Level - Limit Line



NEUTRAL

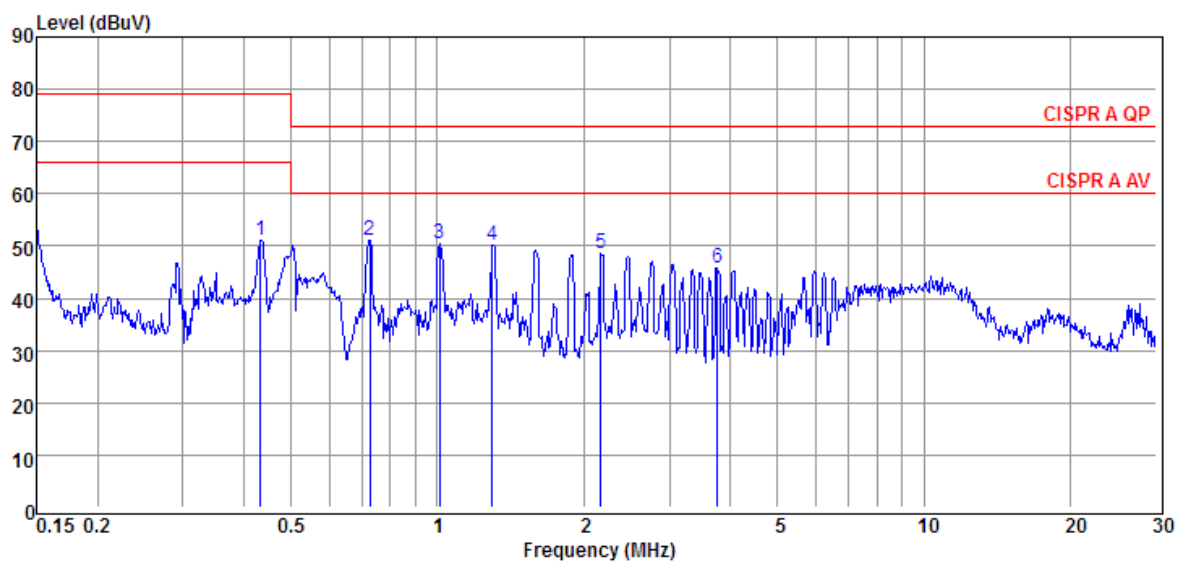

	Freq MHz	Meter Level dBUV	System Factor dB	Cable Loss dB	LISN Factor dB	Real Level dBUV	Limit Line dBUV	Margin dB	Remark
1	0.43	30.81	20.17	20.14	0.03	50.98	79.00	-28.02	Peak
2	0.73	30.94	20.21	20.17	0.04	51.15	73.00	-21.85	Peak
3	1.01	30.30	20.23	20.19	0.04	50.53	73.00	-22.47	Peak
4	1.30	29.83	20.25	20.20	0.05	50.08	73.00	-22.92	Peak
5	2.17	28.26	20.30	20.24	0.06	48.56	73.00	-24.44	Peak
6	3.76	25.45	20.38	20.29	0.09	45.83	73.00	-27.17	Peak

System Factor = Cable Loss + ISN Factor

Cable Loss = Pulse limiter + Insertion Loss

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



10. SPURIOUS EMISSIONS

10.1 TEST SETUP



10.2 LIMIT

According to § 15.247(d) , in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating , the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power , based on either an RF conducted or a radiated measurement , provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands , as defined in § 15.205(a) , must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

10.3 TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 13 GHz to 26GHz range for IEEE 802.11b/g.


10.4 TEST RESULTS: PASS



10.5 TEST DATA:


BDR 1M

Lowest Channel

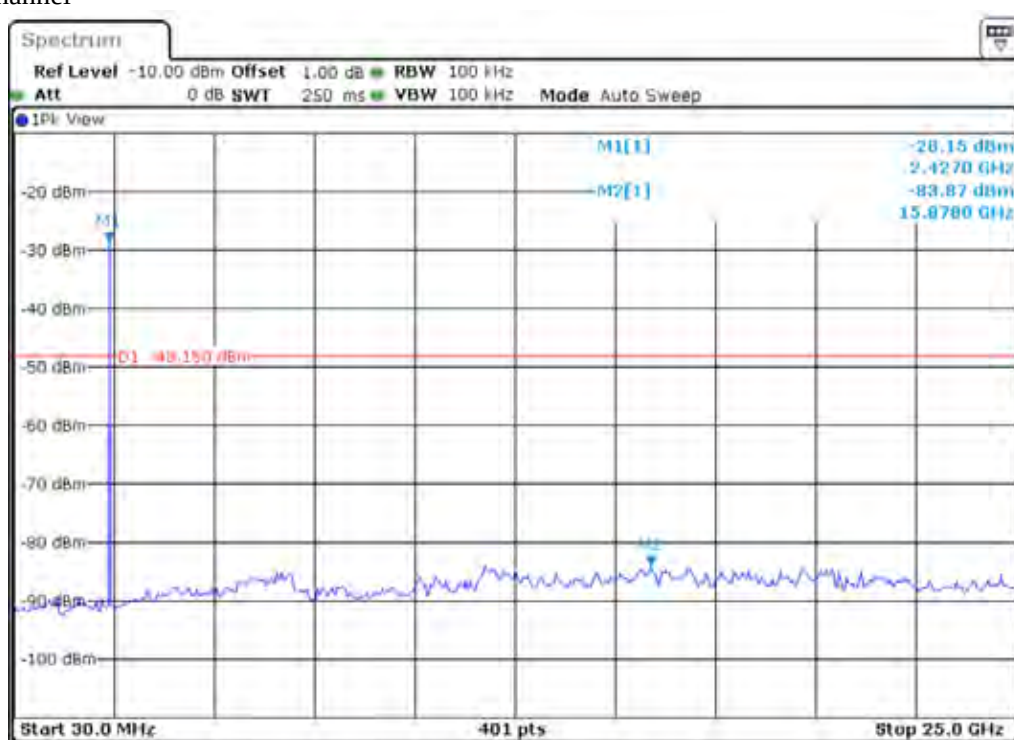




Middle Channel

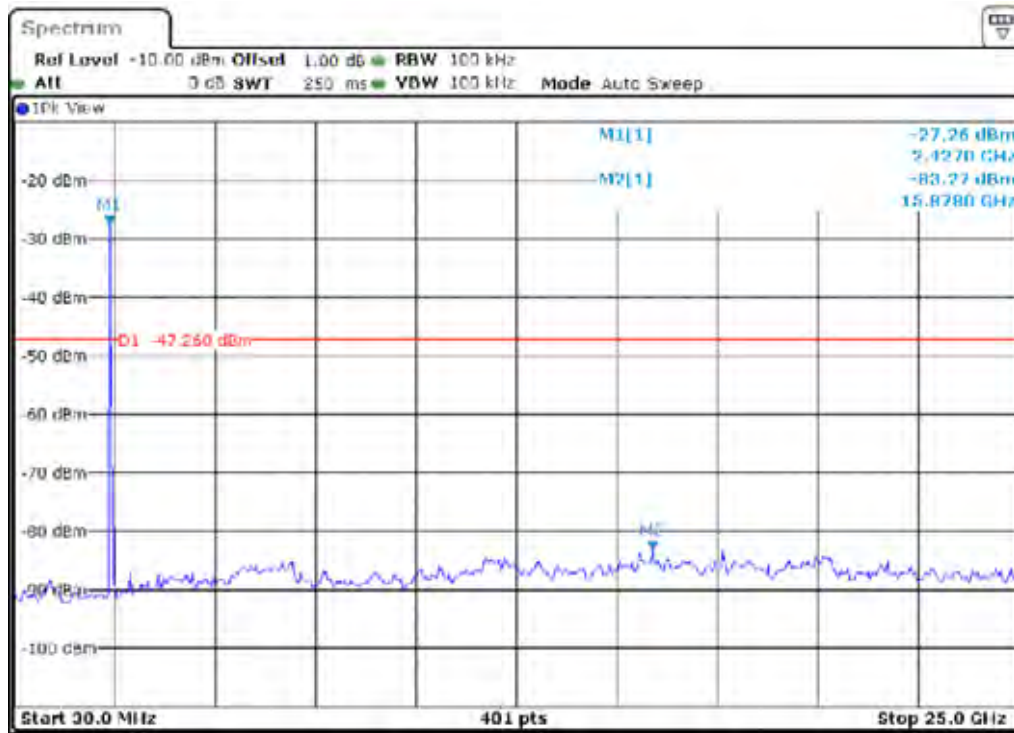


Highest Channel

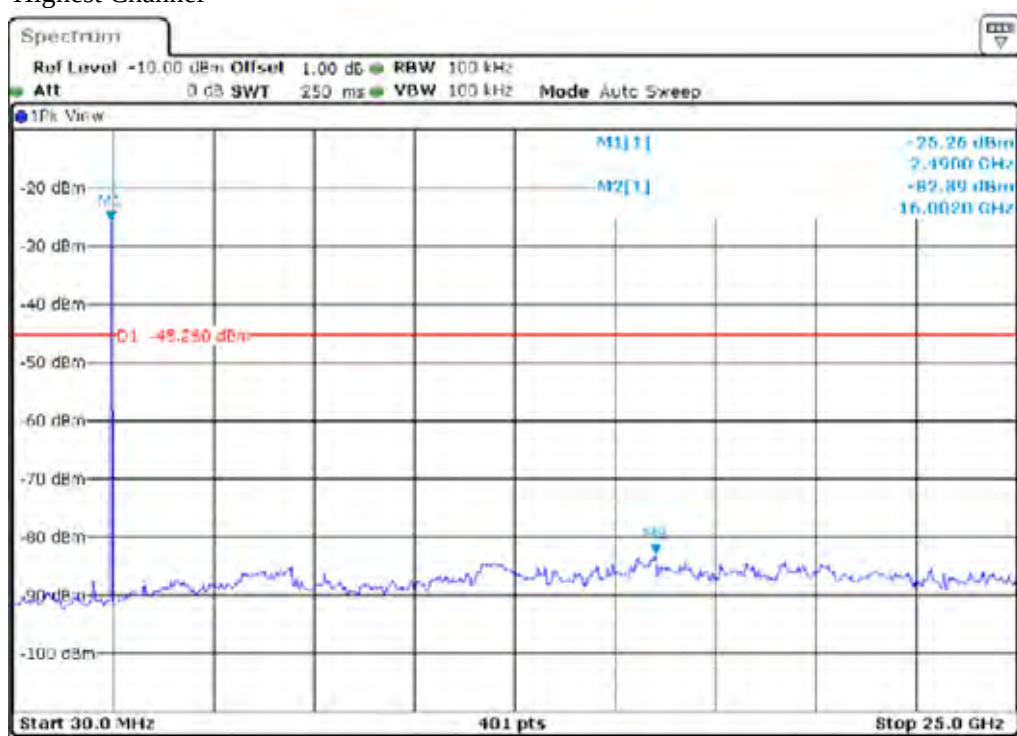




BDR 3M


Lowest Channel

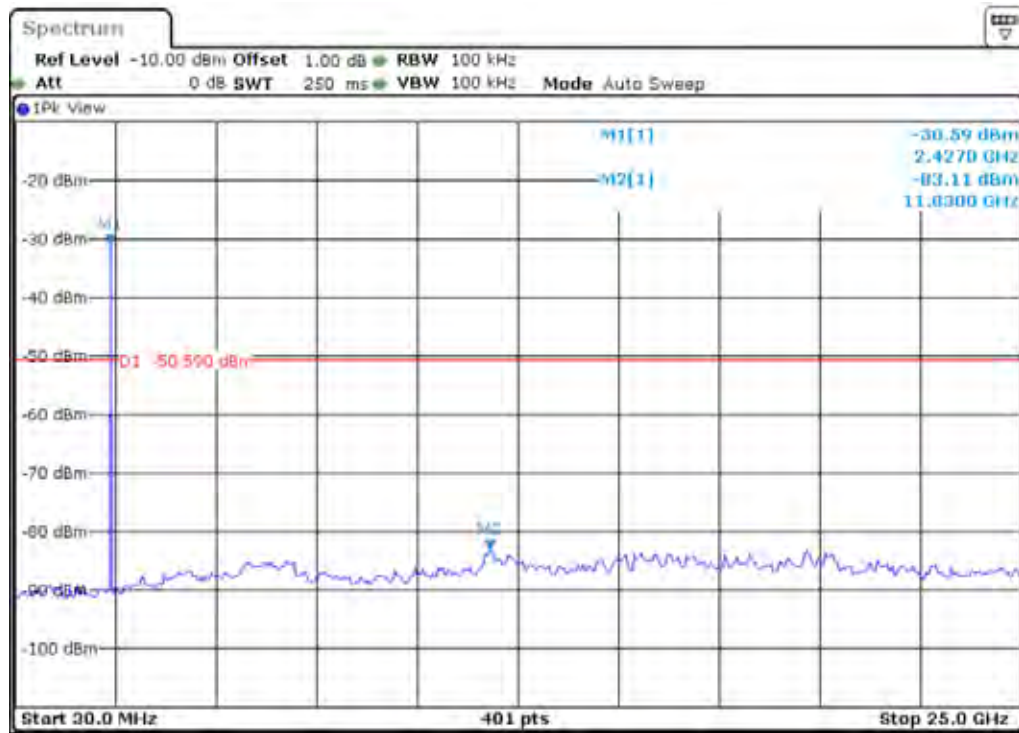

Middle Channel

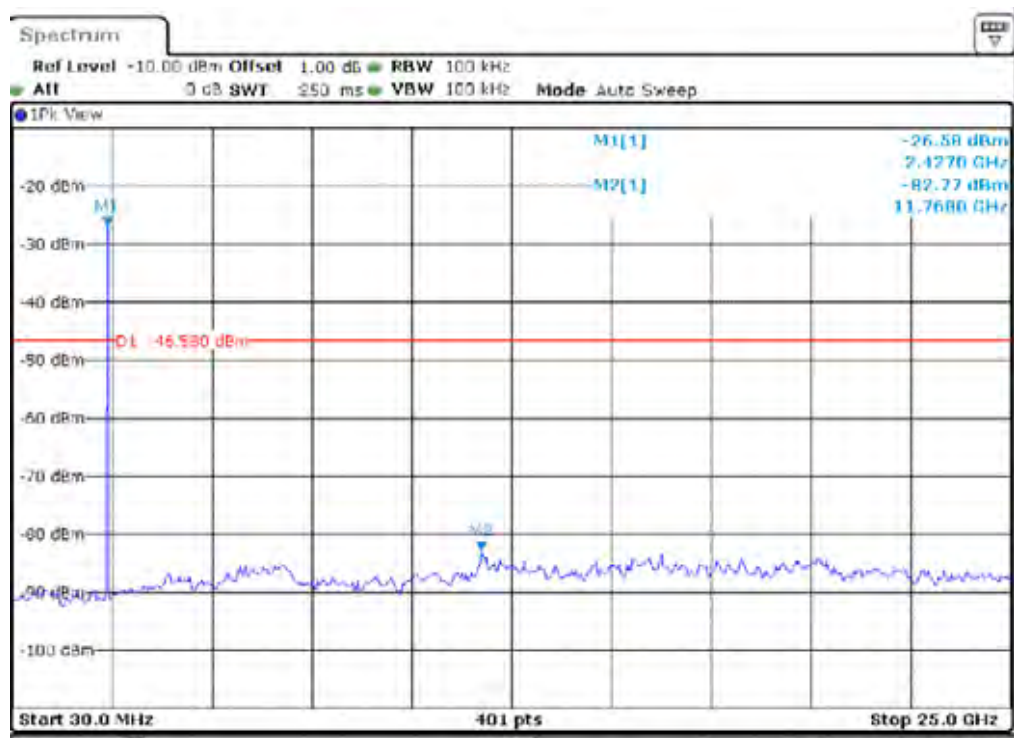


Highest Channel

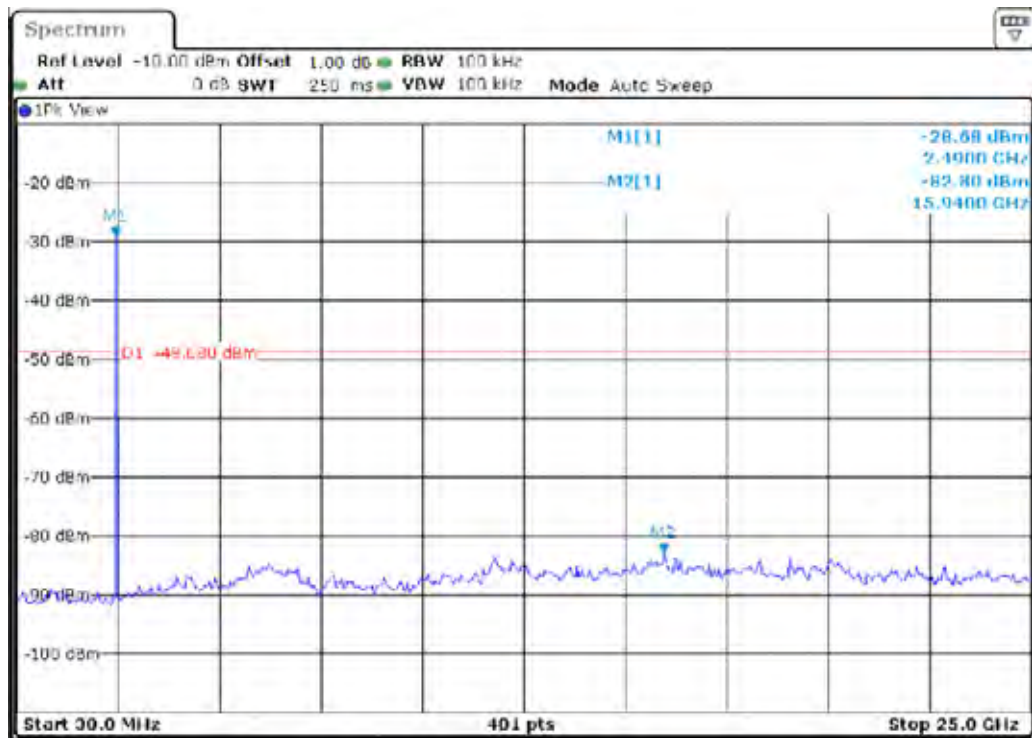

11. CHANNEL SEPARATION



11.1 TEST SETUP



11.2 TEST PROCEDURE

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. The EUT should be transmitting at its maximum data rate as the worst cases.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; RBW 1% of the span;
VBW RBW; Sweep = auto; Detector function = peak; Trace = max hold.
4. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

11.3 LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

11.4 RESULT: PASS

11.5 TEST DATA:


BDR 1M

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limit (MHz)
00	2402	1.002	0.634666667
39	2441	1.002	0.644666667
78	2480	1.002	0.638

Lowest Channel




Middle Channel

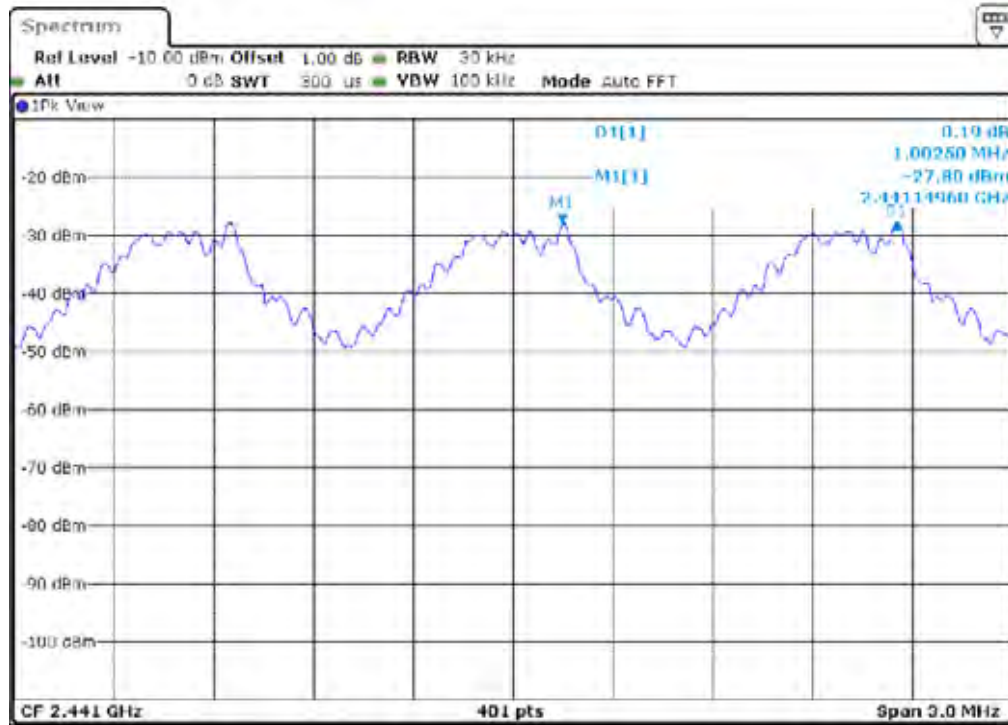




Highest Channel

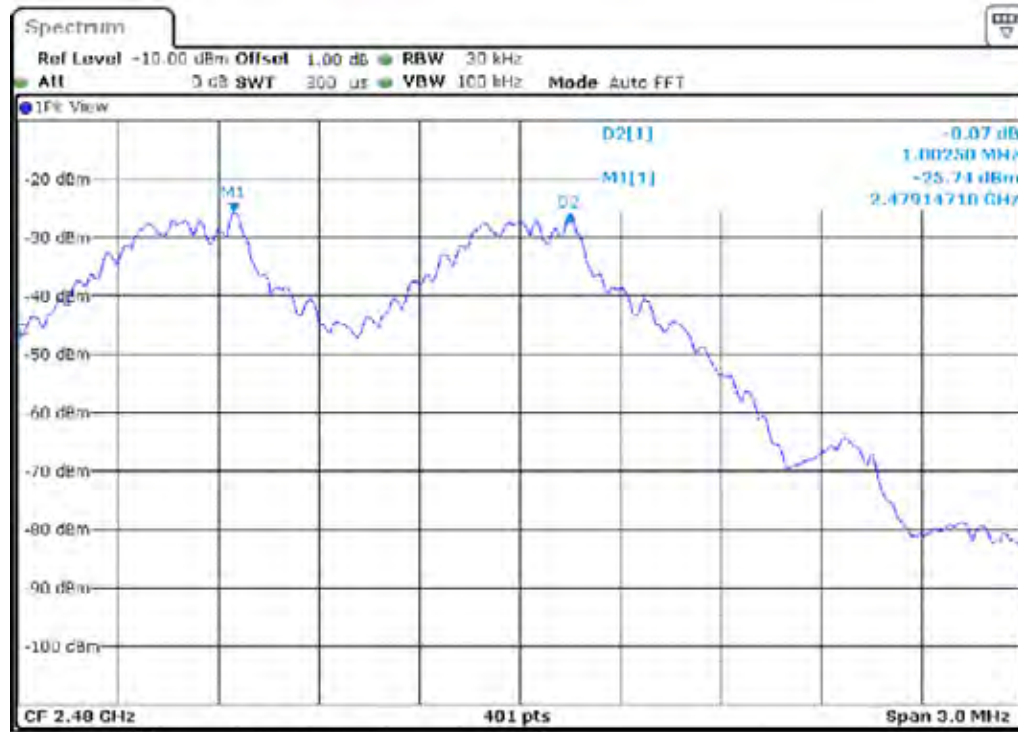


BDR 3M

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limit (MHz)
00	2402	0.995	0.884
39	2441	1.002	0.880666667
78	2480	1.002	0.884

Lowest Channel

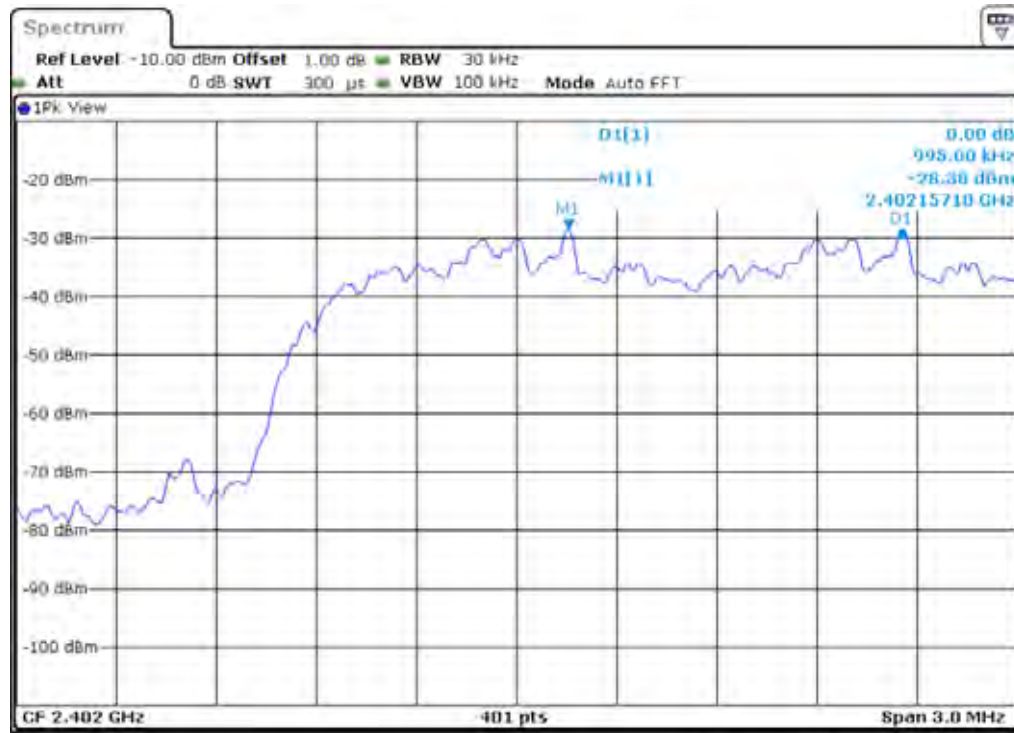


Middle Channel

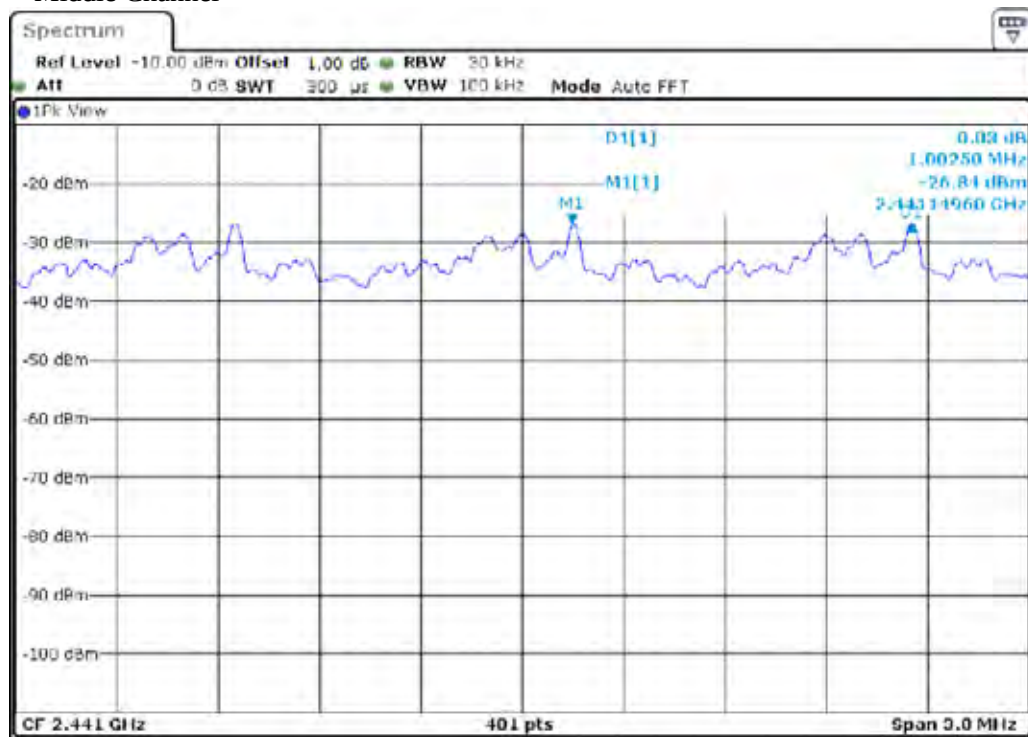




Highest Channel

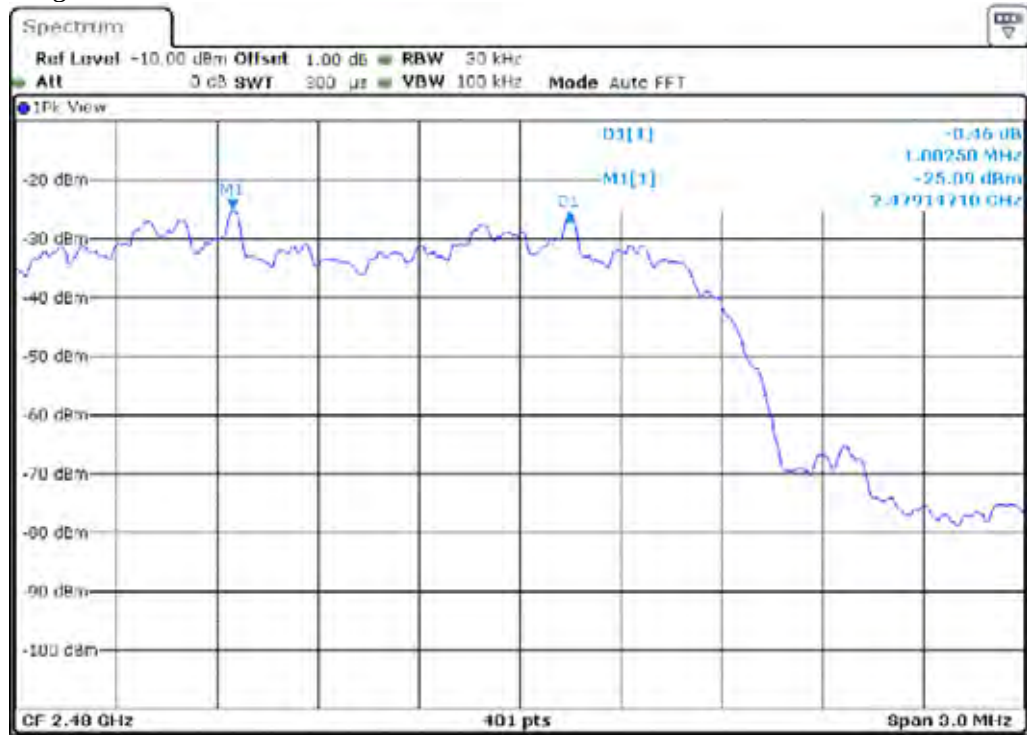



12. DWELL TIME OF EACH CHANNEL

12.1 TEST SETUP

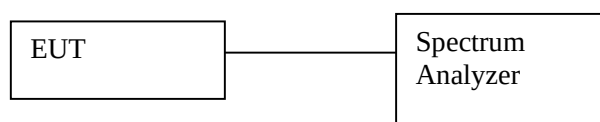

12.2 TEST PROCEDURE

- 1.The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. The EUT should be transmitting at its maximum data rate as the worst cases.
3. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak;
Trace = max hold.
4. Use the marker-delta function to calculate the dwell time.

12.3 LIMIT

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

12.4 RESULT: PASS

12.5 TEST DATA:




BDR 1M

A period time = 0.4 (ms) * 79 = 31.6 (s)

CH Low	DH1 time slot	=	0.512 (ms)	*	(1600/2/79)	*	31.6 =	144.00	(ms)
	DH3 time slot	=	2 (ms)	*	(1600/4/79)	*	31.6 =	280.00	(ms)
	DH5 time slot	=	2.4 (ms)	*	(1600/6/79)	*	31.6 =	320.00	(ms)
CH Mid	DH1 time slot	=	0.475 (ms)	*	(1600/2/79)	*	31.6 =	144.00	(ms)
	DH3 time slot	=	1.8 (ms)	*	(1600/4/79)	*	31.6 =	304.00	(ms)
	DH5 time slot	=	2.45 (ms)	*	(1600/6/79)	*	31.6 =	325.33	(ms)
CH High	DH1 time slot	=	0.5 (ms)	*	(1600/2/79)	*	31.6 =	144.00	(ms)
	DH3 time slot	=	1.8 (ms)	*	(1600/4/79)	*	31.6 =	296.00	(ms)
	DH5 time slot	=	2.35 (ms)	*	(1600/6/79)	*	31.6 =	325.33	(ms)


Lowest Channel

DH1

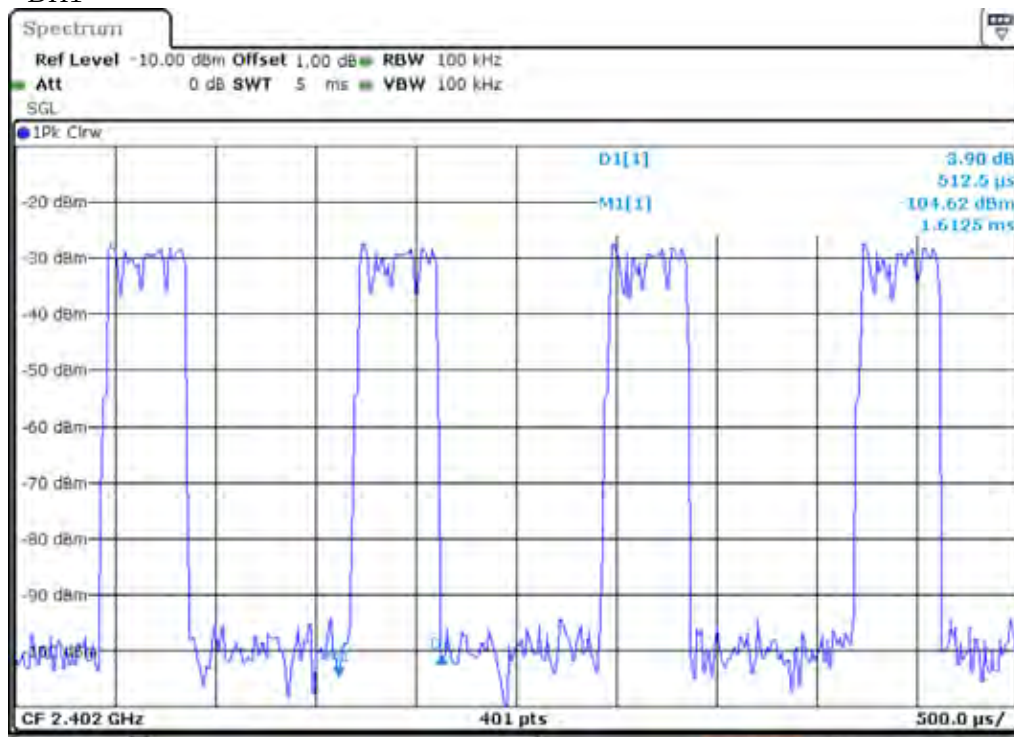




DH3

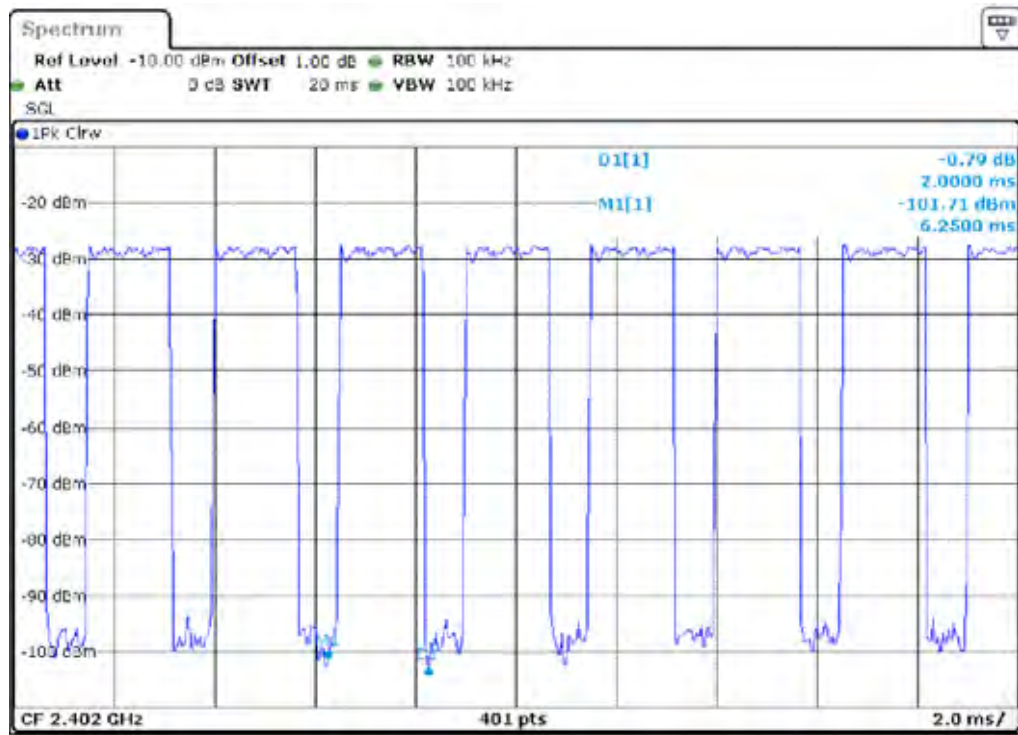


DH5

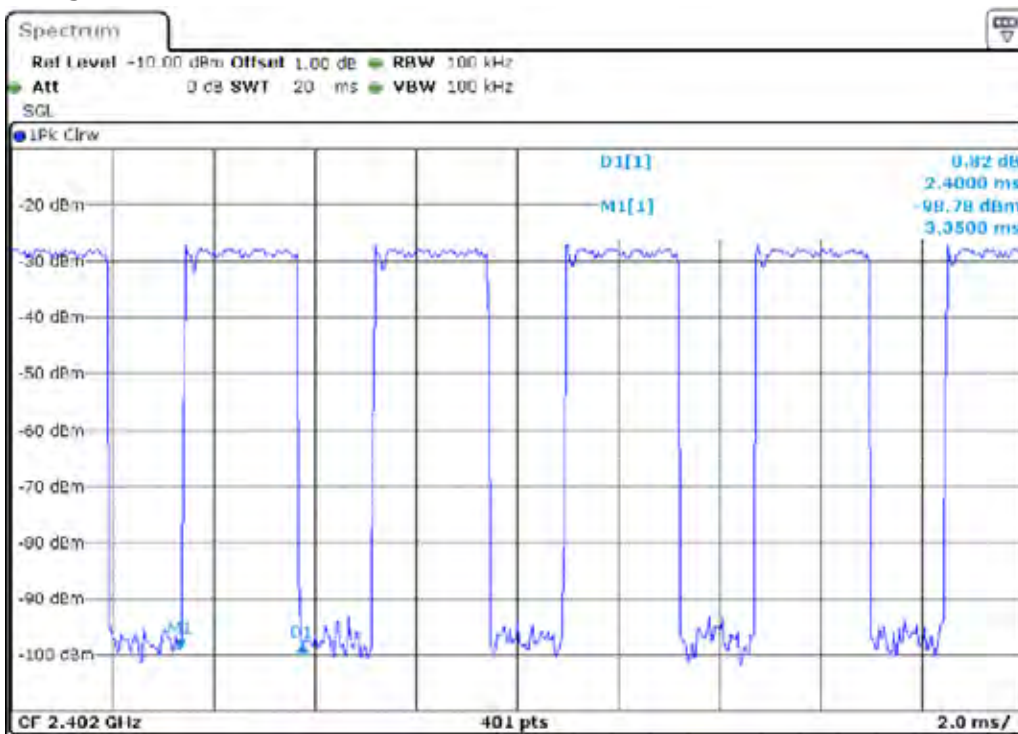




Middle Channel
DH1

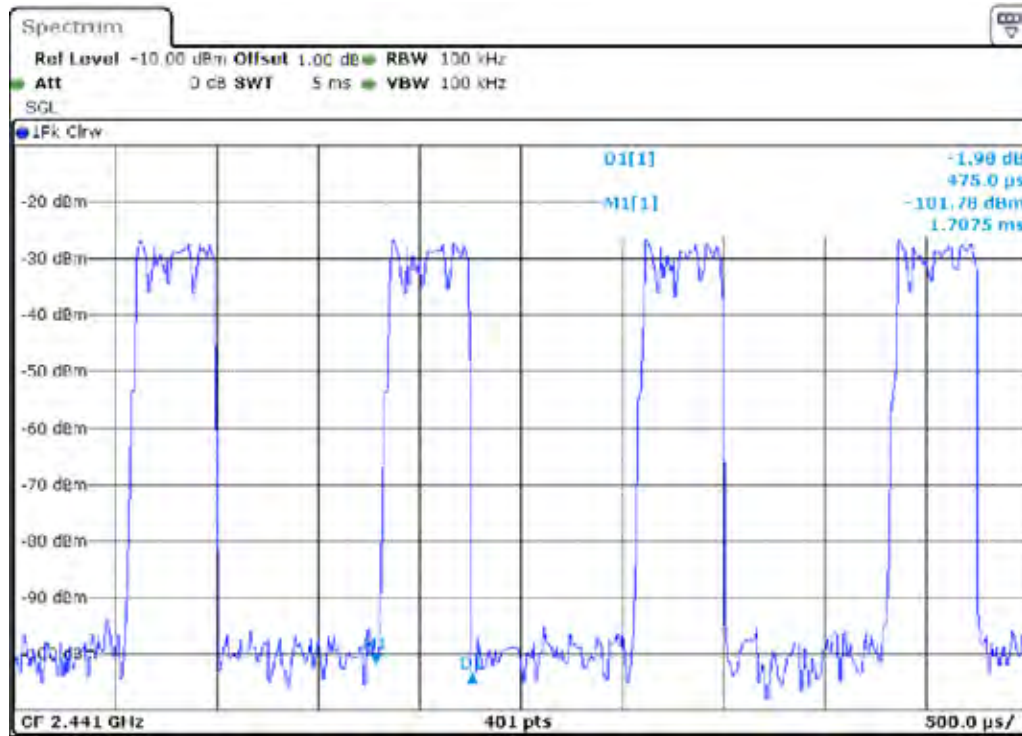


DH3

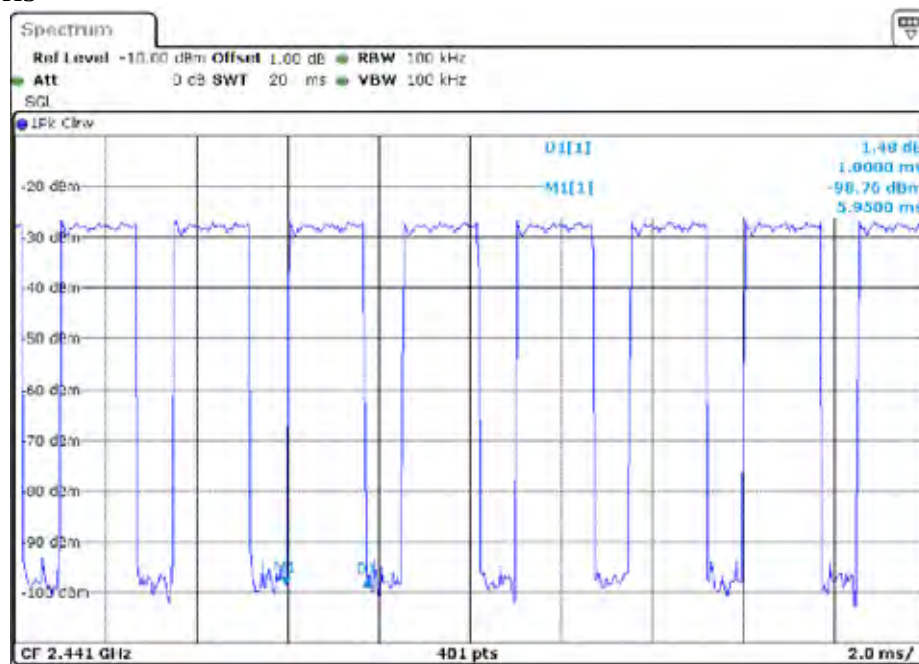





DH5

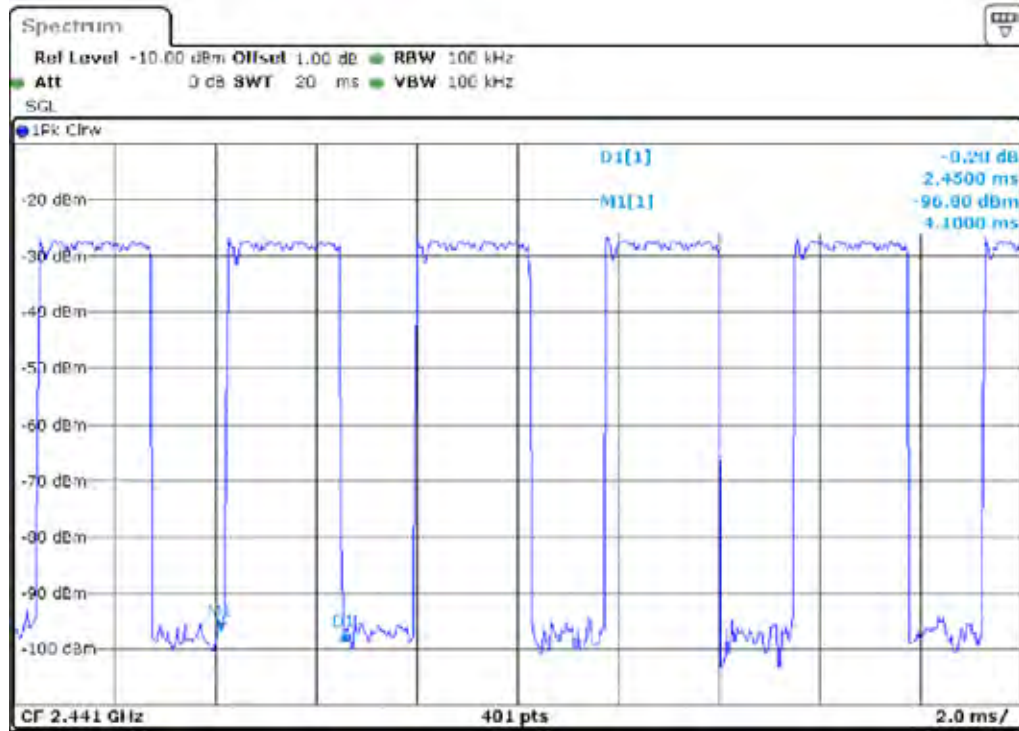


Highest Channel
DH1

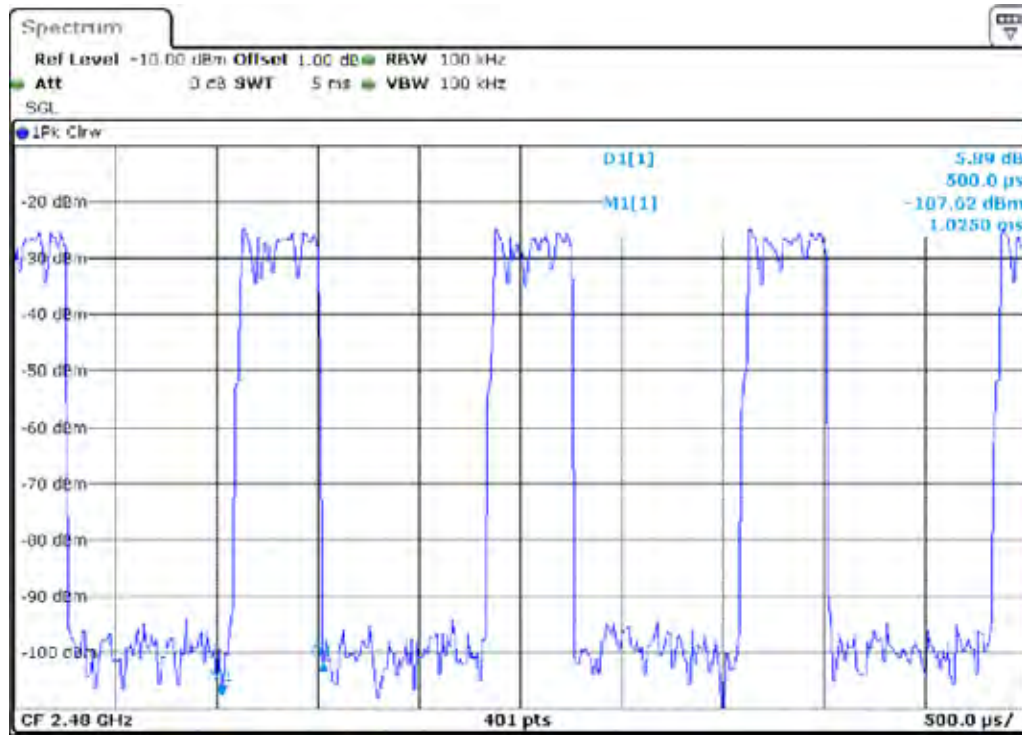

DH3

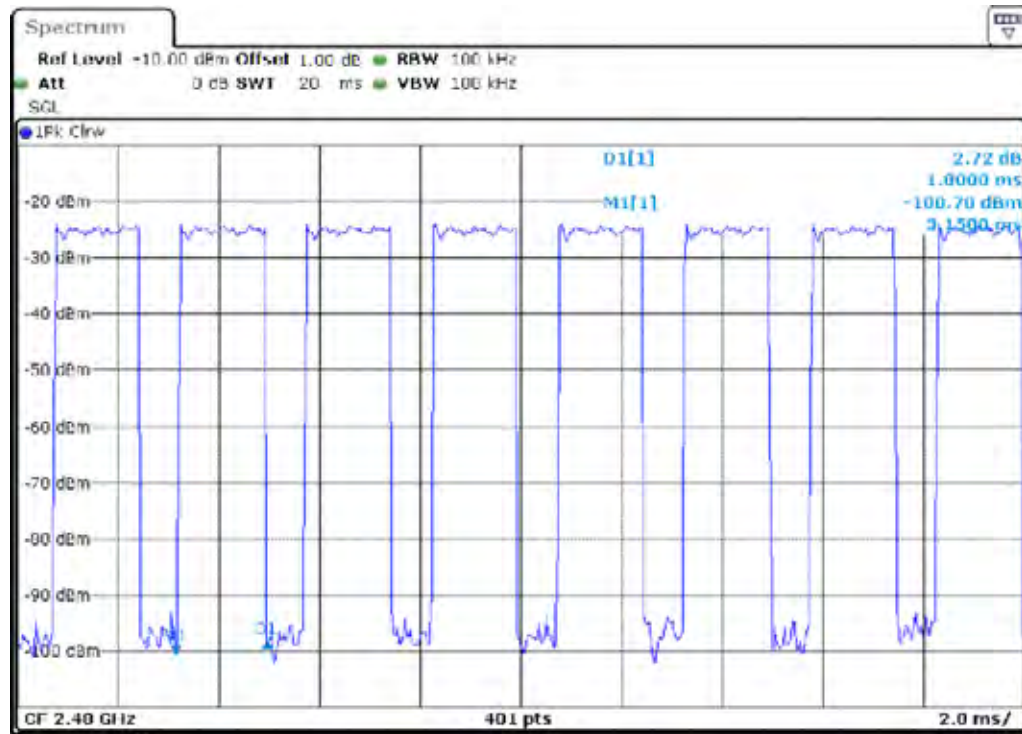

DH5

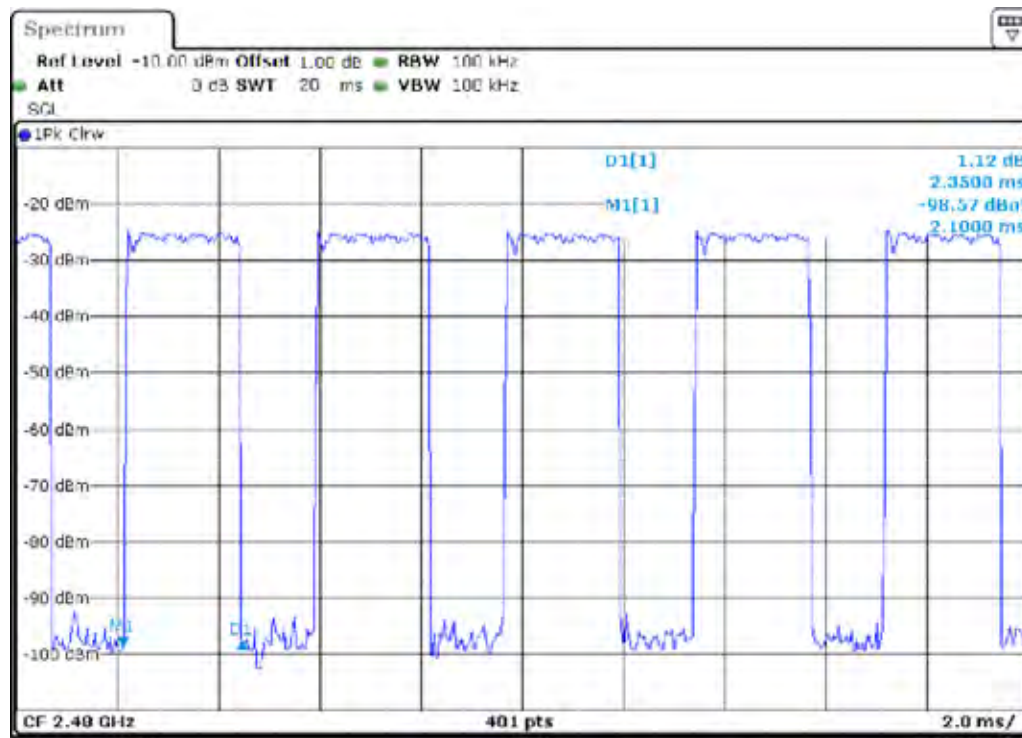

BDR 3M

A period time = 0.4 (ms) * 79 = 31.6 (s)


CH Low	DH1 time slot	=	0.5 (ms)	*	(1600/2/79)	*	31.6 =	152.00 (ms)
	DH3 time slot	=	1 (ms)	*	(1600/4/79)	*	31.6 =	288.00 (ms)
	DH5 time slot	=	1.1 (ms)	*	(1600/6/79)	*	31.6 =	330.66 (ms)

CH Mid	DH1 time slot	=	0.53 (ms)	*	(1600/2/79)	*	31.6 =	155.84 (ms)
	DH3 time slot	=	1 (ms)	*	(1600/4/79)	*	31.6 =	288.00 (ms)
	DH5 time slot	=	1.2 (ms)	*	(1600/6/79)	*	31.6 =	325.33 (ms)


CH High	DH1 time slot	=	0.487 (ms)	*	(1600/2/79)	*	31.6 =	152.00 (ms)
	DH3 time slot	=	1 (ms)	*	(1600/4/79)	*	31.6 =	304.00 (ms)
	DH5 time slot	=	1.2 (ms)	*	(1600/6/79)	*	31.6 =	330.66 (ms)




DH1

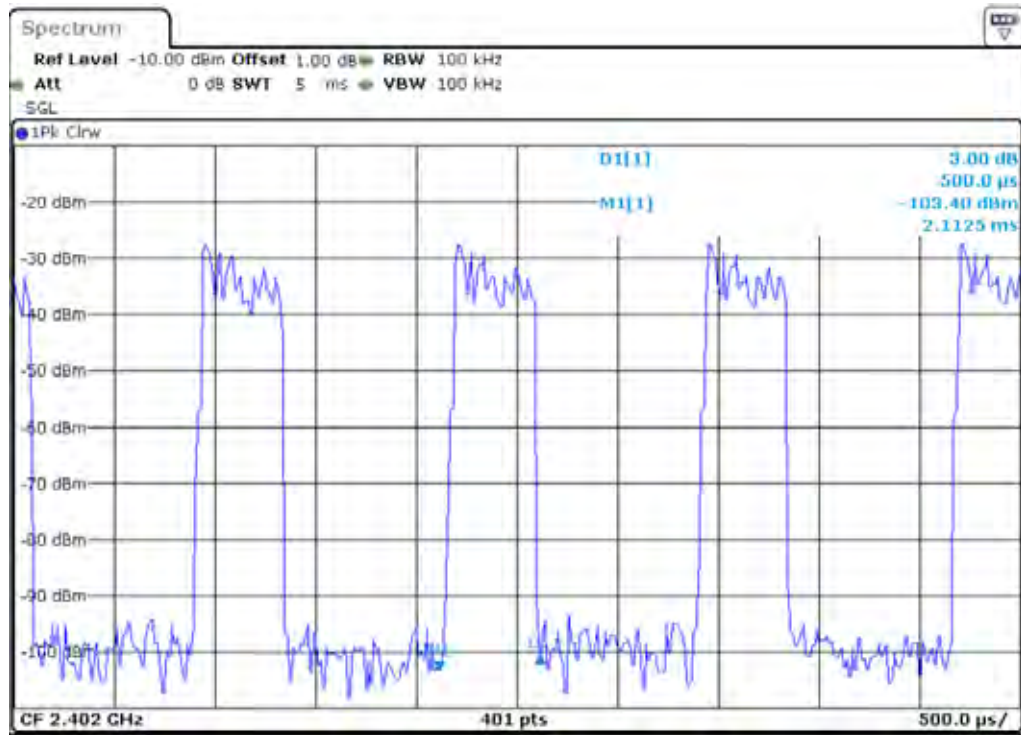


DH3

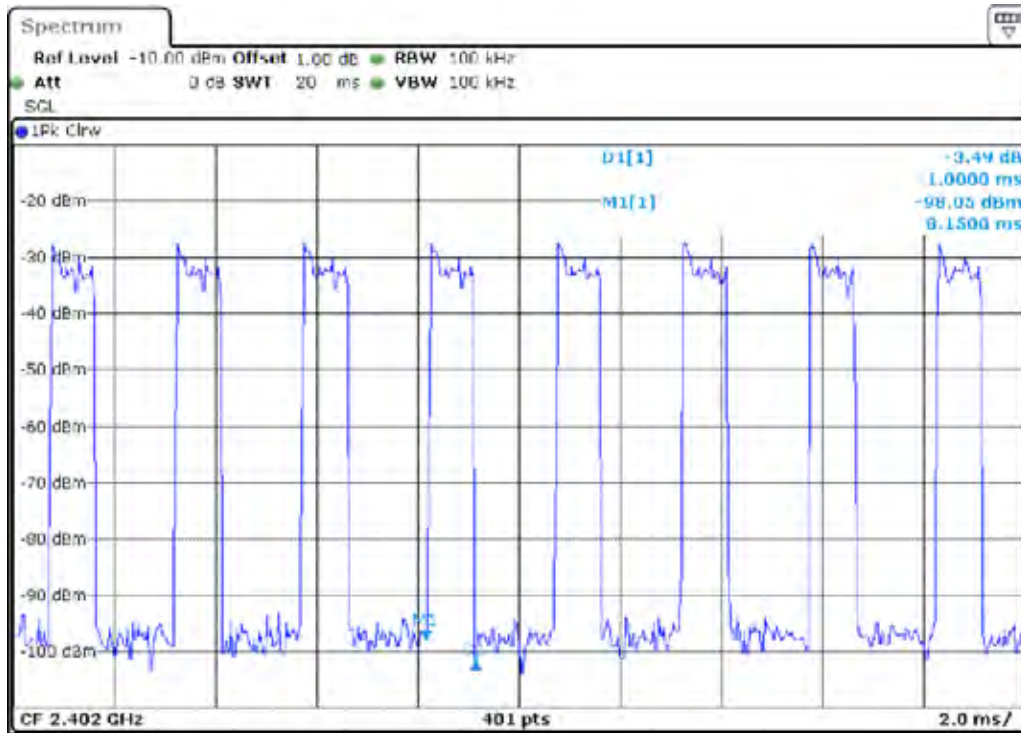


DH5

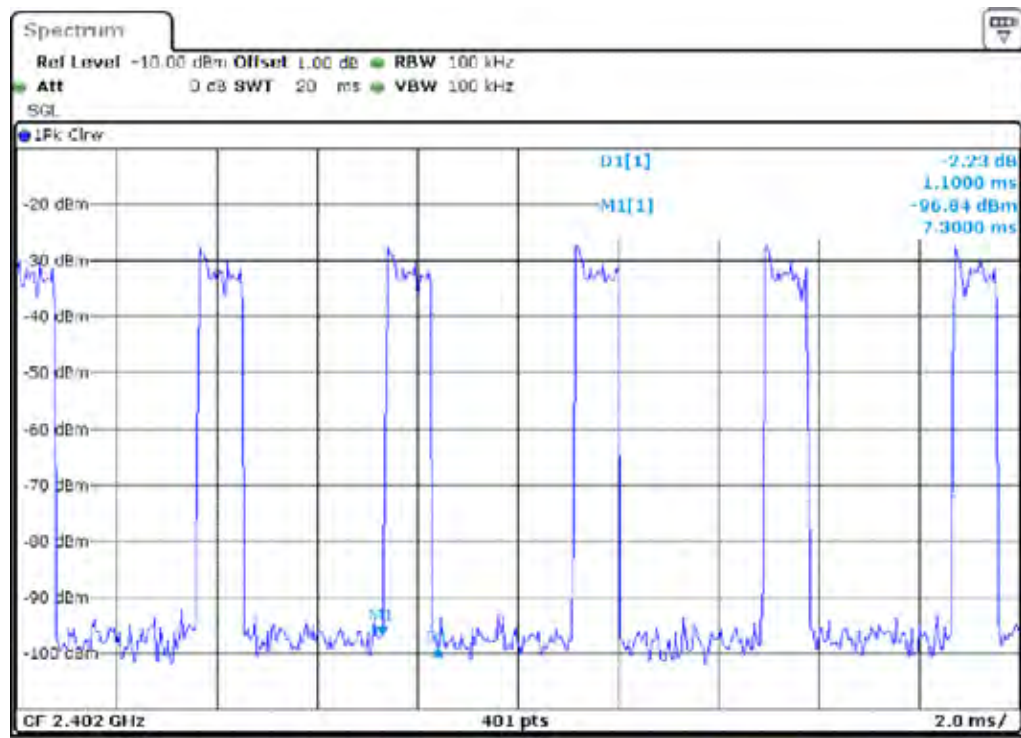


Middle Channel
DH1

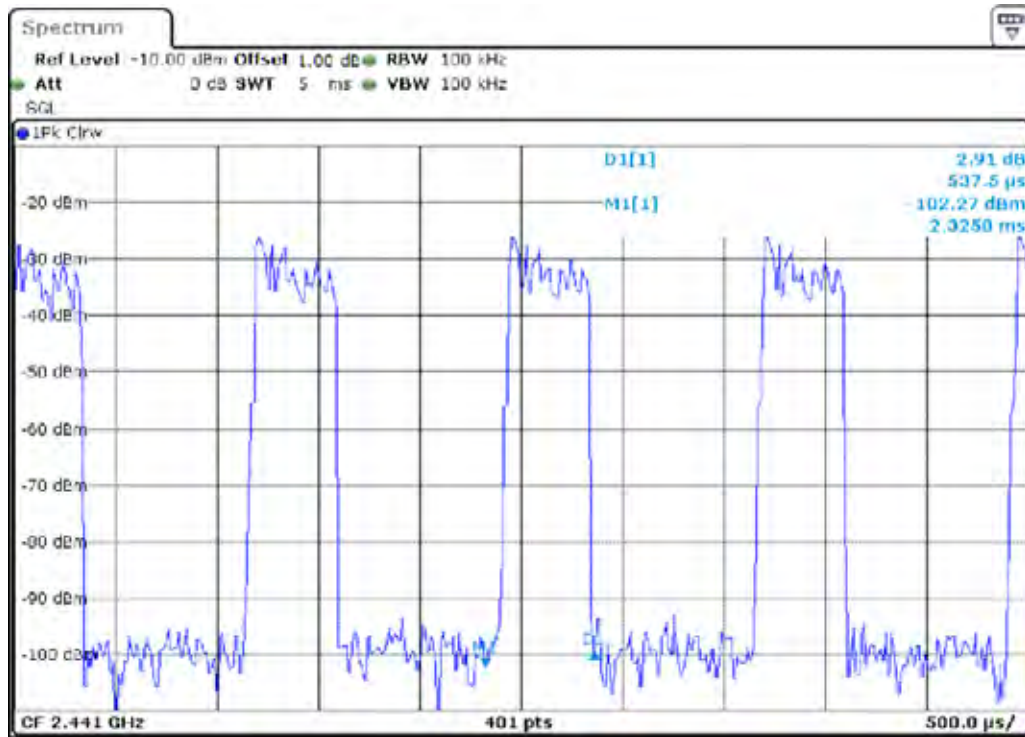


DH3

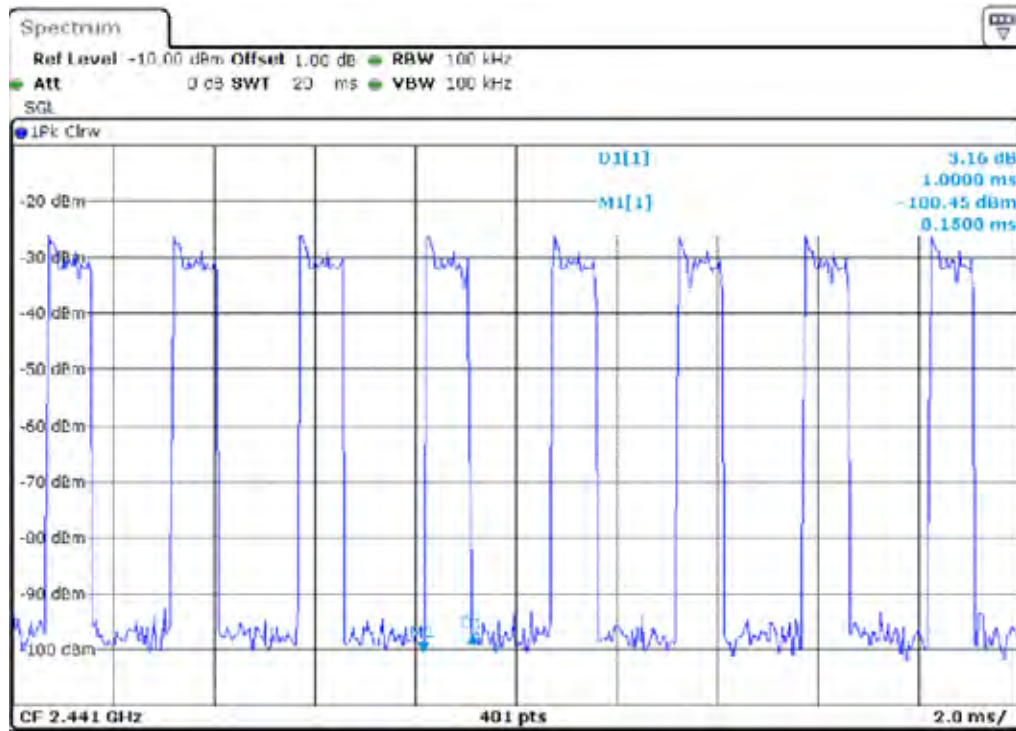

DH5

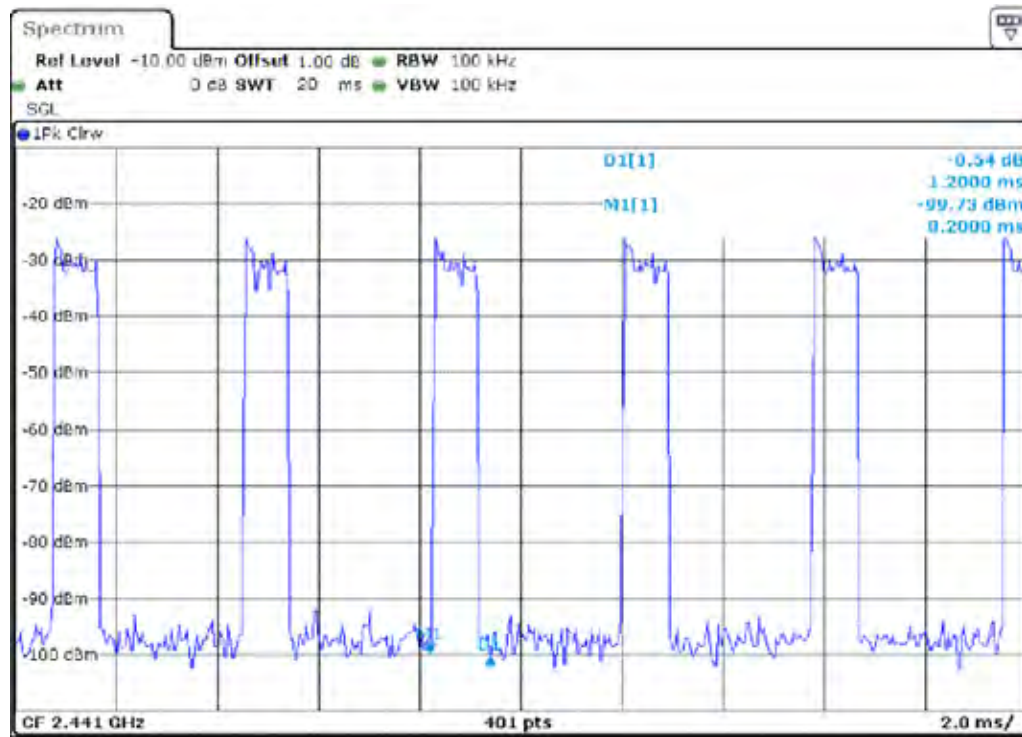


Highest Channel
DH1

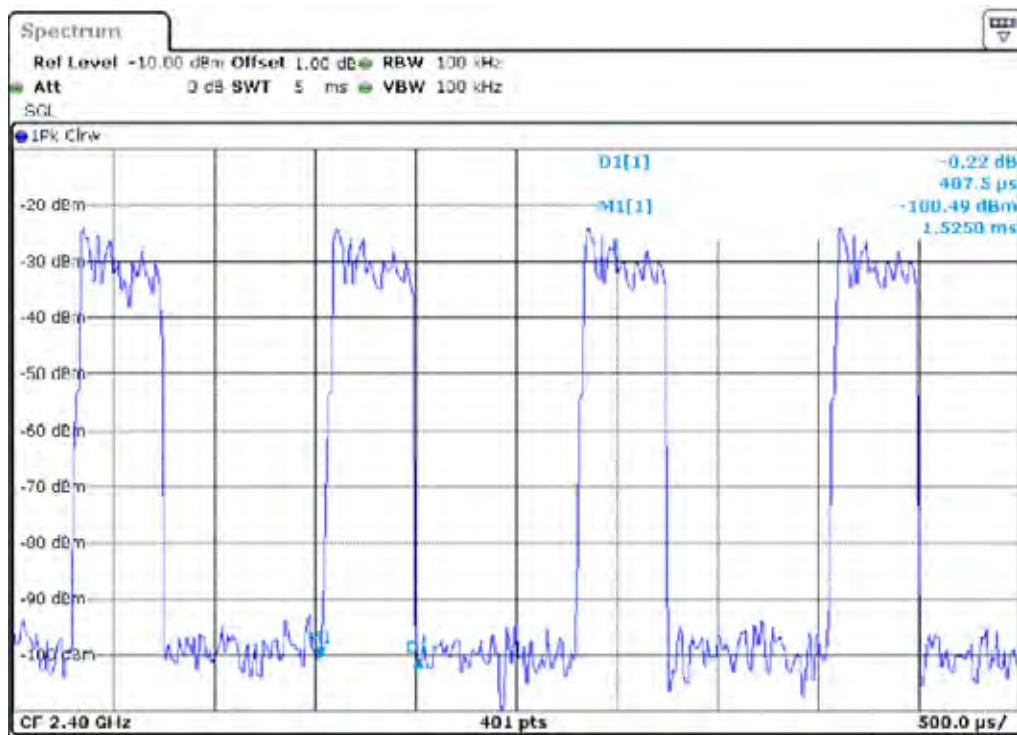




DH3

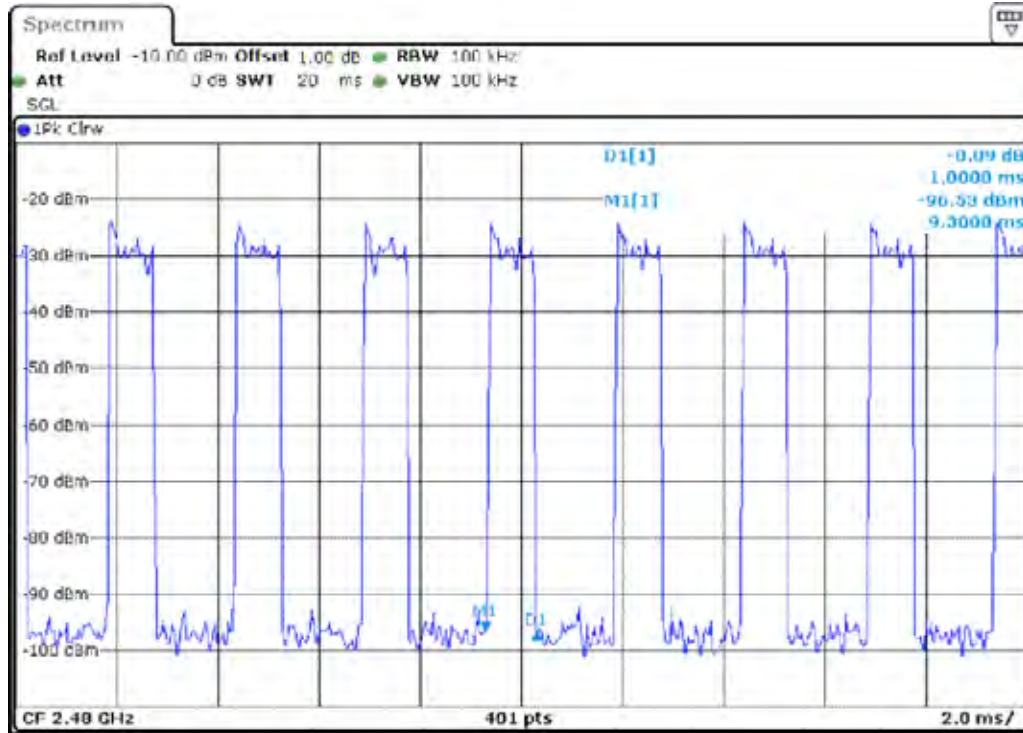


DH5

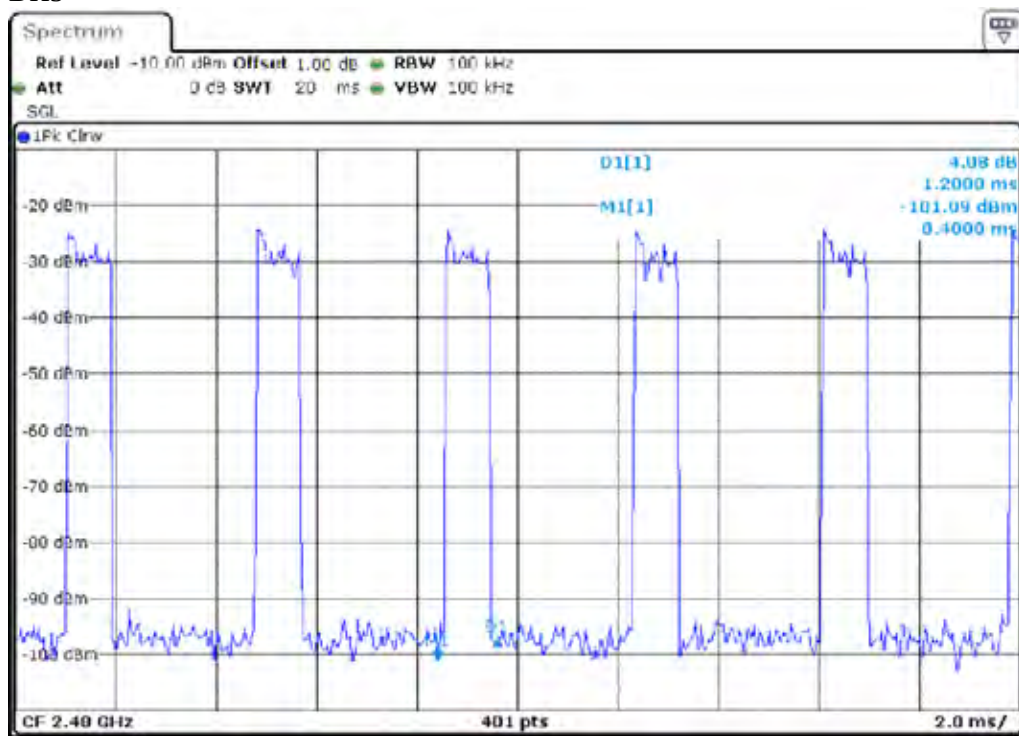



13. NUMBER OF CHANNELS

13.1 TEST SETUP



13.2 TEST PROCEDURE

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. The modulation types of EUT are irrelevant to number of hopping channels deviation.
3. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = the frequency band of operation; RBW 1% of the span; VBW RBW; Sweep = auto;
Detector function = peak; Trace = max hold.
4. The number of hopping frequency used is defined as the device has the numbers of total channel.


13.3 LIMIT

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

13.4 RESULT: PASS

13.5 TEST DATA:

BDR 1M

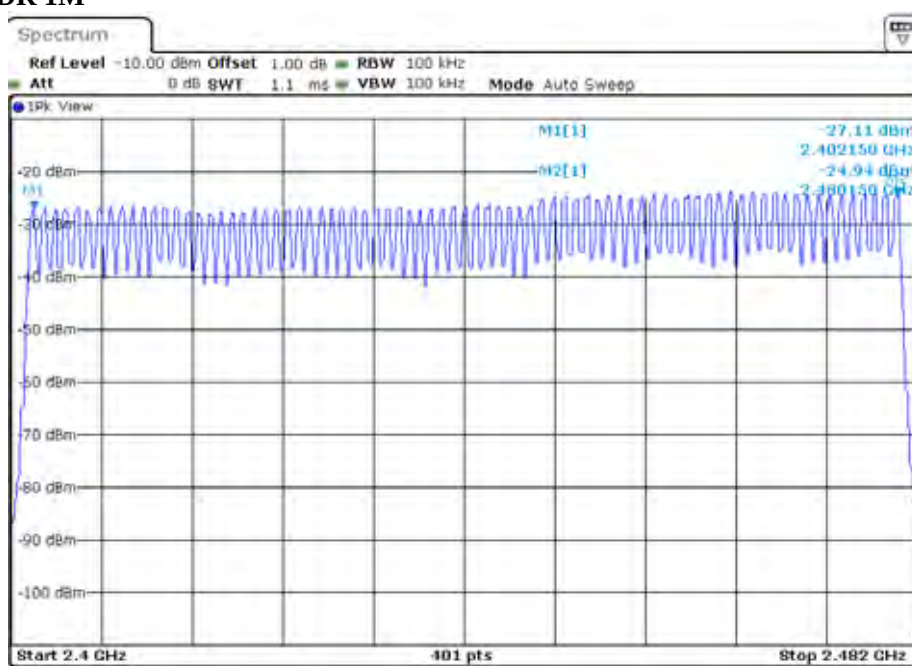



BDR 3M

