

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Report No.: RFBEIH-WTW-P22120764-6

FCC ID: P27IP6442B

Product: WiFi 6E Router

Brand: Charter Spectrum

Model No.: SAX2V1R

Received Date: 2023/2/20

Test Date: 2023/3/4 ~ 2023/4/16

Issued Date: 2023/4/25

Applicant: Sercomm Corporation

Address: 8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kewi Shan Dist., Taoyuan City 33383, Taiwan

FCC Registration / 788550 / TW0003

Designation Number:

Approved by: Jeremy Lin, **Date:** 2023/4/25
Jeremy Lin / Project Engineer

This test report consists of 220 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Celine Chou / Senior Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us-our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Antenna Description of EUT	9
3.3 Channel List	10
3.4 Test Mode Applicability and Tested Channel Detail	12
3.5 Duty Cycle of Test Signal	13
3.6 Test Program Used and Operation Descriptions	15
3.7 Connection Diagram of EUT and Peripheral Devices	15
3.8 Configuration of Peripheral Devices and Cable Connections	15
4 Test Instruments	16
4.1 RF Output Power	16
4.2 Power Spectral Density	16
4.3 Emission Bandwidth	17
4.4 In-Band Emission Mask	17
4.5 Occupied Bandwidth	17
4.6 Frequency Stability	17
4.7 Contention-based Protocol	18
4.8 AC Power Conducted Emissions	18
4.9 Unwanted Emissions below 1 GHz	19
4.10 Unwanted Emissions above 1 GHz	20
5 Limits of Test Items	21
5.1 RF Output Power	21
5.2 Power Spectral Density	21
5.3 Emission Bandwidth	21
5.4 In-Band Emission Mask	21
5.5 Occupied Bandwidth	21
5.6 Frequency Stability	22
5.7 Contention-based Protocol	22
5.8 AC Power Conducted Emissions	22
5.9 Unwanted Emissions below 1 GHz	22
5.10 Unwanted Emissions above 1 GHz	23
6 Test Arrangements	24
6.1 RF Output Power	24
6.1.1 Test Setup	24
6.1.2 Test Procedure	24
6.2 Power Spectral Density	25
6.2.1 Test Setup	25
6.2.2 Test Procedure	25
6.3 Emission Bandwidth	26
6.3.1 Test Setup	26
6.3.2 Test Procedure	26
6.4 In-Band Emission Mask	26
6.4.1 Test Setup	26
6.4.2 Test Procedure	26
6.5 Occupied Bandwidth	27
6.5.1 Test Setup	27
6.5.2 Test Procedure	27
6.6 Frequency Stability	27
6.6.1 Test Setup	27



6.6.2	Test Procedure.....	27
6.7	Contention-based Protocol.....	28
6.7.1	Test Setup.....	28
6.7.2	Test Procedure.....	28
6.8	AC Power Conducted Emissions.....	29
6.8.1	Test Setup.....	29
6.8.2	Test Procedure.....	29
6.9	Unwanted Emissions below 1 GHz.....	30
6.9.1	Test Setup.....	30
6.9.2	Test Procedure.....	31
6.10	Unwanted Emissions above 1 GHz.....	32
6.10.1	Test Setup.....	32
6.10.2	Test Procedure.....	32
7	Test Results of Test Item.....	33
7.1	RF Output Power.....	33
7.2	Power Spectral Density.....	36
7.3	Emission Bandwidth.....	40
7.4	In-Band Emission Mask.....	43
7.5	Occupied Bandwidth.....	77
7.6	Frequency Stability.....	80
7.7	Contention-based Protocol.....	81
7.8	AC Power Conducted Emissions.....	90
7.9	Unwanted Emissions below 1 GHz.....	102
7.10	Unwanted Emissions above 1 GHz.....	106
8	Operational Restrictions for 6 GHz U-NII Devices.....	218
9	Pictures of Test Arrangements.....	219
10	Information of the Testing Laboratories.....	220



Release Control Record

Issue No.	Description	Date Issued
RFBEIH-WTW-P22120764-6	Original release.	2023/4/25

1 Certificate

Product: WiFi 6E Router

Brand: Charter Spectrum

Test Model: SAX2V1R

Sample Status: Engineering sample

Applicant: Sercomm Corporation

Test Date: 2023/3/4 ~ 2023/4/16

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement ANSI C63.10-2013

procedure:

KDB 987594 D02 U-NII 6 GHz EMC Measurement v01v01

KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(5)	RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(5)	Power Spectral Density	Pass	Meet the requirement of limit.
15.407(a)(10)	Occupied Bandwidth	Pass	Meet the requirement of limit.
15.407(b)(9)	AC Power Conducted Emissions	Pass	Minimum passing margin is -8.57 dB at 0.39446 MHz
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -5.1 dB at 54.32 MHz
15.407(b)(6) 15.407(b)(10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -0.5 dB at 13390.00 MHz
15.407(b)(7)	In-Band Emission Mask	Pass	Meet the requirement of limit.
15.407(d)(6)	Contention-based Protocol	Pass	Meet the requirement of limit.
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.407(d)	Operational restrictions for 6 GHz U-NII devices	Pass	Declaration by applicant.
15.203	Antenna Requirement	Pass	No antenna connector is used.
---	Emission Bandwidth	-	Reference only.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Uncertainty (±)
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.99 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	2.44 dB
	30 MHz ~ 1 GHz	2.02 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	1.01 dB
	18 GHz ~ 40 GHz	1.15 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	WiFi 6E Router
Brand	Charter Spectrum
Test Model	SAX2V1R
Status of EUT	Engineering sample
Power Supply Rating	12Vdc from Adapter
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 1024QAM for OFDMA in 11ax mode
Modulation Technology	OFDM, OFDMA
Transfer Rate	Up to 4803.9 Mbps
Operating Frequency	6.115 GHz ~ 6.415 GHz 6.435 GHz ~ 6.525 GHz 6.525 GHz ~ 6.875 GHz 6.875 GHz ~ 7.115 GHz
Number of Channel	802.11a, 802.11ax (HE20):51 802.11ax (HE40):25 802.11ax (HE80):12 802.11ax (HE160):6
Output Power	6.115 GHz ~ 6.415 GHz : EIRP: 180.717 mW (22.57 dBm) 6.435 GHz ~ 6.525 GHz : EIRP: 176.198 mW (22.46 dBm) 6.525 GHz ~ 6.865 GHz : EIRP: 179.061 mW (22.53 dBm) 6.875 GHz ~ 7.115 GHz : EIRP: 178.649 mW (22.52 dBm)
EUT Category	Indoor AP

Note:

1. The EUT uses following accessories.

Item	Brand	Model	Specification
Adapter 1	Netbit	NBS36J120300VU	AC Input : 100-120V, 50/60Hz, 1.0A DC Output : 12.0V, 3.0A DC Output Cable : non-shielded, 1.8m
Adapter 2	Delta	ADH-36L WB	AC Input : 100-120V, 50/60Hz, 1.0A DC Output : 12.0V, 3.0A DC Output Cable : non-shielded, 1.8m
Adapter 3	Challenger	PS-2.5-12-3WT3	AC Input : 100-120V, 50/60Hz, 1.0A DC Output : 12.0V, 3.0A DC Output Cable : non-shielded, 1.8m
LAN cable	-	-	1.0m, non shielded, without core

* For unwanted emissions, after pre-tested, Adapter 1 was the worst case final test.

* For power conducted emissions, adapter 1, 2, and 3 were chosen for final test.

2. There are Bluetooth, Thread and WLAN (2.4 GHz & 5 GHz & 5.9 GHz & 6 GHz) technology used for the EUT.

* WLAN 2.4 GHz & WLAN 5 GHz & WLAN 6 GHz technology can transmit at same time.

* WLAN 2.4 GHz & WLAN 5.9 GHz & WLAN 6 GHz technology can transmit at same time.

* WLAN & Bluetooth & Thread technology cannot transmit at same time.

3. The EUT has two groups for test as below:

Group 1	Group 2
6G_A0-1, 6G_A1-1, 5.6G_A2-1, 5.6G_A3-1	6G_A0-2, 6G_A1-2, 5.6G_A2-2, 5.6G_A3-2

4. The EUT not support channel puncturing and bandwidth reduction.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna No.	Gain (dBi)	Antenna Type	Connector Type
5.6G_A2-1	4.7	PCB	ipex(MHF)
5.6G_A2-2	5.3		
5.6G_A3-1	5.5		
5.6G_A3-2	4		
6G_A0-1	6.3		
6G_A0-2	4.7		
6G_A1-1	5.9		
6G_A1-2	6.4		

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

Modulation Mode	CDD Mode	Beamforming Mode	Tx & Rx Configuration	
802.11a	Support	Not Support	4TX	4RX
802.11ax (HE20)	Support	Not Support	4TX	4RX
802.11ax (HE40)	Support	Not Support	4TX	4RX
802.11ax (HE80)	Support	Not Support	4TX	4RX
802.11ax (HE160)	Support	Not Support	4TX	4RX

Note: For 802.11ax, the EUT not support Partial RU.

3.3 Channel List

U-NII-5:

16 channels are provided for 802.11a, 802.11ax (HE20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
33	6115 MHz	37	6135 MHz	41	6155 MHz	45	6175 MHz
49	6195 MHz	53	6215 MHz	57	6235 MHz	61	6255 MHz
65	6275 MHz	69	6295 MHz	73	6315 MHz	77	6335 MHz
81	6355 MHz	85	6375 MHz	89	6395 MHz	93	6415 MHz

8 channels are provided for 802.11ax (HE40):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
35	6125 MHz	43	6165 MHz	51	6205 MHz	59	6245 MHz
67	6285 MHz	75	6325 MHz	83	6365 MHz	91	6405 MHz

4 channels are provided for 802.11ax (HE80):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
39	6145 MHz	55	6225 MHz	71	6305 MHz	87	6385 MHz

2 channels are provided for 802.11ax (HE160):

Channel	Frequency	Channel	Frequency
47	6185 MHz	79	6345 MHz

U-NII-6:

5 channels are provided for 802.11a, 802.11ax (HE20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
97	6435 MHz	101	6455 MHz	105	6475 MHz	109	6495 MHz
113	6515 MHz						

3 channels are provided for 802.11ax (HE40):

Channel	Frequency	Channel	Frequency	Channel	Frequency
99	6445 MHz	107	6485 MHz	*115	6525 MHz

1 channel is provided for 802.11ax (HE80):

Channel	Frequency
103	6465 MHz

1 channel is provided for 802.11ax (HE160):

Channel	Frequency
*111	6505 MHz

U-NII-7:

17 channels are provided for 802.11a, 802.11ax (HE20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
117	6535 MHz	121	6555 MHz	125	6575 MHz	129	6595 MHz
133	6615 MHz	137	6635 MHz	141	6655 MHz	145	6675 MHz
149	6695 MHz	153	6715 MHz	157	6735 MHz	161	6755 MHz
165	6775 MHz	169	6795 MHz	173	6815 MHz	177	6835 MHz
181	6855 MHz						

8 channels are provided for 802.11ax (HE40):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
123	6565 MHz	131	6605 MHz	139	6645 MHz	147	6685 MHz
155	6725 MHz	163	6765 MHz	171	6805 MHz	179	6845 MHz

5 channels are provided for 802.11ax (HE80):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
*119	6545 MHz	135	6625 MHz	151	6705 MHz	167	6785 MHz
*183	6865 MHz						

2 channels are provided for 802.11ax (HE160):

Channel	Frequency	Channel	Frequency
143	6665 MHz	175	*6825 MHz

U-NII-8:

13 channels are provided for 802.11a, 802.11ax (HE20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
185	6875 MHz	189	6895 MHz	193	6915 MHz	197	6935 MHz
201	6955 MHz	205	6975 MHz	209	6995 MHz	213	7015 MHz
217	7035 MHz	221	7055 MHz	225	7075 MHz	229	7095 MHz
233	7115 MHz						

6 channels are provided for 802.11ax (HE40):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
187	6885 MHz	195	6925 MHz	203	6965 MHz	211	7005 MHz
219	7045 MHz	227	7085 MHz				

2 channels are provided for 802.11ax (HE80):

Channel	Frequency	Channel	Frequency
199	6945 MHz	215	7025 MHz

1 channel is provided for 802.11ax (HE160):

Channel	Frequency
207	6985 MHz

Note: * mean these are straddle channels.

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	EUT antenna has two configurations: Group 1 and Group 2, Pre-scan Group 1 and Group 2, find the worst case as a representative test condition.
Worst Case:	Group 1 and Group 2 worst condition: Group 1 is the worse case.

Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
RF Output Power / Power Spectral Density / Emission Bandwidth / In-Band Emission Mask / Occupied Bandwidth	A	802.11a	CDD	33, 61, 93, 97, 105, 113, 117, 149, 181, 185, 209, 233	BPSK	6Mb/s
		802.11ax (HE20)	CDD	33, 61, 93, 97, 105, 113, 117, 149, 181, 185, 209, 233	BPSK	MCS0
		802.11ax (HE40)	CDD	35, 59, 91, 99, 107, 115, 123, 155, 179, 187, 211, 227	BPSK	MCS0
		802.11ax (HE80)	CDD	39, 55, 87, 103, 119, 151, 183, 199, 215	BPSK	MCS0
		802.11ax (HE160)	CDD	47, 79, 111, 143, 175, 207	BPSK	MCS0
Frequency Stability	A	802.11a	-	33	un-modulation	-
Contention-based Protocol	A, B*	802.11ax (HE20)	CDD	45, 105, 149, 209	BPSK	MCS0
		802.11ax (HE160)	CDD	47, 111, 143, 207	BPSK	MCS0
AC Power Conducted Emissions	A, B	802.11ax (HE160)	CDD	47	BPSK	MCS0
Unwanted Emissions below 1 GHz	A, B	802.11ax (HE160)	CDD	47	BPSK	MCS0
Unwanted Emissions above 1 GHz	A,B	802.11a	CDD	33, 61, 93, 97, 105, 113, 117, 149, 181, 185, 209, 233	BPSK	6Mb/s
		802.11ax (HE20)	CDD	33, 61, 93, 97, 105, 113, 117, 149, 181, 185, 209, 233	BPSK	MCS0
		802.11ax (HE40)	CDD	35, 59, 91, 99, 107, 115, 123, 155, 179, 187, 211, 227	BPSK	MCS0
		802.11ax (HE80)	CDD	39, 55, 87, 103, 119, 151, 183, 199, 215	BPSK	MCS0
		802.11ax (HE160)	CDD	47, 79, 111, 143, 175, 207	BPSK	MCS0
EUT Configure Mode:	A	EUT + Antenna Group 1				
	B	EUT + Antenna Group 2				

Note: The EUT is designed to be positioned on **Z-Plane** only.

*Chosen the minimum gain from ground 1 and ground 2 for Contention-based Protocol final test.

3.5 Duty Cycle of Test Signal


802.11a: Duty cycle = 4.168 ms / 4.25 ms x 100% = 98.1%

802.11ax (HE20): Duty cycle = 4.952 ms / 5.033 ms x 100% = 98.4%


802.11ax (HE40): Duty cycle = 4.943 ms / 5.034 ms x 100% = 98.2%

802.11ax (HE80): Duty cycle = 4.195 ms / 4.273 ms x 100% = 98.2%

802.11ax (HE160): Duty cycle = 4.168 ms / 4.248 ms x 100% = 98.1%

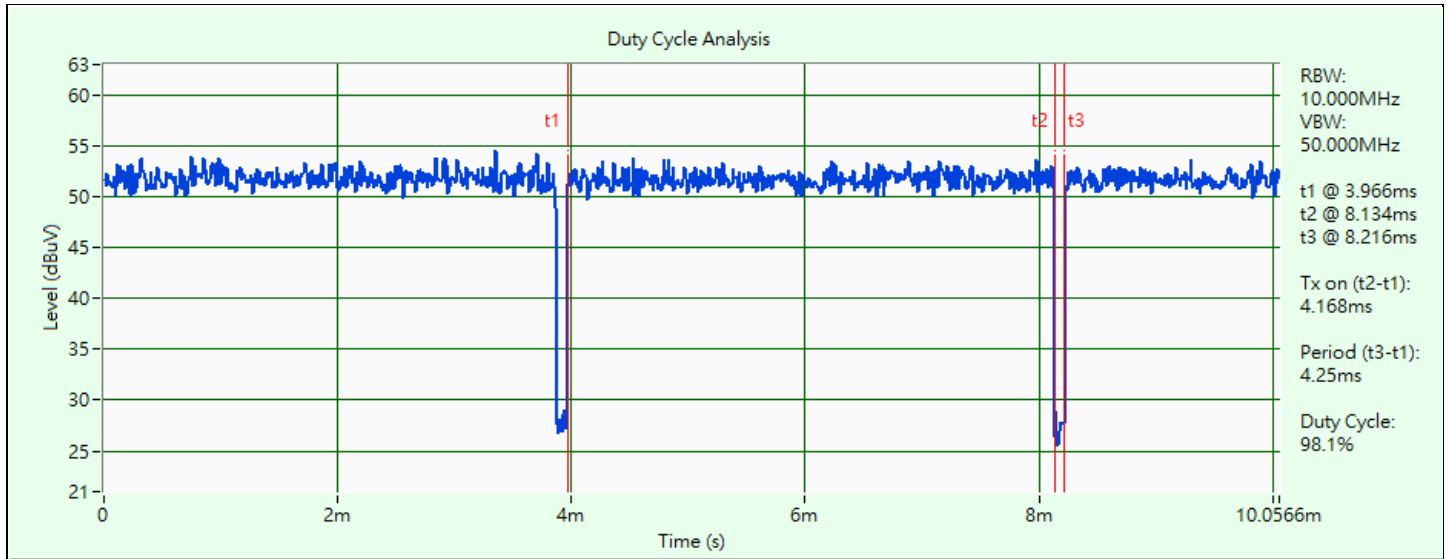


802.11a

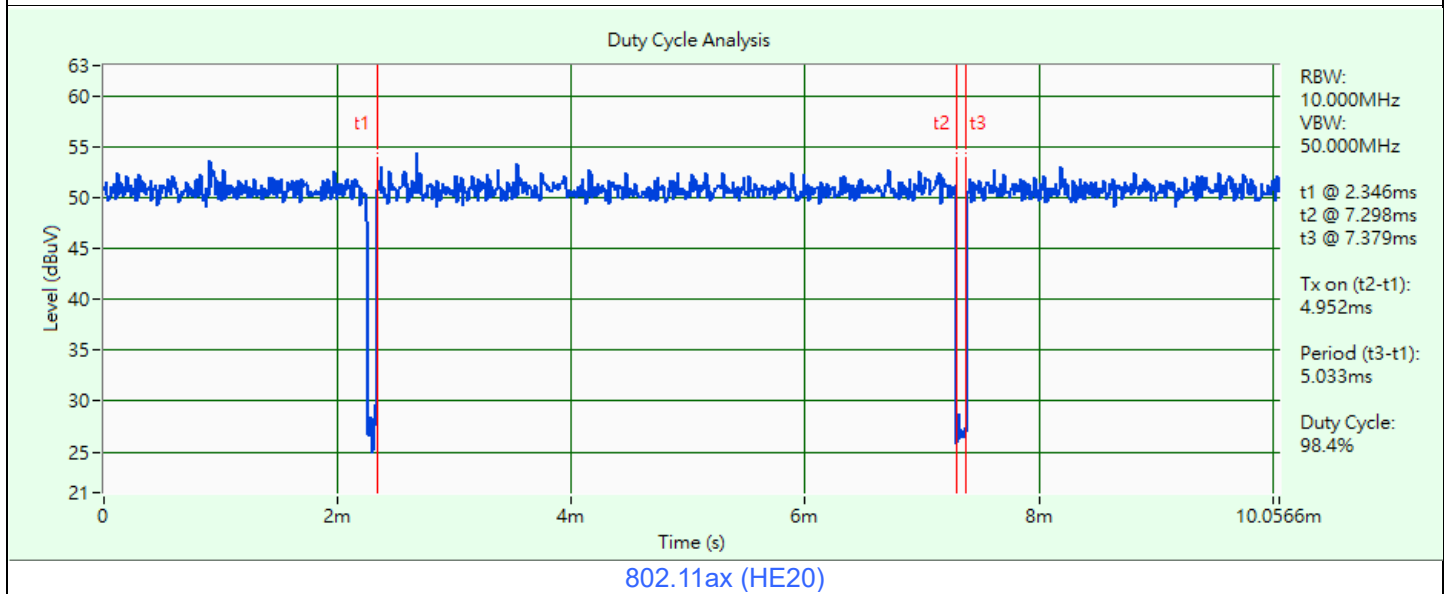


802.11ax (HE20)

Duty Cycle Analysis

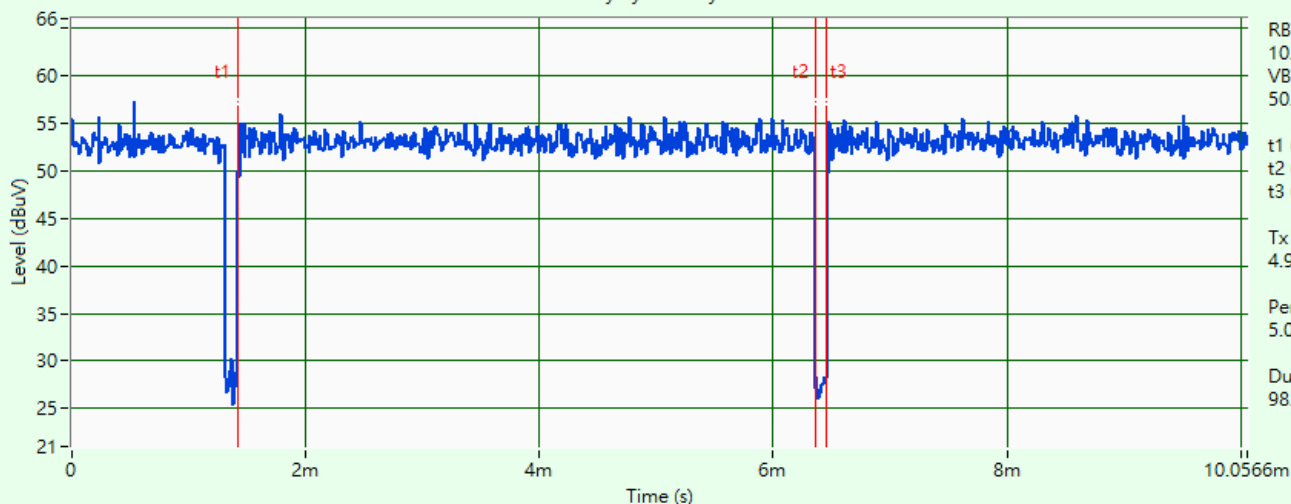


802.11ax (HE40)

Duty Cycle Analysis

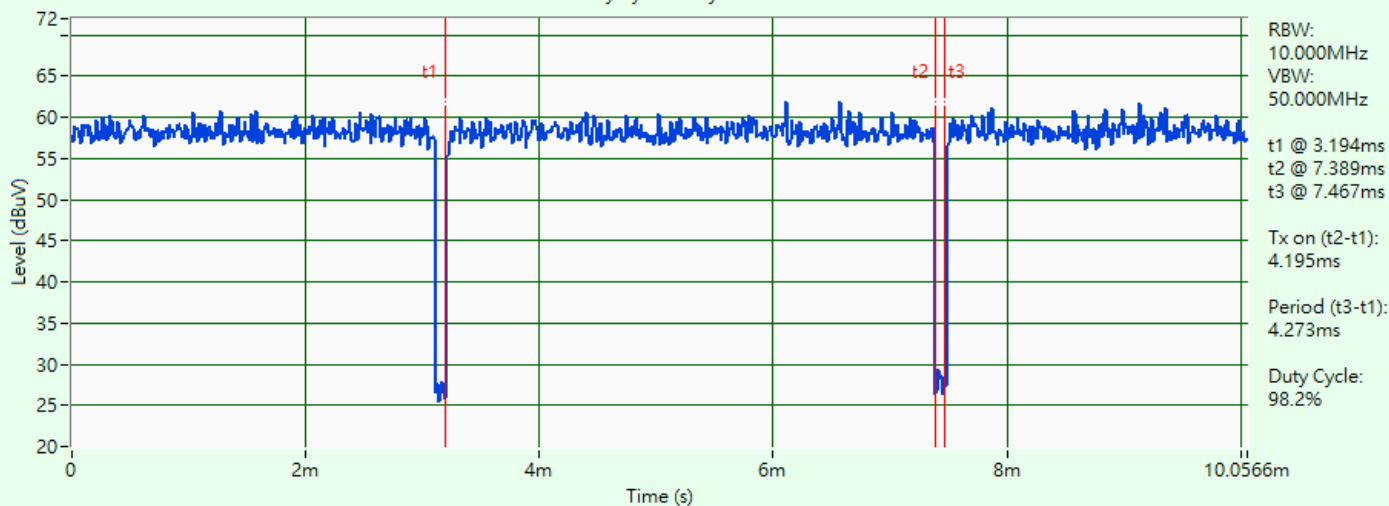

802.11ax (HE80)

Duty Cycle Analysis

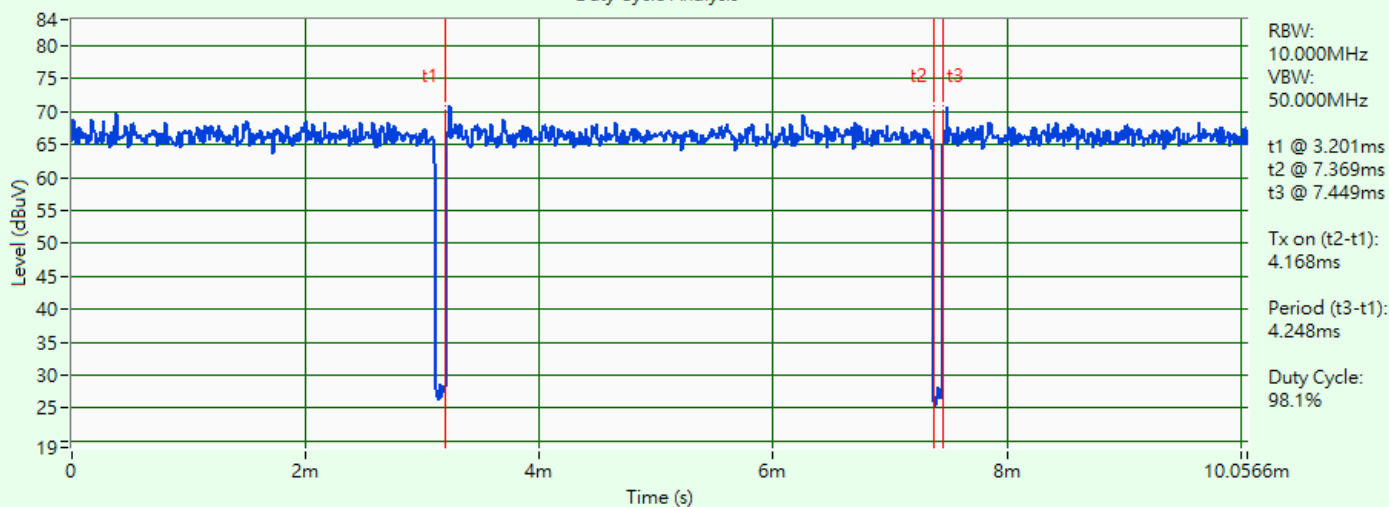


802.11ax (HE160)

3.6 Test Program Used and Operation Descriptions

Controlling software (accessMTool_REL_3_2_1_5) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

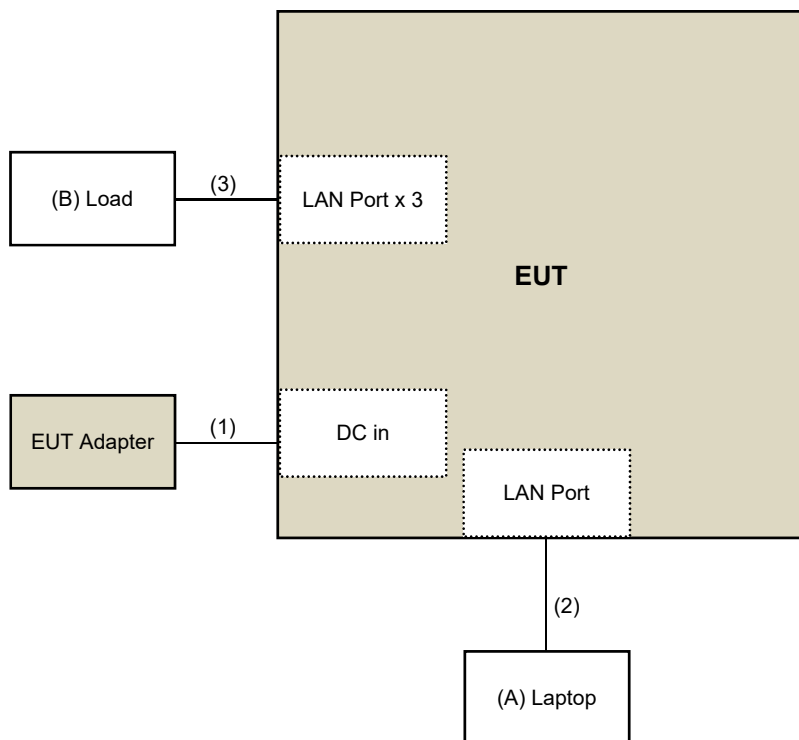

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	Lenovo	80WG	YD01YRC9	N/A	Provided by Lab
B	Load	N/A	N/A	N/A	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC cable	1	1.8	N	0	Supplied by applicant
2	LAN Cable	1	1.0	N	0	Accessory of EUT
3	LAN Cable	3	1.5	N	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	UNAT_5+	PAD-CH6-01	N/A	N/A
Antenna Tower Controller Max-Full	MF-7802	N/A	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	8	N/A	N/A
Horn Antenna ETS-Lindgren	3117	00143293	2022/11/13	2023/11/12
Horn Antenna Schwarzbeck	BBHA 9170	BBHA9170241	2022/10/20	2023/10/19
Pre-Amplifier EMCI	EMC 184045	980116	2022/10/1	2023/9/30
Preamplifier Agilent	83017A	MY39501373	2022/6/14	2023/6/13
RF Coaxial Cable ETS-Lindgren	EMC104-SM-SM-10000	Cable-CH1-01(RFC-SMS-100-SMS-120+RFC-SMS-100-SMS-4)	2022/6/14	2023/6/13
	RFC-SMS-100-SMS-24-IN	Cable-CH1-02(RFC-SMS-100-SMS-24)	2022/6/14	2023/6/13
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	2023/1/7	2024/1/6
RF Coaxial Cable HUBER+SUHNER&EMCI	SUCOFLEX 104& EMC104-SM-SM8000	CABLE-CH9-02 (248780+171006)	2023/1/7	2024/1/6
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Test Receiver Agilent	N9038A	MY52260177	2022/9/19	2023/9/18
Turn Table Max-Full	TT-1510	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802	N/A	N/A	N/A

Notes:

1. The test was performed in XD - 966 chamber 6.
2. Tested Date: 2023/4/16

4.2 Power Spectral Density

Refer to section 4.1 to get information of the instruments.

4.3 Emission Bandwidth

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Software BV	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A
Spectrum Analyzer R&S	FSV40	100980	2022/4/20	2023/4/19

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2023/4/16

4.4 In-Band Emission Mask

Refer to section 4.3 to get information of the instruments.

4.5 Occupied Bandwidth

Refer to section 4.3 to get information of the instruments.

4.6 Frequency Stability

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
AC power supply JIN YIH Technology	6905S	1720444	N/A	N/A
Digital Multimeter Fluke	87-III	70360742	2022/6/23	2023/6/22
Software BV	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A
Spectrum Analyzer R&S	FSV40	100980	2022/4/20	2023/4/19
Temperature & Humidity Chamber TERCHY	HRM-120RF	931022	2022/12/27	2023/12/26

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2023/4/16

4.7 Contention-based Protocol

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Combiner / Splitter (Model:ZN2PD-9G) Mini-Circuits	ZN2PD-9G	ZN2PD-9G	2022/6/9	2023/6/8
MXG Vector signal generator KEYSIGHT	N5182B	MY53052282	2023/1/6	2024/1/5
N9030B - PXA Signal Analyzer KEYSIGHT	N9030B	MY57140488	2023/3/6	2024/3/5
PXA KEYSIGHT	N9030B	MY57140953	2022/7/1	2023/6/30
Signal Analyzer R&S	FSV7	104056	2022/5/20	2023/5/19
Spectrum Analyzer R&S	FSV40	100979	2022/3/25	2023/3/24

Notes:

1. The test was performed in Adaptivity room.
2. Tested Date: 2023/3/21

4.8 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
LISN R&S	ESH3-Z5	100116	2023/2/15	2024/2/14
		100311	2022/9/12	2023/9/11
RF Coaxial Cable WOKEN	5D-FB	Cable-cond1-01	2023/1/7	2024/1/6
Software BVADT	BVADT_Cond_ V7.3.7.4	N/A	N/A	N/A
Test Receiver Rohde&Schwarz	ESCI	100613	2022/12/5	2023/12/4
V-LISN Schwarzbeck	NNBL 8226-2	8226-142	2022/8/31	2023/8/30

Notes:

1. The test was performed in HY - Conduction 1.
2. Tested Date: 2023/4/14

4.9 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	UNAT_5+	PAD-CH6-01	N/A	N/A
Antenna Tower Controller Max-Full	MF-7802	N/A	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB9168	9168-616	2022/10/26	2023/10/25
Loop Antenna EMCI	EM-6879	269	2022/9/19	2023/9/18
Loop Antenna TESEQ	HLA 6121	45745	2022/7/27	2023/7/26
Pre-amplifier EMCI	EMC001340	980201	2022/9/23	2023/9/22
Preamplifier Agilent	310N	187226	2022/6/14	2023/6/13
RF Coaxial Cable EMCI	5D-NM-BM	140903+140902	2023/1/7	2024/1/6
RF Coaxial Cable ETS-Lindgren	EMC104-SM-SM-10000	Cable-CH1-01(RFC-SMS-100-SMS-120+RFC-SMS-100-SMS-4	2022/6/14	2023/6/13
	RFC-SMS-100-SMS-24-IN	Cable-CH1-02(RFC-SMS-100-SMS-24)	2022/6/14	2023/6/13
Software BV ADT	ADT_Radiated_V7.6.15.9.5	N/A	N/A	N/A
Test Receiver Agilent	N9038A	MY52260177	2022/9/19	2023/9/18
Turn Table Max-Full	TT-1510	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802	N/A	N/A	N/A

Notes:

1. The test was performed in XD - 966 chamber 6.
2. Tested Date: 2023/3/9 ~ 2023/4/14

4.10 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	UNAT_5+	PAD-CH6-01	N/A	N/A
Antenna Tower Controller Max-Full	MF-7802	N/A	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	8	N/A	N/A
Horn Antenna ETS-Lindgren	3117	00143293	2022/11/13	2023/11/12
Horn Antenna Schwarzbeck	BBHA 9170	BBHA9170241	2022/10/20	2023/10/19
Pre-Amplifier EMCI	EMC 184045	980116	2022/10/1	2023/9/30
Preamplifier Agilent	83017A	MY39501373	2022/6/14	2023/6/13
RF Coaxial Cable ETS-Lindgren	EMC104-SM-SM-10000	Cable-CH1-01(RFC-SMS-100-SMS-120+RFC-SMS-100-SMS-4)	2022/6/14	2023/6/13
	RFC-SMS-100-SMS-24-IN	Cable-CH1-02(RFC-SMS-100-SMS-24)	2022/6/14	2023/6/13
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	2023/1/7	2024/1/6
RF Coaxial Cable HUBER+SUHNER&EMCI	SUCOFLEX 104& EMC104-SM-SM8000	CABLE-CH9-02 (248780+171006)	2023/1/7	2024/1/6
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Test Receiver Agilent	N9038A	MY52260177	2022/9/19	2023/9/18
Turn Table Max-Full	TT-1510	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802	N/A	N/A	N/A

Notes:

1. The test was performed in XD - 966 chamber 6.
2. Tested Date: 2023/3/4 ~ 2023/4/14

5 Limits of Test Items

5.1 RF Output Power

Operation Band	EUT Category	Limit
		Max Average Power
U-NII-5 U-NII-6 U-NII-7 U-NII-8	Indoor AP	EIRP 30 dBm

5.2 Power Spectral Density

Operation Band	EUT Category	Limit
		Peak Power Density
U-NII-5 U-NII-6 U-NII-7 U-NII-8	Indoor AP	EIRP 5 dBm/MHz

5.3 Emission Bandwidth

The results are for reference only.

5.4 In-Band Emission Mask

Test Item	Frequencies (MHz)	(X) dBc* ¹
Emission Mask	At 1 MHz outside of channel edge	20
	At one channel bandwidth from the channel center* ²	28
	At one- and one-half times the channel bandwidth away from channel center* ³	40
	More than one- and one-half times the channel bandwidth	40

*¹ : The power spectral density must be suppressed by "x" dB

*² : At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression,

*³ : At frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression.

5.5 Occupied Bandwidth

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 MHz.

5.6 Frequency Stability

The frequency of the carrier signal shall be maintained within band of operation.

5.7 Contention-based Protocol

Unlicensed indoor low-power devices must detect co-channel radio frequency power that is at least -62 dBm (The threshold is referenced to a 0 dBi antenna gain.) or lower. Additionally, indoor low-power devices must detect co-channel energy with 90% or greater certainty.

5.8 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.9 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.10 Unwanted Emissions above 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Frequencies (MHz)	EIRP Limit	Equivalent Field Strength at 3 m
5925 MHz > F > 7125 MHz	Peak: -7 (dBm/MHz)	88.2 (dBuV/m)
	Average: -27 (dBm/MHz)	68.2 (dBuV/m)

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:


$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup

Radiated Measurement Method

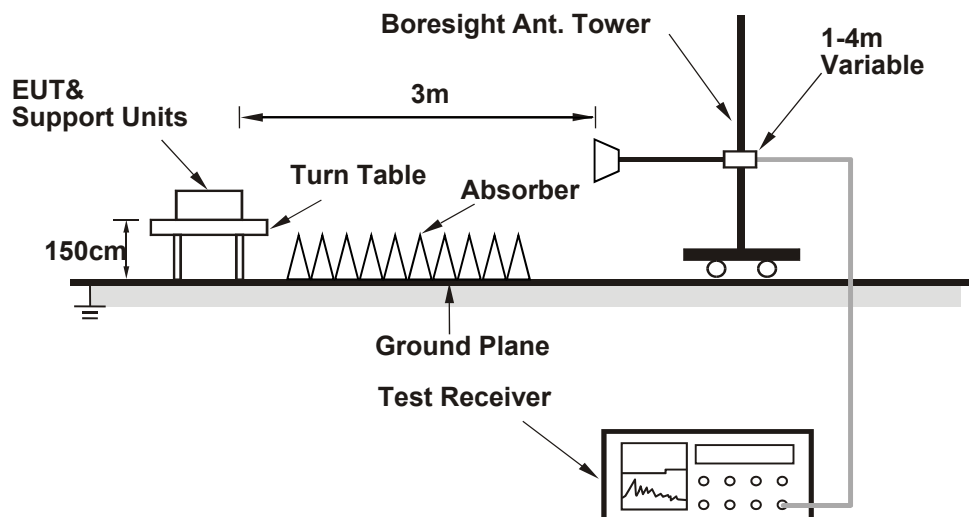

6.1.2 Test Procedure

Radiated Measurement Method

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP level.
- Follow ANSI C63.10 section 12.7.3, $EIRP \text{ Value (dBm)} = \text{Field Strength Value (dBuV/m)} + \text{Correction Factor @ 3 m}$.
- $\text{Correction Factor (dB) @ 3 m} = 20\log(D) - 104.77$; where D is the measurement distance @3 m = -95.23 dB

Spectrum analyzer setting as below:


Method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value

6.2 Power Spectral Density

6.2.1 Test Setup

Radiated Measurement Method

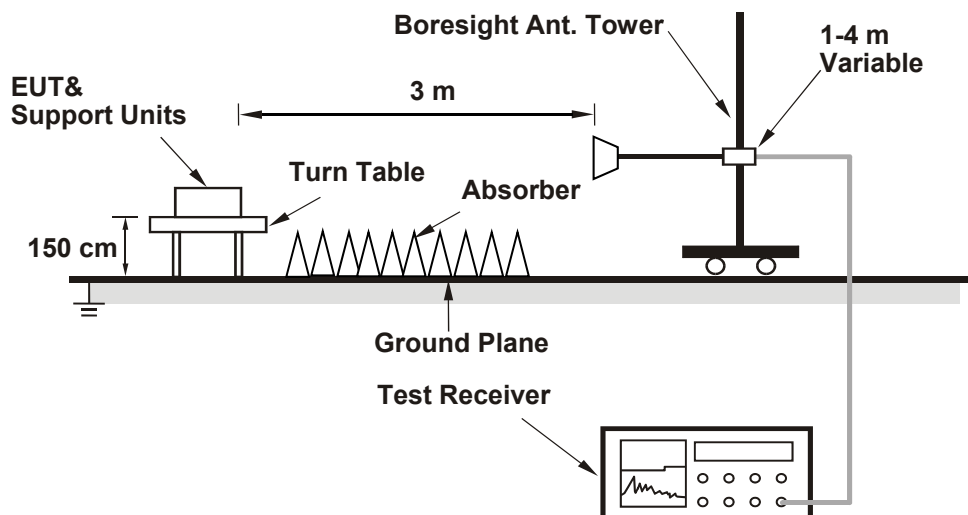

6.2.2 Test Procedure

Radiated Measurement Method

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP level.
- Follow ANSI C63.10 section 12.7.3, $EIRP \text{ Value (dBm)} = \text{Field Strength Value (dBuV/m)} + \text{Correction Factor @ 3 m}$.
- $\text{Correction Factor (dB) @ 3 m} = 20\log(D) - 104.77$; where D is the measurement distance @3 m = -95.23 dB


Spectrum analyzer setting as below:

Method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value

6.3 Emission Bandwidth

6.3.1 Test Setup




6.3.2 Test Procedure

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6.4 In-Band Emission Mask

6.4.1 Test Setup




6.4.2 Test Procedure

- Connect output of the antenna port to a spectrum analyzer and adjust appropriate attenuation.
- Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (Determine the channel edge.)
- Measure the power spectral density (for emissions mask reference) using the following procedure:
 - Set the span to encompass the entire 26 dB EBW of the signal.
 - Set RBW = same RBW used for 26 dB EBW measurement.
 - Set VBW $\geq [3 \times \text{RBW}]$.
 - Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - Sweep time = auto.
 - Detector = RMS (i.e., power averaging).
 - Trace average at least 100 traces in power averaging (rms) mode.
 - Use the peak search function on the instrument to find the peak of the spectrum.
- Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - Suppressed by 28 dB at one channel bandwidth from the channel center.
 - Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
- Adjust the span to encompass the entire mask as necessary and clear trace.
- Trace average at least 100 traces in power averaging (rms) mode.
- Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask

6.5 Occupied Bandwidth

6.5.1 Test Setup

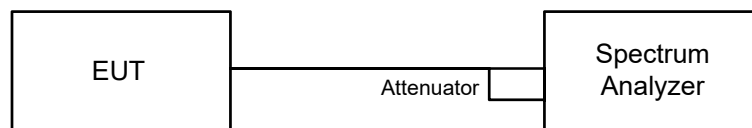


6.5.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to Sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

6.6 Frequency Stability

6.6.1 Test Setup

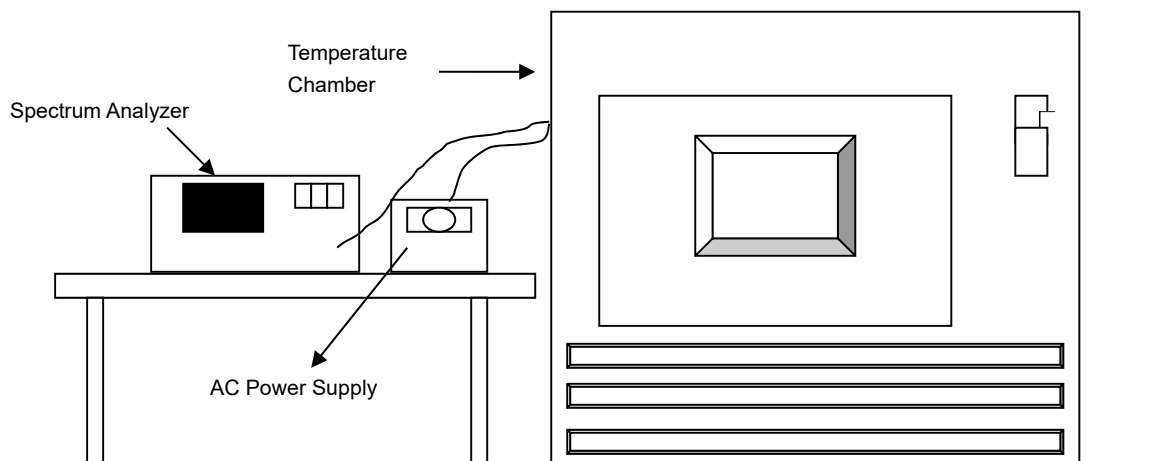


6.6.2 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- Repeat step (d) with the temperature chamber set to the next desired temperature until measurements down to the lowest specified temperature have been completed.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

6.7 Contention-based Protocol

6.7.1 Test Setup

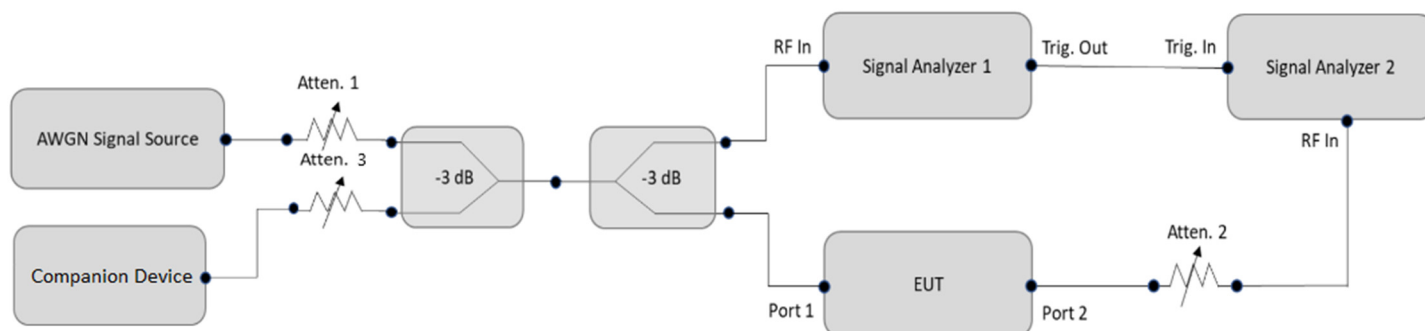

6.7.2 Test Procedure


- Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
- Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters (set as following section 4.7.5 EUT operating condition).
- Determine number of times detection threshold test as following table,

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Same as EUT transmission
$BW_{Inc} < BW_{EUT} \leq 2x BW_{Inc}$	Once	Contained within BW_{EUT}
$2x BW_{Inc} < BW_{EUT} \leq 4x BW_{Inc}$	Twice. (Incumbent transmission is contained within BW_{EUT})	Closely to the lower edge and upper edge of the EUT Channel
$BW_{EUT} > 4x BW_{Inc}$	Three times	Closely to the lower edge, in the middle and upper edge of the EUT Channel

- Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use step c table to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
- Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT.
- Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
- Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
- (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
- Refer to step c table to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step d, choose a different center frequency for the AWGN signal and repeat the process.

6.8 AC Power Conducted Emissions

6.8.1 Test Setup

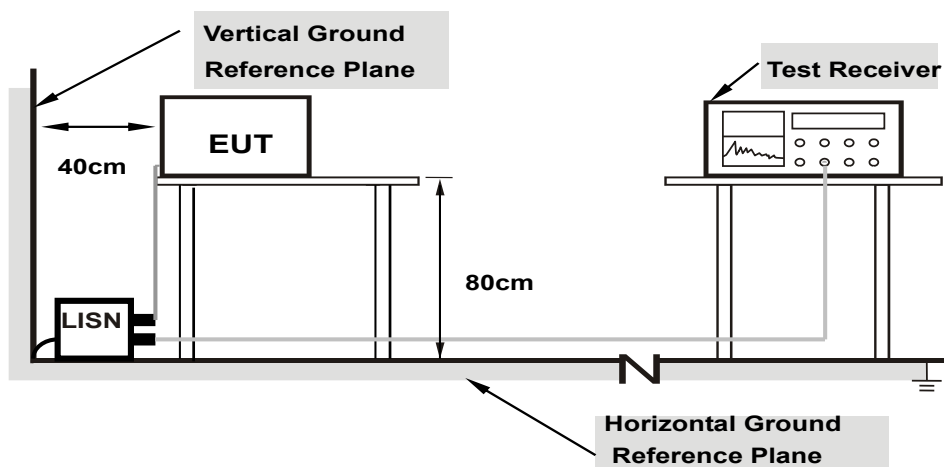

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.8.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.9 Unwanted Emissions below 1 GHz

6.9.1 Test Setup

For Radiated emission below 30 MHz

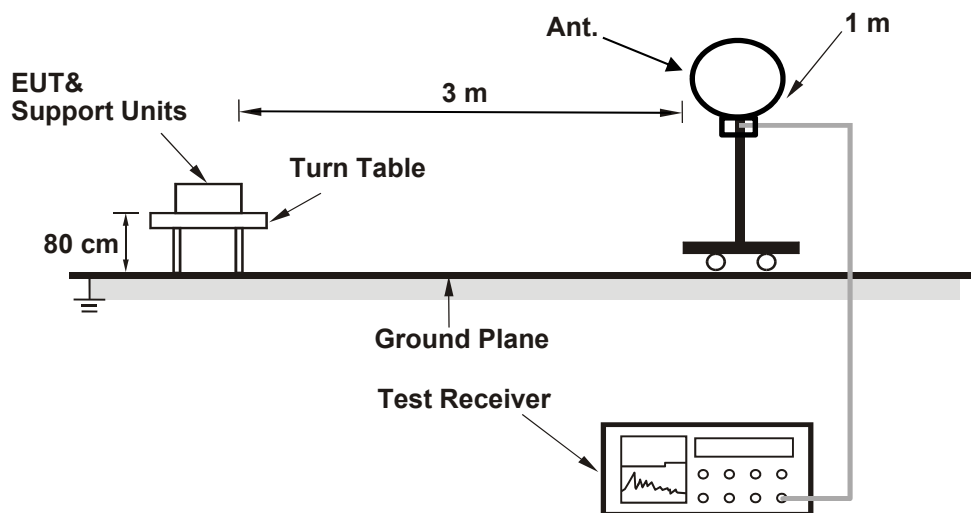

For Radiated emission above 30 MHz

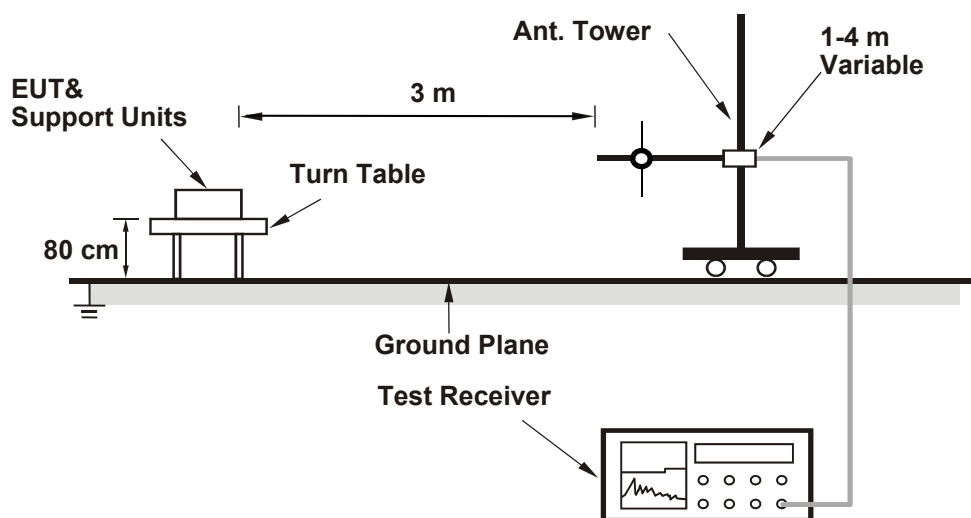

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.9.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.10 Unwanted Emissions above 1 GHz

6.10.1 Test Setup

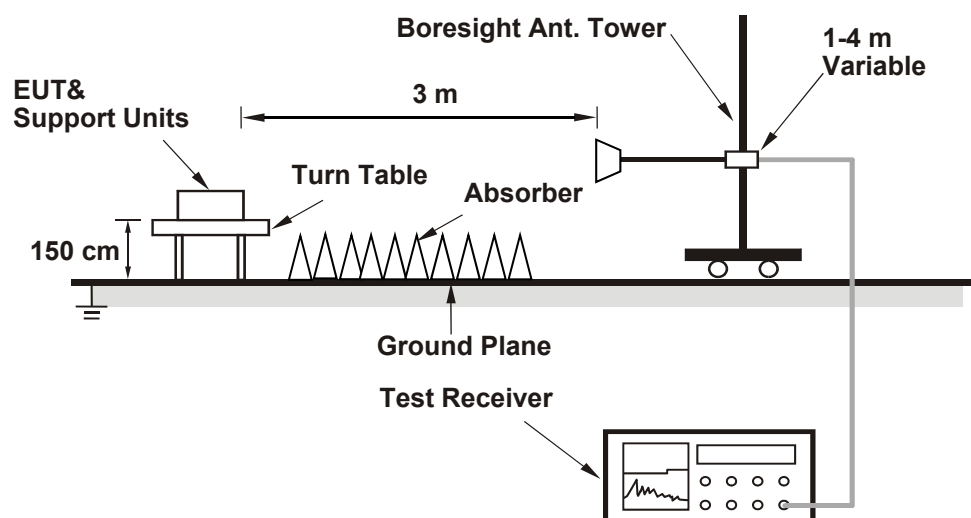

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.10.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.
- For 802.11ax (HE20) CH233: Integration method
 - For peak emissions measurements:
 - Set RBW = 100 kHz
 - Detection = peak.
 - Max hold.
 - Perform band-power integration across the 1 MHz bandwidth in which the band-edge emission level is to be measured.
 - For average emissions measurements:
 - Set RBW = 100 kHz.
 - Perform band-power integration across the 1 MHz bandwidth in which the band-edge emission level is to be measured.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Jisyong Wang
--------------	----------------	---------------------------	--------------	------------	--------------

802.11a

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
33	6115	108.00	-95.23	18.923	12.77	30	Pass
61	6255	107.94	-95.23	18.664	12.71	30	Pass
93	6415	107.90	-95.23	18.493	12.67	30	Pass
97	6435	107.92	-95.23	18.578	12.69	30	Pass
105	6475	107.90	-95.23	18.493	12.67	30	Pass
113	6515	107.86	-95.23	18.323	12.63	30	Pass
117	6535	107.84	-95.23	18.239	12.61	30	Pass
149	6695	107.86	-95.23	18.323	12.63	30	Pass
181	6855	107.89	-95.23	18.45	12.66	30	Pass
185	6875	107.82	-95.23	18.155	12.59	30	Pass
209	6995	107.96	-95.23	18.75	12.73	30	Pass
233	7115	107.92	-95.23	18.578	12.69	30	Pass

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
33	6115	108.30	-95.23	20.277	13.07	30	Pass
61	6255	108.26	-95.23	20.091	13.03	30	Pass
93	6415	108.24	-95.23	19.999	13.01	30	Pass
97	6435	108.27	-95.23	20.137	13.04	30	Pass
105	6475	108.20	-95.23	19.815	12.97	30	Pass
113	6515	108.20	-95.23	19.815	12.97	30	Pass
117	6535	108.23	-95.23	19.953	13.00	30	Pass
149	6695	108.21	-95.23	19.861	12.98	30	Pass
181	6855	108.19	-95.23	19.77	12.96	30	Pass
185	6875	108.09	-95.23	19.32	12.86	30	Pass
209	6995	108.12	-95.23	19.454	12.89	30	Pass
233	7115	108.04	-95.23	19.099	12.81	30	Pass

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
35	6125	111.50	-95.23	42.364	16.27	30	Pass
59	6245	111.42	-95.23	41.591	16.19	30	Pass
91	6405	111.40	-95.23	41.4	16.17	30	Pass
99	6445	111.43	-95.23	41.687	16.20	30	Pass
107	6485	111.39	-95.23	41.305	16.16	30	Pass
115	6525	111.41	-95.23	41.495	16.18	30	Pass
123	6565	111.48	-95.23	42.17	16.25	30	Pass
155	6725	111.46	-95.23	41.976	16.23	30	Pass
179	6845	111.43	-95.23	41.687	16.20	30	Pass
187	6885	111.45	-95.23	41.879	16.22	30	Pass
211	7005	111.39	-95.23	41.305	16.16	30	Pass
227	7085	111.37	-95.23	41.115	16.14	30	Pass

802.11ax (HE80)


Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
39	6145	115.20	-95.23	99.312	19.97	30	Pass
55	6225	115.06	-95.23	96.161	19.83	30	Pass
87	6385	115.12	-95.23	97.499	19.89	30	Pass
103	6465	115.09	-95.23	96.828	19.86	30	Pass
119	6545	115.17	-95.23	98.628	19.94	30	Pass
151	6705	115.16	-95.23	98.401	19.93	30	Pass
183	6865	115.14	-95.23	97.949	19.91	30	Pass
199	6945	115.08	-95.23	96.605	19.85	30	Pass
215	7025	115.10	-95.23	97.051	19.87	30	Pass

802.11ax (HE160)


Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
47	6185	117.80	-95.23	180.717	22.57	30	Pass
79	6345	117.74	-95.23	178.238	22.51	30	Pass
111	6505	117.69	-95.23	176.198	22.46	30	Pass
143	6665	117.76	-95.23	179.061	22.53	30	Pass
175	6825	117.73	-95.23	177.828	22.50	30	Pass
207	6985	117.75	-95.23	178.649	22.52	30	Pass




Spectrum Plot of Maximum Value

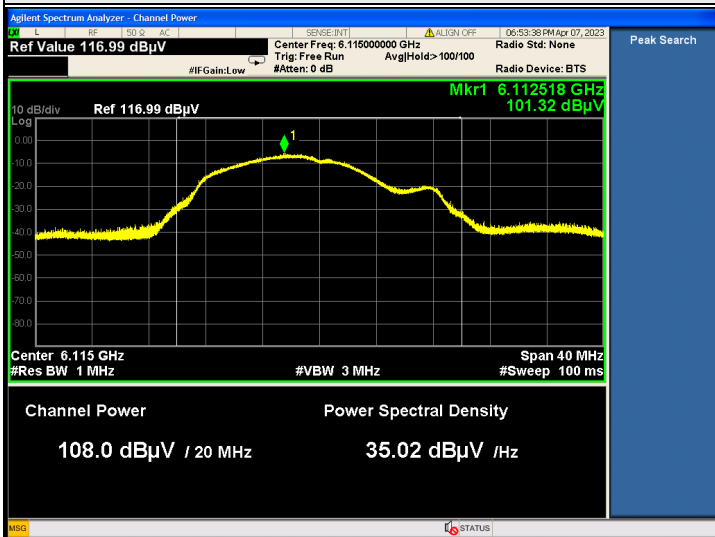


802.11a : CH 33

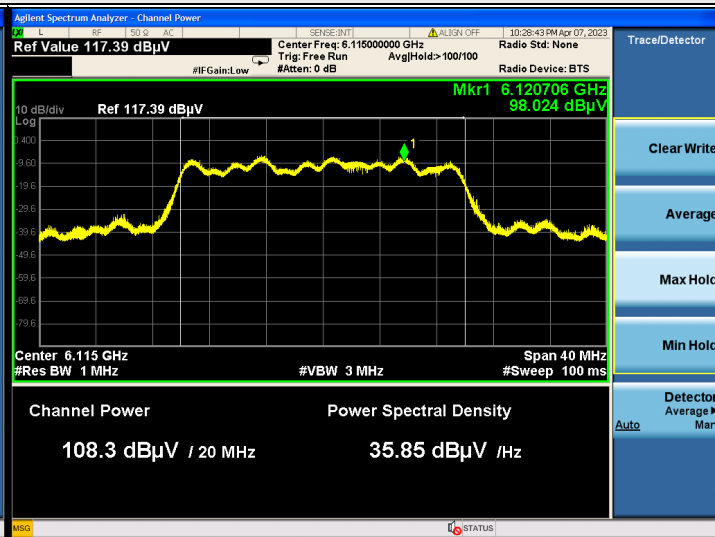


802.11ax (HE20) : CH 33

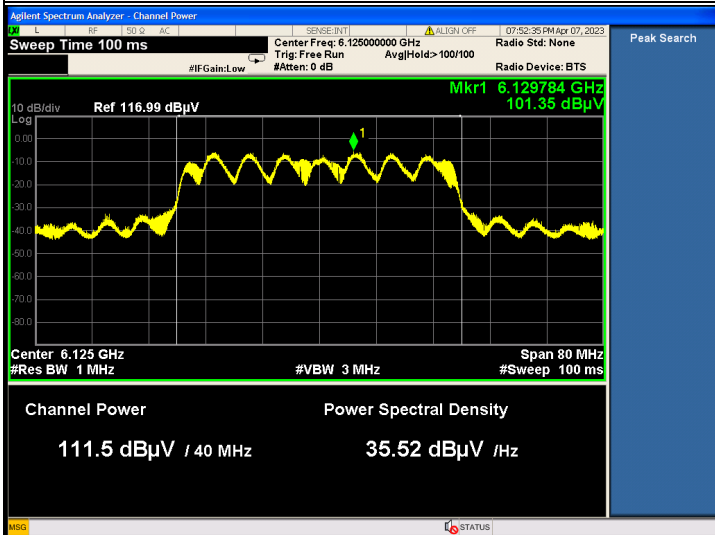

802.11ax (HE40) : CH 35

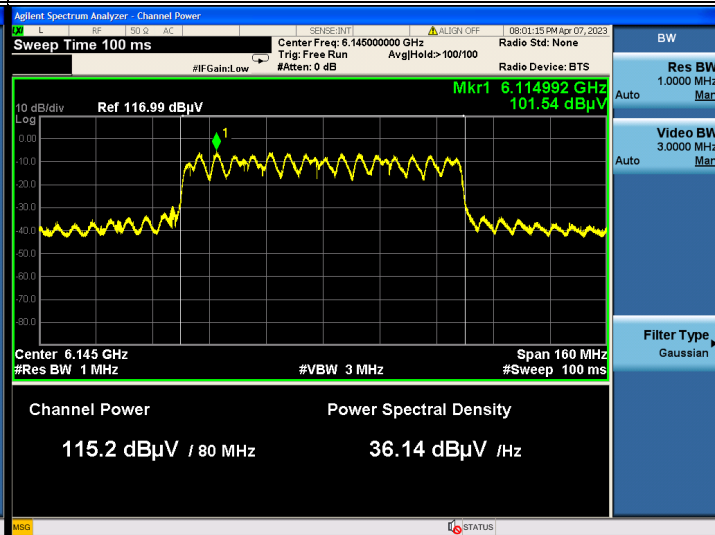

802.11ax (HE80) : CH 39

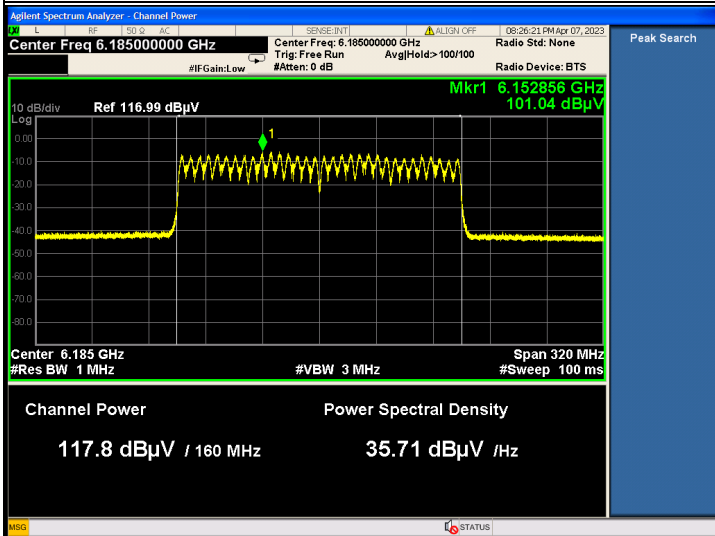

802.11ax (HE160) : CH 47

7.2 Power Spectral Density

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Jisyong Wang
--------------	----------------	---------------------------	--------------	------------	--------------

802.11a

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
33	6115	100.19	-95.23	4.96	5	Pass
61	6255	100.14	-95.23	4.91	5	Pass
93	6415	100.16	-95.23	4.93	5	Pass
97	6435	100.11	-95.23	4.88	5	Pass
105	6475	100.15	-95.23	4.92	5	Pass
113	6515	99.97	-95.23	4.74	5	Pass
117	6535	99.94	-95.23	4.71	5	Pass
149	6695	100.05	-95.23	4.82	5	Pass
181	6855	100.09	-95.23	4.86	5	Pass
185	6875	100.07	-95.23	4.84	5	Pass
209	6995	100.08	-95.23	4.85	5	Pass
233	7115	100.06	-95.23	4.83	5	Pass

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
33	6115	100.12	-95.23	4.89	5	Pass
61	6255	100.10	-95.23	4.87	5	Pass
93	6415	100.04	-95.23	4.81	5	Pass
97	6435	100.06	-95.23	4.83	5	Pass
105	6475	100.09	-95.23	4.86	5	Pass
113	6515	100.07	-95.23	4.84	5	Pass
117	6535	99.98	-95.23	4.75	5	Pass
149	6695	100.01	-95.23	4.78	5	Pass
181	6855	100.02	-95.23	4.79	5	Pass
185	6875	100.08	-95.23	4.85	5	Pass
209	6995	99.97	-95.23	4.74	5	Pass
233	7115	100.00	-95.23	4.77	5	Pass

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
35	6125	100.18	-95.23	4.95	5	Pass
59	6245	100.14	-95.23	4.91	5	Pass
91	6405	100.09	-95.23	4.86	5	Pass
99	6445	100.12	-95.23	4.89	5	Pass
107	6485	100.15	-95.23	4.92	5	Pass
115	6525	100.07	-95.23	4.84	5	Pass
123	6565	100.08	-95.23	4.85	5	Pass
155	6725	100.12	-95.23	4.89	5	Pass
179	6845	100.12	-95.23	4.89	5	Pass
187	6885	100.08	-95.23	4.85	5	Pass
211	7005	100.04	-95.23	4.81	5	Pass
227	7085	100.09	-95.23	4.86	5	Pass

802.11ax (HE80)


Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
39	6145	100.13	-95.23	4.90	5	Pass
55	6225	100.09	-95.23	4.86	5	Pass
87	6385	100.12	-95.23	4.89	5	Pass
103	6465	100.09	-95.23	4.86	5	Pass
119	6545	100.08	-95.23	4.85	5	Pass
151	6705	100.10	-95.23	4.87	5	Pass
183	6865	100.08	-95.23	4.85	5	Pass
199	6945	100.06	-95.23	4.83	5	Pass
215	7025	100.11	-95.23	4.88	5	Pass

802.11ax (HE160)


Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
47	6185	100.14	-95.23	4.91	5	Pass
79	6345	100.09	-95.23	4.86	5	Pass
111	6505	100.12	-95.23	4.89	5	Pass
143	6665	100.06	-95.23	4.83	5	Pass
175	6825	100.12	-95.23	4.89	5	Pass
207	6985	100.07	-95.23	4.84	5	Pass




Spectrum Plot of Maximum Value

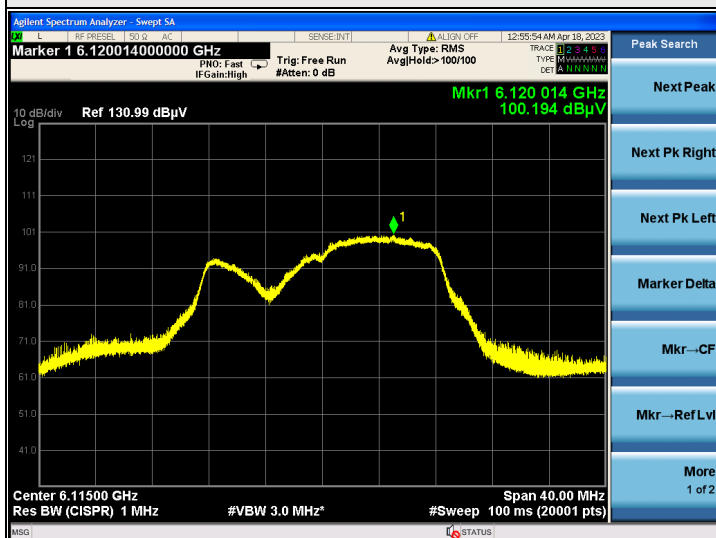


802.11a : CH 33

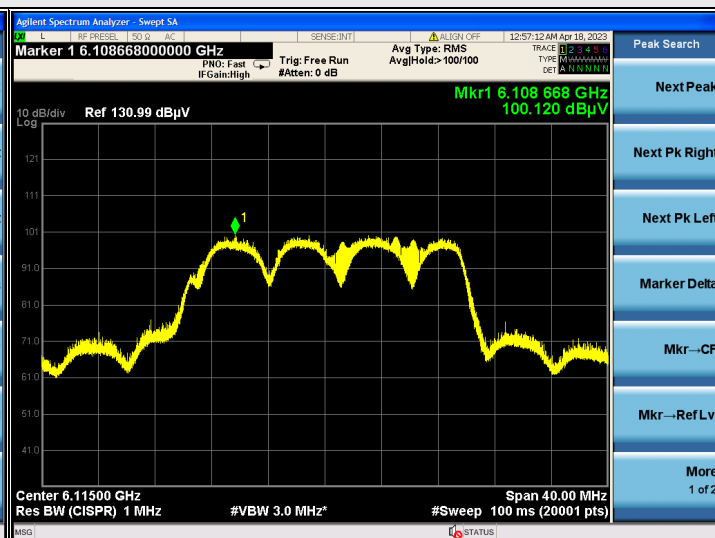


802.11ax (HE20) : CH 33

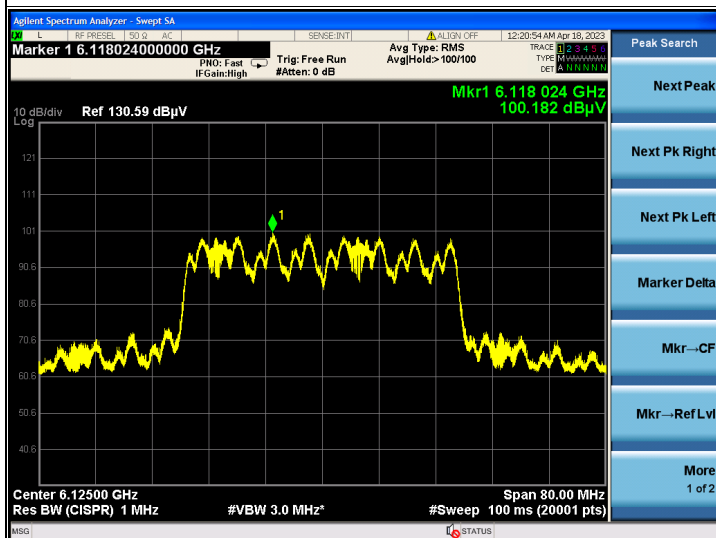

802.11ax (HE40) : CH 35

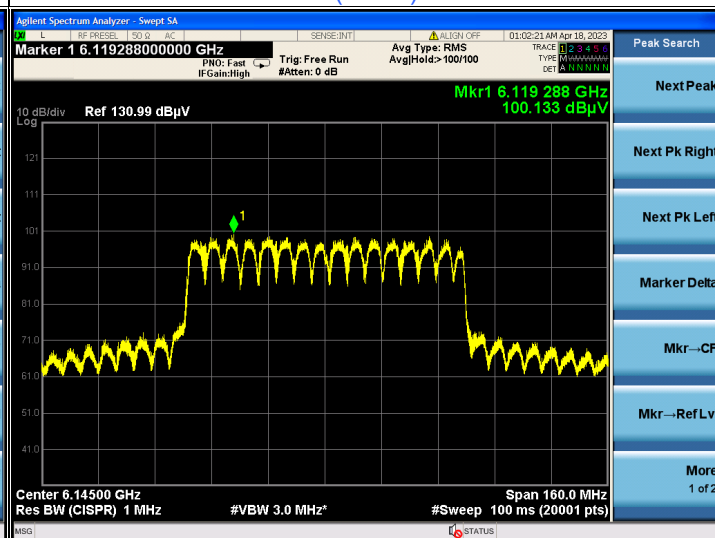

802.11ax (HE80) : CH 39

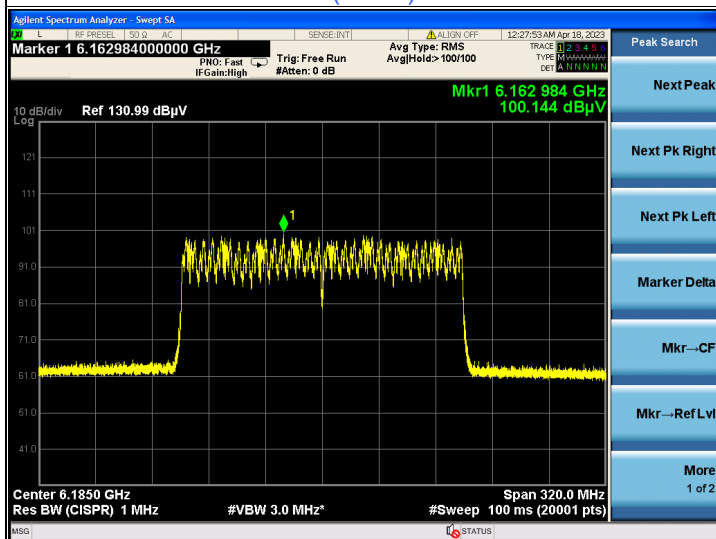

802.11ax (HE160) : CH 47

7.3 Emission Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Jisyong Wang
--------------	----------------	---------------------------	--------------	------------	--------------

802.11a

Channel	Frequency (MHz)	26dB Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
33	6115	23.90	24.08	23.39	23.79
61	6255	23.03	23.15	25.27	25.40
93	6415	22.62	22.83	22.24	22.57
97	6435	23.26	25.02	22.93	23.38
105	6475	22.55	22.63	23.50	23.29
113	6515	22.67	24.25	22.62	23.44
117	6535	24.62	23.50	22.61	22.39
149	6695	23.84	24.39	24.70	23.46
181	6855	23.42	24.07	24.51	23.35
185	6875	25.38	24.32	23.75	24.29
209	6995	22.59	22.14	22.56	22.16
233	7115	23.47	24.88	23.01	23.70

802.11ax (HE20)

Channel	Frequency (MHz)	26dB Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
33	6115	22.49	25.02	25.10	23.62
61	6255	22.38	23.82	22.54	25.32
93	6415	22.39	23.41	24.99	24.57
97	6435	27.79	22.71	22.25	25.77
105	6475	26.75	23.96	25.64	24.08
113	6515	24.84	22.78	22.07	26.22
117	6535	24.09	24.33	23.24	24.60
149	6695	22.58	29.39	22.57	25.45
181	6855	27.59	22.49	24.59	24.70
185	6875	22.43	24.73	22.57	24.20
209	6995	21.89	26.19	22.73	23.94
233	7115	22.49	26.98	22.32	24.79

802.11ax (HE40)

Channel	Frequency (MHz)	26dB Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
35	6125	45.31	43.79	44.52	43.76
59	6245	43.97	43.33	44.92	44.13
91	6405	44.60	45.42	43.72	44.82
99	6445	44.35	44.25	44.62	44.23
107	6485	44.73	43.64	48.12	49.12
115	6525	45.86	44.36	47.03	44.81
123	6565	45.26	44.36	48.16	47.33
155	6725	43.75	43.44	45.19	43.76
179	6845	50.03	45.85	43.79	46.92
187	6885	42.00	48.21	42.56	46.07
211	7005	42.41	47.58	43.54	42.10
227	7085	43.89	50.74	54.27	48.23


802.11ax (HE80)

Channel	Frequency (MHz)	26dB Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
39	6145	84.64	84.13	85.18	85.71
55	6225	83.01	83.38	85.77	86.02
87	6385	83.74	83.19	83.02	84.93
103	6465	85.32	84.33	83.62	83.73
119	6545	83.64	84.42	92.15	88.46
151	6705	83.68	83.57	85.13	83.82
183	6865	83.49	89.99	87.27	85.60
199	6945	84.42	83.75	83.66	83.72
215	7025	84.19	83.05	84.22	83.17


802.11ax (HE160)

Channel	Frequency (MHz)	26dB Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
47	6185	168.07	168.23	168.26	167.87
79	6345	167.43	167.71	167.68	167.43
111	6505	167.60	168.77	167.52	167.53
143	6665	167.82	167.66	167.60	167.32
175	6825	167.87	167.92	168.67	167.12
207	6985	167.23	167.54	168.28	168.00


Spectrum Plot of Maximum Value

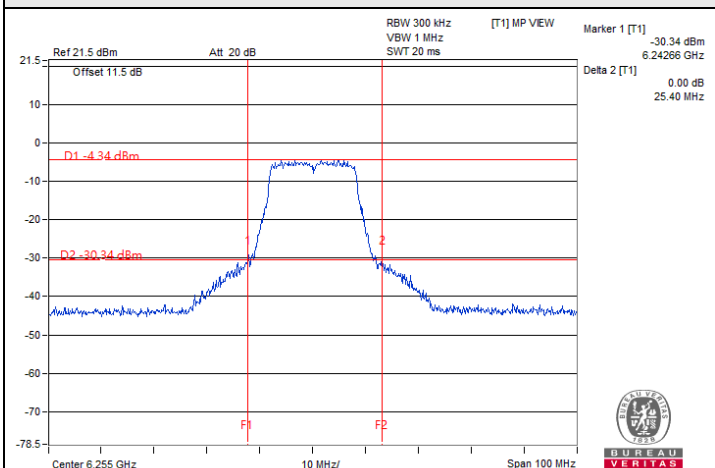


802.11a / Chain 3 : CH 61

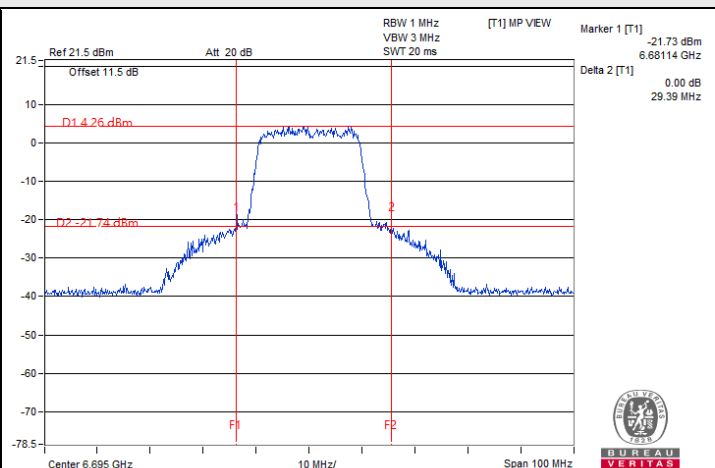


802.11ax (HE20) / Chain 1 : CH 149

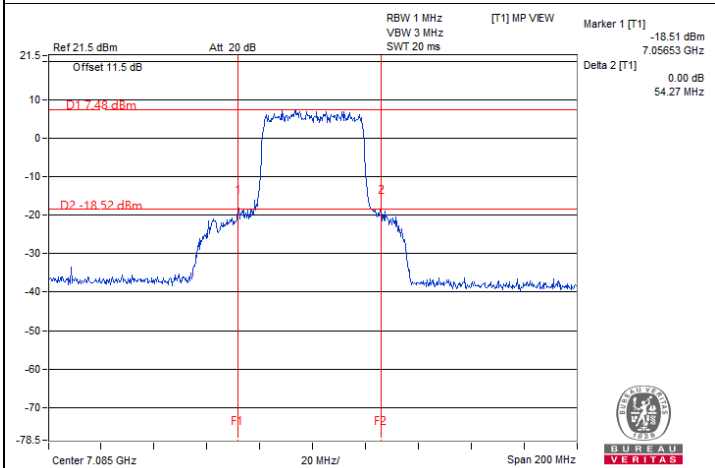

802.11ax (HE40) / Chain 2 : CH 227

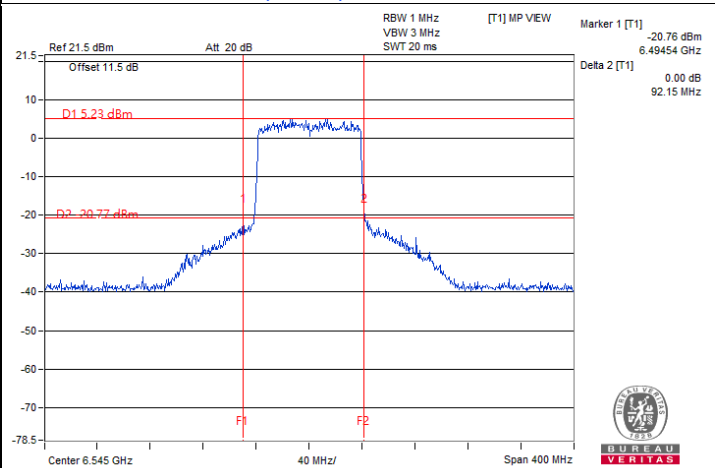

802.11ax (HE80) / Chain 2 : CH 119

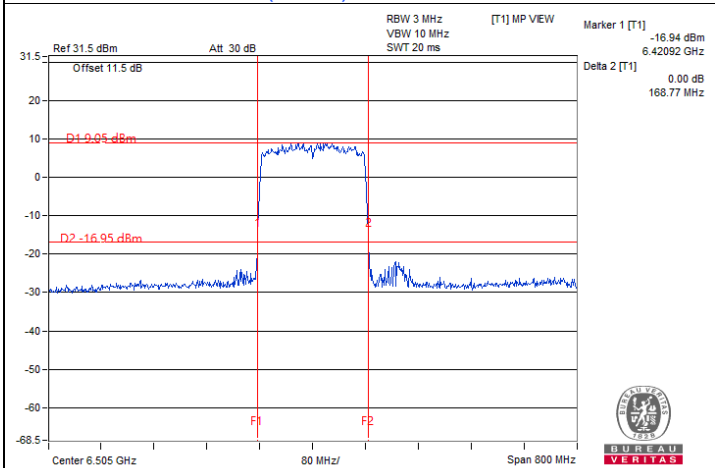


802.11ax (HE160) / Chain 1 : CH 111







7.4 In-Band Emission Mask

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Jisyong Wang
--------------	----------------	---------------------------	--------------	------------	--------------







802.11a

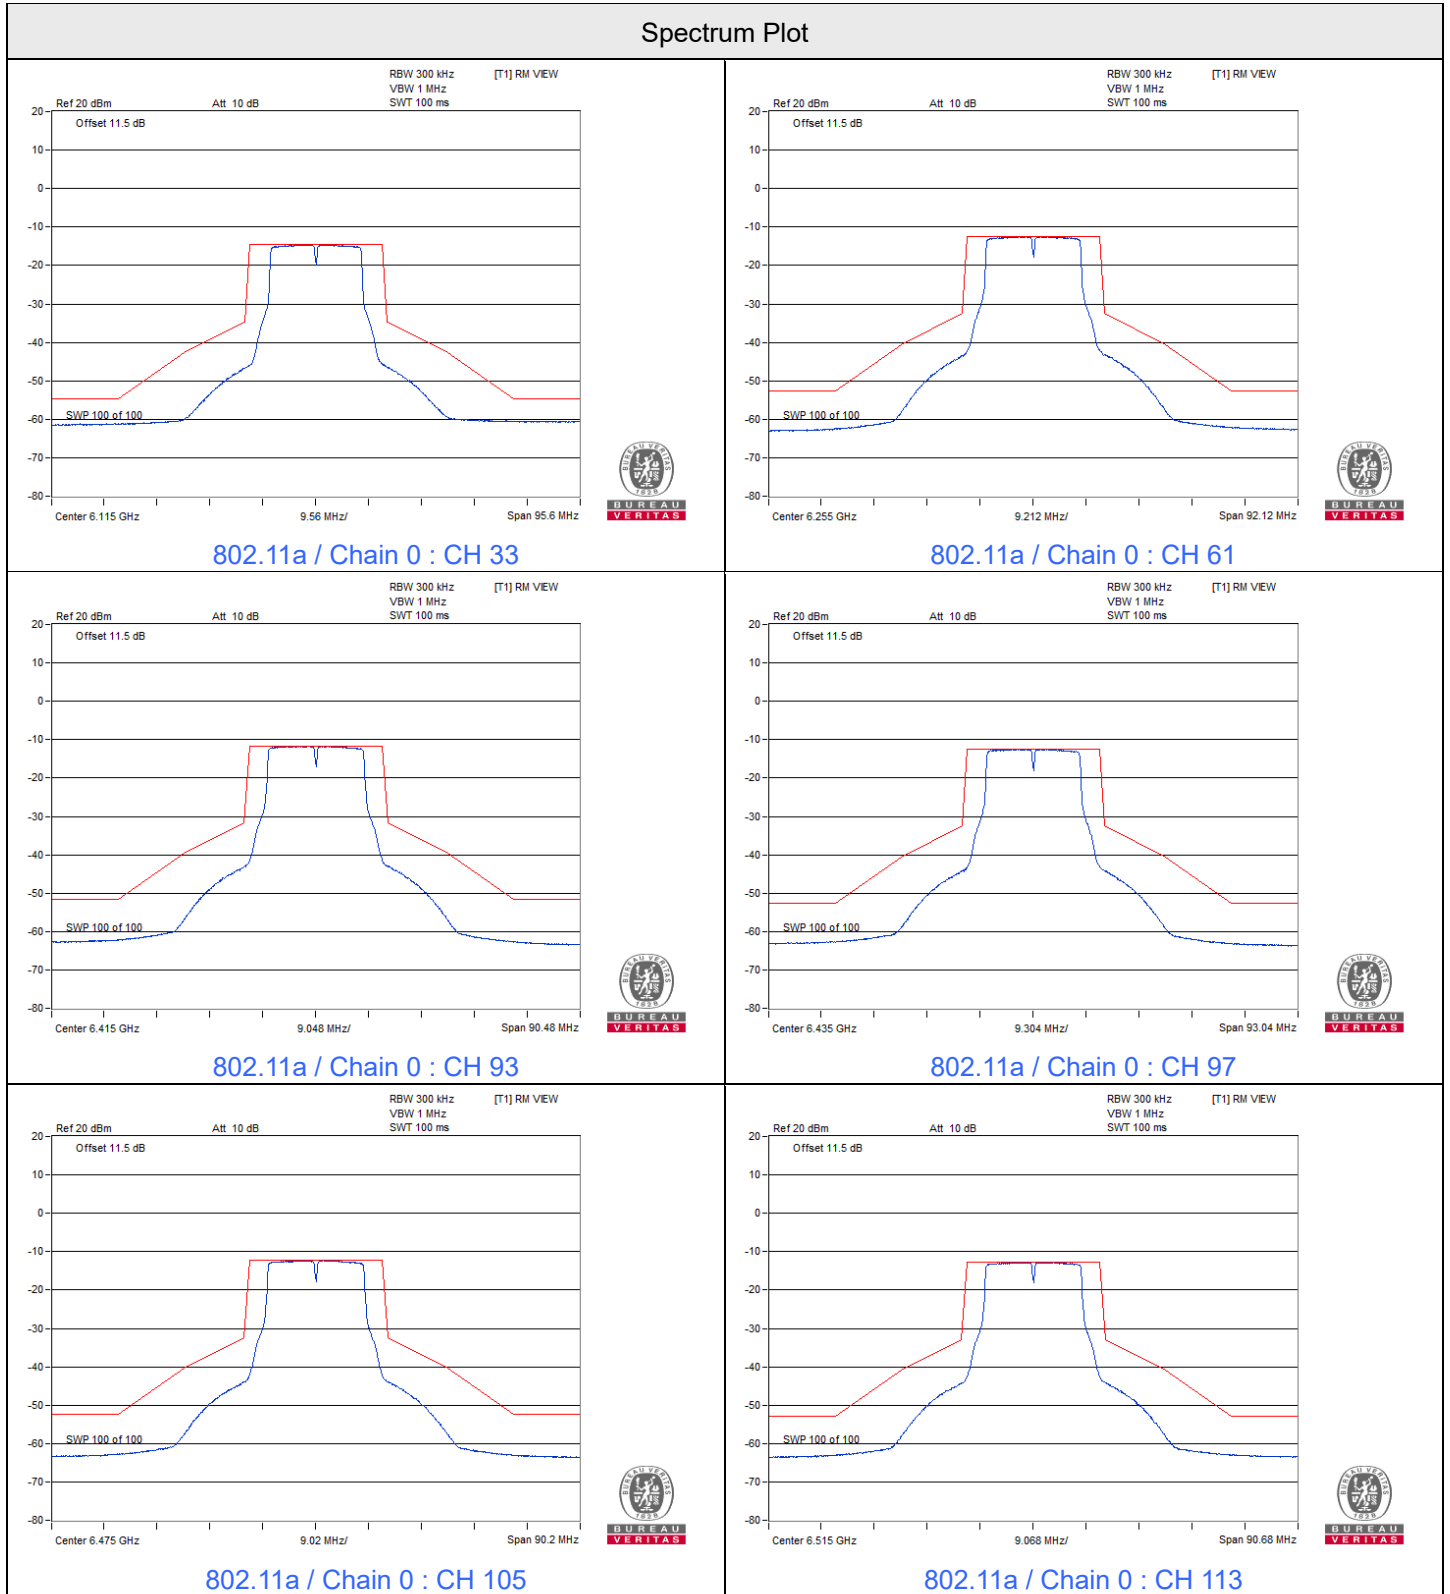







Spectrum Plot

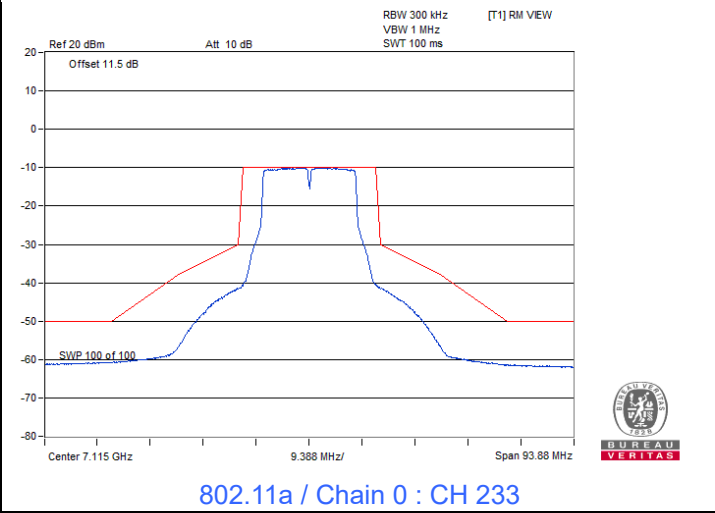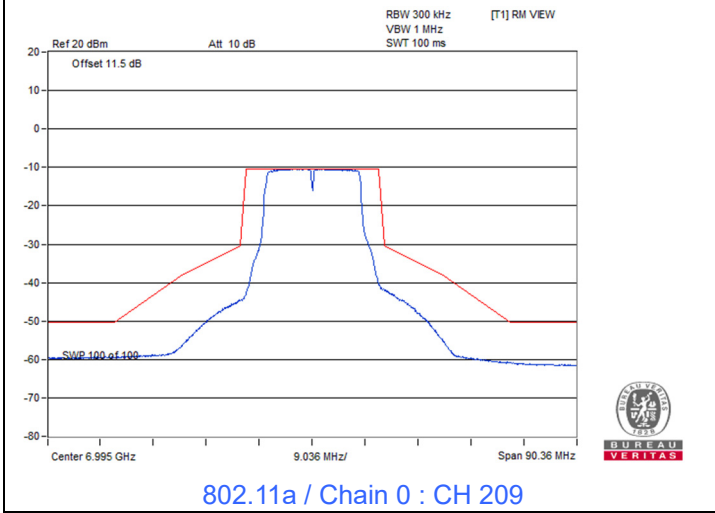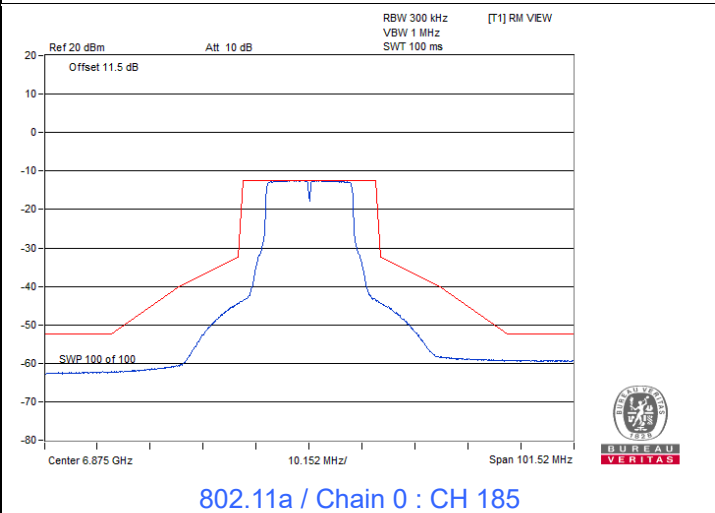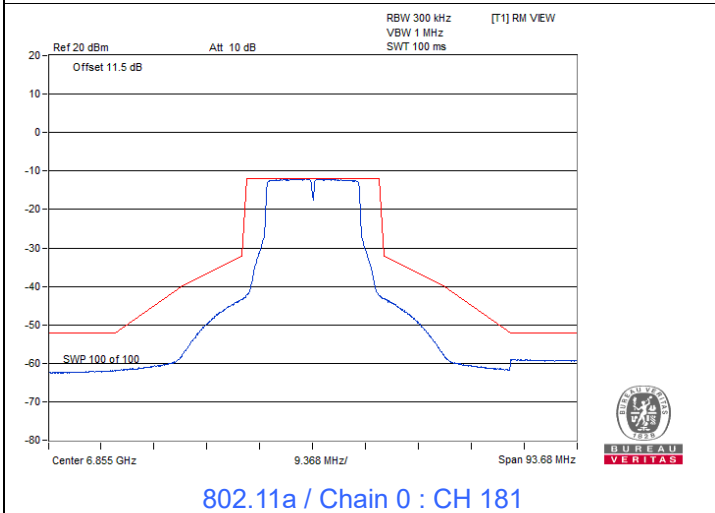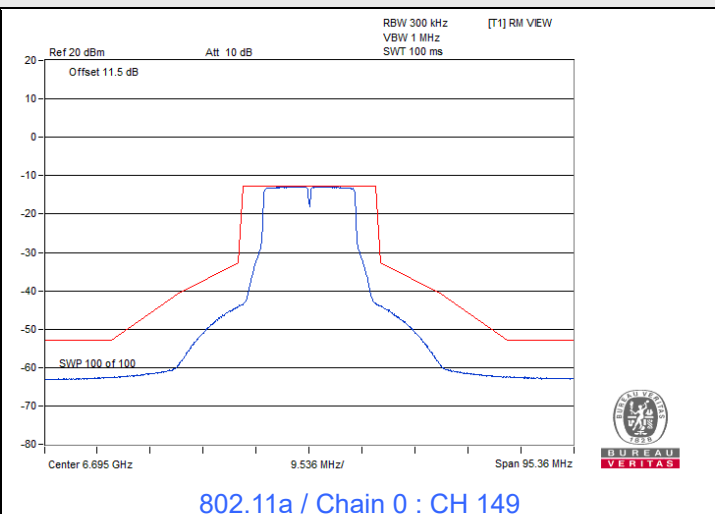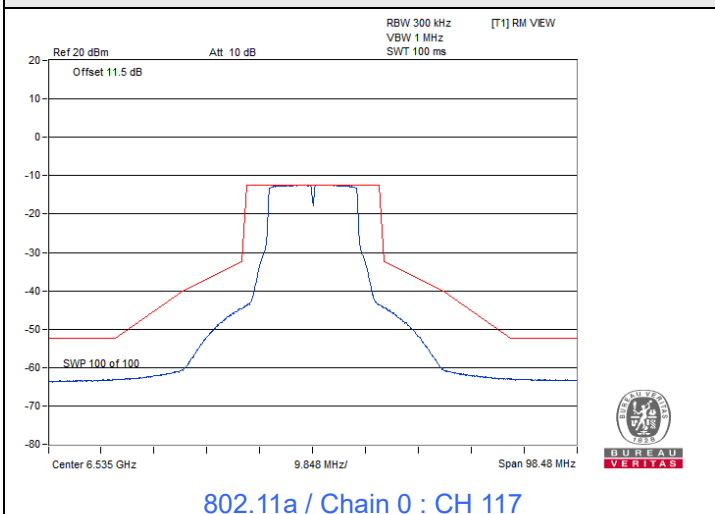







Spectrum Plot

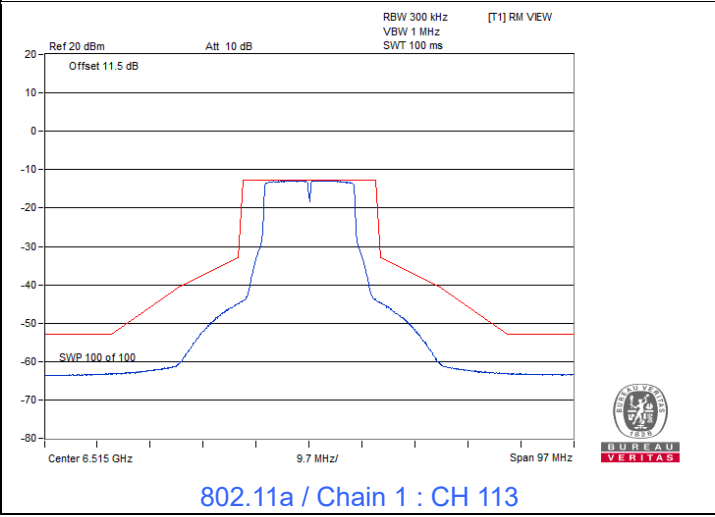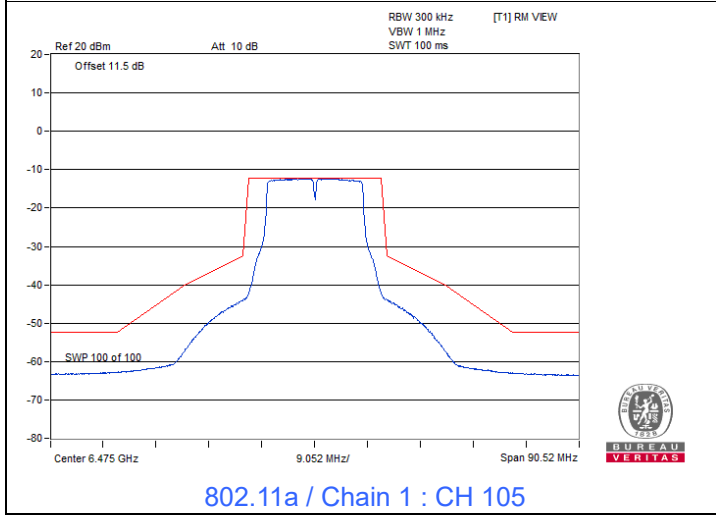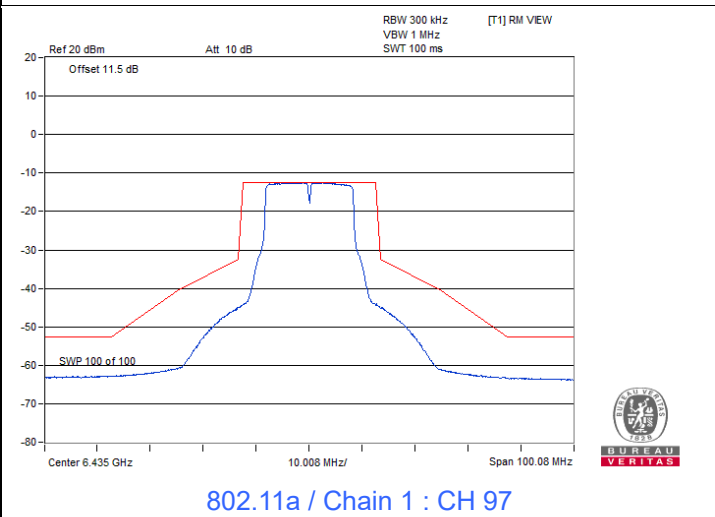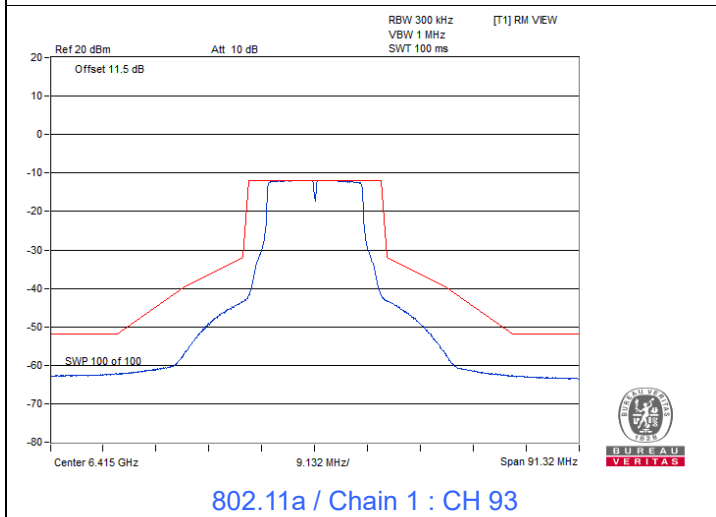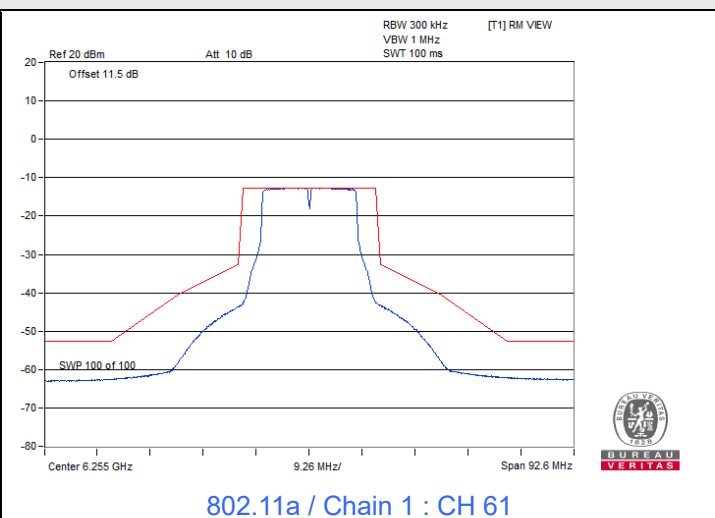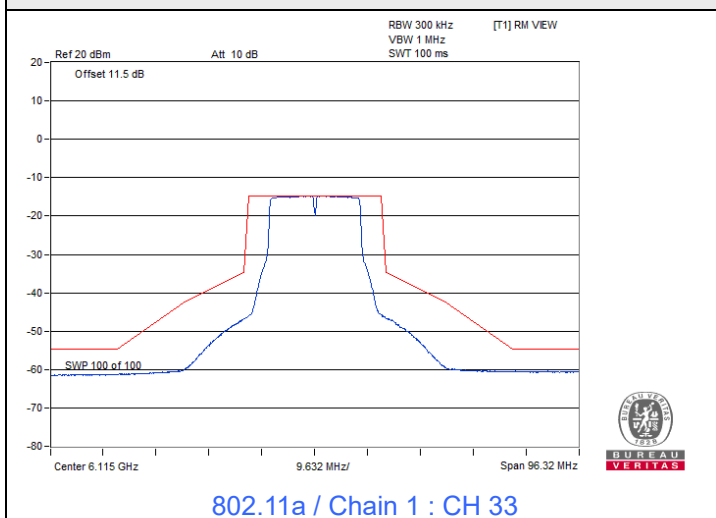







Spectrum Plot

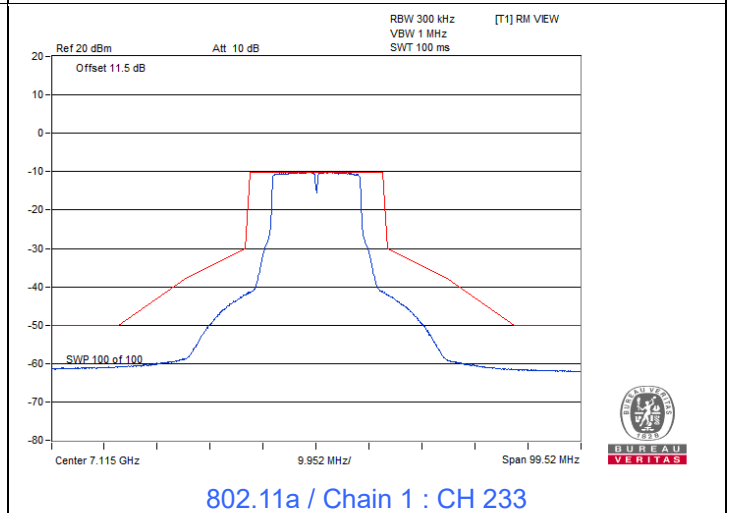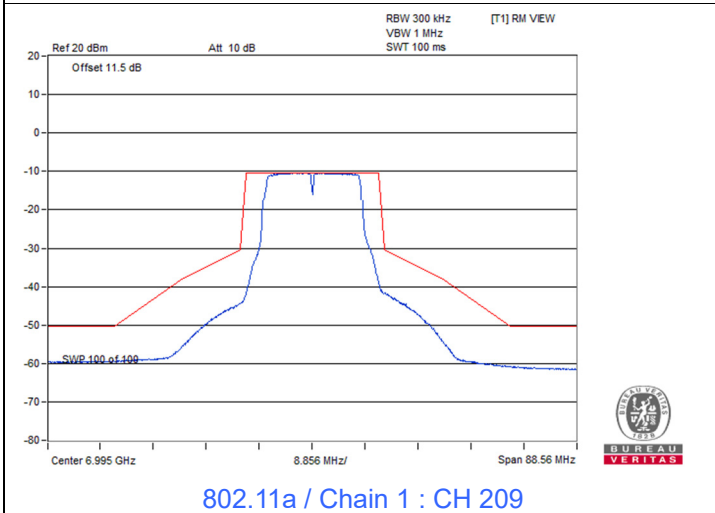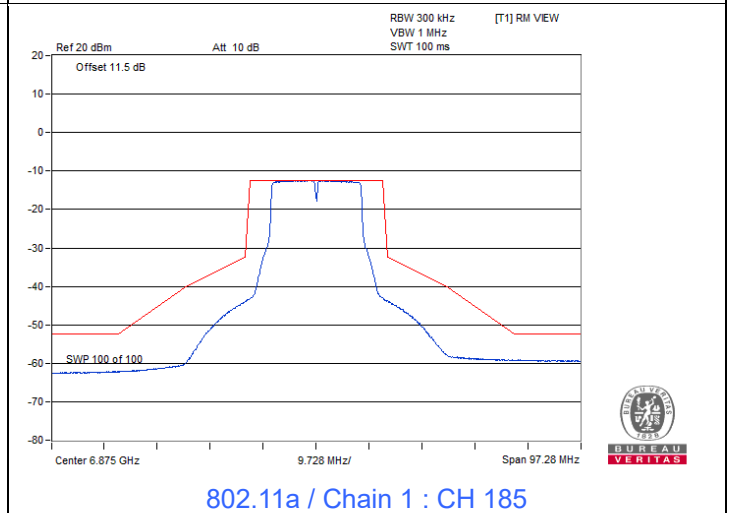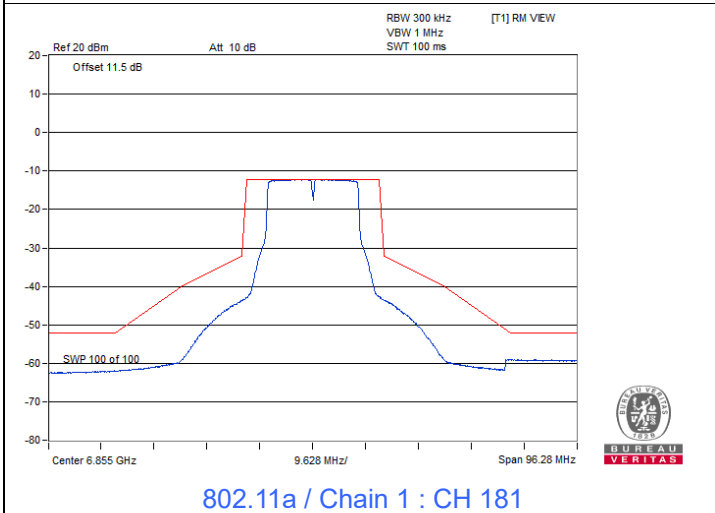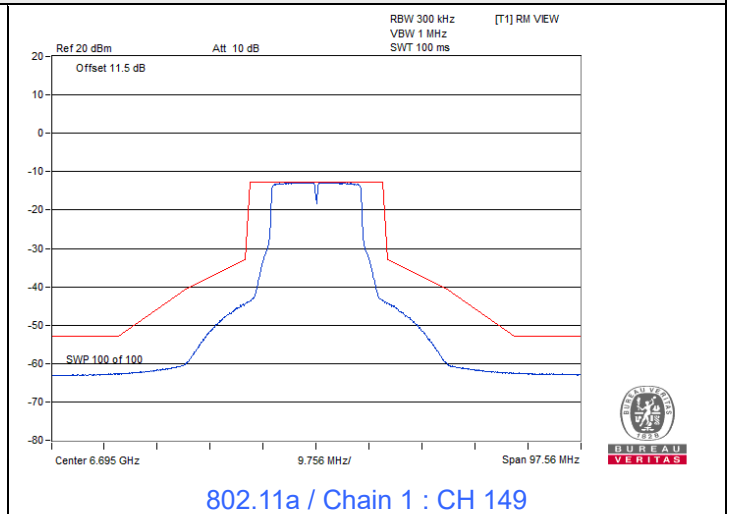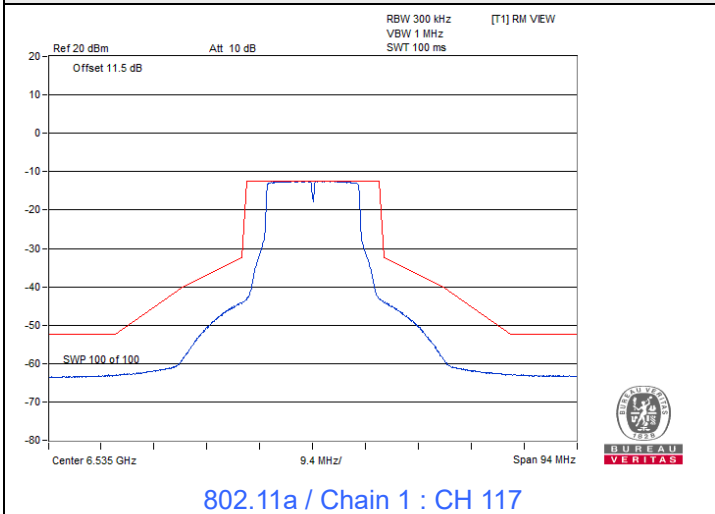







Spectrum Plot

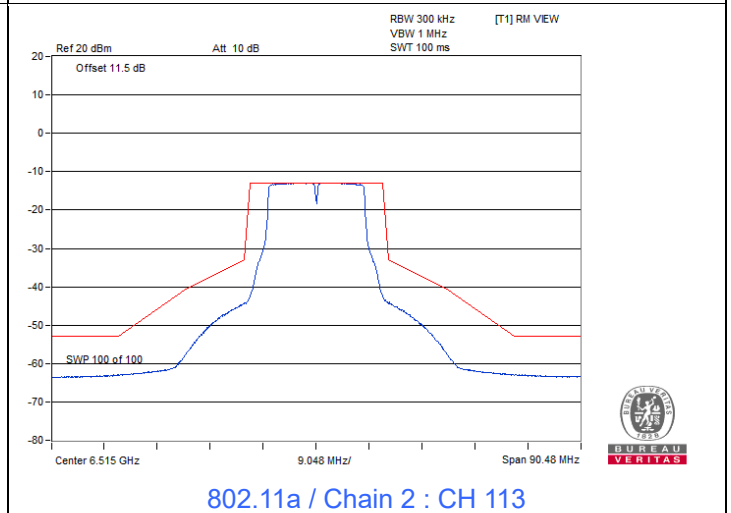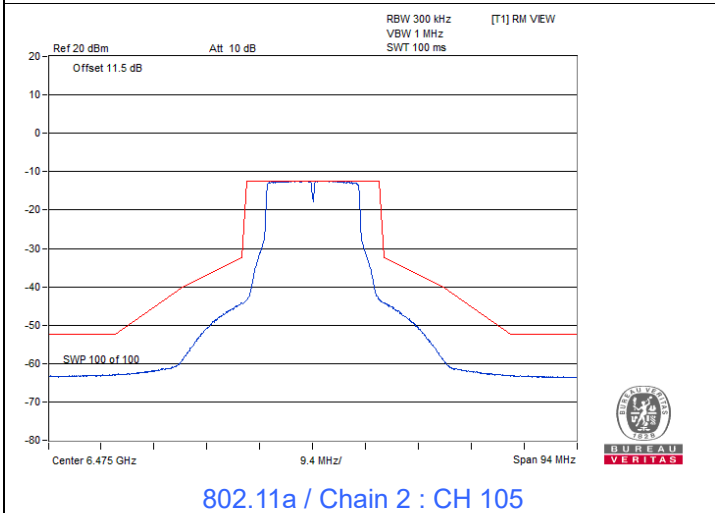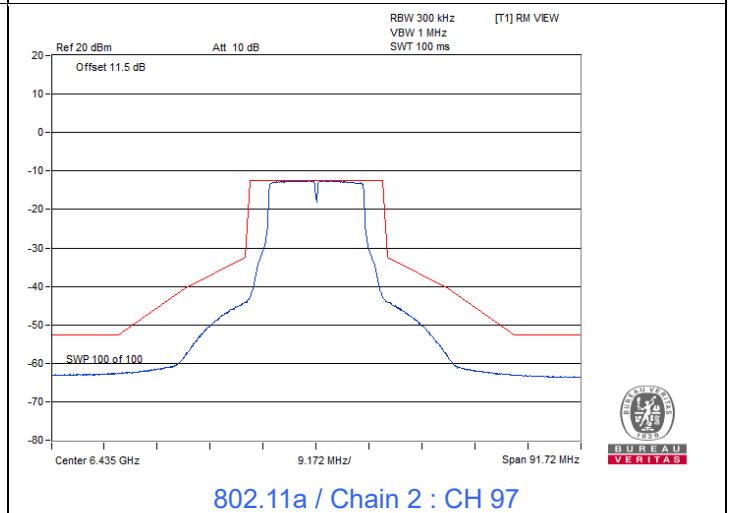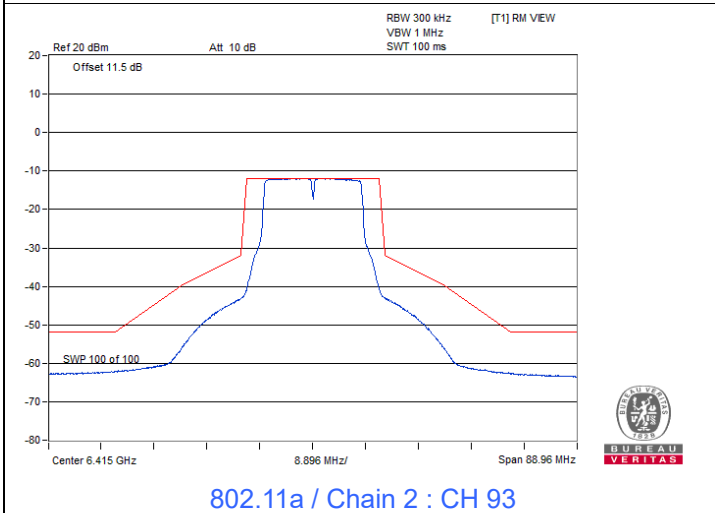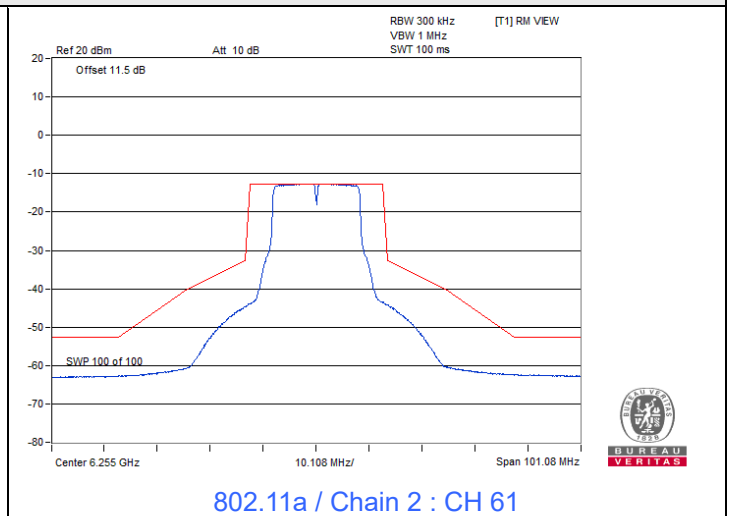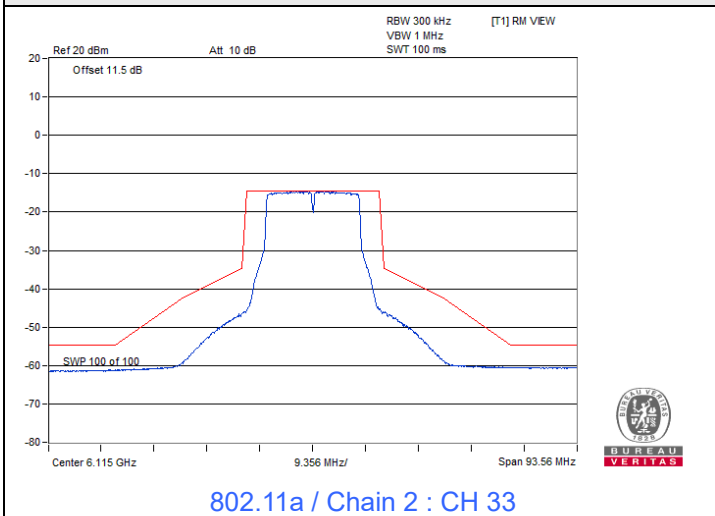







Spectrum Plot

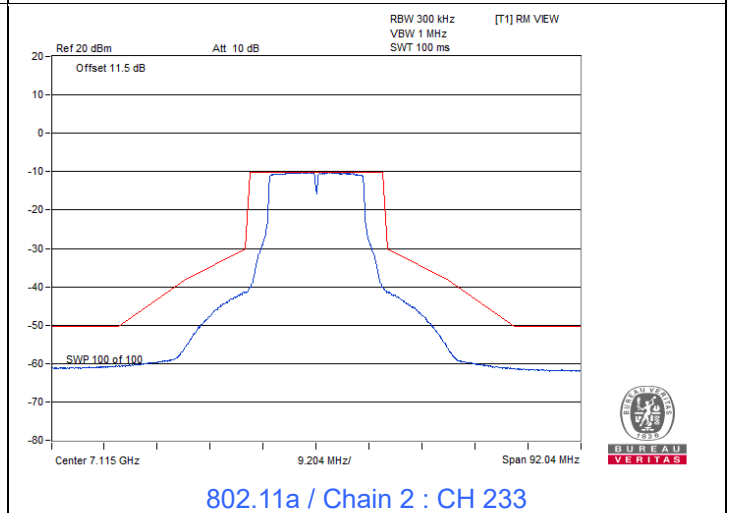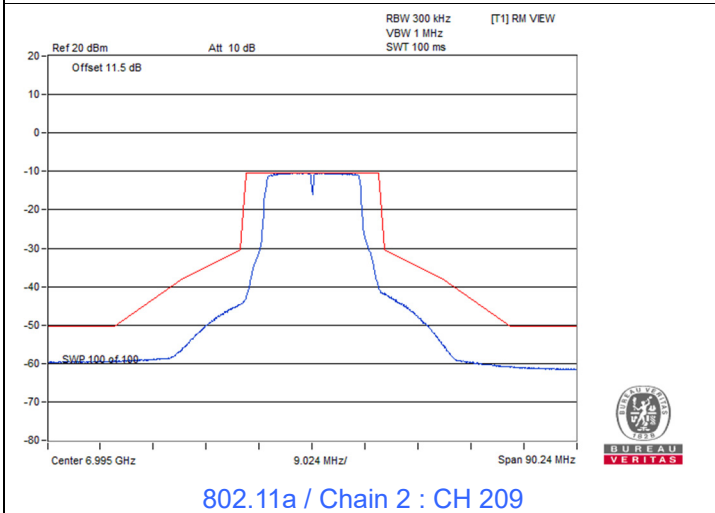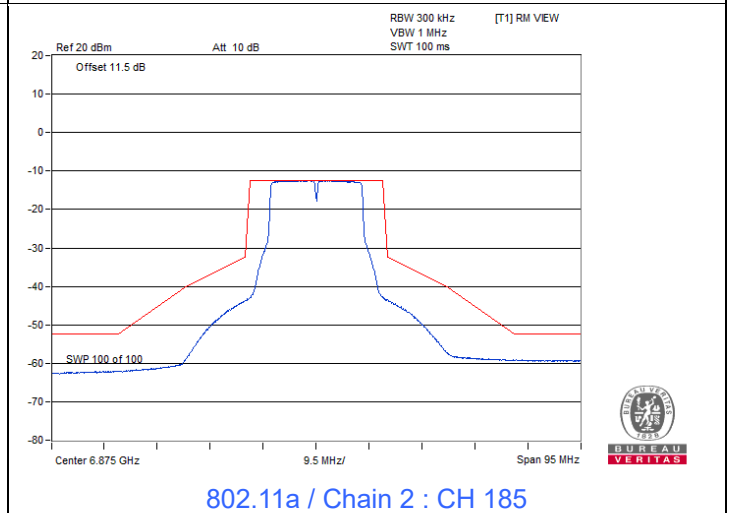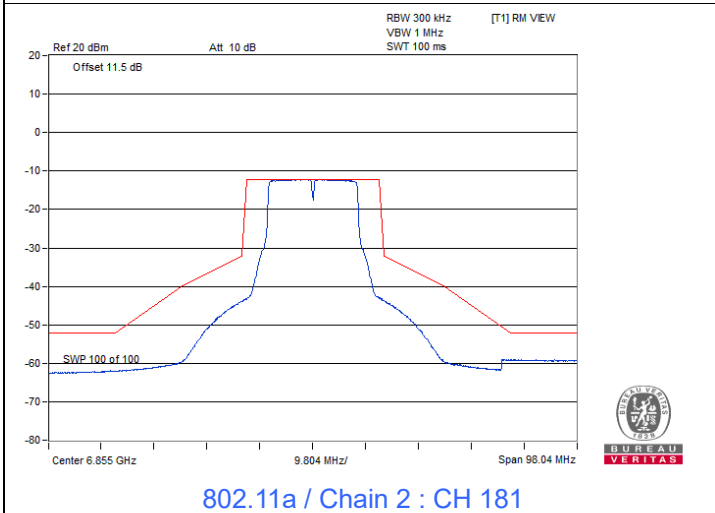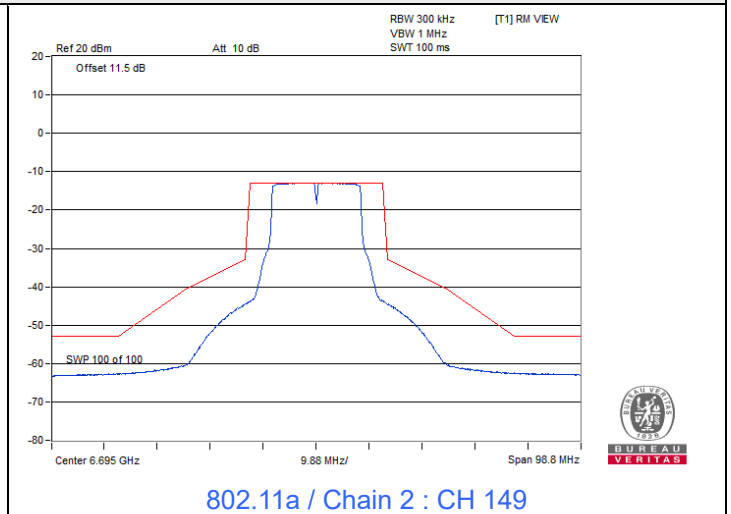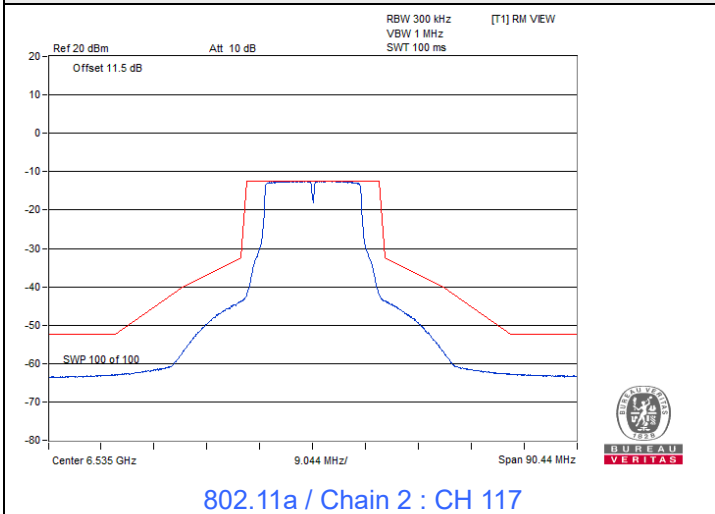

Spectrum Plot

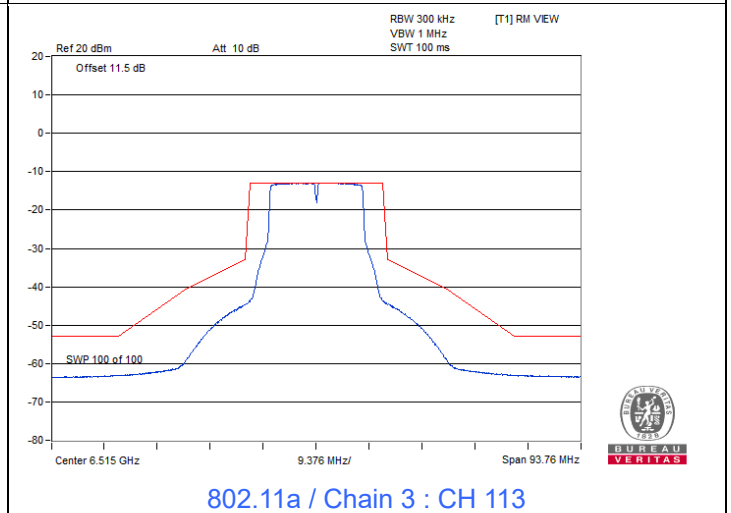
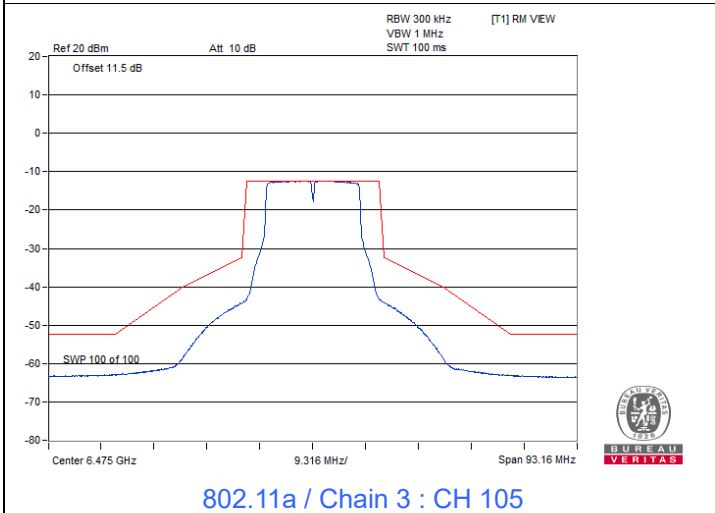
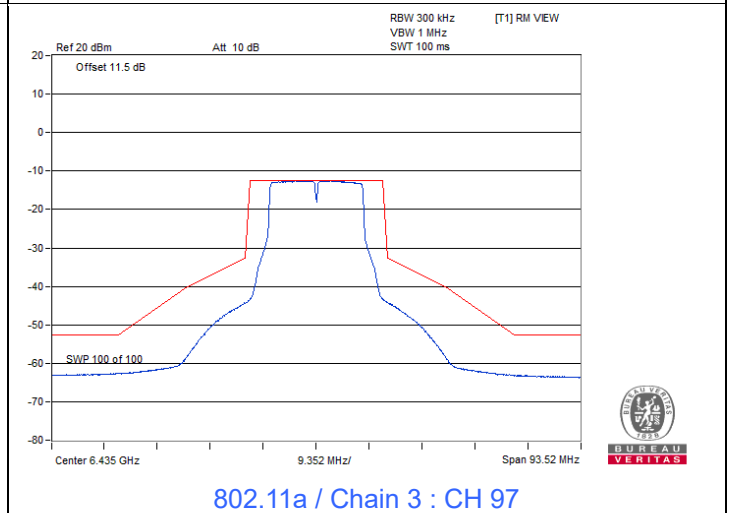
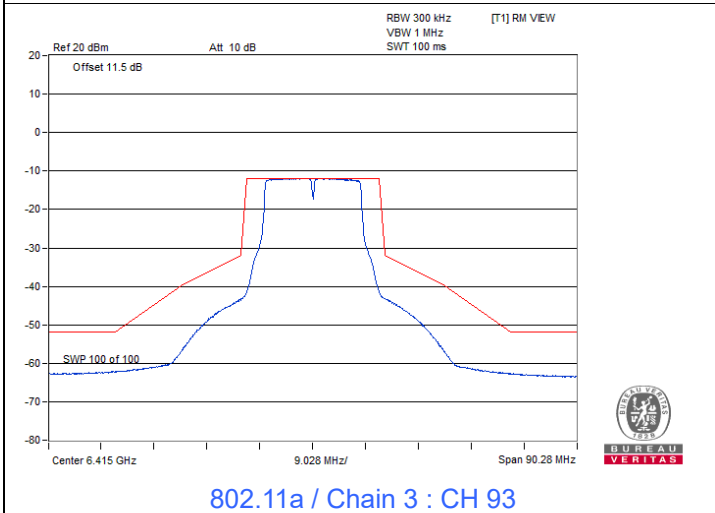
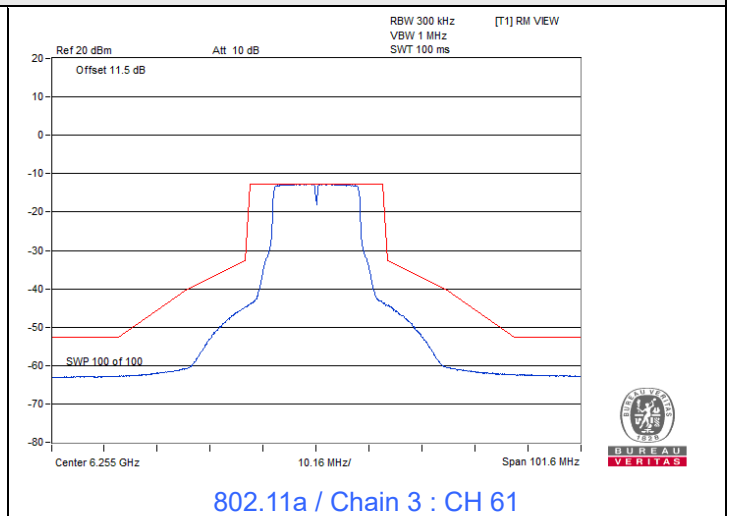
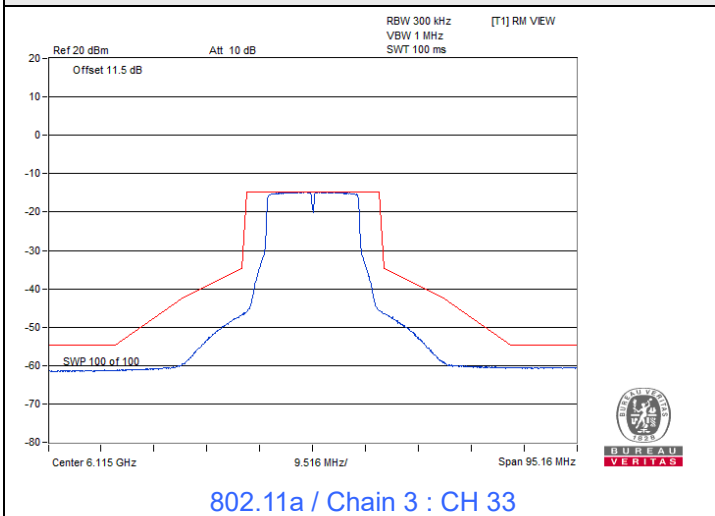


Spectrum Plot

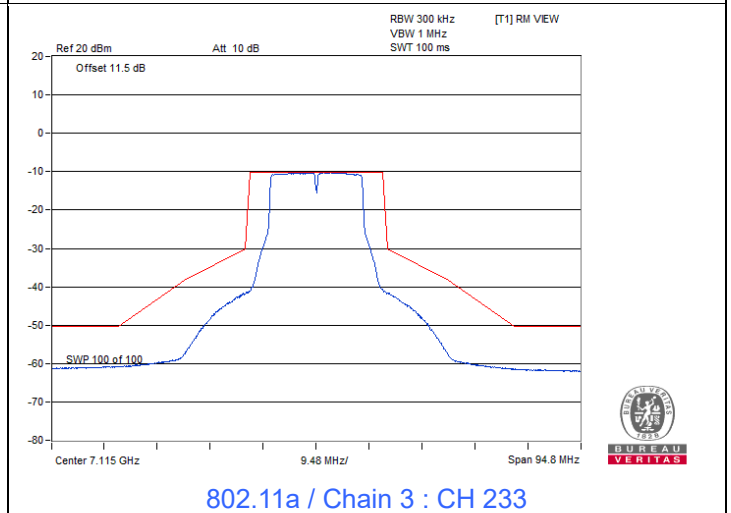
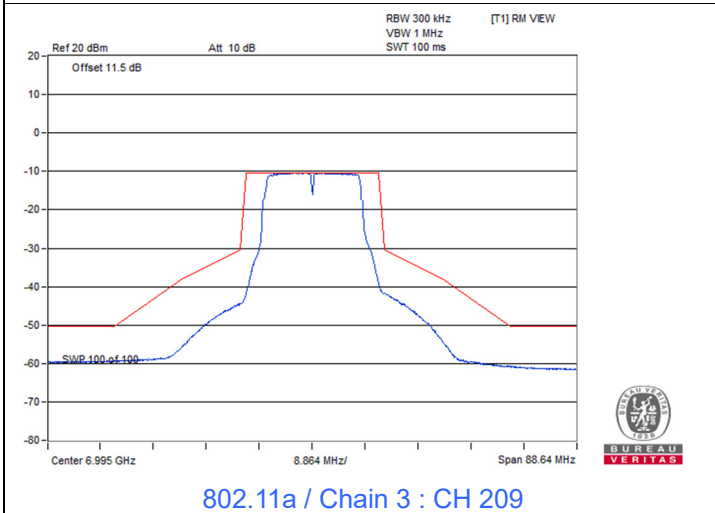
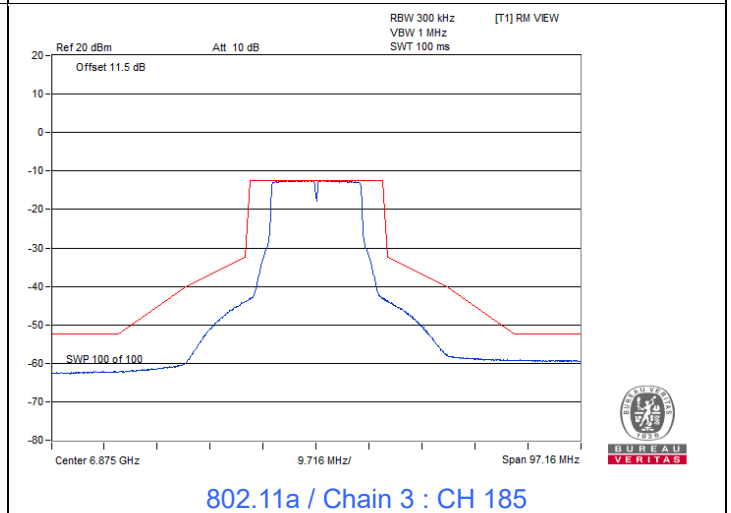
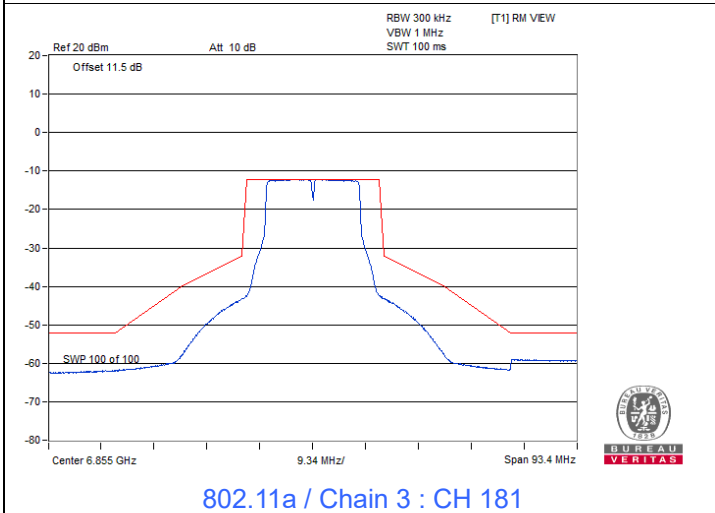
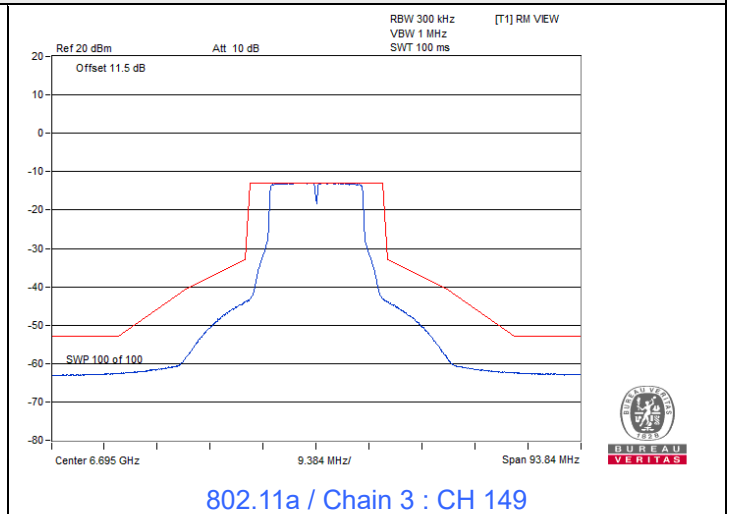
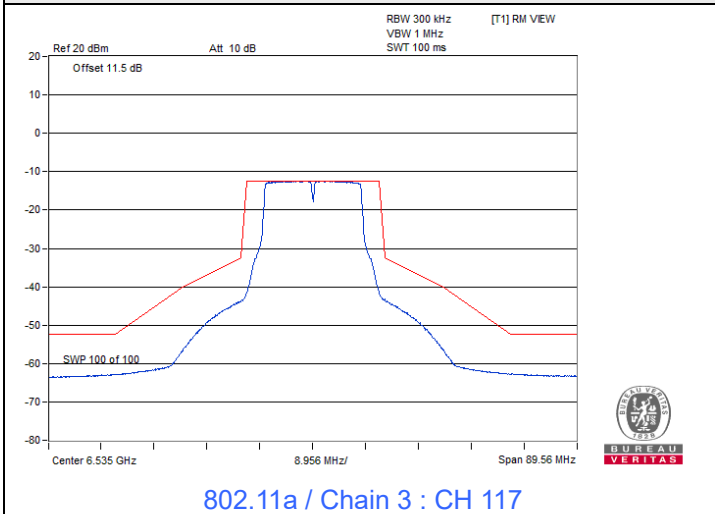


802.11ax (HE20)







Spectrum Plot

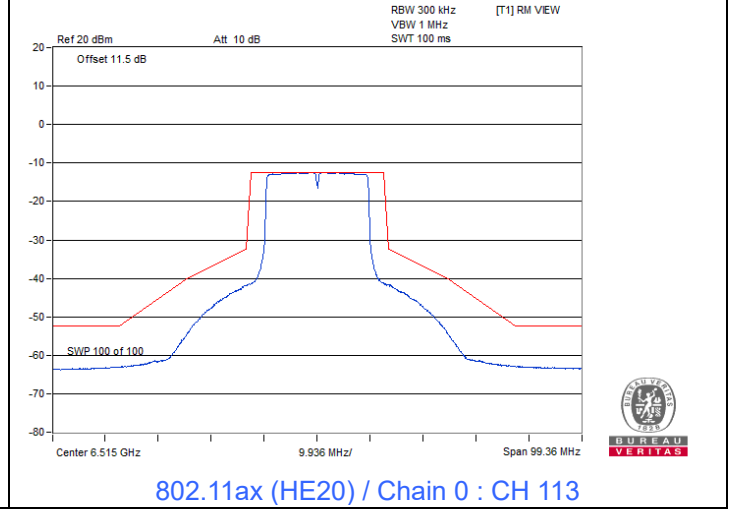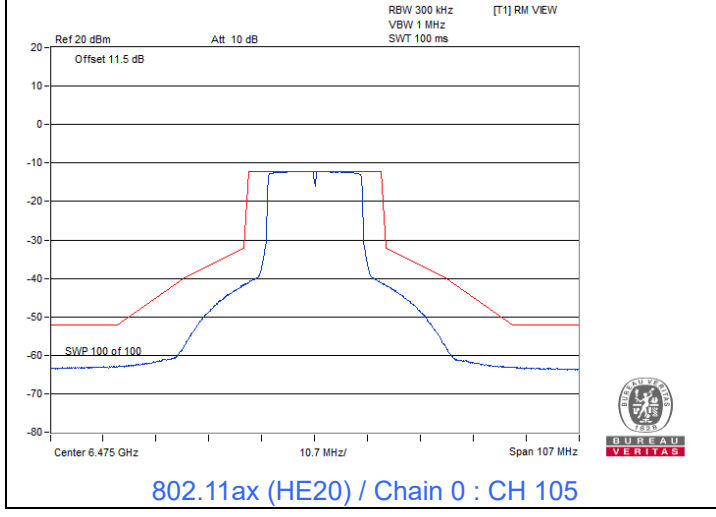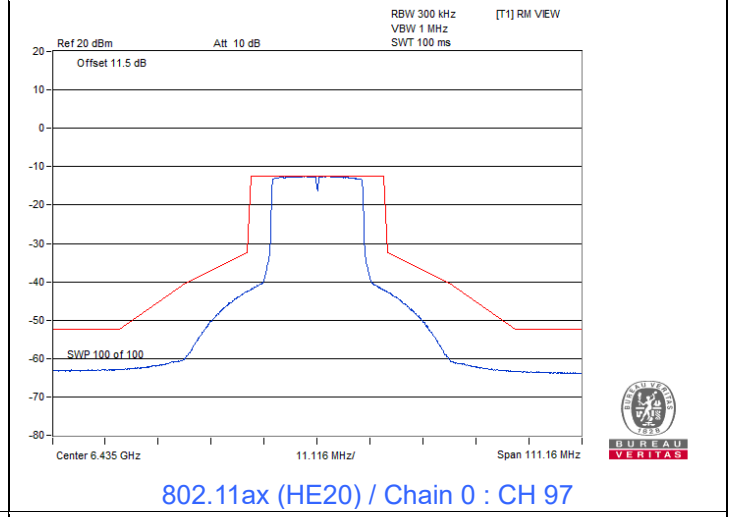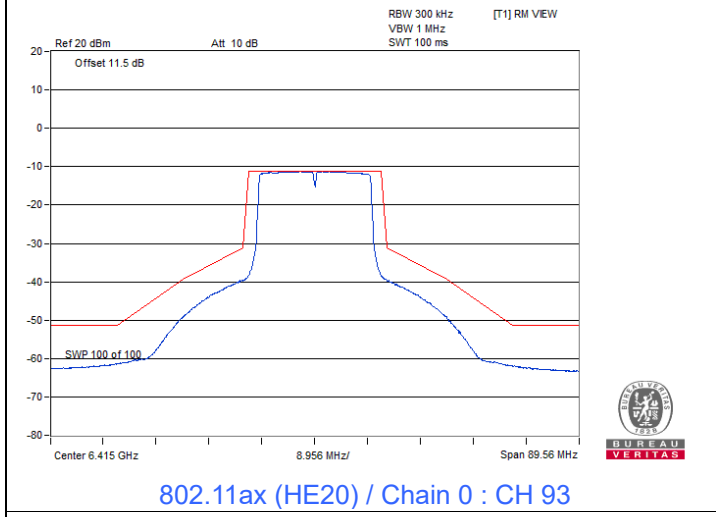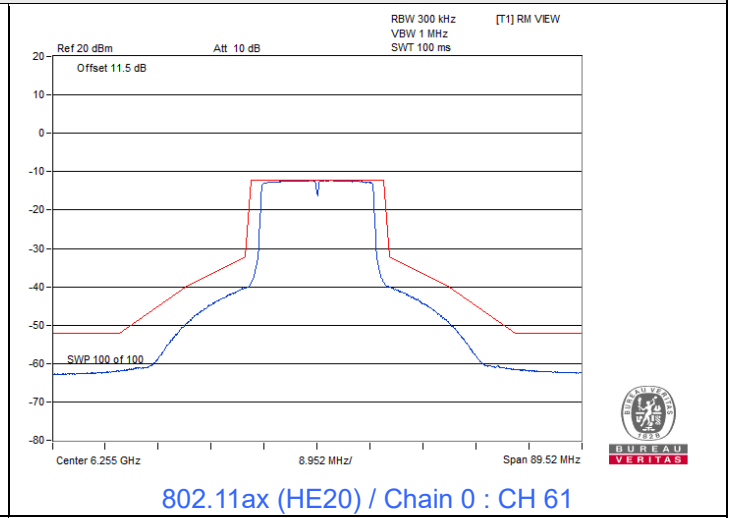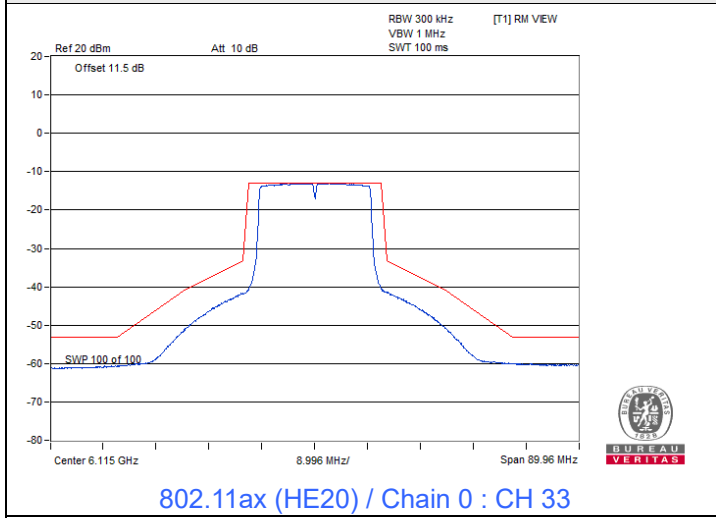


Spectrum Plot

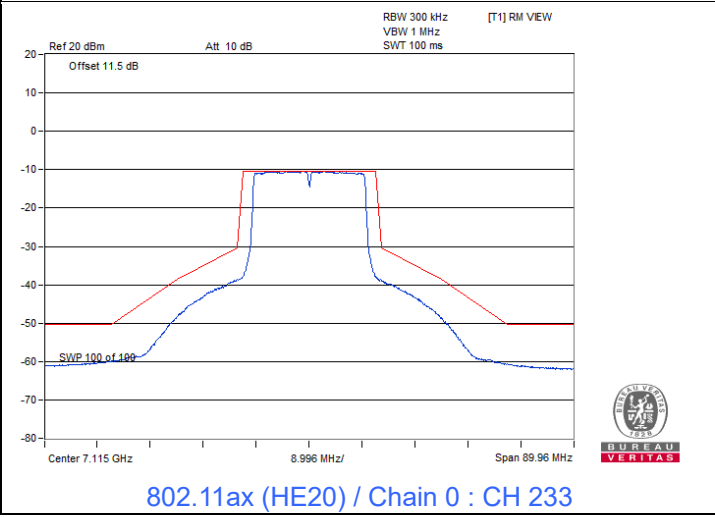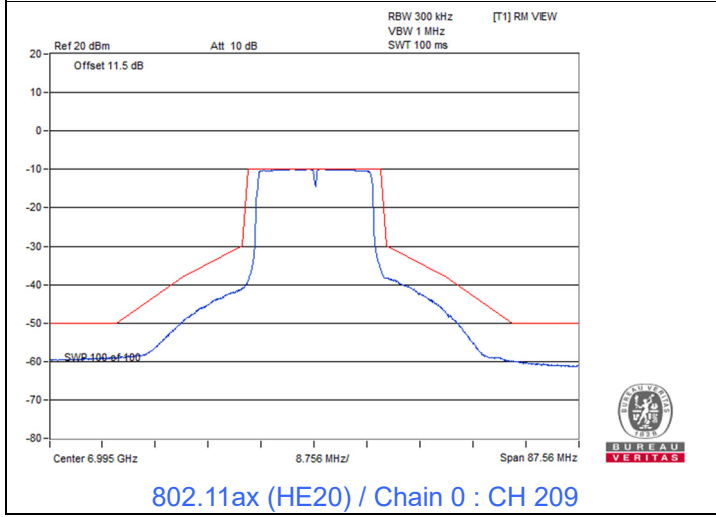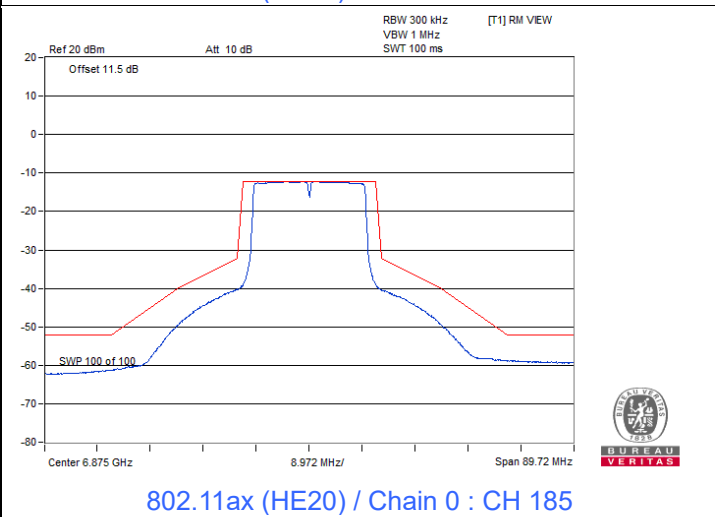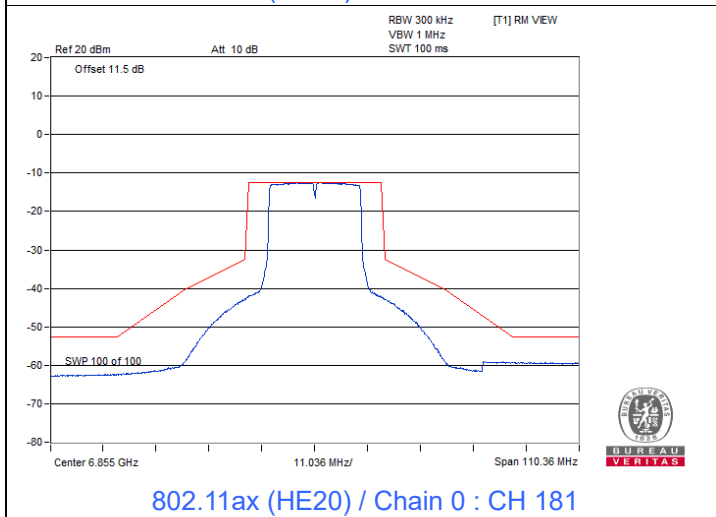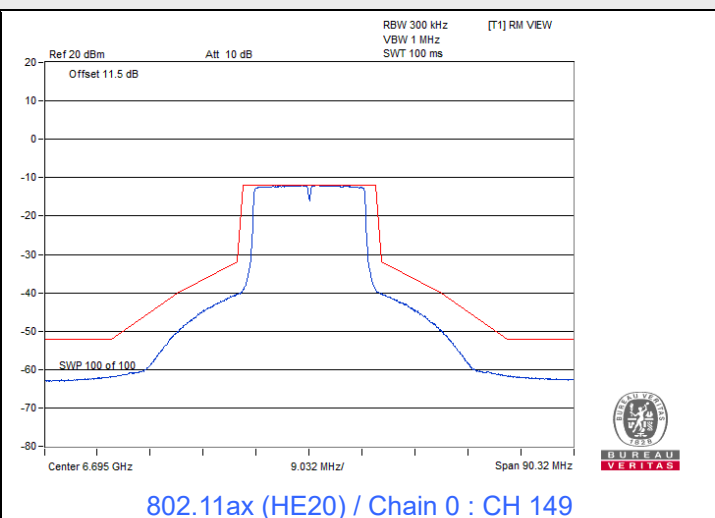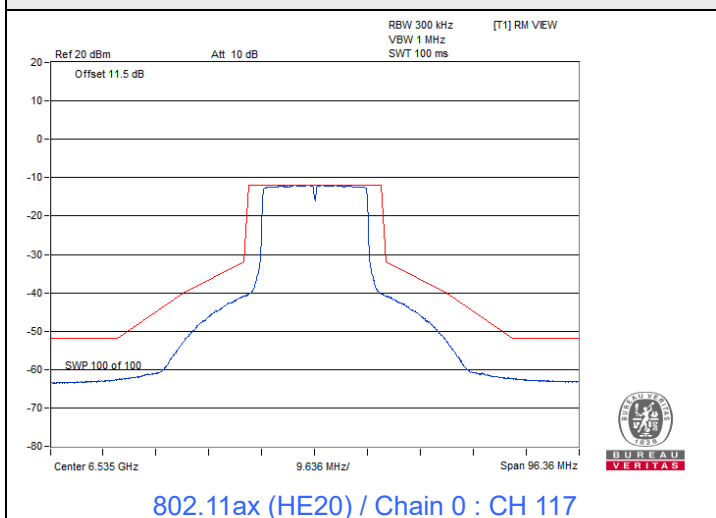


Spectrum Plot

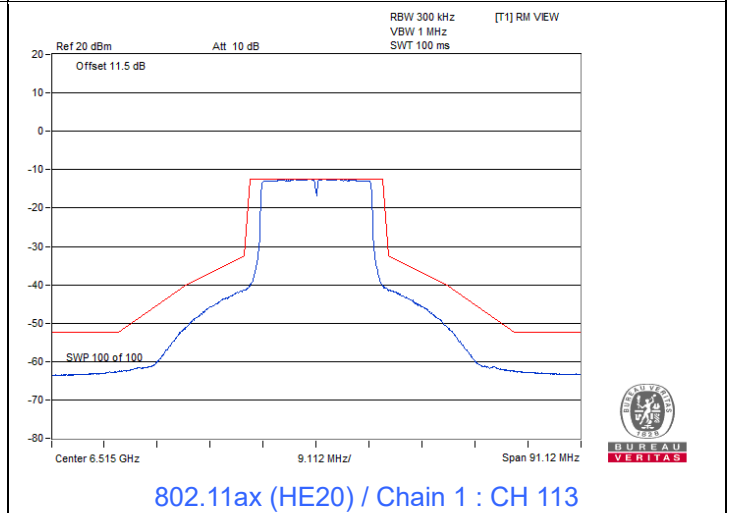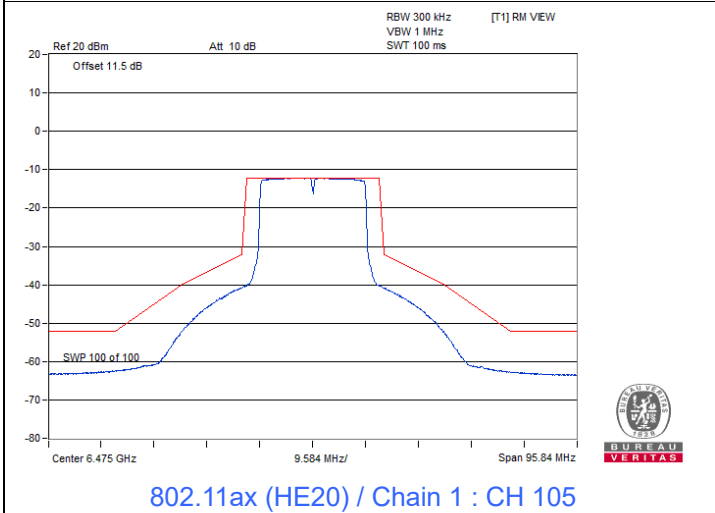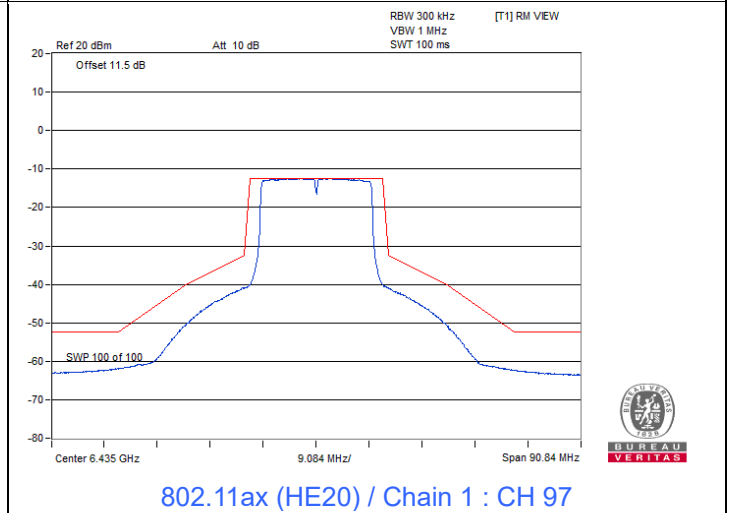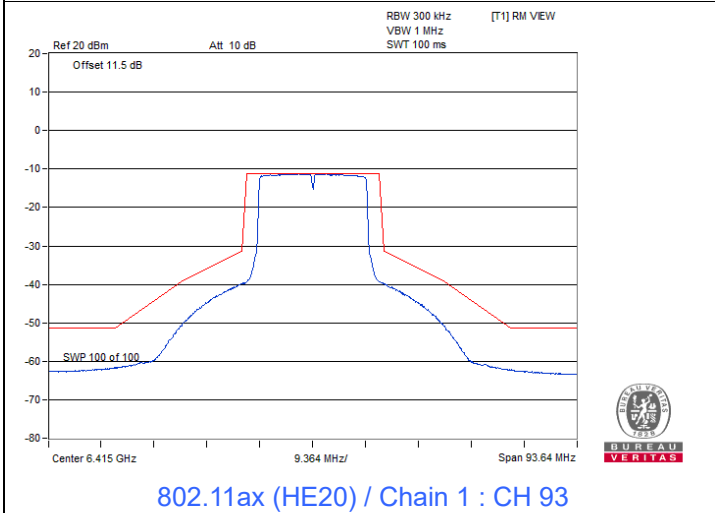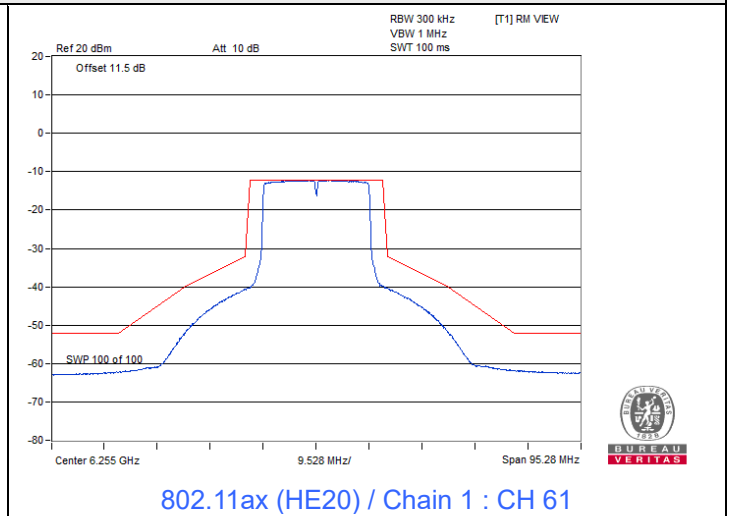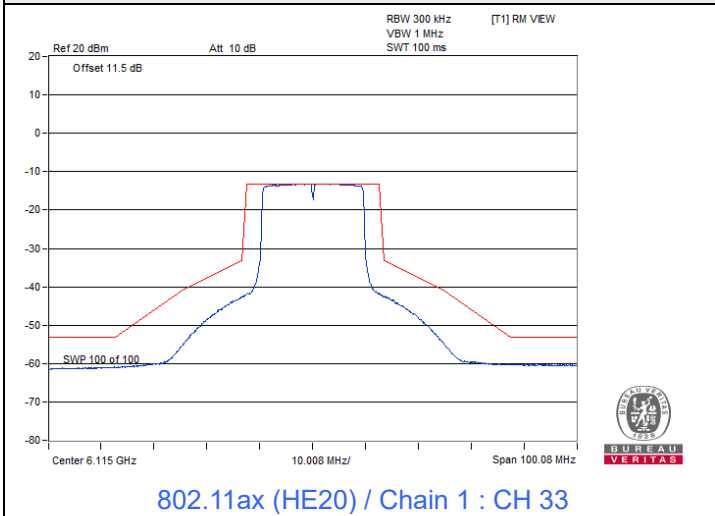


Spectrum Plot

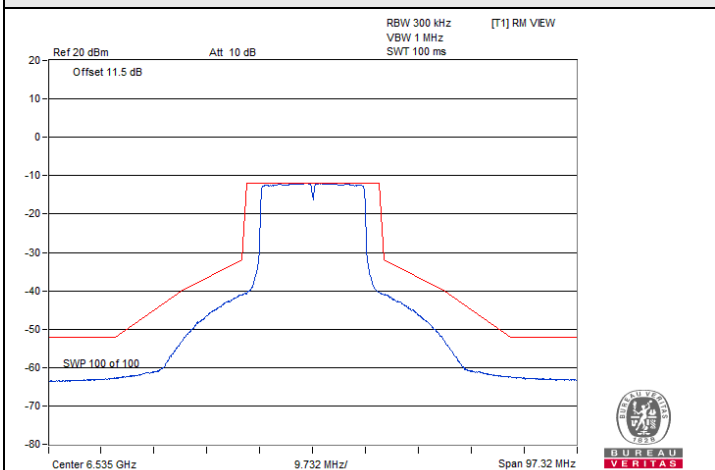


802.11ax (HE20) / Chain 1 : CH 117

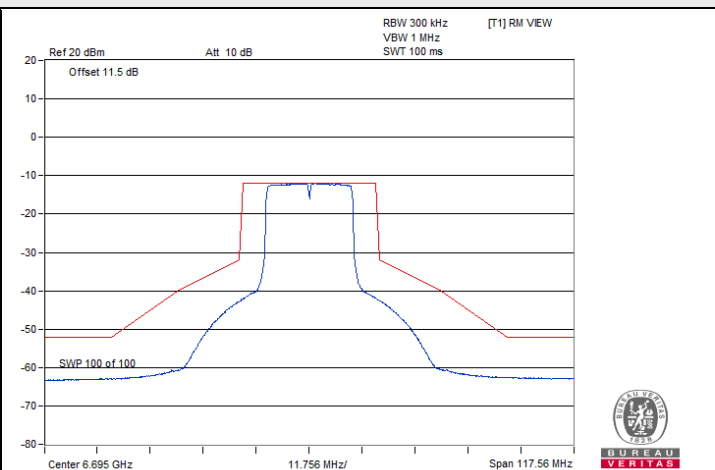


802.11ax (HE20) / Chain 1 : CH 149

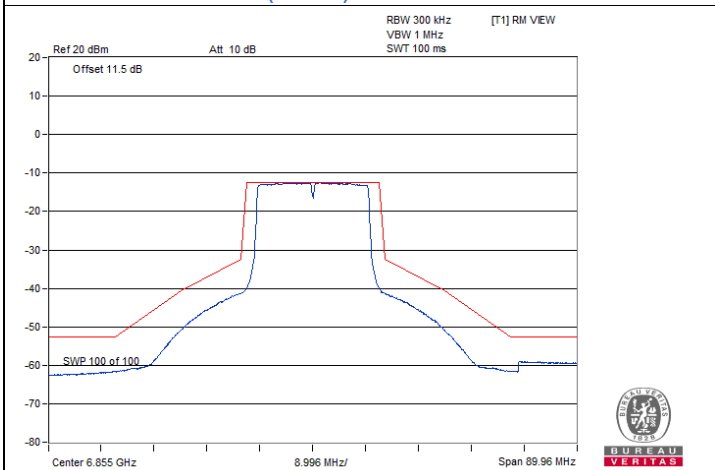


802.11ax (HE20) / Chain 1 : CH 181

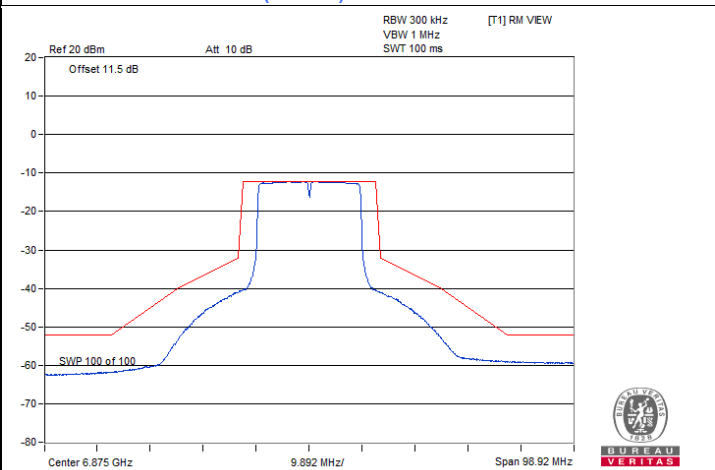

802.11ax (HE20) / Chain 1 : CH 185






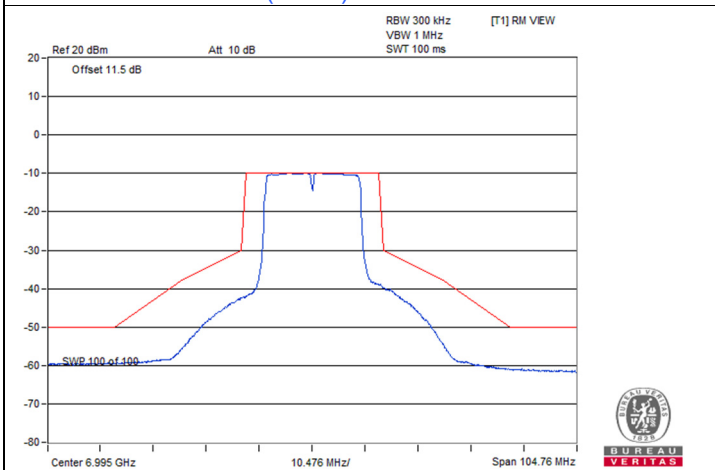


802.11ax (HE20) / Chain 1 : CH 209






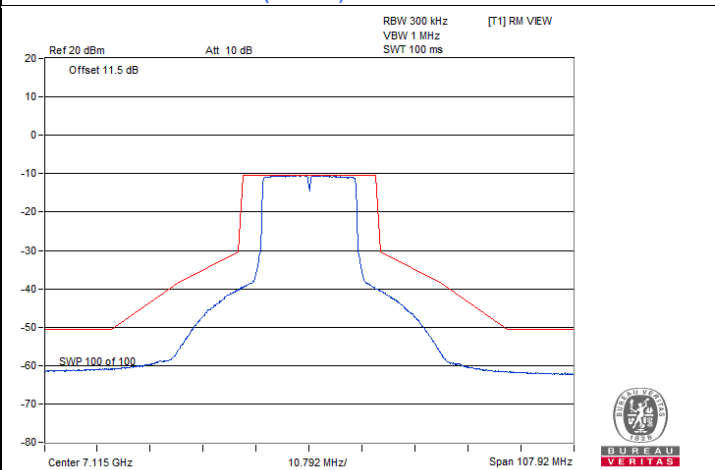


802.11ax (HE20) / Chain 1 : CH 233







Spectrum Plot

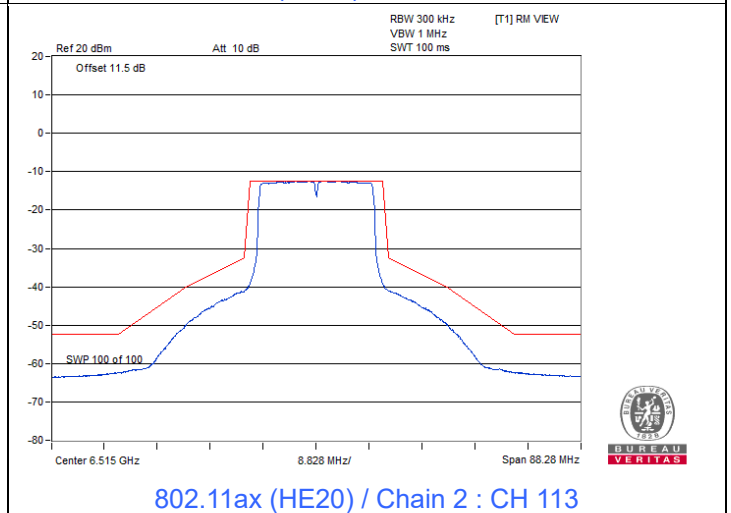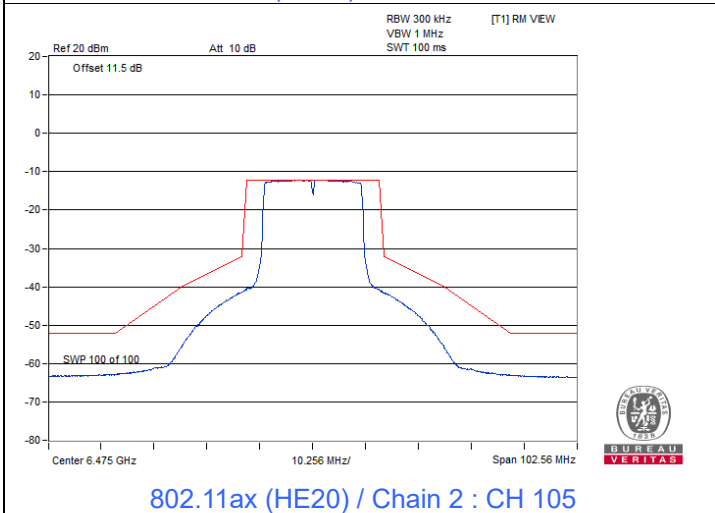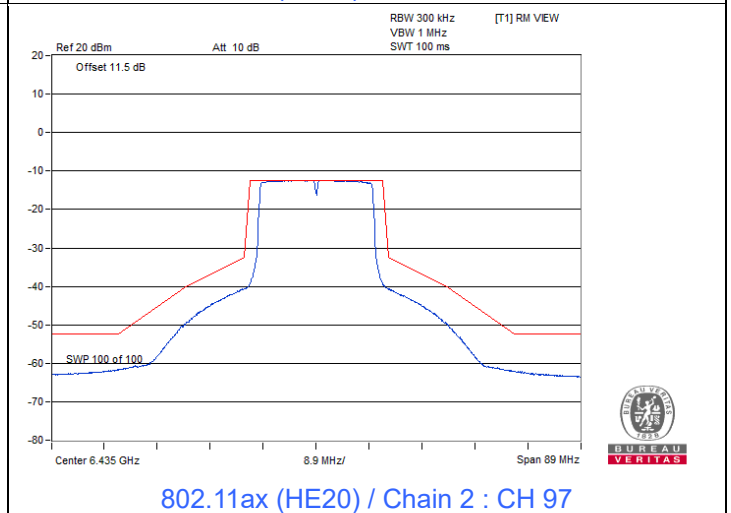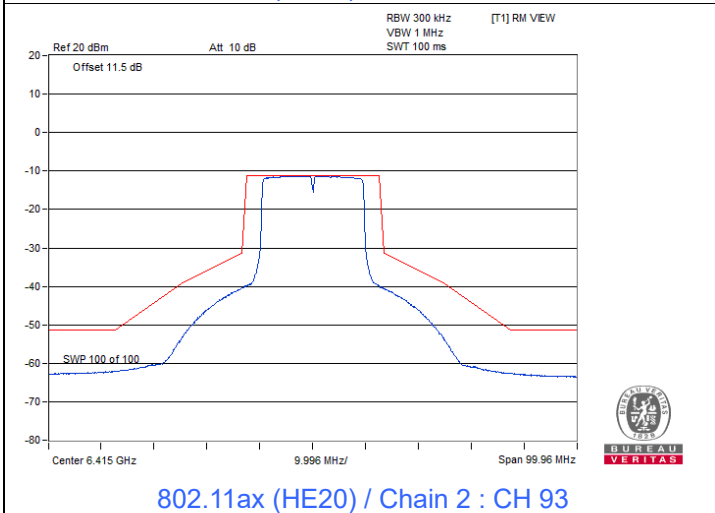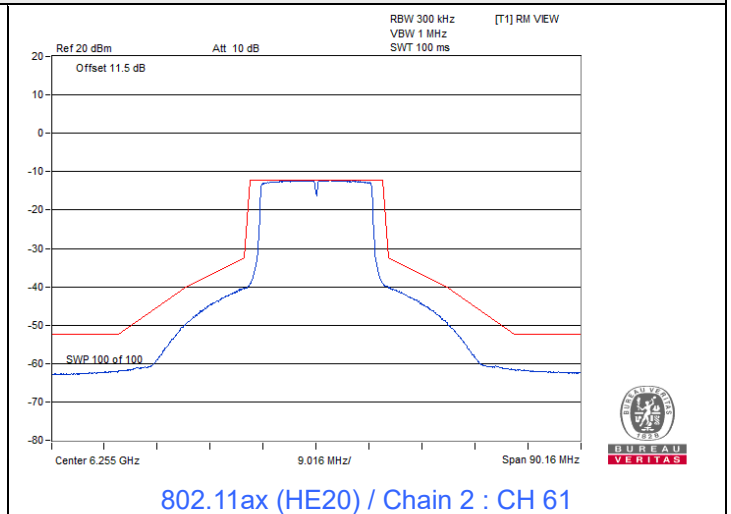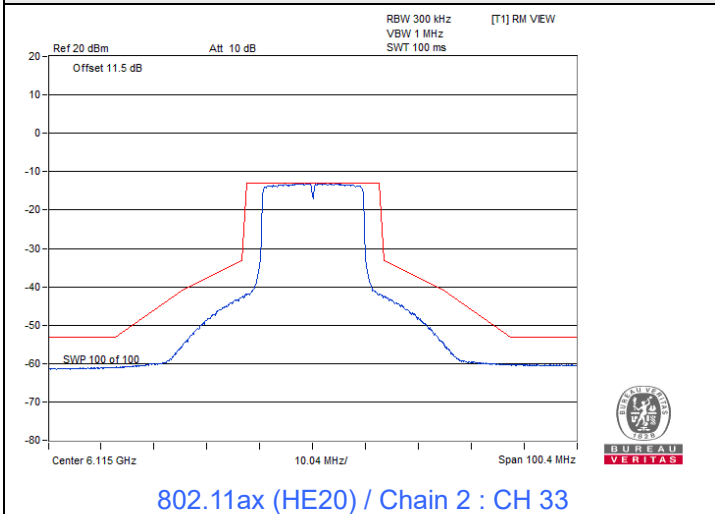







Spectrum Plot

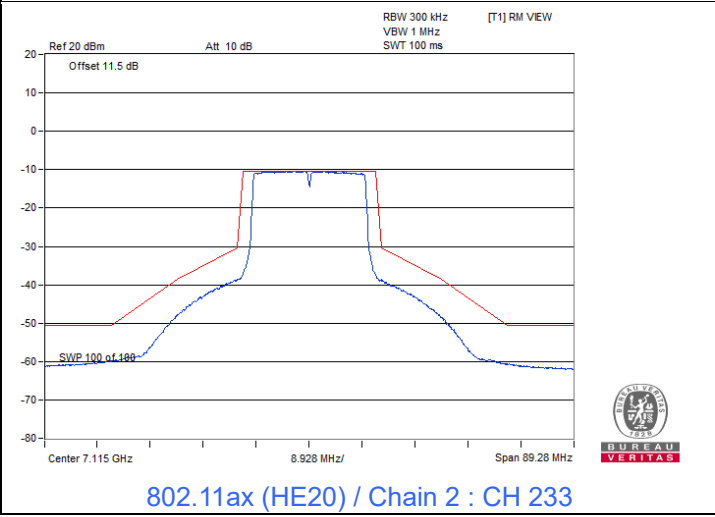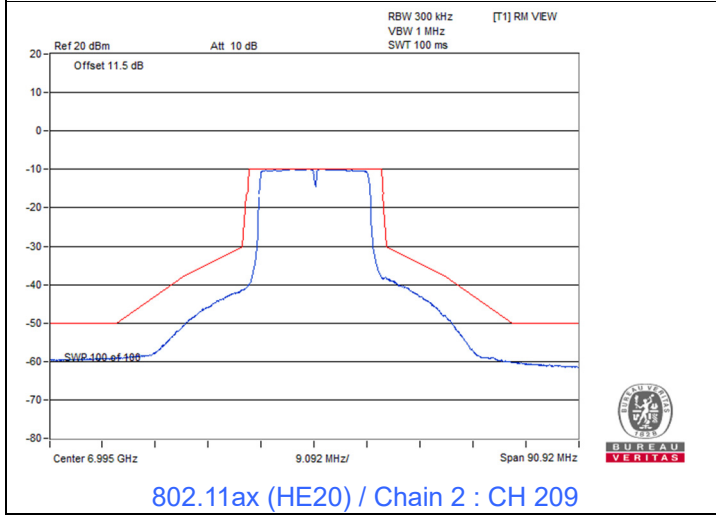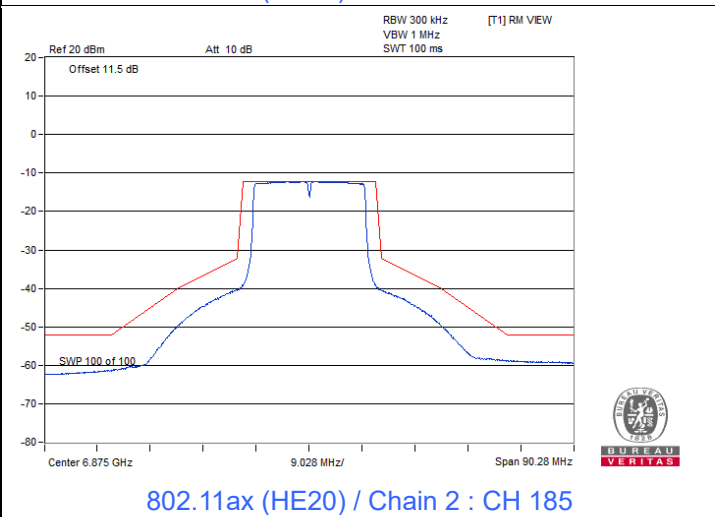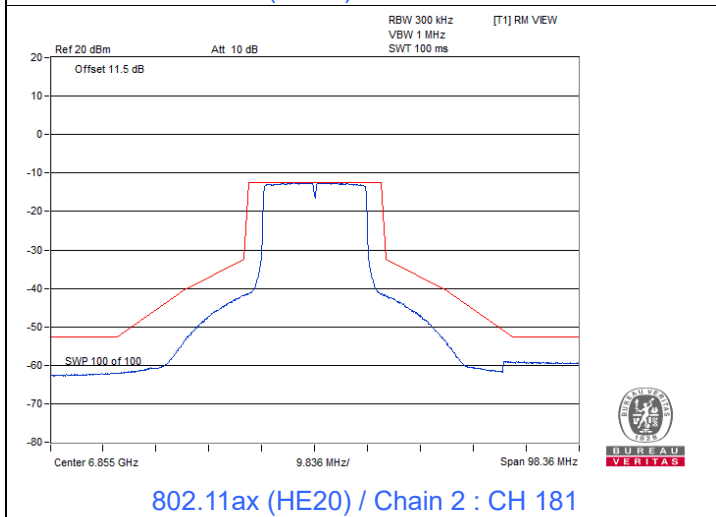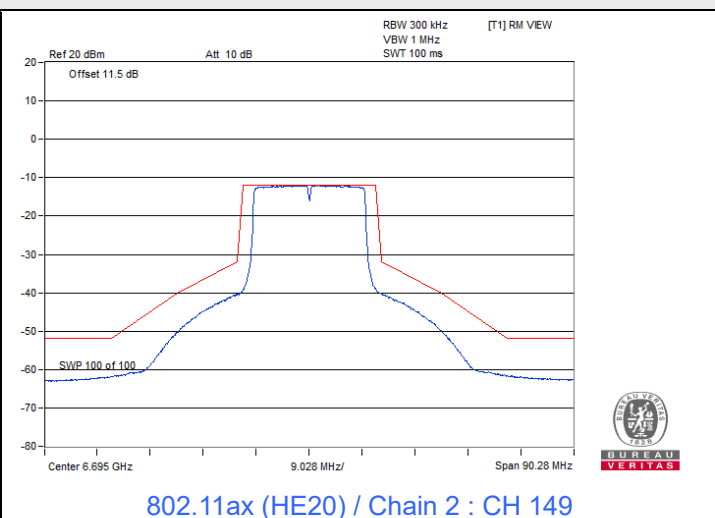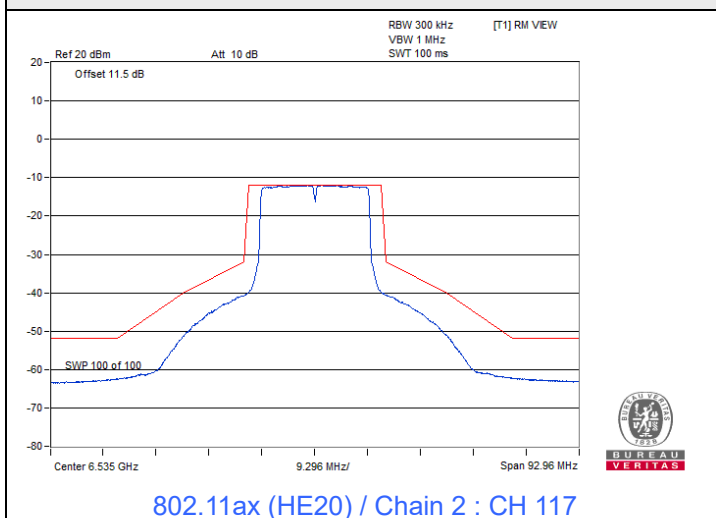

Spectrum Plot

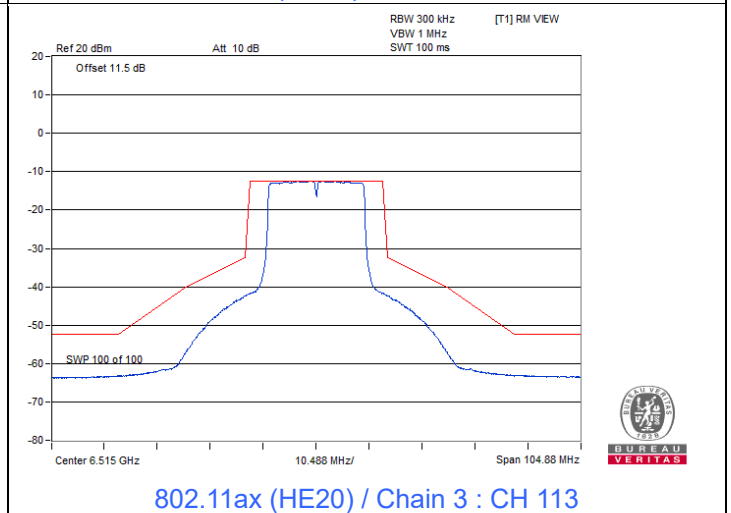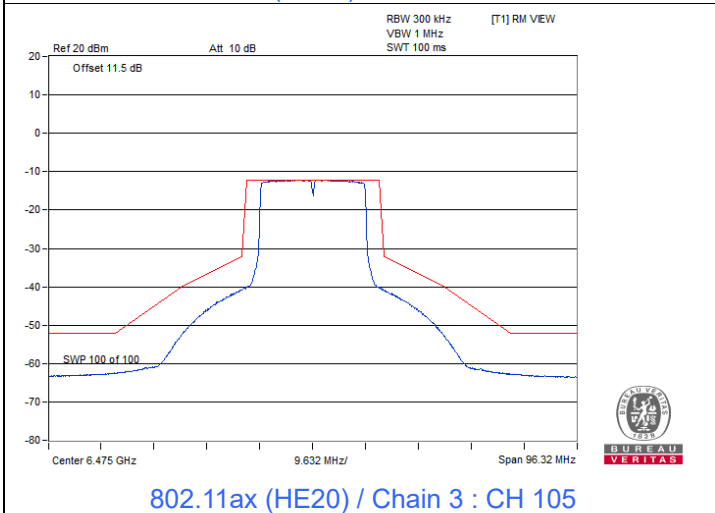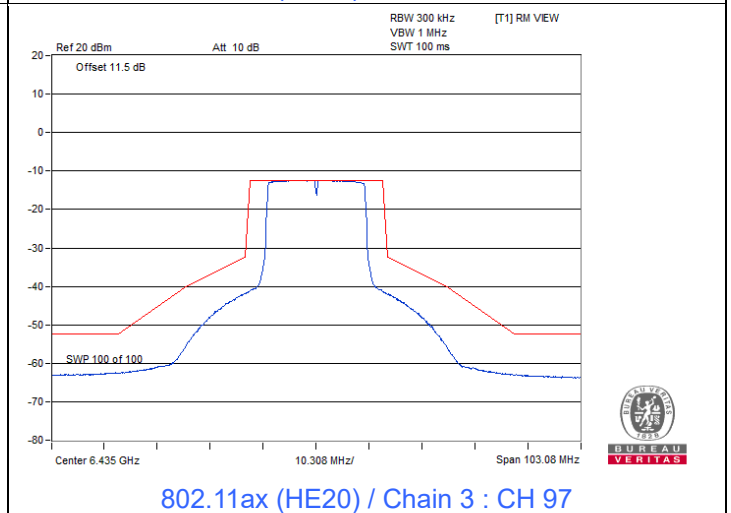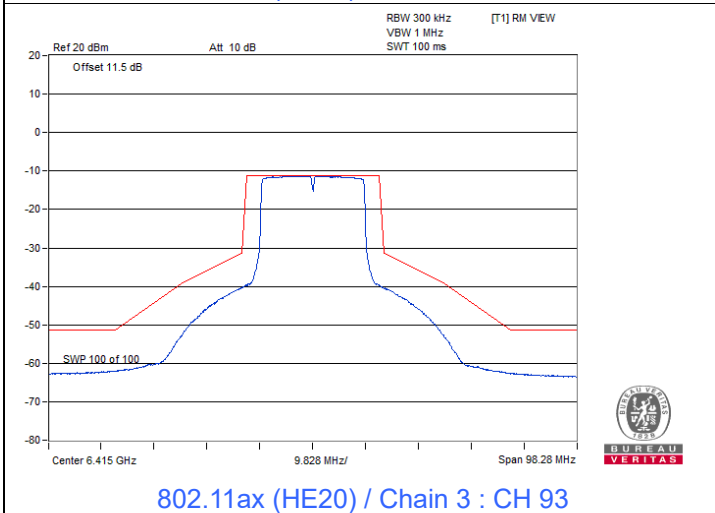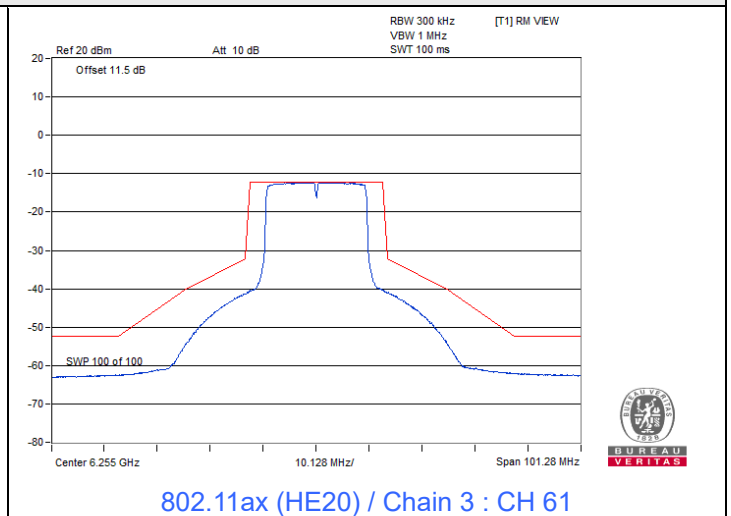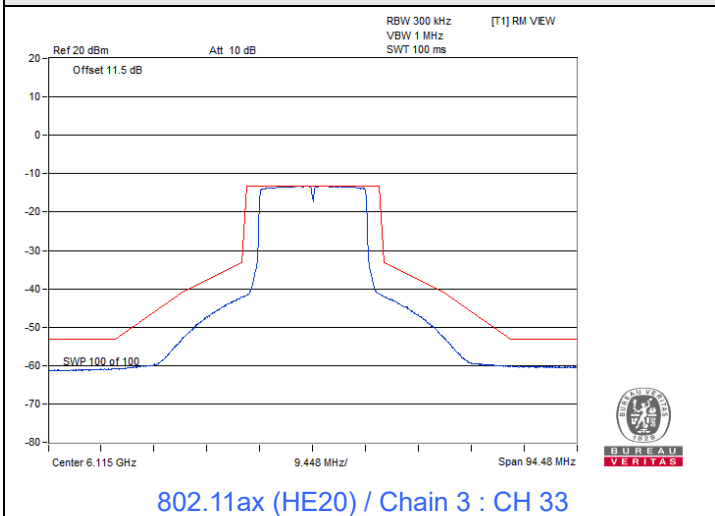







Spectrum Plot

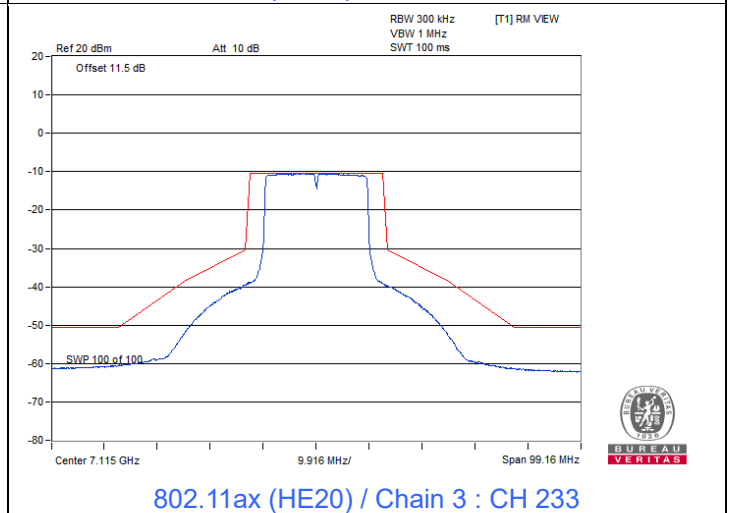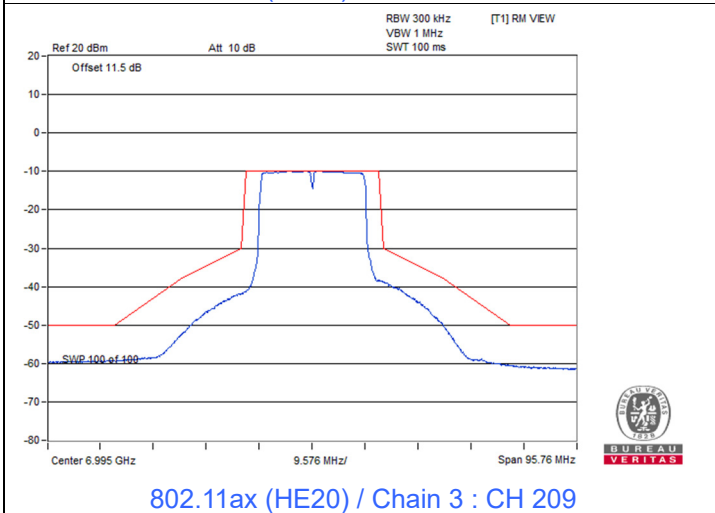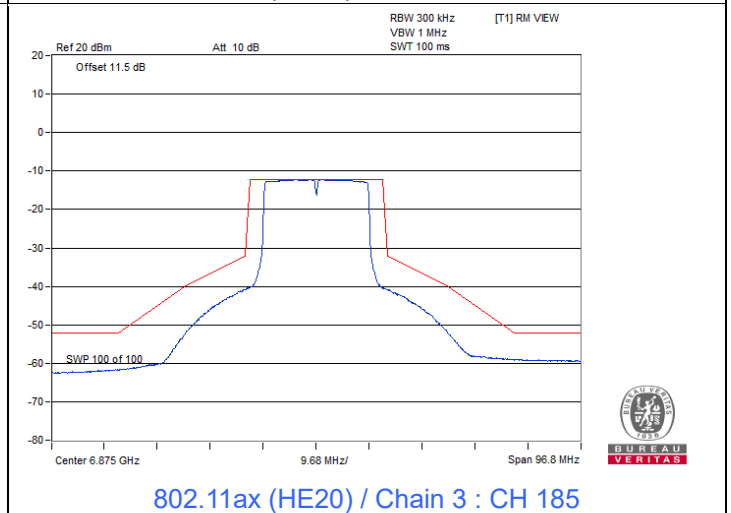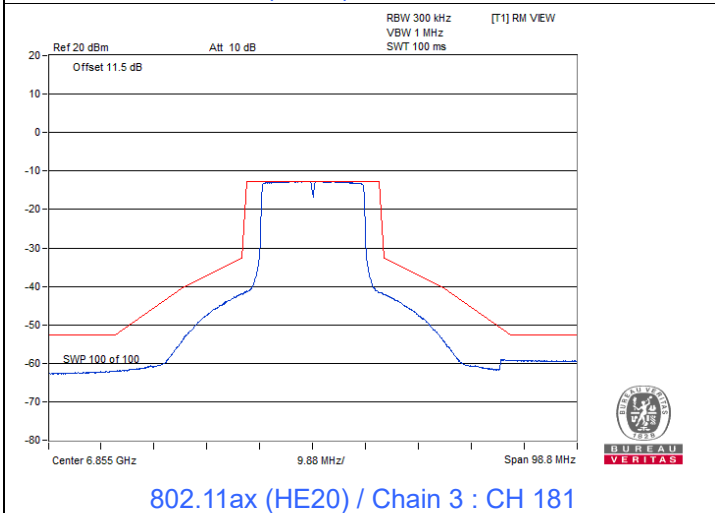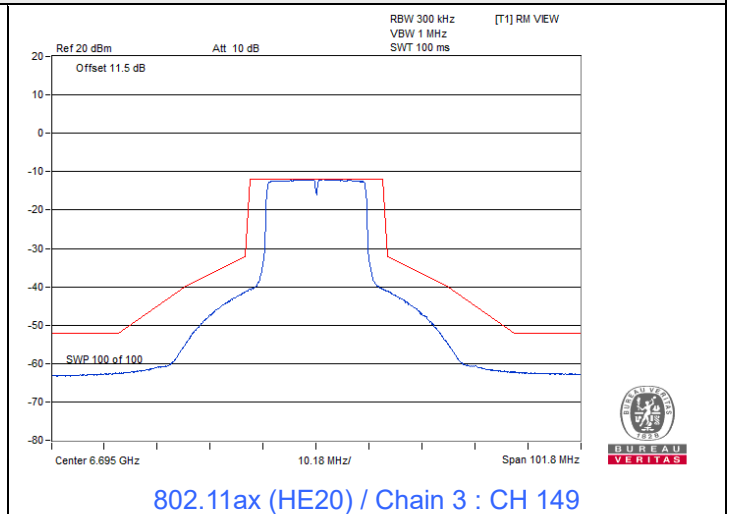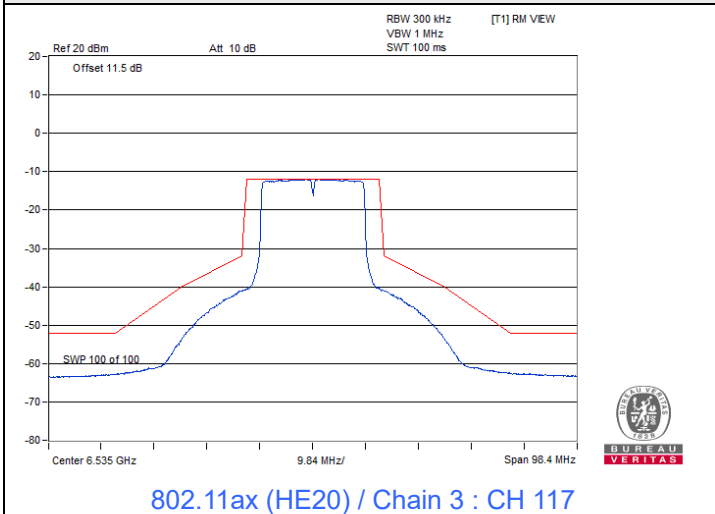







802.11ax (HE40)









Spectrum Plot

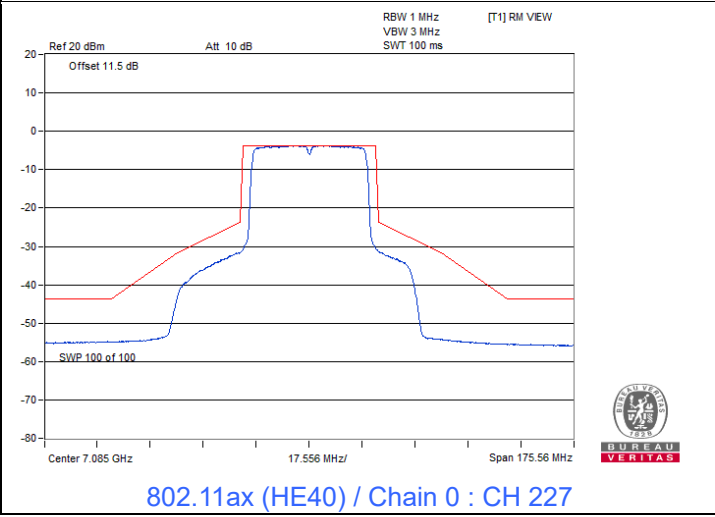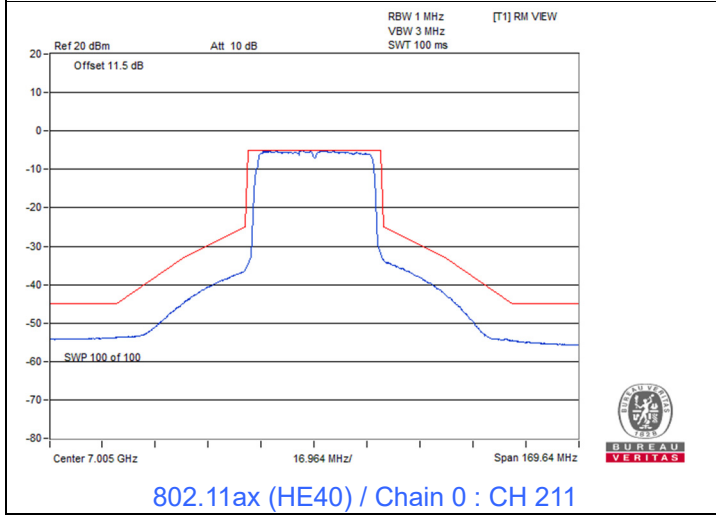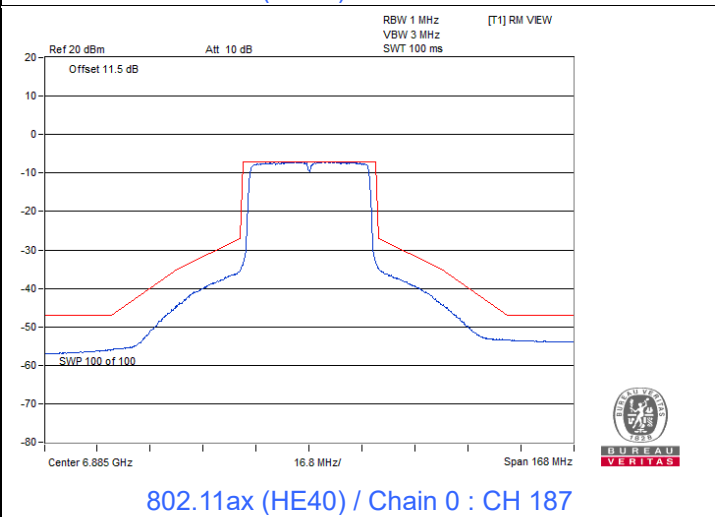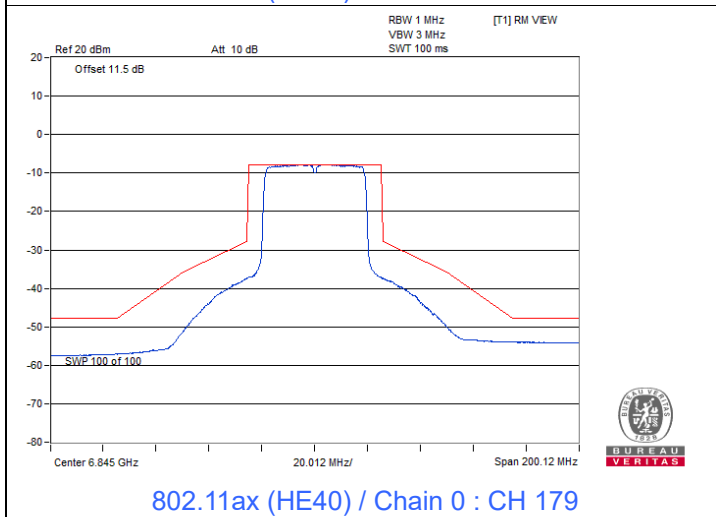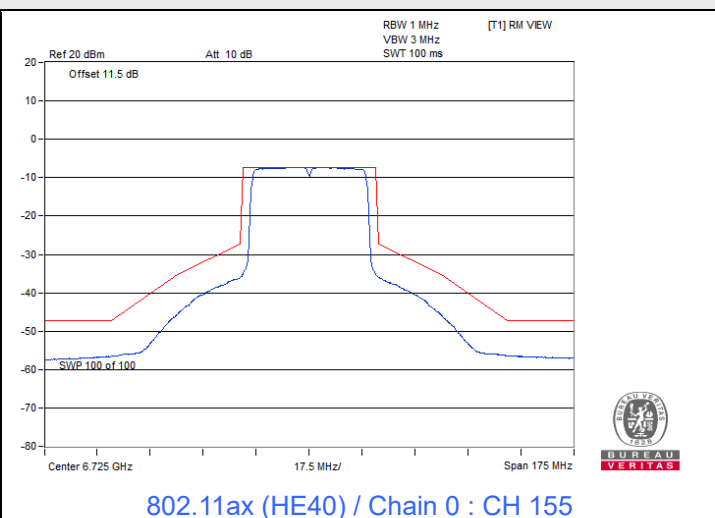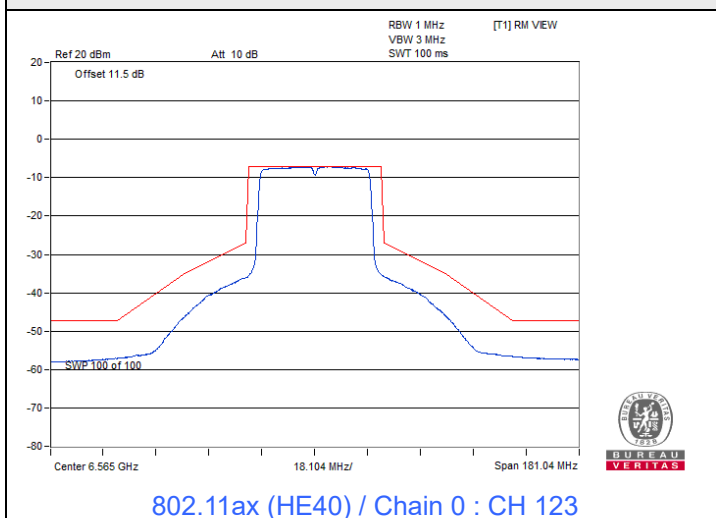







Spectrum Plot

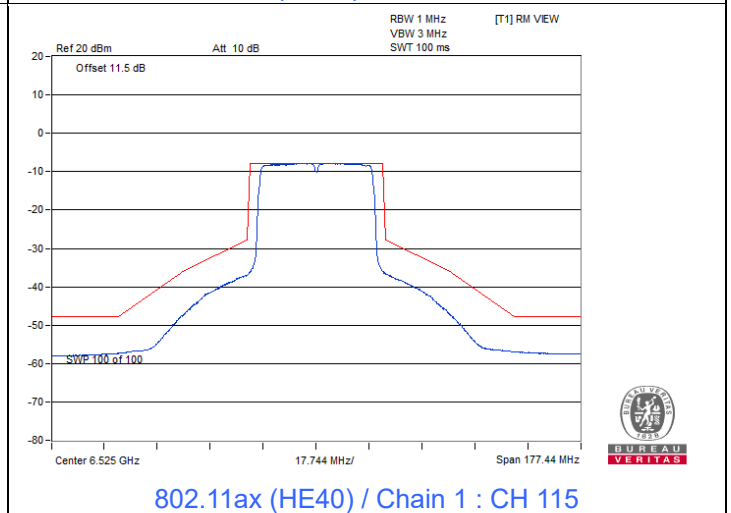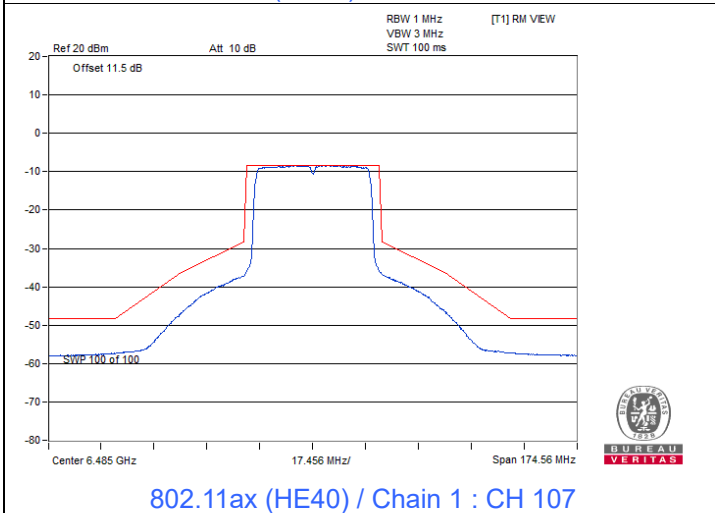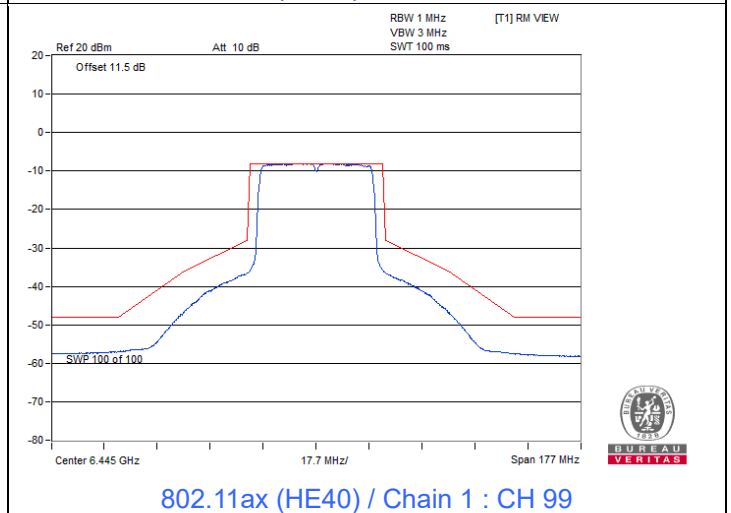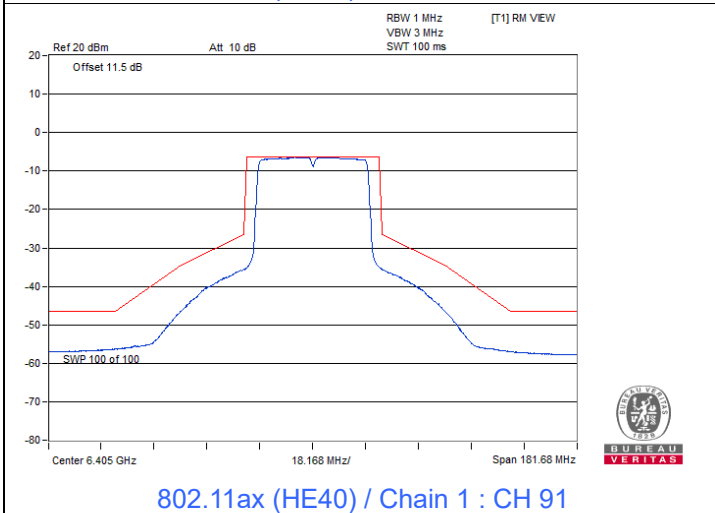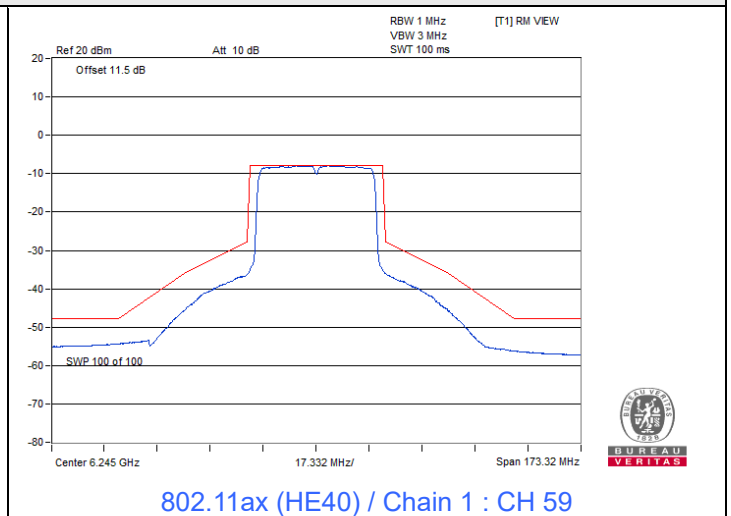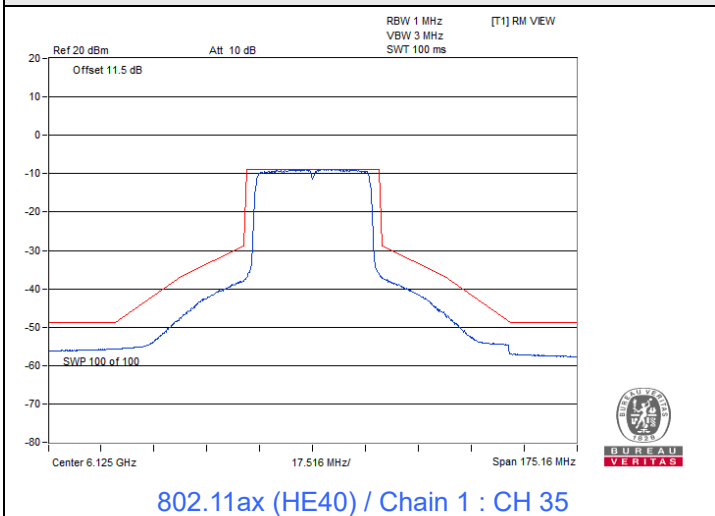







Spectrum Plot

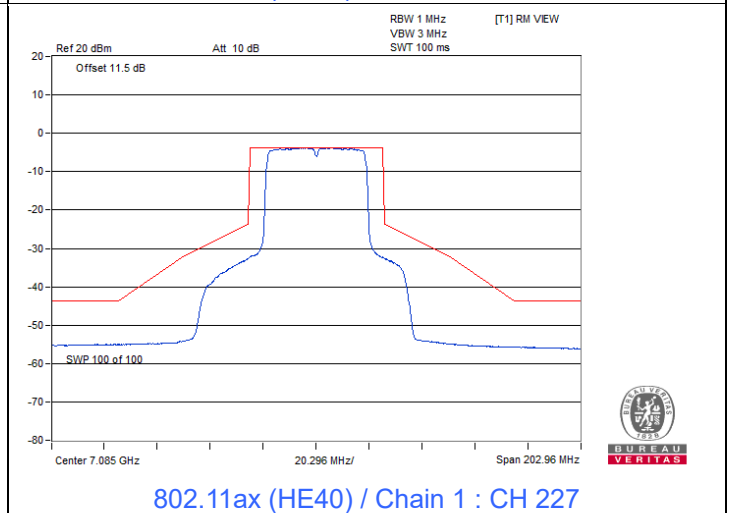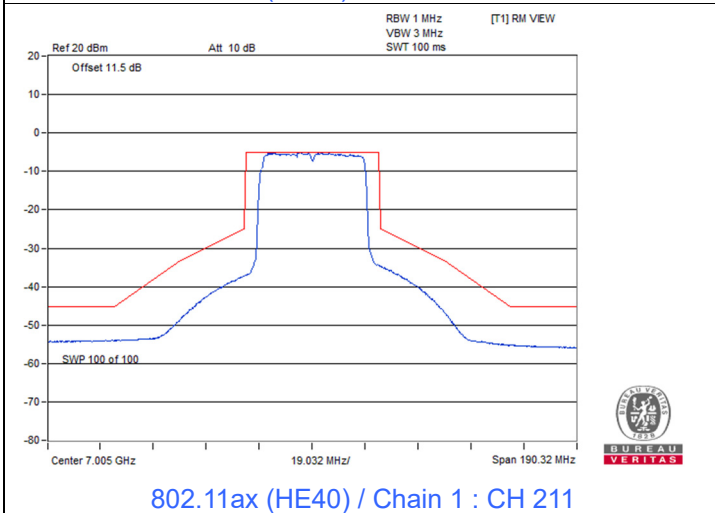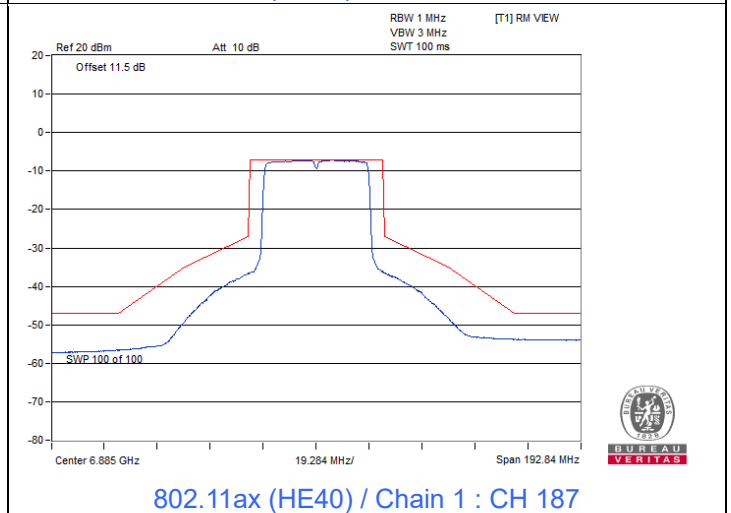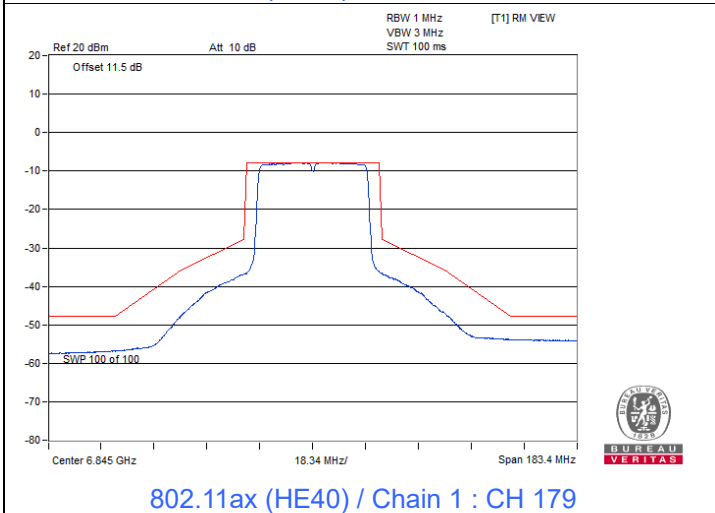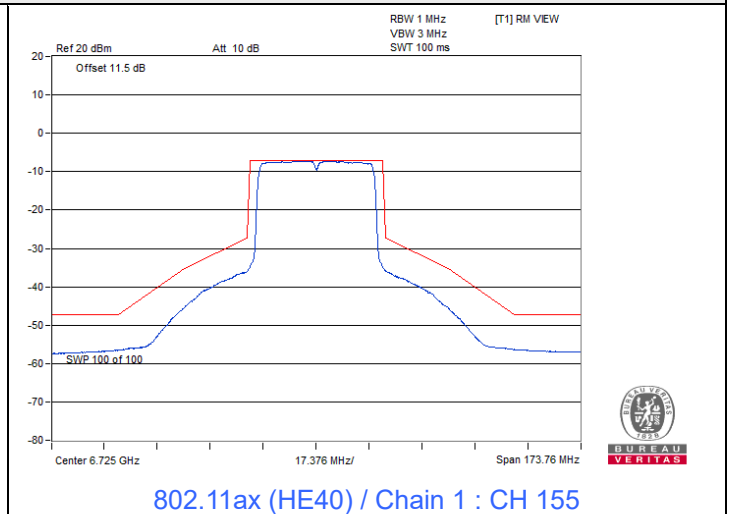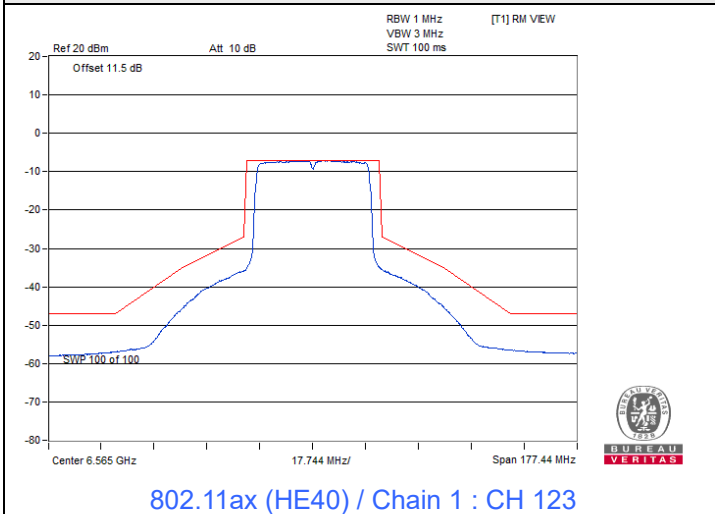







Spectrum Plot

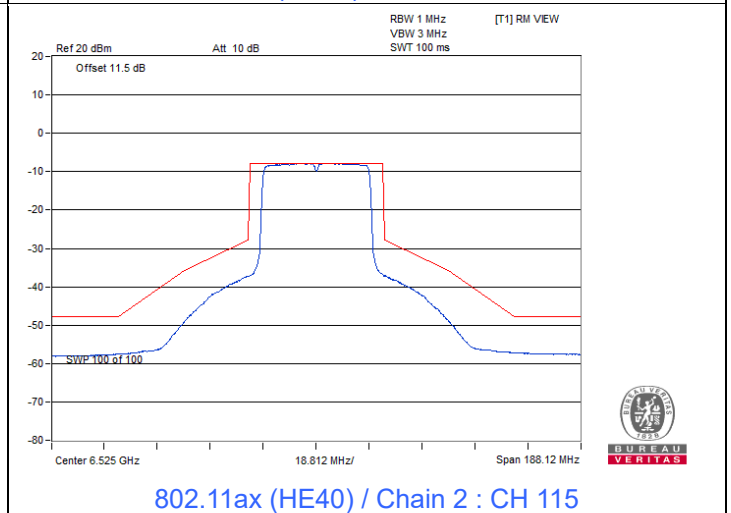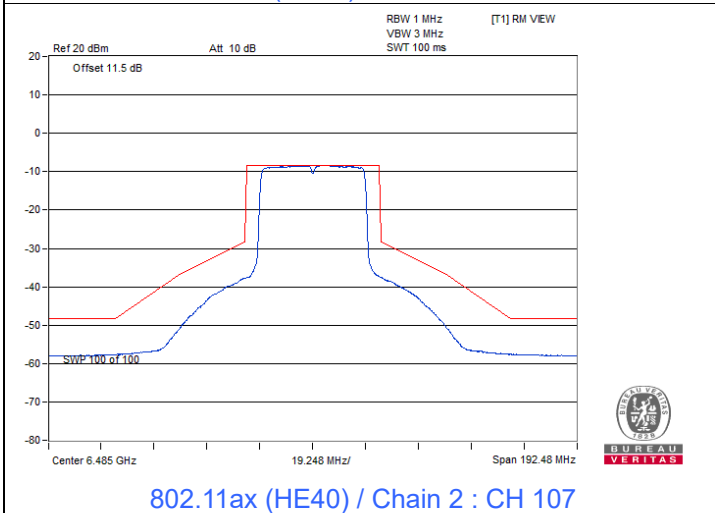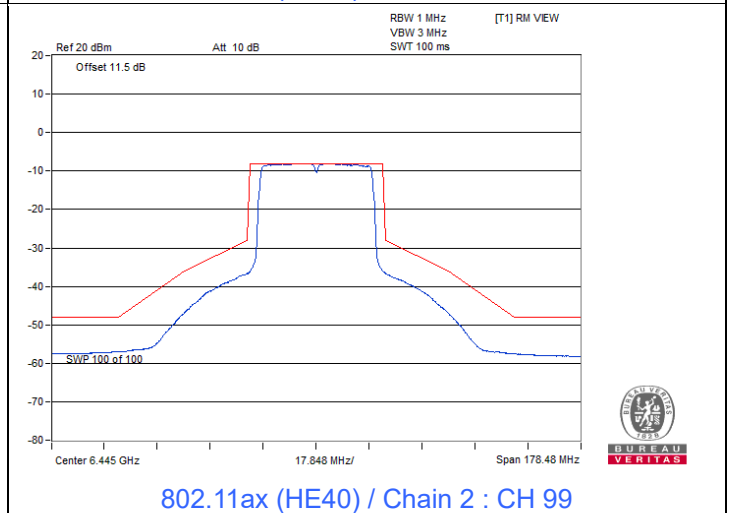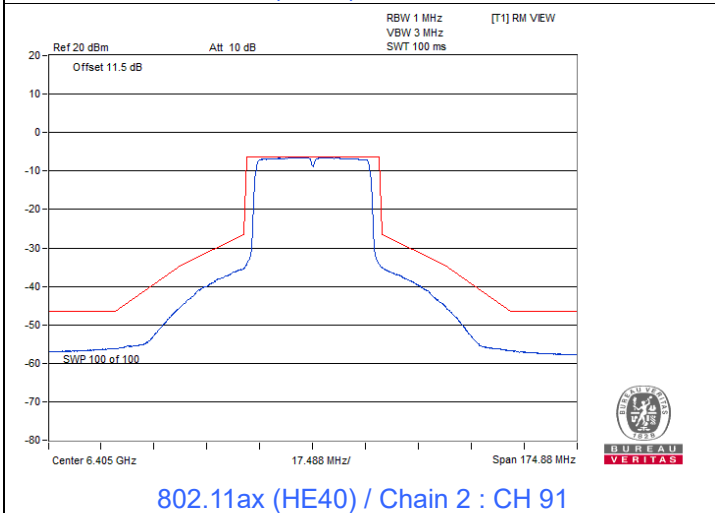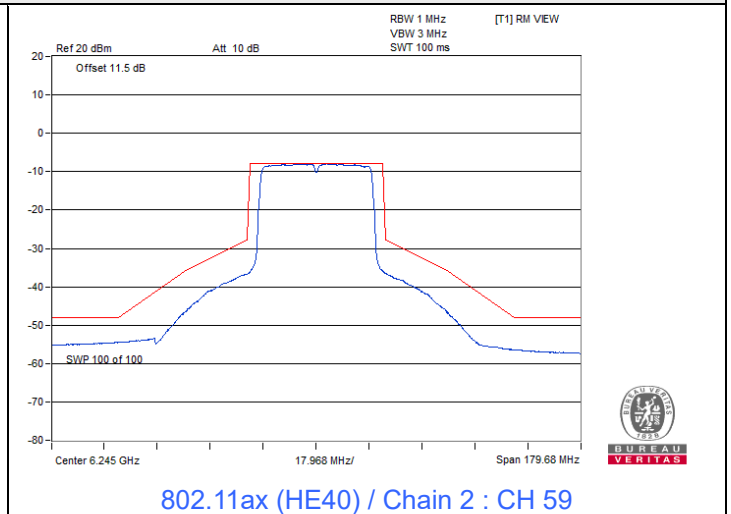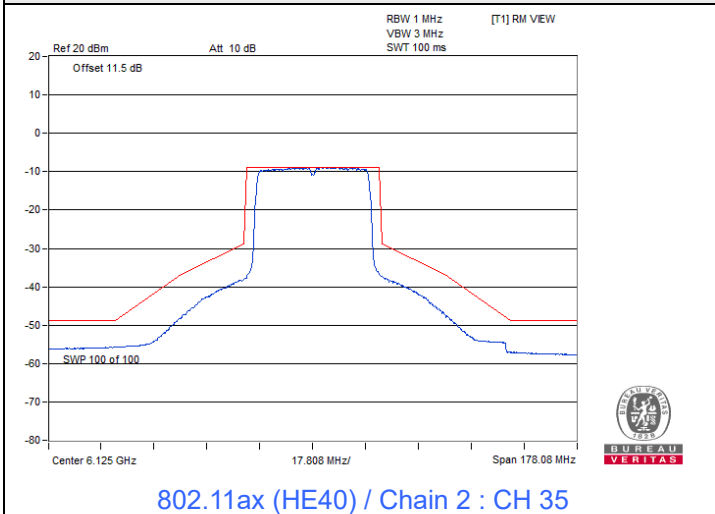







Spectrum Plot

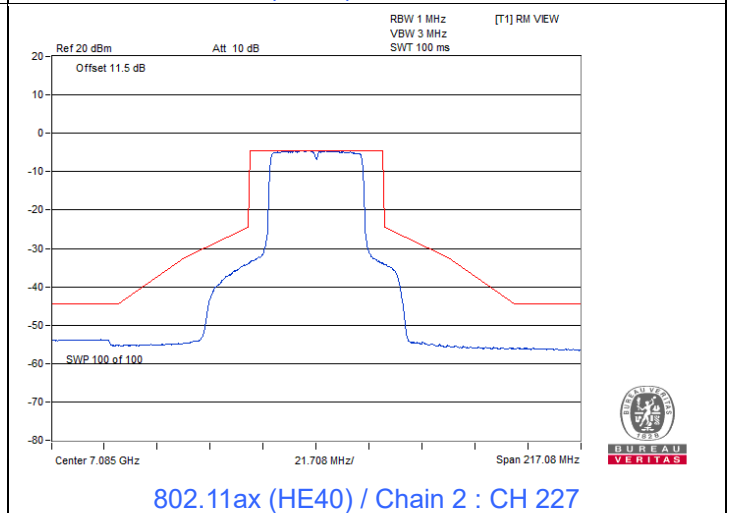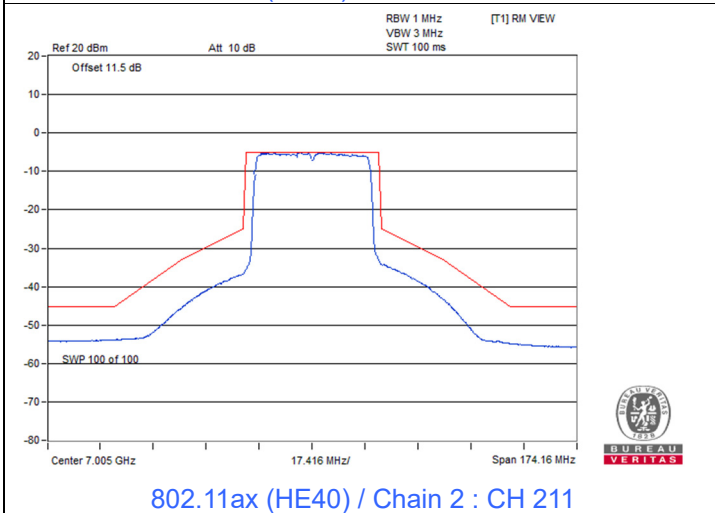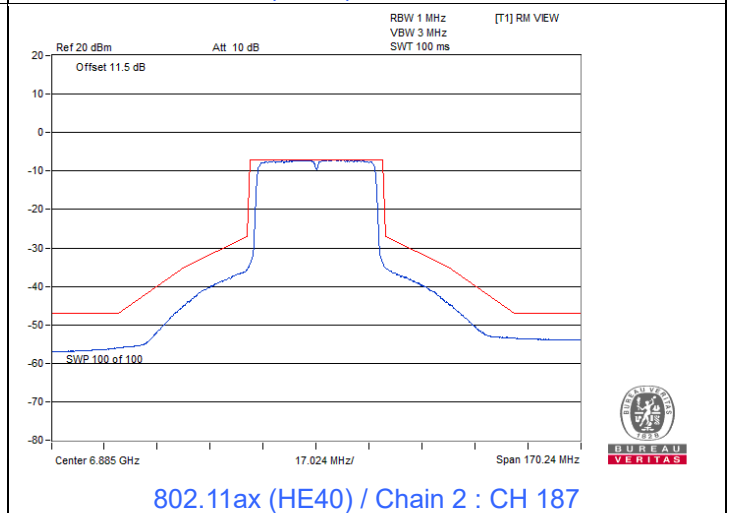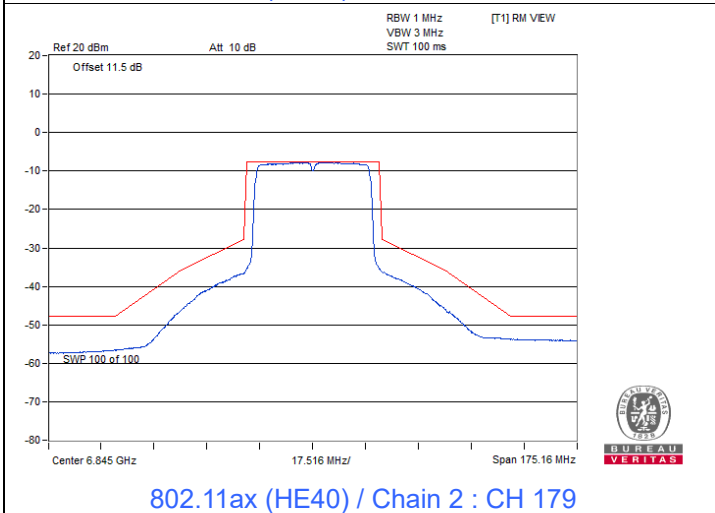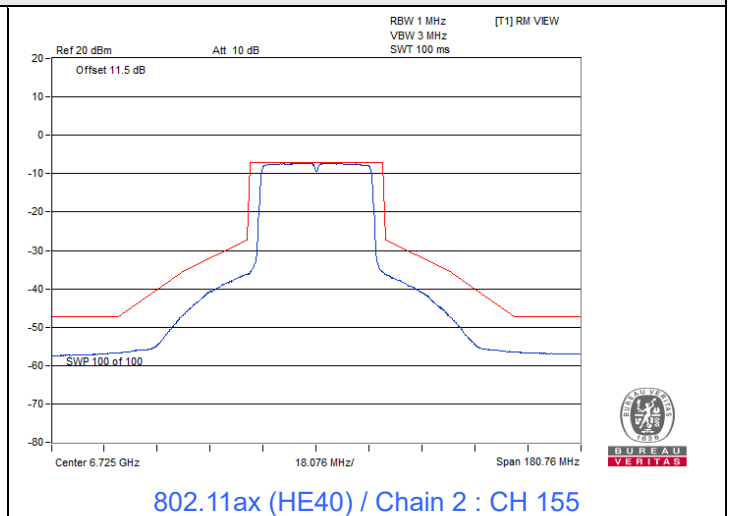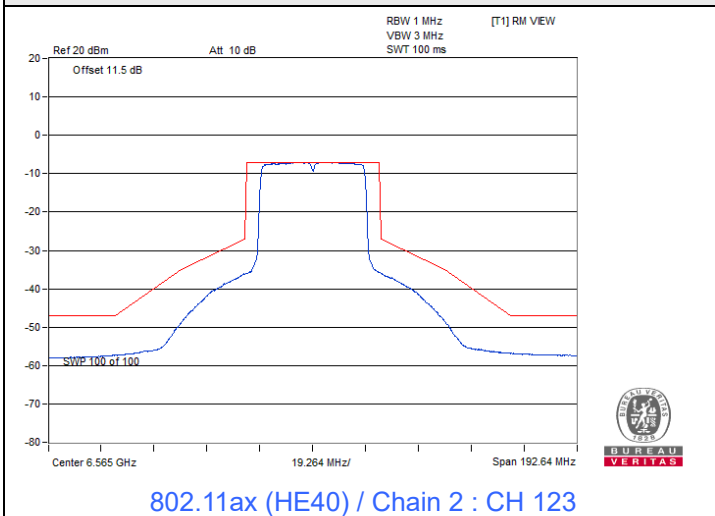

Spectrum Plot

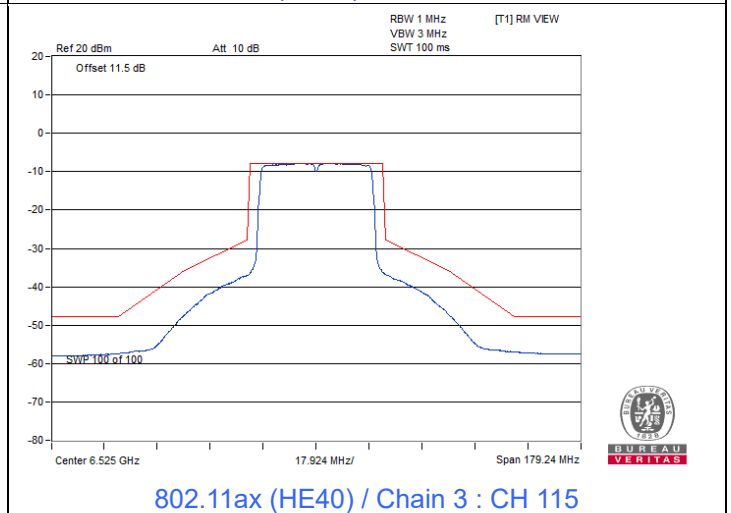
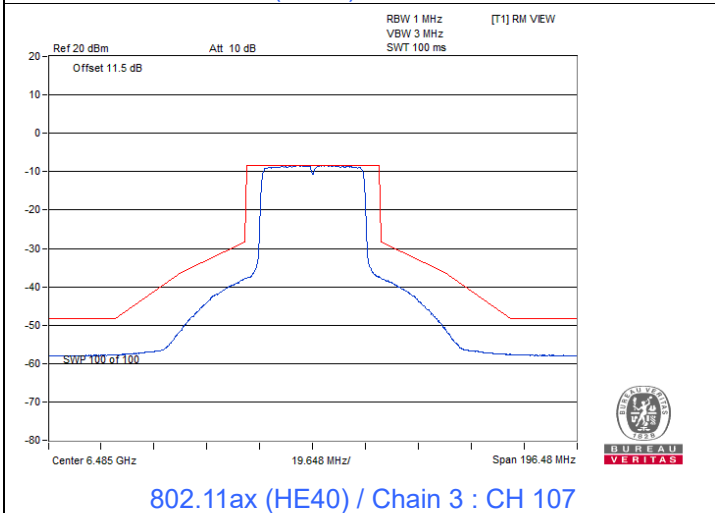
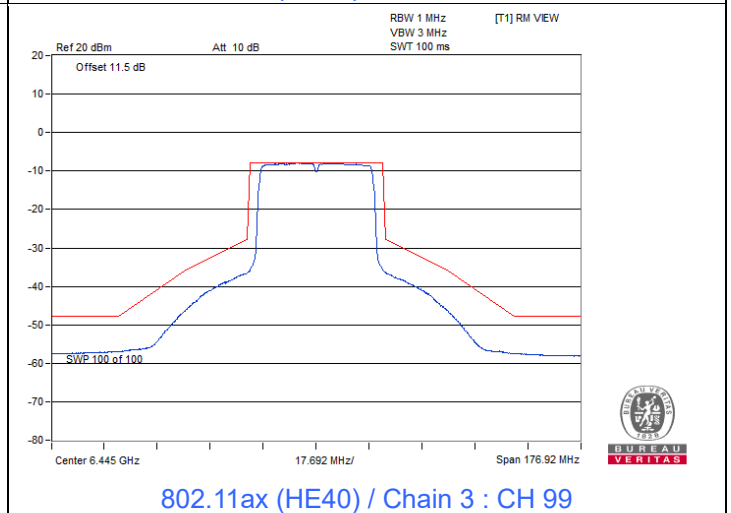
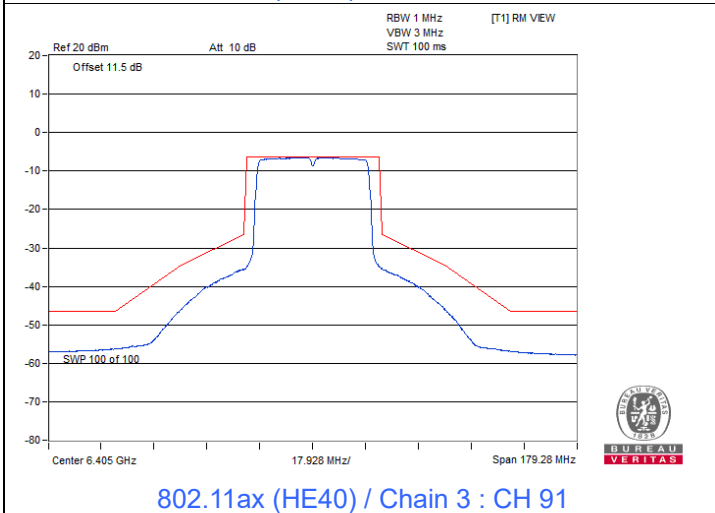
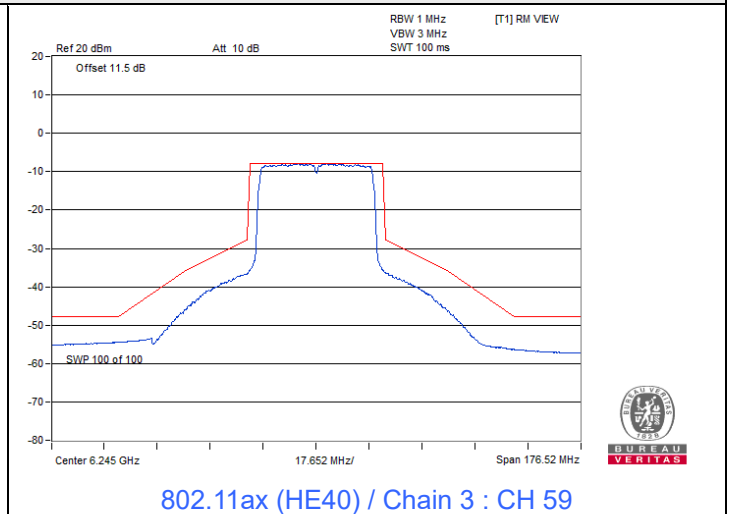
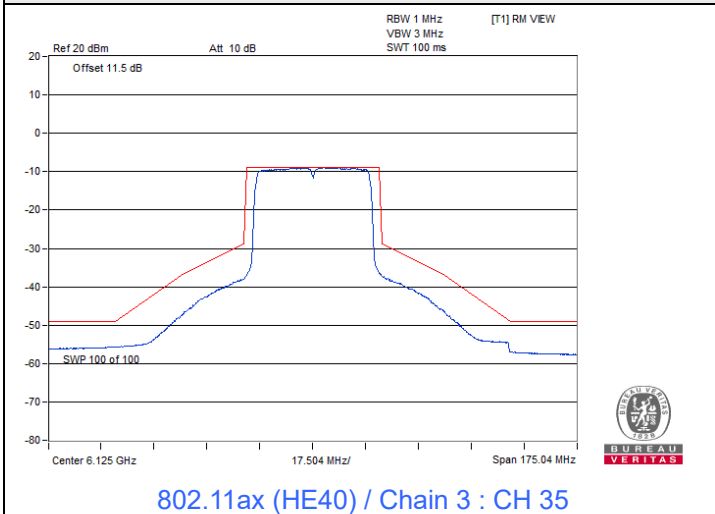


Spectrum Plot

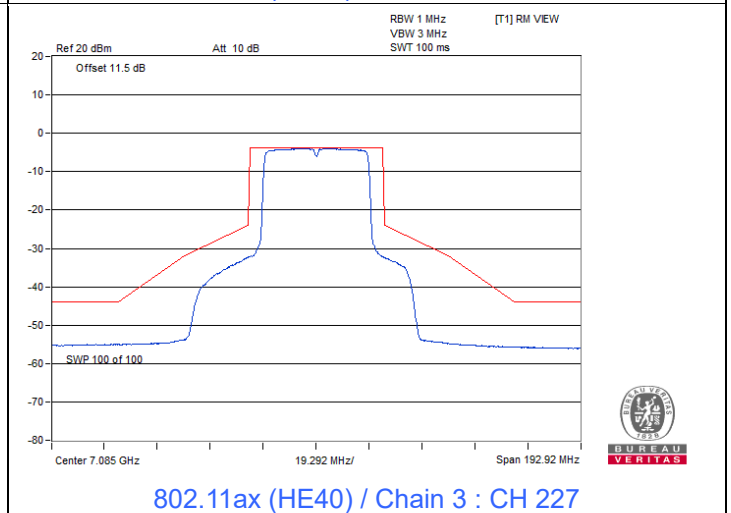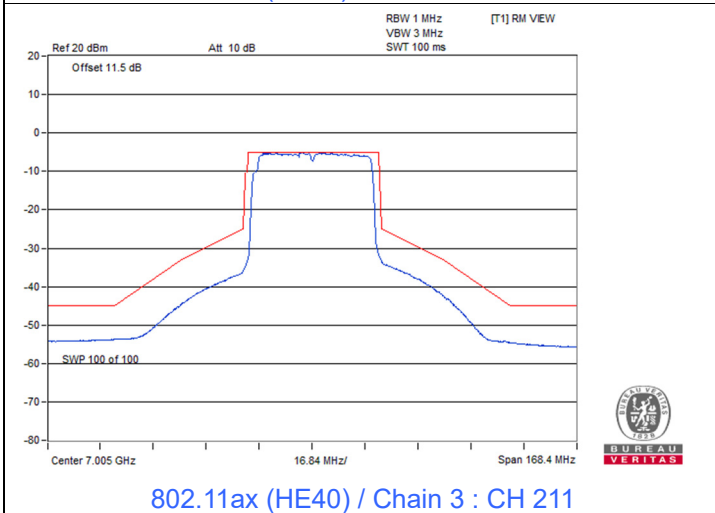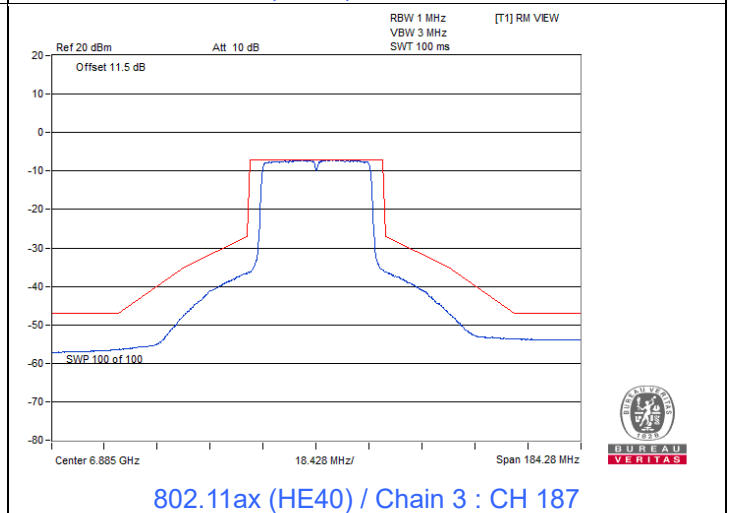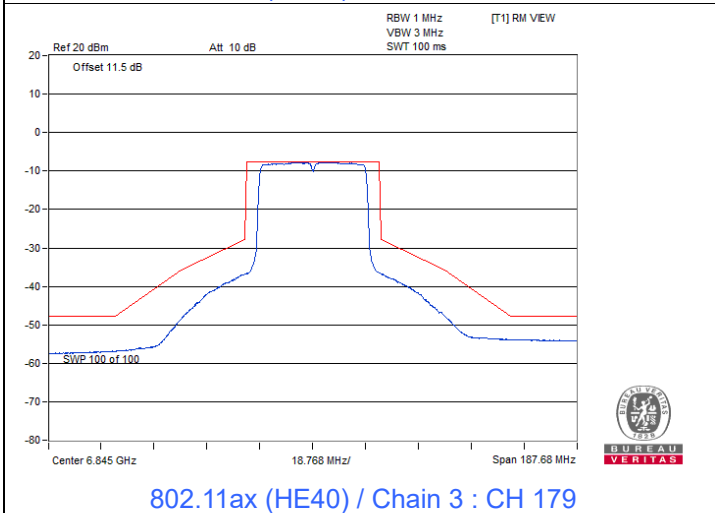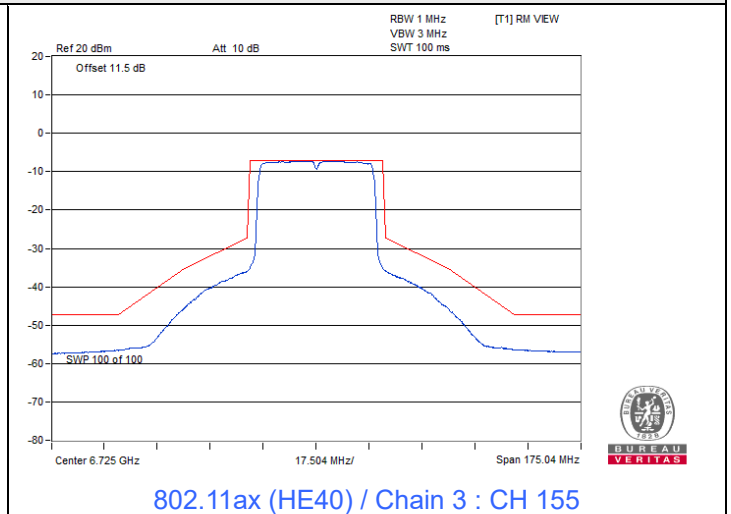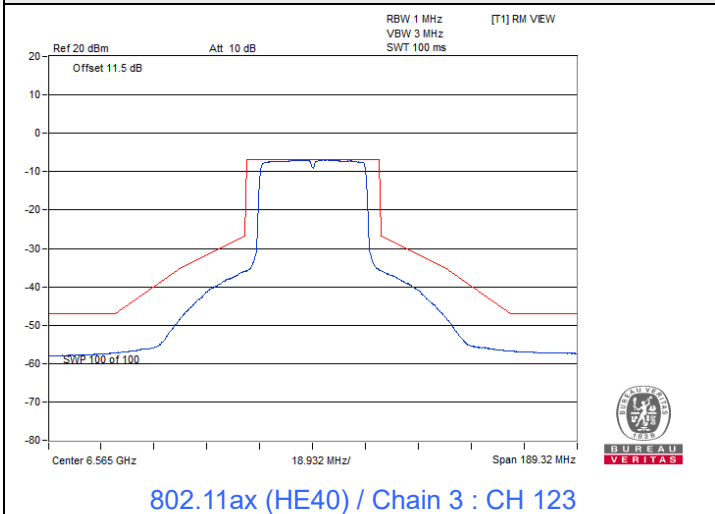


802.11ax (HE80)


Spectrum Plot

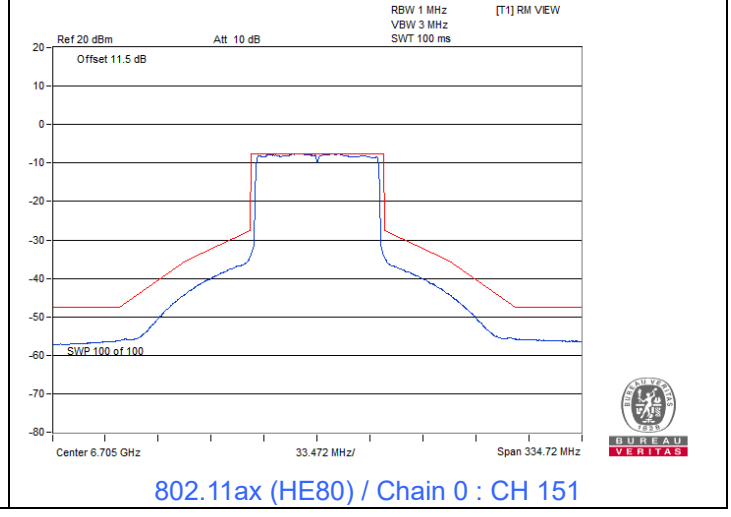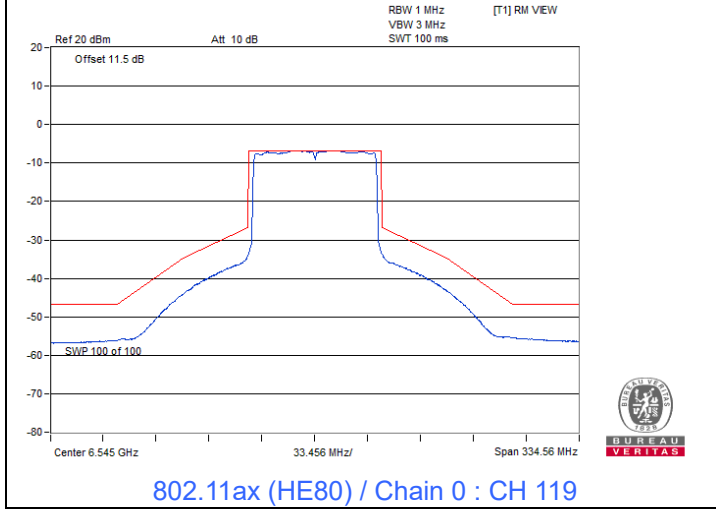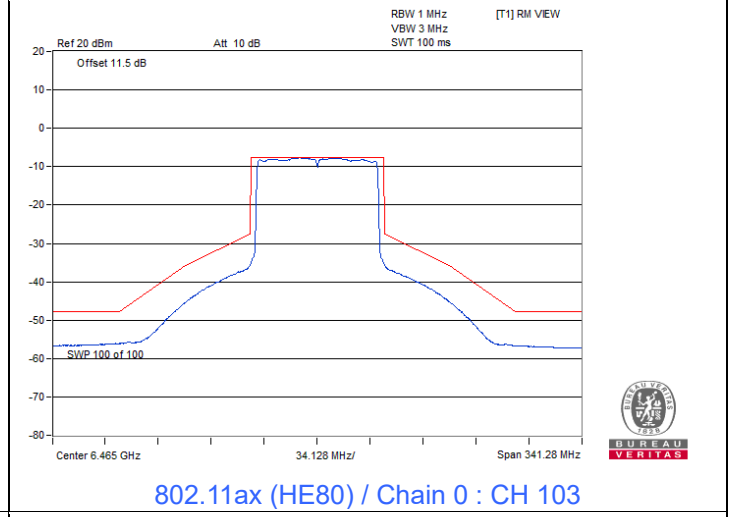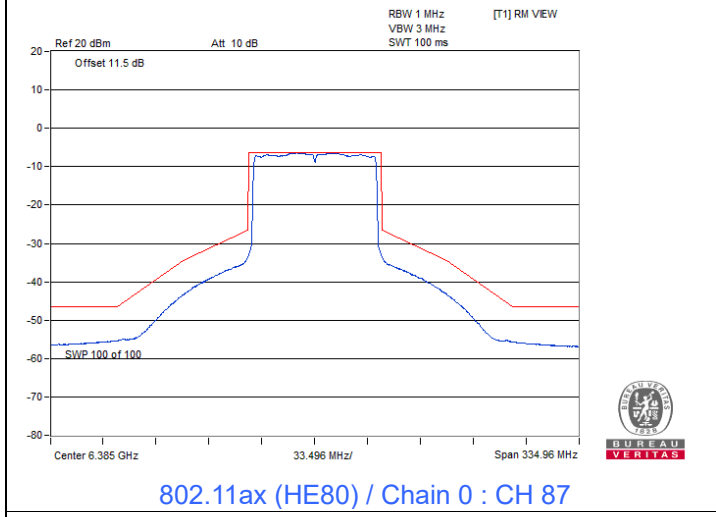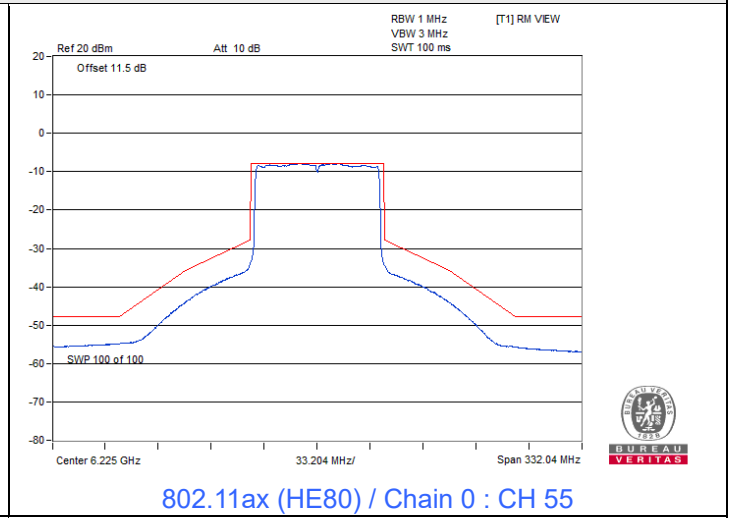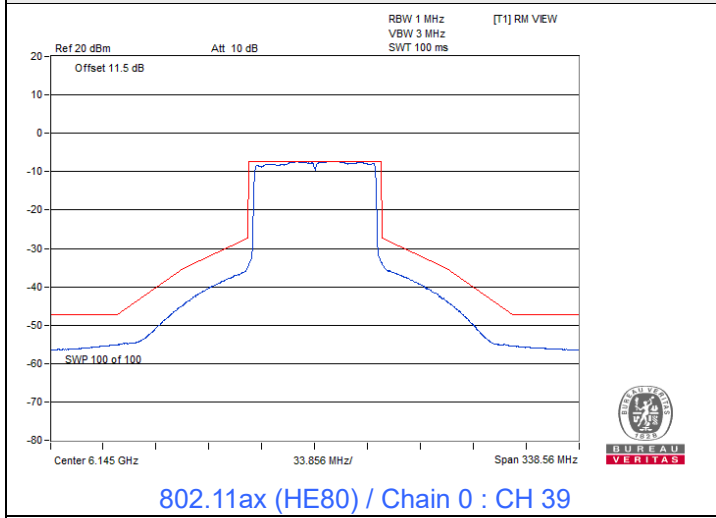


Spectrum Plot

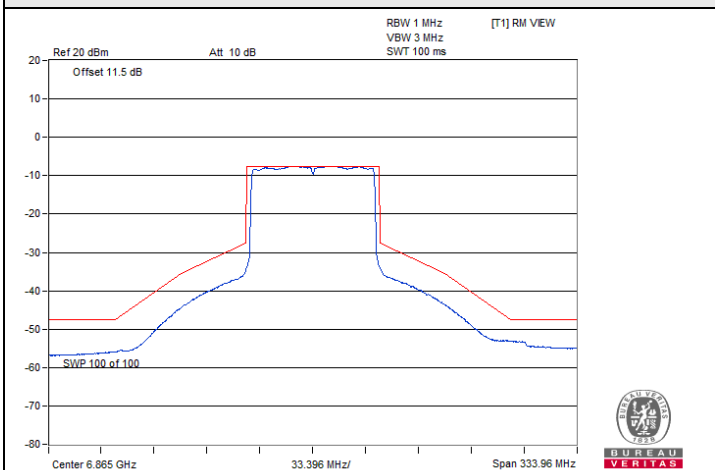


802.11ax (HE80) / Chain 0 : CH 183

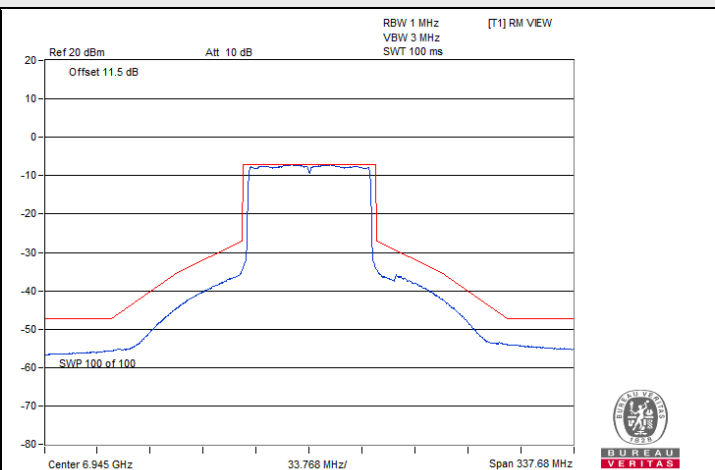


802.11ax (HE80) / Chain 0 : CH 199

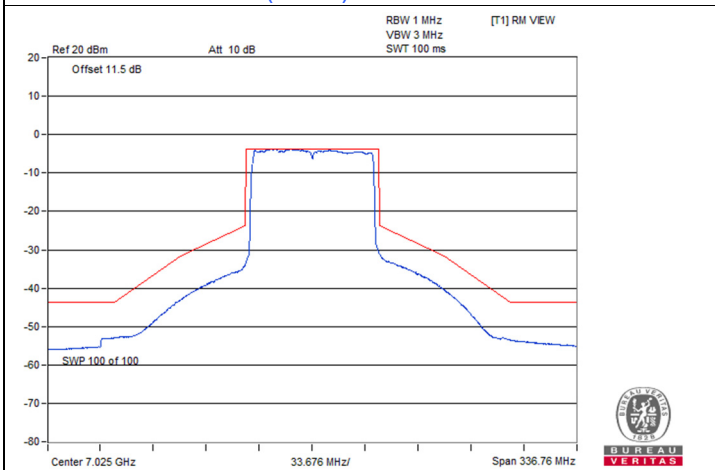


802.11ax (HE80) / Chain 0 : CH 215

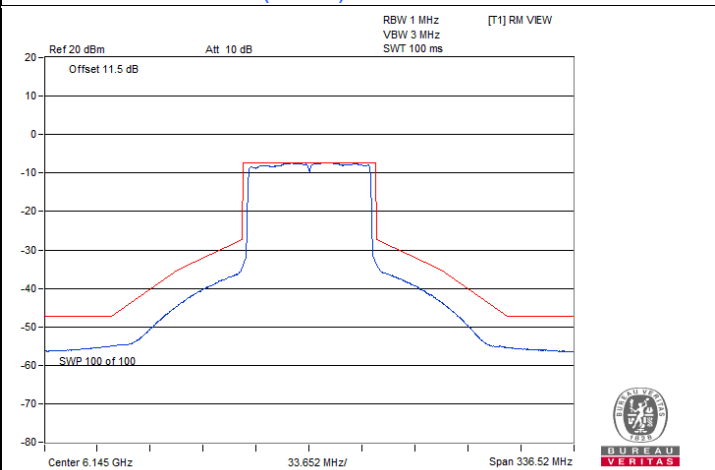

802.11ax (HE80) / Chain 1 : CH 39






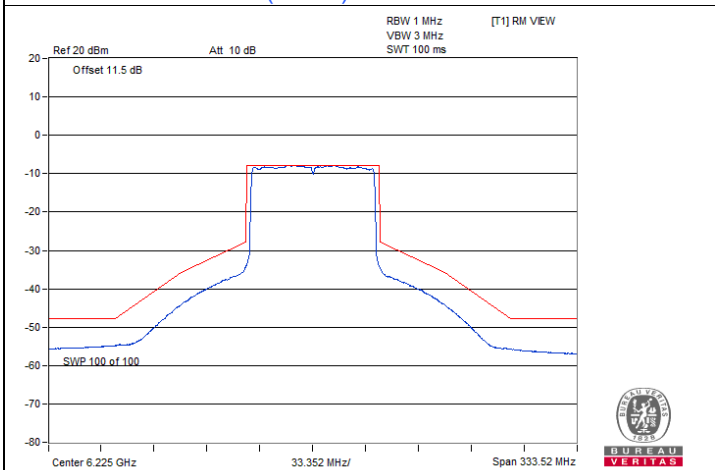


802.11ax (HE80) / Chain 1 : CH 55






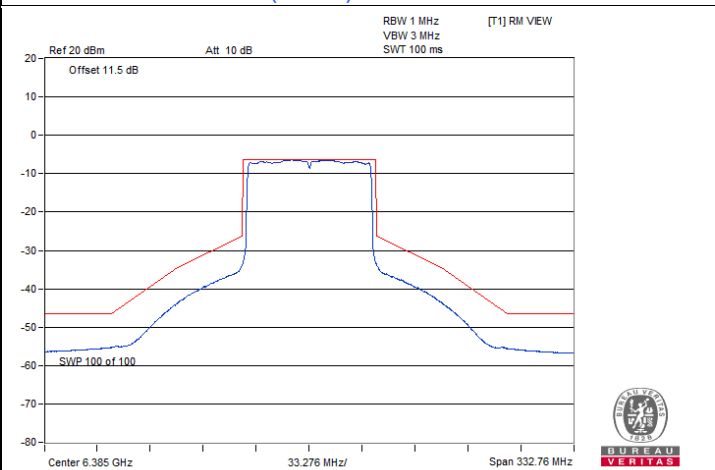


802.11ax (HE80) / Chain 1 : CH 87


Spectrum Plot

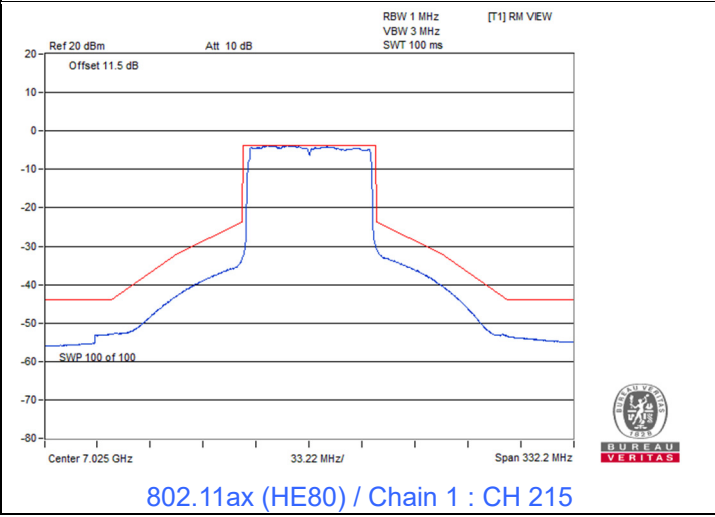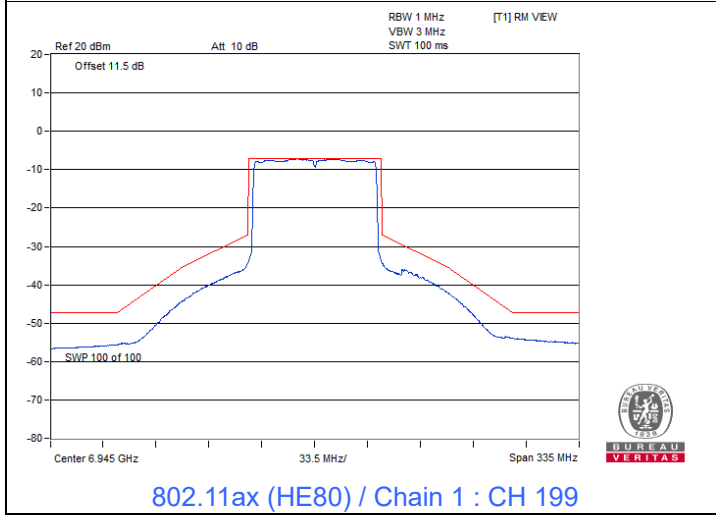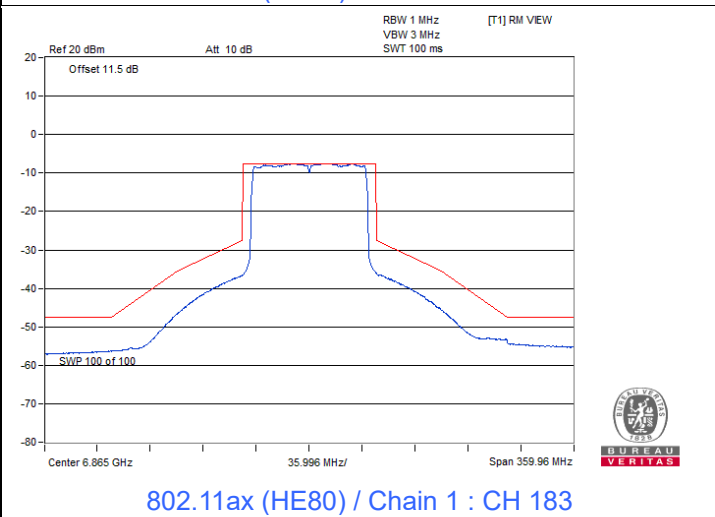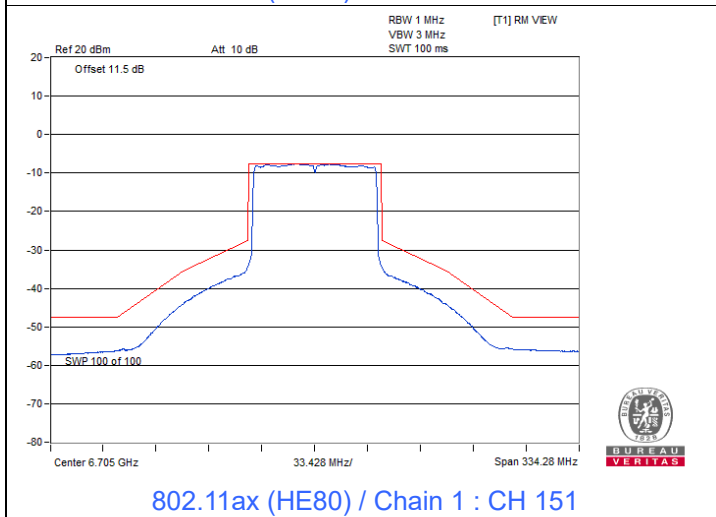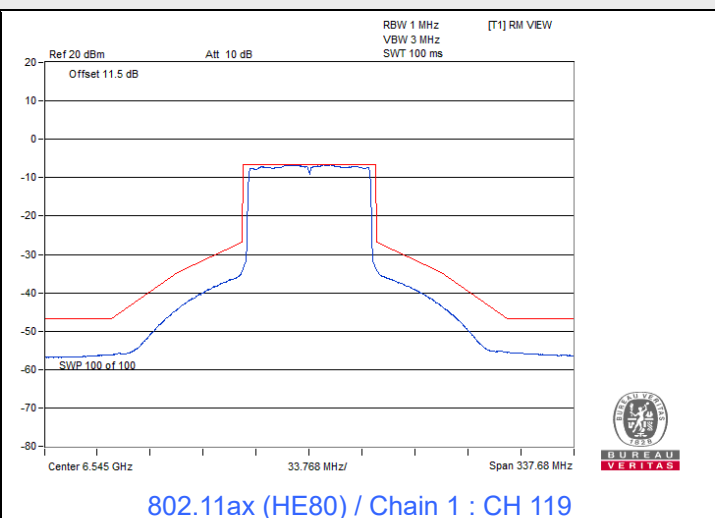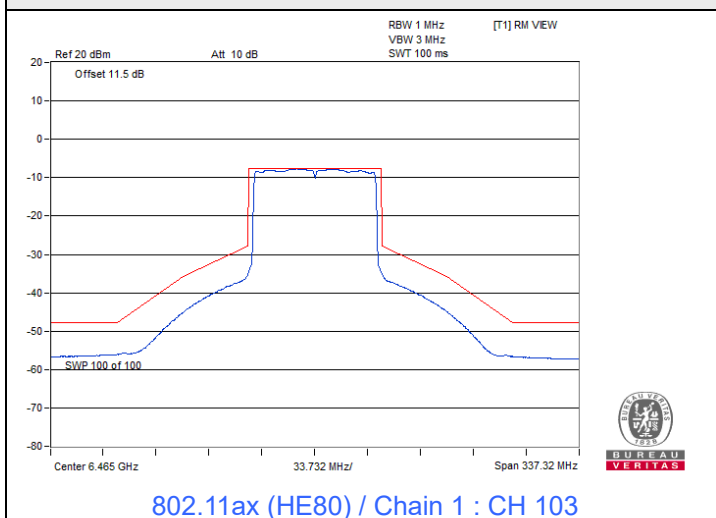


Spectrum Plot

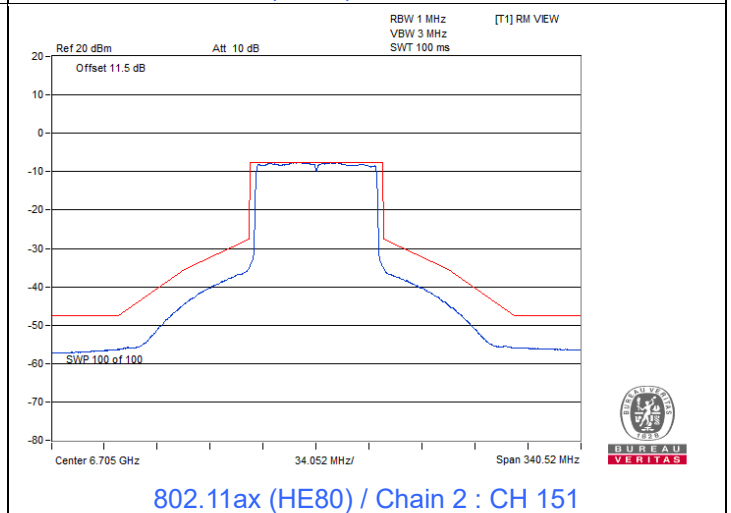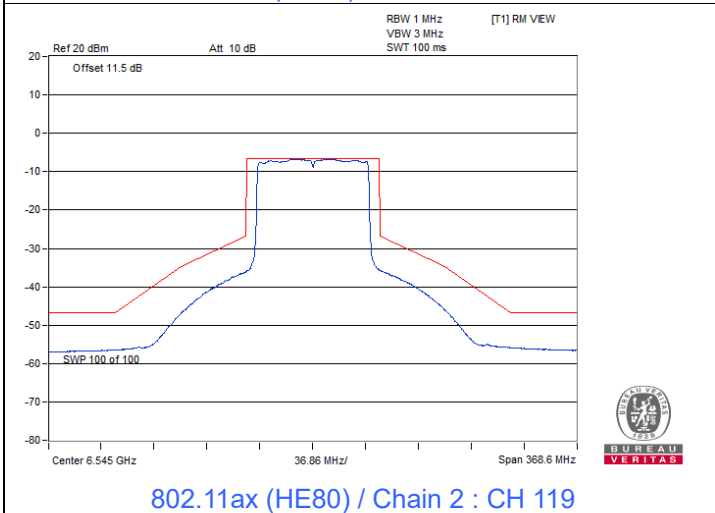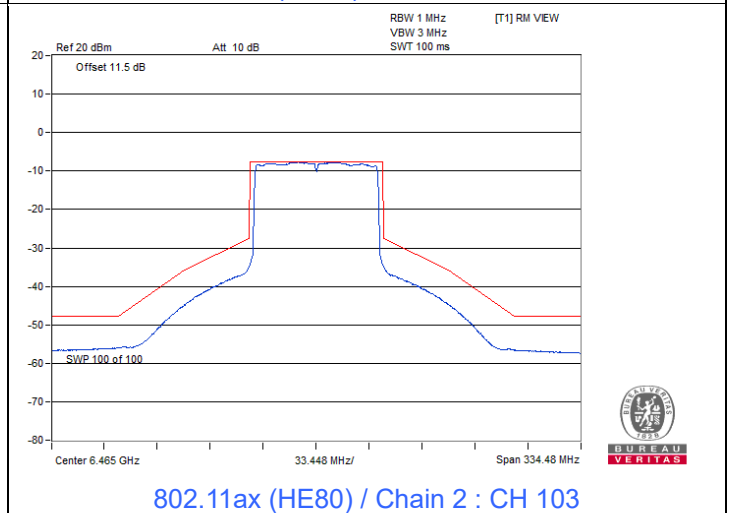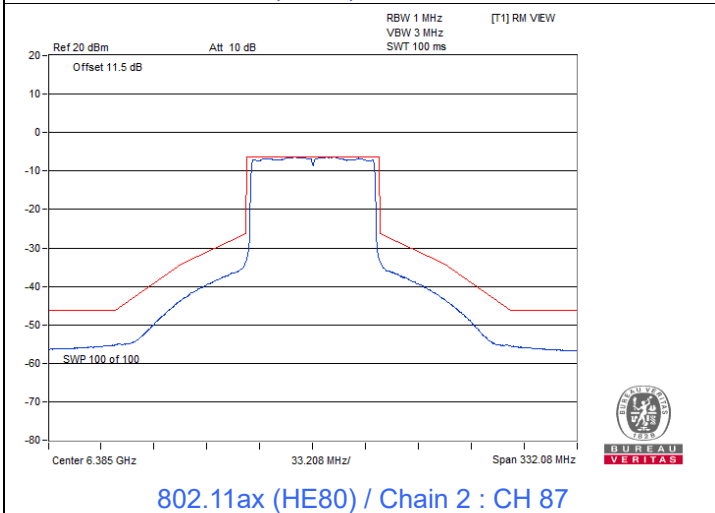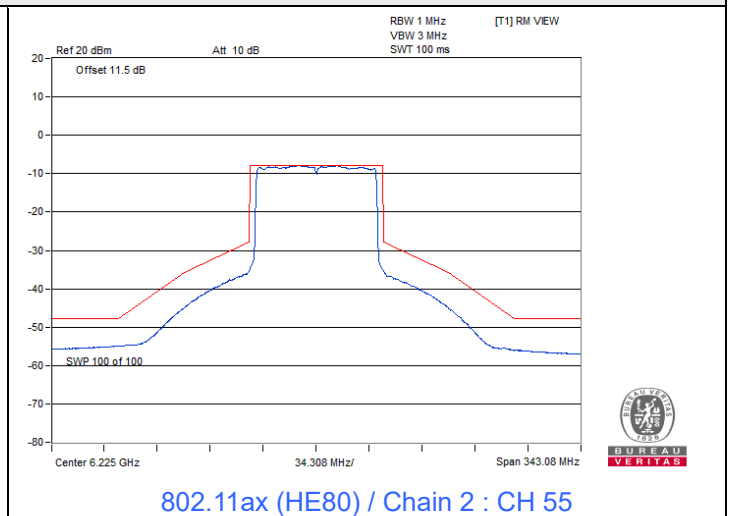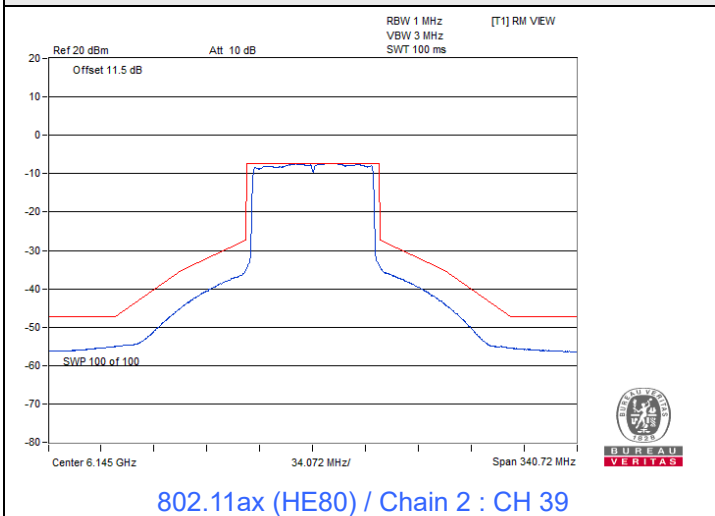


Spectrum Plot

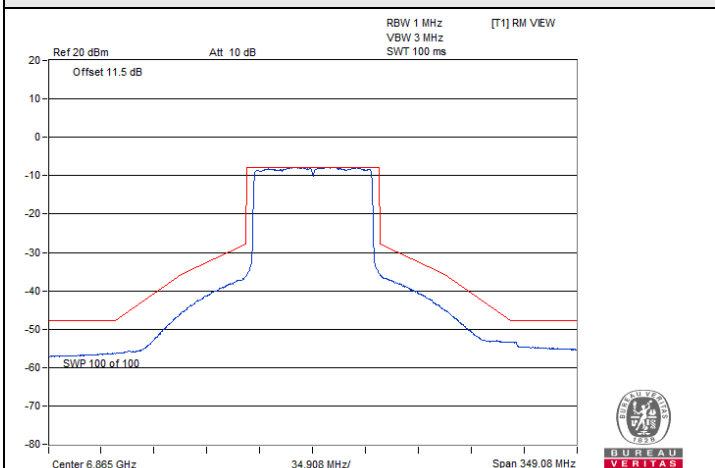


802.11ax (HE80) / Chain 2 : CH 183

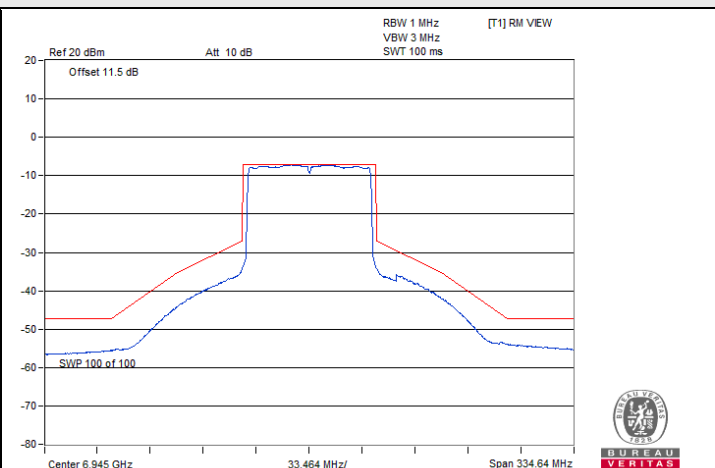


802.11ax (HE80) / Chain 2 : CH 199

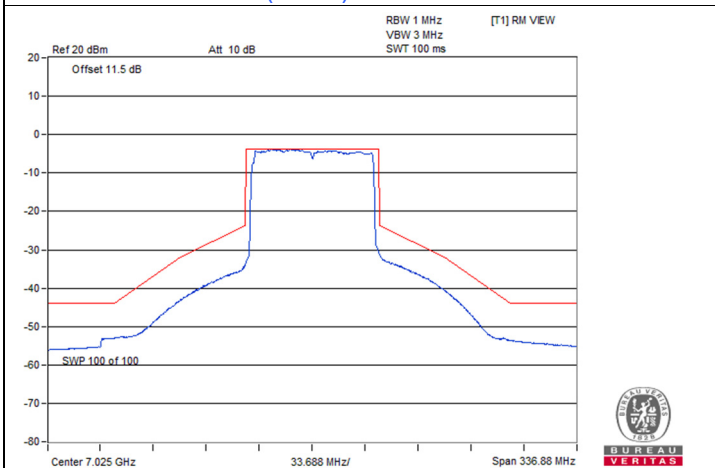


802.11ax (HE80) / Chain 2 : CH 215

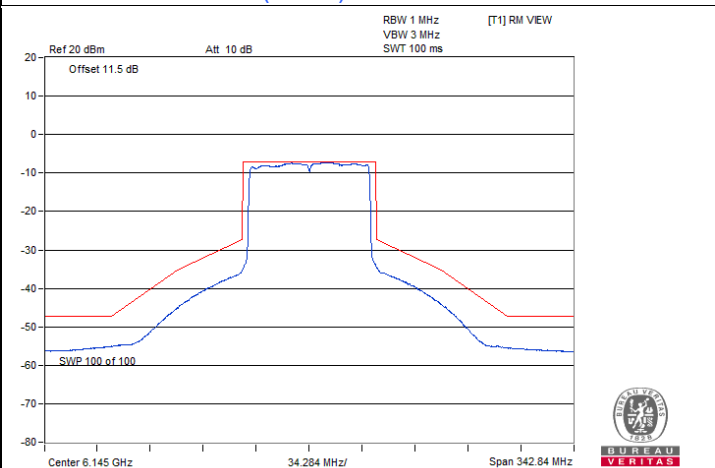

802.11ax (HE80) / Chain 3 : CH 39






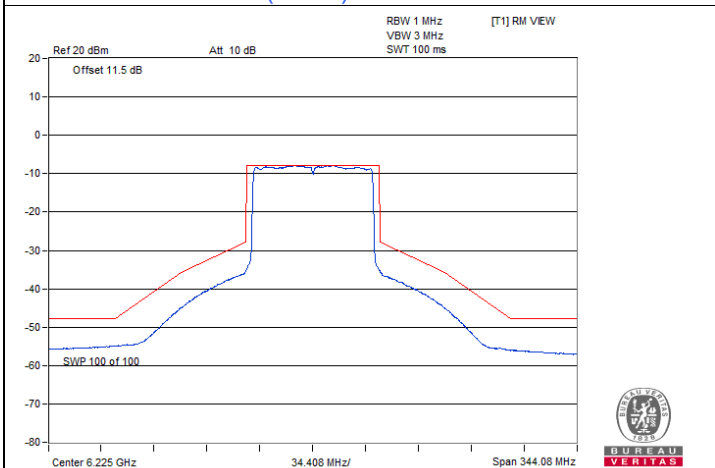


802.11ax (HE80) / Chain 3 : CH 55

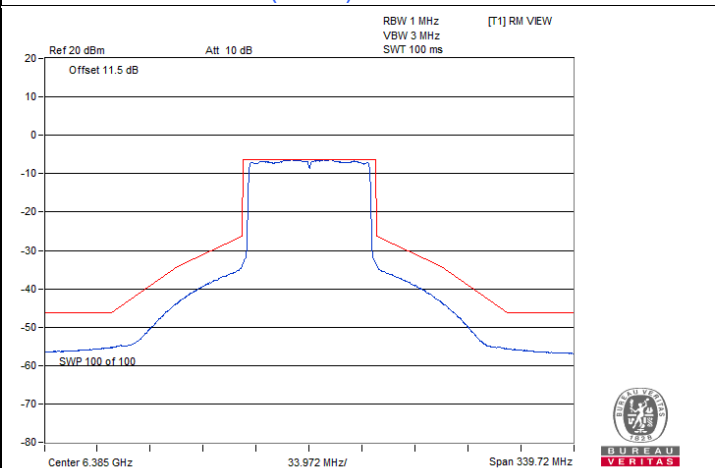


802.11ax (HE80) / Chain 3 : CH 87

Spectrum Plot

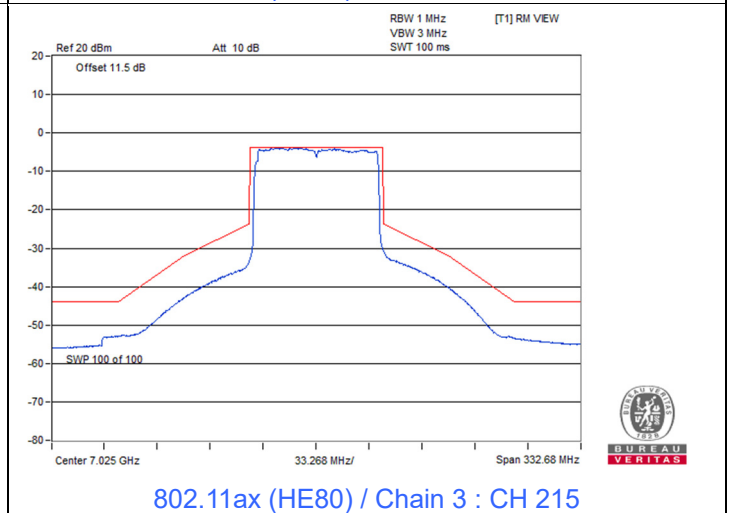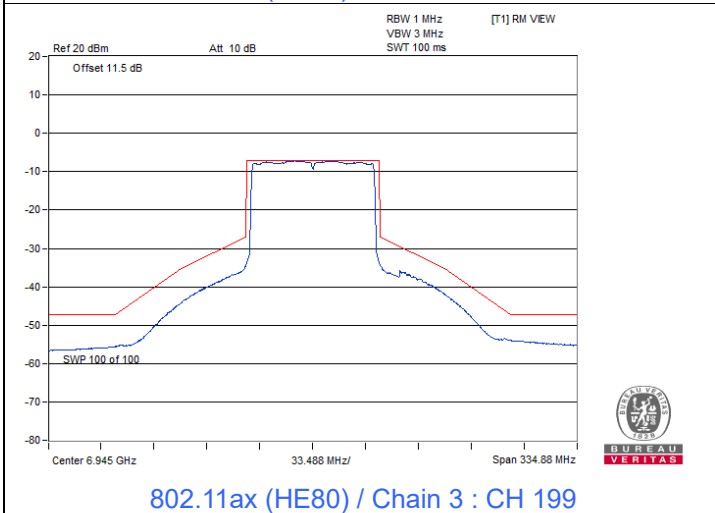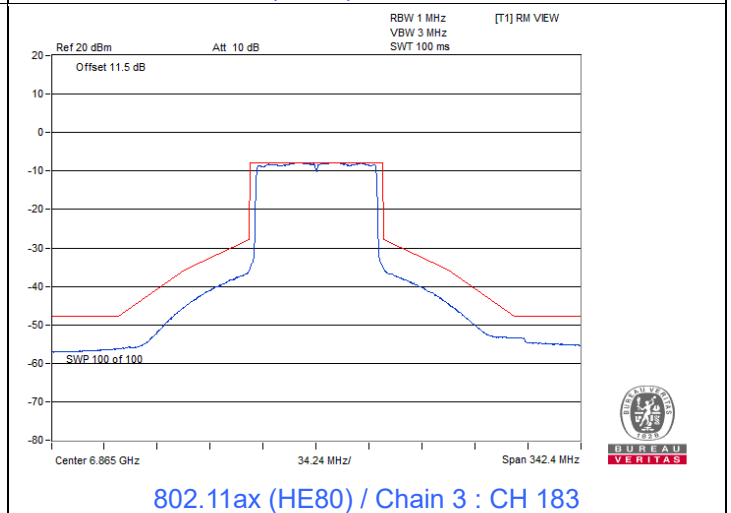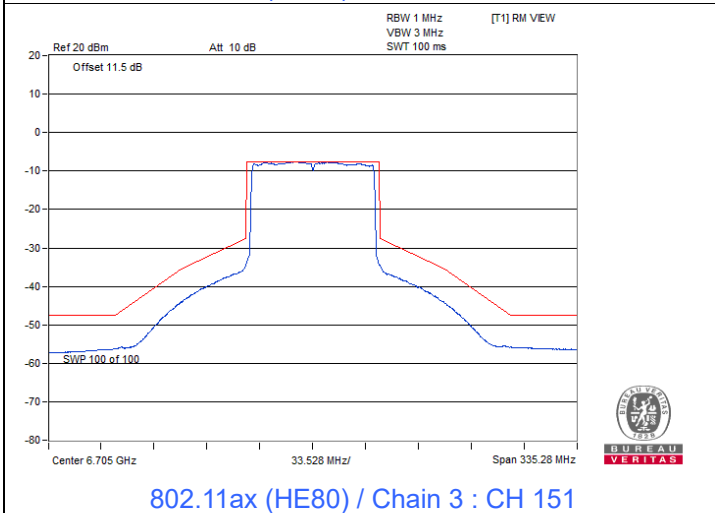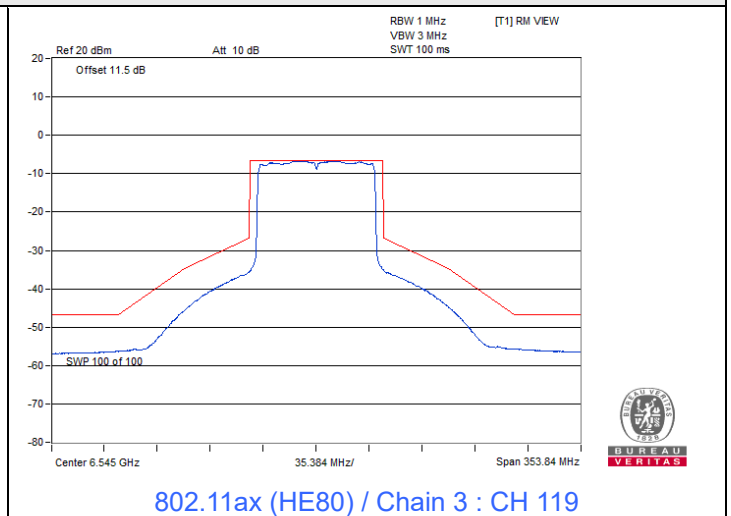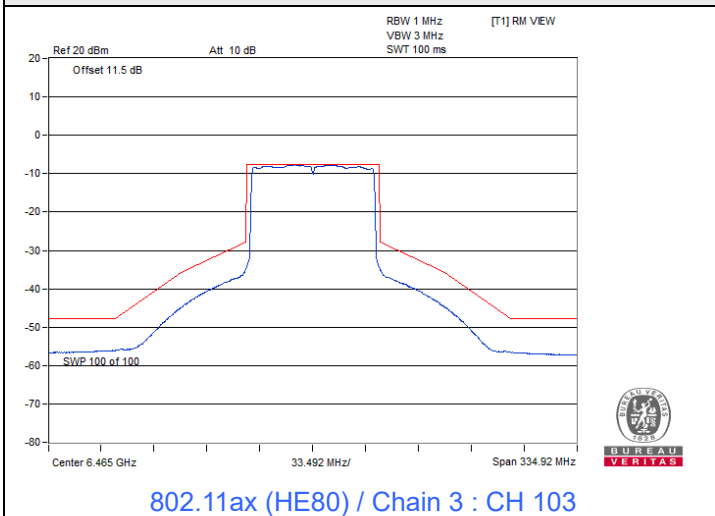


802.11ax (HE160)


Spectrum Plot

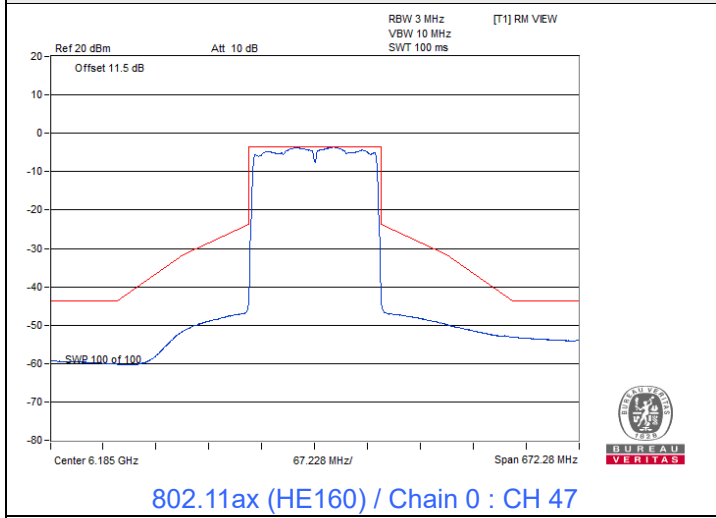


802.11ax (HE160) / Chain 0 : CH 47

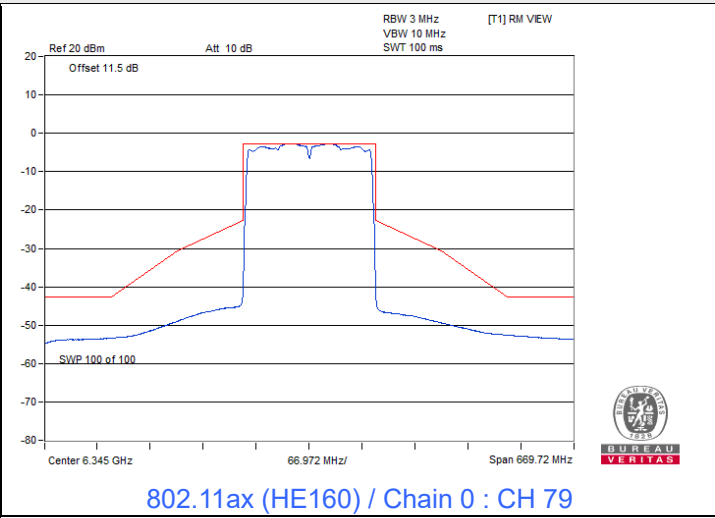


802.11ax (HE160) / Chain 0 : CH 79

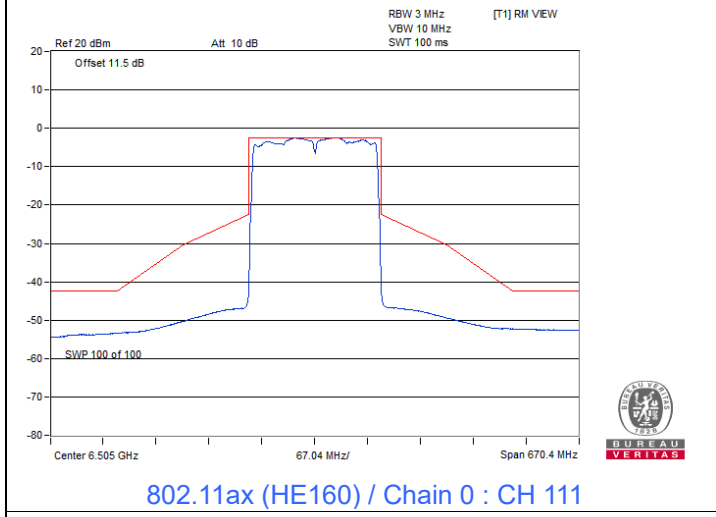


802.11ax (HE160) / Chain 0 : CH 111

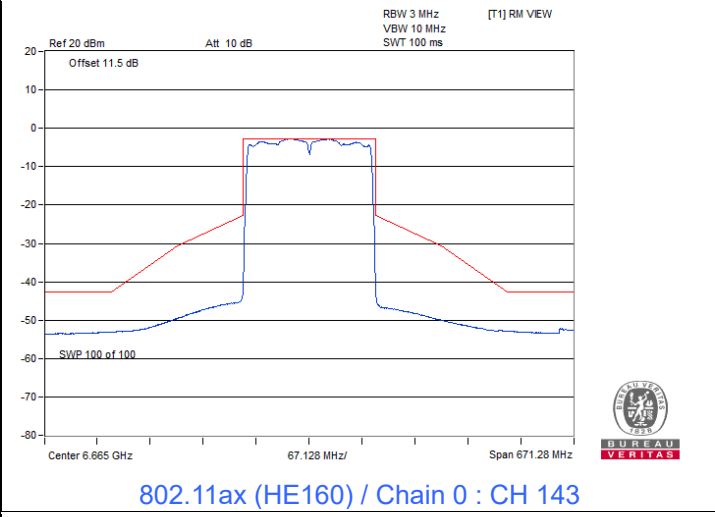

802.11ax (HE160) / Chain 0 : CH 143






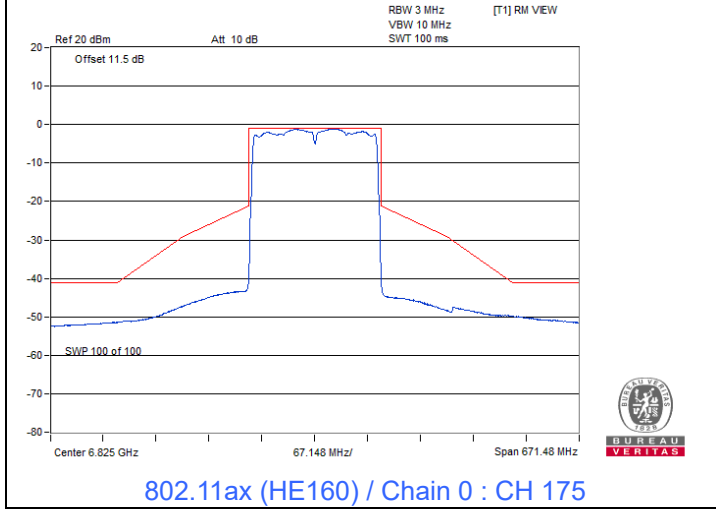


802.11ax (HE160) / Chain 0 : CH 175






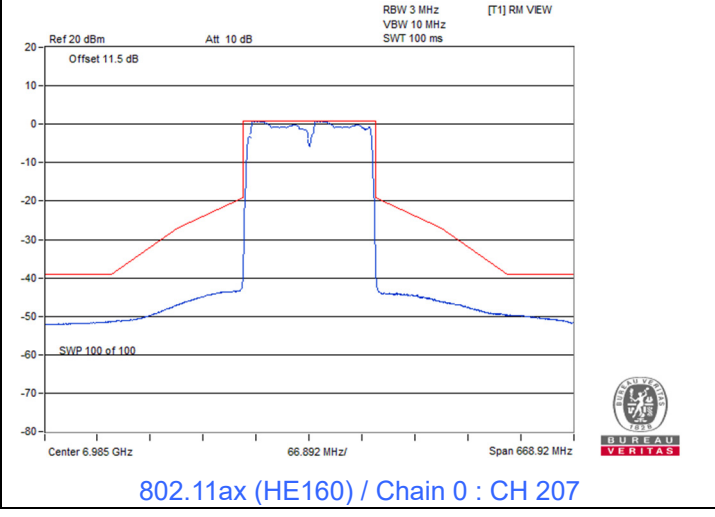


802.11ax (HE160) / Chain 0 : CH 207







Spectrum Plot

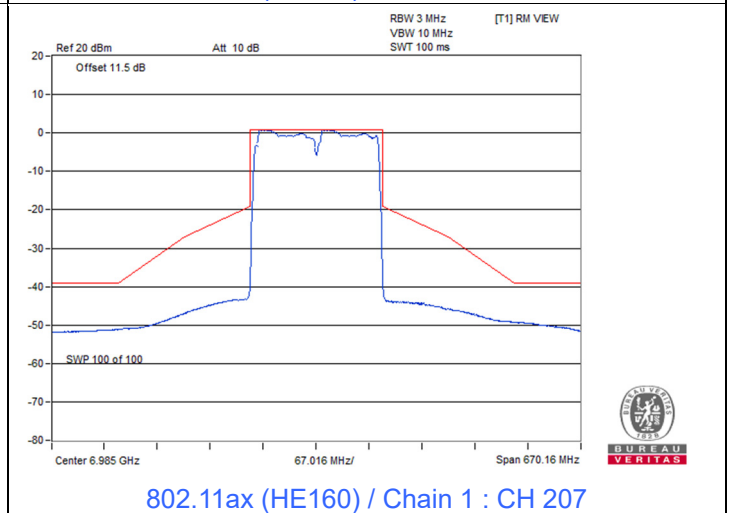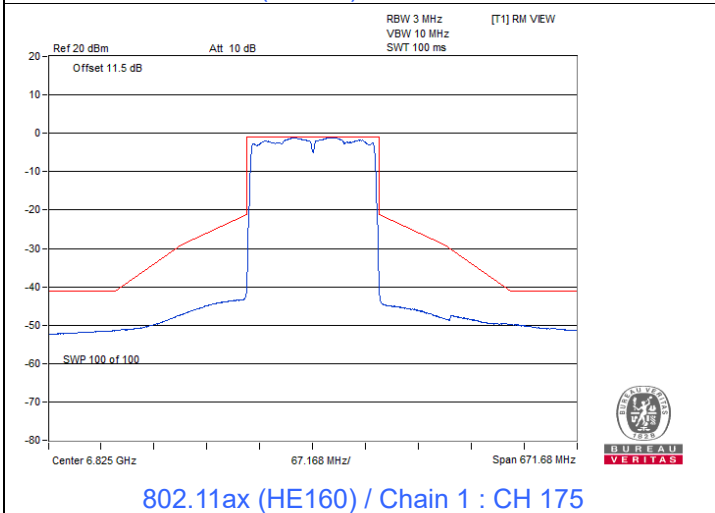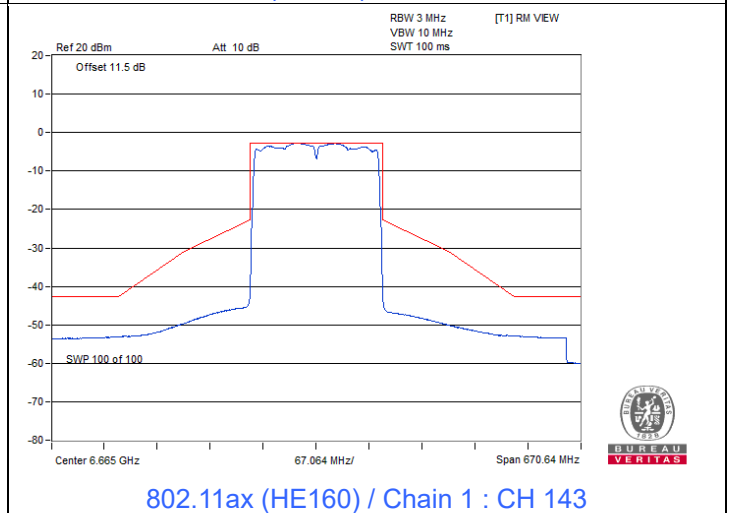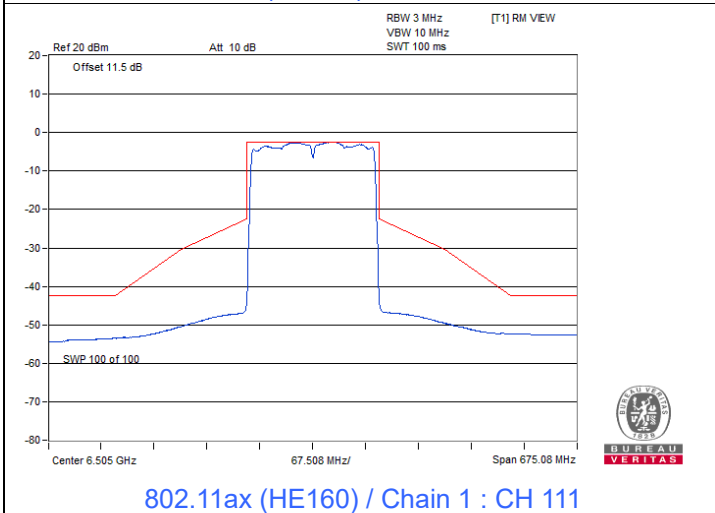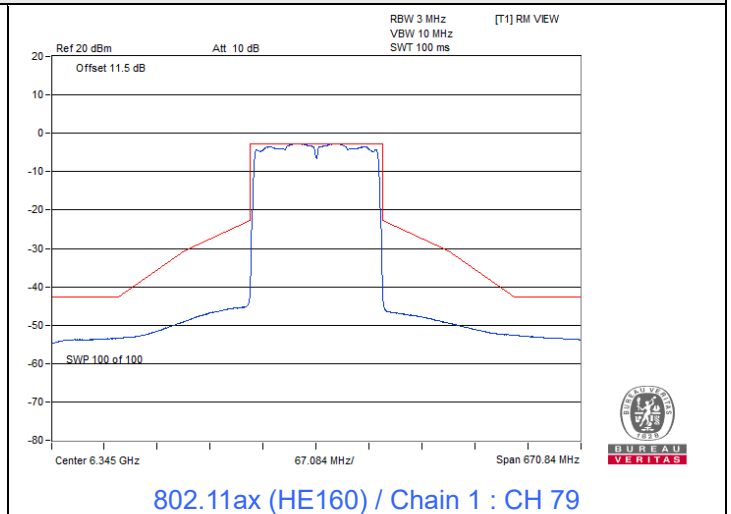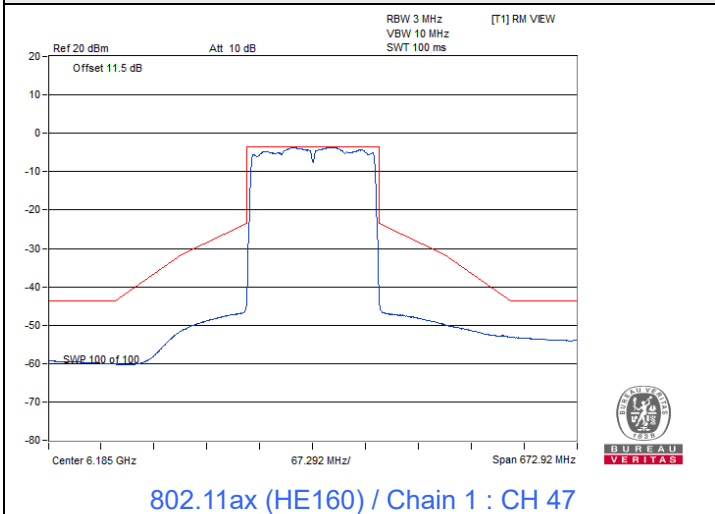

Spectrum Plot

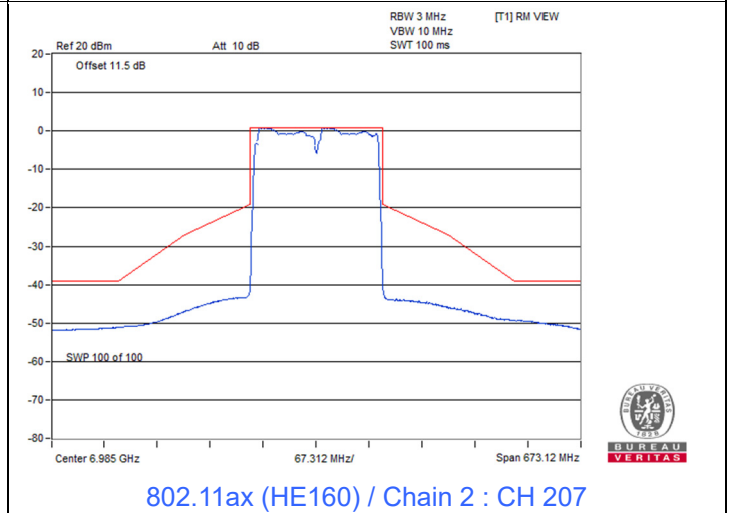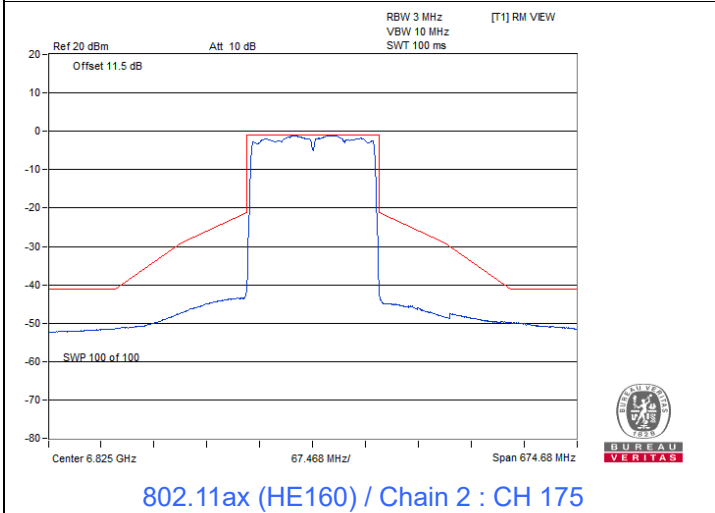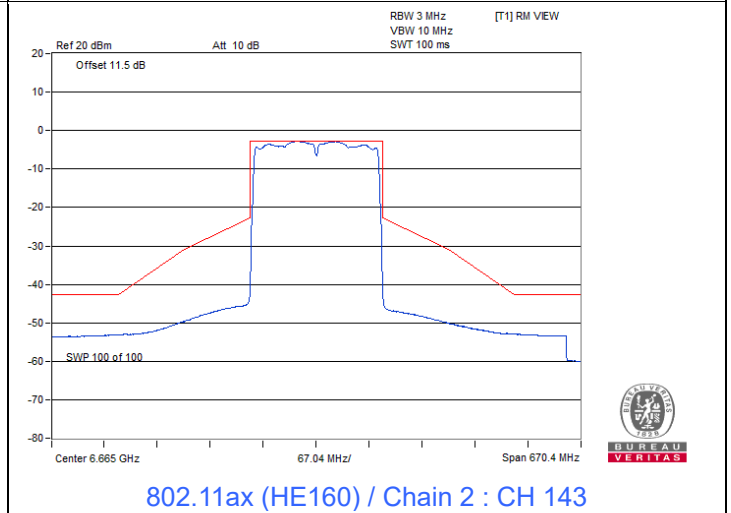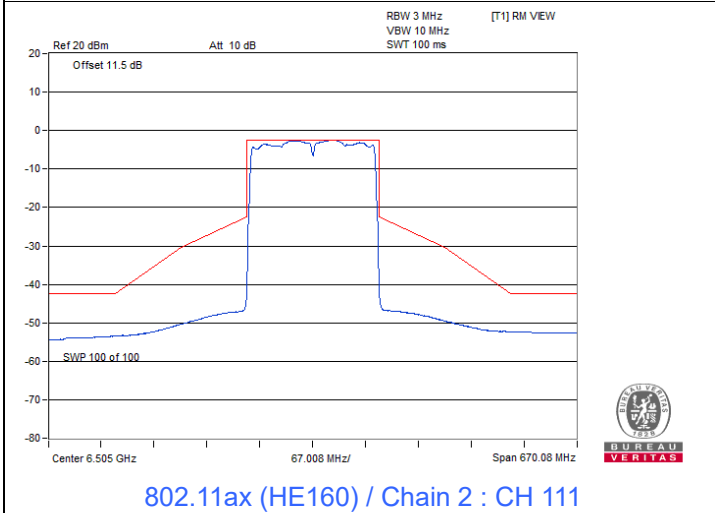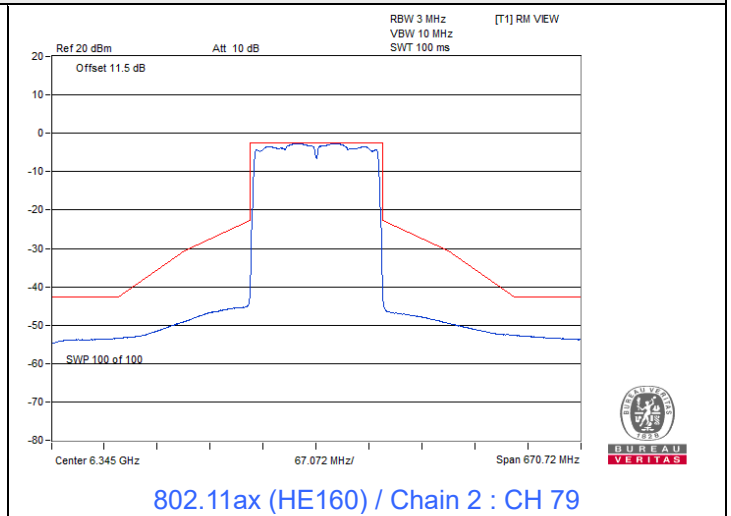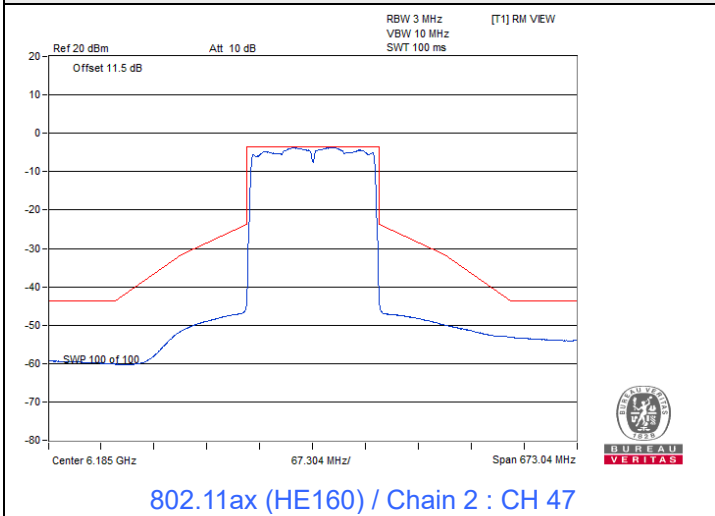

Spectrum Plot

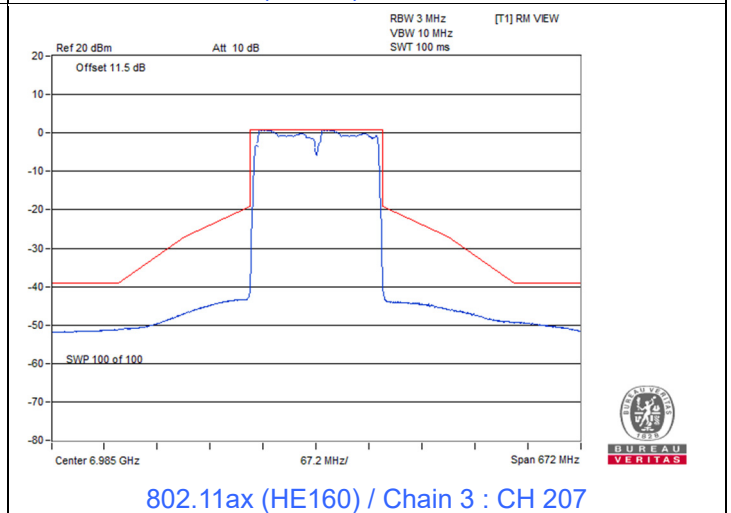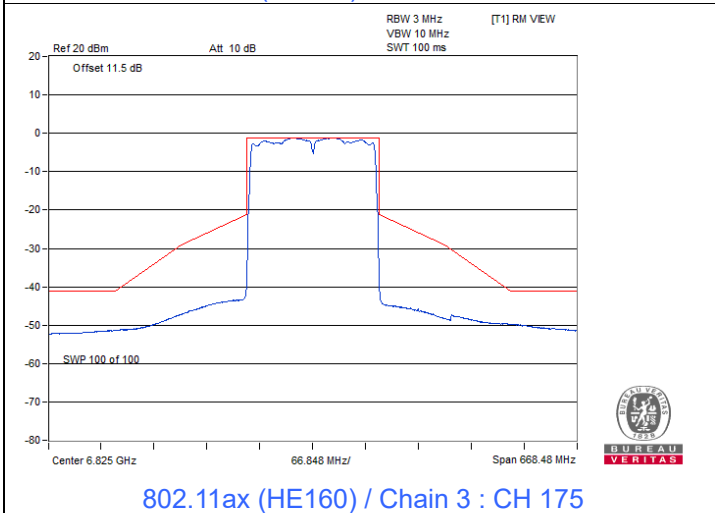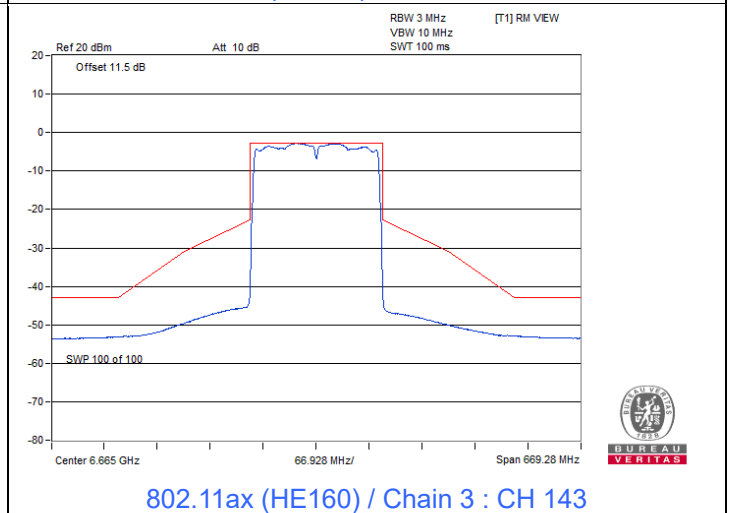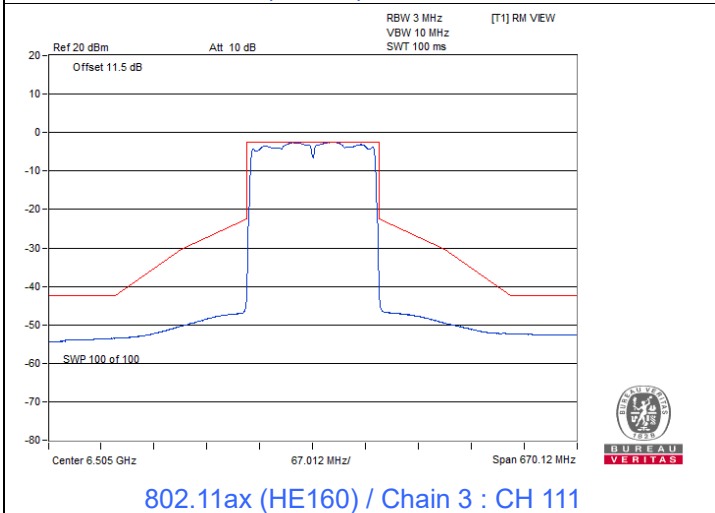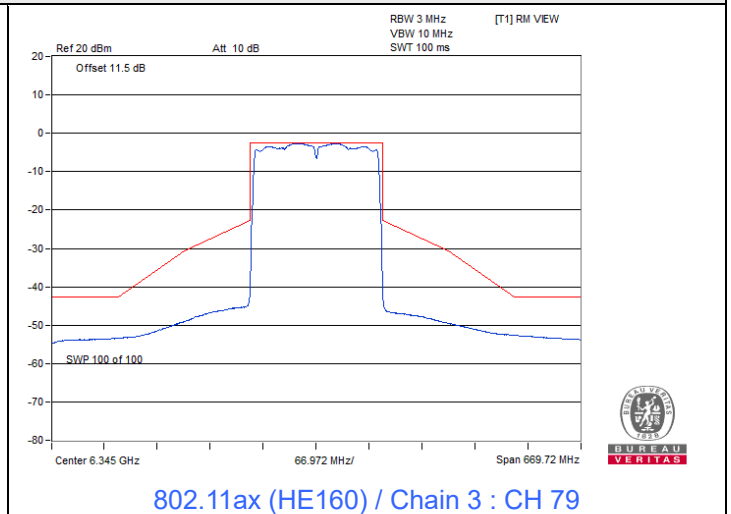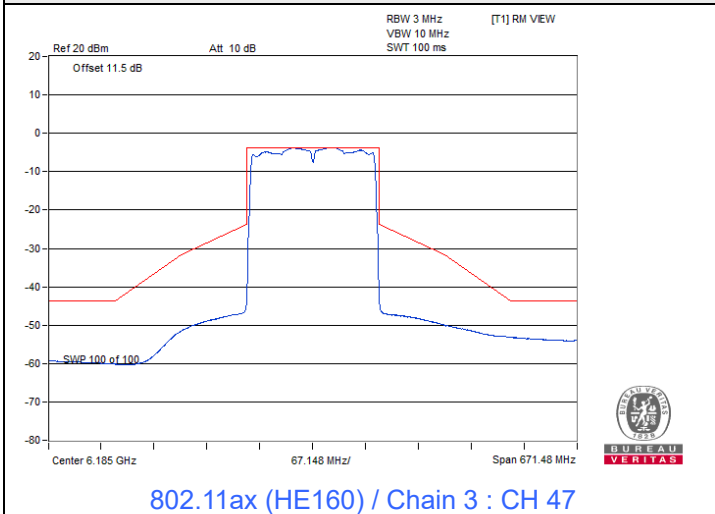

7.5 Occupied Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Jisyong Wang
--------------	----------------	---------------------------	--------------	------------	--------------

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)				Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
33	6115	17.40	17.40	17.48	17.48	320	Pass
61	6255	17.48	17.48	17.40	17.40	320	Pass
93	6415	17.40	17.40	17.40	17.40	320	Pass
97	6435	17.40	17.40	17.40	17.48	320	Pass
105	6475	17.31	17.40	17.31	17.40	320	Pass
113	6515	17.40	17.48	17.40	17.40	320	Pass
117	6535	17.40	17.40	17.40	17.40	320	Pass
149	6695	17.48	17.48	17.40	17.48	320	Pass
181	6855	17.31	17.40	17.31	17.40	320	Pass
185	6875	17.28	17.40	17.40	17.52	320	Pass
209	6995	17.39	17.48	17.39	17.48	320	Pass
233	7115	17.31	17.31	17.31	17.39	320	Pass

802.11ax (HE20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)				Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
33	6115	19.30	19.30	19.30	19.22	320	Pass
61	6255	19.30	19.30	19.30	19.30	320	Pass
93	6415	19.22	19.31	19.30	19.30	320	Pass
97	6435	19.30	19.30	19.22	19.30	320	Pass
105	6475	19.30	19.30	19.30	19.30	320	Pass
113	6515	19.30	19.30	19.30	19.30	320	Pass
117	6535	19.30	19.22	19.22	19.30	320	Pass
149	6695	19.30	19.30	19.30	19.30	320	Pass
181	6855	19.30	19.22	19.22	19.30	320	Pass
185	6875	19.22	19.30	19.30	19.30	320	Pass
209	6995	19.31	19.31	19.31	19.22	320	Pass
233	7115	19.22	19.22	19.22	19.22	320	Pass

802.11ax (HE40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)				Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
35	6125	38.09	38.09	38.26	38.26	320	Pass
59	6245	38.26	38.09	38.26	38.26	320	Pass
91	6405	38.26	38.26	38.09	38.26	320	Pass
99	6445	38.26	38.26	38.26	38.26	320	Pass
107	6485	38.26	38.26	38.26	38.26	320	Pass
115	6525	39.13	38.96	39.13	39.13	320	Pass
123	6565	38.26	38.26	38.26	38.26	320	Pass
155	6725	38.26	38.26	38.26	38.26	320	Pass
179	6845	38.26	38.09	38.26	38.26	320	Pass
187	6885	39.13	38.96	38.96	39.13	320	Pass
211	7005	38.09	38.09	38.09	37.91	320	Pass
227	7085	38.09	38.26	38.26	38.26	320	Pass

802.11ax (HE80)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)				Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
39	6145	77.57	77.22	77.57	77.57	320	Pass
55	6225	77.57	77.22	77.57	77.57	320	Pass
87	6385	77.57	77.57	77.57	77.57	320	Pass
103	6465	77.22	77.92	77.22	77.57	320	Pass
119	6545	79.30	78.60	78.60	78.60	320	Pass
151	6705	77.57	77.57	77.57	77.57	320	Pass
183	6865	78.95	78.95	79.30	78.95	320	Pass
199	6945	77.57	77.22	77.57	77.57	320	Pass
215	7025	76.87	77.57	77.22	77.22	320	Pass

802.11ax (HE160)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)				Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
47	6185	157.22	157.22	157.22	156.52	320	Pass
79	6345	157.22	157.22	157.22	156.52	320	Pass
111	6505	157.22	157.22	157.22	157.22	320	Pass
143	6665	157.22	156.52	157.22	157.22	320	Pass
175	6825	157.22	157.22	157.22	157.22	320	Pass
207	6985	157.22	156.52	157.22	157.22	320	Pass




Spectrum Plot of Maximum Value

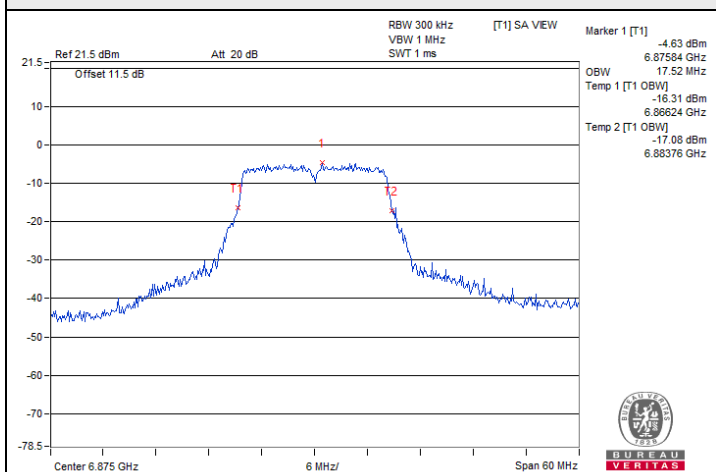


802.11a / Chain 3 : CH 185

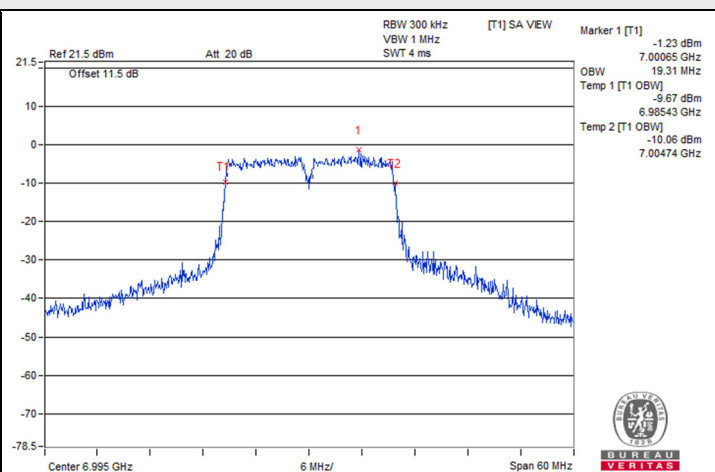


802.11ax (HE20) / Chain 0 : CH 209

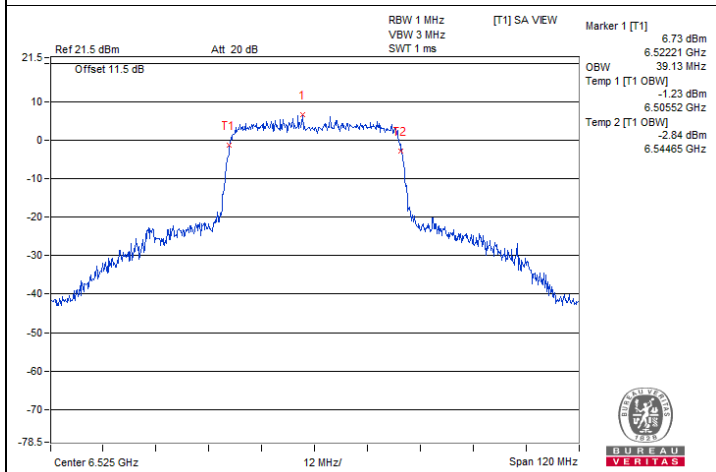

802.11ax (HE40) / Chain 0 : CH 115

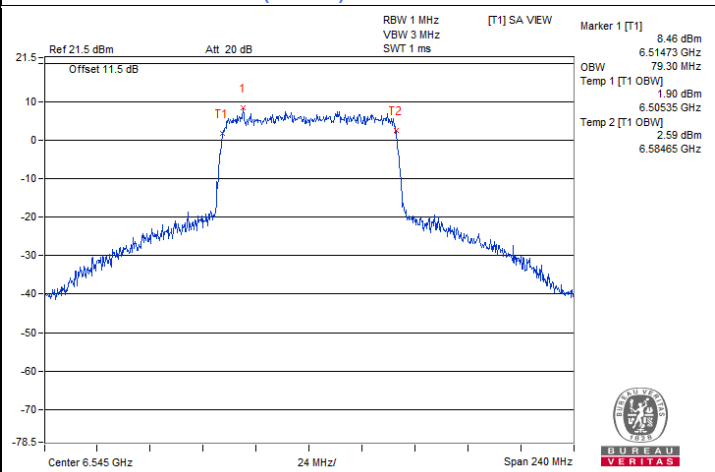

802.11ax (HE80) / Chain 0 : CH 119

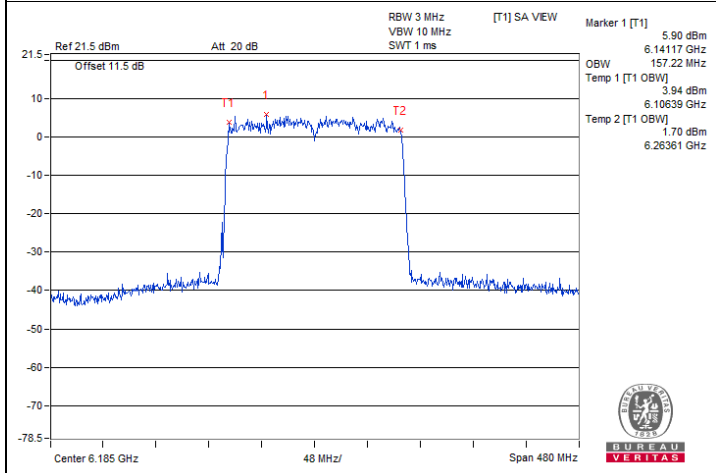

802.11ax (HE160) / Chain 0 : CH 47

7.6 Frequency Stability

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Jisyong Wang
--------------	----------------	---------------------------	--------------	------------	--------------

802.11a

Frequency Stability Versus Temperature									
Operating Frequency: 6115 MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
40	120	6115.0052	Pass	6115.0039	Pass	6115.0063	Pass	6115.0051	Pass
30	120	6114.9891	Pass	6114.9903	Pass	6114.9883	Pass	6114.9882	Pass
20	120	6114.984	Pass	6114.9811	Pass	6114.9838	Pass	6114.9791	Pass
10	120	6114.9913	Pass	6114.9934	Pass	6114.9917	Pass	6114.9922	Pass
0	120	6115.0111	Pass	6115.0108	Pass	6115.0101	Pass	6115.0123	Pass

Frequency Stability Versus Voltage									
Operating Frequency: 6115 MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
20	138	6114.9832	Pass	6114.9858	Pass	6114.9887	Pass	6114.9832	Pass
	120	6114.984	Pass	6114.9811	Pass	6114.9838	Pass	6114.9791	Pass
	102	6114.9932	Pass	6114.9936	Pass	6114.9954	Pass	6114.9979	Pass

7.7 Contention-based Protocol

Environmental Conditions:	26°C, 62% RH	Tested By:	Matthew Yang
---------------------------	--------------	------------	--------------

For Companion Device

UUT Software and Firmware Version	
Model No.	Software/Firmware Version
SAX2V1R	17.10.251.3202

Companion Device Information			
Product	Brand	Model No.	Software/Firmware Version
WiFi 6E Router	Netgear	RAXE500	V1.0.0.48_2.0.34



Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 2)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11ax	20	45	6175	6175	-66	3.4	0	-69.4	-62	OFF
					-68	3.4	0	-71.4	-62	Minimal
					-78.6	3.4	0	-82	-62	ON
	160	47	6185	6110	-66	3.4	0	-69.4	-62	OFF
					-68	3.4	0	-71.4	-62	Minimal
					-78.6	3.4	0	-82	-62	ON
	160	47	6185	6185	-65	3.4	0	-68.4	-62	OFF
					-68	3.4	0	-71.4	-62	Minimal
					-78.6	3.4	0	-82	-62	ON
	160	47	6185	6260	-65	3.4	0	-68.4	-62	OFF
					-68	3.4	0	-71.4	-62	Minimal
					-78.6	3.4	0	-82	-62	ON

Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Ant. 6G_A0-2) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11ax	20	6175	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	160	6110	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6185	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6260	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

