



TEST REPORT

APPLICANT : Unimax Communications
PRODUCT NAME : G1401
MODEL NAME : G1401
BRAND NAME : UNI America
FCC ID : P46-G1401
STANDARD(S) : 47 CFR Part 2(2.1093)
IEEE 1528-2013
RECEIPT DATE : 2020-08-17
TEST DATE : 2020-09-27 to 2020-12-14
ISSUE DATE : 2020-12-16

Edited by : Gan Yueming
Gan Yueming (Rapporteur)
Approved by: Peng Huarui
Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

- 1. SAR Results Summary5
- 2. Technical Information6
 - 2.1. Applicant and Manufacturer Information6
 - 2.2. Equipment under Test (EUT) Description6
 - 2.3. Environment of Test Site/Conditions7
- 3. Specific Absorption Rate (SAR)8
 - 3.1. Introduction8
 - 3.2. SAR Definition8
- 4. RF Exposure Limits9
 - 4.1. Uncontrolled Environment9
 - 4.2. Controlled Environment9
- 5. Applied Reference Documents10
- 6. SAR Measurement System11
 - 6.1. E-Field Probe12
 - 6.2. Data Acquisition Electronics (DAE)13
 - 6.3. Robot13
 - 6.4. Measurement Server14
 - 6.5. Light Beam Unit14
 - 6.6. Phantom14
 - 6.7. Device Holder15
 - 6.8. Data Storage and Evaluation16
 - 6.9. Test Equipment List18
- 7. Tissue Simulating Liquids20
- 8. SAR System Verification22



9. EUT Testing Position 26

10. Measurement Procedures 29

11. SAR Test Procedure 32

11.1. General Scan Requirements 32

11.2. Test Procedure 33

11.3. Description of Interpolation/Extrapolation Scheme 33

11.4. Wireless Router 33

12. SAR Test Configuration 35

13. Conducted RF Output Power 41

14. LTE Carrier Aggregation 61

14.1. Carrier Aggregation Configuration 61

14.2. LTE Downlink Carrier Aggregation Power 62

15. Hot-Spot Mode Evaluation Procedure 64

16. Block Diagram of the Tests to be Performed 65

17. Test Results List 66

17.1. Test Guidance 66

17.2. Body SAR Data 67

17.3. Repeated SAR Assessment 71

17.4. Extremity SAR Assessment 71

18. Simultaneous Transmission Evaluation 72

18.1. Simultaneous Transmission Consideration 72

18.2. Simultaneous Transmission Analysis 73

19. Uncertainty Assessment 75

Annex A General Information 78

Annex B Test Setup Photos

Annex C Plots of System Performance Check

Annex D Plots of Maximum SAR Test Results

Annex E DASY Calibration Certificate



Changed History		
Version	Date	Reason for Change
1.0	2020-12-16	First edition



1. SAR Results Summary

The maximum results of Specific Absorption Rate (SAR) found during test as bellows:

<Highest Reported SAR Summary>

Frequency Band		Highest SAR Summary		Highest Simultaneous Transmission 1g SAR (W/kg)
		Body (Separation 10mm)		
		1g SAR (W/kg)		
LTE	LTE Band 2	0.562		1.12
	LTE Band 4	0.901		
	LTE Band 5	0.457		
	LTE Band 13	0.722		
	LTE Band 66	0.790		
WLAN	2.4GHz WLAN	0.273		
	5GHz WLAN	0.588		

Note:

1. This device is in compliance with Specific Absorption Rate (SAR) for general population or uncontrolled exposure limits (1.6W/kg as averaged over any 1 gram of tissue; specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992), and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.
2. When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% risk level.



2. Technical Information

Note: Provide by applicant.

2.1. Applicant and Manufacturer Information

Applicant:	Unimax Communications
Applicant Address:	18201 McDermott St. West Suite E, Irvine, CA 92614, United States
Manufacturer:	Unimaxcomm
Manufacturer Address:	35th Floor, Office Building, HBC Huilong Center, Minzhi Street, Longhua District, Shenzhen, Guangdong, China

2.2. Equipment under Test (EUT) Description

Product Name:	G1401
Hardware Version:	V1.0
Software Version:	G1401_V1.0.0
Frequency Bands:	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 66: 1710 MHz ~ 1780 MHz WLAN 2.4GHz: 2412 MHz ~ 2462 MHz WLAN 5.2GHz: 5180 MHz ~ 5240 MHz WLAN 5.8GHz: 5745 MHz ~ 5825 MHz
Modulation Mode:	LTE: QPSK/16QAM/64QAM 802.11b: DSSS 802.11a/g/n-HT20/HT40/ac-VHT20/40/80: OFDM
LTE Carrier Aggregation:	CA Downlink
WiFi MIMO:	Support
Hotspot Mode:	WWAN/2.4GHz WLAN/5G WLAN(Band 1&4)
Antenna Type:	WWAN: Fixed Internal Antenna WLAN: PIFA Antenna
SIM Cards Description:	Single SIM Card

Note: For a more detailed description, please refer to specification or user manual supplied by the applicant and/or manufacturer.



2.3. Environment of Test Site/Conditions

Normal Temperature (NT):	20-25 °C
Relative Humidity:	30-75 %
Air Pressure:	980-1020 hPa

Test Frequency:	FDD-LTE Band 2/4/5/13/66 WLAN 2.4GHz WLAN 5.2GHz WLAN 5.8GHz
Operation Mode:	Call established
Power Level:	FDD-LTE Band 2/4/5/7/13/66 (Maximum output power) WLAN 2.4GHz WLAN 5.2GHz WLAN 5.8GHz

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the Factory. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.

3. Specific Absorption Rate (SAR)

3.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational or controlled and general population or uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational or controlled exposure limits are Middle than the limits for general population or uncontrolled.

3.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by(dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density. (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg).

SAR measurement can be either related to the temperature elevation in tissue by,

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where C is the specific head capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where σ is the conductivity of the tissue, ρ is the mass density of the tissue and $|E|$ is the rmselectrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.



4. RF Exposure Limits

4.1. Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2. Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for head and trunk)	1.6 W/kg
Spatial Peak SAR (10g cube tissue for limbs)	4.0 W/kg
Spatial Peak SAR (1g cube tissue for whole body)	0.08 W/kg

Note:

- Occupational/Uncontrolled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).
- Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.



5. Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title	Method Determination /Remark
1	47 CFR Part 2(2.1093)	Radio Frequency Radiation Exposure Evaluation: Portable Devices	No deviation
2	IEEE 1528-2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques	No deviation
3	KDB 447498 D01v06	General RF Exposure Guidance	No deviation
4	KDB 248227 D01v02r02	SAR Measurement Procedures for 802.11 Transmitters	No deviation
5	KDB 865664 D01v01r04	SAR Measurement 100 MHz to 6 GHz	No deviation
6	KDB 865664 D02v01r02	RF Exposure Reporting	No deviation
7	KDB 648474 D04v01r03	Handset SAR	No deviation
8	KDB 941225 D05v02r05	SAR Evaluation Consideration for LTE Devices	No deviation
9	KDB 941225 D06v02r01	SAR Evaluation Procedures For Portable Devices With Wireless Router Capabilities	No deviation

Note 1: The test item is not applicable.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

6. SAR Measurement System

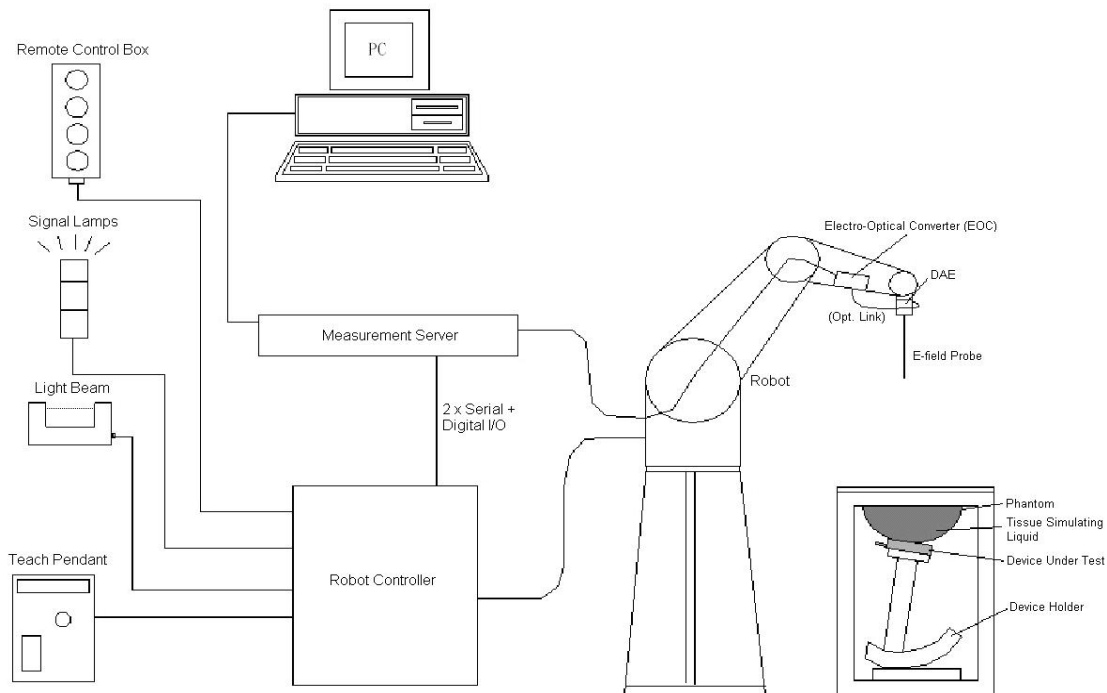


Fig 6.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:


- A standard high precision 6-axis robot with controller, a teach pendant and software.
- A data acquisition electronic (DAE) attached to the robot arm extension.
- A dosimetric probe equipped with an optical surface detector system.
- The electro-optical converter (ECO) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning.
- A computer operating Windows XP.
- DASY software.
- Remove control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom.
- A device holder.
- Tissue simulating liquid.
- Dipole for evaluating the proper functioning of the system.
- Some of the components are described in details in the following sub-sections.

6.1. E-Field Probe


The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

E-Field Probe Specification

<ES3DV3 Probe>

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	 <p>Fig 6.2 Photo of ES3DV3</p>
Frequency	10 MHz to 3 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g to 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 6.8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm	

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	 <p>Fig 6.3 Photo of EX3DV4</p>
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

6.2. Data Acquisition Electronics (DAE)

The data acquisition electronics(DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast16 bit AD-converter and a command decoder and control logic unit. AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 6.4 Photo of DAE

6.3. Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

High precision (repeatability ± 0.035 mm)

High reliability (industrial design)

Jerk-free straight movements

Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 6.5 Photo of DASY5

6.4. Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chip disk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 6.6 Photo of Server for DASY5

6.5. Light Beam Unit

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



Fig. 6.7 Photo of Light Beam

6.6. Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%) Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet



Measurement Areas	Left Head, Right Head, Flat Phantom	Fig. 6.8 Photo of SAM Phantom
--------------------------	-------------------------------------	--------------------------------------

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

6.7. Device Holder

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Fig 6.9 Device Holder

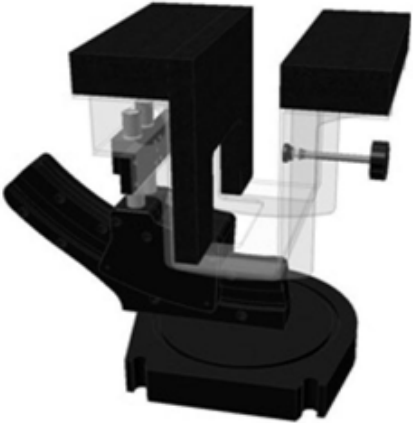


Fig 6.10 Laptop Extension Kit



6.8. Data Storage and Evaluation

➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software.

Probe parameters:	- Sensitivity	$Norm_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	$ConvF_i$
	- Diode compression point	dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the



diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \times \frac{cf}{dcp_i}$$

With V_i = compensated signal of channel i , ($i = x, y, z$)
 U_i = input signal of channel i , ($i = x, y, z$)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \times \text{ConvF}}}$$

$$\text{H-field Probes: } H_i = \sqrt{V_i} \times \frac{a_{i0} + a_{i1} + a_{i2}f^2}{f}$$

With V_i = compensated signal of channel i , ($i = x, y, z$)
 Norm_i = sensor sensitivity of channel i , ($i = x, y, z$), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \times \frac{\sigma}{\rho \times 1000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.



6.9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1173	2018.06.21	2021.06.20
SPEAG	835MHz System Validation Kit	D835V2	4d227	2018.06.22	2021.06.21
SPEAG	1750MHz System Validation Kit	D1750V2	1160	2018.06.25	2021.06.24
SPEAG	1900MHz System Validation Kit	D1900V2	5d221	2018.06.22	2021.06.21
SPEAG	2450MHz System Validation Kit	D2450V2	805	2018.10.26	2021.10.25
SPEAG	5000MHz System Validation Kit	D5GHzV2	1176	2018.11.06	2021.11.05
SPEAG	Dosimetric E-Field Probe	EX3DV4	3823	2020.01.03	2021.01.02
SPEAG	Dosimetric E-Field Probe	EX3DV4	3975	2020.05.20	2021.05.19
SPEAG	Data Acquisition Electronics	DAE4	480	2020.06.02	2021.06.01
SPEAG	Dielectric Assessment KIT	DAK-3.5	1279	2020.10.20	2021.10.19
SPEAG	SAM Twin Phantom 2	QD 000 P40 CB	TP-1464	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
R&S	Network Emulator	CMW500	124534	2020.03.31	2021.03.30
Agilent	Network Analyzer	E5071B	MY42404762	2020.04.01	2021.03.31
mini-circuits	Amplifier	ZHL-42W+	608501717	NCR	NCR
mini-circuits	Amplifier	ZVE-8G+	754401735	NCR	NCR
Agilent	Signal Generator	N5182B	MY53050509	2020.03.31	2021.03.30
Agilent	Power Sensor	N8482A	MY41090849	2020.10.19	2021.10.18
Agilent	Power Meter	E4416A	MY45102093	2020.10.19	2021.10.18
Anritsu	Power Sensor	MA2411B	N/A	2020.10.19	2021.10.18
Anritsu	Power Meter	NRVD	101066	2020.10.19	2021.10.18
Agilent	Dual Directional Coupler	778D	50422	NA	NA
MCL	Attenuation1	351-218-010	N/A	NA	NA
THERMOMETER	Thermo meter	DC-803	N/A	2020.01.22	2021.01.21
N/A	Tissue Simulating Liquids	700-6000MHz	N/A	24H	

Note:

1. The calibration certificate of DASY can be referred to appendix E of this report.
2. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
3. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Speag.



4. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it.
5. Attenuator insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.
6. N.C.R means No Calibration Requirement.

7. Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm, which is shown in Fig. 7.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig.

7.2. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in below table.

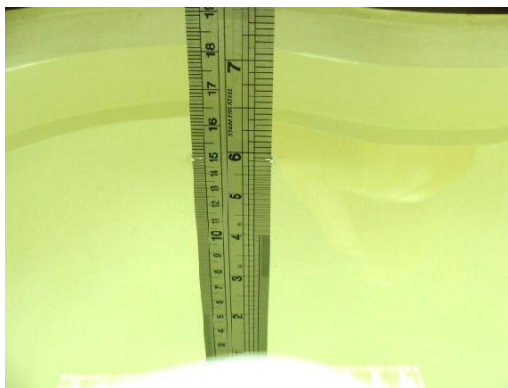


Fig 7.1 Photo of Liquid Height for Head SAR



Fig 7.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquids

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG.

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

Note: Please refer to the validation results for dielectric parameters of each frequency band.



The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using a SPEAG Dielectric Assessment KIT and an Agilent Network Analyzer.

Table 1: Dielectric Performance of Tissue Simulating Liquid

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Conductivity Target (σ)	Delta (σ) (%)	Limit (%)	Date
750	HSL	22.1	0.929	0.89	4.38	±5	2020.09.27
835	HSL	22.4	0.942	0.90	4.67	±5	2020.09.29
1750	HSL	22.2	1.388	1.37	1.31	±5	2020.09.28
1900	HSL	22.1	1.389	1.40	-0.79	±5	2020.09.27
2450	HSL	22.2	1.817	1.80	0.94	±5	2020.09.28
5250	HSL	22.3	4.532	4.71	-3.78	±5	2020.12.14
5750	HSL	22.1	5.374	5.22	2.95	±5	2020.12.14
Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Permittivity (εr)	Permittivity Target (εr)	Delta (εr) (%)	Limit (%)	Date
750	HSL	22.1	42.139	41.90	0.57	±5	2020.09.27
835	HSL	22.4	42.881	41.50	3.33	±5	2020.09.29
1750	HSL	22.2	41.145	40.10	2.61	±5	2020.09.28
1900	HSL	22.1	39.755	40.00	-0.61	±5	2020.09.27
2450	HSL	22.2	38.801	39.20	-1.02	±5	2020.09.28
5250	HSL	22.3	34.968	35.95	-2.73	±5	2020.12.14
5750	HSL	22.1	35.896	35.35	1.54	±5	2020.12.14



8. SAR System Verification

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

➤ System Validation

According to FCC KDB 865664 D02, SAR system verification is required to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles are used with the required tissue-equivalent media for system validation, according to the procedures outlined in FCC KDB 865664 D01 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point must be validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media. A tabulated summary of the system validation status, measurement frequencies, SAR probes, calibrated signal type(s) and tissue dielectric parameters has been included.

➤ Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

➤ System Setup

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected. In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

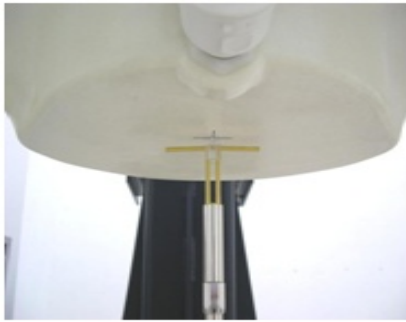


Fig 8.1 Photo of Dipole Setup

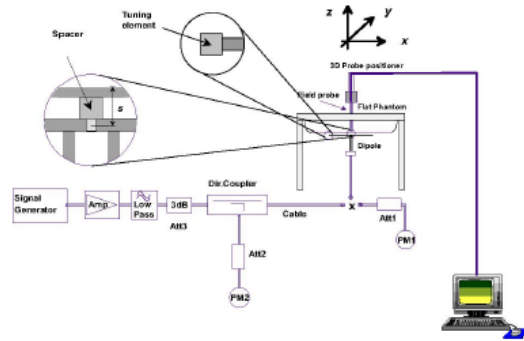


Fig 8.2 System Setup for System Evaluation

➤ **Validation Results**

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

<Validation Setup>

Frequency (MHz)	Tissue Type	Input Power(mW)	Dipole S/N	Probe S/N	DAE S/N
750	HSL	250	D750V2-1173	3975	480
835	HSL	250	D835V2-4d227	3823	480
1750	HSL	250	D1750V2-1160	3823	480
1900	HSL	250	D1900V2_5d221	3823	480
2450	HSL	250	D2450V2-805	3823	480
5250	HSL	100	D5GHzV2-1176-5250	3823	480
5750	HSL	100	D5GHzV2-1176-5750	3823	480

Frequency (MHz)	Tissue Type	Conductivity (σ)	Permittivity (ϵ_r)	CW Signal Validation		
				Sensitivity	Probe Linearity	Probe Isotropy
750	HSL	0.851	42.43	PASS	PASS	PASS
835	HSL	0.898	41.88	PASS	PASS	PASS
1750	HSL	1.386	39.91	PASS	PASS	PASS
1800	HSL	1.449	41.26	PASS	PASS	PASS
1900	HSL	1.435	39.65	PASS	PASS	PASS
2000	HSL	1.451	39.42	PASS	PASS	PASS
2300	HSL	1.764	38.99	PASS	PASS	PASS
2450	HSL	1.863	38.85	PASS	PASS	PASS
2600	HSL	1.973	38.58	PASS	PASS	PASS
5250	HSL	4.528	35.32	PASS	PASS	PASS



5600	HSL	4.905	34.89	PASS	PASS	PASS
5750	HSL	5.077	34.28	PASS	PASS	PASS

Frequency (MHz)	Tissue Type	Conductivity (σ)	Permittivity (ϵ_r)	Modulation Signal Validation		
				Mod. Type	Duty Factor	PAR
750	HSL	0.851	42.43	N/A	N/A	N/A
835	HSL	0.898	41.88	GMSK	PASS	N/A
1750	HSL	1.386	39.91	N/A	N/A	N/A
1800	HSL	1.449	41.26	N/A	N/A	N/A
1900	HSL	1.435	39.65	GMSK	PASS	N/A
2000	HSL	1.451	39.42	GMSK	PASS	N/A
2300	HSL	1.764	38.99	OFDM	PASS	PASS
2450	HSL	1.863	38.85	OFDM	PASS	PASS
2600	HSL	1.973	38.58	TDD	PASS	N/A
5250	HSL	4.528	35.32	OFDM	N/A	PASS
5600	HSL	4.905	34.89	OFDM	N/A	PASS
5750	HSL	5.077	34.28	OFDM	N/A	PASS

<Validation Results>

Date	Frequency (MHz)	Tissue Type	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020.09.27	750	HSL	2.19	8.26	8.76	6.05
2020.09.29	835	HSL	2.39	9.34	9.56	2.36
2020.09.28	1750	HSL	9.48	37.10	37.92	2.21
2020.09.27	1900	HSL	10.20	39.50	40.8	3.29
2020.09.28	2450	HSL	13.50	52.00	54	3.85
2020.12.14	5250	HSL	7.93	78.90	79.3	0.51
2020.12.14	5750	HSL	8.06	80.00	80.6	0.75



Date	Frequency (MHz)	Tissue Type	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2020.09.27	750	HSL	1.47	5.45	5.88	7.89
2020.09.29	835	HSL	1.57	6.07	6.28	3.46
2020.09.28	1750	HSL	4.99	20.00	19.96	-0.20
2020.09.27	1900	HSL	5.30	20.60	21.2	2.91
2020.09.28	2450	HSL	6.15	24.10	24.6	2.07
2020.12.14	5250	HSL	2.26	22.50	22.6	0.44
2020.12.14	5750	HSL	2.28	22.60	22.8	0.88

Note: System checks the specific test data please see Annex C.

9. EUT Testing Position

This EUT was tested in six different positions. They are right cheek/right tilted/left cheek/left tilted for head, Front/Back of the EUT with phantom 10 mm gap, as illustrated below, please refer to Appendix B for the test setup photos.

➤ Handset Reference Points

The vertical centre line passes through two points on the front side of the handset – the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.

The horizontal line is perpendicular to the vertical centre line and passes the center of the acoustic output. The horizontal line is also tangential to the handset at point A.

The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centre line is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.



Fig. 9.1 Illustration for Cheek Position

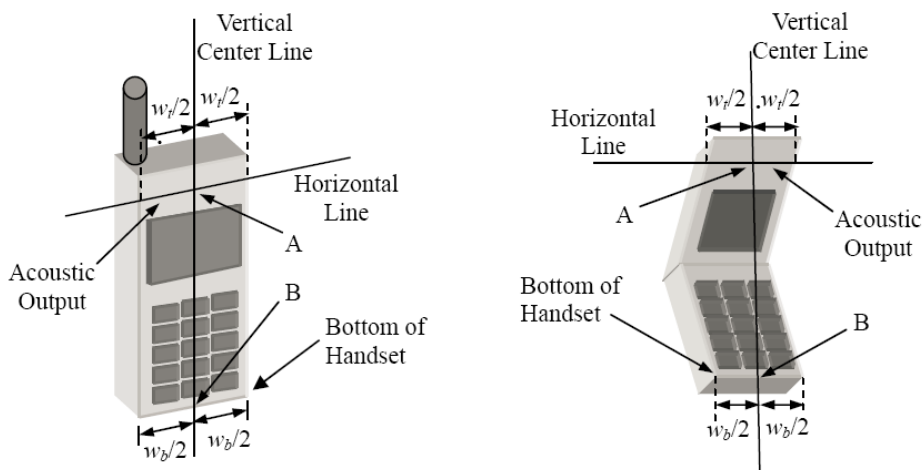


Fig. 9.2 Illustration for Handset Vertical and Horizontal Reference Lines

➤ **Positioning for Cheek / Touch**

To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear and LE: Left Ear) and align the center of the ear piece with the line RE-LE.

To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see below figure)

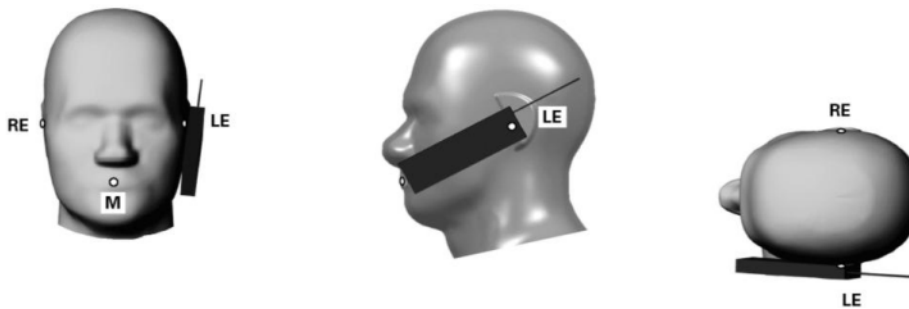


Fig 9.3 Illustration for Cheek Position

➤ **Positioning for Ear / 15° Tilt**

To position the device in the “cheek” position described above.

While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see figure below).

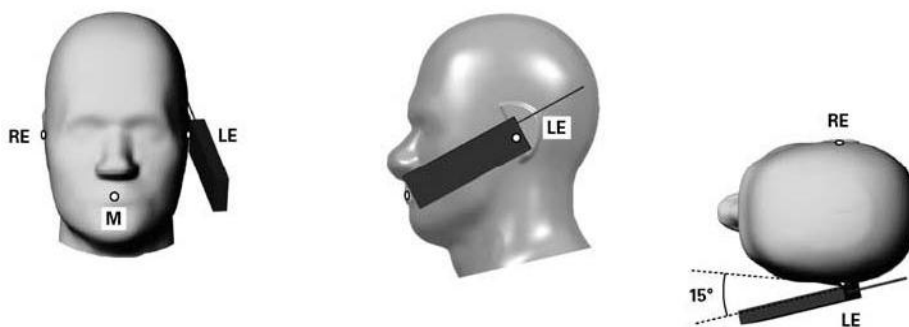


Fig 9.4 Illustration for Tilted Position

➤ **SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom**

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR locations identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

➤ **Hotspot Mode Exposure Position Conditions**

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

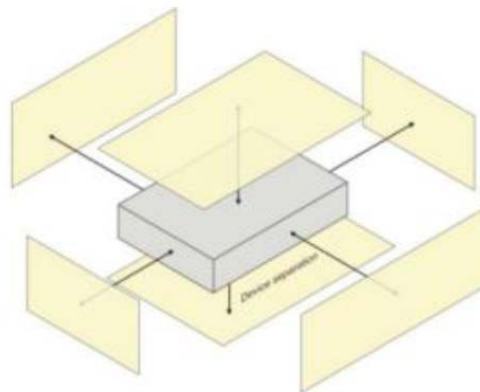


Fig 9.6 Illustration for Hotspot Position



10. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement.
- (b) Area scan.
- (c) Zoom scan.
- (d) Power drift measurement.

➤ Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine



(SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan.
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- (c) Generation of a high-resolution mesh within the measured volume.
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid.
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface.
- (f) Calculation of the averaged SAR within masses of 1g and 10g.

➤ **Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

➤ **Area Scan Procedures**

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm² step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

When an Area Scan has measured all reachable points, it computes the field maxima founding the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE1528-2003.

➤ **Zoom Scan Procedures**

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side length of the 10 g cube 21,5mm. The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications utilize a physical step of 5x5x7 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 30mm in the Z axis.

➤ **SAR Averaged Methods**

In DASy, the interpolation and extrapolation are both based on the modified Quadratic Sheppard's method. The interpolation scheme combines a least-square fitted function method and a weighted



average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

➤ **Power Drift Monitoring**

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

11. SAR Test Procedure

11.1. General Scan Requirements

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.

		≤ 3 GHz	> 3 GHz	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 mm \pm 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm \pm 0.5 mm	
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$	
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm	
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				



11.2. Test Procedure

The Following steps are used for each test position

1. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
2. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
3. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
4. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

11.3. Description of Interpolation/Extrapolation Scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

11.4. Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include



simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



12. SAR Test Configuration

<LTE Mode>

LTE Target MPR level

The device implements maximum power reduction per 3GPP 36.101 requirements where the MPR target is as below table. The MPR settings are implemented configured into firmware and cannot be disabled by the end user or LTE carrier network.

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR	3GPP
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	Target (dB)	MPR (dB)
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	2	≤ 2

Note: The measurement result showed some difference from the target MPR level, due to expected 0.5dB measurement tolerance

LTE Bands

LTE Bands	Channel bandwidth / Transmission bandwidth configuration [RB]					
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz
2	√	√	√	√	√	√
4	√	√	√	√	√	√
5	√	√	√	√	N/A	N/A
13	N/A	N/A	√	√	N/A	N/A
66	√	√	√	√	√	√

Note:

1. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
2. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
3. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
4. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported



- SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
5. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
 6. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ Db higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported band width is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
 7. For LTE B4 / B5 / B7 / B17 the maximum bandwidth does not support three non-overlapping channels, per KDB941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
 8. LTE band 2 / 12 SAR test was covered by Band 25 / 17; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.
 9. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >>constellation" mode of the device connect to the CMW500 base station, therefore, the device 64QAM and 16QAMsignal modulation are correct. Identify if Maximum Power Reduction (MPR) is optional or mandatory, i.e. built-in by design: only mandatory MPR may be considered during SAR testing, when the maximum output power is permanently limited by the MPR implemented within the UE; and only for the applicable RB (resource block) configurations specified in LTE standards: b) A-MPR (additional MPR) must be disabled.
 10. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the



theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

11. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
12. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
13. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.

<WLAN 2.4GHz>

1. SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:
 - a. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
 - b. When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
2. 2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test configuration Procedures should be followed.
3. For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
4. Justification for test configurations for WLAN per KDB Publication 248227 D02DR02-41929 for 2.4 GHz WI-FI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
5. A fixed level power reduction is applied for WiFi when handset operates "held to the body" condition or "held to the ear" condition, the power reduction triggered by audio receiver detection and call



establish status.

6. Per KDB 248227 D01v02r02, In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. SAR is not required for the following 2.4 GHz OFDM conditions:
 - a. When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
 - b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

<WLAN 5GHz>

A) U-NII-1 and U-NII-2A Bands

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

1. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
2. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
3. The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50.
4. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

B) U-NII-2C and U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. when Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range



covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

C) OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

1. The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
2. If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
3. If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
4. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n. After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.
5. The channel closest to mid-band frequency is selected for SAR measurement.
6. For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

**D) SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction Vapplies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.



13. Conducted RF Output Power

➤ LTE Conducted Power

<FDD-LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Low Channel	Middle Channel	High Channel	Tune-up limit (dBm)
Channel				18700	18900	19100	
Frequency (MHz)				1860	1880	1900	
20	QPSK	1	0	22.08	21.57	21.82	22.5
20	QPSK	1	49	21.51	21.97	21.85	
20	QPSK	1	99	21.39	22.10	21.07	
20	QPSK	50	0	20.68	21.07	20.74	21.5
20	QPSK	50	24	20.44	20.85	20.71	
20	QPSK	50	50	20.56	20.93	20.57	
20	QPSK	100	0	20.60	20.93	20.61	
20	16QAM	1	0	21.95	21.18	21.07	22.5
20	16QAM	1	49	21.18	21.64	20.79	
20	16QAM	1	99	21.15	21.42	20.08	
20	16QAM	50	0	19.72	19.88	19.86	20.5
20	16QAM	50	24	19.51	19.92	19.43	
20	16QAM	50	50	19.54	19.96	19.73	
20	16QAM	100	0	19.64	19.99	19.77	
20	64QAM	1	0	21.92	20.94	20.93	21.5
20	64QAM	1	49	21.03	21.14	20.63	
20	64QAM	1	99	20.74	21.04	20.17	
20	64QAM	50	0	19.74	19.76	19.83	20.5
20	64QAM	50	24	19.54	19.83	19.38	
20	64QAM	50	50	19.53	19.98	19.74	
20	64QAM	100	0	19.63	19.91	19.78	
Channel				18675	18900	19125	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1880	1902.5	
15	QPSK	1	0	22.06	21.64	21.92	22.5
15	QPSK	1	37	21.66	22.07	22.02	
15	QPSK	1	74	21.88	22.01	21.25	
15	QPSK	36	0	20.62	20.55	20.72	21.5
15	QPSK	36	20	20.66	20.93	20.84	
15	QPSK	36	39	20.59	21.11	20.60	



15	QPSK	75	0	20.75	20.87	20.72	
15	16QAM	1	0	22.05	20.72	20.94	22.5
15	16QAM	1	37	21.35	21.81	21.59	
15	16QAM	1	74	20.70	21.25	20.42	
15	16QAM	36	0	19.76	19.82	19.38	20.5
15	16QAM	36	20	19.65	19.98	19.60	
15	16QAM	36	39	19.53	20.13	19.29	
15	16QAM	75	0	19.85	19.89	19.41	
15	64QAM	1	0	21.74	21.06	21.00	22
15	64QAM	1	37	20.62	21.18	21.54	
15	64QAM	1	74	20.91	21.13	20.44	
15	64QAM	36	0	19.67	19.74	19.34	20.5
15	64QAM	36	20	19.59	20.07	19.53	
15	64QAM	36	39	19.57	20.02	19.24	
15	64QAM	75	0	19.75	19.86	19.40	
Channel				18650	18900	19150	Tune-up limit (dBm)
Frequency (MHz)				1855	1880	1905	
10	QPSK	1	0	21.96	21.44	21.67	22.5
10	QPSK	1	25	22.05	22.05	21.49	
10	QPSK	1	49	21.97	21.81	21.04	
10	QPSK	25	0	20.63	20.67	20.84	21.5
10	QPSK	25	12	20.82	21.09	20.75	
10	QPSK	25	25	20.66	21.03	20.31	
10	QPSK	50	0	20.71	20.76	20.67	
10	16QAM	1	0	21.74	21.19	20.92	22
10	16QAM	1	25	20.98	21.22	20.95	
10	16QAM	1	49	21.10	21.53	20.25	
10	16QAM	25	0	19.79	19.87	19.59	20.5
10	16QAM	25	12	19.79	20.19	19.59	
10	16QAM	25	25	19.72	20.08	19.39	
10	16QAM	50	0	19.72	19.86	19.40	
10	64QAM	1	0	21.68	20.56	21.15	22
10	64QAM	1	25	20.96	21.35	20.91	
10	64QAM	1	49	20.78	20.96	19.90	
10	64QAM	25	0	19.78	19.77	19.65	20.5
10	64QAM	25	12	19.68	20.01	19.43	
10	64QAM	25	25	19.70	20.01	19.16	



10	64QAM	50	0	19.69	19.91	19.38	
Channel				18625	18900	19175	Tune-up limit (dBm)
Frequency (MHz)				1852.5	1880	1907.5	
5	QPSK	1	0	22.07	21.54	21.79	22.5
5	QPSK	1	12	21.48	21.94	21.82	
5	QPSK	1	24	21.36	21.96	21.04	
5	QPSK	12	0	20.65	20.59	20.71	21.5
5	QPSK	12	7	20.41	20.82	20.68	
5	QPSK	12	13	20.53	20.90	20.54	
5	QPSK	25	0	20.57	20.90	20.58	22.5
5	16QAM	1	0	21.92	21.15	21.04	
5	16QAM	1	12	21.15	21.61	20.76	
5	16QAM	1	24	21.12	21.39	20.05	20.5
5	16QAM	12	0	19.69	19.85	19.83	
5	16QAM	12	7	19.48	19.89	19.40	
5	16QAM	12	13	19.51	19.93	19.70	20.5
5	16QAM	25	0	19.61	19.96	19.74	
5	64QAM	1	0	21.89	20.91	20.90	
5	64QAM	1	12	21.00	21.11	20.60	22.5
5	64QAM	1	24	20.71	21.01	20.14	
5	64QAM	12	0	19.71	19.73	19.80	
5	64QAM	12	7	19.51	19.80	19.35	20.5
5	64QAM	12	13	19.50	19.95	19.71	
5	64QAM	25	0	19.60	19.88	19.75	
Channel				18615	18900	19185	Tune-up limit (dBm)
Frequency (MHz)				1851.5	1880	1908.5	
3	QPSK	1	0	22.04	21.51	21.76	22.5
3	QPSK	1	8	21.45	21.91	21.79	
3	QPSK	1	14	21.33	21.93	21.01	
3	QPSK	8	0	20.62	20.56	20.68	21.5
3	QPSK	8	4	20.38	20.79	20.65	
3	QPSK	8	7	20.50	20.87	20.51	
3	QPSK	15	0	20.54	20.87	20.55	22.5
3	16QAM	1	0	21.89	21.12	21.01	
3	16QAM	1	8	21.12	21.58	20.73	
3	16QAM	1	14	21.09	21.36	20.02	



3	16QAM	8	0	19.66	19.82	19.80	20.5
3	16QAM	8	4	19.45	19.86	19.37	
3	16QAM	8	7	19.48	19.90	19.67	
3	16QAM	15	0	19.58	19.93	19.71	
3	64QAM	1	0	21.86	20.88	20.87	22.5
3	64QAM	1	8	20.97	21.08	20.57	
3	64QAM	1	14	20.68	20.98	20.11	
3	64QAM	8	0	19.68	19.70	19.77	20.5
3	64QAM	8	4	19.48	19.77	19.32	
3	64QAM	8	7	19.47	19.92	19.68	
3	64QAM	15	0	19.57	19.85	19.72	
Channel				18607	18900	19193	Tune-up limit (dBm)
Frequency (MHz)				1850.7	1880	1909.3	
1.4	QPSK	1	0	22.01	21.48	21.73	22.5
1.4	QPSK	1	3	21.42	21.88	21.76	
1.4	QPSK	1	5	21.30	21.90	20.98	
1.4	QPSK	3	0	20.59	20.53	20.65	
1.4	QPSK	3	1	20.35	20.76	20.62	
1.4	QPSK	3	3	20.47	20.84	20.48	
1.4	QPSK	6	0	20.51	20.84	20.52	21.5
1.4	16QAM	1	0	21.86	21.09	20.98	22
1.4	16QAM	1	3	21.09	21.55	20.70	
1.4	16QAM	1	5	21.06	21.33	19.99	
1.4	16QAM	3	0	19.63	19.79	19.77	
1.4	16QAM	3	1	19.42	19.83	19.34	
1.4	16QAM	3	3	19.45	19.87	19.64	
1.4	16QAM	6	0	19.55	19.90	19.68	20.5
1.4	64QAM	1	0	21.83	20.85	20.84	21
1.4	64QAM	1	3	20.94	21.05	20.54	
1.4	64QAM	1	5	20.65	20.95	20.08	
1.4	64QAM	3	0	19.65	19.67	19.74	
1.4	64QAM	3	1	19.45	19.74	19.29	
1.4	64QAM	3	3	19.44	19.89	19.65	
1.4	64QAM	6	0	19.54	19.82	19.69	20



<FDD-LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Low Channel	Middle Channel	High Channel	Tune-up limit (dBm)
Channel				20050	20175	20300	
Frequency (MHz)				1720	1732.5	1745	
20	QPSK	1	0	23.39	23.72	23.32	24.5
20	QPSK	1	49	23.64	23.42	23.47	
20	QPSK	1	99	23.01	23.44	23.58	
20	QPSK	50	0	22.78	22.85	22.96	23.5
20	QPSK	50	24	22.76	22.69	22.88	
20	QPSK	50	50	22.68	22.89	22.87	
20	QPSK	100	0	22.75	22.88	22.95	
20	16QAM	1	0	22.97	23.07	23.51	24
20	16QAM	1	49	23.14	22.30	23.10	
20	16QAM	1	99	22.34	23.11	22.51	
20	16QAM	50	0	21.93	21.56	21.66	22.5
20	16QAM	50	24	21.87	21.15	21.70	
20	16QAM	50	50	21.68	21.39	21.42	
20	16QAM	100	0	21.78	21.39	21.61	
20	64QAM	1	0	23.05	22.88	22.48	23.5
20	64QAM	1	49	22.92	22.26	22.21	
20	64QAM	1	99	22.24	22.92	22.35	
20	64QAM	50	0	21.89	21.61	21.55	22
20	64QAM	50	24	21.90	21.09	21.60	
20	64QAM	50	50	21.71	21.40	21.36	
20	64QAM	100	0	21.80	21.32	21.55	
Channel				20025	20175	20325	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1732.5	1747.5	
15	QPSK	1	0	23.36	23.69	23.29	24
15	QPSK	1	37	23.61	22.89	23.44	
15	QPSK	1	74	22.98	23.41	23.55	
15	QPSK	36	0	22.75	22.82	22.93	23.5
15	QPSK	36	20	22.73	22.66	22.85	
15	QPSK	36	39	22.65	22.86	22.84	
15	QPSK	75	0	22.72	22.85	22.92	
15	16QAM	1	0	22.94	23.04	23.48	24
15	16QAM	1	37	23.11	22.27	23.07	



15	16QAM	1	74	22.31	23.08	22.48	22.5
15	16QAM	36	0	21.90	21.53	21.63	
15	16QAM	36	20	21.84	21.12	21.67	
15	16QAM	36	39	21.65	21.36	21.39	
15	16QAM	75	0	21.75	21.36	21.58	
15	64QAM	1	0	23.02	22.85	22.45	23.5
15	64QAM	1	37	22.89	22.23	22.18	
15	64QAM	1	74	22.21	22.89	22.32	
15	64QAM	36	0	21.86	21.58	21.52	22
15	64QAM	36	20	21.87	21.06	21.57	
15	64QAM	36	39	21.68	21.37	21.33	
15	64QAM	75	0	21.77	21.29	21.52	
Channel				20000	20175	20350	Tune-up limit (dBm)
Frequency (MHz)				1715	1732.5	1750	
10	QPSK	1	0	23.34	23.67	23.27	24.5
10	QPSK	1	25	23.59	22.87	23.42	
10	QPSK	1	49	22.96	23.39	23.53	
10	QPSK	25	0	22.73	22.80	22.91	23.5
10	QPSK	25	12	22.71	22.64	22.83	
10	QPSK	25	25	22.63	22.84	22.82	
10	QPSK	50	0	22.70	22.83	22.90	
10	16QAM	1	0	22.92	23.02	23.46	24
10	16QAM	1	25	23.09	22.25	23.05	
10	16QAM	1	49	22.29	23.06	22.46	
10	16QAM	25	0	21.88	21.51	21.61	22.5
10	16QAM	25	12	21.82	21.10	21.65	
10	16QAM	25	25	21.63	21.34	21.37	
10	16QAM	50	0	21.73	21.34	21.56	
10	64QAM	1	0	23.00	22.83	22.43	23
10	64QAM	1	25	22.87	22.21	22.16	
10	64QAM	1	49	22.19	22.87	22.30	
10	64QAM	25	0	21.84	21.56	21.50	22.5
10	64QAM	25	12	21.85	21.04	21.55	
10	64QAM	25	25	21.66	21.35	21.31	
10	64QAM	50	0	21.75	21.27	21.50	
Channel				19975	20175	20375	Tune-up limit
Frequency (MHz)				1712.5	1732.5	1752.5	



							(dBm)
5	QPSK	1	0	23.33	23.66	23.26	24
5	QPSK	1	12	23.58	22.86	23.41	
5	QPSK	1	24	22.95	23.38	23.52	
5	QPSK	12	0	22.72	22.79	22.90	23
5	QPSK	12	7	22.70	22.63	22.82	
5	QPSK	12	13	22.62	22.83	22.81	
5	QPSK	25	0	22.69	22.82	22.89	
5	16QAM	1	0	22.91	23.01	23.45	24
5	16QAM	1	12	23.08	22.24	23.04	
5	16QAM	1	24	22.28	23.05	22.45	
5	16QAM	12	0	21.87	21.50	21.60	22.5
5	16QAM	12	7	21.81	21.09	21.64	
5	16QAM	12	13	21.62	21.33	21.36	
5	16QAM	25	0	21.72	21.33	21.55	
5	64QAM	1	0	22.99	22.82	22.42	23.5
5	64QAM	1	12	22.86	22.20	22.15	
5	64QAM	1	24	22.18	22.86	22.29	
5	64QAM	12	0	21.83	21.55	21.49	22
5	64QAM	12	7	21.84	21.03	21.54	
5	64QAM	12	13	21.65	21.34	21.30	
5	64QAM	25	0	21.74	21.26	21.49	
Channel				19965	20175	20385	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1732.5	1753.5	
3	QPSK	1	0	23.31	23.64	23.24	24.5
3	QPSK	1	8	23.56	22.84	23.39	
3	QPSK	1	14	22.93	23.36	23.50	
3	QPSK	8	0	22.70	22.77	22.88	23.5
3	QPSK	8	4	22.68	22.61	22.80	
3	QPSK	8	7	22.60	22.81	22.79	
3	QPSK	15	0	22.67	22.80	22.87	
3	16QAM	1	0	22.89	22.99	23.43	24
3	16QAM	1	8	23.06	22.22	23.02	
3	16QAM	1	14	22.26	23.03	22.43	
3	16QAM	8	0	21.85	21.48	21.58	22.5
3	16QAM	8	4	21.79	21.07	21.62	
3	16QAM	8	7	21.60	21.31	21.34	



3	16QAM	15	0	21.70	21.31	21.53	
3	64QAM	1	0	22.97	22.80	22.40	23.5
3	64QAM	1	8	22.84	22.18	22.13	
3	64QAM	1	14	22.16	22.84	22.27	
3	64QAM	8	0	21.81	21.53	21.47	22
3	64QAM	8	4	21.82	21.01	21.52	
3	64QAM	8	7	21.63	21.32	21.28	
3	64QAM	15	0	21.72	21.24	21.47	
Channel				19957	20175	20393	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1732.5	1754.3	
1.4	QPSK	1	0	23.29	23.62	23.22	24.5
1.4	QPSK	1	3	23.54	22.82	23.37	
1.4	QPSK	1	5	22.91	23.34	23.48	
1.4	QPSK	3	0	22.68	22.75	22.86	
1.4	QPSK	3	1	22.66	22.59	22.78	
1.4	QPSK	3	3	22.58	22.79	22.77	
1.4	QPSK	6	0	22.65	22.78	22.85	23.5
1.4	16QAM	1	0	22.87	22.97	23.41	23.5
1.4	16QAM	1	3	23.04	22.20	23.00	
1.4	16QAM	1	5	22.24	23.01	22.41	
1.4	16QAM	3	0	21.83	21.46	21.56	
1.4	16QAM	3	1	21.77	21.05	21.60	
1.4	16QAM	3	3	21.58	21.29	21.32	
1.4	16QAM	6	0	21.68	21.29	21.51	22.5
1.4	64QAM	1	0	22.95	22.78	22.38	23.5
1.4	64QAM	1	3	22.82	22.16	22.11	
1.4	64QAM	1	5	22.14	22.82	22.25	
1.4	64QAM	3	0	21.79	21.51	21.45	
1.4	64QAM	3	1	21.80	20.99	21.50	
1.4	64QAM	3	3	21.61	21.30	21.26	
1.4	64QAM	6	0	21.70	21.22	21.45	22



<FDD-LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Low Channel	Middle Channel	High Channel	Tune-up limit (dBm)
Channel				20450	20525	20600	
Frequency (MHz)				829	836.5	844	
10	QPSK	1	0	21.63	21.48	21.56	22.5
10	QPSK	1	25	21.70	21.71	21.45	
10	QPSK	1	49	21.50	21.70	21.55	
10	QPSK	25	0	20.61	20.79	20.77	21.5
10	QPSK	25	12	20.74	20.49	20.62	
10	QPSK	25	25	20.65	20.58	20.83	
10	QPSK	50	0	20.77	20.58	20.72	
10	16QAM	1	0	21.02	20.96	20.9	21.5
10	16QAM	1	25	20.62	20.72	20.99	
10	16QAM	1	49	21.07	20.82	21.2	
10	16QAM	25	0	19.95	19.65	19.62	20.5
10	16QAM	25	12	19.79	19.64	19.65	
10	16QAM	25	25	19.68	19.6	19.71	
10	16QAM	50	0	19.76	19.7	19.78	
10	64QAM	1	0	20.82	20.6	20.77	21.5
10	64QAM	1	25	20.81	20.37	20.36	
10	64QAM	1	49	20.68	20.54	20.77	
10	64QAM	25	0	19.77	19.51	19.62	20.5
10	64QAM	25	12	19.85	19.6	19.78	
10	64QAM	25	25	19.7	19.53	19.69	
10	64QAM	50	0	19.69	19.68	19.68	
Channel				20425	20525	20625	Tune-up limit (dBm)
Frequency (MHz)				826.5	836.5	846.5	
5	QPSK	1	0	21.78	21.44	21.53	22.5
5	QPSK	1	12	21.65	21.47	21.42	
5	QPSK	1	24	21.45	21.66	21.52	
5	QPSK	12	0	20.86	20.45	20.74	21.5
5	QPSK	12	7	20.89	20.50	20.59	
5	QPSK	12	13	20.60	20.54	20.80	
5	QPSK	25	0	20.72	20.54	20.69	
5	16QAM	1	0	20.97	20.92	20.87	21.5
5	16QAM	1	12	20.57	20.68	20.96	



5	16QAM	1	24	21.02	20.78	21.17	20.5
5	16QAM	12	0	19.90	19.61	19.59	
5	16QAM	12	7	19.74	19.60	19.62	
5	16QAM	12	13	19.63	19.56	19.68	
5	16QAM	25	0	19.71	19.66	19.75	
5	64QAM	1	0	20.77	20.56	20.74	21.5
5	64QAM	1	12	20.76	20.33	20.33	
5	64QAM	1	24	20.63	20.50	20.74	
5	64QAM	12	0	19.72	19.47	19.59	19.5
5	64QAM	12	7	19.80	19.56	19.75	
5	64QAM	12	13	19.65	19.49	19.66	
5	64QAM	25	0	19.64	19.64	19.65	
Channel				20415	20525	20635	Tune-up limit (dBm)
Frequency (MHz)				825.5	836.5	847.5	
3	QPSK	1	0	20.23	21.87	21.8	22.5
3	QPSK	1	8	21.79	21.93	21.92	
3	QPSK	1	14	22.02	21.91	20.1	
3	QPSK	8	0	21.25	21.28	21.29	21.5
3	QPSK	8	4	20.98	20.97	21.02	
3	QPSK	8	7	20.91	20.94	20.95	
3	QPSK	15	0	21.03	20.97	21.06	
3	16QAM	1	0	19.26	21.08	21.17	22.5
3	16QAM	1	8	21.29	21.58	21.22	
3	16QAM	1	14	21.69	21.27	19.71	
3	16QAM	8	0	20.35	20.34	20.38	21
3	16QAM	8	4	19.95	19.98	20.02	
3	16QAM	8	7	19.93	19.86	19.87	
3	16QAM	15	0	19.93	20	20.02	
3	64QAM	1	0	19.8	20.88	21.09	22
3	64QAM	1	8	21.48	21.16	21.41	
3	64QAM	1	14	20.95	21.15	19.05	
3	64QAM	8	0	20.29	20.26	20.19	21
3	64QAM	8	4	19.89	20.05	20	
3	64QAM	8	7	19.84	20.01	19.9	
3	64QAM	15	0	20.13	20.1	19.92	
Channel				20407	20525	20643	Tune-up limit
Frequency (MHz)				824.7	836.5	848.3	



							(dBm)
1.4	QPSK	1	0	22.53	22.02	21.97	23
1.4	QPSK	1	3	22.49	22.3	22.29	
1.4	QPSK	1	5	22.07	21.77	22.41	
1.4	QPSK	3	0	22.2	22.21	21.89	
1.4	QPSK	3	1	22.4	22.18	22.15	
1.4	QPSK	3	3	22.12	21.9	21.96	
1.4	QPSK	6	0	21.23	21.11	21.18	22
1.4	16QAM	1	0	21.79	21.13	21.04	22
1.4	16QAM	1	3	22.08	21.91	21.36	
1.4	16QAM	1	5	21.38	21.46	21.54	
1.4	16QAM	3	0	21.13	21.24	20.94	
1.4	16QAM	3	1	21.37	21.22	21.22	
1.4	16QAM	3	3	21.21	21.06	21.04	
1.4	16QAM	6	0	20.39	20.2	20.27	21
1.4	64QAM	1	0	21.79	21.19	20.93	22
1.4	64QAM	1	3	21.99	21.17	21.47	
1.4	64QAM	1	5	21.32	21.13	21.66	
1.4	64QAM	3	0	21.3	21.25	21.07	
1.4	64QAM	3	1	21.36	21.22	21.11	
1.4	64QAM	3	3	21.51	21.15	21.14	
1.4	64QAM	6	0	20.3	20.14	20.16	21



<FDD-LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Low Channel	Middle Channel	High Channel	Tune-up limit (dBm)
Channel				23230			
Frequency (MHz)				782			
10	QPSK	1	0		23.58		24.5
10	QPSK	1	25		23.36		
10	QPSK	1	49		24.09		
10	QPSK	25	0		22.83		23.5
10	QPSK	25	12		22.68		
10	QPSK	25	25		22.69		
10	QPSK	50	0		22.83		23.5
10	16QAM	1	0		22.74		
10	16QAM	1	25		23.18		
10	16QAM	1	49		23.36		23.0
10	16QAM	25	0		21.90		
10	16QAM	25	12		21.68		
10	16QAM	25	25		21.83		23.0
10	16QAM	50	0		21.93		
10	64QAM	1	0		22.65		
10	64QAM	1	25		22.65		23.0
10	64QAM	1	49		23.58		
10	64QAM	25	0		21.93		
10	64QAM	25	12		21.78		23.0
10	64QAM	25	25		21.79		
10	64QAM	50	0		21.95		
Channel				23205	23230	23255	Tune-up limit (dBm)
Frequency (MHz)				779.5	782	784.5	
5	QPSK	1	0	23.23	23.58	23.03	24.5
5	QPSK	1	12	23.47	23.33	23.48	
5	QPSK	1	24	23.06	23.12	23.88	
5	QPSK	12	0	24.05	23.96	23.74	24.5
5	QPSK	12	7	23.59	23.46	23.37	
5	QPSK	12	13	23.50	23.32	23.67	
5	QPSK	25	0	22.42	22.39	22.74	23.5
5	16QAM	1	0	22.39	22.80	22.19	
5	16QAM	1	12	22.83	22.99	23.11	



5	16QAM	1	24	22.89	22.38	23.07	23.0
5	16QAM	12	0	23.25	23.17	22.75	
5	16QAM	12	7	22.75	22.55	22.68	
5	16QAM	12	13	22.68	22.49	22.81	
5	16QAM	25	0	21.60	21.37	21.89	
5	64QAM	1	0	22.58	23.02	22.26	23.0
5	64QAM	1	12	22.73	22.67	22.81	
5	64QAM	1	24	22.40	22.44	22.97	
5	64QAM	12	0	23.26	23.19	22.78	23.0
5	64QAM	12	7	22.82	22.55	22.61	
5	64QAM	12	13	22.83	22.52	22.74	
5	64QAM	25	0	21.64	21.44	21.78	

<FDD-LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Low Channel	Middle Channel	High Channel	Tune-up limit (dBm)
Channel				132072	132322	132572	23.5
Frequency (MHz)				1720	1745	1770	
20	QPSK	1	0	22.23	21.77	22.24	23.5
20	QPSK	1	49	22.96	22.35	22.87	
20	QPSK	1	99	22.07	22.31	22.00	
20	QPSK	50	0	21.74	21.62	21.85	22.5
20	QPSK	50	24	21.58	21.53	21.65	
20	QPSK	50	50	21.40	21.39	21.25	
20	QPSK	100	0	21.61	21.39	21.45	
20	16QAM	1	0	22.74	22.64	22.38	23.5
20	16QAM	1	49	22.82	22.56	22.77	
20	16QAM	1	99	22.81	22.54	22.83	
20	16QAM	50	0	21.50	21.78	21.78	22
20	16QAM	50	24	21.30	21.72	21.68	
20	16QAM	50	50	21.29	21.61	21.30	
20	16QAM	100	0	21.29	21.68	21.56	
20	64QAM	1	0	22.66	22.55	22.21	23
20	64QAM	1	49	22.74	22.47	22.71	
20	64QAM	1	99	22.73	22.45	22.77	
20	64QAM	50	0	21.42	21.69	21.70	22.5
20	64QAM	50	24	21.22	21.63	21.62	
20	64QAM	50	50	21.31	21.52	21.24	



20	64QAM	100	0	21.21	21.59	21.50	Tune-up limit (dBm)
Channel				132047	132322	132597	
Frequency (MHz)				1717.5	1745	1772.5	23.5
15	QPSK	1	0	22.20	21.74	22.21	
15	QPSK	1	37	22.93	22.32	22.84	
15	QPSK	1	74	22.04	22.28	21.97	22
15	QPSK	36	0	21.71	21.59	21.52	
15	QPSK	36	20	21.55	21.50	21.62	
15	QPSK	36	39	21.37	21.36	21.22	
15	QPSK	75	0	21.58	21.36	21.42	23.5
15	16QAM	1	0	22.71	22.61	22.35	
15	16QAM	1	37	22.79	22.53	22.74	
15	16QAM	1	74	22.78	22.51	22.80	22.5
15	16QAM	36	0	21.47	21.75	21.75	
15	16QAM	36	20	21.27	21.69	21.65	
15	16QAM	36	39	21.26	21.58	21.27	
15	16QAM	75	0	21.26	21.65	21.53	23.5
15	64QAM	1	0	22.63	22.52	22.18	
15	64QAM	1	37	22.71	22.44	22.68	
15	64QAM	1	74	22.70	22.42	22.74	22.5
15	64QAM	36	0	21.39	21.66	21.67	
15	64QAM	36	20	21.19	21.60	21.59	
15	64QAM	36	39	21.28	21.49	21.21	
15	64QAM	75	0	21.18	21.56	21.47	Tune-up limit (dBm)
Channel				132022	132322	132622	
Frequency (MHz)				1715	1745	1775	
10	QPSK	1	0	22.18	21.72	22.19	23.5
10	QPSK	1	25	22.91	22.30	22.82	
10	QPSK	1	49	22.02	22.26	21.95	
10	QPSK	25	0	21.69	21.57	21.50	22.5
10	QPSK	25	12	21.53	21.48	21.60	
10	QPSK	25	25	21.35	21.34	21.20	
10	QPSK	50	0	21.56	21.34	21.40	
10	16QAM	1	0	22.69	22.59	22.33	23.5
10	16QAM	1	25	22.77	22.51	22.72	
10	16QAM	1	49	22.76	22.49	22.78	



10	16QAM	25	0	21.45	21.73	21.73	22.5
10	16QAM	25	12	21.25	21.67	21.63	
10	16QAM	25	25	21.24	21.56	21.25	
10	16QAM	50	0	21.24	21.63	21.51	
10	64QAM	1	0	22.61	22.50	22.16	23.5
10	64QAM	1	25	22.69	22.42	22.66	
10	64QAM	1	49	22.68	22.40	22.72	
10	64QAM	25	0	21.37	21.64	21.65	22.5
10	64QAM	25	12	21.17	21.58	21.57	
10	64QAM	25	25	21.26	21.47	21.19	
10	64QAM	50	0	21.16	21.54	21.45	
Channel				131997	132322	132647	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1745	1777.5	
5	QPSK	1	0	22.16	21.70	22.17	23.5
5	QPSK	1	12	22.89	22.28	22.80	
5	QPSK	1	24	22.00	22.24	21.93	
5	QPSK	12	0	21.67	21.55	21.48	22
5	QPSK	12	7	21.51	21.46	21.58	
5	QPSK	12	13	21.33	21.32	21.18	
5	QPSK	25	0	21.54	21.32	21.38	
5	16QAM	1	0	22.67	22.57	22.31	23.5
5	16QAM	1	12	22.75	22.49	22.70	
5	16QAM	1	24	22.74	22.47	22.76	
5	16QAM	12	0	21.43	21.71	21.71	22
5	16QAM	12	7	21.23	21.65	21.61	
5	16QAM	12	13	21.22	21.54	21.23	
5	16QAM	25	0	21.22	21.61	21.49	
5	64QAM	1	0	22.59	22.48	22.14	23
5	64QAM	1	12	22.67	22.40	22.64	
5	64QAM	1	24	22.66	22.38	22.70	
5	64QAM	12	0	21.35	21.62	21.63	22
5	64QAM	12	7	21.15	21.56	21.55	
5	64QAM	12	13	21.24	21.45	21.17	
5	64QAM	25	0	21.14	21.52	21.43	
Channel				131987	132322	132657	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1745	1778.5	



3	QPSK	1	0	22.14	21.68	22.15	23.5
3	QPSK	1	8	22.87	22.26	22.78	
3	QPSK	1	14	21.98	22.22	21.91	
3	QPSK	8	0	21.65	21.53	21.46	22
3	QPSK	8	4	21.49	21.44	21.56	
3	QPSK	8	7	21.31	21.30	21.16	
3	QPSK	15	0	21.52	21.30	21.36	23.5
3	16QAM	1	0	22.65	22.55	22.29	
3	16QAM	1	8	22.73	22.47	22.68	
3	16QAM	1	14	22.72	22.45	22.74	22
3	16QAM	8	0	21.41	21.69	21.69	
3	16QAM	8	4	21.21	21.63	21.59	
3	16QAM	8	7	21.20	21.52	21.21	23
3	16QAM	15	0	21.20	21.59	21.47	
3	64QAM	1	0	22.57	22.46	22.12	
3	64QAM	1	8	22.65	22.38	22.62	22.5
3	64QAM	1	14	22.64	22.36	22.68	
3	64QAM	8	0	21.33	21.60	21.61	
3	64QAM	8	4	21.13	21.54	21.53	22.5
3	64QAM	8	7	21.22	21.43	21.15	
3	64QAM	15	0	21.12	21.50	21.41	
Channel				131979	132322	132665	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1745	1779.3	
1.4	QPSK	1	0	22.12	21.66	22.13	23.5
1.4	QPSK	1	3	22.85	22.24	22.76	
1.4	QPSK	1	5	21.96	22.20	21.89	
1.4	QPSK	3	0	21.63	21.51	21.44	
1.4	QPSK	3	1	21.47	21.42	21.54	
1.4	QPSK	3	3	21.29	21.28	21.14	22
1.4	QPSK	6	0	21.50	21.28	21.34	
1.4	16QAM	1	0	22.63	22.53	22.27	23.5
1.4	16QAM	1	3	22.71	22.45	22.66	
1.4	16QAM	1	5	22.70	22.43	22.72	
1.4	16QAM	3	0	21.39	21.67	21.67	
1.4	16QAM	3	1	21.19	21.61	21.57	
1.4	16QAM	3	3	21.18	21.50	21.19	
1.4	16QAM	6	0	21.18	21.57	21.45	22



1.4	64QAM	1	0	22.55	22.44	22.10	23.5
1.4	64QAM	1	3	22.63	22.36	22.60	
1.4	64QAM	1	5	22.62	22.34	22.66	
1.4	64QAM	3	0	21.31	21.58	21.59	
1.4	64QAM	3	1	21.11	21.52	21.51	
1.4	64QAM	3	3	21.20	21.41	21.13	
1.4	64QAM	6	0	21.10	21.48	21.39	22

➤ **WLAN Conducted Power**

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
2.4GHz WLAN ANT 0	802.11b 1Mbps	CH 1	2412	16.16	17.0	40	89.42
		CH 6	2437	16.73	17.5	40	
		CH 11	2462	16.87	17.5	40	
	802.11g 6Mbps	CH 1	2412	11.17	11.5	40	93.31
		CH 6	2437	11.66	12.5	40	
		CH 11	2462	11.81	12.5	40	
	802.11n-HT20 MCS0	CH 1	2412	11.90	12.5	40	77.48
		CH 6	2437	11.90	12.5	40	
		CH 11	2462	12.14	12.5	40	
	802.11n-HT40 MCS0	CH 3	2422	9.91	10.5	40	86.29
		CH 6	2437	10.23	11.0	40	
		CH 9	2452	10.42	11.0	40	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
2.4GHz WLAN ANT 0+1	802.11n-HT20 MCS0	CH 1	2412	15.56	16.0	40	77.48
		CH 6	2437	15.80	16.5	40	
		CH 11	2462	15.80	16.5	40	
	802.11n-HT40 MCS0	CH 3	2422	13.42	14.0	40	86.29
		CH 6	2437	13.62	14.0	40	
		CH 9	2452	13.80	14.0	40	

Note:



1. Per KDB 248227 D01v02r02, In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. SAR is not required for the following 2.4 GHz OFDM conditions:
 - 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
 - 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
3. Per KDB 248227 D01, A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. Therefore 802.11n-HT40 should be selected to perform SAR measurement for the antenna 0+1, and the reported SAR must be scaled to the maximum transmission duty factor to determine compliance.
4. According to the character of this device that the WLAN antenna 1 cannot transmit independently, when the antenna 1 is active, the WLAN MIMO works at the same time, therefore the standalone power of WLAN antenna 1 would not be recorded in this report.

<5.2GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
5.2GHz WLAN ANT 0	802.11a 6Mbps	CH 36	5180	10.29	11.0	30	77.51
		CH 44	5220	11.09	11.5	30	
		CH 48	5240	11.08	11.5	30	
	802.11n-HT20 MCS0	CH 36	5180	13.12	14.0	30	92.51
		CH 44	5220	13.20	14.0	30	
		CH 48	5240	13.17	13.5	30	
	802.11n-HT40 MCS0	CH 38	5190	12.32	13.0	30	95.45
		CH 46	5230	12.75	13.5	30	
	802.11ac-VH T20 MCS0	CH 36	5180	7.71	8.0	30	97.79
		CH 44	5220	8.64	9.0	30	
		CH 48	5240	9.09	9.5	30	
	802.11ac-VH T40 MCS0	CH 38	5190	9.64	10.0	30	95.87
		CH 46	5230	10.35	10.5	30	
	802.11ac-VH T80 MCS0	CH 42	5210	8.70	9.0	30	91.33



5.2GHz WLAN ANT 0+1	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
	802.11n-HT20 MCS0	CH 36	5180	15.91	16.5	30	92.51
		CH 44	5220	16.02	16.5	30	
		CH 48	5240	16.02	16.5	30	
	802.11n-HT40 MCS0	CH 38	5190	15.68	16.0	30	95.45
		CH 46	5230	15.91	16.5	30	
	802.11ac VHT20 MCS0	CH 36	5180	13.01	13.5	30	97.79
		CH 44	5220	13.22	14.0	30	
		CH 48	5240	13.42	14.0	30	
	802.11ac VHT40 MCS0	CH 38	5190	13.80	14.5	30	95.87
CH 46		5230	13.98	14.5	30		
802.11ac VHT80 MCS0	CH 42	5210	12.79	13.5	30	91.33	

<5.8GHz WLAN>

5.8GHz WLAN ANT 0	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
	802.11a 6Mbps	CH 149	5745	10.59	11.0	30	77.51
		CH 157	5785	11.41	11.5	30	
		CH 165	5825	12.25	13.0	30	
	802.11n-HT20 MCS0	CH 149	5745	13.48	14.0	30	92.51
		CH 157	5785	14.32	15.0	30	
		CH 165	5825	14.50	15.0	30	
	802.11n-HT40 MCS0	CH 151	5755	13.42	14.0	30	95.45
		CH 159	5795	13.31	14.0	30	
	802.11ac-VH T20 MCS0	CH 149	5745	10.02	10.5	30	97.79
		CH 157	5785	10.92	11.5	30	
		CH 165	5825	11.77	12	30	
	802.11ac-VH T40 MCS0	CH 151	5755	11.21	12	30	95.87
		CH 159	5795	11.83	12.5	30	
	802.11ac-VH T80 MCS0	CH 155	5775	9.59	10.0	30	91.33



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
5.8GHz WLAN ANT 0+1	802.11n-HT20 MCS0	CH 149	5745	16.43	17.0	30	92.51
		CH 157	5785	16.99	17.5	30	
		CH 165	5825	16.99	17.5	30	
	802.11n-HT40 MCS0	CH 151	5755	16.72	17.0	30	95.45
		CH 159	5795	16.63	17.0	30	
	802.11ac VHT20 MCS0	CH 149	5745	15.31	16.0	30	97.79
		CH 157	5785	15.68	16.0	30	
		CH 165	5825	15.91	16.5	30	
	802.11ac VHT40 MCS0	CH 151	5755	15.56	16.0	30	95.87
		CH 159	5795	15.80	16.5	30	
802.11ac VHT80 MCS0	CH 155	5775	13.42	14.0	30	91.33	

Note:

According to the character of this device that the WLAN antenna 1 cannot transmit independently, when the antenna 1 is active, the WLAN MIMO works at the same time, therefore the standalone power of WLAN antenna 1 would not be recorded in this report.

14. LTE Carrier Aggregation

14.1. Carrier Aggregation Configuration

This device supports Carrier Aggregation on downlink for inter. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.

2CC Downlink Carrier Aggregation				
NO.	Combination	PCC	Restriction	Completely Covered by Measurement Superset
1	CA_2A-4A	2A		
2	CA_2A-66A	2A		
3	CA_2A-66C	2A		
4	CA_2C-66C	2C		
5	CA_4A-5A	4A		
6	CA_4A-13A	4A		
7	CA_5A-66A	5A		
8	CA_5A-66C	5A		
9	CA_13A-66A	13A		
10	CA_13A-66C	13A		
11	CA_66B	66B		
12	CA_66C	66C		

14.2. LTE Downlink Carrier Aggregation Power

1. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
2. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
3. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
4. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
5. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
6. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy
7. 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$




➤ **Power for 2CC power verification**

PCC					SCC			Power	
Band	BW (MHz)	RB Offset	UL Ch.	UL Freq. (MHz)	BW MHz	DL Ch.	DL Freq. (MHz)	Power With DL_CA	Rel. 8 Power
intra-band CA (2CC)									
CA_66B	15	1#37	132047	1717.5	5	66604	2126.8	22.98	22.93
CA_66C	20	1#49	132072	1720	20	66734	2139.8	23.02	22.96

PCC					SCC			Power	
Band	Band	BW (MHz)	RB Offset	UL Ch./Freq. (MHz)	Band	BW (MHz)	DL Ch./Freq. (MHz)	Power With DL_CA	Rel. 8 Power
inter-band CA (2CC)									
CA_2A-4A	2	20	1#99	18900/1880	4	20	2175/1732.5	19.58	22.10
CA_2A-66A	2	20	1#99	18900/1880	66	20	66734/2139.8	19.71	22.10
CA_2A-66C	2	20	1#99	18900/1880	66	20	66734/2139.8	19.83	22.10
CA_2C-66C	2	20	1#99	18900/1880	66	20	66734/2139.8	19.82	22.10
CA_4A-5A	4	20	1#0	20175/1732.5	5	10	2525/881.5	20.36	23.72
CA_4A-13A	4	20	1#0	20175/1732.5	13	10	5230/751	20.43	23.72
CA_5A-66A	5	10	1#25	20525/836.5	66	20	66734/2139.8	19.83	21.71
CA_5A-66C	5	10	1#25	20525/836.5	66	20	66734/2139.8	19.91	21.71

15. Hot-Spot Mode Evaluation Procedure

➤ EUT Antenna Location

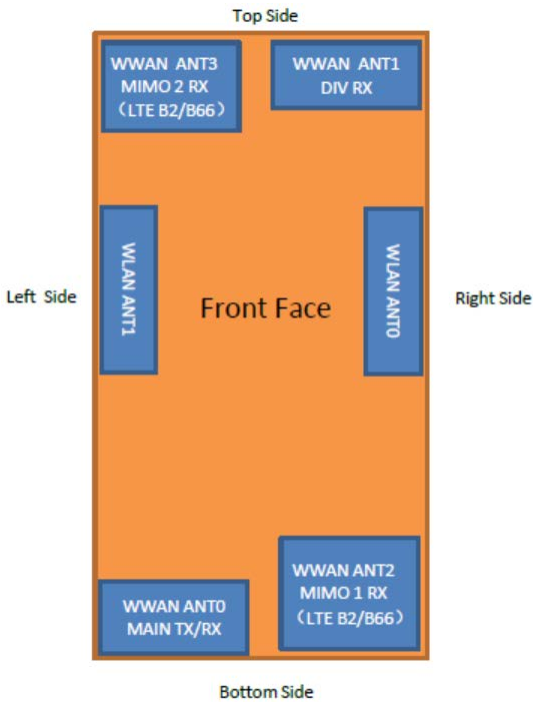	<p>WWAN ANT 0: FDD LTE Band 2/4/5/13/66</p> <p>WWAN ANT 1: DIV RX</p> <p>WWAN ANT 2: MIMO 1 RX FDD LTE Band 2/66</p> <p>WWAN ANT 3: MIMO 2 RX FDD LTE Band 2/66</p> <p>WLAN ANT 0: WLAN 2.4GHz/5.2GHz & 5.8GHz</p> <p>WLAN ANT 1: WLAN 2.4GHz/5.2GHz & 5.8GHz</p>
--	---

➤ EUT Antenna Distance


Antenna Location	Support Function	Top Side(mm)	Bottom Side(mm)	Left Side(mm)	Right Side(mm)
WWAN ANT0	TX/RX	75	1	1	27
WWAN ANT1	DRX	1	83	26	3
WWAN ANT2	DRX	84	1	41	3
WWAN ANT3	DRX	1	86	5	47
WLAN ANT0	TX/RX	35	38	59	1
WLAN ANT1	TX/RX	32	37	1	60

Note :

1. EUT size: 95mm * 65mm
2. The SAR evaluation procedures for Portable Devices with Wireless Router function is according to KDB 941225 D06 Hotspot SAR v02r01.
3. Referring to KDB 941225 D06, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

16. Block Diagram of the Tests to be Performed

➤ Body

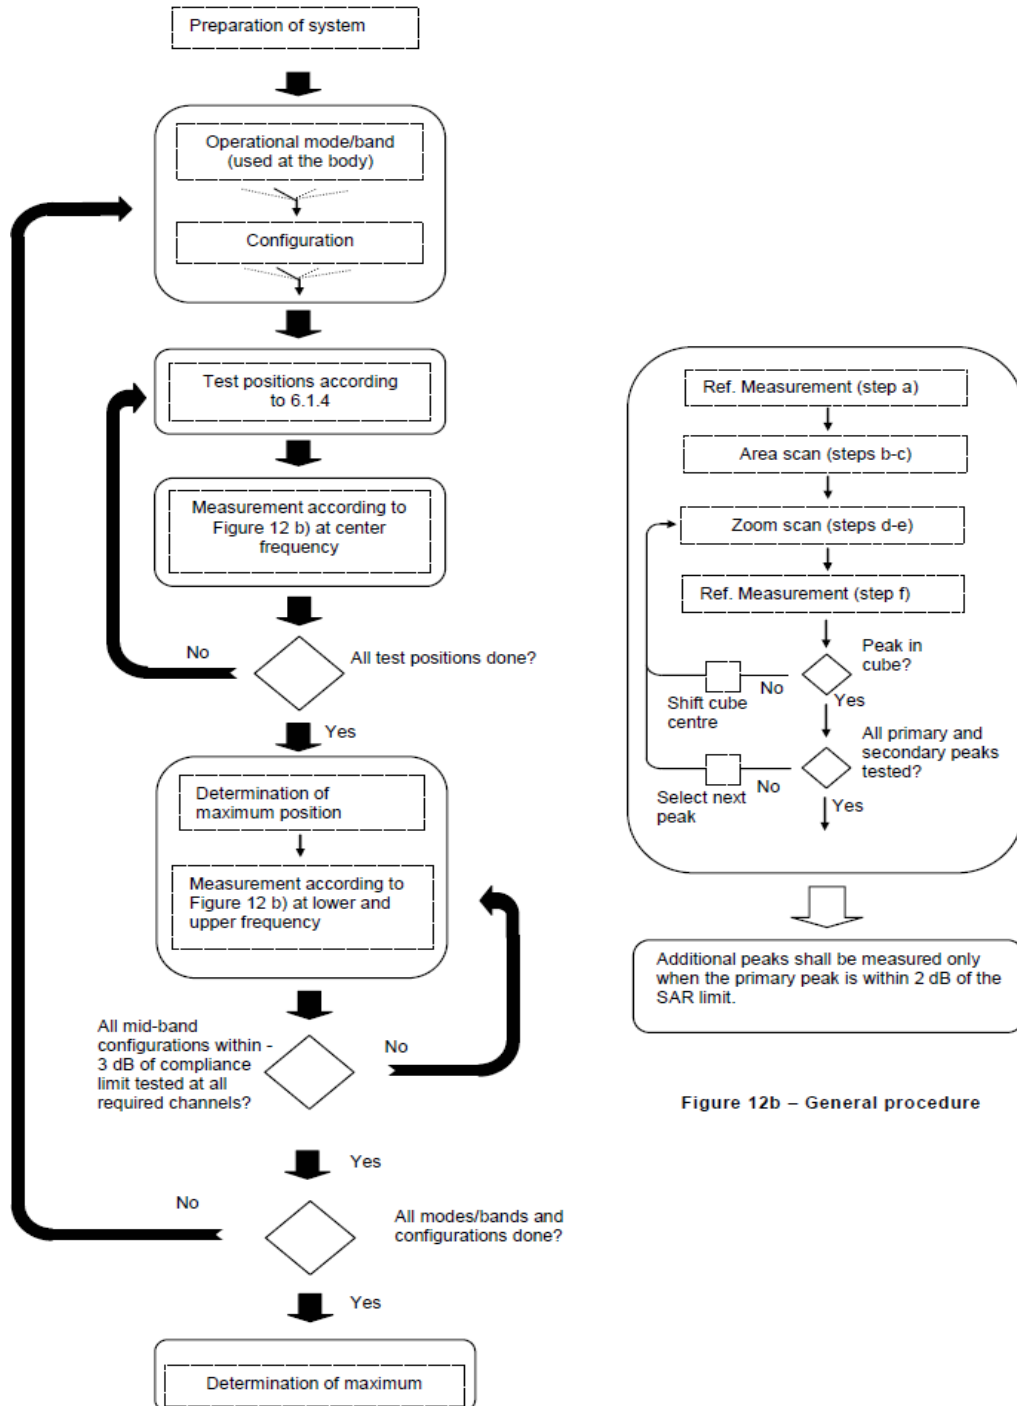



17. Test Results List

17.1. Test Guidance

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor.
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - a. ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - b. ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - c. ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per KDB248227 D01v02r02, a Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies required for operations in the U.S. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic transmission duty factor is required for current generation SAR systems to measure SAR correctly. Unless it is permitted by specific KDB procedures or continuous transmission is specifically restricted by the device, the reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. When a device is not capable of sustaining continuous transmission or the output can become nonlinear, and it is limited by hardware design and unable to transmit at higher than 85% duty factor, a periodic duty factor within 15% of the maximum duty factor the device is capable of transmitting should be used. The reported SAR must be scaled to the maximum transmission duty factor to determine compliance. Descriptions of the procedures applied to establish the specific duty factor used for SAR testing are required in SAR reports to support the test results.



5. According to the character of this device that the WLAN antenna 1 cannot transmit independently, when the antenna 1 is active, the WLAN MIMO works at the same time, therefore it is necessary to test the WLAN MIMO to calculate the co-location SAR.

17.2. Body SAR Data

➤ LTE QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
	LTE Band 2/1RB#99 20M	Front Side	18900	22.10	22.50	1.096	0.293	0.321
	LTE Band 2/1RB#99 20M	Back Side	18900	22.10	22.50	1.096	0.283	0.310
	LTE Band 2/1RB#99 20M	Left Side	18900	22.10	22.50	1.096	0.153	0.168
	LTE Band 2/1RB#99 20M	Right Side	18900	22.10	22.50	1.096	0.021	0.023
	LTE Band 2/1RB#99 20M	Top Side	18900	22.10	22.50	1.096	0.022	0.024
	LTE Band 2/1RB#99 20M	Bottom Side	18900	22.10	22.50	1.096	0.394	0.432
	LTE Band 2/50RB#0 20M	Front Side	18900	21.07	21.50	1.104	0.306	0.338
	LTE Band 2/50RB#0 20M	Back Side	18900	21.07	21.50	1.104	0.304	0.336
	LTE Band 2/50RB#0 20M	Left Side	18900	21.07	21.50	1.104	0.182	0.201
	LTE Band 2/50RB#0 20M	Right Side	18900	21.07	21.50	1.104	0.027	0.030
	LTE Band 2/50RB#0 20M	Top Side	18900	21.07	21.50	1.104	0.026	0.029
1#	LTE Band 2/50RB#0 20M	Bottom Side	18900	21.07	21.50	1.104	0.509	0.562
2#	LTE Band 4/1RB#0 20M	Front Side	20175	23.72	24.50	1.197	0.753	0.901
	LTE Band 4/1RB#0 20M	Back Side	20175	23.72	24.50	1.197	0.454	0.543
	LTE Band 4/1RB#0 20M	Left Side	20175	23.72	24.50	1.197	0.301	0.360
	LTE Band 4/1RB#0 20M	Right Side	20175	23.72	24.50	1.197	0.207	0.248
	LTE Band 4/1RB#0 20M	Top Side	20175	23.72	24.50	1.197	0.071	0.085
	LTE Band 4/1RB#0 20M	Bottom Side	20175	23.72	24.50	1.197	0.692	0.828
	LTE Band 4/1RB#0 20M	Front Side	20050	23.39	24.50	1.291	0.558	0.721
	LTE Band 4/1RB#0 20M	Front Side	20300	23.32	24.50	1.312	0.505	0.663
	LTE Band 4/50RB#0 20M	Front Side	20300	22.96	23.50	1.132	0.510	0.578
	LTE Band 4/50RB#0 20M	Back Side	20300	22.96	23.50	1.132	0.531	0.601
	LTE Band 4/50RB#0 20M	Left Side	20300	22.96	23.50	1.132	0.222	0.251
	LTE Band 4/50RB#0 20M	Right Side	20300	22.96	23.50	1.132	0.101	0.114
	LTE Band 4/50RB#0 20M	Top Side	20300	22.96	23.50	1.132	0.040	0.046
	LTE Band 4/50RB#0 20M	Bottom Side	20300	22.96	23.50	1.132	0.376	0.426



Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
	LTE Band 5/1RB#25 10M	Front Side	20525	21.71	22.5	1.199	0.349	0.419
3#	LTE Band 5/1RB#25 10M	Back Side	20525	21.71	22.5	1.199	0.381	0.457
	LTE Band 5/1RB#25 10M	Left Side	20525	21.71	22.5	1.199	0.264	0.317
	LTE Band 5/1RB#25 10M	Right Side	20525	21.71	22.5	1.199	0.167	0.200
	LTE Band 5/1RB#25 10M	Top Side	20525	21.71	22.5	1.199	0.043	0.051
	LTE Band 5/1RB#25 10M	Bottom Side	20525	21.71	22.5	1.199	0.109	0.131
	LTE Band 5/25RB#25 10M	Front Side	20525	20.83	21.50	1.167	0.262	0.306
	LTE Band 5/25RB#25 10M	Back Side	20525	20.83	21.50	1.167	0.341	0.398
	LTE Band 5/25RB#25 10M	Left Side	20525	20.83	21.50	1.167	0.210	0.245
	LTE Band 5/25RB#25 10M	Right Side	20525	20.83	21.50	1.167	0.129	0.151
	LTE Band 5/25RB#25 10M	Top Side	20525	20.83	21.50	1.167	0.034	0.039
	LTE Band 5/25RB#25 10M	Bottom Side	20525	20.83	21.50	1.167	0.085	0.099
	LTE Band 13/1RB#49 10M	Front Side	23230	24.09	24.50	1.099	0.601	0.661
4#	LTE Band 13/1RB#49 10M	Back Side	23230	24.09	24.50	1.099	0.657	0.722
	LTE Band 13/1RB#49 10M	Left Side	23230	24.09	24.50	1.099	0.436	0.479
	LTE Band 13/1RB#49 10M	Right Side	23230	24.09	24.50	1.099	0.188	0.207
	LTE Band 13/1RB#49 10M	Top Side	23230	24.09	24.50	1.099	0.028	0.030
	LTE Band 13/1RB#49 10M	Bottom Side	23230	24.09	24.50	1.099	0.162	0.178
	LTE Band 13/25RB#0 10M	Front Side	23095	22.83	23.50	1.167	0.434	0.506
	LTE Band 13/25RB#0 10M	Back Side	23095	22.83	23.50	1.167	0.442	0.516
	LTE Band 13/25RB#0 10M	Left Side	23095	22.83	23.50	1.167	0.310	0.362
	LTE Band 13/25RB#0 10M	Right Side	23095	22.83	23.50	1.167	0.120	0.140
	LTE Band 13/25RB#0 10M	Top Side	23095	22.83	23.50	1.167	0.027	0.031
	LTE Band 13/25RB#0 10M	Bottom Side	23095	22.83	23.50	1.167	0.127	0.148
	LTE Band 66/1RB#49 20M	Front Side	132072	22.96	23.50	1.132	0.499	0.565
	LTE Band 66/1RB#49 20M	Back Side	132072	22.96	23.50	1.132	0.434	0.491
	LTE Band 66/1RB#49 20M	Left Side	132072	22.96	23.50	1.132	0.286	0.324
	LTE Band 66/1RB#49 20M	Right Side	132072	22.96	23.50	1.132	0.186	0.211
	LTE Band 66/1RB#49 20M	Top Side	132072	22.96	23.50	1.132	0.063	0.071
5#	LTE Band 66/1RB#49 20M	Bottom Side	132072	22.96	23.50	1.132	0.698	0.790



Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
	LTE Band 66/50RB#0 20M	Front Side	132572	21.85	22.50	1.161	0.520	0.604
	LTE Band 66/50RB#0 20M	Back Side	132572	21.85	22.50	1.161	0.420	0.488
	LTE Band 66/50RB#0 20M	Left Side	132572	21.85	22.50	1.161	0.216	0.251
	LTE Band 66/50RB#0 20M	Right Side	132572	21.85	22.50	1.161	0.119	0.138
	LTE Band 66/50RB#0 20M	Top Side	132572	21.85	22.50	1.161	0.046	0.053
	LTE Band 66/50RB#0 20M	Bottom Side	132572	21.85	22.50	1.161	0.425	0.494

➤ **WLAN Body SAR**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
ANT 0								
	WLAN2.4GHz/802.11b	Front Side	11	16.87	17.50	1.156	0.074	0.096
	WLAN2.4GHz/802.11b	Back Side	11	16.87	17.50	1.156	0.142	0.184
	WLAN2.4GHz/802.11b	Left Side	11	16.87	17.50	1.156	0.120	0.155
6#	WLAN2.4GHz/802.11b	Right Side	11	16.87	17.50	1.156	0.151	0.195
	WLAN2.4GHz/802.11b	Top Side	11	16.87	17.50	1.156	0.028	0.036
	WLAN2.4GHz/802.11b	Bottom Side	11	16.87	17.50	1.156	0.019	0.025
ANT 0+1								
	WLAN2.4GHz/802.11n20	Front Side	9	13.80	14.00	1.047	0.179	0.217
	WLAN2.4GHz/802.11n20	Back Side	9	13.80	14.00	1.047	0.127	0.154
7#	WLAN2.4GHz/802.11n20	Left Side	9	13.80	14.00	1.047	0.225	0.273
	WLAN2.4GHz/802.11n20	Right Side	9	13.80	14.00	1.047	0.030	0.037
	WLAN2.4GHz/802.11n20	Top Side	9	13.80	14.00	1.047	0.027	0.033
	WLAN2.4GHz/802.11n20	Bottom Side	9	13.80	14.00	1.047	0.023	0.028
ANT 0								
	WLAN5.2GHz/802.11n20	Front Side	44	13.2	14.00	1.202	0.051	0.066
	WLAN5.2GHz/802.11n20	Back Side	44	13.2	14.00	1.202	0.105	0.136
	WLAN5.2GHz/802.11n20	Left Side	44	13.2	14.00	1.202	0.049	0.063
8#	WLAN5.2GHz/802.11n20	Right Side	44	13.2	14.00	1.202	0.314	0.408
	WLAN5.2GHz/802.11n20	Top Side	44	13.2	14.00	1.202	0.051	0.067
	WLAN5.2GHz/802.11n20	Bottom Side	44	13.2	14.00	1.202	0.022	0.028



Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
ANT 0+1								
	WLAN5.2GHz/802.11n20	Front Side	48	16.02	16.5	1.117	0.032	0.038
	WLAN5.2GHz/802.11n20	Back Side	48	16.02	16.5	1.117	0.070	0.084
9#	WLAN5.2GHz/802.11n20	Left Side	48	16.02	16.5	1.117	0.371	0.448
	WLAN5.2GHz/802.11n20	Right Side	48	16.02	16.5	1.117	0.151	0.182
	WLAN5.2GHz/802.11n20	Top Side	48	16.02	16.5	1.117	0.108	0.130
	WLAN5.2GHz/802.11n20	Bottom Side	48	16.02	16.5	1.117	0.039	0.047
ANT 0								
	WLAN5.8GHz/802.11n20	Front Side	165	14.5	15.00	1.122	0.180	0.218
	WLAN5.8GHz/802.11n20	Back Side	165	14.5	15.00	1.122	0.231	0.280
	WLAN5.8GHz/802.11n20	Left Side	165	14.5	15.00	1.122	0.109	0.132
10#	WLAN5.8GHz/802.11n20	Right Side	165	14.5	15.00	1.122	0.485	0.588
	WLAN5.8GHz/802.11n20	Top Side	165	14.5	15.00	1.122	0.148	0.180
	WLAN5.8GHz/802.11n20	Bottom Side	165	14.5	15.00	1.122	0.043	0.052
ANT 0+1								
	WLAN5.8GHz/802.11n20	Front Side	165	16.99	17.50	1.125	0.067	0.081
	WLAN5.8GHz/802.11n20	Back Side	165	16.99	17.50	1.125	0.156	0.190
	WLAN5.8GHz/802.11n20	Left Side	165	16.99	17.50	1.125	0.245	0.298
11#	WLAN5.8GHz/802.11n20	Right Side	165	16.99	17.50	1.125	0.287	0.349
	WLAN5.8GHz/802.11n20	Top Side	165	16.99	17.50	1.125	0.041	0.050
	WLAN5.8GHz/802.11n20	Bottom Side	165	16.99	17.50	1.125	0.032	0.039

Note:

1. The WLAN Reported 1g SAR (W/kg) has been calculated together with the duty cycle scaling factor 1.118 for 2.4GHz WLAN antenna 0 and 1.159 for antenna 0+1.
2. The WLAN Reported 1g SAR (W/kg) has been calculated together with the duty cycle scaling factor 1.081 for 5GHz WLAN antenna 0 and antenna 0+1.



17.3. Repeated SAR Assessment

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2)through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

17.4. Extremity SAR Assessment

Guidance:

1. According to KDB 648747 D04v01r03 The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB Publication 865664 D01 to address interactive hand use exposure conditions.
2. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.
3. According to the user manual, the EUT diagonal size is greater than 16cm, therefore the 0mm extremity SAR of WLAN 5GHz is required. There are two types of antennas in this device, only the worst antenna was tested the extremity SAR in this report.



18. Simultaneous Transmission Evaluation

18.1. Simultaneous Transmission Consideration

No.	Simultaneous Transmission Consideration	Body
1	WWAN+WLAN 2.4GHz	
2	WWAN+WLAN 5GHz	
3	WLAN 2.4GHz(MIMO)	
4	WLAN 5GHz(MIMO)	

Note:

1. When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the Wi-Fi transmitter and another WWAN transmitter. Both the transmitters often cannot transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.
2. Per KDB 447498D01v06, simultaneous transmission SAR evaluation procedures is as followed:
Step 1: If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.
Step 2: If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters calculated.
Step 3: If the ratio of SAR to peak separation distance is ≤ 0.04 , Simultaneous SAR measurement is not required.
Step 4: If the ratio of SAR to peak separation distance is > 0.04 , Simultaneous SAR measurement is required and simultaneous transmission SAR value is calculated.
(The ratio is determined by: $(SAR1 + SAR2) \wedge 1.5/Ri \leq 0.04$,
Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

18.2. Simultaneous Transmission Analysis

➤ Simultaneous Transmission for WWAN+WLAN Antenna 0

WWAN Band	Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 0	5GHz WLAN Ant 0		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
LTE Band 2	Front Side	0.338	0.096	0.218	0.43	0.56
	Back Side	0.336	0.184	0.280	0.52	0.62
	Left Side	0.201	0.155	0.132	0.36	0.33
	Right Side	0.030	0.195	0.588	0.23	0.62
	Top Side	0.029	0.036	0.180	0.07	0.21
	Bottom Side	0.562	0.025	0.052	0.59	0.61
LTE Band 4	Front Side	0.901	0.096	0.218	1.00	1.12
	Back Side	0.543	0.184	0.280	0.73	0.82
	Left Side	0.360	0.155	0.132	0.52	0.49
	Right Side	0.248	0.195	0.588	0.44	0.84
	Top Side	0.085	0.036	0.180	0.12	0.27
	Bottom Side	0.828	0.025	0.052	0.85	0.88
LTE Band 5	Front Side	0.419	0.096	0.218	0.52	0.64
	Back Side	0.457	0.184	0.280	0.64	0.74
	Left Side	0.317	0.155	0.132	0.47	0.45
	Right Side	0.200	0.195	0.588	0.40	0.79
	Top Side	0.051	0.036	0.180	0.09	0.23
	Bottom Side	0.131	0.025	0.052	0.16	0.18
LTE Band 13	Front Side	0.661	0.096	0.218	0.76	0.88
	Back Side	0.722	0.184	0.280	0.91	1.00
	Left Side	0.479	0.155	0.132	0.63	0.61
	Right Side	0.207	0.195	0.588	0.40	0.80
	Top Side	0.030	0.036	0.180	0.07	0.21
	Bottom Side	0.178	0.025	0.052	0.20	0.23
LTE Band 66	Front Side	0.604	0.096	0.218	0.70	0.82
	Back Side	0.491	0.184	0.280	0.68	0.77
	Left Side	0.324	0.155	0.132	0.48	0.46
	Right Side	0.211	0.195	0.588	0.41	0.80
	Top Side	0.071	0.036	0.180	0.11	0.25
	Bottom Side	0.790	0.025	0.052	0.82	0.84



➤ **Simultaneous Transmission for WWAN+WLAN MIMO**

WWAN Band	Exposure Position	1	2	3	1+2	1+3
		WWAN	2.4GHz WLAN Ant 0+1	5GHz WLAN Ant 0+1	Summed 1g SAR	Summed 1g SAR
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
LTE Band 2	Front Side	0.338	0.217	0.081	0.56	0.42
	Back Side	0.336	0.154	0.190	0.49	0.53
	Left Side	0.201	0.273	0.448	0.47	0.65
	Right Side	0.030	0.037	0.349	0.07	0.38
	Top Side	0.029	0.033	0.130	0.06	0.16
	Bottom Side	0.562	0.028	0.047	0.59	0.61
LTE Band 4	Front Side	0.901	0.217	0.081	1.12	0.98
	Back Side	0.543	0.154	0.190	0.70	0.73
	Left Side	0.360	0.273	0.448	0.63	0.81
	Right Side	0.248	0.037	0.349	0.29	0.60
	Top Side	0.085	0.033	0.130	0.12	0.22
	Bottom Side	0.828	0.028	0.047	0.86	0.88
LTE Band 5	Front Side	0.419	0.217	0.081	0.64	0.50
	Back Side	0.457	0.154	0.190	0.61	0.65
	Left Side	0.317	0.273	0.448	0.59	0.77
	Right Side	0.200	0.037	0.349	0.24	0.55
	Top Side	0.051	0.033	0.130	0.08	0.18
	Bottom Side	0.131	0.028	0.047	0.16	0.18
LTE Band 13	Front Side	0.661	0.217	0.081	0.88	0.74
	Back Side	0.722	0.154	0.190	0.88	0.91
	Left Side	0.479	0.273	0.448	0.75	0.93
	Right Side	0.207	0.037	0.349	0.24	0.56
	Top Side	0.030	0.033	0.130	0.06	0.16
	Bottom Side	0.178	0.028	0.047	0.21	0.23
LTE Band 66	Front Side	0.604	0.217	0.081	0.82	0.69
	Back Side	0.491	0.154	0.190	0.65	0.68
	Left Side	0.324	0.273	0.448	0.60	0.77
	Right Side	0.211	0.037	0.349	0.25	0.56
	Top Side	0.071	0.033	0.130	0.10	0.20
	Bottom Side	0.790	0.028	0.047	0.82	0.84



19. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observations is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/ κ ^(b)	1/ $\sqrt{3}$	1/ $\sqrt{6}$	1/ $\sqrt{2}$

Standard Uncertainty for Assumed Distribution

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.0	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	0.089	0.089
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						11.4%	11.4%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						22.9%	22.7%



Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.55	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	2.0	R	1.732	1	1	1.2	1.2
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	6.7	R	1.732	1	1	3.9	3.9
Max. SAR Eval.	4.0	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	0.089	0.089
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.1	R	1.732	1	1	3.8	3.8
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						12.5%	12.5%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						25.1 %	25.1%



Annex A General Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

The FCC designation number is CN1192, the test firm registration number is 226174.

Note:

The main report is end here and the other Annex (B,C,D,E) will be submitted separately.

***** END OF MAIN REPORT *****