

# NOKIA

NOKIA CORPORATION

Yrttipellontie 6  
FIN-90230 Oulu  
FINLAND  
Tel. +358 7180 08000  
Fax. +358 7180 52641

Jan 15, 2003

Federal Communications Commission,  
Authorization & Evaluation Division,  
7435 Oakland Mills Road  
Columbia, MD. 21046

Attention: Equipment Authorization Branch

We hereby certify that the transceiver FCC ID: P4JDTE-3 complies with ANSI/IEEE C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

Compliance was determined by testing appropriate parameters according to standard.

NOKIA CORPORATION



Petteri Holma  
Product Program Manager, Nokia Corporation Oulu

**SAR Compliance Test Report**

Test report no.:	Not numbered	Date of report:	2002-12-17
Number of pages:	92	Contact person:	Pentti Pärnänen
		Responsible test engineer:	Pertti Mäkikyö

Testing laboratory:	Nokia Corporation Elektroniikkatie 10 P.O. Box 50 FIN-90571 OULU Finland Tel. +358-7180-08000 Fax. +358-7180-47222	Client:	Nokia Corporation Yrtyipellontie 10 P.O. Box 300 FIN-90230 OULU Finland Tel. +358-7180-08000 Fax. +358-7180-58300
---------------------	--	---------	---

Tested devices: P4JDTE-3

Supplement reports: -

Testing has been carried out in accordance with:

- 47CFR §2.1093  
Radiofrequency Radiation Exposure Evaluation: Portable Devices
- IEEE P1528-200X Draft 6.4  
Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques
- FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01)  
Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields


Documentation: The documentation of the testing performed on the tested devices is archived for 15 years at TCC Oulu

Test results: **The tested device complies with the requirements in respect of all parameters subject to the test.**

The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.

Date and signatures: 2002-12-17  
For the contents:

  
Pertti Mäkikyö  
Engineering Manager, EMC

  
Anne Kiviniemi  
Test Engineer

**CONTENTS**

1.	SUMMARY FOR SAR TEST REPORT .....	3
1.1	MAXIMUM RESULTS FOUND DURING SAR EVALUATION.....	3
1.1.1	Body Worn Configuration.....	3
1.1.2	Measurement Uncertainty .....	3
2.	DESCRIPTION OF TESTED DEVICE .....	4
2.1	PICTURE OF TESTED DEVICE.....	4
2.2	DESCRIPTION OF THE ANTENNA .....	4
2.3	SNAP-ON SPACER .....	4
3.	TEST CONDITIONS .....	5
3.1	AMBIENT CONDITIONS .....	5
3.2	RF CHARACTERISTICS OF THE TEST SITE.....	5
3.3	TEST SIGNAL, FREQUENCIES, AND OUTPUT POWER .....	5
4.	DESCRIPTION OF THE TEST EQUIPMENT.....	5
4.1	SYSTEM ACCURACY VERIFICATION.....	6
4.2	TISSUE SIMULANTS.....	7
4.2.1	Muscle Tissue Simulant.....	7
4.3	PHANTOMS.....	8
4.4	ISOTROPIC E-FIELD PROBE ET3DV6 .....	9
5.	DESCRIPTION OF THE TEST PROCEDURE .....	9
5.1	TEST POSITIONS.....	9
	Position for testing the lower part area of P4JDTE-3 .....	10
5.1.2	Position for testing the tip area of P4JDTE-3.....	12
5.2	SCAN PROCEDURES.....	14
5.3	SAR AVERAGING METHODS.....	14
6.	MEASUREMENT UNCERTAINTY .....	15
6.1	DESCRIPTION OF INDIVIDUAL MEASUREMENT UNCERTAINTY .....	15
6.1.1	Assessment Uncertainty.....	15
7.	RESULTS.....	16
7.1	BODY WORN CONFIGURATION .....	16
APPENDIX A: Validation Test Printouts (11 pages)		
APPENDIX B: SAR Distribution Printouts (33 pages)		
APPENDIX C: Calibration Certificate(s) (28 pages)		

**1. SUMMARY FOR SAR TEST REPORT**

Date of test	2002-11-13 – 2002-11-15, 2002-11-17 – 2002-11-18 2002-11-23 – 2002-11-24, 2002-11-26, 2002-11-29
Contact person	Pentti Pärnänen
Test plan referred to	-
FCC ID	P4JDTE-3
SN, HW and numbers of tested device	SN: 001004/10/07/5800/3, HW: 0701, SW: v02.30
Accessories used in testing	Snap-on spacer
Notes	-
Document code	DTX 05855-EN
Responsible test engineer	Pertti Mäkikyrö
Measurement performed by	Anne Kiviniemi

**1.1 Maximum Results Found during SAR Evaluation**

The equipment is deemed to fulfil the requirements if the measured values are less than or equal to the limit. Maximum found results are reported per operating band.

**1.1.1 Body Worn Configuration**

Mode	Ch / f (MHz)	Power	Separation Distance	Limit	Measured	Result
GPRS 850	128/824.20	29.2 dBm	18.9 mm	1.6 mW/g	0.59 mW/g	<b>PASSED</b>
GPRS 1900	512/1850.20	29.9 dBm	18.9 mm	1.6 mW/g	0.90 mW/g	<b>PASSED</b>
WLAN	6/2437	17.1 dBm	18.8 mm	1.6 mW/g	0.15 mW/g	<b>PASSED</b>

**1.1.2 Measurement Uncertainty**

<b>Combined Standard Uncertainty</b>	<b>± 13.6%</b>
<b>Expanded Standard Uncertainty (k=2)</b>	<b>± 27.1%</b>

**2. DESCRIPTION OF TESTED DEVICE**

Device category	Portable device		
Exposure environment	Uncontrolled exposure		
Unit type	Prototype unit		
Modes of Operation	GSM	GPRS	WLAN
Modulation Mode	Gaussian Minimum Shift Keying	Gaussian Minimum Shift Keying	Differential Quadrature Phase Shift Keying
Duty Cycle	1/8	2/8	4/5
Transmitter Frequency Range (MHz)	824.2 – 848.8 1850.2 -1909.8	824.2 - 848.8 1850.2 -1909.8	2412-2462

**2.1 Picture of Tested Device**



**2.2 Description of the Antenna**

Type	Internal integrated antenna
Location	Tip of the device

**2.3 Snap-on spacer**

Snap-on spacer was attached to P4JDTE-3 during body worn measurements.



**3. TEST CONDITIONS**

**3.1 Ambient Conditions**

Ambient temperature (°C)	22±2
Tissue simulating liquid temperature (°C)	22±2
Humidity	42

**3.2 RF characteristics of the test site**

Tests were performed in a enclosed RF shielded environment.

**3.3 Test Signal, Frequencies, and Output Power**

The device was controlled by using a test mode software and by using a radio tester. GSM mode was not tested since P4JDTE-3 is able to use two time slots for transmitting data in GPRS mode whereas GSM mode uses only one time slot.

P4JDTE-3 is capable of operating in several host products. Typical laptops IBM ThinkPad T23, IBM ThinkPad 560x, IBM ThinkPad 600x and pocket PCs: Casio Cassiopeia, Compaq iPAQ and Hewlett Packard Jornada were chosen for testing.

In 850 and 1900 MHz operating bands the measurements were performed on lowest, middle and highest channels and in 2450 MHz band measurements were performed at the middle channel only, because each test configuration in that channel was more than 3.0dB lower than the SAR limit. Maximum power level was used during the all tests.

DASY3 system measures power drift during SAR testing by comparing e-field in the same location at the beginning and at the end of measurement. These records were used to monitor stability of power output.

**4. DESCRIPTION OF THE TEST EQUIPMENT**

The measurements were performed with an automated near-field scanning system, DASY3, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland.

Test Equipment	Serial Number	Due Date
DASY3 DAE V1	405	02/03
E-field Probe ET3DV6	1379	02/03
Dipole Validation Kit, D835V2	448	11/03
Dipole Validation Kit, D1900V2	511	02/03

E-field probe calibration records are presented in Appendix C.

Additional equipment needed in validation

Test Equipment	Model	Serial Number	Due Date
Signal Generator	Agilent E4433B	GB40050947	09/04
Amplifier	Amplifier Research 5S1G4	27573	-
Power Meter	R&S NRT	835065/049	04/03
Power Sensor	R&S NRT-Z44	835374/021	04/03
Thermometer	DO9416	1505985462	-
Vector Network Analyzer	Hewlett Packard 8753E	US38432701	05/03
Dielectric Probe Kit	Agilent 85070C	-	-

**4.1 System Accuracy Verification**

The probes are calibrated annually by the manufacturer. Dielectric parameters of the simulating liquids are measured by using a dielectric probe kit and a vector network analyzer.

The SAR measurement of the DUT were done within 24 hours of system accuracy verification, which was done using the dipole validation kit.

The dipole antenna, which is manufactured by Schmid & Partner Engineering AG, is matched to be used near flat phantom filled with tissue simulating solution. Length of 835 MHz dipole is 161mm with overall height of 330mm. Dipole length for 1900 MHz is 68 mm with overall height of 300mm. A specific distance holder is used in the positioning of both antennas to ensure correct spacing between the phantom and the dipole. Manufacturer's reference dipole data is presented in Appendix C.

Due to lack of dipole and verification data for 2450 MHz, system verification for WLAN measurements were done with dipole for 1900MHz .

Power level of 250 mW was supplied to a dipole antenna placed under the flat section of SAM phantom. The validation results are in the table below and printout of the validation test is presented in Appendix A. All the measured parameters were within the specification.

Tissue	f (MHz)	Description	SAR (W/kg), 1g	Dielectric Parameters		Temp (°C)
				$\epsilon_r$	$\sigma$ (S/m)	
Muscle	835	Measured 11/15/2002	2.75	57.9	0.95	22
		Reference Result	2.73	56.0	0.98	N/A
Muscle	835	Measured 11/17/2002	2.66	56.8	0.95	22
		Reference Result	2.73	56.0	0.98	N/A
Muscle	835	Measured 11/18/2002	2.66	56.7	0.96	22
		Reference Result	2.73	56.0	0.98	N/A
Muscle	835	Measured 11/24/2002	2.70	56.8	0.94	22
		Reference Result	2.73	56.0	0.98	N/A

Muscle	835	Measured 11/26/2002	2.73	56.8	0.96	22
		Reference Result	2.73	56.0	0.98	N/A
Muscle	1900	Measured 11/13/2002	10.9	50.8	1.50	22
		Reference Result	10.6	53.5	1.46	N/A
Muscle	1900	Measured 11/14/2002	11.0	51.0	1.52	22
		Reference Result	10.6	53.5	1.46	N/A
Muscle	1900	Measured 11/15/2002	11.0	51.1	1.52	22
		Reference Result	10.6	53.5	1.46	N/A
Muscle	1900	Measured 11/23/2002	11.1	51.0	1.49	22
		Reference Result	10.6	53.5	1.46	N/A
Muscle	1900	Measured 11/24/2002	10.8	51.0	1.50	22
		Reference Result	10.6	53.5	1.46	N/A
Muscle	1900	Measured 11/29/2002	10.6	51.0	1.50	22
		Reference Result	10.6	53.5	1.46	N/A

**4.2 Tissue Simulants**

All dielectric parameters of tissue simulants were measured within 24 hours of SAR measurements. The depth of the tissue simulant in the ear reference point of the phantom was 15cm ± 5mm during all the tests. Volume for each tissue simulant was 26 liters.

**4.2.1 Muscle Tissue Simulant**

The composition of the muscle tissue simulating liquid for 835MHz is

- 55.97% De-Ionized Water
- 41.76% Sugar
- 1.21% HEC
- 0.79% Salt
- 0.27% Preservative

and for 1900MHz

- 69.02% De-Ionized Water
- 30.76% Diethylene Glycol Monobutyl Ether
- 0.22% Salt

and for 2450 MHz

- 70.0% De-Ionized Water
- 30.0% Diethylene Glycol Monobutyl Ether

<i>f</i> (MHz)	Description	Dielectric Parameters		Temp (°C)
		$\epsilon_r$	$\sigma$ (S/m)	
835	Measured 11/15/2002	57.9	0.95	22
	Recommended Values	55.2	0.97	20-26
835	Measured 11/17/2002	56.8	0.95	22
	Recommended Values	55.2	0.97	20-26



835	Measured 11/18/2002	56.7	0.96	22
	Recommended Values	55.2	0.97	20-26
835	Measured 11/24/2002	56.8	0.94	22
	Recommended Values	55.2	0.97	20-26
835	Measured 11/26/2002	56.8	0.96	22
	Recommended Values	55.2	0.97	20-26
1880	Measured 11/13/2002	50.9	1.48	22
	Recommended Values	53.3	1.52	20-26
1880	Measured 11/14/2002	51.2	1.51	22
	Recommended Values	53.3	1.52	20-26
1880	Measured 11/15/2002	51.3	1.51	22
	Recommended Values	53.3	1.52	20-26
1880	Measured 11/23/2002	51.0	1.47	22
	Recommended Values	53.3	1.52	20-26
1880	Measured 11/24/2002	51.2	1.47	22
	Recommended Values	53.3	1.52	20-26
2450	Measured 11/29/2002	53.7	2.05	22
	Recommended Values	52.7	1.95	20-26

Recommended values are adopted from OET Bulletin 65 (97-01) Supplement C (01-01).

### 4.3

#### Phantoms

"SAM v4.0" phantom", manufactured by SPEAG, was used during the measurement. It has fiberglass shell integrated in a wooden table. The shape of the shell corresponds to the phantom defined by SCC34-SC2. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. Reference



markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

The thickness of phantom shell is 2 mm except for the ear, where an integrated ear spacer provides a 6 mm spacing from the tissue boundary. Manufacturer reports tolerance in shell thickness to be  $\pm 0.1$ mm.

**4.4 Isotropic E-Field Probe ET3DV6**

<b>Construction</b>	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycoether)
<b>Calibration</b>	Calibration certificate in Appendix C
<b>Frequency</b>	10 MHz to 3 GHz (dosimetry); Linearity: $\pm 0.2$ dB (30 MHz to 3 GHz)
<b>Optical Surface Detection</b>	$\pm 0.2$ mm repeatability in air and clear liquids over diffuse reflecting surfaces
<b>Directivity</b>	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.4$ dB in HSL (rotation normal to probe axis)
<b>Dynamic Range</b>	5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB
<b>Dimensions</b>	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
<b>Application</b>	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms



**5. DESCRIPTION OF THE TEST PROCEDURE**

**5.1 Test Positions**

P4JDTE-3 with Snap-On spacer attached was placed into laptops and pocket PCs and then below the flat section of the phantom using a device holder and expanded polystyrene (EPS).


Two positions were used to test compliance. These positions correspond to applicable operating configurations.



## 5.1.1 Position for testing the lower part area of P4JDTE-3




Laptop IBM 560x, all the laptops were positioned similarly for testing underneath P4JDTE-3

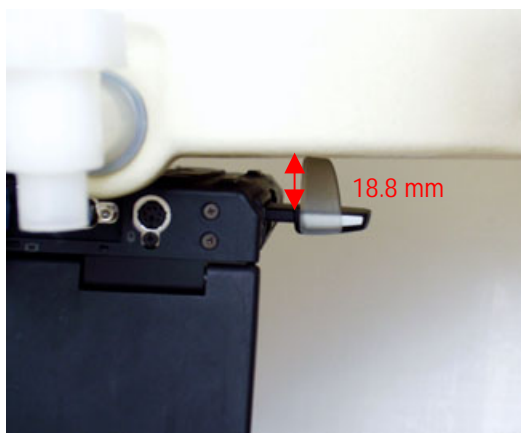


Laptop IBM 600x




Laptop IBM t23

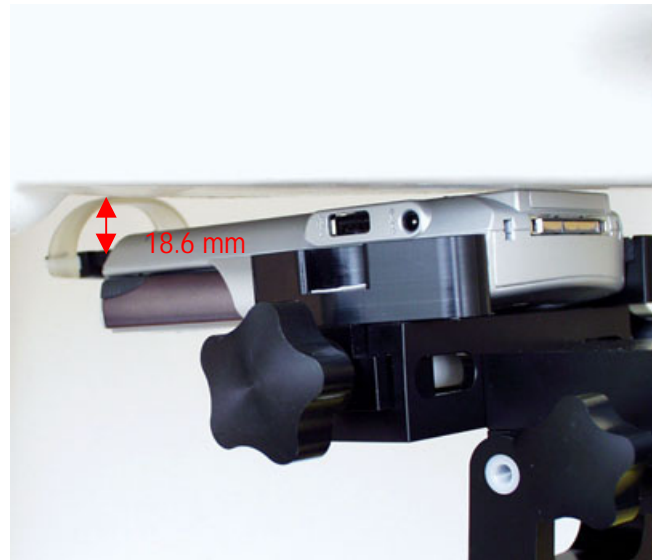

Pocket PC Casio Cassiopeia, all the pocket PCs were positioned similarly for testing underneath P4JDTE-3


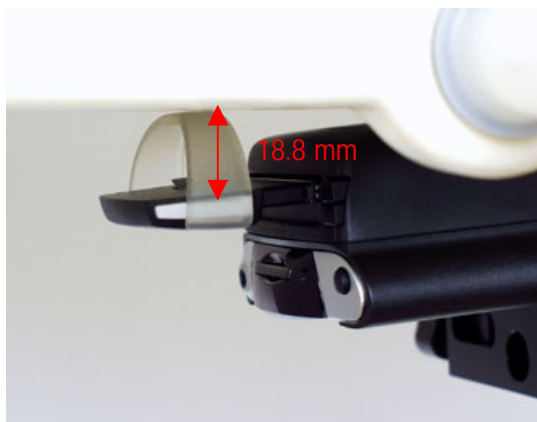


Pocket PC Compaq iPAQ

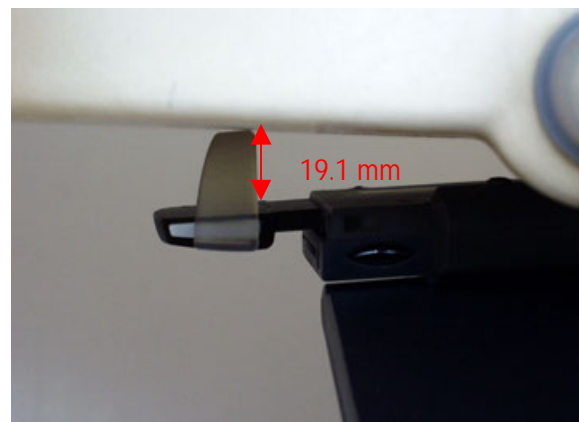

Handheld PC Hewlett Packard Jornada


## 5.1.2 Position for testing the tip area of P4JDTE-3

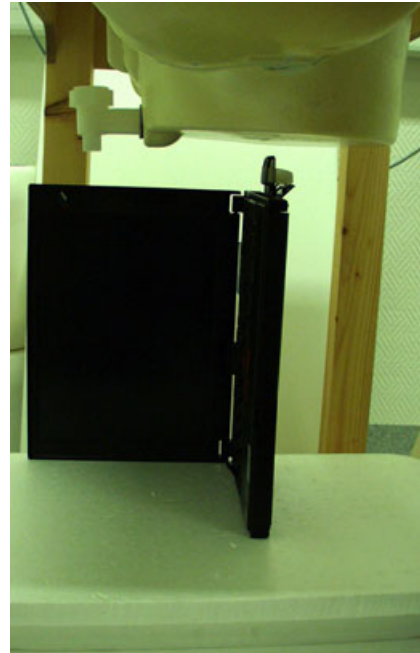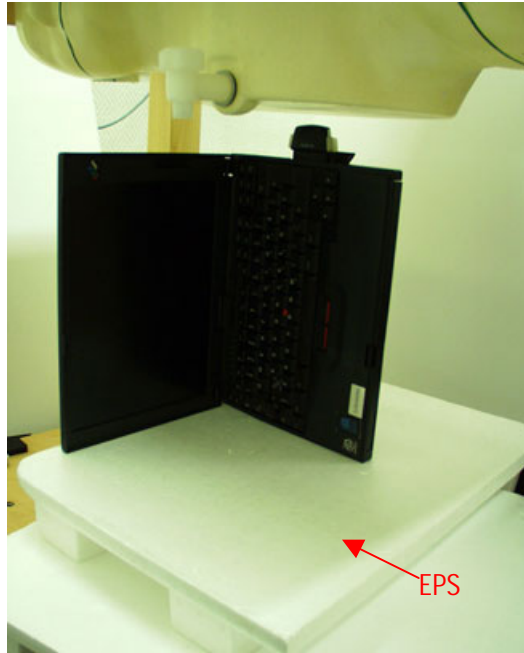

Laptop IBM 560x, all the laptops were positioned similarly for testing the tip of P4JDTE-3 with separation distance 15mm.



Laptop IBM 600x

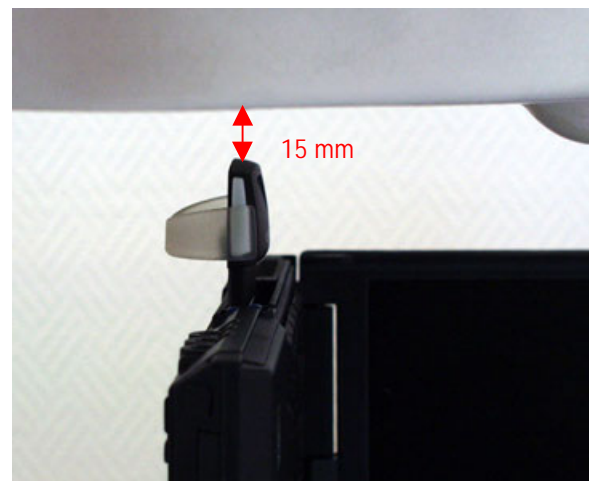

Laptop IBM T23



Pocket PC Casio Cassiopeia, all the pocket PCs were positioned similarly for testing the tip of P4JDTE-3 with separation distance 15mm.



Pocket PC Compaq iPAQ



Handheld PC Hewlett Packard Jornada

## 5.2 Scan Procedures

First coarse scans are used for quick determination of the field distribution. Next a cube scan, 5x5x7 points; spacing between each point 8x8x5 mm, is performed around the highest E-field value to determine the averaged SAR-distribution over 1g.

## 5.3 SAR Averaging Methods

The maximum SAR value is averaged over its volume using interpolation and extrapolation.

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot" -condition [W. Gander, Computermathematik, p. 141-150] (x, y and z -directions) [Numerical Recipes in C, Second Edition, p 123].

The extrapolation is based on least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 30 mm in all z-axis, polynomials of order four are calculated. This polynomial is then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1mm from one another.

6. MEASUREMENT UNCERTAINTY

6.1 Description of Individual Measurement Uncertainty

6.1.1 Assessment Uncertainty

Uncertainty description	Uncert. value %	Probability distribution	Div.	$c_i^{-1}$	Stand. uncert (1g) %	$v_i^2$ or $v_{eff}$
<b>Measurement System</b>						
Probe calibration	± 4.4	normal	1	1	± 4.4	∞
Axial isotropy of the probe	± 4.7	rectangular	√3	$(1-c_p)^{1/2}$	± 1.9	∞
Sph. Isotropy of the probe	± 9.6	rectangular	√3	$(c_p)^{1/2}$	± 3.9	∞
Spatial resolution	± 0.0	rectangular	√3	1	± 0.0	∞
Boundary effects	± 5.5	rectangular	√3	1	± 3.2	∞
Probe linearity	± 4.7	rectangular	√3	1	± 2.7	∞
Detection limit	± 1.0	rectangular	√3	1	± 0.6	∞
Readout electronics	± 1.0	normal	1	1	± 1.0	∞
Response time	± 0.8	rectangular	√3	1	± 0.5	∞
Integration time	± 1.4	rectangular	√3	1	± 0.8	∞
RF ambient conditions	± 3.0	rectangular	√3	1	± 1.7	∞
Mech. Constrains of robot	± 0.4	rectangular	√3	1	± 0.2	∞
Probe positioning	± 2.9	rectangular	√3	1	± 1.7	∞
Extrap. And integration	± 3.9	rectangular	√3	1	± 2.3	∞
<b>Test Sample Related</b>						
Device positioning	± 6.0	normal	0.89	1	± 6.7	12
Device holder uncertainty	± 5.0	normal	0.84	1	± 5.9	8
Power drift	± 5.0	rectangular	√3	1	± 2.9	∞
<b>Phantom and Setup</b>						
Phantom uncertainty	± 4.0	rectangular	√3	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	rectangular	√3	0.6	± 1.7	∞
Liquid conductivity (meas.)	± 10.0	rectangular	√3	0.6	± 3.5	∞
Liquid permittivity (target)	± 5.0	rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 5.0	rectangular	√3	0.6	± 1.7	∞
<b>Combined Standard Uncertainty</b>					± 13.6	
<b>Expanded Standard Uncertainty (k=2)</b>					± 27.1	



**7. RESULTS**

Corresponding SAR distribution printouts of maximum results in every operating mode and position are shown in Appendix B. It also includes Z-plots of maximum measurement results in body worn configurations. The SAR distributions are substantially similar or equivalent to the plots submitted regardless of used channel in each mode and position. As all WLAN SAR results with the laptop PCs were below 0.16 W/kg, WLAN was not remeasured with the pocket PCs.

**7.1 Body Worn Configuration**

Mode	Channel/ <i>f</i> (MHz)	Power (dBm)
GPRS 850	128/824.20	29.2
	190/836.60	29.2
	251/848.80	29.0
GPRS 1900	512/1850.20	29.9
	661/1880.00	29.5
	810/1909.80	29.4
WLAN	6/2437	17.1

P4JDTE-3 with laptop IBM T23			
Mode	Channel/ <i>f</i> (MHz)	SAR, averaged over 1g (mW/g)	
		Underneath	Tip
GPRS 850	128/824.20	0.52	0.06
	190/836.60	0.51	0.06
	251/848.80	0.51	0.06
GPRS 1900	512/1850.20	0.56	0.30
	661/1880.00	0.53	0.26
	810/1909.80	0.48	0.26
WLAN	6/2437	0.15	0.04

P4JDTE-3 with laptop IBM 560x			
Mode	Channel/ <i>f</i> (MHz)	SAR, averaged over 1g (mW/g)	
		Underneath	Tip
GPRS 850	128/824.20	0.42	<b>0.09</b>
	190/836.60	0.41	0.09
	251/848.80	0.41	0.08
GPRS 1900	512/1850.20	<b>0.90</b>	<b>0.43</b>
	661/1880.00	0.77	0.36
	810/1909.80	0.69	0.33
WLAN	6/2437	0.13	0.03

P4JDTE-3 with laptop IBM 600x			
Mode	Channel/ f (MHz)	SAR, averaged over 1g (mW/g)	
		Underneath	Tip
GPRS 850	128/824.20	0.44	0.04
	190/836.60	0.43	0.04
	251/848.80	0.40	0.05
GPRS 1900	512/1850.20	0.67	0.28
	661/1880.00	0.55	0.25
	810/1909.80	0.51	0.26
WLAN	6/2437	0.15	0.07

P4JDTE-3 with pocket PC Casio Cassiopeia			
Mode	Channel/ f (MHz)	SAR, averaged over 1g (mW/g)	
		Underneath	Tip
GPRS 850	128/824.20	0.37	0.03
	190/836.60	0.40	0.03
	251/848.80	0.40	0.04
GPRS 1900	512/1850.20	0.61	0.23
	661/1880.00	0.50	0.22
	810/1909.80	0.46	0.23

P4JDTE-3 with pocket PC Compaq iPAQ			
Mode	Channel/ f (MHz)	SAR, averaged over 1g (mW/g)	
		Underneath	Tip
GPRS 850	128/824.20	0.59	0.03
	190/836.60	0.58	0.04
	251/848.80	0.56	0.04
GPRS 1900	512/1850.20	0.72	0.24
	661/1880.00	0.54	0.23
	810/1909.80	0.51	0.26


P4JDTE-3 with Handheld PC Hewlett Packard Jornada			
Mode	Channel/ f (MHz)	SAR, averaged over 1g (mW/g)	
		Underneath	Tip
GPRS 850	128/824.20	0.35	0.05
	190/836.60	0.37	0.05
	251/848.80	0.36	0.05
GPRS 1900	512/1850.20	0.48	0.21
	661/1880.00	0.41	0.21
	810/1909.80	0.40	0.20

APPENDIX A.

Validation Test Printouts

# Dipole 835 MHz

SAM 3; Flat  
Probe: ET3DV6 - SN1379; ConvF(6.20,6.20,6.20); Crest factor: 1.0; Muscle 836 MHz:  $\sigma = 0.95$  mho/m  $\epsilon_r = 57.9$   $\rho = 1.00$  g/cm<sup>3</sup>, liquid temperature: 21.0 C  
Cubes (2): Peak: 4.43 mW/g  $\pm 0.09$  dB, SAR (1g): 2.75 mW/g  $\pm 0.07$  dB, SAR (10g): 1.76 mW/g  $\pm 0.05$  dB  
Penetration depth: 12.5 (10.7, 14.9) [mm]  
Powerdrift: -0.06 dB

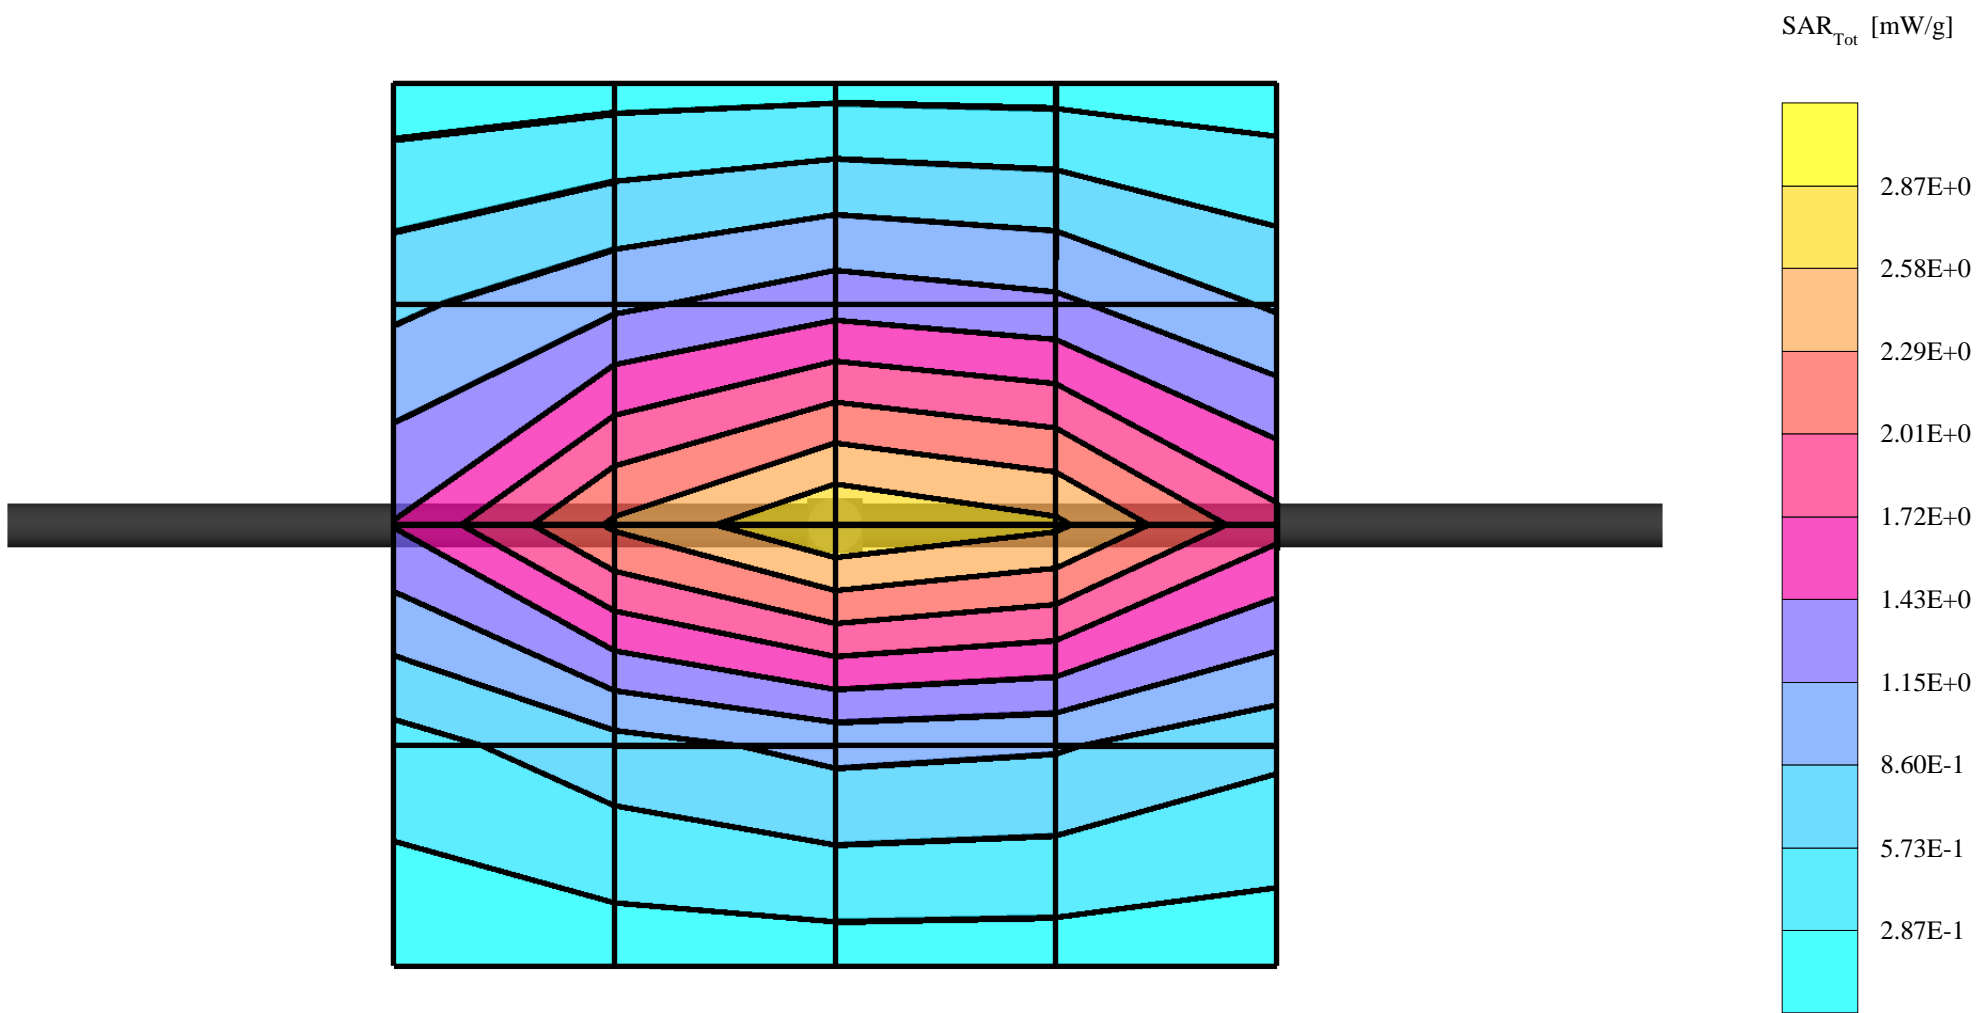

# Dipole 835 MHz


SAM 3; Flat

Probe: ET3DV6 - SN1379; ConvF(6.20,6.20,6.20); Crest factor: 1.0; Muscle 836 MHz:  $\sigma = 0.95$  mho/m  $\epsilon_r = 56.8$   $\rho = 1.00$  g/cm<sup>3</sup>, liquid temperature: 22.3 C

Cubes (2): Peak: 4.18 mW/g  $\pm 0.06$  dB, SAR (1g): 2.66 mW/g  $\pm 0.07$  dB, SAR (10g): 1.73 mW/g  $\pm 0.07$  dB


Penetration depth: 12.8 (11.2, 14.8) [mm]

Powerdrift: 0.01 dB

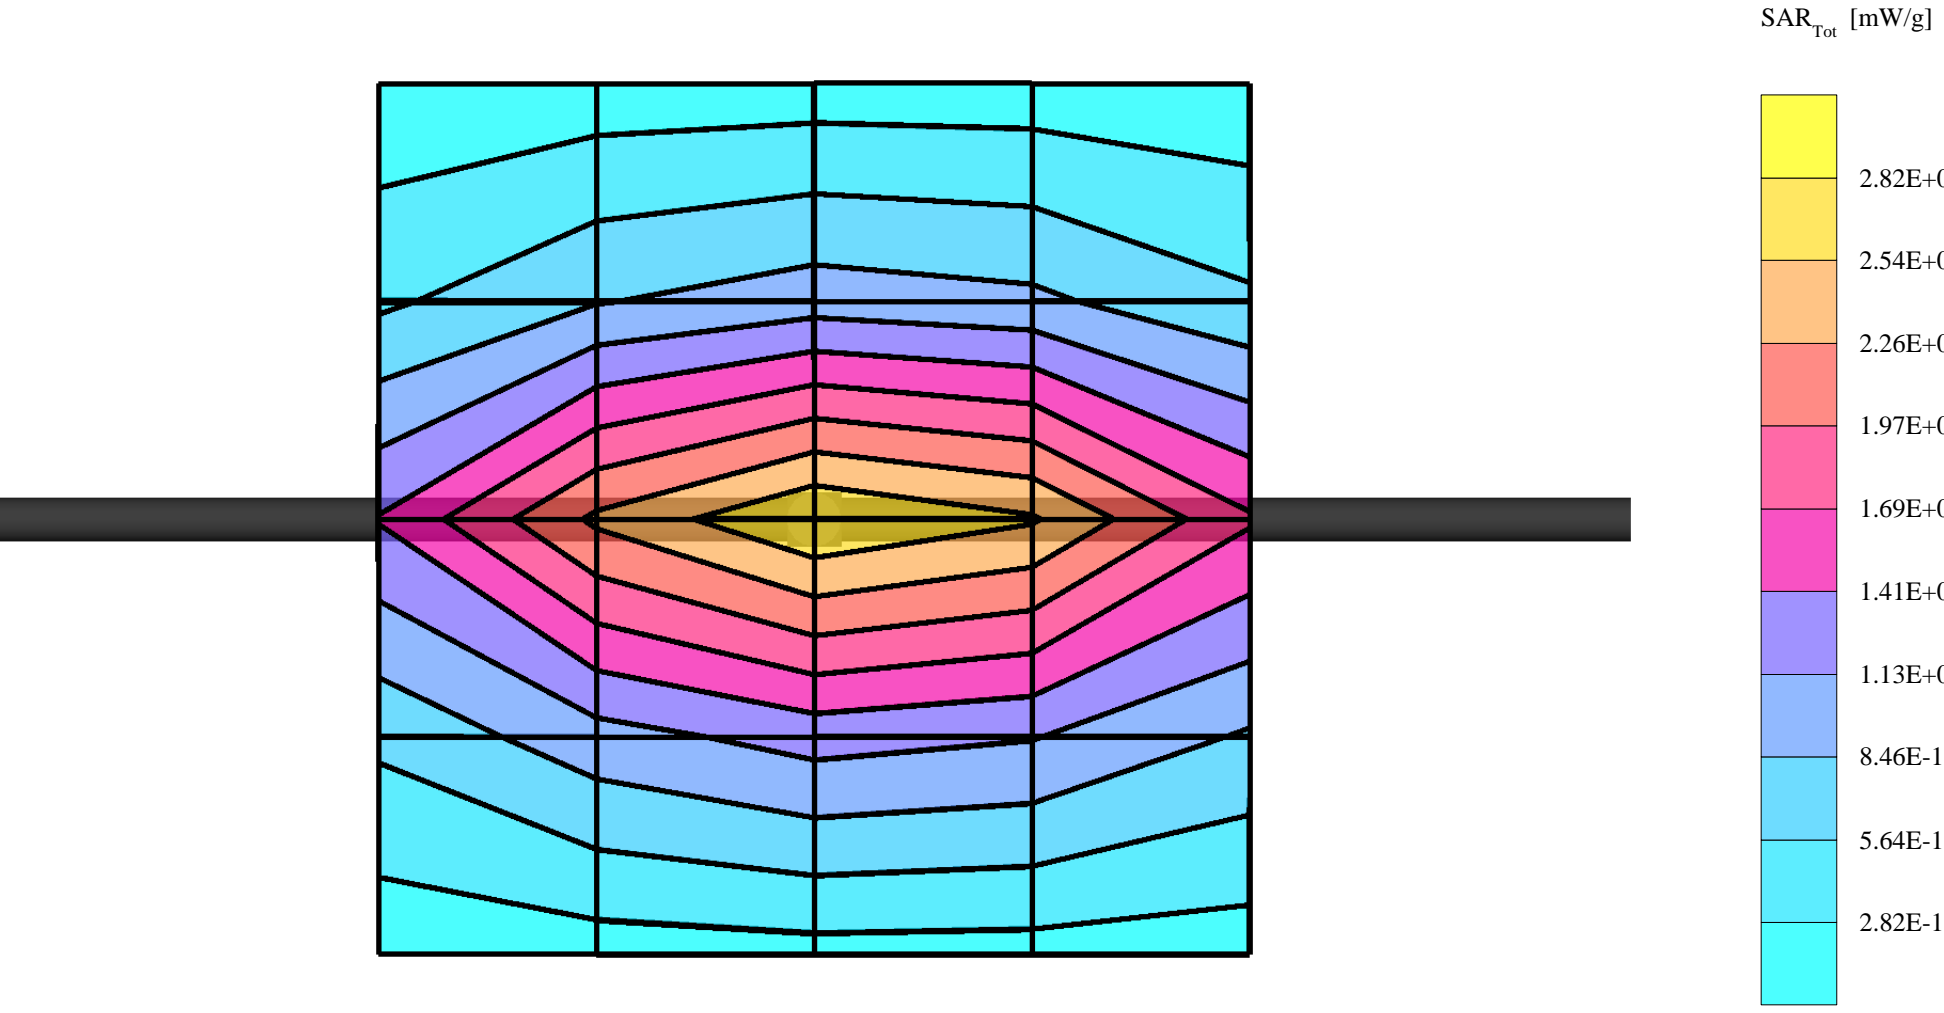

# Dipole 835 MHz

SAM 3; Flat  
Probe: ET3DV6 - SN1379; ConvF(6.20,6.20,6.20); Crest factor: 1.0; Muscle 836 MHz:  $\sigma = 0.96$  mho/m  $\epsilon_r = 56.7$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 22.5 °C  
Cubes (2): Peak: 4.20 mW/g  $\pm 0.13$  dB, SAR (1g): 2.66 mW/g  $\pm 0.10$  dB, SAR (10g): 1.72 mW/g  $\pm 0.08$  dB  
Penetration depth: 12.6 (11.0, 14.7) [mm]  
Powerdrift: -0.02 dB

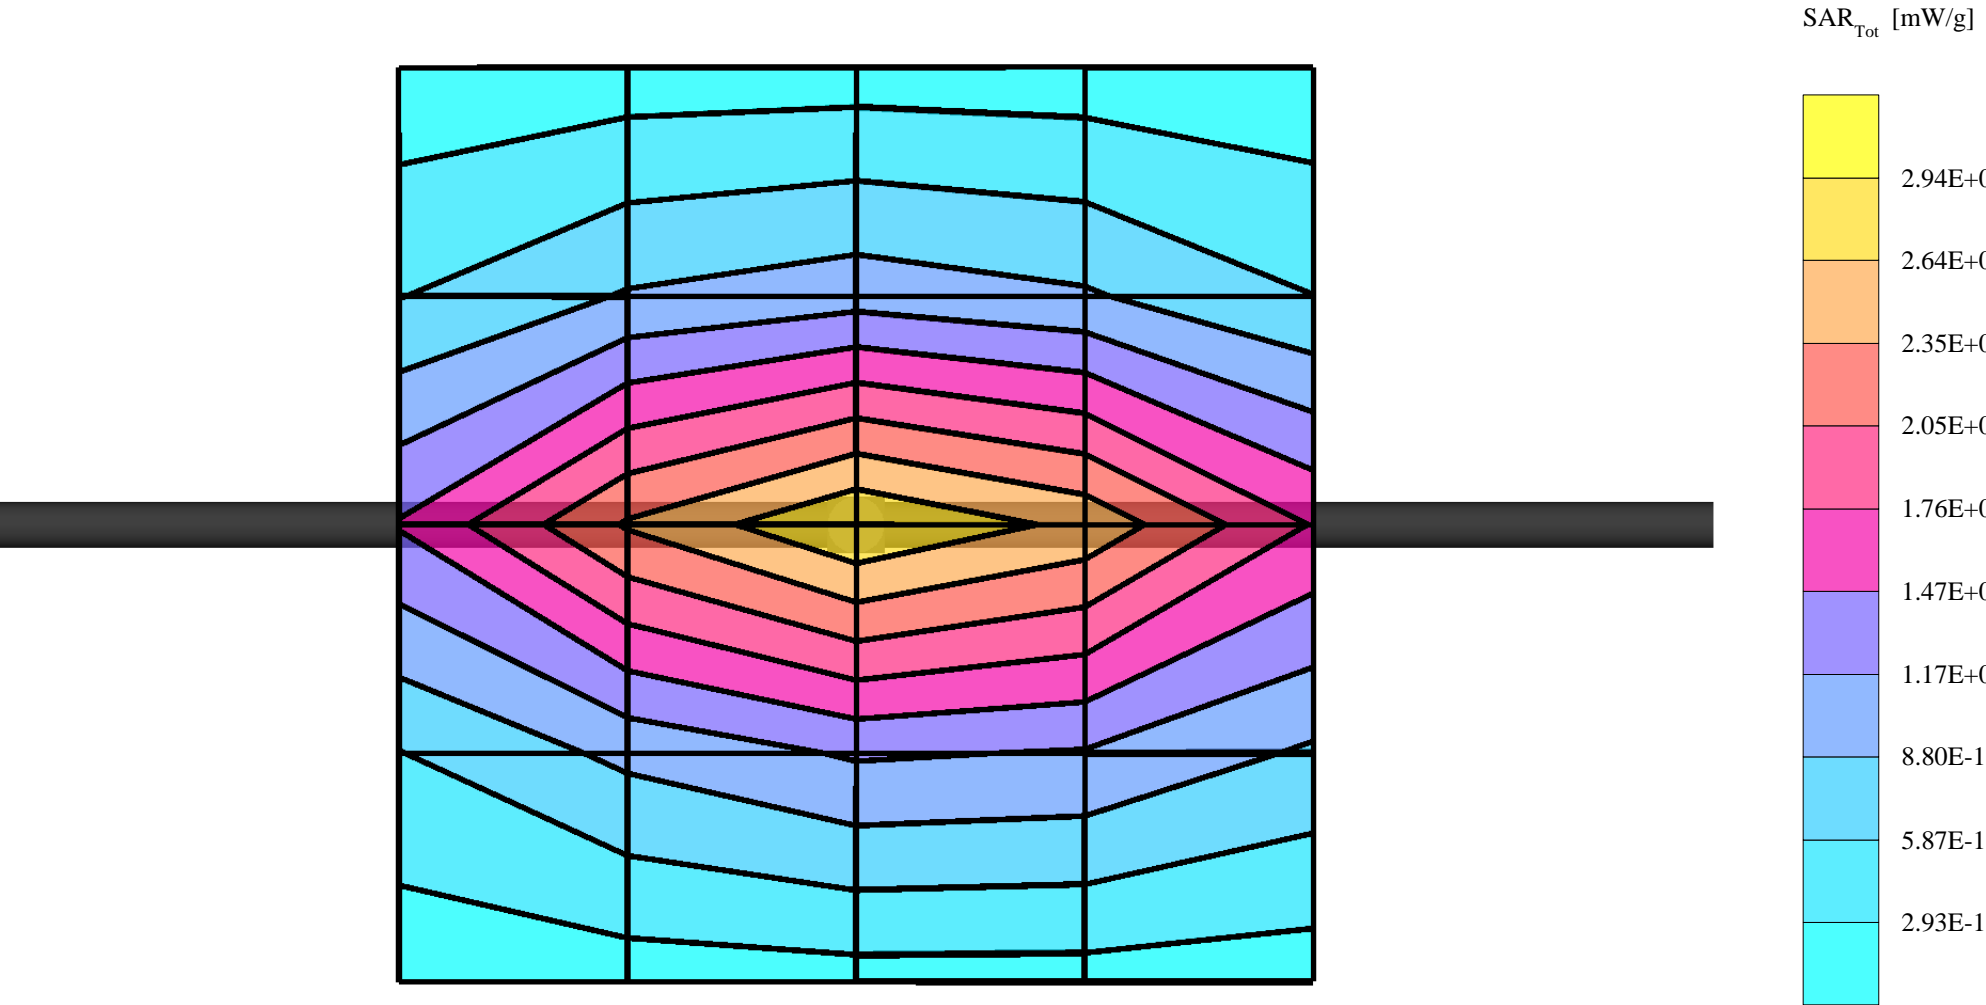

# Dipole 835 MHz


SAM 3; Flat

Probe: ET3DV6 - SN1379; ConvF(6.20,6.20,6.20); Crest factor: 1.0; Muscle 836 MHz:  $\sigma = 0.94$  mho/m  $\epsilon_r = 56.8$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 21.5 °C

Cubes (2): Peak: 4.25 mW/g  $\pm 0.03$  dB, SAR (1g): 2.70 mW/g  $\pm 0.06$  dB, SAR (10g): 1.75 mW/g  $\pm 0.07$  dB


Penetration depth: 12.8 (11.2, 14.8) [mm]

Powerdrift: 0.01 dB

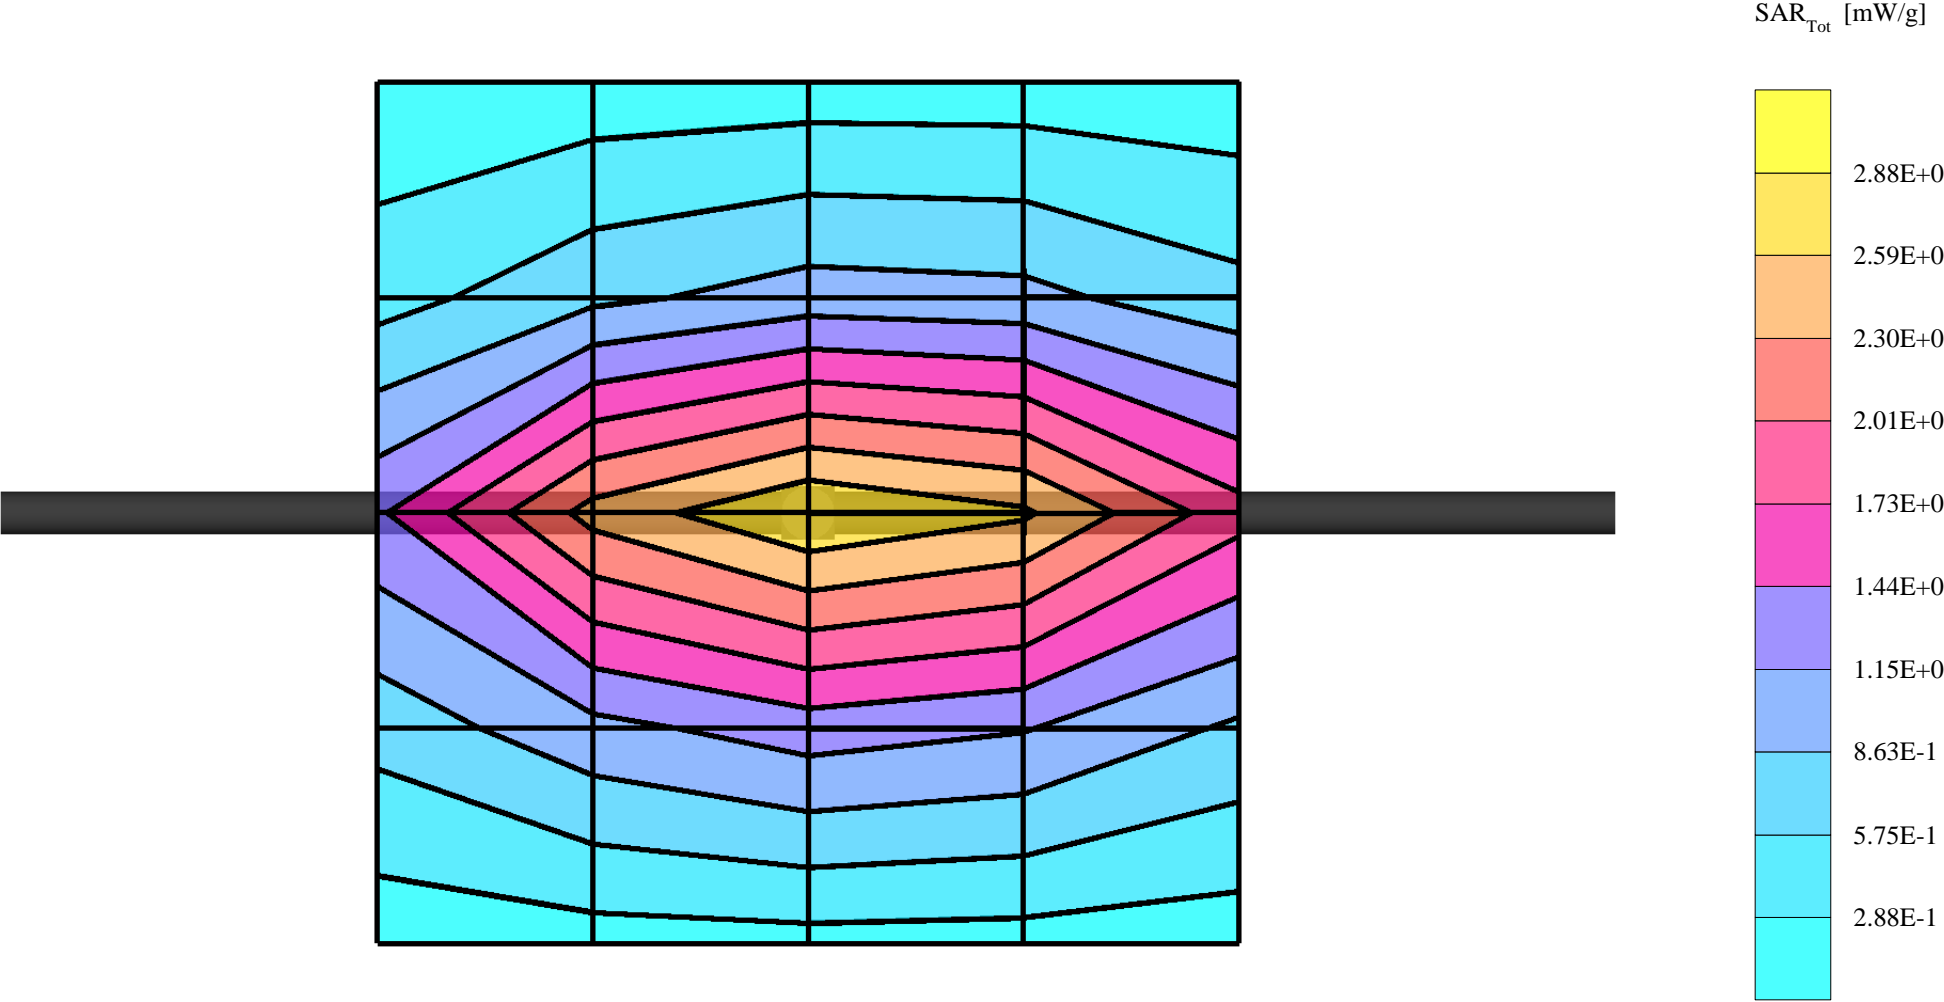

# Dipole 835 MHz


SAM 3; Flat  
Probe: ET3DV6 - SN1379; ConvF(6.20,6.20,6.20); Crest factor: 1.0; Muscle 836 MHz:  $\sigma = 0.96$  mho/m  $\epsilon_r = 56.8$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 21.9 °C  
Cubes (2): Peak: 4.35 mW/g  $\pm 0.06$  dB, SAR (1g): 2.73 mW/g  $\pm 0.01$  dB, SAR (10g): 1.76 mW/g  $\pm 0.06$  dB  
Penetration depth: 12.7 (11.2, 14.8) [mm]  
Powerdrift: -0.03 dB

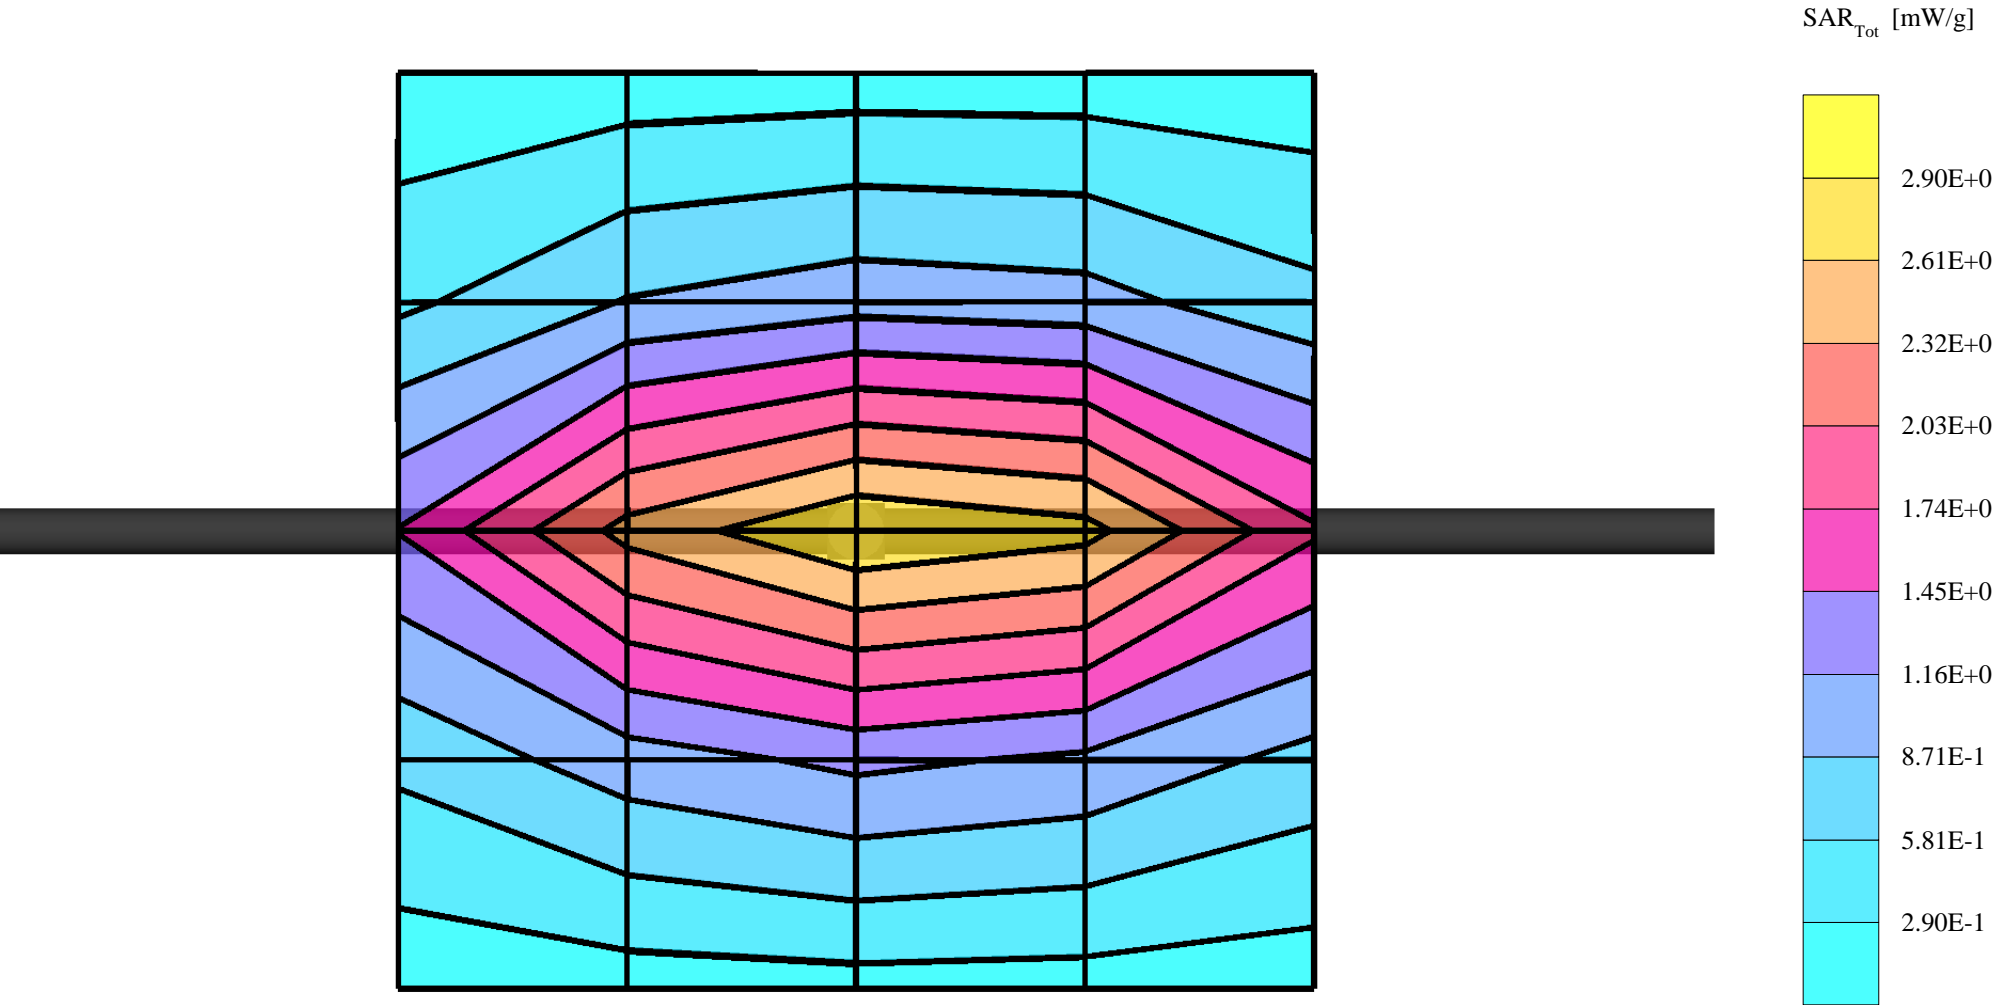



# Dipole 1900 MHz

SAM 1; Flat  
Probe: ET3DV6 - SN1379; ConvF(4.80,4.80,4.80); Crest factor: 1.0; Muscle 1900 MHz:  $\sigma = 1.50$  mho/m  $\epsilon_r = 50.8$   $\rho = 1.00$  g/cm<sup>3</sup>, liquid temperature: 21.6 C  
Cubes (2): Peak: 20.5 mW/g  $\pm$  0.09 dB, SAR (1g): 10.9 mW/g  $\pm$  0.08 dB, SAR (10g): 5.53 mW/g  $\pm$  0.07 dB  
Penetration depth: 8.6 (7.8, 9.9) [mm]  
Powerdrift: 0.03 dB

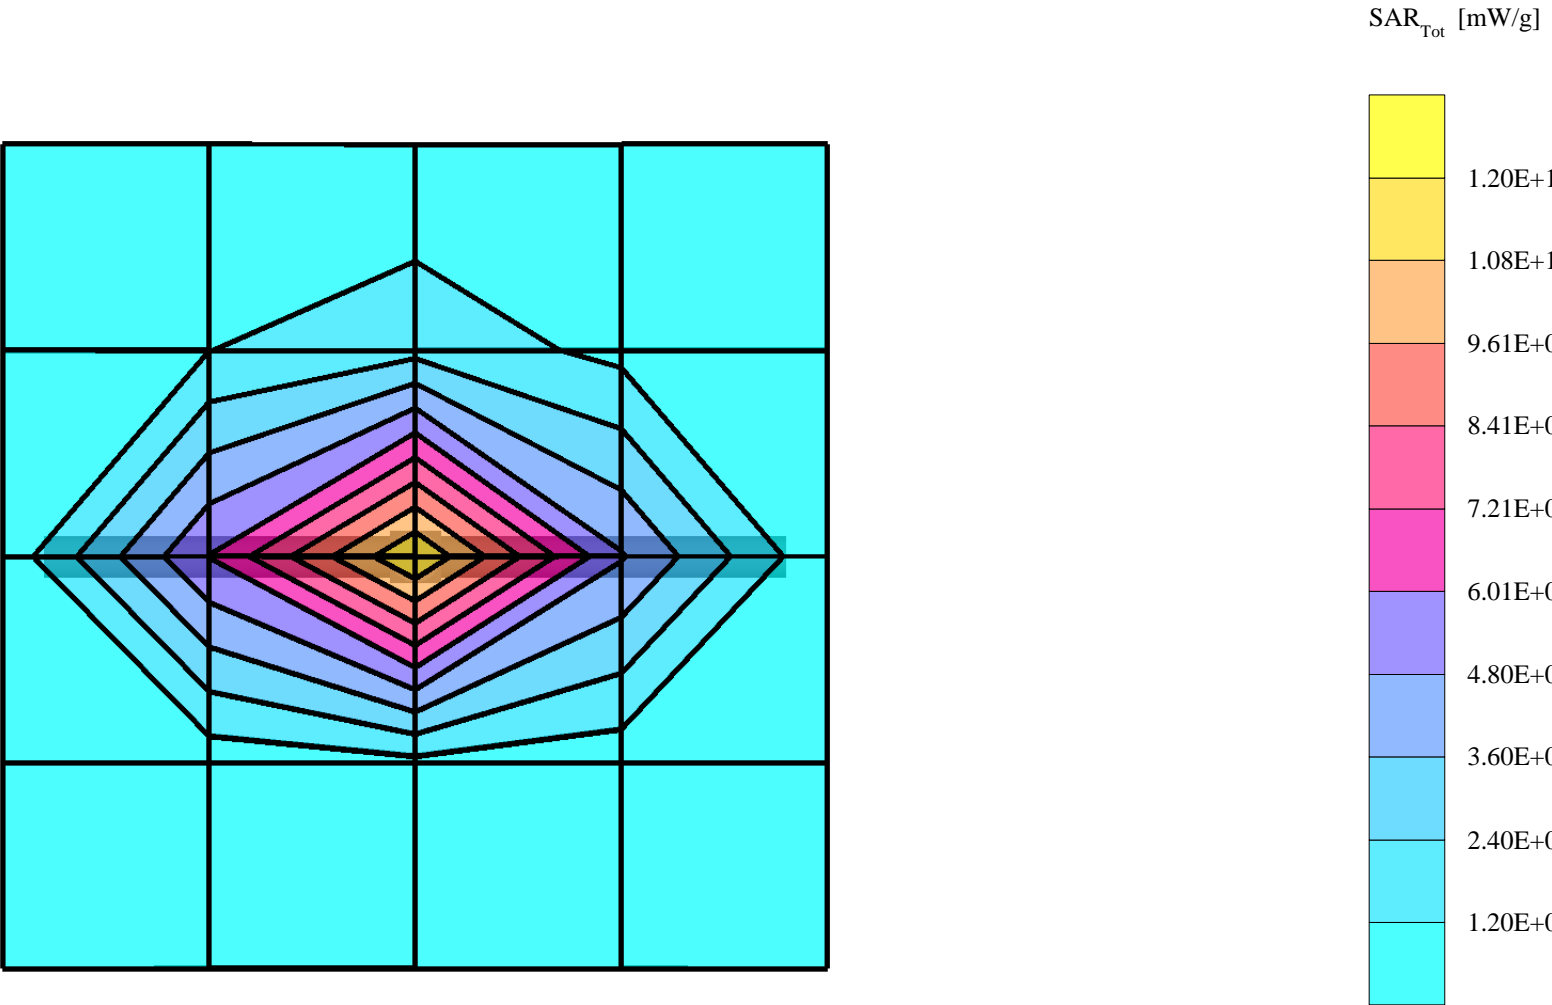

# Dipole 1900 MHz


SAM 1; Flat

Probe: ET3DV6 - SN1379; ConvF(4.80,4.80,4.80); Crest factor: 1.0; Muscle 1900 MHz:  $\sigma = 1.52 \text{ mho/m}$   $\epsilon_r = 51.0$   $\rho = 1.00 \text{ g/cm}^3$ , liquid temperature: 21.0 C

Cubes (2): Peak: 20.6 mW/g  $\pm 0.08 \text{ dB}$ , SAR (1g): 11.0 mW/g  $\pm 0.08 \text{ dB}$ , SAR (10g): 5.62 mW/g  $\pm 0.07 \text{ dB}$


Penetration depth: 8.6 (7.9, 9.9) [mm]

Powerdrift: 0.03 dB

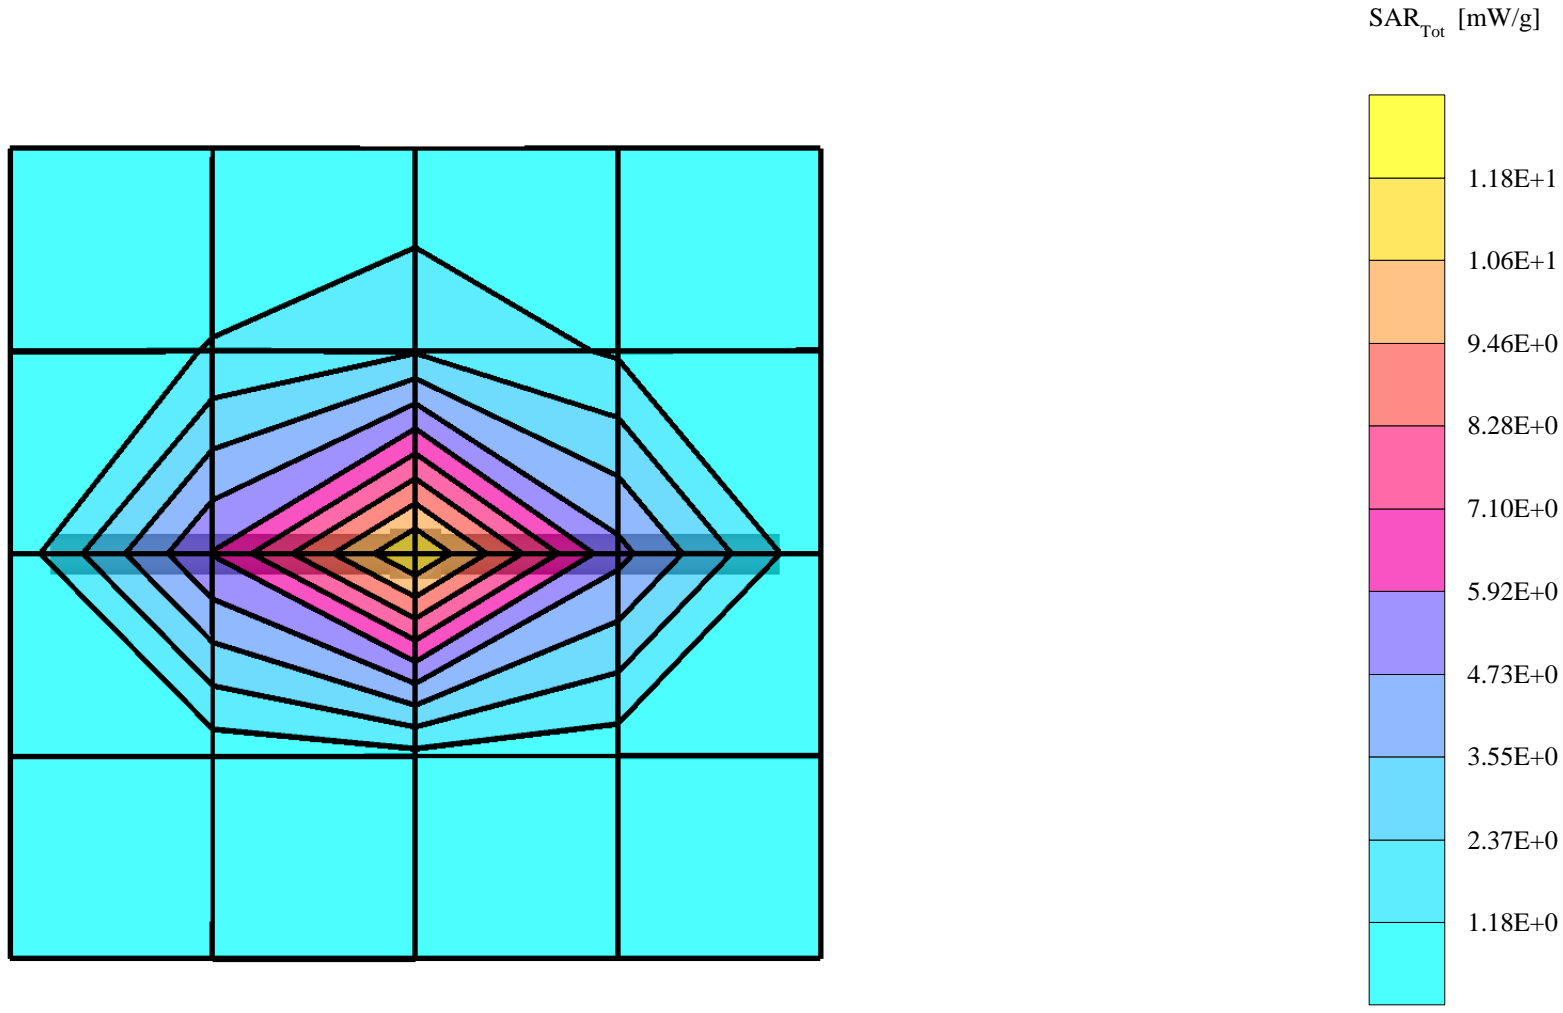


# Dipole 1900 MHz

SAM 1; Flat  
Probe: ET3DV6 - SN1379; ConvF(4.80,4.80,4.80); Crest factor: 1.0; Muscle 1900 MHz:  $\sigma = 1.52$  mho/m  $\epsilon_r = 51.1$   $\rho = 1.00$  g/cm<sup>3</sup>, liquid temperature: 21.2 C  
Cubes (2): Peak: 20.8 mW/g  $\pm 0.10$  dB, SAR (1g): 11.0 mW/g  $\pm 0.07$  dB, SAR (10g): 5.58 mW/g  $\pm 0.05$  dB  
Penetration depth: 8.4 (7.7, 9.7) [mm]  
Powerdrift: 0.04 dB

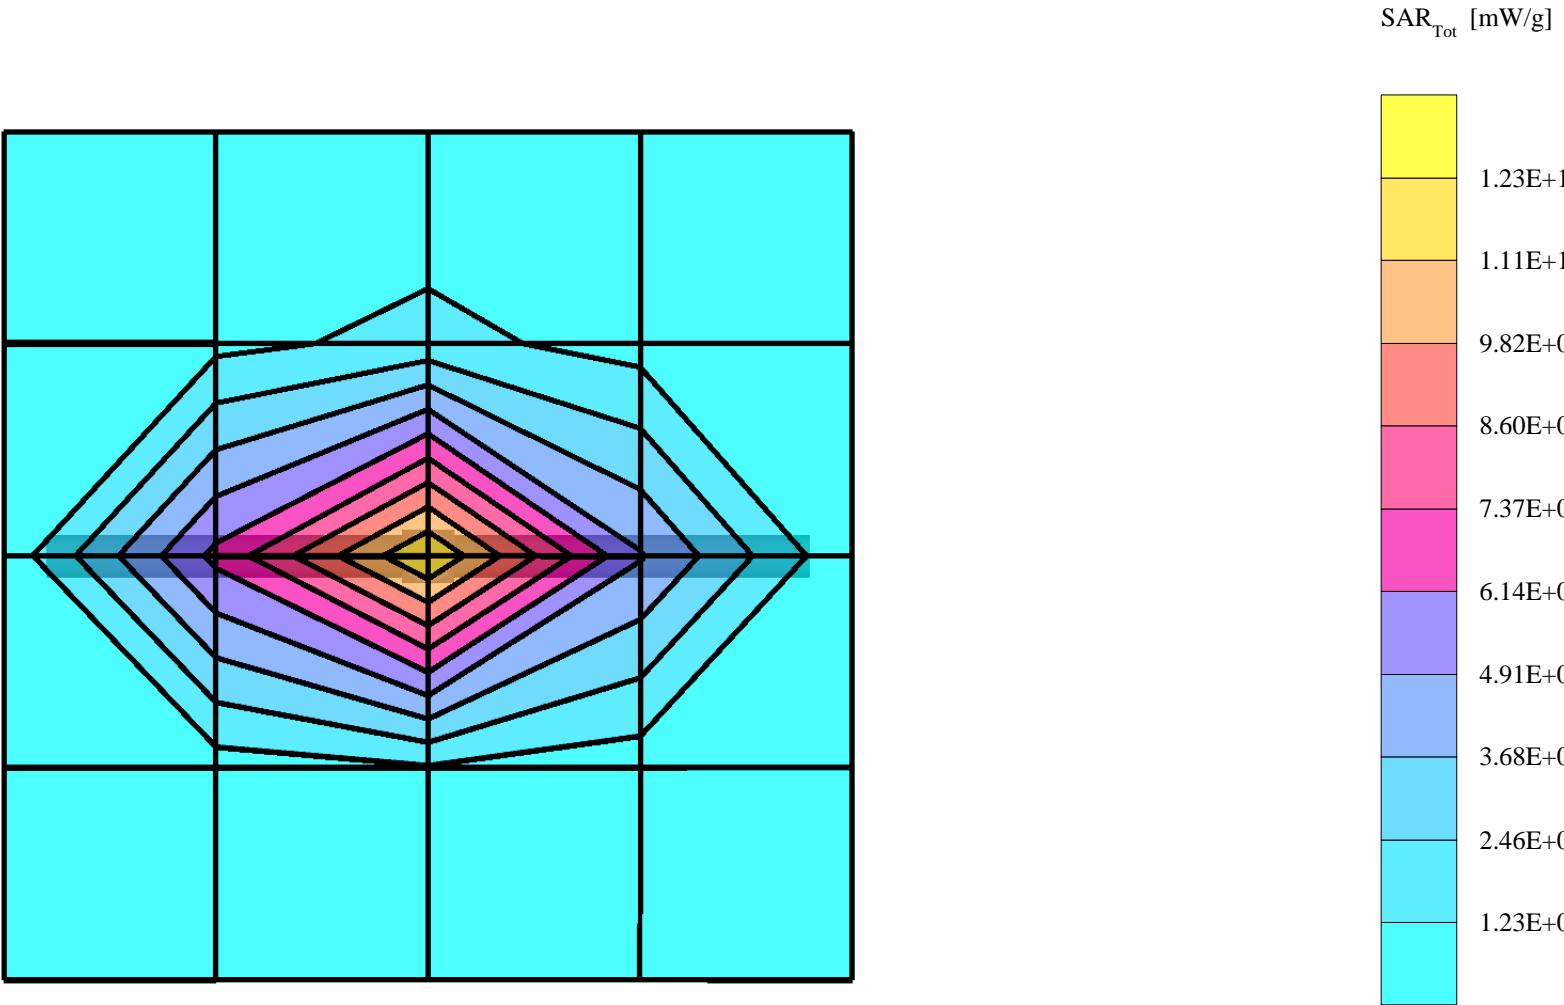


# Dipole 1900 MHz

SAM 1; Flat  
Probe: ET3DV6 - SN1379; ConvF(4.80,4.80,4.80); Crest factor: 1.0; Muscle 1900 MHz:  $\sigma = 1.49$  mho/m  $\epsilon_r = 51.0$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 21.8 °C  
Cubes (2): Peak: 20.8 mW/g  $\pm 0.05$  dB, SAR (1g): 11.1 mW/g  $\pm 0.08$  dB, SAR (10g): 5.64 mW/g  $\pm 0.09$  dB  
Penetration depth: 8.6 (7.9, 9.9) [mm]  
Powerdrift: -0.01 dB

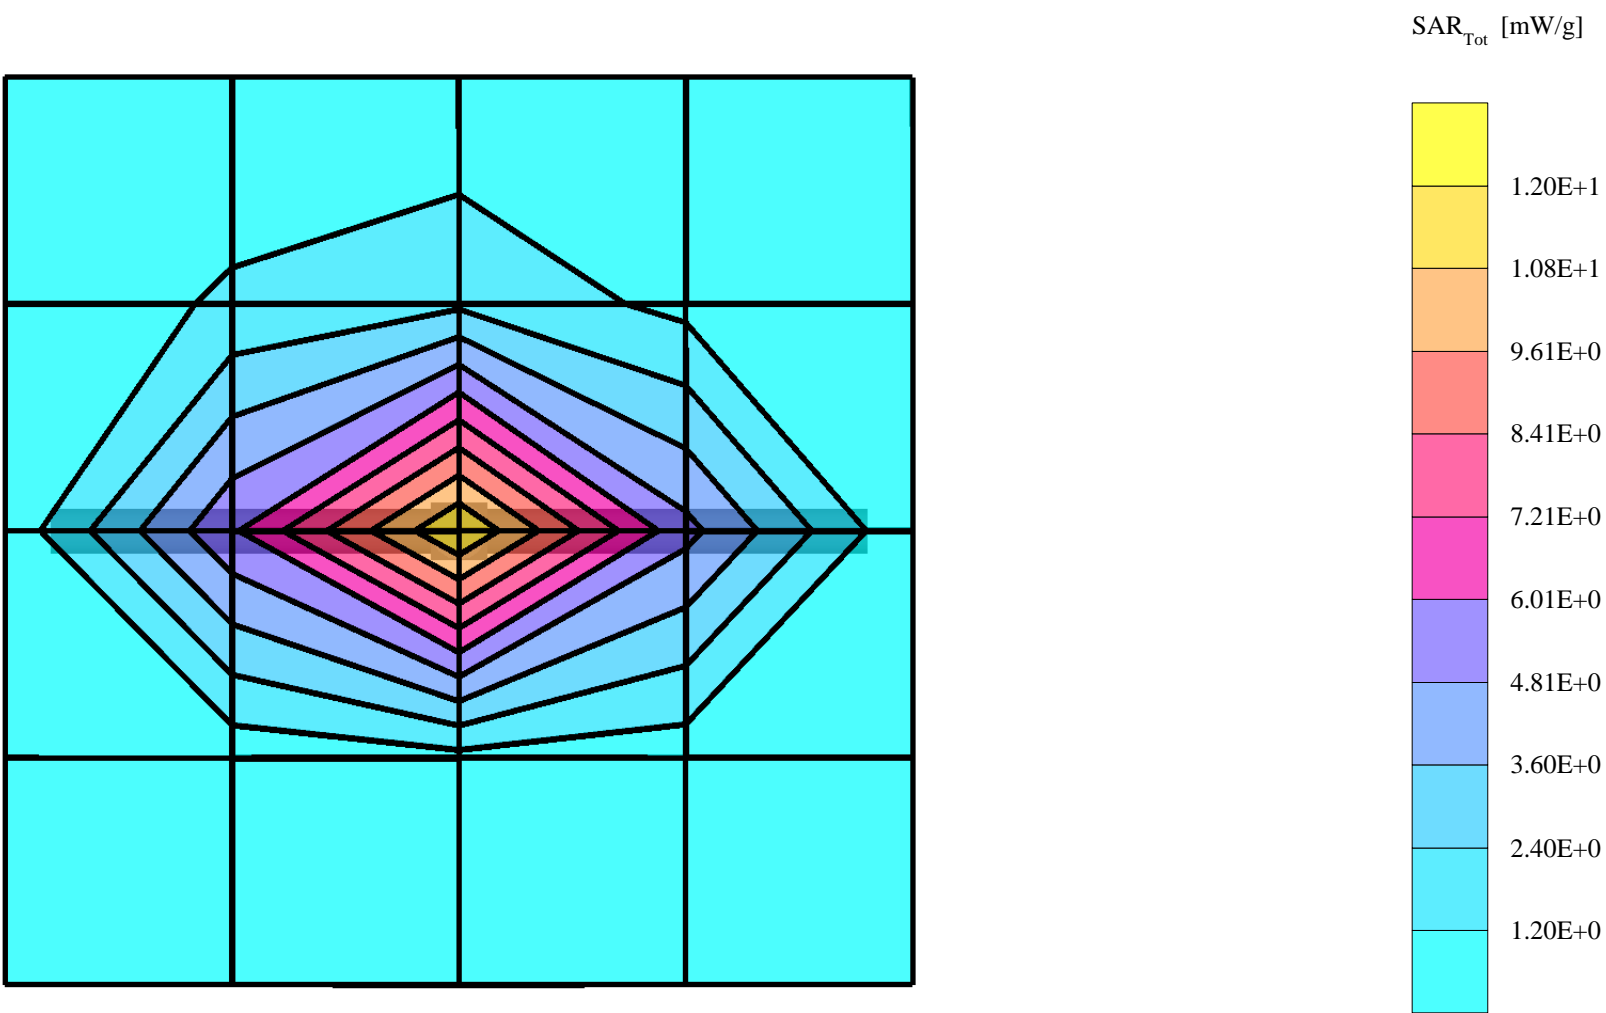


# Dipole 1900 MHz

SAM 1; Flat  
Probe: ET3DV6 - SN1379; ConvF(4.80,4.80,4.80); Crest factor: 1.0; Muscle 1900 MHz:  $\sigma = 1.50$  mho/m  $\epsilon_r = 51.0$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 21.0 °C  
Cubes (2): Peak: 20.5 mW/g  $\pm$  0.05 dB, SAR (1g): 10.8 mW/g  $\pm$  0.07 dB, SAR (10g): 5.53 mW/g  $\pm$  0.08 dB  
Penetration depth: 8.5 (7.8, 9.7) [mm]  
Powerdrift: 0.03 dB

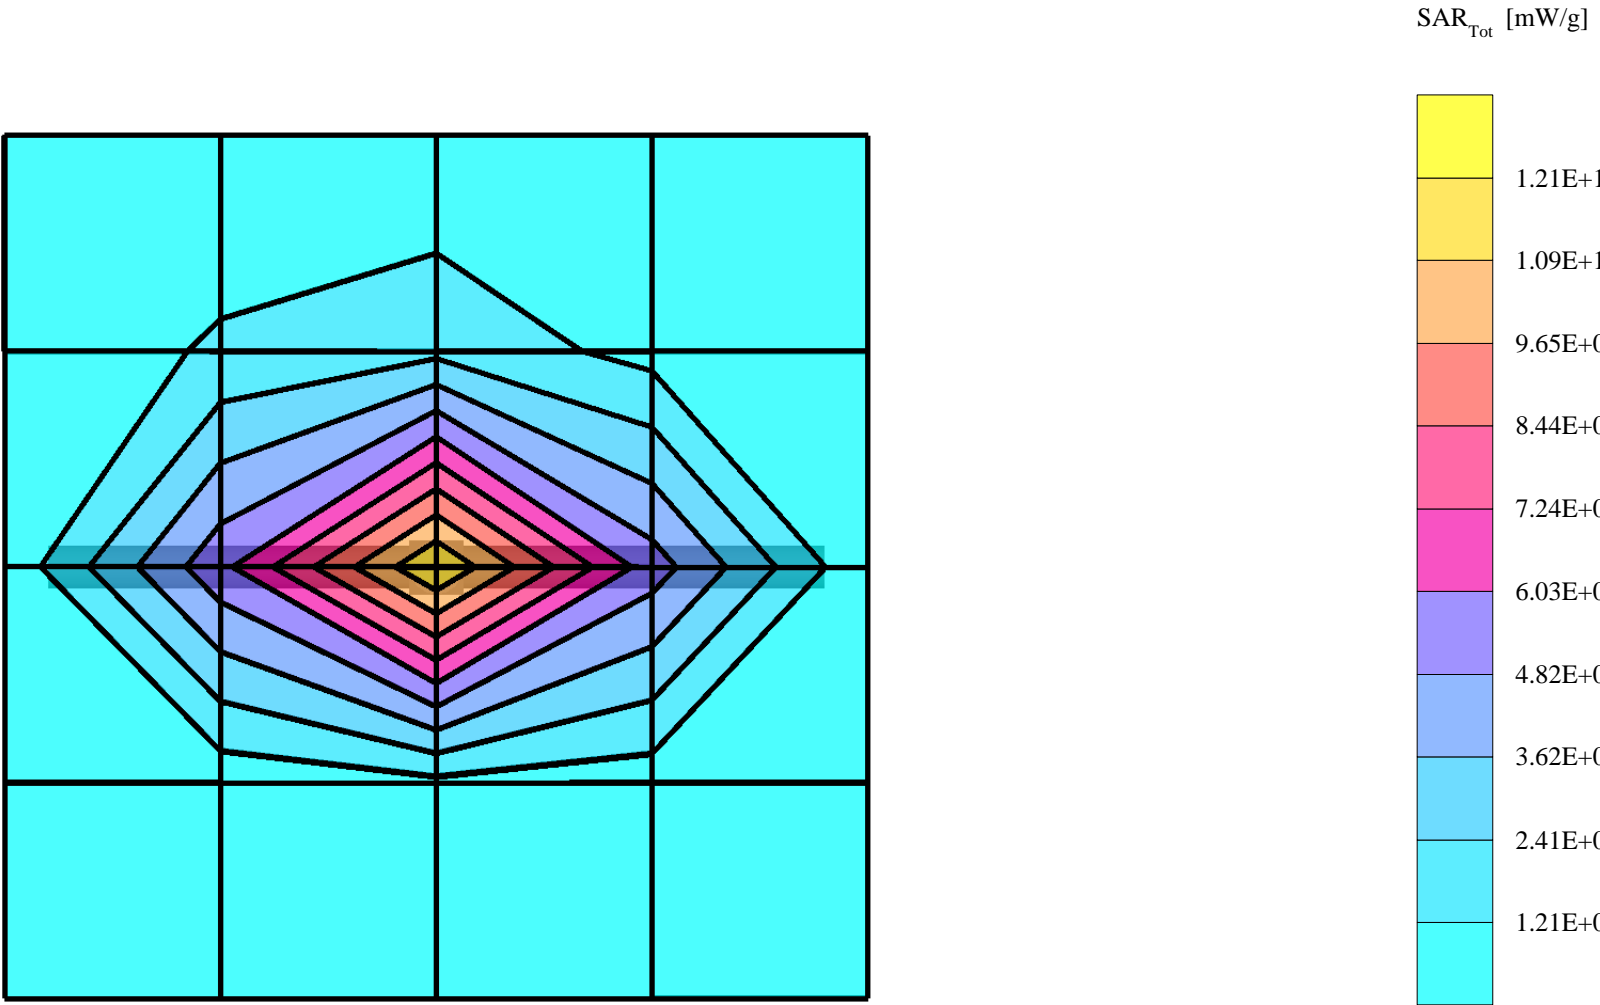

# Dipole 1900 MHz

SAM 2; Flat  
Probe: ET3DV6 - SN1379; ConvF(4.80,4.80,4.80); Crest factor: 1.0; Muscle 1900 MHz:  $\sigma = 1.50$  mho/m  $\epsilon_r = 51.0$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 21.9 °C  
Cubes (2): Peak: 19.9 mW/g  $\pm 0.01$  dB, SAR (1g): 10.6 mW/g  $\pm 0.03$  dB, SAR (10g): 5.44 mW/g  $\pm 0.08$  dB  
Penetration depth: 8.7 (7.9, 10.2) [mm]  
Powerdrift: -0.00 dB

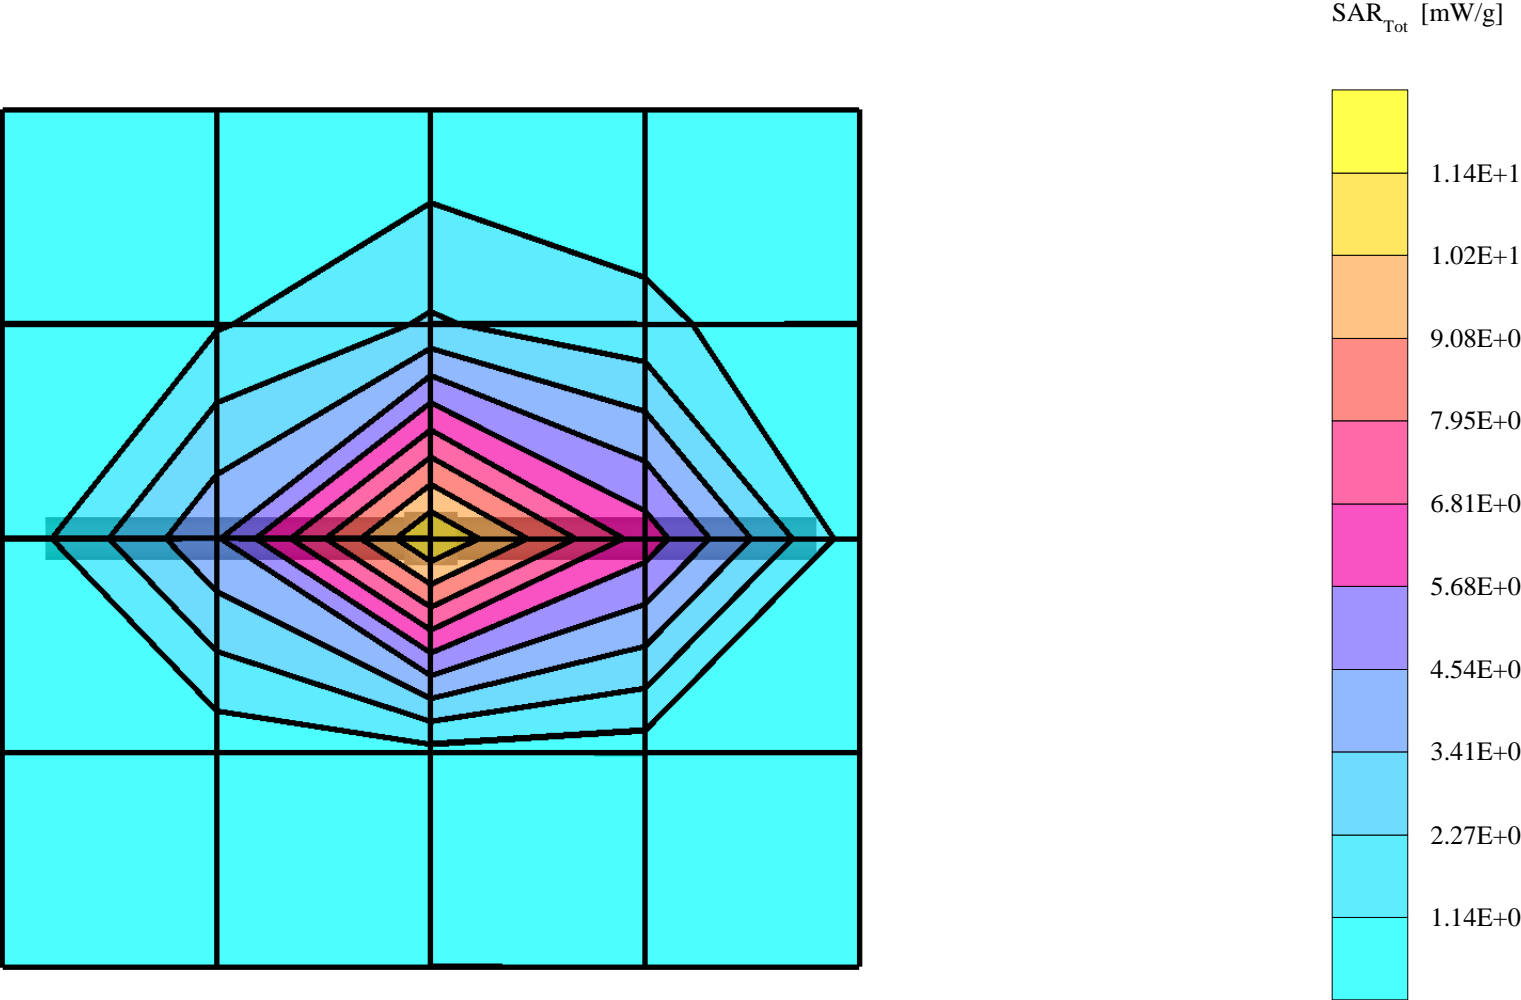


APPENDIX B.

SAR Distribution Printouts

# P4JDTE-3


SAM 3 Phantom; Flat Section; Position: body worn, IBM T23; Frequency: 824 MHz; GPRS  
Probe: ET3DV6 - SN1379; ConvF(6.20,6.20,6.20); Crest factor: 4.0; Muscle 836 MHz:  $\sigma = 0.96$  mho/m  $\epsilon_r = 56.7$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 22.5 °C  
Cube 5x5x7; SAR (1g): 0.522 mW/g, SAR (10g): 0.359 mW/g  
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0  
Powerdrift: -0.01 dB

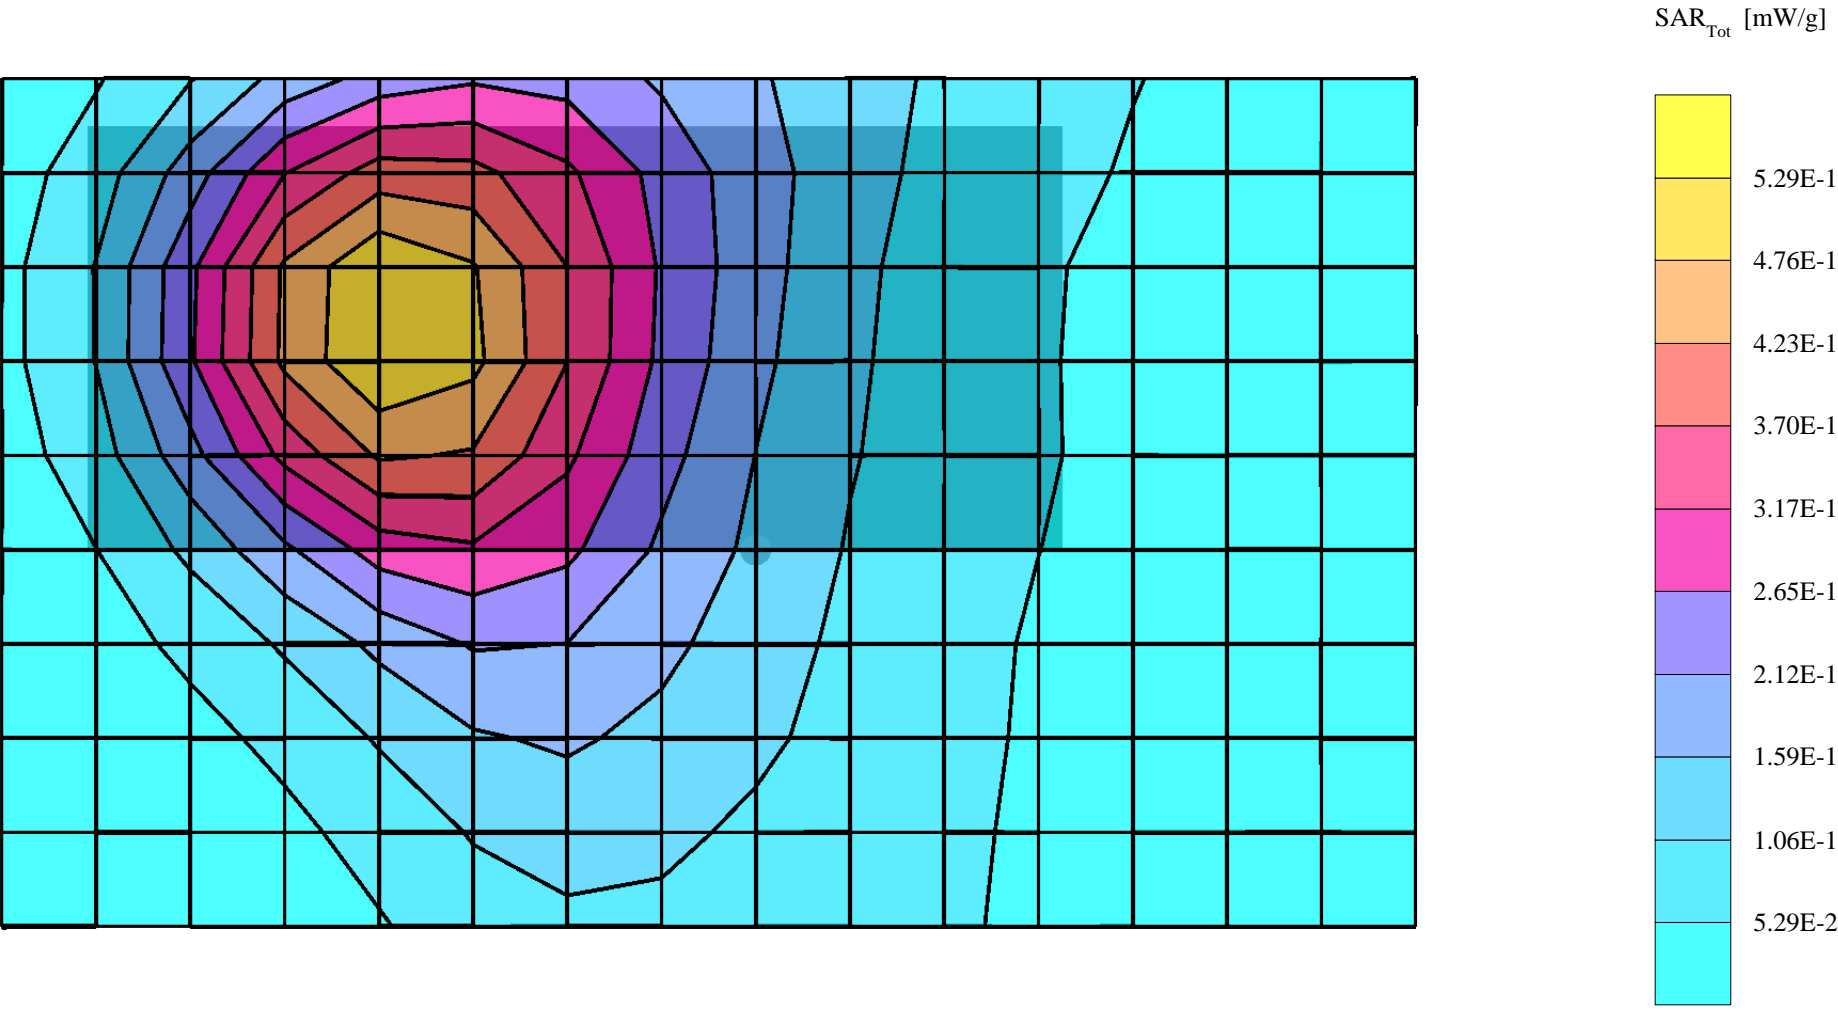




# P4JDTE-3

SAM 3 Phantom; Flat Section; Position: body worn, IBM 560X; Frequency: 824 MHz; GPRS  
Probe: ET3DV6 - SN1379; ConvF(6.20,6.20,6.20); Crest factor: 4.0; Muscle 836 MHz:  $\sigma = 0.95$  mho/m  $\epsilon_r = 56.8$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 21.6 °C  
Cube 5x5x7: SAR (1g): 0.419 mW/g, SAR (10g): 0.290 mW/g  
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0  
Powerdrift: 0.01 dB

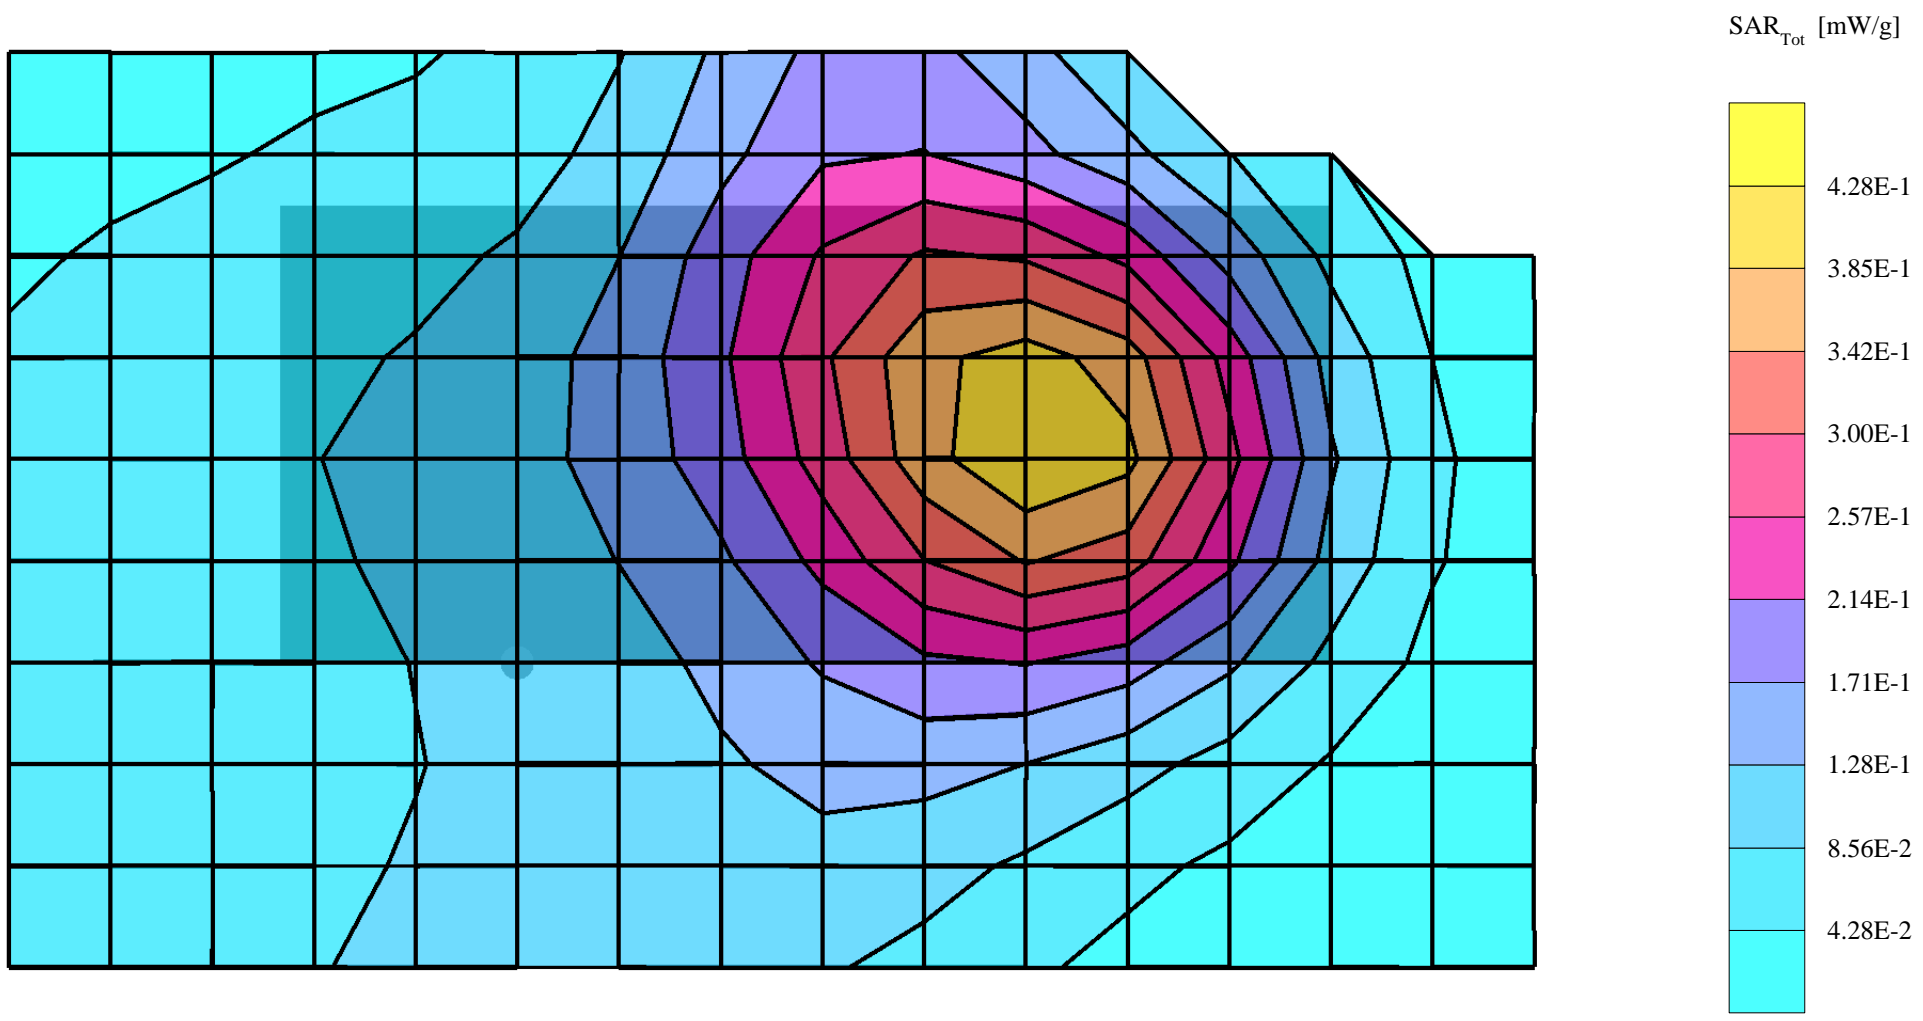

# P4JDTE-3

SAM 3 Phantom; Flat Section; Position: body worn, IBM 600X; Frequency: 824 MHz; GPRS  
Probe: ET3DV6 - SN1379; ConvF(6.20,6.20,6.20); Crest factor: 4.0; Muscle 836 MHz:  $\sigma = 0.95$  mho/m  $\epsilon_r = 56.8$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 21.5 °C  
Cube 5x5x7: SAR (1g): 0.443 mW/g, SAR (10g): 0.306 mW/g  
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0  
Powerdrift: -0.03 dB

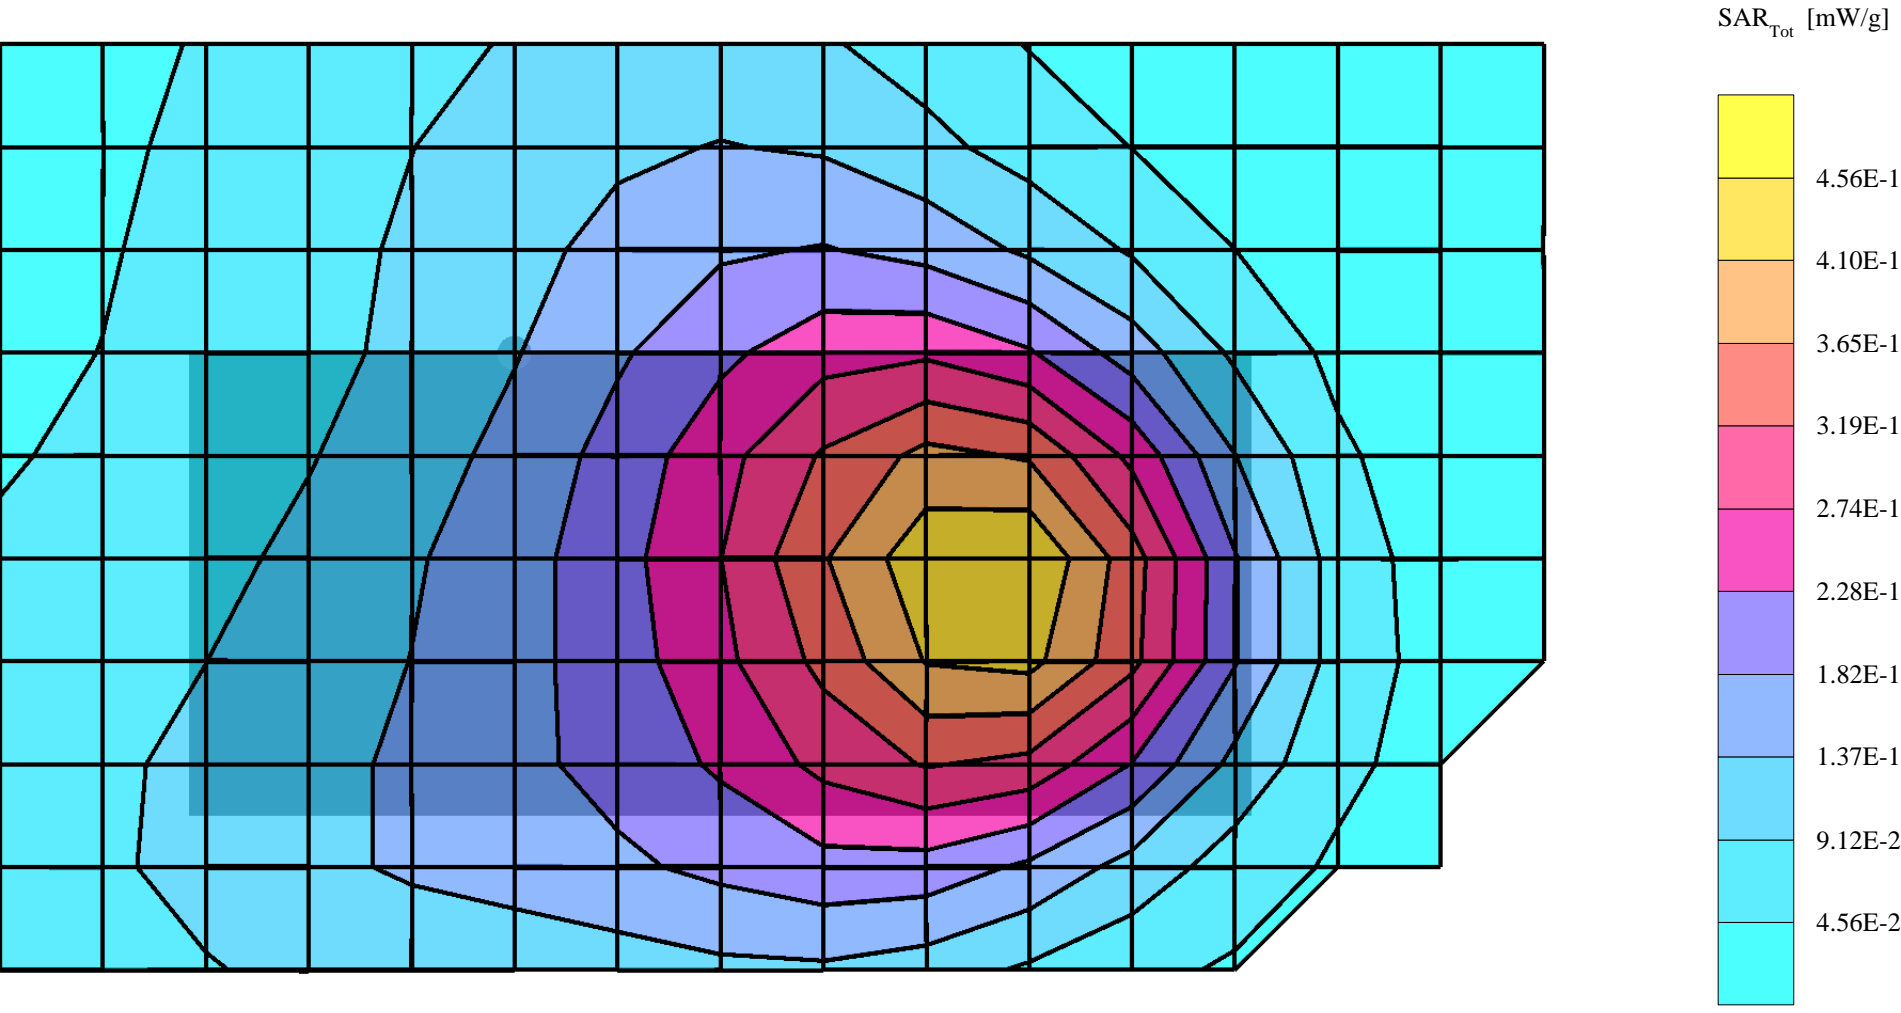

# P4JDTE-3


SAM 3 Phantom; Flat Section; Position: body worn, Casio; Frequency: 836 MHz; GPRS

Probe: ET3DV6 - SN1379; ConvF(6.20,6.20,6.20); Crest factor: 4.0; Muscle 836 MHz:  $\sigma = 0.94$  mho/m  $\epsilon_r = 56.8$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 21.7 °C

Cube 5x5x7: SAR (1g): 0.403 mW/g, SAR (10g): 0.308 mW/g


Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0

Powerdrift: 0.03 dB

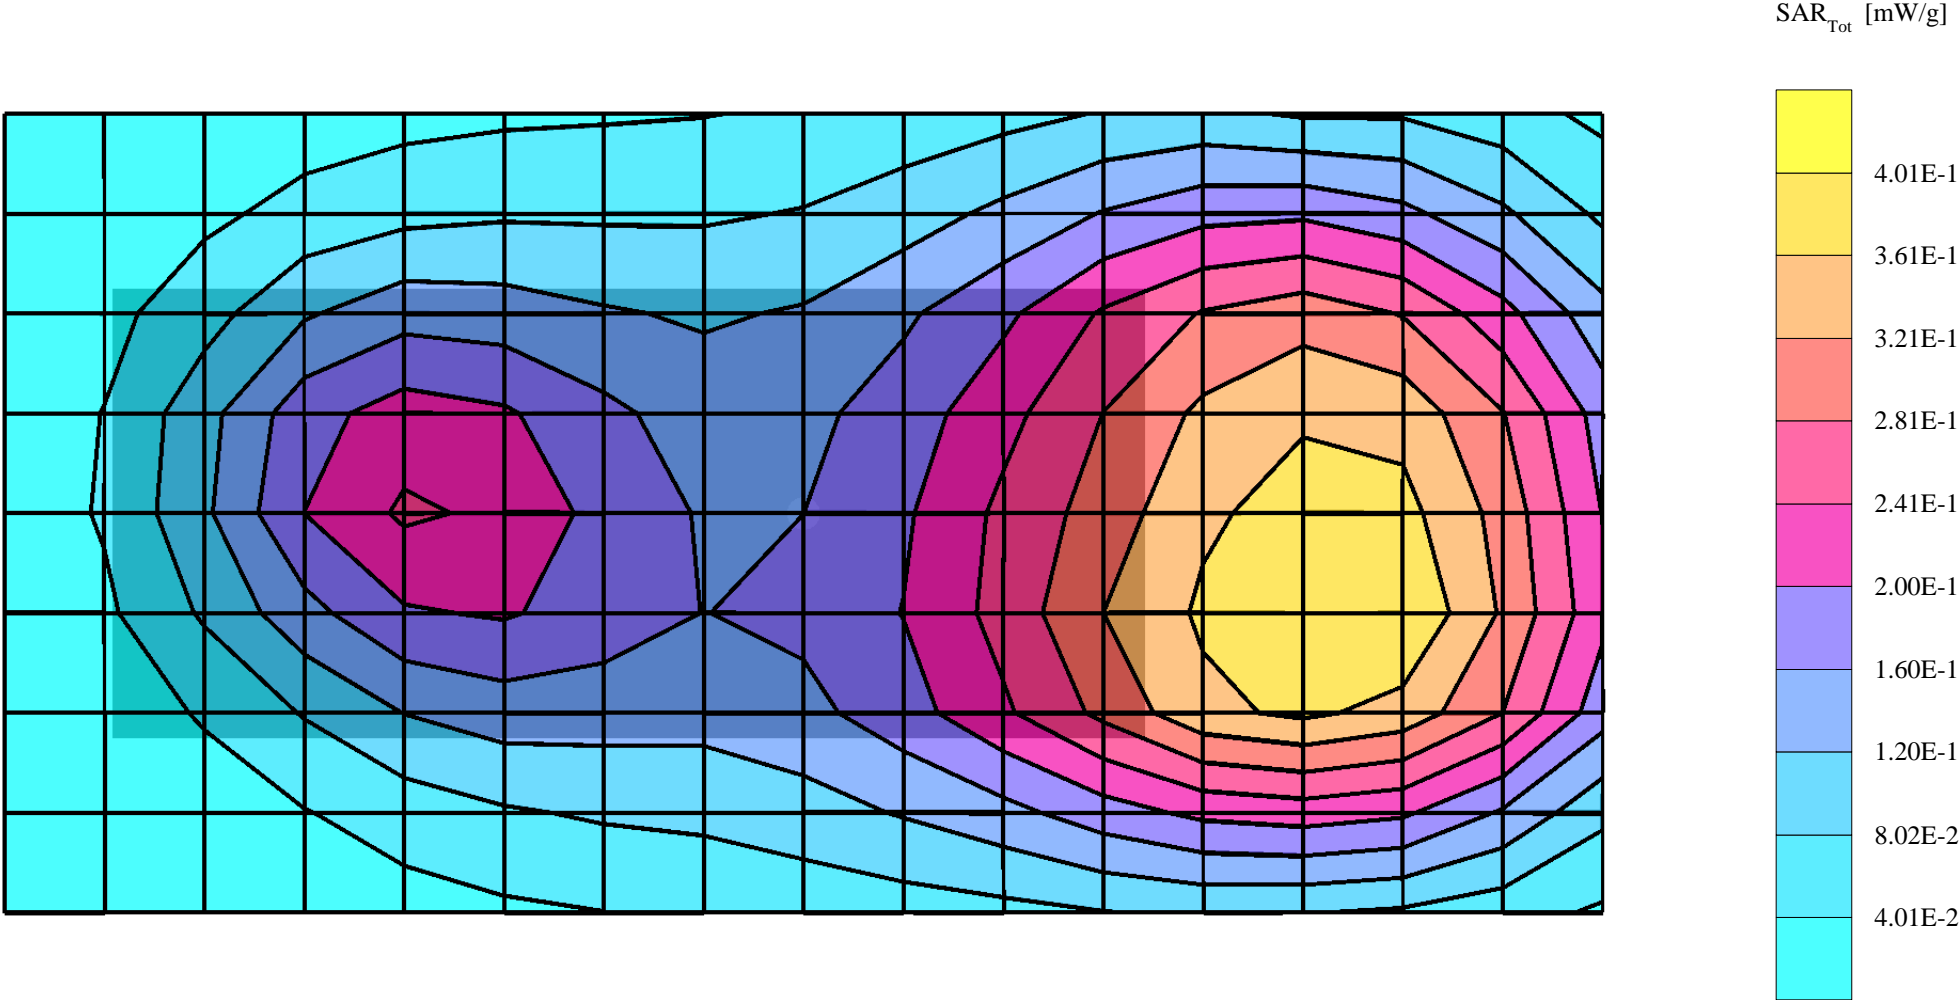


# P4JDTE-3

SAM 3 Phantom; Flat Section; Position: body worn, Compaq; Frequency: 824 MHz; GPRS  
Probe: ET3DV6 - SN1379; ConvF(6.20,6.20,6.20); Crest factor: 4.0; Muscle 836 MHz:  $\sigma = 0.94$  mho/m  $\epsilon_r = 56.8$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature, 21.6 °C  
Cube 5x5x7: SAR (1g): 0.590 mW/g, SAR (10g): 0.436 mW/g  
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0  
Powerdrift: -0.06 dB

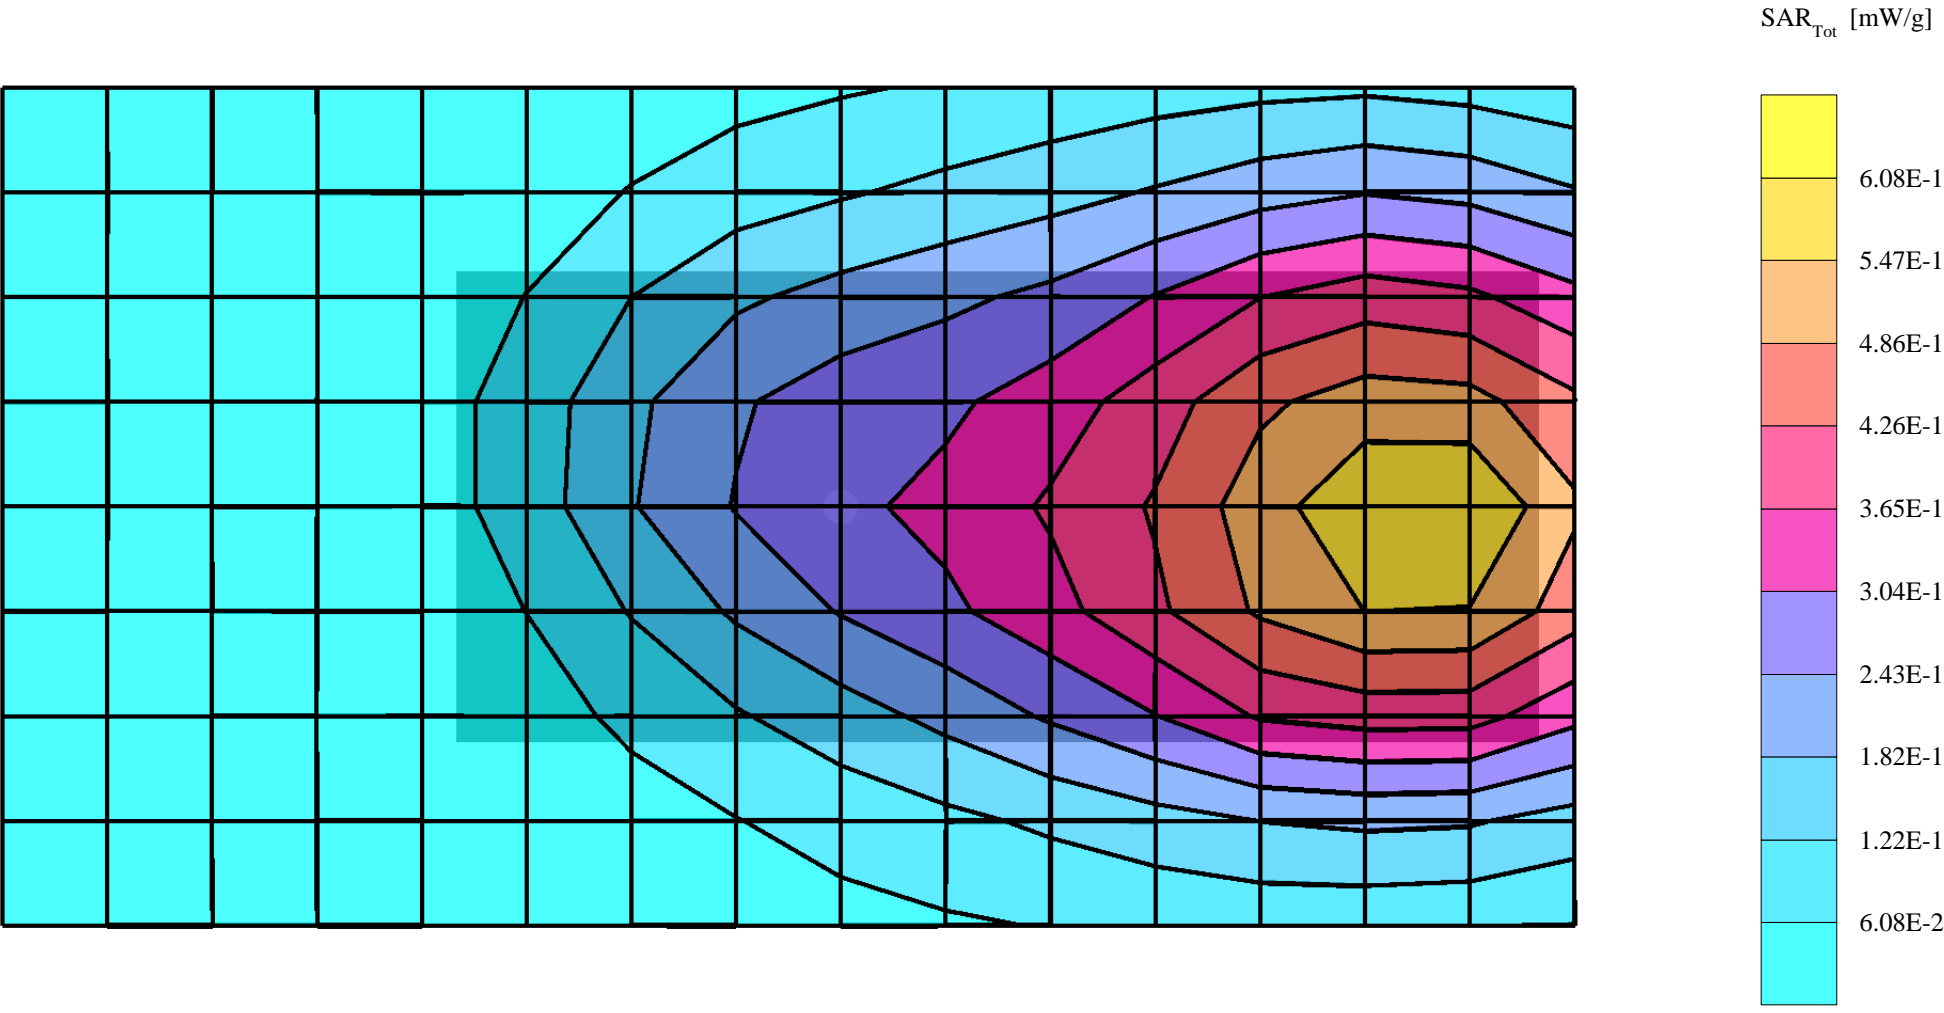


# P4JDTE-3

SAM 3 Phantom; Flat Section; Position: body worn, HP; Frequency: 836 MHz; GPRS  
Probe: ET3DV6 - SN1379; ConvF(6.20,6.20,6.20); Crest factor: 4.0; Muscle 836 MHz:  $\sigma = 0.96$  mho/m  $\epsilon_r = 56.8$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 22.0 °C  
Cube 5x5x7: SAR (1g): 0.368 mW/g, SAR (10g): 0.249 mW/g  
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0  
Powerdrift: 0.03 dB

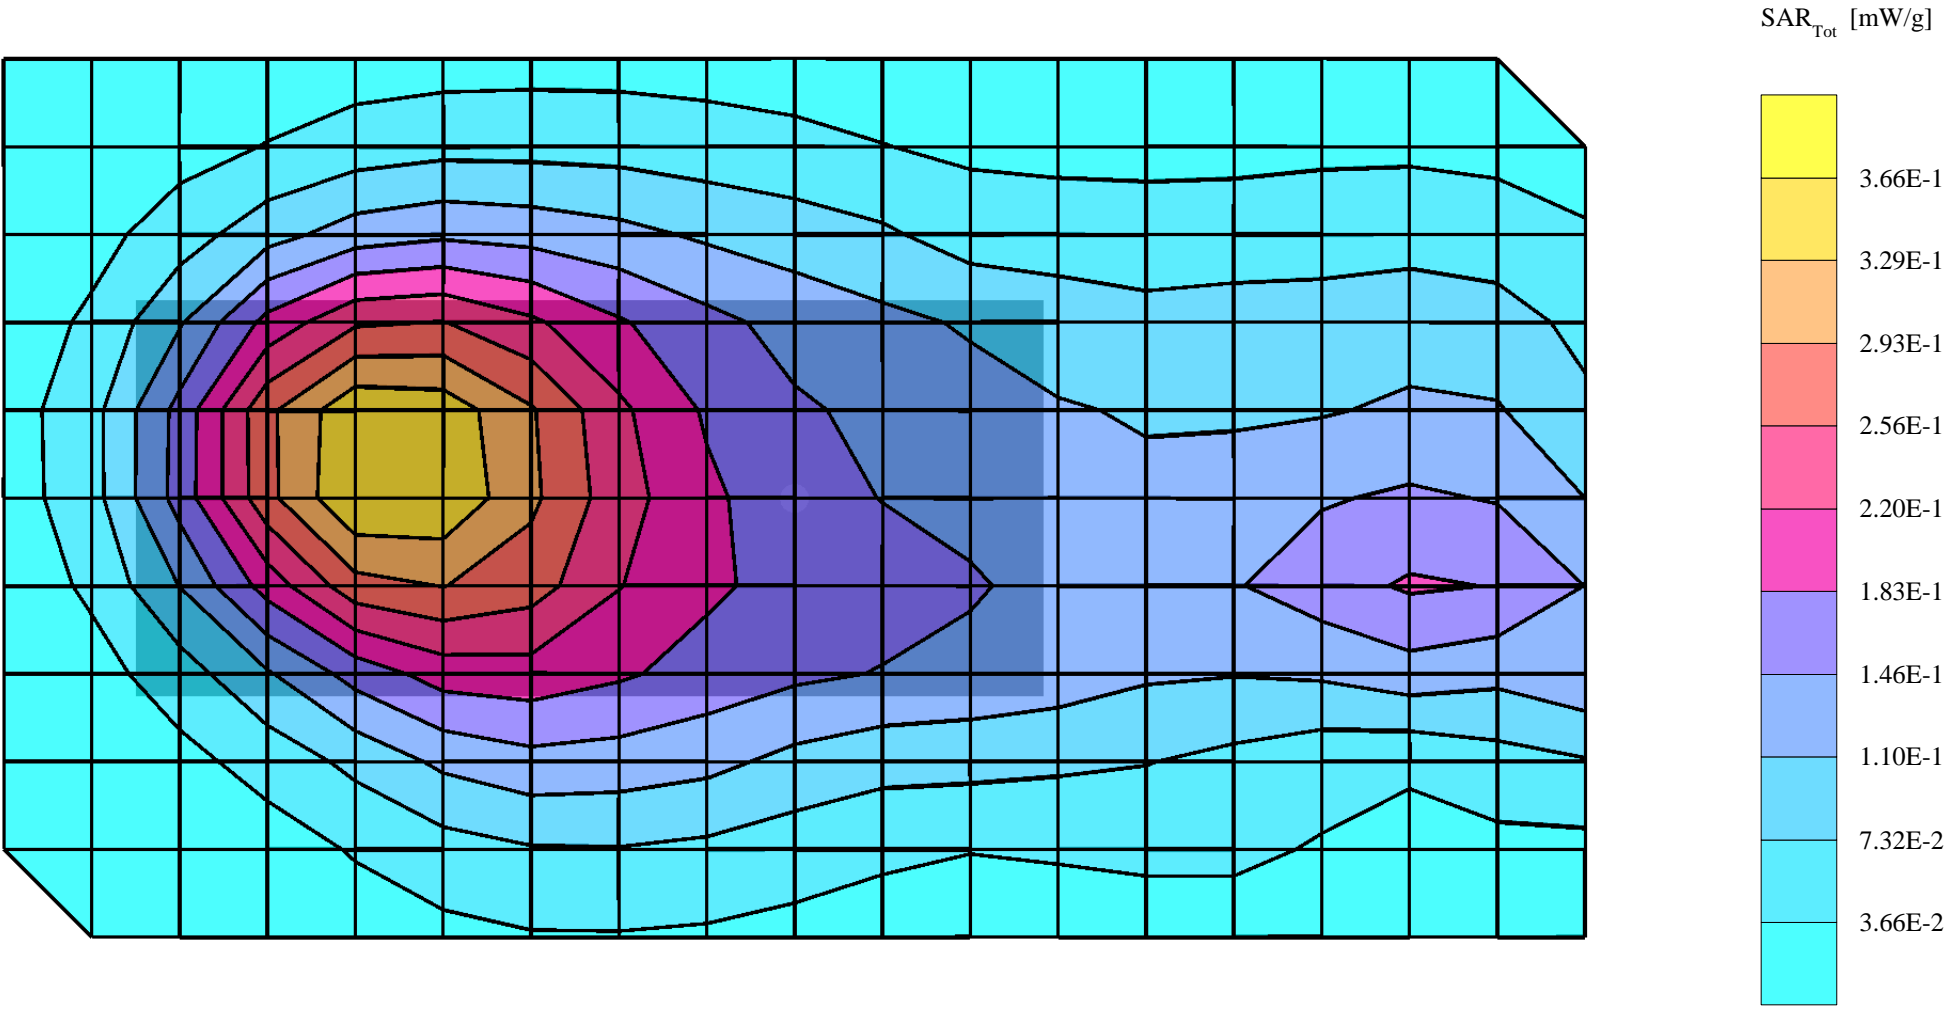


# P4JDTE-3

SAM 3 Phantom; Flat Section; Position: body worn, IBM T23; Frequency: 836 MHz; GPRS  
Probe: ET3DV6 - SN1379; ConvF(6.20,6.20,6.20); Crest factor: 4.0; Muscle 836 MHz:  $\sigma = 0.95$  mho/m  $\epsilon_r = 57.9$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 21.1 °C  
Cube 5x5x7: SAR (1g): 0.0570 mW/g, SAR (10g): 0.0418 mW/g  
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0  
Powerdrift: 0.07 dB

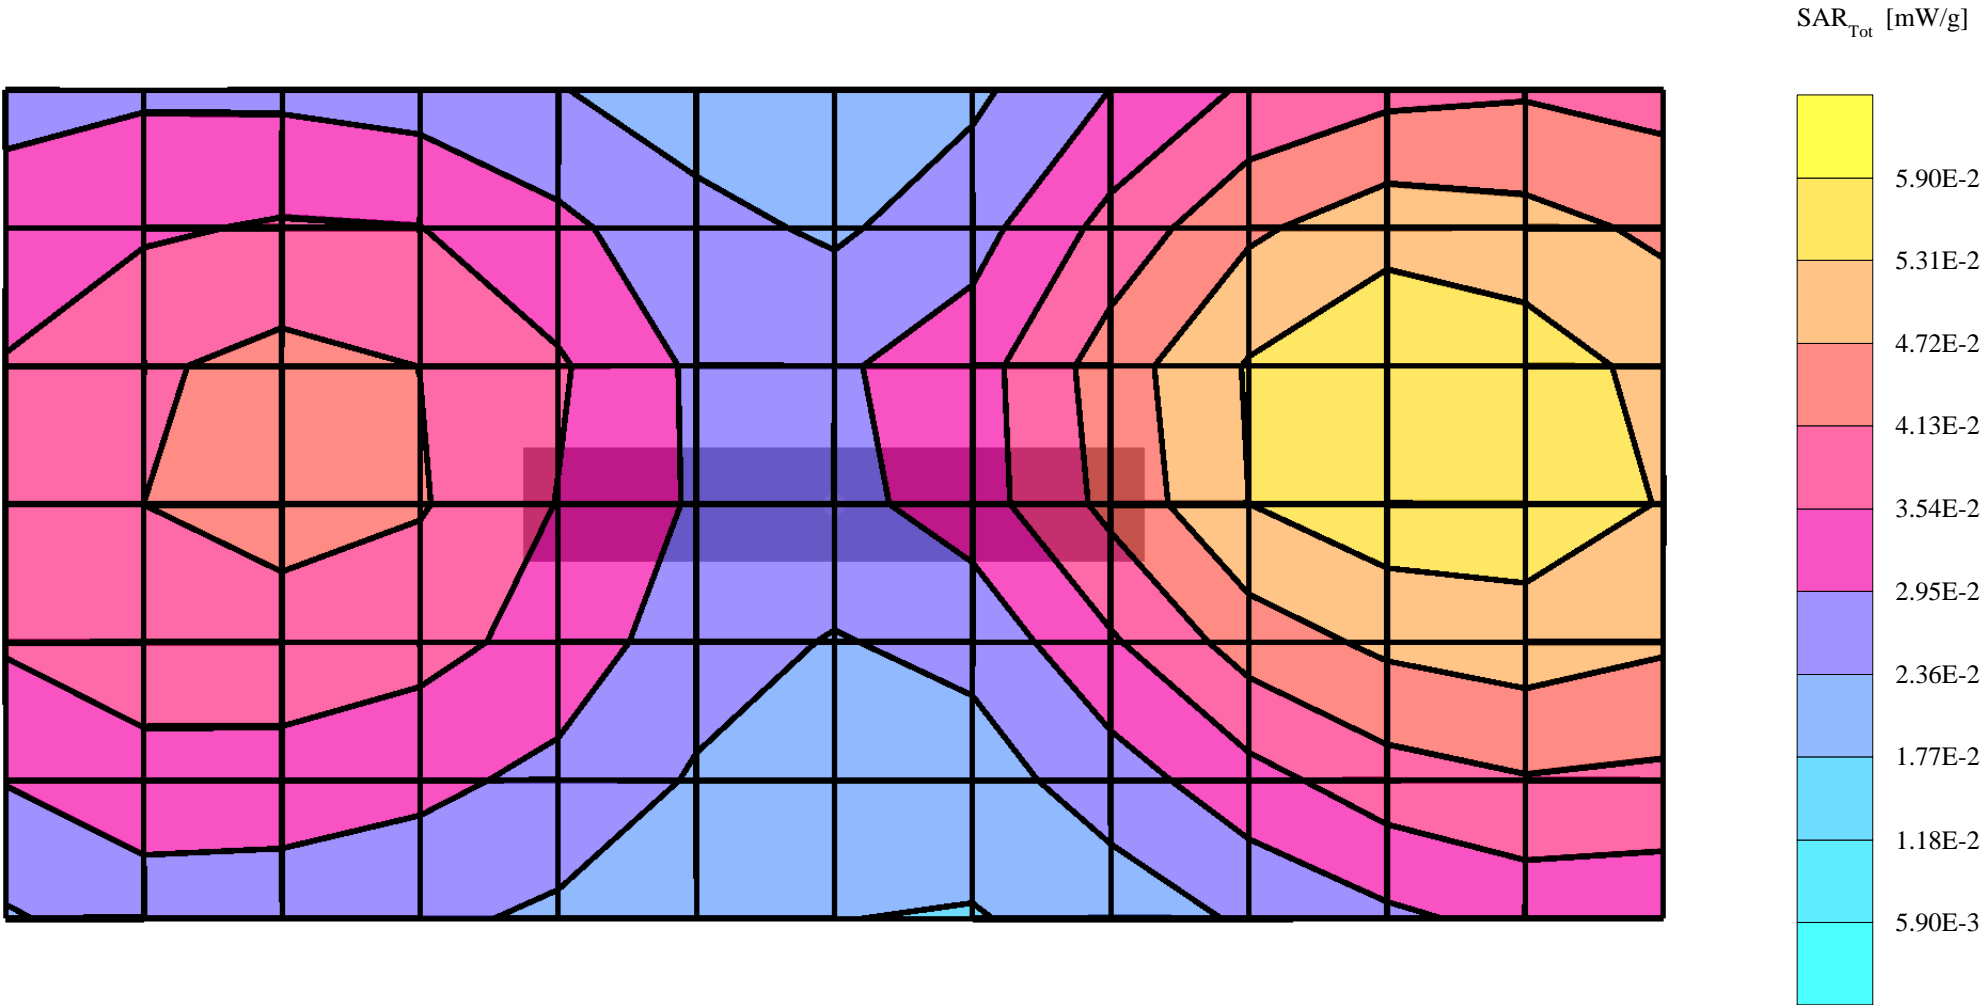


# P4JDTE-3

SAM 3 Phantom; Flat Section; Position: body worn, IBM 560X; Frequency: 824 MHz; GPRS  
Probe: ET3DV6 - SN1379; ConvF(6.20,6.20,6.20); Crest factor: 4.0; Muscle 836 MHz:  $\sigma = 0.96$  mho/m  $\epsilon_r = 56.7$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 22.5 °C  
Cube 5x5x7: SAR (1g): 0.0920 mW/g, SAR (10g): 0.0674 mW/g  
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0  
Powerdrift: -0.02 dB

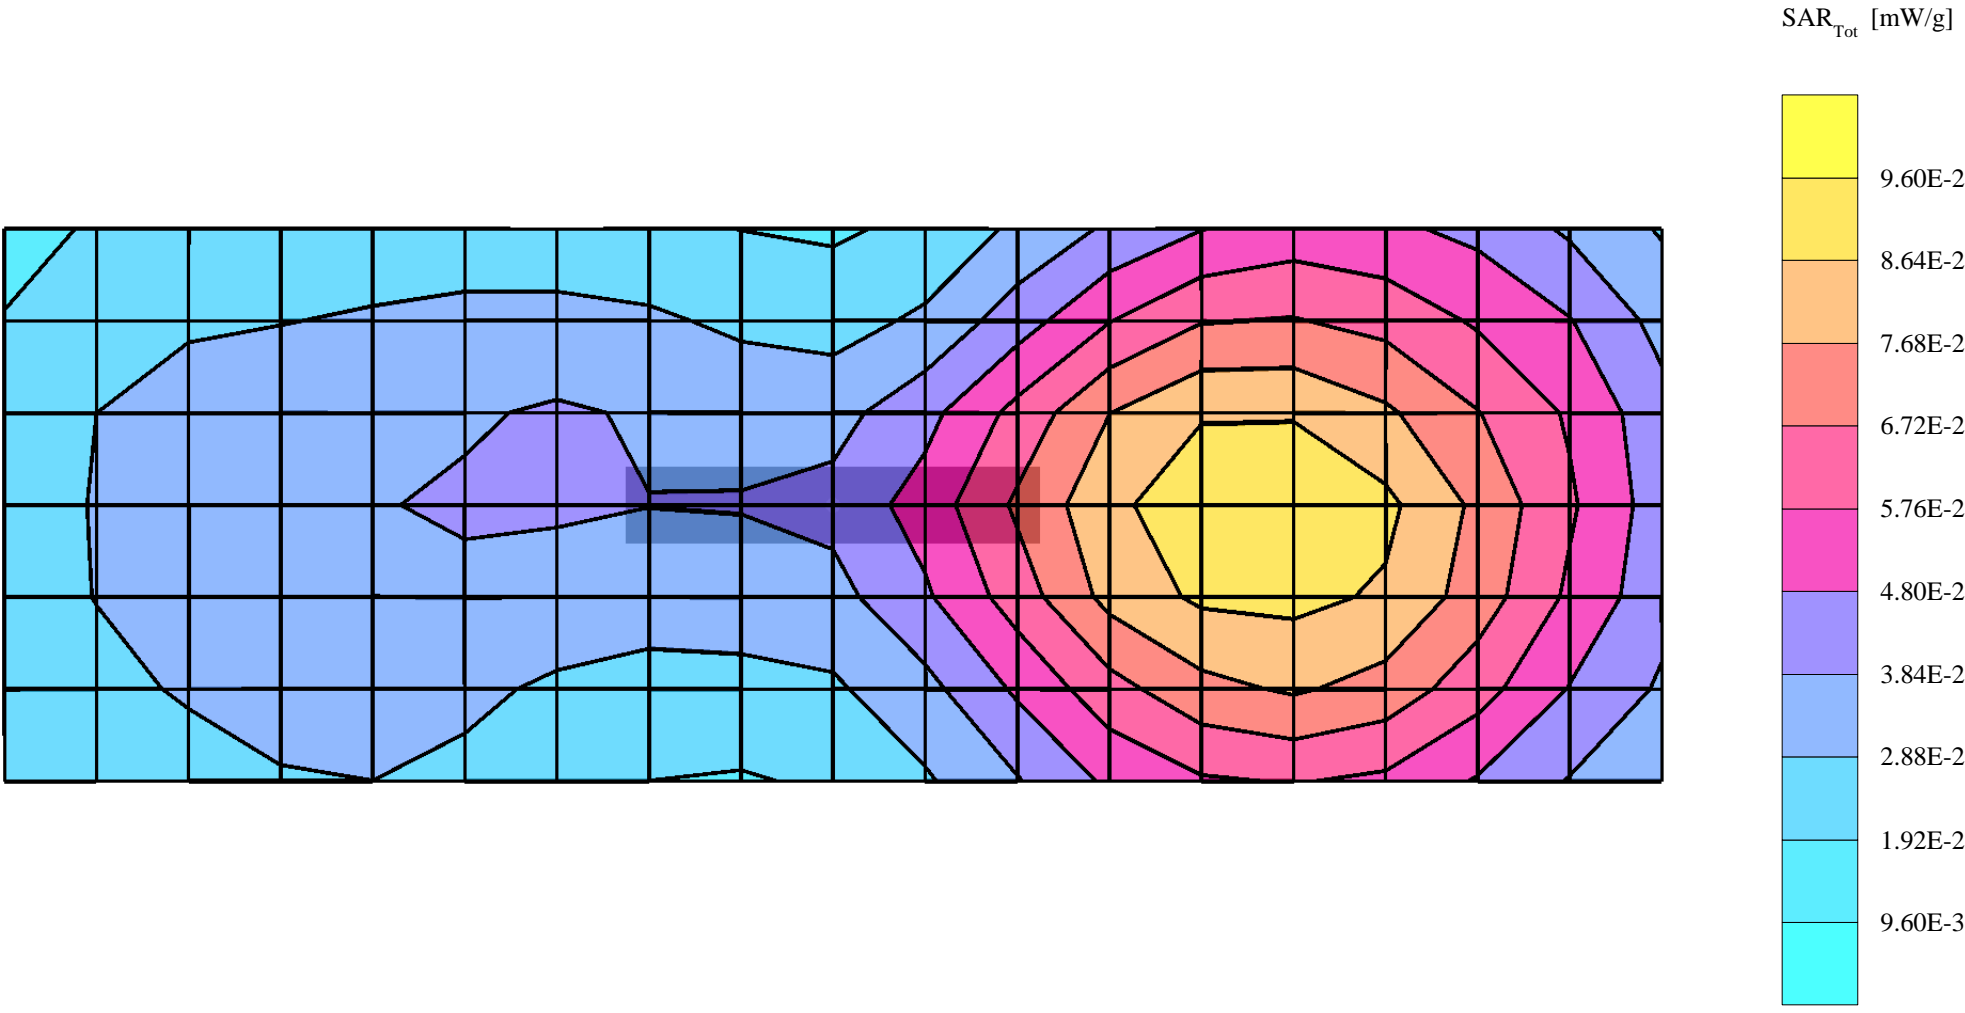

# P4JDTE-3

SAM 3 Phantom; Flat Section; Position: body worn, IBM 600X; Frequency: 849 MHz; GPRS  
Probe: ET3DV6 - SN1379; ConvF(6.20,6.20,6.20); Crest factor: 4.0; Muscle 836 MHz:  $\sigma = 0.96$  mho/m  $\epsilon_r = 56.7$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 22.7 °C  
Cube 5x5x7: left peak SAR (1g): 0.0499 mW/g, SAR (10g): 0.0288 mW/g, right peak SAR (1g): 0.0388mW/g, SAR (10g): 0.0285mW/g  
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0  
Powerdrift: -0.01 dB

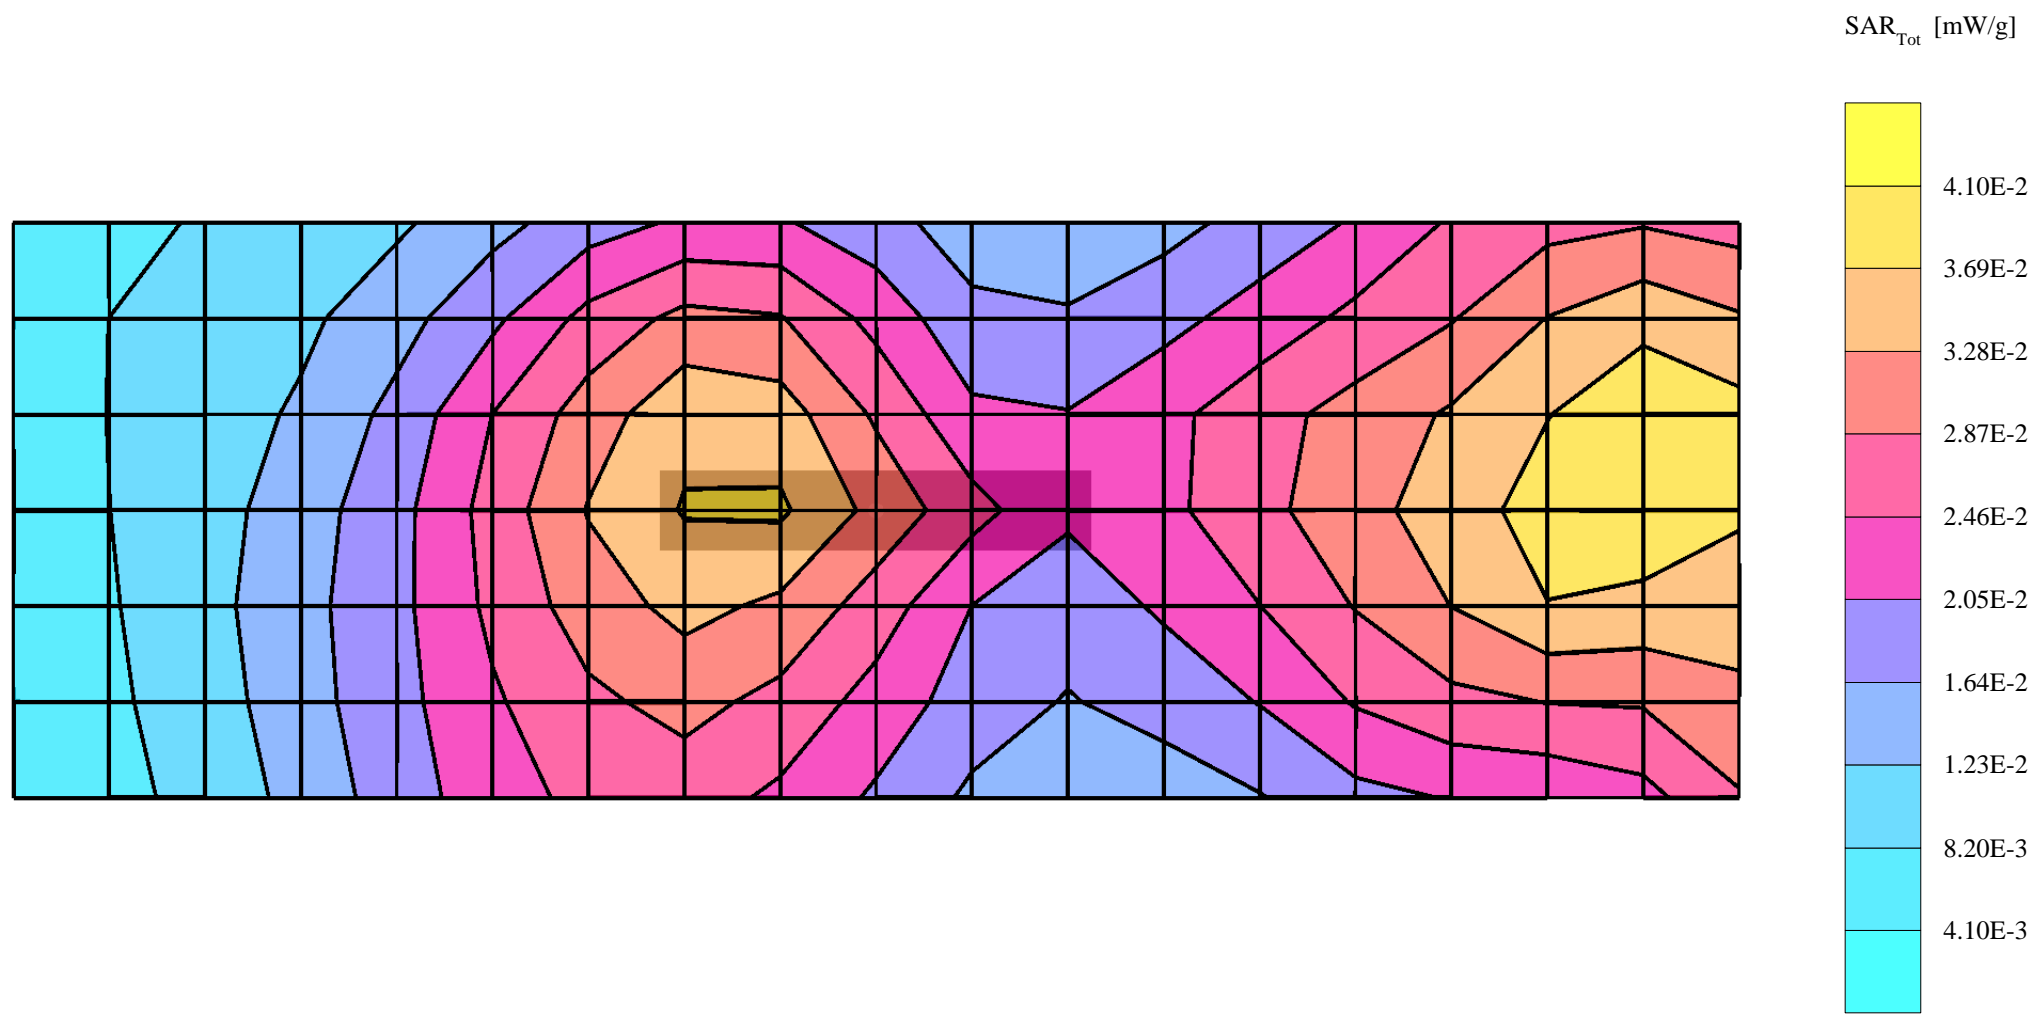



# P4JDTE-3


SAM 3 Phantom; Flat Section; Position: body worn, Casio; Frequency: 849 MHz; GPRS

Probe: ET3DV6 - SN1379; ConvF(6.20,6.20,6.20); Crest factor: 4.0; Muscle 836 MHz:  $\sigma = 0.96$  mho/m  $\epsilon_r = 56.8$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 22.4 °C

Cube 5x5x7: SAR (1g): 0.0358 mW/g, SAR (10g): 0.0230 mW/g


Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0

Powerdrift: -0.02 dB

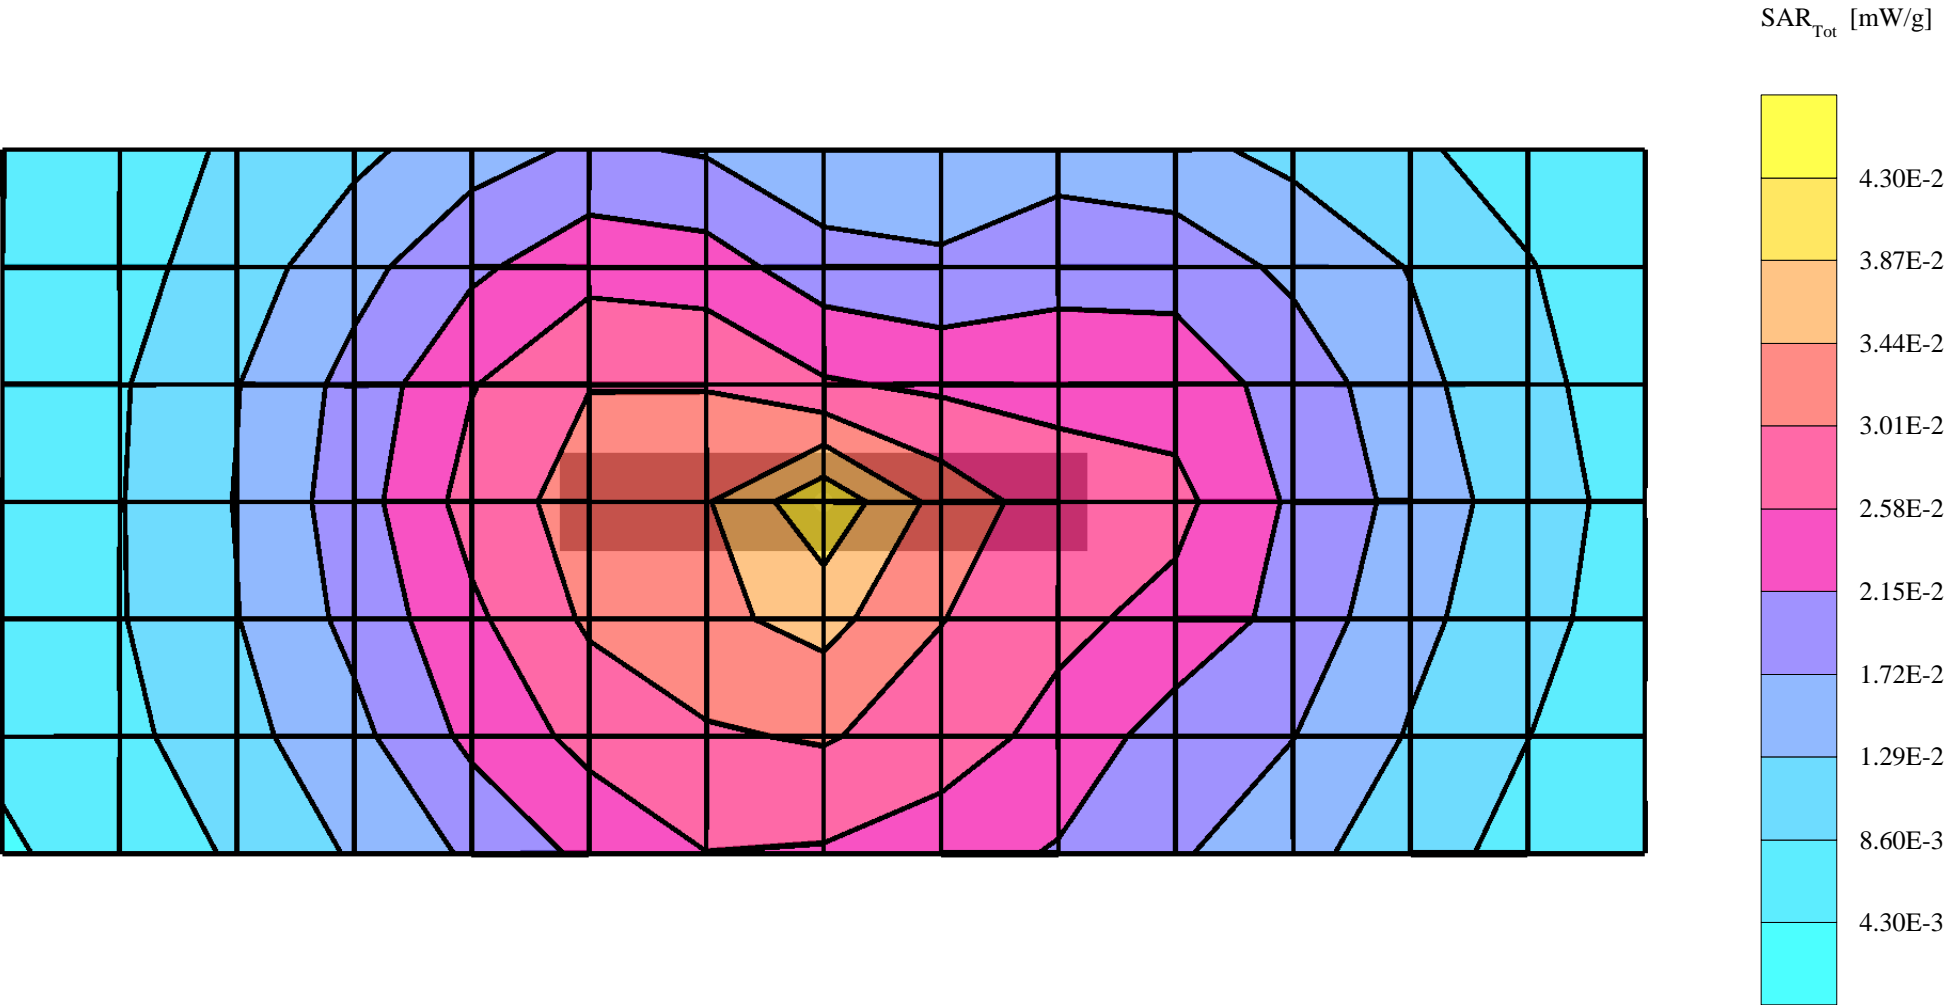


# P4JDTE-3

SAM 3 Phantom; Flat Section; Position: body worn, Compaq; Frequency: 849 MHz; GPRS  
Probe: ET3DV6 - SN1379; ConvF(6.20,6.20,6.20); Crest factor: 4.0; Muscle 836 MHz:  $\sigma = 0.96$  mho/m  $\epsilon_r = 56.8$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 22.1 °C  
Cube 5x5x7: SAR (1g): 0.0381 mW/g, SAR (10g): 0.0235 mW/g  
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0  
Powerdrift: 0.01 dB

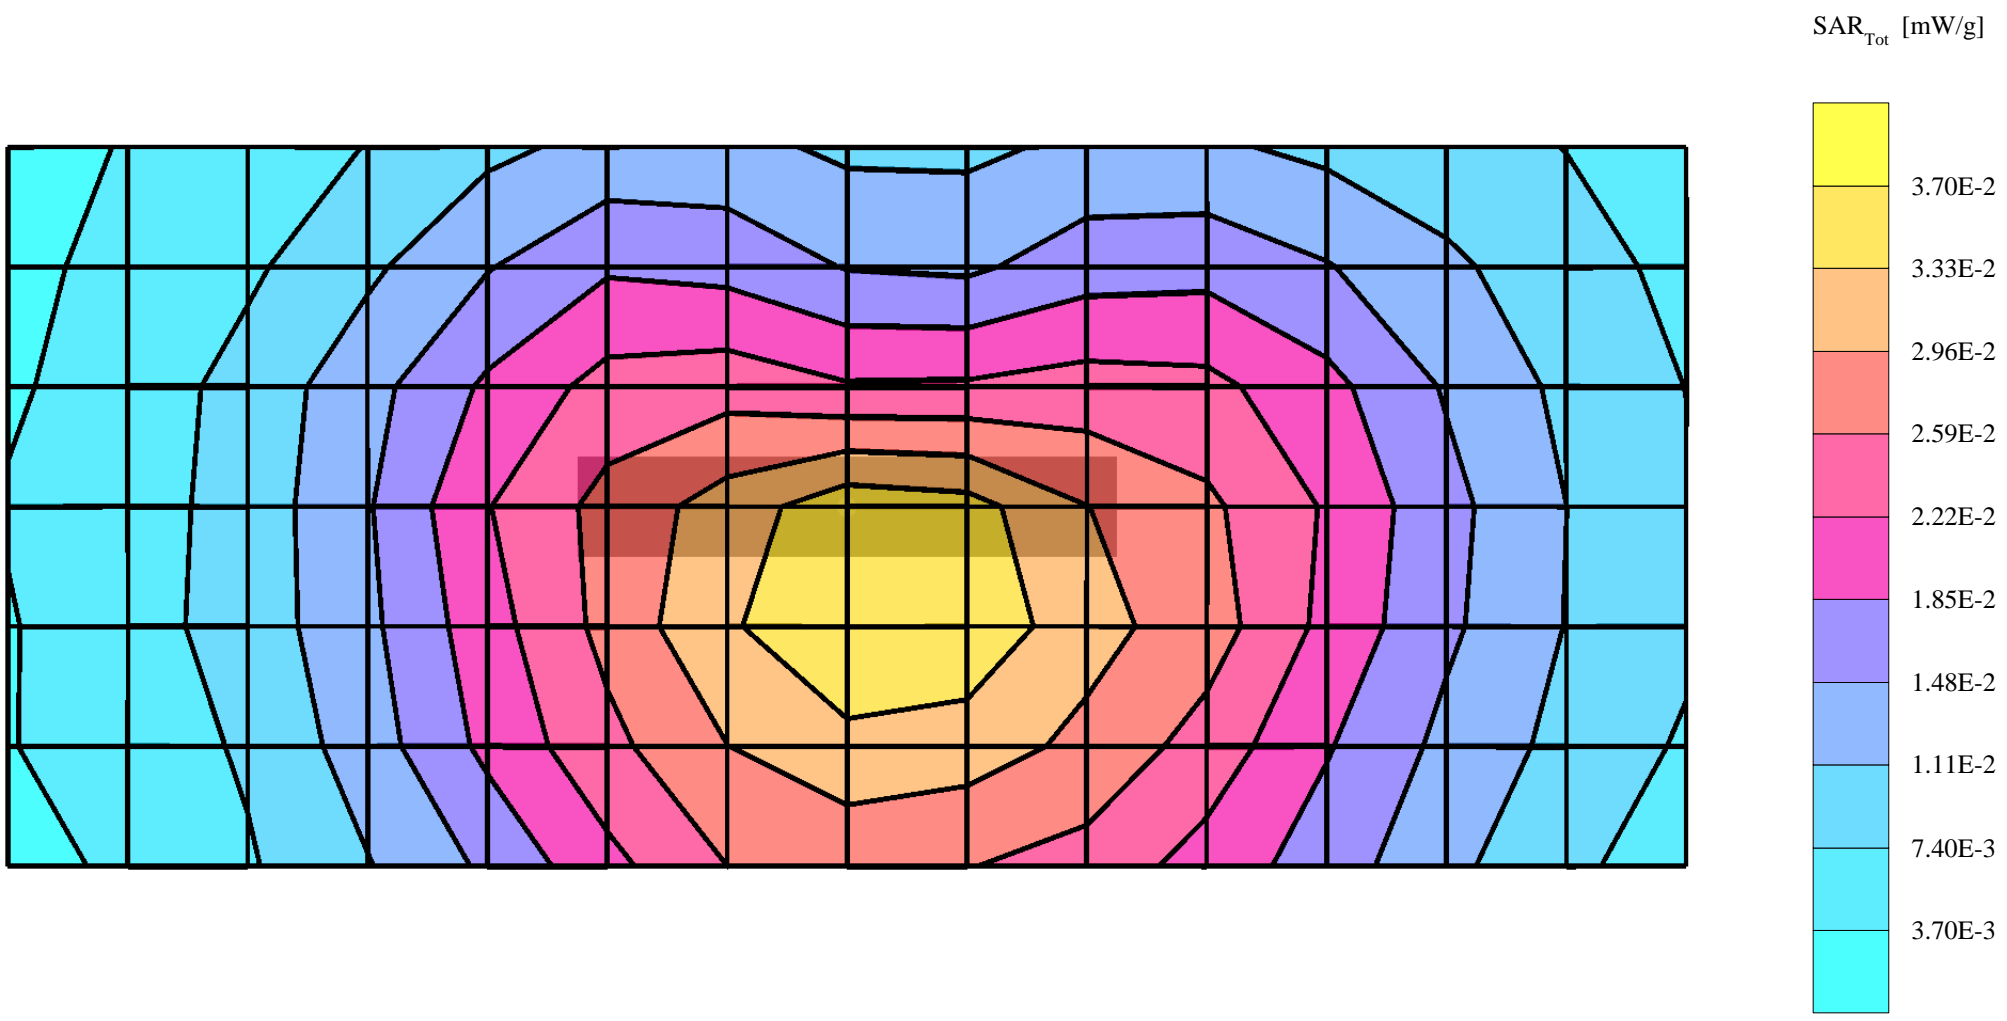


# P4JDTE-3

SAM 3 Phantom; Flat Section; Position: body worn, HP; Frequency: 836 MHz; GPRS  
Probe: ET3DV6 - SN1379; ConvF(6.20,6.20,6.20); Crest factor: 4.0; Muscle 836 MHz:  $\sigma = 0.96$  mho/m  $\epsilon_r = 56.8$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 21.9 °C  
Cube 5x5x7: SAR (1g): 0.0530 mW/g, SAR (10g): 0.0377 mW/g  
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0  
Powerdrift: 0.04 dB

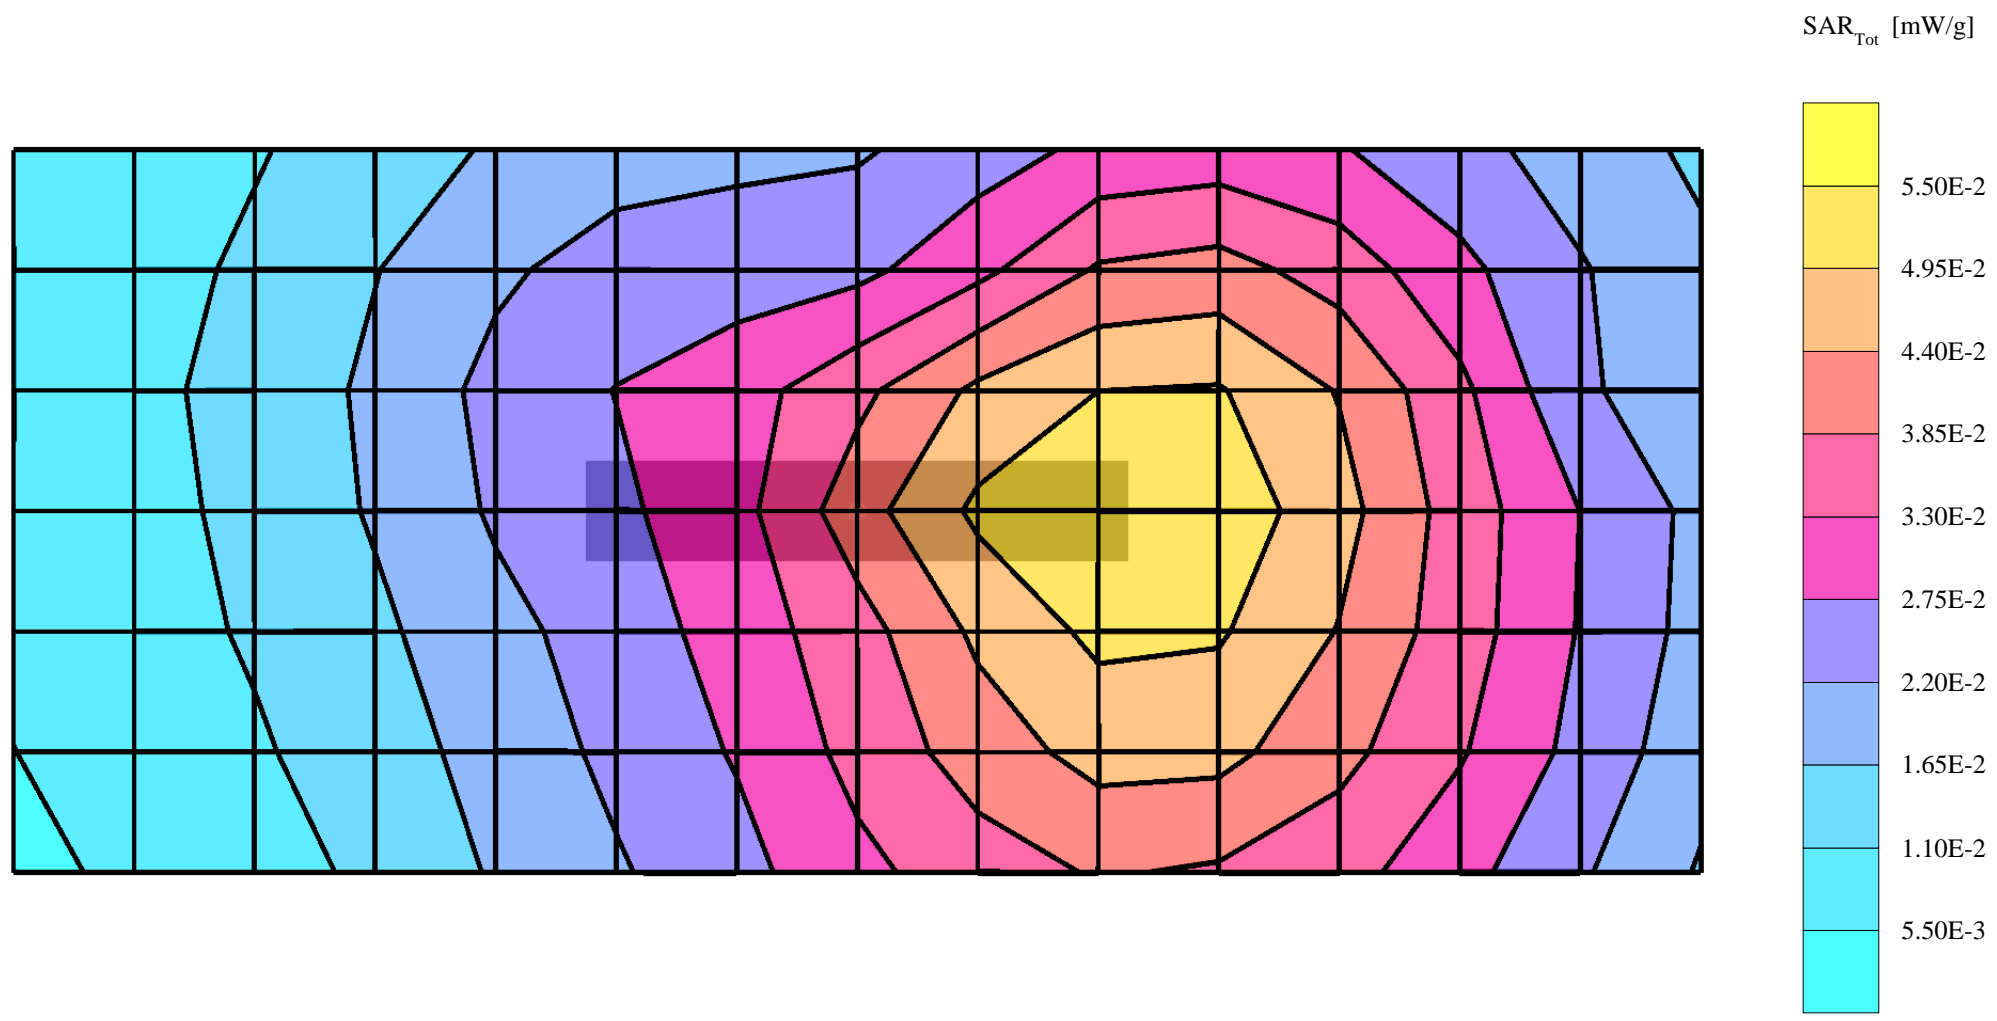


### P4JDTE-3

SAM 1 Phantom; Flat Section; Position: body worn, IBM T23; Frequency: 1850 MHz; GPRS  
Probe: ET3DV6 - SN1379; ConvF(4.80,4.80,4.80); Crest factor: 4.0; Muscle 1880 MHz:  $\sigma = 1.48$  mho/m  $\epsilon_r = 50.9$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 21.6 °C  
Cube 5x5x7: Upper peak SAR (1g): 0.560 mW/g, SAR (10g): 0.315 mW/g, lower peak SAR (1g): 0.549 mW/g, SAR (10g): 0.317 mW/g  
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0  
Powerdrift: -0.11 dB

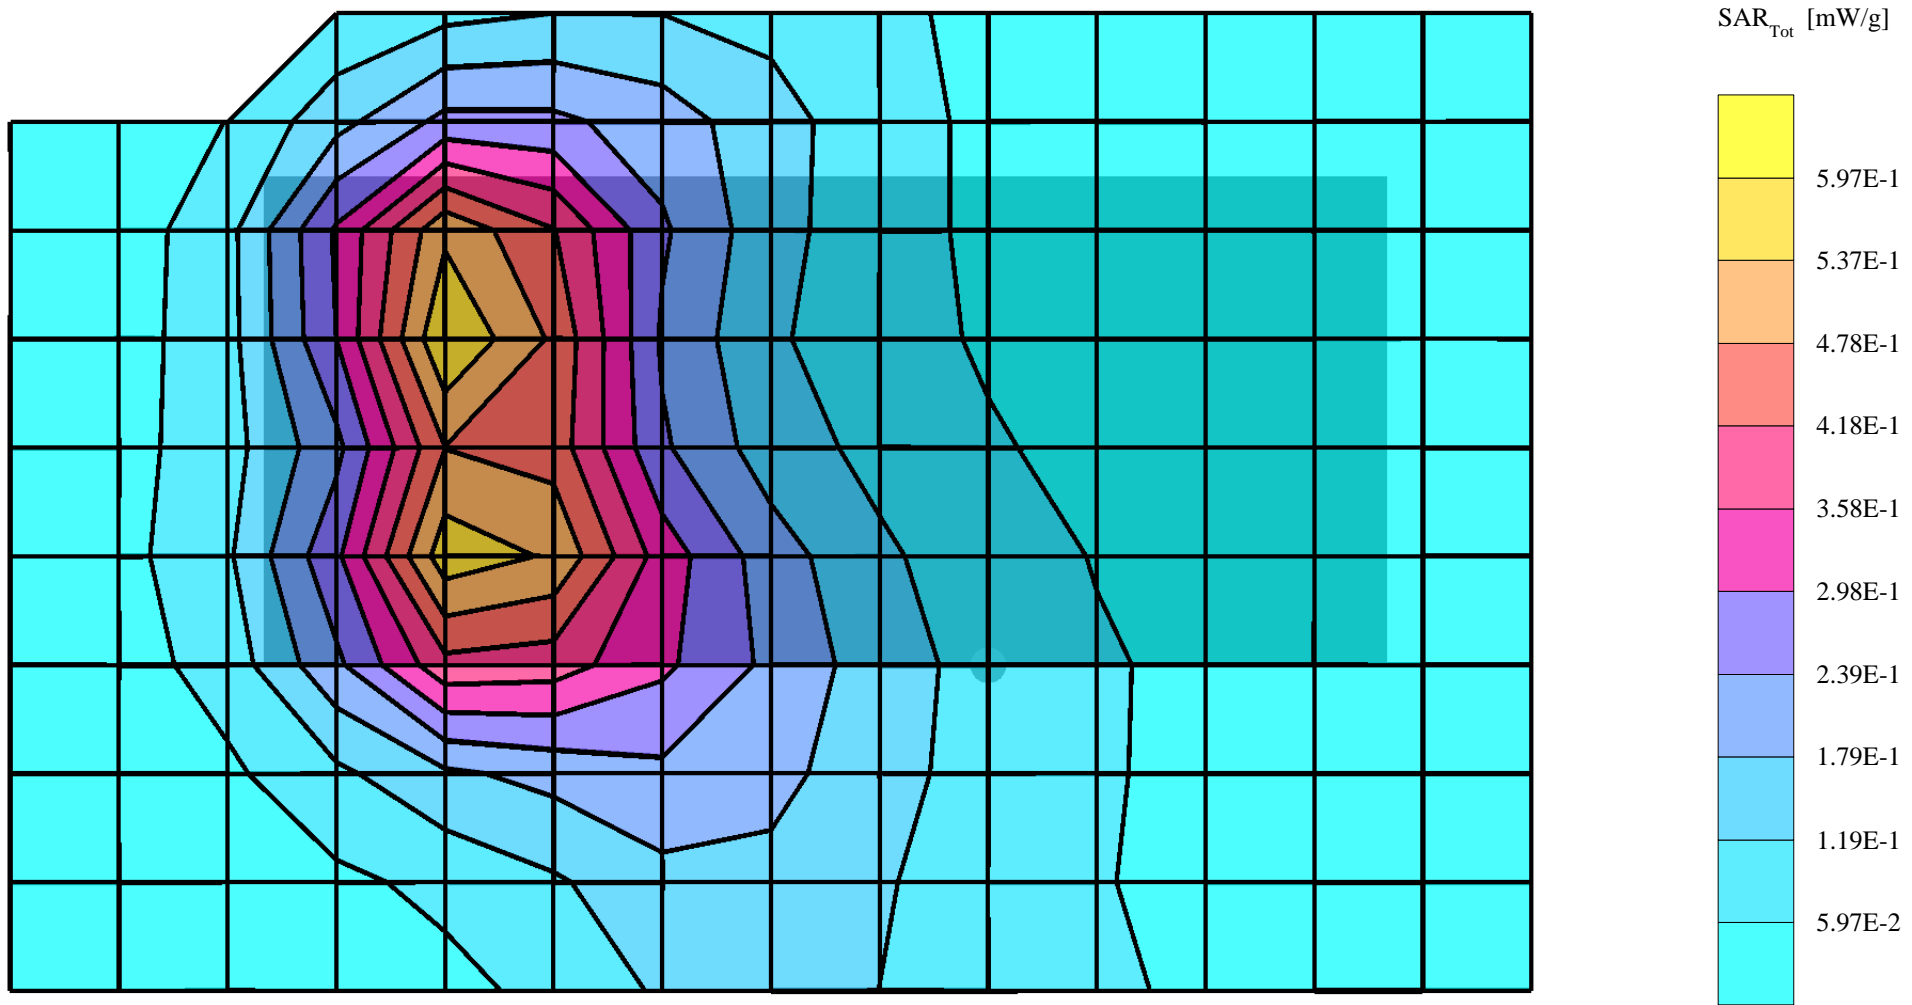


# P4JDTE-3

SAM 1 Phantom; Flat Section; Position: body worn, IBM 560X; Frequency: 1850 MHz; GPRS  
Probe: ET3DV6 - SN1379; ConvF(4.80,4.80,4.80); Crest factor: 4.0; Muscle 1880 MHz:  $\sigma = 1.51$  mho/m  $\epsilon_r = 51.2$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 21.1 °C  
Cube 5x5x7: SAR (1g): 0.902 mW/g, SAR (10g): 0.542 mW/g  
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0  
Powerdrift: 0.06 dB

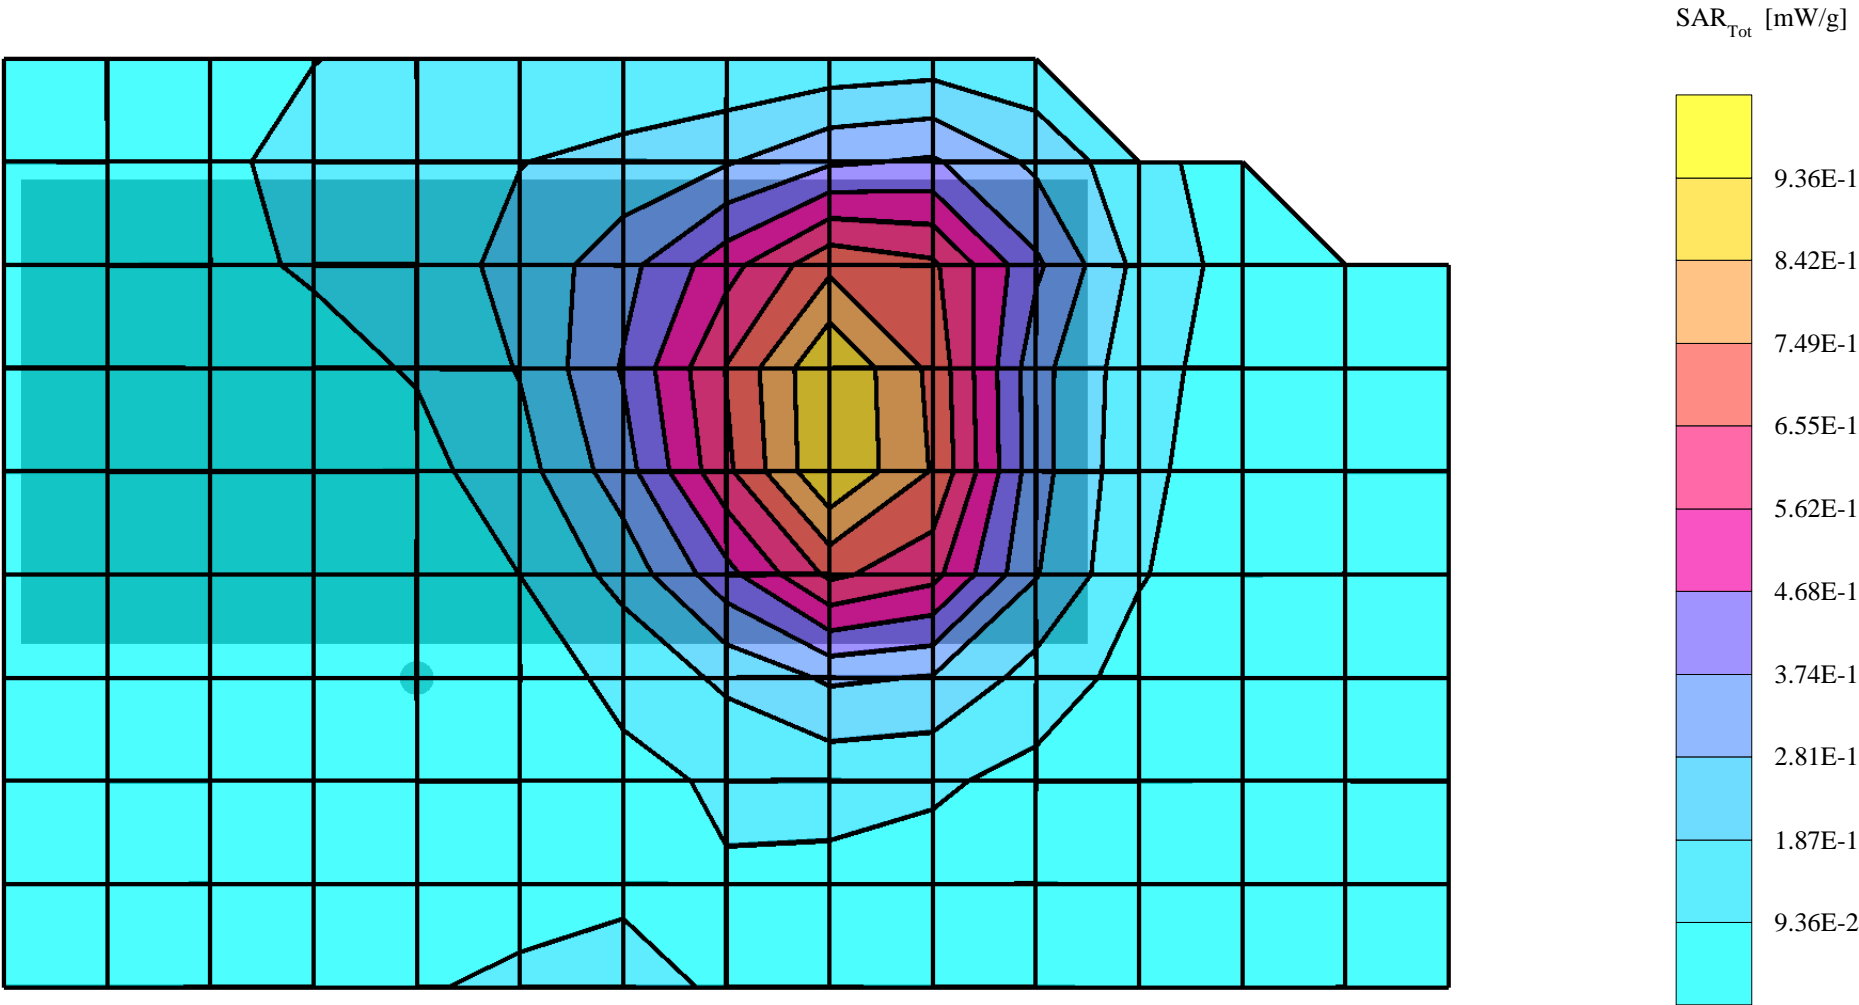


# P4JDTE-3

SAM 1 Phantom; Flat Section; Position: body worn, IBM 600X; Frequency: 1850 MHz; GPRS  
Probe: ET3DV6 - SN1379; ConvF(4.80,4.80,4.80); Crest factor: 4.0; Muscle 1880 MHz:  $\sigma = 1.51$  mho/m  $\epsilon_r = 51.2$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 21.6 °C  
Cube 5x5x7: SAR (1g): 0.668 mW/g, SAR (10g): 0.366 mW/g  
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0  
Powerdrift: -0.00 dB

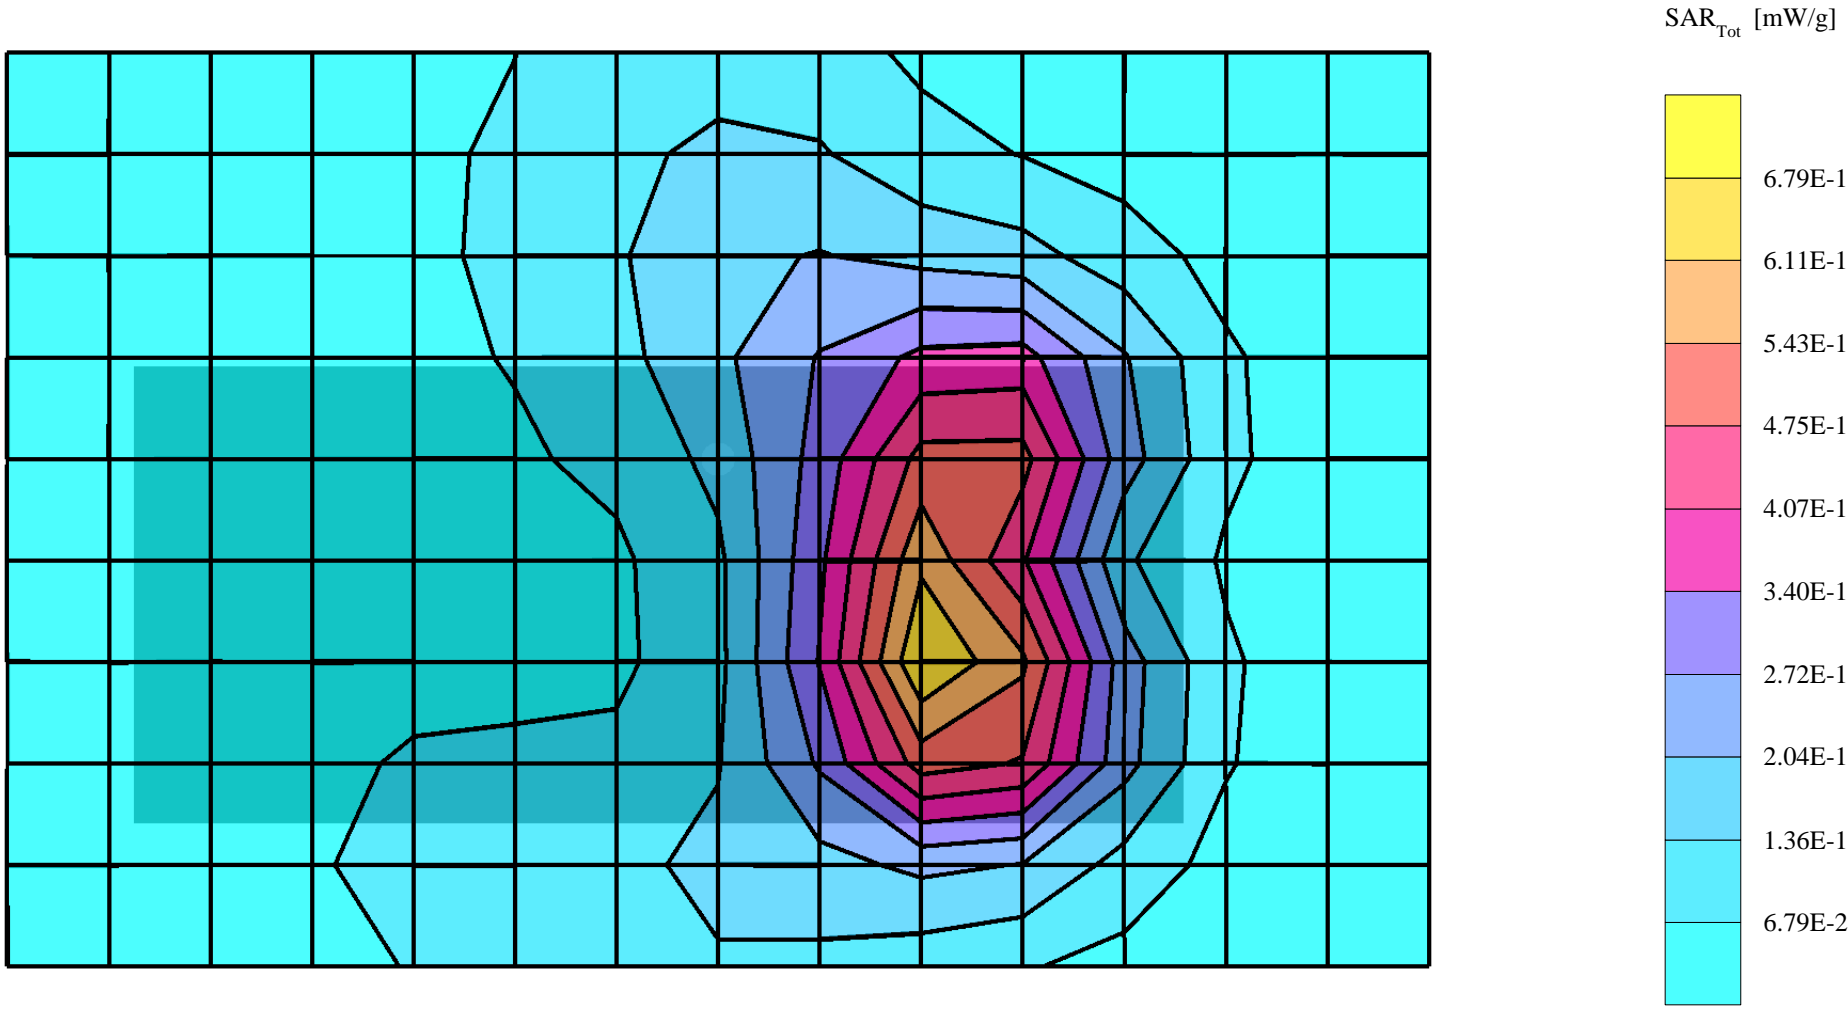


### P4JDTE-3

SAM 1 Phantom; Flat Section; Position: body worn, Casio; Frequency: 1850 MHz; GPRS  
Probe: ET3DV6 - SN1379; ConvF(4.80,4.80,4.80); Crest factor: 4.0; Muscle 1880 MHz:  $\sigma = 1.47$  mho/m  $\epsilon_r = 51.0$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 22.3 °C  
Cube 5x5x7: SAR (1g): 0.611 mW/g, SAR (10g): 0.358 mW/g  
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0  
Powerdrift: -0.06 dB

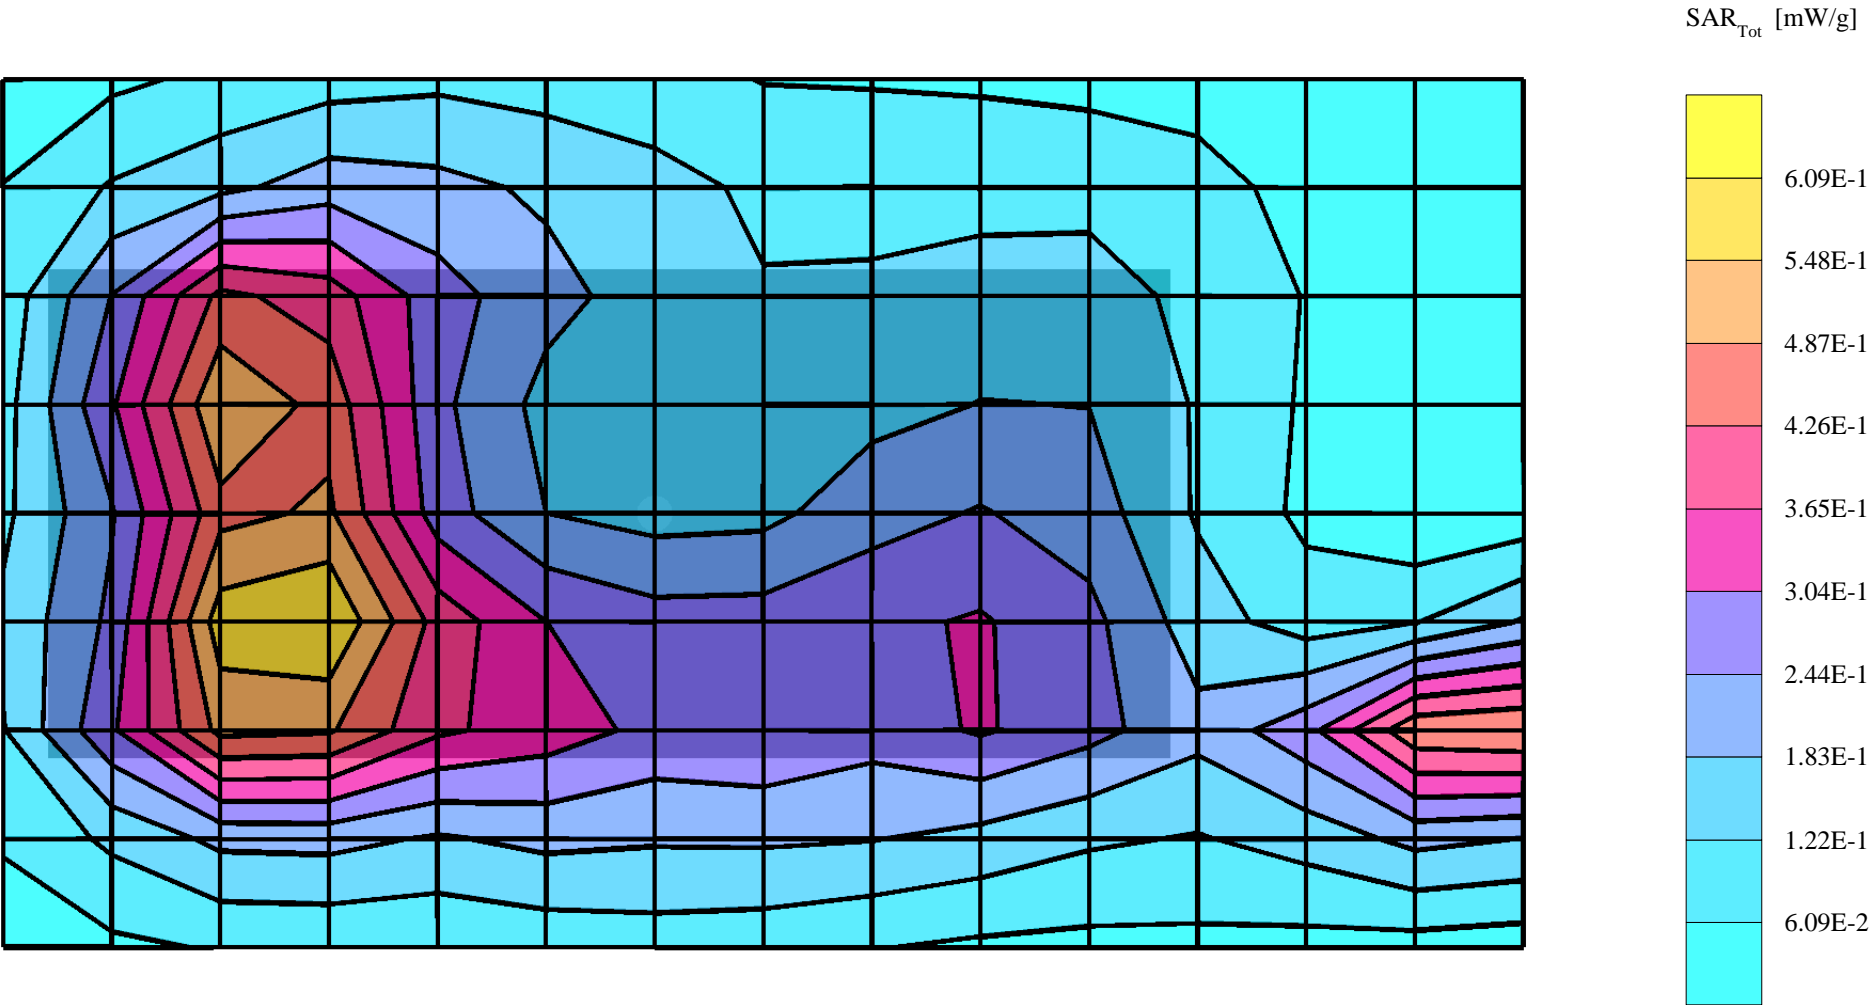

# P4JDTE-3


SAM 1 Phantom; Flat Section; Position: body worn, Compaq; Frequency: 1850 MHz; GPRS  
Probe: ET3DV6 - SN1379; ConvF(4.80,4.80,4.80); Crest factor: 4.0; Muscle 1880 MHz:  $\sigma = 1.47$  mho/m  $\epsilon_r = 51.0$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 22.3 °C  
Cube 5x5x7: Upper peak SAR (1g): 0.715 mW/g, SAR (10g): 0.352 mW/g, lower peak SAR (1g): 0.622mW/g, SAR (10g): 0.363 mW/g  
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0  
Powerdrift: 0.09 dB

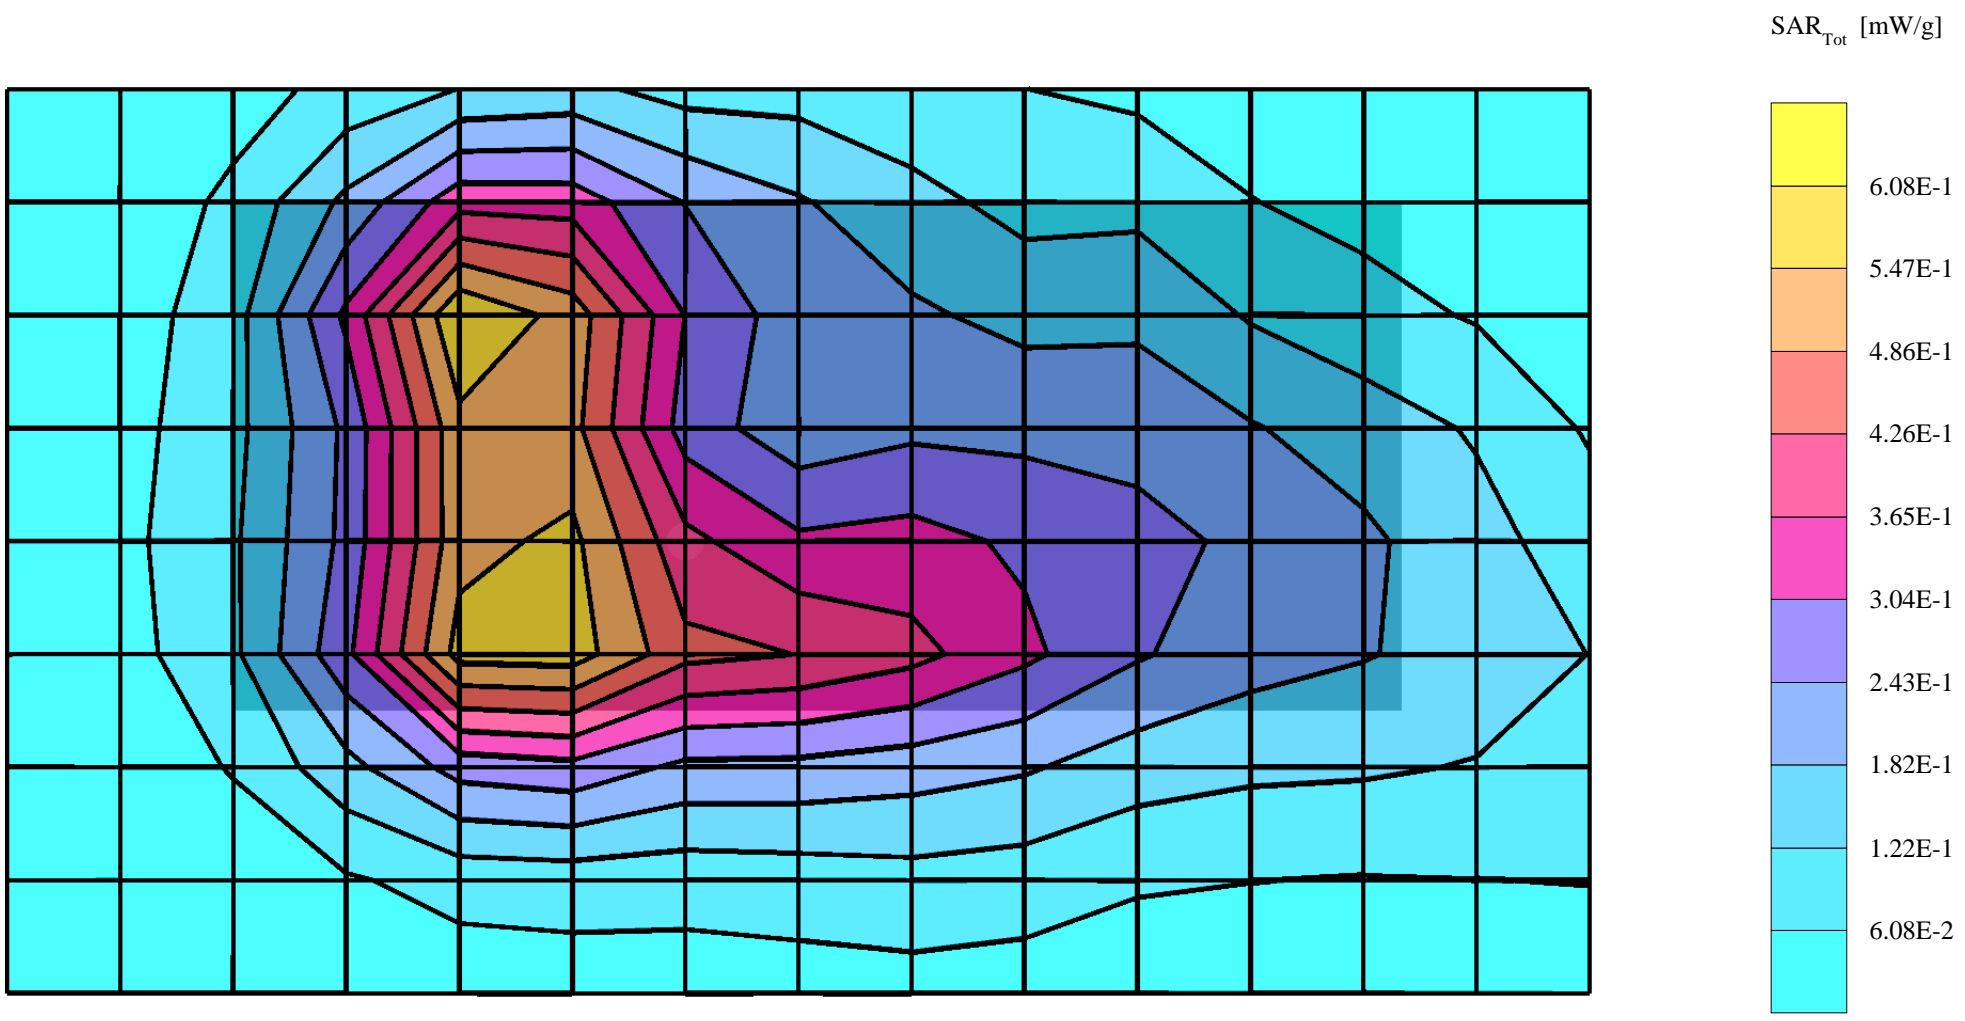




# P4JDTE-3

SAM 1 Phantom; Flat Section; Position: body worn, HP; Frequency: 1850 MHz; GPRS  
Probe: ET3DV6 - SN1379; ConvF(4.80,4.80,4.80); Crest factor: 4.0; Muscle 1880 MHz:  $\sigma = 1.47$  mho/m  $\epsilon_r = 51.0$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 21.5 °C  
Cube 5x5x7: SAR (1g): 0.483 mW/g, SAR (10g): 0.290 mW/g  
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0  
Powerdrift: 0.03 dB

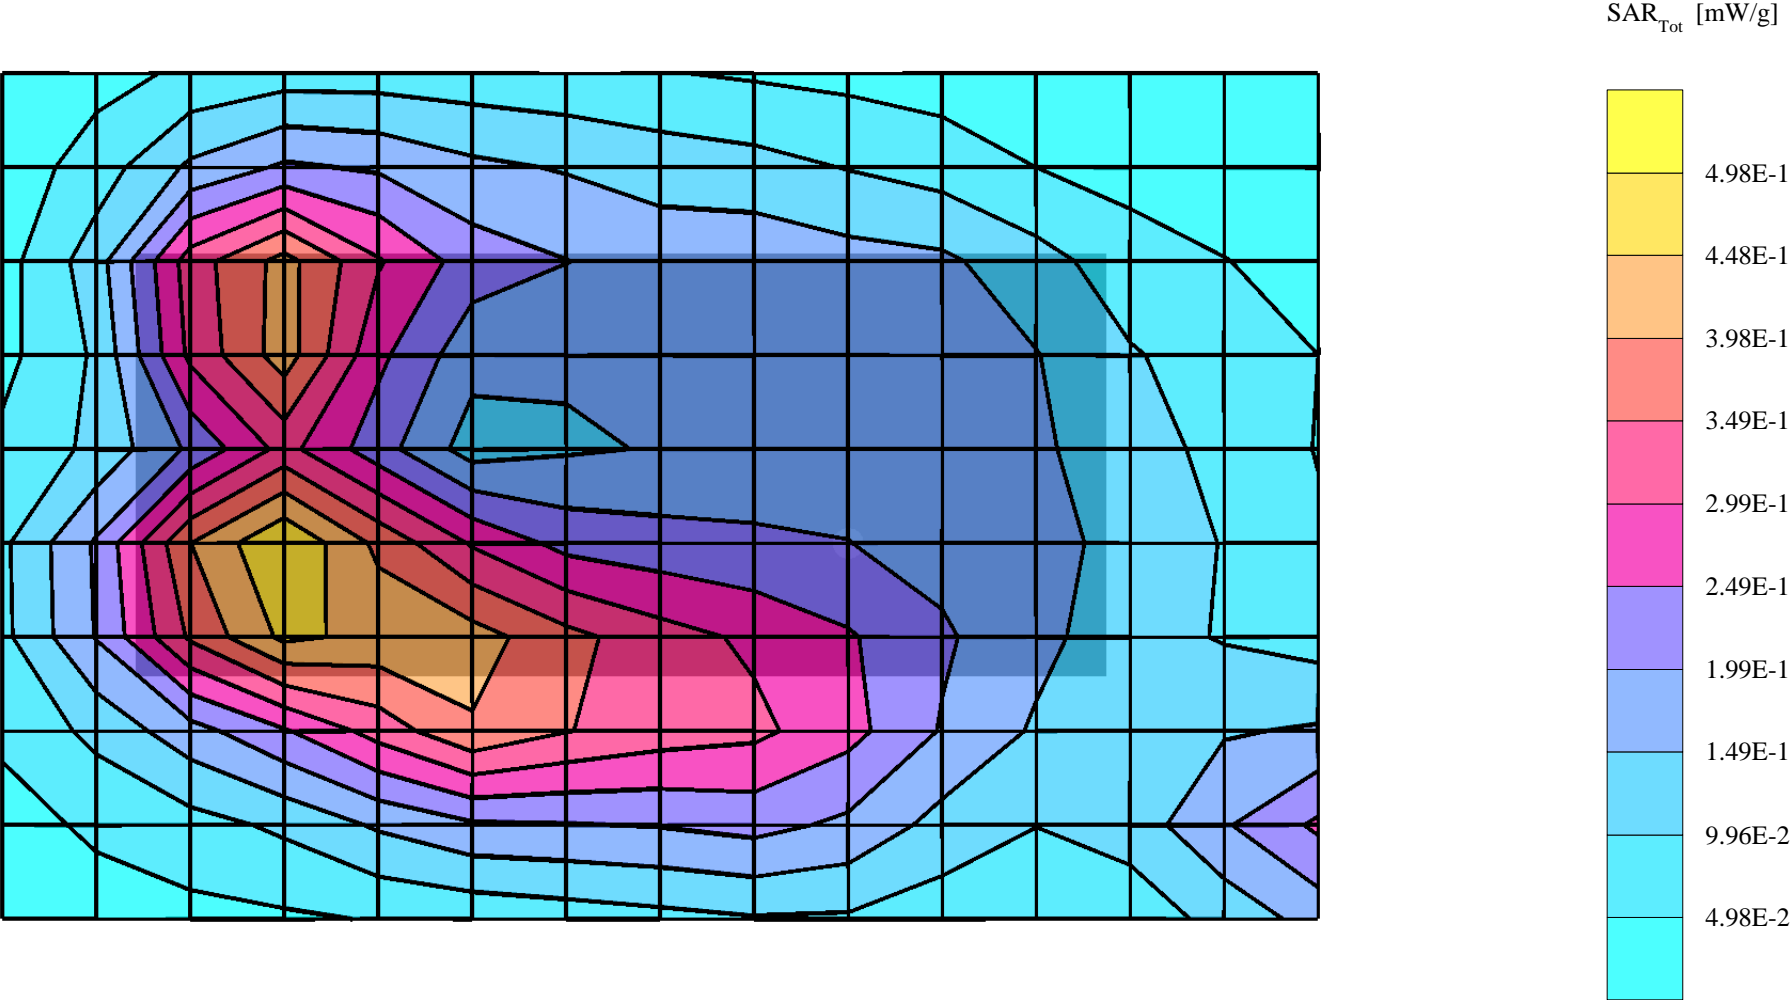


# P4JDTE-3

SAM 1 Phantom; Flat Section; Position: body worn, IBM T23; Frequency: 1850 MHz, GPRS  
Probe: ET3DV6 - SN1379; ConvF(4.80,4.80,4.80); Crest factor: 4.0; Muscle 1880 MHz:  $\sigma = 1.51$  mho/m  $\epsilon_r = 51.2$   $\rho = 1.00$  g/cm<sup>3</sup>, liquid temperature: 21.8 C  
Cube 5x5x7: SAR (1g): 0.302 mW/g, SAR (10g): 0.181 mW/g  
Coarse: Dx = 13.0, Dy = 13.0, Dz = 10.0  
Powerdrift: -0.14 dB

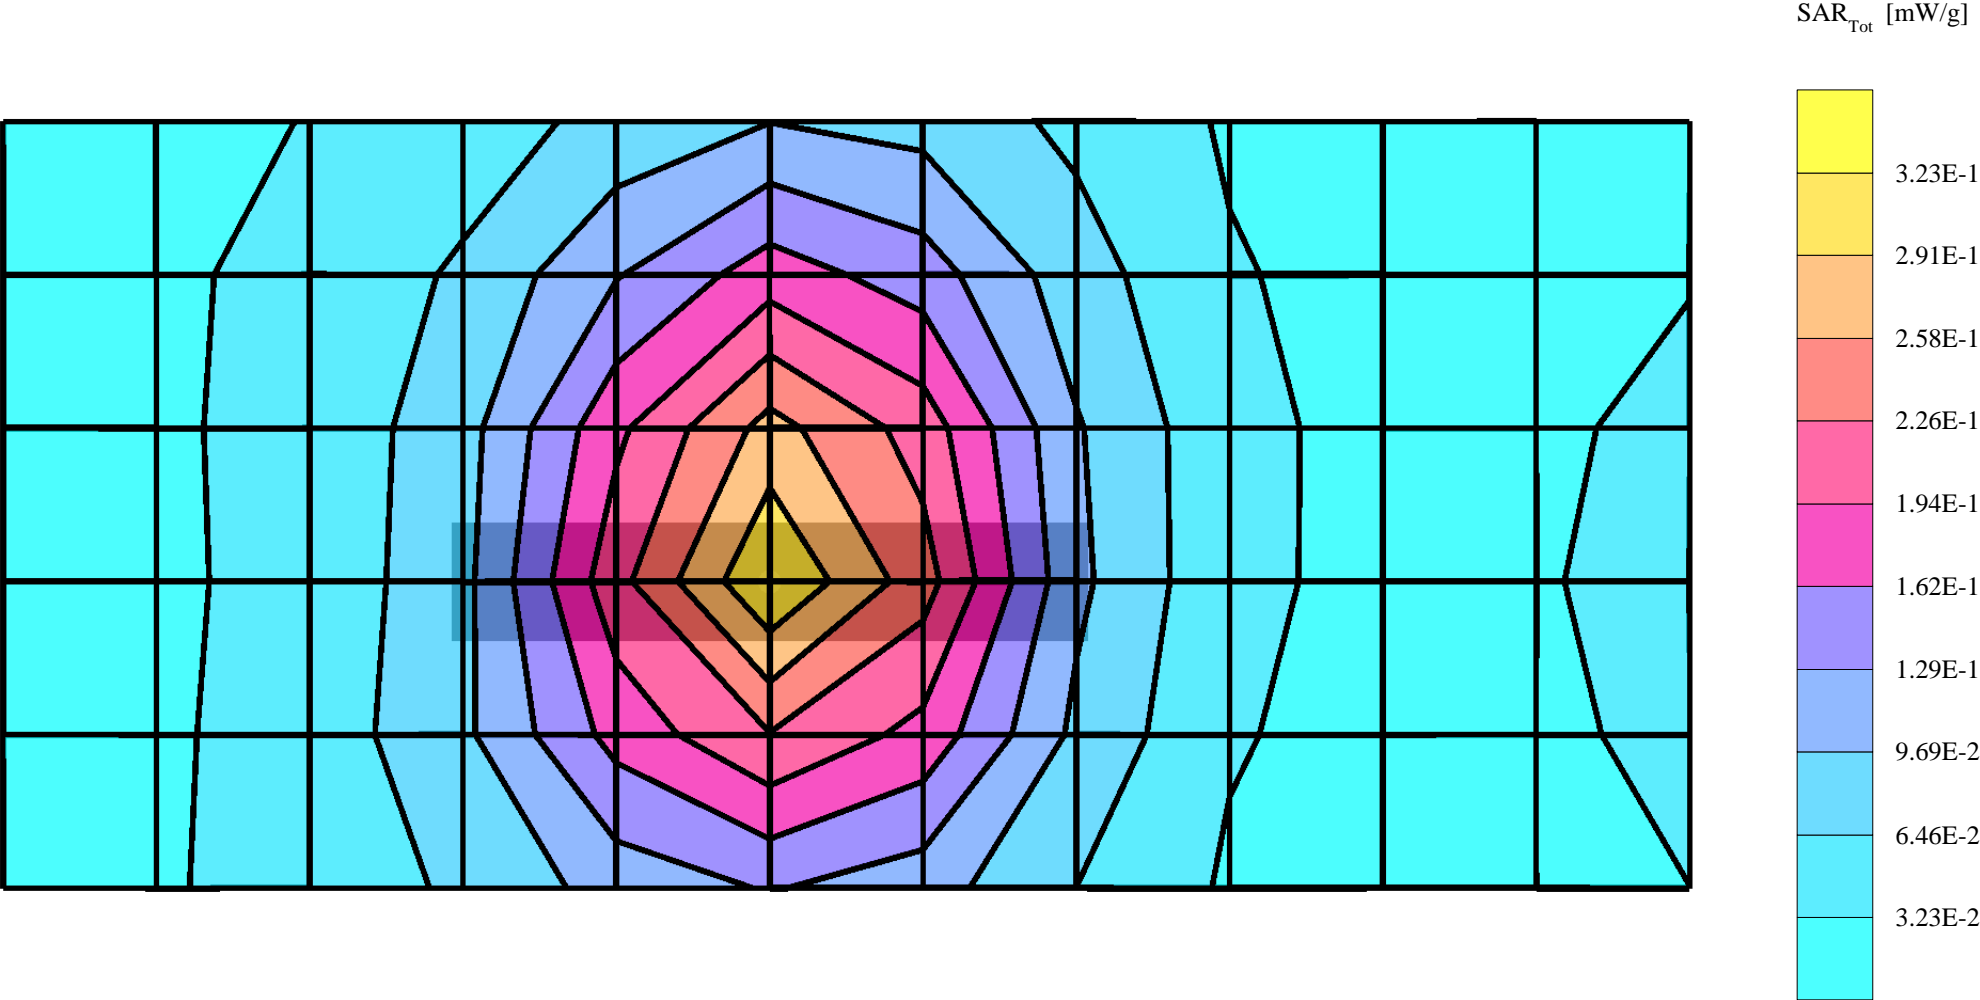


# P4JDTE-3

SAM 1 Phantom; Flat Section; Position: body worn, IBM 560X; Frequency: 1850 MHz, GPRS  
Probe: ET3DV6 - SN1379; ConvF(4.80,4.80,4.80); Crest factor: 4.0; Muscle 1880 MHz:  $\sigma = 1.51$  mho/m  $\epsilon_r = 51.3$   $\rho = 1.00$  g/cm<sup>3</sup>, liquid temperature: 21.2 C  
Cube 5x5x7: SAR (1g): 0.429 mW/g, SAR (10g): 0.259 mW/g  
Coarse: Dx = 13.0, Dy = 13.0, Dz = 10.0  
Powerdrift: -0.07 dB

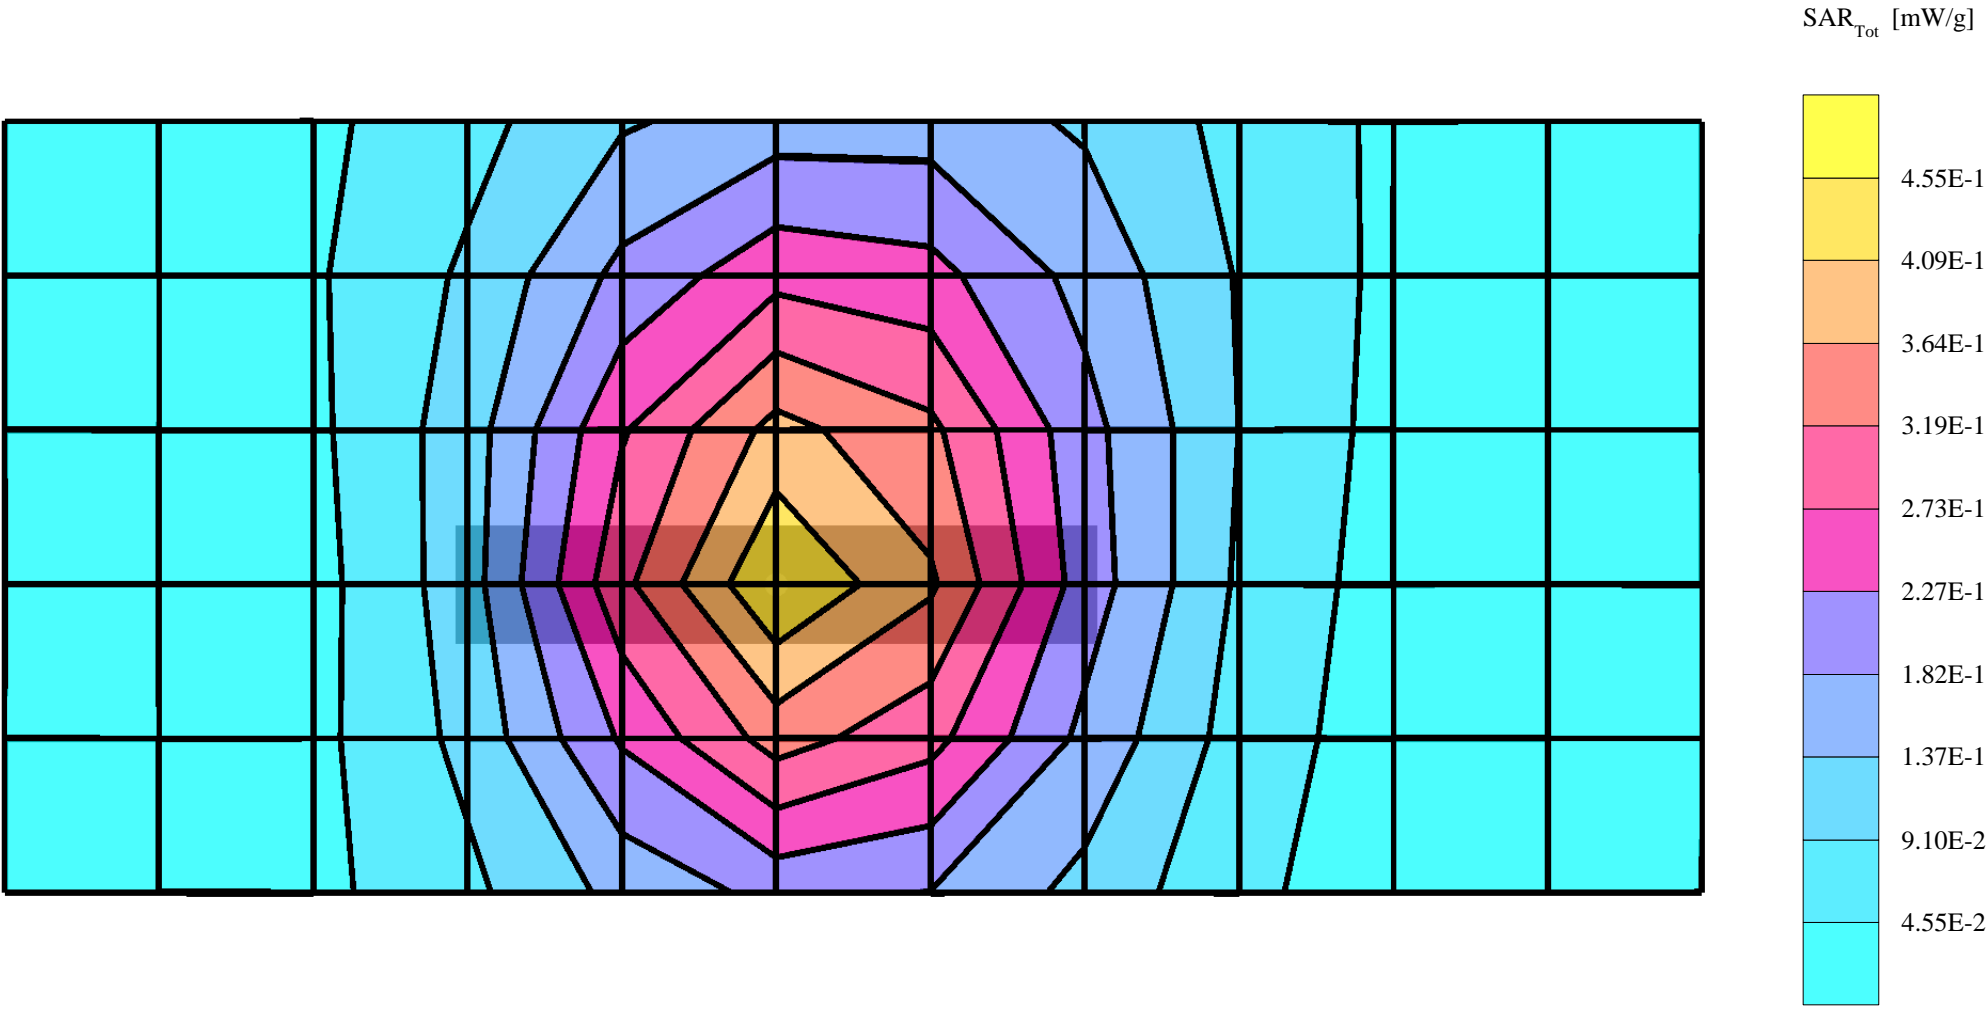


# P4JDTE-3

SAM 1 Phantom; Flat Section; Position: body worn, IBM 600X ; Frequency: 1850 MHz, GPRS  
Probe: ET3DV6 - SN1379; ConvF(4.80,4.80,4.80); Crest factor: 4.0; Muscle 1880 MHz:  $\sigma = 1.51$  mho/m  $\epsilon_r = 51.3$   $\rho = 1.00$  g/cm<sup>3</sup>, liquid temperature: 21.4 C  
Cube 5x5x7: SAR (1g): 0.279 mW/g, SAR (10g): 0.167 mW/g  
Coarse: Dx = 13.0, Dy = 13.0, Dz = 10.0  
Powerdrift: -0.02 dB

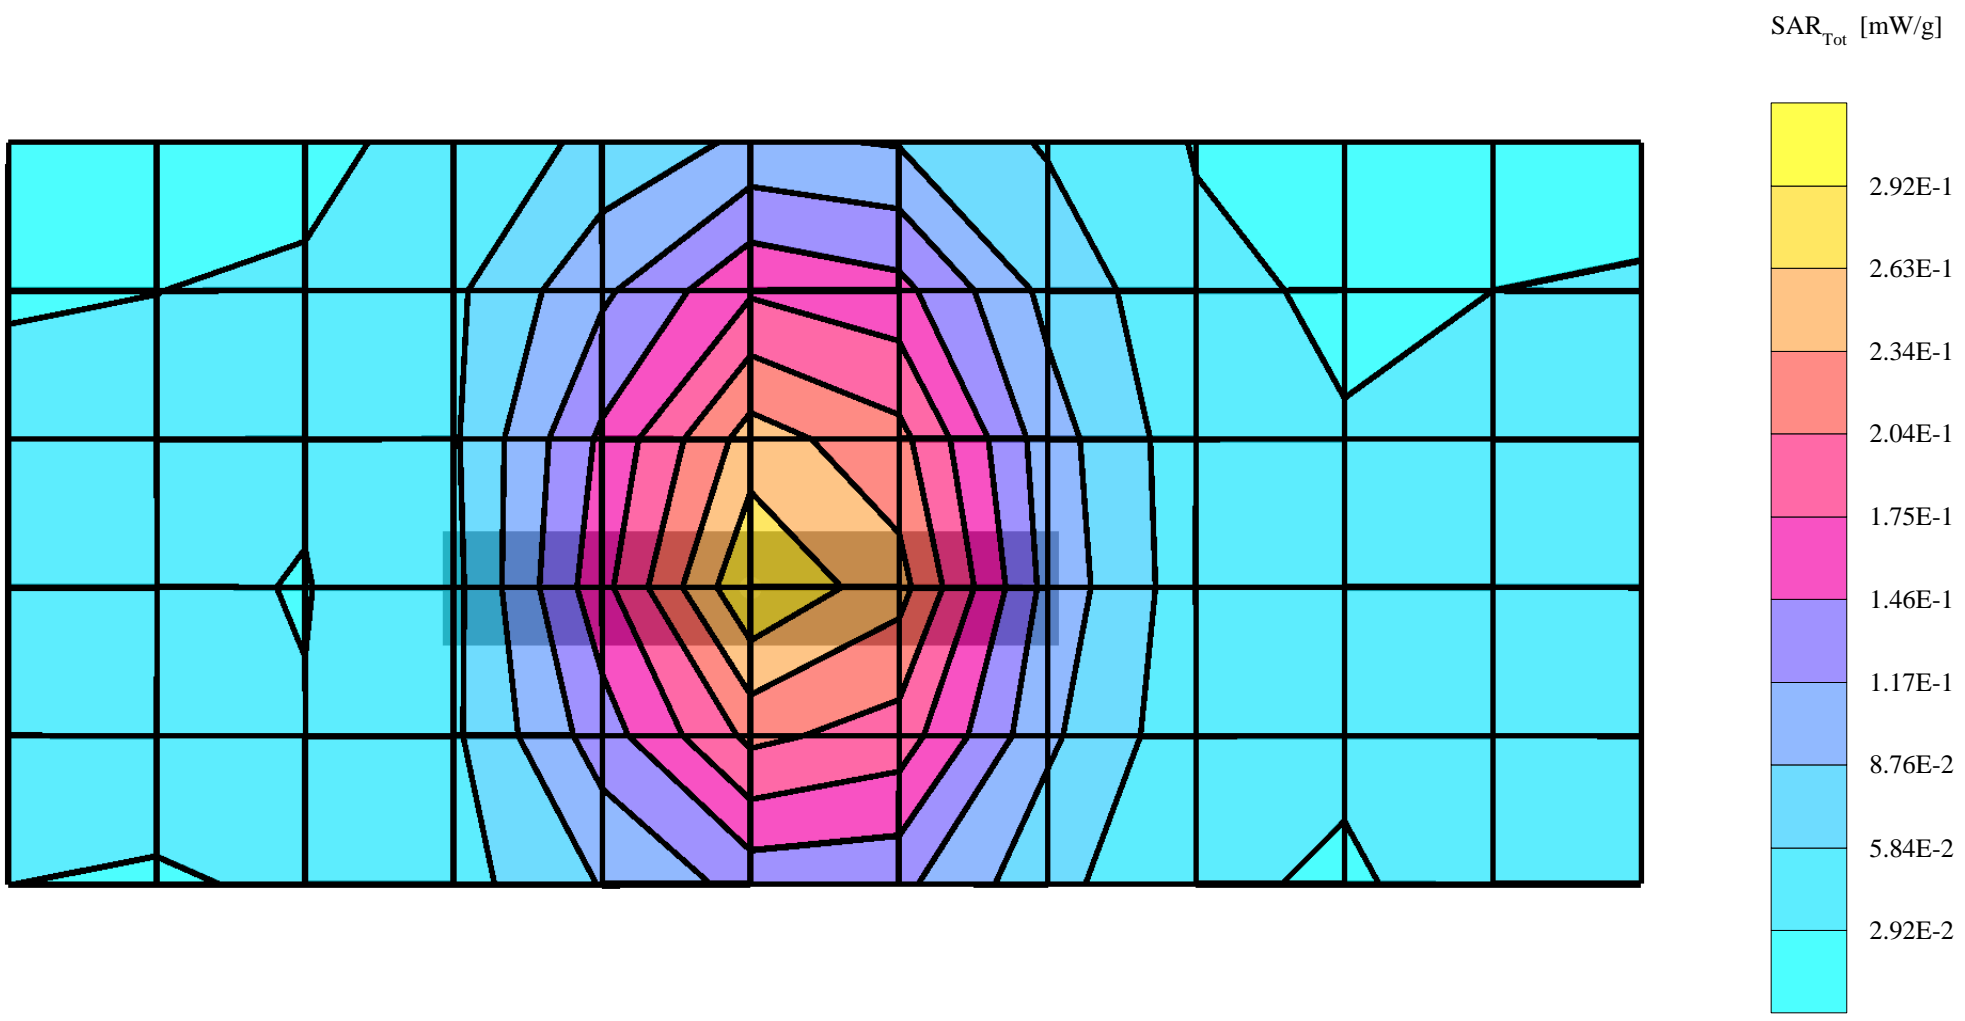

### P4JDTE-3

SAM 1 Phantom; Flat Section; Position: body worn, Casio; Frequency: 1910 MHz; GPRS  
Probe: ET3DV6 - SN1379; ConvF(4.80,4.80,4.80); Crest factor: 4.0; Muscle 1880 MHz:  $\sigma = 1.47$  mho/m  $\epsilon_r = 51.2$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 21.7 °C  
Cube 5x5x7: SAR (1g): 0.233 mW/g, SAR (10g): 0.136 mW/g  
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0  
Powerdrift: -0.00 dB

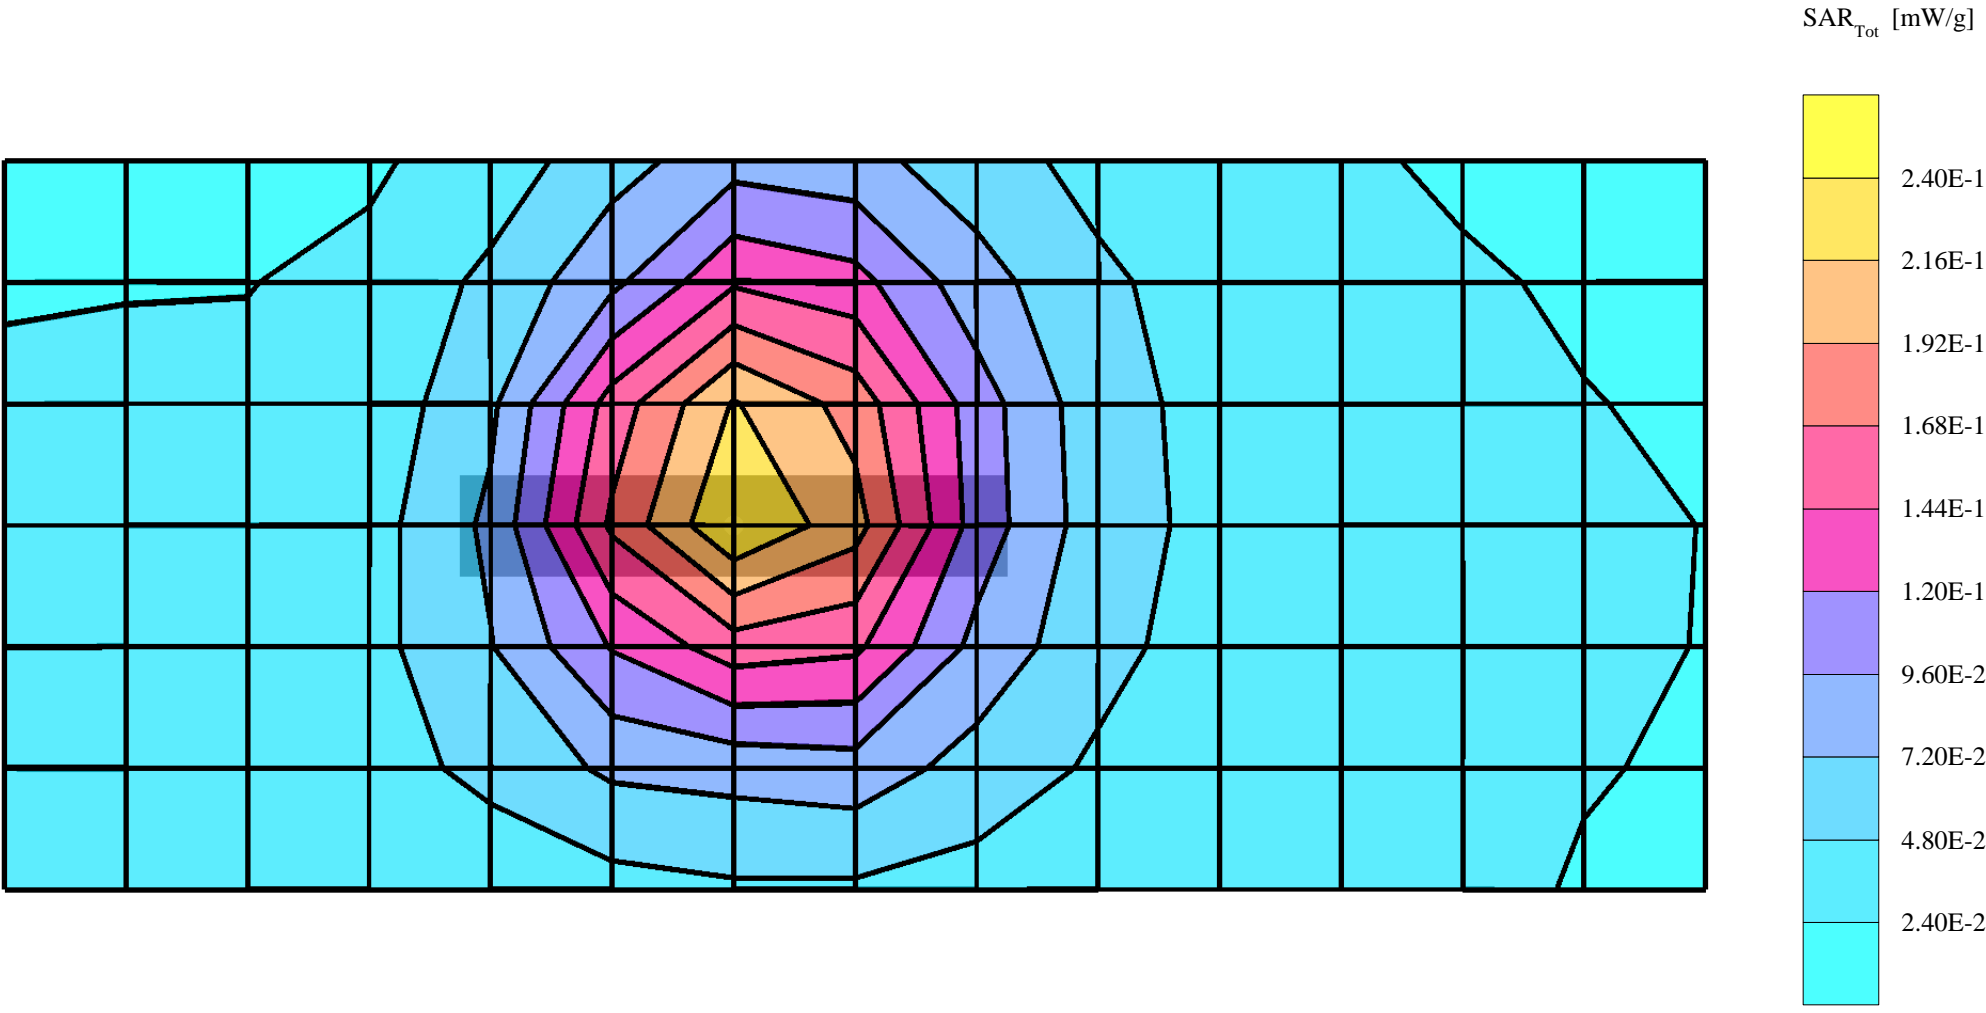

# P4JDTE-3


SAM 1 Phantom; Flat Section; Position: body worn, Compaq; Frequency: 1910 MHz; GPRS

Probe: ET3DV6 - SN1379; ConvF(4.80,4.80,4.80); Crest factor: 4.0; Muscle 1880 MHz:  $\sigma = 1.47$  mho/m  $\epsilon_r = 51.2$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 21.6 °C

Cube 5x5x7: SAR (1g): 0.260 mW/g, SAR (10g): 0.151 mW/g


Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0

Powerdrift: -0.04 dB

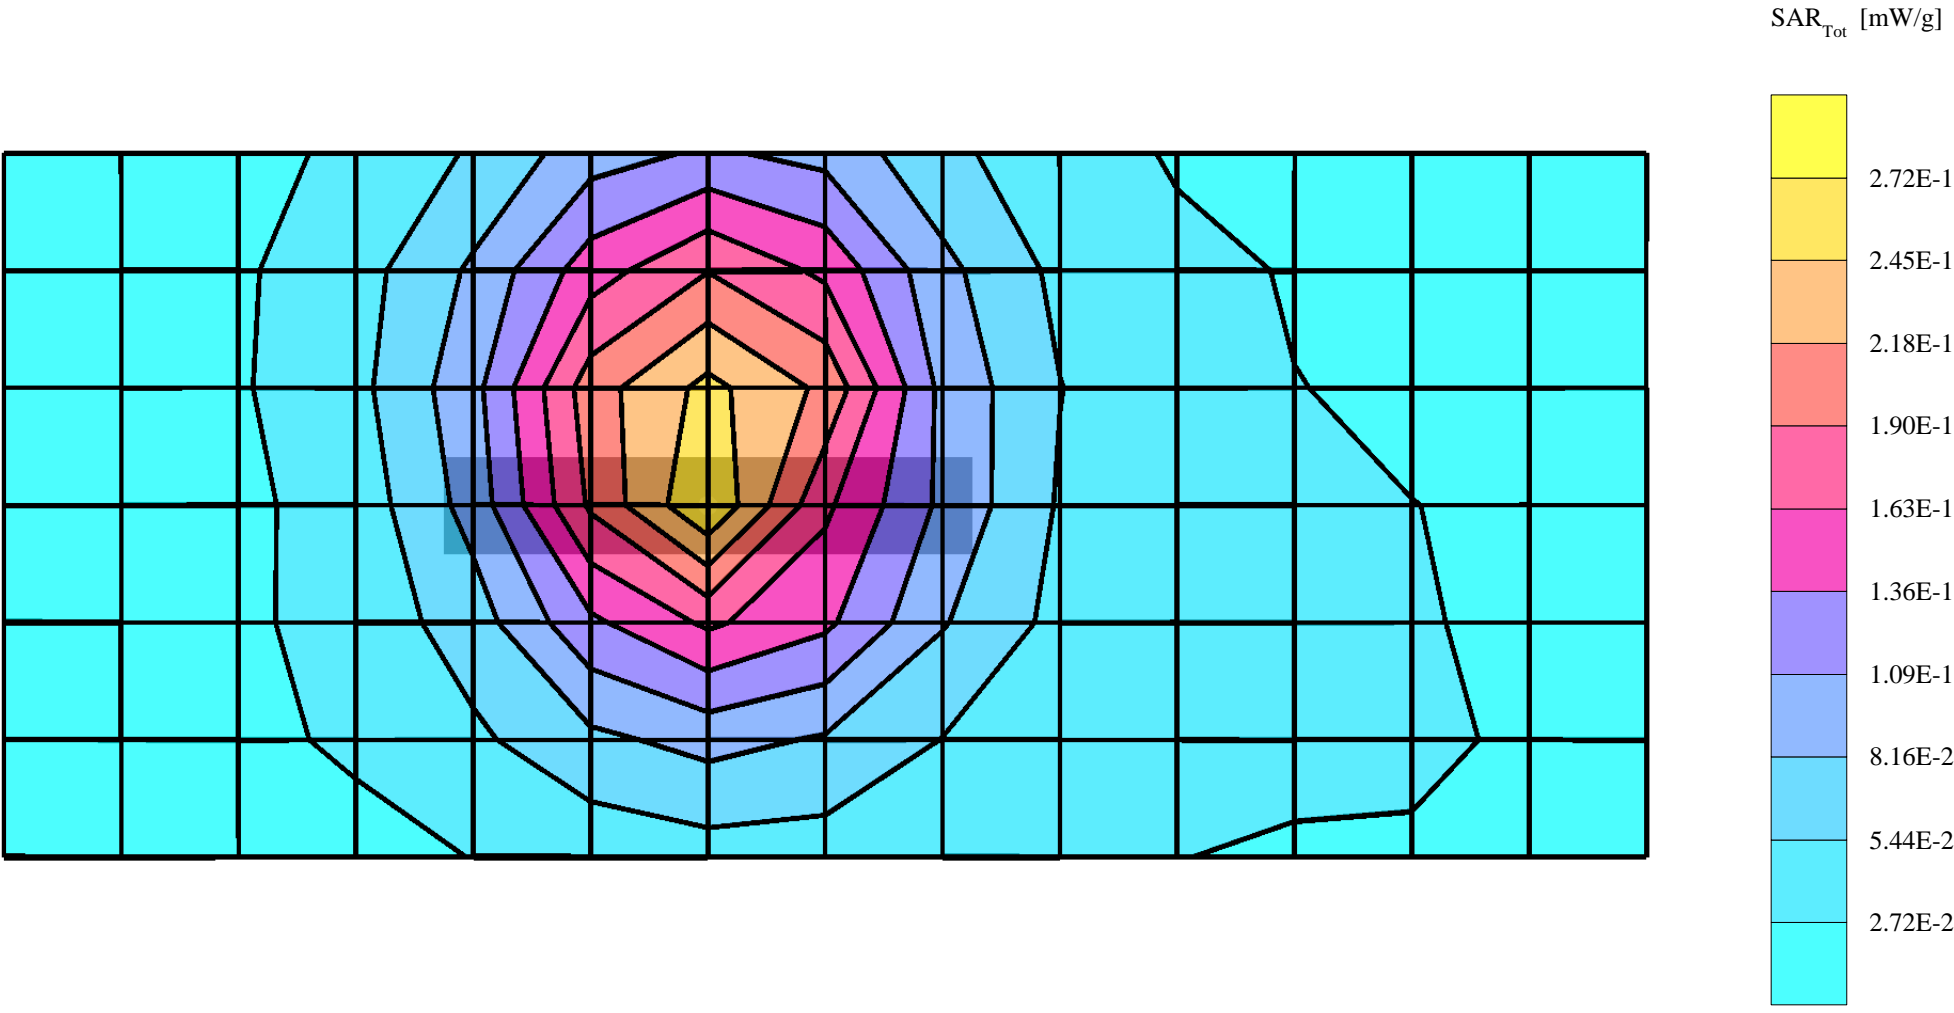


# P4JDTE-3

SAM 1 Phantom; Flat Section; Position: body worn, HP; Frequency: 1880 MHz; GPRS  
Probe: ET3DV6 - SN1379; ConvF(4.80,4.80,4.80); Crest factor: 4.0; Muscle 1880 MHz:  $\sigma = 1.47$  mho/m  $\epsilon_r = 51.2$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 21.2 °C  
Cube 5x5x7: SAR (1g): 0.214 mW/g, SAR (10g): 0.124 mW/g  
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0  
Powerdrift: 0.04 dB

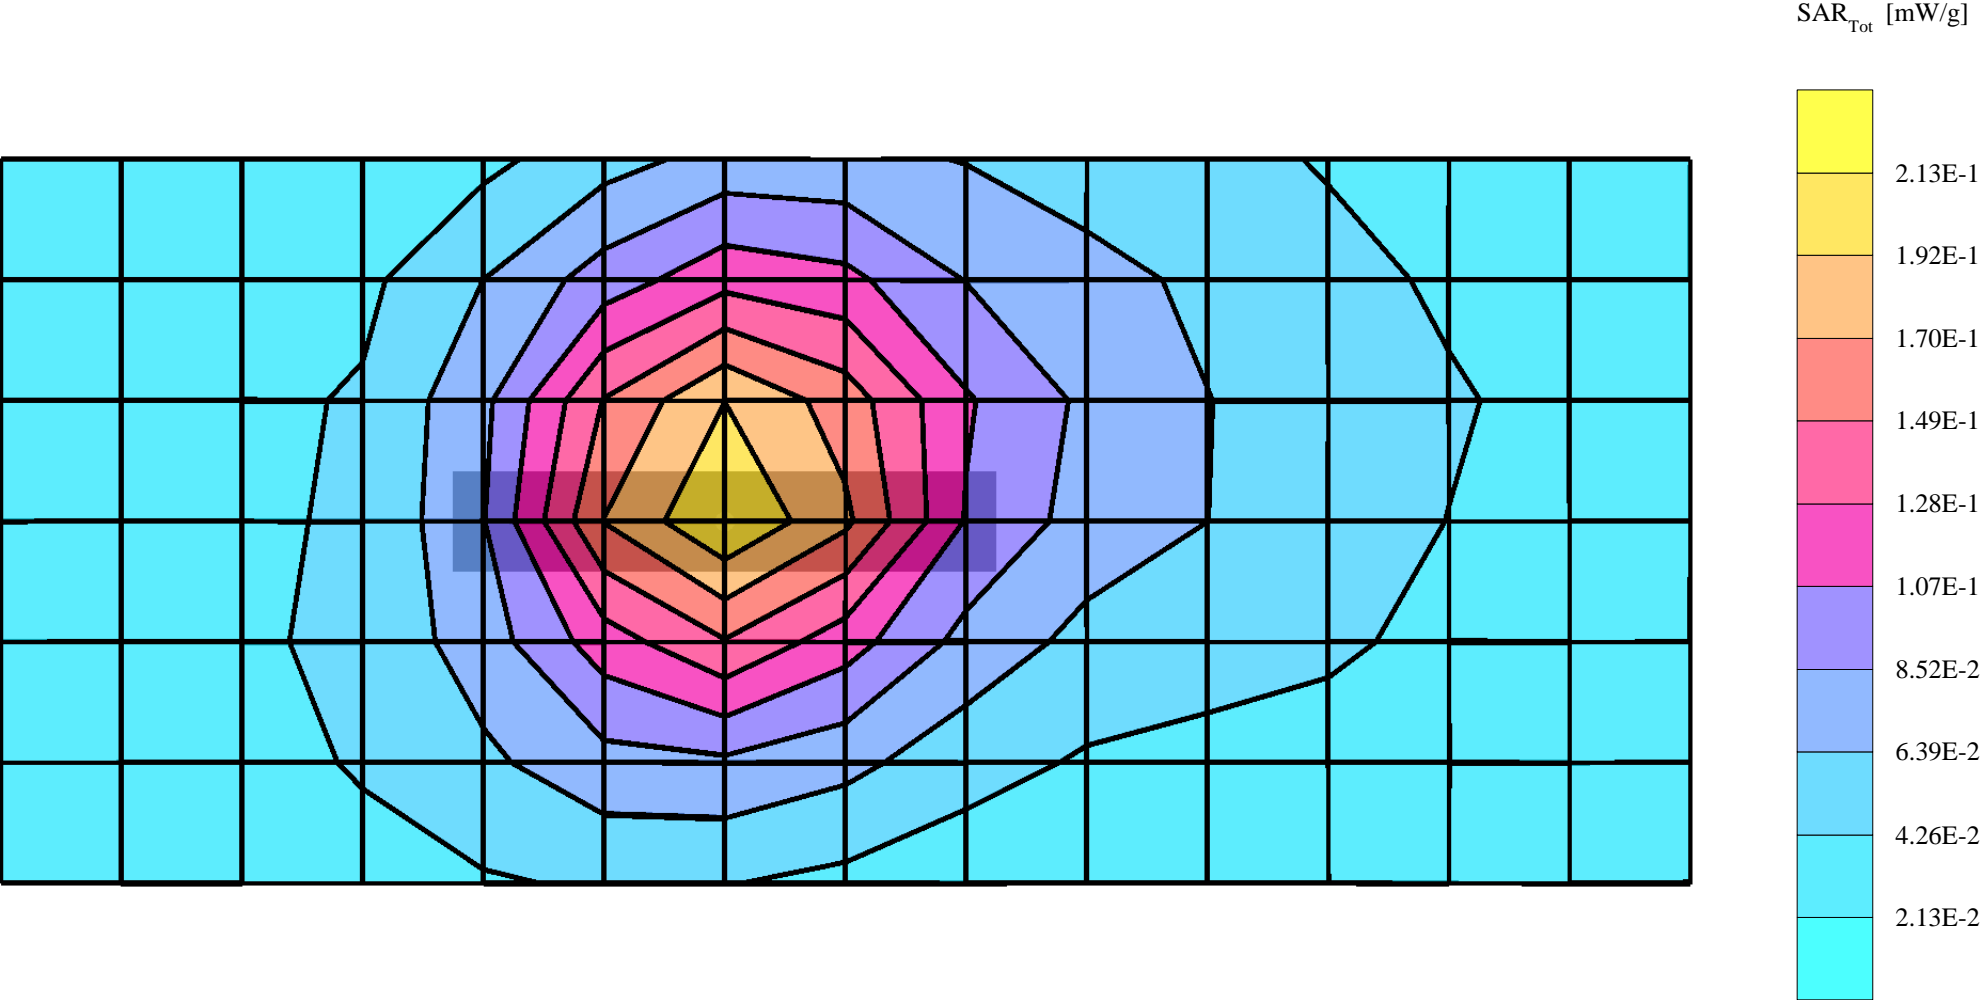

# P4JDTE-3


SAM 1 Phantom; Flat Section; Position: body worn, IBM T23; Frequency: 2437 MHz; WLAN  
Probe: ET3DV6 - SN1379; ConvF(4.00,4.00,4.00); Crest factor: 1.3; Muscle 2437 MHz:  $\sigma = 2.00$  mho/m  $\epsilon_r = 53.7$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 21.5 °C  
Cube 5x5x7: SAR (1g): 0.147 mW/g, SAR (10g): 0.0827 mW/g  
Coarse: Dx = 13.0, Dy = 13.0, Dz = 10.0  
Powerdrift: 0.06 dB

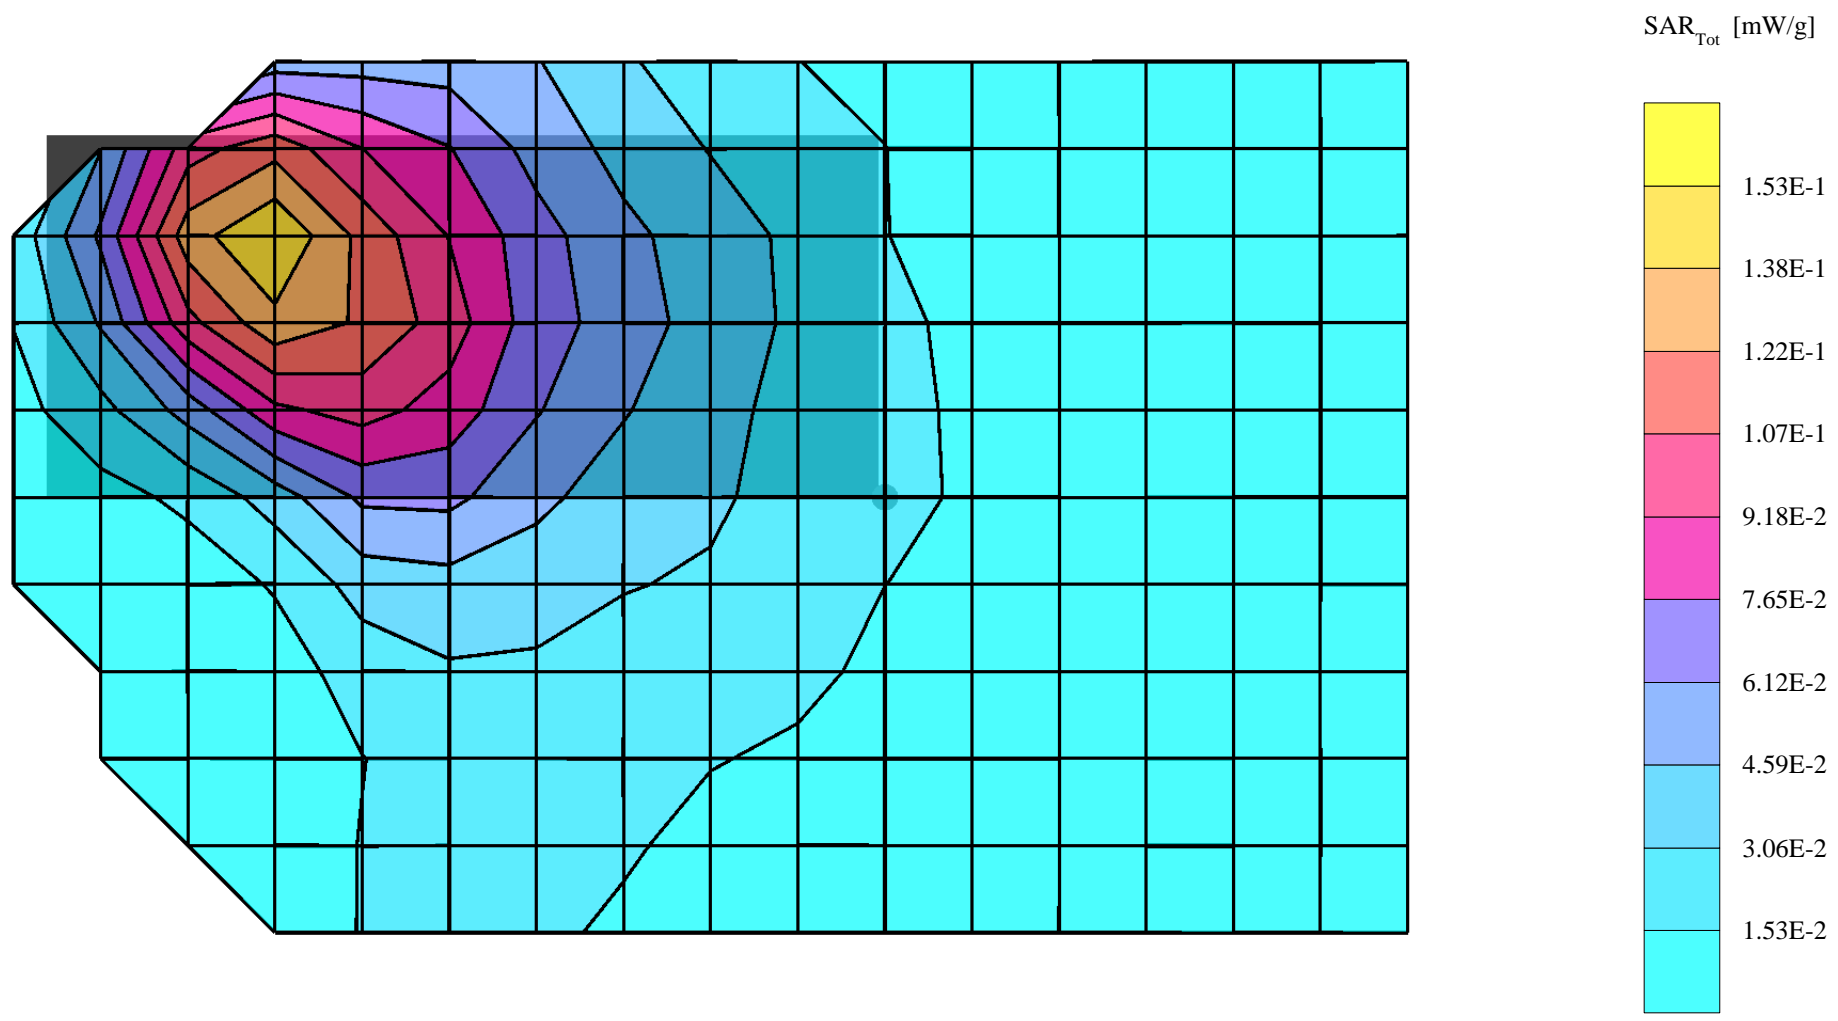




### P4JDTE-3

SAM 1 Phantom; Flat Section; Position: body worn IBM 560X; Frequency: 2437 MHz, WLAN  
Probe: ET3DV6 - SN1379; ConvF(4.00,4.00,4.00); Crest factor: 1.3; Muscle 2437 MHz:  $\sigma = 2.00$  mho/m  $\epsilon_r = 53.7$   $\rho = 1.00$  g/cm<sup>3</sup>, liquid temperature: 21.6 C  
Cube 5x5x7: SAR (1g): 0.125 mW/g, SAR (10g): 0.0568 mW/g  
Coarse: Dx = 13.0, Dy = 13.0, Dz = 10.0  
Powerdrift: -0.03 dB

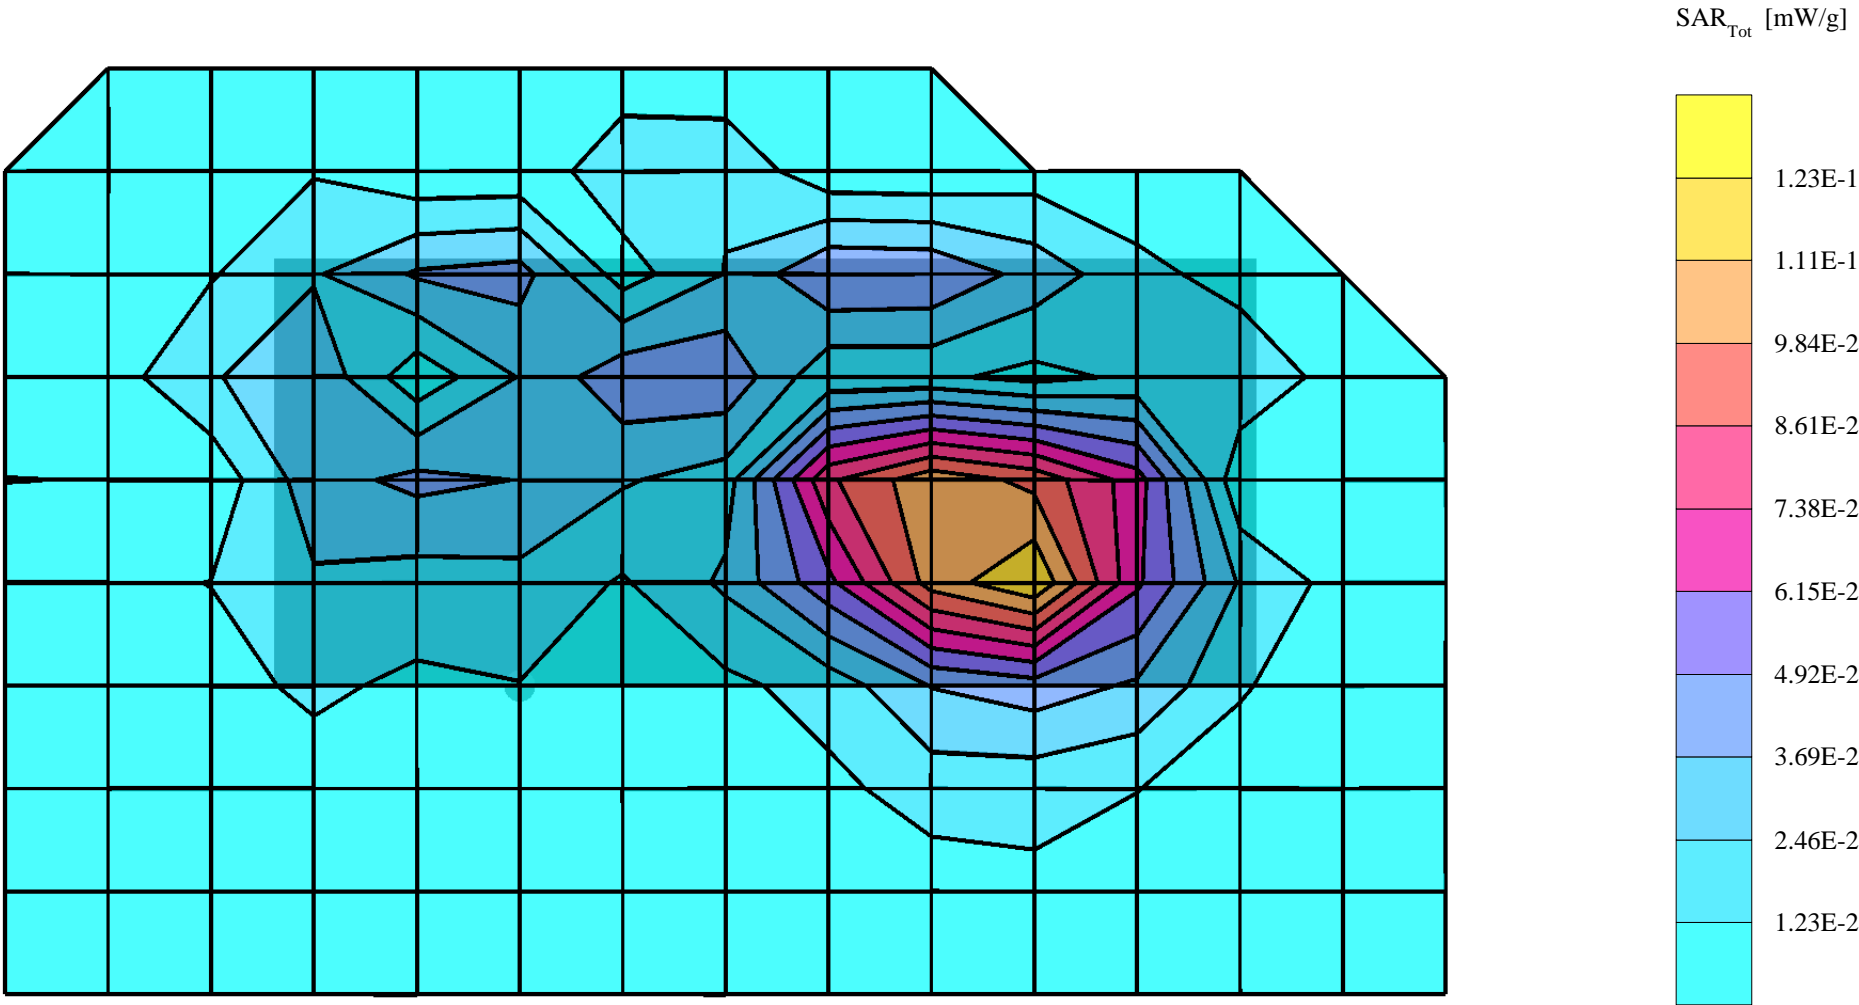


# P4JDTE-3

SAM 1 Phantom; Flat Section; Position: body worn, IBM 600X; Frequency: 2437 MHz, WLAN  
Probe: ET3DV6 - SN1379; ConvF(4.00,4.00,4.00); Crest factor: 1.3; Muscle 2437 MHz:  $\sigma = 2.00$  mho/m  $\epsilon_r = 53.7$   $\rho = 1.00$  g/cm<sup>3</sup>, liquid temperature: 21.5 C  
Cube 5x5x7: SAR (1g): 0.153 mW/g, SAR (10g): 0.0833 mW/g  
Coarse: Dx = 13.0, Dy = 13.0, Dz = 10.0  
Powerdrift: -0.25 dB

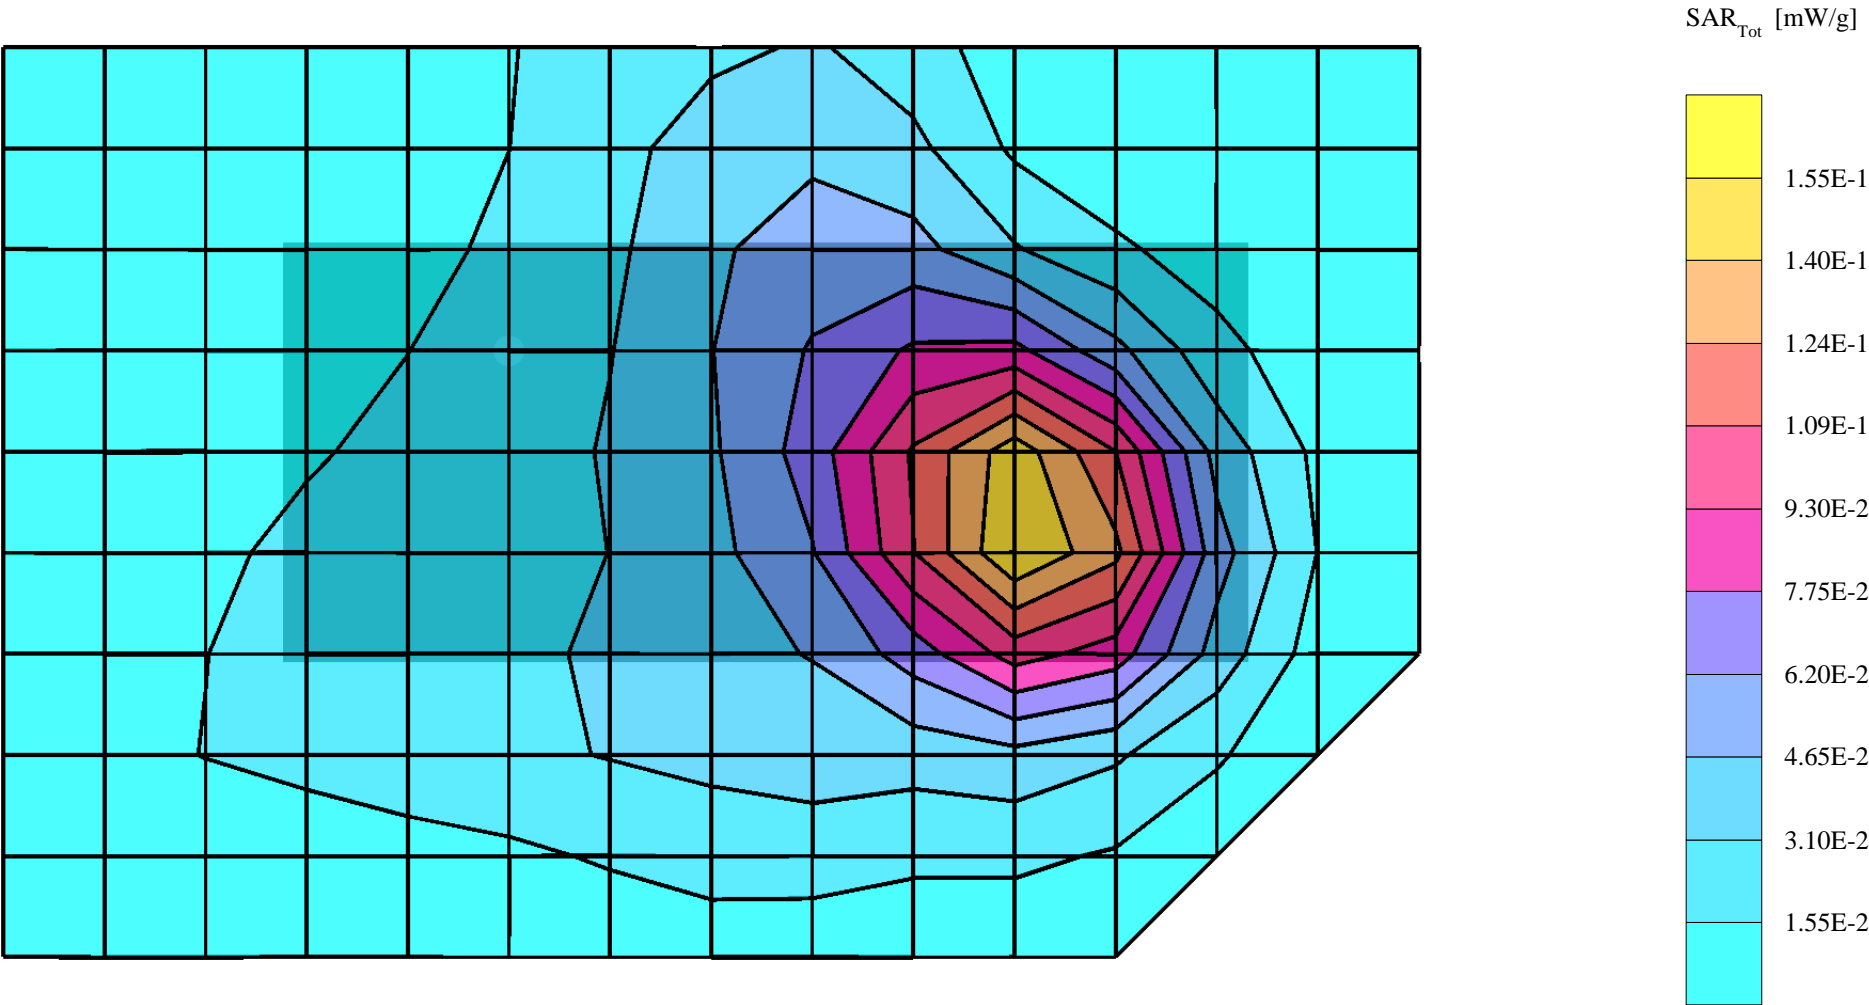


# P4JDTE-3

SAM 1 Phantom; Flat Section; Position: body worn, IBM T23; Frequency: 2437 MHz; WLAN  
Probe: ET3DV6 - SN1379; ConvF(4.00,4.00,4.00); Crest factor: 1.3; Muscle 2437 MHz:  $\sigma = 2.00$  mho/m  $\epsilon_r = 53.7$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 22.1°C  
Cube 5x5x7: SAR (1g): 0.0360 mW/g, SAR (10g): 0.0192 mW/g  
Coarse: Dx = 13.0, Dy = 13.0, Dz = 10.0  
Powerdrift: -0.15 dB

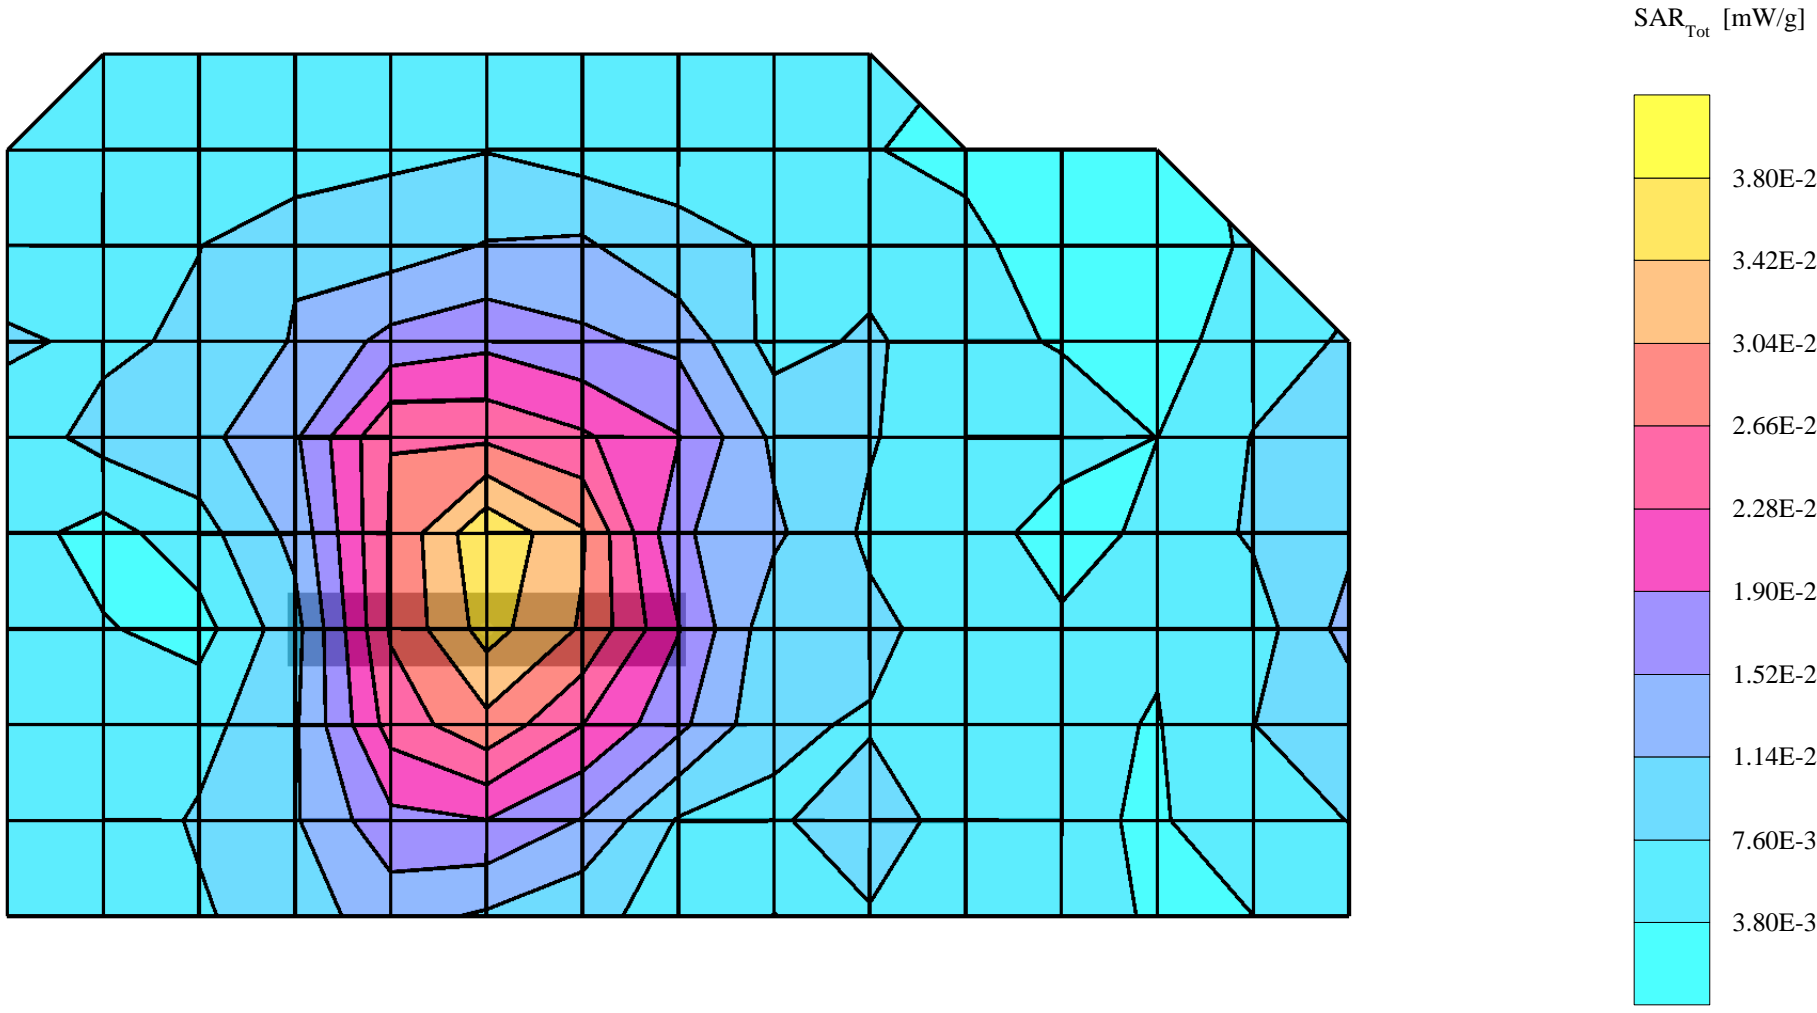


# P4JDTE-3

SAM 1 Phantom; Flat Section; Position: body worn, IBM 560X; Frequency: 2437 MHz; WLAN  
Probe: ET3DV6 - SN1379; ConvF(4.00,4.00,4.00); Crest factor: 1.3; Muscle 2437 MHz:  $\sigma = 2.00$  mho/m  $\epsilon_r = 53.7$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 22.3 °C  
Cube 5x5x7: SAR (1g): 0.0335 mW/g, SAR (10g): 0.0134 mW/g  
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0  
Powerdrift: -0.24 dB

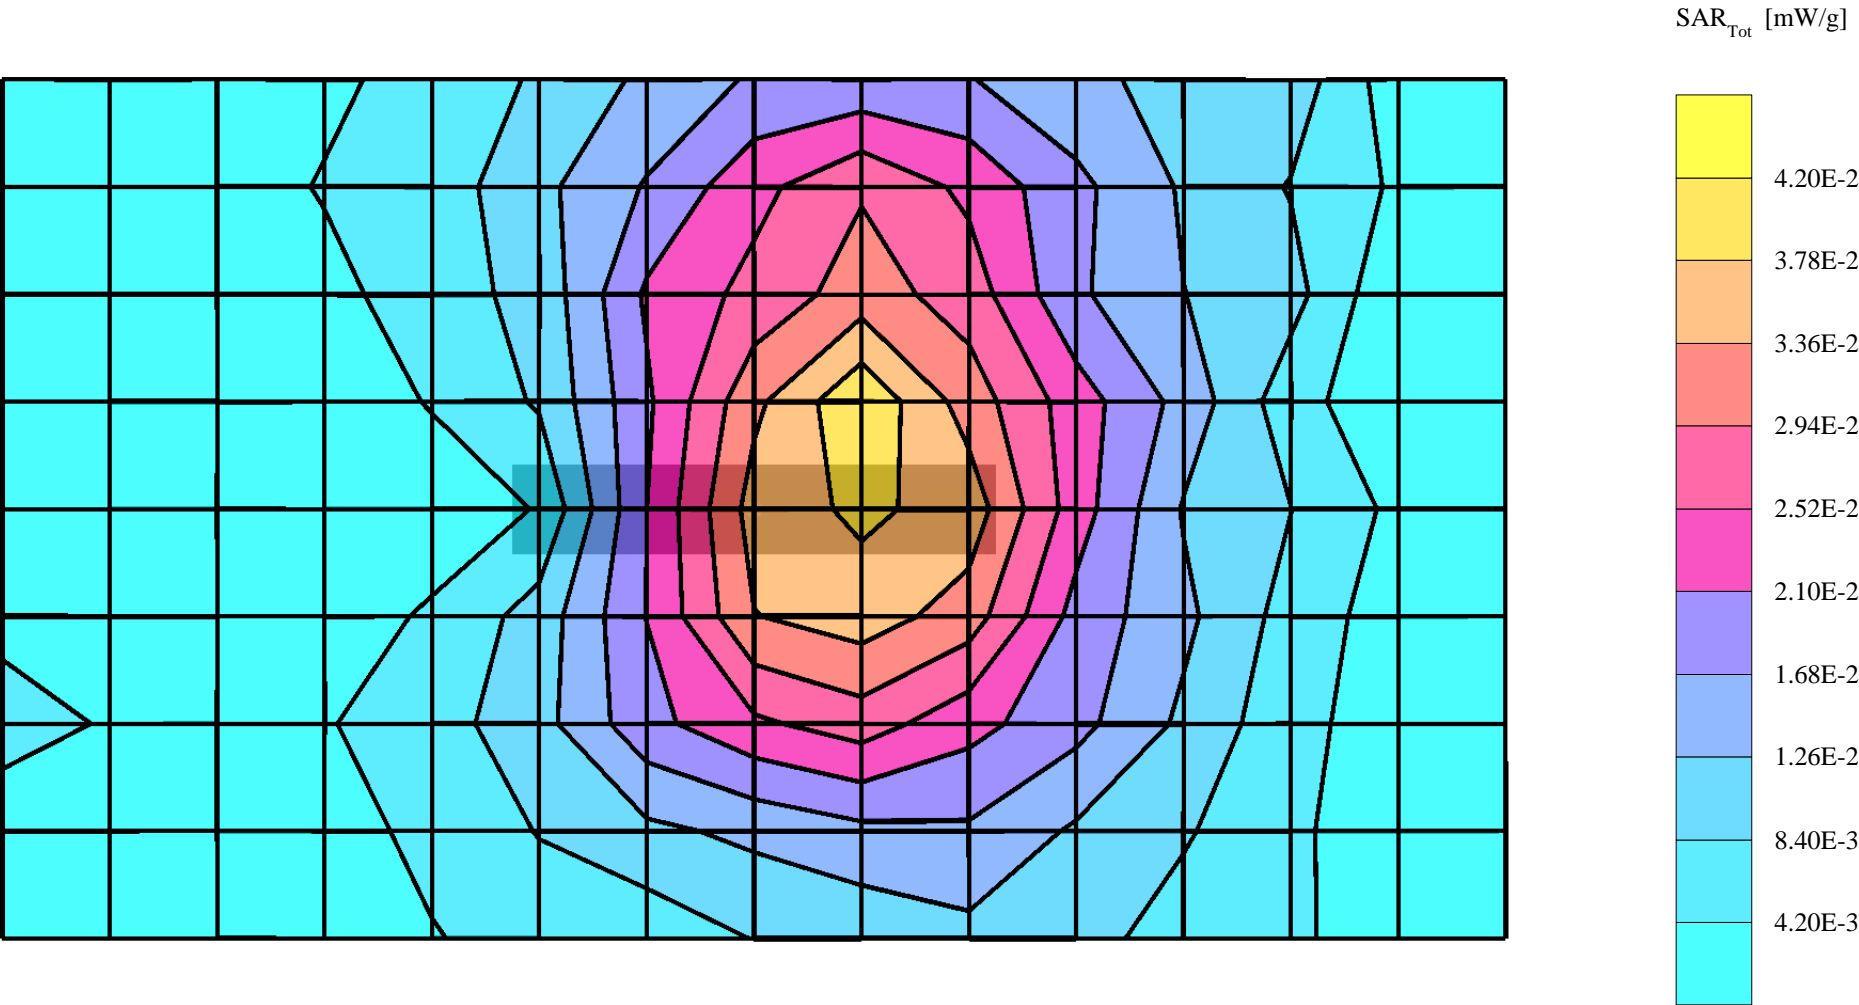

# P4JDTE-3

SAM 1 Phantom; Flat Section; Position: body worn, IBM 600X; Frequency: 2437 MHz; WLAN  
Probe: ET3DV6 - SN1379; ConvF(4.00,4.00,4.00); Crest factor: 1.3; Muscle 2437 MHz:  $\sigma = 2.00$  mho/m  $\epsilon_r = 53.7$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 22.3 °C  
Cube 5x5x7: SAR (1g): 0.0654 mW/g, SAR (10g): 0.0362 mW/g  
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0  
Powerdrift: 0.26 dB

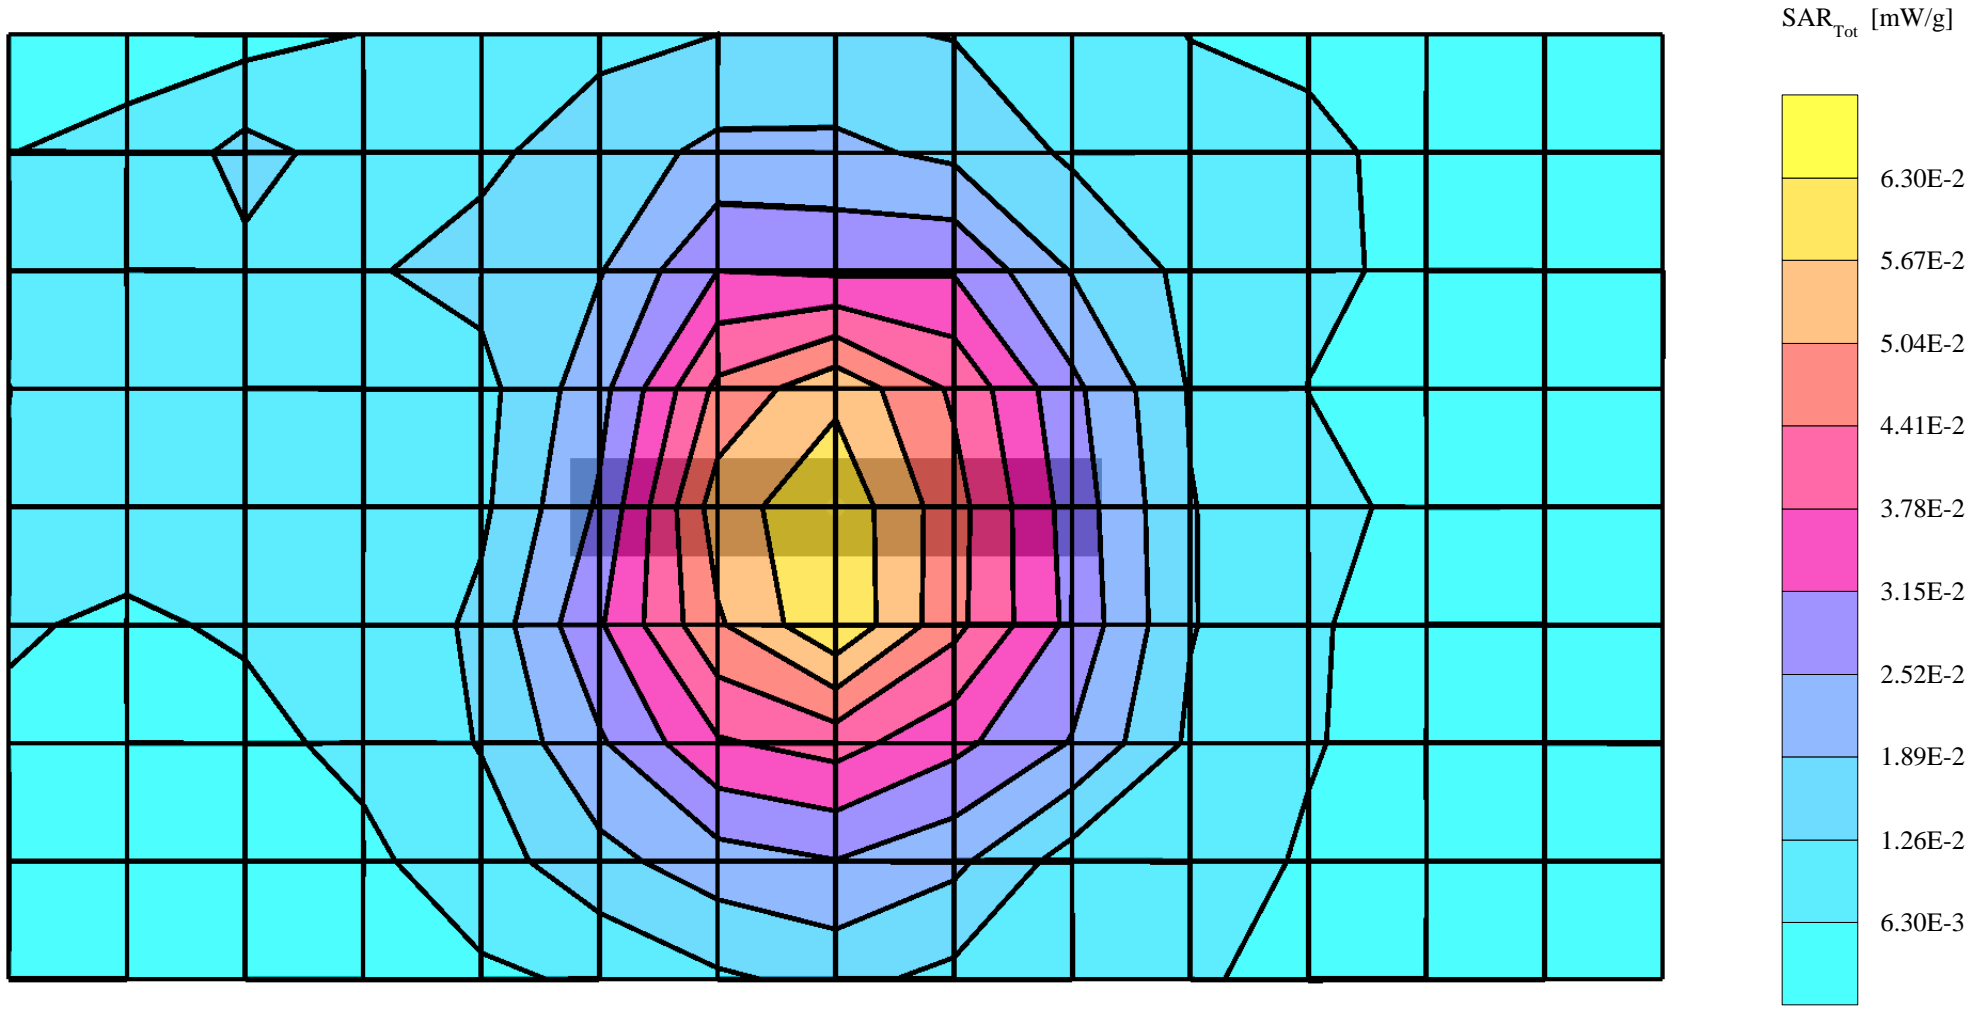


# P4JDTE-3

SAM 3 Phantom; Flat Section; Position: body worn, Compaq; Frequency: 824 MHz, GPRS

Probe: ET3DV6 - SN1379; ConvF(6.20,6.20,6.20); Crest factor: 4.0; Muscle 836 MHz:  $\sigma = 0.94$  mho/m  $\epsilon_r = 56.8$   $\rho = 1.00$  g/cm<sup>3</sup>, liquid temperature: 21.6 C

Cube 5x5x7: SAR (1g): 0.590 mW/g, SAR (10g): 0.436 mW/g

Cube 5x5x7: Dx = 8.0, Dy = 8.0, Dz = 5.0

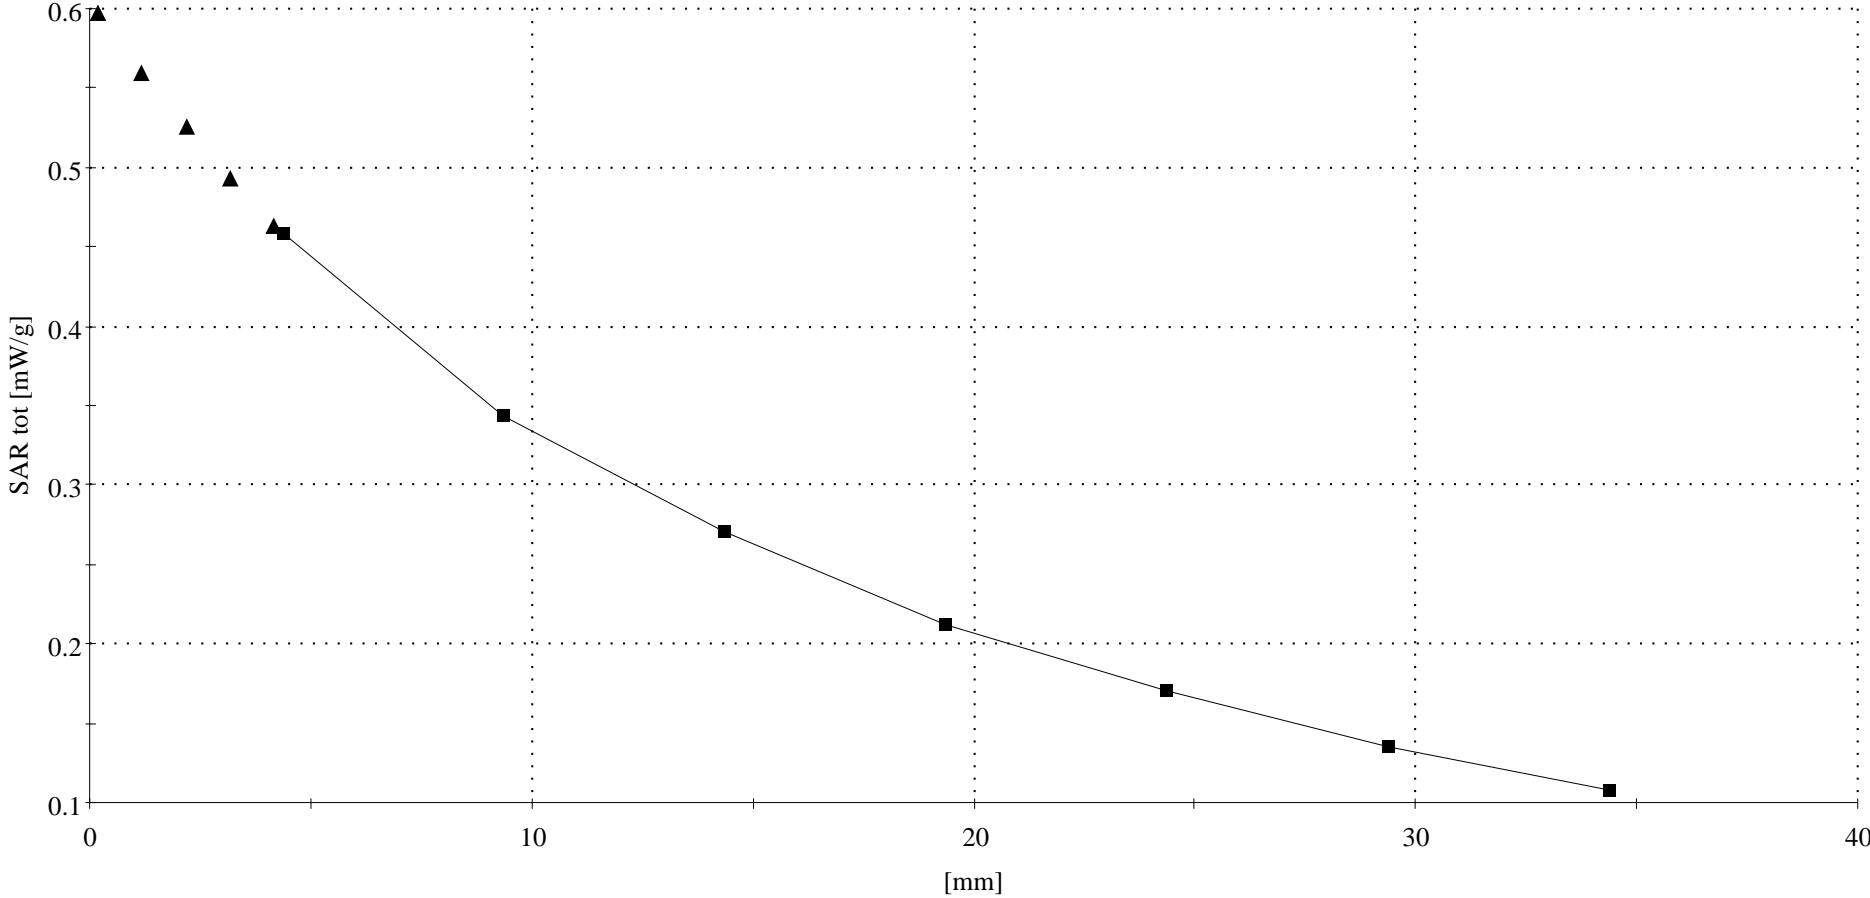


# P4JDTE-3

SAM 1 Phantom; Flat Section; Position: body worn, IBM560X; Frequency: 1850 MHz; GPRS

Probe: ET3DV6 - SN1379; ConvF(4.80,4.80,4.80); Crest factor: 4.0; Muscle 1880 MHz:  $\sigma = 1.51$  mho/m  $\epsilon_r = 51.2$   $\rho = 1.00$  g/cm<sup>3</sup>; Liquid temperature: 21.1 °C


Cube 5x5x7: SAR (1g): 0.902 mW/g, SAR (10g): 0.542 mW/g

Cube 5x5x7: Dx = 8.0, Dy = 8.0, Dz = 5.0

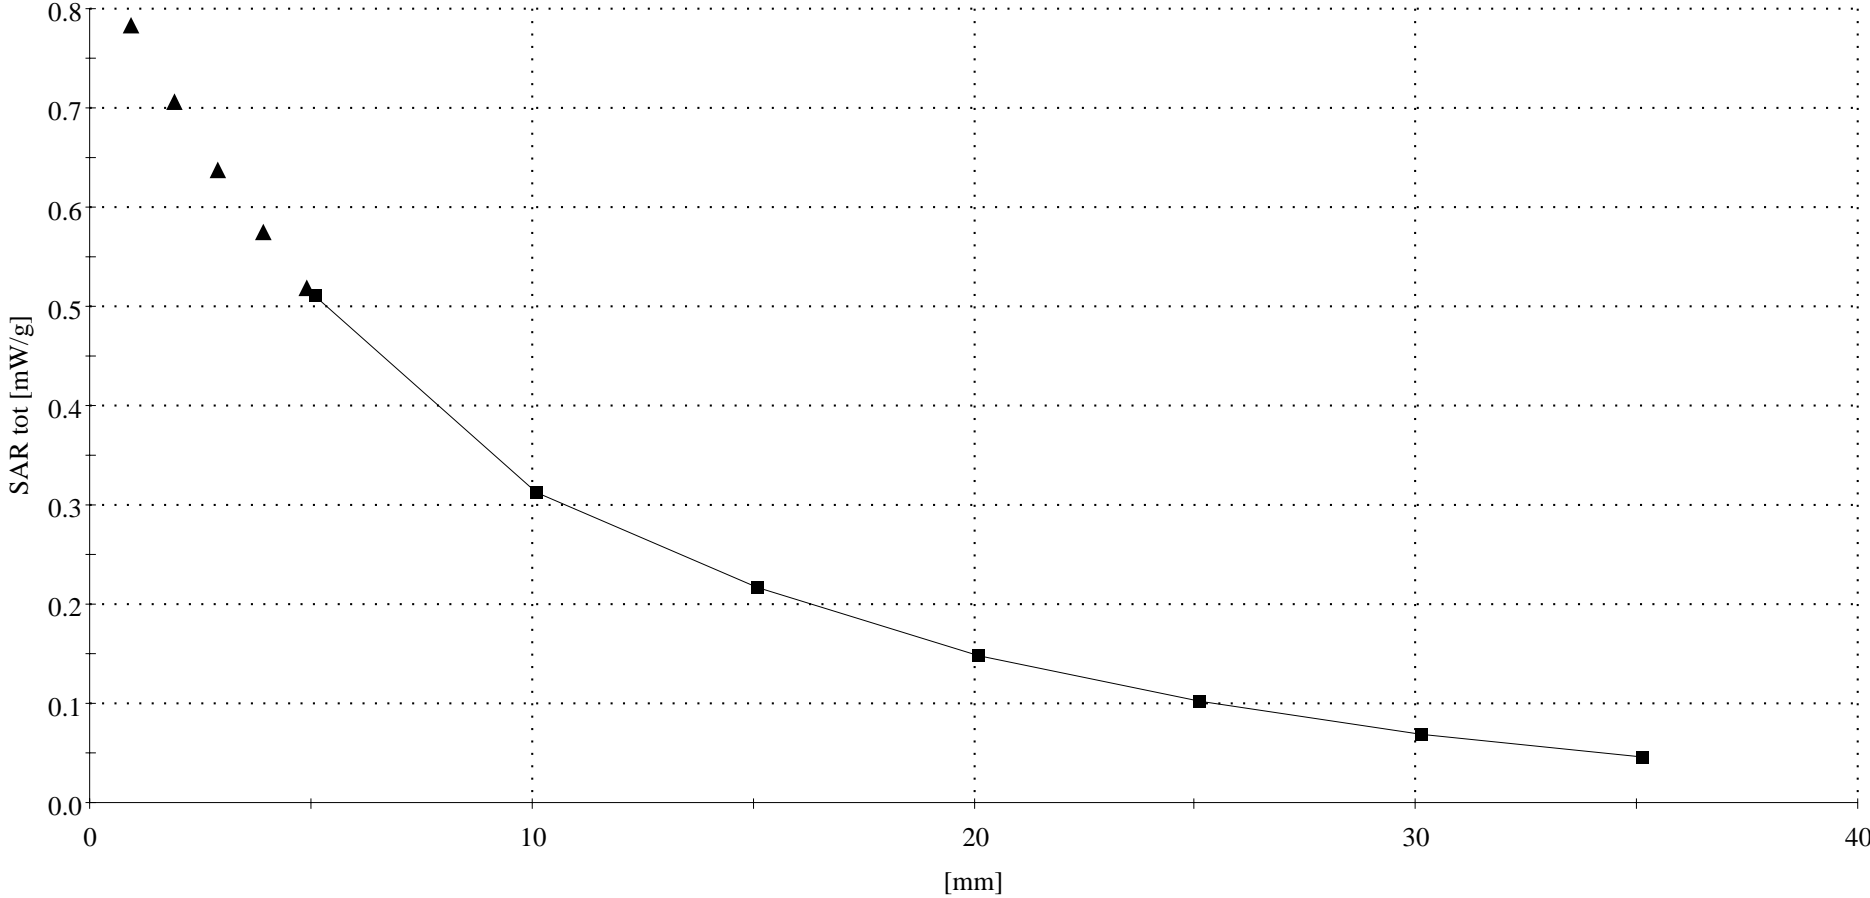

# P4JDTE-3

SAM 1 Phantom; Flat Section; Position: body worn, IBM 600X; Frequency: 2437 MHz, WLAN  
Probe: ET3DV6 - SN1379; ConvF(4.00,4.00,4.00); Crest factor: 1.3; Muscle 2437 MHz:  $\sigma = 2.00$  mho/m  $\epsilon_r = 53.7$   $\rho = 1.00$  g/cm<sup>3</sup>, liquid temperature: 21.5 C  
Cube 5x5x7: SAR (1g): 0.153 mW/g, SAR (10g): 0.0833 mW/g  
Cube 5x5x7: Dx = 8.0, Dy = 8.0, Dz = 5.0

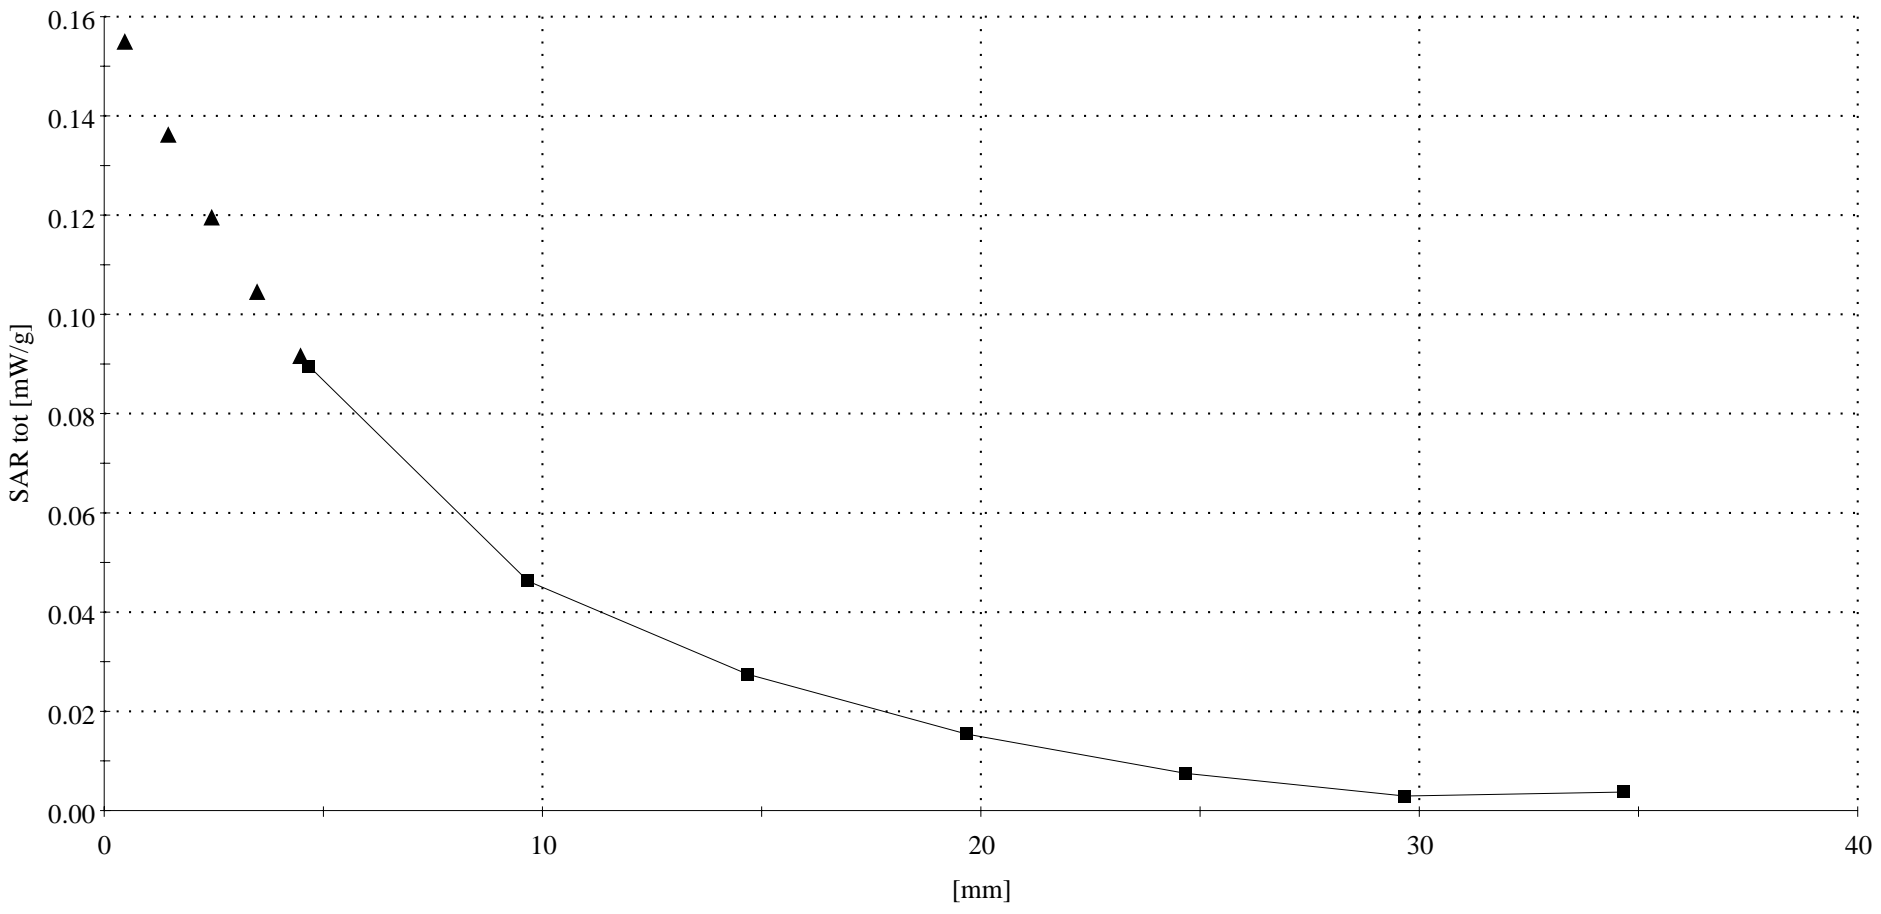



APPENDIX C.

Calibration Certificate(s)

530065

# Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

## Calibration Certificate

### Dosimetric E-Field Probe

Type:

**ET3DV6**

Serial Number:

**1379**

Place of Calibration:

**Zurich**

Date of Calibration:

**February 22, 2002**


Calibration Interval:

**12 months**

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:

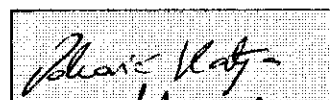

Approved by:



# Probe ET3DV6

SN:1379

Manufactured:	September 21, 1999
Last calibration:	February 20, 2001
Recalibrated:	February 22, 2002

Calibrated for System DASY3

**DASY3 - Parameters of Probe: ET3DV6 SN:1379**

## Sensitivity in Free Space

NormX	<b>1.74</b> $\mu\text{V}/(\text{V}/\text{m})^2$
NormY	<b>1.72</b> $\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	<b>1.75</b> $\mu\text{V}/(\text{V}/\text{m})^2$

## Diode Compression

DCP X	<b>95</b>	mV
DCP Y	<b>95</b>	mV
DCP Z	<b>95</b>	mV

## Sensitivity in Tissue Simulating Liquid

**Head**                      **900 MHz**                       $\epsilon_r = 41.5 \pm 5\%$                        $s = 0.97 \pm 5\%$  mho/m

ConvF X	<b>6.5</b> $\pm 8.9\%$ (k=2)	Boundary effect:
ConvF Y	<b>6.5</b> $\pm 8.9\%$ (k=2)	Alpha <b>0.45</b>
ConvF Z	<b>6.5</b> $\pm 8.9\%$ (k=2)	Depth <b>2.34</b>

**Head**                      **1800 MHz**                       $\epsilon_r = 40.0 \pm 5\%$                        $s = 1.40 \pm 5\%$  mho/m

ConvF X	<b>5.4</b> $\pm 8.9\%$ (k=2)	Boundary effect:
ConvF Y	<b>5.4</b> $\pm 8.9\%$ (k=2)	Alpha <b>0.62</b>
ConvF Z	<b>5.4</b> $\pm 8.9\%$ (k=2)	Depth <b>2.15</b>

## Boundary Effect

**Head**                      **900 MHz**                      **Typical SAR gradient: 5 % per mm**

Probe Tip to Boundary		<b>1 mm</b>	<b>2 mm</b>
SAR <sub>be</sub> [%]	Without Correction Algorithm	10.6	5.8
SAR <sub>be</sub> [%]	With Correction Algorithm	0.3	0.6





**Head**                      **1800 MHz**                      **Typical SAR gradient: 10 % per mm**



Probe Tip to Boundary		<b>1 mm</b>	<b>2 mm</b>
SAR <sub>be</sub> [%]	Without Correction Algorithm	12.3	7.6
SAR <sub>be</sub> [%]	With Correction Algorithm	0.1	0.2

## Sensor Offset


Probe Tip to Sensor Center	<b>2.7</b>	mm
Optical Surface Detection	<b>1.5 <math>\pm</math> 0.2</b>	mm

### Receiving Pattern (f), q = 0°

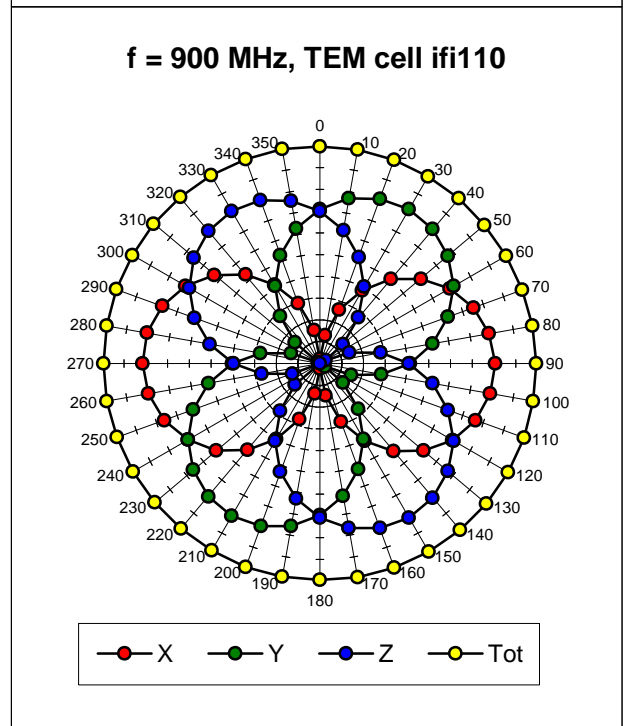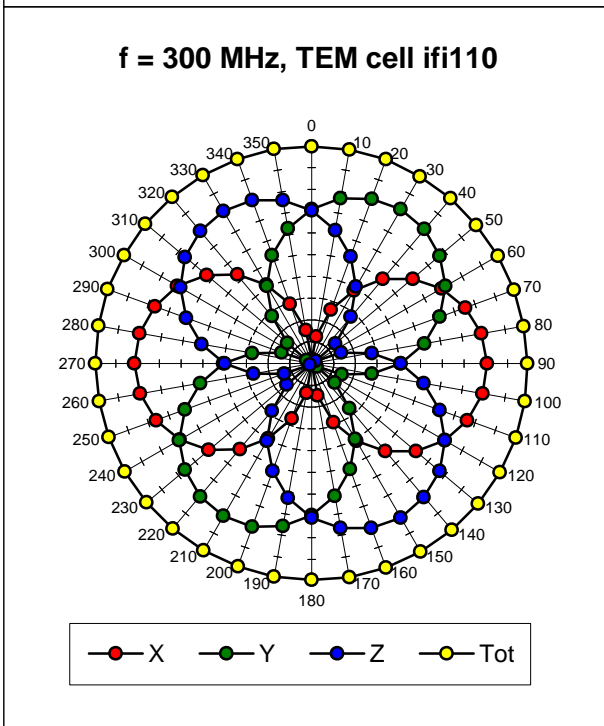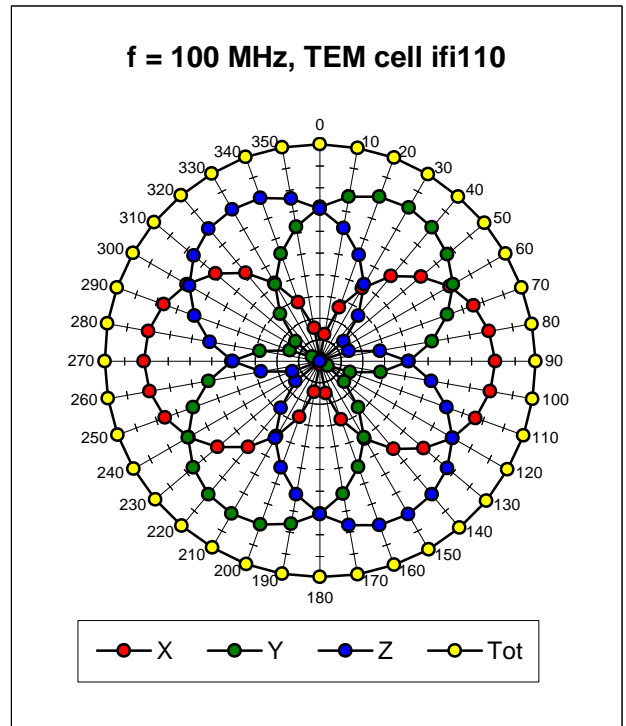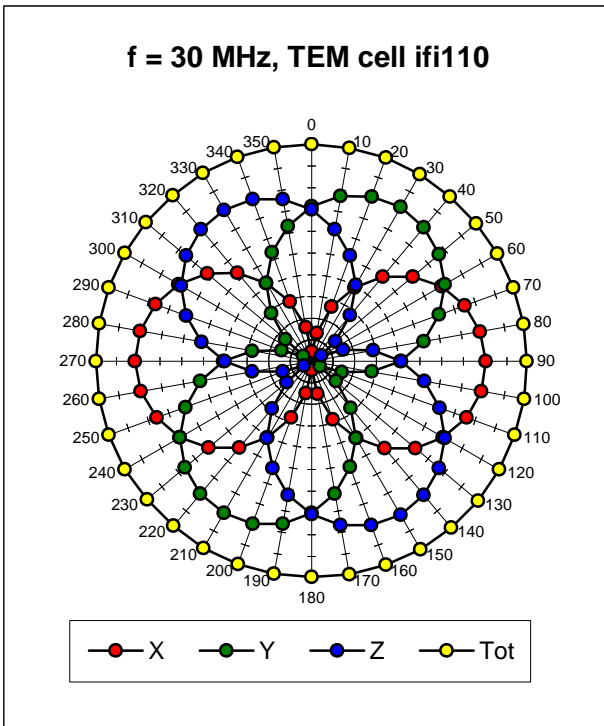

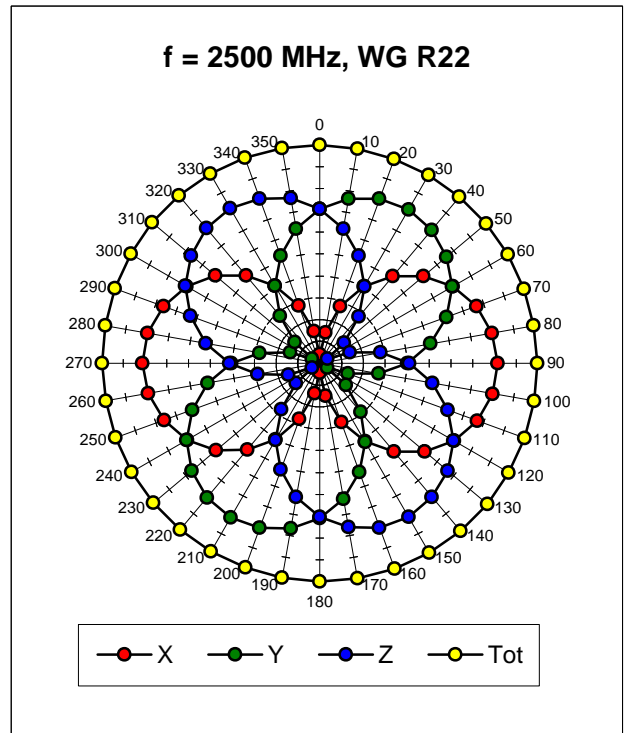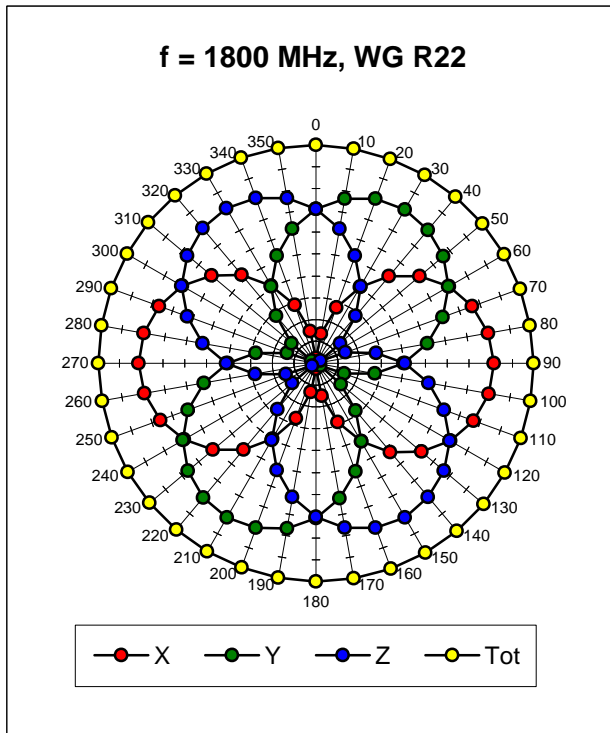


### Isotropy Error (f), $q = 0^\circ$


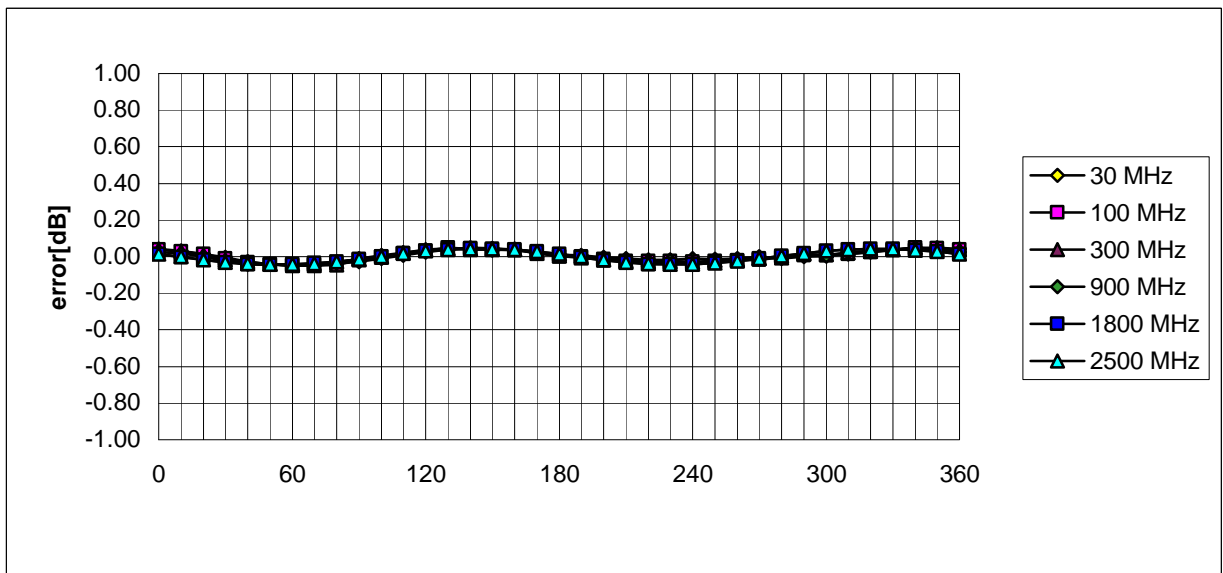


# Frequency Response of E-Field

( TEM-Cell:ifi110, Waveguide R22)

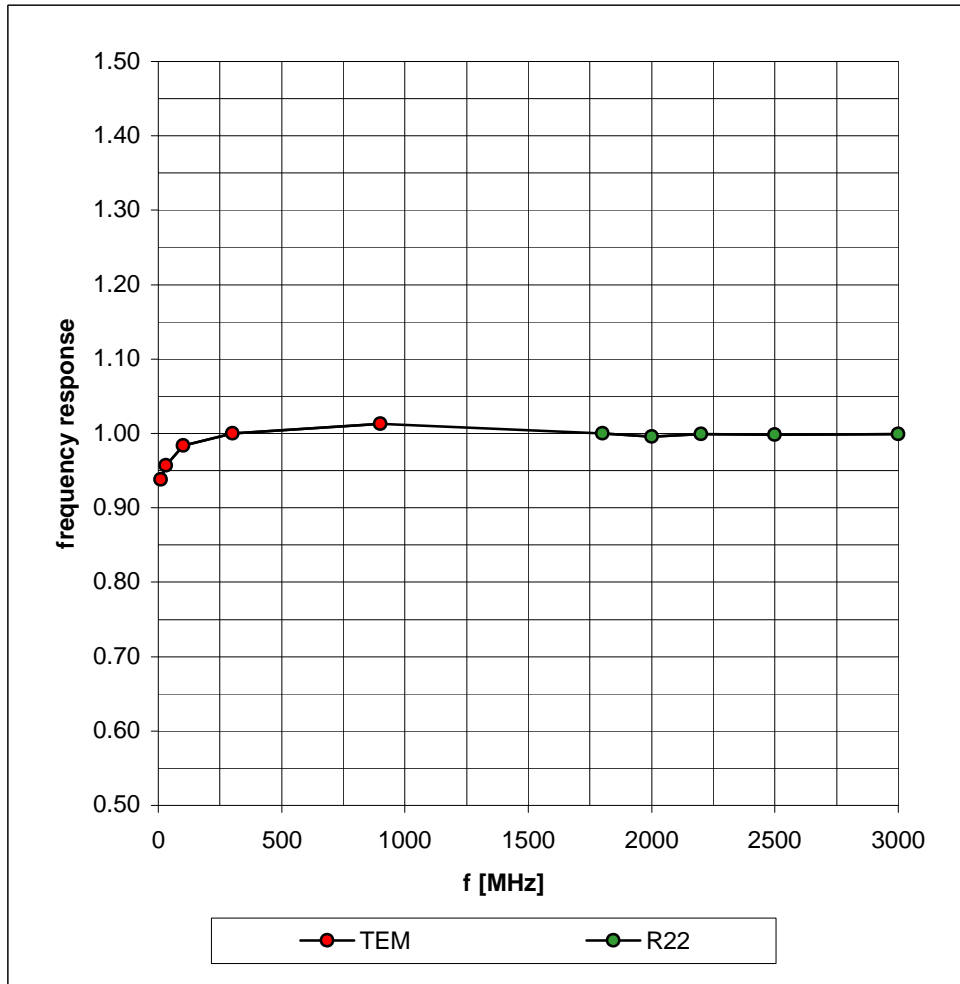


## Dynamic Range f(SAR<sub>brain</sub>) ( Waveguide R22 )

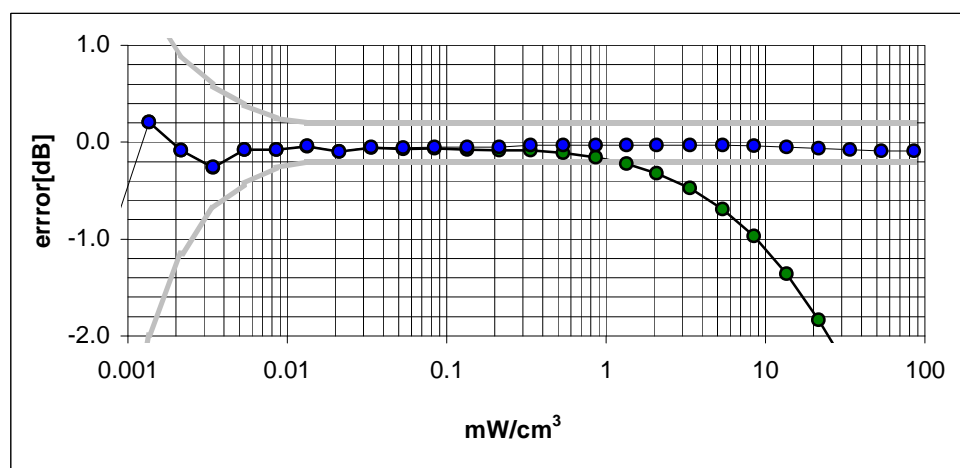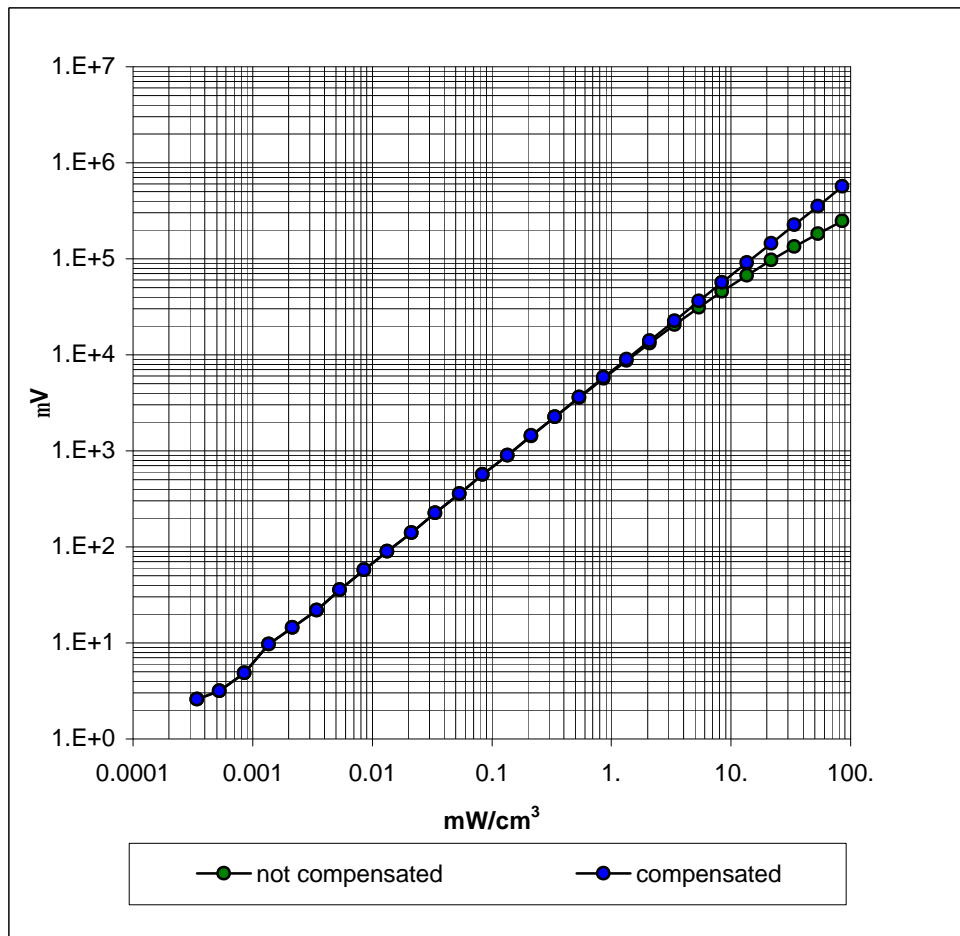



# Conversion Factor Assessment

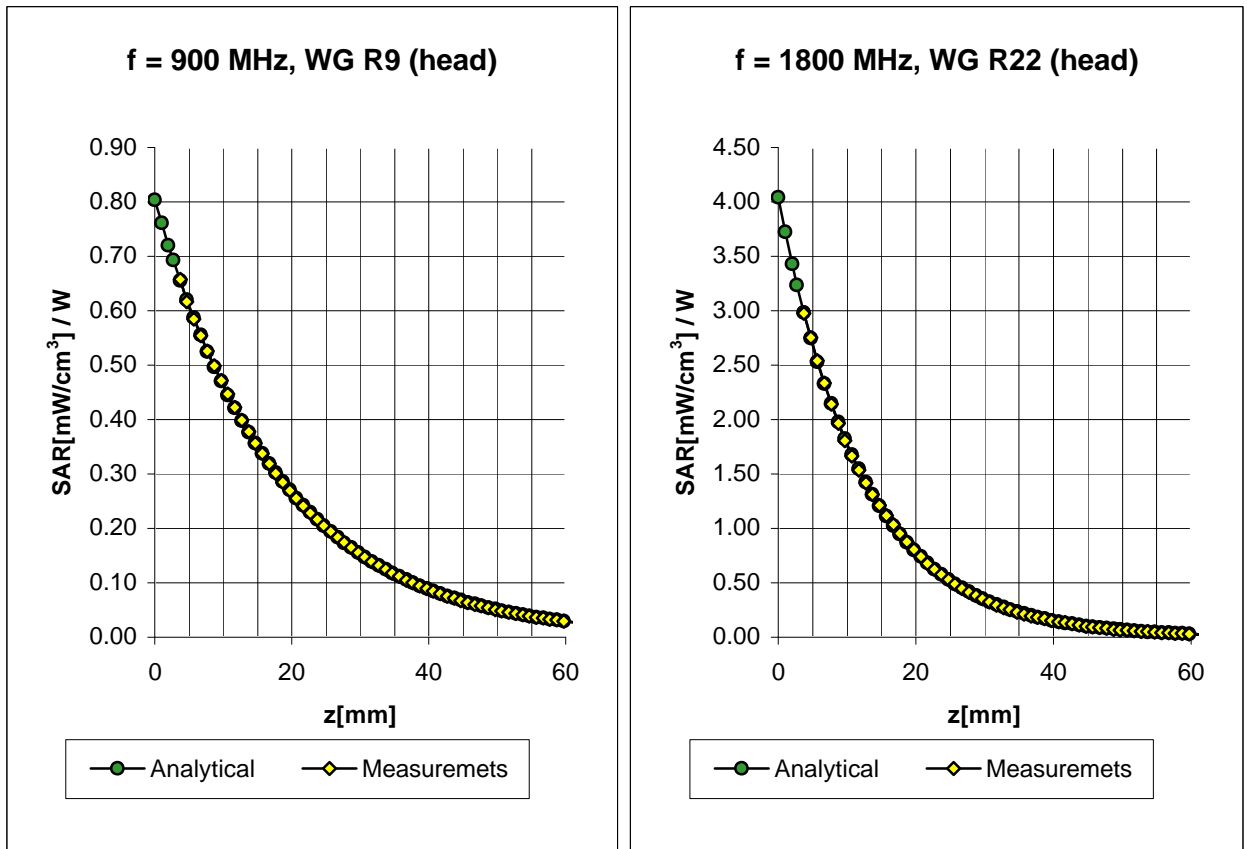


<b>Head</b>	<b>900 MHz</b>	$\epsilon_r = 41.5 \pm 5\%$	$s = 0.97 \pm 5\% \text{ mho/m}$
	ConvF X	<b>6.5</b> $\pm 8.9\%$ (k=2)	Boundary effect:
	ConvF Y	<b>6.5</b> $\pm 8.9\%$ (k=2)	Alpha <b>0.45</b>
	ConvF Z	<b>6.5</b> $\pm 8.9\%$ (k=2)	Depth <b>2.34</b>

<b>Head</b>	<b>1800 MHz</b>	$\epsilon_r = 40.0 \pm 5\%$	$s = 1.40 \pm 5\% \text{ mho/m}$
	ConvF X	<b>5.4</b> $\pm 8.9\%$ (k=2)	Boundary effect:
	ConvF Y	<b>5.4</b> $\pm 8.9\%$ (k=2)	Alpha <b>0.62</b>
	ConvF Z	<b>5.4</b> $\pm 8.9\%$ (k=2)	Depth <b>2.15</b>

ET3DV6 SN:1379

February 22, 2002

# Conversion Factor Assessment

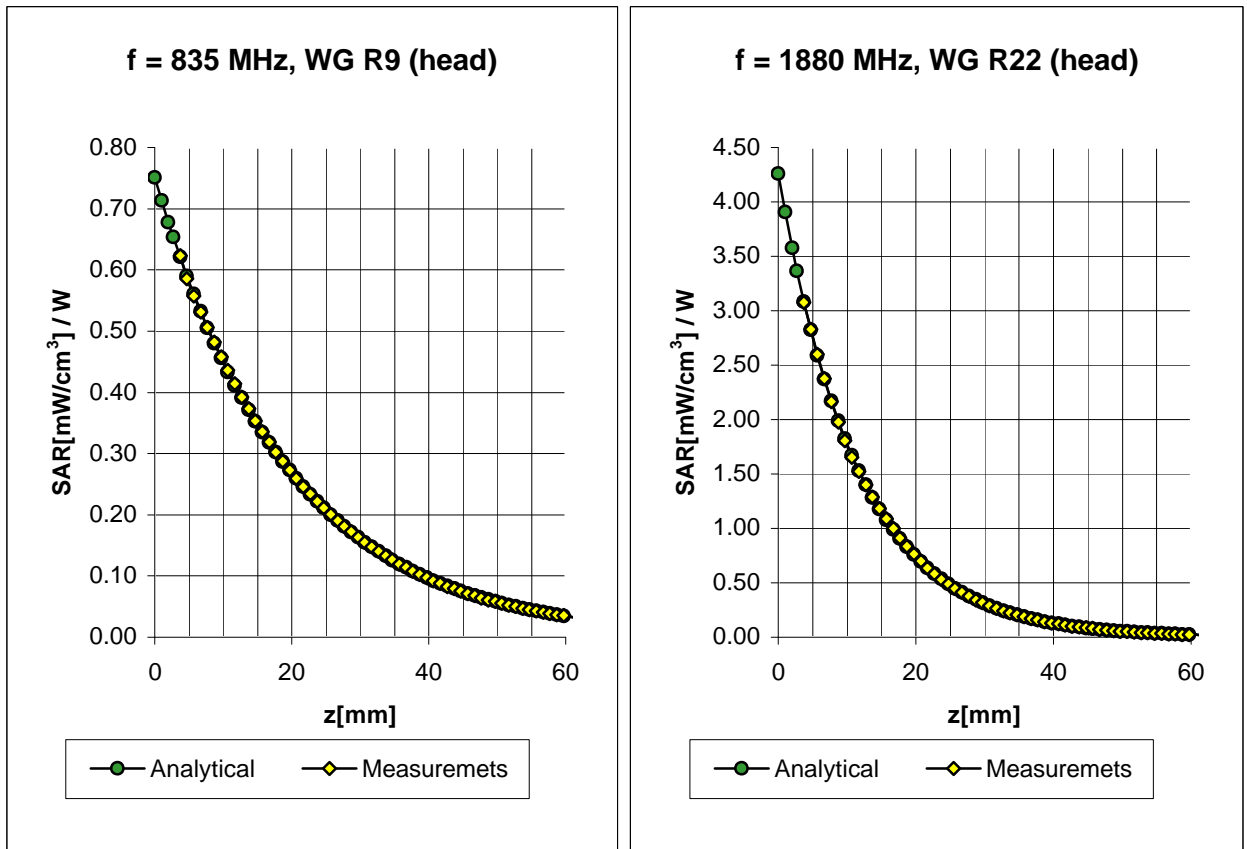


<b>Head</b>	<b>835 MHz</b>	$\epsilon_r = 41.5 \pm 5\%$	$s = 0.90 \pm 5\% \text{ mho/m}$
	ConvF X	<b>6.6</b> $\pm 8.9\%$ (k=2)	Boundary effect:
	ConvF Y	<b>6.6</b> $\pm 8.9\%$ (k=2)	Alpha <b>0.42</b>
	ConvF Z	<b>6.6</b> $\pm 8.9\%$ (k=2)	Depth <b>2.44</b>

<b>Head</b>	<b>1880 MHz</b>	$\epsilon_r = 40.0 \pm 5\%$	$s = 1.40 \pm 5\% \text{ mho/m}$
	ConvF X	<b>5.3</b> $\pm 8.9\%$ (k=2)	Boundary effect:
	ConvF Y	<b>5.3</b> $\pm 8.9\%$ (k=2)	Alpha <b>0.64</b>
	ConvF Z	<b>5.3</b> $\pm 8.9\%$ (k=2)	Depth <b>2.15</b>

ET3DV6 SN:1379

February 22, 2002

# Conversion Factor Assessment

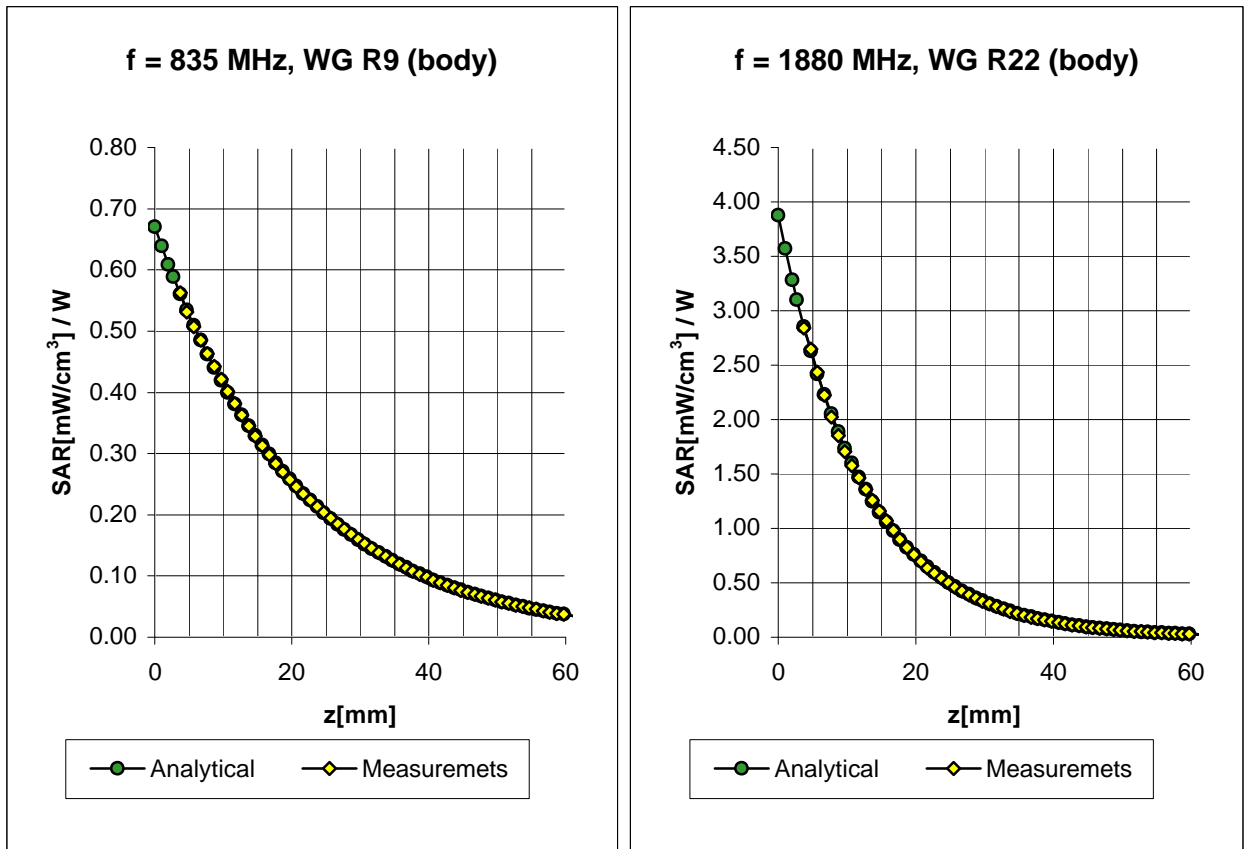

<b>Body</b>	<b>835 MHz</b>	$\epsilon_r = 55.2 \pm 5\%$	$s = 0.97 \pm 5\% \text{ mho/m}$
	ConvF X	<b>6.2</b> $\pm 8.9\%$ (k=2)	Boundary effect:
	ConvF Y	<b>6.2</b> $\pm 8.9\%$ (k=2)	Alpha <b>0.42</b>
	ConvF Z	<b>6.2</b> $\pm 8.9\%$ (k=2)	Depth <b>2.56</b>


<b>Body</b>	<b>1880 MHz</b>	$\epsilon_r = 53.3 \pm 5\%$	$s = 1.52 \pm 5\% \text{ mho/m}$
	ConvF X	<b>4.8</b> $\pm 8.9\%$ (k=2)	Boundary effect:
	ConvF Y	<b>4.8</b> $\pm 8.9\%$ (k=2)	Alpha <b>0.92</b>
	ConvF Z	<b>4.8</b> $\pm 8.9\%$ (k=2)	Depth <b>1.86</b>

ET3DV6 SN:1379

February 22, 2002

# Deviation from Isotropy in HSL

Error (q,f), f = 900 MHz

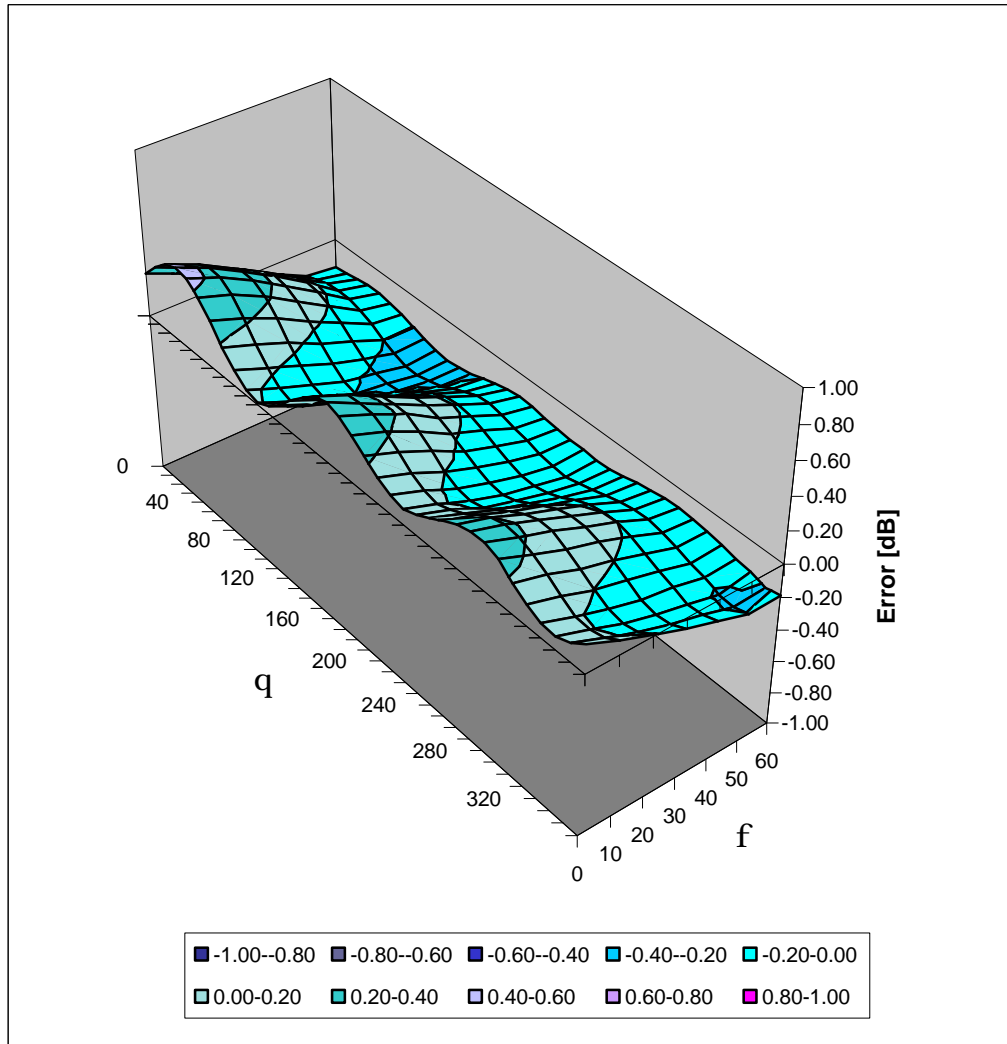

Schmid & Partner  
Engineering AG

---

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

---

DASY

Dipole Validation Kit

Type: D835V2

Serial: 448

Manufactured: October 24, 2001  
Calibrated: November 30, 2001

## 1. Measurement Conditions

The measurements were performed in the flat section of the new generic twin phantom filled with head simulating solution of the following electrical parameters at 835 MHz:

Relative Dielectricity	<b>42.3</b>	$\pm 5\%$
Conductivity	<b>0.91 mho/m</b>	$\pm 5\%$

The DASY3 System (Software version 3.1c) with a dosimetric E-field probe ET3DV6 (SN:1507, Conversion factor 6.48 at 900 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 20mm was aligned with the dipole. The 5x5x7 fine cube was chosen for cube integration. Probe isotropy errors were cancelled by measuring the SAR with normal and 90° turned probe orientations and averaging.

The dipole input power (forward power) was 250mW  $\pm 3\%$ . The results are normalized to 1W input power.

## 2. SAR Measurement

Standard SAR-measurements were performed with the phantom according to the measurement conditions described in section 1. The results have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values are:

averaged over 1 cm <sup>3</sup> (1 g) of tissue:	<b>10.36 mW/g</b>
averaged over 10 cm <sup>3</sup> (10 g) of tissue:	<b>6.64 mW/g</b>

Note: If the liquid parameters for validation are slightly different from the ones used for initial calibration, the SAR-values will be different as well.

### 3. Dipole Impedance and Return Loss

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint. The transformation parameters from the SMA-connector to the dipole feedpoint are:

Electrical delay:	<b>1.404 ns</b>	(one direction)
Transmission factor:	<b>0.995</b>	(voltage transmission, one direction)

The dipole was positioned at the flat phantom sections according to section 1 and the distance holder was in place during impedance measurements.

Feedpoint impedance at 835 MHz:	$\text{Re}\{Z\} = 49.1 \Omega$
---------------------------------	--------------------------------

	$\text{Im}\{Z\} = -5.3 \Omega$
--	--------------------------------

Return Loss at 835 MHz	<b>-25.3 dB</b>
------------------------	-----------------

### 4. Measurement Conditions

The measurements were performed in the flat section of the new generic twin phantom filled with muscle simulating solution of the following electrical parameters at 835 MHz:

Relative Dielectricity	<b>56.0</b>	$\pm 5\%$
Conductivity	<b>0.98 mho/m</b>	$\pm 5\%$

The DASY3 System (Software version 3.1c) with a dosimetric E-field probe ET3DV6 (SN:1507, Conversion factor 6.10 at 900 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 20mm was aligned with the dipole. The 5x5x7 fine cube was chosen for cube integration. Probe isotropy errors were cancelled by measuring the SAR with normal and 90° turned probe orientations and averaging.

The dipole input power (forward power) was 250mW  $\pm 3\%$ . The results are normalized to 1W input power.

## 5. SAR Measurement

Standard SAR-measurements were performed with the phantom according to the measurement conditions described in section 4. The results have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values are:

averaged over 1 cm<sup>3</sup> (1 g) of tissue:            10.92 mW/g

averaged over 10 cm<sup>3</sup> (10 g) of tissue:        7.04 mW/g

## 6. Dipole Impedance and Return Loss

The dipole was positioned at the flat phantom sections according to section 4 and the distance holder was in place during impedance measurements.

Feedpoint impedance at 835 MHz:             $\text{Re}\{Z\} = 45.6 \Omega$

$\text{Im}\{Z\} = -6.5 \Omega$

Return Loss at 835 MHz                        -21.8 dB

## 7. Handling

Do not apply excessive force to the dipole arms, because they might bend. Bending of the dipole arms stresses the soldered connections near the feedpoint leading to a damage of the dipole.

## 8. Design

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

## 9. Power Test



After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.



### Validation Dipole D835V2 SN:448, d = 15 mm


Frequency: 835 MHz; Antenna Input Power: 250 [mW]  
 SAM Phantom; Flat Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0  
 Probe: ET3DV6 - SN1507; ConvF(6.48,6.48,6.48) at 900 MHz; IEEE1528 835 MHz;  $\sigma = 0.91$  mho/m  $\epsilon_r = 42.3 \mu = 1.00$  g/cm<sup>3</sup>  
 Cubes (2): Peak: 4.15 mW/g  $\pm 0.02$  dB, SAR (1g): 2.59 mW/g  $\pm 0.00$  dB, SAR (10g): 1.66 mW/g  $\pm 0.01$  dB, (Worst-case extrapolation)  
 Penetration depth: 12.0 (10.6, 13.7) [mm]  
 Powerdrift: -0.01 dB

SAR<sub>Tot</sub> [mW/g]

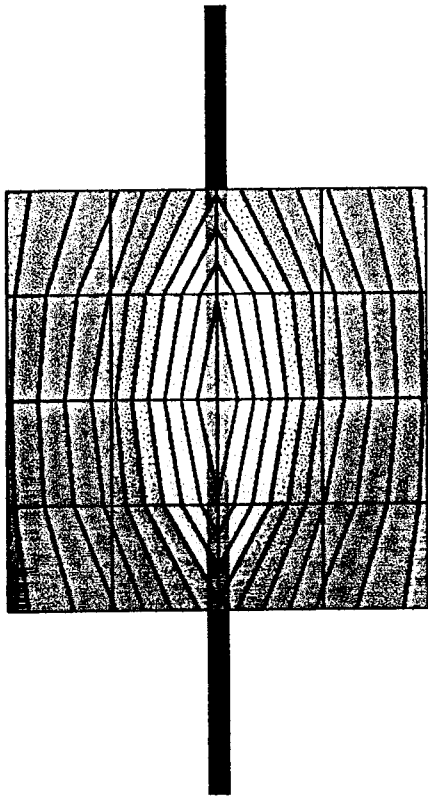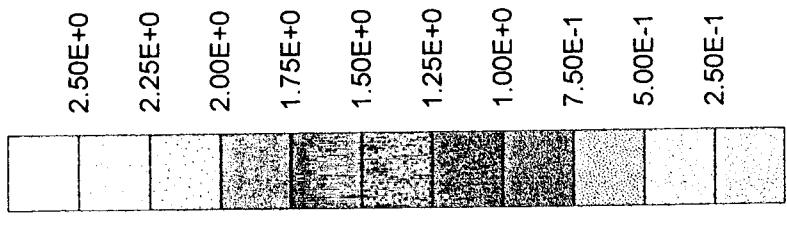


CH1 S11 1 U FS 1: 49.117  $\Omega$  -5.3047  $\Omega$  35.931 pF 835.000 000 MHz

De1  
PRM  
Cor  
Avg  
15  
↑


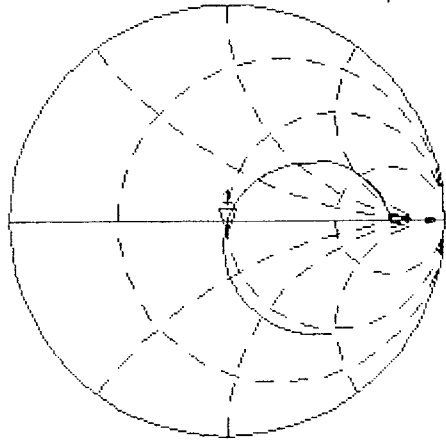


CH2 S11 LOG 5 dB/REF 0 dB 1: -25.311 dB 835.000 000 MHz

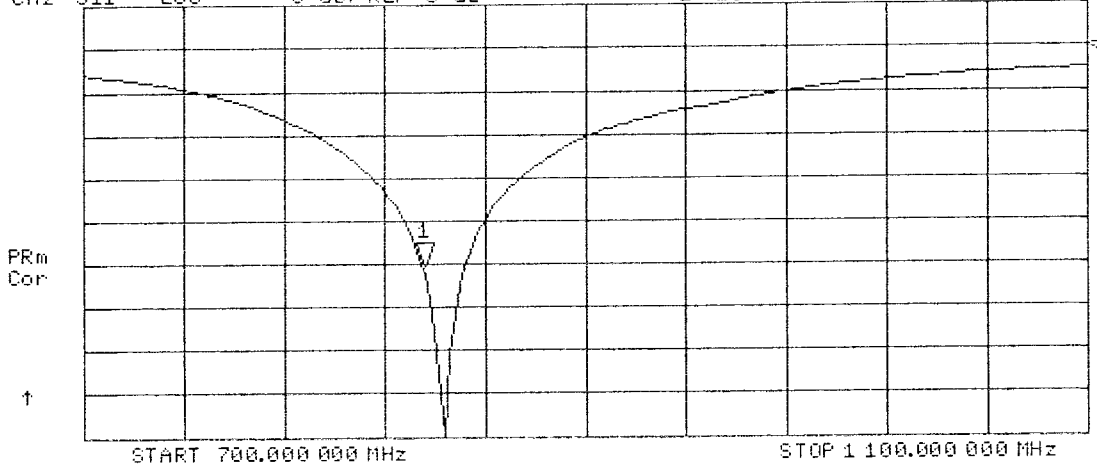

### Validation Dipole D835V2 SN:448, d = 15 mm

Frequency: 835 MHz; Antenna Input Power: 250 [mW]  
SAM Phantom; Flat Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0  
Probe: ET3DV6 - SN1507; ConvF(6.10,6.10,6.10) at 900 MHz; Muscle 835 MHz;  $\sigma = 0.98$  mho/m  $\epsilon_r = 56.0$   $\rho = 1.00$  g/cm<sup>3</sup>  
Cubes (2): Peak: 4.32 mW/g  $\pm 0.00$  dB, SAR (1g): 2.73 mW/g  $\pm 0.01$  dB, SAR (10g): 1.76 mW/g  $\pm 0.02$  dB, (Worst-case extrapolation)  
Penetration depth: 12.4 (11.0, 14.3) [mm]  
Powerdrift: 0.02 dB

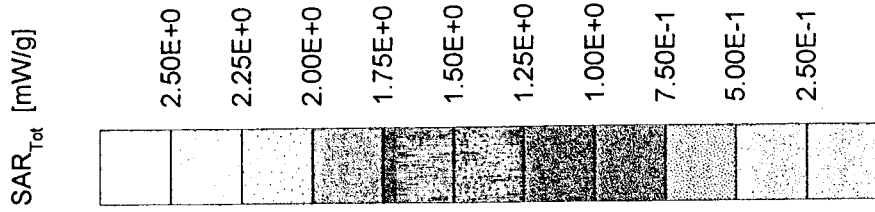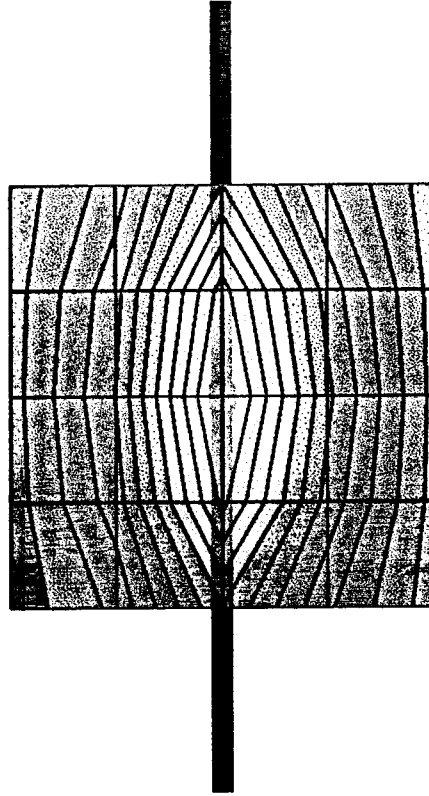


CHI S11 1 U FS


1: 45.607  $\Omega$  -6.4648  $\Omega$  29.483 pF

835.000 000 MHz

Del  
PRM  
Cor  
Avg  
15  
↑

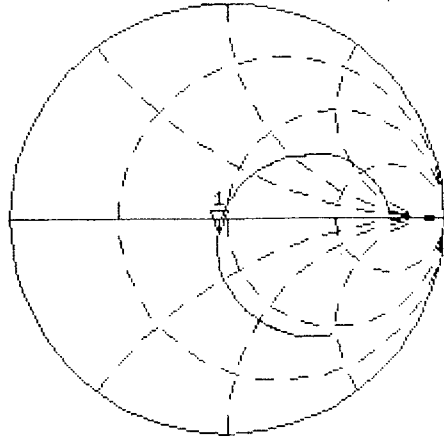

CH2 S11 LOG 5 dB/REF 0 dB 1:-21.790 dB 835.000 000 MHz

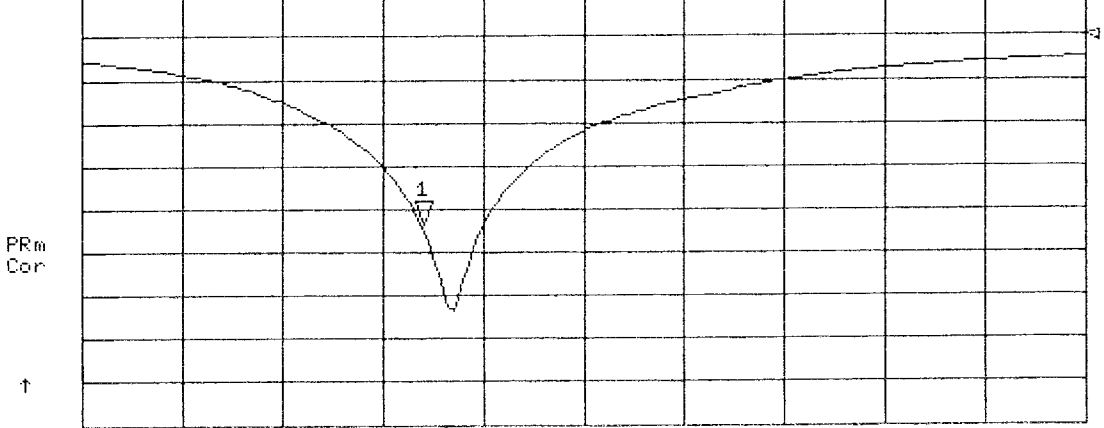

PRM  
Cor  
↑

START 700.000 000 MHz

STOP 1 100.000 000 MHz

**Schmid & Partner  
Engineering AG**

---

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

---

**DASY3**

**Dipole Validation Kit**

**Type: D1900V2**

**Serial: 511**

**Manufactured: October 20, 1999**

**Calibrated: February 13, 2001**

## 1. Measurement Conditions

The measurements were performed in the flat section of the new generic twin phantom filled with head simulating solution of the following electrical parameters at 1900 MHz:

Relative permittivity	39.2	± 5%
Conductivity	1.47 mho/m	± 10%

The DASY3 System (Software version 3.1c) with a dosimetric E-field probe ET3DV6 (SN:1507, conversion factor 5.57 at 1800 MHz) was used for the measurements.

The dipole feedpoint was positioned below the center marking and oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 5x5x7 fine cube was chosen for cube integration. Probe isotropy errors were cancelled by measuring the SAR with normal and 90° turned probe orientations and averaging.

The dipole input power (forward power) was 250mW ± 3 %. The results are normalized to 1W input power.

## 2. SAR Measurement

Standard SAR-measurements were performed with the head phantom according to the measurement conditions described in section 1. The results (see figure) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values are:

averaged over 1 cm <sup>3</sup> (1 g) of tissue:	42.8 mW/g
averaged over 10 cm <sup>3</sup> (10 g) of tissue:	21.9 mW/g

Note: If the liquid parameters for validation are slightly different from the ones used for initial calibration, the SAR-values will be different as well. The estimated sensitivities of SAR-values and penetration depths to the liquid parameters are listed in the DASY Application Note 4: 'SAR Sensitivities'.

### 3. Dipole impedance and return loss

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint. The transformation parameters from the SMA-connector to the dipole feedpoint are:

Electrical delay:	1.205 ns	(one direction)
Transmission factor:	0.983	(voltage transmission, one direction)

The dipole was positioned at the flat phantom sections according to section 1 and the distance holder was in place during impedance measurements.

Feedpoint impedance at 1900 MHz:	$\text{Re}\{Z\} = 50.1 \Omega$
	$\text{Im}\{Z\} = -1.5 \Omega$
Return Loss at 1900 MHz	- 34.9 dB

### 4. Measurement Conditions

The measurements were performed in the flat section of the new generic twin phantom filled with muscle simulating solution of the following electrical parameters at 1900 MHz:

Relative permittivity	53.5	$\pm 5\%$
Conductivity	1.46 mho/m	$\pm 10\%$

The DASY3 System (Software version 3.1c) with a dosimetric E-field probe ET3DV6 (SN:1507, conversion factor 4.85 at 1800 MHz) was used for the measurements.

The dipole feedpoint was positioned below the center marking and oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 5x5x7 fine cube was chosen for cube integration. Probe isotropy errors were cancelled by measuring the SAR with normal and 90° turned probe orientations and averaging.

The dipole input power (forward power) was 250mW  $\pm 3\%$ . The results are normalized to 1W input power.

## 6. SAR Measurement

Standard SAR-measurements were performed with the head phantom according to the measurement conditions described in section 1. The results (see figure) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values are:

averaged over 1 cm<sup>3</sup> (1 g) of tissue: 42.4 mW/g

averaged over 10 cm<sup>3</sup> (10 g) of tissue: 22.0 mW/g

Note: If the liquid parameters for validation are slightly different from the ones used for initial calibration, the SAR-values will be different as well.

## 7. Dipole impedance and return loss

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint. The transformation parameters from the SMA-connector to the dipole feedpoint are:

Electrical delay: 1.205 ns (one direction)  
Transmission factor: 0.983 (voltage transmission, one direction)

The dipole was positioned at the flat phantom sections according to section 1 and the distance holder was in place during impedance measurements.

Feedpoint impedance at 1900 MHz:  $\text{Re}\{Z\} = 45.3 \Omega$

$\text{Im}\{Z\} = -1.0 \Omega$

Return Loss at 1900 MHz: -25.6 dB

## 8. Handling

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

Do not apply excessive force to the dipole arms, because they might bend. If the dipole arms have to be bent back, take care to release stress to the soldered connections near the feedpoint; they might come off.

After prolonged use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.



### Validation Dipole D1900V2 SN:511, d = 10 mm

Frequency: 1900 MHz; Antenna Input Power: 250 [mW]

Generic Twin Phantom; Flat Section; Grid Spacing: Dx = 15.0, Dy = 15.0, Dz = 10.0

Probe: ET3DV6 - SN1507; ConvF(5.57,5.57,5.57) at 1800 MHz; IEEE1528 1900 MHz;  $\sigma = 1.47$  mW/cm  $\epsilon_r = 39.2$   $\rho = 1.00$  g/cm<sup>3</sup>


Cubes (2); Peak: 20.6 mW/g  $\pm$  0.02 dB, SAR (1g): 10.7 mW/g  $\pm$  0.03 dB, SAR (10g): 5.47 mW/g  $\pm$  0.03 dB, SAR (10g): 5.47 mW/g  $\pm$  0.03 dB, (Worst-case extrapolation)

Penetration depth: 7.9 (7.4, 9.1) [mm]

Powerdrift: 0.00 dB

SAR<sub>Trx</sub> [mW/g]

1.00E+1  
9.00E+0  
8.00E+0  
7.00E+0  
6.00E+0  
5.00E+0  
4.00E+0  
3.00E+0  
2.00E+0  
1.00E+0

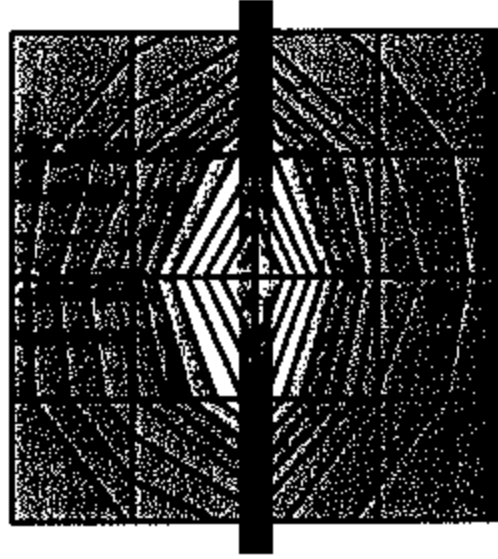

13 Feb 2001 10:46:52

CH1 511 1 U F8


11 50.137  $\Omega$  -1.5078  $\Omega$  55.555 pF

1 900.000 000 MHz

PRM  
De-1

Cor  
rv9  
16

↑

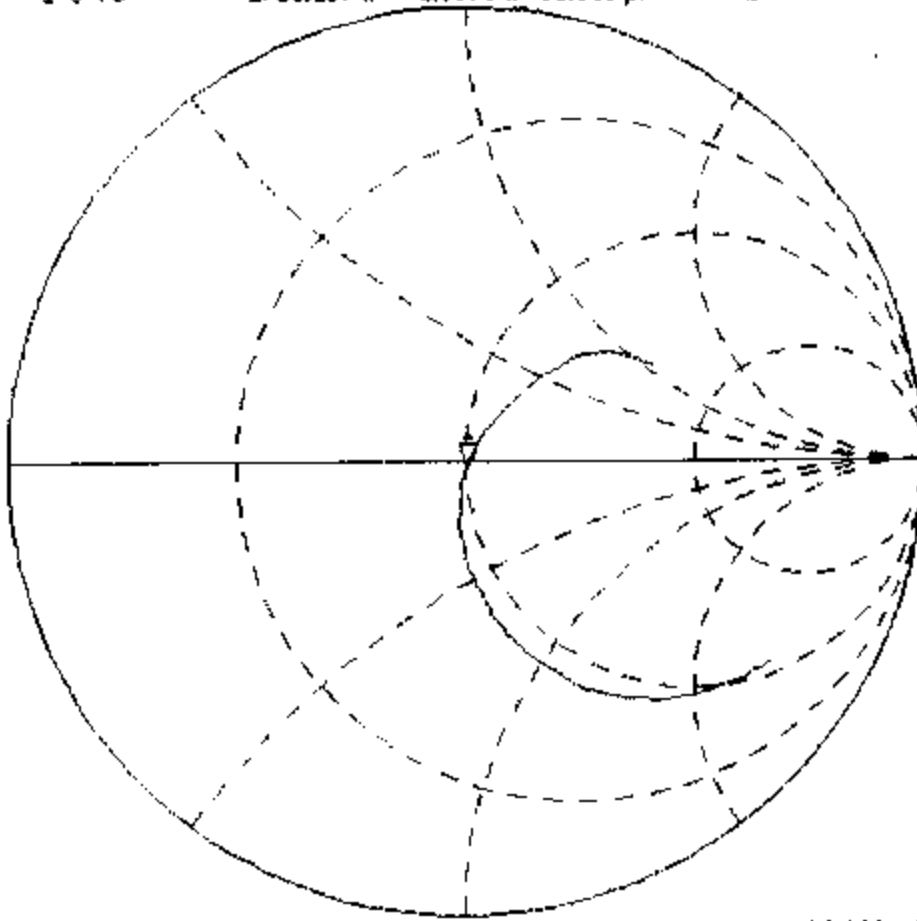


START 1 400.000 000 MHz

STOP 2 200.000 000 MHz

13 Feb 2001 10:46:40

CH1 S11 L00 5 dB/REF 0 dB 1:-34.942 dB 1 900.000 000 MHz

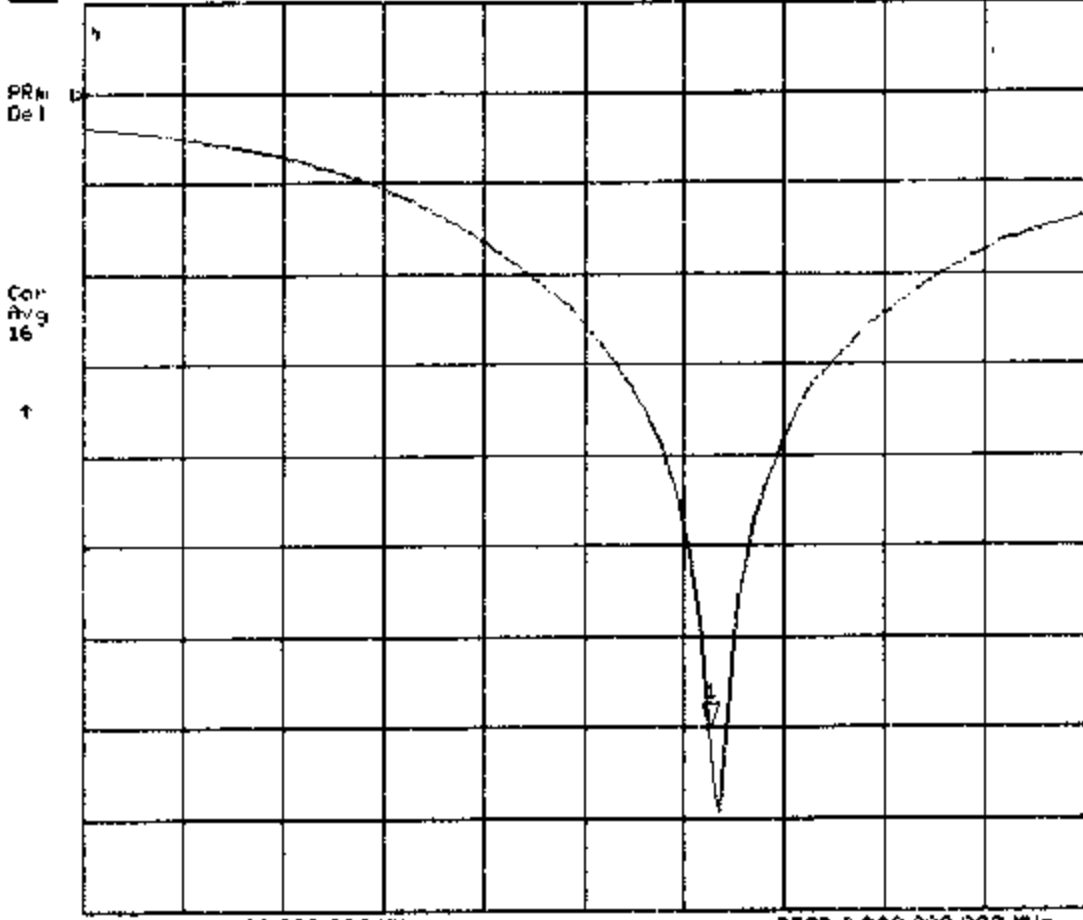

## Validation Dipole D1900V2 SN:511, d = 10 mm

Frequency: 1900 MHz; Antenna Input Power: 250 [mW]

Generic: Twin Phantom; Flat Section; Grid Spacing: Dx = 15.0, Dy = 15.0, Dz = 10.0

Probe ET3DV6 - SN1507; ConvF(4.85,4.85,4.85) at 1800 MHz; Muscle: 1900 MHz,  $\sigma = 1.46$  mho/m,  $\epsilon_r = 53.5$ ,  $\rho = 1.00$  g/cm<sup>3</sup>

Cubes (2): Peak: 20.0 mW/g  $\pm$  0.06 dB; SAR (1g) 10.6 mW/g  $\pm$  0.05 dB; SAR (10g): 5.49 mW/g  $\pm$  0.04 dB, (Worst-case extrapolation)

Penetration depth: 8.7 (7.9, 10.3) [mm]

Powerdrift: 0.01 dB

