

\*\*\* USER'S MANUAL \*\*\*

---

**FCC ID : P5A002**

## The Federal Communication Commission Statement

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of more of the following measures: -


- **Reorient or relocate the receiving antenna.**
- **Increase the separation between the equipment and receiver.**
- **Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.**
- **Consult the dealer or an experienced Radio/TV technician for help.**

Use only shielded cables to connect I/O devices to this equipment. You are cautioned that change or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERECE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE D OPERATION.

1. This device may not cause harmful interference and
2. This device must accept any interference received, including interference that may cause undesired operation.

With the software provided, many commonly-used tasks can be assigned to the programmable buttons.

- A. Double click the "Presenter Mouse" icon  at the lower right corner of Windows control panel.
- B. Select the "Programmable Buttons" to assign many frequently-used Windows and the Web functions as below:



**Auto Scroll**  
Move the documents in the direction with just moving the mouse



**Back**  
Return to the last page in the Internet



**Magic Jump**  
Magic Jump lets you open eight special functions quickly



**Forward**  
Go to the next page in the Internet



**Switch AP**  
Quickly switch from one open application to another without moving the mouse



**Power Point Page Up**  
Return to the last page in the power point.



**Third Button**  
The programmable button can be assigned to perform special functions in certain applications.



**Power Point Page Down**  
Go to the next page in the power point.



**Double Click**  
You can assign the "Double Click" function to reduce extra clicks



**Screen Saver**


#### ◆ Trouble shooting

- (1) Make sure you have connected the charging cardle or the receiver correctly to the computer's USB port.
- (2) For the supreme performance, we suggest you locate the receiver with a distance from other electrical devices, such as the computer, the computer monitor or external storage drives.
- (3) Make sure you have set the communication between the receiver and the mouse. Refer to the channel setting instruction in this manual.
- (4) Some system devices might conflict with the mouse. Confirm the IRQ/address settings of these devices for conflicts, and change the settings as required.
- (5) Make sure that you are not working the mouse on glossy or reflective surfaces.
- (6) Try unplugging then reconnecting the receiver cable to your computer.
- (7) Make sure the software is installed completely. Please check if the Remote Presenter Mouse appears in the list of the Mouse Device under Device Manger. If No, Please reinstall again.

#### ◆ Battery use reminders

- (1) Please make sure the batteries used for recharging are "Rechargeable batteries".
- (2) Avoid reverse charging. Check battery polarity before charging.
- (3) Keep all batteries (used or new) out of the reach of children.
- (4) To have the batteries with a regular check and replace new batteries if not used for a long time.
- (5) Remove batteries from the electrical device if the device is not going to be used for a long time.
- (6) If the performance of the batteries decrease substantially, it is time to replace the batteries.
- (7) Do not mix different types of batteries (e.g. NiMH, NiCd, alkaline, etc) in the mouse.

# Presenter User's Guide

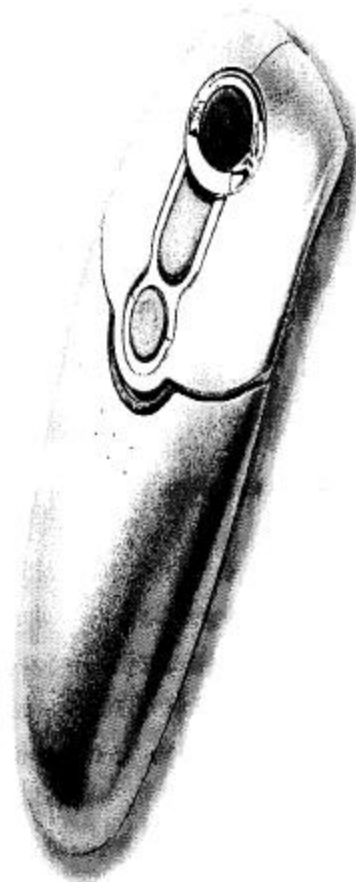


## 4-in-1 Wireless Optical Mouse & Remote Trackball & Wireless Presenter & Laser Pointer

All other brands and trademarks are the properties of their respective owners.  
The product specifications are subject to change without notice.

Congratulations on your purchase of the world first 2.4GHz multi-functional wireless remote presenter mouse.

### Features:


- Consolidating 2.4GHz wireless, optical and remote presenter technology.
- 4-in-1 design for use as a wireless optical mouse at the desktop, a wireless trackball in the air, a laser pointer, and a remote presenter while making presentation toward audience.
- Ergonomic design for comfort use at the desktop and in the air.
- Eight channels with 4096 ID. No interference!
- Wide range and long transmission distance for min. 10m.
- Auto-mode switch between mouse mode at desktop use and remote trackball in air use.
- Laser pointer available for presentation.
- Angle-adjustable charging cradle with a slide-in mini-receiver.
- Charging through USB port from charging cradle or charging cable.
- Quick charging 2 hours.
- Restorable mini-receiver designed for traveling users.
- Page up/page down between presentation slides.
- Three programmable buttons for quick access of Windows and application programs.
- Power On/Off button to save battery life.

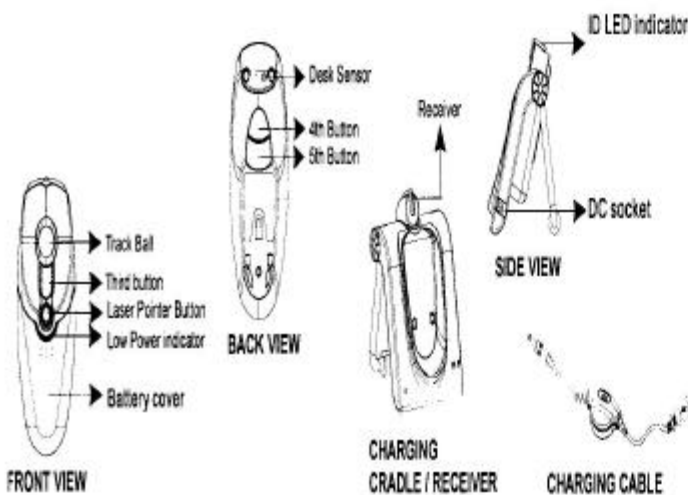

### 1. Insert batteries

- Press and push the battery cover on the mouse to open the battery compartment. (See PIC 1)
- Fit in the batteries accordingly to the diagram indicated in the battery compartment.
- Close the battery compartment cover.

A wrong battery placement may cause a battery overheat.

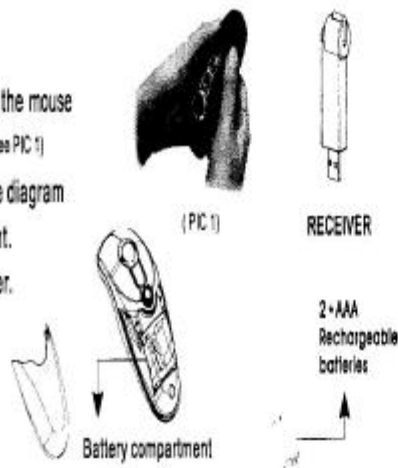

### Note

- For a supreme battery performance, it is a MUST to fully charge the rechargeable batteries contained in this package at the first-time use. (Please refer to battery recharge instruction to charge the batteries.)
- The Presenter Mouse offers a strong power saving management function. Once the mouse accesses the sleeping mode, "to click any button of the mouse" is compulsory to wake it up.


### 2. Connect the charging cradle & the receiver

- Turn off your PC.
- Connect the cable on the cradle to the PC USB port or plug the mini receiver to the notebook PC. (Refer Pic 1&2)
- Turn on your PC.



### 3. Establish communication between the mouse and the receiver

- Press the ID search button on the top of the receiver, and note the red LED will blink slowly.
- Press the ID change button on the bottom of the mouse to set a new ID. The receiver's red LED indicator will blink at a faster rate until an identical ID is located.

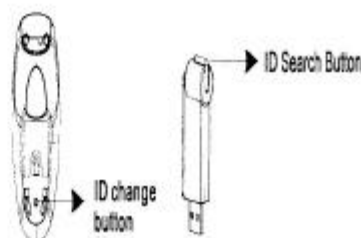


### NOTE

► An appropriate environment setting can ensure the wireless device performance

- The ID indicator on the receiver will blink any time the mouse sends it a signal.

### 4. Recharge the batteries

When the mouse Power Indications signals, please go forward to the charging process by following solutions. (Please make sure that you are using rechargeable batteries)

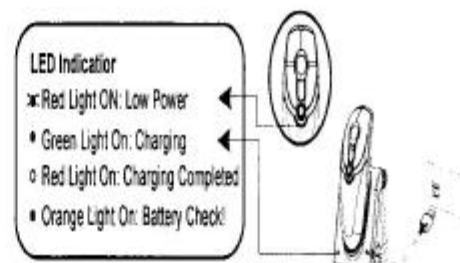

### Important Notice

Please recharge the batteries when the Low Power LED ON. If you use up the batteries, you may need to re-install the batteries again.

#### A. Recharge from the charging cradle receiver

##### (1) Through PC's USB port

Connect USB cable of the cradle receiver to an available PC's USB port. Make sure the power of your PC is on to start the recharging process.

##### (2) Through AC/DC adaptor(Optional)

Connect the AC/DC adaptor cord into the DC socket and plug the adaptor into a wall power outlet to start the recharge process.

### Important Notice

It is a MUST to purchase an AC/DC SWITCHING POWER ADAPTOR according to the specification beside. A misused adaptor may cause serious damages to your computer or other devices.



## B. Recharge directly from the mouse (for charging when traveling) (Optional)

### (1) Through PC's USB port

Plug the USB charging cable to an available PC's USB port and the socket on the top end of the mouse. Make sure your PC's power is on and then, the recharging process begins.

- Green Light On: Charging
- Green Light Off: Charging Completed



### Note

1. It is NOT suggested to operate the mouse while charging directly from the mouse.
2. The mouse surface may become warm during charging process. It is a normal phenomenon.
3. Please do not recharge through a USB hub, which may cause an ineffective execution.

### @After recharging

- (1) Remove the mouse from the charging cradle receiver or disconnect the charging cables.
- (2) Make sure whether the communication between the mouse and the receiver is still available or not. If not, please refer to the ID setting instruction in the manual to re-set the communication.

## 5. Using Remote Presenter Mouse At the Desktop

The mouse provides great flexibility in how you control your computer and its optical sensor allows for precise tracking on any surface (for optimal performance, avoid highly reflective glass or mirrored surfaces). To use on the desktop:

- (1) Please follow the instructions of the "ID Setting" and "Recharging".
- (3) Use the mouse like a standard wireless optical desktop mouse.
- (3) Using the trackball on the top of the mouse as a 4D (directions) scroller.



### Tip

➤ For optimal battery life, avoid using the mouse on dark-colored surfaces.

## 6. Using Remote Presenter Mouse Off the Desk.

The mouse has no line-of-sight requirements so it's not necessary to point the device at the computer, receiver or monitor. Find a comfortable, relaxed position and move the cursor with easy wrist movements.

(1) Please follow the instructions of "ID Setting" and "Recharging".

(2) Hold the mouse in a comfortable, relaxed position with your index finger on the bottom of the mouse and your thumb at the top of the mouse (see illustration)



(3) You can control the cursor movement by rolling the trackball using your thumb.

⚠ Please avoid put your finger on the top of the desk sensor. This will cause function fault.



(4) The Programmable Buttons on the bottom of the mouse are designed for quick access up and down between slides with Power Point. (Must install Software)

(5) Press and hold the pointer button for pointing the subject, while making the presentation.



While using laser pointer, please avoid laser light to direct contact with man's eyes. It may occur serious hurt to man's eyes!

## 7. Powering Off/On Mouse

To power off the mouse:



1. Press and hold the 4th button on the bottom of the unit over five second. The low power LED on the top of the mouse will FLASH. The will immediately enter deep sleep mode and will be unresponsive to button clicks.

2. Repeat this sequence to power the unit back on. The unit will confirm it is powering on by flashing its LED for one second.

### Important Notice

Powering off the mouse prevents battery drain when traveling. It may be necessary to power off the unit when traveling on commercial airlines due to FCC regulations regarding radio-emitting devices.

## 8. Install the Software

A. Before installing the driver, we suggest you check if any other mouse driver is installed in your system. If yes, in order to avoid any conflicts, please un-install or remove that driver before installing the new driver.

B. Insert the drive diskette, follow the instructions on the screen to complete the software installation, and then restart the PC.

C. Please make sure to plug the receiver, or charging cradle USB cable to the exactly same USB port of your PC as the software installed. Otherwise the software will not be active. You should install the software