



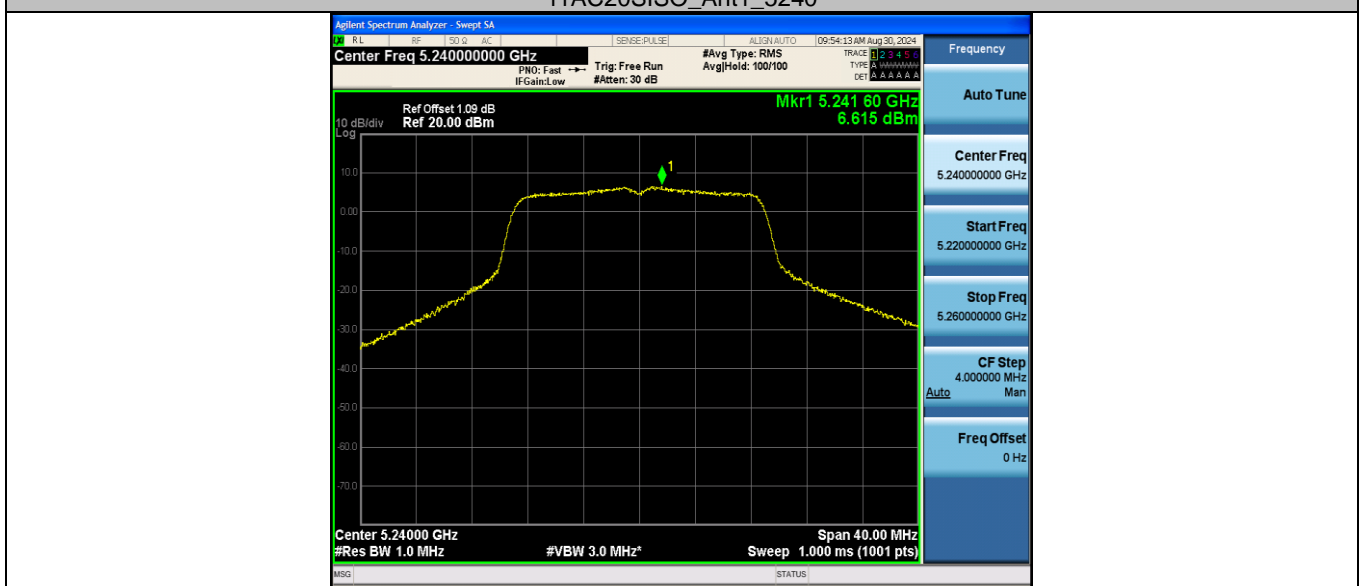





11AC20SISO\_Ant1\_5180

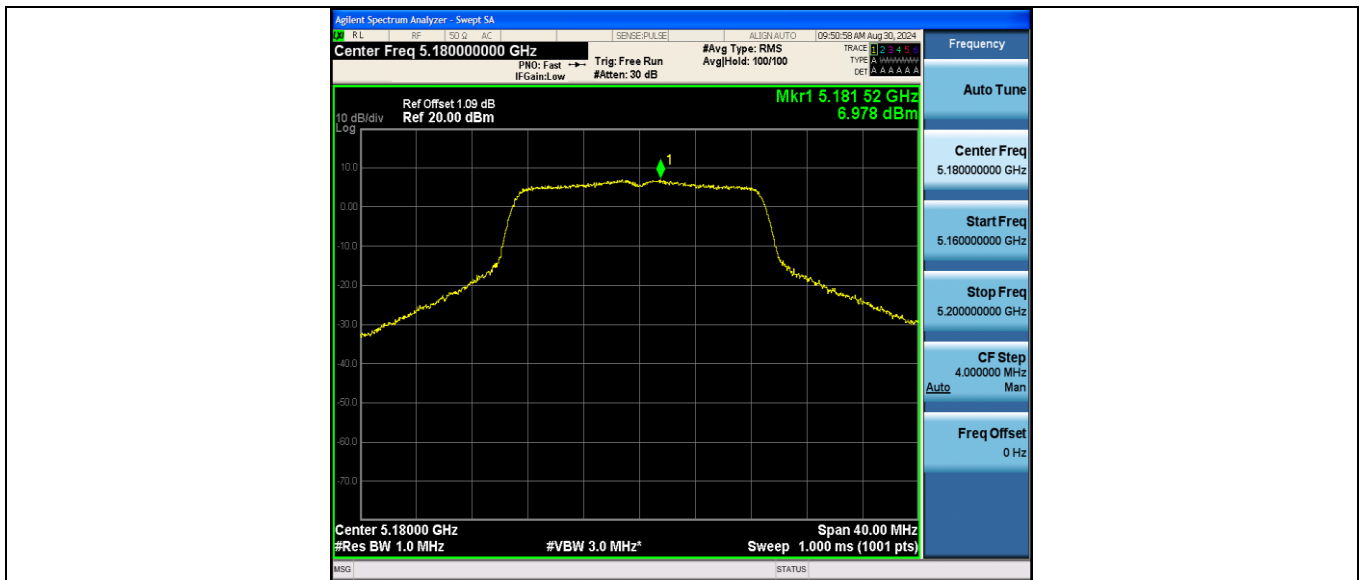


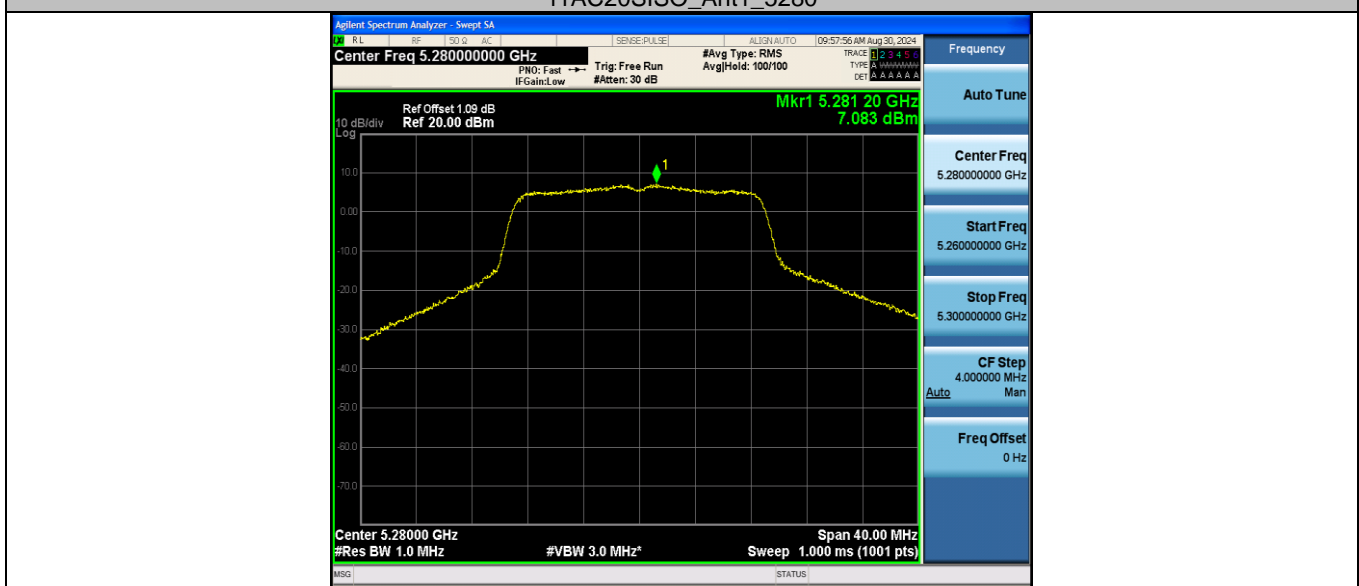


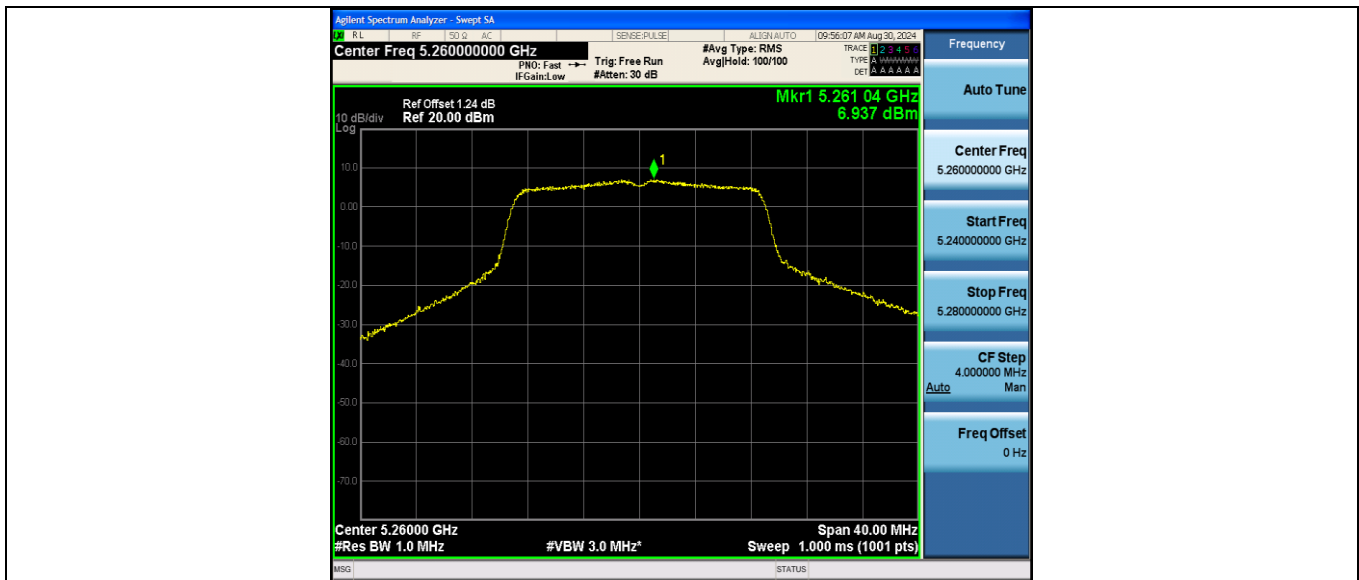


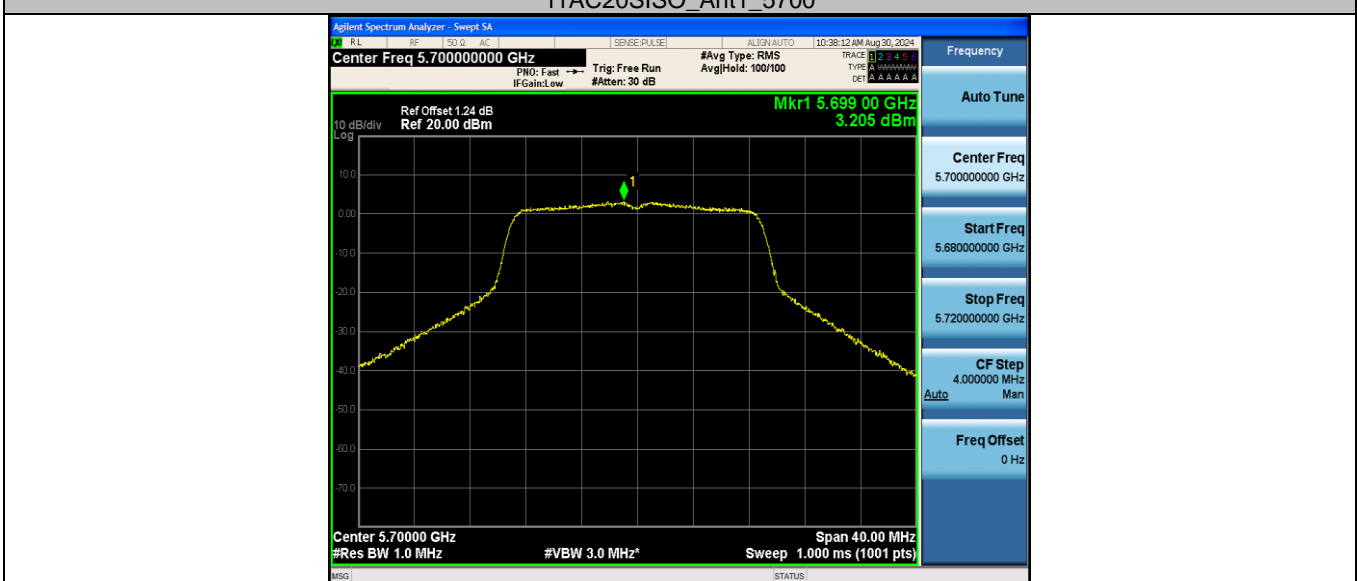

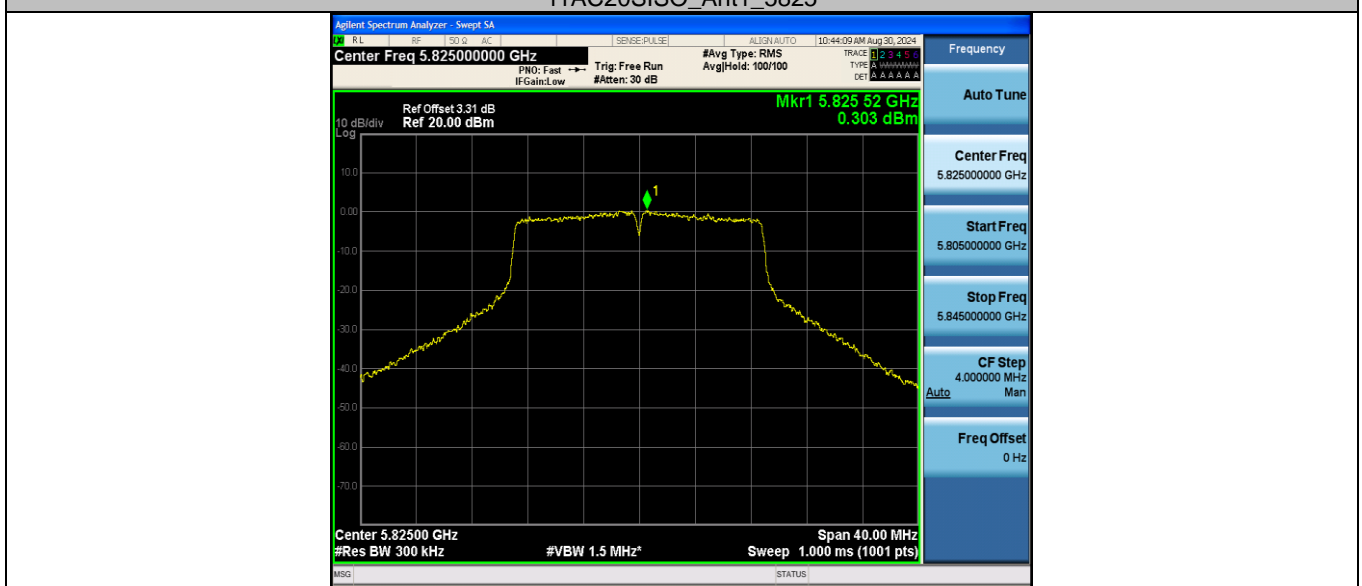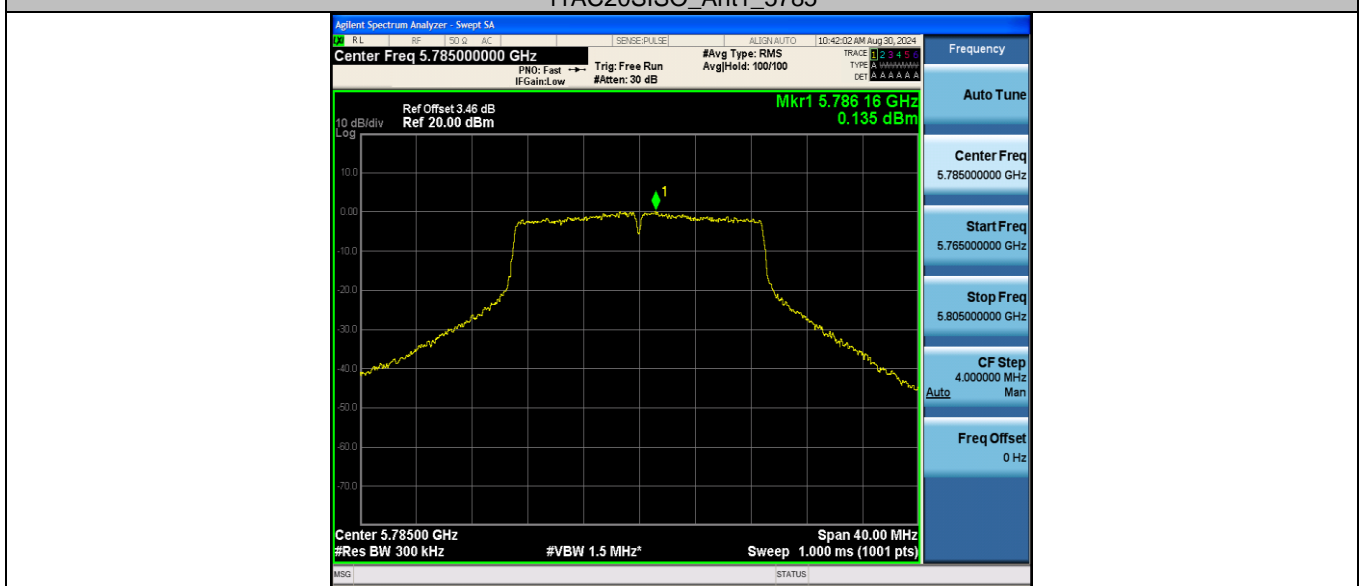
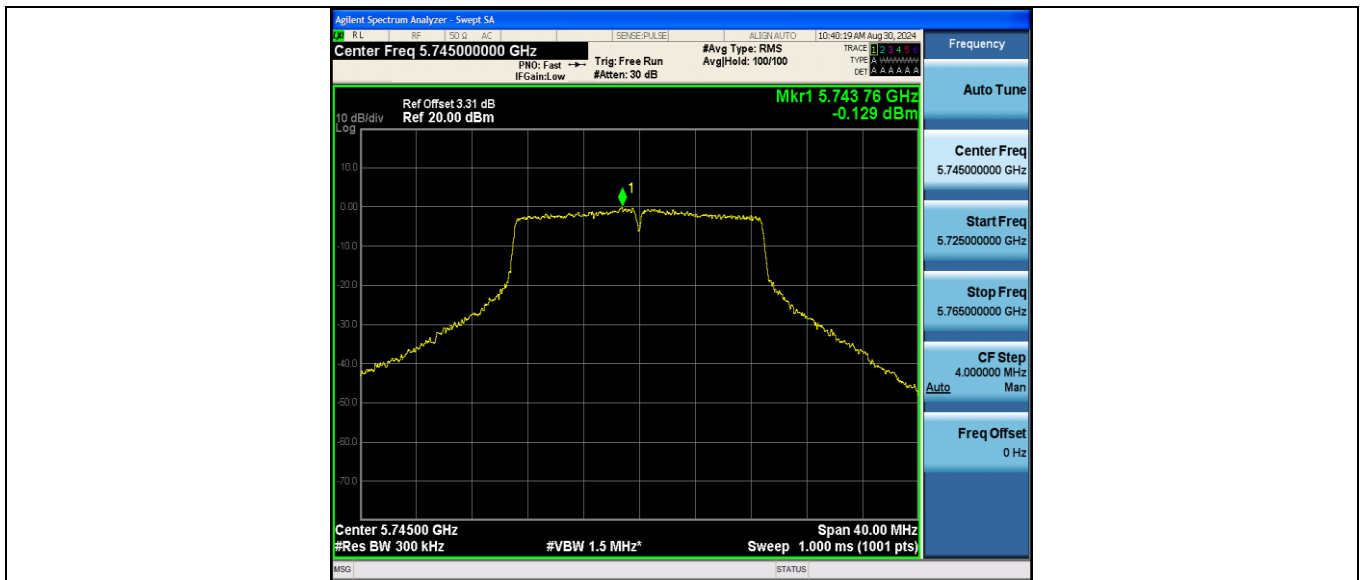


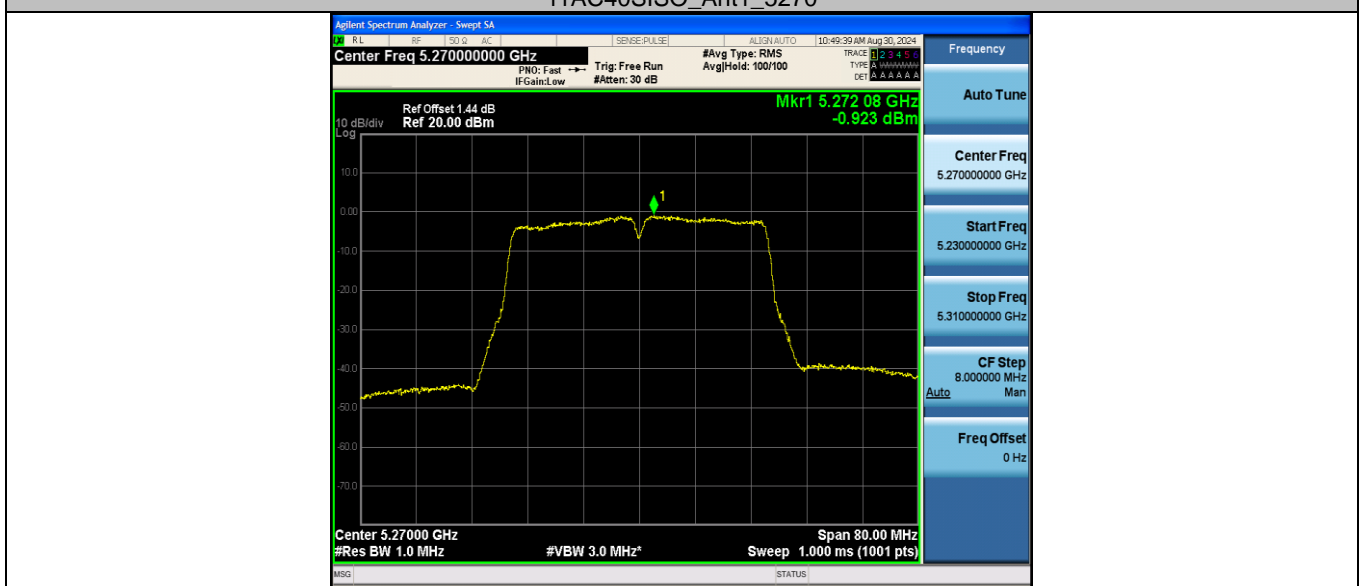


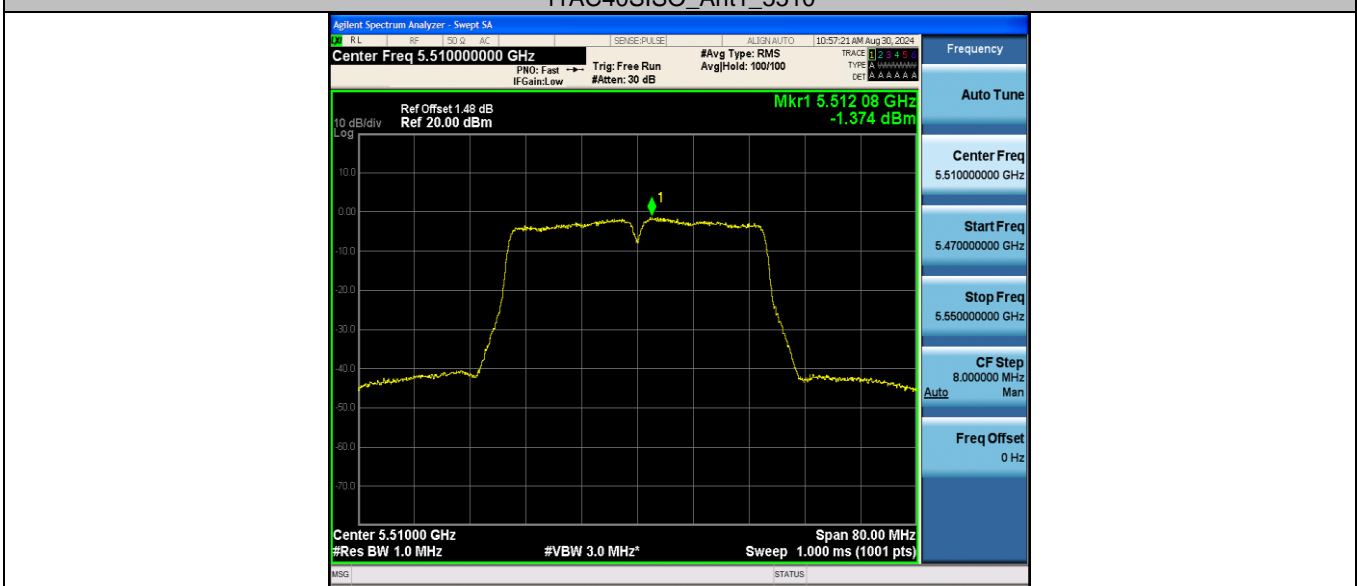

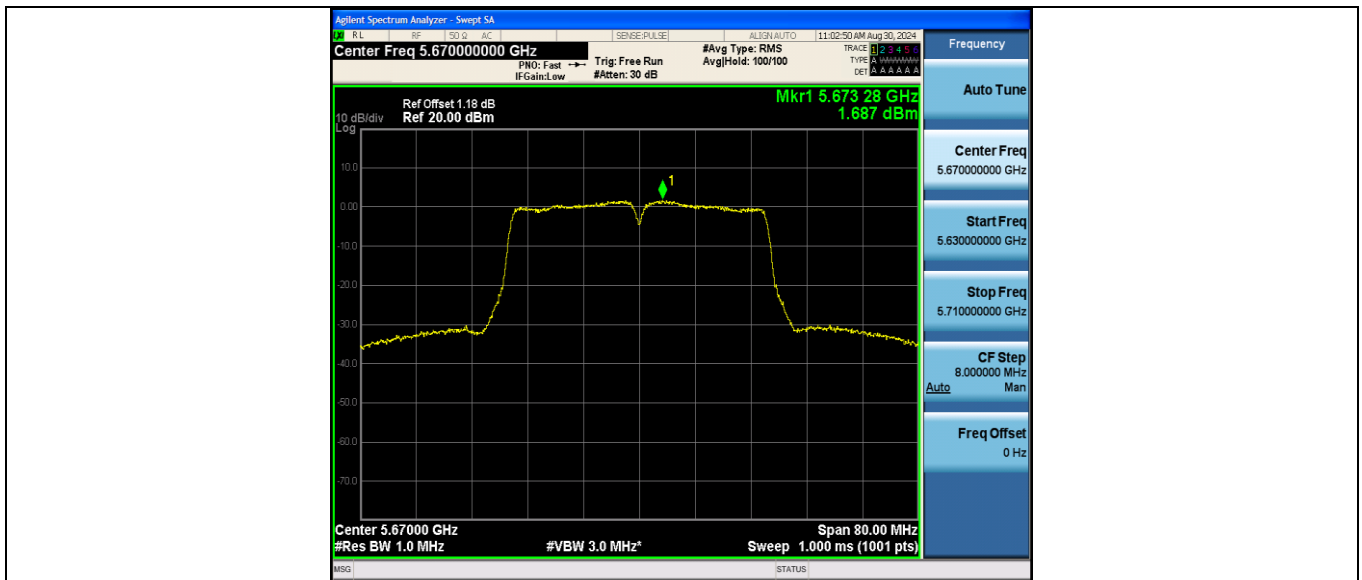



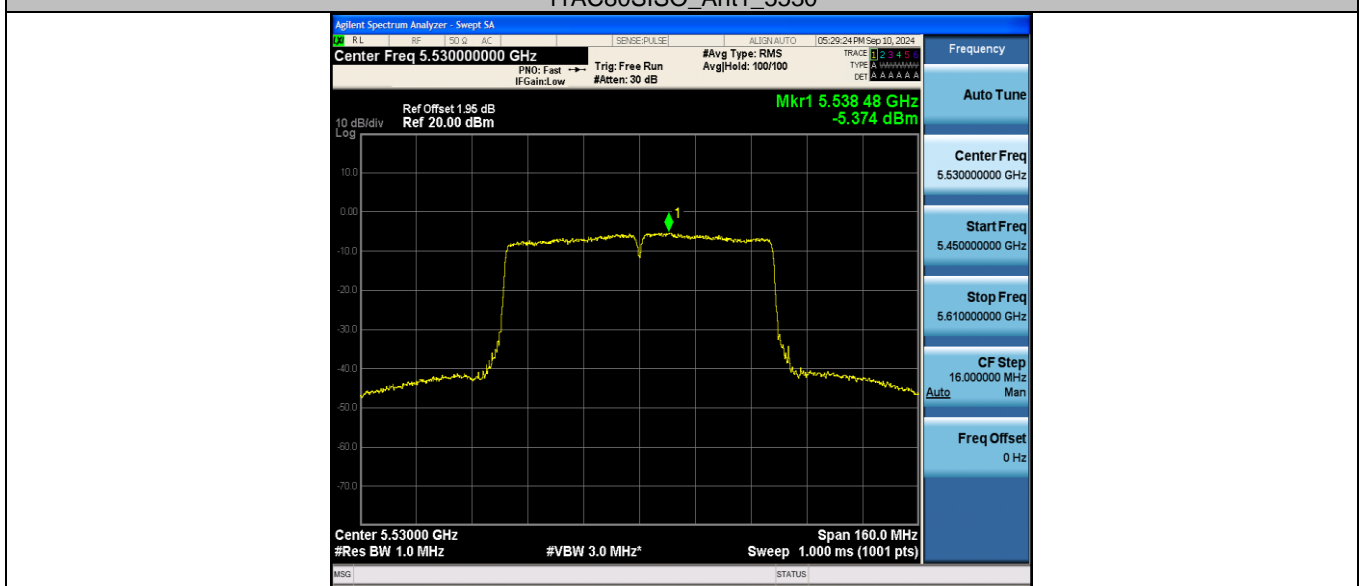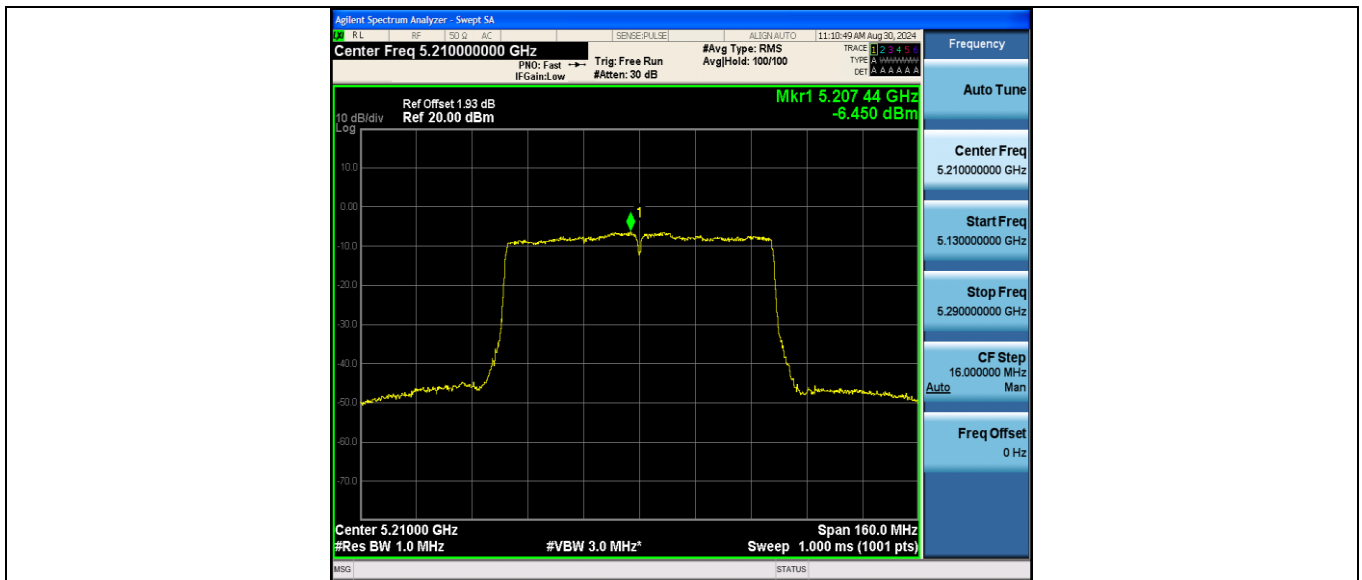

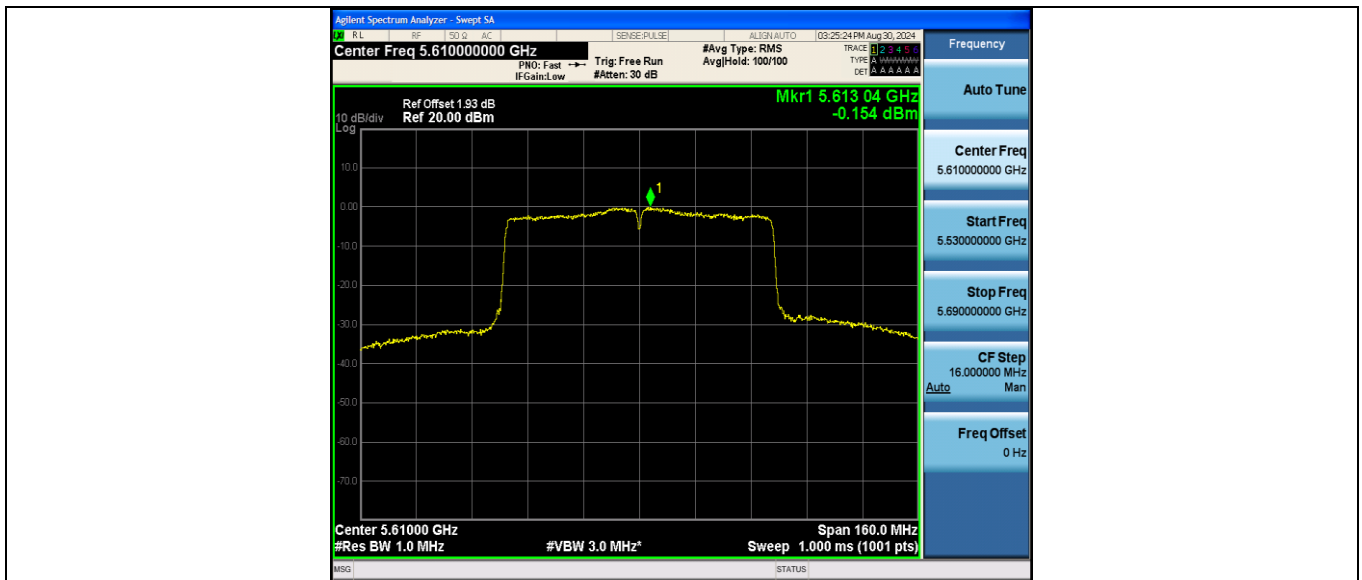




### 3.7. Frequency Stability

#### Limit

FCC CFR Title 47 Part 15 Subpart E Section 15.407(g) / RSS-Gen 6.11

Test Item	Limit	Frequency Range (MHz)
Frequency Stability	Specified in the user's manual, the transmitter center frequency tolerance shall be $\pm 20$ ppm maximum for the 5 GHz band (IEEE 802.11n specification)	5150~5250
		5250~5350
		5500~5700
		5725~5850

#### Test Configuration

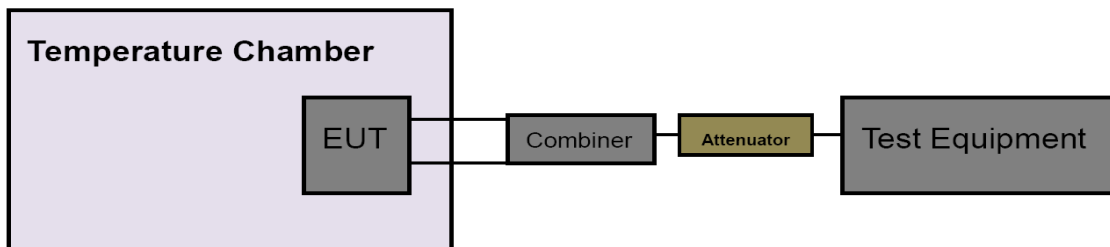

#### Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyzer center frequency to transmitting frequency.
- (3) Set the span to encompass the entire emissions bandwidth (EBW) of the signal.
- (4) Set the RBW to: 8MHz, VBW=8MHz with peak detector and max hold settings.
- (5) The test extreme voltage is to change the primary supply voltage from 4.5V to 5.5V percent of the nominal value.
- (6) Extreme temperature is 0°C~40°C

NOTE: The EUT was set to continuously transmitting in continuously un-modulation transmitting mode.

#### Test Mode

Please refer to the clause 2.4.

**Test Result**

Test Mode	Freq(MHz)	Voltage					Limit (ppm)	Verdict
		Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)		
20M	5180	NV	NT	-54000.00	-10.424710	20	PASS	
		LV	NT	-54000.00	-10.424710	20	PASS	
		HV	NT	-54000.00	-10.424710	20	PASS	
	5200	NV	NT	-54000.00	-10.384615	20	PASS	
		LV	NT	-54000.00	-10.384615	20	PASS	
		HV	NT	-53000.00	-10.192308	20	PASS	
	5240	NV	NT	-54000.00	-10.305344	20	PASS	
		LV	NT	-54000.00	-10.305344	20	PASS	
		HV	NT	-54000.00	-10.305344	20	PASS	
	5260	NV	NT	-54000.00	-10.266160	20	PASS	
		LV	NT	-54000.00	-10.266160	20	PASS	
		HV	NT	-54000.00	-10.266160	20	PASS	
	5280	NV	NT	-55000.00	-10.416667	20	PASS	
		LV	NT	-55000.00	-10.416667	20	PASS	
		HV	NT	-55000.00	-10.416667	20	PASS	
	5320	NV	NT	-54000.00	-10.150376	20	PASS	
		LV	NT	-55000.00	-10.338346	20	PASS	
		HV	NT	-55000.00	-10.338346	20	PASS	
	5500	NV	NT	-57000.00	-10.363636	20	PASS	
		LV	NT	-57000.00	-10.363636	20	PASS	
		HV	NT	-57000.00	-10.363636	20	PASS	
	5580	NV	NT	-58000.00	-10.394265	20	PASS	
		LV	NT	-57000.00	-10.215054	20	PASS	
		HV	NT	-58000.00	-10.394265	20	PASS	
	5700	NV	NT	-59000.00	-10.350877	20	PASS	
		LV	NT	-59000.00	-10.350877	20	PASS	
		HV	NT	-59000.00	-10.350877	20	PASS	
	5745	NV	NT	-59000.00	-10.269800	20	PASS	
		LV	NT	-60000.00	-10.443864	20	PASS	
		HV	NT	-59000.00	-10.269800	20	PASS	
5785	NV	NT	-60000.00	-10.371651	20	PASS		
	LV	NT	-60000.00	-10.371651	20	PASS		
	HV	NT	-60000.00	-10.371651	20	PASS		
5825	NV	NT	-59000.00	-10.128755	20	PASS		
	LV	NT	-60000.00	-10.300429	20	PASS		
	HV	NT	-60000.00	-10.300429	20	PASS		
40M	5190	NV	NT	-41000.00	-7.899807	20	PASS	
		LV	NT	-42000.00	-8.092486	20	PASS	
		HV	NT	-43000.00	-8.285164	20	PASS	
	5230	NV	NT	-46000.00	-8.795411	20	PASS	
		LV	NT	-46000.00	-8.795411	20	PASS	
		HV	NT	-47000.00	-8.986616	20	PASS	
	5270	NV	NT	-49000.00	-9.297913	20	PASS	
		LV	NT	-49000.00	-9.297913	20	PASS	
		HV	NT	-49000.00	-9.297913	20	PASS	
	5310	NV	NT	-49000.00	-9.227872	20	PASS	
		LV	NT	-50000.00	-9.416196	20	PASS	
		HV	NT	-50000.00	-9.416196	20	PASS	
	5510	NV	NT	-53000.00	-9.618875	20	PASS	
		LV	NT	-54000.00	-9.800363	20	PASS	
		HV	NT	-54000.00	-9.800363	20	PASS	
	5550	NV	NT	-54000.00	-9.729730	20	PASS	
		LV	NT	-54000.00	-9.729730	20	PASS	
		HV	NT	-54000.00	-9.729730	20	PASS	
	5670	NV	NT	-55000.00	-9.700176	20	PASS	

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>



	5755	LV	NT	-55000.00	-9.700176	20	PASS	
		HV	NT	-56000.00	-9.876543	20	PASS	
		NV	NT	-57000.00	-9.904431	20	PASS	
		LV	NT	-57000.00	-9.904431	20	PASS	
		HV	NT	-57000.00	-9.904431	20	PASS	
		NV	NT	-57000.00	-9.836066	20	PASS	
	5795	LV	NT	-58000.00	-10.008628	20	PASS	
		HV	NT	-58000.00	-10.008628	20	PASS	
		5210	NV	NT	-51000.00	-9.788868	20	PASS
			LV	NT	-52000.00	-9.980806	20	PASS
			HV	NT	-51000.00	-9.788868	20	PASS
		5290	NV	NT	-53000.00	-10.018904	20	PASS
LV	NT		-53000.00	-10.018904	20	PASS		
HV	NT		-53000.00	-10.018904	20	PASS		
5530	NV	NT	-55000.00	-9.945750	20	PASS		
	LV	NT	-55000.00	-9.945750	20	PASS		
	HV	NT	-56000.00	-10.126582	20	PASS		
5610	NV	NT	-56000.00	-9.982175	20	PASS		
	LV	NT	-56000.00	-9.982175	20	PASS		
	HV	NT	-56000.00	-9.982175	20	PASS		
5775	NV	NT	-58000.00	-10.043290	20	PASS		
	LV	NT	-58000.00	-10.043290	20	PASS		
	HV	NT	-59000.00	-10.216450	20	PASS		

Temperature							
Test Mode	Freq(MHz)	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
20M	5180	NV	0	-54000.00	-10.424710	20	PASS
		NV	10	-53000.00	-10.231660	20	PASS
		NV	20	-54000.00	-10.424710	20	PASS
		NV	30	-54000.00	-10.424710	20	PASS
		NV	40	-54000.00	-10.424710	20	PASS
	5200	NV	0	-54000.00	-10.384615	20	PASS
		NV	10	-53000.00	-10.192308	20	PASS
		NV	20	-54000.00	-10.384615	20	PASS
		NV	30	-54000.00	-10.384615	20	PASS
		NV	40	-54000.00	-10.384615	20	PASS
	5240	NV	0	-54000.00	-10.305344	20	PASS
		NV	10	-55000.00	-10.496183	20	PASS
		NV	20	-54000.00	-10.305344	20	PASS
		NV	30	-54000.00	-10.305344	20	PASS
		NV	40	-54000.00	-10.305344	20	PASS
	5260	NV	0	-54000.00	-10.266160	20	PASS
		NV	10	-55000.00	-10.456274	20	PASS
		NV	20	-54000.00	-10.266160	20	PASS
		NV	30	-54000.00	-10.266160	20	PASS
		NV	40	-54000.00	-10.266160	20	PASS
	5280	NV	0	-54000.00	-10.227273	20	PASS
		NV	10	-54000.00	-10.227273	20	PASS
		NV	20	-54000.00	-10.227273	20	PASS
		NV	30	-55000.00	-10.416667	20	PASS
		NV	40	-55000.00	-10.416667	20	PASS
	5320	NV	0	-55000.00	-10.338346	20	PASS
		NV	10	-55000.00	-10.338346	20	PASS
		NV	20	-55000.00	-10.338346	20	PASS
		NV	30	-55000.00	-10.338346	20	PASS
		NV	40	-55000.00	-10.338346	20	PASS
	5500	NV	0	-57000.00	-10.363636	20	PASS
		NV	10	-57000.00	-10.363636	20	PASS



		NV	20	-57000.00	-10.363636	20	PASS	
		NV	30	-57000.00	-10.363636	20	PASS	
		NV	40	-57000.00	-10.363636	20	PASS	
	5580	NV	0	-58000.00	-10.394265	20	PASS	
		NV	10	-58000.00	-10.394265	20	PASS	
		NV	20	-58000.00	-10.394265	20	PASS	
		NV	30	-58000.00	-10.394265	20	PASS	
		NV	40	-58000.00	-10.394265	20	PASS	
	5700	NV	0	-59000.00	-10.350877	20	PASS	
		NV	10	-59000.00	-10.350877	20	PASS	
		NV	20	-59000.00	-10.350877	20	PASS	
		NV	30	-59000.00	-10.350877	20	PASS	
		NV	40	-59000.00	-10.350877	20	PASS	
	5745	NV	0	-60000.00	-10.443864	20	PASS	
		NV	10	-59000.00	-10.269800	20	PASS	
		NV	20	-60000.00	-10.443864	20	PASS	
		NV	30	-60000.00	-10.443864	20	PASS	
		NV	40	-60000.00	-10.443864	20	PASS	
	5785	NV	0	-60000.00	-10.371651	20	PASS	
		NV	10	-60000.00	-10.371651	20	PASS	
		NV	20	-60000.00	-10.371651	20	PASS	
		NV	30	-60000.00	-10.371651	20	PASS	
		NV	40	-60000.00	-10.371651	20	PASS	
	5825	NV	0	-60000.00	-10.300429	20	PASS	
		NV	10	-60000.00	-10.300429	20	PASS	
		NV	20	-60000.00	-10.300429	20	PASS	
		NV	30	-60000.00	-10.300429	20	PASS	
		NV	40	-60000.00	-10.300429	20	PASS	
	40M	5190	NV	0	-43000.00	-8.285164	20	PASS
			NV	10	-44000.00	-8.477842	20	PASS
			NV	20	-44000.00	-8.477842	20	PASS
			NV	30	-45000.00	-8.670520	20	PASS
			NV	40	-45000.00	-8.670520	20	PASS
		5230	NV	0	-47000.00	-8.986616	20	PASS
			NV	10	-47000.00	-8.986616	20	PASS
			NV	20	-47000.00	-8.986616	20	PASS
			NV	30	-47000.00	-8.986616	20	PASS
			NV	40	-48000.00	-9.177820	20	PASS
		5270	NV	0	-49000.00	-9.297913	20	PASS
			NV	10	-49000.00	-9.297913	20	PASS
NV			20	-49000.00	-9.297913	20	PASS	
NV			30	-50000.00	-9.487666	20	PASS	
NV			40	-50000.00	-9.487666	20	PASS	
5310		NV	0	-50000.00	-9.416196	20	PASS	
		NV	10	-50000.00	-9.416196	20	PASS	
		NV	20	-51000.00	-9.604520	20	PASS	
		NV	30	-51000.00	-9.604520	20	PASS	
		NV	40	-51000.00	-9.604520	20	PASS	
5510		NV	0	-54000.00	-9.800363	20	PASS	
		NV	10	-53000.00	-9.618875	20	PASS	
		NV	20	-54000.00	-9.800363	20	PASS	
		NV	30	-54000.00	-9.800363	20	PASS	
		NV	40	-54000.00	-9.800363	20	PASS	
5550		NV	0	-55000.00	-9.909910	20	PASS	
		NV	10	-55000.00	-9.909910	20	PASS	
		NV	20	-55000.00	-9.909910	20	PASS	
		NV	30	-55000.00	-9.909910	20	PASS	
		NV	40	-55000.00	-9.909910	20	PASS	
5670		NV	0	-56000.00	-9.876543	20	PASS	
		NV	10	-56000.00	-9.876543	20	PASS	

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and

Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>



		NV	20	-56000.00	-9.876543	20	PASS	
		NV	30	-56000.00	-9.876543	20	PASS	
		NV	40	-56000.00	-9.876543	20	PASS	
	5755	NV	0	-57000.00	-9.904431	20	PASS	
		NV	10	-57000.00	-9.904431	20	PASS	
		NV	20	-57000.00	-9.904431	20	PASS	
		NV	30	-57000.00	-9.904431	20	PASS	
		NV	40	-57000.00	-9.904431	20	PASS	
	5795	NV	0	-58000.00	-10.008628	20	PASS	
		NV	10	-58000.00	-10.008628	20	PASS	
		NV	20	-58000.00	-10.008628	20	PASS	
		NV	30	-58000.00	-10.008628	20	PASS	
		NV	40	-58000.00	-10.008628	20	PASS	
	80M	5210	NV	0	-52000.00	-9.980806	20	PASS
			NV	10	-52000.00	-9.980806	20	PASS
NV			20	-52000.00	-9.980806	20	PASS	
NV			30	-52000.00	-9.980806	20	PASS	
NV			40	-53000.00	-10.172745	20	PASS	
5290		NV	0	-53000.00	-10.018904	20	PASS	
		NV	10	-53000.00	-10.018904	20	PASS	
		NV	20	-53000.00	-10.018904	20	PASS	
		NV	30	-53000.00	-10.018904	20	PASS	
		NV	40	-53000.00	-10.018904	20	PASS	
5530		NV	0	-56000.00	-10.126582	20	PASS	
		NV	10	-56000.00	-10.126582	20	PASS	
		NV	20	-56000.00	-10.126582	20	PASS	
		NV	30	-56000.00	-10.126582	20	PASS	
		NV	40	-56000.00	-10.126582	20	PASS	
5610		NV	0	-56000.00	-9.982175	20	PASS	
		NV	10	-57000.00	-10.160428	20	PASS	
		NV	20	-57000.00	-10.160428	20	PASS	
		NV	30	-56000.00	-9.982175	20	PASS	
		NV	40	-57000.00	-10.160428	20	PASS	
5775	NV	0	-58000.00	-10.043290	20	PASS		
	NV	10	-59000.00	-10.216450	20	PASS		
	NV	20	-59000.00	-10.216450	20	PASS		
	NV	30	-59000.00	-10.216450	20	PASS		
	NV	40	-59000.00	-10.216450	20	PASS		



### 3.8. Antenna Requirement

#### Requirement

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.203**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### Test Result

The directional gain of the antenna is less than 6dBi, please refer to the EUT internal photographs antenna photo.





### 3.9. Dynamic Frequency Selection

#### Requirement

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

**Limit**

## 1. DFS Detection Thresholds

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP $<$ 200 milliwatt and power spectral density $<$ 10 dBm/MHz	-62 dBm
EIRP $<$ 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0dBi receive antenna.  
Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.  
Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

## 2. DFS Response Requirements

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.  
Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.  
Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

**Radar Test Waveforms**

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.



Table 5 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	$\text{Roundup} \left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

For example if in Short Pulse Radar Type 1 Test B a PRI of 3066 μsec is selected, the number of pulses

would be Round up  $\left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{3066} \right) \right\} = \text{Round up } \{17.2\} = 18.$

Table 5a - Pulse Repetition Intervals Values for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658



Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Table 6 – Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Table 7 – Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same Burst parameters are used for each wave form. The hopping sequence is different for each wave form and a 100-length segment is selected from the hopping sequence defined by the following algorithm:


The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250–5724MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

**Calibration of Radar Waveform**

Radar Waveform Calibration Procedure


- 1) A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master
- 2) The interference Radar Detection Threshold Level is  $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$  that had been taken into account the output power range and antenna gain.
- 3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset  $-1.0\text{dB}$  to compensate RF cable loss  $1.0\text{dB}$ .
- 4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was  $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$ . Capture the spectrum analyzer plots on short pulse radar waveform.

**Conducted Calibration Setup**

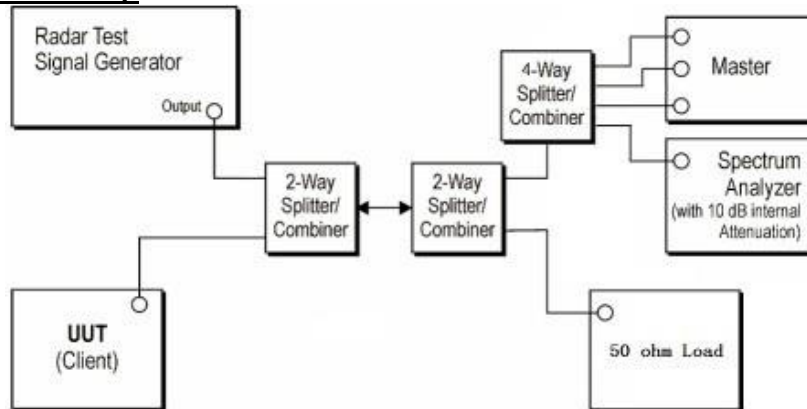


**Test Configuration**

Setup for Client with injection at the Master

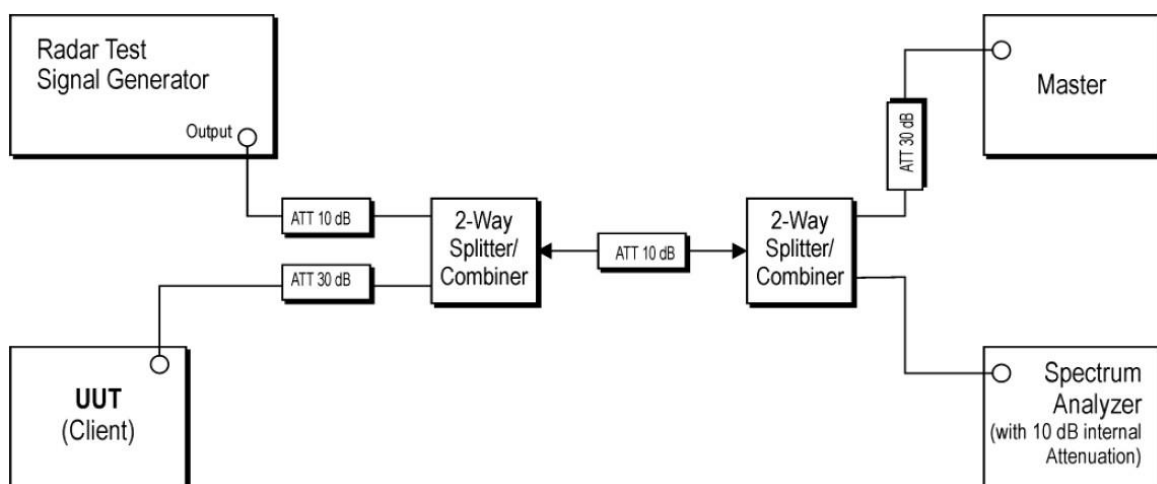



## Radar Waveform Calibration Result

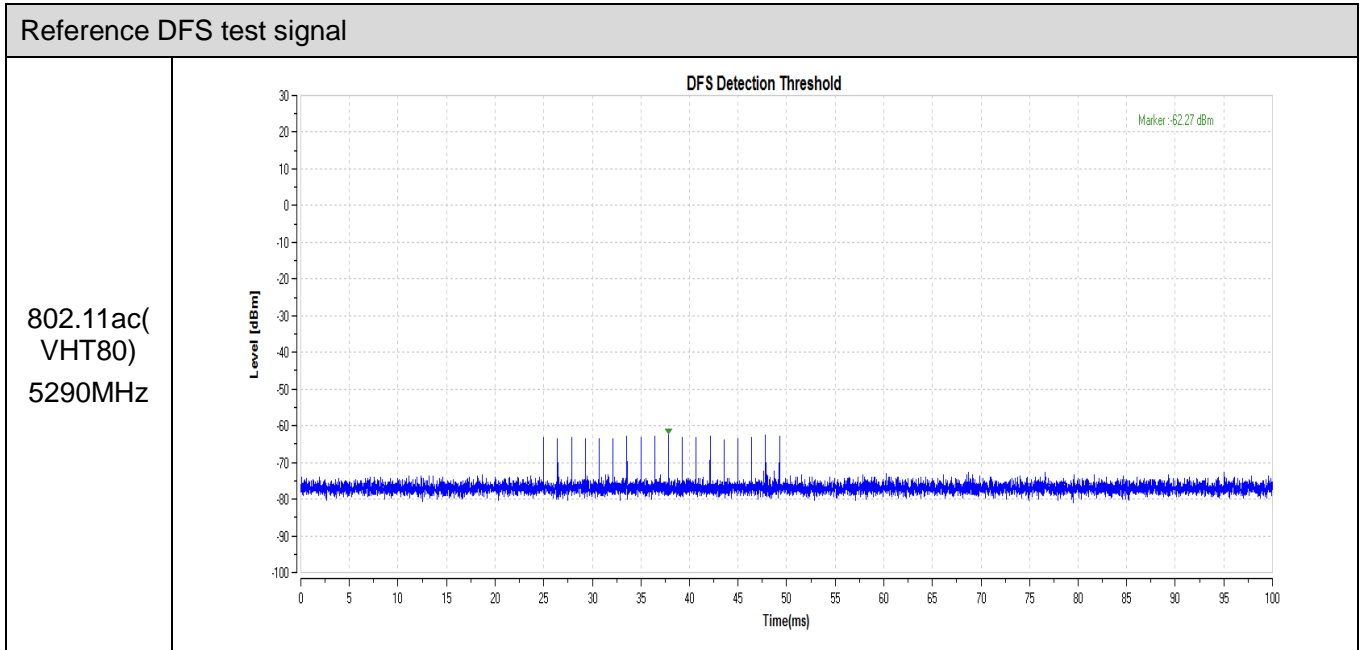

### Test Procedure

1. The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device
3. A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
4. EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
5. When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type
7. Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by:  $Dwell (0.3ms) = S (12000ms) / B (4000)$ ; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by:  $C (ms) = N \times Dwell (0.3ms)$ ; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
8. Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.



**Test Mode**

Please refer to the clause 2.4.


**Test Result**

**Passed**                       **Not Applicable**

The product in this report belongs to Client Without Radar Detection.

Frequency	Test Item	Test Result	Limit	Verdict
802.11ac(VHT80) 5290MHz	Channel Move Time	0ms	< 10s	Pass
	Channel Closing Transmission Time	0ms	< 200+60ms	Pass
	Non-Occupancy Period	See test graph	≥1800	Pass



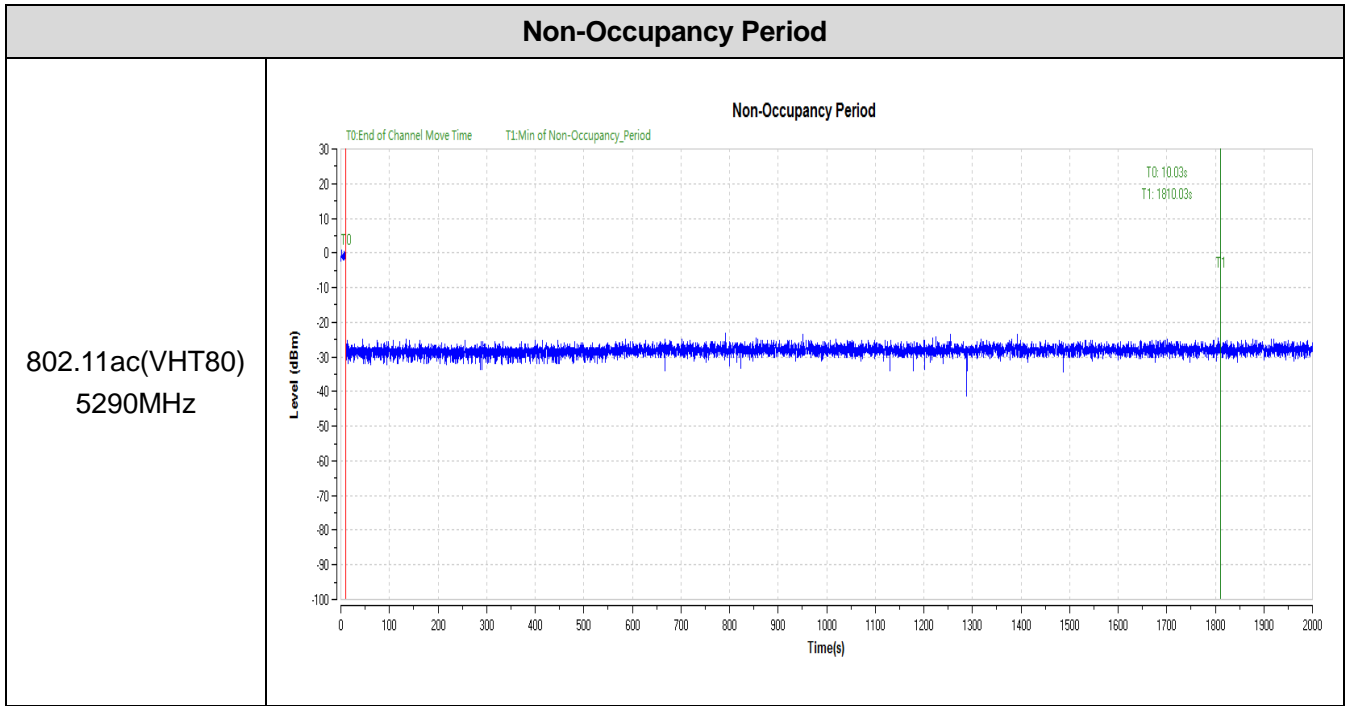

\*\*\*\*\*THE END\*\*\*\*\*