

Annex B


Internal Photo

Report No.: HK2205192113-E


Page 1 of 5

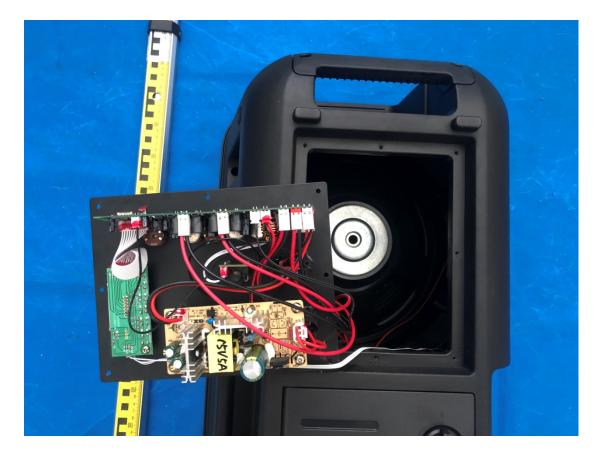


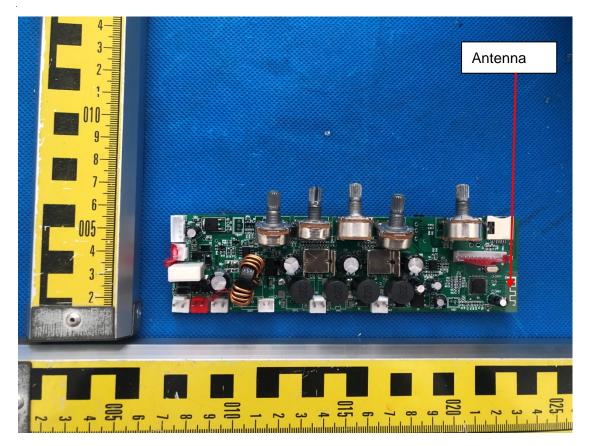


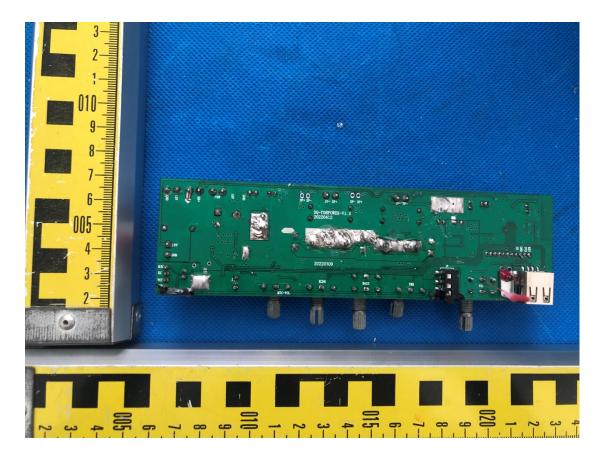



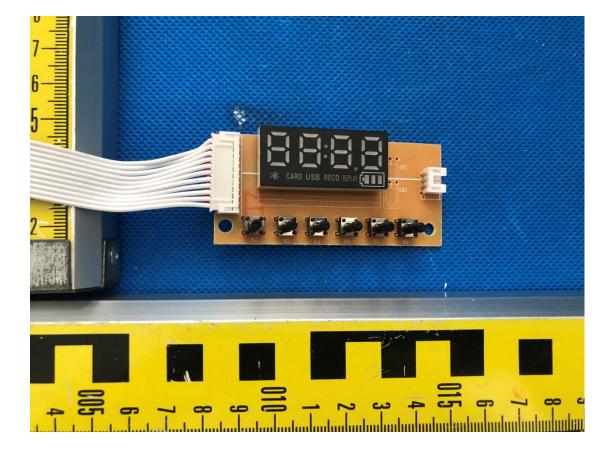

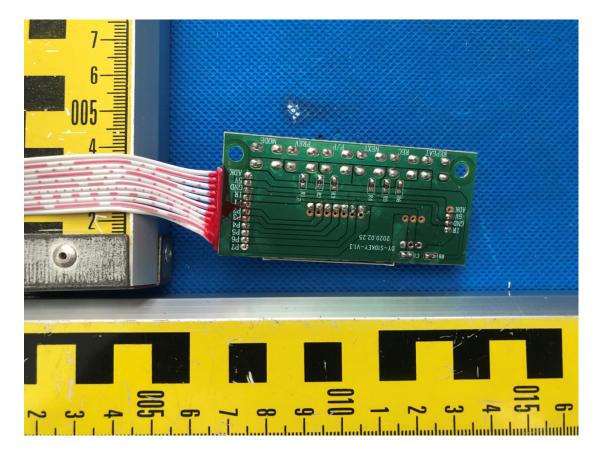

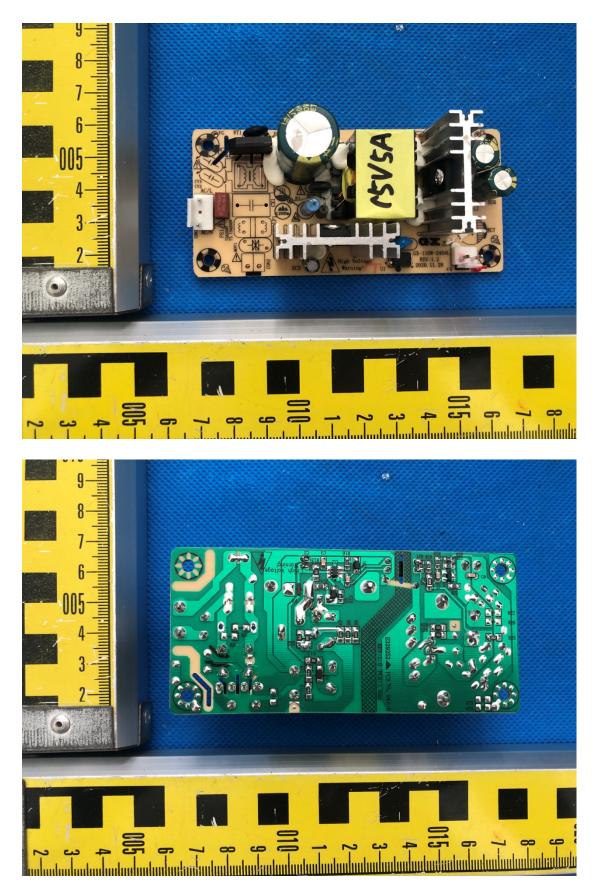

| | ling's , | |
|----------------------------|---|-----------------------------|
| | | second second second second |
| | | FM4.5 (12V4.5A |
| Usage | For Stand-by Use | For Cycle Use |
| Charging Voltage(V) | 13.50-13.80 | 14.50-14.80 |
| Max Charging Current(A) | 0.3C20 C'means Ah value of battery's rated capac | |
| CAUTION | e battery terminals | ંદ 🕸 |