

## Regulatory WLAN Antenna Information (Example)

(English Language Required for Intel Regulatory Review / Approval)

**(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.  
Remove Intel references and make this your own document)**

<b>Platform</b>	
Platform Owner	
Brand Name	
Model Name	LL2
ODM	
Target Launch Date	(YYYY/ MM/ DD)
<b>Antenna</b>	
Brand Name	Quanta
Part Number	<input checked="" type="checkbox"/> Tx1 Antenna: LL2ANT00100
	<input checked="" type="checkbox"/> Tx2 Antenna: LL2ANT00200
	<input type="checkbox"/> Tx3 (or Rx3) Antenna:
<b>Module</b>	
With WLAN Module	<input checked="" type="checkbox"/> Intel 5100N MOW M PCIE NB 无线网卡 (LI)
(Check Box)	<input checked="" type="checkbox"/> Intel 5300N MOW M PCIE NB 无线网卡 (LI)
	<input checked="" type="checkbox"/> Intel 5150 N & WiMAX MOW M PCIE NB 无线网卡 (LI)
	<input checked="" type="checkbox"/> Intel 5350 N & WiMAX MOW M PCIE NB 无线网卡 (LI)
	<input type="checkbox"/>
	<input type="checkbox"/>
	<input type="checkbox"/>
	<input type="checkbox"/>
	<input type="checkbox"/>

## Antenna Sample / Antenna Data Requirements for worldwide regulatory approval

Section	Description of Required OEM / ODM Antenna Information	US / IC	EU	Japan	Taiwan	S.Korea
1A	Part Number for Antenna only	Required	Required	Required	Required	Required
1B	Antenna Manufacturer Name	Required	Required	Required	Required	Required
1C	Description of Antenna Type	Required	N/A	N/A	N/A	N/A
1D	Part number of Antenna Assembly / cable impedance, length & diameter.	Required	Desired	Desired	Desired	Desired
1E	Tx1, Tx2 & Tx3 antenna (Peak Gain W/ cable loss) *	Required	Required	Required	Required	Required
	1E OR 1F, 1G, 1H					
1F	Tx1, Tx2 & Tx3 antenna (Peak Gain only) *	Required	Required	Required	Required	Required
1G	VSWR of cable including connector	Required	Required	Required	Required	Required
1H	Tx1, Tx2 & Tx3 antenna (Cable loss W/ connector) *	Required	Required	Required	Required	Required
2	Dimensioned Photographs <u>and</u> Drawings of Tx1, Tx2, and Tx3 (or Rx3) antennas	Required	Required	Required	Required	Required
3	Radiation patterns of antennas loaded in the host platform.	Required	Desired	Required	N/A	Required
4	Platform model name / number - correlated to antenna manufacturer and antenna part number	Required	Required	Desired	Required	Desired
5	Photograph(s) or Drawings showing location of antennas in platform. <u>(S. Korea requires photographs of antennas for approval submission). Taiwan requires pictures of each antenna type shown in the system.</u>	Required	Required	Desired	<u>Required (Photos)</u>	<u>Required (Photos)</u>
6	Mech. drawings / photos with dimensions of antenna locations and distance from end-user (For evaluation of SAR testing requirement).	Required	N/A	N/A	N/A	N/A
7	Photograph(s) or Drawings showing the location of all antennas (WLAN, other) and distance between those transmitting antennas. Information will be used to evaluate whether co-location testing is required.	Required	N/A	N/A	N/A	N/A
8	Local representative contact information for LMA/ PARS process.	Required	N/A	N/A	N/A	N/A

**NOTE:**

(\*) if 3<sup>rd</sup> antenna is Rx only (e.g. receive only for 4965AGN) then peak gain and cable loss not required

# Antenna Information

## Section 1. Antenna Assembly Specifications

### Antenna Assembly Summary:

1A Antenna Part Number	1B Manufacture	1C Antenna Type	1D Cable Assembly Part Number and Information	1E *Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G VSWR	1H Cable Loss (dBi)
(P/N: LL2ANT00100) Tx1 antenna	Quanta	PIFA	50 ohm Coaxial. length:480mm diameter: 1.37mm Connector: IPEX	2400-2500MHz 0.4 dBi (peak)	2400-2500MHz 1.9 dBi (peak)	2400-2500MHz 2 max	2400-2500MHz 1.5 dBi (peak)
				2496-2690MHz -0.4 dBi (peak)	2496-2690MHz 1.3 dBi (peak)	2496-2690MHz 2 max	2496-2690MHz 1.7 dBi (peak)
				5150-5350MHz 1.5 dBi (peak)	5150-5350MHz 4.0 dBi (peak)	5150-5350MHz 2 max	5150-5350MHz 2.5 dBi (peak)
				5470-5725MHz 1.7 dBi (peak)	5470-5725MHz 4.4 dBi (peak)	5470-5725MHz 2 max	5470-5725MHz 2.7 dBi (peak)
				5725-5850MHz 0.3 dBi (peak)	5725-5850MHz 3.2 dBi (peak)	5725-5850MHz 2 max	5725-5850MHz 2.9 dBi (peak)
(P/N: LL2ANT00200) Tx2 (or Rx2 for 512 family) antenna	Quanta	PIFA	50 ohm Coaxial. length:660mm diameter: 1.37mm Connector: IPEX	2400-2500MHz -1.7 dBi (peak)	2400-2500MHz 0.0 dBi (peak)	2400-2500MHz 2 max *	2400-2500MHz 1.7 dBi (peak)
				2496-2690MHz -1.4 dBi (peak)*	2496-2690MHz 0.6 dBi (peak) *	2496-2690MHz 2 max *	2496-2690MHz 2.0 dBi (peak)*
				5150-5350MHz 1.9 dBi (peak)	5150-5350MHz 4.9 dBi (peak) *	5150-5350MHz 2 max *	5150-5350MHz 3.0 dBi (peak)
				5470-5725MHz -1.9 dBi (peak)	5470-5725MHz 1.2 dBi (peak) *	5470-5725MHz 2 max *	5470-5725MHz 3.1 dBi (peak)
				5725-5850MHz -0.1 dBi (peak)	5725-5850MHz 3.2 dBi (peak) *	5725-5850MHz 2 max *	5725-5850MHz 3.3 dBi (peak)

### NOTE:

(\*) If Rx2/Rx3 only (2<sup>nd</sup> or 3<sup>rd</sup> antenna receives only, e.g. for 512 family & 4965AGN) then the information marked with \* is not required

### Antenna Peak Gain Table:


Frequency (MHz)	Tx1 antenna		Tx2 (or Rx2) Antenna	
	Horizontal (dBi)	Vertical (dBi)	Horizontal (dBi)	Vertical (dBi)
2400	-0.5	0.2	-4.4	-1.7
2450	0.2	0.4	-2.1	-2.0
2500	-0.4	-0.7	-3.8	-2.7
2501	-0.6	-0.4	-3.6	-3.0
2593	-3.1	-1.1	-1.8	-2.0
2685	-3.4	-1.2	-1.4	-3.0
5150	0.8	-2.5	1.9	-2.8
5250	-0.2	-0.5	0.7	-1.7
5350	1.5	0.0	-0.5	-0.7
5470	-0.4	-0.4	-2.5	-2.3
5600	1.7	-1.8	-1.9	-4.9
5725	-1.1	-2.8	-2.0	-3.5
5785	0.3	-2.5	-0.1	-2.6
5850	-0.4	-1.6	-0.5	-3.6

- Antenna Peak Gain required being test in system basis.
- 1E frame contend absolutely peak antenna gain include H/V
- If Rx2 only (2<sup>nd</sup> antenna receives only, e.g. for 512 family) then the information is not required for Rx2.
- If Rx3 only (3<sup>rd</sup> antenna receives only, e.g. for 4965AGN) then the information is not required for Rx3.


## Section 2. Dimensioned Photos or Drawings of Antennas

Include a dimensioned photo and dimensioned drawing of Tx1 antenna here.

### Tx1 Antenna Dimensioned Drawing:

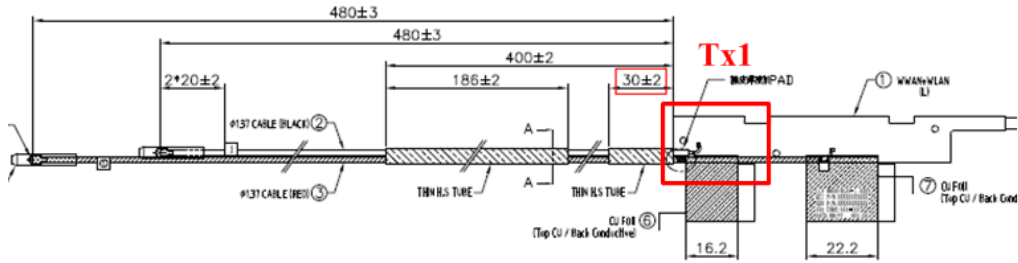


### Tx1 Antenna Photo:

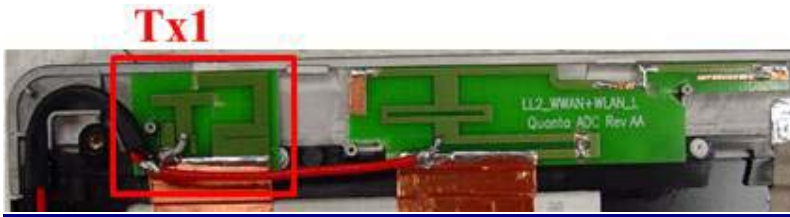

Include a dimensioned photo and dimensioned drawing of Tx2 (or Rx2) antenna here.

**Tx2 (or Rx2) Antenna Dimensioned Drawing:**

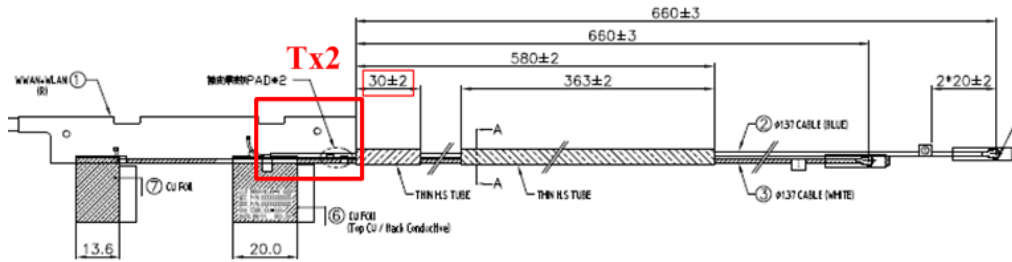


**Tx2 (or Rx2) Antenna Photo:**



**Include front view photo of all 3 antennas here.**

Antenna Manufacturer: Quanta


Antenna Part Number: LL2ANT00100 (Tx1), LL2ANT00200 (Tx2 or Rx2)

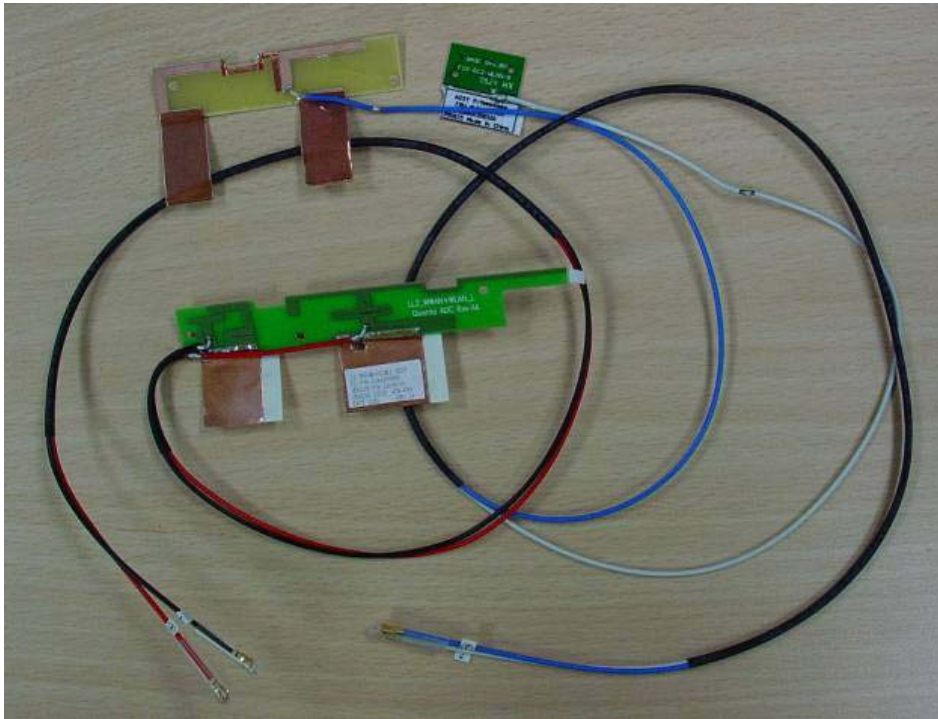

**Include back view photo of all 3 antennas here.**

Antenna Manufacturer: Quanta


Antenna Part Number: LL2ANT00100 (Main), LL2ANT00200 (Aux)

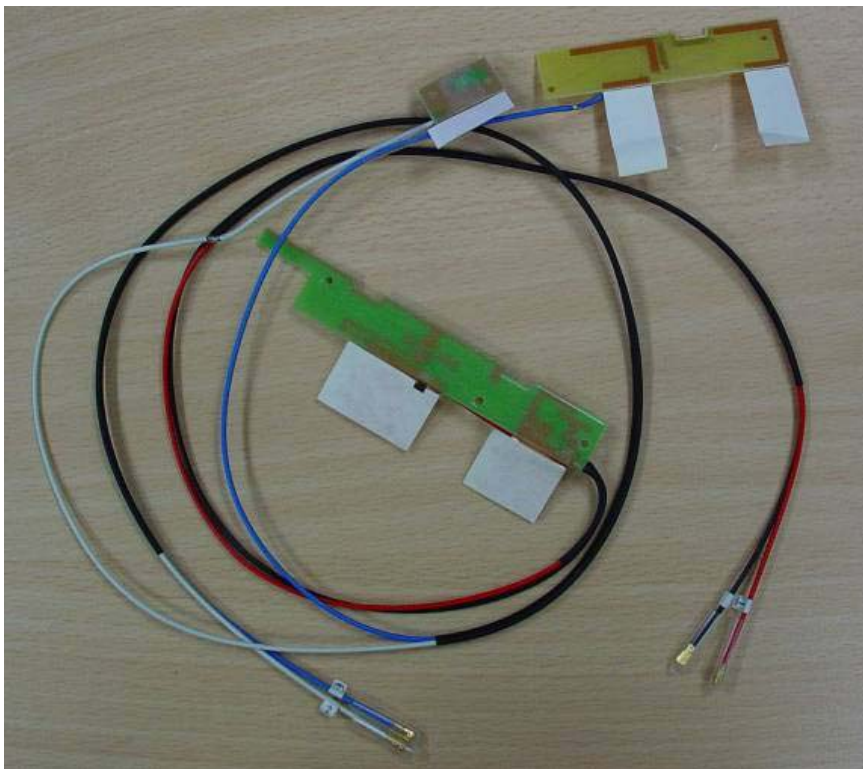

## Section 3. Radiation characteristics of antennae Loaded in Host Platform


### 2400-2500MHz radiation characteristic

Tx1 antenna: 2400 MHz

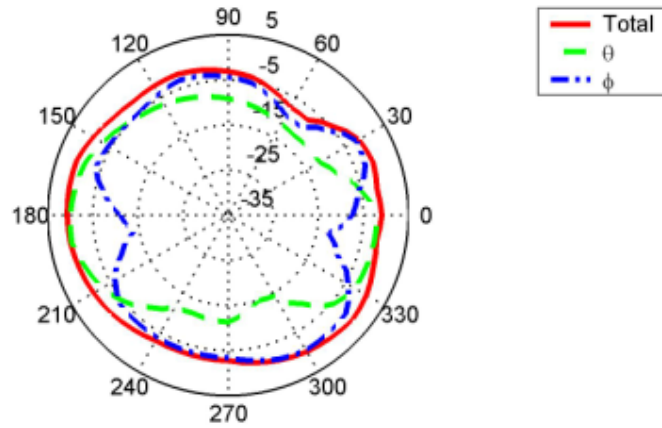

Center Frequency	<b>2400 MHz</b>
Horizontal (dBi) peak	<b>-0.5</b>
Vertical (dBi) peak	<b>0.2</b>


**Tx1 antenna: 2450 MHz**

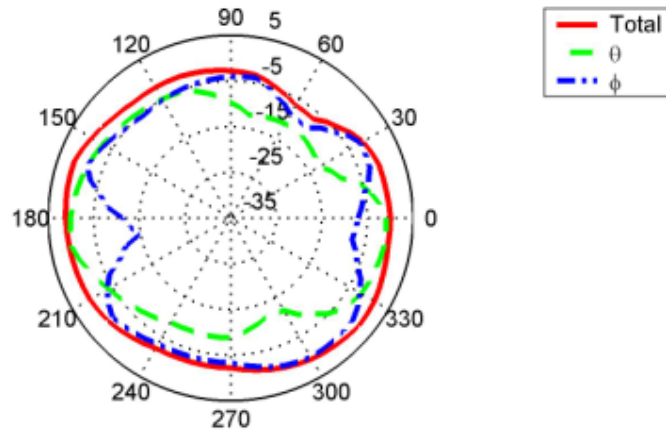

Center Frequency	<b>2450 MHz</b>
Horizontal (dBi) peak	<b>0.2</b>
Vertical (dBi) peak	<b>0.4</b>




**Tx1 antenna: 2500 MHz**

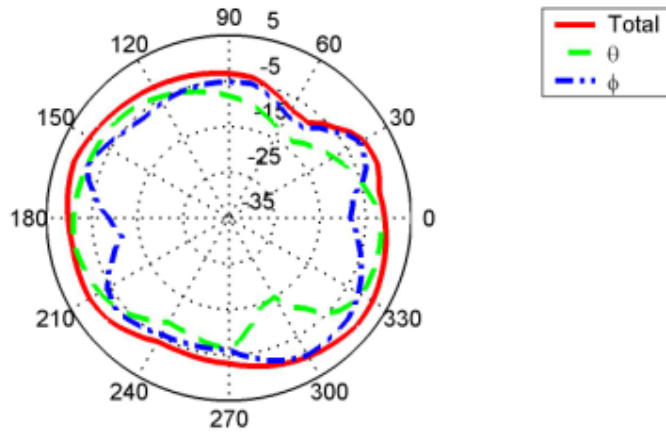


Center Frequency	<b>2500 MHz</b>
Horizontal (dBi) peak	<b>-0.4</b>
Vertical (dBi) peak	<b>-0.7</b>

**Tx2 (or Rx2) antenna: 2400 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

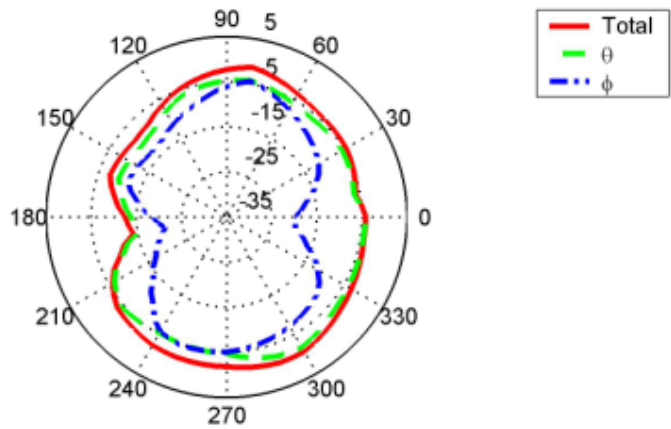


Center Frequency	<b>2400 MHz</b>
Horizontal (dBi) peak	<b>-4.4</b>
Vertical (dBi) peak	<b>-1.7</b>

**Tx2 (or Rx2) antenna: 2450 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

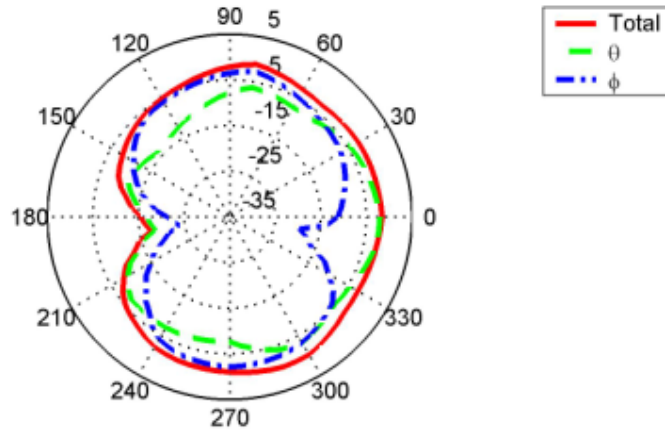

Center Frequency	<b>2450 MHz</b>
Horizontal (dBi) peak	<b>-2.1</b>
Vertical (dBi) peak	<b>-2.0</b>


**Tx2 (or Rx2) antenna: 2500 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

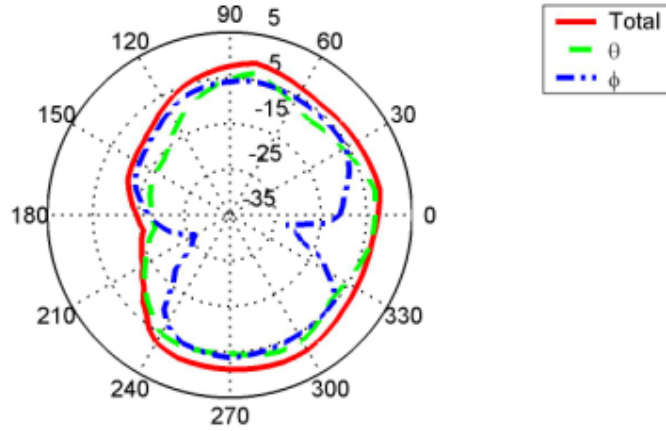

Center Frequency	<b>2500 MHz</b>
Horizontal (dBi) peak	<b>-3.8</b>
Vertical (dBi) peak	<b>-2.7</b>


2490-2700MHz radiation characteristic

**Tx1antenna: 2501MHz**

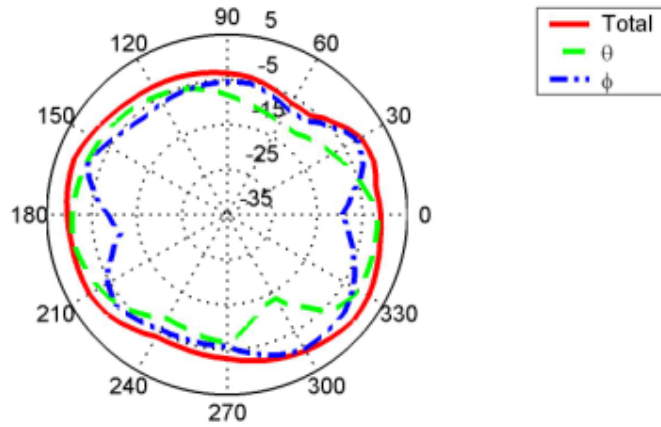


Center Frequency	<b>2501 MHz</b>
Horizontal (dBi) peak	<b>-0.6</b>
Vertical (dBi) peak	<b>-0.4</b>

**Tx1 antenna: 2593MHz**

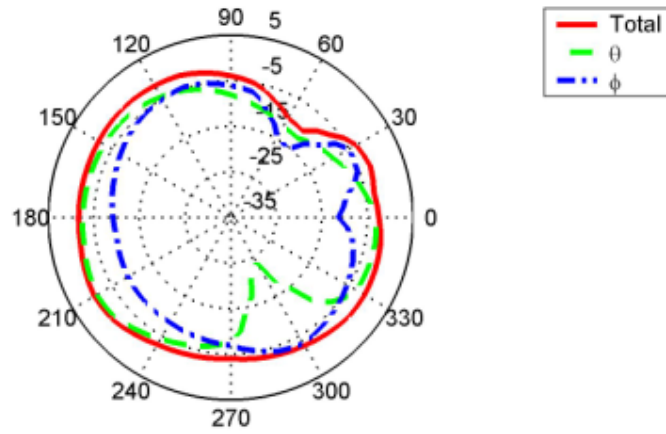


Center Frequency	<b>2593 MHz</b>
Horizontal (dBi) peak	<b>-3.1</b>
Vertical (dBi) peak	<b>-1.1</b>

**Tx1 antenna: 2685 MHz**

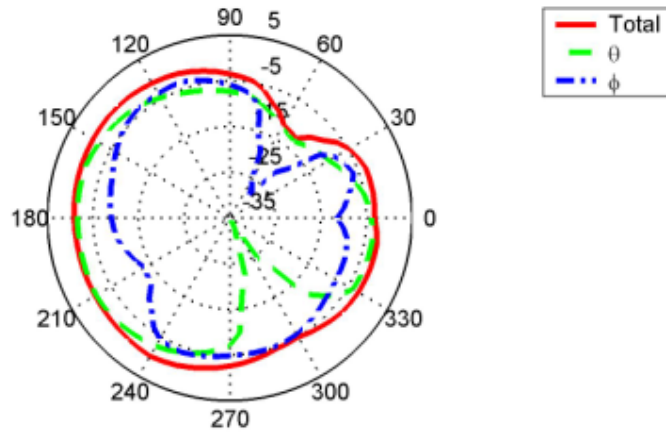

Center Frequency	<b>2685 MHz</b>
Horizontal (dBi) peak	<b>-3.4</b>
Vertical (dBi) peak	<b>-1.2</b>


**Tx2 (or Rx2) antenna: 2501MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

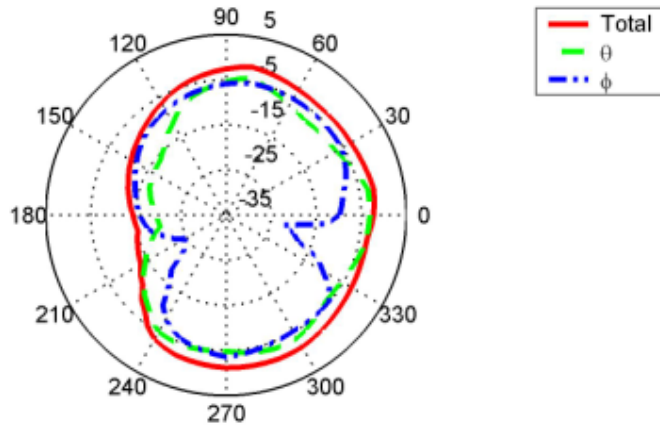

Center Frequency	<b>2501 MHz</b>
Horizontal (dBi) peak	<b>-3.6</b>
Vertical (dBi) peak	<b>-3.0</b>




**Tx2 (or Rx2) antenna: 2593MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

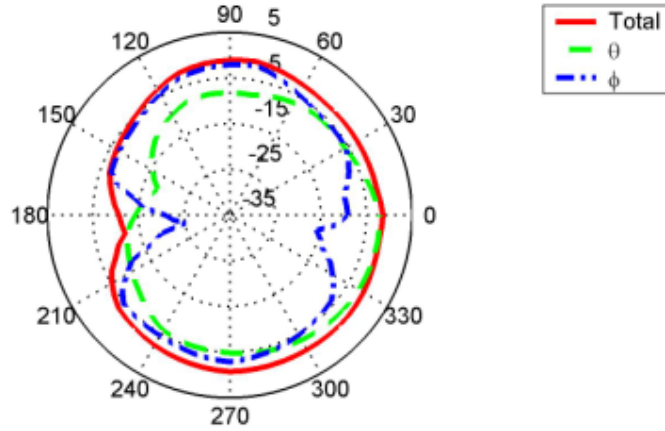

Center Frequency	<b>2593 MHz</b>
Horizontal (dBi) peak	<b>-1.8</b>
Vertical (dBi) peak	<b>-2.0</b>


**Tx2 (or Rx2) antenna: 2685 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

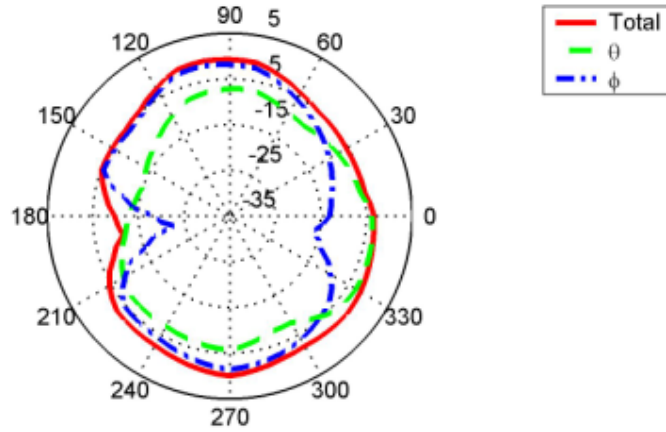

Center Frequency	<b>2685 MHz</b>
Horizontal (dBi) peak	<b>-1.4</b>
Vertical (dBi) peak	<b>-3.0</b>


**5150-5350 MHz radiation characteristic**

**Tx1 antenna: 5150 MHz**

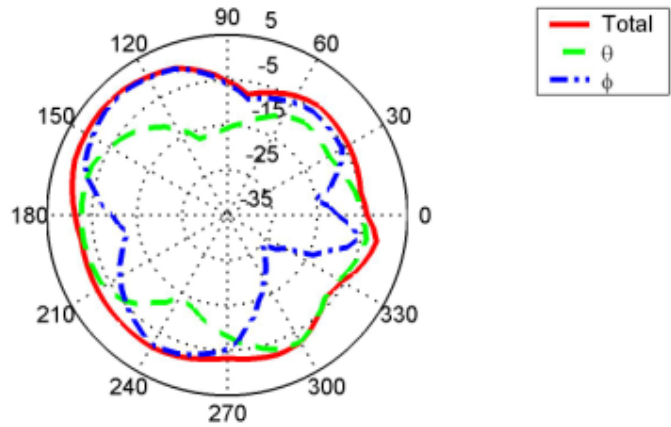


Center Frequency	<b>5150 MHz</b>
Horizontal (dBi) peak	<b>0.8</b>
Vertical (dBi) peak	<b>-2.5</b>

**Tx1 antenna: 5250 MHz**

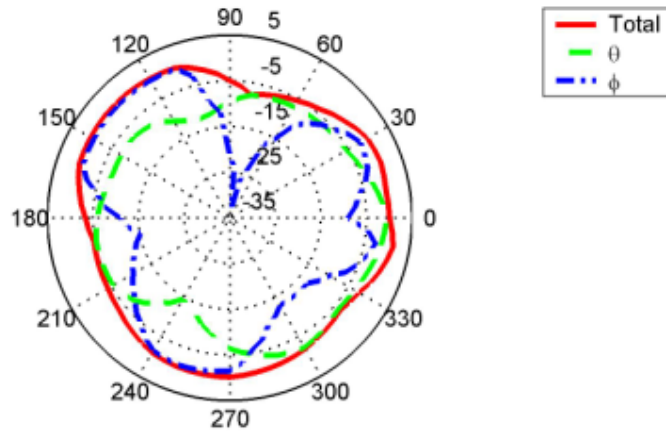


Center Frequency	<b>5250 MHz</b>
Horizontal (dBi) peak	<b>-0.2</b>
Vertical (dBi) peak	<b>-0.5</b>

**Tx1 antenna: 5350 MHz**

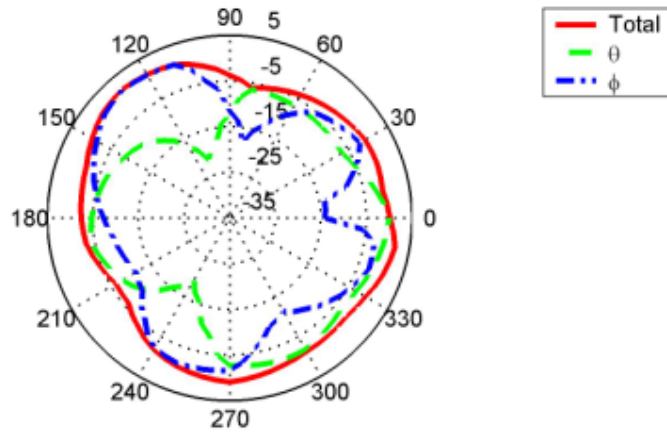


Center Frequency	<b>5350 MHz</b>
Horizontal (dBi) peak	<b>1.5</b>
Vertical (dBi) peak	<b>0.0</b>

**Tx2 (or Rx2) antenna: 5150 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

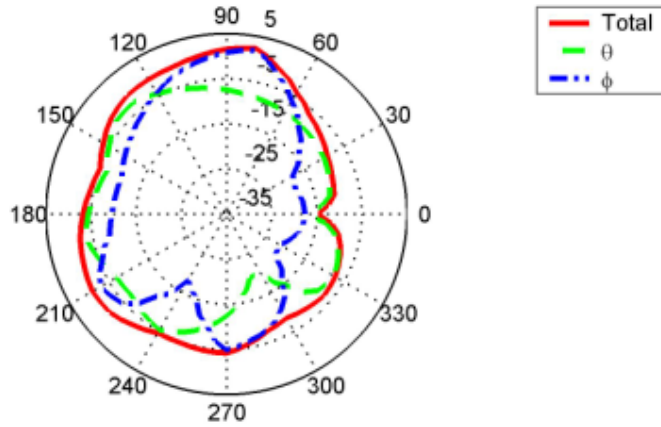


Center Frequency	<b>5150 MHz</b>
Horizontal (dBi) peak	<b>1.9</b>
Vertical (dBi) peak	<b>-2.8</b>

**Tx2 (or Rx2) antenna: 5250 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

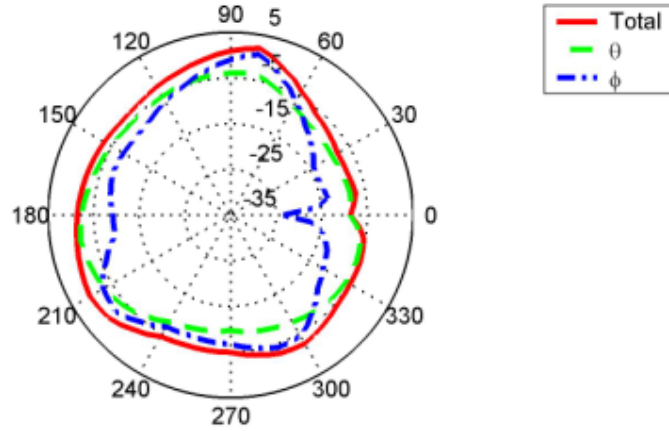

Center Frequency	<b>5250 MHz</b>
Horizontal (dBi) peak	<b>0.7</b>
Vertical (dBi) peak	<b>-1.7</b>

**Tx2 (or Rx2) antenna: 5350 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

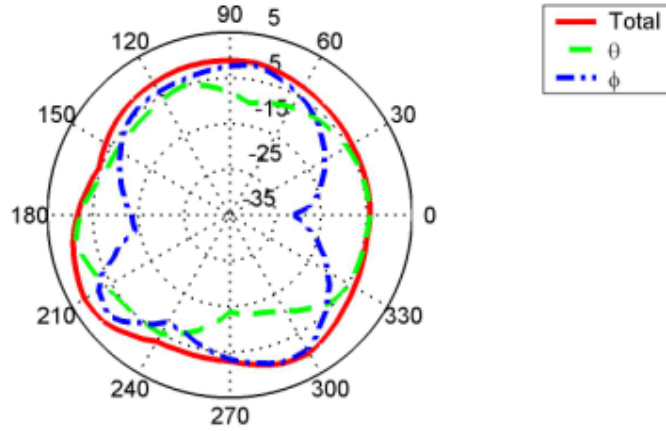


Center Frequency	<b>5350 MHz</b>
Horizontal (dBi) peak	<b>-0.5</b>
Vertical (dBi) peak	<b>-0.7</b>




5470-5725MHz radiation characteristic

**Tx1 antenna: 5470 MHz**

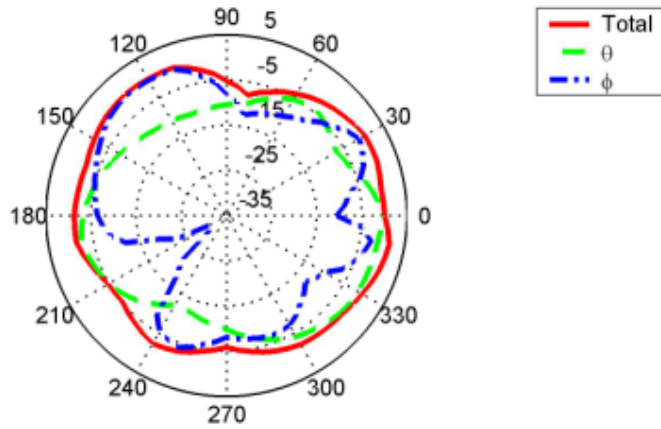


Center Frequency	<b>5470 MHz</b>
Horizontal (dBi) peak	<b>-0.4</b>
Vertical (dBi) peak	<b>-0.4</b>

**Tx1 antenna: 5597.5 MHz**

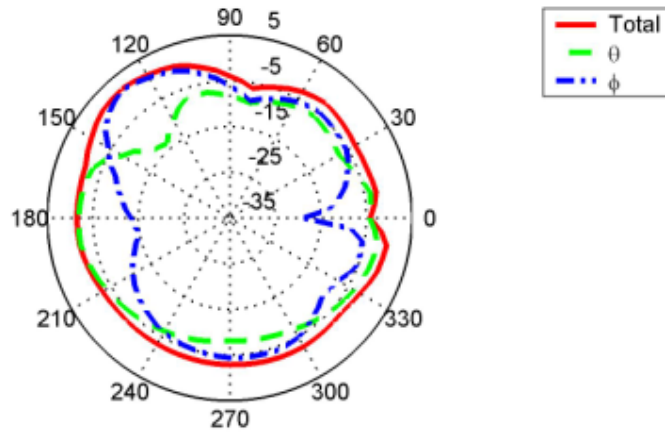


Center Frequency	<b>5597.5 MHz</b>
Horizontal (dBi) peak	<b>1.7</b>
Vertical (dBi) peak	<b>-1.8</b>

**Tx1 antenna: 5725 MHz**

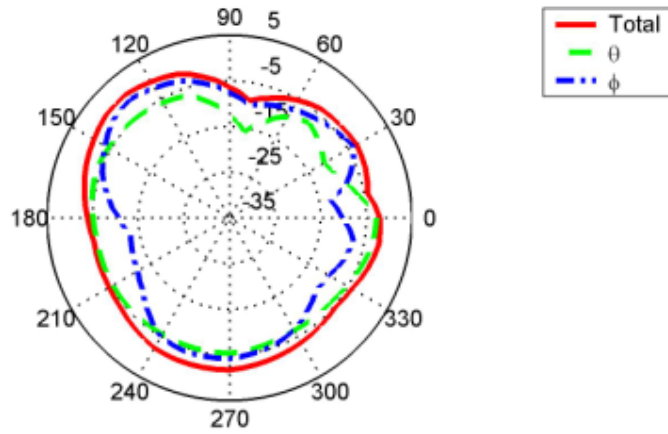


Center Frequency	<b>5725 MHz</b>
Horizontal (dBi) peak	<b>-1.1</b>
Vertical (dBi) peak	<b>-2.8</b>

**Tx2 (or Rx2) antenna: 5470 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

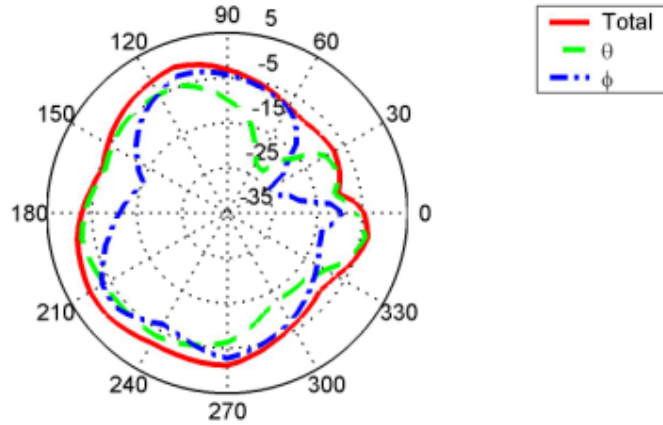


Center Frequency	<b>5470 MHz</b>
Horizontal (dBi) peak	<b>-2.5</b>
Vertical (dBi) peak	<b>-2.3</b>

**Tx2 (or Rx2) antenna: 5597.5 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

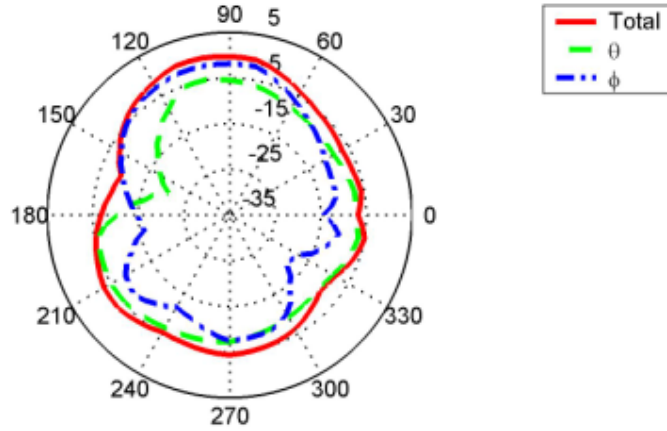

Center Frequency	<b>5597.5 MHz</b>
Horizontal (dBi) peak	<b>-1.9</b>
Vertical (dBi) peak	<b>-4.9</b>


**Tx2 (or Rx2) antenna: 5725 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

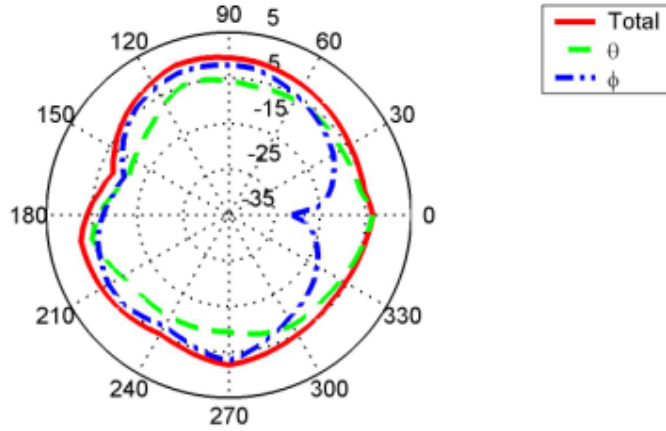

Center Frequency	<b>5725 MHz</b>
Horizontal (dBi) peak	<b>-2.0</b>
Vertical (dBi) peak	<b>-3.5</b>


5725-5850 MHz radiation characteristic

**Tx1 antenna: 5725 MHz**

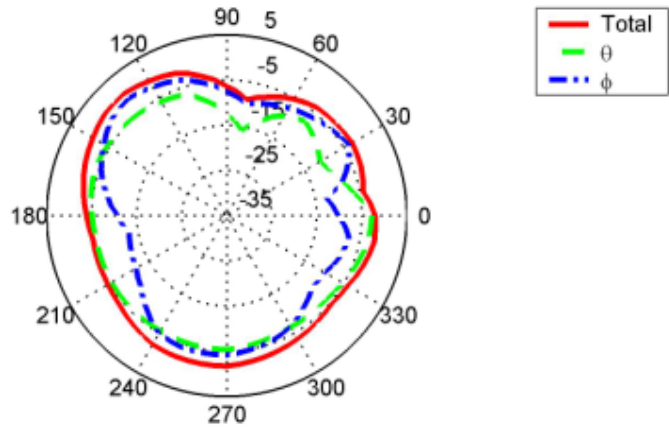

Center Frequency	<b>5725 MHz</b>
Horizontal (dBi) peak	<b>-1.1</b>
Vertical (dBi) peak	<b>-2.8</b>


### Tx1 antenna: 5785 MHz

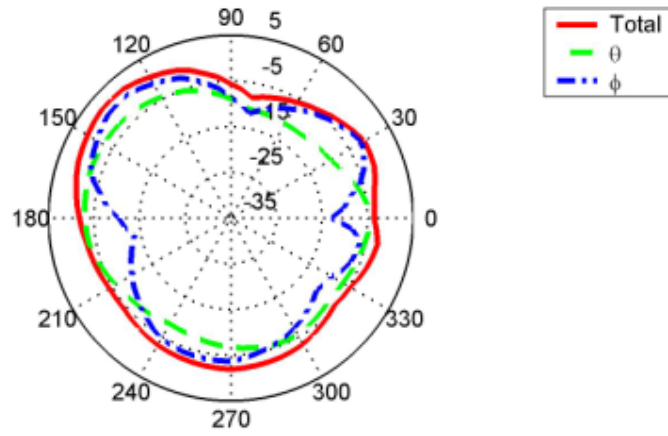

Center Frequency	<b>5785 MHz</b>
Horizontal (dBi) peak	<b>0.3</b>
Vertical (dBi) peak	<b>-2.5</b>




**Tx1 antenna: 5850 MHz**

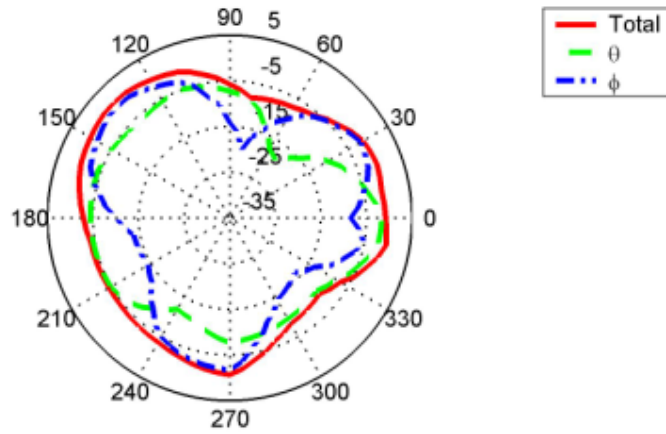


Center Frequency	<b>5850 MHz</b>
Horizontal (dBi) peak	<b>-0.4</b>
Vertical (dBi) peak	<b>-1.6</b>

**Tx2 (or Rx2) antenna: 5725 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

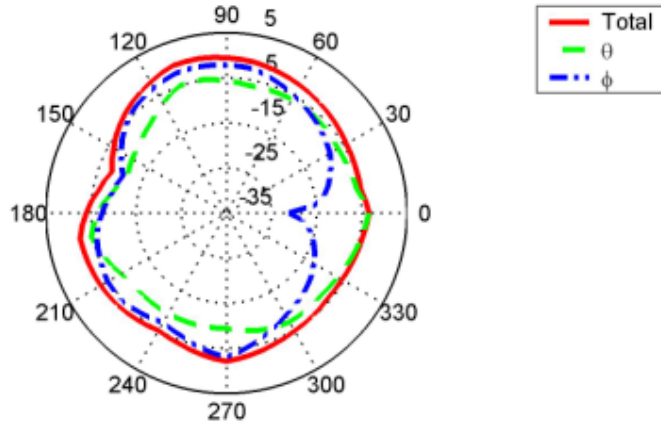


Center Frequency	<b>5725 MHz</b>
Horizontal (dBi) peak	<b>-2.0</b>
Vertical (dBi) peak	<b>-3.5</b>

**Tx2 (or Rx2) antenna: 5785 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

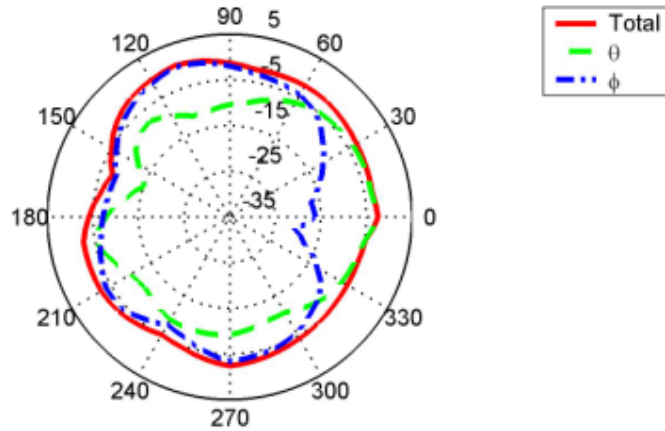

Center Frequency	<b>5785 MHz</b>
Horizontal (dBi) peak	<b>-0.1</b>
Vertical (dBi) peak	<b>-2.6</b>

**Tx2 (or Rx2) antenna: 5850 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

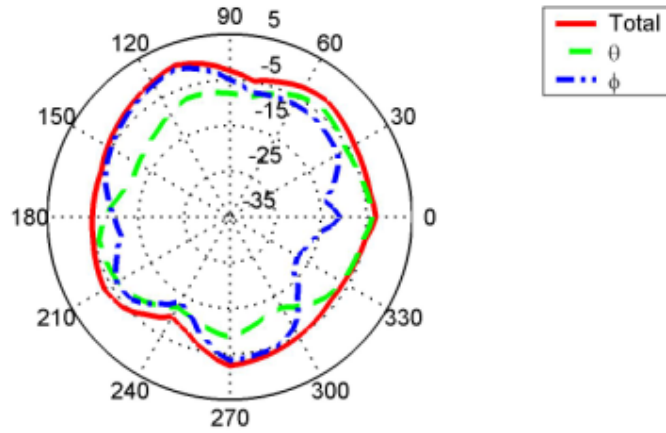


Center Frequency	<b>5850 MHz</b>
Horizontal (dBi) peak	<b>-0.5</b>
Vertical (dBi) peak	<b>-3.6</b>

## Section 4. Host Platform Information

OEM / ODM Host platform: (XXXXXXX) platform correlated to antenna data  
Rating Label Photo:


## Section 5. Antenna Host Platform Location Information

Include a **dimensioned photo or dimensioned drawing** of Tx1, Tx2 and Tx3 antenna placements (measurements are not required for receive-only antenna). Any antenna that transmits must show dimensions to bottom of laptop.

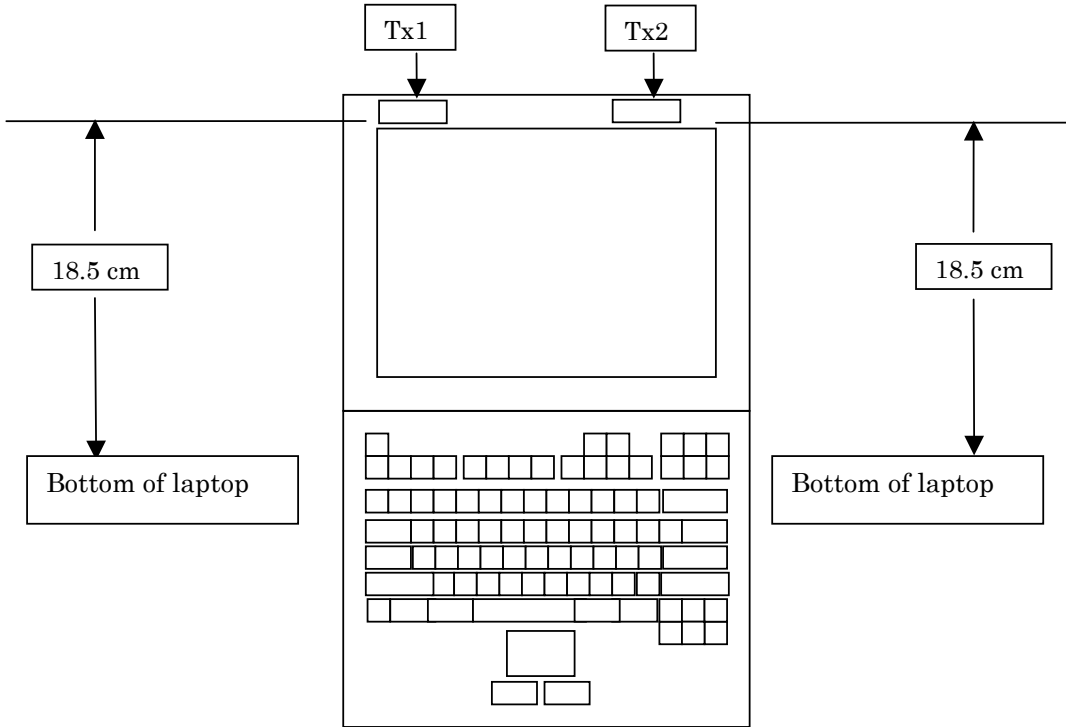

## Section 6. Antenna dimensional information for SAR evaluation


Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between the transmit antennas and the user (excluding hands, wrist, feet, lap/ thigh, and ankle)

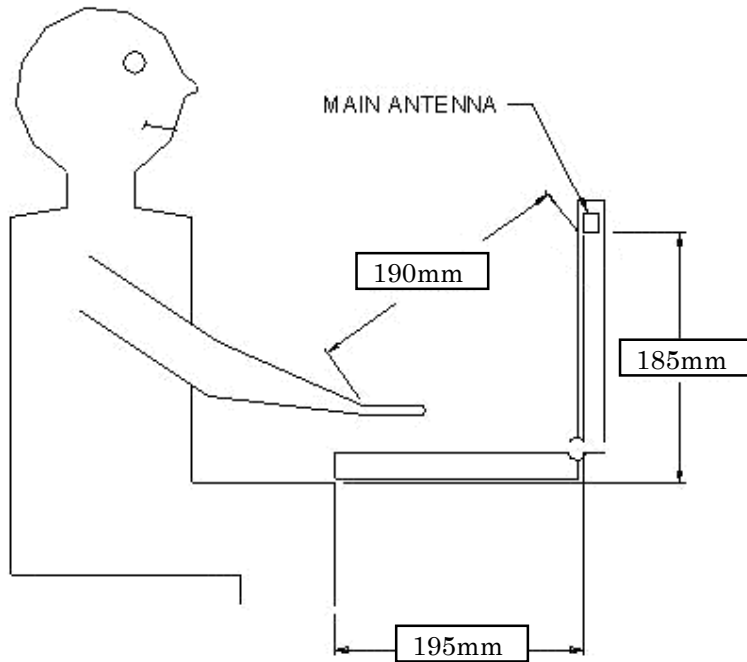

## Section 7. Diagram Example of Co-Location Antenna Separation

Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between all WLAN transmit antennas and other co-located radiator transmit antenna such as Bluetooth, WWAN,..

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

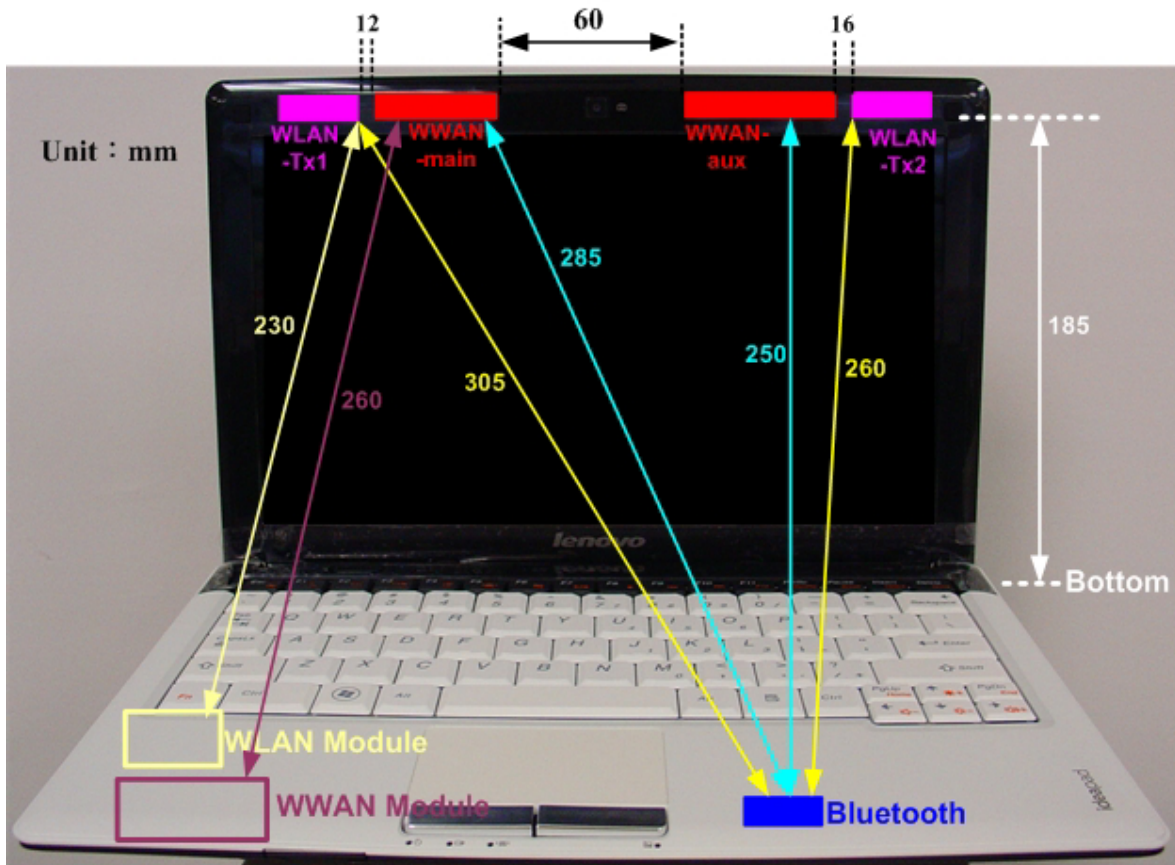



## Section 8. Local representative contact information

Local representative contact information is required for regulatory support for target countries below.

	Local company name	Contact name	Phone number	FAX Number	e-Mail Address	Notes
Argentina						
Brazil						
Indonesia						
Israel						
Malaysia						
Mexico						
Singapore						Telecommunication Equipment Dealer License Required
South Africa						
USA, Canada						