

# RADIO PERFORMANCE TEST REPORT

**Test Report No.** : OT-224-RWD-032

**Reception No.** : 2203001006

**Applicant** : ONSEMIROTECH CO., LTD.

**Address** : Rm920, Lead Smartsquare, Maehwasandan3gil 1, Siheung-si, Gyeonggi-do, 14931, South Korea

**Manufacturer** : ONSEMIROTECH CO., LTD.

**Address** : Rm920, Lead Smartsquare, Maehwasandan3gil 1, Siheung-si, Gyeonggi-do, 14931, South Korea

**Type of Equipment** : BLE Module

**FCC ID.** : 2A6YE-OSB-32

**Model Name** : OSB-32

**Multiple Model Name** : OSB-11, OSB-10, IOKEY

**Serial number** : N/A

**Total page of Report** : 36 pages (including this page)

**Date of Incoming** : April 04, 2022

**Date of issue** : April 27, 2022

## SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.247**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

유수민

기홍

Tested by  
Su-Min, Yoo / Assistant Manager  
ONETECH Corp.

Reviewed by  
Tae-Ho, Kim / General Manager  
ONETECH Corp.

Approved by  
Ki-Hong, Nam / General Manager  
ONETECH Corp.

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

## CONTENTS

	PAGE
<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>5</b>
<b>2. TEST SUMMARY .....</b>	<b>6</b>
<b>2.1 TEST ITEMS AND RESULTS .....</b>	<b>6</b>
<b>2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....</b>	<b>6</b>
<b>2.3 RELATED SUBMITTAL(S) / GRANT(S) .....</b>	<b>6</b>
<b>2.4 PURPOSE OF THE TEST .....</b>	<b>6</b>
<b>2.5 TEST METHODOLOGY.....</b>	<b>6</b>
<b>2.6 TEST FACILITY.....</b>	<b>6</b>
<b>3. GENERAL INFORMATION .....</b>	<b>7</b>
<b>3.1 PRODUCT DESCRIPTION.....</b>	<b>7</b>
<b>3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....</b>	<b>7</b>
<b>4. EUT MODIFICATIONS.....</b>	<b>7</b>
<b>5. SYSTEM TEST CONFIGURATION .....</b>	<b>8</b>
<b>5.1 JUSTIFICATION .....</b>	<b>8</b>
<b>5.2 PERIPHERAL EQUIPMENT .....</b>	<b>8</b>
<b>5.3 MODE OF OPERATION DURING THE TEST .....</b>	<b>9</b>
<b>5.4 CONFIGURATION OF TEST SYSTEM .....</b>	<b>11</b>
<b>6. PRELIMINARY TEST .....</b>	<b>11</b>
<b>6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....</b>	<b>11</b>
<b>6.2 GENERAL RADIATED EMISSIONS TESTS .....</b>	<b>11</b>
<b>7. MINIMUM 6 DB BANDWIDTH .....</b>	<b>12</b>
<b>7.1 OPERATING ENVIRONMENT .....</b>	<b>12</b>
<b>7.2 TEST SET-UP .....</b>	<b>12</b>
<b>7.3 TEST DATE .....</b>	<b>12</b>
<b>7.4 TEST DATA FOR 1 MBPS .....</b>	<b>13</b>
<b>8. MAXIMUM PEAK OUTPUT POWER .....</b>	<b>15</b>
<b>8.1 OPERATING ENVIRONMENT .....</b>	<b>15</b>
<b>8.2 TEST SET-UP .....</b>	<b>15</b>
<b>8.3 TEST DATE .....</b>	<b>15</b>
<b>8.4 TEST DATA FOR 1 MBPS .....</b>	<b>16</b>
<b>9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....</b>	<b>18</b>

<b>9.1 OPERATING ENVIRONMENT .....</b>	18
<b>9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT .....</b>	18
<b>9.3 TEST SET-UP FOR RADIATED MEASUREMENT.....</b>	18
<b>9.4 TEST DATE .....</b>	18
<b>9.5 TEST DATA FOR CONDUCTED EMISSION .....</b>	19
<b>9.5.1 Test data for 1 Mbps .....</b>	19
<b>9.6 TEST DATA FOR RADIATED EMISSION.....</b>	24
<b>9.6.1 Radiated Emission which fall in the Restricted Band.....</b>	24
<b>9.6.2 Spurious &amp; Harmonic Radiated Emission.....</b>	25
<b>10. PEAK POWER SPECTRAL DENSITY .....</b>	26
<b>10.1 OPERATING ENVIRONMENT .....</b>	26
<b>10.2 TEST SET-UP .....</b>	26
<b>10.3 TEST DATE .....</b>	26
<b>10.4 TEST DATA FOR 1 MBPS .....</b>	27
<b>11. RADIATED EMISSION TEST.....</b>	29
<b>11.1 OPERATING ENVIRONMENT .....</b>	29
<b>11.2 TEST SET-UP .....</b>	29
<b>11.3 TEST DATE .....</b>	30
<b>11.4 TEST DATA FOR 30 MHz ~ 1 GHz.....</b>	31
<b>11.5 TEST DATA FOR BELOW 30 MHZ .....</b>	32
<b>11.6 TEST DATA FOR ABOVE 1 GHz .....</b>	32
<b>12. CONDUCTED EMISSION TEST.....</b>	33
<b>12.1 OPERATING ENVIRONMENT .....</b>	33
<b>12.2 TEST SET-UP .....</b>	33
<b>12.3 TEST DATE .....</b>	33
<b>12.4 TEST DATA.....</b>	34
<b>13. LIST OF TEST EQUIPMENT .....</b>	36

**Revision History**

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-224-RWD-032	April 27, 2022	Initial Release	All

## 1. VERIFICATION OF COMPLIANCE

Applicant : ONSEMIROTECH CO., LTD.

Address : Rm920, Lead Smartsquare, Maehwasandan3gil 1, Siheung-si, Gyeonggi-do, 14931, South Korea

Contact Person : DONG-HOON, YOO / CEO

Telephone No. : +82-70-8796-9444

FCC ID : 2A6YE-OSB-32

Model Name : OSB-32

Brand Name : -

Serial Number : N/A

Date : April 27, 2022

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	BLE Module
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2020
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT	Certification
AUTHORIZATION REQUESTED	
EQUIPMENT WILL BE OPERATED	FCC PART 15 SUBPART C Section 15.247
UNDER FCC RULES PART(S)	KDB 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

## 2. TEST SUMMARY

### 2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

### 2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

### 2.3 Related Submittal(s) / Grant(s)

Original submittal only

### 2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

### 2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2020. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

### 2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

- Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

### 3. GENERAL INFORMATION

#### 3.1 Product Description

The ONSEMIROTECH CO., LTD., Model OSB-32 (referred to as the EUT in this report) is a BLE Module. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	BLE Module
OPERATING FREQUENCY	2 402 MHz ~ 2 480 MHz
MODULATION TYPE	GFSK
RF OUTPUT POWER	-4.13 dBm
NUMBER OF CHANNEL	40 Channel
ANTENNA TYPE	Chip Antenna
ANTENNA GAIN	2.3 dBi
Electrical Rating	DC 3.30 V
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	32 MHz

#### 3.2 Alternative type(s)/model(s); also covered by this test report.

- The following lists consist of the added model and their differences.

Model Name	Differences	Tested
OSB-32	Basic Model	<input checked="" type="checkbox"/>
OSB-11, OSB-10, IOKEY	The model is identical to basic model except for the model name only.	<input type="checkbox"/>

Note: 1. Applicant consigns only basic model to test. Therefore this test report just guarantees the units, which have been tested.

2. The Applicant/manufacturer is responsible for the compliance of all variants.

### 4. EUT MODIFICATIONS

- None

## 5. SYSTEM TEST CONFIGURATION

### 5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	ONSEMIROTECH CO., LTD.	N/A	N/A

### 5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
OSB-32	ONSEMIROTECH CO., LTD.	BLE Module (EUT)	-
IdeaPad L340	Lenovo	Notebook PC	EUT

### 5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 440 MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is "XZ" axis, but the worst data was recorded in this report.

#### - Channel List (Bluetooth LE)

Channel	Frequency[MHz]	Channel	Frequency[MHz]	Channel	Frequency[MHz]
0	2 402.00	14	2 430.00	28	2 458.00
1	2 404.00	15	2 432.00	29	2 460.00
2	2 406.00	16	2 434.00	30	2 462.00
3	2 408.00	17	2 436.00	31	2 464.00
4	2 410.00	18	2 438.00	32	2 466.00
5	2 412.00	19	2 440.00	33	2 468.00
6	2 414.00	20	2 442.00	34	2 470.00
7	2 416.00	21	2 444.00	35	2 472.00
8	2 418.00	22	2 446.00	36	2 474.00
9	2 420.00	23	2 448.00	37	2 476.00
10	2 422.00	24	2 450.00	38	2 478.00
11	2 424.00	25	2 452.00	39	2 480.00
12	2 426.00	26	2 454.00		
13	2 428.00	27	2 456.00		


## - Duty Cycle

Mode	Tx On Time [ ms ]	Tx Off Time [ ms ]	Duty Cycle [ % ]	Correction Factor [ dB ]
Bluetooth LE_1 Mbps	0.392	0.626	62.62	2.03

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) \* 100

Correction Factor :  $10 * \log(1 / (\text{Duty Cycle} / 100))$

## - Test Plot

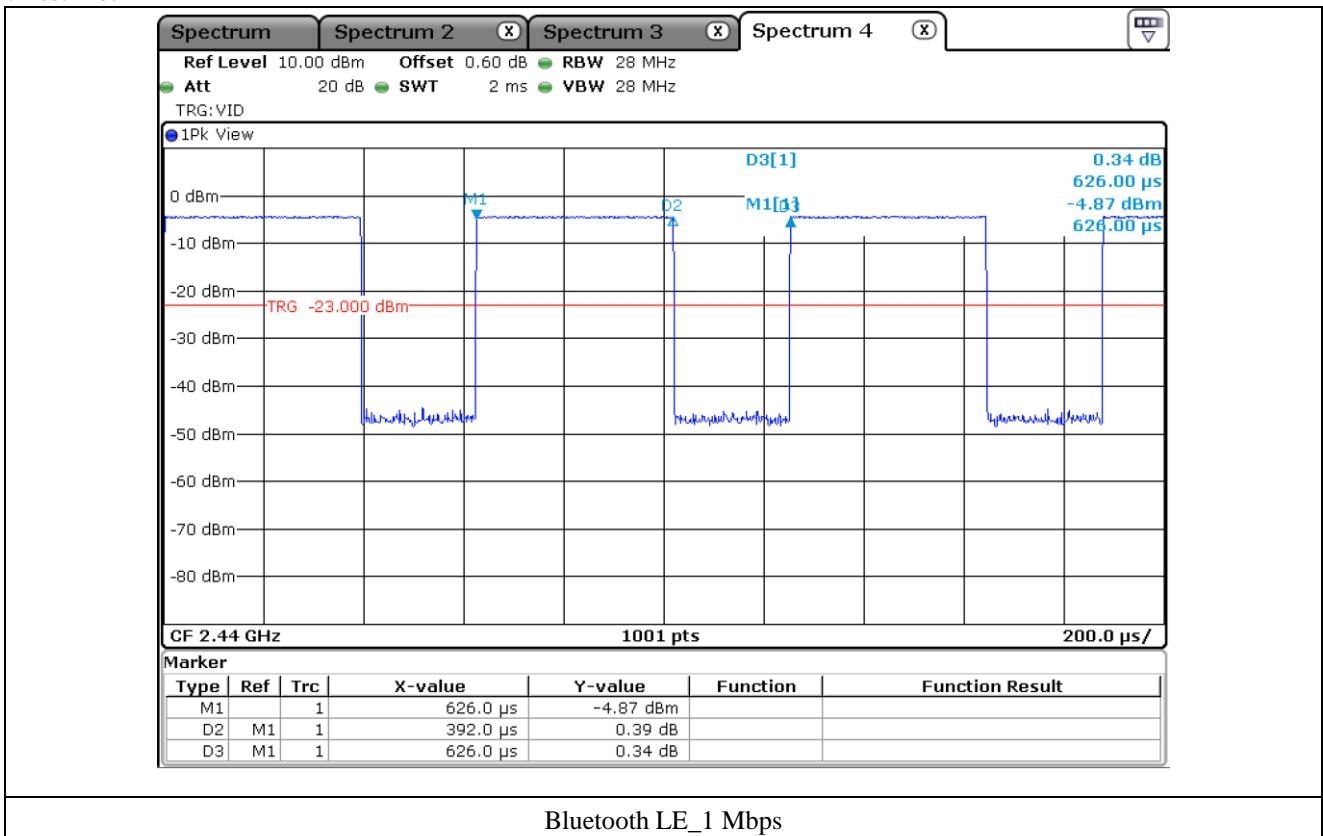

## 5.4 Configuration of Test System

**Line Conducted Test:** The EUT was tested in the Transmitting mode. All supporting equipment were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions.

**Radiated Emission Test:** Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber. The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

## 5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### Antenna Construction:

The antenna of the EUT is a Chip Antenna on the main Board in the EUT, so that it cannot be replaced by the user.

## 6. PRELIMINARY TEST

### 6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

### 6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

## 7. MINIMUM 6 dB BANDWIDTH


### 7.1 Operating environment

Temperature : 21 °C

Relative humidity : 41 % R.H.

### 7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

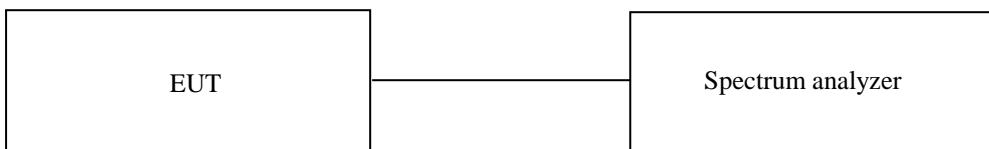


### 7.3 Test Date


April 04, 2022 ~ April 13, 2022

### 7.4 Test data for 1 Mbps

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2 402.00	719.30	500.00	219.30
Middle	2 440.00	719.30	500.00	219.30
High	2 480.00	724.30	500.00	224.30

Remark. Margin = Measured Value - Limit

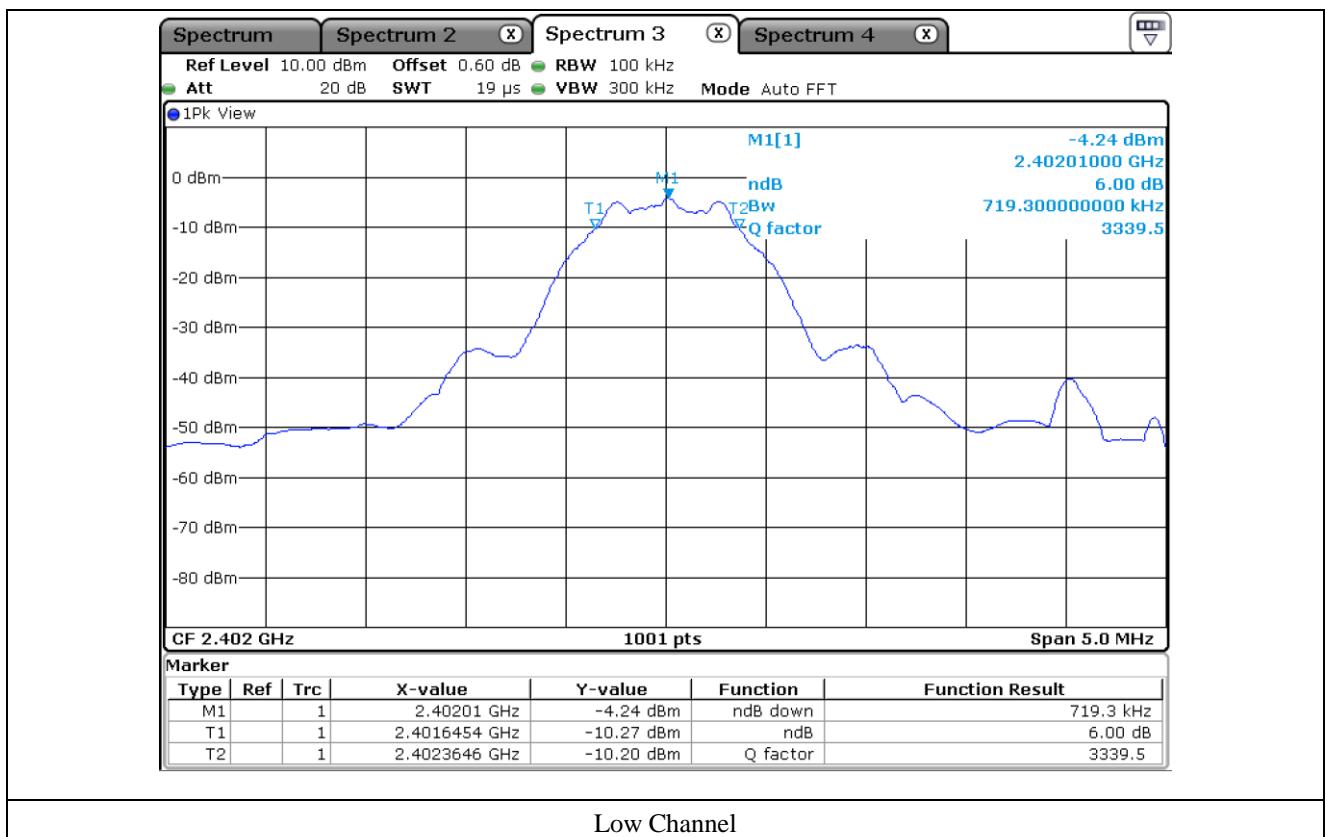

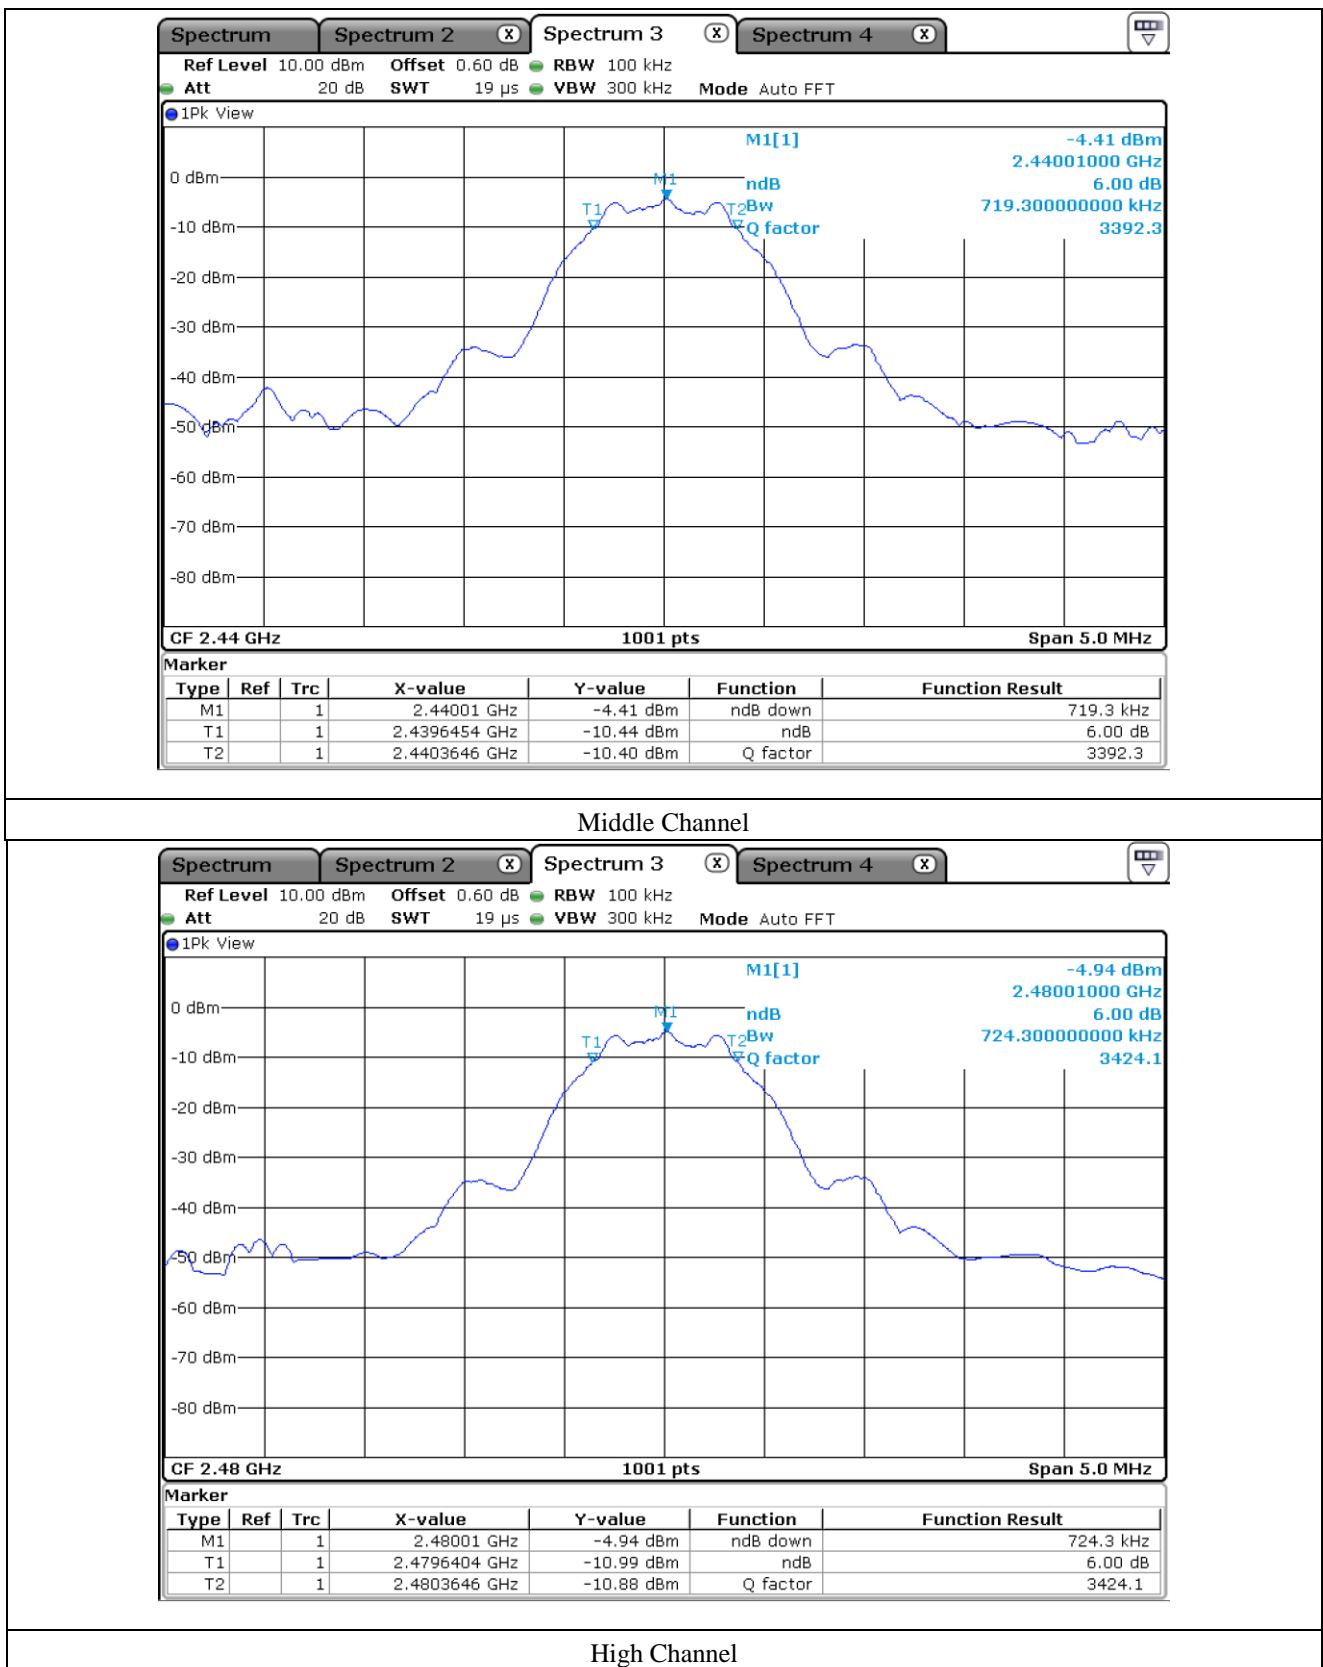

## 8. MAXIMUM PEAK OUTPUT POWER

### 8.1 Operating environment


Temperature : 21 °C

Relative humidity : 41 % R.H.

### 8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to  $\geq$  DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

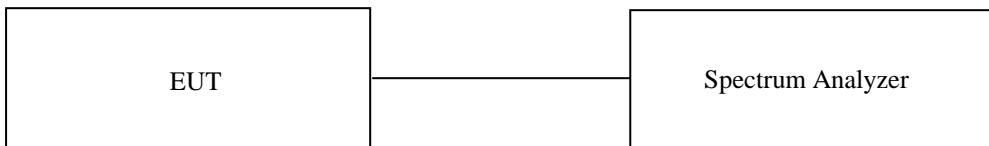

### 8.3 Test Date


April 04, 2022 ~ April 13, 2022


### 8.4 Test data for 1 Mbps

- Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	-4.13	30.00	34.13
MIDDLE	2 440.00	-4.29	30.00	34.29
HIGH	2 480.00	-4.63	30.00	34.63

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

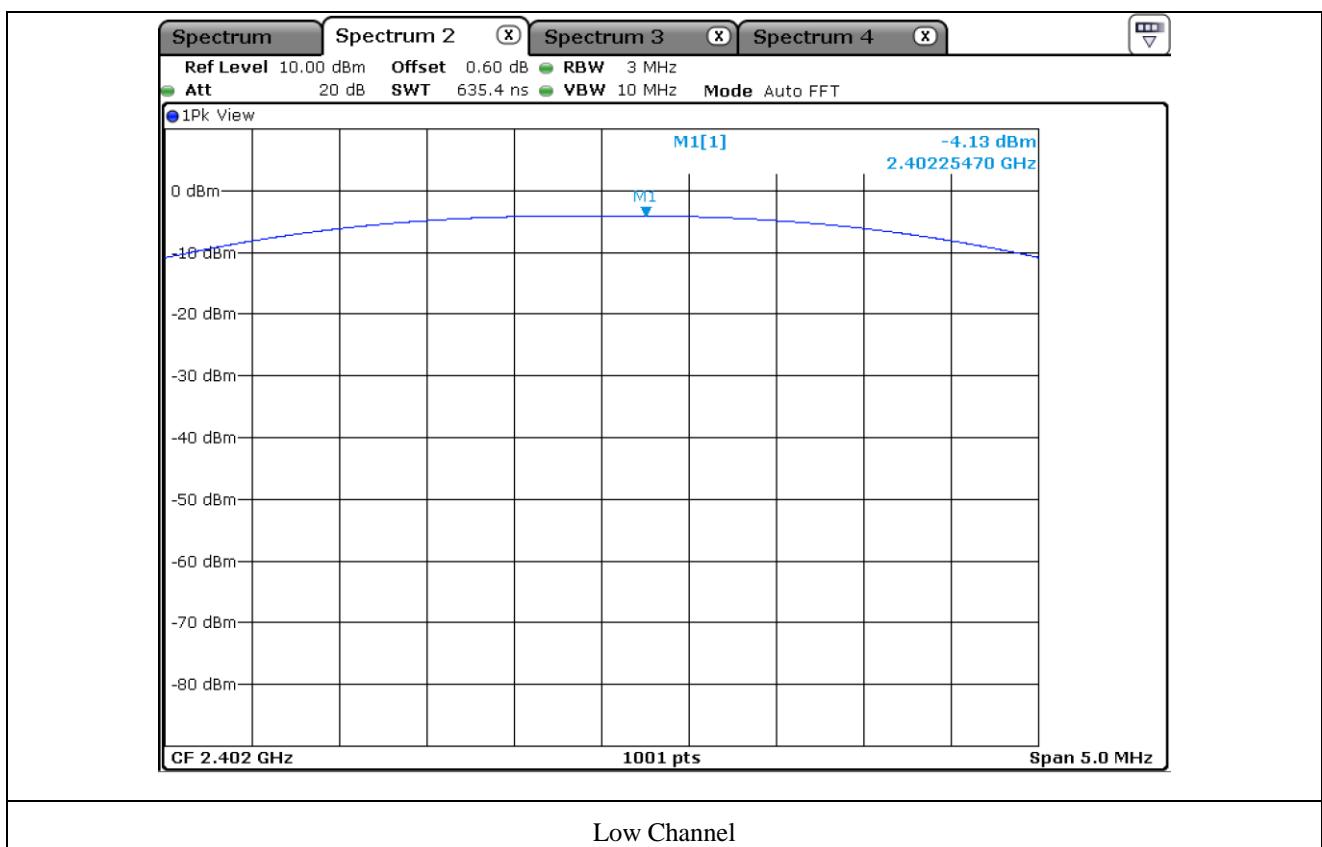

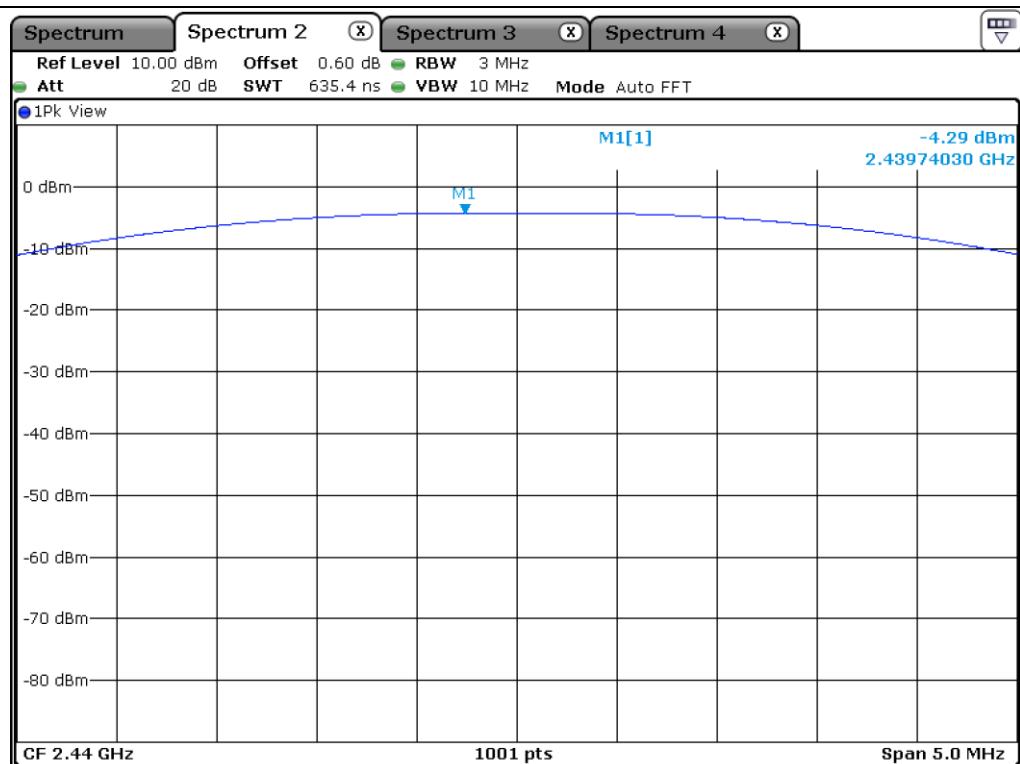

## Middle Channel

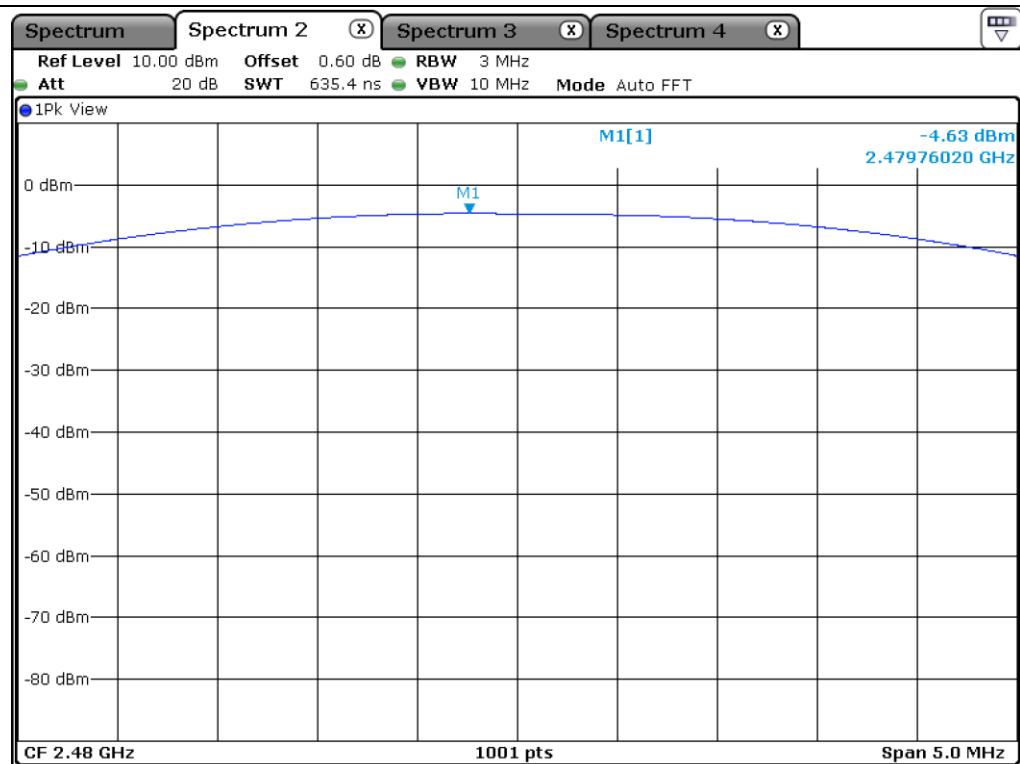

## High Channel

## 9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND


### 9.1 Operating environment

Temperature : 21 °C

Relative humidity : 41 % R.H.

### 9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, the video bandwidth is set to 3 times the resolution bandwidth and peak detection was used.

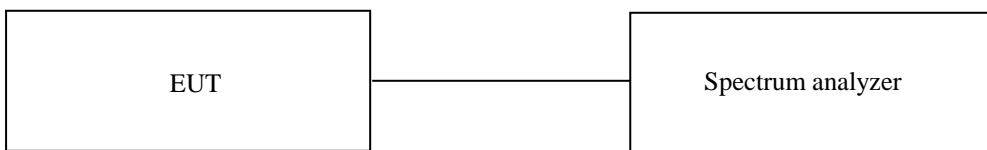

### 9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


### 9.4 Test Date


April 04, 2022 ~ April 13, 2022

## 9.5 Test data for conducted emission


### 9.5.1 Test data for 1 Mbps

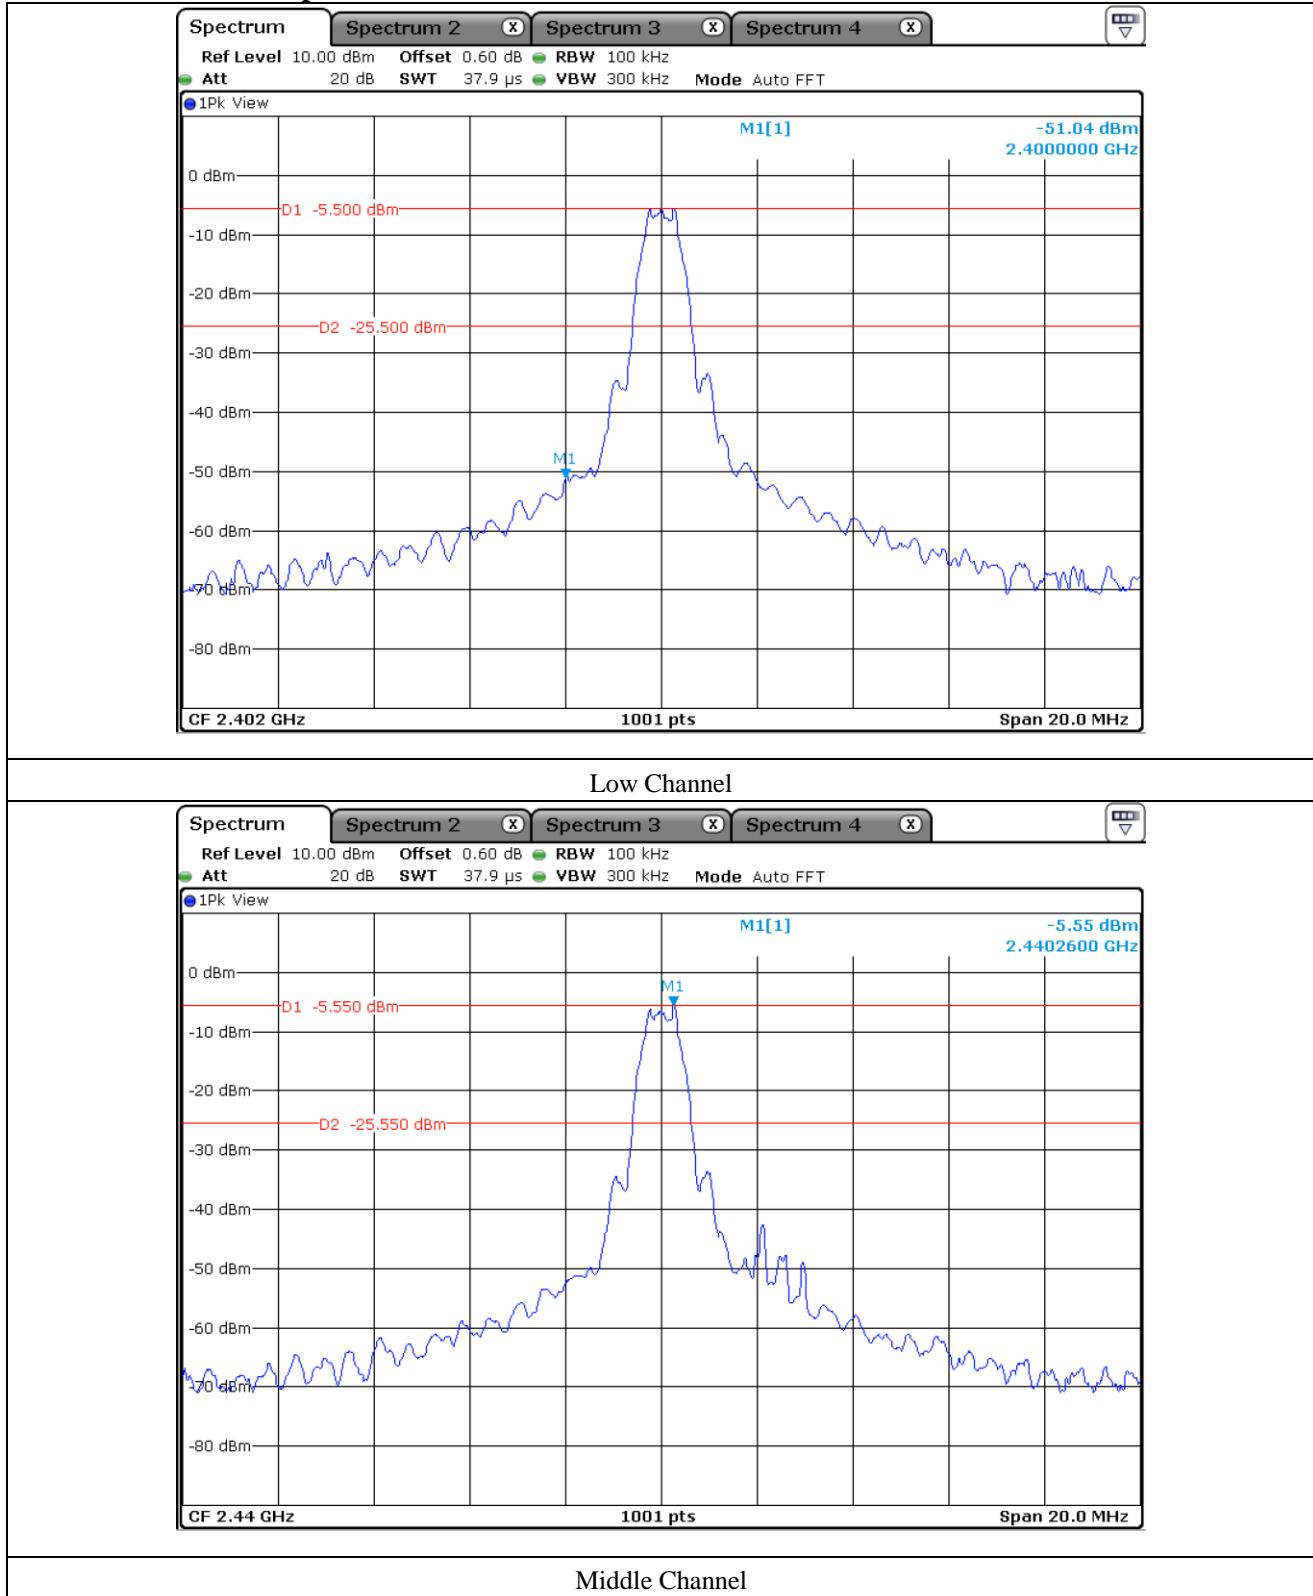

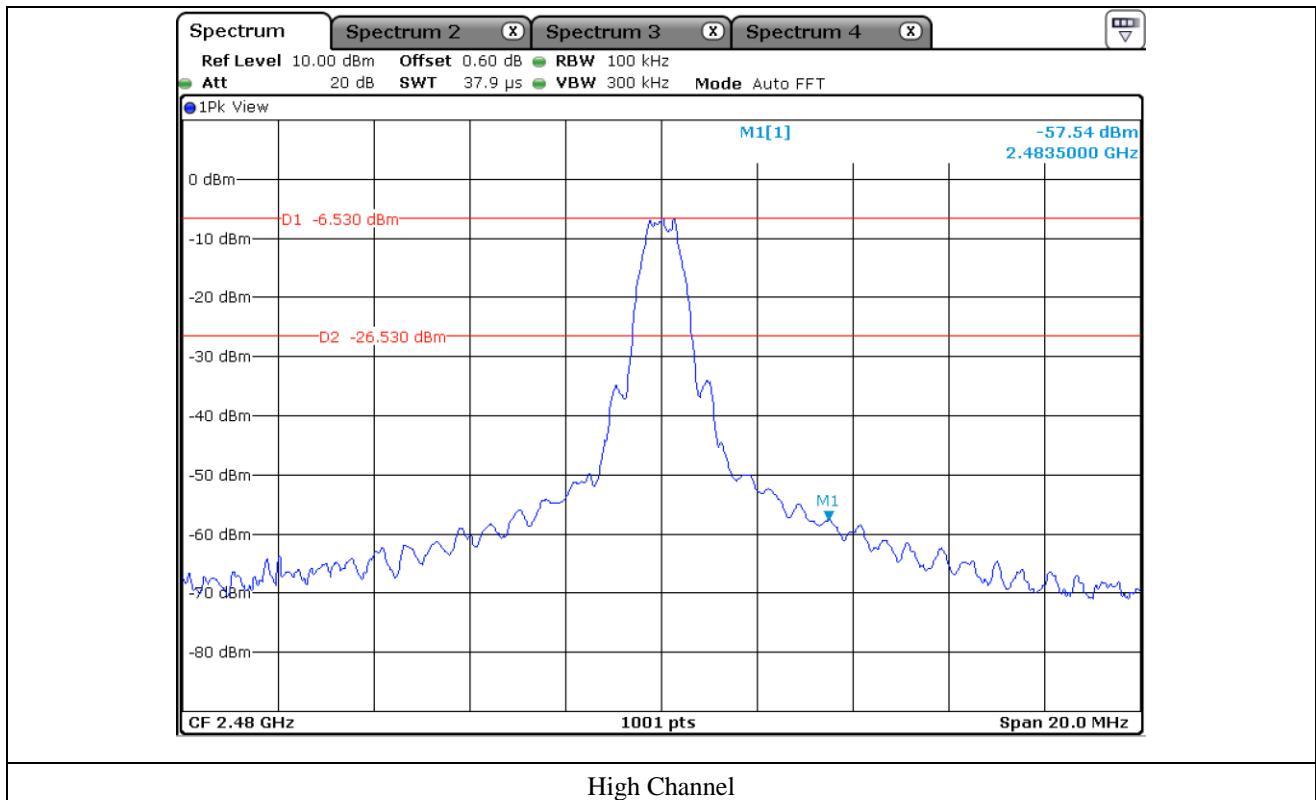


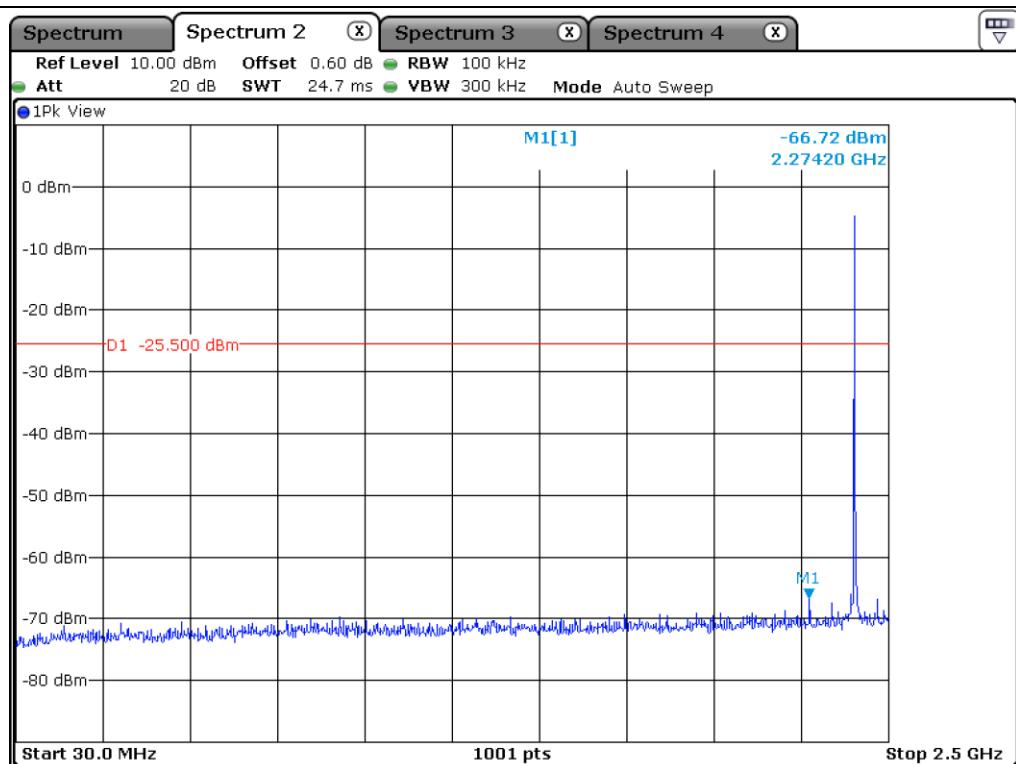


## Low Channel

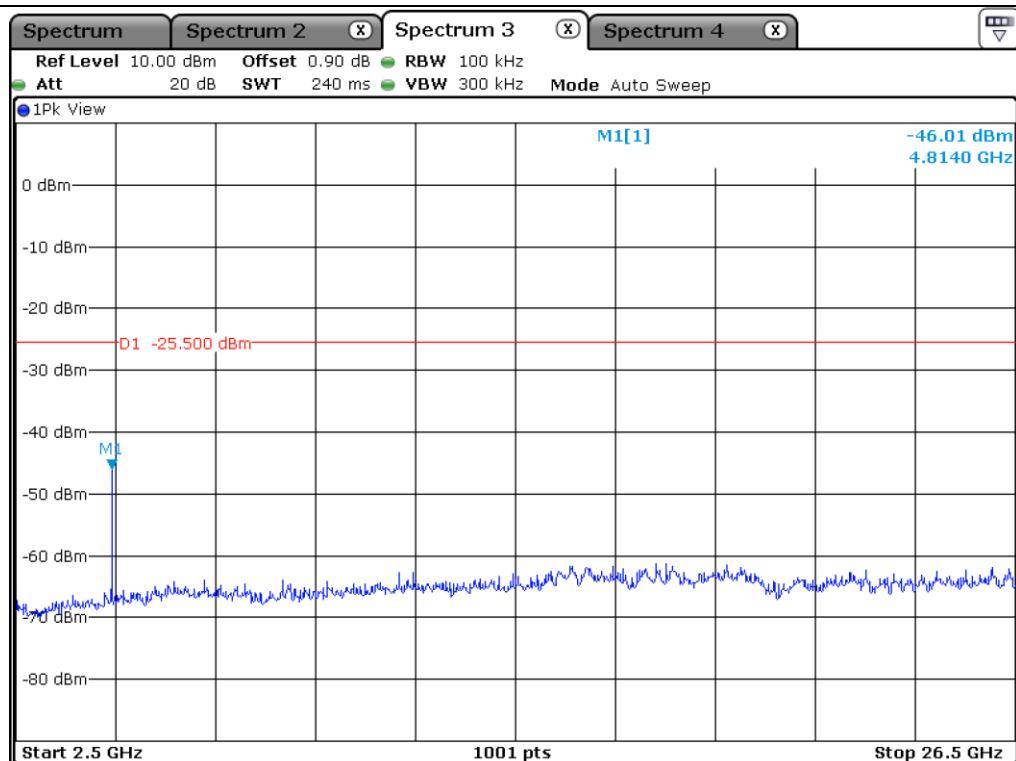


## Low Channel

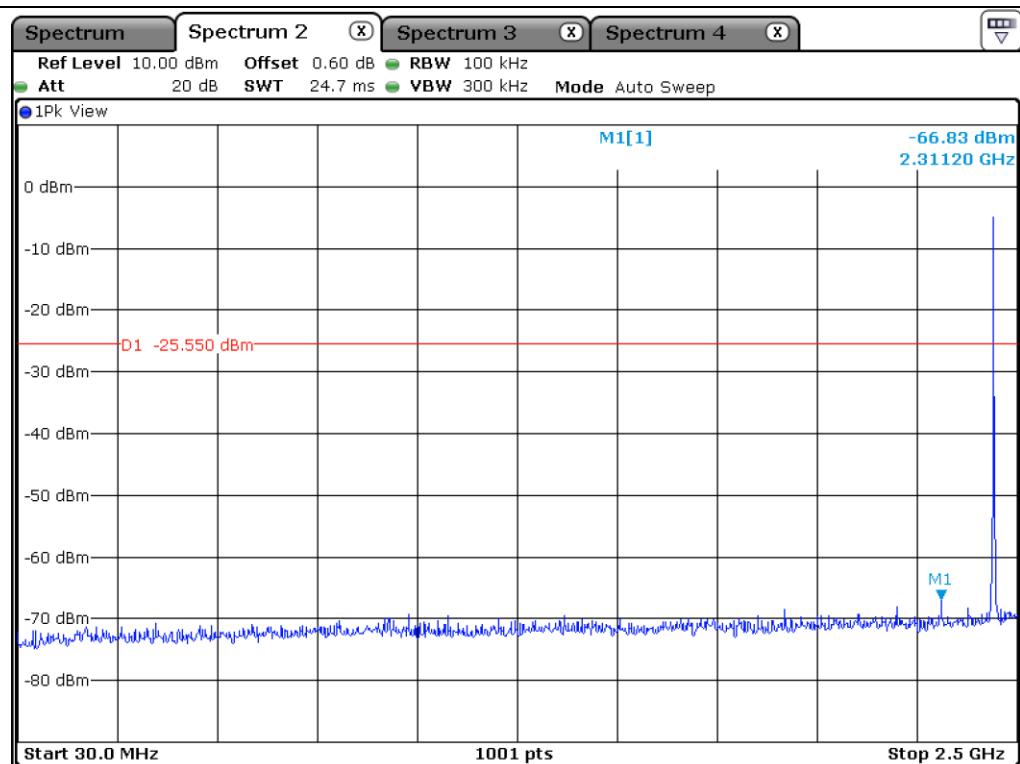


## Middle Channel

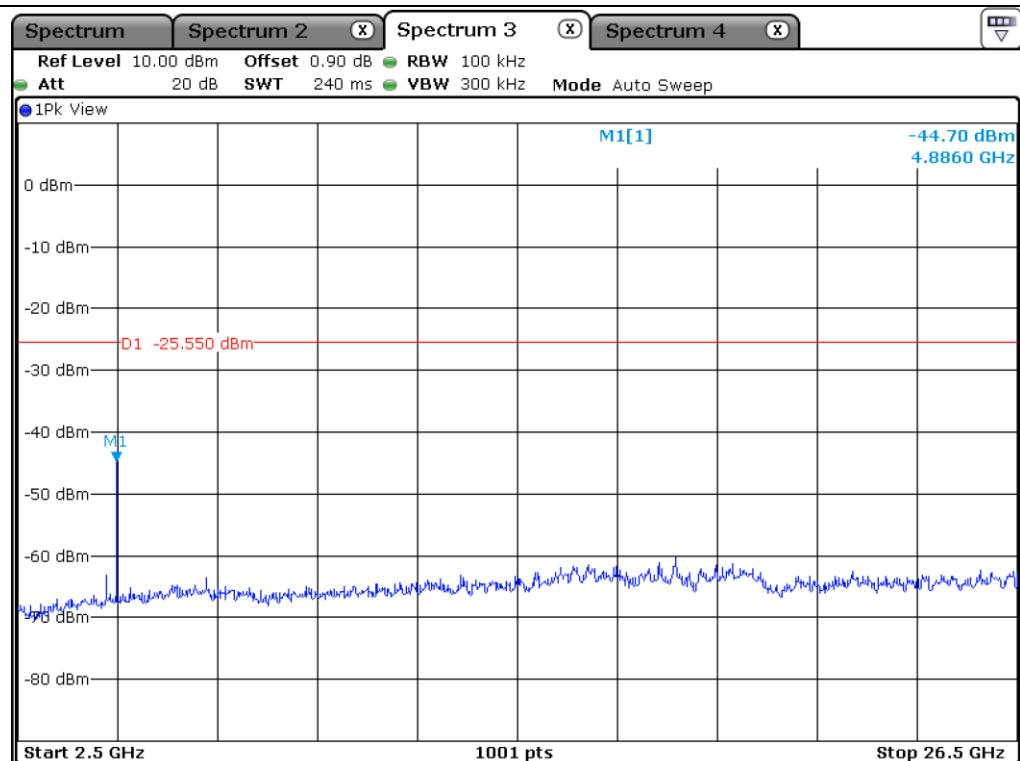

## Middle Channel

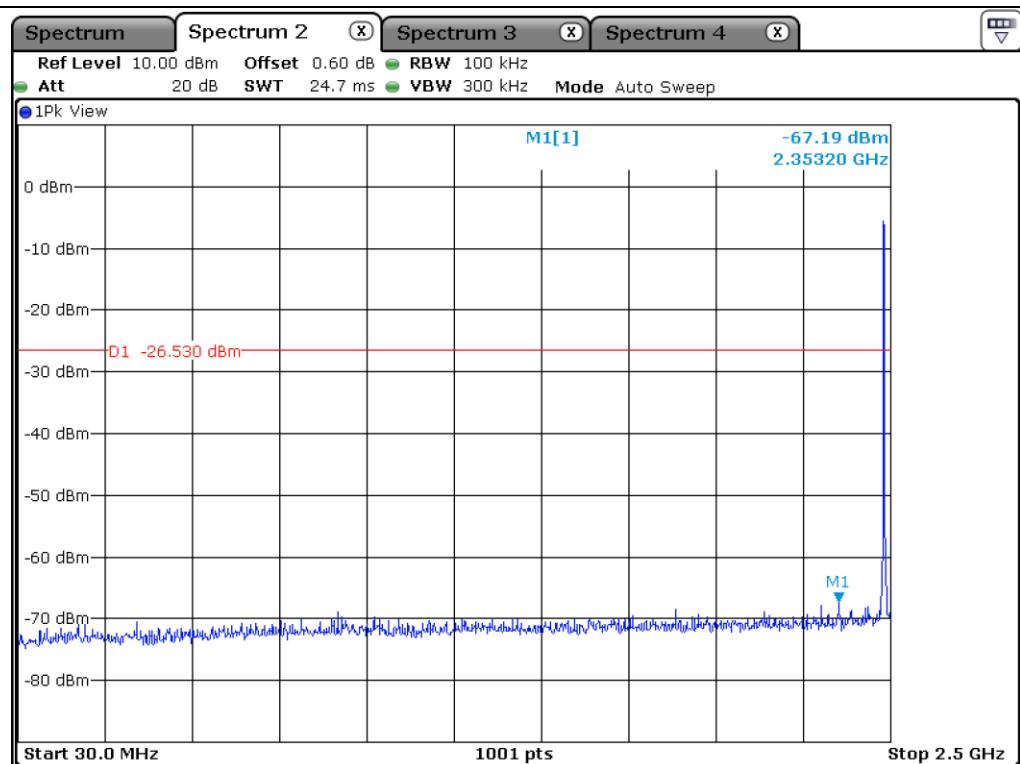

## High Channel

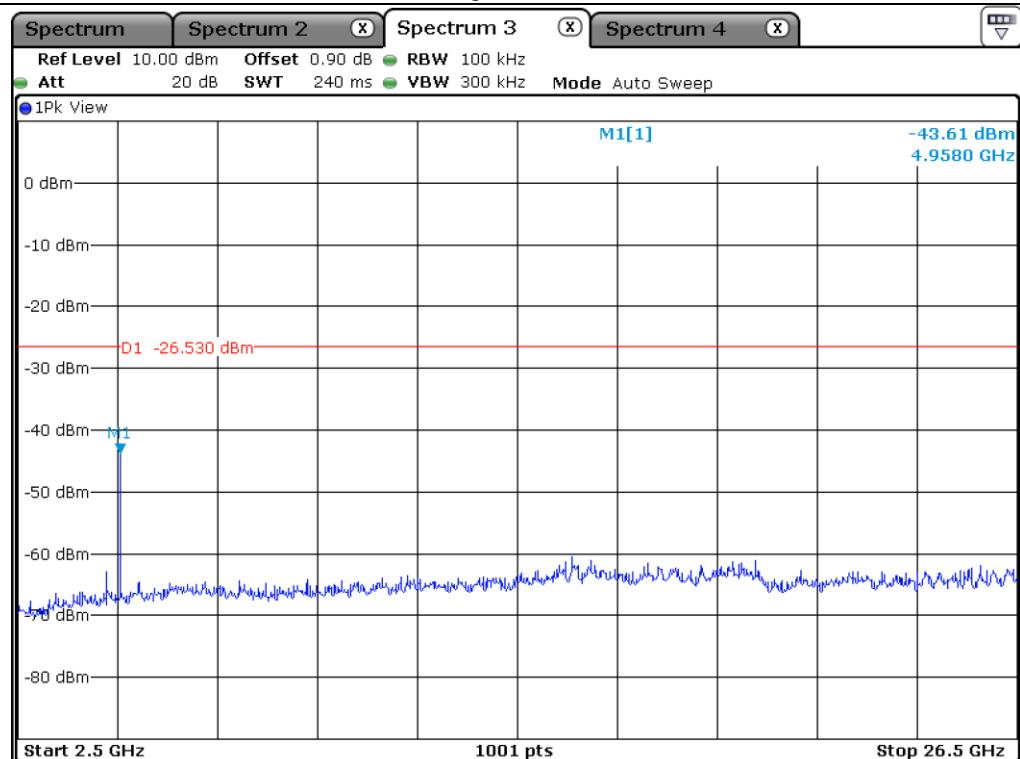

## High Channel

## 9.6 Test data for radiated emission

### 9.6.1 Radiated Emission which fall in the Restricted Band

#### 9.6.1.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode  
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 62.62 %
- Result : PASSED

Frequency (MHz)	Reading (dB $\mu$ V)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Gain	AMP Factor	Duty Factor (dB)	Total (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
<b>Test Data for Low Channel</b>											
2 341.96	45.22	Peak	H	27.50	10.40	45.79	-	-	37.33	74.00	36.67
2 362.73	36.67	Average	H	27.50	10.40	45.79	-	2.03	30.81	54.00	23.19
2 369.93	45.10	Peak	V	27.50	10.40	45.79	-	-	37.21	74.00	36.79
2 385.03	36.45	Average	V	27.50	10.40	45.79	-	2.03	30.59	54.00	23.41
<b>Test Data for High Channel</b>											
2 483.50	52.28	Peak	H	27.30	10.40	45.79	-	-	44.19	74.00	29.81
2 483.50	38.77	Average	H	27.30	10.40	45.79	-	2.03	32.71	54.00	21.29
2 483.50	49.23	Peak	V	27.30	10.40	45.79	-	-	41.14	74.00	32.86
2 483.50	36.42	Average	V	27.30	10.40	45.79	-	2.03	30.36	54.00	23.64

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{AMP Gain} + \text{Duty Factor}$$

## 9.6.2 Spurious & Harmonic Radiated Emission

### 9.6.2.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,  
1 MHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 62.62 %
- Result : PASSED

Frequency (MHz)	Reading (dB $\mu$ V)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Gain	AMP Factor	Duty Factor (dB)	Total (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
<b>Test Data for Low Channel</b>											
4 804.00	45.41	Peak	H	31.10	15.30	45.03	-	-	46.78	74.00	27.22
4 804.00	35.06	Average	H	31.10	15.30	45.03	-	2.03	38.46	54.00	15.54
4 804.00	50.58	Peak	V	31.10	15.30	45.03	-	-	51.95	74.00	22.05
4 804.00	42.53	Average	V	31.10	15.30	45.03	-	2.03	45.93	54.00	8.07
<b>Test Data for Middle Channel</b>											
4 880.00	45.27	Peak	H	31.10	15.30	45.03	-	-	46.64	74.00	27.36
4 880.00	36.18	Average	H	31.10	15.30	45.03	-	2.03	39.58	54.00	14.42
4 880.00	49.19	Peak	V	31.10	15.30	45.03	-	-	50.56	74.00	23.44
4 880.00	41.01	Average	V	31.10	15.30	45.03	-	2.03	44.41	54.00	9.59
<b>Test Data for High Channel</b>											
4 960.00	45.29	Peak	H	31.40	15.30	45.03	-	-	46.96	74.00	27.04
4 960.00	35.69	Average	H	31.40	15.30	45.03	-	2.03	39.39	54.00	14.61
4 960.00	46.77	Peak	V	31.40	15.30	45.03	-	-	48.44	74.00	25.56
4 960.00	37.64	Average	V	31.40	15.30	45.03	-	2.03	41.34	54.00	12.66

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{AMP Gain} + \text{Duty Factor}$$

## 10. PEAK POWER SPECTRAL DENSITY

### 10.1 Operating environment

Temperature : 21 °C

Relative humidity : 41 % R.H.

### 10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ , the video bandwidth is set to 3 times the resolution bandwidth.



### 10.3 Test Date

April 04, 2022 ~ April 13, 2022


#### 10.4 Test data for 1 Mbps


- Test Result : Pass

- Operating Condition : Continuous transmitting mode

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 402.00	-19.97	8.00	27.97
Middle	2 440.00	-20.29	8.00	28.29
High	2 480.00	-20.70	8.00	28.70

Remark. Margin = Limit – Measured value

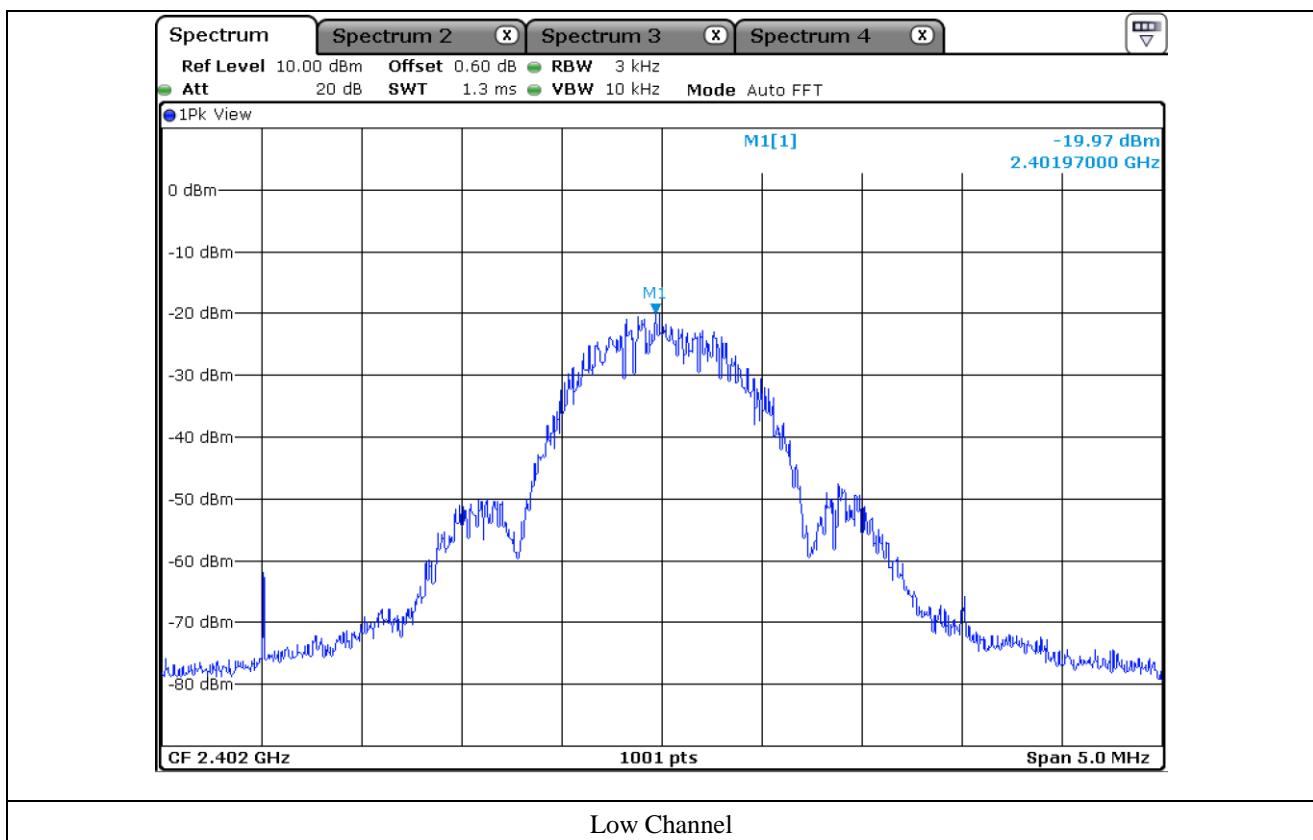

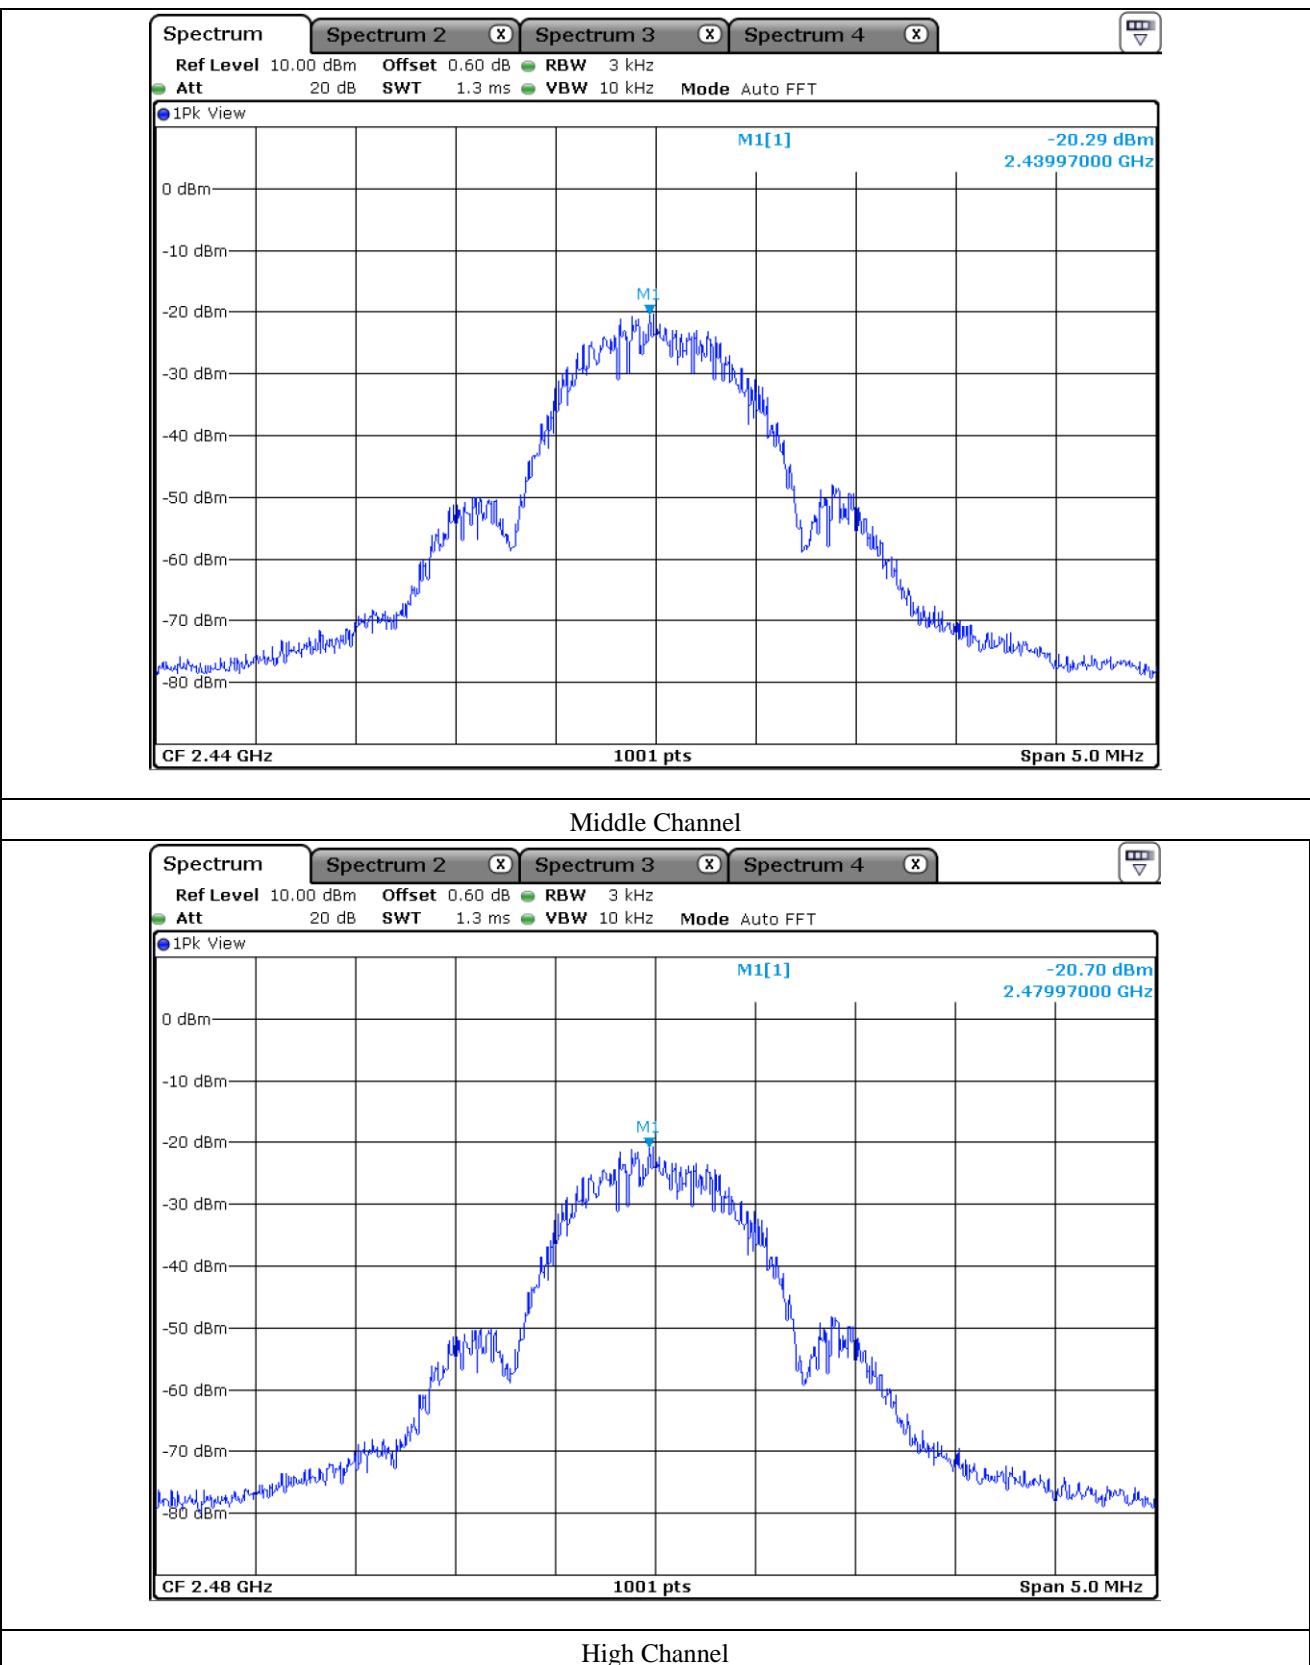

## 11. RADIATED EMISSION TEST

### 11.1 Operating environment

Temperature : 21 °C

Relative humidity : 41 % R.H.


### 11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

#### - Test Configuration


##### 1. Below 30 MHz

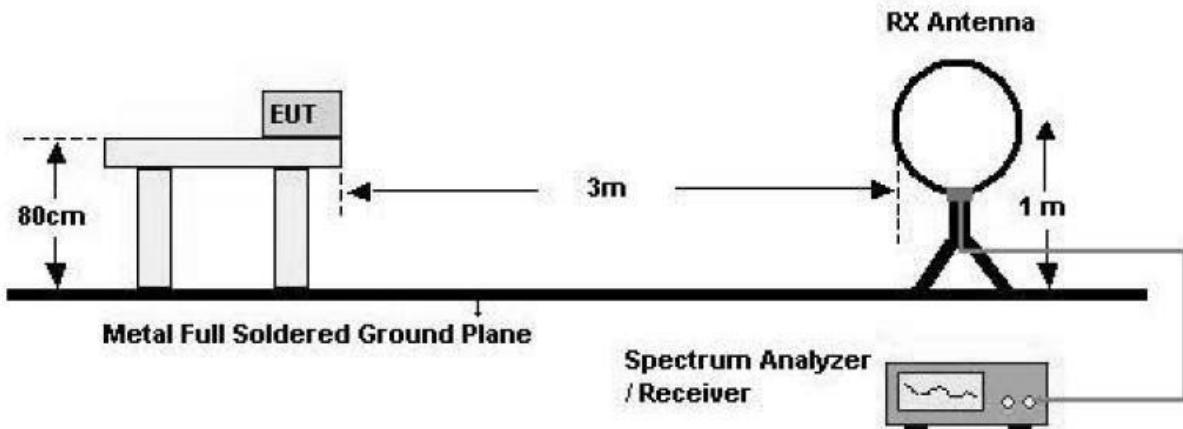

## 2. 30 MHz - 1 GHz

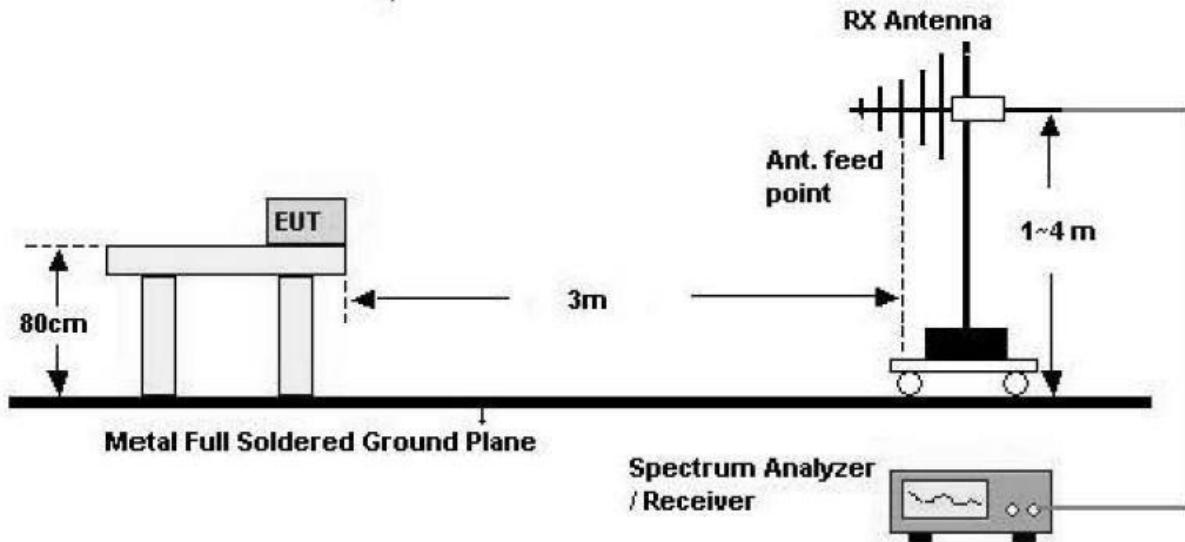

## 3. Above 1 GHz

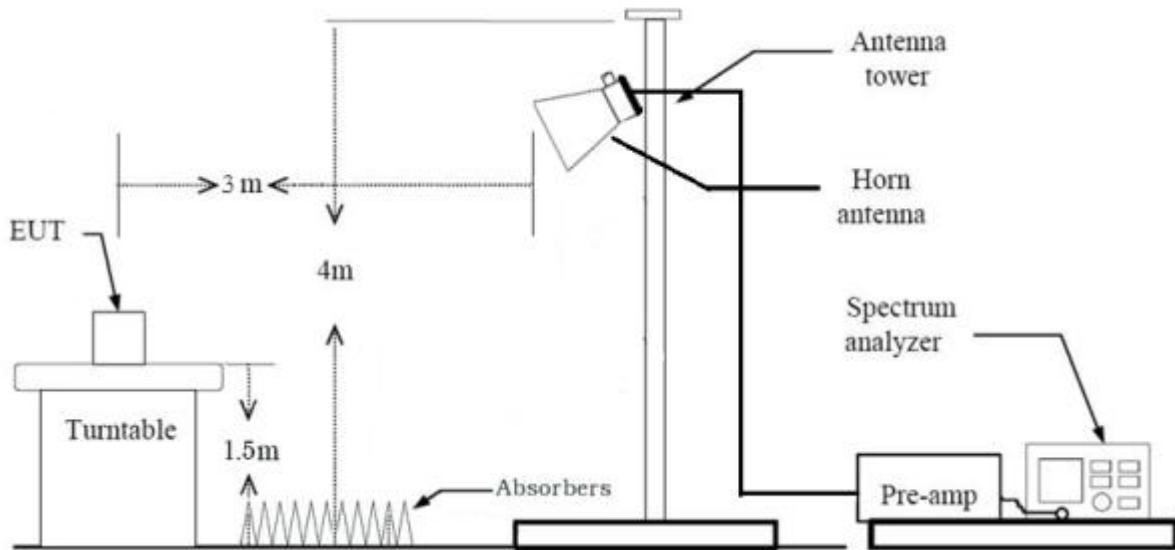

**11.3 Test Date**

April 04, 2022 ~ April 13, 2022

**11.4 Test data for 30 MHz ~ 1 GHz**Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247Result : PASSED

EUT : BLE Module

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

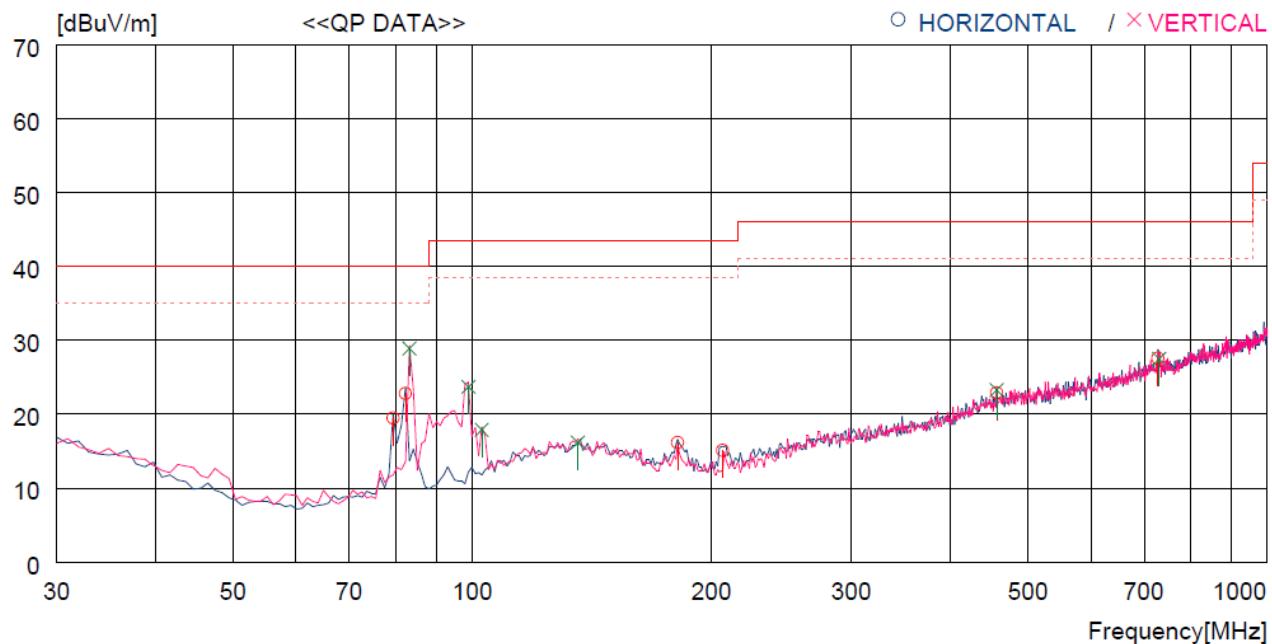

No.	FREQ [MHz]	READING QP [dB <sub>uV</sub> ]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dB <sub>uV/m</sub> ]	LIMIT [dB <sub>uV/m</sub> ]	MARGIN [dB]	ANTENNA TABLE	
									[cm]	[DEG]
<b>----- Horizontal -----</b>										
1	79.470	36.6	13.3	2.7	33.1	19.5	40.0	20.5	400	0
2	82.380	39.8	13.4	2.7	33.1	22.8	40.0	17.2	400	0
3	181.320	28.8	16.7	3.7	33.0	16.2	43.5	27.3	400	0
4	206.540	28.4	15.7	4.0	33.0	15.1	43.5	28.4	200	166
5	456.801	26.6	23.4	6.0	33.1	22.9	46.0	23.1	100	359
6	728.394	27.4	26.0	7.5	33.3	27.6	46.0	18.4	300	359
<b>----- Vertical -----</b>										
7	83.350	45.9	13.4	2.7	33.1	28.9	40.0	11.1	400	359
8	98.870	38.7	15.2	2.9	33.1	23.7	43.5	19.8	300	0
9	102.750	32.0	16.0	2.9	33.0	17.9	43.5	25.6	300	0
10	135.730	26.5	19.3	3.4	33.0	16.2	43.5	27.3	300	0
11	456.801	27.0	23.4	6.0	33.1	23.3	46.0	22.7	300	0
12	731.304	27.2	26.1	7.6	33.4	27.5	46.0	18.5	100	342

### 11.5 Test data for Below 30 MHz

- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dB $\mu$ V)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

### 11.6 Test data for above 1 GHz

- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,  
1 MHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dB $\mu$ V)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

## 12. CONDUCTED EMISSION TEST

### 12.1 Operating environment

Temperature : 21 °C

Relative humidity : 41 % R.H.

### 12.2 Test set-up


The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a  $50 \Omega / 50 \mu\text{H} + 5 \Omega$  Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

### 12.3 Test date

April 04, 2022 ~ April 13, 2022

## 12.4 Test data

- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

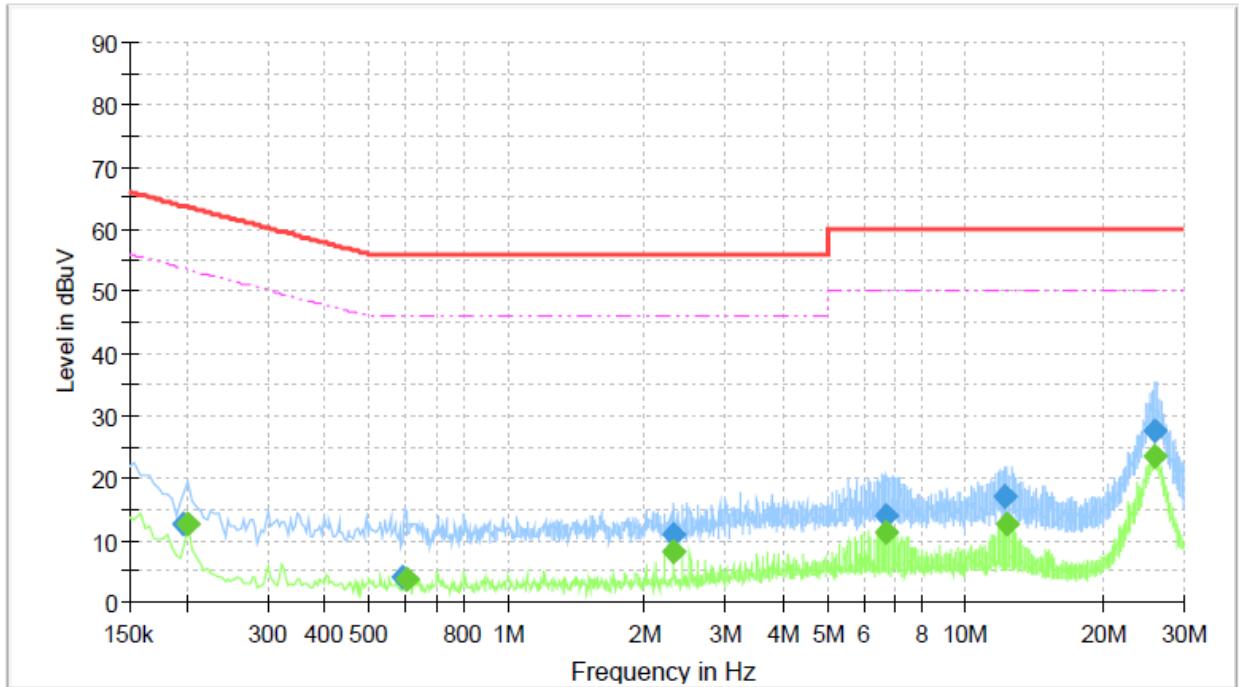


## Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.198	12.68	---	63.72	51.03	9.0	L1	10.01
0.202	---	12.65	53.55	40.90	9.0	L1	10.01
0.590	4.08	---	56.00	51.92	9.0	L1	10.13
0.606	---	3.84	46.00	42.16	9.0	L1	10.14
2.312	10.96	---	56.00	45.04	9.0	L1	10.21
2.316	---	8.25	46.00	37.75	9.0	L1	10.21
6.729	13.85	---	60.00	46.15	9.0	L1	10.31
6.741	---	11.23	50.00	38.77	9.0	L1	10.31
12.161	16.91	---	60.00	43.09	9.0	L1	10.51
12.269	---	12.70	50.00	37.30	9.0	L1	10.51
25.852	---	23.57	50.00	26.43	9.0	L1	10.71
25.996	27.74	---	60.00	32.26	9.0	L1	10.72

-. Tested Line

: NEUTRAL LINE

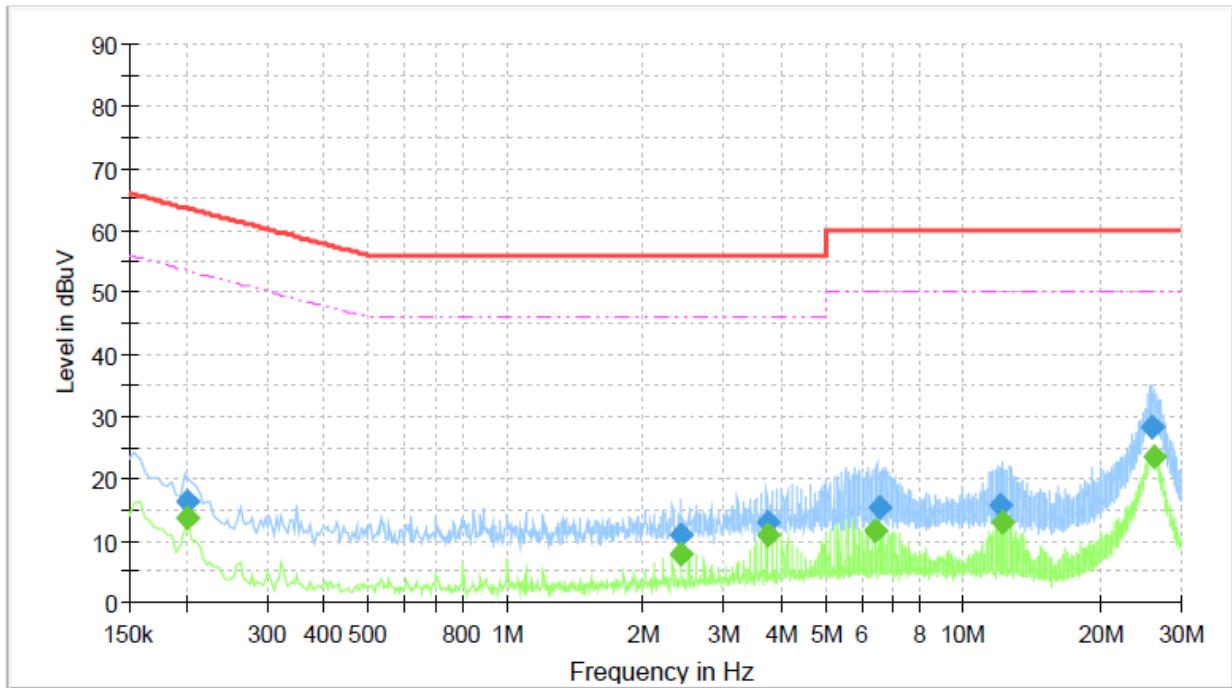

## Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.202	---	13.80	53.55	39.75	9.0	N	9.95
0.202	16.40	---	63.55	47.15	9.0	N	9.95
2.414	---	7.88	46.00	38.12	9.0	N	10.05
2.414	10.80	---	56.00	45.20	9.0	N	10.05
3.724	---	10.87	46.00	35.13	9.0	N	10.09
3.728	12.87	---	56.00	43.13	9.0	N	10.09
6.441	---	11.71	50.00	38.29	9.0	N	10.18
6.541	15.32	---	60.00	44.68	9.0	N	10.18
12.055	15.66	---	60.00	44.34	9.0	N	10.46
12.171	---	12.97	50.00	37.03	9.0	N	10.46
25.788	28.39	---	60.00	31.61	9.0	N	10.72
26.099	---	23.36	50.00	26.64	9.0	N	10.72

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

### 13. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSV40-N	Rohde & Schwarz	Signal Analyzer	102177	Apr. 11, 2022 (1Y)
ESR	Rohde & Schwarz	EMI Test Receiver	101470	Oct. 18, 2021 (1Y)
GP-4303D	LG Precision Co., Ltd	DC Power Supply	5071069	Jan. 03, 2022 (1Y)
ZUP36-6	NEMIC-LAMBDA	DC Power Supply	1305531	Apr. 11, 2022 (1Y)
310N	Sonoma Instrument	Pre-Amplifier	312544	Mar. 15, 2022 (1Y)
SCU18	Rohde & Schwarz	Pre-Amplifier	102266	Jul. 14, 2021 (1Y)
SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	Jan. 18, 2022 (1Y)
DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
FMZB 1513	Schwarzbeck	Loop Antenna	1513-235	Mar. 24, 2022 (2Y)
HLP-2008	TDK	Hybrid Antenna	131313	Feb. 21, 2022 (2Y)
BBHA9120D	Schwarzbeck	Horn Antenna	1349	Jul. 26, 2021 (1Y)
BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 06, 2022 (1Y)
HPF 3GHz	Rohde & Schwarz	High Pass Filter	N/A	Jan. 18, 2022 (1Y)
ESR3	Rohde & Schwarz	EMI TEST RECEIVER	102602	Mar. 14, 2022 (1Y)
NSLK8126	Schwarzbeck	AMN	8126404	Mar. 14, 2022 (1Y)
ESH3Z2	Rohde & Schwarz	PULSE LIMITER	357.8810.52	Mar. 14, 2022 (1Y)