

Regulatory WLAN Antenna Information

(English Language Required for Intel Regulatory Review / Approval)

Platform	
Platform Owner	Lenovo
Brand Name	IdeaPad
Model Name	Y650
ODM	Compal
Target Launch Date	2009/02/05
Antenna	
Brand Name	WNC
Part Number	<input checked="" type="checkbox"/> Tx1 Antenna:81.EJS15.004
	<input checked="" type="checkbox"/> Tx2 Antenna:81.EJS15.004
	<input checked="" type="checkbox"/> Tx3 Antenna:81.EJS15.004
Module	
With WLAN Module	<input type="checkbox"/> BCM94312MCG
(Check Box)	<input type="checkbox"/> WM3B2915ABG
	<input type="checkbox"/> WM3945ABG
	<input type="checkbox"/> 4965AGN
	<input type="checkbox"/> 4965AG_
	<input checked="" type="checkbox"/> 533ANX Family
	<input checked="" type="checkbox"/> 512ANX Family
	<input checked="" type="checkbox"/> 533AN Family
	<input checked="" type="checkbox"/> 512AN Family

Antenna Sample / Antenna Data Requirements for worldwide regulatory approval

Section	Description of Required OEM / ODM Antenna Information	US / IC	EU	Japan	Taiwan	S.Korea
1A	Part Number for Antenna only	Required	Required	Required	Required	Required
1B	Antenna Manufacturer Name	Required	Required	Required	Required	Required
1C	Description of Antenna Type	Required	N/A	N/A	N/A	N/A
1D	Part number of Antenna Assembly / cable impedance, length & diameter.	Required	Desired	Desired	Desired	Desired
1E	Tx1, Tx2 & Tx3 antenna (Peak Gain W/ cable loss) *	Required	Required	Required	Required	Required
	1E OR 1F, 1G, 1H					
1F	Tx1, Tx2 & Tx3 antenna (Peak Gain only) *	Required	Required	Required	Required	Required
1G	VSWR of cable including connector	Required	Required	Required	Required	Required
1H	Tx1, Tx2 & Tx3 antenna (Cable loss W/ connector) *	Required	Required	Required	Required	Required
2	Dimensioned Photographs and Drawings of Tx1, Tx2, and Tx3 (or Rx3) antennas	Required	Required	Required	Required	Required
3	Radiation patterns of antennas loaded in the host platform.	Required	Desired	Required	N/A	Required
4	Platform model name / number - correlated to antenna manufacturer and antenna part number	Required	Required	Desired	Required	Desired
5	Photograph(s) or Drawings showing location of antennas in platform. (S. Korea requires photographs of antennas for approval submission). Taiwan requires pictures of each antenna type shown in the system.	Required	Required	Desired	Required (Photos)	Required (Photos)
6	Mech. drawings / photos with dimensions of antenna locations and distance from end-user (For evaluation of SAR testing requirement).	Required	N/A	N/A	N/A	N/A
7	Photograph(s) or Drawings showing the location of all antennas (WLAN, other) and distance between those transmitting antennas. Information will be used to evaluate whether co-location testing is required.	Required	N/A	N/A	N/A	N/A
8	Local representative contact information for LMA/ PARS process.	Required	N/A	N/A	N/A	N/A

NOTE:

(*) if 3rd antenna is Rx only (e.g. receive only for 4965AGN) then peak gain and cable loss not required

Antenna Information

Section 1. Antenna Assembly Specifications

Antenna Assembly Summary:

1A	1B	1C	1D	1E	1F	1G	1H
Antenna Part Number	Manufacture	Antenna	Cable Assembly Part	Peak Gain W/ Cable	Peak Gain w/o Cable	VSWR	Cable Loss (dBi)
T1 Antenna (WNC P/N: 81.EJS15.004 (customer P/N: DC33000HT00	Wistron Neweb	PIFA	P/N: 57.EJS15.004 length: 578 diameter: 1.37 mm Connector: IPEX	2400-2500MHz 1.77 dBi (peak)	2400-2500MHz 3.20 dBi (peak)	2400-2500MHz 2.0 max	2400-2500MHz 1.44 dBi (peak)
				5150-5350MHz -0.58 dBi (peak)	5150-5350MHz 1.67 dBi (peak)	5150-5350MHz 2.0 max	5150-5350MHz 2.26 dBi (peak)
				5470-5725MHz 1.46 dBi (peak)	5470-5725MHz 3.84 dBi (peak)	5470-5725MHz 2.0 max	5470-5725MHz 2.39 dBi (peak)
				5725-5850MHz 1.73 dBi (peak)	5725-5850MHz 4.15 dBi (peak)	5725-5850MHz 2.0 max	5725-5850MHz 2.42 dBi (peak)
T2 antenna (WNC P/N: 81.EJS15.004 (customer P/N: DC33000HT00	Wistron Neweb	PIFA	P/N: 57.EJS15.004 length: 758 diameter: 1.37 mm Connector: IPEX	2400-2500MHz 0.21 dBi (peak)	2400-2500MHz 2.04 dBi (peak)	2400-2500MHz 2.0 max	2400-2500MHz 1.82 dBi (peak)
				5150-5350MHz -0.01 dBi (peak)	5150-5350MHz 2.25 dBi (peak)	5150-5350MHz 2.0 max	5150-5350MHz 2.26 dBi (peak)
				5470-5725MHz 0.11 dBi (peak)	5470-5725MHz 3.17 dBi (peak)	5470-5725MHz 2.0 max	5470-5725MHz 3.05 dBi (peak)
				5725-5850MHz 0.84 dBi (peak)	5725-5850MHz 3.94 dBi (peak)	5725-5850MHz 2.0 max	5725-5850MHz 3.10 dBi (peak)
T3 antenna (WNC P/N: 81.EJS15.004 (customer P/N: DC33000HT00	Wistron Neweb	PIFA	P/N: 57.EJS15.004 length: 256 diameter: 1.37 mm Connector: IPEX	2400-2500MHz -1.56 dBi (peak)	2400-2500MHz -0.81 dBi (peak)	2400-2500MHz 2.0 max	2400-2500MHz 0.75 dBi (peak)
				5150-5350MHz 1.78 dBi (peak)	5150-5350MHz 2.92 dBi (peak)	5150-5350MHz 2.0 max	5150-5350MHz 1.13 dBi (peak)
				5470-5725MHz 0.74 dBi (peak)	5470-5725MHz 1.94 dBi (peak)	5470-5725MHz 2.0 max	5470-5725MHz 1.20 dBi (peak)
				5725-5850MHz 1.36 dBi (peak)	5725-5850MHz 2.57 dBi (peak)	5725-5850MHz 2.0 max	5725-5850MHz 1.21 dBi (peak)

NOTE:

(* If Rx2/Rx3 only (2nd or 3rd antenna receives only, e.g. for 512 family & 4965AGN) then the information marked with * is not required

Antenna Peak Gain Table:


Frequency (MHz)	T1 Antenna		T2 Antenna		T3 Antenna	
	Horizontal	Vertical	Horizontal	Vertical	Horizontal	Vertical
	(dBi)	(dBi)	(dBi)	(dBi)	(dBi)	(dBi)
2400	1.08	-0.87	-0.52	-1.53	-3.23	-2.76
2450	1.18	-0.62	-0.29	-0.81	-3.13	-1.80
2500	1.77	-1.30	-0.61	0.21	-4.48	-1.56
5150	-0.67	-0.58	-0.01	-0.92	-0.16	1.78
5250	-1.46	-1.51	-0.17	-2.01	-0.68	1.42
5350	-0.96	-0.67	-0.35	-1.76	-1.98	0.69
5470	-0.46	0.88	-1.65	-3.22	-3.44	0.74
5600	0.46	-2.10	-0.08	-2.39	-3.08	0.41
5725	0.51	1.46	0.11	-2.27	-2.62	0.70
5785	0.30	1.04	0.67	-2.79	-3.05	0.63
5850	0.82	1.73	0.84	-2.29	-2.65	1.36

- Antenna Peak Gain required being test in system basis.
- 1E frame contend absolutely peak antenna gain include H/V
- If Rx2 only (2nd antenna receives only, e.g. for 512 family) then the information is not required for Rx2.
- If Rx3 only (3rd antenna receives only, e.g. for 4965AGN) then the information is not required for Rx3.

Section 2. Dimensioned Photos or Drawings of Antennas

Include a dimensioned photo and dimensioned drawing of Tx1 antenna here.

Tx1 Antenna Dimensioned Drawing:

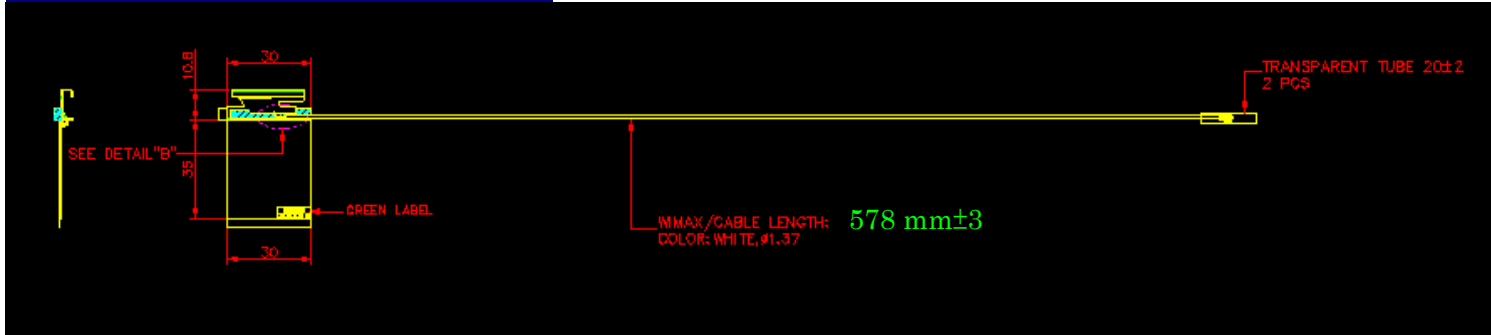


Tx1 Antenna Photo:



Include a dimensioned photo and dimensioned drawing of Tx2 (or Rx2) antenna here.

Tx2 (or Rx2) Antenna Dimensioned Drawing:

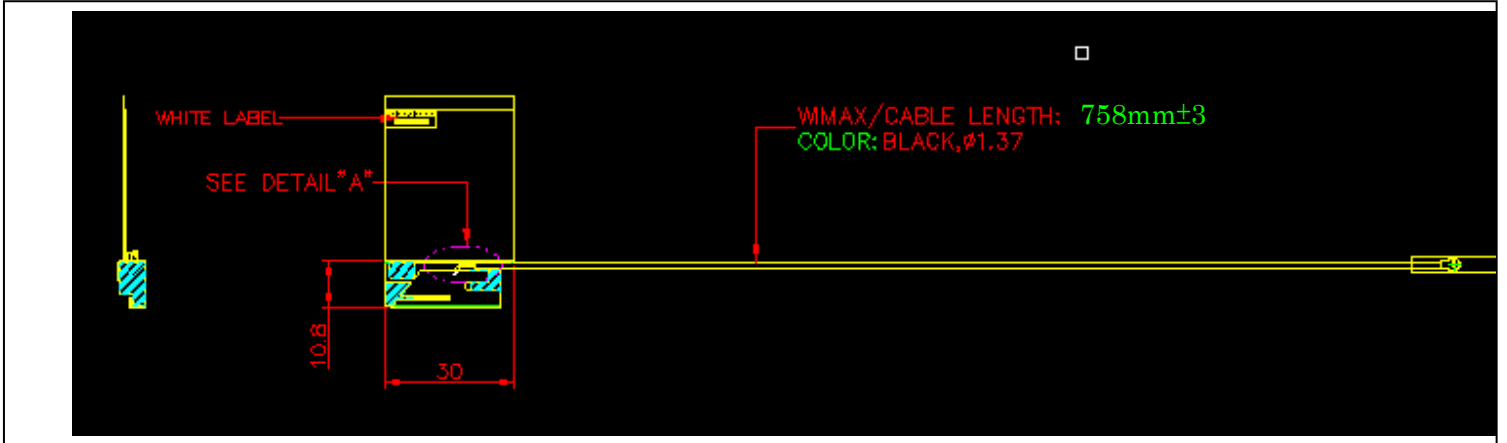


Tx2 (or Rx2) Antenna Photo:




Include a dimensioned photo and dimensioned drawing of Tx3 (or Rx3) antenna here.

Tx3 (or Rx3) Antenna Dimensioned Drawing:

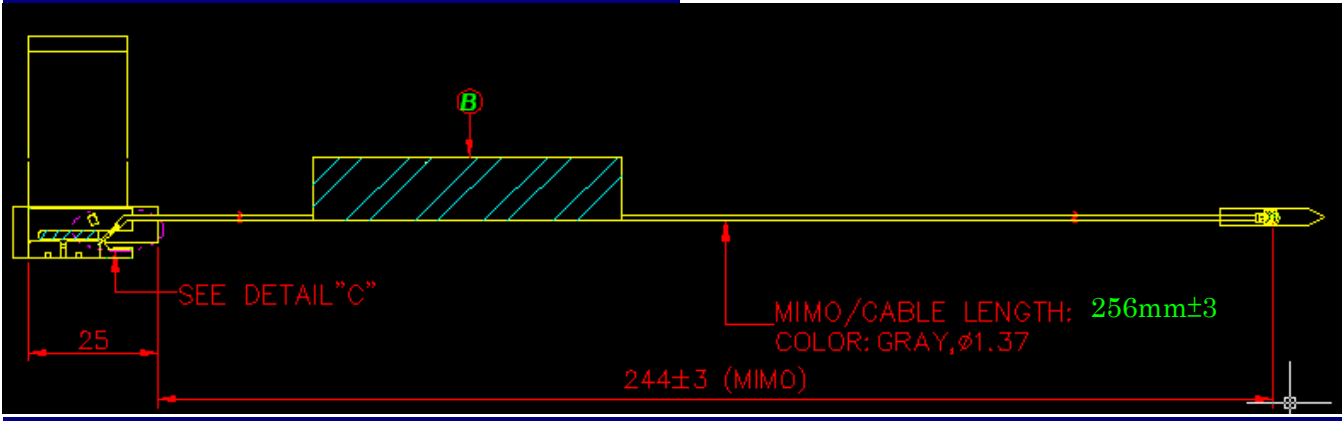


Tx3 (or Rx3) Antenna Photo:

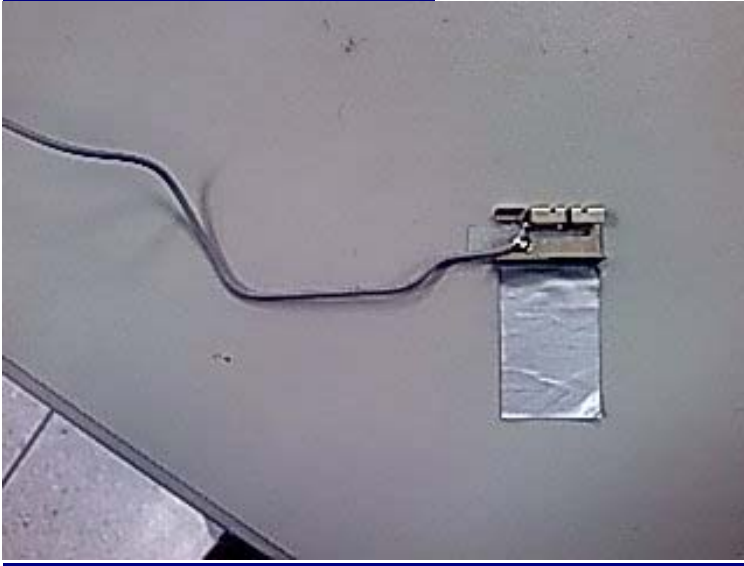

Include front view photo of all 2 antennas here.

Antenna Manufacturer: WLAN


Antenna Part Number: 81.EJS15.004(Tx1), 81.EJS15.004(Tx2 or Rx2), 81.EJS15.004(Tx3 or Rx3)

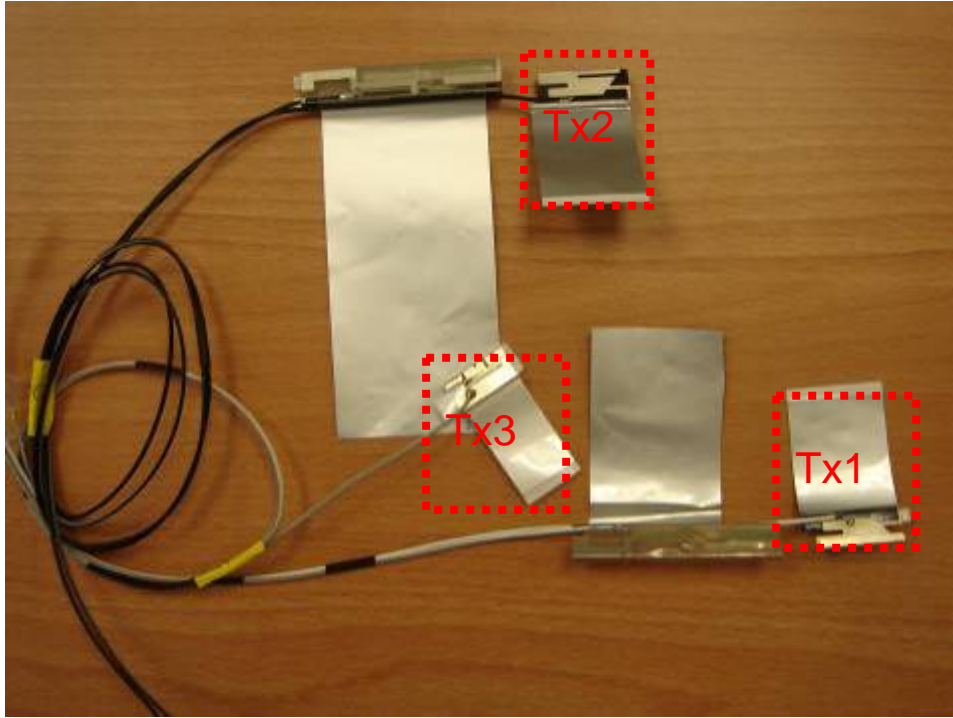

Include back view photo of all 2 antennas here.

Antenna Manufacturer: WLAN


Antenna Part Number: 81.EJS15.004(Tx1), 81.EJS15.004(Tx2 or Rx2), 81.EJS15.004(Tx3 or Rx3)

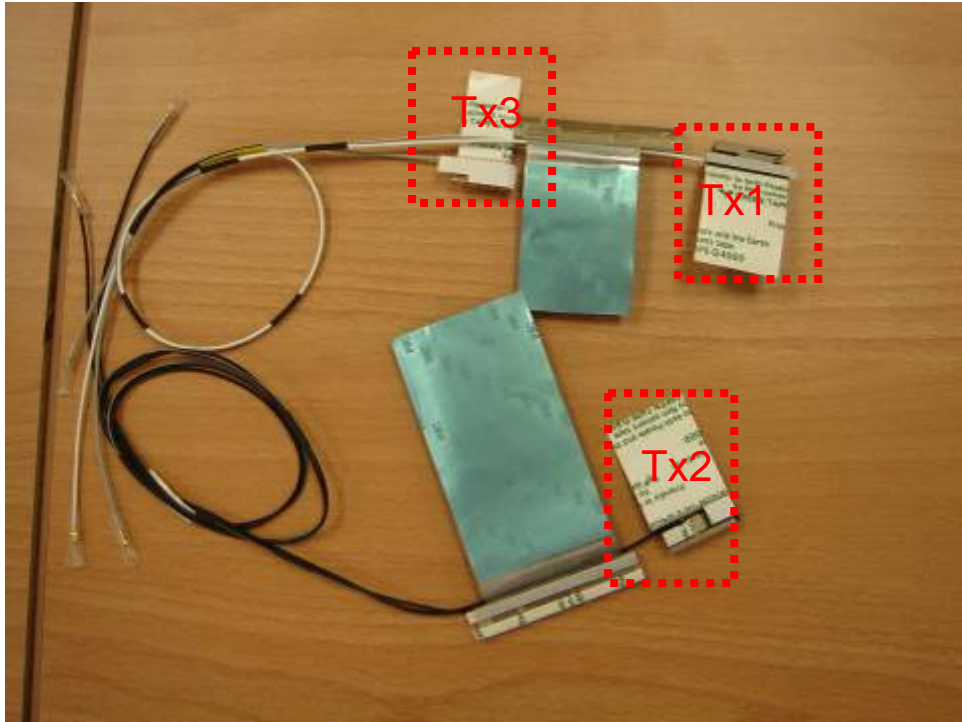

Section 3. Radiation characteristics of antennae Loaded in Host Platform


2400-2500MHz radiation characteristic

Tx1 antenna: 2400 MHz

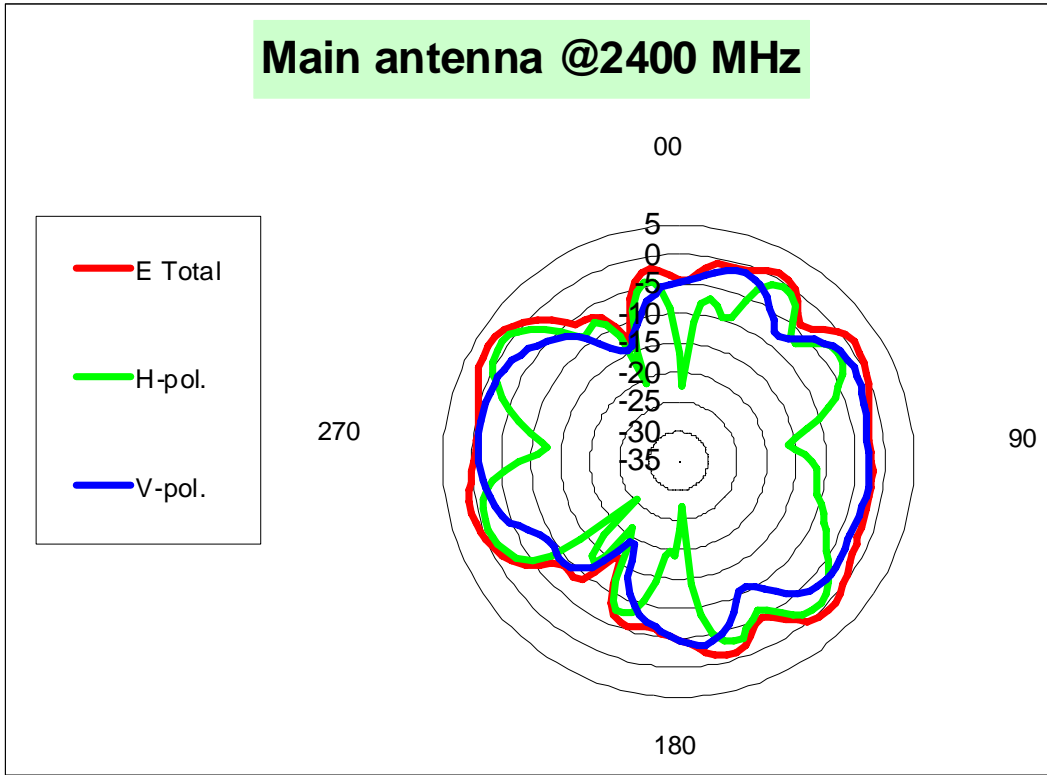


	H-pol	V pol
Peak Gain	1.08	-0.87

Tx1 antenna: 2450 MHz

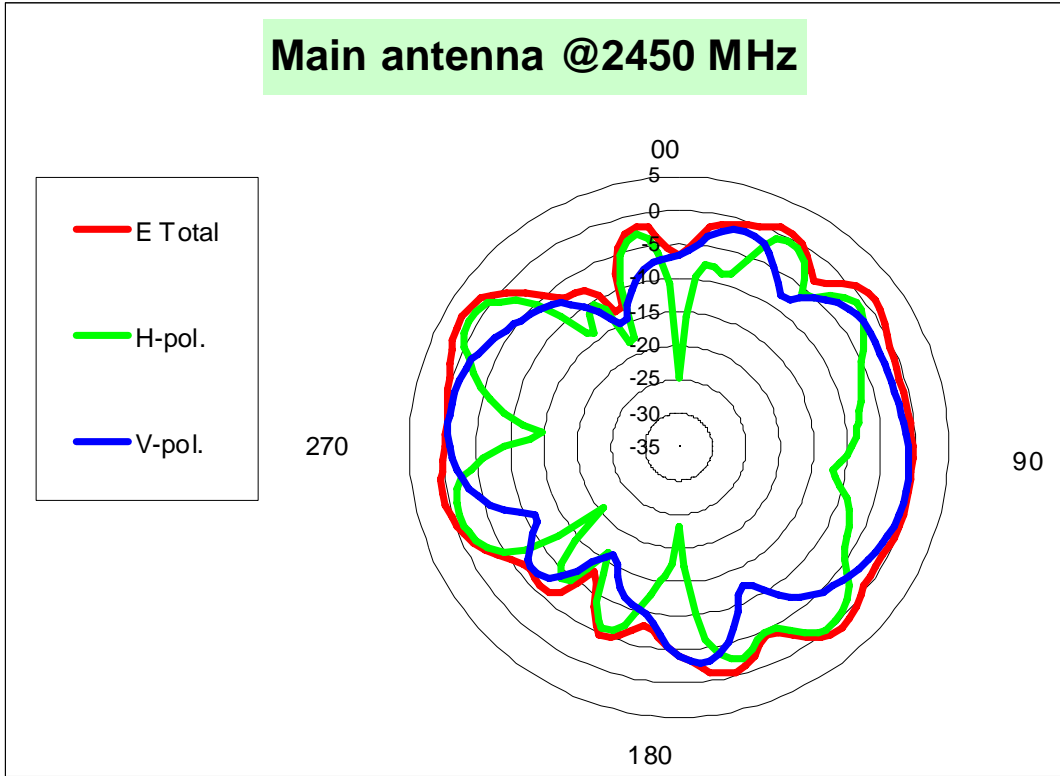


	H-pol	V pol
Peak Gain	1.18	-0.62

Tx1 antenna: 2500 MHz

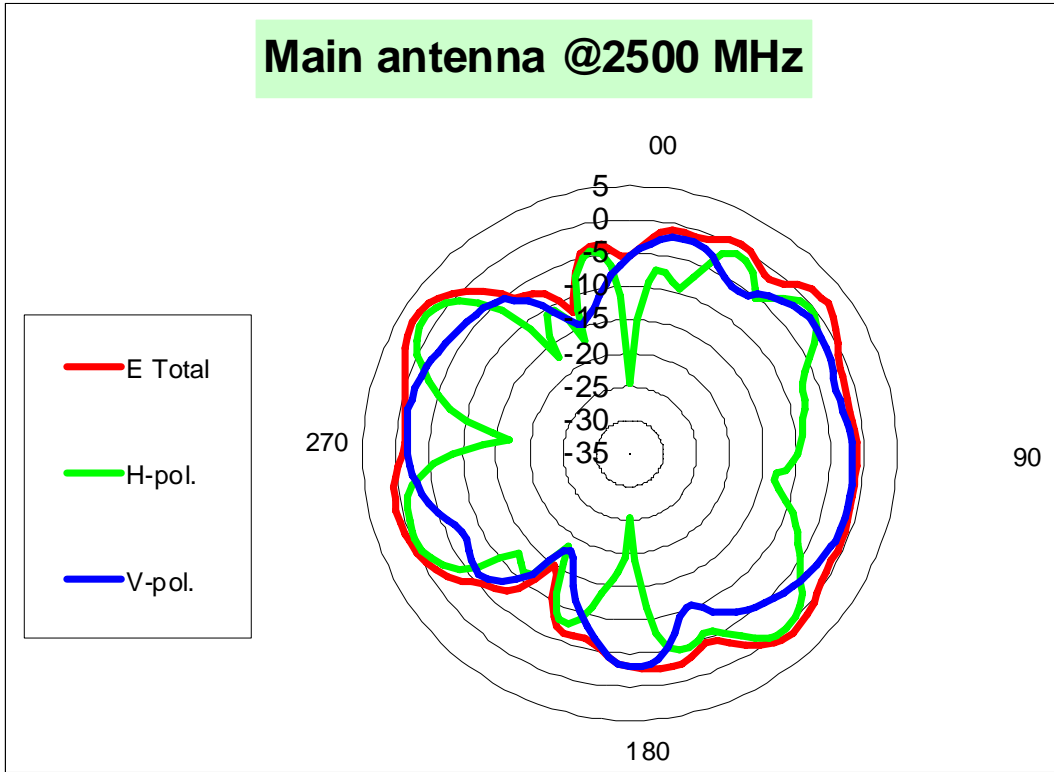


	H-pol	V pol
Peak Gain	1.77	-1.30

Tx2 (or Rx2) antenna: 2400 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

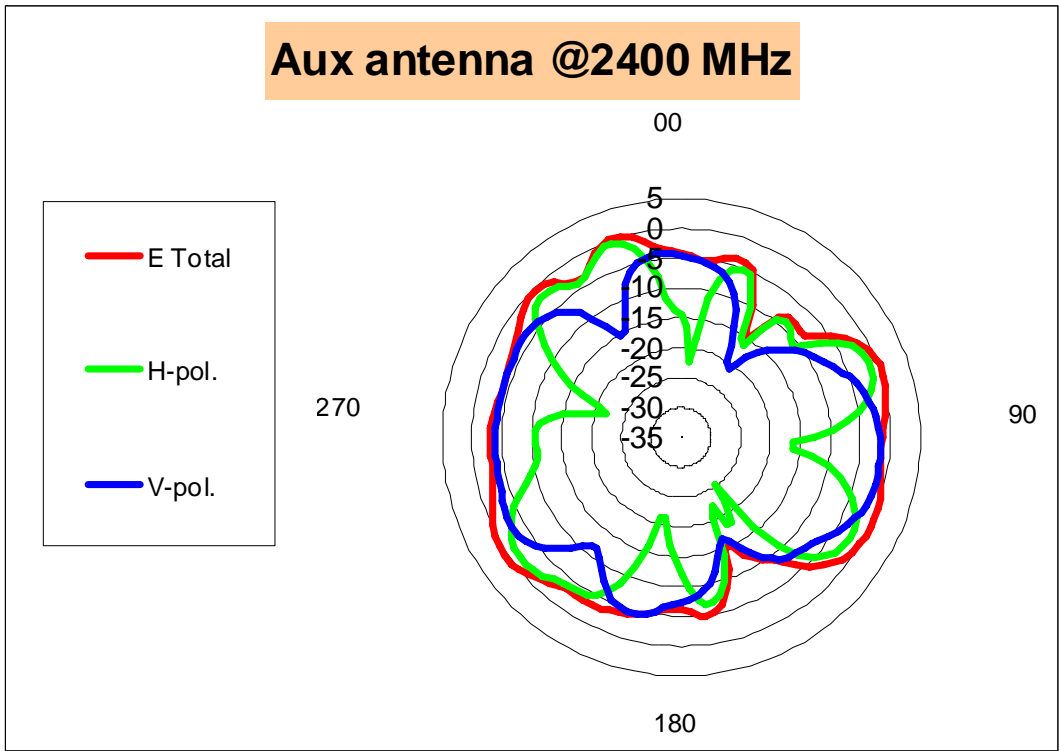


Total	H-pol	V pol
Peak Gain	-0.52	-1.53

Tx2 (or Rx2) antenna: 2450 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

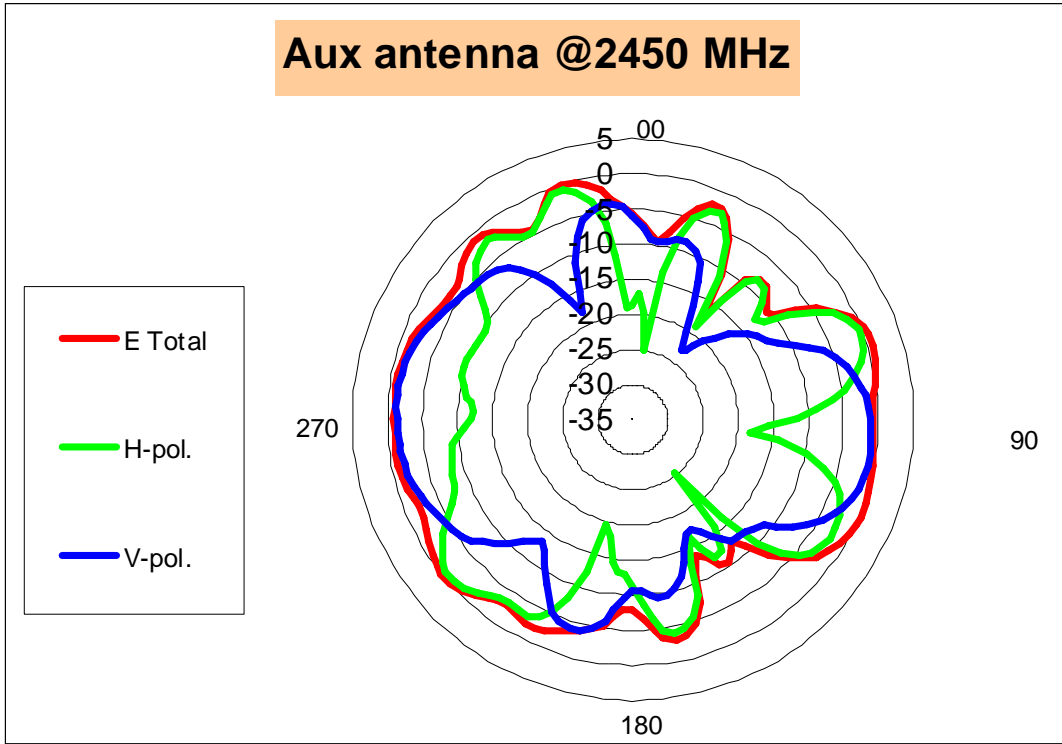


	H-pol	V pol
Peak Gain	-0.29	-0.81

Tx2 (or Rx2) antenna: 2500 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

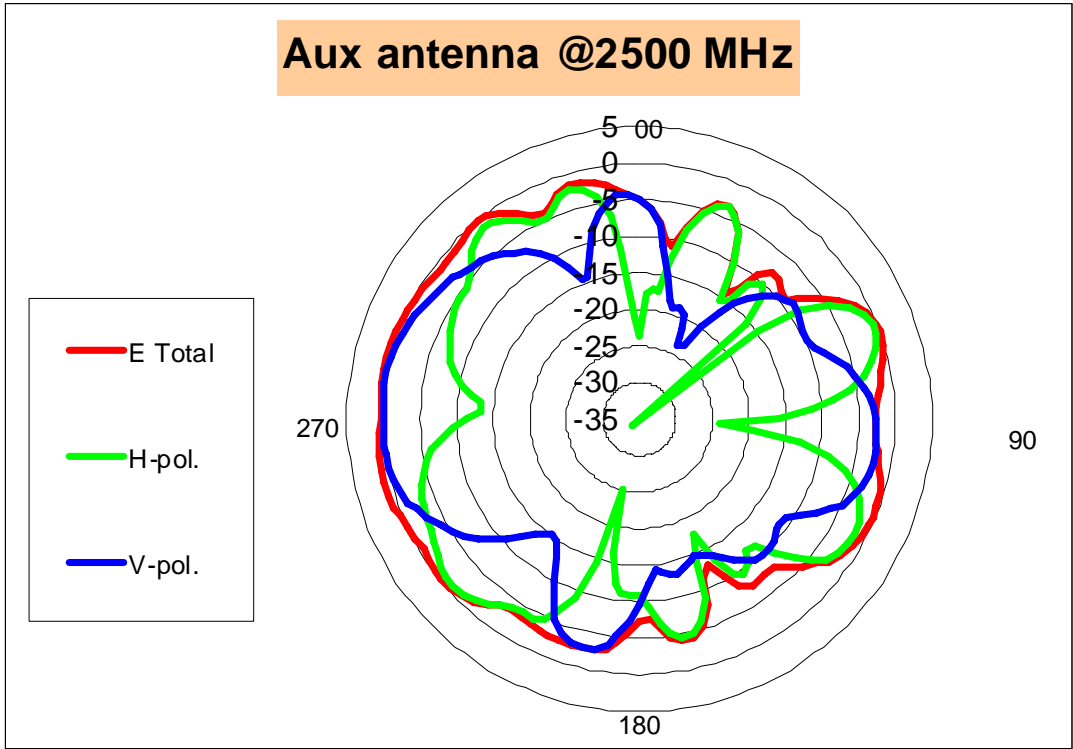


	H-pol	V pol
Peak Gain	-0.61	0.21

Tx3 (or Rx3) antenna: 2400 MHz (Plot is not required if 3rd Antenna is receive only e.g. Rx3 for 4965AGN)

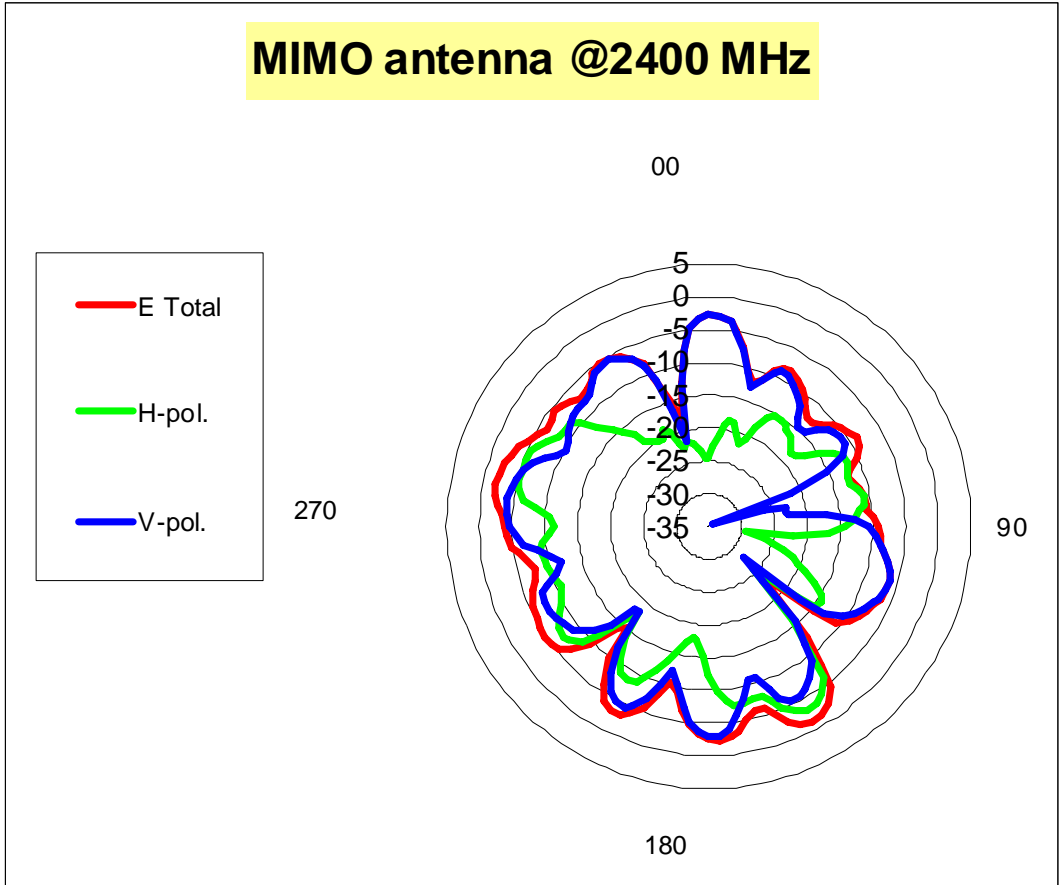


Total	H-pol	V pol
Peak Gain	-3.23	-2.76

Tx3 (or Rx3) antenna: 2450 MHz (Plot is not required if 3rd Antenna is receive only e.g. Rx3 for 4965AGN)

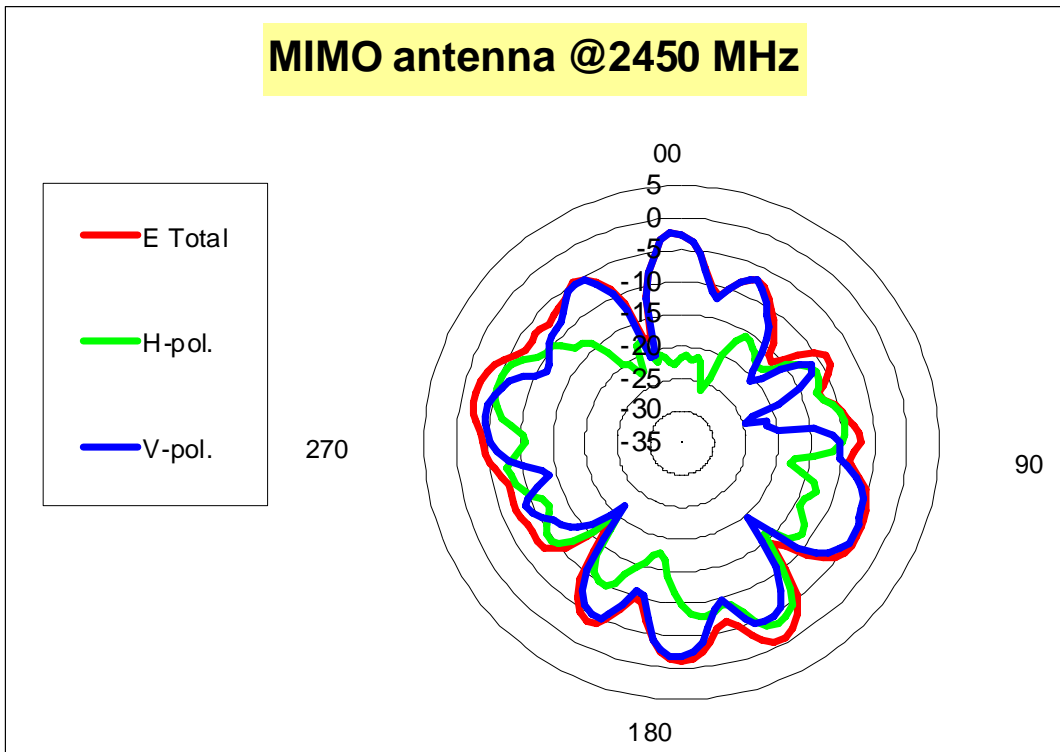

	H-pol	V pol
Peak Gain	-3.13	-1.80


Tx3 (or Rx3) antenna: 2500 MHz (Plot is not required if 3rd Antenna is receive only e.g. Rx3 for 4965AGN)

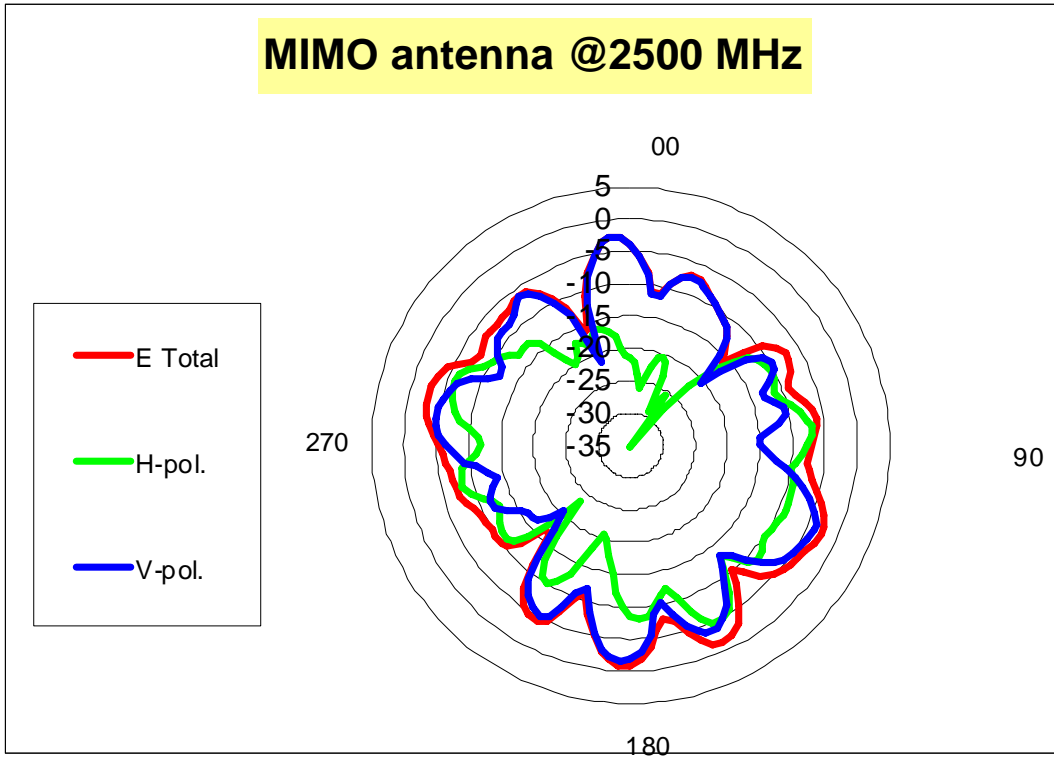

	H-pol	V pol
Peak Gain	-4.48	-1.56


5150-5350 MHz radiation characteristic

Tx1 antenna: 5150 MHz

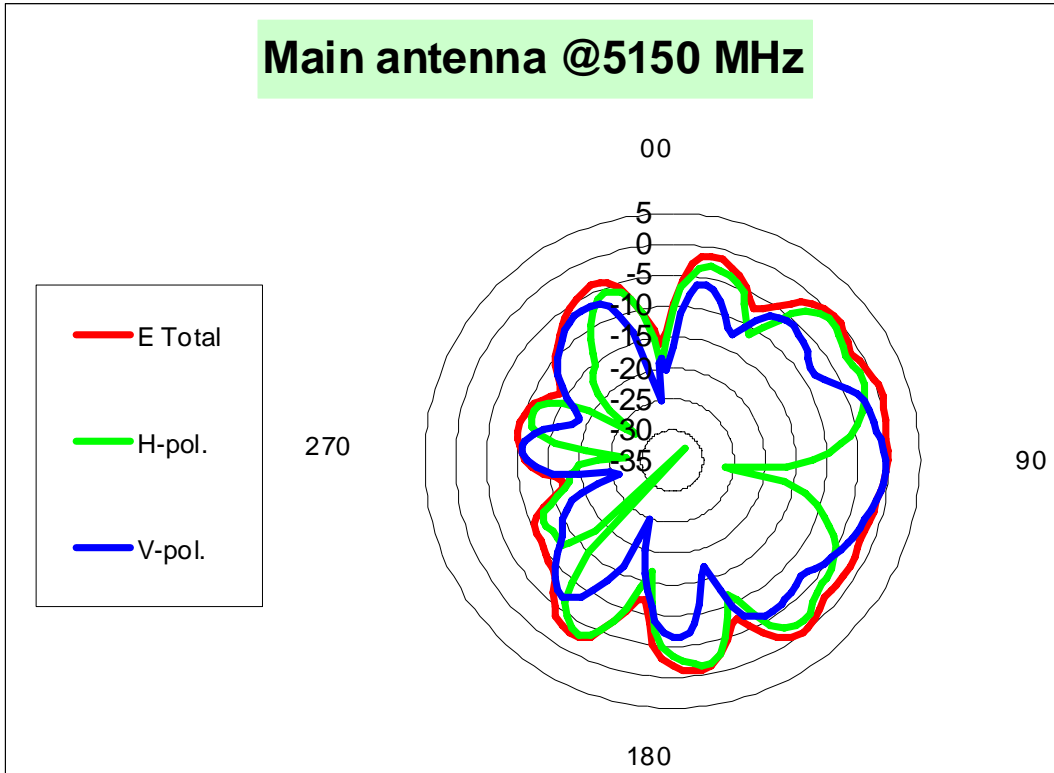


	H-pol	V pol
Peak Gain	-0.67	-0.58

Tx1 antenna: 5250 MHz

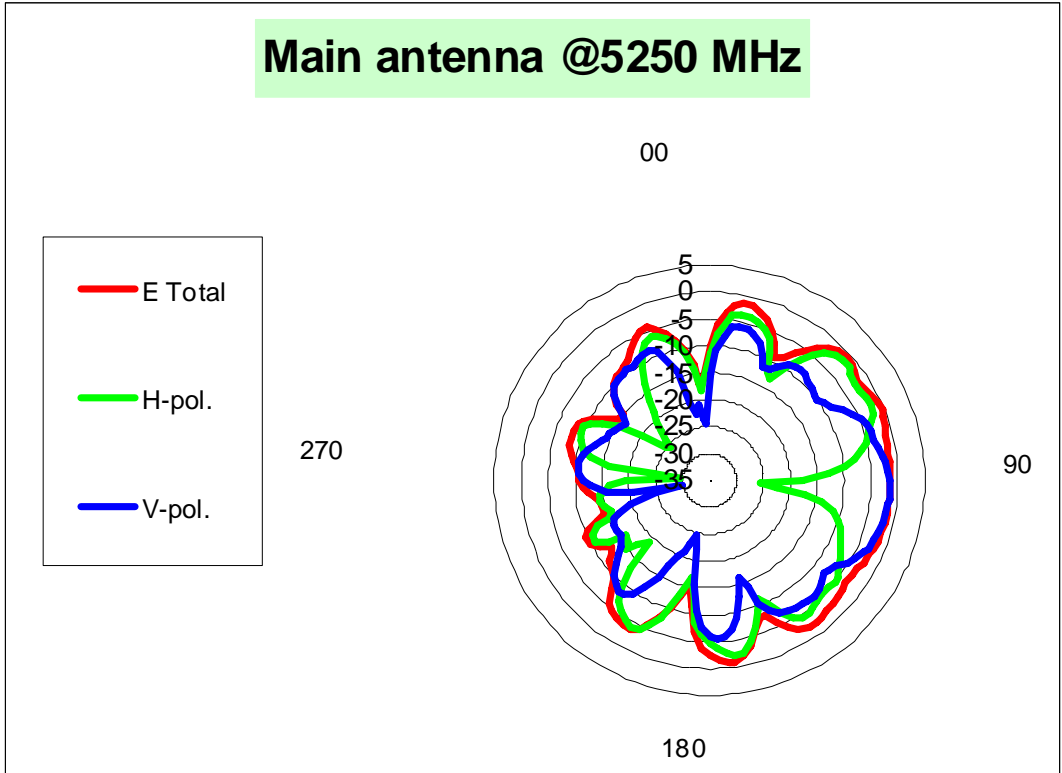


	H-pol	V pol
Peak Gain	-1.46	-1.51

Tx1 antenna: 5350 MHz

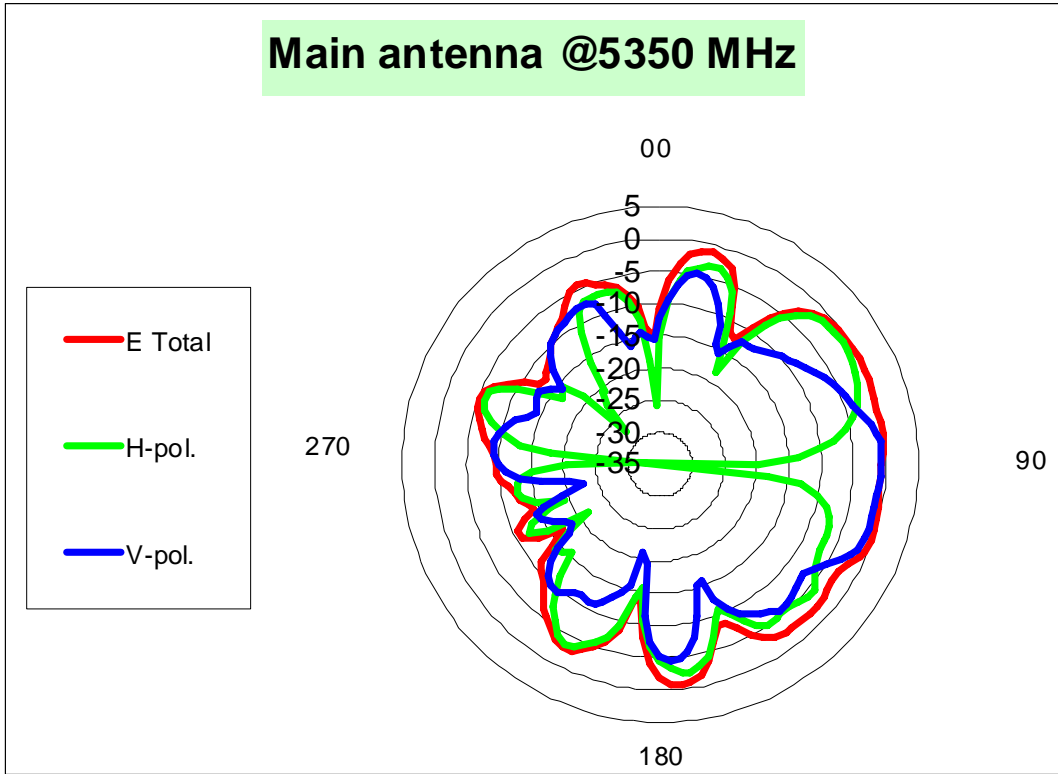


	H-pol	V pol
Peak Gain	-0.96	-0.67

Tx2 (or Rx2) antenna: 5150 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

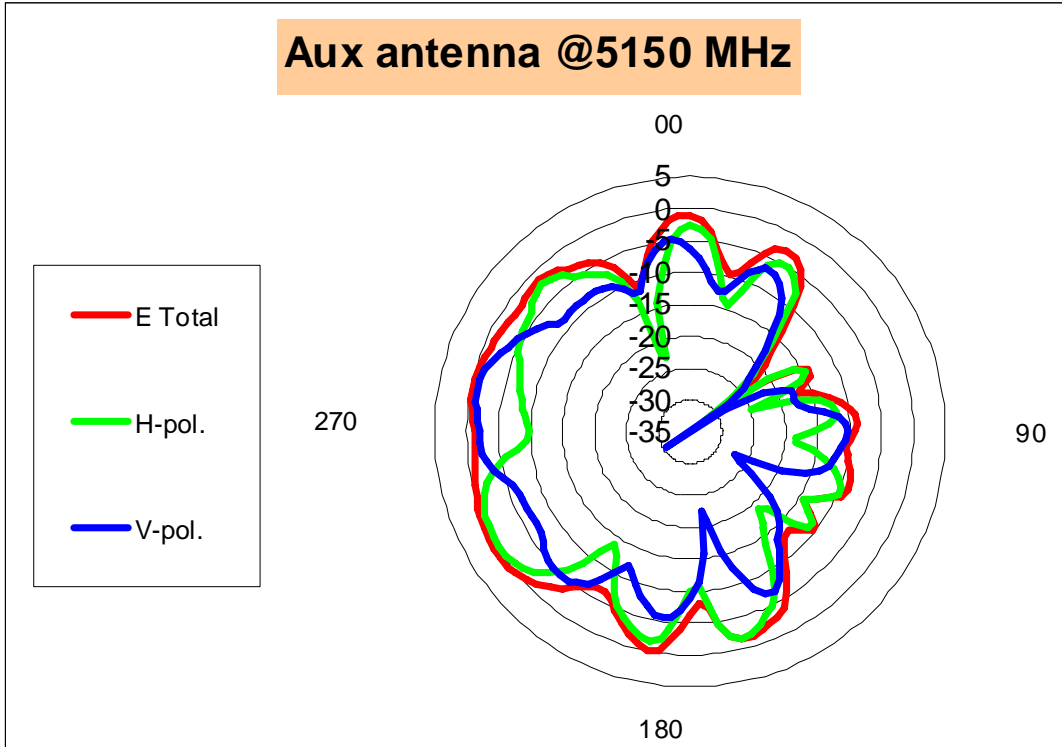


	H-pol	V pol
Peak Gain	-0.01	-0.92

Tx2 (or Rx2) antenna: 5250 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

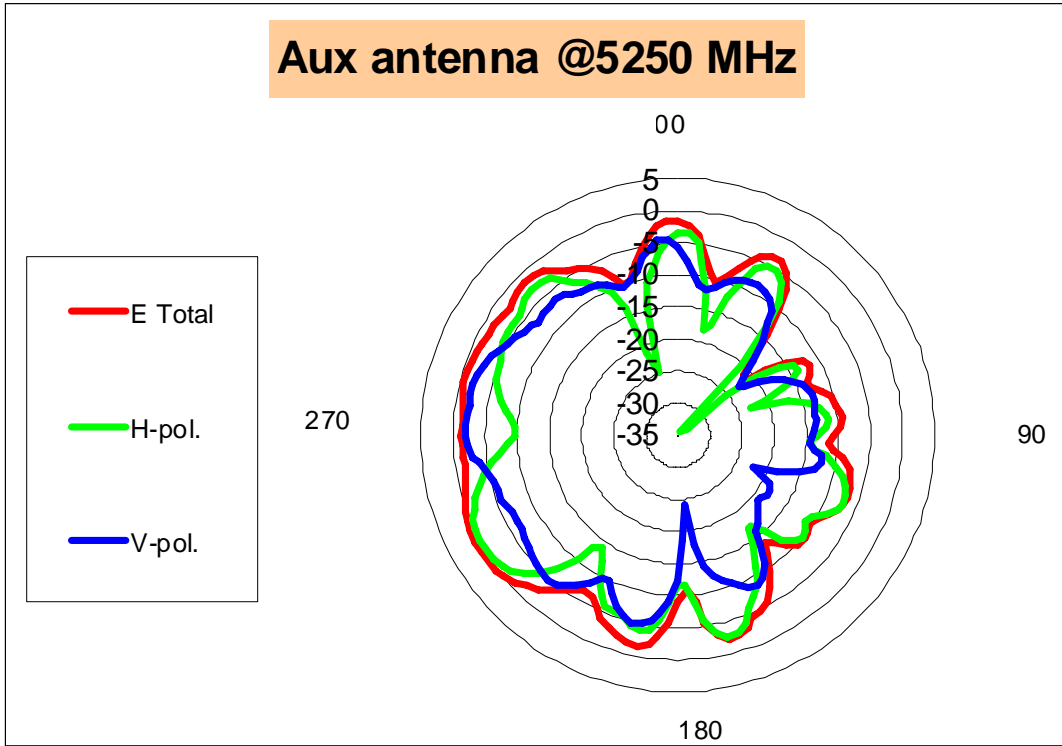


	H-pol	V pol
Peak Gain	-0.17	-2.01

Tx2 (or Rx2) antenna: 5350 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

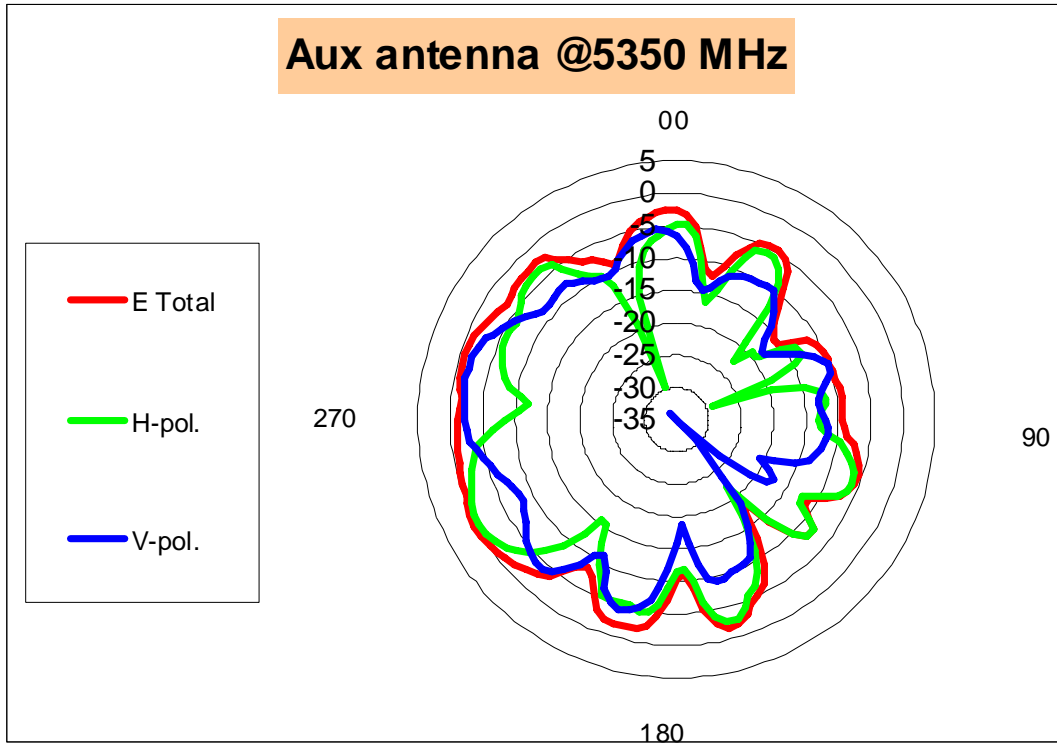


	H-pol	V pol
Peak Gain	-0.35	-1.76

Tx3 (or Rx3) antenna: 5150 MHz (Plot is not required if 3rd Antenna is receive only e.g. Rx3 for 4965AGN)

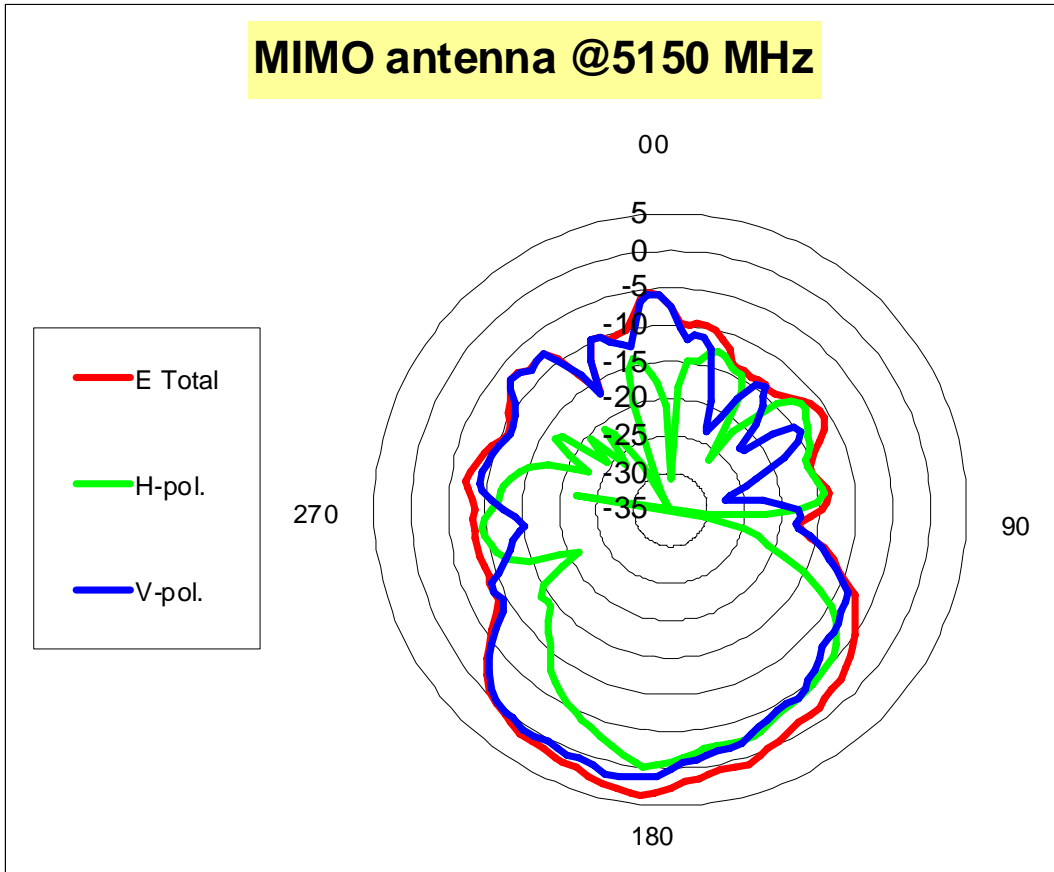


	H-pol	V pol
Peak Gain	-0.16	1.78

Tx3 (or Rx3) antenna: 5250 MHz (Plot is not required if 3rd Antenna is receive only e.g. Rx3 for 4965AGN)

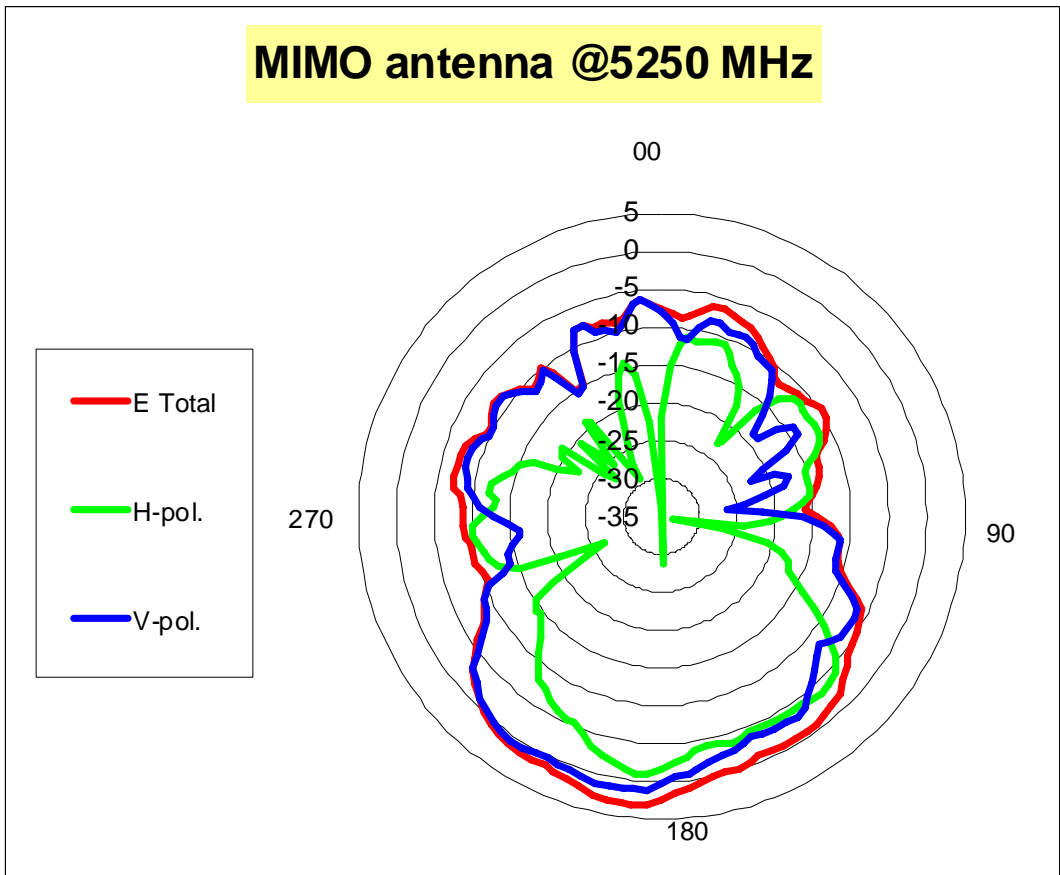

	H-pol	V pol
Peak Gain	-0.68	1.42


Tx3 (or Rx3) antenna: 5350 MHz (Plot is not required if 3rd Antenna is receive only e.g. Rx3 for 4965AGN)

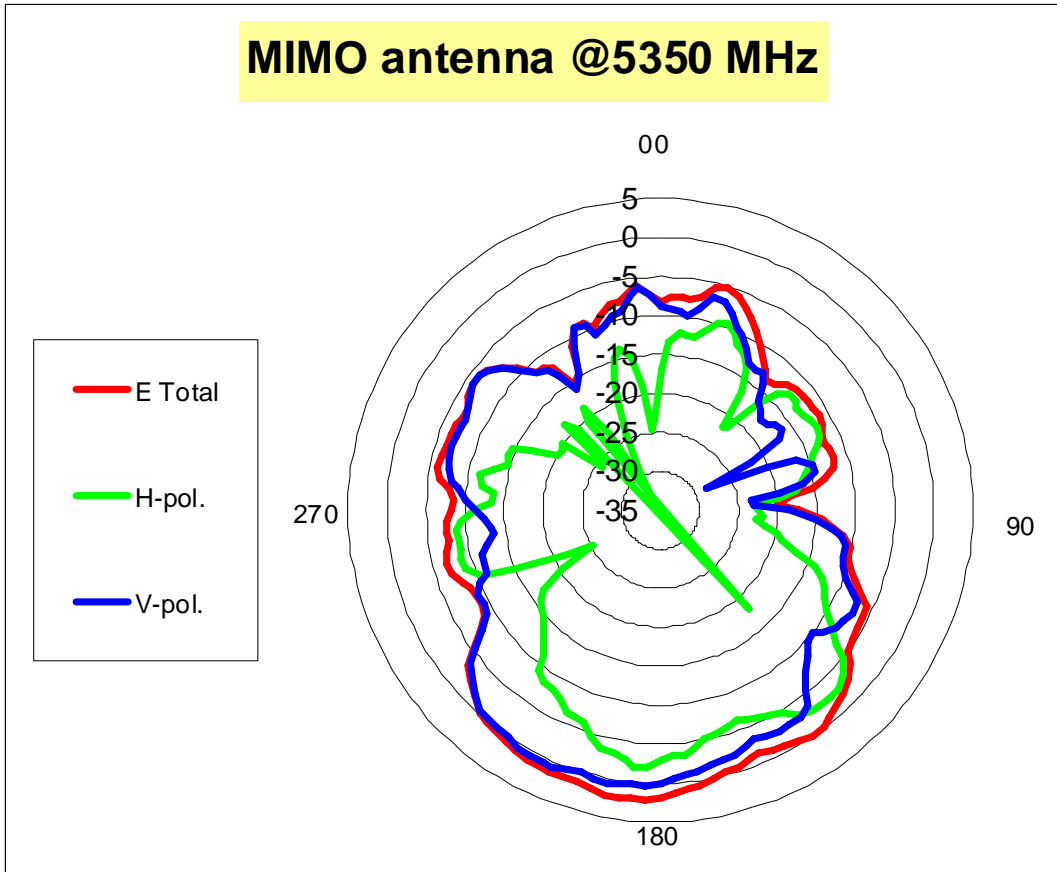

	H-pol	V pol
Peak Gain	-1.98	0.69


5470-5725MHz radiation characteristic

Tx1 antenna: 5470 MHz

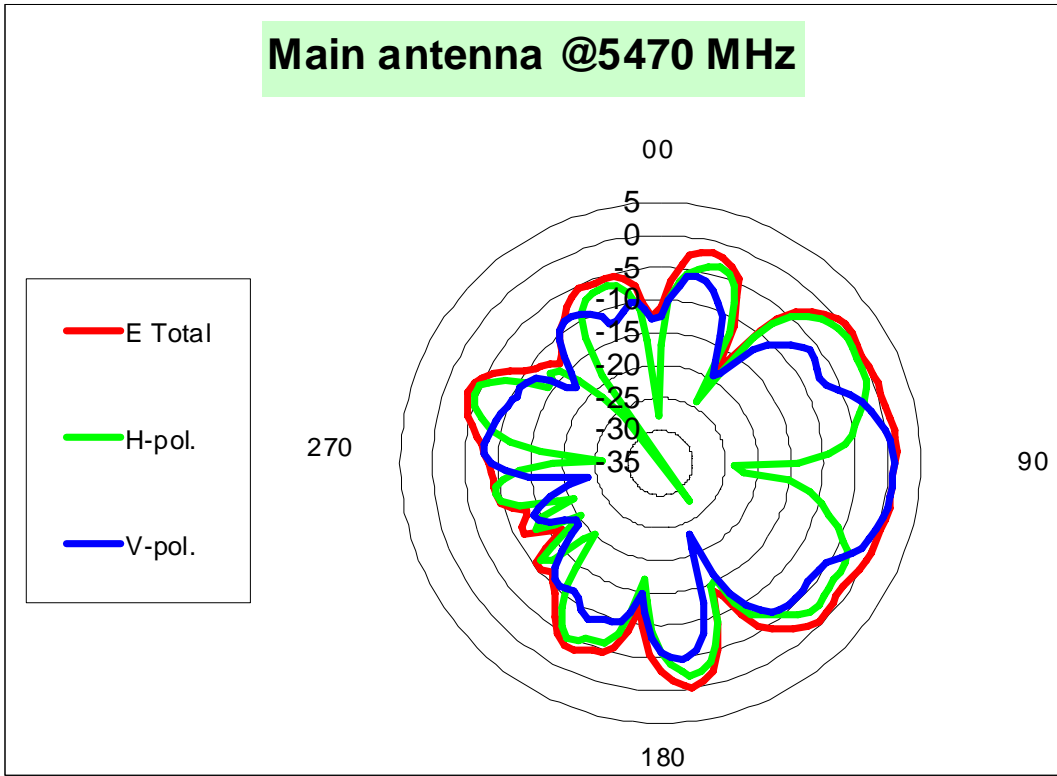


	H-pol	V pol
Peak Gain	-0.46	0.88

Tx1 antenna: 5597.5 MHz

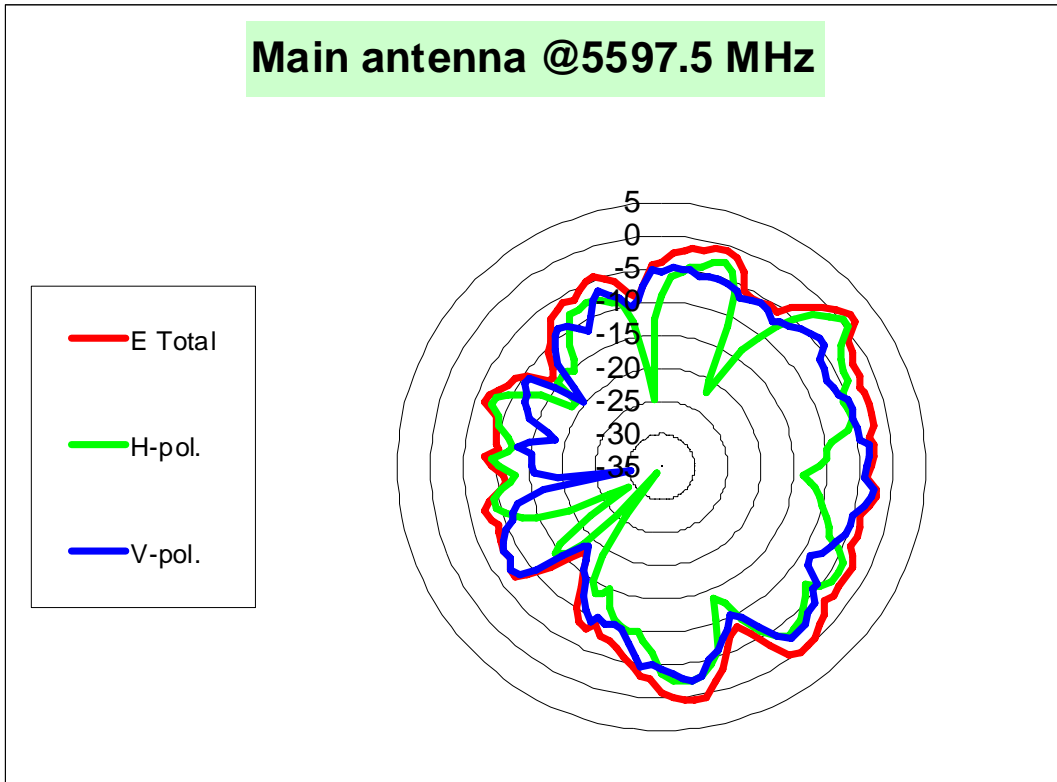


	H-pol	V pol
Peak Gain	0.46	-2.10

Tx1 antenna: 5725 MHz

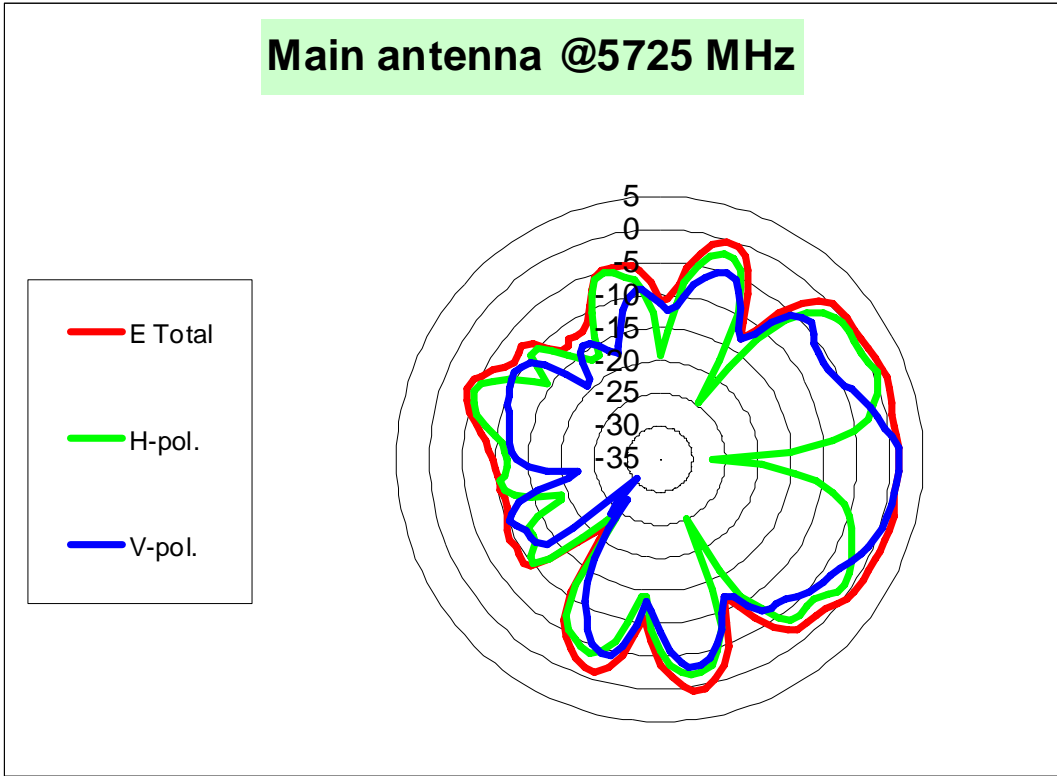


	H-pol	V pol
Peak Gain	0.51	1.46

Tx2 (or Rx2) antenna: 5470 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

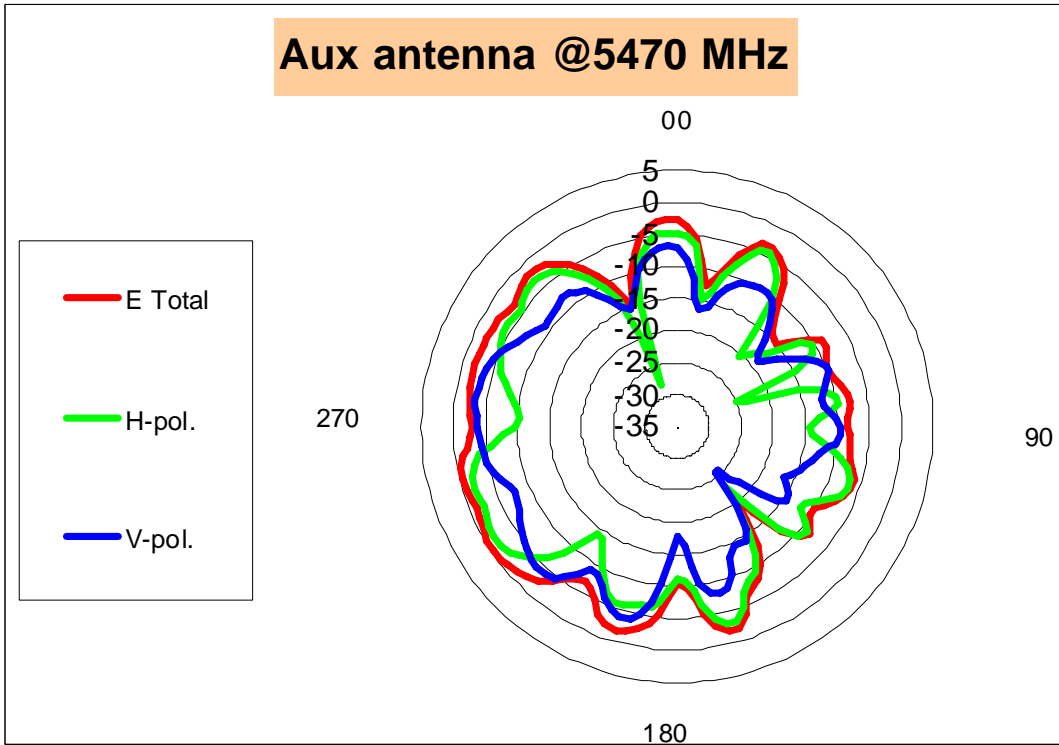


	H-pol	V pol
Peak Gain	-1.65	-3.22

Tx2 (or Rx2) antenna: 5597.5 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

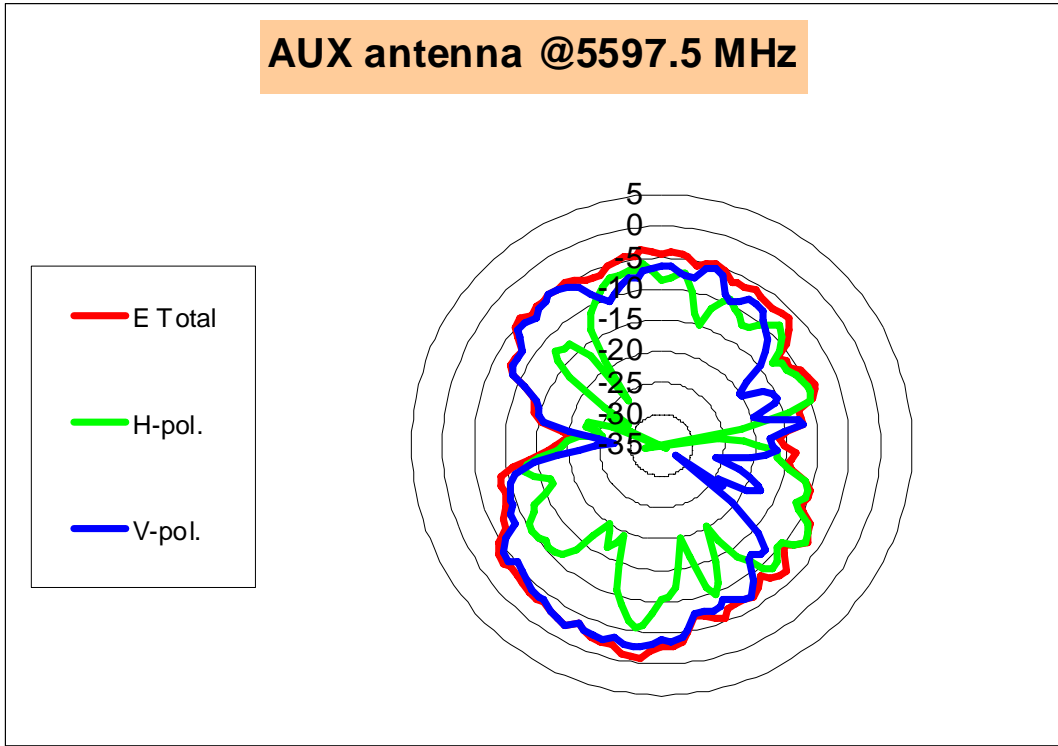


	H-pol	V pol
Peak Gain	-0.08	-2.39

Tx2 (or Rx2) antenna: 5725 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

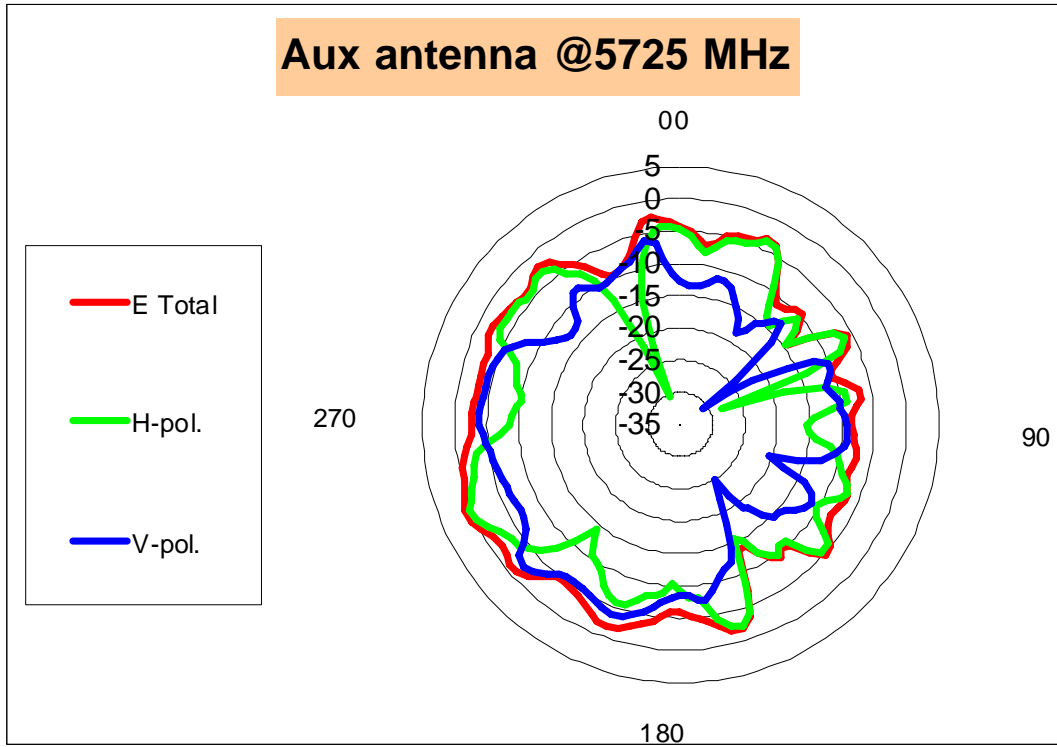


	H-pol	V pol
Peak Gain	0.11	-2.27

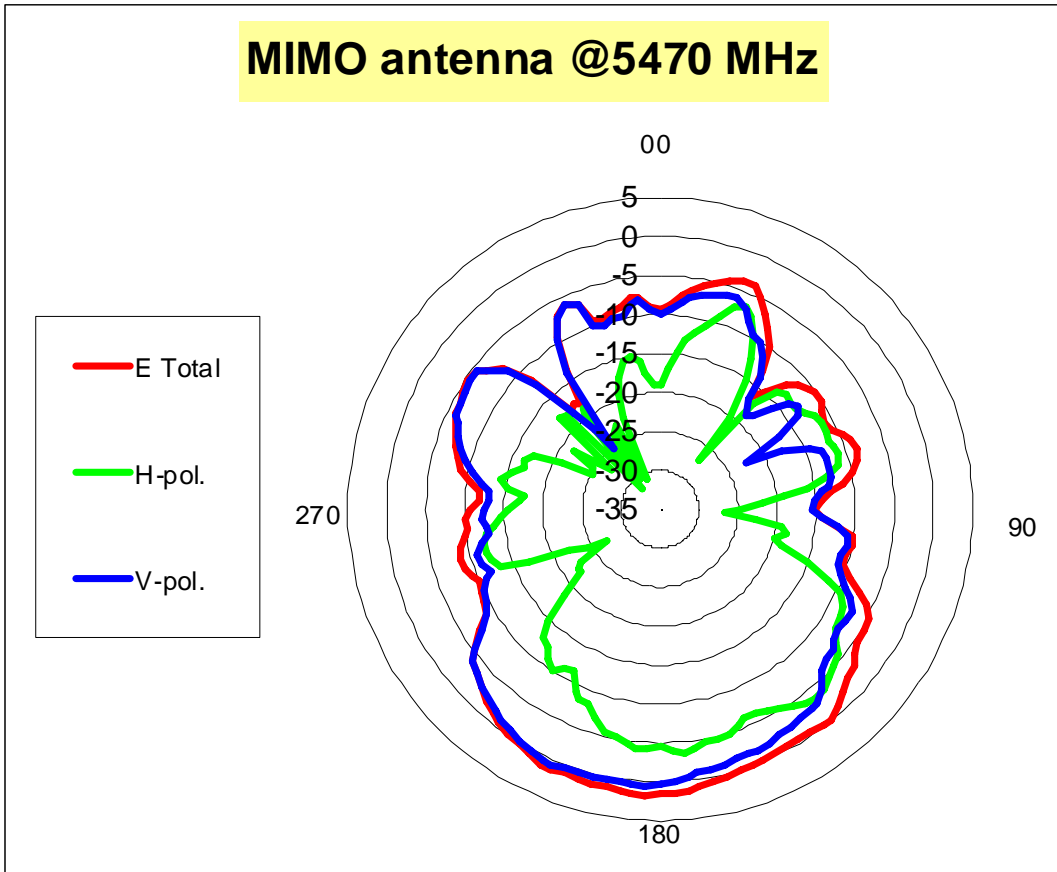


	H-pol	V pol
Peak Gain	-3.44	0.74

Tx3 (or Rx3) antenna: 5597.5 MHz (Plot is not required if 3rd Antenna is receive only e.g. Rx3 for 4965AGN)

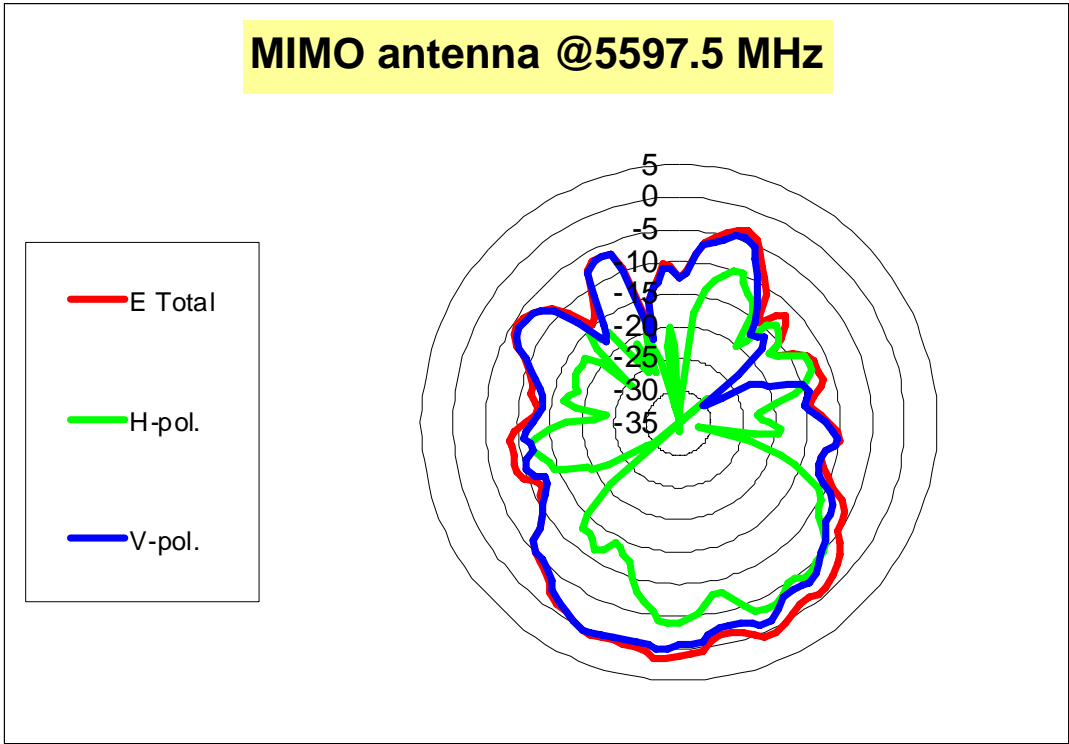

	H-pol	V pol
Peak Gain	-3.08	0.41


Tx3 (or Rx3) antenna: 5725 MHz (Plot is not required if 3rd Antenna is receive only e.g. Rx3 for 4965AGN)

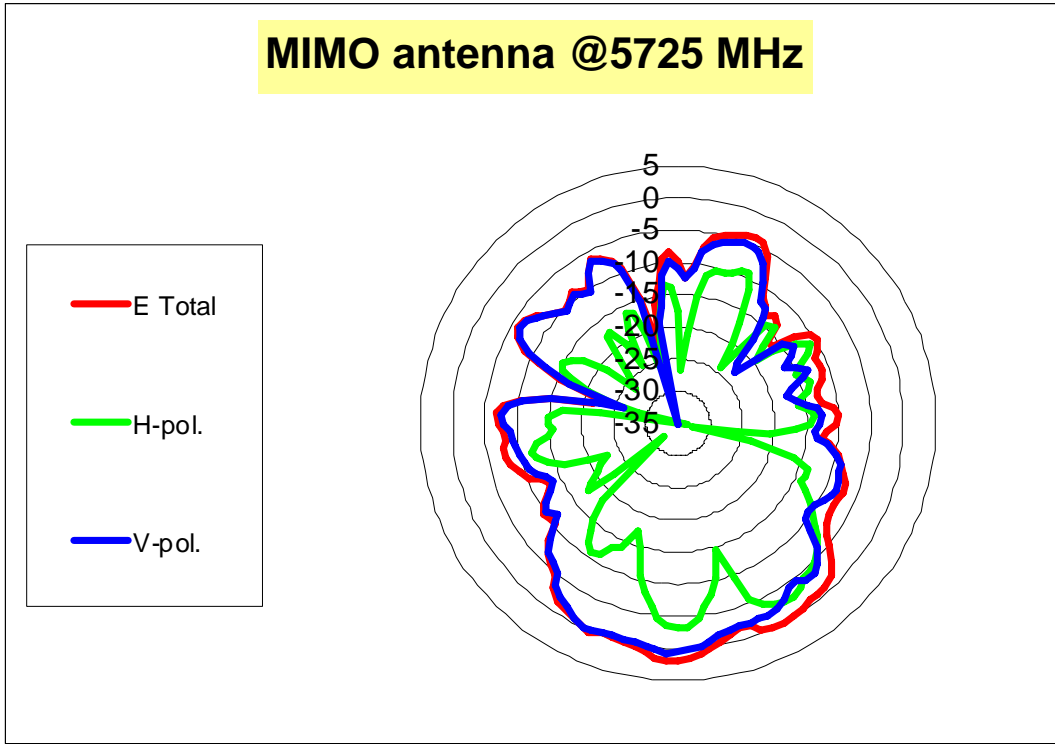

	H-pol	V pol
Peak Gain	-2.62	0.70


5725-5850 MHz radiation characteristic

Tx1 antenna: 5725 MHz

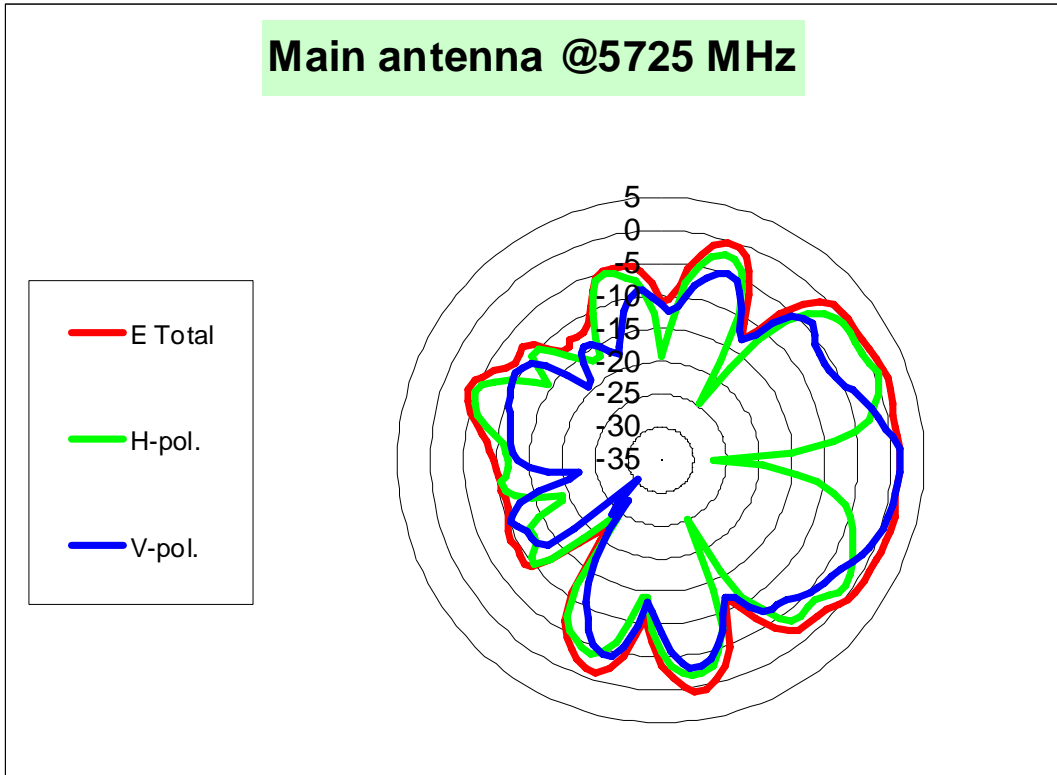


	H-pol	V pol
Peak Gain	0.51	1.46

Tx1 antenna: 5785 MHz

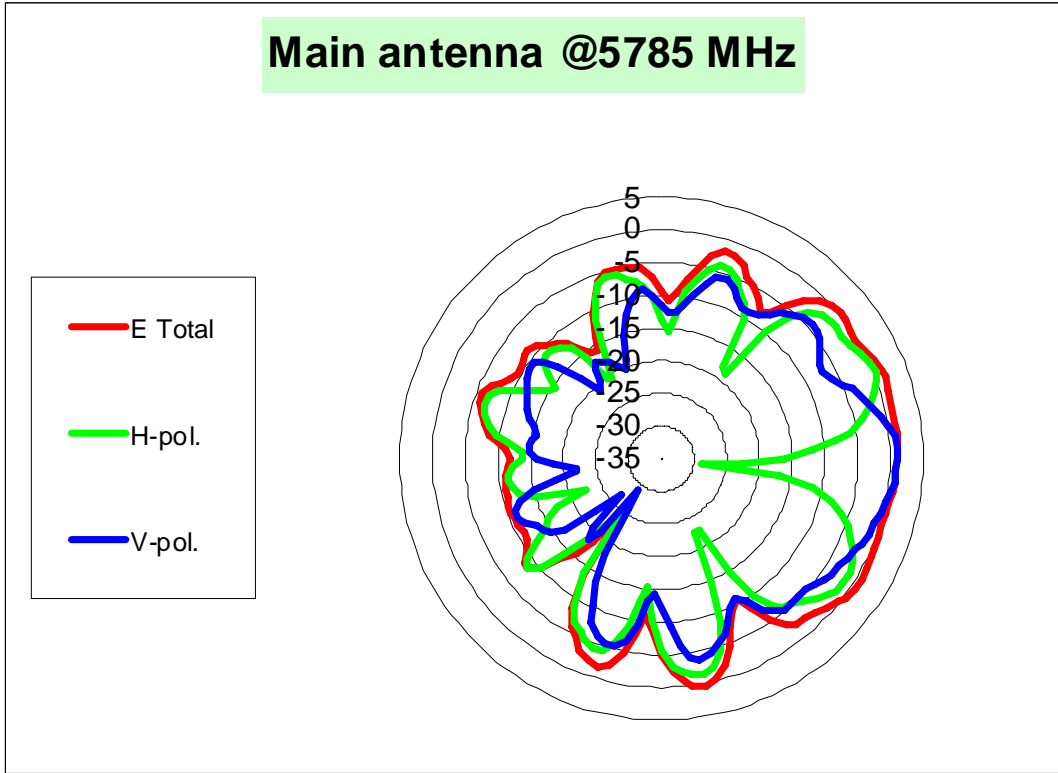


	H-pol	V pol
Peak Gain	0.30	1.04

Tx1 antenna: 5850 MHz

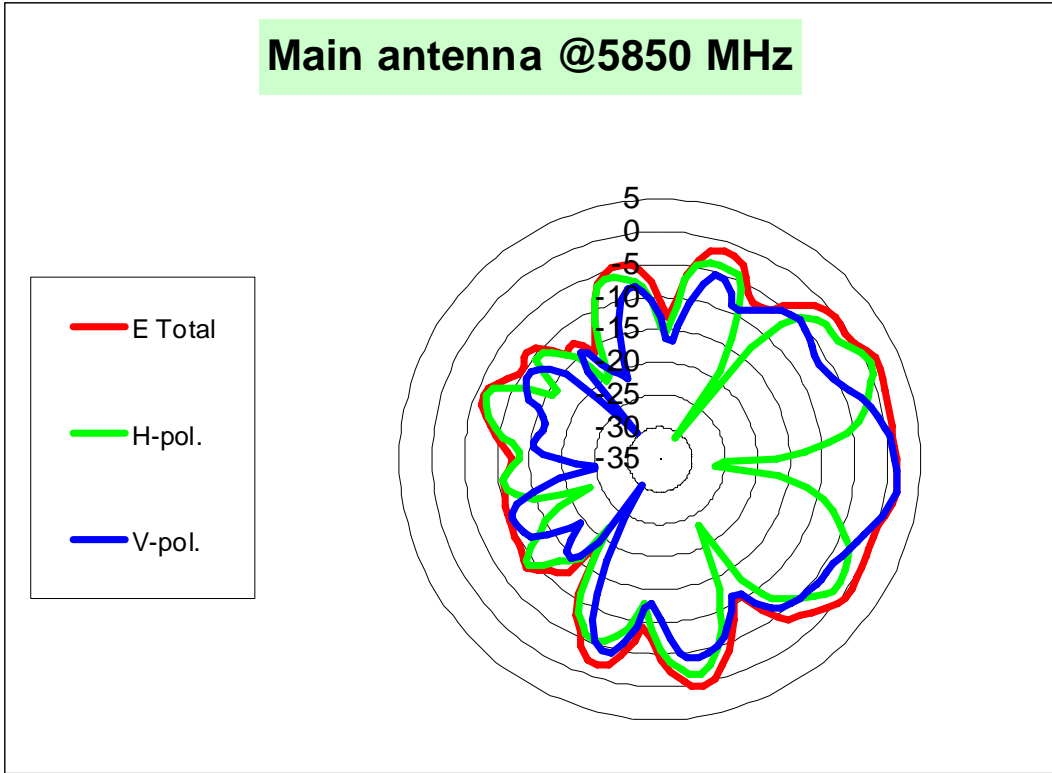


	H-pol	V pol
Peak Gain	0.82	1.73

Tx2 (or Rx2) antenna: 5725 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

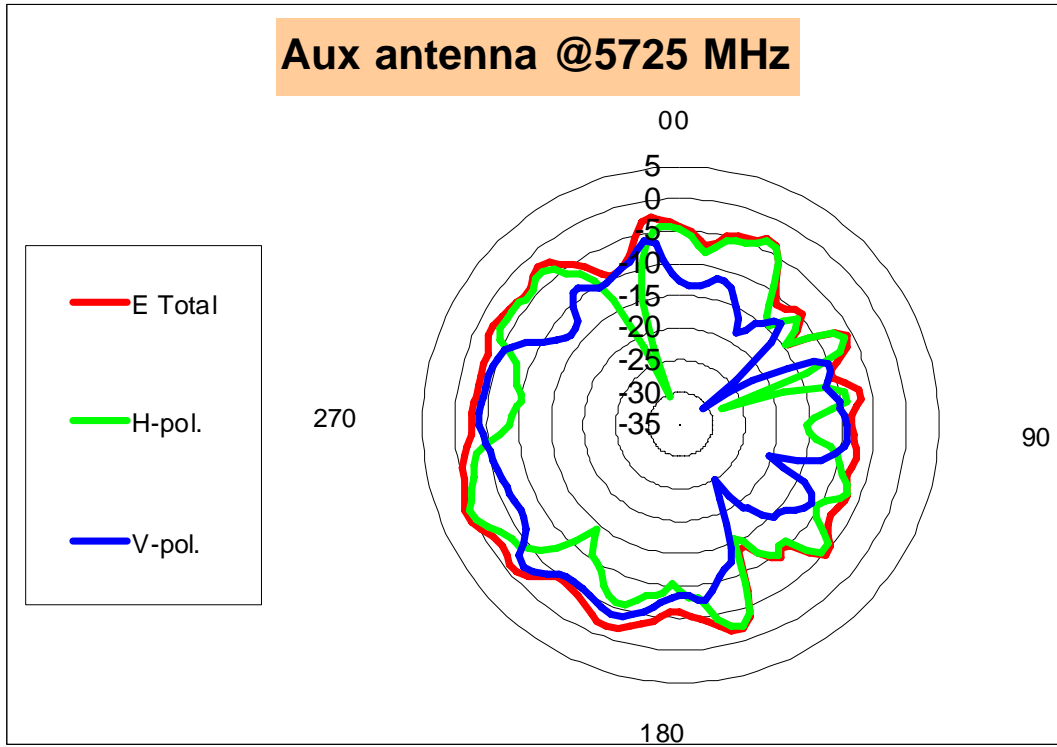


	H-pol	V pol
Peak Gain	0.11	-2.27

Tx2 (or Rx2) antenna: 5785 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

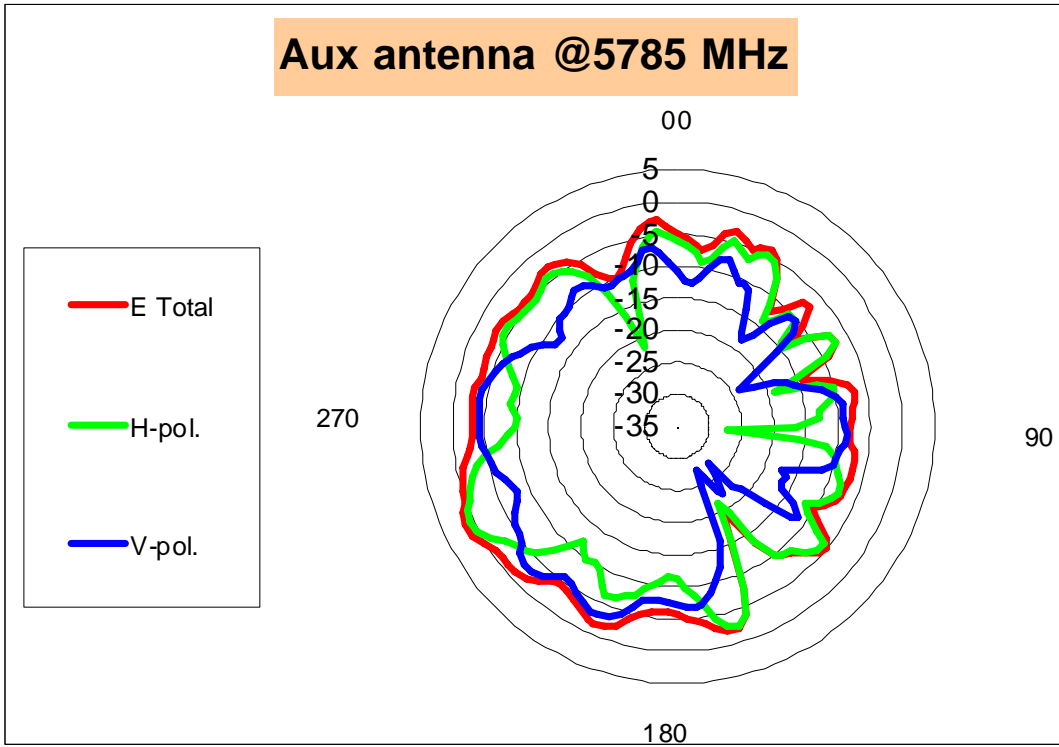


	H-pol	V pol
Peak Gain	0.67	-2.79

Tx2 (or Rx2) antenna: 5850 MHz (Plot is not required if 2nd Antenna is receive only e.g. Rx2 for 512 family)

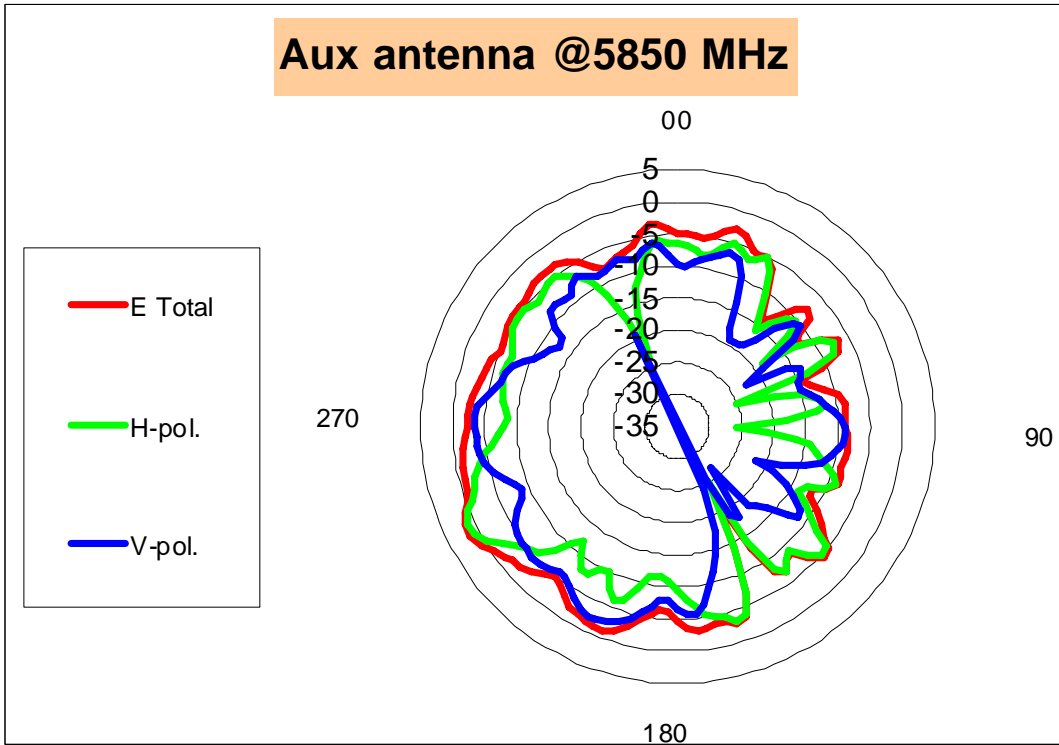


	H-pol	V pol
Peak Gain	0.84	-2.29

Tx3 (or Rx3) antenna: 5725 MHz (Plot is not required if 3rd Antenna is receive only e.g. Rx3 for 4965AGN)

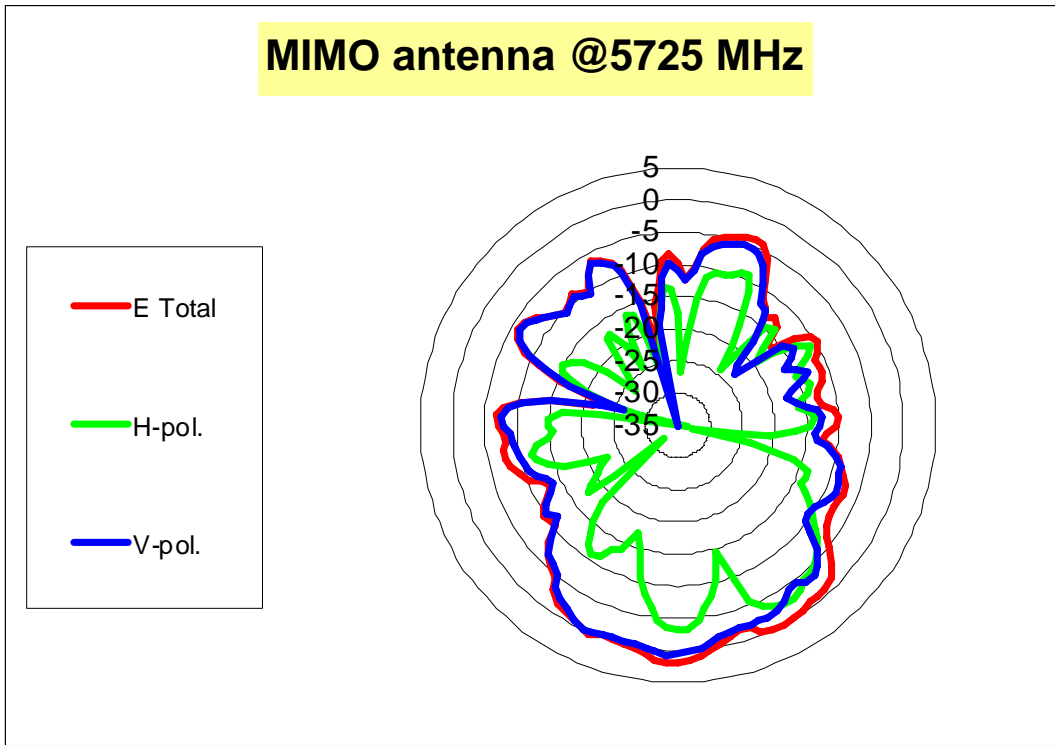


	H-pol	V pol
Peak Gain	-2.62	0.70

Tx3 (or Rx3) antenna: 5785 MHz (Plot is not required if 3rd Antenna is receive only e.g. Rx3 for 4965AGN)

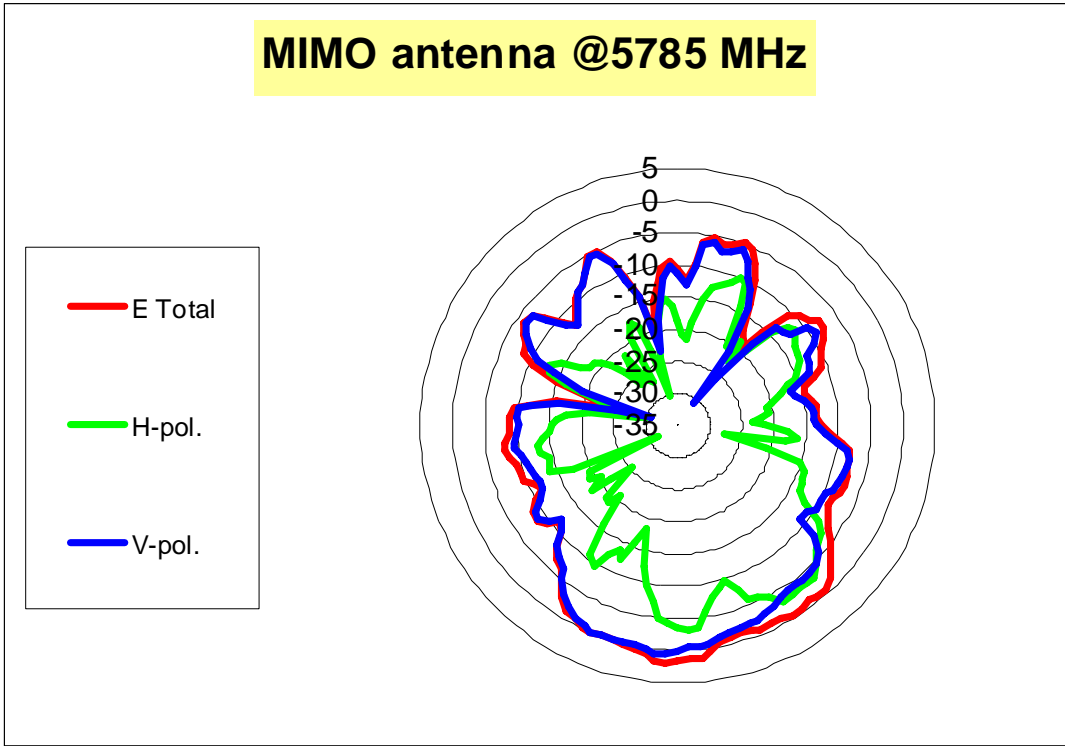

	H-pol	V pol
Peak Gain	-3.05	0.63

Tx3 (or Rx3) antenna: 5850 MHz (Plot is not required if 3rd Antenna is receive only e.g. Rx 3 for 4965AGN)

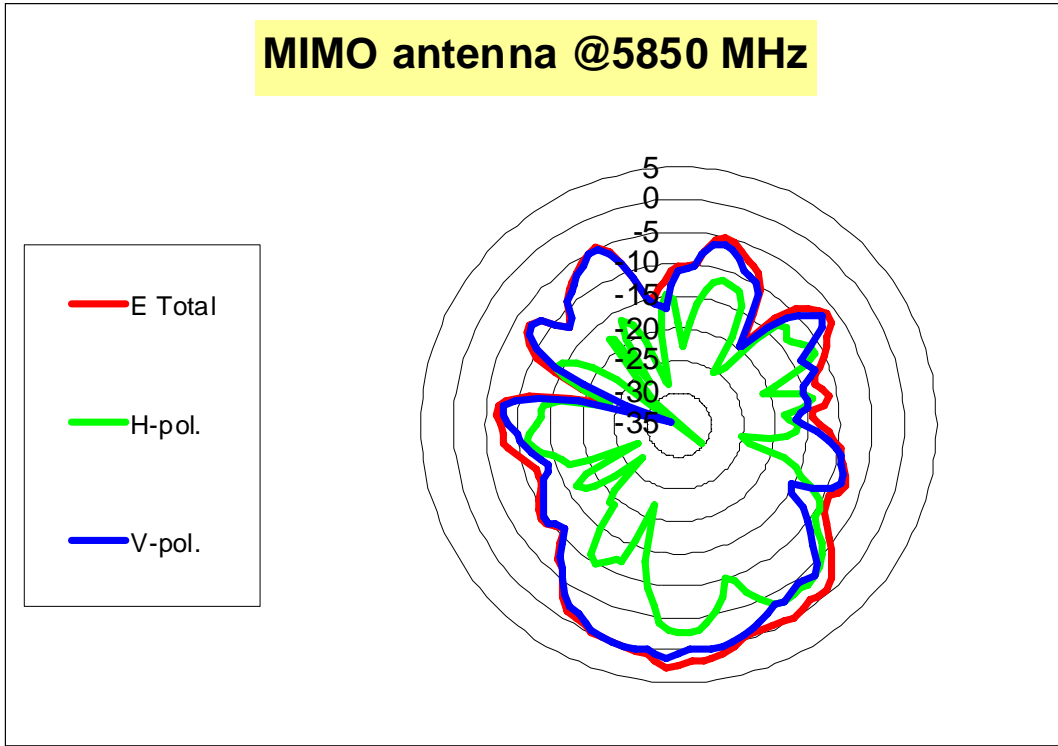

	H-pol	V pol
Peak Gain	-2.65	1.36

Section 4. Host Platform Information

OEM / ODM Host platform: (XXXXXXX) platform correlated to antenna data


Rating Label Photo:

Customer	ODM (Compal)		Antenna Vendor	
Model name	Model Name	Part Number	Manufacturer	Part Number
		DC33000HT00	WNC	81.EJS15.004




Section 5. Antenna Host Platform Location Information

Include a **dimensioned photo or dimensioned drawing** of Tx1, Tx2 and Tx3 antenna placements (measurements are not required for receive-only antenna). Any antenna that transmits must show dimensions to bottom of laptop.

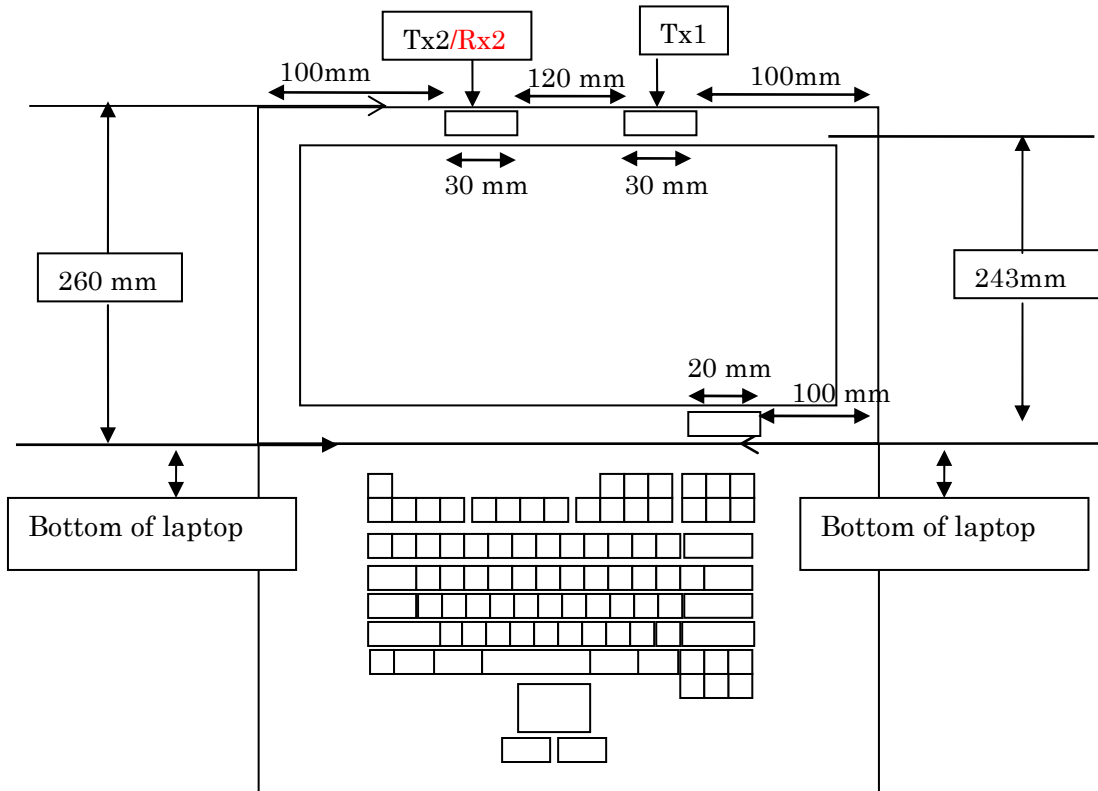

Section 6. Antenna dimensional information for SAR evaluation


Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between the transmit antennas and the user (excluding hands, wrist, feet, lap/ thigh, and ankle)

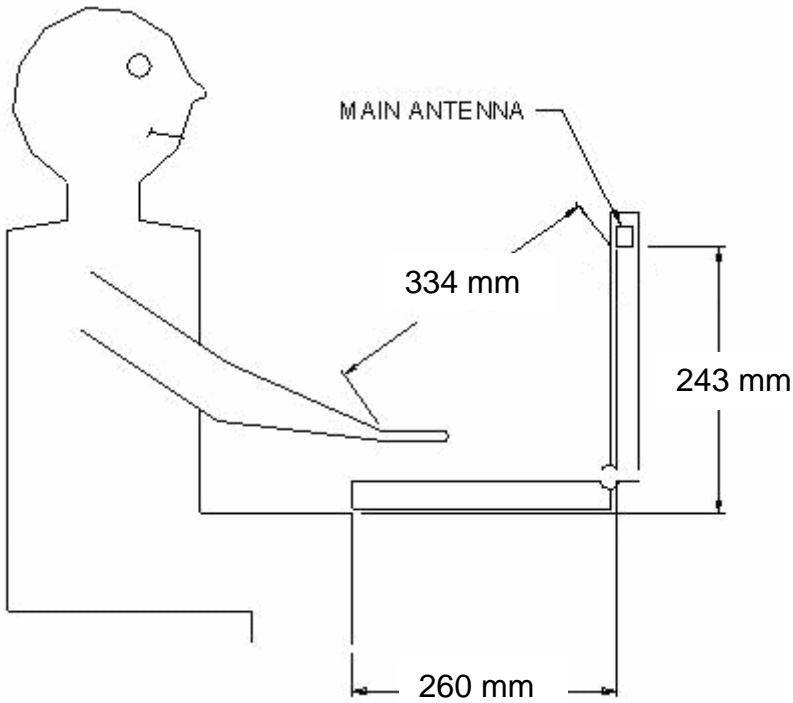

Section 7. Diagram Example of Co-Location Antenna Separation

Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between **all WLAN transmit antennas** and other co-located radiator transmit antenna such as Bluetooth, WWAN,..

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

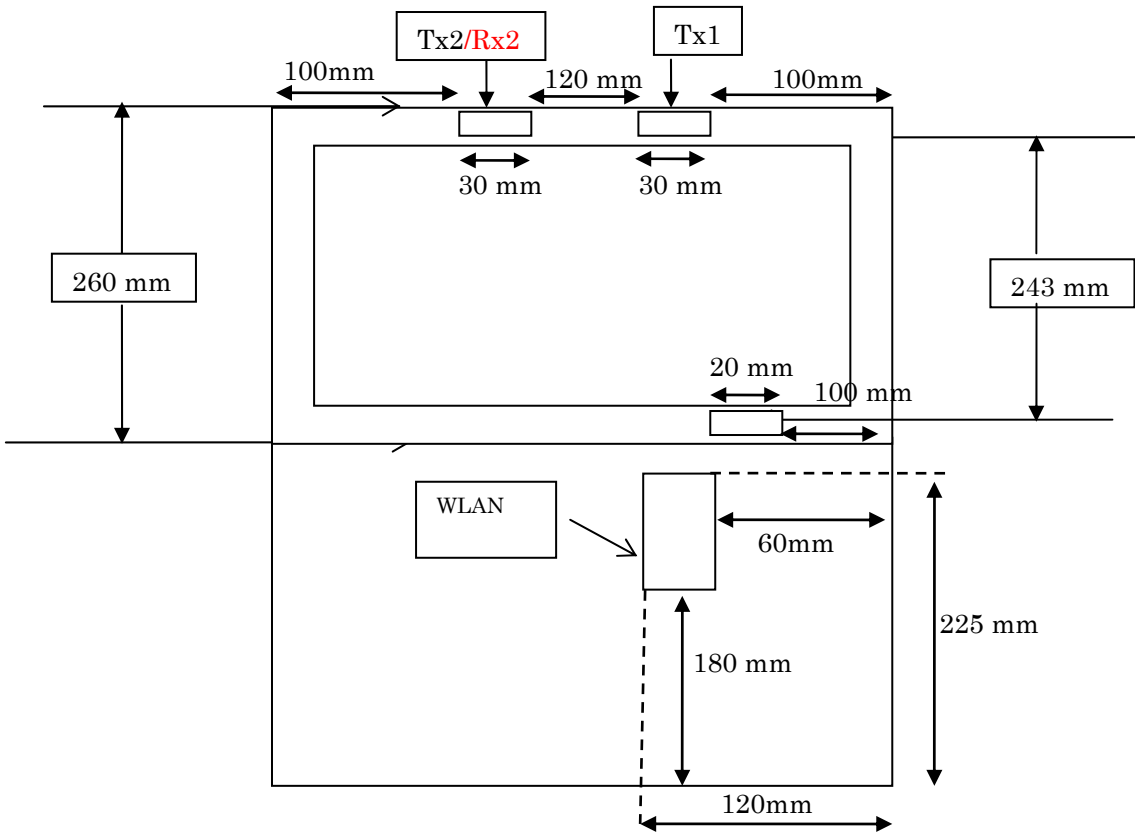

Section 8. Local representative contact information

Local representative contact information is required for regulatory support for target countries below.

	Local company name	Contact name	Phone number	FAX Number	e-Mail Address	Notes
Argentina						
Brazil						
Indonesia						
Israel						
Malaysia						
Mexico						
Singapore						Telecommunication Equipment Dealer License Required
South Africa						
USA, Canada						