

# Regulatory WLAN Antenna Information (Template)

*English Language Required for Intel Regulatory Review / Approval*

**(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.**

**Remove Intel references and make this your own document)**

Platform information										
Brand	ODM	****End product model name	Intel platform (ex: Yes, No or NA)	Platform type (ex: regular NB, convertible PC, AIO...etc)	*SAR minimum separation (mm)					
Lenovo	HQ	Yoga 7 16IRL8	YES	Convertible PC	NB:4.9、PAD:4.97					
****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.										
Antenna information										
Vendor	Type			Antenna Part number (Main)	Antenna Part number (Aux)					
AWAN	PIFA			AYL6Y-100023	AYL6Y-100022					
Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz	
Main	2.64	1.07	2.92	2.93	2.68	2.89	2.07	1.56	1.59	
Aux	2.38	2.18	1.68	2.51	1.70	2.07	1.03	1.73	0.95	
Intel Reference Gain/Type/ Separation distance										
Antenna Type	Antenna Peak gain (In dBi)*									Distance to the end user (mm)
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0GHz 6875-7125MHz	
Design	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	Generic: refer to modular FCC SAR report Mid-power: ≥ 8 mm Low power: ≥ 5 mm
PIFA	3.24	3.64	3.73	4.77	4.97	4.83	4.30	5.37	5.59	
Dipole	2.89	2.92	3.19	4.41	4.22	4.83	4.30	4.49	5.34	
Notes (marked with *)										
* SAR minimum separation (mm)										
- Regular NB: Minimum antenna-to-body (from antenna bottom to the bottom of the device)										
- Tablet / Convertible PC: Minimum antenna-to-edge (5 sides of the device)										
- Mini-tablet: Minimum antenna-to-edge (6 sides of the device)										
* 3D Peak Antenna gain should be equal or greater than -2 dBi										
- If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.										

# Table of contents

1. Applicable test method
2. Test & System Description
  - a. Test setup
  - b. Equipment list
3. Setup photo

[Section 1. Antenna Assembly Specifications](#)

[Section 2. Dimensioned Photos or Drawings of Antennas](#)

[Section 3. Radiation characteristics of antenna loaded in Host Platform](#)

[Section 4. Antenna Host Platform Location Information](#)

[Section 5. Antenna dimensional information for SAR evaluation](#)

[Section 6. Diagram Example of Co-Location Antenna Separation](#)

1. **Applicable test methods**


<insert test description here for test method>

This test report is prepared for host antenna testing under a Full Anechoic Chamber.

2. **Test & System Description**

a. Test setup

<insert test diagram here for test site utilized>

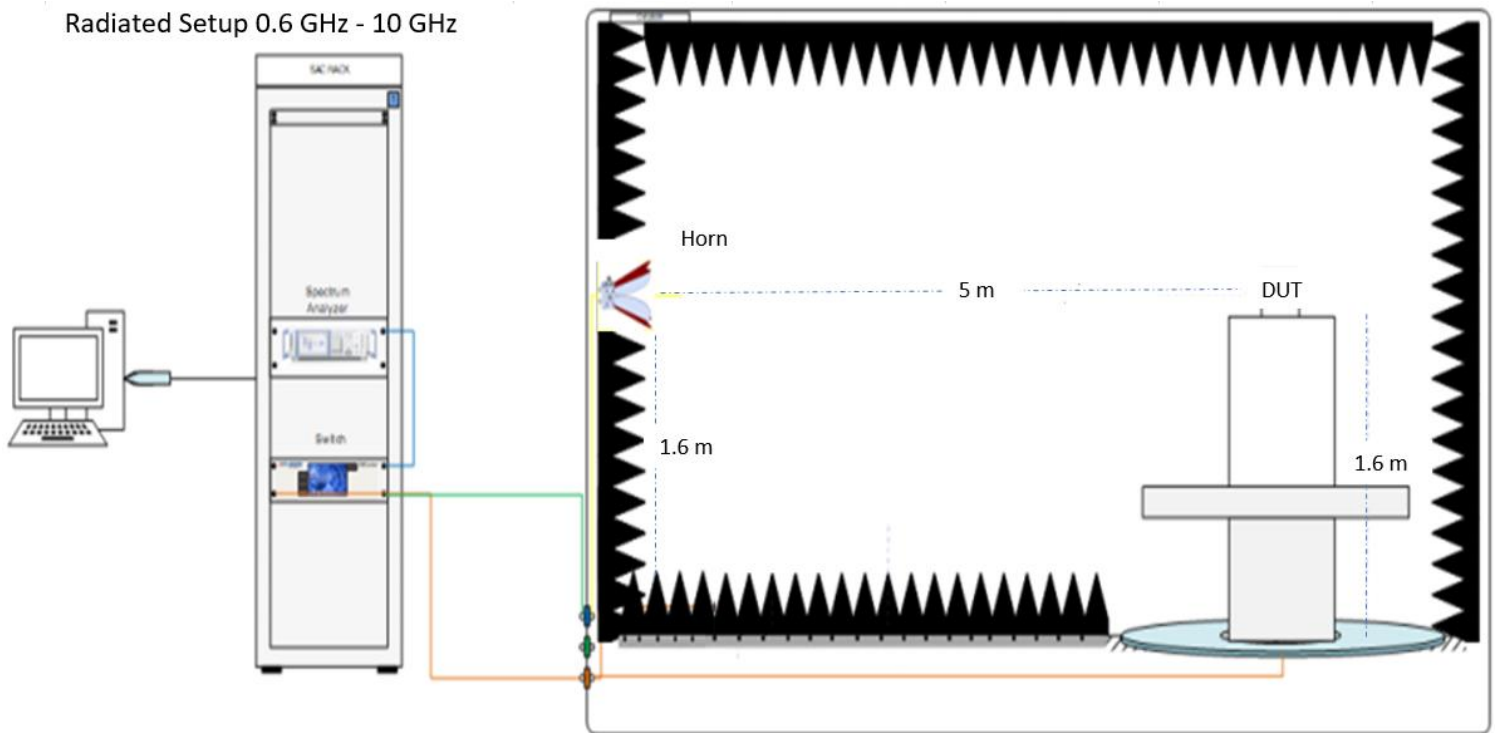

## b. Equipment list

*<insert test diagram here for test site utilized>*

Number	Device	Manufacturer	Cal. Date	Cal. Due. Date
1	Chamber	ETS-Lindgren	2022/3/13	2023/3/12
2	Hron Antenna	Bwant	2021/5/16	2023/5/15
3	Notwork Analyzer	Keysight	2022/3/17	2023/3/16
4	Turn table control box	ETS-Lindgren	N/A	N/A
5	Turn table control computer	ETS-Lindgren	N/A	N/A
6	Test system host	EMT	N/A	N/A
7	RF Line TX	Jmtt	2022/3/27	2023/3/26
8	RF Line RX	Jmtt	2022/3/27	2023/3/26
9	Cable 2m 1GHz-8.5GHz	Jmtt	2022/3/27	2023/3/26
10	Optical fiber line	Jmtt	N/A	N/A

# Antenna Information

## Section 1. Antenna Assembly Specifications


1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E * Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
(AYL6Y-100023) Main Antenna	AWAN	PIFA	1)cable p/n: Shen-Yu 2) 50 ohm OD 1.13 coaxial cable 3) length: 288mm 4) Connector p/n: I-pex:20565-001R-13	2400-2483.5	2.64	3.31	3	0.67
				5150-5250	1.07	2.16	3	1.09
				5250-5350	2.92	4.01	3	1.09
				5470-5725	2.93	4.02	3	1.09
				5725-5850	2.68	3.77	3	1.09
				5925-6425	2.89	4.08	3	1.19
				6425-6525	2.07	3.26	3	1.19
				6525-6875	1.56	2.75	3	1.19
				6875-7125	1.59	2.78	3	1.19
(AYL6Y-100022) Aux Antenna	AWAN	PIFA	1)cable p/n: Shen-Yu/Yuan-Da 2) 50 ohm OD 1.13 coaxial cable 3) length: 223mm 4) Connector p/n: I-pex:20565-001R-13	2400-2483.5	2.38	2.9	3	0.52
				5150-5250	2.18	3.02	3	0.84
				5250-5350	1.68	2.52	3	0.84
				5470-5725	2.51	3.35	3	0.84
				5725-5850	1.70	2.54	3	0.84
				5925-6425	2.07	2.99	3	0.92
				6425-6525	1.03	1.95	3	0.92
				6525-6875	1.73	2.65	3	0.92
				6875-7125	0.95	1.87	3	0.92

- 3D Antenna Peak Gain required being test in system basis.

## Main Antenna


### Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.64

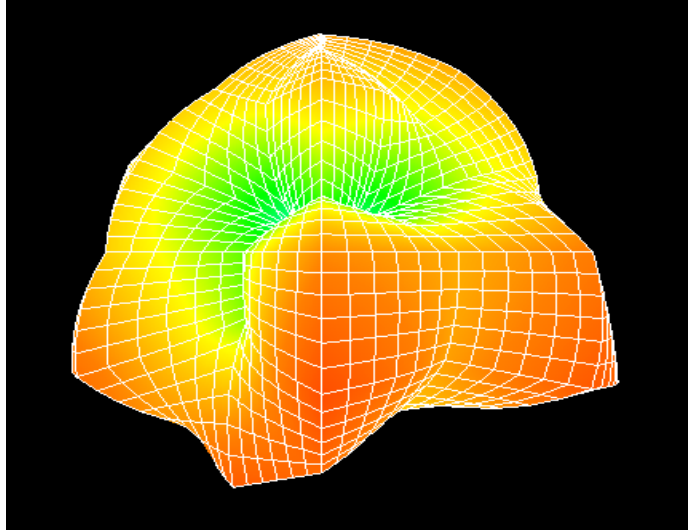


### Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	1.07

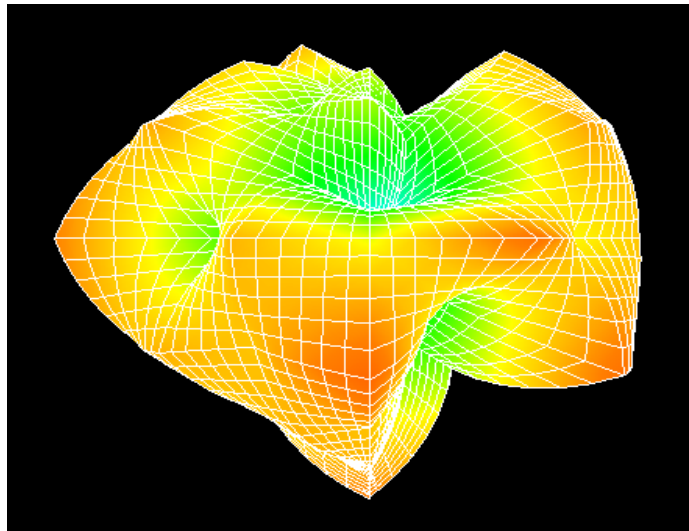


### Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.92

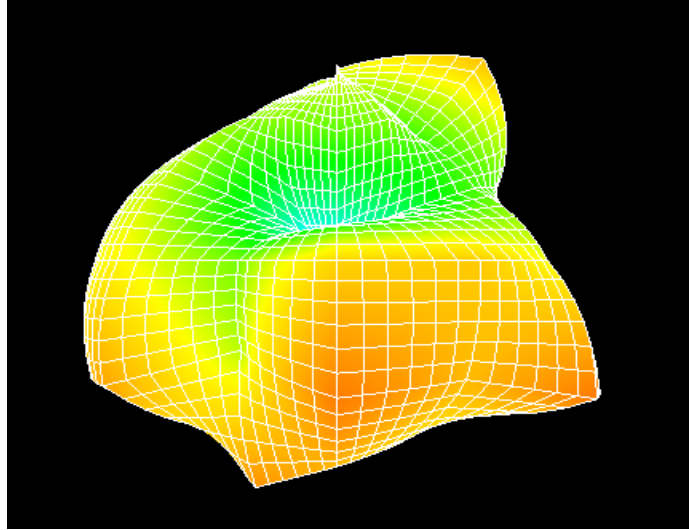


### Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	2.93

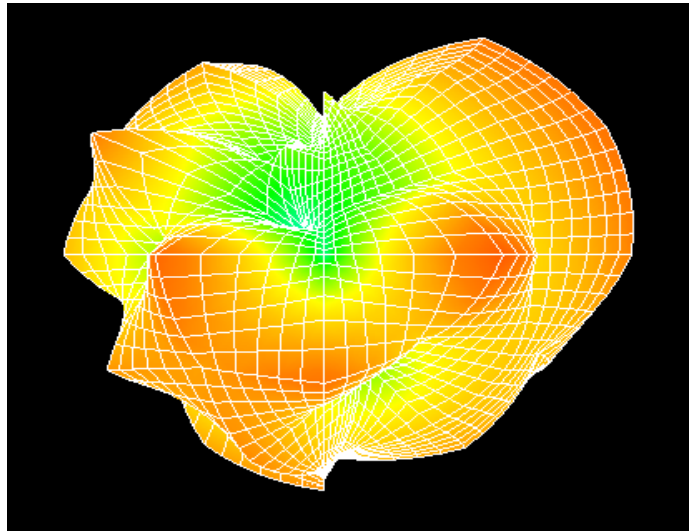


### Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	2.68

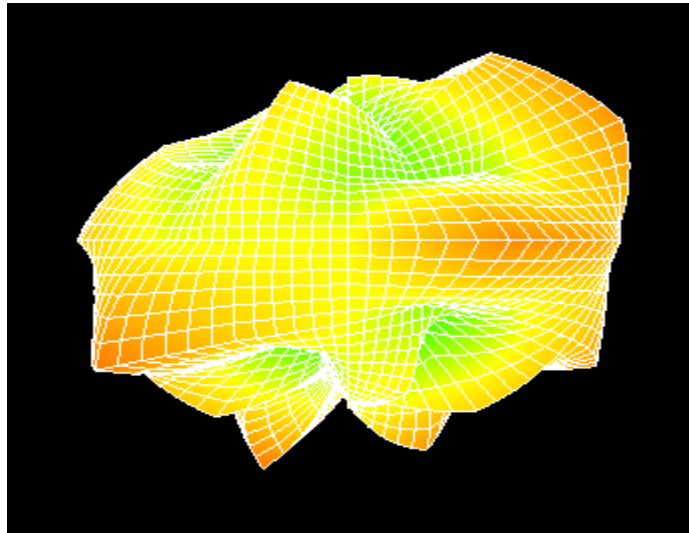

### Max Antenna 3D Radiation Pattern 5925-6425 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	2.89

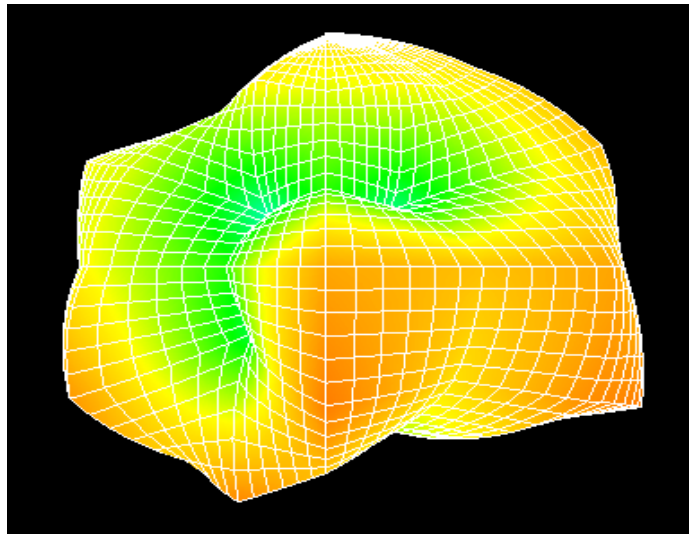




### Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	2.07

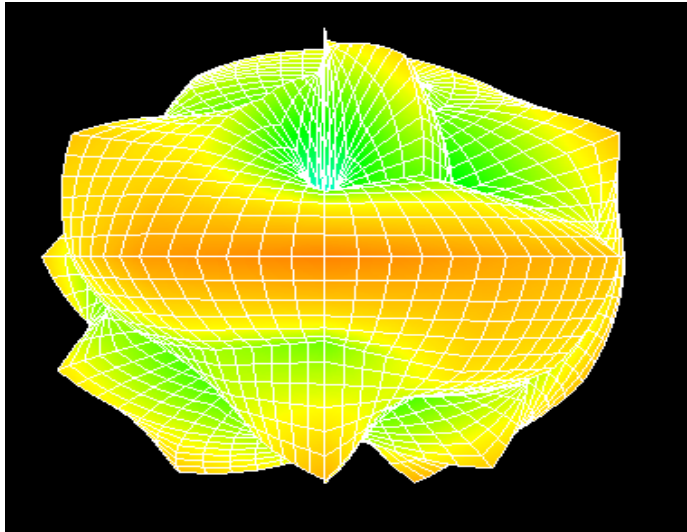


### Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	1.56

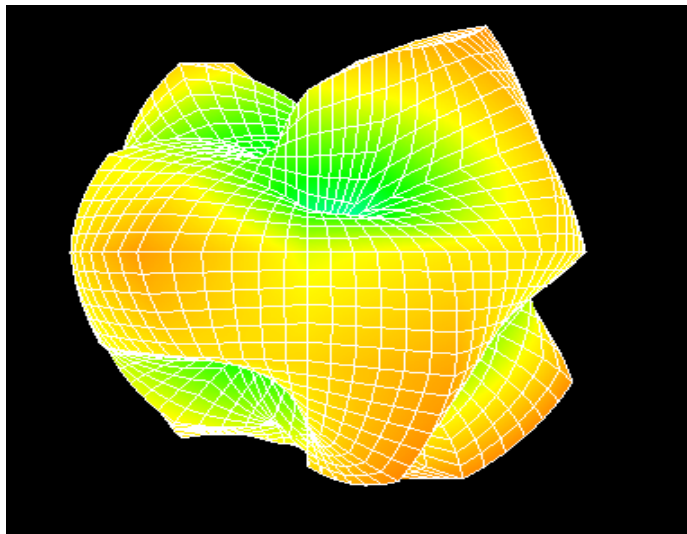

## Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	1.59

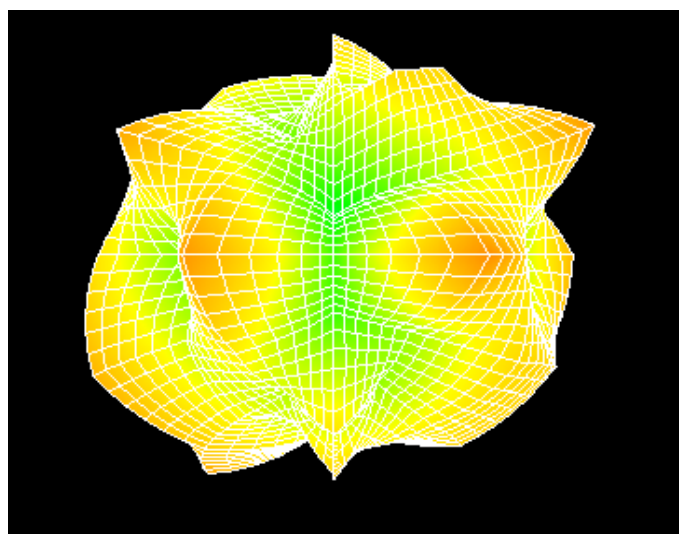

## Auxiliary Antenna


### Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.38

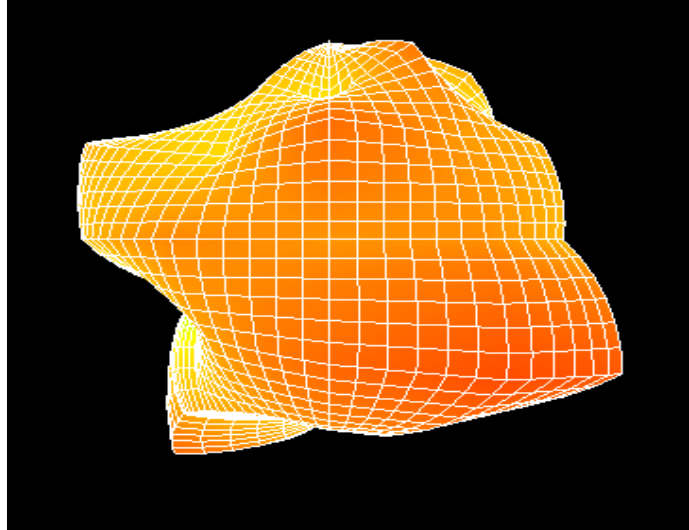


### Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.18

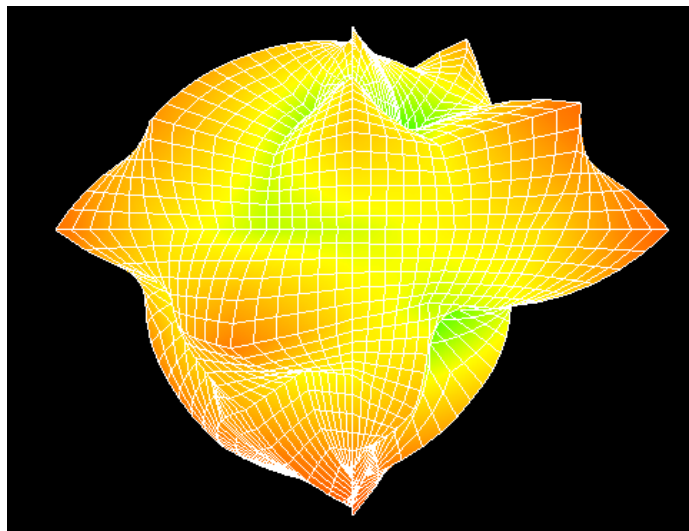


### Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	1.68

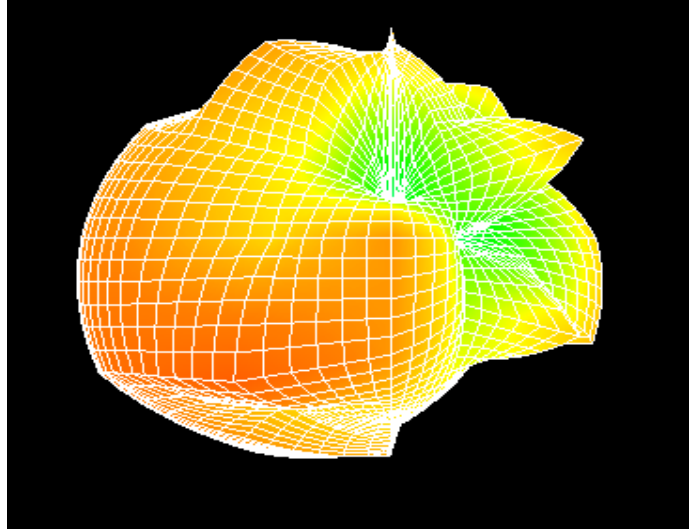


### Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	2.51

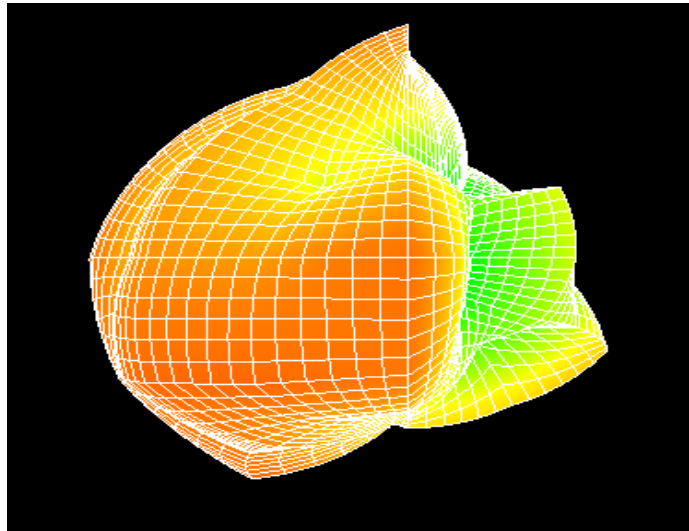


### Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	1.70

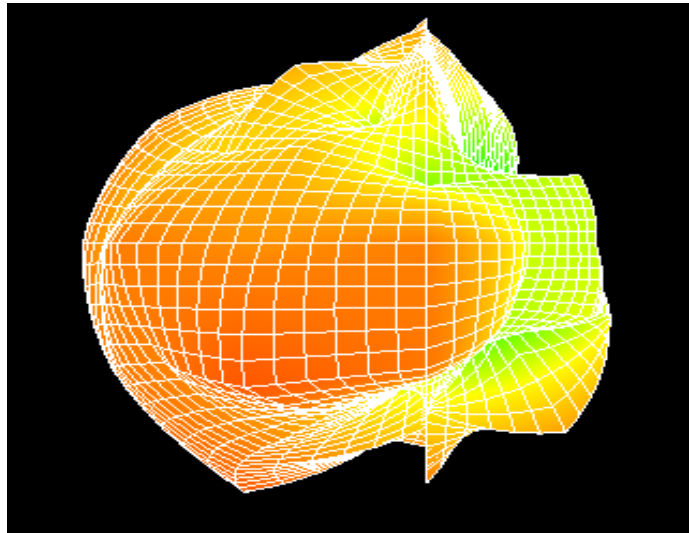


### Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	2.07

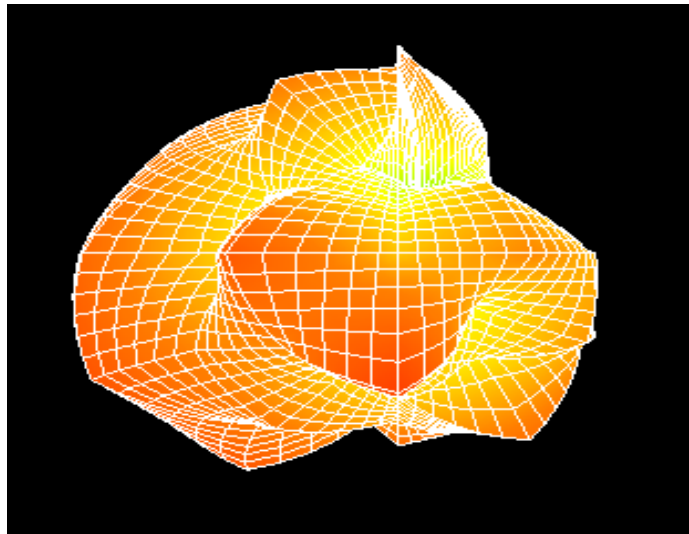


### Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	1.03

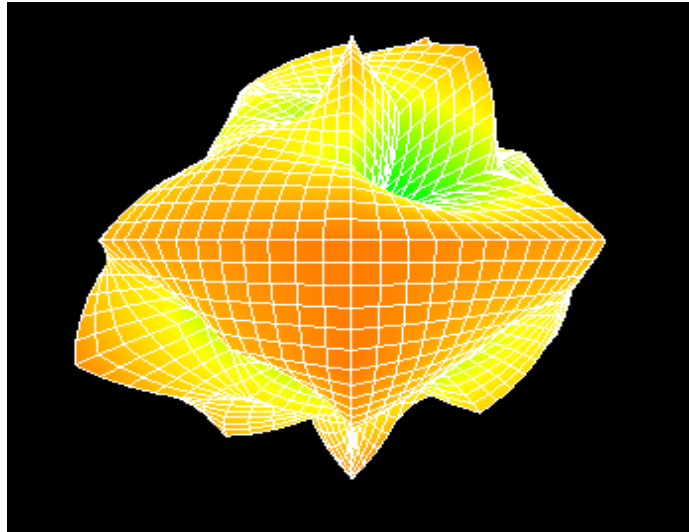

### Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	1.73

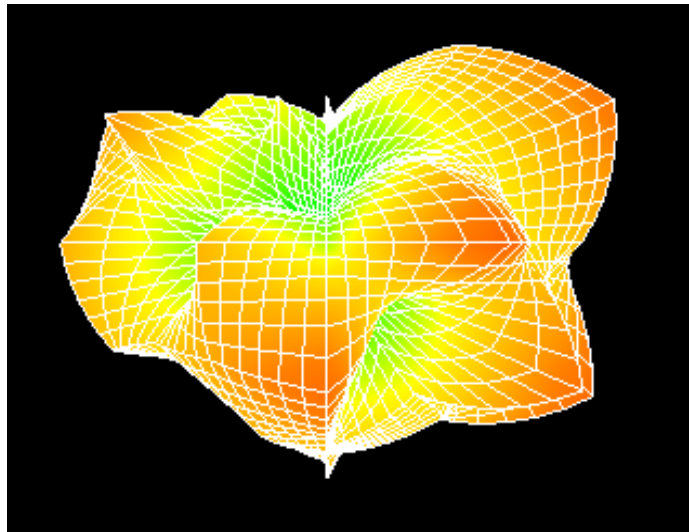

## Max Antenna 3D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	0.95

