

Regulatory WLAN Antenna Information (Template)

English Language Required for Intel Regulatory Review / Approval

(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.

Remove Intel references and make this your own document)

Platform information										
Brand	ODM	****End product model name	Intel platform (ex: Yes, No or NA)	Platform type (ex: regular NB, convertible PC, AIO...etc)	*SAR minimum separation (mm)					
Lenovo	Huaqin	Yoga 7 16IRL8	YES	Convertible PC	NB:4.9、PAD:4.97					
****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.										
Antenna information										
Vendor	Type	Antenna Part number (Main)			Antenna Part number (Aux)					
Luxshae-ICT	PIFA	L01RF357-NB-H			L01RF356-NB-H					
Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz	
Main	-0.51	2.09	2.25	4.21	4.21	3.19	4.01	4.01	3.04	
Aux	1.16	2.67	1.92	2.94	3.71	3.38	2.51	2.51	2.9	
Intel Reference Gain/Type/ Separation distance										
Antenna Type	Antenna Peak gain (In dBi)*									Distance to the end user (mm)
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0GHz 6875-7125MHz	
Design	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	Generic: refer to modular FCC SAR report Mid-power: ≥ 8 mm Low power: ≥ 5 mm
PIFA	3.24	3.64	3.73	4.77	4.97	4.83	4.30	5.37	5.59	
Dipole	2.89	2.92	3.19	4.41	4.22	4.83	4.30	4.49	5.34	
Notes (marked with *)										
* SAR minimum separation (mm)										
- Regular NB: Minimum antenna-to-body (from antenna bottom to the bottom of the device)										
- Tablet / Convertible PC: Minimum antenna-to-edge (5 sides of the device)										
- Mini-tablet: Minimum antenna-to-edge (6 sides of the device)										
* 3D Peak Antenna gain should be equal or greater than -2 dBi										
- If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.										

Table of contents

1. Applicable test method
2. Test & System Description
 - a. Test setup
 - b. Equipment list
3. Setup photo

[Section 1. Antenna Assembly Specifications](#)

[Section 2. Dimensioned Photos or Drawings of Antennas](#)

[Section 3. Radiation characteristics of antenna loaded in Host Platform](#)

[Section 4. Antenna Host Platform Location Information](#)

[Section 5. Antenna dimensional information for SAR evaluation](#)


[Section 6. Diagram Example of Co-Location Antenna Separation](#)

1. **Applicable test methods**

This test report is prepared by testing in a dark room that is completely silenced and shielded from external signals .

2. **Test & System Description**

a. Test setup

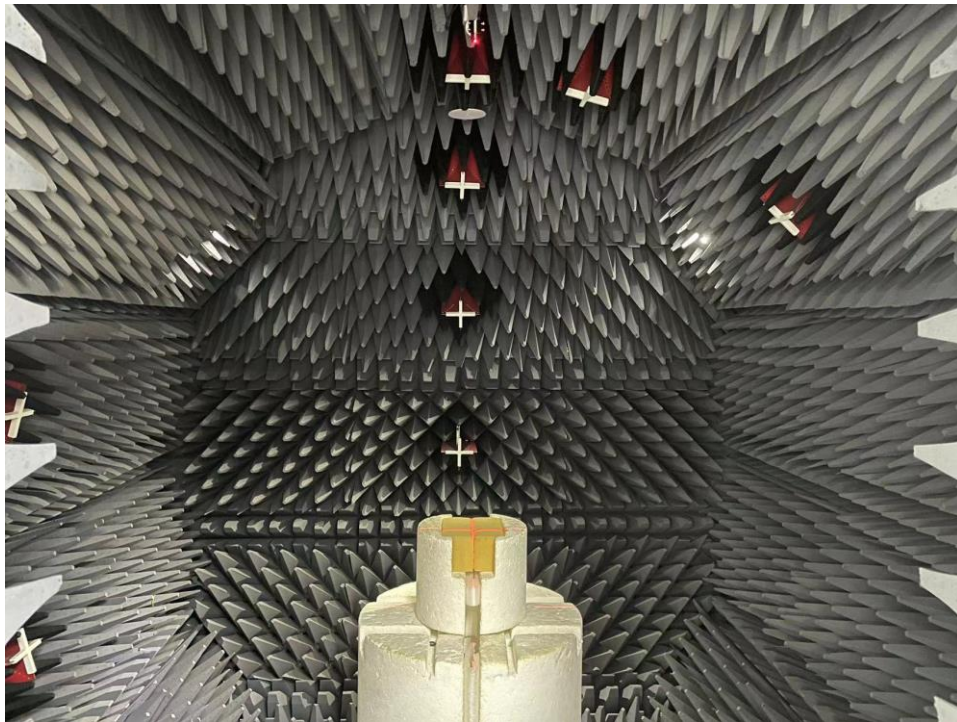




b. Equipment list

Number	Device	Manufacturer	Cal. Date	Cal. Due Date
1	RayZone-2800 Chamber	GTS	2022/5/06	2023/10/31
2	GNSS simulator	GTS	2022/5/06	2023/10/31
3	GTS MaxSign 100 test software	GTS	2022/5/06	2023/10/31
4	Test system computer	GTS	2022/5/06	2023/10/31
5	23 Probe Antenna	GTS	2022/5/06	2023/10/31
6	2 Communication Antenna	GTS	2022/5/06	2023/10/31
7	Wi-Fi Dynamic amplifier	GTS	2022/5/06	2023/10/31
8	Coupling box	GTS	N/A	N/A
9	Cable 0.6m – 50MHz -18GHz	GTS	2022/5/06	2022/12/31
10	Cable 0.8m – 50MHz -18GHz	GTS	2022/5/06	2022/12/31
11	Network analyzer E5071C	KeySight	2022/5/06	2023/10/31
12	Oscilloscope EXA N9020A	KeySight	2022/5/06	2023/10/31
13	CMW500	RS	2022/5/06	2023/10/31

N/A: Not Applicable

Note: Chamber calibration included full set of implement

3. Setup photo

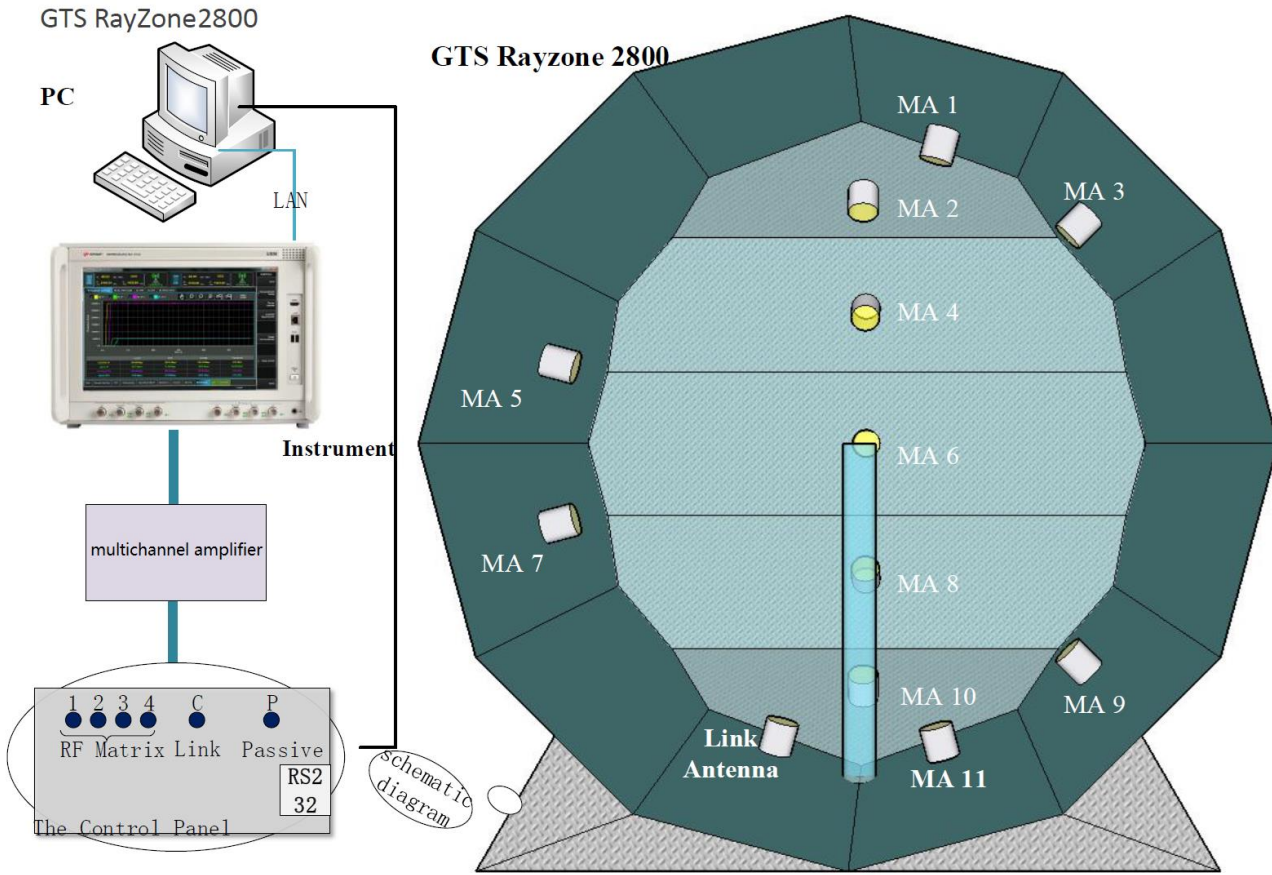

Antenna Information

Section 1. Antenna Assembly Specifications

1A	1B	1C	1D	1E	1F	1G	1H	
Antenna Part Number	Manufacturer	Antenna Type	Cable Assembly Part Number and Information	Freq Range MHz	* Peak Gain W/ Cable loss (dBi)	Peak Gain w/o Cable Loss (dBi)	Max VSWR	Cable Loss (dB)
(P/N: L01RF357-NB-H) Main Antenna	Luxshare-ICT	PIFA	P/N: I-PEX(20565-001R-13) 50 ohm Coaxial length:305mm diameter: 1.13mm Connector type: IPEX4	2400-2483.5	-0.51	0.24	3.0	0.75
				5150-5250	2.09	3.21	3.0	1.12
				5250-5350	2.25	3.38	3.0	1.13
				5470-5725	4.21	5.37	3.0	1.16
				5725-5850	4.21	5.38	3.0	1.17
				5925-6425	3.19	4.4	3.0	1.21
				6425-6525	4.01	5.22	3.0	1.21
				6525-6875	4.01	5.23	3.0	1.22
				6875-7125	3.04	4.26	3.0	1.22
(P/N: L01RF356-NB-H) AUX Antenna	Luxshare-ICT	PIFA	P/N: I-PEX(20565-001R-13) 50 ohm Coaxial length: 240mm diameter: 1.13mm Connector type: IPEX4	2400-2483.5	1.16	1.75	3.0	0.59
				5150-5250	2.67	3.55	3.0	0.88
				5250-5350	1.92	2.81	3.0	0.89
				5470-5725	2.94	3.86	3.0	0.92
				5725-5850	3.71	4.63	3.0	0.92
				5925-6425	3.38	4.33	3.0	0.95
				6425-6525	2.51	3.46	3.0	0.95
				6525-6875	2.51	3.47	3.0	0.96
				6875-7125	2.9	3.86	3.0	0.96


- 3D Antenna Peak Gain required being test in system basis.

Section 3. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	-0.51

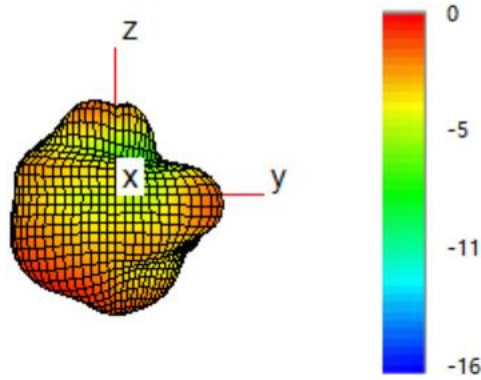


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.09

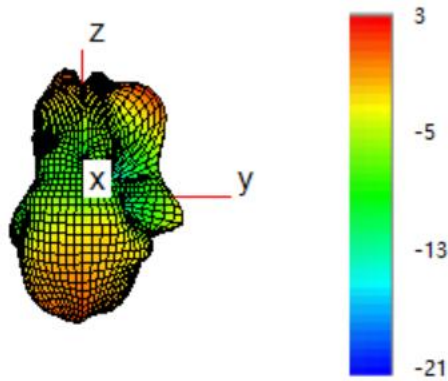


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.25

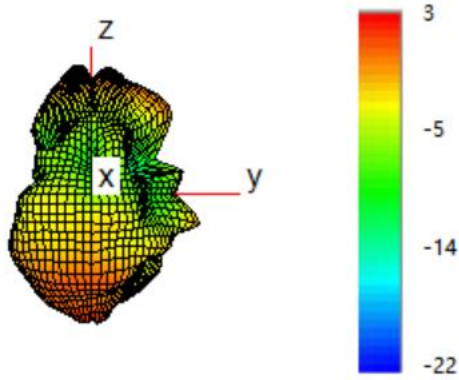


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	4.21

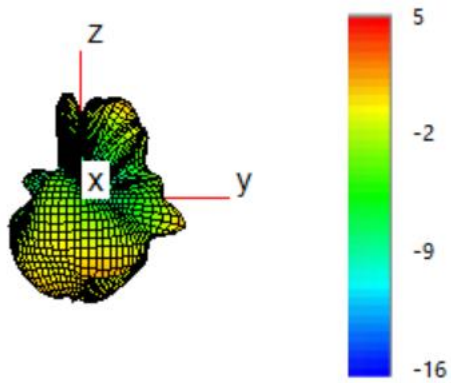


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	4.21

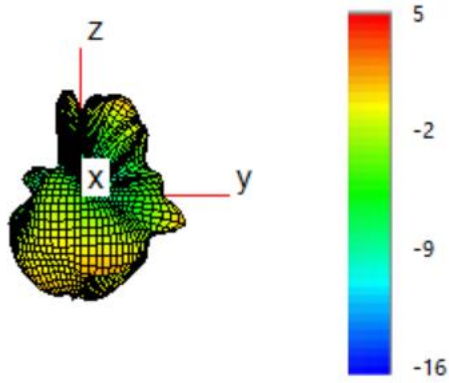


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	3.19

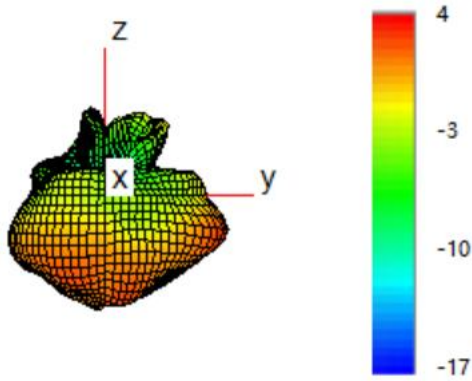


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	4.01

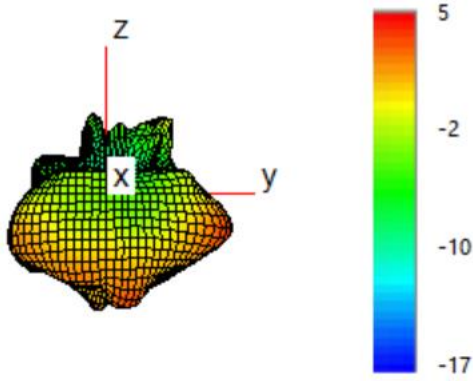


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	4.01

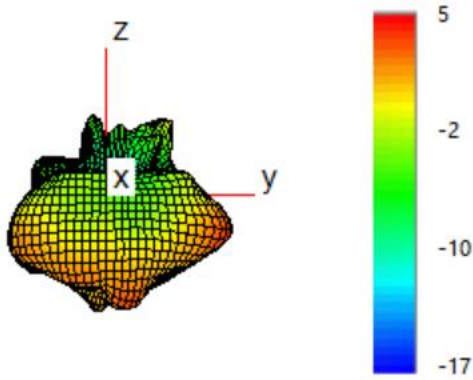

Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	3.04

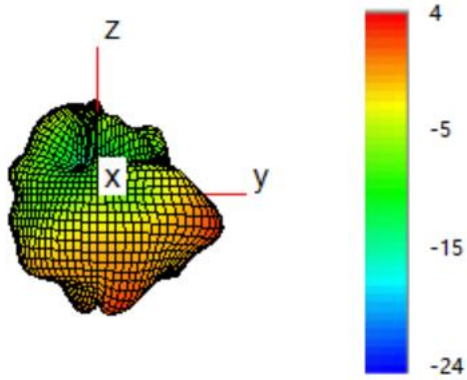

Auxiliary Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	1.16

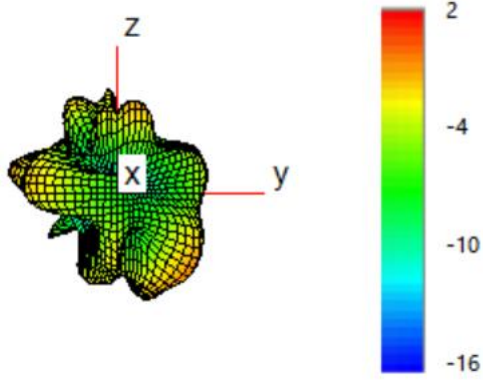


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.67

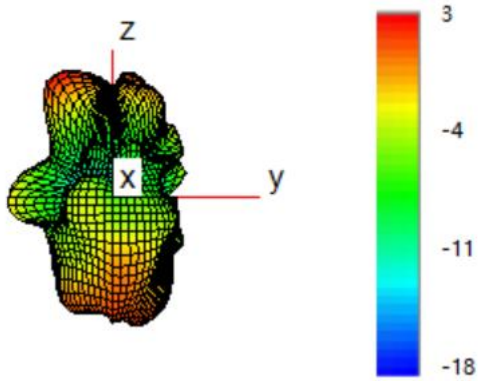


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	1.92

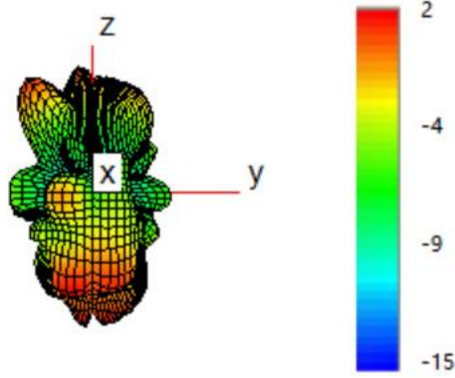


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	2.94

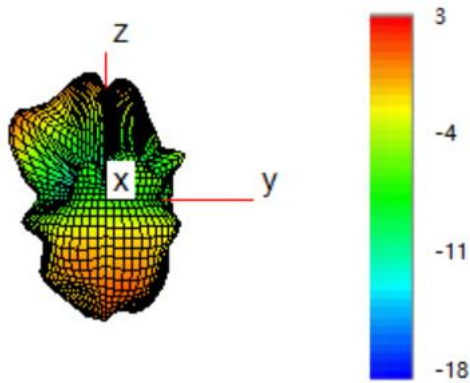


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	3.71

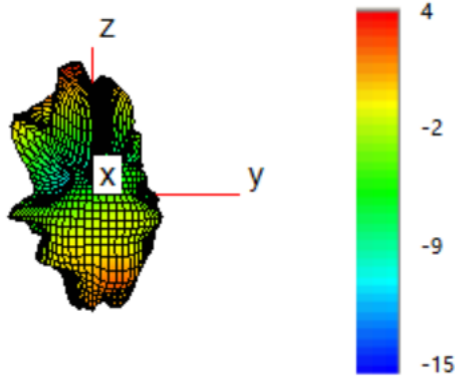


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	3.38

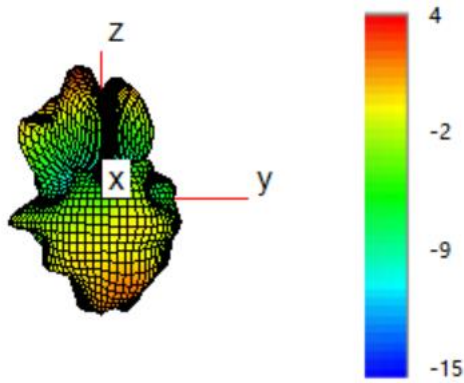


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	2.51

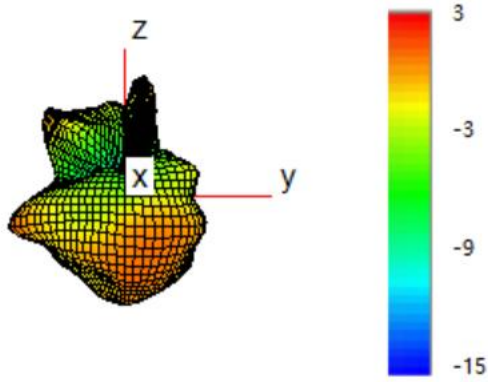

Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	2.51

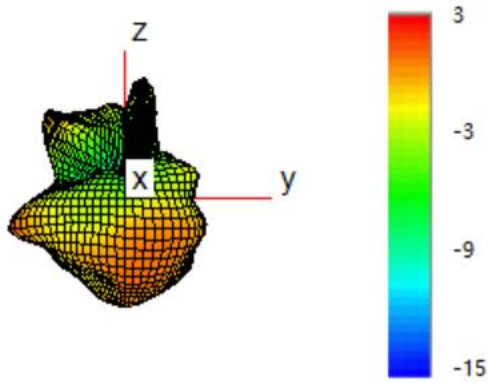

Max Antenna 3D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	2.9

