

## **TEST REPORT**

### **Covering the DYNAMIC FREQUENCY SELECTION (DFS) REQUIREMENTS OF**

**FCC Part 15 Subpart E (UNII), RSS-247**

**ARRIS  
Model: C61W**

FCC ID: PGRC61W

COMPANY: ARRIS  
310 Providence Mine Rd.  
Nevada City, CA, 95959

TEST SITE: National Technical Systems - Silicon Valley  
41039 Boyce Road  
Fremont, CA 94538

REPORT DATE: March 14, 2017

FINAL TEST DATE: February 6, 2016

TEST ENGINEER: Mehran Birgani

TOTAL NUMBER OF PAGES: 28




National Technical Systems - Silicon Valley is accredited by the A2LA, certificate number 0214.26, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

---

**VALIDATING SIGNATORIES**

PROGRAM MGR /



---

Mark Hill  
Staff Engineer

TECHNICAL REVIEWER:



---

Mark Hill  
Staff Engineer

REPORT PREPARER:



---

Mehran Birgani  
EMC Engineer

QUALITY ASSURANCE DELEGATE



---

David Guidotti  
Senior Technical Writer

**REVISION HISTORY**

Rev #	Date	Comments	Modified By
0	March 14, 2017	Initial Release	-
1.0	May 8, 2017	Removed the test configuration photographs for FCC application. Updated channel closing transmission time results.	MEH

**TABLE OF CONTENTS**

**TITLE PAGE.....1**  
**VALIDATING SIGNATORIES .....2**  
**REVISION HISTORY .....3**  
**TABLE OF CONTENTS .....4**  
**LIST OF TABLES.....5**  
**LIST OF FIGURES.....5**  
**SCOPE.....6**  
**OBJECTIVE .....6**  
**STATEMENT OF COMPLIANCE.....6**  
**DEVIATIONS FROM THE STANDARD .....6**  
**TEST RESULTS.....7**  
    TEST RESULTS SUMMARY – FCC PART 15, CLIENT DEVICE .....7  
    MEASUREMENT UNCERTAINTIES.....7  
**EQUIPMENT UNDER TEST (EUT) DETAILS.....8**  
    GENERAL.....8  
    ENCLOSURE.....8  
    MODIFICATIONS.....8  
    SUPPORT EQUIPMENT.....8  
    EUT INTERFACE PORTS .....9  
    EUT OPERATION.....9  
**RADAR WAVEFORMS.....10**  
**DFS TEST METHODS .....12**  
    RADIATED TEST METHOD .....12  
**DFS MEASUREMENT INSTRUMENTATION.....14**  
    RADAR GENERATION SYSTEM.....14  
    CHANNEL MONITORING SYSTEM.....15  
**DFS MEASUREMENT METHODS .....22**  
    DFS – CHANNEL CLOSING TRANSMISSION TIME AND CHANNEL MOVE TIME .....22  
    DFS – CHANNEL NON-OCCUPANCY AND VERIFICATION OF PASSIVE SCANNING.....22  
**APPENDIX A TEST EQUIPMENT CALIBRATION DATA .....23**  
**APPENDIX B TEST DATA TABLES AND PLOTS FOR CHANNEL CLOSING .....24**  
    FCC PART 15 SUBPART E CHANNEL CLOSING MEASUREMENTS .....24  
**APPENDIX C TEST CONFIGURATION PHOTOGRAPH(S).....27**  
**END OF REPORT .....28**

**LIST OF TABLES**

Table 1 - FCC Part 15 Subpart E Client Device Test Result Summary..... 7  
Table 2 - FCC Short Pulse Radar Test Waveforms ..... 10  
Table 3 - FCC Long Pulse Radar Test Waveforms..... 10  
Table 4 - FCC Frequency Hopping Radar Test Waveforms..... 11  
Table 5 - FCC Part 15 Subpart E Channel Closing Test Results ..... 24

**LIST OF FIGURES**

Figure 1 Test Configuration for radiated Measurement Method ..... 12  
Figure 2 SA Noise Floor During Testing (radar shown at 520 ms) ..... 15  
Figure 3 FCC Type 1 Radar (18 pulses) ..... 16  
Figure 4 FCC Type 2 Radar (24 pulses) ..... 17  
Figure 5 FCC Type 3 Radar (17 pulses) ..... 18  
Figure 6 FCC Type 4 Radar (16 pulses) ..... 19  
Figure 7 FCC Type 5 Radar (burst with three pulses, 1650  $\mu$ s first period)..... 20  
Figure 8 FCC Type 6 Radar (9 pulses in each burst)..... 21  
Figure 9 Channel closing time and channel move time (ac80 mode) – 40 second plot..... 24  
Figure 10 Close-up of transmissions occurring more than 200ms after the end of radar (ac80 mode) ..... 25  
Figure 11 Radar channel non-occupancy plot (ac80 mode)..... 26

**SCOPE**

Test data has been taken pursuant to the relevant DFS requirements of the following standard(s):

- FCC Part 15 Subpart E Unlicensed National Information Infrastructure (U-NII) Devices.

Tests were performed in accordance with these standards together with the current published versions of the basic standards referenced therein including FCC KDB 905462 D02 and FCC KDB 905462 D03 as outlined in NTS Silicon Valley test procedures. The test results recorded herein are based on a single type test of the ARRIS model C61W and therefore apply only to the tested sample. The sample was selected and prepared by Mark Rieger of ARRIS

**OBJECTIVE**

The objective of the manufacturer is to comply with the standards identified in the previous section. In order to demonstrate compliance, the manufacturer or a contracted laboratory makes measurements and takes the necessary steps to ensure that the equipment complies with the appropriate technical standards. Compliance with some DFS features is covered through a manufacturer statement or through observation of the device.

**STATEMENT OF COMPLIANCE**

The tested sample of the ARRIS model C61W complied with the DFS requirements of FCC Part 15.407(h)(2).

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

**DEVIATIONS FROM THE STANDARD**

No deviations were made from the test methods and requirements covered by the scope of this report.

**TEST RESULTS**

**TEST RESULTS SUMMARY – FCC Part 15, CLIENT DEVICE**

Table 1 - FCC Part 15 Subpart E Client Device Test Result Summary						
Description	Radar Type	EUT Frequency	Measured Value	Requirement	Test Data	Status
Channel closing transmission time	Type 0	5690MHz	1.0ms	60ms	Appendix B	Passed
Channel move time	Type 0	5690MHz	252ms	10s	Appendix B	Passed
Non-occupancy period - associated	Type 0	5290MHz	>30 minutes	> 30 minutes	Appendix B	Passed
Passive Scanning	N/A	N/A	Refer to manufacturer attestation			
1) Tests were performed using the radiated test method.						

**MEASUREMENT UNCERTAINTIES**

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level, with a coverage factor (k=2) and were calculated in accordance with UKAS document LAB 34.

Measurement	Measurement Unit	Expanded Uncertainty
Timing (Channel move time, aggregate transmission time)	ms	Timing resolution ± 0.24%
Timing (non occupancy period)	seconds	5 seconds
DFS Threshold (radiated)	dBm	1.6
DFS Threshold (conducted)	dBm	1.2

**EQUIPMENT UNDER TEST (EUT) DETAILS**

**GENERAL**

The ARRIS model C61W is a residential set-top-box utilizing an IEEE 802.11an/ac radio.

The sample was received on February 6, 2017 and tested on February 6, 2016. The EUT consisted of the following component(s):

Manufacturer	Model	Description	Serial Number
ARRIS	C61W	Set-top box	G62DA6TB200070
Direct TV	ESP10R4-15	Power Supply	-

The manufacturer declared values for the EUT operational characteristics that affect DFS are as follows:

**Operating Modes (5250 – 5350 MHz, 5470 – 5725 MHz)**

Client Device (no In Service Monitoring, no Ad-Hoc mode)

**Channel Protocol**

IP Based

Frame Based

**ENCLOSURE**

The EUT enclosure measures approximately 18 cm by 11.5 cm by 2 cm. It is primarily constructed of uncoated coated plastic.

**MODIFICATIONS**

The EUT did not require modifications during testing in order to comply with the requirements of the standard(s) referenced in this test report.

**SUPPORT EQUIPMENT**

The following equipment was used as local support equipment for testing:

Manufacturer	Model	Description	Serial Number	FCC ID
<i>Arris (Pace)</i>	<i>WVB2</i>	<i>MOCA Wireless Bridge</i>	<i>R36FD6JXA00462</i>	<i>ACQ-WVB2R0-34</i>
Arris (Pace)	HR54-700	Set-top-box	G54DA5DN00030	N/A
Lilliput	-	TV	1013B726622041	N/A
Dell		Laptop	42626033065	DoC
Dell		Laptop	18681427369	DoC

The italicized device was the master device



**EUT INTERFACE PORTS**

The I/O cabling configuration during testing was as follows:

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length (m)
C61W HDMI	TV	HDMI	Shielded	1.0
C61W onboard Serial Port	Client Laptop	Serial	Unshielded	5.0
C61W Power	Power Supply	2 Wire	Unshielded	1.0
HR-54 SAT IN	Arris WVB2	Coax	Shielded	0.5
HR-54 Ethernet	Master Laptop	CAT 5	Shielded	10.0

**EUT OPERATION**

The EUT was operating with the following software.

Client Device: 20161214\_c61w-bcm-7250\_v1.24.1.5 (system) / 1.363 R110.37 (radio)

Channel loading was performed via streaming of a movie from the master device to the EUT. In addition, iperf was used to generate additional traffic. The channel loading was evaluated to be 18.4% (refer to figure 10) meeting the approximately 17% loading as required by FCC KDB 905462 D02.

The RF energy emitted from the C61W is below the FCC 15.109 limits for unintentional radiators when it is not transmitting. Refer to separate report covering unintentional emissions.

**RADAR WAVEFORMS**

Table 2 - FCC Short Pulse Radar Test Waveforms					
Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses / burst	Minimum Detection Percentage	Minimum Number of Trials
0	1	1428	18	See <b>Note 1</b>	
1	1a	15 unique PRI values randomly selected from the list of 23 PRI values in <b>Note 2</b> below	Round Up 1/360* 19*10 <sup>6</sup> / PRI μsec	60%	15
	1b	518-3066 with minimum increment of 1 μsec, excluding PRI values selected in 1a			15
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
<b>Note 1:</b> Short Pulse Radar Type 0 is used for the detection bandwidth test, channel move time, and channel closing time tests.					
<b>Note 2:</b> Pulse repetition intervals values for Test 1a above					
Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)			
1	1930.5	518			
2	1858.7	538			
3	1792.1	558			
4	1730.1	578			
5	1672.2	598			
6	1618.1	618			
7	1567.4	638			
8	1519.8	658			
9	1474.9	678			
10	1432.7	698			
11	1392.8	718			
12	1355	738			
13	1319.3	758			
14	1285.3	778			
15	1253.1	798			
16	1222.5	818			
17	1193.3	838			
18	1165.6	858			
19	1139	878			
20	1113.6	898			
21	1089.3	918			
22	1066.1	938			
23	326.2	3066			

**Table 3 - FCC Long Pulse Radar Test Waveforms**

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Pulses / burst	Number of Bursts	Minimum Detection Percentage	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30


**Table 4 - FCC Frequency Hopping Radar Test Waveforms**

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses / hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Detection Percentage	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

**DFS TEST METHODS**

**RADIATED TEST METHOD**

The combination of master and slave devices is located in an anechoic chamber. The simulated radar waveform is transmitted from a directional horn antenna (typically an EMCO 3115) toward the unit performing the radar detection (radar detection device, RDD). Every effort is made to ensure that the main beam of the EUT's antenna is aligned with the radar-generating antenna which is oriented in vertical polarization.

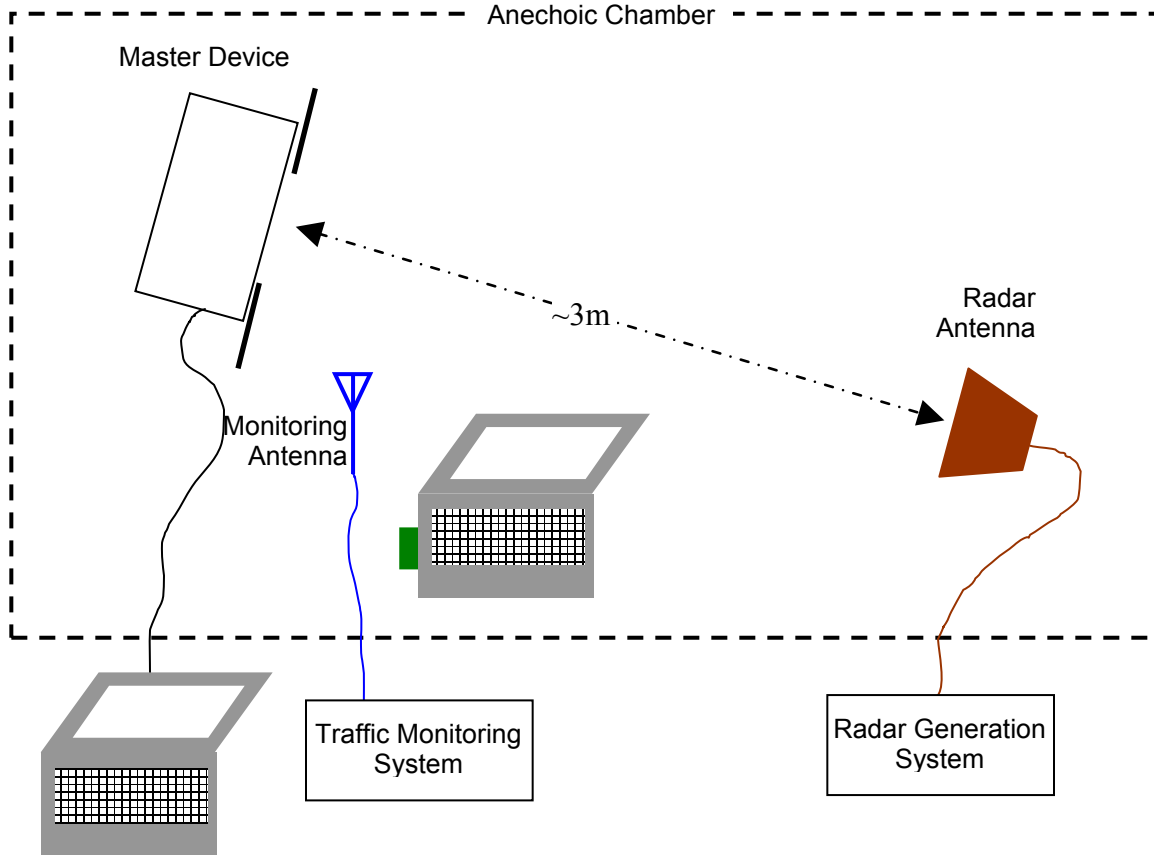

**Figure 1 Test Configuration for radiated Measurement Method**

The signal level of the simulated waveform is set to a reference level equal to the threshold level (plus 1dB if testing against FCC requirements). Lower levels may also be applied on request of the manufacturer. The level reported is the level at the RDD antenna and so it is not corrected for the RDD's antenna gain. The RDD is configured with the lowest gain antenna assembly intended for use with the device.

The signal level is verified by measuring the CW signal level from the radar generation system using a reference antenna of gain  $G_{REF}$  (dBi). The radar signal level is calculated from the measured level,  $R$  (dBm), and any cable loss,  $L$  (dB), between the reference antenna and the measuring instrument:

$$\text{Applied level (dBm)} = R - G_{REF} + L$$

If both master and client devices have radar detection capability then the device not under test is positioned with absorbing material between its antenna and the radar generating antenna, and the radar level at the non RDD is verified to be at least 20dB below the threshold level to ensure that any responses are due to the RDD detecting radar.

The antenna connected to the channel monitoring subsystem is positioned to allow both master and client transmissions to be observed, with the level of the EUT's transmissions between 6 and 10dB higher than those from the other device.

## **DFS MEASUREMENT INSTRUMENTATION**

### **RADAR GENERATION SYSTEM**

An Agilent PSG is used as the radar-generating source. The integral arbitrary waveform generators are programmed using Agilent's "Pulse Building" software and NTS Silicon Valley custom software to produce the required waveforms, with the capability to produce both un-modulated and modulated (FM Chirp) pulses. Where there are multiple values for a specific radar parameter then the software selects a value at random and, for FCC tests, the software verifies that the resulting waveform is truly unique.

With the exception of the hopping waveforms required by the FCC's rules (see below), the radar generator is set to a single frequency within the radar detection bandwidth of the EUT. The frequency is varied from trial to trial by stepping in 5MHz steps. For radar types with variable parameters, each detection probability trial is performed using a unique set of parameters obtained by a random selection with uniform distribution for each of the variable parameters.

Frequency hopping radar waveforms are simulated using a time domain model. A randomly hopping sequence algorithm (which uses each channel in the hopping radar's range once in a hopping sequence) generates a hop sequence. A segment of the first 100 elements of the hop sequence are then examined to determine if it contains one or more frequencies within the radar detection bandwidth of the EUT. If it does not then the first element of the segment is discarded and the next frequency in the sequence is added. The process repeats until a valid segment is produced. The radar system is then programmed to produce bursts at time slots coincident with the frequencies within the segment that fall in the detection bandwidth. The frequency of the generator is stepped in 1 MHz increments across the EUT's detection range.

The radar signal level is verified during testing using a long duration pulse waveform generated in the same manner as the normal radar generated signals.

The generator output is connected to the coupling port of the conducted set-up or to the radar-generating antenna. The radar generating antenna (when used) is oriented for vertical polarization.

**CHANNEL MONITORING SYSTEM**

Channel monitoring is achieved using a spectrum analyzer and digital storage oscilloscope. The analyzer is configured in a zero-span mode, center frequency set to the radar waveform’s frequency or the center frequency of the EUT’s operating channel. The IF output of the analyzer is connected to one input of the oscilloscope.

A signal generator output is set to send either the modulating signal directly or a pulse gate with an output pulse co-incident with each radar pulse. This output is connected to a second input on the oscilloscope and the oscilloscope displays both the channel traffic (via the if input) and the radar pulses on its display.

For in service monitoring tests the analyzer sweep time is set to > 20 seconds and the oscilloscope is configured with a data record length of 10 seconds for the short duration and frequency hopping waveforms, 20 seconds for the long duration waveforms. Both instruments are set for a single acquisition sequence. The analyzer is triggered 500ms before the start of the waveform and the oscilloscope is triggered directly by the modulating pulse train. Timing measurements for aggregate channel transmission time and channel move time are made from the oscilloscope data, with the end of the waveform clearly identified by the pulse train on one trace. The analyzer trace data is used to confirm that the last transmission occurred within the 10-second record of the oscilloscope. If necessary the record length of the oscilloscope is expanded to capture the last transmission on the channel prior to the channel move.

Channel availability check time timing plots are made using the analyzer. The analyzer is triggered at start of the EUT’s channel availability check and used to verify that the EUT does not transmit when radar is applied during the check time.

The analyzer detector and oscilloscope sampling mode is set to peak detect for all plots.

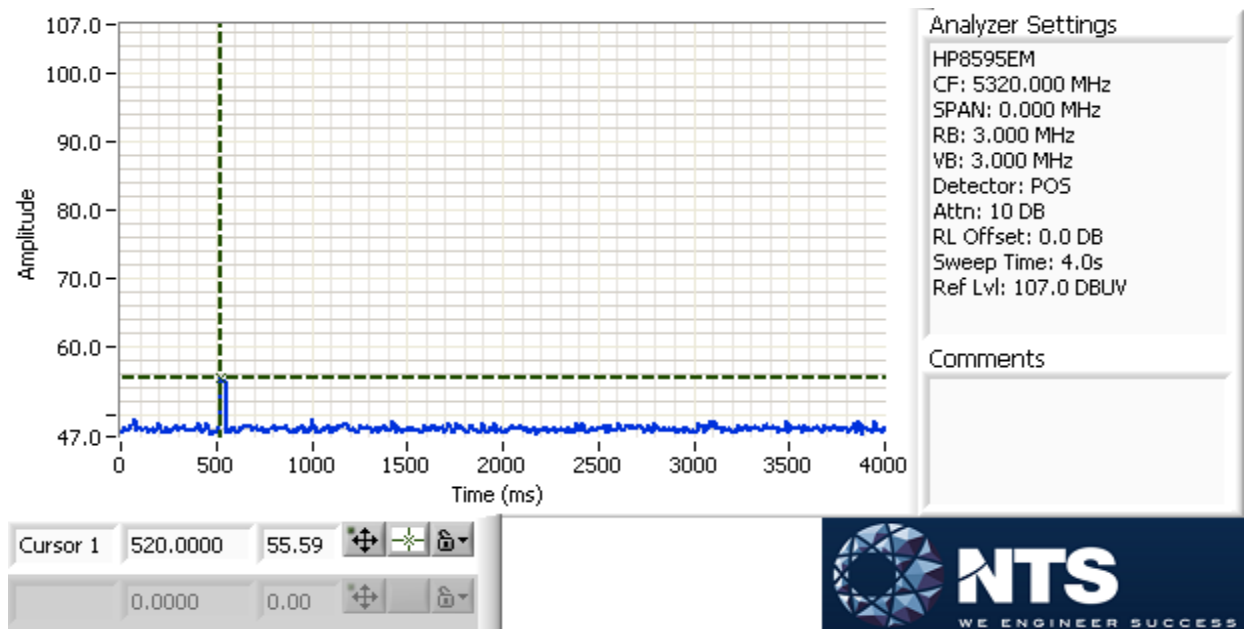


Figure 2 SA Noise Floor During Testing (radar shown at 520 ms)

### RADAR GENERATOR PLOTS

The radar generator was connected to Spectrum Analyzer (SA) input, with the SA set to zero span, 3 MHz RBW, 3 MHz VBW. The SA IF output was connected to an oscilloscope to provide timing plots.

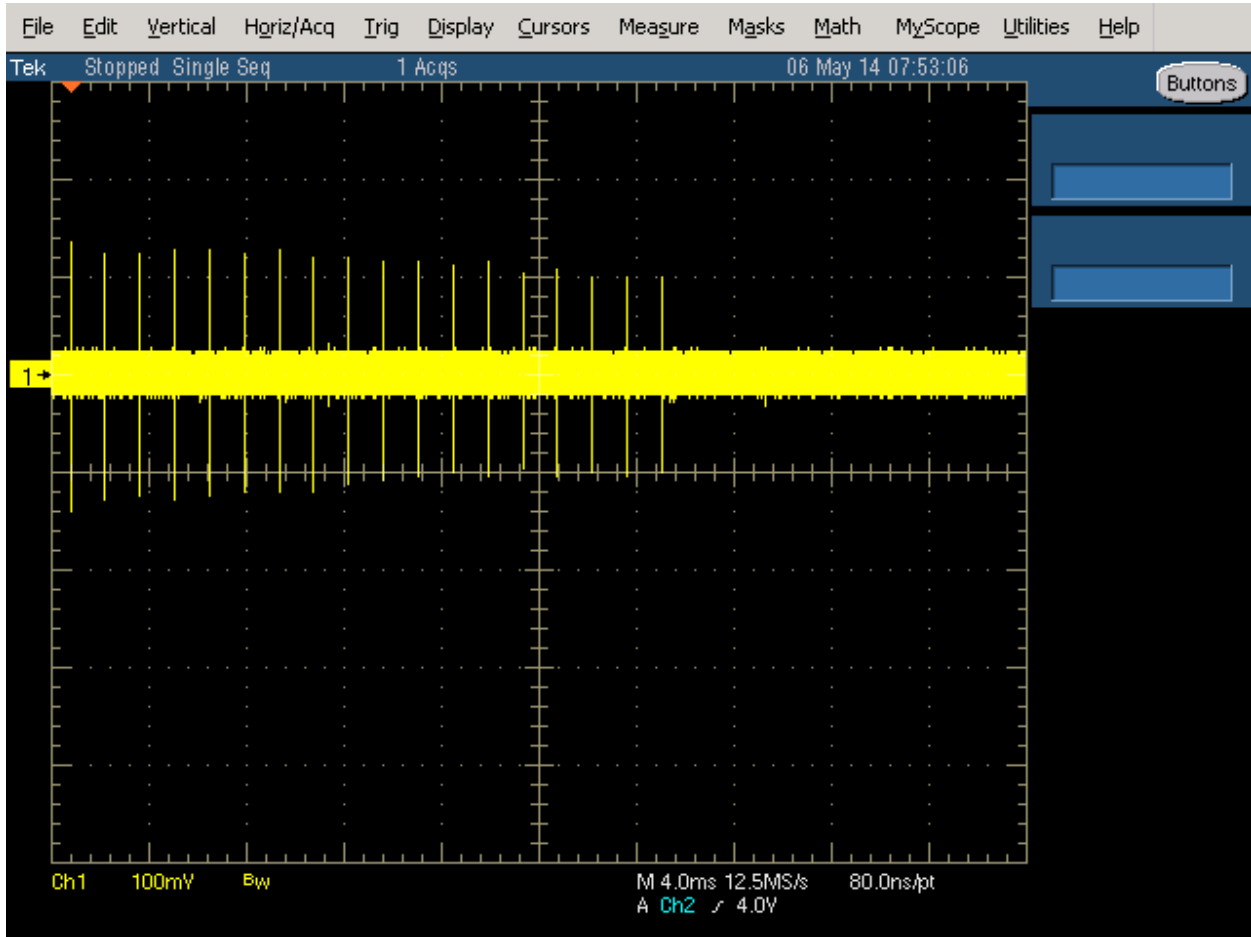


Figure 3 FCC Type 1 Radar (18 pulses)



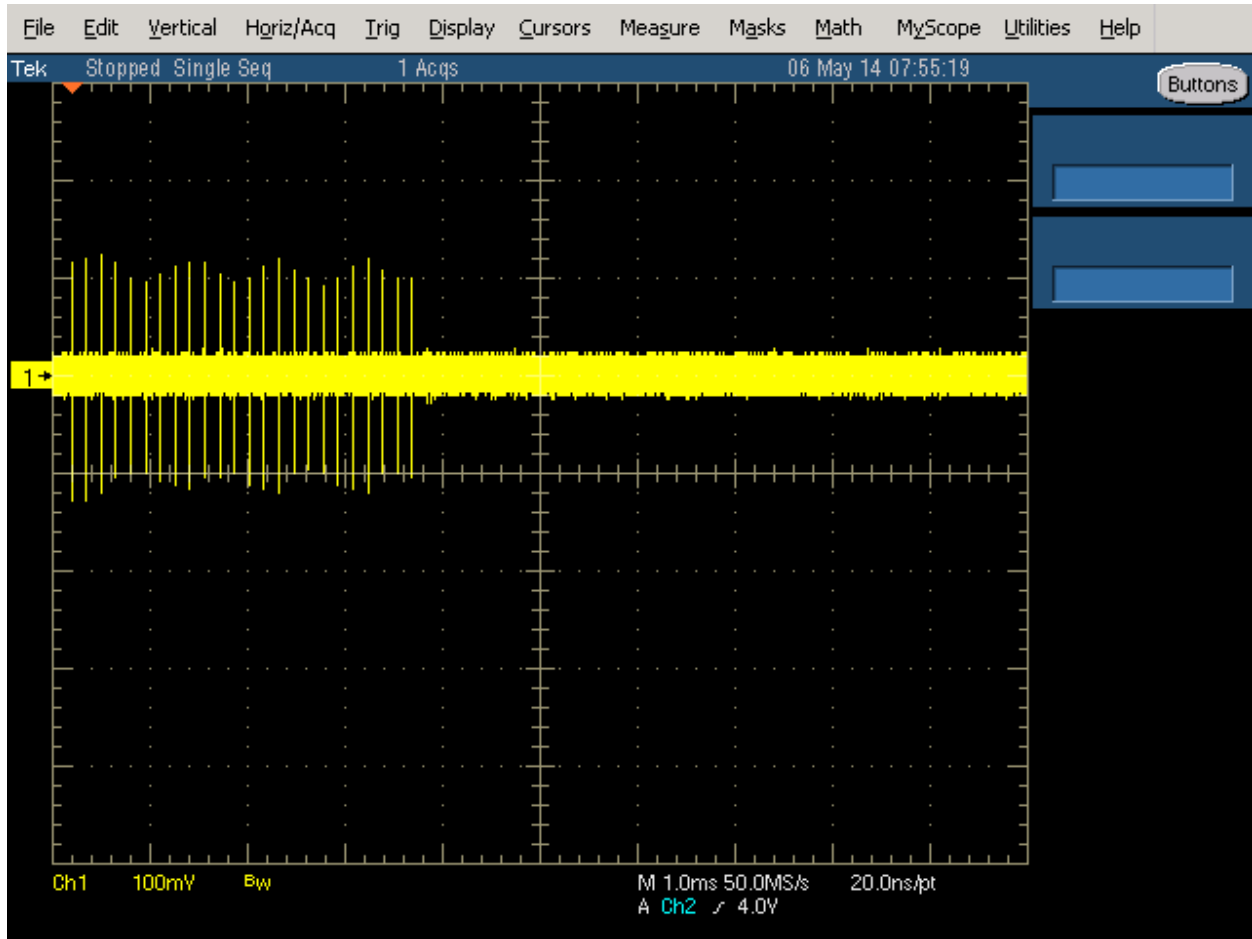


Figure 4 FCC Type 2 Radar (24 pulses)

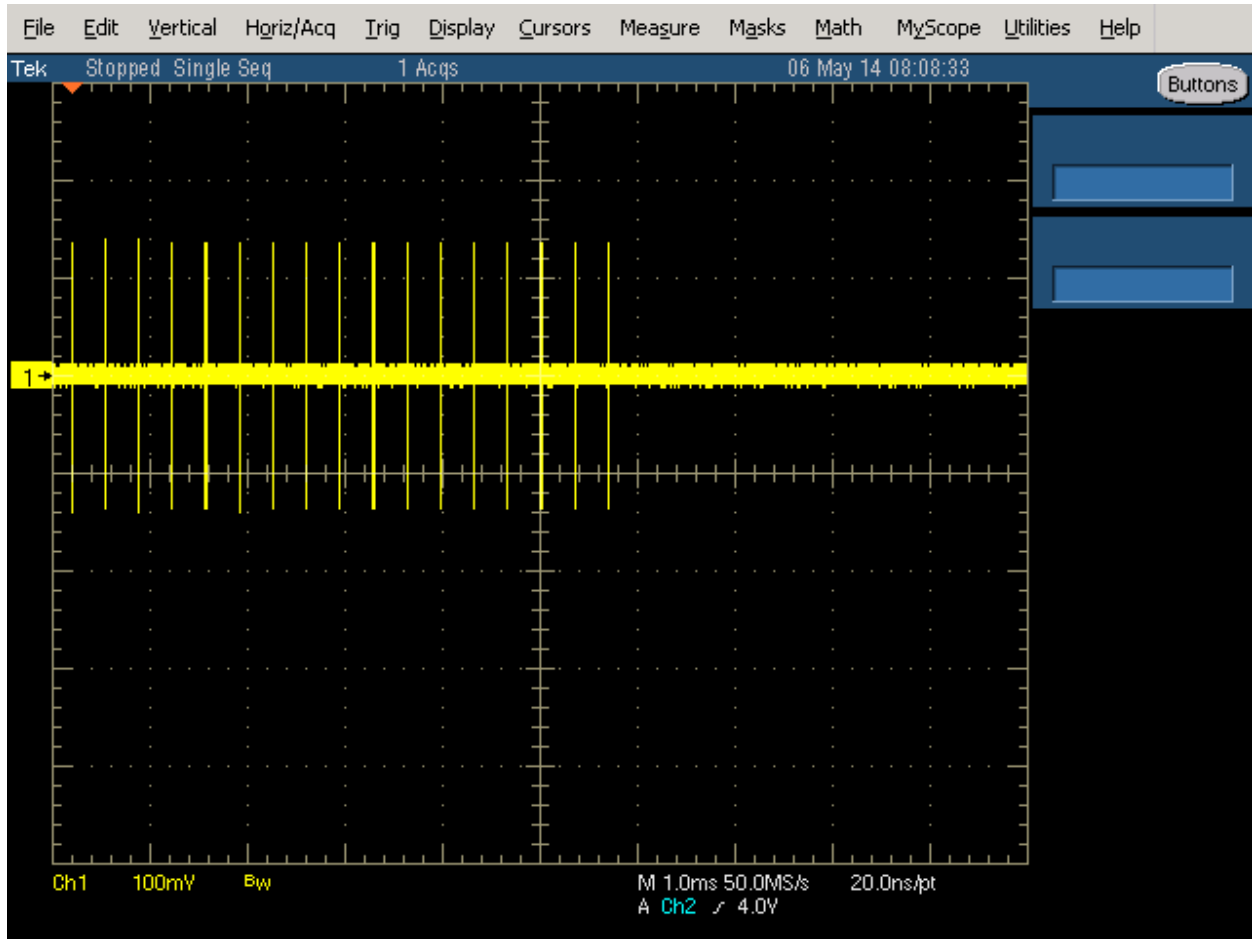


Figure 5 FCC Type 3 Radar (17 pulses)

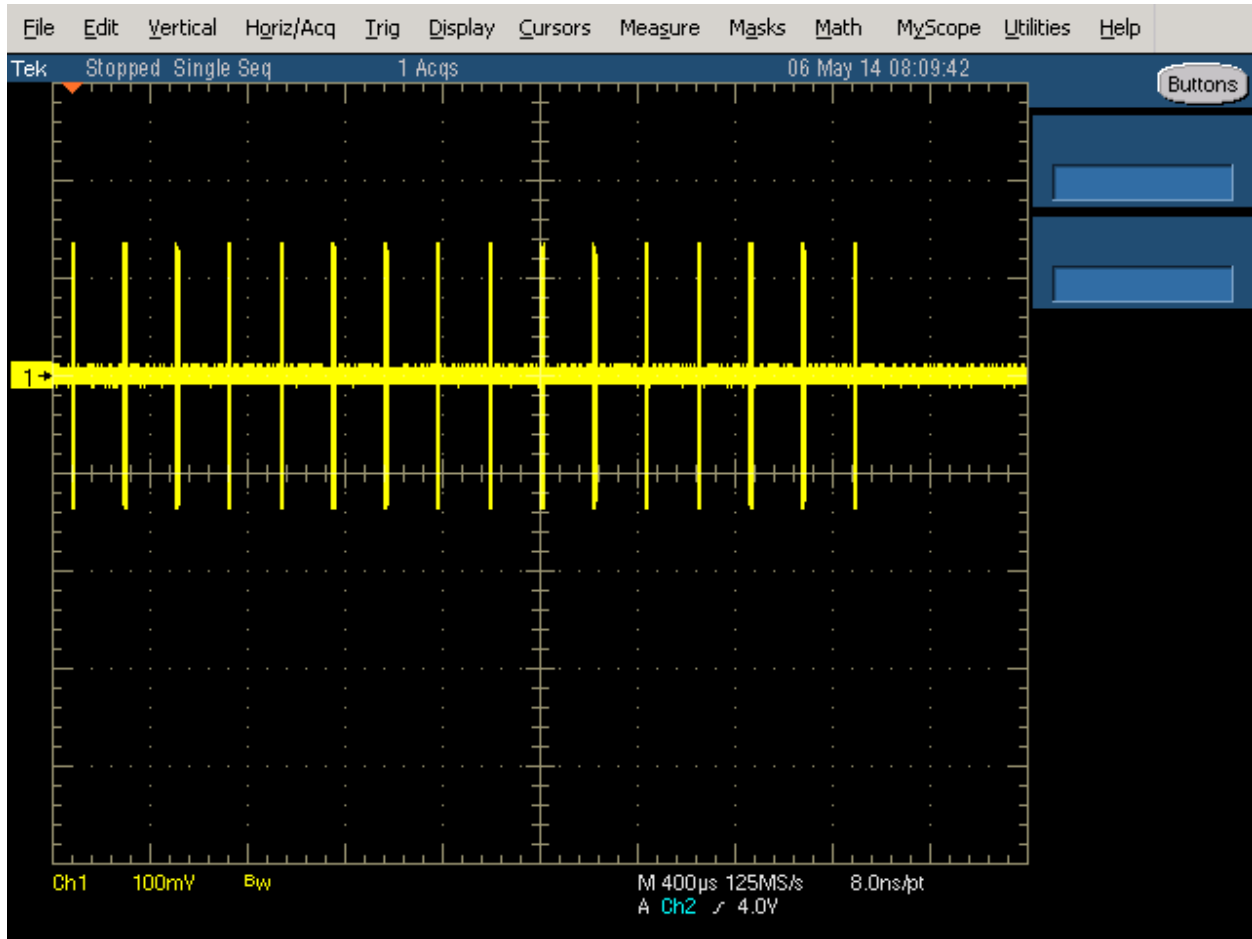


Figure 6 FCC Type 4 Radar (16 pulses)

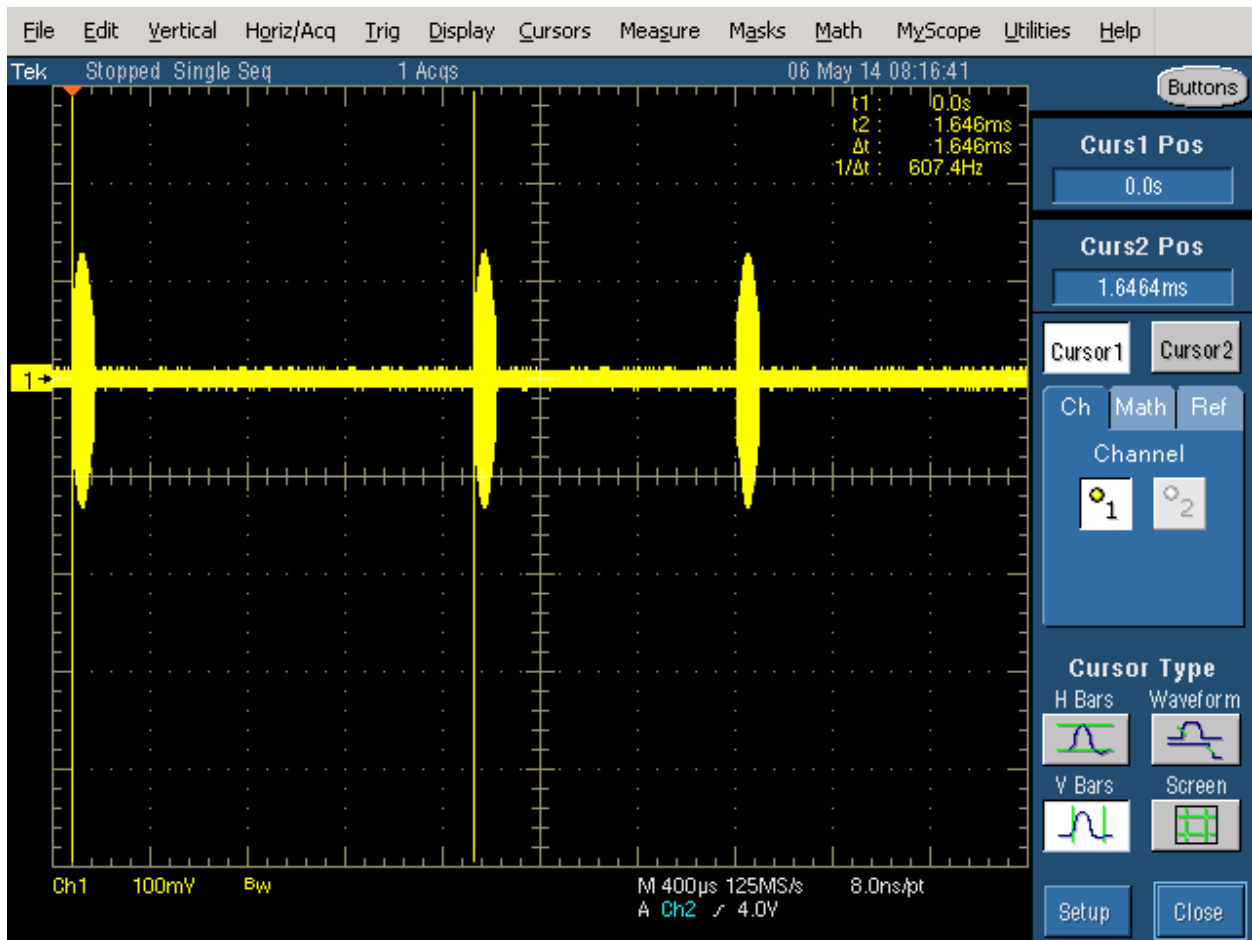


Figure 7 FCC Type 5 Radar (burst with three pulses, 1650 μs first period)

The shape is round due to chirped frequency during pulse as the SA is in zero span with 3 MHz BW.

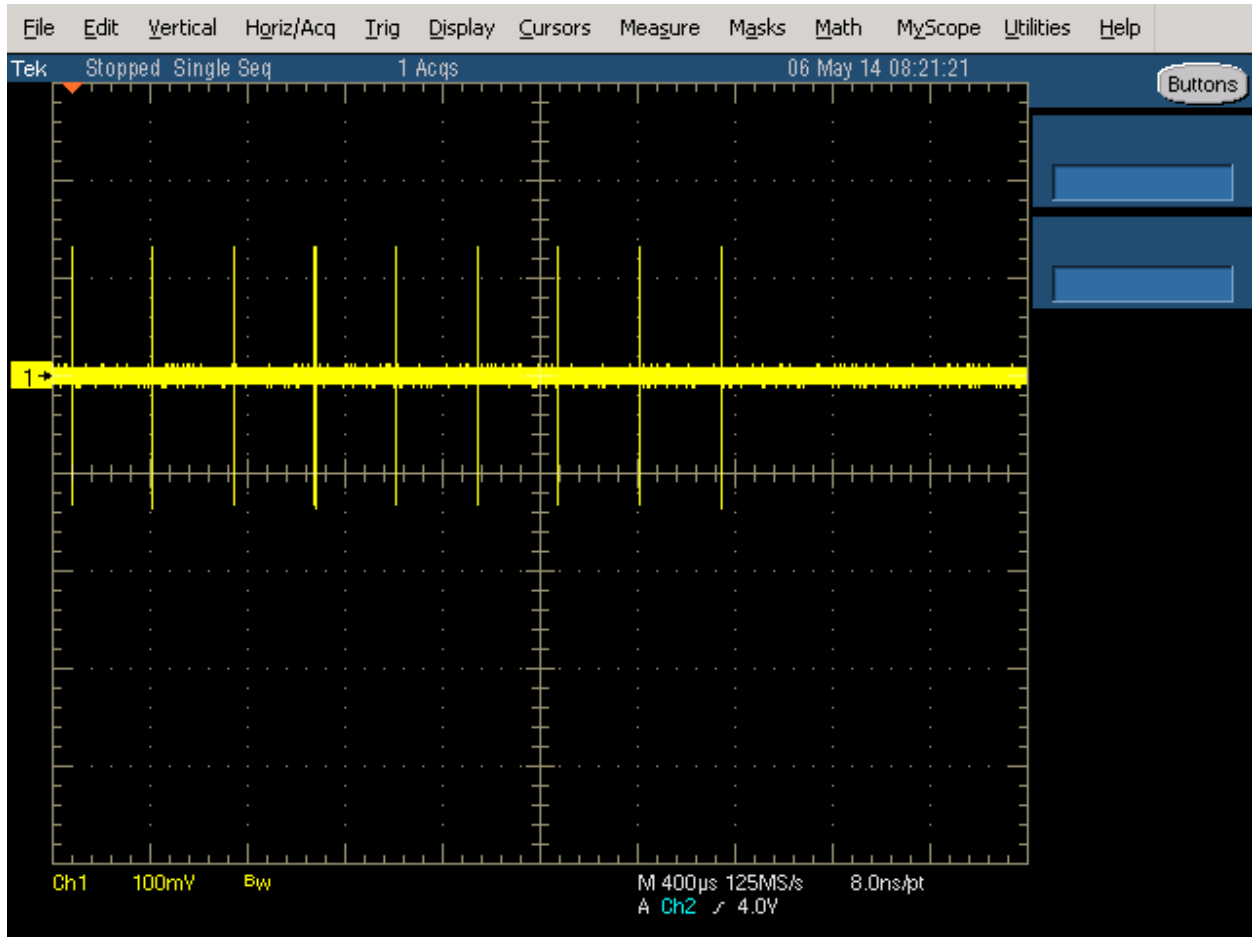


Figure 8 FCC Type 6 Radar (9 pulses in each burst)

---

**DFS MEASUREMENT METHODS****DFS – CHANNEL CLOSING TRANSMISSION TIME AND CHANNEL MOVE TIME**

Channel clearing and closing times are measured by applying a burst of radar with the device configured to change channel and by observing the channel for transmissions. The time between the end of the applied radar waveform and the final transmission on the channel is the channel move time.

The aggregate transmission closing time is measured in one of two ways:

FCC/MSIP Notice No. 2015-95 – the total time of all individual transmissions from the EUT that are observed starting 200ms at the end of the last radar pulse in the waveform. This value is required to be less than 60ms.

**DFS – CHANNEL NON-OCCUPANCY AND VERIFICATION OF PASSIVE SCANNING**

The channel that was in use prior to radar detection by the master is additionally monitored for 30 minutes to ensure no transmissions on the vacated channel over the required non-occupancy period. This is achieved by tuning the spectrum analyzer to the vacated channel in zero-span mode and connecting the IF output to an oscilloscope. The oscilloscope is triggered by the radar pulse and set to provide a single sweep (in peak detect mode) that lasts for at least 30 minutes after the end of the channel move time.

For devices with a client-mode that are being evaluated against FCC rules the manufacturer must supply an attestation letter stating that the client device does not employ any active scanning techniques (i.e. does not transmit in the DFS bands without authorization from a Master device).

**Appendix A Test Equipment Calibration Data**


<b><u>Manufacturer</u></b>	<b><u>Description</u></b>	<b><u>Model #</u></b>	<b><u>Asset #</u></b>	<b><u>Cal Due</u></b>
Hewlett Packard	EMC Spectrum Analyzer, 9 kHz - 6.5 GHz	8595EM	780	30-Mar-17
ETS Lindgren	Antenna, Horn, 1-18 GHz	3117	1662	13-Jun-18
Agilent Technologies	PSG, Vector Signal Generator, (250kHz - 20GHz)	E8267D	3011	02-Mar-17
Tektronix	350 MHz Digital Oscilloscope	TDS5034 B	3255	12-Feb-17

**Appendix B Test Data Tables and Plots for Channel Closing**

**FCC PART 15 SUBPART E Channel Closing Measurements**

Table 5 - FCC Part 15 Subpart E Channel Closing Test Results					
Waveform Type	Channel Closing Transmission Time <sup>1</sup>		Channel Move Time		Result
	Measured	Limit	Measured	Limit	
Radar Type 0	1.0 ms	60 ms	0.3 s	10 s	PASS

Testing was performed with the EUT operating using an 80MHz transmission bandwidth. The control channel was monitored for all tests.

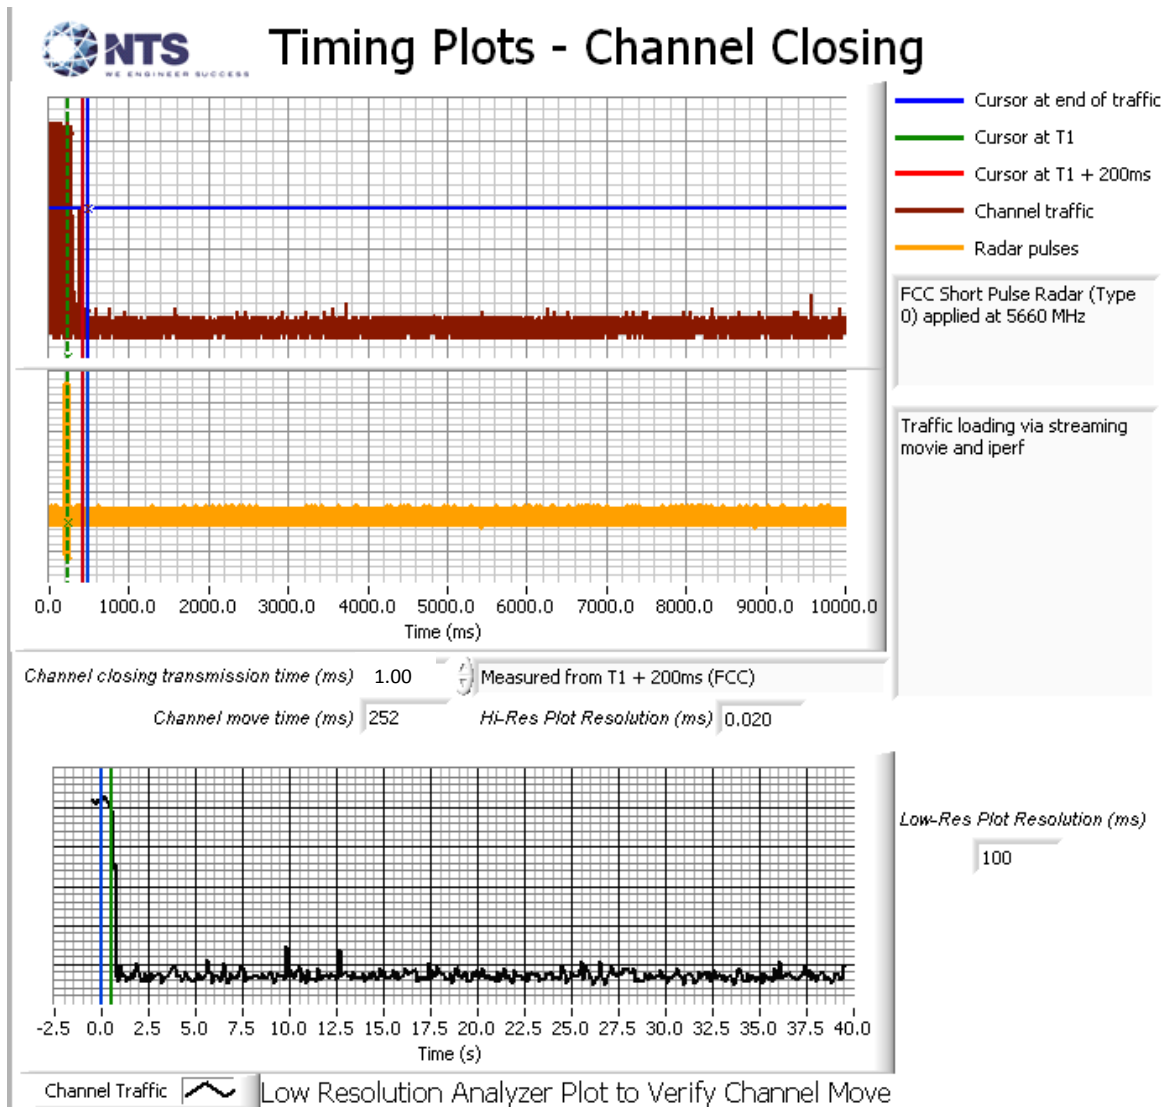

**Figure 9 Channel closing time and channel move time (ac80 mode) – 40 second plot**

<sup>1</sup> Channel closing time for FCC measurements is the aggregate transmission time starting from 200ms after the end of the radar signal to the completion of the channel move.




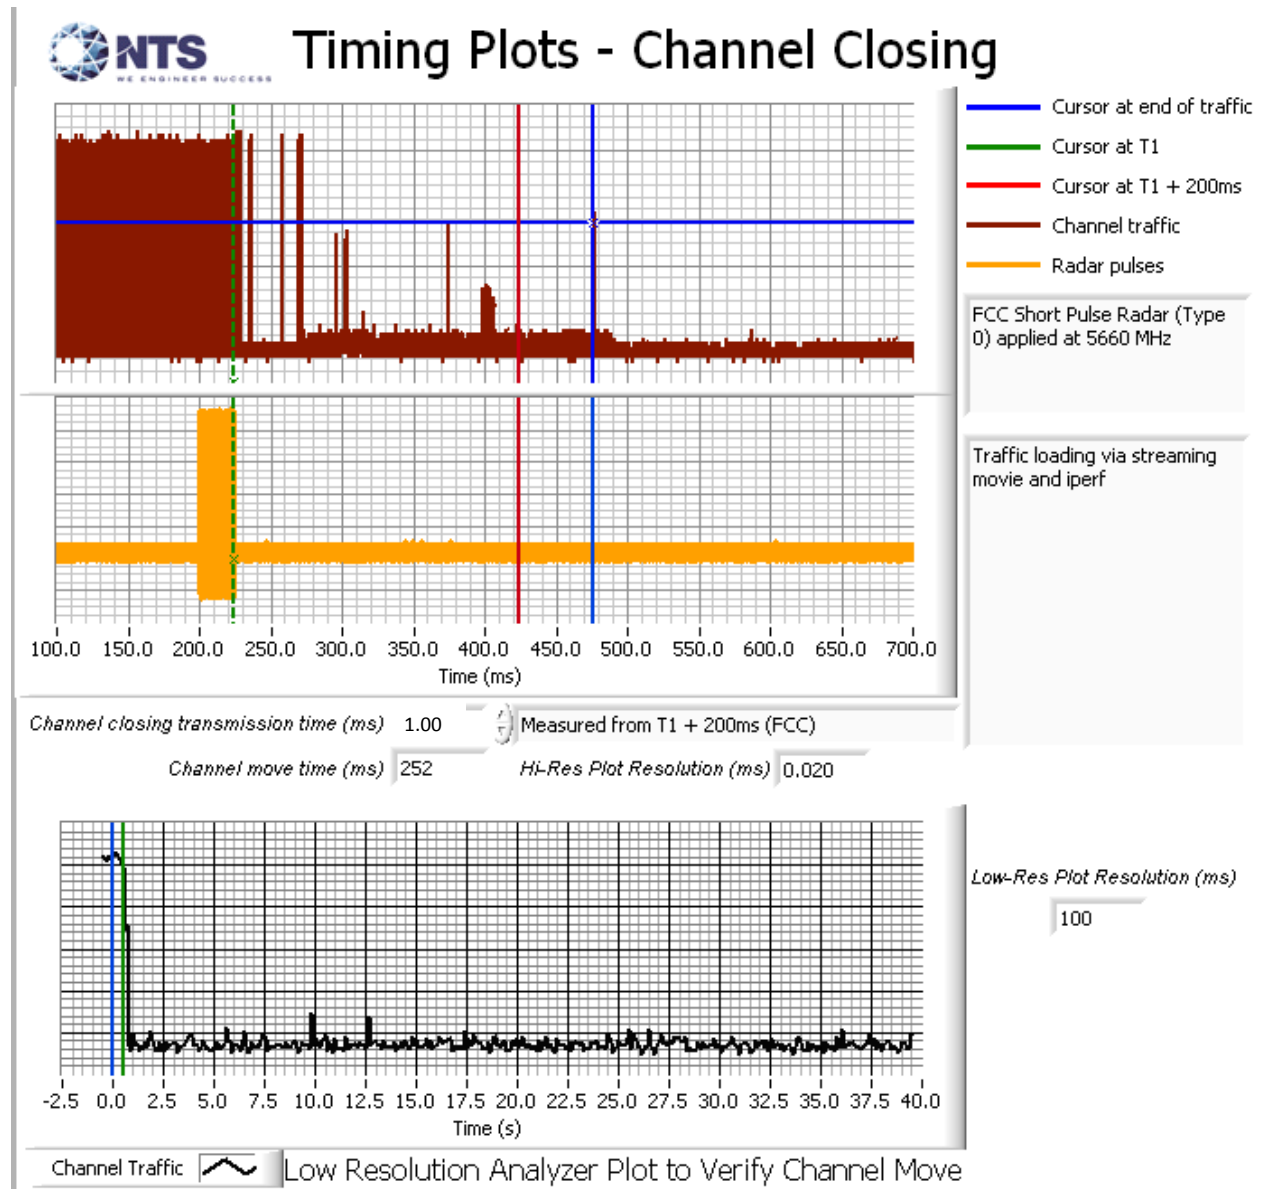


Figure 10 Close-up of transmissions occurring more than 200ms after the end of radar (ac80 mode)

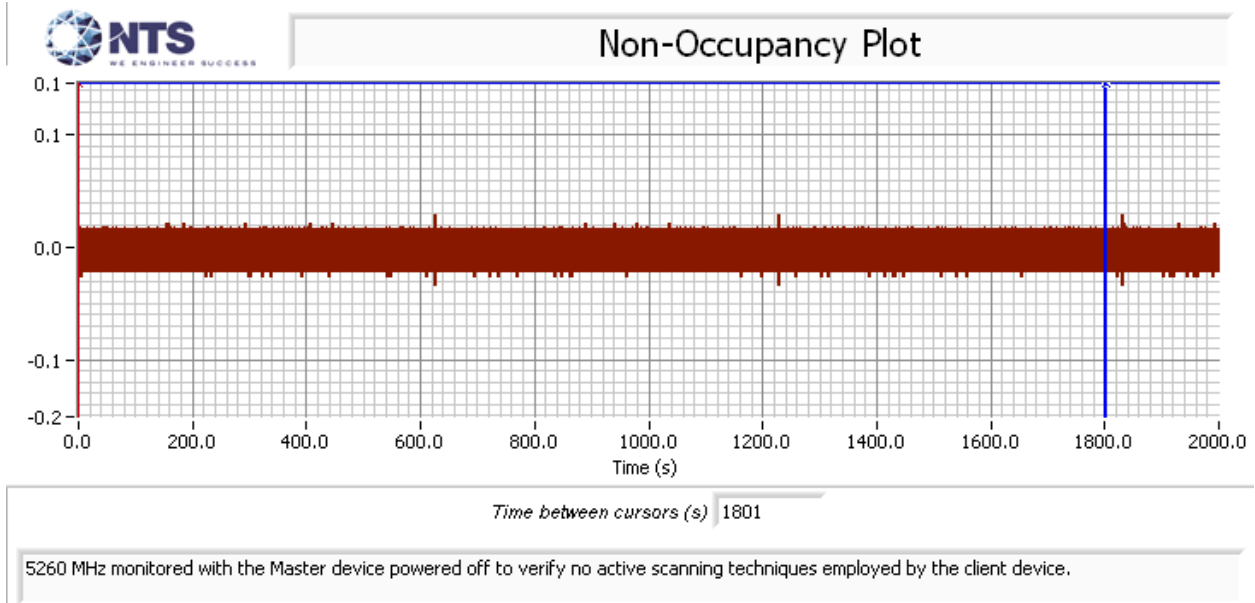

**Figure 11 Radar channel non-occupancy plot (ac80 mode)**

The non-occupancy plot was made over a 30-minute time period following the channel move time with the analyzer IF output connected to the scope and tuned to the vacated channel. Radar was applied at the control signal. No transmissions were observed on the vacated channel after the channel move had been completed.

After the channel move the client re-associated with the master device on the new channel.

**Appendix C Test Configuration Photograph(s)**

Refer to separate exhibit.

***End of Report***

This page is intentionally blank and marks the last page of this test report.