


TEST REPORT
Covering the
DYNAMIC FREQUENCY SELECTION (DFS)
REQUIREMENTS
OF
FCC Part 15 Subpart E (UNII), RSS-210 Annex 9
Pace Americas
Model: IPW8000 STB


IC CERTIFICATION #: 3439B-IPW8X4N
FCC ID: PGRIPW8X4N
COMPANY: Pace Americas
310 Providence Mine Road, Suite 200
Nevada City, CA, 95959
TEST SITE: National Technical Systems - Silicon Valley
41039 Boyce Road
Fremont, CA 94538
REPORT DATE: September 23, 2013
FINAL TEST DATE: August 20, 2013

PROGRAM MGR /
TECHNICAL REVIEWER:




Mark Hill
Staff Engineer

TEST ENGINEER /
REPORT PREPARER:



Mehran Birgani
EMC Engineer

QUALITY ASSURANCE REPRESENTATIVE:



David Guidotti
Senior Technical Writer



National Technical Systems - Silicon Valley is accredited by the A2LA, certificate number 0214.26, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

REVISION HISTORY

| Rev # | Date | Comments | Modified By |
|-------|------------|---------------|-------------|
| - | 09-23-2013 | Initial Draft | - |

TABLE OF CONTENTS

REVISION HISTORY2

TABLE OF CONTENTS3

LIST OF TABLES.....4

LIST OF FIGURES.....4

SCOPE.....5

OBJECTIVE5

STATEMENT OF COMPLIANCE.....5

DEVIATIONS FROM THE STANDARD5

TEST RESULTS.....6

 TEST RESULTS SUMMARY – FCC PART 15, CLIENT DEVICE6

 MEASUREMENT UNCERTAINTIES.....6

EQUIPMENT UNDER TEST (EUT) DETAILS.....7

 GENERAL.....7

 ENCLOSURE.....7

 MODIFICATIONS7

 SUPPORT EQUIPMENT8

 EUT INTERFACE PORTS8

 EUT OPERATION8

RADAR WAVEFORMS.....9

DFS TEST METHODS10

 RADIATED TEST METHOD10

DFS MEASUREMENT INSTRUMENTATION.....12

 RADAR GENERATION SYSTEM12

 CHANNEL MONITORING SYSTEM13

DFS MEASUREMENT METHODS14

 DFS – CHANNEL CLOSING TRANSMISSION TIME AND CHANNEL MOVE TIME14

 DFS – CHANNEL NON-OCCUPANCY AND VERIFICATION OF PASSIVE SCANNING.....14

 DFS CHANNEL AVAILABILITY CHECK TIME.....15

 TRANSMIT POWER CONTROL (TPC)15

SAMPLE CALCULATIONS16

 DETECTION PROBABILITY / SUCCESS RATE16

 THRESHOLD LEVEL16

APPENDIX A TEST EQUIPMENT CALIBRATION DATA17

APPENDIX B TEST DATA TABLES AND PLOTS FOR CHANNEL CLOSING18

 FCC PART 15 SUBPART E CHANNEL CLOSING MEASUREMENTS18

APPENDIX C TEST CONFIGURATION PHOTOGRAPH(S).....23

LIST OF TABLES

Table 1 - FCC Part 15 Subpart E Client Device Test Result Summary (20MHz) 6
Table 2 - FCC Part 15 Subpart E Client Device Test Result Summary (40MHz) 6
Table 3 - FCC Short Pulse Radar Test Waveforms 9
Table 4 - FCC Long Pulse Radar Test Waveforms..... 9
Table 5 - FCC Frequency Hopping Radar Test Waveforms..... 9
Table 6 - FCC Part 15 Subpart E Channel Closing Test Results 18

LIST OF FIGURES

Figure 1 Test Configuration for radiated Measurement Method 10
Figure 2 Channel Closing Time and Channel Move Time (20 MHz mode) – 40 second plot 18
Figure 3 Close-Up of Transmissions Occurring More Than 200ms After The End of Radar (20MHz mode) 19
Figure 4 Channel Closing Time and Channel Move Time (40MHz mode) – 40 second plot 20
Figure 5 Close-Up of Transmissions Occurring More Than 200ms After The End of Radar (40MHz mode) 21
Figure 6 Radar Channel Non-Occupancy Plot (mode) 22

SCOPE

Test data has been taken pursuant to the relevant DFS requirements of the following standard(s):

- FCC Part 15 Subpart E Unlicensed National Information Infrastructure (U-NII) Devices.
- RSS-210 Annex 9 Local Area Network Devices.

Tests were performed in accordance with these standards together with the current published versions of the basic standards referenced therein including FCC KDB 848637 and the appendix to FCC 06-96 MO&O as outlined in NTS Silicon Valley test procedures. The test results recorded herein are based on a single type test of the Pace Americas model IPW8000 STB and therefore apply only to the tested sample. The sample was selected and prepared by Mark Rieger of Pace Americas.

OBJECTIVE

The objective of the manufacturer is to comply with the standards identified in the previous section. In order to demonstrate compliance, the manufacturer or a contracted laboratory makes measurements and takes the necessary steps to ensure that the equipment complies with the appropriate technical standards. Compliance with some DFS features is covered through a manufacturer statement or through observation of the device.

STATEMENT OF COMPLIANCE

The tested sample of the Pace Americas model IPW8000 STB complied with the DFS requirements of FCC Part 15.407(h)(2), RSS-210 Annex 9.3.

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

DEVIATIONS FROM THE STANDARD

No deviations were made from the test methods and requirements covered by the scope of this report.

TEST RESULTS

TEST RESULTS SUMMARY – FCC Part 15, CLIENT DEVICE

| Table 1 - FCC Part 15 Subpart E Client Device Test Result Summary (20MHz) | | | | | | |
|--|------------|---------------|----------------|-------------|------------|--------|
| Description | Radar Type | EUT Frequency | Measured Value | Requirement | Test Data | Status |
| Channel closing transmission time | Type 1 | 5540 | 0 ms | 60 ms | Appendix B | PASS |
| Channel move time | Type 1 | 5540 | 0.14 s | 10 s | Appendix B | PASS |
| 1) Tests were performed using the radiated test method. | | | | | | |

| Table 2 - FCC Part 15 Subpart E Client Device Test Result Summary (40MHz) | | | | | | |
|---|------------|---------------|-----------------------------------|--------------|------------|--------|
| Description | Radar Type | EUT Frequency | Measured Value | Requirement | Test Data | Status |
| Channel closing transmission time | Type 1 | 5510 | 0 | 60 ms | Appendix B | PASS |
| Channel move time | Type 1 | 5510 | 0.13 s | 10 s | Appendix B | PASS |
| Non-occupancy period - associated | Type 1 | 5550 | > 30 minutes | > 30 minutes | Appendix B | PASS |
| Passive Scanning | N/A | N/A | Refer to manufacturer attestation | | | |
| 2) Tests were performed using the radiated test method. | | | | | | |
| 3) Channel availability check and detection threshold are not applicable to client devices. | | | | | | |

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level, with a coverage factor (k=2) and were calculated in accordance with UKAS document LAB 34.

| Measurement | Measurement Unit | Expanded Uncertainty |
|--|------------------|-----------------------------|
| Timing (Channel move time, aggregate transmission time) | ms | Timing resolution +/- 0.24% |
| Timing (non occupancy period) | seconds | 5 seconds |
| DFS Threshold (radiated) | dBm | 1.6 |
| DFS Threshold (conducted) | dBm | 1.2 |

EQUIPMENT UNDER TEST (EUT) DETAILS

GENERAL

The Pace Americas model IPW8000 STB is non-DVR set-top that offers wireless connectivity utilizing an integrated 4x4 5GHz 802.11an wireless client.

The sample was received on August 19, 2013 and tested on August 20, 2013. The EUT consisted of the following component(s):

| Manufacturer | Model | Description | Serial Number |
|--------------|---------|------------------|------------------|
| Pace | IPW8000 | Mediaroom client | TDVAAGC325620001 |

The manufacturer declared values for the EUT operational characteristics that affect DFS are as follows:

Operating Modes (5250 – 5350 MHz, 5470 – 5725 MHz)

- Client Device with In-Service Monitoring

Antenna Gains / EIRP (5250 – 5350 MHz, 5470 – 5725 MHz)

| | 5250 – 5350 MHz | 5470 – 5725 MHz |
|----------------------------|-----------------|-----------------|
| Lowest Antenna Gain (dBi) | 7.9 | 7.9 |
| Highest Antenna Gain (dBi) | 7.9 | 7.9 |
| EIRP Output Power (dBm) | 29.6 | 29.8 |

- Power can exceed 200mW eirp

Channel Protocol

- IP Based

ENCLOSURE

The EUT enclosure measures approximately 15cm wide by 14cm deep by 4.5cm high. It is primarily constructed of uncoated coated plastic.

MODIFICATIONS

The EUT did not require modifications during testing in order to comply with the requirements of the standard(s) referenced in this test report.

SUPPORT EQUIPMENT

The following equipment was used as local support equipment for testing:

| Manufacturer | Model | Description | Serial Number | FCC ID |
|--------------|---------------|---------------------|--------------------|-----------------|
| Dell | Latitude 131L | Laptop | HLBPQC1 | DoC |
| Dell | Precision | Laptop | CC35CT1 | DoC |
| D-Link | DES-1105 | Switch | DRL7273009665 | DoC |
| LILLIPUT | FA1013-NP/HY | TV | 1013A71025041 | DoC |
| <i>Pace</i> | <i>405</i> | <i>Access Point</i> | <i>2713M000008</i> | <i>PGR405ND</i> |

The italicized device was the master device.

EUT INTERFACE PORTS

The I/O cabling configuration during testing was as follows:

| Port | Connected To | Cable(s) | | |
|-------|--------------|-------------|------------------------|------------|
| | | Description | Shielded or Unshielded | Length (m) |
| HDMI | TV | HDMI | Shielded | 8.0 |
| Power | Main | 2 wire | Unshielded | 1.0 |

EUT OPERATION

The EUT was operating with the following software. The software is secured by encryption codes to prevent the user from disabling the DFS function.

Client Device: V32.131.5

The manufacturer provided special software that over-rode the non-occupancy mechanism (allowing return to the same channel) for the purposes of determining the probability of detection. This test feature was disabled and the normal operating software enabled for verifying the 30-minute non-occupancy period and channel move time.

The start of the Channel Availability Check was the instant the command to change channel was sent.

During the in-service monitoring detection probability and channel moving tests the system was configured with a streaming video file from the master device (sourced by the PC connected to the master device via an Ethernet interface) to the client device.

The streamed file was the "FCC" test file and the client device was using Windows Media Player Classic as required by FCC Part 15 Subpart E.

RADAR WAVEFORMS

| Table 3 - FCC Short Pulse Radar Test Waveforms | | | | | |
|---|--------------------|------------|----------------|------------------------------|--------------------------|
| Radar Type | Pulse Width (µsec) | PRI (µsec) | Pulses / burst | Minimum Detection Percentage | Minimum Number of Trials |
| 1 | 1 | 1428 | 18 | 60% | 30 |
| 2 | 1-5 | 150-230 | 23-29 | 60% | 30 |
| 3 | 6-10 | 200-500 | 16-18 | 60% | 30 |
| 4 | 11-20 | 200-500 | 12-16 | 60% | 30 |
| Aggregate (Radar Types 1-4) | | | | 80% | 120 |

| Table 4 - FCC Long Pulse Radar Test Waveforms | | | | | | | |
|--|--------------------|-------------------|------------|----------------|------------------|------------------------------|--------------------------|
| Radar Type | Pulse Width (µsec) | Chirp Width (MHz) | PRI (µsec) | Pulses / burst | Number of Bursts | Minimum Detection Percentage | Minimum Number of Trials |
| 5 | 50-100 | 5-20 | 1000-2000 | 1-3 | 8-20 | 80% | 30 |

| Table 5 - FCC Frequency Hopping Radar Test Waveforms | | | | | | | |
|---|--------------------|------------|--------------|--------------------|--------------------------------|------------------------------|--------------------------|
| Radar Type | Pulse Width (µsec) | PRI (µsec) | Pulses / hop | Hopping Rate (kHz) | Hopping Sequence Length (msec) | Minimum Detection Percentage | Minimum Number of Trials |
| 6 | 1 | 333 | 9 | 0.333 | 300 | 70% | 30 |

DFS TEST METHODS

RADIATED TEST METHOD

The combination of master and slave devices is located in an anechoic chamber. The simulated radar waveform is transmitted from a directional horn antenna (typically an EMCO 3115) toward the unit performing the radar detection (radar detection device, RDD). Every effort is made to ensure that the main beam of the EUT's antenna is aligned with the radar-generating antenna.

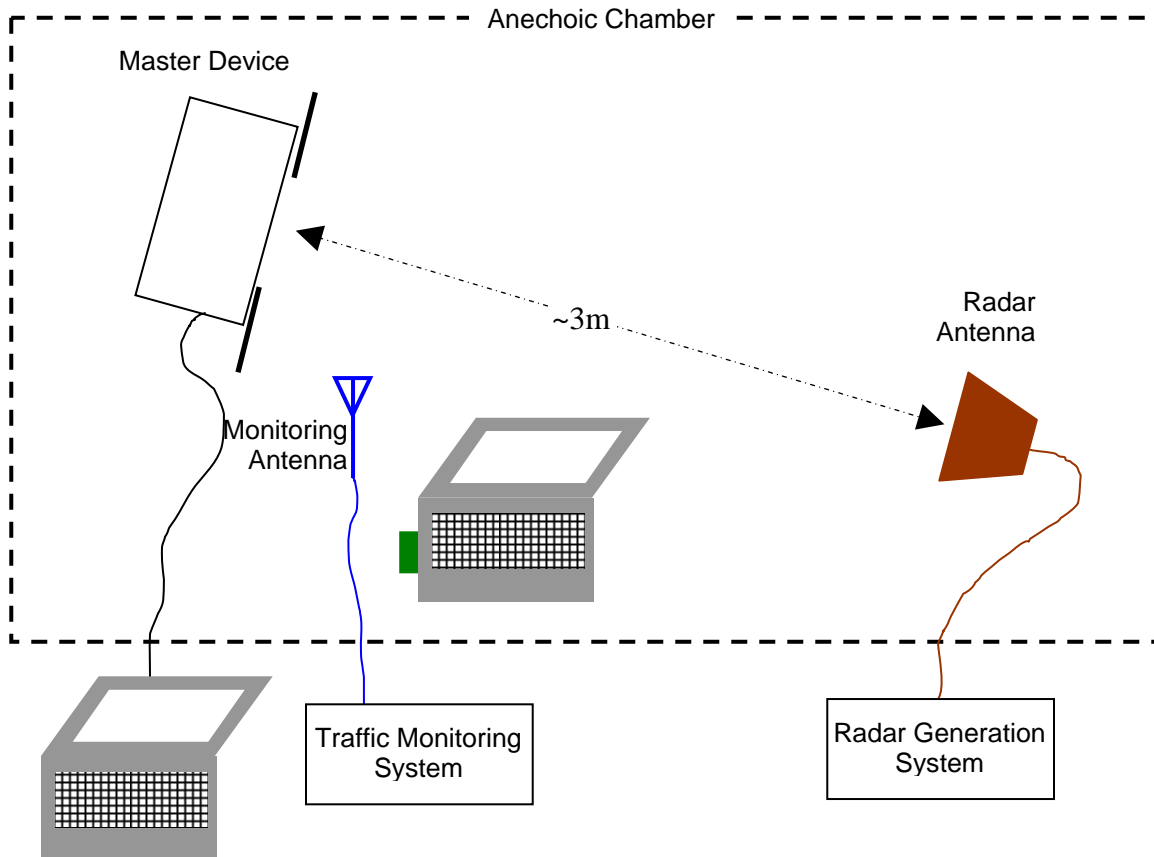


Figure 1 Test Configuration for radiated Measurement Method

The signal level of the simulated waveform is set to a reference level equal to the threshold level (plus 1dB if testing against FCC requirements). Lower levels may also be applied on request of the manufacturer. The level reported is the level at the RDD antenna and so it is not corrected for the RDD's antenna gain. The RDD is configured with the lowest gain antenna assembly intended for use with the device.

The signal level is verified by measuring the CW signal level from the radar generation system using a reference antenna of gain G_{REF} (dBi). The radar signal level is calculated from the measured level, R (dBm), and any cable loss, L (dB), between the reference antenna and the measuring instrument:

$$\text{Applied level (dBm)} = R - G_{REF} + L$$

If both master and client devices have radar detection capability then the device not under test is positioned with absorbing material between its antenna and the radar generating antenna, and the radar level at the non RDD is verified to be at least 20dB below the threshold level to ensure that any responses are due to the RDD detecting radar.

The antenna connected to the channel monitoring subsystem is positioned to allow both master and client transmissions to be observed, with the level of the EUT's transmissions between 6 and 10dB higher than those from the other device.

DFS MEASUREMENT INSTRUMENTATION

RADAR GENERATION SYSTEM

An Agilent PSG is used as the radar-generating source. The integral arbitrary waveform generators are programmed using Agilent's "Pulse Building" software and NTS Silicon Valley custom software to produce the required waveforms, with the capability to produce both un-modulated and modulated (FM Chirp) pulses. Where there are multiple values for a specific radar parameter then the software selects a value at random and, for FCC tests, the software verifies that the resulting waveform is truly unique.

With the exception of the hopping waveforms required by the FCC's rules (see below), the radar generator is set to a single frequency within the radar detection bandwidth of the EUT. The frequency is varied from trial to trial by stepping in 5MHz steps.

Frequency hopping radar waveforms are simulated using a time domain model. A randomly hopping sequence algorithm (which uses each channel in the hopping radar's range once in a hopping sequence) generates a hop sequence. A segment of the first 100 elements of the hop sequence are then examined to determine if it contains one or more frequencies within the radar detection bandwidth of the EUT. If it does not then the first element of the segment is discarded and the next frequency in the sequence is added. The process repeats until a valid segment is produced. The radar system is then programmed to produce bursts at time slots coincident with the frequencies within the segment that fall in the detection bandwidth. The frequency of the generator is stepped in 1 MHz increments across the EUT's detection range.

The radar signal level is verified during testing using a CW signal with the AGC function switched on. Correction factors to account for the fact that pulses are generated with the AGC functions switched off are measured annually and an offset is used to account for this in the software.

The generator output is connected to the coupling port of the conducted set-up or to the radar-generating antenna.

CHANNEL MONITORING SYSTEM

Channel monitoring is achieved using a spectrum analyzer and digital storage oscilloscope. The analyzer is configured in a zero-span mode, center frequency set to the radar waveform's frequency or the center frequency of the EUT's operating channel. The IF output of the analyzer is connected to one input of the oscilloscope.

A signal generator output is set to send either the modulating signal directly or a pulse gate with an output pulse co-incident with each radar pulse. This output is connected to a second input on the oscilloscope and the oscilloscope displays both the channel traffic (via the if input) and the radar pulses on its display.

For in service monitoring tests the analyzer sweep time is set to > 20 seconds and the oscilloscope is configured with a data record length of 10 seconds for the short duration and frequency hopping waveforms, 20 seconds for the long duration waveforms. Both instruments are set for a single acquisition sequence. The analyzer is triggered 500ms before the start of the waveform and the oscilloscope is triggered directly by the modulating pulse train. Timing measurements for aggregate channel transmission time and channel move time are made from the oscilloscope data, with the end of the waveform clearly identified by the pulse train on one trace. The analyzer trace data is used to confirm that the last transmission occurred within the 10-second record of the oscilloscope. If necessary the record length of the oscilloscope is expanded to capture the last transmission on the channel prior to the channel move.

Channel availability check time timing plots are made using the analyzer. The analyzer is triggered at start of the EUT's channel availability check and used to verify that the EUT does not transmit when radar is applied during the check time.

The analyzer detector and oscilloscope sampling mode is set to peak detect for all plots.

DFS MEASUREMENT METHODS

DFS – CHANNEL CLOSING TRANSMISSION TIME AND CHANNEL MOVE TIME

Channel clearing and closing times are measured by applying a burst of radar with the device configured to change channel and by observing the channel for transmissions. The time between the end of the applied radar waveform and the final transmission on the channel is the channel move time.

The aggregate transmission closing time is measured in one of two ways:

FCC/KCC Notice No. 2010-48 – the total time of all individual transmissions from the EUT that are observed starting 200ms at the end of the last radar pulse in the waveform. This value is required to be less than 60ms.

DFS – CHANNEL NON-OCCUPANCY AND VERIFICATION OF PASSIVE SCANNING

The channel that was in use prior to radar detection by the master is additionally monitored for 30 minutes to ensure no transmissions on the vacated channel over the required non-occupancy period. This is achieved by tuning the spectrum analyzer to the vacated channel in zero-span mode and connecting the IF output to an oscilloscope. The oscilloscope is triggered by the radar pulse and set to provide a single sweep (in peak detect mode) that lasts for at least 30 minutes after the end of the channel move time.

For devices with a client-mode that are being evaluated against FCC rules the manufacturer must supply an attestation letter stating that the client device does not employ any active scanning techniques (i.e. does not transmit in the DFS bands without authorization from a Master device).

DFS CHANNEL AVAILABILITY CHECK TIME

It is preferred that the EUT report when it starts the radar channel availability check. If the EUT does not report the start of the check time, then the time to start transmitting on a channel after switching the device on is measured to approximate the time from power-on to the end of the channel availability check. The start of the channel availability check is assumed to be 60 seconds prior to the first transmission on the channel.

To evaluate the channel availability check, a single burst of one radar type is applied within the first 2 seconds of the start of the channel availability check and it is verified that the device does not use the channel by continuing to monitor the channel for a period of at least 60 seconds. The test is repeated by applying a burst of radar in the last 2 seconds (i.e. between 58 and 60 seconds after the start of CAC when evaluating a 60-second CAC) of the channel availability check.

TRANSMIT POWER CONTROL (TPC)

Compliance with the transmit power control requirements for devices is demonstrated through measurements showing multiple power levels and manufacturer statements explaining how the power control is implemented.

SAMPLE CALCULATIONS

DETECTION PROBABILITY / SUCCESS RATE

The detection probability, or success rate, for any one radar waveform equals the number of successful trials divided by the total number of trials for that waveform.

THRESHOLD LEVEL

The threshold level is the level of the simulated radar waveform at the EUT's antenna. If the test is performed in a conducted fashion then the level at the rf input equals the level at the antenna plus the gain of the antenna assembly, in dBi. The gain of the antenna assembly equals the gain of the antenna minus the loss of the cabling between the rf input and the antenna. The lowest gain value for all antenna assemblies intended for use with the device is used when making this calculation.

If the test is performed using the radiated method then the threshold level is the level at the antenna.

Appendix A Test Equipment Calibration Data

| <u>Manufacturer</u> | <u>Description</u> | <u>Model #</u> | <u>Asset #</u> | <u>Cal Due</u> |
|----------------------------|-------------------------------|-----------------------|-----------------------|-----------------------|
| Hewlett Packard | EMC Analyzer | 8595EM | 780 | 07-Mar-2014 |
| Agilent Technologies | PSG Vector Signal Generator | E8267C | 1877 | 07-Jun-2014 |
| Tecktronix | Digital Phosphor Oscilloscope | TDS5052B | 2118 | 22-Oct-2013 |
| EMCO | Antenna, Horn 1-18 GHz | 3117 | 1662 | 25-May-2014 |

Appendix B Test Data Tables and Plots for Channel Closing

FCC PART 15 SUBPART E Channel Closing Measurements

| Table 6 - FCC Part 15 Subpart E Channel Closing Test Results | | | | | |
|--|--|-------|-------------------|-------|--------|
| Waveform Type | Channel Closing Transmission Time ¹ | | Channel Move Time | | Result |
| | Measured | Limit | Measured | Limit | |
| Radar Type 1, 20MHz | 0 ms | 60 ms | 0.14 s | 10 s | PASS |
| Radar Type 1, 40MHz | 0 ms | 60 ms | 0.13 s | 10 s | PASS |

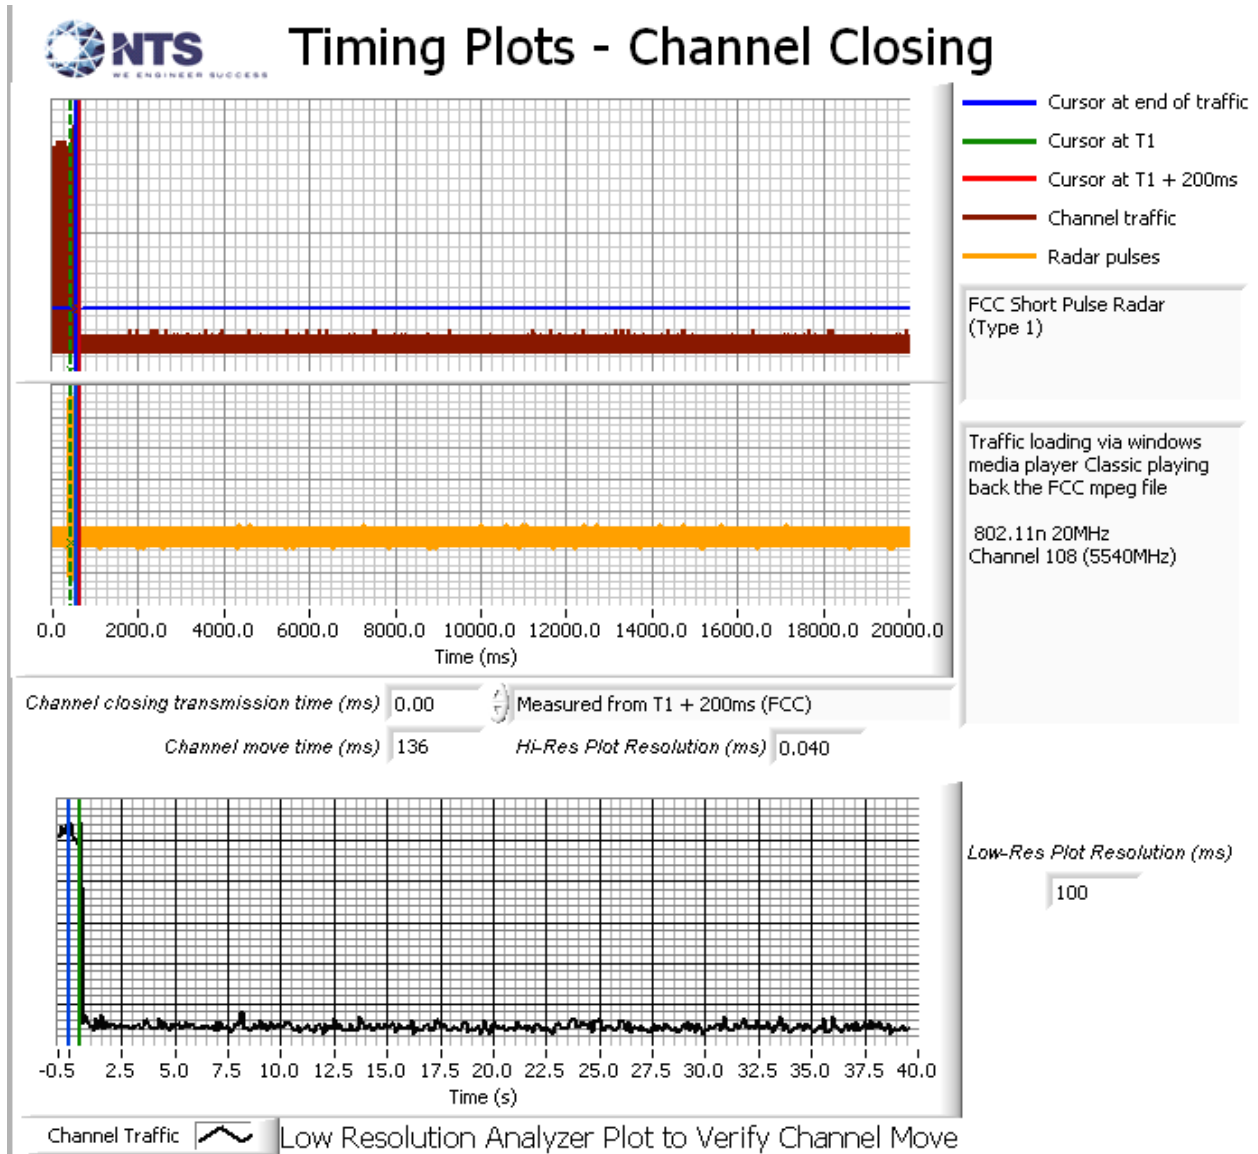


Figure 2 Channel Closing Time and Channel Move Time (20 MHz mode) – 40 second plot

¹ Channel closing time for FCC measurements is the aggregate transmission time starting from 200ms after the end of the radar signal to the completion of the channel move.

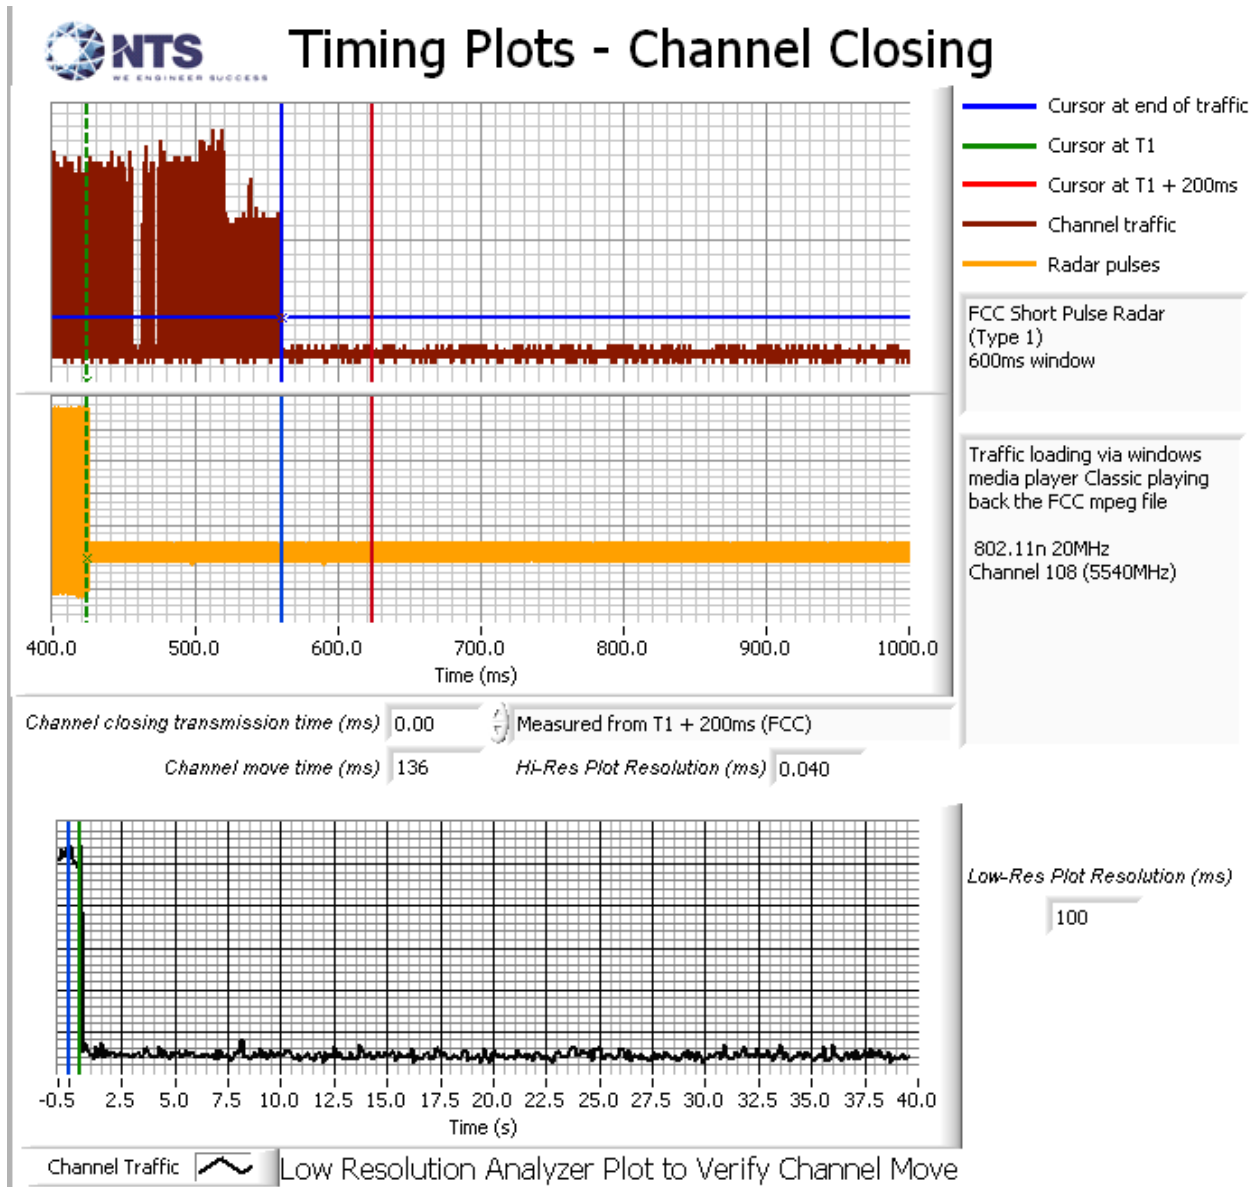


Figure 3 Close-Up of Transmissions Occurring More Than 200ms After The End of Radar (20MHz mode)

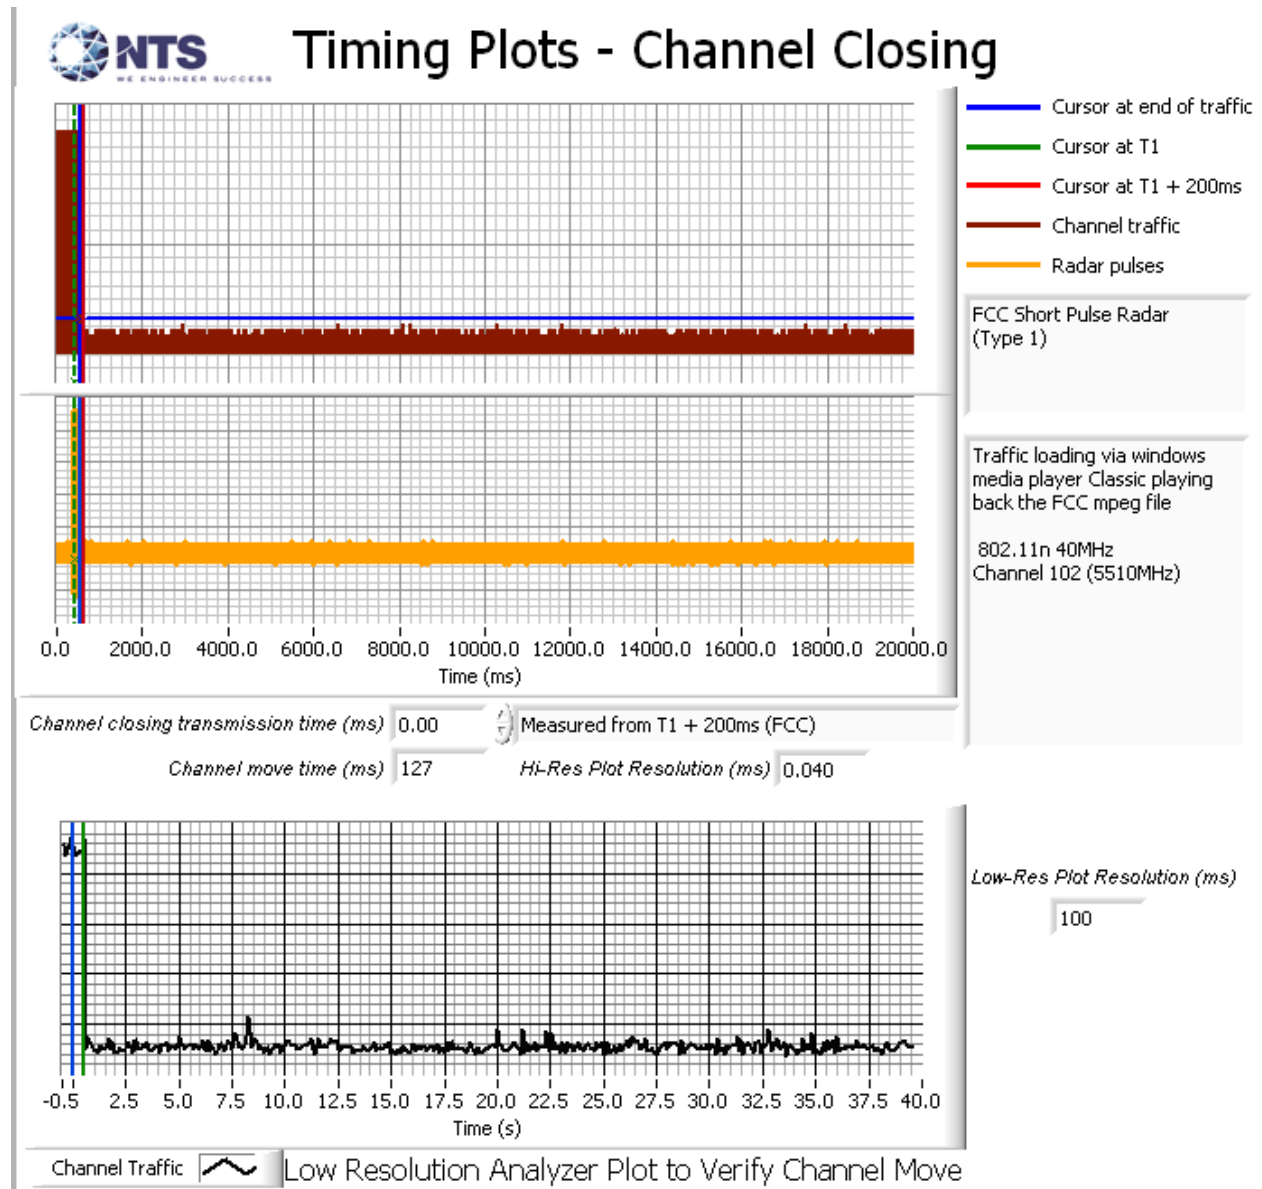


Figure 4 Channel Closing Time and Channel Move Time (40MHz mode) – 40 second plot

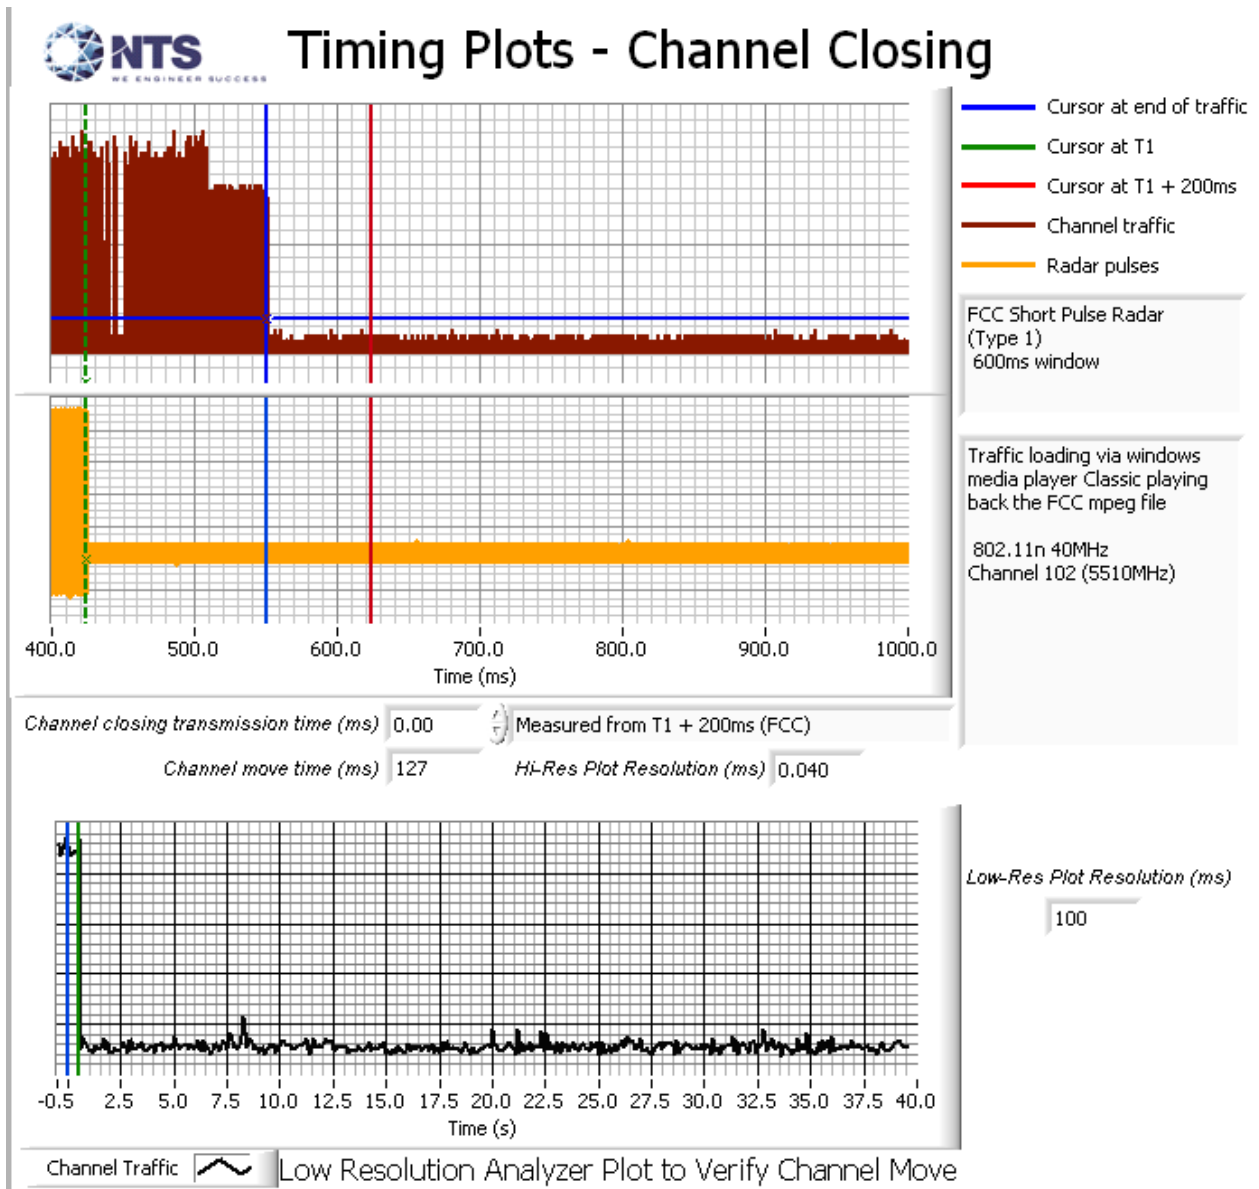


Figure 5 Close-Up of Transmissions Occurring More Than 200ms After The End of Radar (40MHz mode)

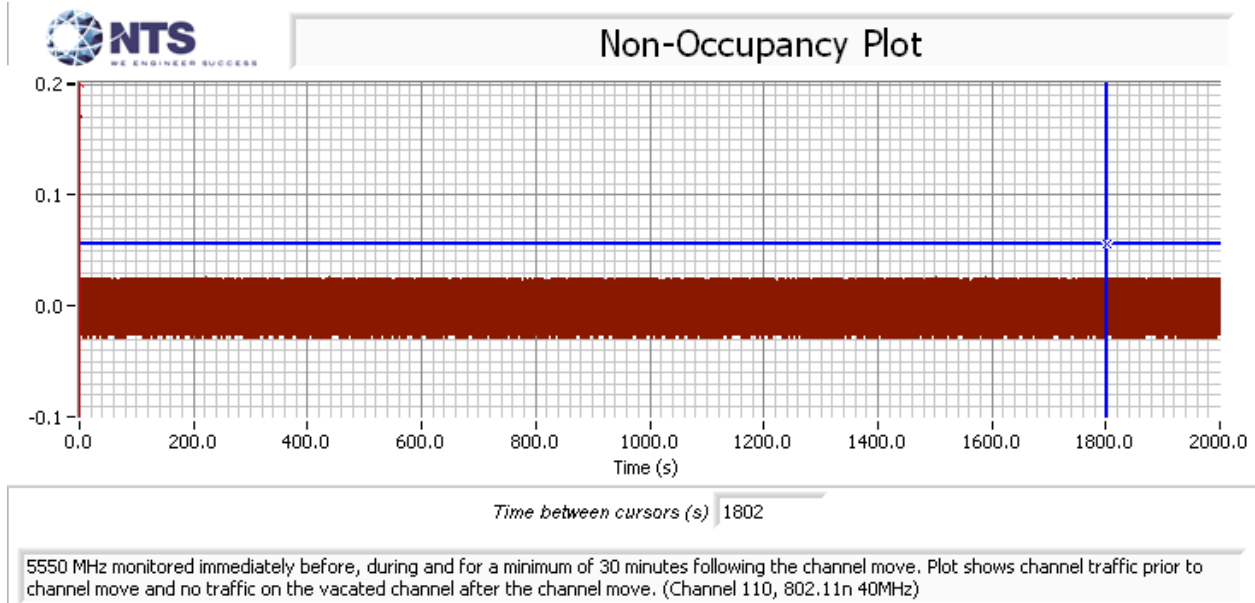


Figure 6 Radar Channel Non-Occupancy Plot (mode)

The non-occupancy plot was made over a 30-minute time period following the channel move time with the analyzer IF output connected to the scope and tuned to the vacated channel. No transmissions were observed on the vacated channel after the channel move had been completed.

Appendix C Test Configuration Photograph(s)

Uploaded as a separate exhibit