

9 OUT-OF-BAND RF CONDUCTED SPURIOUS EMISSION MEASUREMENT

9.1 Standard Applicable

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 4. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Agilent	8564EC	09/23/2006

9.4 Measurement Data


Test Date : Jan. 10, 2006

Temperature : 21°C


Humidity : 70%

Channel	Test Frequency Range	Note	Chart
0	2360 MHz - 2440 MHz	Lower Band Edge	Page 44
78	2443.5 MHz - 2523.5 MHz	Upper Band Edge	Page 45
0	30 MHz - 25 GHz		Page 46
39	30 MHz - 25 GHz		Page 47
78	30 MHz - 25 GHz		Page 48


Note: Please refer to page 44 to page 48 for chart.

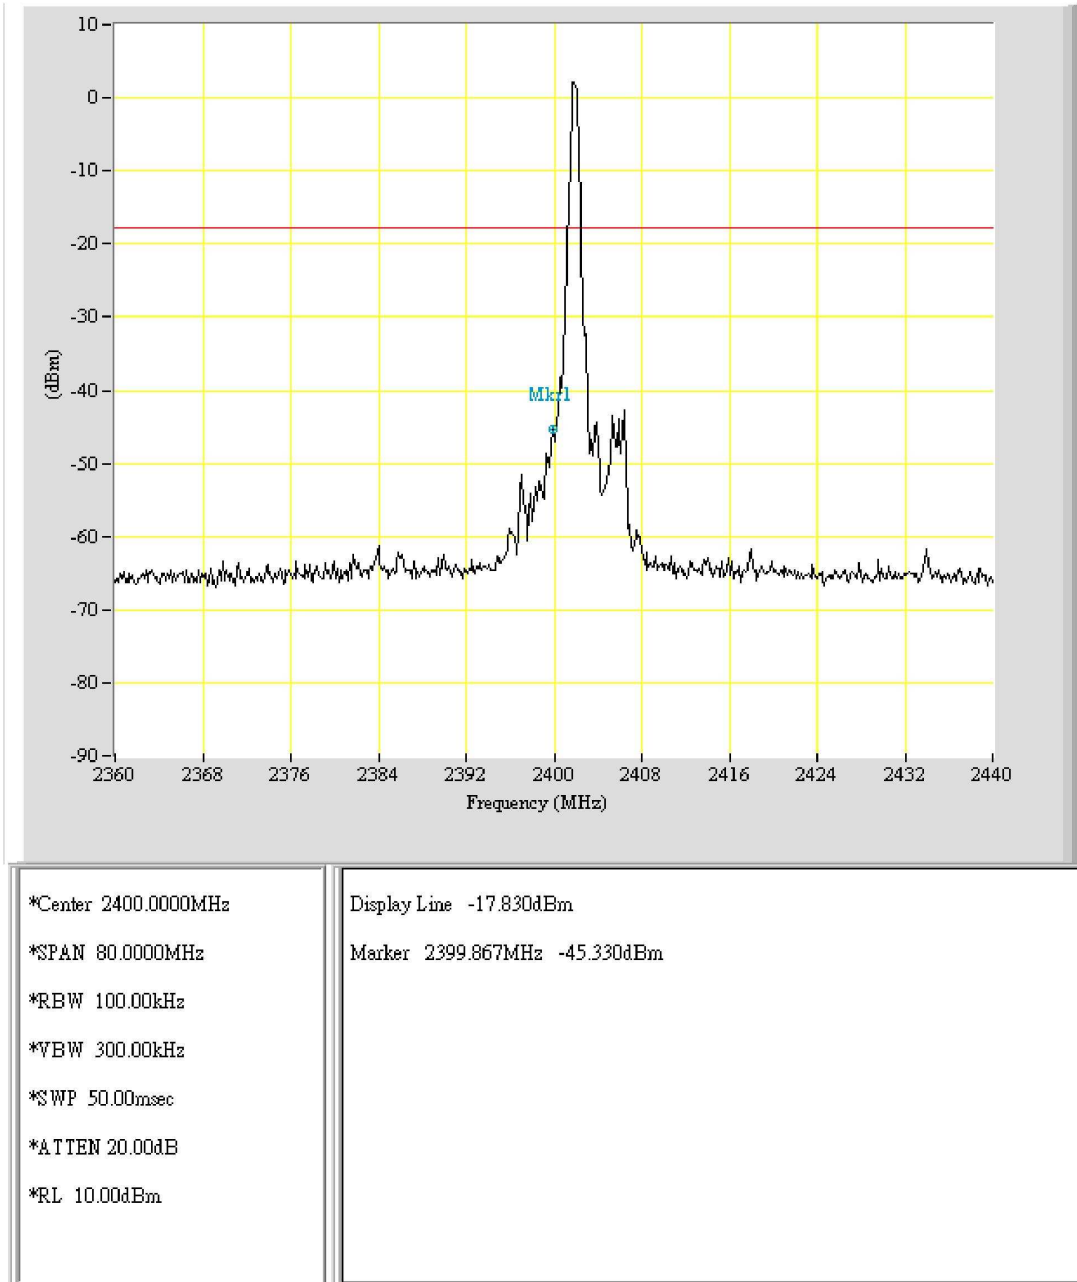


EUT: BLUETOOTH
Purpose: Band_Edge
Condition: CH0
Note:

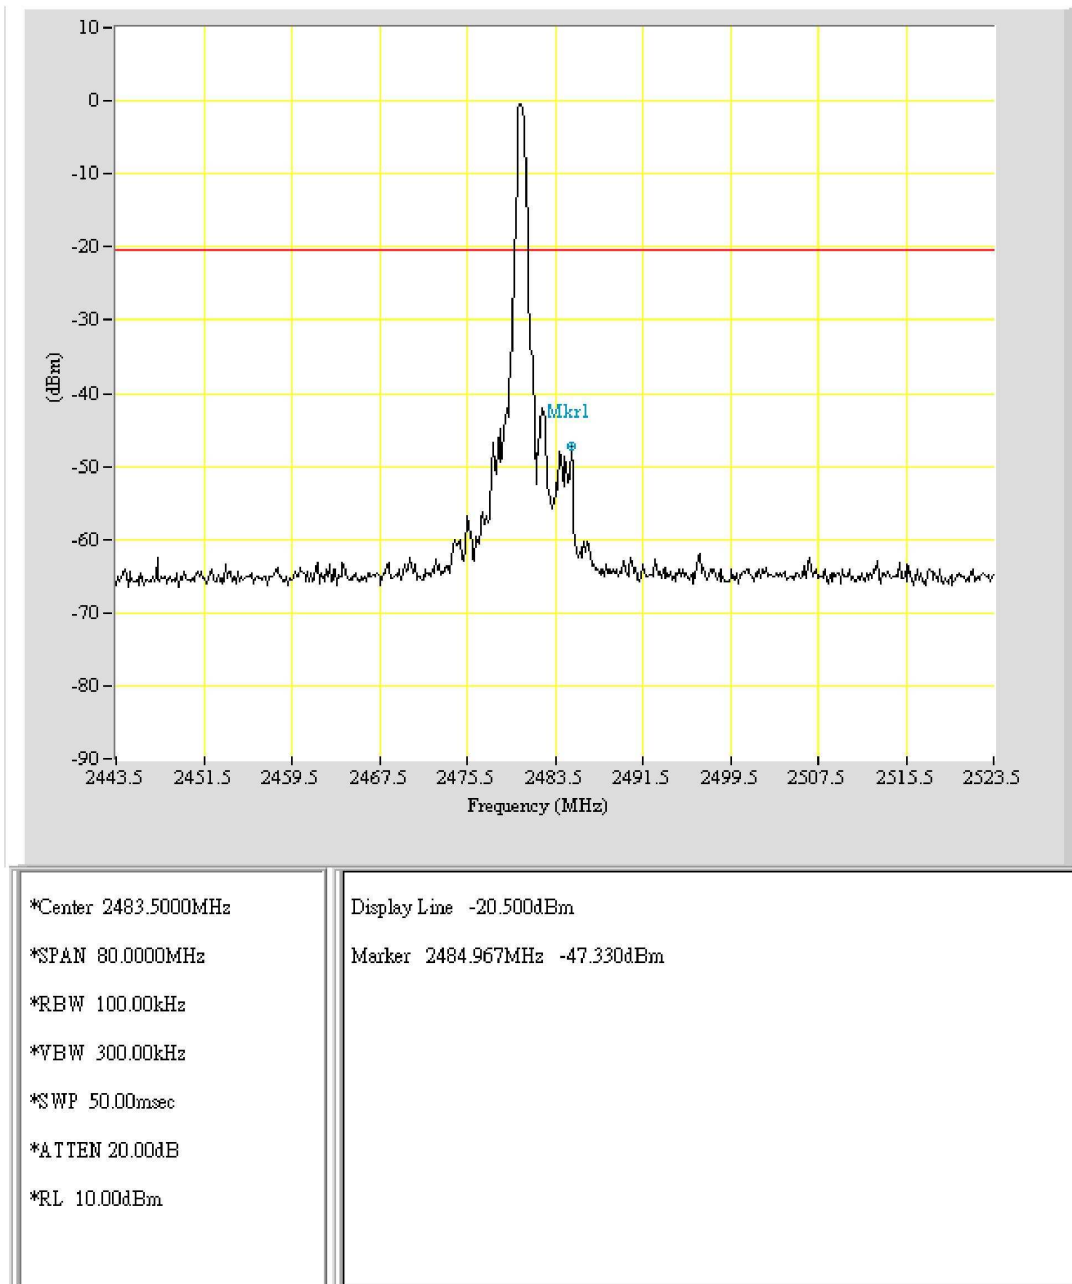


EUT: BLUETOOTH
Purpose: Band_Edge
Condition: CH78
Note:

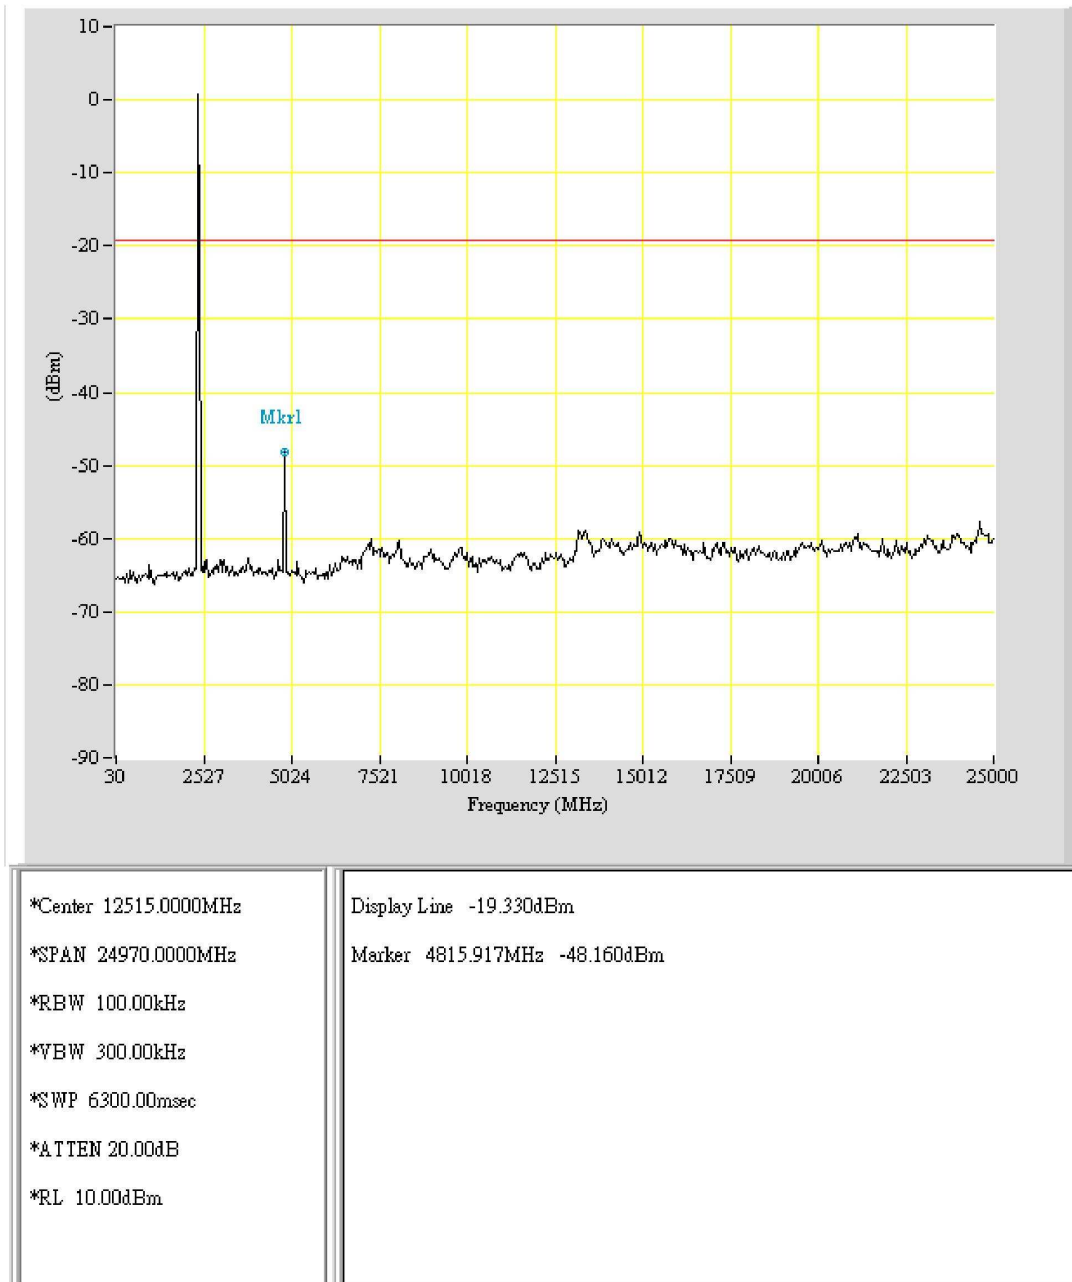

EUT: BLUETOOTH
Purpose: Band_Edge_All
Condition: CH0
Note:

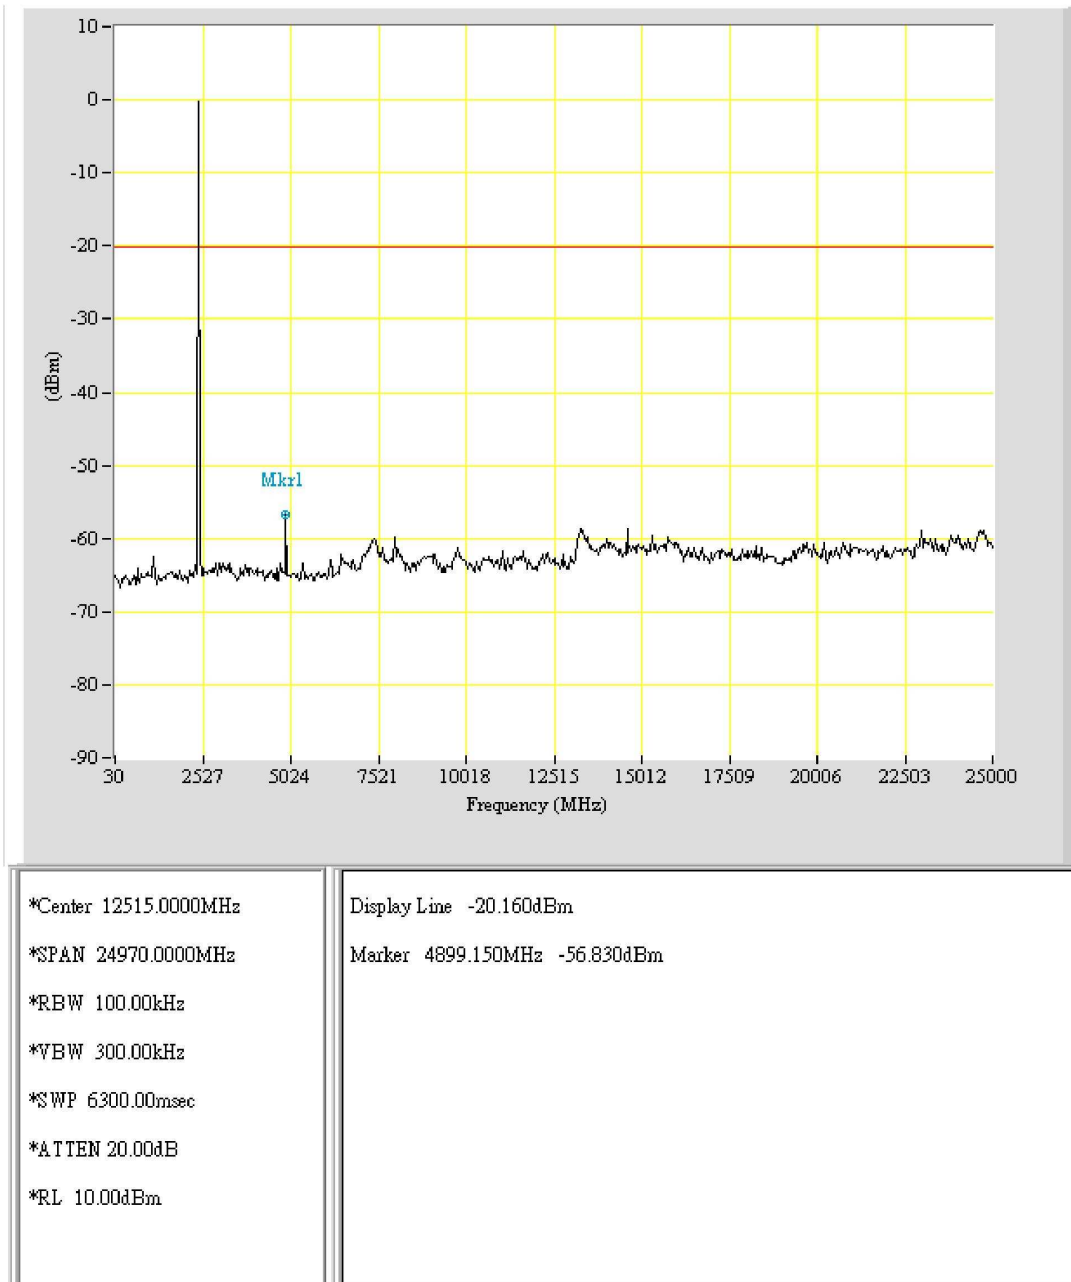

EUT: BLUETOOTH
Purpose: Band_Edge_All
Condition: CH39
Note:

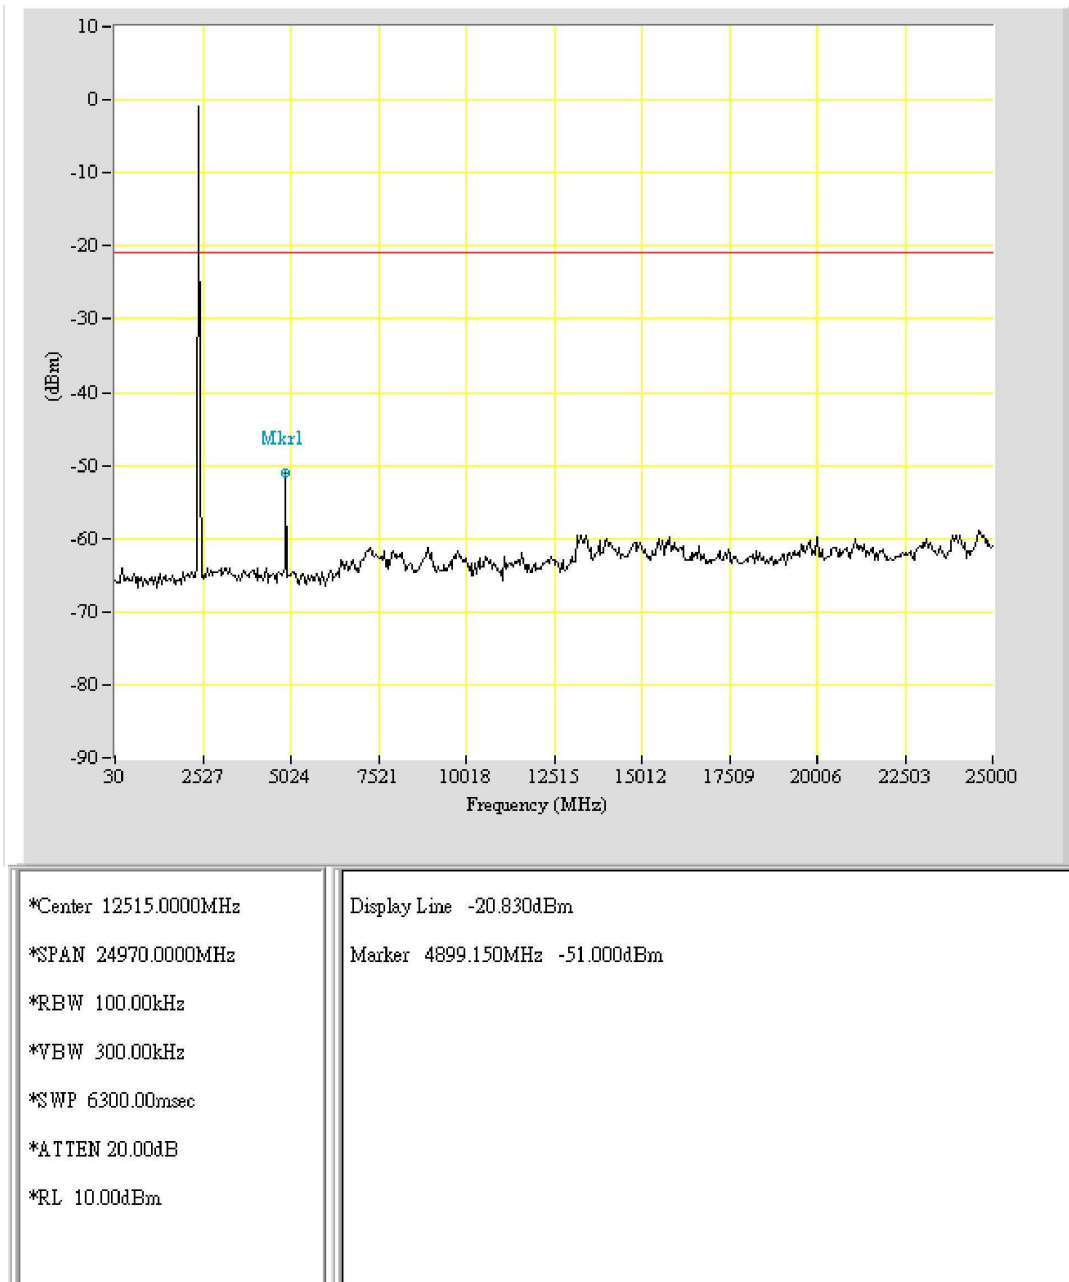

EUT: BLUETOOTH
Purpose: Band_Edge_All
Condition: CH78
Note:

10 NUMBER of HOPPING CHANNELS

10.1 Standard Applicable

According to 15.247(b)(1), for frequency hopping systems, operating in the 2400-2483.5MHz band employing at least 75 hopping channels

10.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 4. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to hopping operating mode and set spectrum analyzer maximum to measure the number of hopping channels.

10.3 Measurement Equipment


Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Agilent	8564EC	09/23/2006

10.4 Measurement Data


Test Date : Jan. 10, 2006 Temperature : 21°C Humidity : 70%

Number of hopping channels = 79 channels


Note: Please refer to page 50 to page 52 for chart.

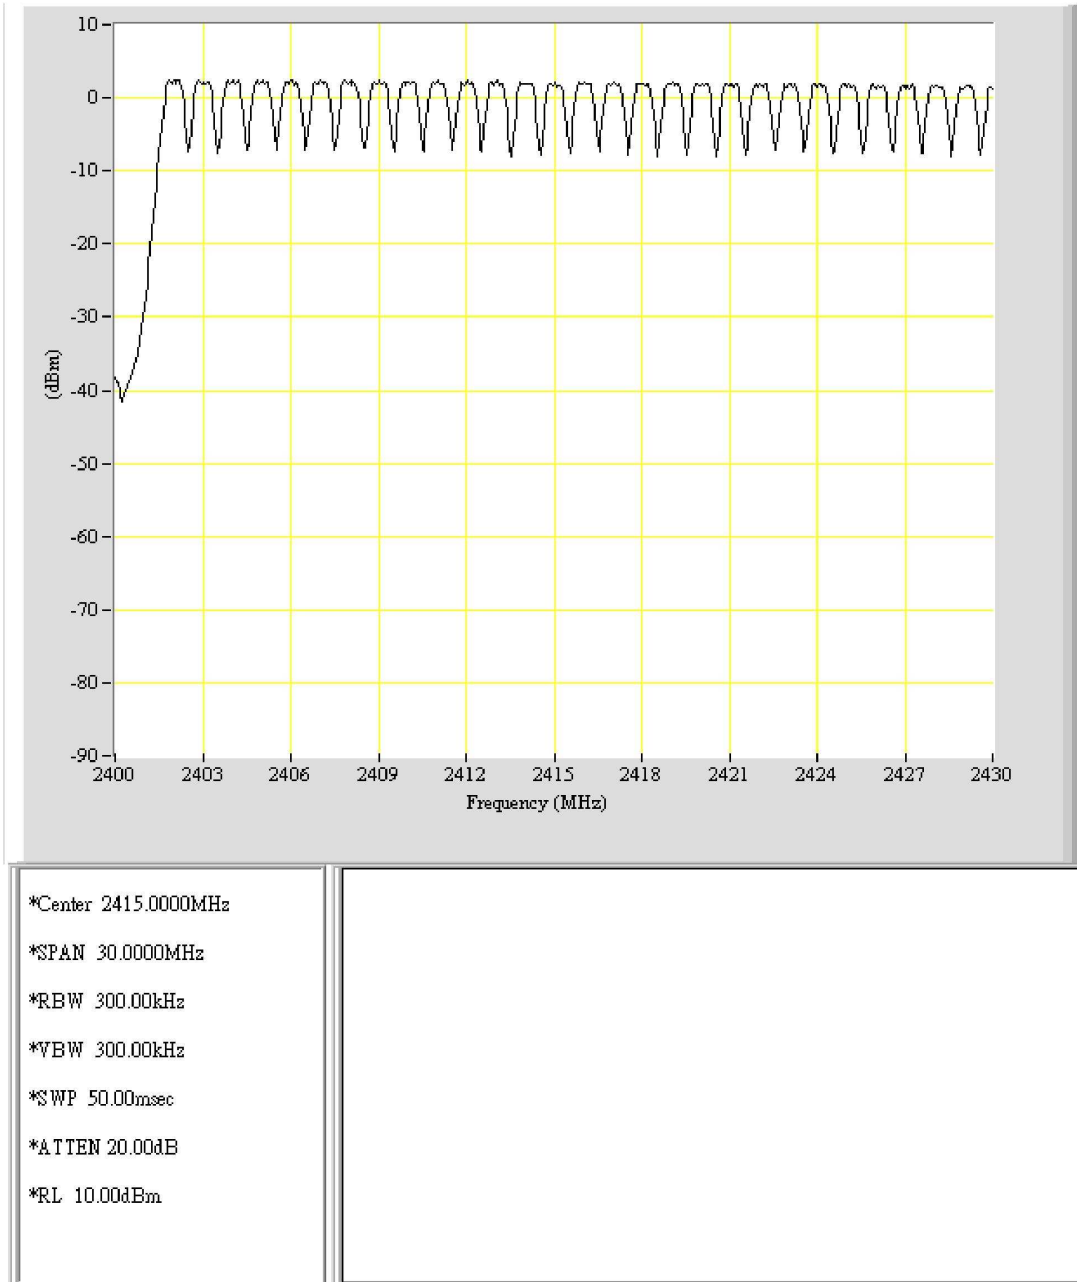

EUT: BLUETOOTH
Purpose: No_of_Channel
Condition: HOPPING_1
Note:

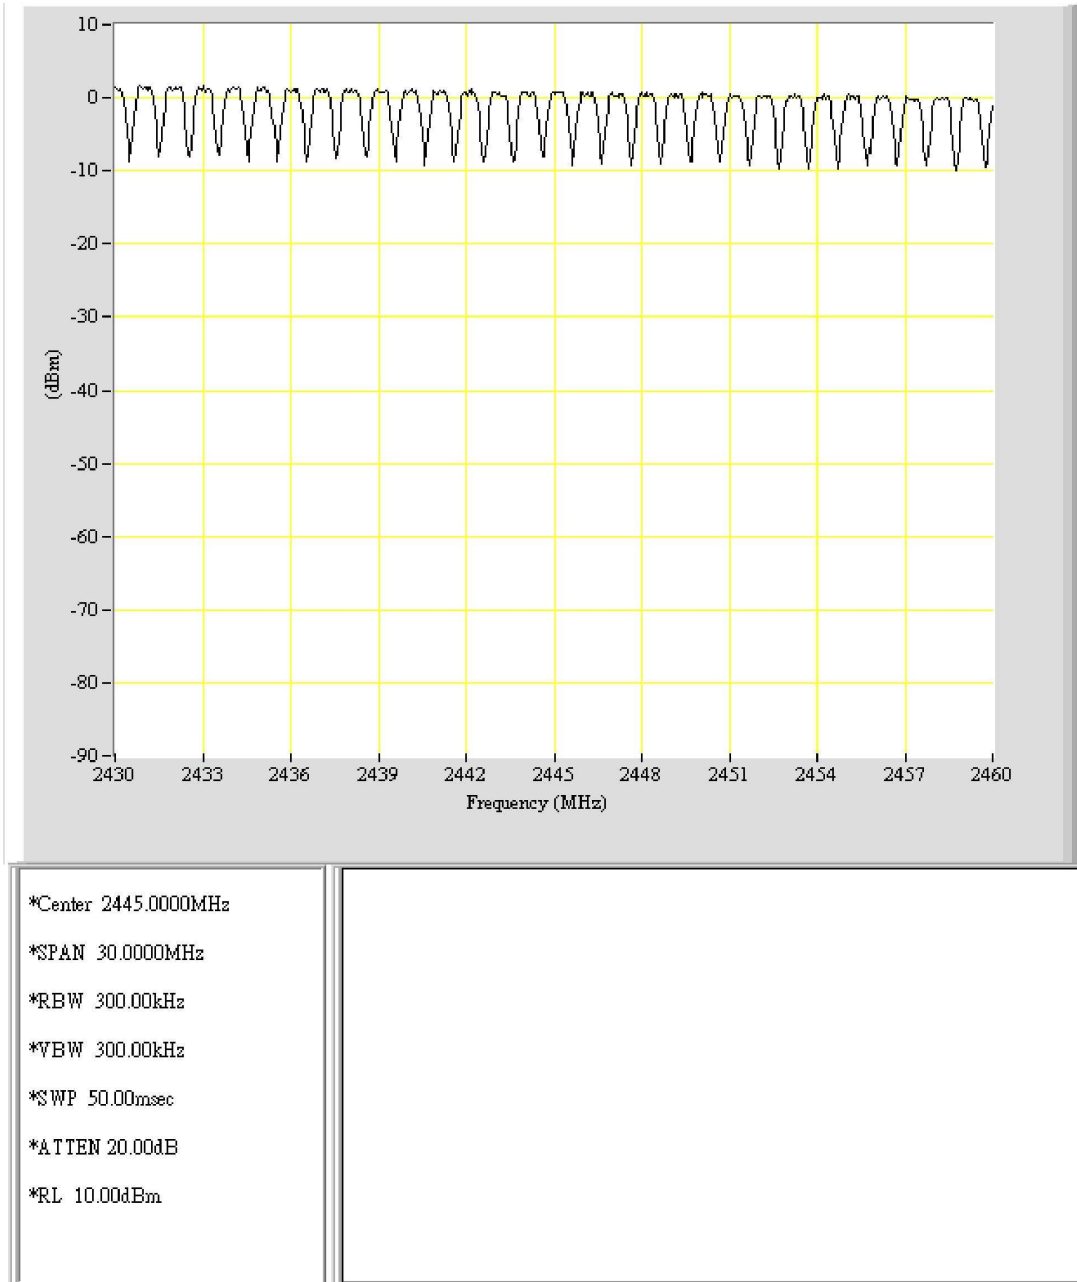

EUT: BLUETOOTH
Purpose: No_of_Channel
Condition: HOPPING_2
Note:

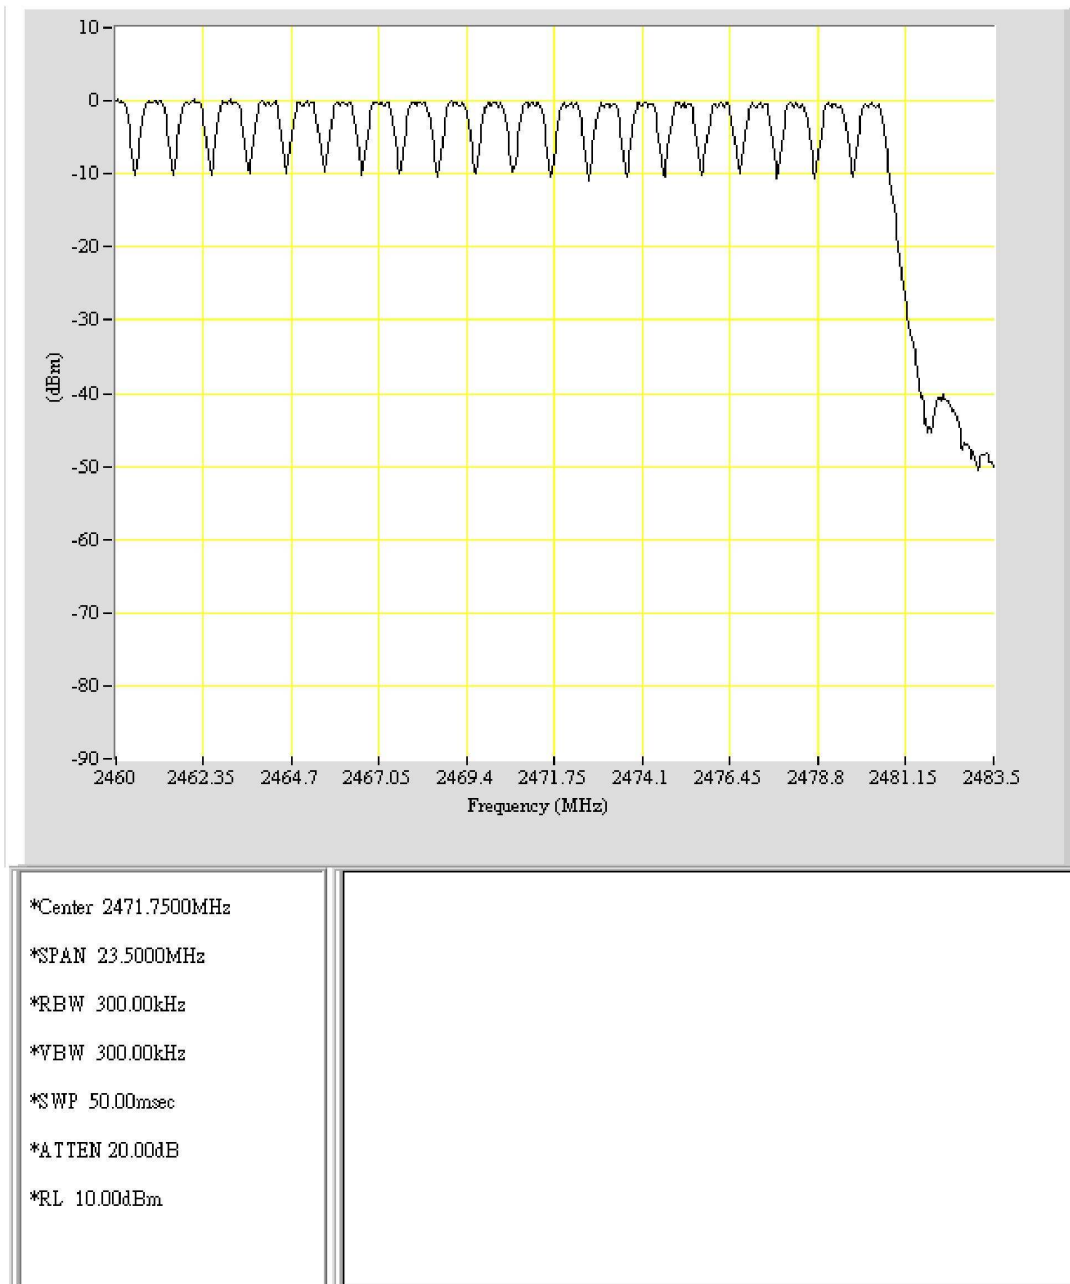

EUT: BLUETOOTH
Purpose: No_of_Channel
Condition: HOPPING_3
Note:

11 HOPPING CHANNEL CARRIER FREQUENCY SEPARATED

11.1 Standard Applicable

According to 15.247(a)(1), the frequency hopping system shall have hopping channel carrier frequencies separated by minimum of 25kHz or the 20dB bandwidth of hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 4. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any measurement frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set spectrum analyzer maximum hold to measure channel carrier frequency , then adjust channel carrier frequency to adjacent channel.
4. Repeat above procedure until all measured frequencies were complete.

11.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Agilent	8564EC	09/23/2006

11.4 Measurement Data


Test Date : Jan. 10, 2006

Temperature : 21°C

Humidity : 70%


Channel	Frequency (MHz)	Hopping Channel Carrier Frequency Separated (MHz)	Chart
0	2402	1	Page 55
39	2441	1	Page 56
78	2480	1	Page 57

Note: Please refer to page 55 to page 57 for chart.

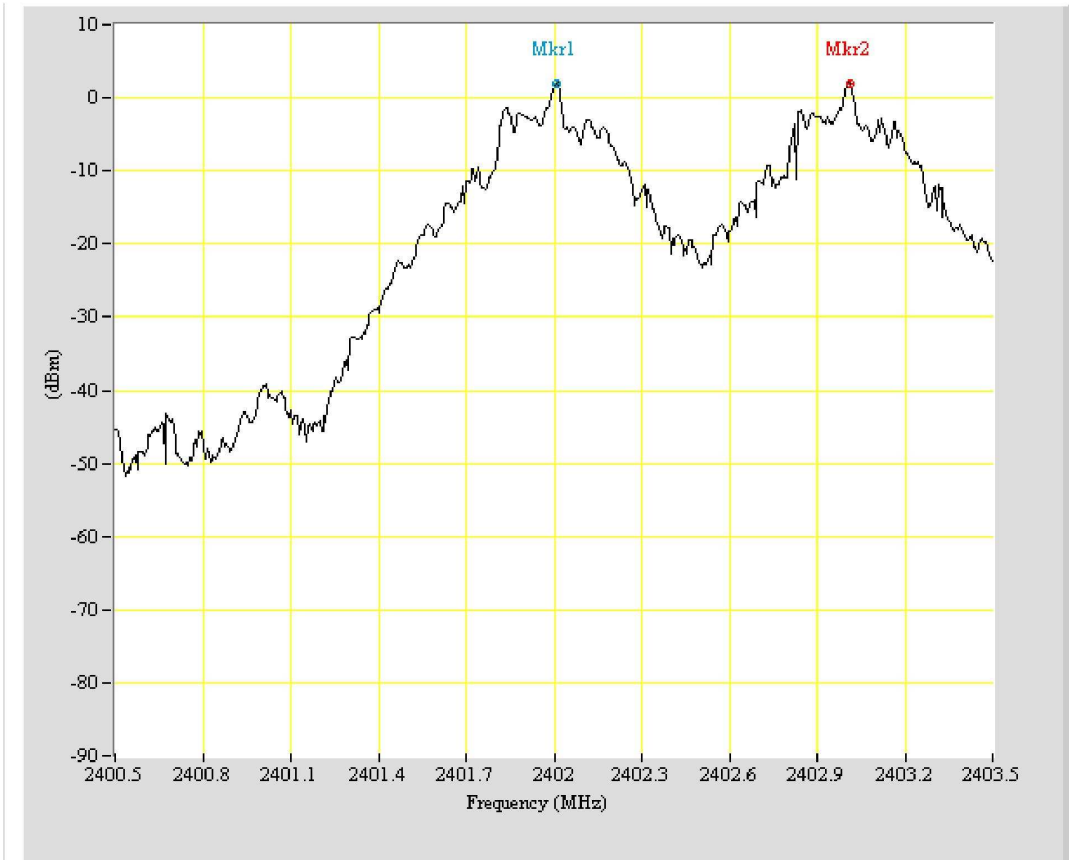


*Center 2402.0000MHz	Δ Marker -1.0000MHz 0.000dB
*SPAN 3.0000MHz	Mkr1 2402.010MHz 2.000dBm
*RBW 30.00kHz	Mkr2 2403.010MHz 2.000dBm
*VBW 30.00kHz	
*SWP 50.00msec	
*ATTEN 20.00dB	
*RL 10.00dBm	

EUT: BLUETOOTH
Purpose: Channel_Seperation
Condition: CH0
Note:

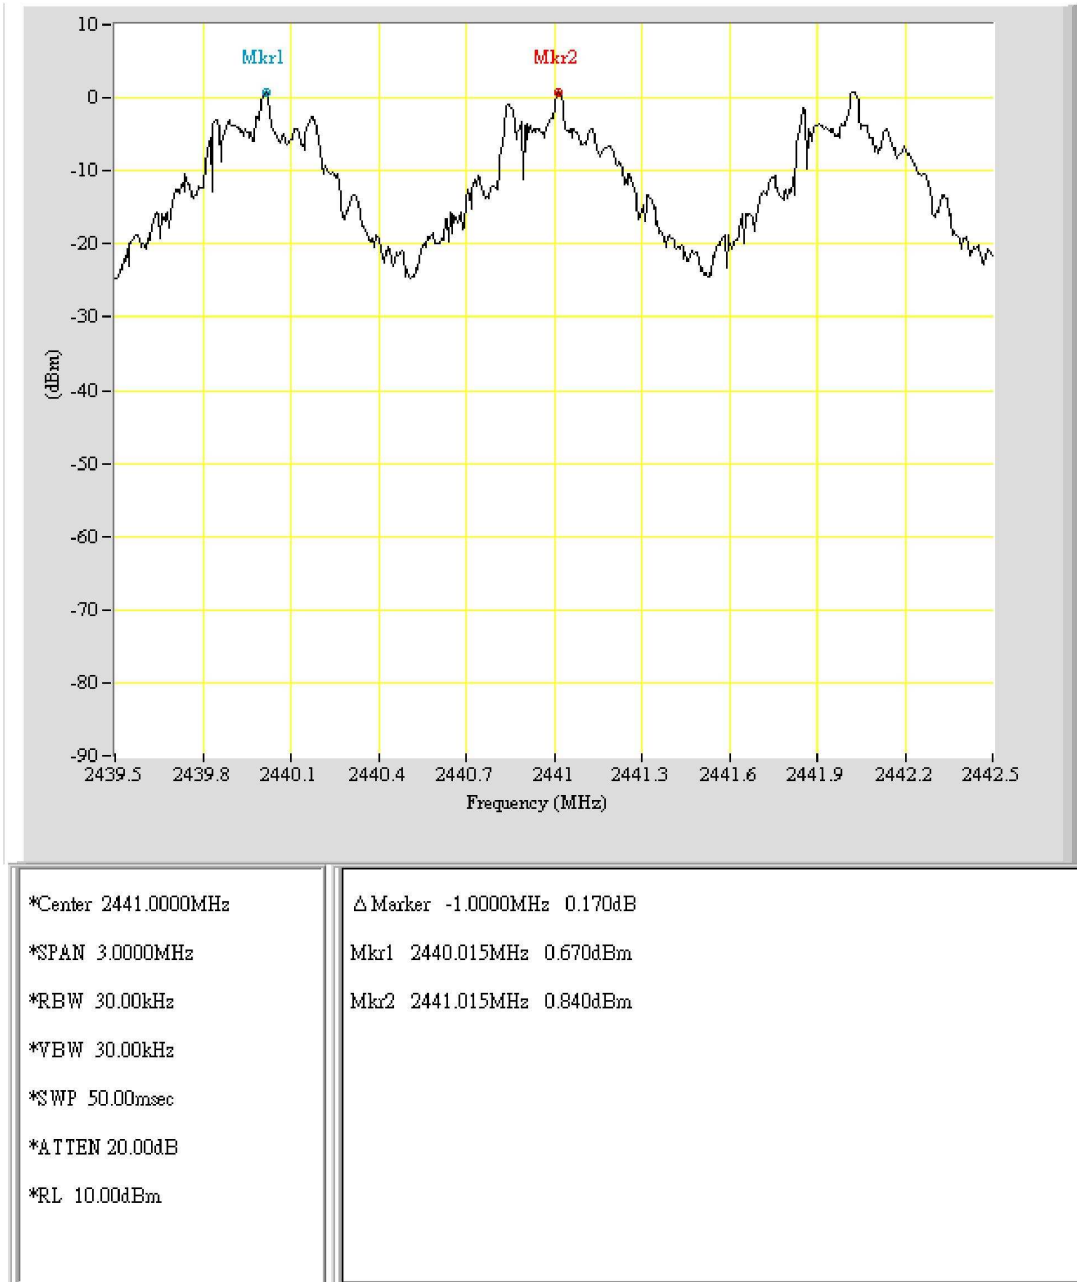

EUT: BLUETOOTH
Purpose: Channel_Separation
Condition: CH39
Note:

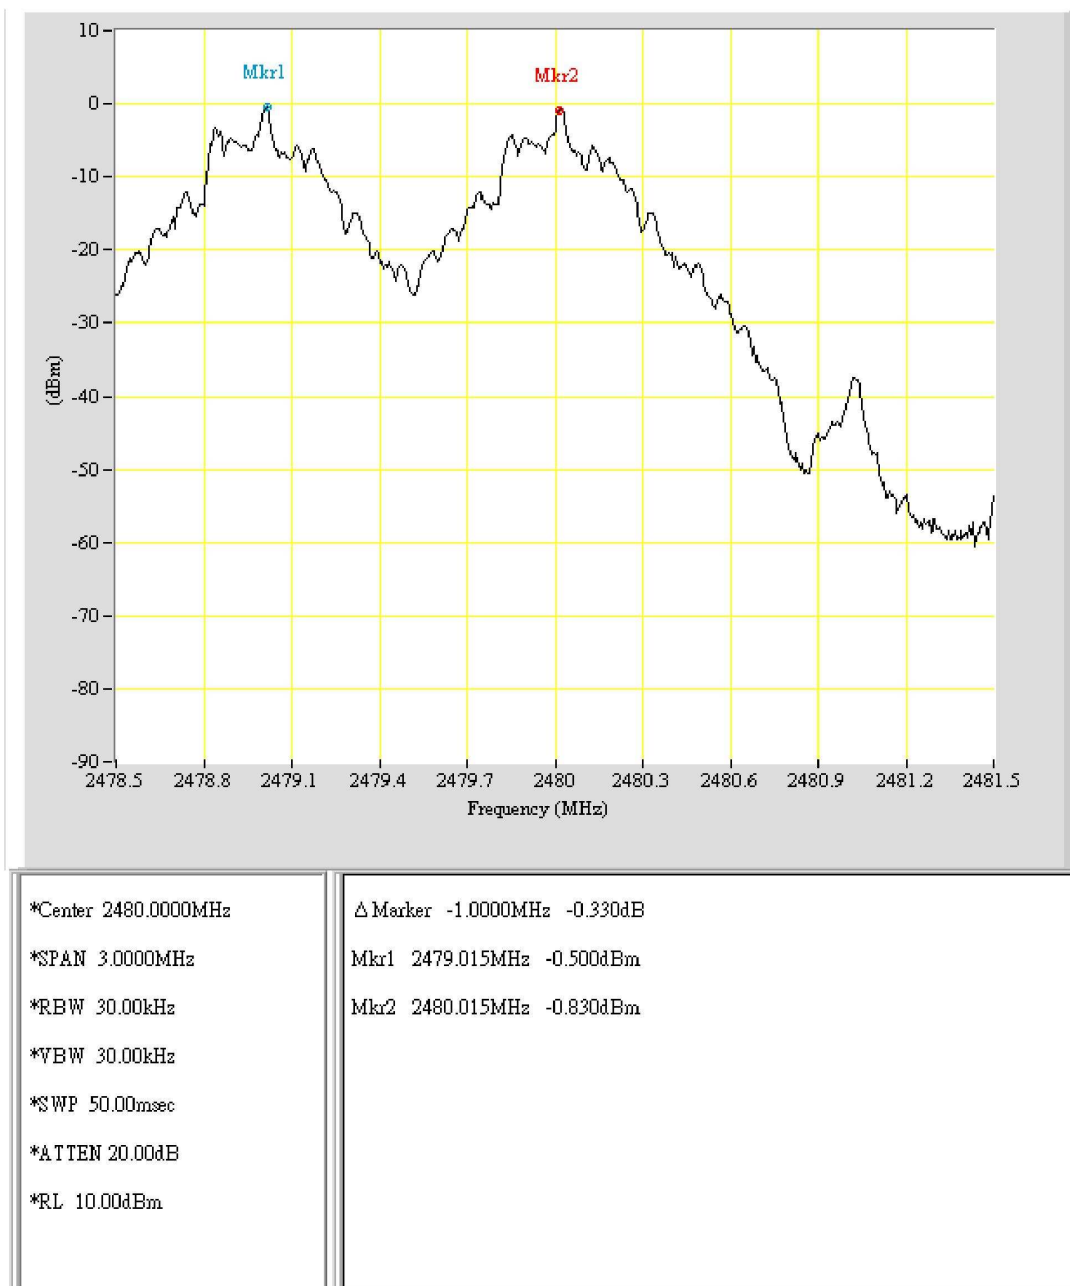

EUT: BLUETOOTH
Purpose: Channel_Separation
Condition: CH78
Note: