



FCC RADIO TEST REPORT

FCC ID : PKRISGFW3000
Equipment : Outdoor Fixed CPE
Brand Name : Inseego
Model Name : FW3000
Marketing Name : FW3000
Applicant : Inseego Corp.
9710 Scranton Road Suite 200, San Diego,, CA 92121
Manufacturer : Inseego Corp.
9710 Scranton Road Suite 200, San Diego,, CA 92121
Standard : FCC 47 CFR Part 2, 96

The product was received on Jul. 01, 2023 and testing was performed from Sep. 07, 2023 to Oct. 04, 2023. We, Sporton International (USA) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International (USA) Inc., the test report shall not be reproduced except in full.

Approved by: Abi Lin

Sporton International (USA) Inc.
1175 Montague Expressway, Milpitas, CA 95035



Table of Contents

| | |
|---|-----------|
| History of this test report..... | 3 |
| Summary of Test Result..... | 4 |
| 1 General Description | 5 |
| 1.1 Product Feature of Equipment Under Test | 5 |
| 1.2 Modification of EUT | 5 |
| 1.3 Testing Location | 6 |
| 1.4 Applied Standards | 6 |
| 2 Test Configuration of Equipment Under Test | 7 |
| 2.1 Test Mode..... | 7 |
| 2.2 Connection Diagram of Test System | 8 |
| 2.3 Support Unit used in test configuration | 9 |
| 2.4 Measurement Results Explanation Example | 9 |
| 2.5 Frequency List of Low/Middle/High Channels..... | 10 |
| 3 Conducted Test Items..... | 11 |
| 3.1 Measuring Instruments..... | 11 |
| 3.2 Conducted Output Power | 12 |
| 3.3 Peak-to-Average Ratio | 13 |
| 3.4 EIRP | 14 |
| 3.5 Occupied Bandwidth | 15 |
| 3.6 Conducted Band Edge | 16 |
| 3.7 Conducted Spurious Emission | 17 |
| 3.8 Frequency Stability..... | 18 |
| 4 Radiated Test Items | 19 |
| 4.1 Measuring Instruments..... | 19 |
| 4.2 Test Setup | 19 |
| 4.3 Test Result of Radiated Test..... | 20 |
| 4.4 Radiated Spurious Emission | 21 |
| 5 List of Measuring Equipment..... | 22 |
| 6 Measurement Uncertainty | 23 |
| Appendix A. Test Results of Conducted Test | |
| Appendix B. Test Results of Radiated Test | |
| Appendix C. Test Setup Photographs | |



Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items | Result (PASS/FAIL) | Remark |
|---------------|-------------------|---|--------------------|---|
| 3.2 | §2.1046 | Conducted Output Power | Reporting only | - |
| 3.3 | §96.41 | Peak-to-Average Ratio | Pass | - |
| 3.4 | §96.41 | Effective Isotropic Radiated Power | Pass | - |
| 3.5 | §2.1049 §96.41 | Occupied Bandwidth | Reporting only | - |
| 3.6 | §2.1051 §96.41 | Conducted Band Edge Measurement | Pass | - |
| 3.7 | §2.1051 §96.41 | Conducted Spurious Emission | Pass | - |
| 3.8 | §2.1055 | Frequency Stability for Temperature & Voltage | Pass | - |
| 4.4 | §2.1051 §96.41 | Radiated Spurious Emission | Pass | 6.99 dB under the limit at 10820.00 MHz |

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Product Feature of Equipment Under Test

| Product Feature | |
|--|--|
| General Specs 4G-LTE, 5G-FR1, Bluetooth-LE, and GNSS. | |
| Antenna Type WWAN: Fixed Internal Antenna Bluetooth-LE: Fixed Internal Antenna GPS / Glonass / BDS / Galileo: Fixed Internal Antenna | |

| Support Band and Evaluated Information | |
|--|-----|
| Supported Band | n48 |
| Evaluated and Tested Band | n48 |

| TDD Band Power Class | | | | | |
|----------------------|-----|-----|----------|----------|------------|
| | PC3 | PC2 | PC3 MIMO | PC2 MIMO | PC1.5 MIMO |
| n48 | V | | V | | |

| Antenna Information | | | | | | | | |
|---------------------|------|------|------|------|-------|-------|-------------|------------------|
| Band | Ant0 | Ant1 | Ant4 | Ant6 | Ant12 | Ant13 | Main Ant. # | Secondary Ant. # |
| n48 | | | 10.1 | 9.4 | | | 4 | 6 |

Remark: The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

| | | |
|------------------------------|---|-----------|
| Test Site | Sporton International (USA) Inc. | |
| Test Site Location | 1175 Montague Expressway, Milpitas, CA 95035 TEL : 408 9043300 | |
| Test Site No. | Sporton Site No. | |
| | TH01-CA | 03CH01-CA |
| Test Engineer | Venkata Kondepudi | Fu Chen |
| Temperature (°C) | 20~20.7 | 19.2~23.8 |
| Relative Humidity (%) | 52.8~56 | 39.1~47.1 |

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: US1250

1.4 Applied Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS Eqpt v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (POE Adapter), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report..

| Modulation Type | Modulation | Modulation Type | Modulation |
|-----------------|----------------------|-----------------|----------------|
| A | DFT-s-OFDM pi/2 BPSK | N/A | N/A |
| B | DFT-s-OFDM QPSK | F | CP-OFDM QPSK |
| C | DFT-s-OFDM 16QAM | G | CP-OFDM 16QAM |
| D | DFT-s-OFDM 64QAM | H | CP-OFDM 64QAM |
| E | DFT-s-OFDM 256QAM | I | CP-OFDM 256QAM |

<SISO Mode>

| Test Item | Modulation Type | Bandwidth | RB Size | Channel |
|--------------------------|------------------|---------------------|-------------------------|---------|
| Conducted Power | A, B, C, D, E | All | 1, Half, Full | L, M, H |
| EIRP | A, B, C, D, E | All | 1, Half, Full | L, M, H |
| PAR | A, B, C, D, E | 20 MHz or less | Outer_Full | M |
| Bandwidth | A, F, G, H, I | All | Outer_Full | M |
| Mask (Part 96) (RSS-192) | A, B, C, D, E, F | All | Outer_1RB Outer_Full | L, M, H |
| CSE | B | All | Inner_1RB | L, M, H |
| Frequency Stability | B | 20 MHz or less | Outer_Full | M |
| RSE | B | 40MHz (max of EIRP) | Inner_1RB | L, M, H |

Remark:

1. Evaluated all the transmitter signal and reporting worst-case configuration among all modulation types.
2. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst-case emissions are reported.


<MIMO Mode>

| Test Item | Modulation Type | Bandwidth | RB Size | Channel |
|--------------------------------|-----------------|------------------------|-------------------------|---------|
| Conducted Power | F, G, H, I | All | 1, Half, Full | L, M, H |
| EIRP | F, G, H, I | All | 1, Half, Full | L, M, H |
| Bandwidth | F, G, H, I | All | Outer_Full | M |
| Mask (Part 96) (RSS-192) | F, G, H, I | All | Outer_1RB Outer_Full | L, M, H |
| CSE | F | All | Inner_1RB | L, M, H |
| Frequency Stability | F | 20 MHz or less | Outer_Full | M |
| RSE | F | 40MHz (max of EIRP) | Inner_1RB | L, M, H |

Remark:

1. Evaluated all the transmitter signal and reporting worst-case configuration among all modulation types.
2. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst-case emissions are reported.

2.2 Connection Diagram of Test System

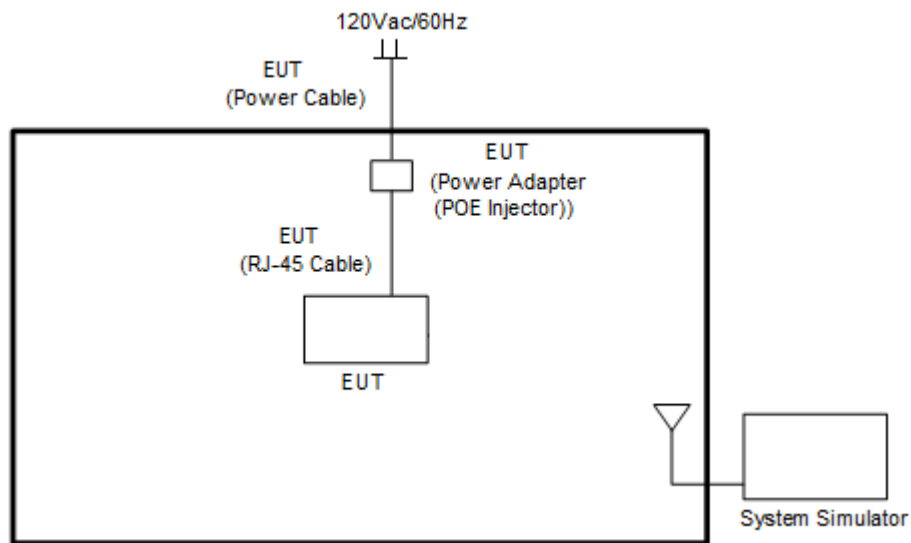



2.3 Support Unit used in test configuration

| Item | Equipment | Brand Name | Model No. | FCC ID | Data Cable | Power Cord |
|------|------------------|------------|-----------|--------|------------|-------------------|
| 1. | System Simulator | Anritsu | MT8000A | N/A | N/A | Unshielded, 1.8 m |
| 2. | System Simulator | Anritsu | MT8821C | N/A | N/A | Unshielded, 1.8 m |

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

| 5G NR n48 Channel and Frequency List | | | | |
|--------------------------------------|------------------------|---------|---------|---------|
| BW [MHz] | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 40 | Channel | 638000 | 641666 | 645332 |
| | Frequency | 3570 | 3624.99 | 3679.98 |
| 30 | Channel | 637668 | 641666 | 645666 |
| | Frequency | 3565.02 | 3624.99 | 3684.99 |
| 20 | Channel | 637334 | 641666 | 646000 |
| | Frequency | 3560.01 | 3624.99 | 3690 |
| 10 | Channel | 637000 | 641666 | 646332 |
| | Frequency | 3555 | 3624.99 | 3694.98 |


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

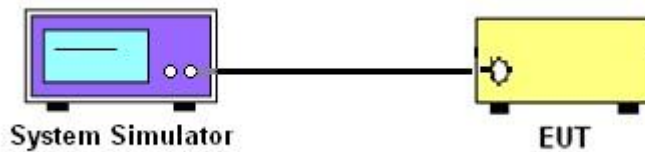

3.1.3 EIRP, Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

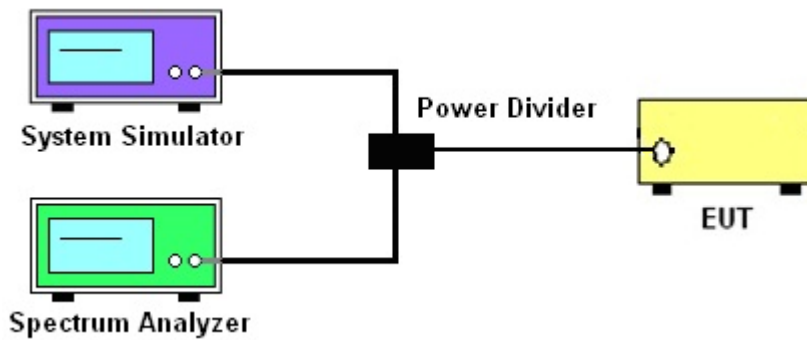

3.1.4 Frequency Stability

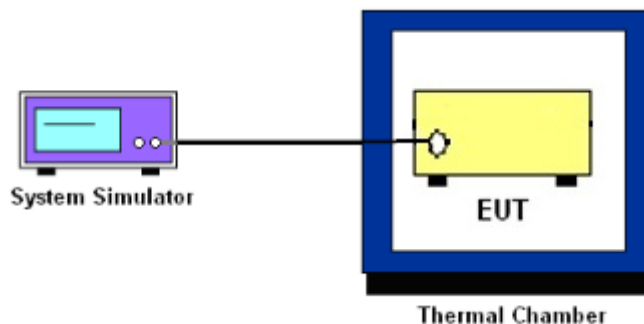

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power

3.2.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio

3.4 EIRP

3.4.1 Description of the EIRP Measurement

The EIRP of mobile transmitters must not exceed 47 dBm /10 megahertz for 5G NR n48.

The testing follows ANSI C63.26-2015 Section 5.2.5.5

According to KDB 412172 D01 Power Approach,

EIRP = PT + GT – LC, where

PT = transmitter output power in dBm

GT = gain of the transmitting antenna in dBi

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

| Device | Maximum EIRP (dBm/10 MHz) | Maximum PSD (dBm/MHz) |
|-----------------|------------------------------|--------------------------|
| Category B CBSD | 47 | 37 |

Remark:

1. Total channel power is complied with EIRP limit 47dBm/10MHz.
2. For MIMO mode, the directional gain calculation is following F)2)d) of KDB 662911 D01 v02r01.

d) *Unequal antenna gains, with equal transmit powers.* For antenna gains given by G_1, G_2, \dots, G_N dBi

(ii) If all transmit signals are *completely uncorrelated*, then

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10})/N_{ANT}] \text{ dBi}$$

| | | | MIMO Mode |
|------------|-------|-------|--------------|
| | | | Uncorrelated |
| 5G NR | Ant 4 | Ant 6 | NSS = 2 |
| n48 | (dBi) | (dBi) | (dBi) |
| Ant. 4 + 6 | 10.10 | 9.40 | 9.77 |

Directional gain for Ant. 4+6 uncorrelated of MIMO mode derived from formula which is

$$10 \times \log \{ [10^{(10.1 \text{ dBi} / 10)} + 10^{(9.4 \text{ dBi} / 10)}] / 2 \}$$

$$= 9.77 \text{ dBi}$$

3.4.2 Test Procedures

The testing follows procedure in Section 5.2 of ANSI C63.26-2015 and KDB 940660 D01 Part 96 CBRS Eqpt v03 Section 3.2(b)(2)

Determine the EIRP by adding the effective antenna gain to the measured average conducted power level.



3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

The occupied bandwidth shall not exceed the equipment's channel bandwidth, which is declared by the manufacturer.

3.5.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the "-26 dB down amplitude" as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "-X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.6 Conducted Band Edge

3.6.1 Description of Conducted Band Edge Measurement

The conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz. Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. For MIMO mode, add additional MIMO factor $10\log(\text{NTX}=2) = 3.01\text{dB}$ into the spectrum analyzer offset.

For Adjacent Channel Leakage Ratio (ACLR) measurement,

1. The Adjacent Channel Leakage Ratio (ACLR) is the ratio of the average power in the assigned aggregated channel bandwidth to the average power over the equivalent adjacent channel bandwidth.
2. The option ACLR of spectrum analyzer is used and measures the ACLR ratio by setting equivalent channel bandwidth.
3. The measured ACLR ratio shall be at least 30 dB.



3.7 Conducted Spurious Emission

3.7.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is -40dBm/MHz.
10. For MIMO mode, add additional MIMO factor $10\log(\text{NTX}=2) = 3.01\text{dB}$ into the spectrum analyzer offset.



3.8 Frequency Stability

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


For radiated emissions below 30MHz

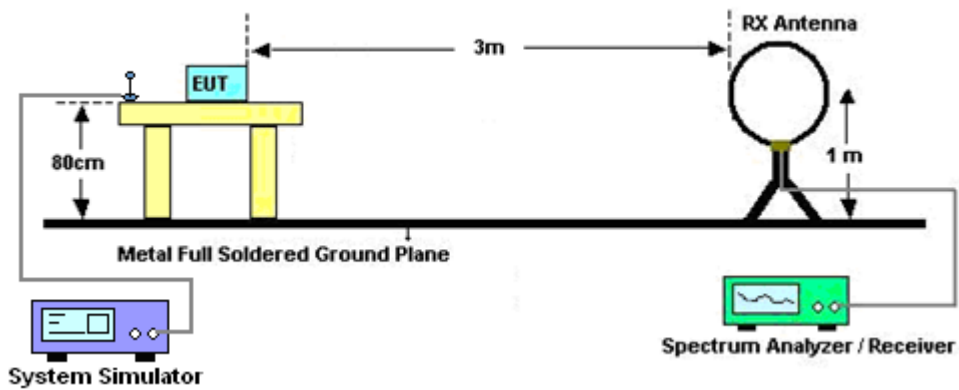


For radiated emissions from 30MHz to 1GHz

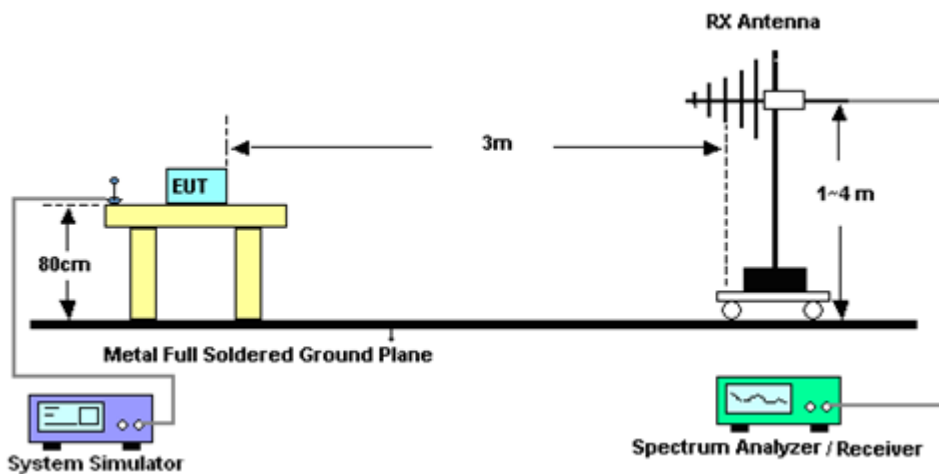

For radiated test from 1GHz to 18GHz

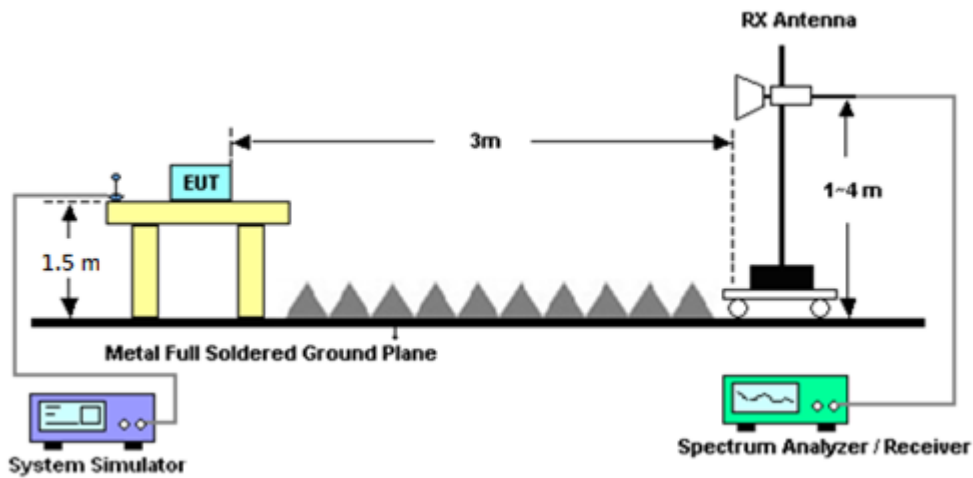

For radiated test above 18GHz

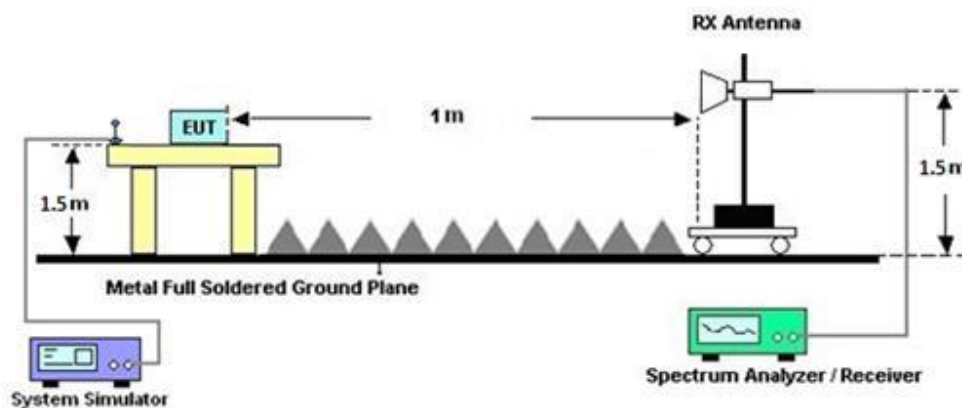

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz .
The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
ERP (dBm) = EIRP - 2.15
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
The limit line is -40dBm/MHz



5 List of Measuring Equipment

| Instrument | Brand Name | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|----------------------------------|-----------------|--------------------------------------|--------------------------------------|-----------------------------------|------------------|---------------------------------|---------------|--------------------------|
| Hygrometer | Testo | 608-H1 | 45141354 | N/A | Jul. 26, 2023 | Sep. 27, 2023~ Sep. 28, 2023 | Jul. 25, 2024 | Conducted (TH01-CA) |
| Spectrum Analyzer | Rohde & Schwarz | FSV40 | 101089 | 10Hz-40GHz | May 22, 2023 | Sep. 27, 2023~ Sep. 28, 2023 | May 21, 2024 | Conducted (TH01-CA) |
| Radio Communication Test Station | Anritsu | MT8000A | 6262208375 | N/A | May 23, 2023 | Sep. 27, 2023~ Sep. 28, 2023 | May 22, 2024 | Conducted (TH01-CA) |
| Signal Generator | Rohde & Schwarz | SMF100A | 105544 | 9kHz~44GHz | May 04, 2023 | Sep. 07, 2023~ Oct. 04, 2023 | May 03, 2024 | Radiation (03CH01-CA) |
| Loop Antenna | R&S | HFH2-Z2E | 100840 | 9kHz~30MHz | Jun. 29, 2023 | Sep. 07, 2023~ Oct. 04, 2023 | Jun. 28, 2024 | Radiation (03CH01-CA) |
| Bilog Antenna | TESEQ | 6111D | 50391 | 30MHz~1GHz | Aug. 16, 2023 | Sep. 07, 2023~ Oct. 04, 2023 | Aug. 15, 2024 | Radiation (03CH01-CA) |
| Bilog Antenna | TESEQ | 6111D | 54683 | 30MHz~1GHz | Nov. 01, 2022 | Sep. 07, 2023~ Oct. 04, 2023 | Oct. 31, 2023 | Radiation (03CH01-CA) |
| Horn Antenna | SCHWARZBECK | BBHA 9120D | 02115 | 1GHz~18GHz | Aug. 09, 2023 | Sep. 07, 2023~ Oct. 04, 2023 | Aug. 08, 2024 | Radiation (03CH01-CA) |
| Horn Antenna | SCHWARZBECK | BBHA 9120D | 02113 | 1GHz~18GHz | Jun. 07, 2023 | Sep. 07, 2023~ Oct. 04, 2023 | Jun. 06, 2024 | Radiation (03CH01-CA) |
| SHF-EHF Horn Antenna | SCHWARZBECK | BBHA9170 | 00842 | 18GHz~40GHz | Jul. 17, 2023 | Sep. 07, 2023~ Oct. 04, 2023 | Jul. 16, 2024 | Radiation (03CH01-CA) |
| SHF-EHF Horn Antenna | SCHWARZBECK | BBHA9170 | 00841 | 18GHz~40GHz | Aug. 22, 2023 | Sep. 07, 2023~ Oct. 04, 2023 | Aug. 11, 2024 | Radiation (03CH01-CA) |
| Filter | Wainwright | WHKX8-5872. 5-6750-18000 -40ST | SN8 | 6.75GHz High Pass Filter | Jul. 05, 2023 | Sep. 07, 2023~ Oct. 04, 2023 | Jul. 04, 2024 | Radiation (03CH01-CA) |
| Preamplifier | EMEC | EMC18G40G | 060725 | 18GHz~40GHz | May 04, 2023 | Sep. 07, 2023~ Oct. 04, 2023 | May 03, 2024 | Radiation (03CH01-CA) |
| Preamplifier | SONOMA | 310N | 372241 | 9kHz~1GHz | May 03, 2023 | Sep. 07, 2023~ Oct. 04, 2023 | May 02, 2024 | Radiation (03CH01-CA) |
| Preamplifier | E-instrument | ERA-100M-18 G-56-01-A70 | EC1900251 | 1GHz~18GHz | Jun. 27, 2023 | Sep. 07, 2023~ Oct. 04, 2023 | Jun. 26, 2024 | Radiation (03CH01-CA) |
| Spectrum Analyzer | Keysight | N9010B | MY63440343 | 10Hz - 44GHz | Jan. 15, 2023 | Sep. 07, 2023~ Oct. 04, 2023 | Jan. 14, 2024 | Radiation (03CH01-CA) |
| EMI Test Receiver | R&S | ESU26 | 100049 | 20Hz~26.5GHz | May 02, 2023 | Sep. 07, 2023~ Oct. 04, 2023 | May 01, 2024 | Radiation (03CH01-CA) |
| RF Cable | HUBER+SUHNER | SUCOFLEX 102 | 8015932/2, 8015762/2, 804938/2 | N/A | Mar. 06, 2023 | Sep. 07, 2023~ Oct. 04, 2023 | Mar. 05, 2024 | Radiation (03CH01-CA) |
| Hygrometer | TESTO | 608-H1 | 45142559 | N/A | Aug. 30, 2023 | Sep. 07, 2023~ Oct. 04, 2023 | Aug. 29, 2024 | Radiation (03CH01-CA) |
| Controller | Chaintek | EM-1000 | 060881 | Control Turn Table & Antenna Mast | N/A | Sep. 07, 2023~ Oct. 04, 2023 | N/A | Radiation (03CH01-CA) |
| Antenna Mast | ChainTek | MBS-520-1 | N/A | 1m~4m | N/A | Sep. 07, 2023~ Oct. 04, 2023 | N/A | Radiation (03CH01-CA) |
| Test Software | Audix E3 | E6.2009-8-24 d | PK-002093 | N/A | N/A | Sep. 07, 2023~ Oct. 04, 2023 | N/A | Radiation (03CH01-CA) |



6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 3.40 dB |
|---|---------|

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

| | |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 3.60 dB |
|---|---------|

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

| | |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.30 dB |
|---|---------|



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) and EIRP

<SISO Mode>

| NR n48 Maximum Average Power [dBm] (GT - LC = 10.1 dB) | | | | | | | | |
|--|--------------------|-----------|-----------|--------|--------|---------|------------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) |
| 10 | 1 | 1 | PI/2 BPSK | 24.09 | 22.99 | 23.65 | 34.35 | 2.7227 |
| 10 | 1 | 22 | | 24.18 | 23.02 | 23.66 | | |
| 10 | 12 | 6 | | 24.25 | 23.16 | 23.54 | | |
| 10 | 1 | 0 | | 23.70 | 22.61 | 21.23 | | |
| 10 | 1 | 23 | | 23.69 | 22.60 | 21.27 | | |
| 10 | 24 | 0 | | 23.80 | 23.35 | 23.53 | | |
| 10 | 1 | 1 | QPSK | 24.12 | 23.01 | 23.62 | 34.35 | 2.7227 |
| 10 | 1 | 22 | | 24.23 | 23.02 | 23.46 | | |
| 10 | 12 | 6 | | 24.17 | 23.22 | 23.51 | | |
| 10 | 1 | 0 | | 23.11 | 22.60 | 23.25 | | |
| 10 | 1 | 23 | | 23.14 | 22.61 | 23.22 | | |
| 10 | 24 | 0 | | 23.23 | 22.90 | 23.57 | | |
| 10 | 1 | 1 | 16-QAM | 23.17 | 23.05 | 23.63 | 33.92 | 2.4660 |
| 10 | 1 | 1 | 64-QAM | 21.45 | 23.82 | 23.52 | | |
| 10 | 1 | 1 | 256-QAM | 19.41 | 22.88 | 23.50 | | |
| Limit | EIRP < 47dBm/10MHz | | | Result | | | Pass | |

Total EIRP power is less than EIRP PSD limit 37 dBm/MHz.



| NR n48 Maximum Average Power [dBm] (GT - LC = 10.1 dB) | | | | | | | | | | |
|--|--------------------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 20 | 1 | 1 | PI/2 BPSK | 24.25 | 24.75 | 24.47 | 35.04 | 3.1915 | | |
| 20 | 1 | 49 | | 24.32 | 24.89 | 24.37 | | | | |
| 20 | 25 | 12 | | 24.41 | 24.94 | 24.54 | | | | |
| 20 | 1 | 0 | | 23.84 | 24.35 | 23.90 | | | | |
| 20 | 1 | 50 | | 23.81 | 24.37 | 23.87 | | | | |
| 20 | 50 | 0 | | 23.91 | 24.45 | 23.95 | | | | |
| 20 | 1 | 1 | QPSK | 24.29 | 24.72 | 24.48 | | | 35.04 | 3.1915 |
| 20 | 1 | 49 | | 24.35 | 24.89 | 24.36 | | | | |
| 20 | 25 | 12 | | 24.41 | 24.94 | 24.55 | | | | |
| 20 | 1 | 0 | | 23.34 | 23.82 | 23.46 | | | | |
| 20 | 1 | 50 | | 23.30 | 23.86 | 23.33 | | | | |
| 20 | 50 | 0 | | 23.40 | 23.95 | 23.45 | | | | |
| 20 | 1 | 1 | 16-QAM | 23.22 | 23.81 | 23.51 | 33.91 | 2.4604 | | |
| 20 | 1 | 1 | 64-QAM | 21.65 | 22.18 | 21.90 | | | | |
| 20 | 1 | 1 | 256-QAM | 19.56 | 20.07 | 19.81 | | | | |
| Limit | EIRP < 47dBm/10MHz | | | Result | | | Pass | | | |

Total EIRP power is less than EIRP PSD limit 37 dBm/MHz.

| NR n48 Maximum Average Power [dBm] (GT - LC = 10.1 dB) | | | | | | | | | | |
|--|--------------------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 30 | 1 | 1 | PI/2 BPSK | 21.30 | 24.81 | 24.59 | 35.04 | 3.1915 | | |
| 30 | 1 | 76 | | 21.34 | 24.76 | 24.44 | | | | |
| 30 | 36 | 18 | | 21.36 | 24.94 | 24.64 | | | | |
| 30 | 1 | 0 | | 21.42 | 24.42 | 23.99 | | | | |
| 30 | 1 | 77 | | 21.32 | 24.22 | 23.92 | | | | |
| 30 | 75 | 0 | | 19.83 | 24.45 | 24.11 | | | | |
| 30 | 1 | 1 | QPSK | 21.32 | 24.80 | 24.59 | | | 35.04 | 3.1915 |
| 30 | 1 | 76 | | 21.34 | 24.74 | 24.43 | | | | |
| 30 | 36 | 18 | | 21.35 | 24.93 | 24.61 | | | | |
| 30 | 1 | 0 | | 21.40 | 23.90 | 23.51 | | | | |
| 30 | 1 | 77 | | 21.31 | 23.75 | 23.43 | | | | |
| 30 | 75 | 0 | | 18.83 | 23.94 | 23.61 | | | | |
| 30 | 1 | 1 | 16-QAM | 21.36 | 23.80 | 23.55 | 33.90 | 2.4547 | | |
| 30 | 1 | 1 | 64-QAM | 22.18 | 22.16 | 21.95 | | | | |
| 30 | 1 | 1 | 256-QAM | 22.15 | 20.12 | 19.95 | | | | |
| Limit | EIRP < 47dBm/10MHz | | | Result | | | Pass | | | |

Total EIRP power is less than EIRP PSD limit 37 dBm/MHz.



| NR n48 Maximum Average Power [dBm] (GT - LC = 10.1 dB) | | | | | | | | |
|--|--------------------|-----------|-----------|--------|--------|---------|------------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) |
| 40 | 1 | 1 | PI/2 BPSK | 18.82 | 24.76 | 21.95 | 35.05 | 3.1989 |
| 40 | 1 | 104 | | 19.10 | 24.90 | 21.85 | | |
| 40 | 50 | 25 | | 18.90 | 24.93 | 22.49 | | |
| 40 | 1 | 0 | | 18.93 | 24.39 | 20.00 | | |
| 40 | 1 | 105 | | 19.15 | 24.32 | 19.95 | | |
| 40 | 100 | 0 | | 18.91 | 24.33 | 22.00 | | |
| 40 | 1 | 1 | QPSK | 18.85 | 24.69 | 22.41 | 32.97 | 1.9815 |
| 40 | 1 | 104 | | 19.13 | 24.86 | 21.84 | | |
| 40 | 50 | 25 | | 18.89 | 24.95 | 22.38 | | |
| 40 | 1 | 0 | | 18.95 | 23.90 | 21.53 | | |
| 40 | 1 | 105 | | 19.12 | 23.84 | 21.44 | | |
| 40 | 100 | 0 | | 17.90 | 23.86 | 21.97 | | |
| 40 | 1 | 1 | 16-QAM | 18.95 | 19.02 | 22.61 | 32.97 | 1.9815 |
| 40 | 1 | 1 | 64-QAM | 18.70 | 22.07 | 22.87 | | |
| 40 | 1 | 1 | 256-QAM | 18.67 | 19.99 | 22.72 | | |
| Limit | EIRP < 47dBm/10MHz | | | Result | | | Pass | |

Total EIRP power is less than EIRP PSD limit 37 dBm/MHz.



<MIMO Mode>

| Part96 NR n48 Maximum Average Power [dBm], DG = 9.77 dBi | | | | | | | | | | | | | | |
|--|--------------------|--------------|---------|-----------|--------|---------|-----------|--------|---------|---------|--------|---------|---------------|-------------|
| BW (MHz) | RB Size | RB Offset | Mod | Antenna 4 | | | Antenna 6 | | | Combine | | | EIRP (dBm) | EIRP (W) |
| | | | | Lowest | Middle | Highest | Lowest | Middle | Highest | Lowest | Middle | Highest | | |
| 10 | 1 | 1 | QPSK | 13.61 | 20.28 | 20.01 | 13.16 | 19.63 | 19.57 | 16.40 | 22.98 | 22.81 | 32.81 | 1.9099 |
| 10 | 1 | 22 | | 13.64 | 20.28 | 19.93 | 13.29 | 19.76 | 19.53 | 16.48 | 23.04 | 22.74 | | |
| 10 | 12 | 6 | | 13.66 | 20.35 | 20.02 | 13.00 | 19.69 | 19.39 | 16.35 | 23.04 | 22.73 | | |
| 10 | 1 | 0 | | 13.60 | 18.77 | 18.45 | 12.95 | 18.19 | 17.96 | 16.30 | 21.50 | 21.22 | | |
| 10 | 1 | 23 | | 13.64 | 18.81 | 18.43 | 13.15 | 18.18 | 17.87 | 16.41 | 21.52 | 21.17 | | |
| 10 | 24 | 0 | | 13.68 | 18.83 | 18.54 | 12.94 | 18.15 | 17.94 | 16.34 | 21.51 | 21.26 | | |
| 10 | 1 | 1 | 16-QAM | 13.60 | 19.74 | 19.53 | 13.09 | 19.32 | 19.08 | 16.36 | 22.55 | 22.32 | 32.32 | 1.7061 |
| 10 | 1 | 1 | 64-QAM | 13.60 | 18.31 | 17.99 | 12.80 | 17.49 | 17.29 | 16.23 | 20.93 | 20.66 | | |
| 10 | 1 | 1 | 256-QAM | 13.69 | 15.34 | 15.11 | 13.03 | 14.67 | 14.50 | 16.38 | 18.03 | 17.83 | | |
| Limit | EIRP < 47dBm/10MHz | | | Result | | | | | | | | | Pass | |

Total EIRP power is less than EIRP PSD limit 37 dBm/MHz.

| Part96 NR n48 Maximum Average Power [dBm], DG = 9.77 dBi | | | | | | | | | | | | | | |
|--|--------------------|--------------|---------|-----------|--------|---------|-----------|--------|---------|---------|--------|---------|---------------|-------------|
| BW (MHz) | RB Size | RB Offset | Mod | Antenna 4 | | | Antenna 6 | | | Combine | | | EIRP (dBm) | EIRP (W) |
| | | | | Lowest | Middle | Highest | Lowest | Middle | Highest | Lowest | Middle | Highest | | |
| 20 | 1 | 1 | QPSK | 13.76 | 20.39 | 20.09 | 13.20 | 19.87 | 19.66 | 16.50 | 23.15 | 22.89 | 33.06 | 2.0230 |
| 20 | 1 | 49 | | 13.80 | 20.48 | 19.98 | 13.26 | 19.91 | 19.48 | 16.55 | 23.21 | 22.75 | | |
| 20 | 25 | 12 | | 13.94 | 20.62 | 20.24 | 13.24 | 19.90 | 19.62 | 16.61 | 23.29 | 22.95 | | |
| 20 | 1 | 0 | | 13.83 | 18.93 | 18.64 | 13.30 | 18.35 | 18.10 | 16.58 | 21.66 | 21.39 | | |
| 20 | 1 | 50 | | 13.95 | 19.00 | 18.51 | 13.27 | 18.32 | 18.01 | 16.63 | 21.68 | 21.28 | | |
| 20 | 51 | 0 | | 13.87 | 19.09 | 18.67 | 13.22 | 18.24 | 18.04 | 16.57 | 21.70 | 21.38 | | |
| 20 | 1 | 1 | 16-QAM | 13.73 | 19.94 | 19.66 | 13.20 | 19.40 | 19.20 | 16.48 | 22.69 | 22.45 | 32.46 | 1.7620 |
| 20 | 1 | 1 | 64-QAM | 13.70 | 18.42 | 18.02 | 13.00 | 17.58 | 17.44 | 16.37 | 21.03 | 20.75 | | |
| 20 | 1 | 1 | 256-QAM | 13.80 | 15.54 | 15.23 | 13.20 | 14.81 | 14.61 | 16.52 | 18.20 | 17.94 | | |
| Limit | EIRP < 47dBm/10MHz | | | Result | | | | | | | | | Pass | |

Total EIRP power is less than EIRP PSD limit 37 dBm/MHz.



| Part96 NR n48 Maximum Average Power [dBm], DG = 9.77 dBi | | | | | | | | | | | | | | |
|--|--------------------|--------------|---------|-----------|--------|---------|-----------|--------|---------|---------|--------|---------|---------------|-------------|
| BW (MHz) | RB Size | RB Offset | Mod | Antenna 4 | | | Antenna 6 | | | Combine | | | EIRP (dBm) | EIRP (W) |
| | | | | Lowest | Middle | Highest | Lowest | Middle | Highest | Lowest | Middle | Highest | | |
| 30 | 1 | 1 | QPSK | 13.81 | 14.23 | 20.25 | 13.08 | 13.30 | 19.78 | 16.47 | 16.80 | 23.03 | 32.80 | 1.9055 |
| 30 | 1 | 76 | | 13.76 | 14.24 | 19.99 | 13.39 | 13.35 | 19.57 | 16.59 | 16.83 | 22.80 | | |
| 30 | 39 | 19 | | 13.90 | 14.35 | 20.30 | 13.10 | 13.31 | 19.71 | 16.53 | 16.87 | 23.03 | | |
| 30 | 1 | 0 | | 13.93 | 14.30 | 18.64 | 13.28 | 13.39 | 18.28 | 16.63 | 16.88 | 21.47 | | |
| 30 | 1 | 77 | | 13.88 | 14.30 | 18.49 | 13.31 | 13.26 | 18.15 | 16.61 | 16.82 | 21.33 | | |
| 30 | 78 | 0 | | 13.92 | 14.38 | 18.85 | 13.19 | 13.30 | 18.20 | 16.58 | 16.88 | 21.55 | | |
| 30 | 1 | 1 | 16-QAM | 13.70 | 14.24 | 19.72 | 13.20 | 13.36 | 19.39 | 16.47 | 16.83 | 22.57 | 32.34 | 1.7140 |
| 30 | 1 | 1 | 64-QAM | 13.75 | 14.27 | 18.10 | 13.00 | 13.12 | 17.56 | 16.40 | 16.74 | 20.85 | | |
| 30 | 1 | 1 | 256-QAM | 13.97 | 14.31 | 15.30 | 13.24 | 13.41 | 14.80 | 16.63 | 16.89 | 18.07 | | |
| Limit | EIRP < 47dBm/10MHz | | | Result | | | | | | | | | Pass | |

Total EIRP power is less than EIRP PSD limit 37 dBm/MHz.

| Part96 NR n48 Maximum Average Power [dBm], DG = 9.77 dBi | | | | | | | | | | | | | | |
|--|--------------------|--------------|---------|-----------|--------|---------|-----------|--------|---------|---------|--------|---------|---------------|-------------|
| BW (MHz) | RB Size | RB Offset | Mod | Antenna 4 | | | Antenna 6 | | | Combine | | | EIRP (dBm) | EIRP (W) |
| | | | | Lowest | Middle | Highest | Lowest | Middle | Highest | Lowest | Middle | Highest | | |
| 40 | 1 | 1 | QPSK | 13.77 | 15.91 | 20.64 | 13.10 | 15.21 | 19.99 | 16.46 | 18.58 | 23.34 | 33.11 | 2.0464 |
| 40 | 1 | 104 | | 14.10 | 15.86 | 20.13 | 13.48 | 15.32 | 19.67 | 16.81 | 18.61 | 22.92 | | |
| 40 | 53 | 26 | | 13.84 | 16.02 | 20.23 | 13.18 | 15.33 | 19.64 | 16.53 | 18.70 | 22.96 | | |
| 40 | 1 | 0 | | 13.98 | 15.98 | 18.75 | 13.30 | 15.40 | 18.23 | 16.66 | 18.71 | 21.51 | | |
| 40 | 1 | 105 | | 14.12 | 15.93 | 18.65 | 13.43 | 15.26 | 18.18 | 16.80 | 18.62 | 21.43 | | |
| 40 | 106 | 0 | | 13.98 | 16.06 | 18.75 | 13.28 | 15.37 | 18.19 | 16.65 | 18.74 | 21.49 | | |
| 40 | 1 | 1 | 16-QAM | 13.71 | 15.95 | 19.70 | 13.18 | 15.40 | 19.38 | 16.46 | 18.69 | 22.55 | 32.32 | 1.7061 |
| 40 | 1 | 1 | 64-QAM | 13.72 | 15.87 | 18.24 | 13.00 | 15.12 | 17.58 | 16.39 | 18.52 | 20.93 | | |
| 40 | 1 | 1 | 256-QAM | 13.89 | 15.99 | 15.26 | 13.20 | 15.34 | 14.78 | 16.57 | 18.69 | 18.04 | | |
| Limit | EIRP < 47dBm/10MHz | | | Result | | | | | | | | | Pass | |

Total EIRP power is less than EIRP PSD limit 37 dBm/MHz.



FR1 n48

<SISO Mode>


Peak-to-Average Ratio

| Mode | FR1 n48 / 20MHz / DFT-S OFDM | | | | |
|-----------|------------------------------|---------|---------|---------|-------------|
| Mod. | PI/2 BPSK | QPSK | 16QAM | 64QAM | Limit: 13dB |
| RB Size | Full RB | Full RB | Full RB | Full RB | Result |
| Middle CH | 4.49 | 8.35 | 8.03 | 8.32 | PASS |
| Mode | FR1 n48 / 20MHz / DFT-S OFDM | | | | |
| Mod. | 256QAM | | | | Limit: 13dB |
| RB Size | Full RB | | | | Result |
| Middle CH | 8.78 | | | | PASS |




FR1 n48 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

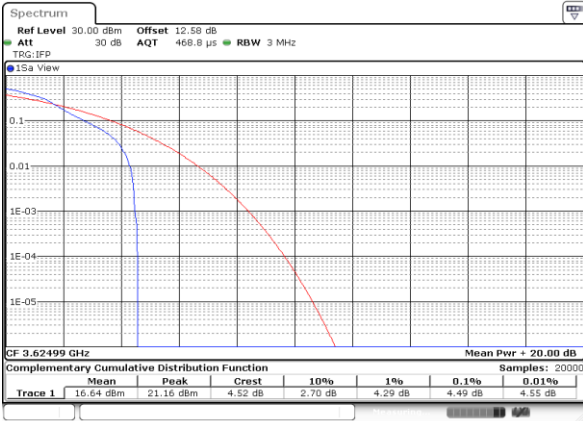


Date: 29 SEP 2023 00:58:03

QPSK

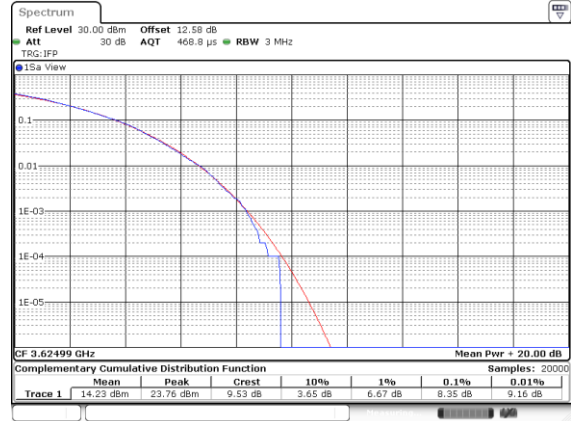


Date: 29 SEP 2023 00:58:43

16QAM

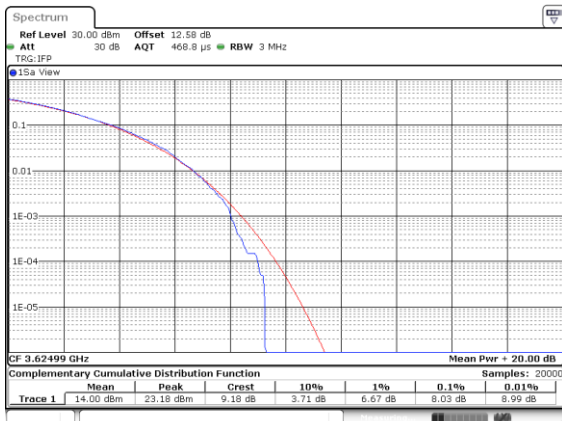


Date: 29 SEP 2023 01:00:09

64QAM

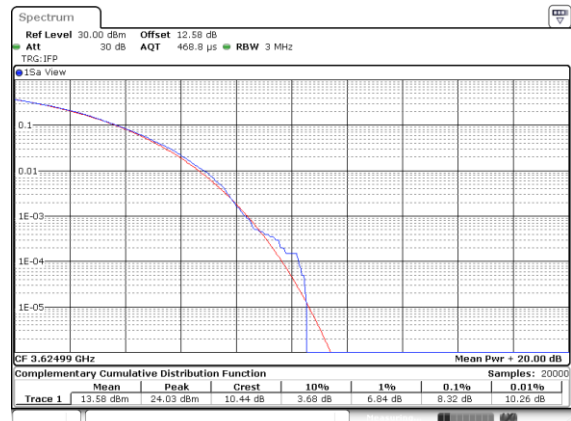

Date: 29 SEP 2023 01:00:38

256QAM

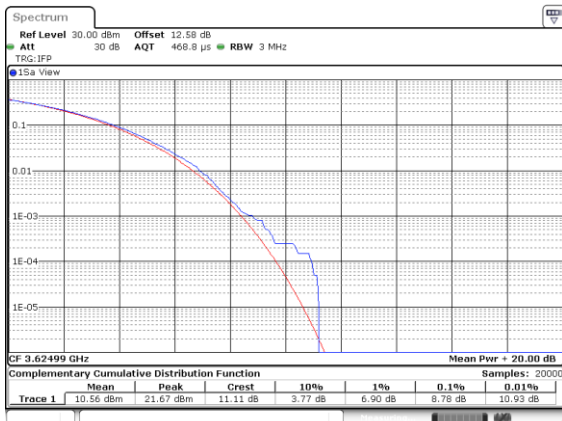

Date: 29 SEP 2023 01:01:03



26dB Bandwidth


| Mode | FR1 n48 : 26dB BW(MHz) / DFT-S OFDM | | | | | | | |
|-----------|-------------------------------------|-----------|-----------|-----------|-----------|--|--|--|
| BW | 10MHz | 15MHz | 20MHz | 30MHz | 40MHz | | | |
| Mod. | PI/2 BPSK | PI/2 BPSK | PI/2 BPSK | PI/2 BPSK | PI/2 BPSK | | | |
| Middle CH | 9.33 | 13.73 | 18.90 | 28.17 | 38.36 | | | |

| Mode | FR1 n48 : 26dB BW(MHz) / CP OFDM | | | | | | | |
|-----------|----------------------------------|--------|-------|--------|-------|--------|-------|--------|
| BW | 10MHz | | 15MHz | | 20MHz | | 30MHz | |
| Mod. | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM |
| Middle CH | 9.57 | 9.29 | 14.30 | 14.36 | 19.06 | 19.14 | 28.89 | 29.37 |
| Mod. | 64QAM | 256QAM | 64QAM | 256QAM | 64QAM | 256QAM | 64QAM | 256QAM |
| Middle CH | 9.89 | 9.61 | 14.42 | 14.33 | 19.22 | 19.50 | 29.13 | 29.13 |
| BW | 40MHz | | | | | | | |
| Mod. | QPSK | 16QAM | | | | | | |
| Middle CH | 40.36 | 40.44 | | | | | | |
| Mod. | 64QAM | 256QAM | | | | | | |
| Middle CH | 40.52 | 40.28 | | | | | | |



FR1 n48 / 10MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

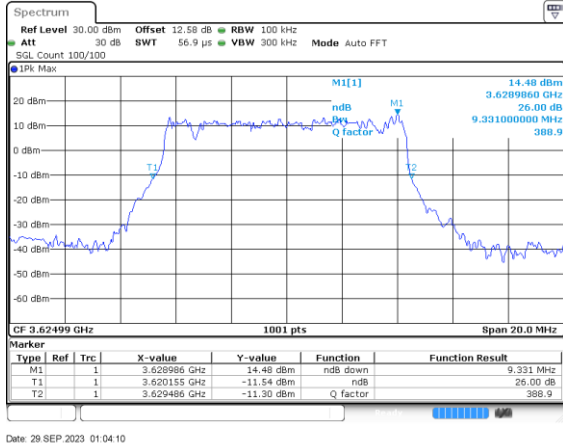

Date: 29 SEP 2023 01:04:10


FR1 n48 / 10MHz / CP OFDM / Middle Channel / Full RB

QPSK

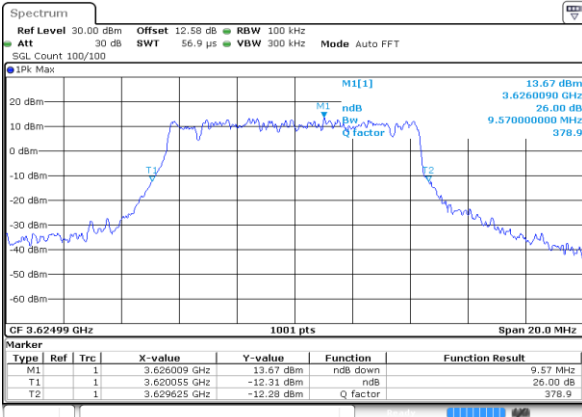


Date: 29 SEP 2023 01:05:02

16QAM

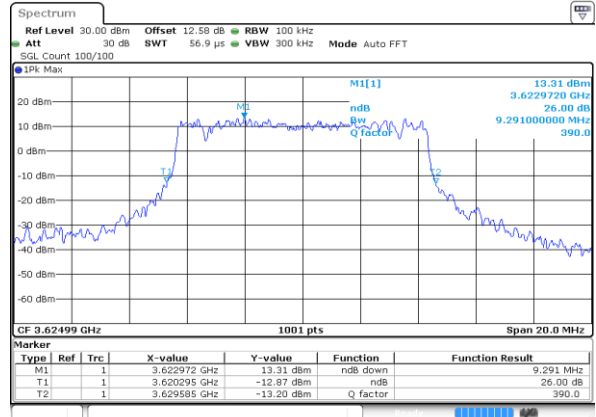


Date: 29 SEP 2023 01:05:47

64QAM

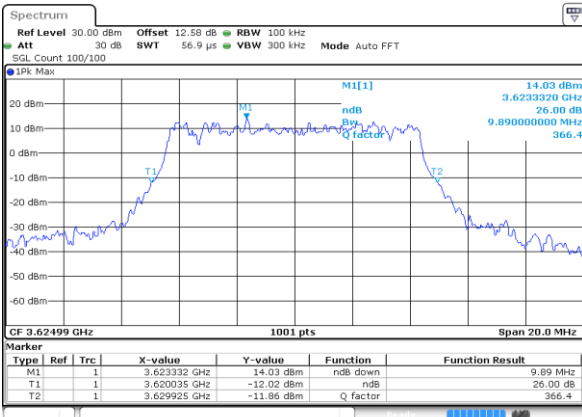

Date: 29 SEP 2023 01:06:00

256QAM

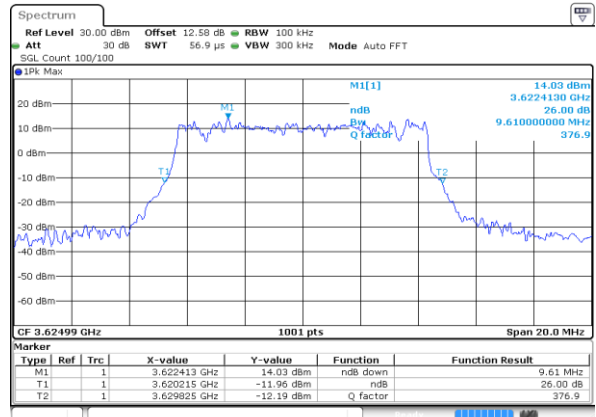


Date: 29 SEP 2023 01:06:26



FR1 n48 / 15MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

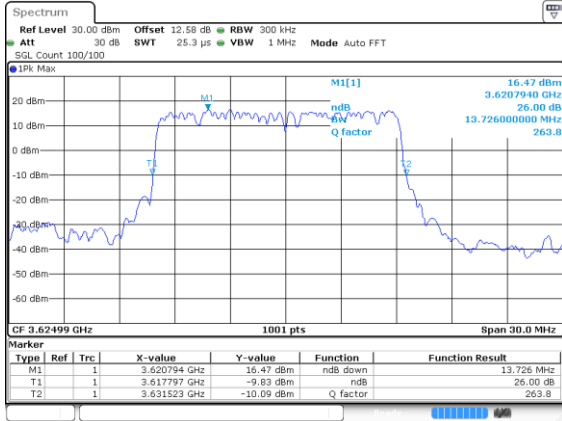

Date: 29 SEP 2023 01:03:30


FR1 n48 / 15MHz / CP OFDM / Middle Channel / Full RB

QPSK

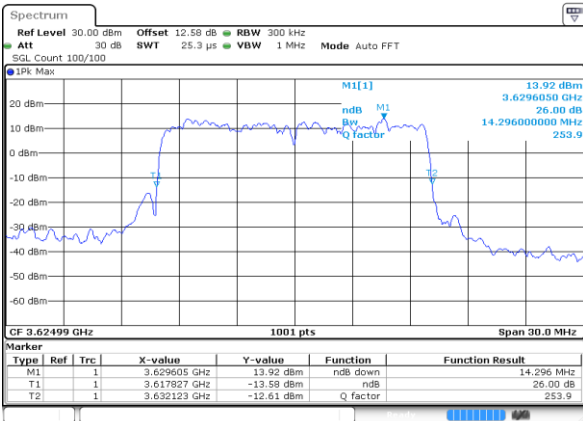


Date: 29 SEP 2023 01:02:57

16QAM

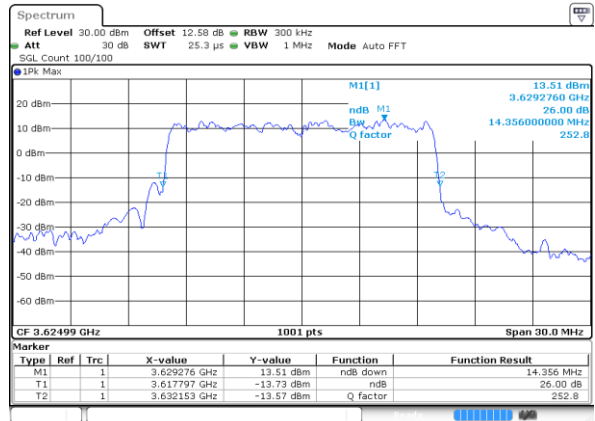


Date: 29 SEP 2023 01:02:40

64QAM

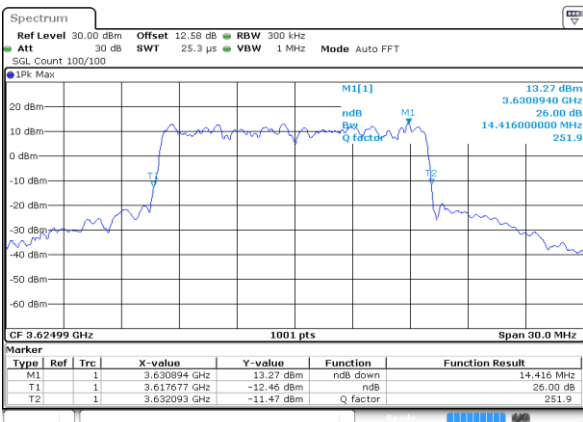

Date: 29 SEP 2023 01:02:21


256QAM

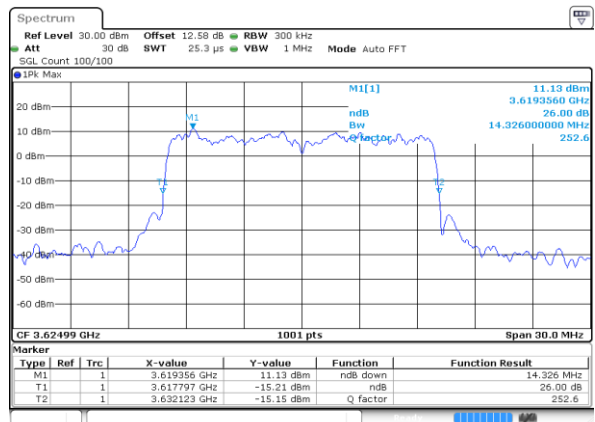

Date: 29 SEP 2023 01:01:59

FR1 n48 / 20MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

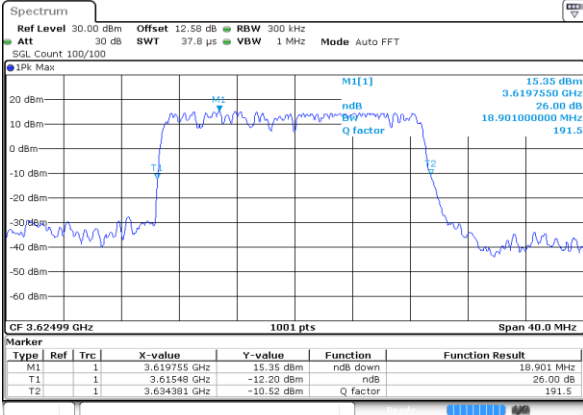

Date: 29 SEP 2023 00:59:16


FR1 n48 / 20MHz / CP OFDM / Middle Channel / Full RB

QPSK

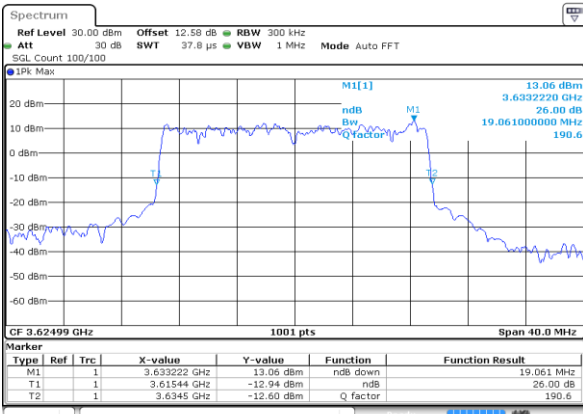


Date: 29 SEP 2023 00:59:55

16QAM

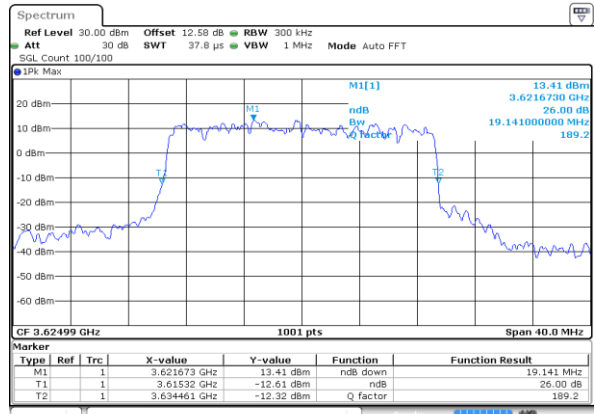


Date: 29 SEP 2023 01:00:23

64QAM

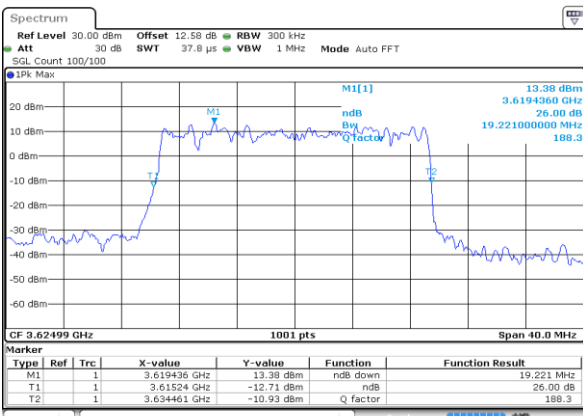

Date: 29 SEP 2023 01:00:51

256QAM

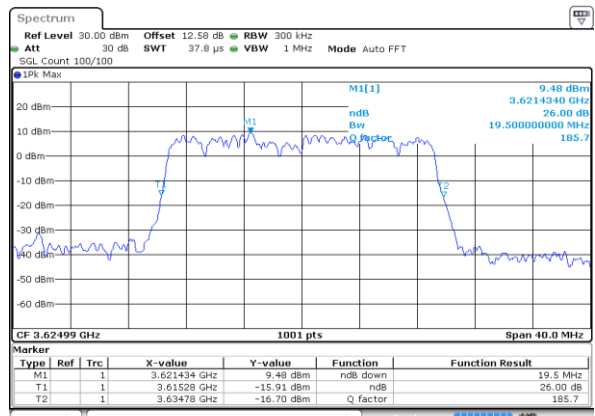


Date: 29 SEP 2023 01:01:13



FR1 n48 / 30MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

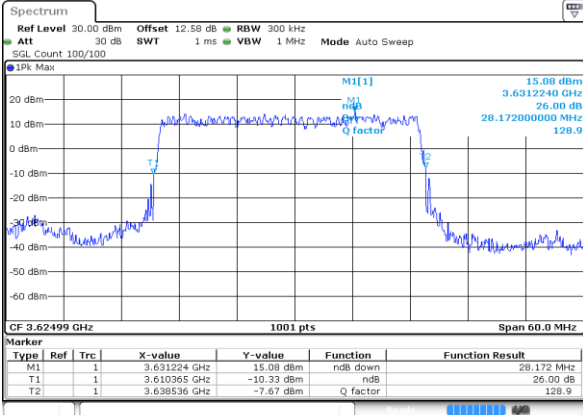

Date: 29 SEP 2023 00:57:44


FR1 n48 / 30MHz / CP OFDM / Middle Channel / Full RB

QPSK

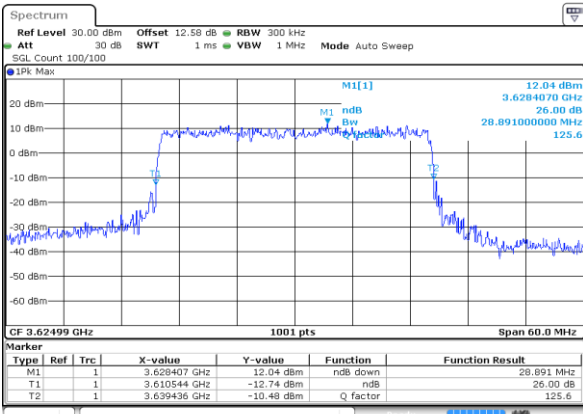


Date: 29 SEP 2023 00:57:10

16QAM

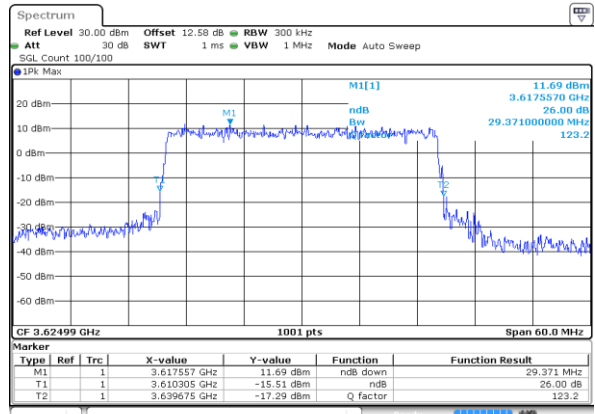


Date: 29 SEP 2023 00:56:54

64QAM

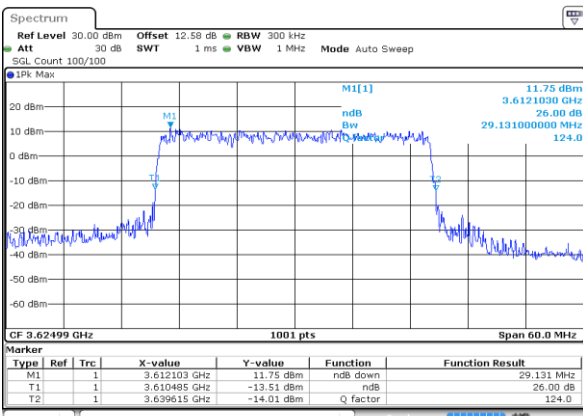

Date: 29 SEP 2023 00:56:38

256QAM

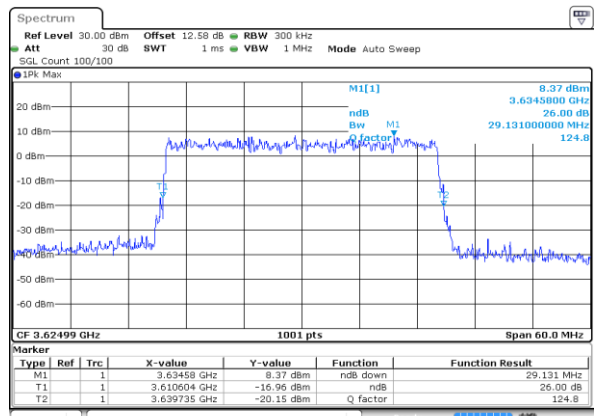


Date: 29 SEP 2023 00:56:19



FR1 n48 / 40MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

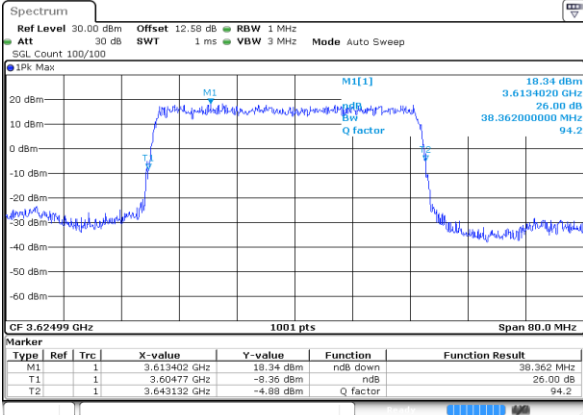

Date: 29 SEP 2023 00:53:24


FR1 n48 / 40MHz / CP OFDM / Middle Channel / Full RB

QPSK

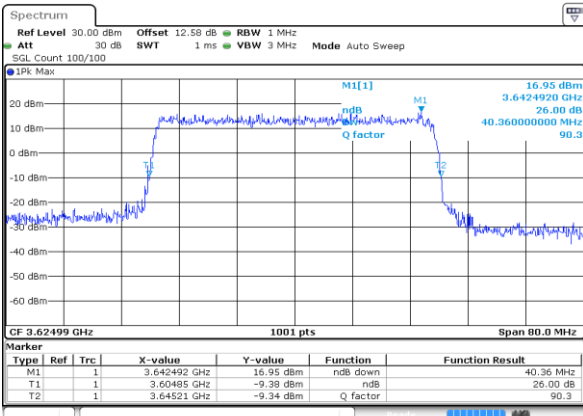


Date: 29 SEP 2023 00:54:22

16QAM

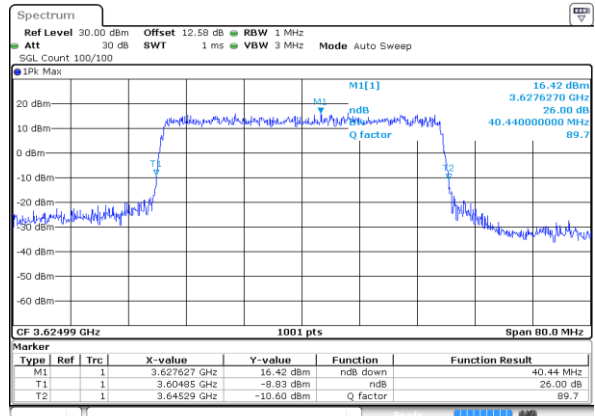


Date: 29 SEP 2023 00:54:45

64QAM

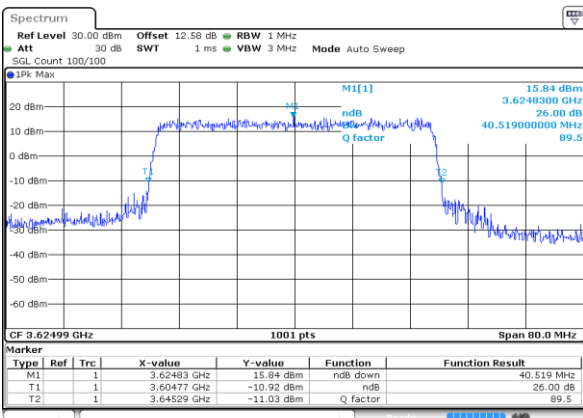

Date: 29 SEP 2023 00:55:06

256QAM

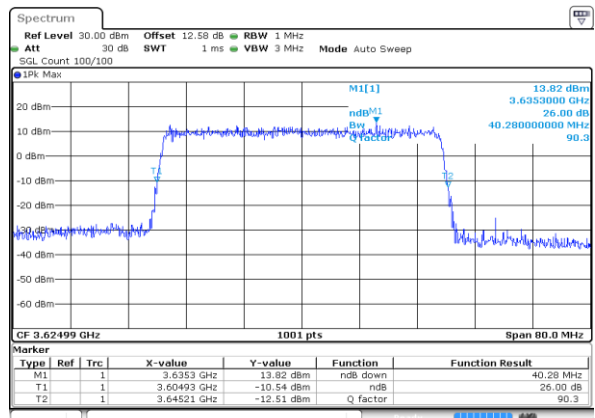

Date: 29 SEP 2023 00:55:25



Occupied Bandwidth


| Mode | FR1 n48 : OB BW(MHz) / DFT-S OFDM | | | | | | | |
|-----------|-----------------------------------|-----------|-----------|-----------|-----------|--|--|--|
| BW | 10MHz | 15MHz | 20MHz | 30MHz | 40MHz | | | |
| Mod. | PI/2 BPSK | PI/2 BPSK | PI/2 BPSK | PI/2 BPSK | PI/2 BPSK | | | |
| Middle CH | 8.57 | 12.98 | 17.86 | 26.79 | 35.88 | | | |

| Mode | FR1 n48 : OB BW(MHz) / CP OFDM | | | | | | | |
|-----------|--------------------------------|--------|-------|--------|-------|--------|-------|--------|
| BW | 10MHz | | 15MHz | | 20MHz | | 30MHz | |
| Mod. | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM |
| Middle CH | 8.57 | 8.59 | 13.60 | 13.60 | 18.18 | 18.26 | 27.81 | 27.87 |
| Mod. | 64QAM | 256QAM | 64QAM | 256QAM | 64QAM | 256QAM | 64QAM | 256QAM |
| Middle CH | 8.55 | 8.59 | 13.57 | 13.54 | 18.30 | 18.18 | 27.75 | 27.87 |
| BW | 40MHz | | | | | | | |
| Mod. | QPSK | 16QAM | | | | | | |
| Middle CH | 37.96 | 38.12 | | | | | | |
| Mod. | 64QAM | 256QAM | | | | | | |
| Middle CH | 38.12 | 37.88 | | | | | | |



FR1 n48 / 10MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

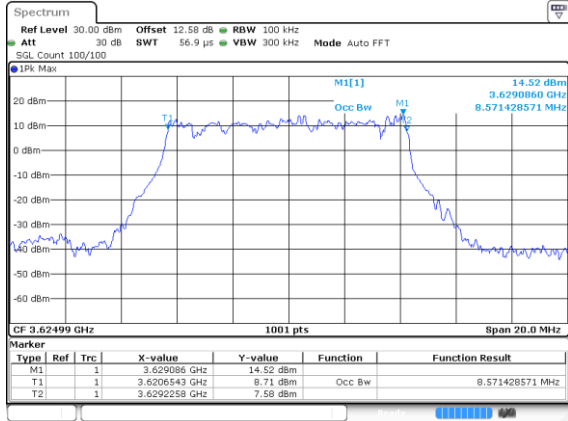

Date: 29 SEP 2023 01:04:05


FR1 n48 / 10MHz / CP OFDM / Middle Channel / Full RB

QPSK

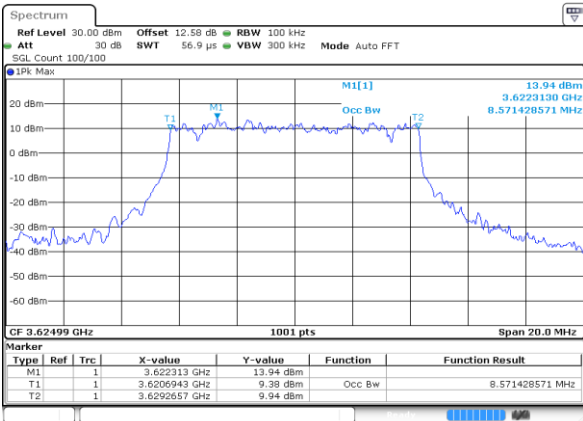


Date: 29 SEP 2023 01:04:57

16QAM

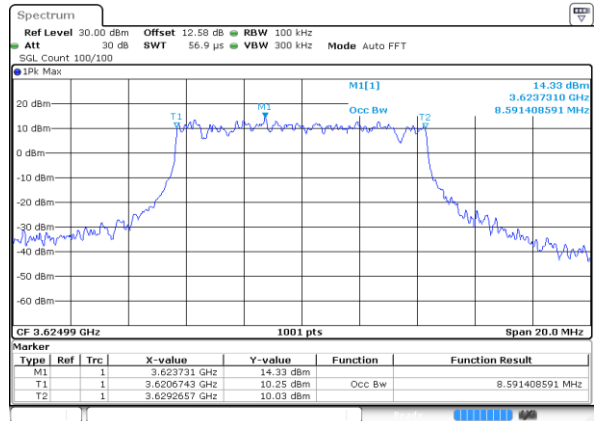


Date: 29 SEP 2023 01:05:38

64QAM

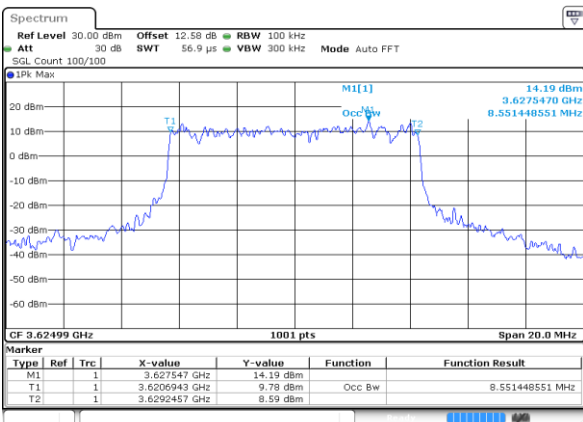

Date: 29 SEP 2023 01:05:54

256QAM

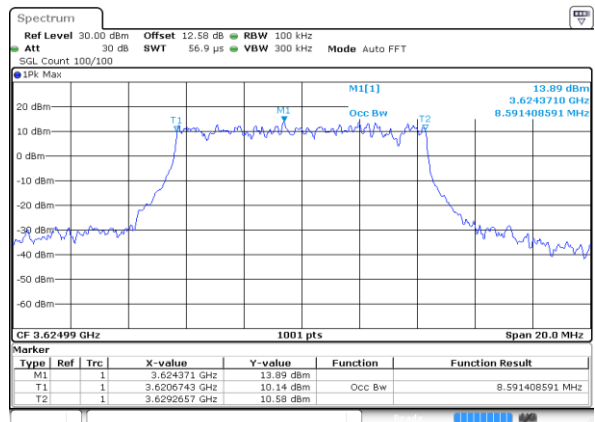


Date: 29 SEP 2023 01:06:14



FR1 n48 / 15MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

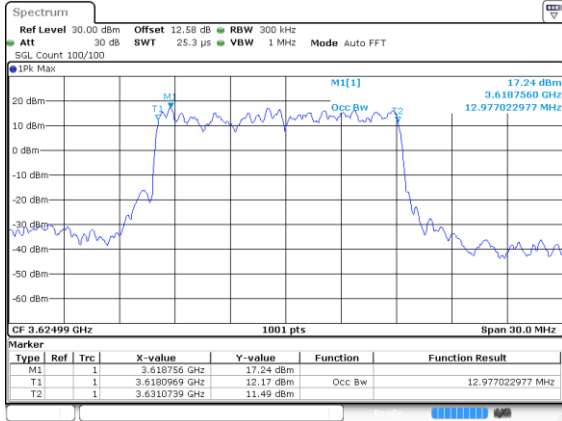

Date: 29 SEP 2023 01:03:23


FR1 n48 / 15MHz / CP OFDM / Middle Channel / Full RB

QPSK

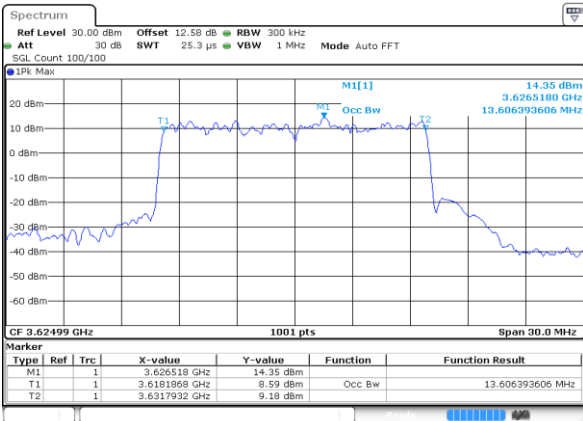


Date: 29 SEP 2023 01:02:51

16QAM

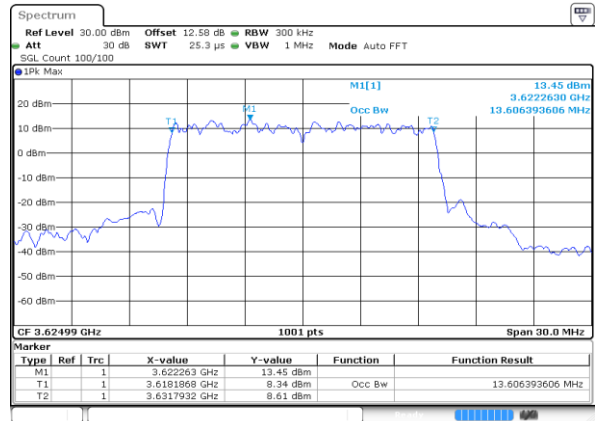


Date: 29 SEP 2023 01:02:34

64QAM

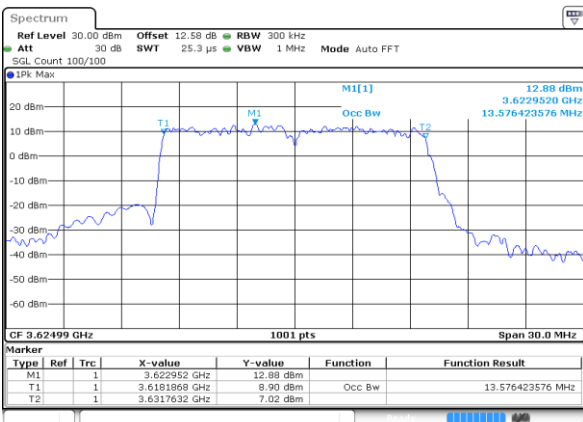

Date: 29 SEP 2023 01:02:13

256QAM

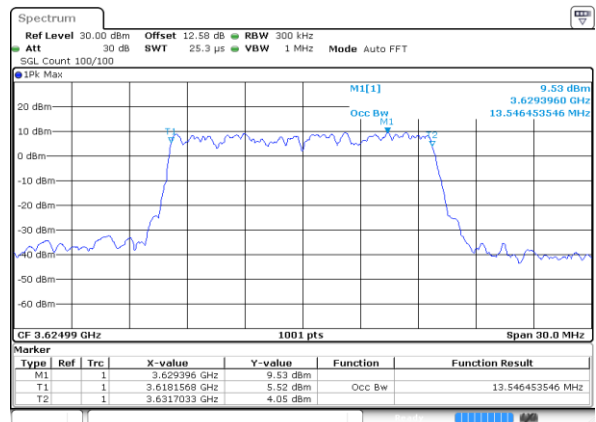


Date: 29 SEP 2023 01:01:52



FR1 n48 / 20MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

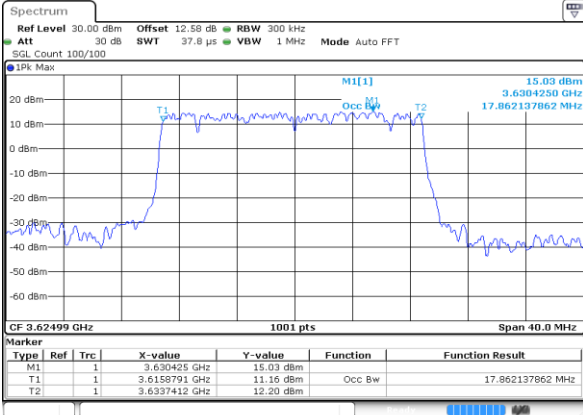

Date: 29 SEP 2023 00:59:10


FR1 n48 / 20MHz / CP OFDM / Middle Channel / Full RB

QPSK

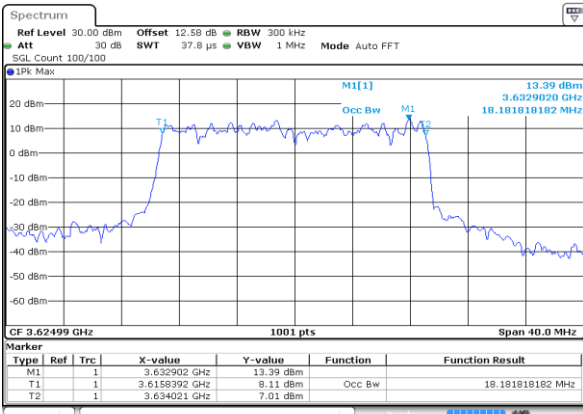


Date: 29 SEP 2023 00:59:49

16QAM

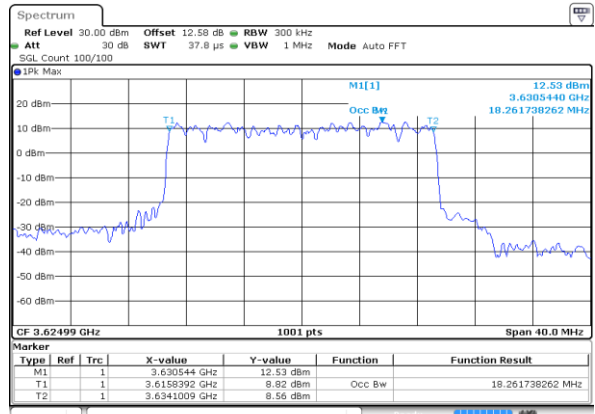


Date: 29 SEP 2023 01:00:16

64QAM

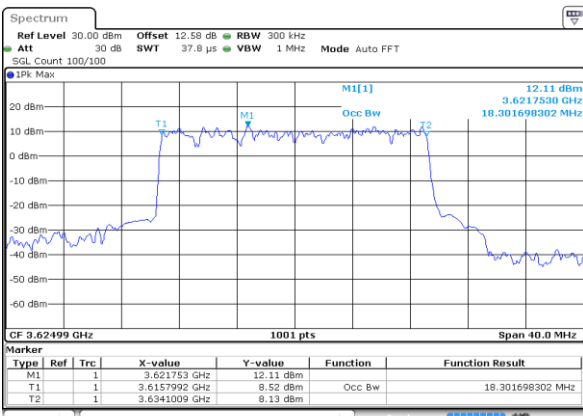

Date: 29 SEP 2023 01:00:44

256QAM

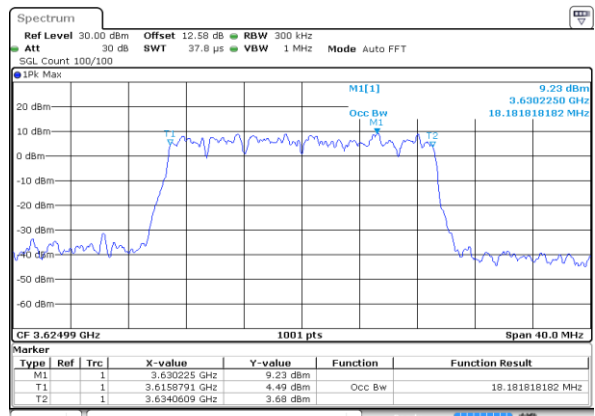


Date: 29 SEP 2023 01:01:08



FR1 n48 / 30MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

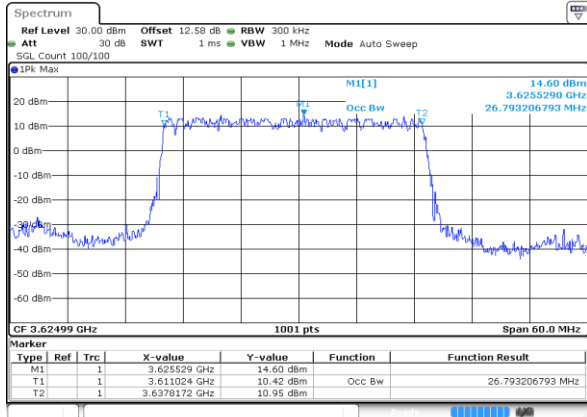

Date: 29 SEP 2023 00:57:37


FR1 n48 / 30MHz / CP OFDM / Middle Channel / Full RB

QPSK

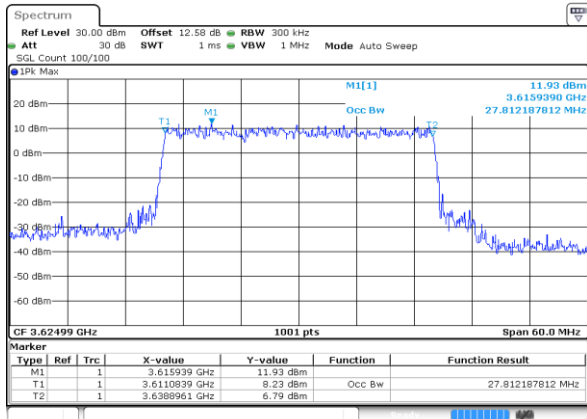


Date: 29 SEP 2023 00:57:04

16QAM

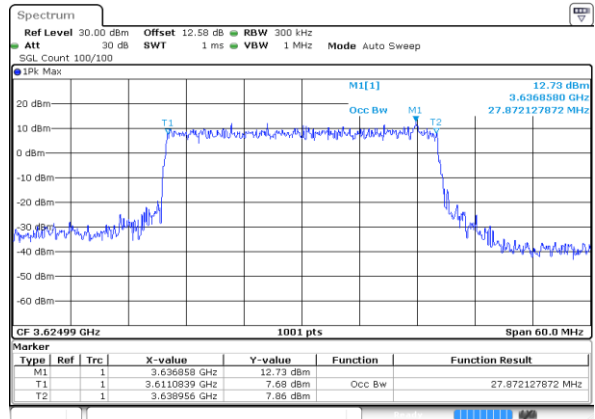


Date: 29 SEP 2023 00:56:48

64QAM

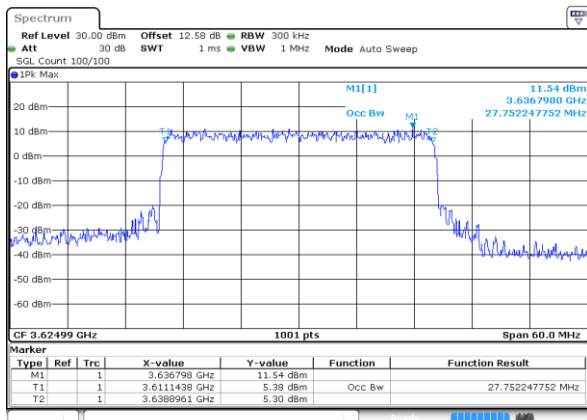

Date: 29 SEP 2023 00:56:31

256QAM

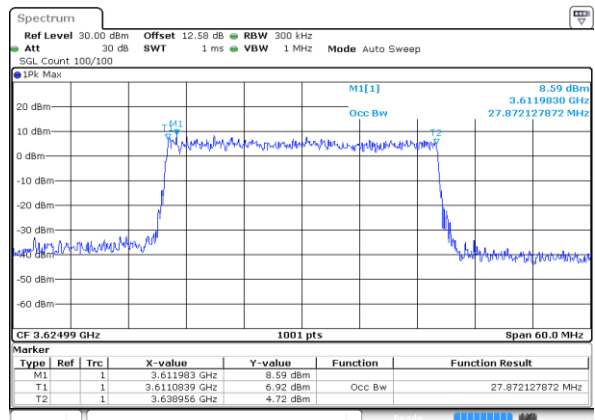


Date: 29 SEP 2023 00:56:13



FR1 n48 / 40MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

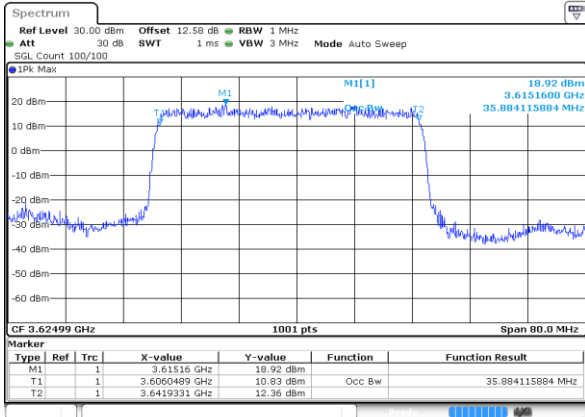

Date: 29 SEP 2023 00:53:16


FR1 n48 / 40MHz / CP OFDM / Middle Channel / Full RB

QPSK

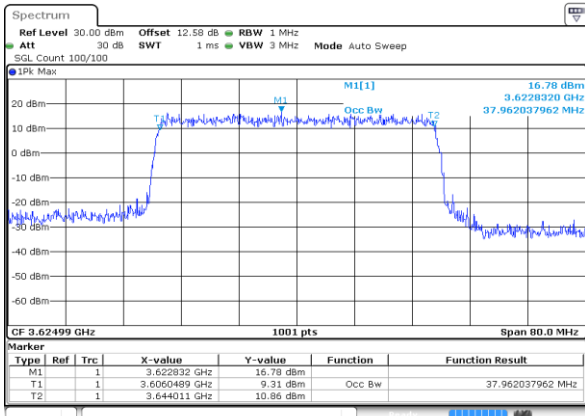


Date: 29 SEP 2023 00:54:11

16QAM

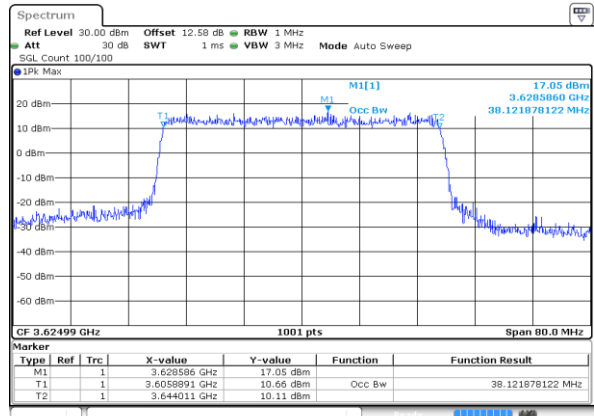


Date: 29 SEP 2023 00:54:38

64QAM

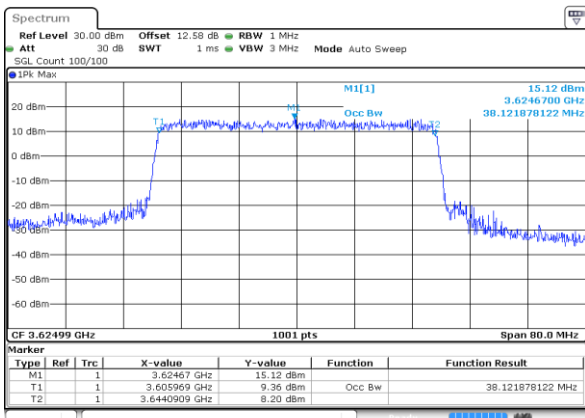

Date: 29 SEP 2023 00:55:00

256QAM

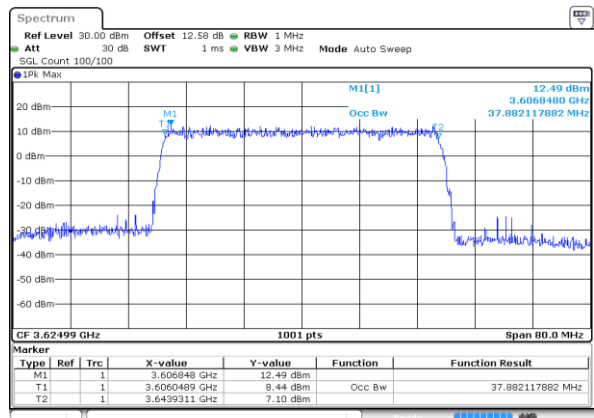

Date: 29 SEP 2023 00:55:19




Unwanted Emission (MASK)

FR1 n48 / 10MHz / DFT-S OFDM / PI/2 BPSK


Lowest Channel

1RB0

1RBmax

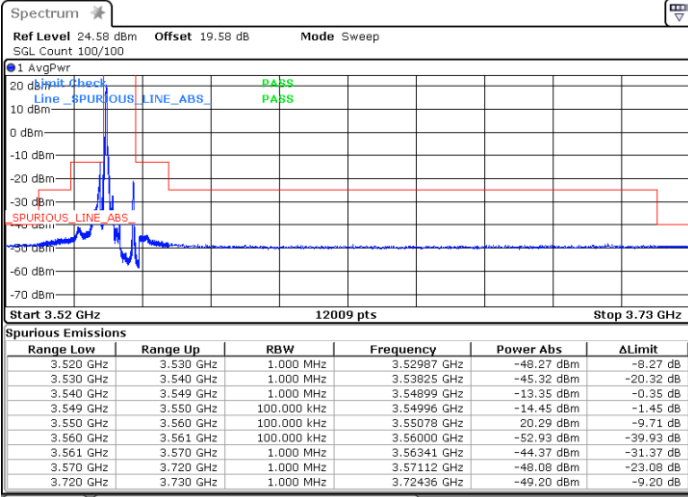


Date: 28.SEP.2023 22:19:28

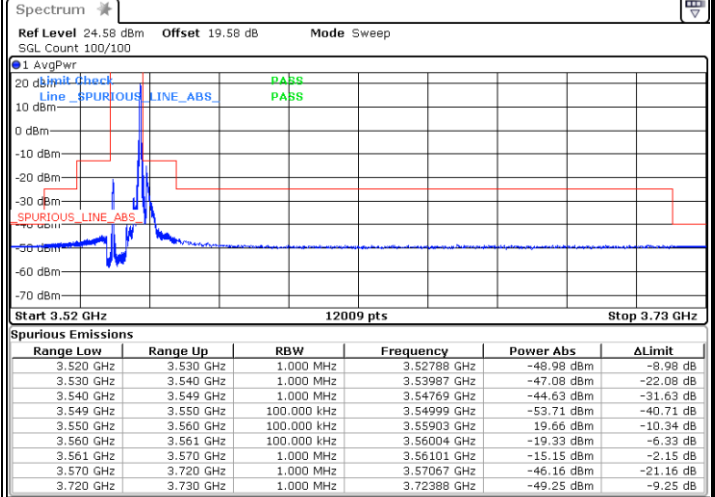

Date: 28.SEP.2023 22:19:59

Full RB

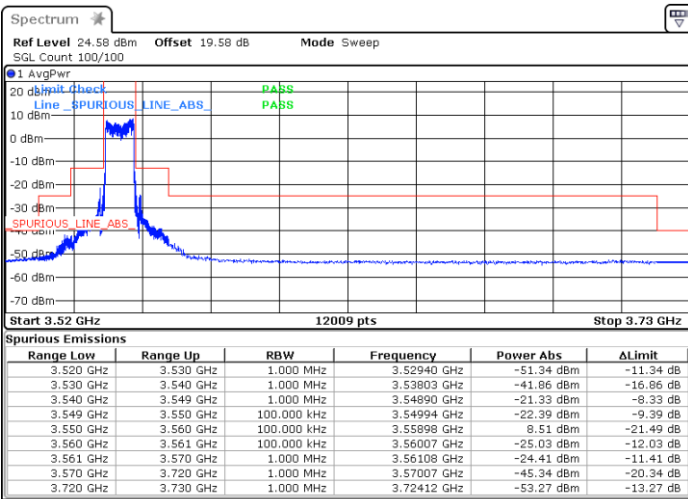

Date: 28.SEP.2023 20:50:50




FR1 n48 / 10MHz / DFT-S OFDM / PI/2 BPSK


Middle Channel

1RB0

1RBmax

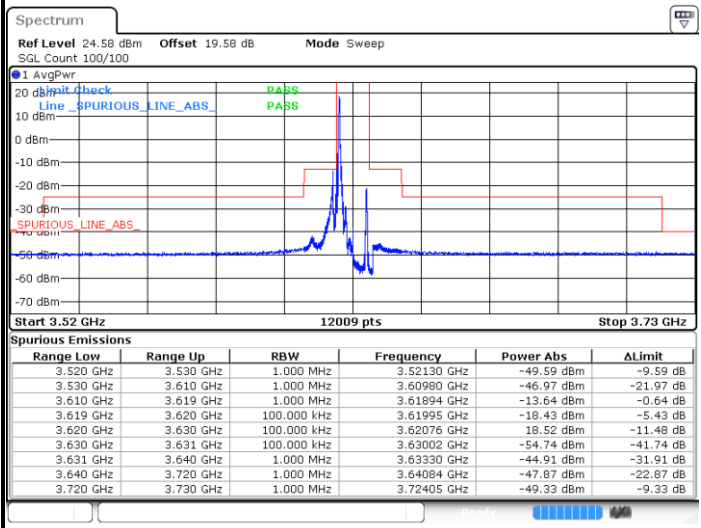


Date: 28.SEP.2023 22:36:52

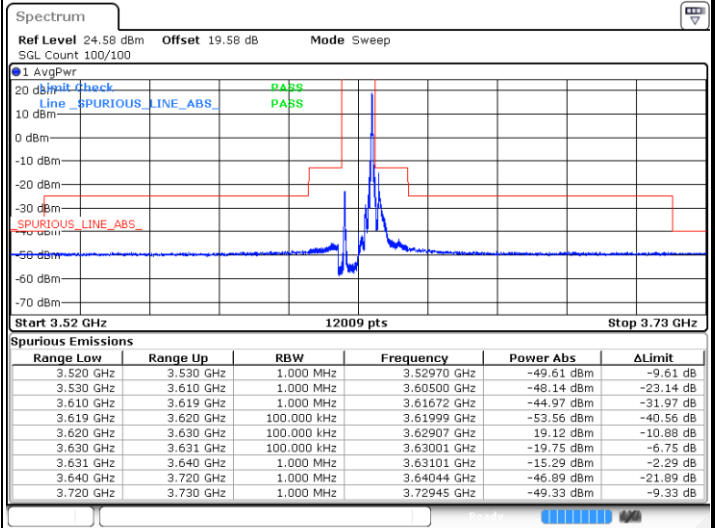

Date: 28.SEP.2023 22:37:18

Full RB

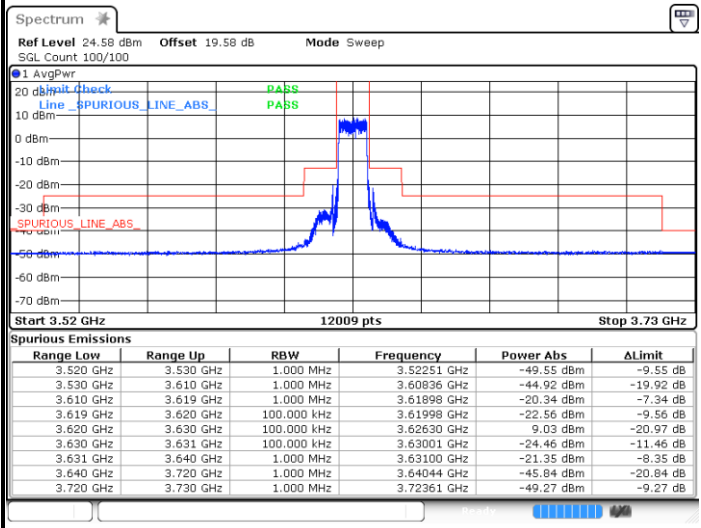

Date: 28.SEP.2023 22:26:05





FR1 n48 / 10MHz / DFT-S OFDM / PI/2 BPSK

Highest Channel

1RB0


1RBmax

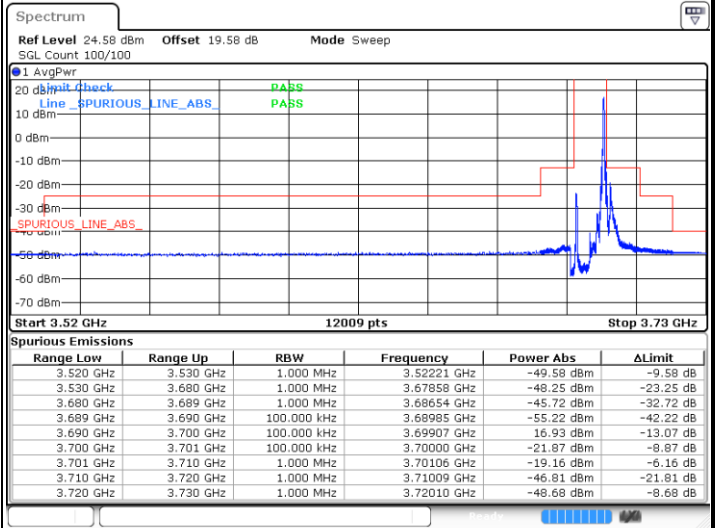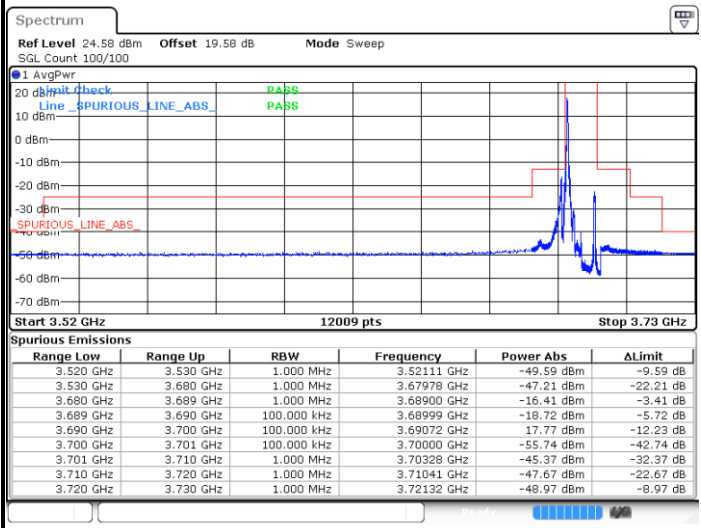

Date: 28.SEP.2023 22:43:01

Date: 28.SEP.2023 22:50:12

Full RB

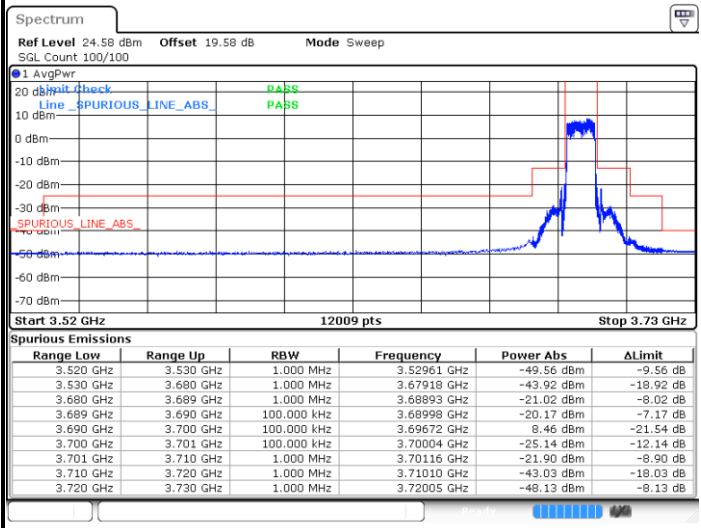

Date: 28.SEP.2023 22:42:40




FR1 n48 / 10MHz / DFT-S OFDM / QPSK


Lowest Channel

1RB0

1RBmax

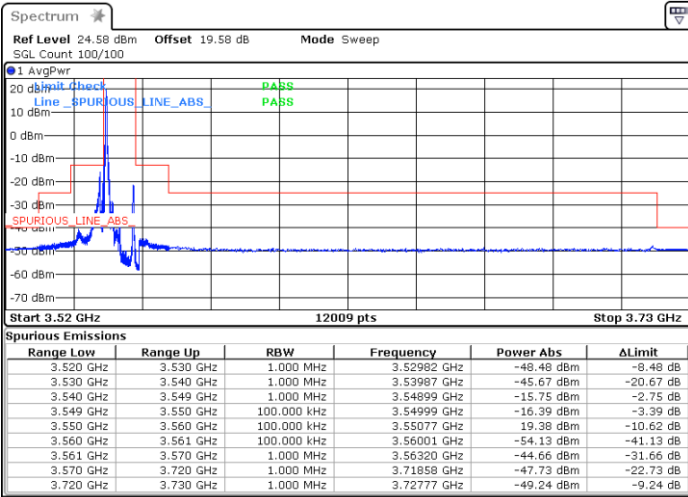


Date: 28.SEP.2023 22:18:59

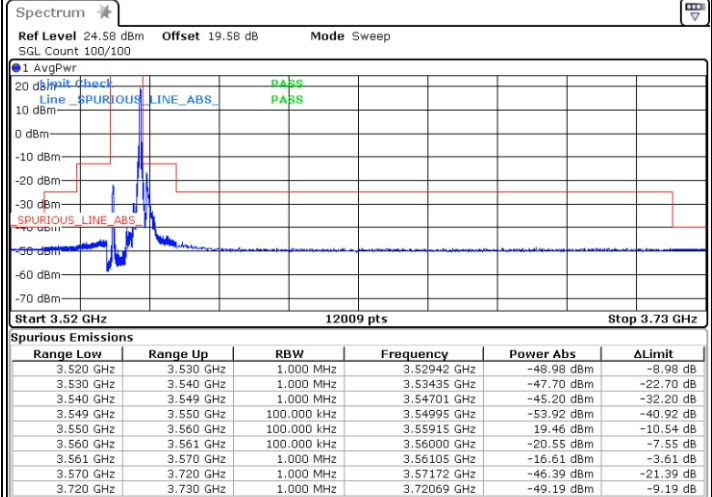

Date: 28.SEP.2023 22:20:19

Full RB

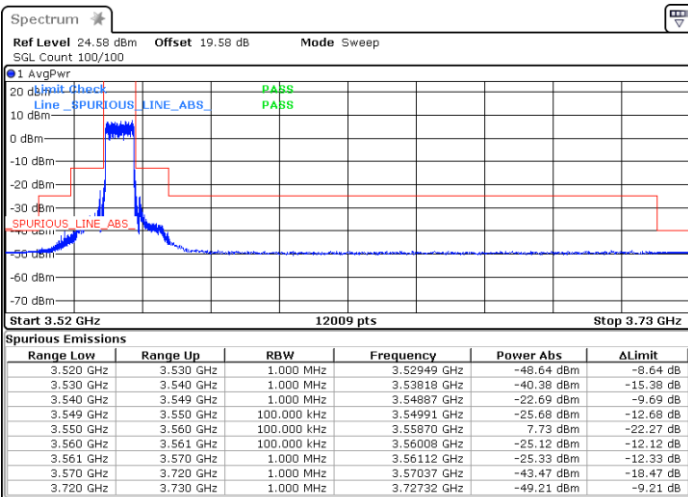

Date: 28.SEP.2023 21:00:12





FR1 n48 / 10MHz / DFT-S OFDM / QPSK

Middle Channel

1RB0


1RBmax

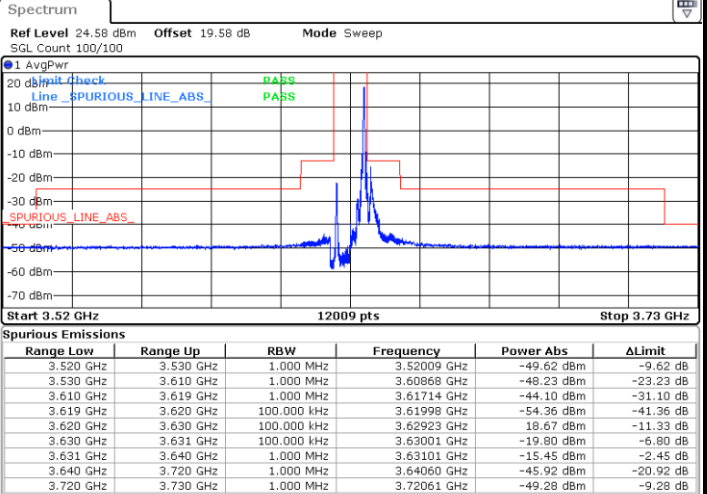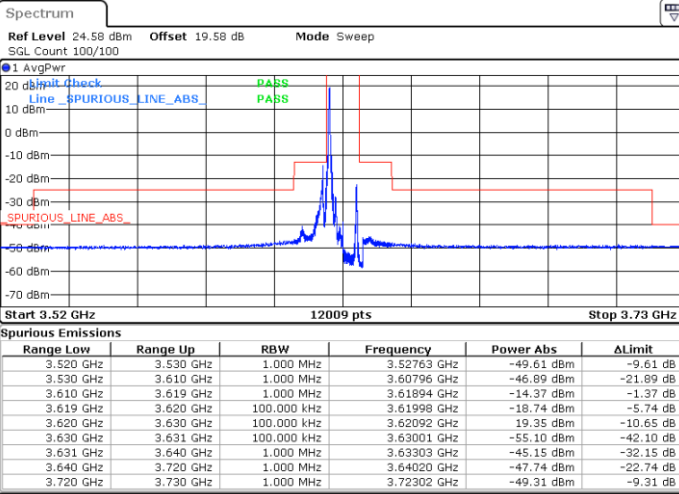

Date: 28.SEP.2023 22:36:19

Date: 28.SEP.2023 22:37:43

Full RB

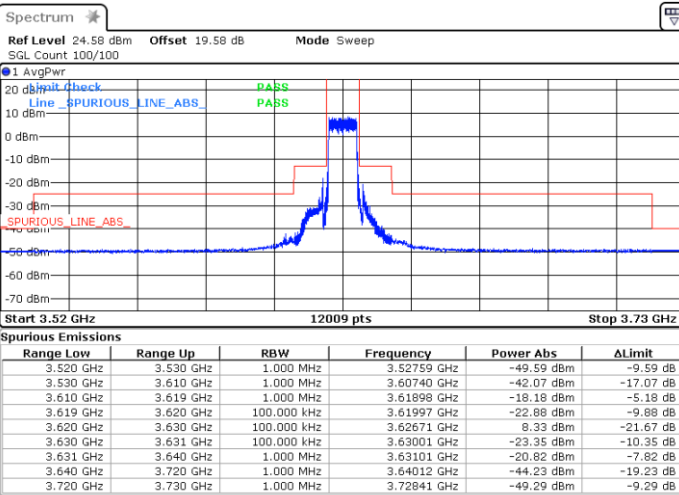

Date: 28.SEP.2023 22:26:32





FR1 n48 / 10MHz / DFT-S OFDM / QPSK

Highest Channel

1RB0


1RBmax

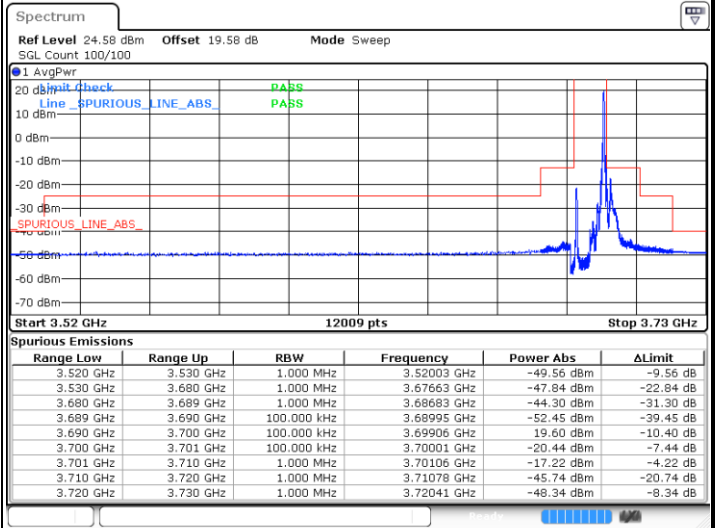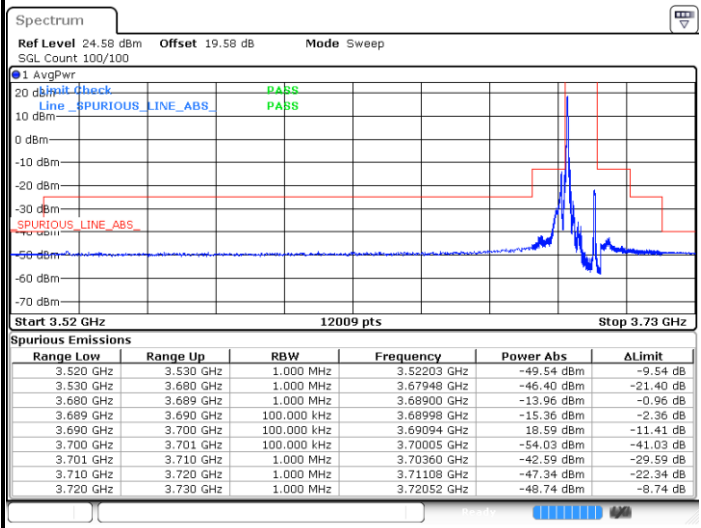

Date: 28.SEP.2023 22:43:21

Date: 28.SEP.2023 22:49:47

Full RB

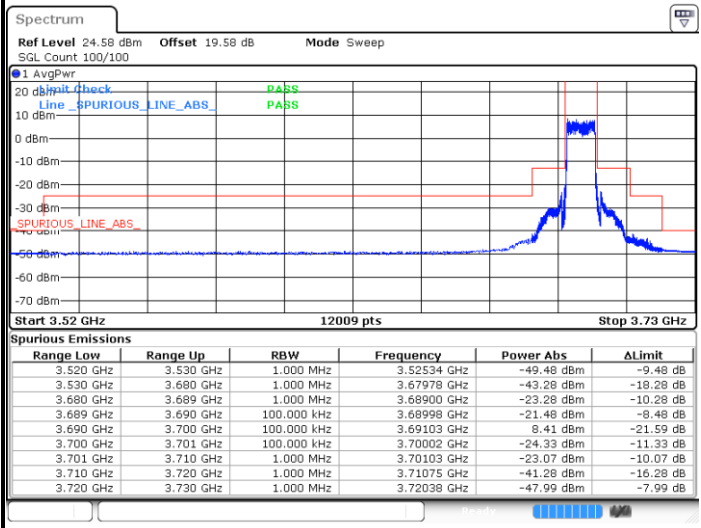

Date: 28.SEP.2023 22:42:13



FR1 n48 / 10MHz / DFT-S OFDM / 16QAM


Lowest Channel

1RB0

1RBmax




Date: 28.SEP.2023 22:18:33

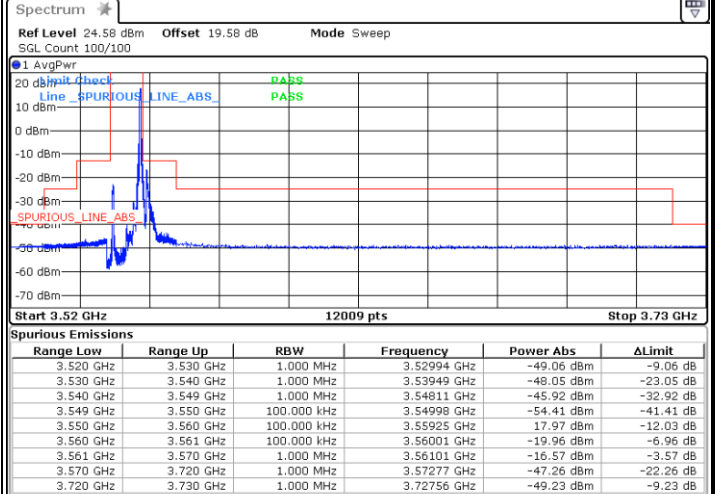

Date: 28.SEP.2023 22:20:39

Full RB

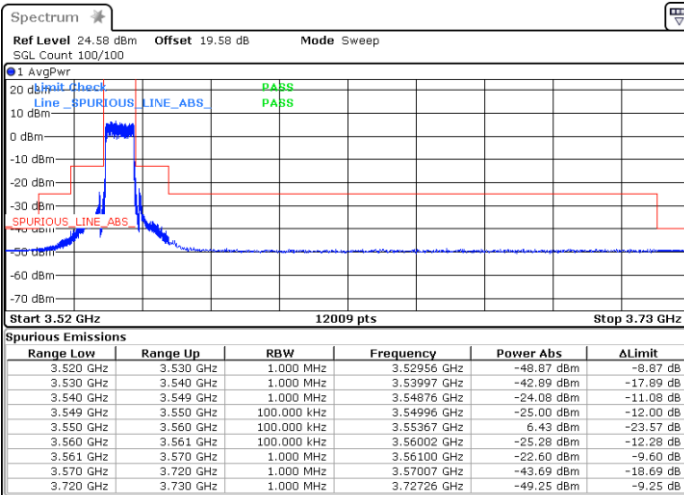

Date: 28.SEP.2023 21:00:59





FR1 n48 / 10MHz / DFT-S OFDM / 16QAM

Middle Channel

1RB0


1RBmax

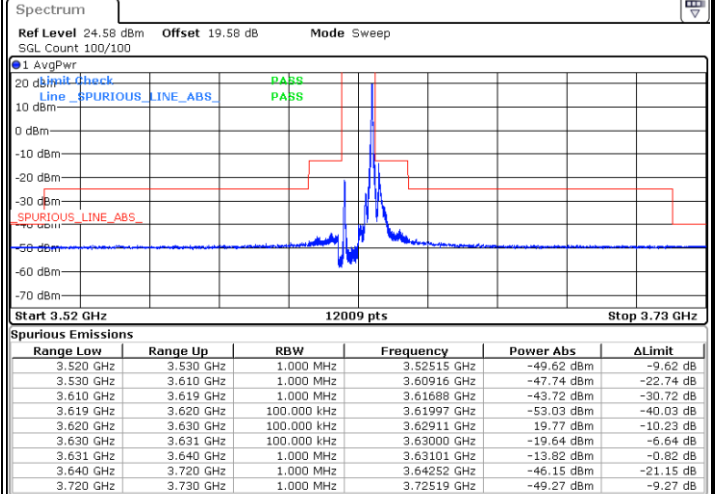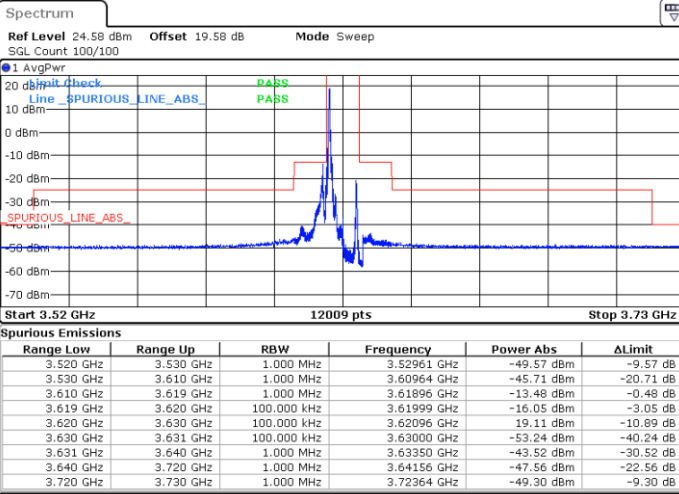

Date: 28.SEP.2023 22:35:46

Date: 28.SEP.2023 22:38:18

Full RB

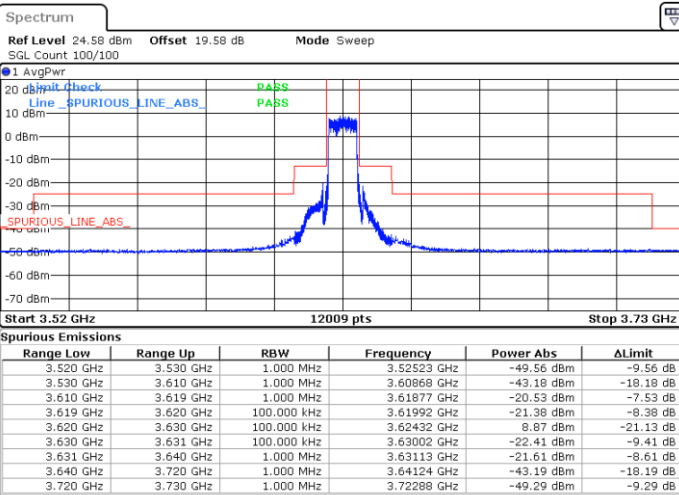

Date: 28.SEP.2023 22:27:02





FR1 n48 / 10MHz / DFT-S OFDM / 16QAM

Highest Channel

1RB0


1RBmax

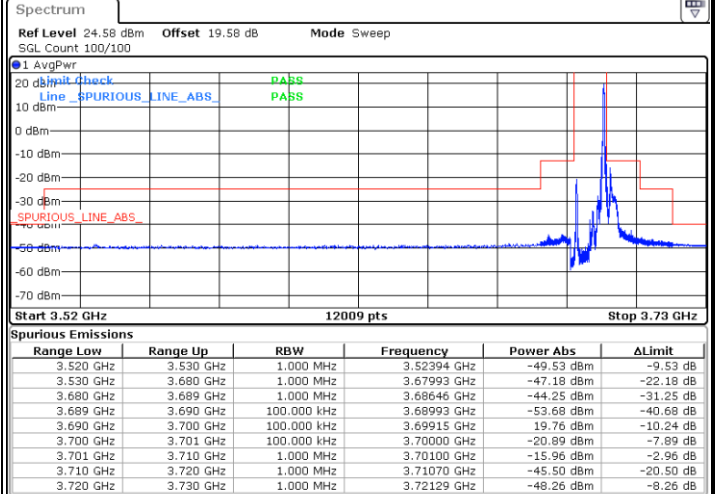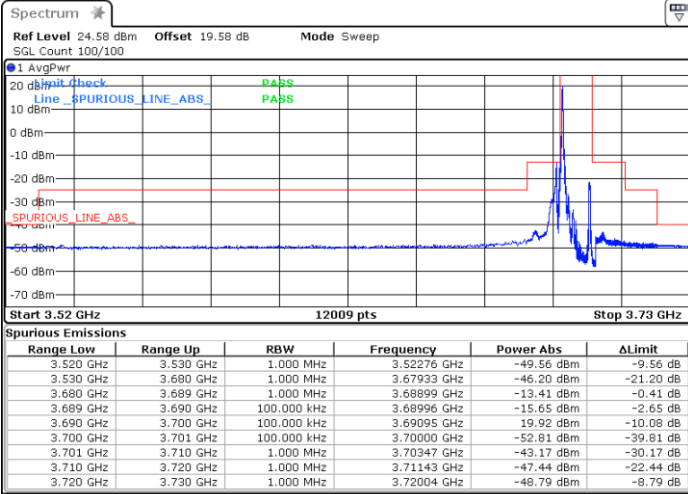

Date: 28.SEP.2023 22:44:06

Date: 28.SEP.2023 22:49:29

Full RB

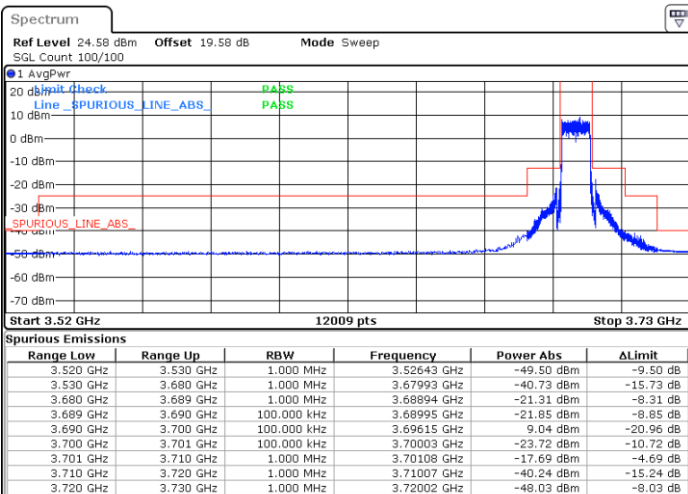

Date: 28.SEP.2023 22:41:55




FR1 n48 / 10MHz / DFT-S OFDM / 64QAM


Lowest Channel

1RB0

1RBmax

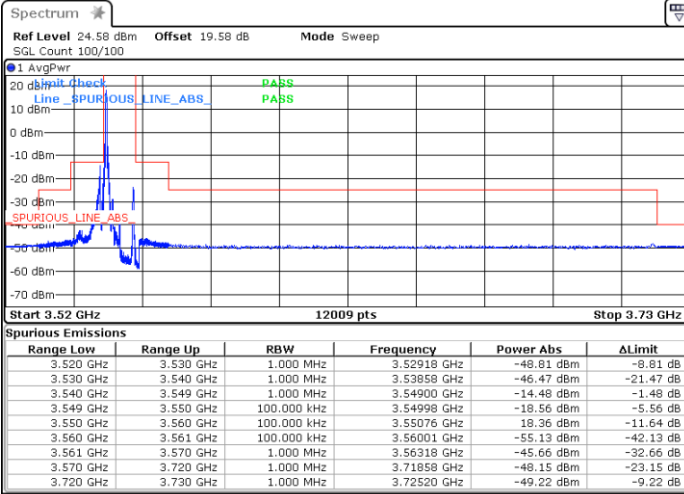


Date: 28.SEP.2023 22:18:06

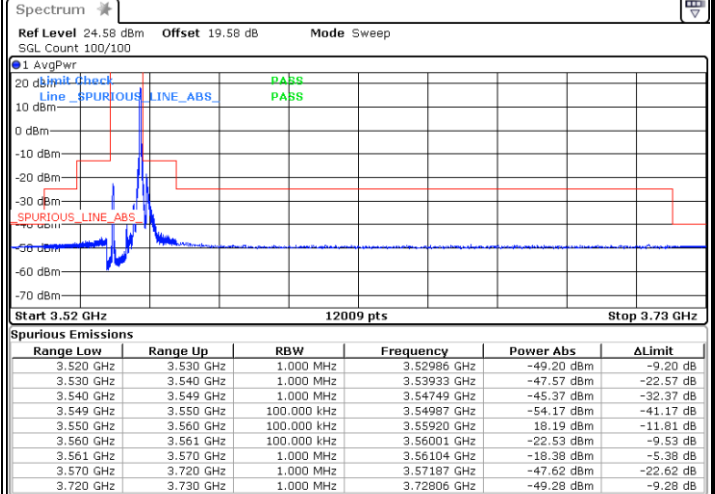

Date: 28.SEP.2023 22:21:03

Full RB

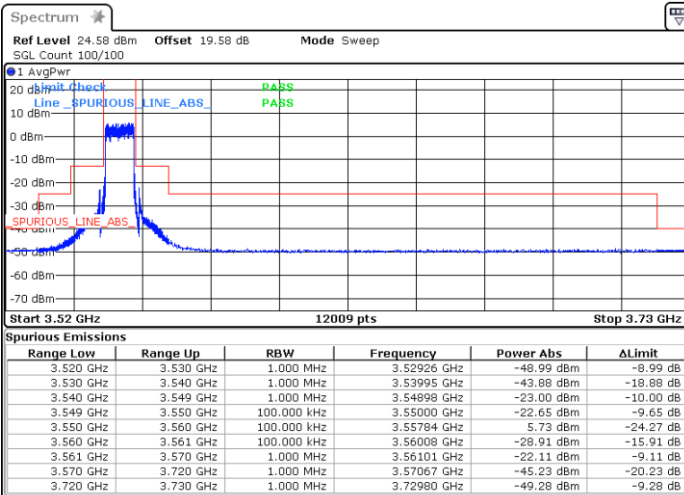

Date: 28.SEP.2023 22:14:02





FR1 n48 / 10MHz / DFT-S OFDM / 64QAM

Middle Channel

1RB0


1RBmax

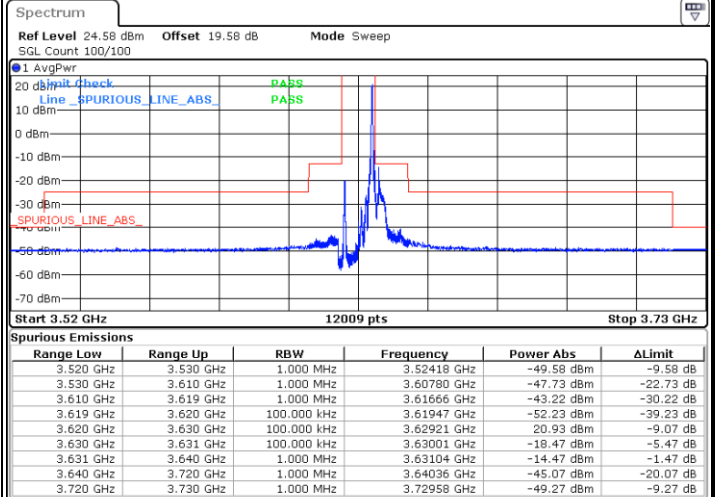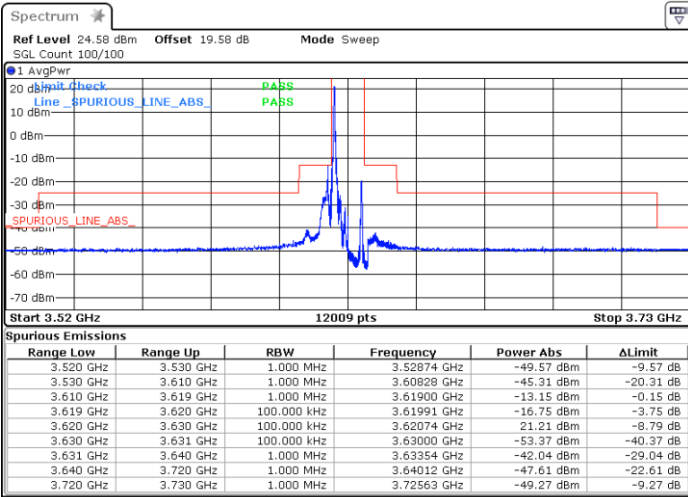

Date: 28.SEP.2023 22:33:59

Date: 28.SEP.2023 22:38:42

Full RB

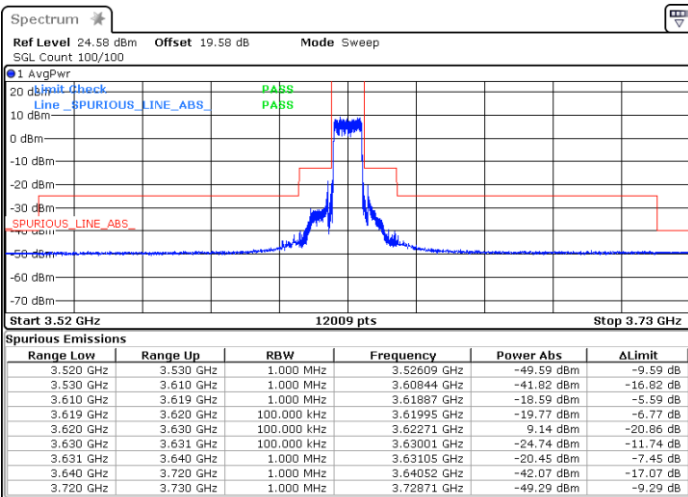

Date: 28.SEP.2023 22:27:26





FR1 n48 / 10MHz / DFT-S OFDM / 64QAM

Highest Channel

1RB0

1RBmax

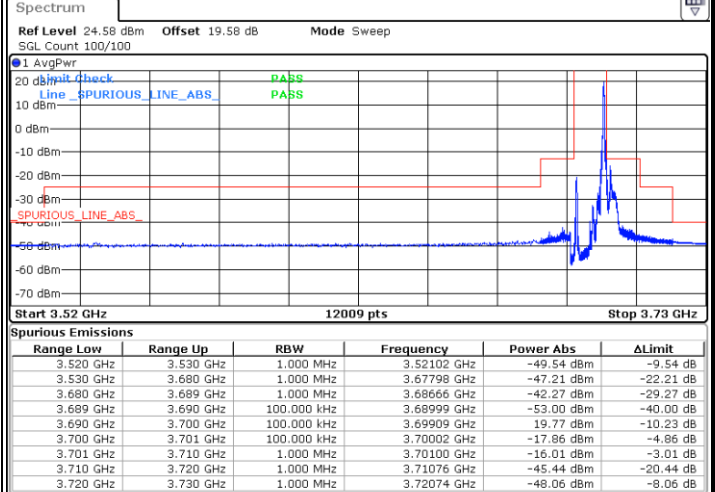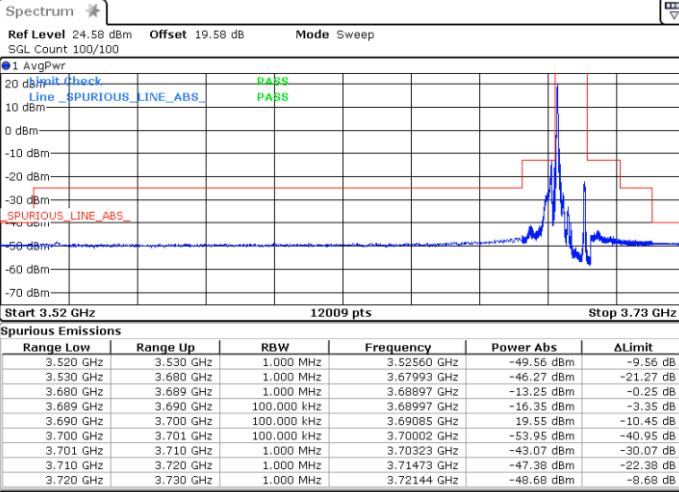

Date: 29.SEP.2023 01:35:25

Date: 28.SEP.2023 22:49:09

Full RB



Date: 28.SEP.2023 22:41:36