



FCC RADIO TEST REPORT

FCC ID : PKRISGM1000
Equipment : Wireless Hotspot Modem
Brand Name : inseeego
Model Name : M1000
Marketing Name : 5G MiFi M1000
Applicant : Inseeego Corp.
9605 Scranton Road, Suite 300, San Diego, CA 92121
Manufacturer : Inseeego Corp.
9605 Scranton Road, Suite 300, San Diego, CA 92121
Standard : FCC 47 CFR Part 2, and 30

The product was received on April, 29, 2019 and testing was started from May 03, 2019 and completed on Jun. 10, 2019. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures ANSI C63.26-2015 and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: William Chen

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test	5
1.3 Modification of EUT	5
1.4 Testing Location	6
1.5 Applied Standards	6
2 Test Configuration of Equipment Under Test	7
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System	8
2.3 Support Unit used in test configuration	8
2.4 Measurement Results Explanation Example	9
2.5 Far Field Condition for Frequency above 18GHz.....	9
2.6 Frequency List of Low/Middle/High Channels.....	10
3 Radiated Test Items	11
3.1 Measuring Instruments.....	11
3.2 Test Setup	11
3.3 Test Result of Radiated Test.....	13
3.4 EIRP Measurement	14
3.5 Occupied Bandwidth	15
3.6 Radiated Spurious Emission Measurement.....	16
3.7 Frequency Stability Measurement.....	18
4 List of Measuring Equipment.....	19
5 Uncertainty of Evaluation.....	20
Appendix A. Test Results of EIRP and Radiated Test	
Appendix B. Test Setup Photos	
Appendix C. R&S Mixer Certificate	



History of this test report

Report No.	Version	Description	Issued Date
FG950301-01A	01	Initial issue of report	Jun. 13, 2019



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Limit	Result (PASS/FAIL)	Remark
3.4	§2.1046 §30.202	EIRP Measurement	+43dBm	Pass	-
3.5	§2.1049	Occupied Bandwidth	Not Applicable	Reporting only	-
3.6	§2.1053 §30.203	Radiated Spurious Emission	-5dBm/MHz -13dBm/MHz	Pass	-
3.7	§2.1055	Frequency Stability for Temperature & Voltage	Within the band	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Louis Wu

Report Producer: Maggie Chiang



1 General Description

1.1 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Wireless Hotspot Modem
FCC ID	PKRISGM1000
EUT supports Radios application	UMTS/LTE/NR/WiFi
HW Version	3.0
FW Version	1.17
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer.

Specification of Accessories	
USB Cable 1	Brand Name : inseegeo
	Model Name : INSGUSB3.0

1.2 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Device Category in Part 30	Mobile station
Tx Frequency	NR band n260: 37GHz ~ 40GHz
Rx Frequency	NR band n260: 37GHz ~ 40GHz
Support Bandwidth	NR band n260: 50 MHz and 100 MHz
Maximum Number of contiguous CC	4
Maximum Aggregated Bandwidth	400MHz
Maximum Output Power (EIRP)	NR band n260: Module 0: 23.90 dBm Module 1: 23.17 dBm Module 2: 23.57 dBm Module 3: 23.82 dBm
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM DFT-s-OFDM: Not supported

Note: Highest EIRP was measured on Module-0/Ant-0, Patch.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC.			
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978			
Test Site Information	Site No.	Engineer	Temperature	Humidity
	TH02-HY	Chester Chen	20~22°C	43~45 %

Test Site	SPORTON INTERNATIONAL INC.			
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855			
Test Site Information	Site No.	Engineer	Temperature	Humidity
	03CH11-HY	Hao Hsu	20~22°C	42~45 %

FCC Designation No. TW1190 and TW0007

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR Part 2, 30
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 842590 D01 Upper Microwave Flexible Use Service v01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

EUT has total 4 millimeter wave antenna modules and up to 2 beams operation for each module.

Any antenna module cannot transmit simultaneously with the other antenna modules.

Preliminary EIRP test was performed for all beam configurations in the anechoic chamber at the manufacturer’s facility so the EIRP worst case beam-pair were identified.

EIRP was investigated that the MIMO beam rated maximum EIRP is 3dB lower than the single beam rated maximum EIRP.

EUT configured to transmit a single beam at a rated maximum EIRP.

The NR radio operation is controlled via software tool QRCT.


The EUT is forced to operate continuously (100% duty cycle) with maximum output power during the test.

2.1 Test Mode

For radiated measurement, the pre-scan is performed to find the worst cases EUT position.

Test Items	Band	Bandwidth (MHz)			Modulation			RB #			Test Channel		
		50	100	400	QPSK	16QAM	64QAM	1	-	Full	L	M	H
EIRP	n260	v	v	v	v	v	v	v		v	v	v	v
99% Occupied Bandwidth	n260	v	v	v	v	v	v			v	v	v	v
Out of Band Emission	n260	v	v	v	v	v	v	v		v	v		v
Spurious Emission	n260	v	v	v	v			v			v	v	v
Frequency Stability	n260	CW tone										v	
Remark	<ol style="list-style-type: none"> The mark "v " means that this configuration is chosen for testing The device is investigated from 30MHz to 100GHz of fundamental signal for radiated spurious emission test under different RB size and modulations in exploratory test. Subsequently, only the worst case emissions are reported. All the radiated test cases were performed with built-in battery. The out of band emission and spurious emissions were measured radiated EIRP. 												

2.2 Connection Diagram of Test System

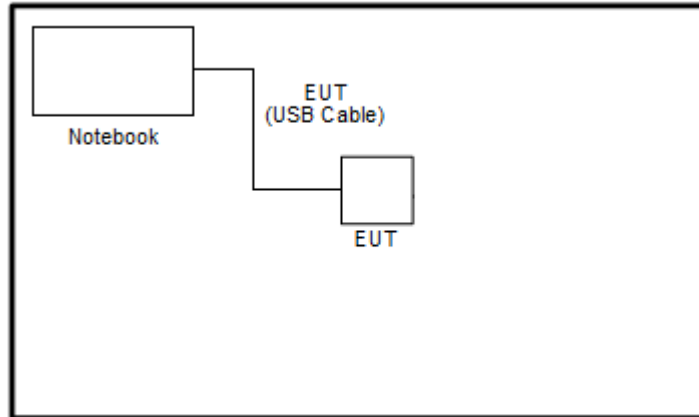

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Notebook	Dell	N/A	N/A	N/A	N/A



2.4 Measurement Results Explanation Example

According to ANSI C63.26-2015 Section 5.2.7

$$EIRP \text{ (dBm)} = E(\text{dBuV/m}) + 20\log(D) - 104.8.$$

where D is the measurement distance (in the far field region) in m.

$$E \text{ (dBuV/m)} = \text{Spectrum Reading Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$$

Hence, the spectrum analyzer *Offset* is derived including RF cable loss and antenna factor.

$$\text{Offset} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$

The conversion loss of RF mixer is also included by the mixer table of spectrum analyzer when measurement frequency is above 40GHz.

Example :

$$\begin{aligned} \text{Offset} &= \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8 \\ &= 42.3 + 3.0 + 107 + 20\log(1) - 104.8 \\ &= 47.5 \text{ (dB)} \end{aligned}$$

2.5 Far Field Condition for Frequency above 18GHz

Horn Antenna	Frequency (GHz)	Antenna Dimension A (mm)	Wavelength (λ) (m)	Far field R (m) $\geq 2A^2 / \lambda$	Measurement Distance (D) (m)	Distance Factor $20\log(D)$ (dB)
BBHA 9170	18	60	0.0167	0.43	1	0.00
	40	60	0.0075	0.96		
QWH-UPRR00	40	48	0.0075	0.61	1	0.00
	60	48	0.0050	0.92		
QWH-EPRR00	60	31	0.0050	0.38	1	0.00
	90	31	0.0033	0.58		
QWH-FPRR00	90	21	0.0033	0.26	1	0.00
	140	21	0.0021	0.41		
QWH-GPRR00	140	15	0.0021	0.21	0.5	-6.02
	220	15	0.0014	0.33		



2.6 Frequency List of Low/Middle/High Channels

NR Band n260 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Frequency	37025	38500	39975
100	Frequency	37050	38500	39950
400	Frequency 1	37050	38350	39650
	Frequency 2	37150	38450	39750
	Frequency 3	37250	38550	39850
	Frequency 4	37350	38650	39950


3 Radiated Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


For radiated emissions from 30MHz to 1GHz

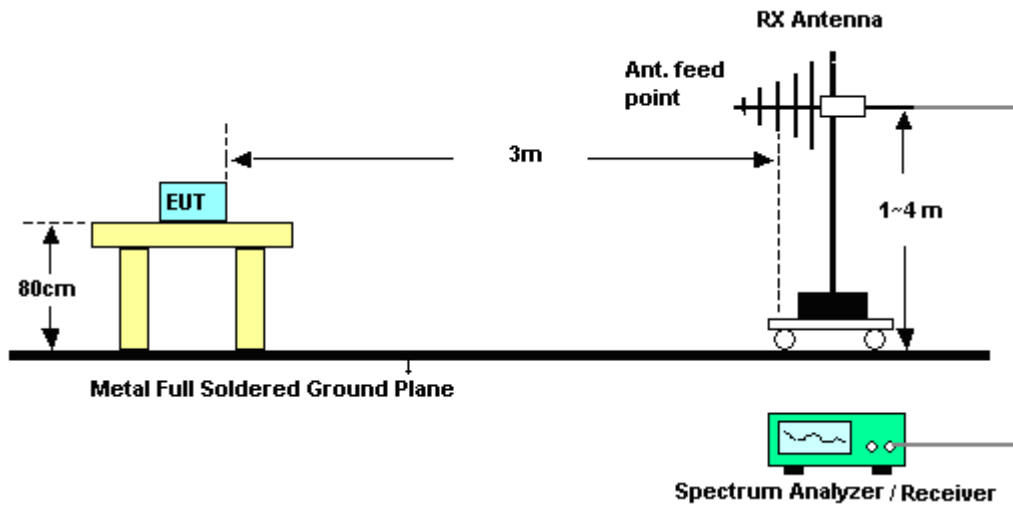


For radiated emissions 1GHz to 18GHz

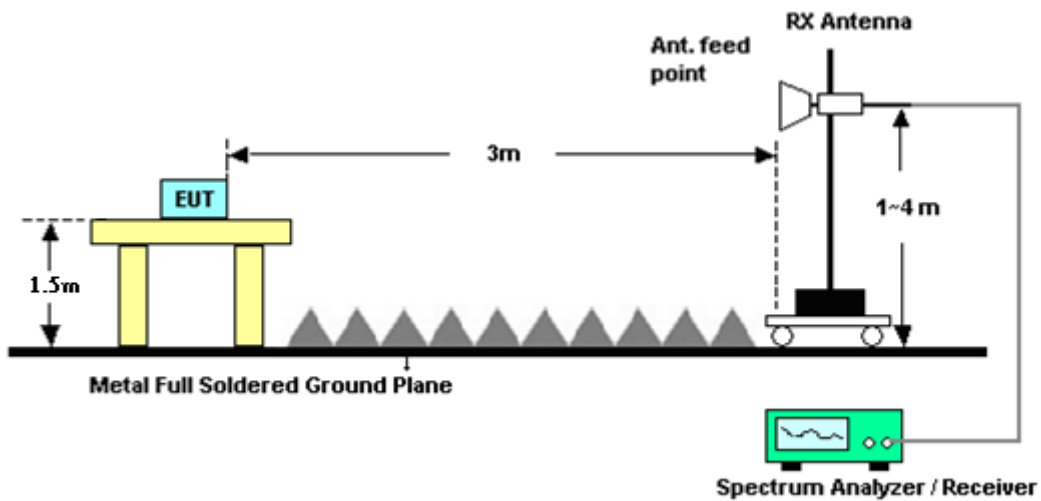


For radiated emissions above 18GHz

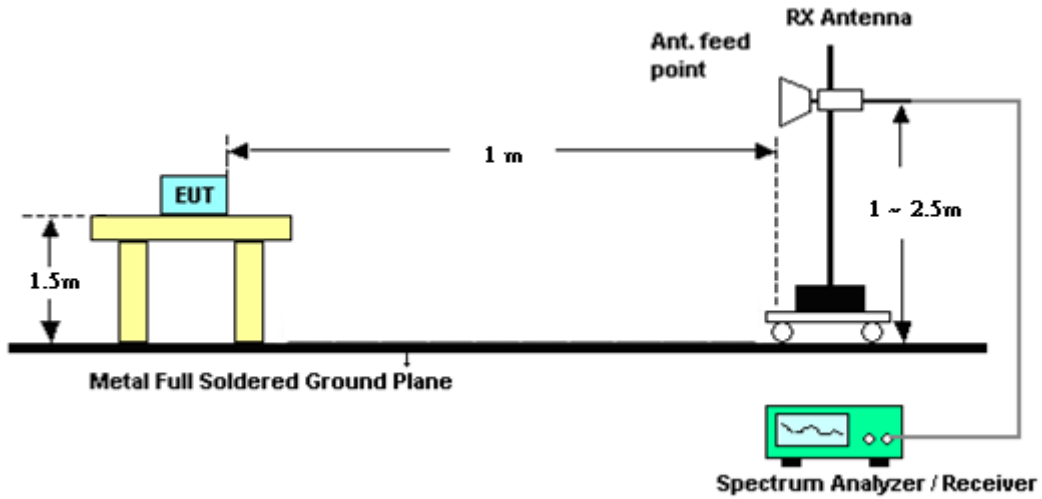

For radiated emissions above 40GHz up to 140GHz

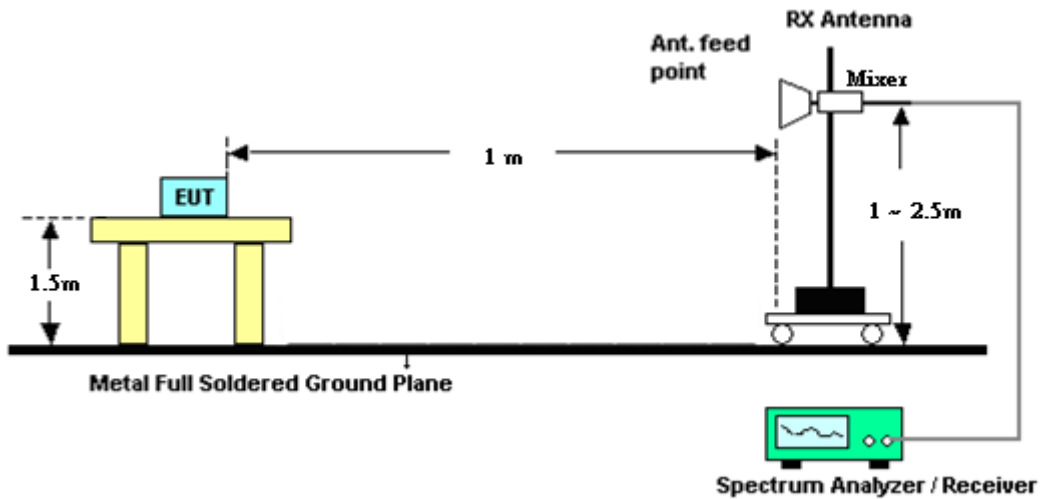

For radiated emissions above 140GHz up to 200GHz

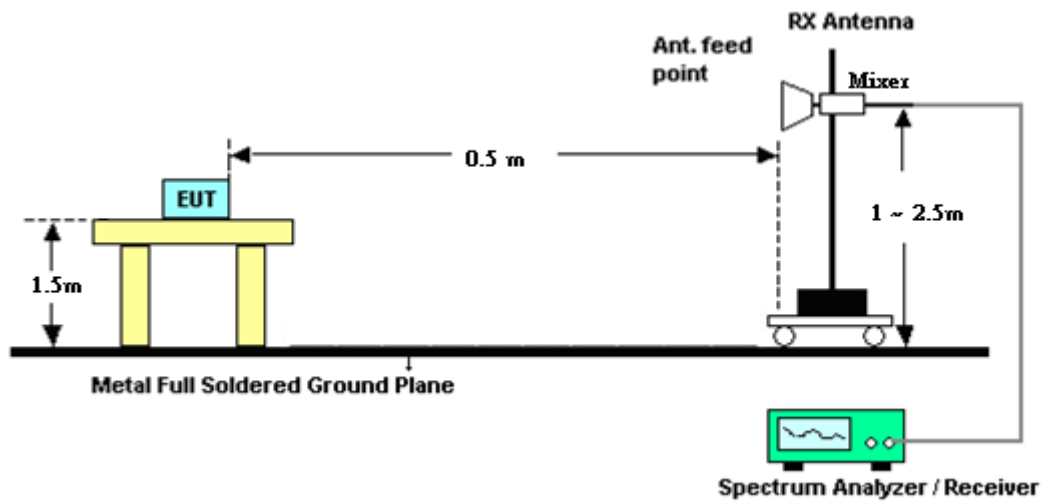

3.3 Test Result of Radiated Test

Please refer to Appendix A.



3.4 EIRP Measurement

3.4.1 Description of EIRP Measurement

For mobile stations, the average power of the sum of all antenna elements is limited to a maximum EIRP of +43 dBm.

3.4.2 Test Procedures

1. Set EUT at maximum output power.
2. Select lowest, middle, and highest channels for each band and different modulation.
3. Enable channel power function of spectrum analyzer
4. Set frequency would like to be investigated.
5. Set Detector = RMS
6. Set Trace mode = trace average
7. Set Sweep time = auto couple
8. Set sweep points $\geq 2 \times \text{Span/RBW}$
9. Set sweep count 100 and wait until the trace to be stabilized
10. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
11. Measure and record the power level from the spectrum analyzer.
12. The test result is calculated according to

ANSI C63.26-2015 Section 5.2.7

$$\text{EIRP (dBm)} = \text{E(dBuV/m)} + 20\log(D) - 104.8.$$

where D is the measurement distance (in the far field region) in m.

$$\text{E (dBuV/m)} = \text{Spectrum Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$$

That is, set the spectrum offset including sum of

$$\text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$



3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

This is for reporting only.

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

3.5.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.4

1. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be at least 1.5 times the anticipated OBW.
2. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
3. Set the detection mode to peak, and the trace mode to max hold.
4. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.6 Radiated Spurious Emission Measurement

3.6.1 Description of Radiated Spurious Emission Measurement

The spectrum is scanned from 30 MHz up to 200GHz.

The conductive power or the total radiated power of any emission outside a licensee's frequency block shall be -13 dBm/MHz or lower. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be -5 dBm/MHz or lower.

3.6.2 Test Procedures

1. Set EUT at maximum output power..
2. Select lowest, middle, and highest channels for each band and different modulation.
3. Measure and record the power level from the spectrum analyzer.
4. Set frequency would like to be investigated.
5. Set Detector = RMS
6. Set Trace mode = trace average
7. Set Sweep time = auto couple
8. Set sweep points $\geq 2 \times \text{Span/RBW}$
9. Set sweep count 100 and wait until the trace to be stabilized
10. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
11. For measurement frequency from 30MHz to 18GHz,
An antenna was substituted in place of the EUT and was driven by a signal generator.
Tune the output power of signal generator to the same emission level with EUT maximum spurious emission. Take record of output power and repeat for another polarization.
12. For measurement frequency above 18GHz,
the test result is calculated according to
ANSI C63.26-2015 Section 5.2.7 and 5.7.3 and 5.7.4
$$\text{EIRP (dBm)} = \text{E(dBuV/m)} + 20\log(D) - 104.8.$$
where D is the measurement distance (in the far field region) in m.
$$\text{E (dBuV/m)} = \text{Spectrum Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$$
That is, set the spectrum offset including sum of
$$\text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$
13. The conversion loss of RF mixer is also included in conversion loss table of the spectrum analyzer when measurement frequency is above 40GHz.



14. If the maximum EIRP is less than TRP limit then early exit condition is met, and no further measurements are required for that frequency.
15. Otherwise follow TRP measurement procedures described in KDB 842590 D01 v01, clause 4.4.2.2 “Two or Three Cut Method When Pattern Multiplication Is Not Applicable”.

EUT antenna dimension is 19.1mm x 6.7mm x 1.84mm.

Frequency Point 1		Frequency Point 2	
d(cm)	1.91	d(cm)	1.91
w(cm)	0.67	w(cm)	0.67
h(cm)	1.84	h(cm)	1.84
Frequency(MHz)	36947	Frequency(MHz)	40097
Wavelength(cm)	0.81	Wavelength(cm)	0.75
Vertical sampling	Horizontal sampling	Vertical sampling	Horizontal sampling
$D = 2.7 \text{ cm}$	$D_{cyl} = 2.0 \text{ cm}$	$D = 2.7 \text{ cm}$	$D_{cyl} = 2.1 \text{ cm}$
$D/\lambda = 3.4$	$D_{cyl}/\lambda = 2.5$	$D/\lambda = 3.4$	$D_{cyl}/\lambda = 2.8$
$\Delta\theta_{ref} = 15^\circ$	$\Delta\phi_{ref} = 15^\circ$	$\Delta\theta_{ref} = 15^\circ$	$\Delta\phi_{ref} = 15^\circ$
$\Delta\theta = 15^\circ$	$\Delta\phi = 15^\circ$	$\Delta\theta = 15^\circ$	$\Delta\phi = 15^\circ$
$\Delta\theta_{max} = 15^\circ$	$\Delta\phi_{max} = 15^\circ$	$\Delta\theta_{max} = 15^\circ$	$\Delta\phi_{max} = 15^\circ$
SF = Max (15/15, 15/15) = 1		SF = Max (15/15, 15/15) = 1	
SF max = Max (15/15, 15/15) = 1		SF max = Max (15/15, 15/15) = 1	
$\Delta TRP = 1$		$\Delta TRP = 1$	
Note: Choosing max sampling grid step size ($\Delta\theta = \Delta\theta_{max} = 15^\circ$ & $\Delta\phi = \Delta\phi_{max} = 15^\circ$), means SF = SFmax, which results in TRP correction of 1 dB (when SFmax > 1) to the actual measurement.			



3.7 Frequency Stability Measurement

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.

1. The EUT was set up in the thermal chamber.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.

1. The EUT was placed in a temperature chamber at 20° C.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Amplifier	SONOMA	310N	187311	9kHz~1GHz	Oct. 23, 2018	May 03,2019~ Jun. 10, 2019	Oct. 22, 2019	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	May 03,2019~ Jun. 10, 2019	Nov. 22, 2019	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	37059&01	30MHz~1GHz	Oct. 13, 2018	May 03,2019~ Jun. 10, 2019	Oct. 12, 2019	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-132 6	1GHz ~ 18GHz	Oct. 15, 2018	May 03,2019~ Jun 10, 2019	Oct. 14, 2019	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 251	18GHz ~ 40GHz	Nov. 20, 2018	May 03,2019~ Jun 10, 2019	Nov. 19, 2019	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP140320	N/A	Nov. 05, 2018	May 03,2019~ Jun 10, 2019	Nov. 04, 2019	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY532701 48	1GHz~26.5GHz	Nov. 14, 2018	May 03,2019~ Jun 10, 2019	Nov. 13, 2019	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz ~ 44GHz	Oct. 18, 2018	May 03,2019~ Jun 10, 2019	Oct. 17, 2019	Radiation (03CH11-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV30	103738	9kHz~30GHz	May 22, 2018	May 03,2019~ May 18, 2019	May 21, 2019	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-00104 2	N/A	N/A	May 03,2019~ Jun 10, 2019	N/A	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	May 03,2019~ Jun 10, 2019	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	May 03,2019~ Jun 10, 2019	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2200	N/A	0~360 Degree	N/A	May 03,2019~ Jun 10, 2019	N/A	Radiation (03CH11-HY)
*Mixer	Rohde & Schwarz	FS-Z60	100986	40 ~ 60 GHz	Oct. 31, 2018	May 03,2019~ May 18, 2019	Oct. 30, 2021	Radiation (03CH11-HY)
*Mixer	Rohde & Schwarz	FS-Z90	101811	60 ~ 90 GHz	Jul. 16, 2018	May 03,2019~ May 18, 2019	Jul. 16, 2021	Radiation (03CH11-HY)
*Mixer	Rohde & Schwarz	FS-Z140	101128	90 ~ 140 GHz	Sep. 03, 2018	May 03,2019~ May 18, 2019	Sep. 02, 2021	Radiation (03CH11-HY)
*Mixer	Rohde & Schwarz	FS-Z220	101014	140 ~ 220 GHz	Aug. 28, 2018	Jan 08, 2018~ May 18, 2019	Aug. 27, 2021	Radiation (03CH11-HY)
Standard Horn Antenna	Quinstar	QWH-UPRR00	923600007	40 ~ 60 GHz	Aug. 17, 2018	May 03,2019~ May 18, 2019	Aug. 16, 2021	Radiation (03CH11-HY)
Standard Horn Antenna	Quinstar	QWH-EPRR00	784600034	60 ~ 90 GHz	Aug. 17, 2018	May 03,2019~ May 18, 2019	Aug. 16, 2021	Radiation (03CH11-HY)
Standard Horn Antenna	Quinstar	QWH-FPRR00	923800008	90 ~ 140 GHz	Aug. 17, 2018	May 03,2019~ May 18, 2019	Aug. 16, 2021	Radiation (03CH11-HY)
Standard Horn Antenna	Quinstar	QWH-GPRR00	923900001	140 ~ 220 GHz	Aug. 17, 2018	May 03,2019~ May 18, 2019	Aug. 16, 2021	Radiation (03CH11-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 14, 2018	May 03,2019~ Jun 10, 2019	Jun. 13, 2019	Thermal (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-9307 01	N/A	Jul. 19, 2018	May 03,2019~ May 22, 2019	Jul. 18, 2019	Thermal (TH02-HY)

Note:

(*) Equipment manufacturer's Calibration Certificate.



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.37
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.67
---	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.03
---	------

Uncertainty of Radiated Emission Measurement (40 GHz ~ 140 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.80
---	------

Uncertainty of Radiated Emission Measurement (140 GHz ~ 200 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.80
---	------



Appendix A. Test Results of EIRP and Radiated Test

EIRP Power(Average power)

NR Band n260 Module 0						
Maximum Average EIRP [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
50	1	0	QPSK	21.29	23.84	22.93
50	32	0		22.29	23.90	23.01
50	1	0	16-QAM	20.64	23.08	21.82
50	32	0		21.67	22.85	22.22
50	1	0	64-QAM	19.67	20.69	19.37
50	32	0		19.73	20.90	20.19
100	1	0	QPSK	20.93	22.92	23.63
100	66	0		22.22	23.84	23.58
100	1	0	16-QAM	20.70	22.82	22.77
100	66	0		21.20	22.83	22.54
100	1	0	64-QAM	19.21	20.86	20.10
100	66	0		19.32	20.86	20.55
400	66	0	QPSK	20.46	22.94	21.03
400	66	0	16-QAM	19.43	22.10	20.24
400	66	0	64-QAM	16.98	19.78	17.95




NR Band n260 Module 1						
Maximum Average EIRP [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
50	1	0	QPSK	21.80	22.08	22.36
50	32	0		22.44	22.95	23.01
50	1	0	16-QAM	20.85	21.92	21.29
50	32	0		21.52	22.10	22.10
50	1	0	64-QAM	18.58	19.99	19.37
50	32	0		19.49	20.02	20.33
100	1	0	QPSK	21.36	23.09	22.54
100	66	0		22.80	23.17	22.96
100	1	0	16-QAM	20.81	22.59	21.73
100	66	0		21.73	22.19	21.78
100	1	0	64-QAM	19.00	20.67	19.36
100	66	0		20.07	20.05	19.90
400	66	0	QPSK	21.08	21.48	23.07
400	66	0	16-QAM	20.14	20.42	22.54
400	66	0	64-QAM	18.05	18.15	20.58



NR Band n260 Module 2						
Maximum Average EIRP [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
50	1	0	QPSK	21.74	23.31	23.55
50	32	0		22.32	23.46	23.56
50	1	0	16-QAM	21.06	22.76	22.98
50	32	0		21.28	22.44	22.72
50	1	0	64-QAM	18.95	20.35	20.62
50	32	0		19.57	20.39	20.74
100	1	0	QPSK	21.78	23.22	23.20
100	66	0		22.46	23.33	23.57
100	1	0	16-QAM	21.27	22.63	22.26
100	66	0		21.55	22.35	22.59
100	1	0	64-QAM	19.10	20.21	19.83
100	66	0		19.85	20.41	20.67
400	66	0	QPSK	20.16	21.91	23.48
400	66	0	16-QAM	19.26	20.98	22.40
400	66	0	64-QAM	17.13	18.64	21.10



NR Band n260 Module 3						
Maximum Average EIRP [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
50	1	0	QPSK	20.83	23.70	23.73
50	32	0		21.35	23.33	23.82
50	1	0	16-QAM	20.07	22.67	22.92
50	32	0		20.41	22.55	22.96
50	1	0	64-QAM	18.12	20.48	20.77
50	32	0		18.77	20.66	20.90
100	1	0	QPSK	21.23	23.31	23.45
100	66	0		21.58	23.41	23.67
100	1	0	16-QAM	19.90	22.69	22.58
100	66	0		20.78	22.50	22.49
100	1	0	64-QAM	17.85	20.46	20.37
100	66	0		19.13	20.63	20.53
400	66	0	QPSK	19.03	21.38	22.98
400	66	0	16-QAM	18.16	20.63	22.19
400	66	0	64-QAM	15.94	18.39	22.00

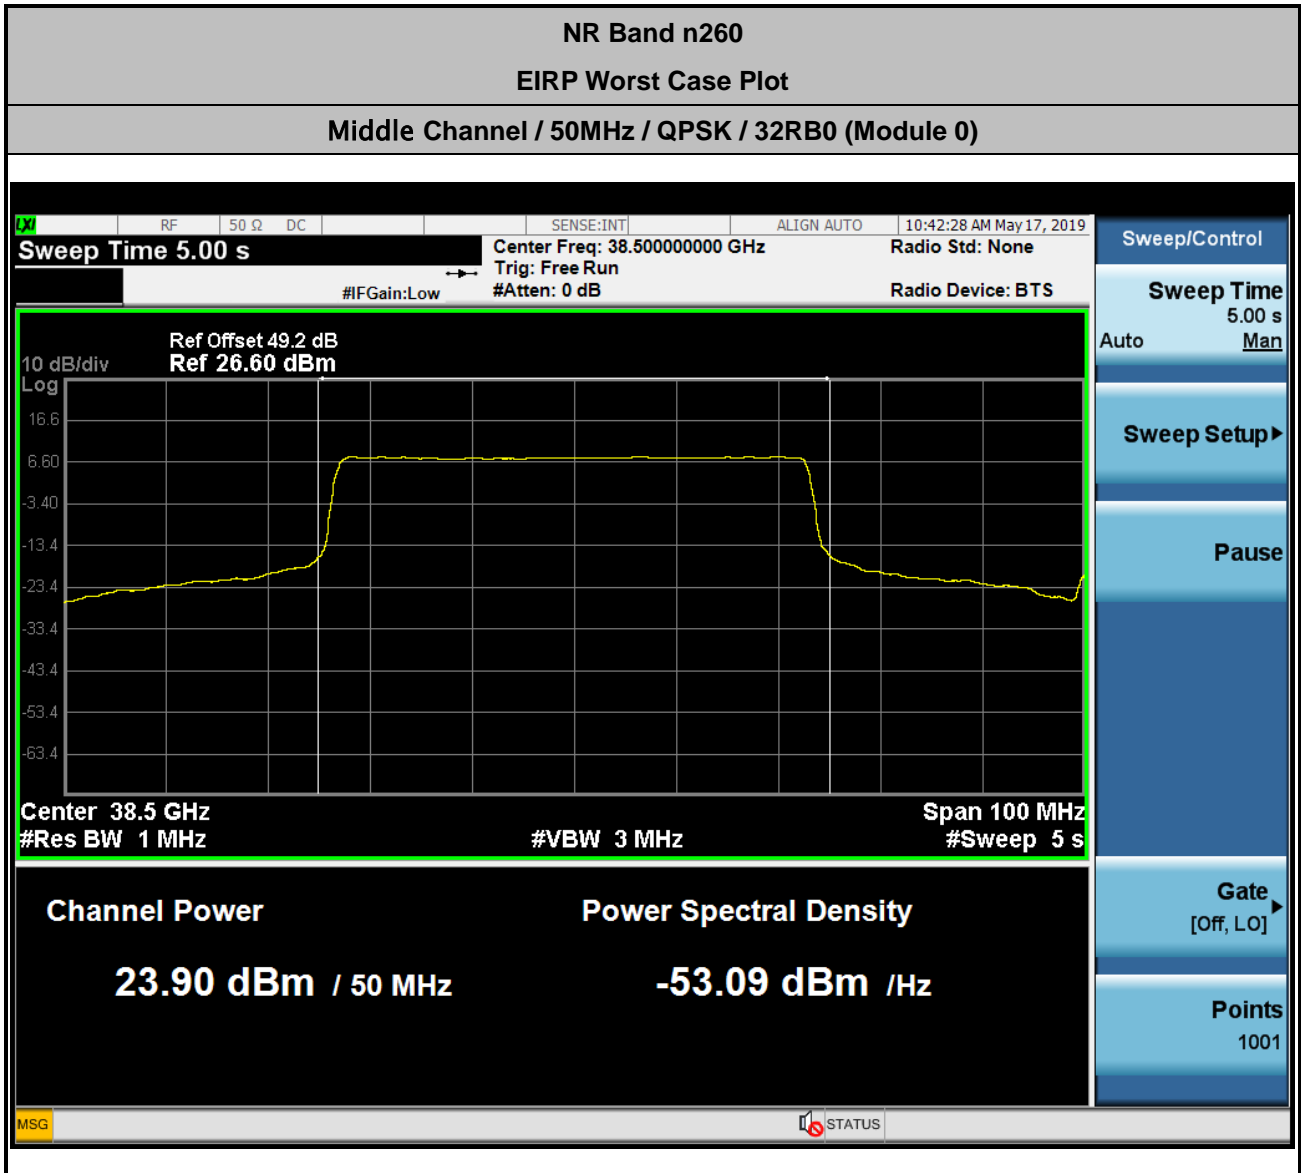

$$\begin{aligned}
 \text{Offset} &= \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8 \\
 &= 44.1 + 2.9 + 107 + 20\log(1) - 104.8 \\
 &= 49.2 \text{ (dB)}
 \end{aligned}$$



NR Band n260

Occupied Bandwidth

Mode	Module 0 NR Band n260 : 99%OBW(MHz)								
BW	50MHz			100MHz			400MHz		
Mod.	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
Lowest CH	47.047	46.348	46.298	94.331	94.127	94.078	393.17	392.46	391.99
Middle CH	46.957	46.423	46.437	94.281	94.236	94.020	393.52	393.58	393.00
Highest CH	46.780	46.360	46.451	94.178	94.342	94.083	394.32	393.81	393.63

Mode	Module 1 NR Band n260 : 99%OBW(MHz)								
BW	50MHz			100MHz			400MHz		
Mod.	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
Lowest CH	46.891	46.063	46.407	94.380	94.146	94.121	393.19	393.02	393.02
Middle CH	46.633	46.260	48.158	94.146	94.331	94.067	394.04	393.92	393.31
Highest CH	46.756	46.428	46.867	94.279	94.130	94.109	396.38	396.44	393.30

Mode	Module 2 NR Band n260 : 99%OBW(MHz)								
BW	50MHz			100MHz			400MHz		
Mod.	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
Lowest CH	46.866	46.391	46.439	94.231	94.206	94.195	392.90	392.10	391.86
Middle CH	47.275	46.720	46.730	94.317	94.240	94.142	394.30	394.04	393.41
Highest CH	47.563	46.410	46.568	94.268	94.294	94.164	394.50	394.08	392.76


Mode	Module 3 NR Band n260 : 99%OBW(MHz)								
BW	50MHz			100MHz			400MHz		
Mod.	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
Lowest CH	47.653	46.497	46.802	94.346	94.222	94.047	393.49	392.62	393.00
Middle CH	47.622	46.526	46.538	94.290	94.263	94.126	395.54	394.36	393.68
Highest CH	47.324	46.324	46.462	94.339	94.328	94.206	395.33	394.38	392.79




Module 0

NR Band n260


Lowest Channel / 50MHz / QPSK

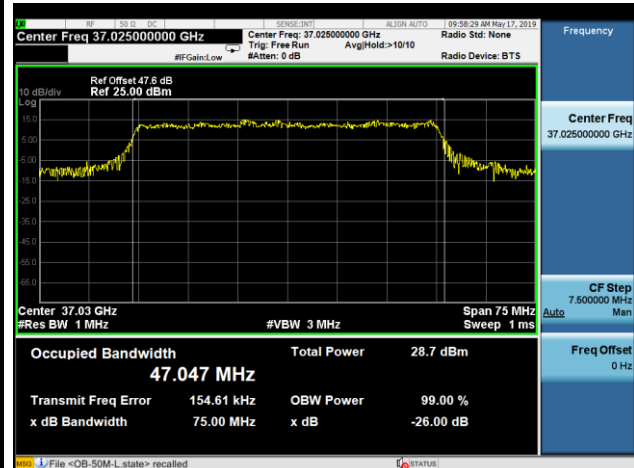


Lowest Channel / 50MHz / 16QAM

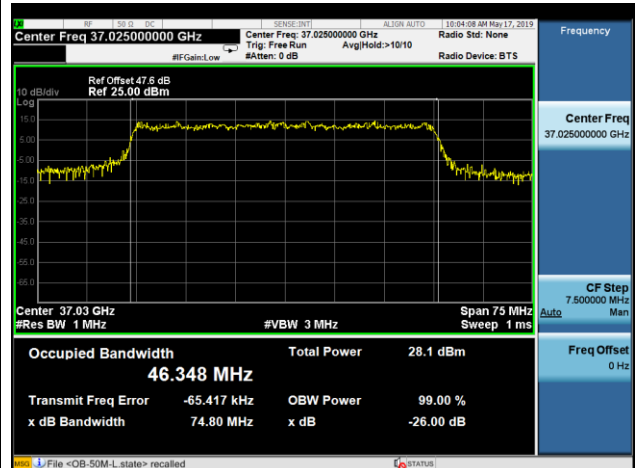


Middle Channel / 50MHz / QPSK

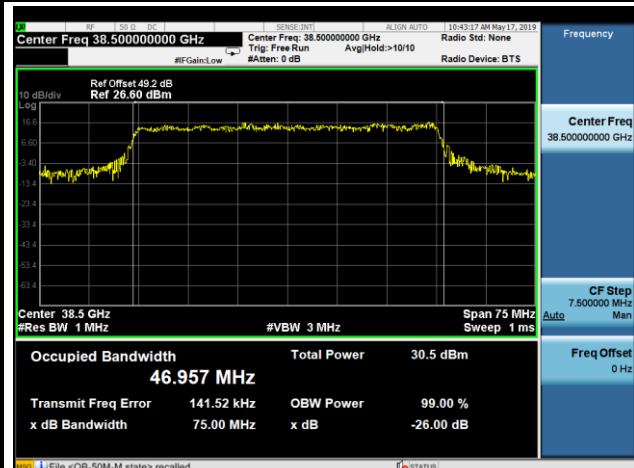

Middle Channel / 50MHz / 16QAM

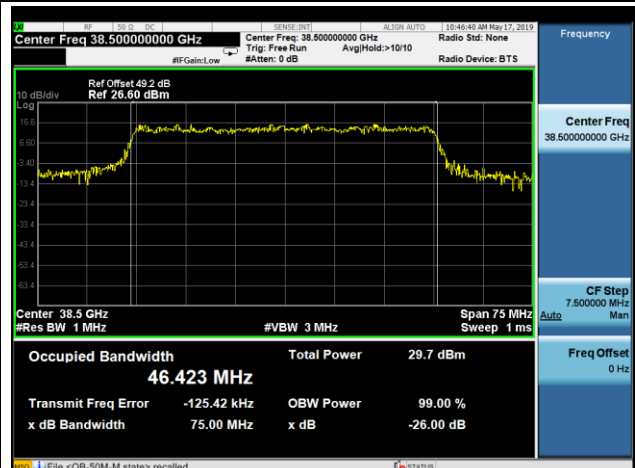

Highest Channel / 50MHz / QPSK

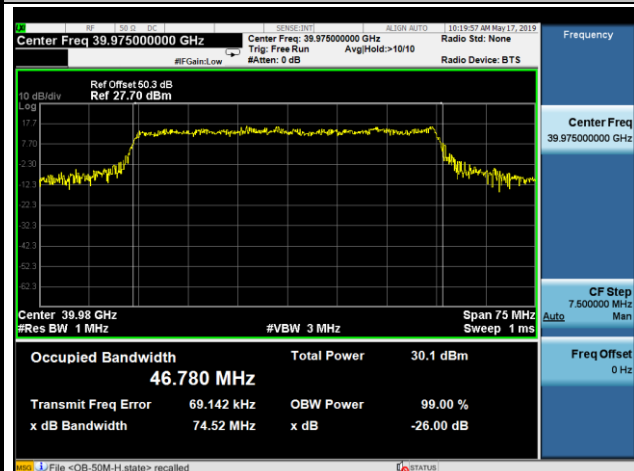

Highest Channel / 50MHz / 16QAM







Module 0

NR Band n260


Lowest Channel / 50MHz / 64QAM

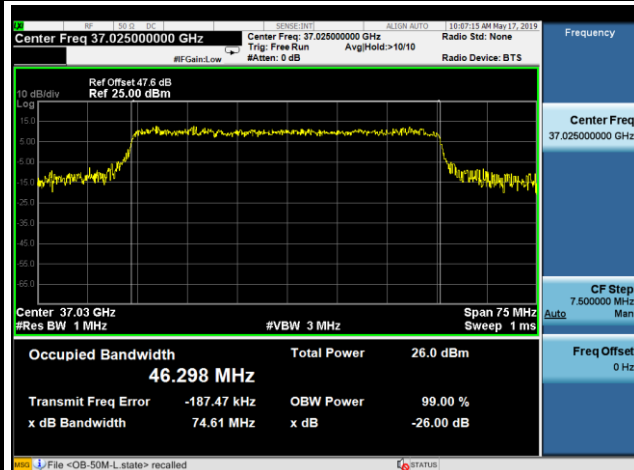


Lowest Channel / 100MHz / QPSK

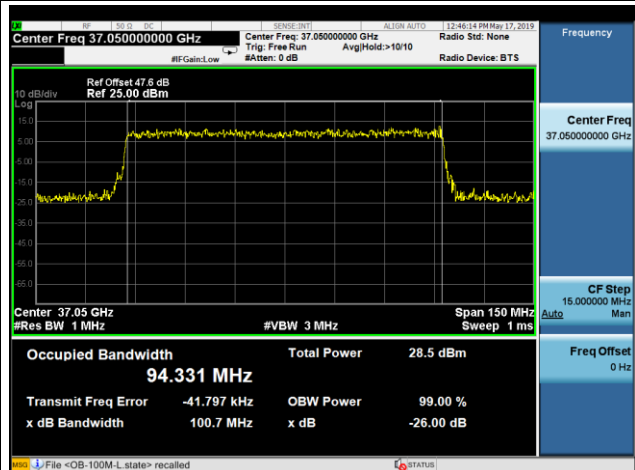


Middle Channel / 50MHz / 64QAM

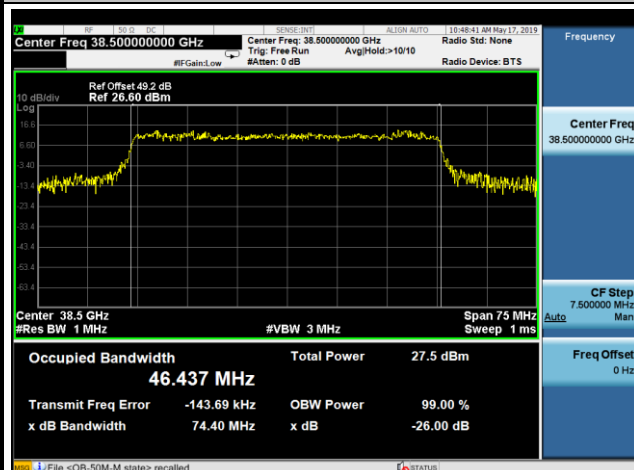


Middle Channel / 100MHz / QPSK

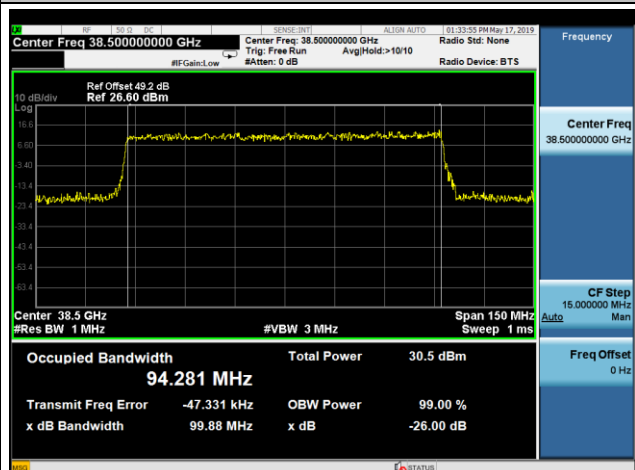

Highest Channel / 50MHz / 64QAM

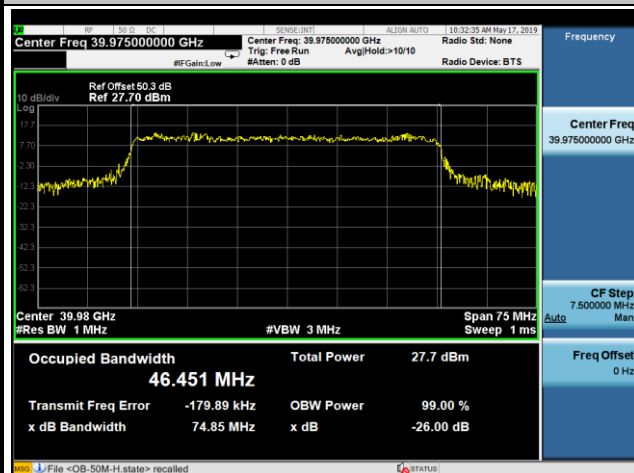

Highest Channel / 100MHz / QPSK

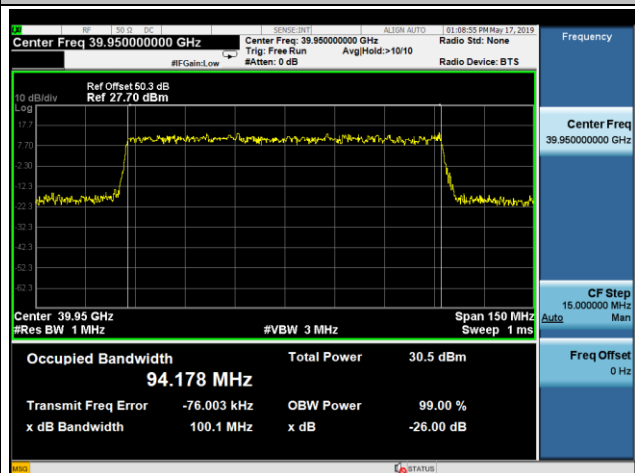





Module 0

NR Band n260


Lowest Channel / 100MHz / 16QAM

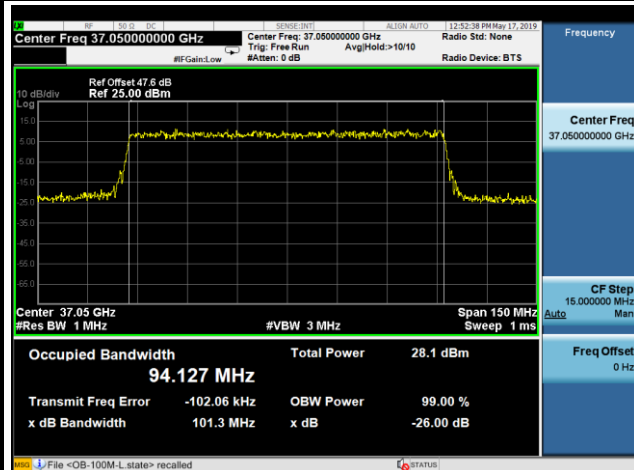


Lowest Channel / 100MHz / 64QAM

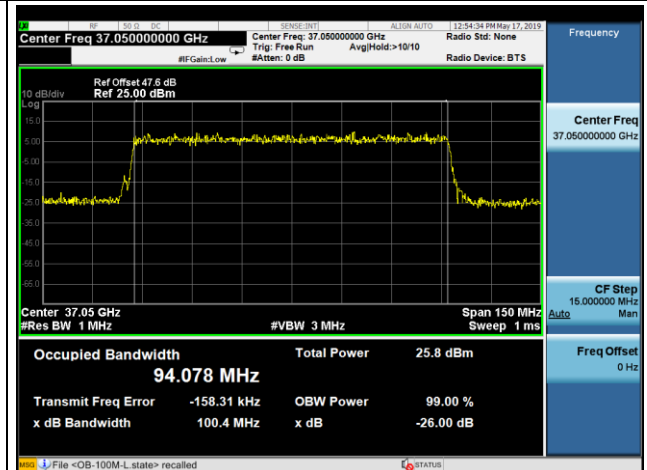


Middle Channel / 100MHz / 16QAM

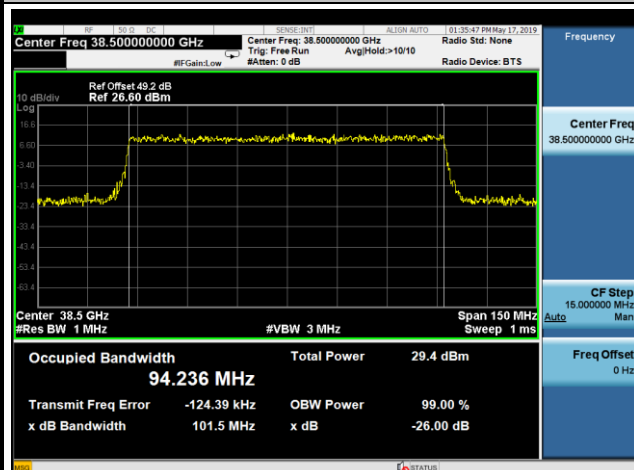


Middle Channel / 100MHz / 64QAM

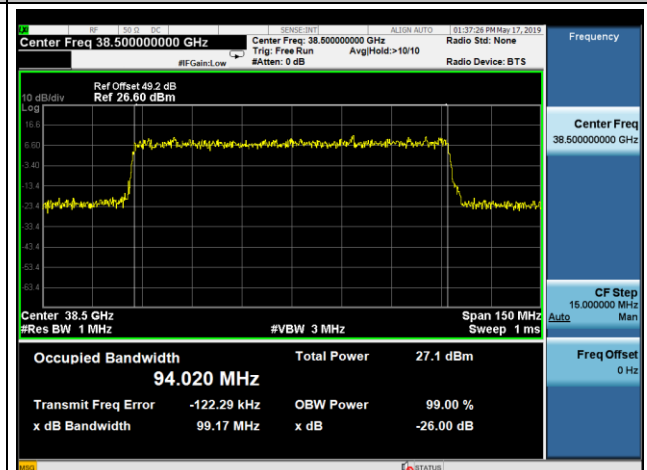

Highest Channel / 100MHz / 16QAM

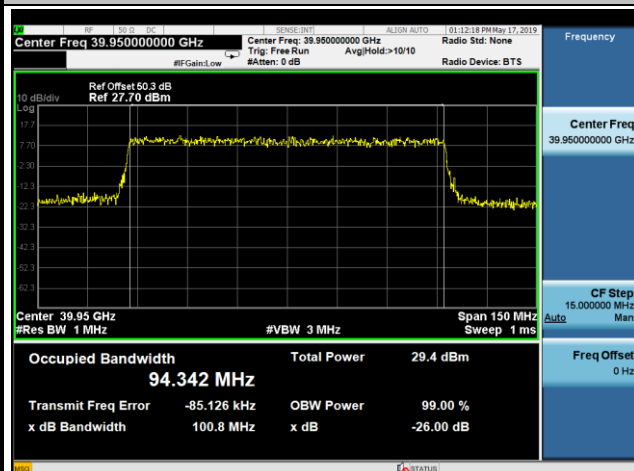

Highest Channel / 100MHz / 64QAM

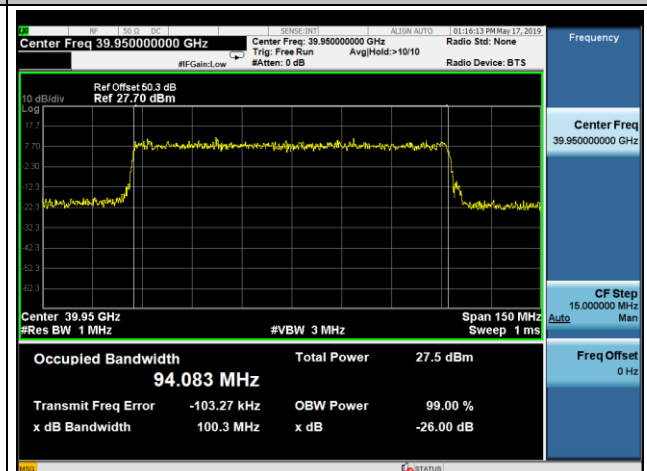





Module 0

NR Band n260


Lowest Channel / 400MHz / QPSK

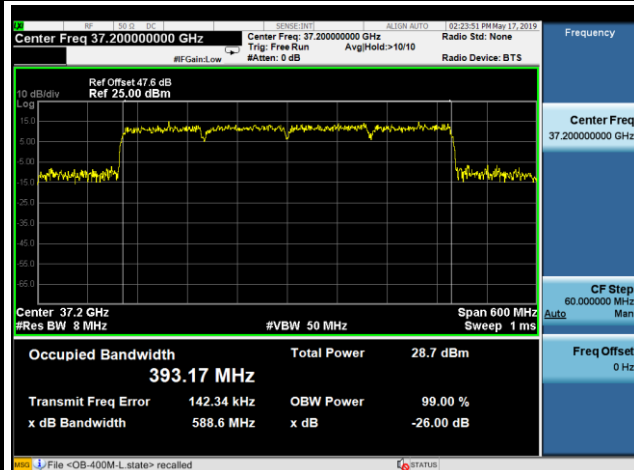


Lowest Channel / 400MHz / 16QAM

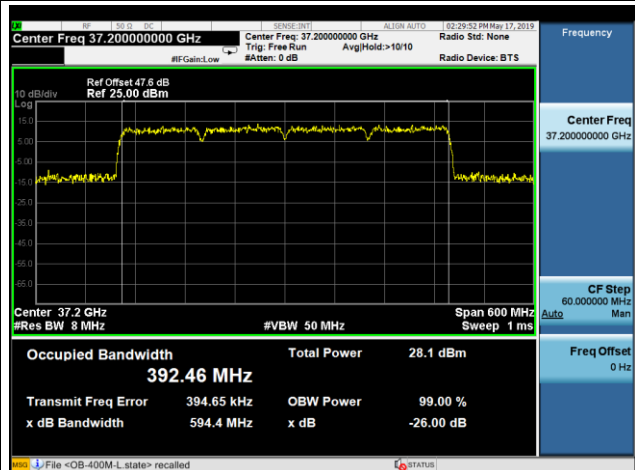


Middle Channel / 400MHz / QPSK

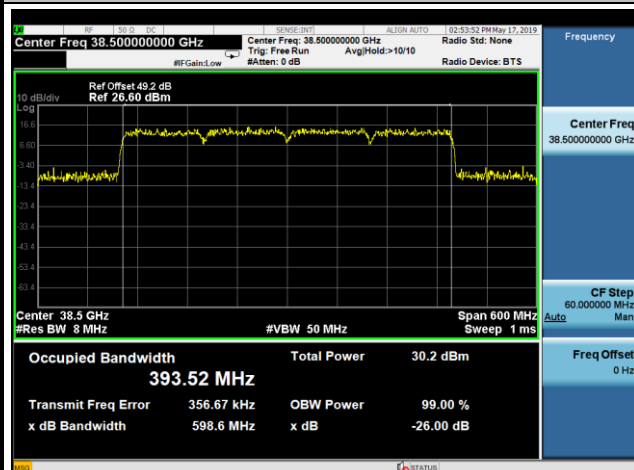


Middle Channel / 400MHz / 16QAM

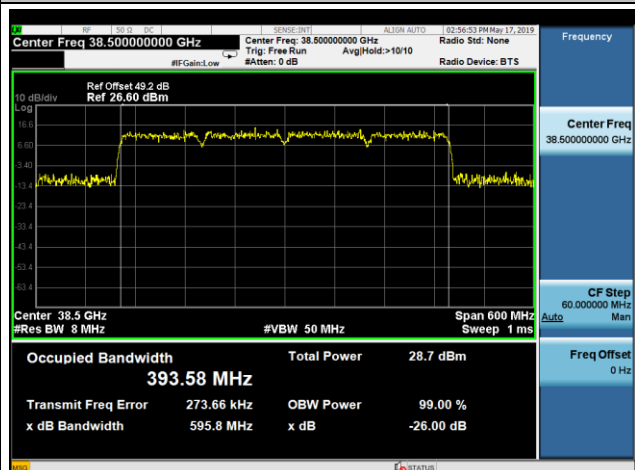

Highest Channel / 400MHz / QPSK

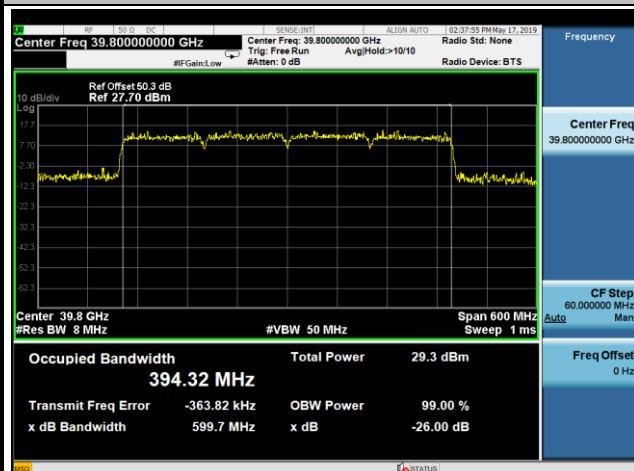

Highest Channel / 400MHz / 16QAM

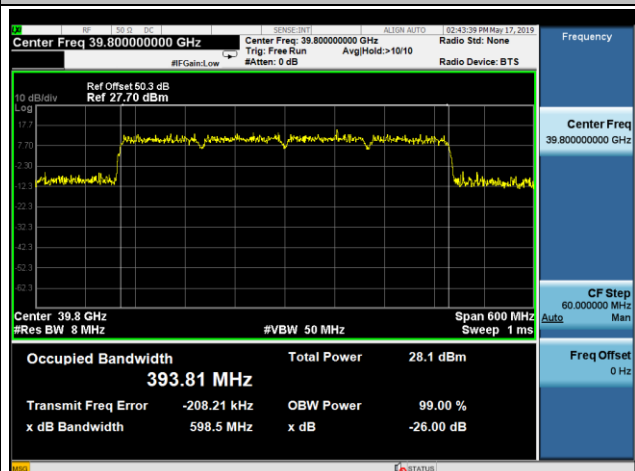




Module 0


NR Band n260

Lowest Channel / 400MHz / 64QAM

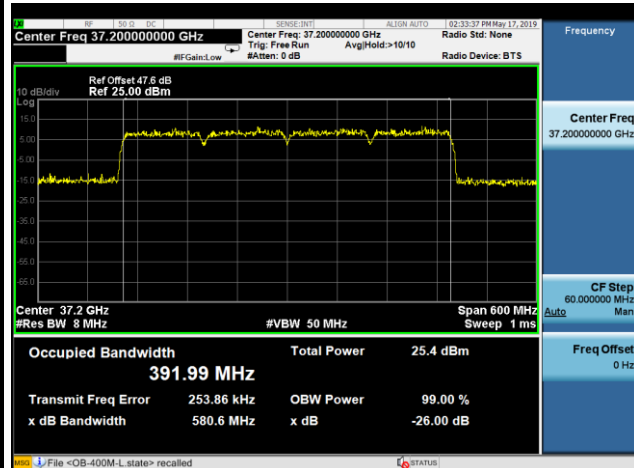


intentionally blank

Middle Channel / 400MHz / 64QAM

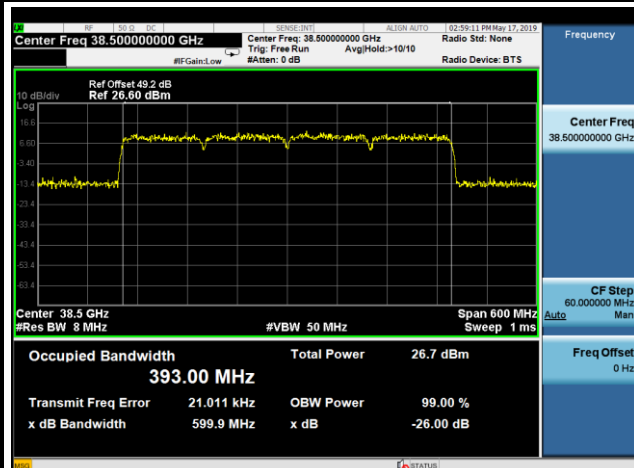

intentionally blank

Highest Channel / 400MHz / 64QAM

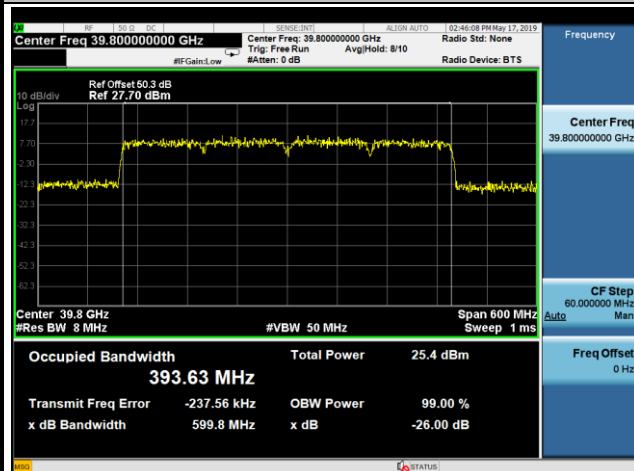


intentionally blank




Module 1

NR Band n260


Lowest Channel / 50MHz / QPSK

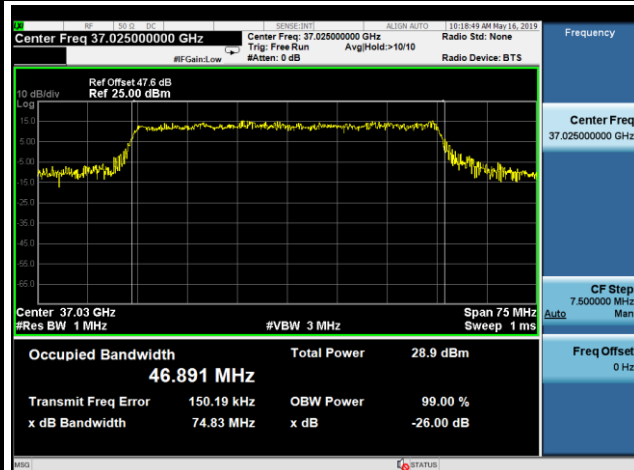


Lowest Channel / 50MHz / 16QAM

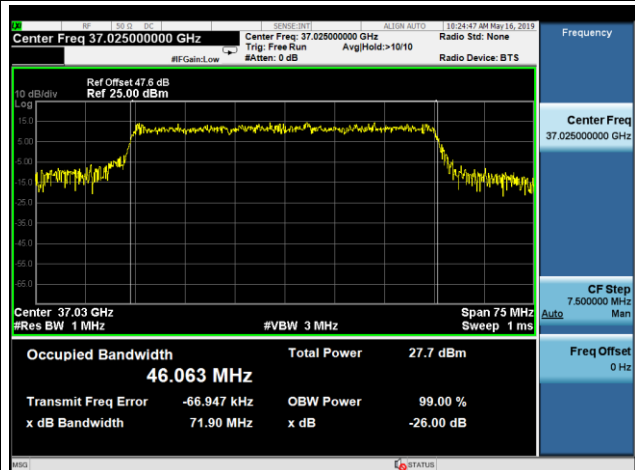


Middle Channel / 50MHz / QPSK

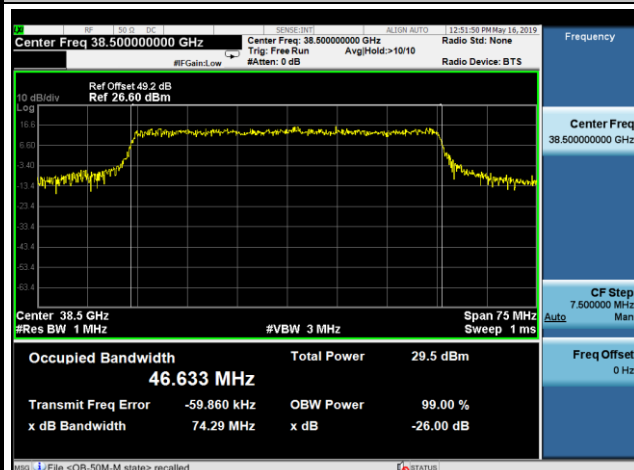


Middle Channel / 50MHz / 16QAM

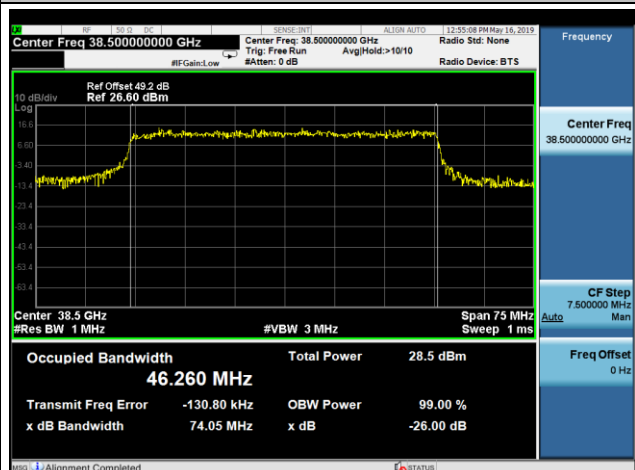

Highest Channel / 50MHz / QPSK

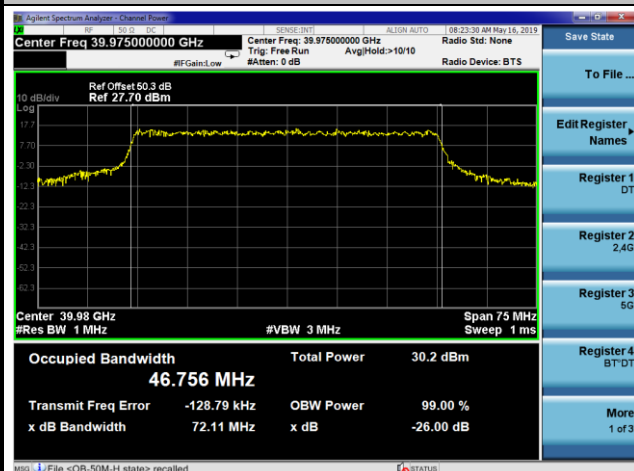

Highest Channel / 50MHz / 16QAM

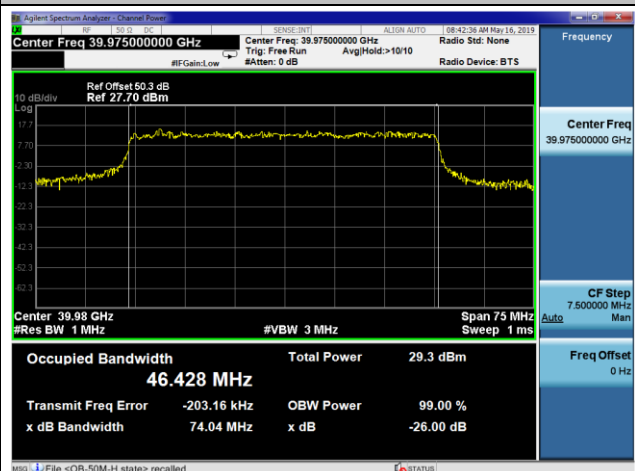





Module 1

NR Band n260


Lowest Channel / 50MHz / 64QAM

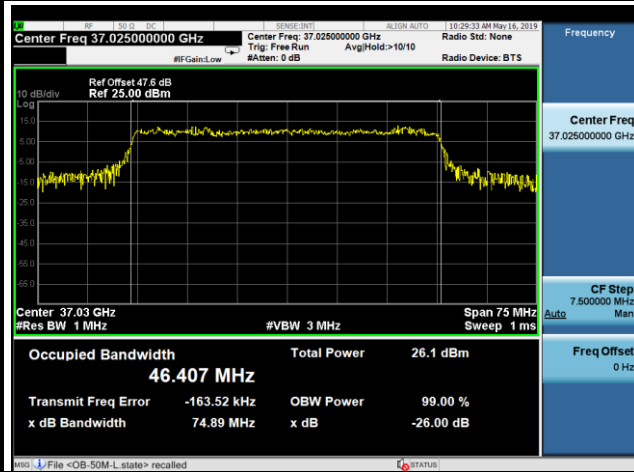


Lowest Channel / 100MHz / QPSK

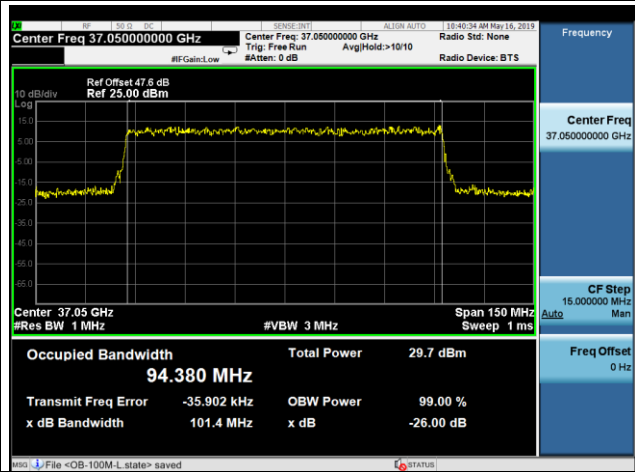


Middle Channel / 50MHz / 64QAM

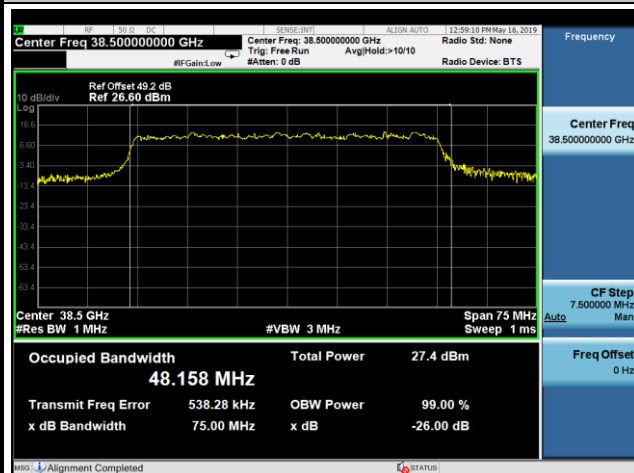


Middle Channel / 100MHz / QPSK

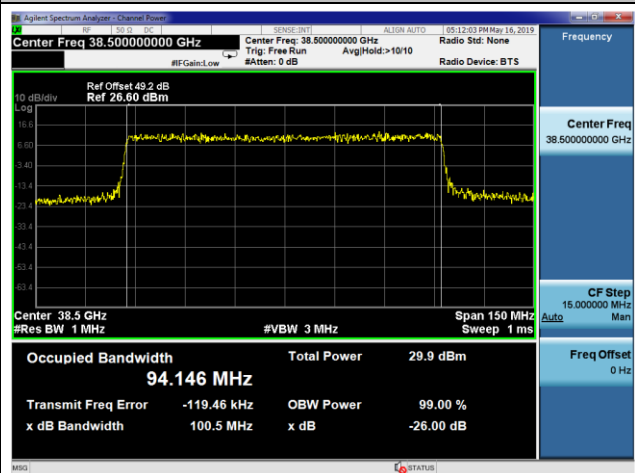

Highest Channel / 50MHz / 64QAM

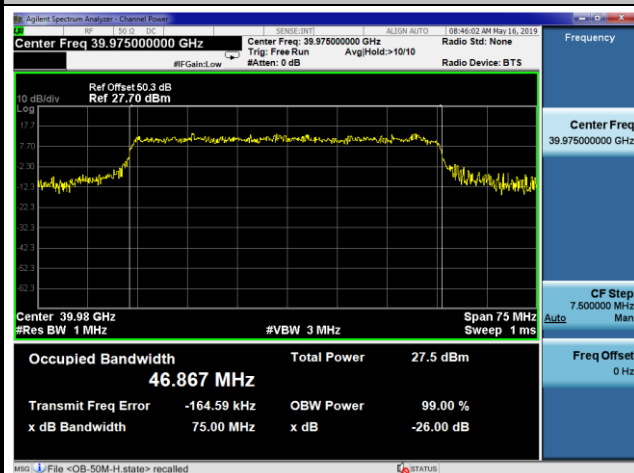

Highest Channel / 100MHz / QPSK

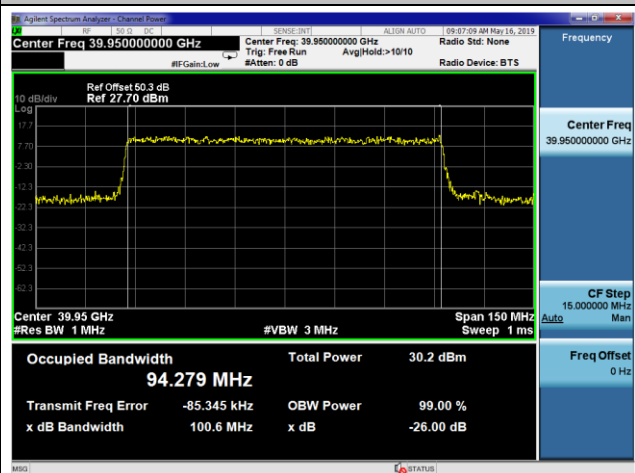





Module 1

NR Band n260


Lowest Channel / 100MHz / 16QAM

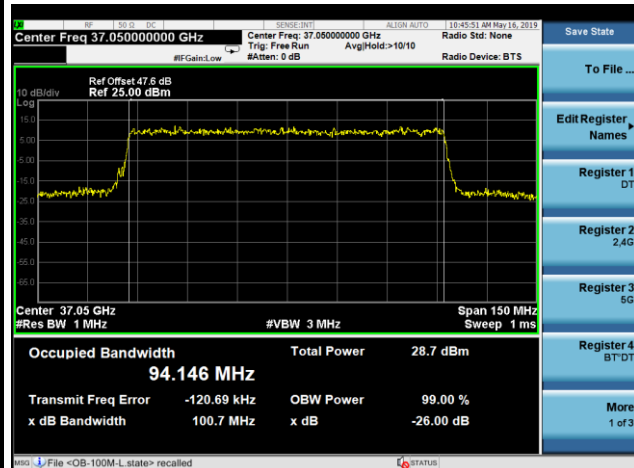


Lowest Channel / 100MHz / 64QAM

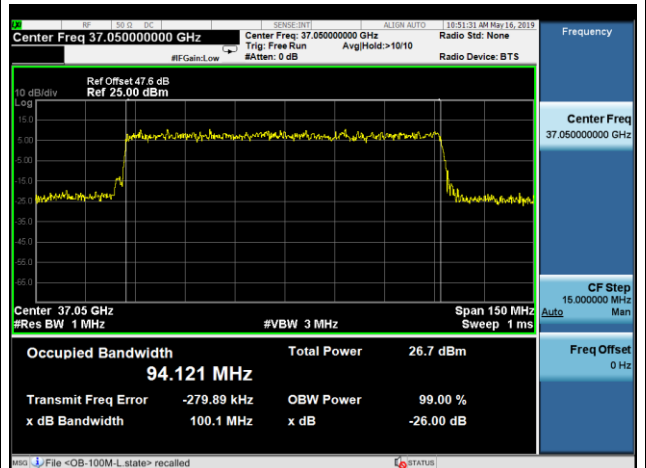


Middle Channel / 100MHz / 16QAM

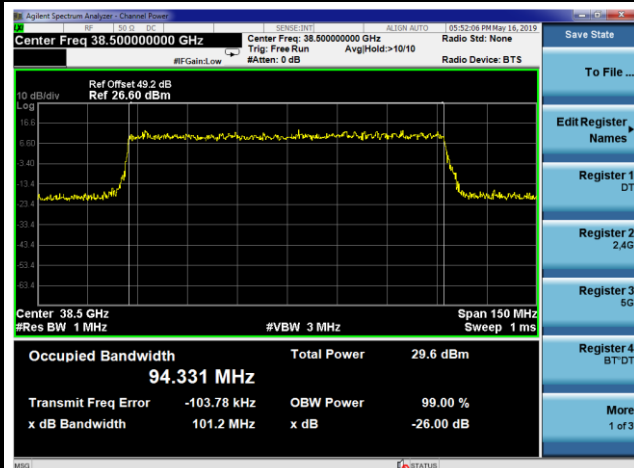


Middle Channel / 100MHz / 64QAM

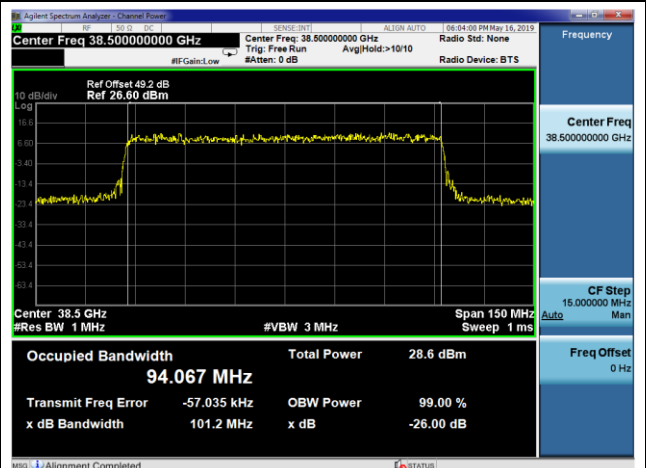

Highest Channel / 100MHz / 16QAM

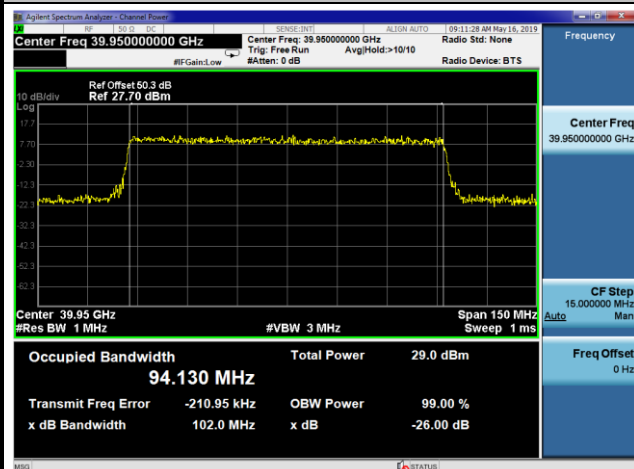

Highest Channel / 100MHz / 64QAM

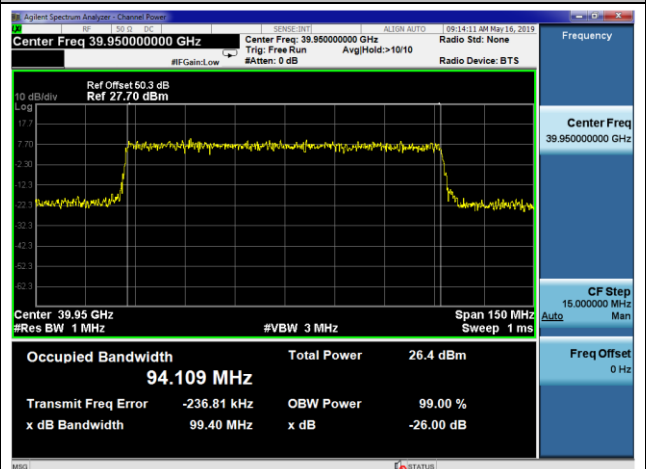





Module 1

NR Band n260


Lowest Channel / 400MHz / QPSK

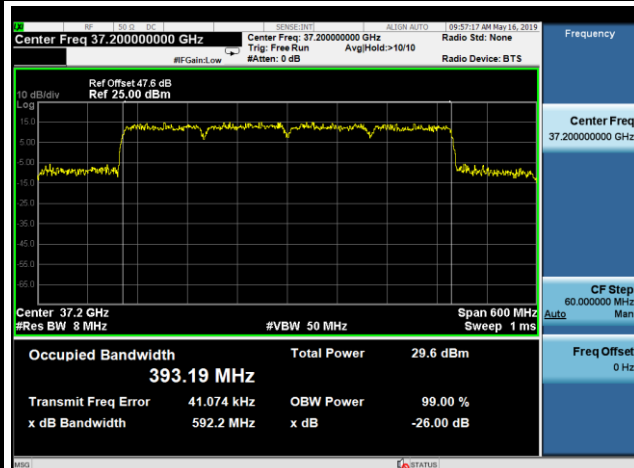


Lowest Channel / 400MHz / 16QAM

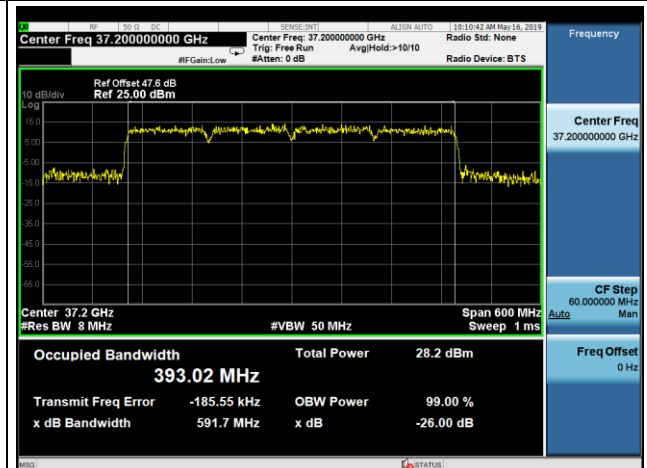


Middle Channel / 400MHz / QPSK

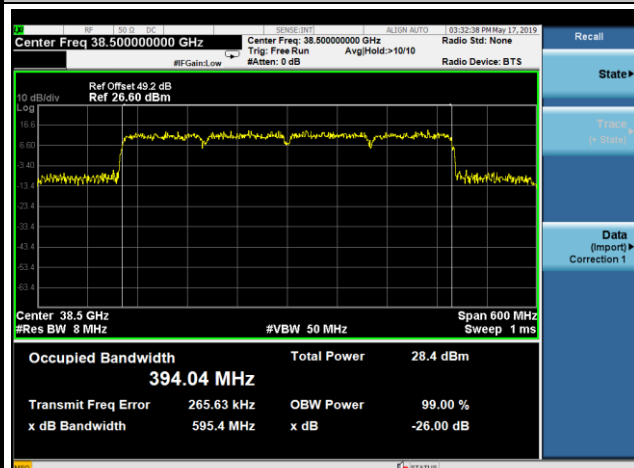


Middle Channel / 400MHz / 16QAM

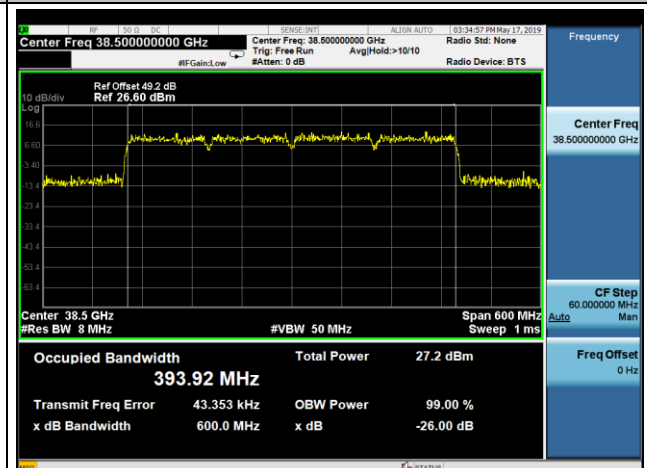

Highest Channel / 400MHz / QPSK

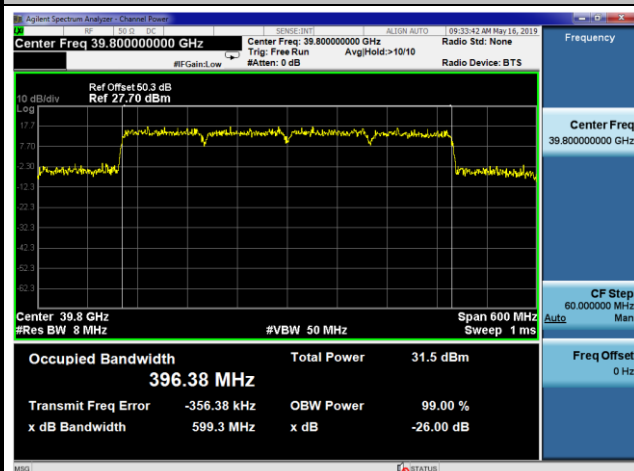

Highest Channel / 400MHz / 16QAM

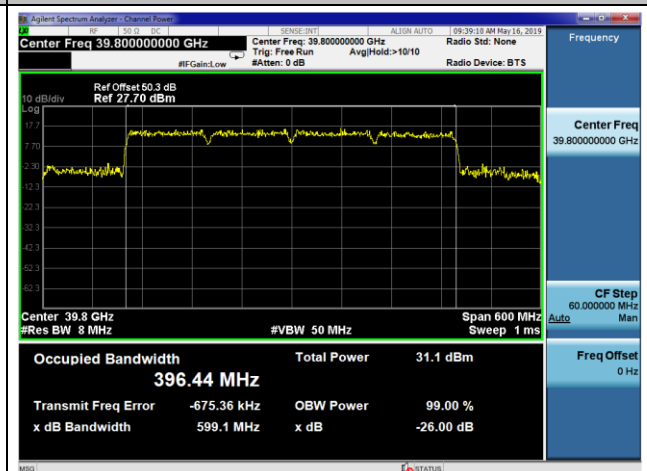




Module 1


NR Band n260

Lowest Channel / 400MHz / 64QAM

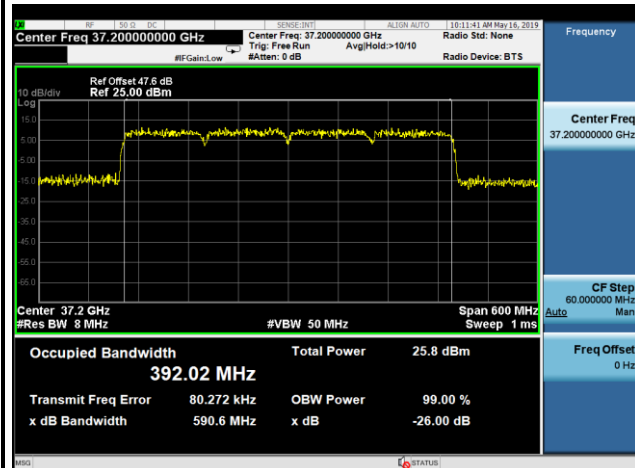


intentionally blank

Middle Channel / 400MHz / 64QAM

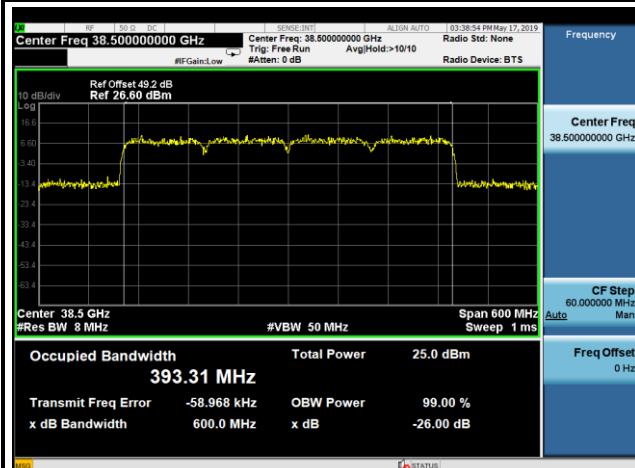

intentionally blank

Highest Channel / 400MHz / 64QAM

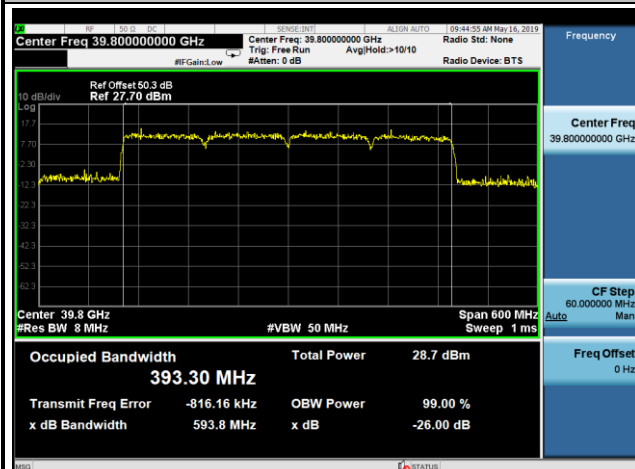


intentionally blank




Module 2

NR Band n260


Lowest Channel / 50MHz / QPSK

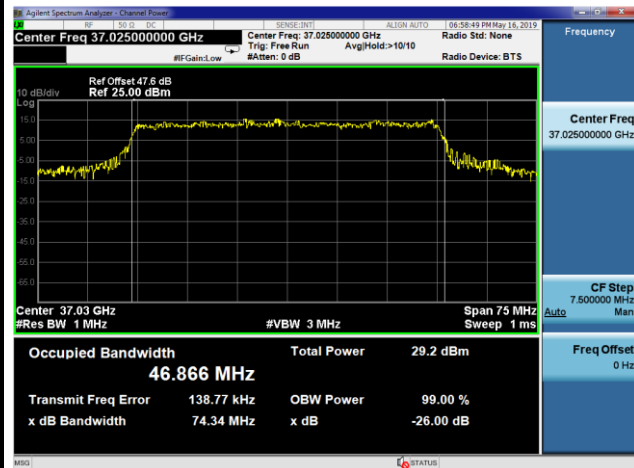


Lowest Channel / 50MHz / 16QAM

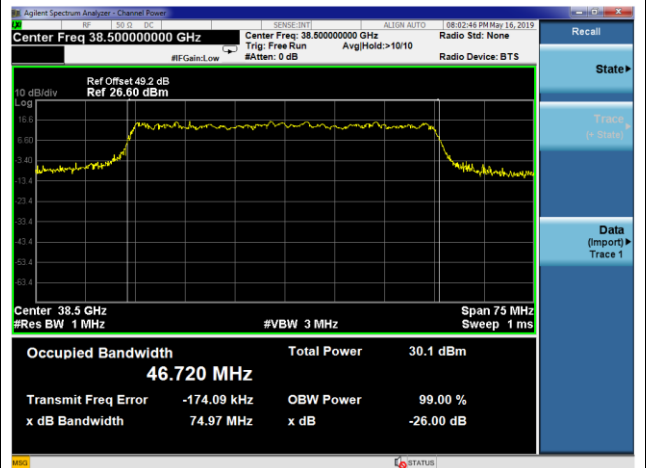


Middle Channel / 50MHz / QPSK

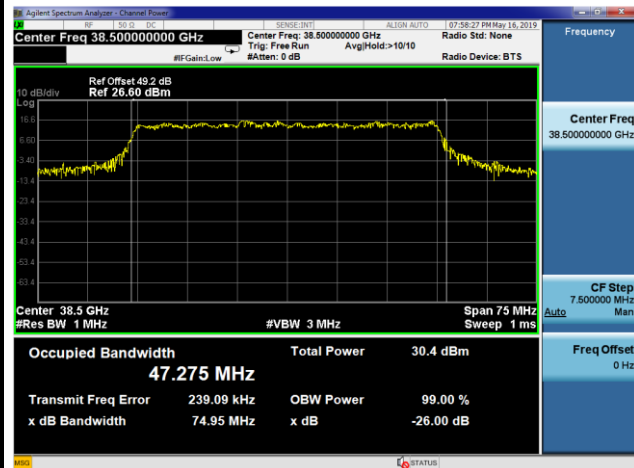

Middle Channel / 50MHz / 16QAM

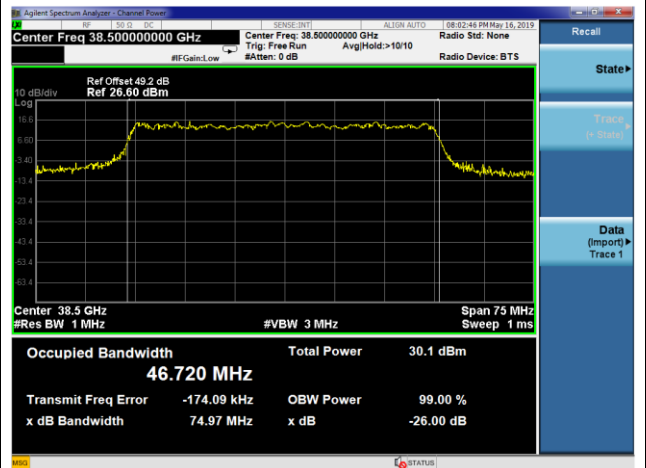

Highest Channel / 50MHz / QPSK

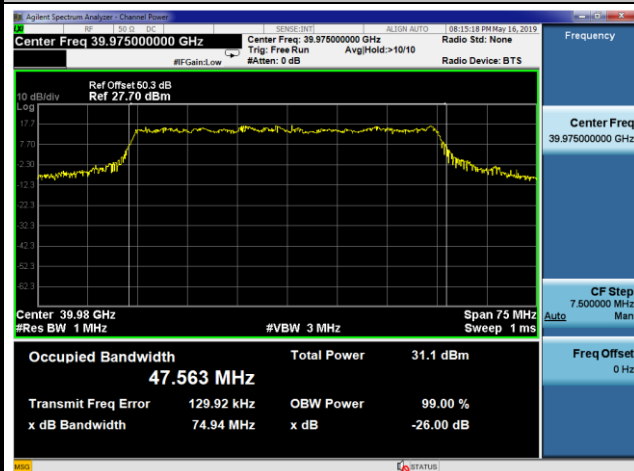

Highest Channel / 50MHz / 16QAM







Module 2

NR Band n260


Lowest Channel / 50MHz / 64QAM

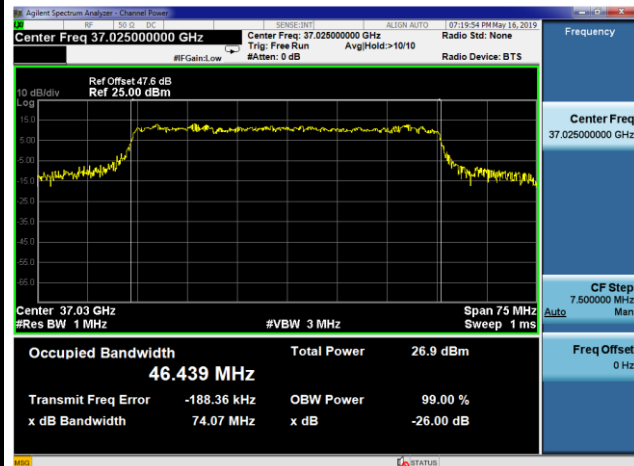


Lowest Channel / 100MHz / QPSK

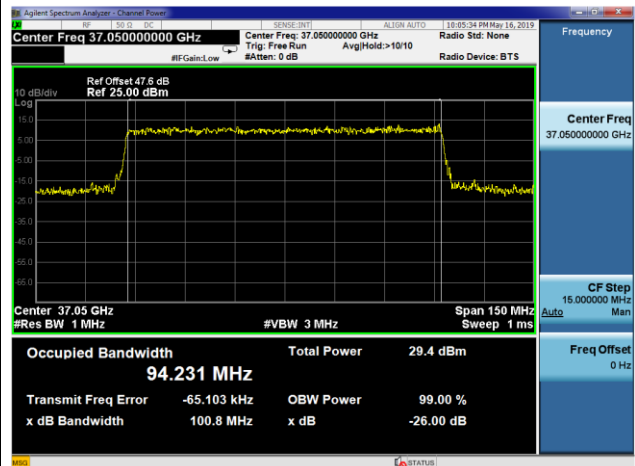


Middle Channel / 50MHz / 64QAM

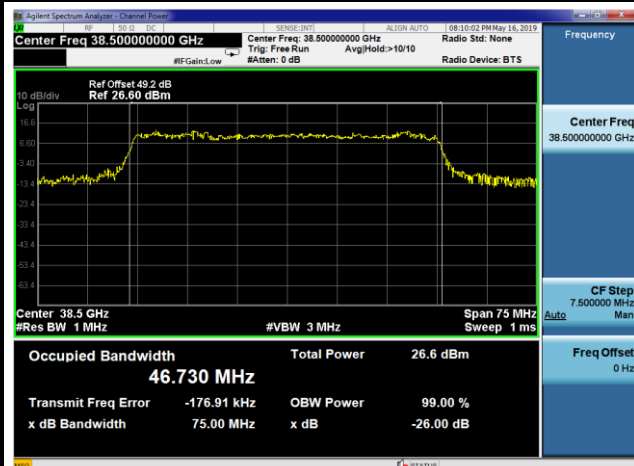

Middle Channel / 100MHz / QPSK

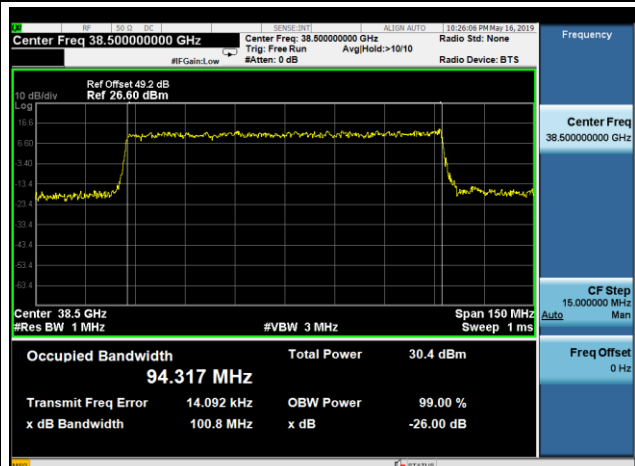

Highest Channel / 50MHz / 64QAM

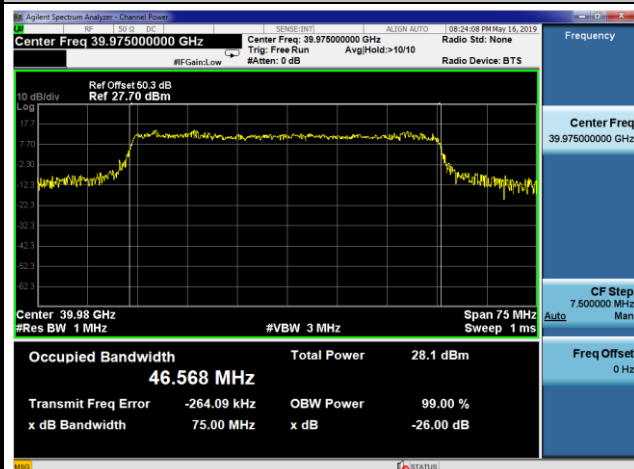

Highest Channel / 100MHz / QPSK

