

## M3000B Wi-Fi Antenna Specifications

1. Inseego Custom Antenna Part#'s:

- WiFi Ant #0 Part Number: 12023299
- WiFi Ant #1 Part Number: 12023300

2. Construction:


- Flexible Printed Circuit (FPC) Design consisting of Copper, Polyimide, and Adhesive
- Type: Planar Inverted-F Antenna (PIFA)




3. Antenna Passive Pk Gain Results Table:

Wi-Fi Ant #0	Frequency Range	Pk Gain
ISM	2440MHz (2412MHz to 2462MHz)	0.9 dBi
UNI-1	5200MHz (5170MHz to 5250MHz)	3.1 dBi
UNI-3	5700MHz (5735MHz to 5835MHz)	3.9 dBi
Wi-Fi Ant #1	Frequency Range	Pk Gain
ISM	2440MHz (2412MHz to 2462MHz)	4.3 dBi
UNI-1	5200MHz (5170MHz to 5250MHz)	4.5 dBi
UNI-3	5700MHz (5735MHz to 5835MHz)	6.4 dBi

4. Antenna Passive Gain (dBi) Charts:

- Antenna Engineer: Matt Salvino
- Passive Measurement Date: 03-22-2022

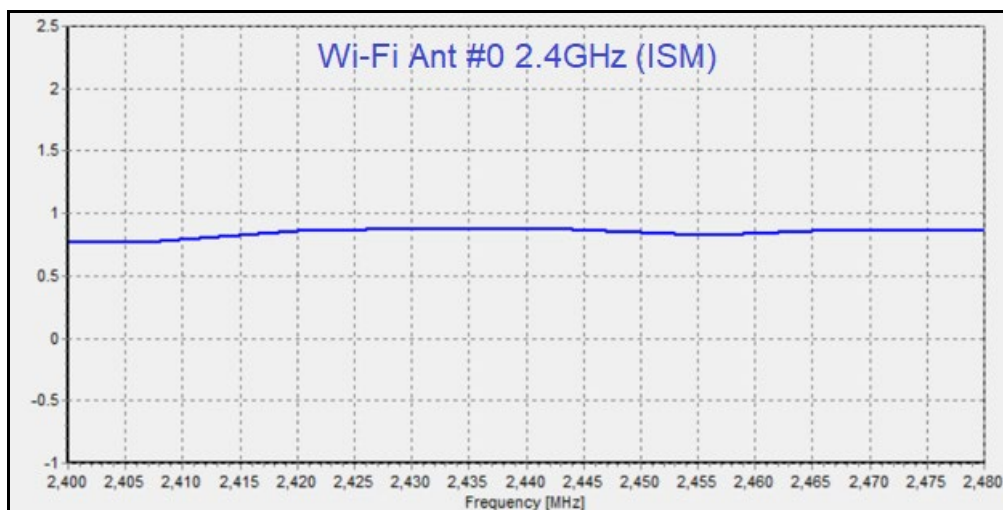

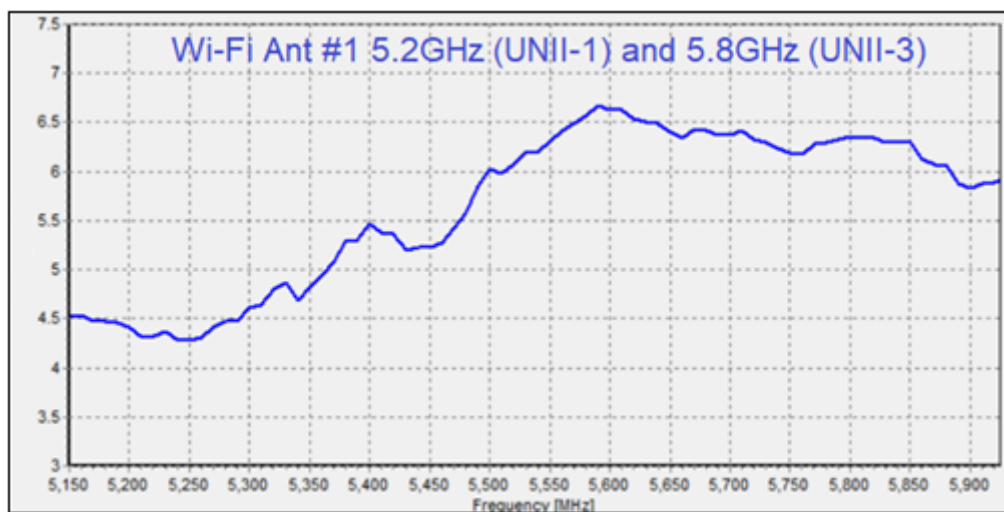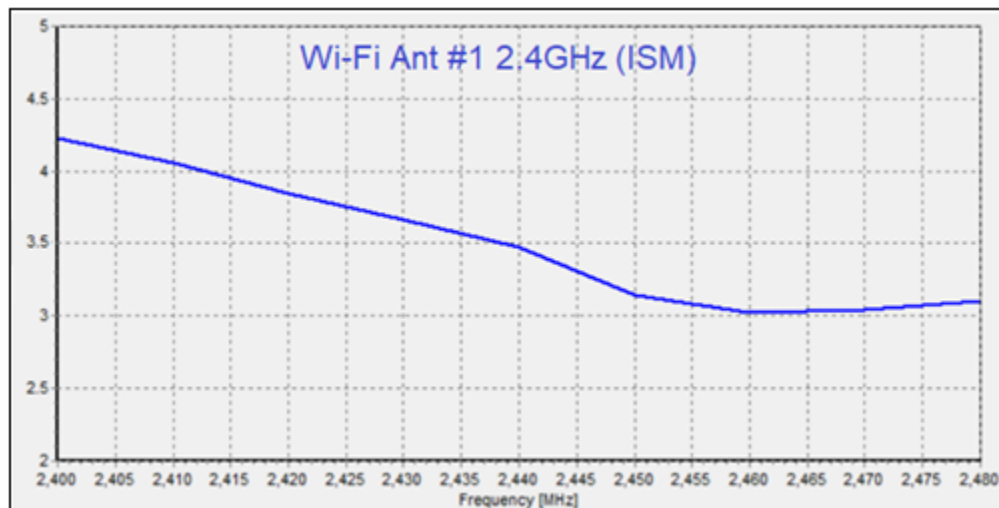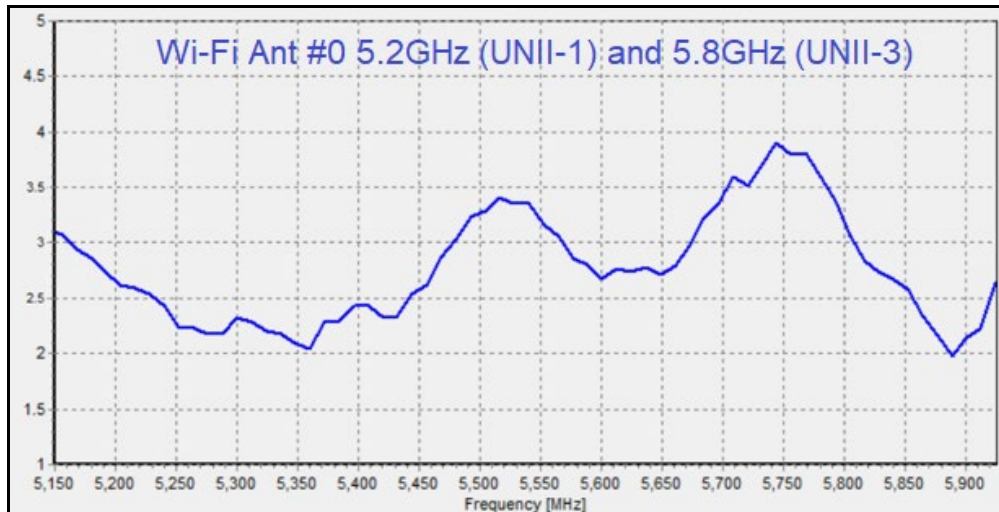

## 5. Measurement Setup Illustration:

### Passive Performance Test System components and diagram:


Frequency Bands: 600 MHz to 10 GHz

Max. Size of DUT: 450mm for spherical set-up

Max. Weight of DUT: 10 kgs

The system is capable of the following measurements:

- Gain
- Directivity
- Beamwidth
- Cross polar discrimination
- Sidelobe levels
- 3D radiation pattern
- Radiation pattern in any polarization (linear or circular)
- Antenna efficiency test

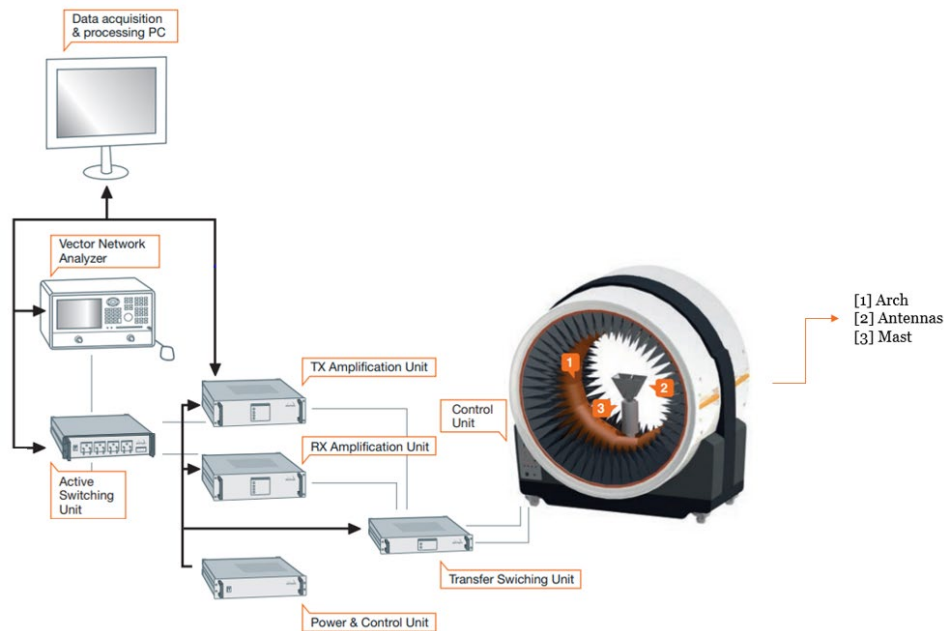

### Inseego Corp.

9710 Scranton Road Suite 200, San Diego CA 92121, USA

Toll Free: 888.888.9231 • Main 858.812.3400

[www.inseego.com](http://www.inseego.com)


## Gain Measurement method Explained:

- a) **Calibration:** Use Two Antennas (one has to have a known gain [In this case Ref] ) to measure and record the S parameter  $S_{21}$  which is the input/output relation ship between the ports on the Network analyzer
  - a. Normalize the calibration to produce 0 DB reference on the network Analyzer.
  - b. All cable loss factors are accounted for in the system

Notes : A1 represents Arch antennas in system


The software instructs the VNA to produce a sweep signal over the frequency range specified.

The it will generate the signal is a swept CW between the start and end frequency and pausing at predetermined points long enough to collect measurement.

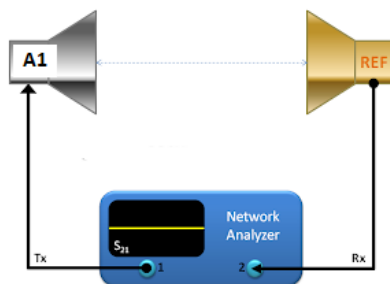

**Calibration diagram**

- b) **DUT Measurements:** Replace reference Antenna with DUT Antenna (maintaining the same conditions) distance etc.



**DUT Measurement diagram**

- c) Remeasure  $S_{21}$  response which now represents the gain relative to reference antenna. Collect  $G(\text{Rel})$ .

**Inseego Corp.**



9710 Scranton Road Suite 200, San Diego CA 92121, USA

Toll Free: 888.888.9231 • Main 858.812.3400

[www.inseego.com](http://www.inseego.com)

d) Calculate  $G(\text{Dut})=G(\text{ref})+ G(\text{rel})$

Note that the system used in the chamber is automated. (the measurement is taken at multiple locations by rotating the DUT and the arch)

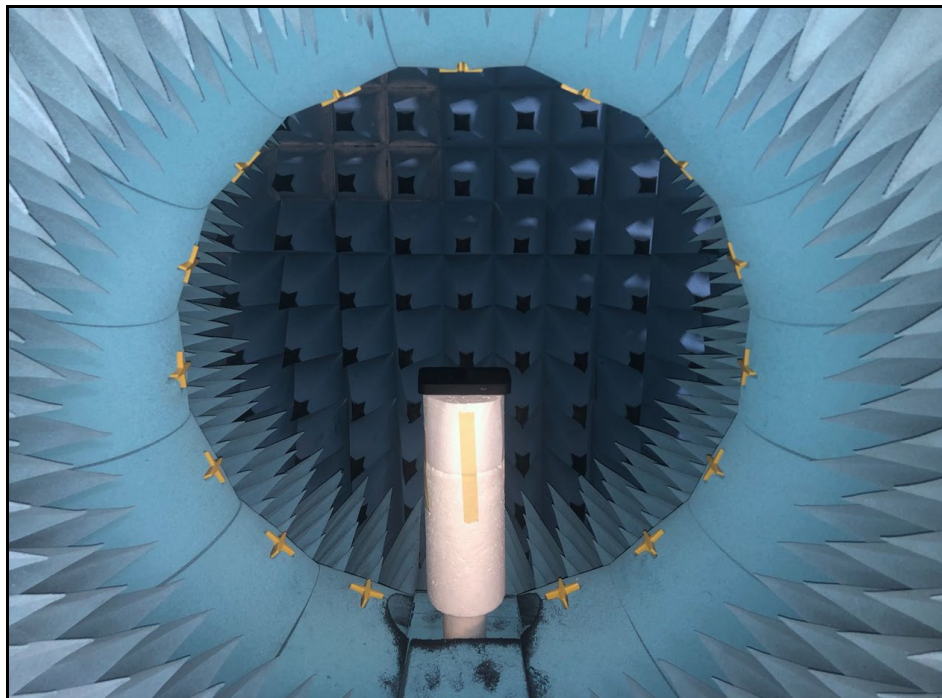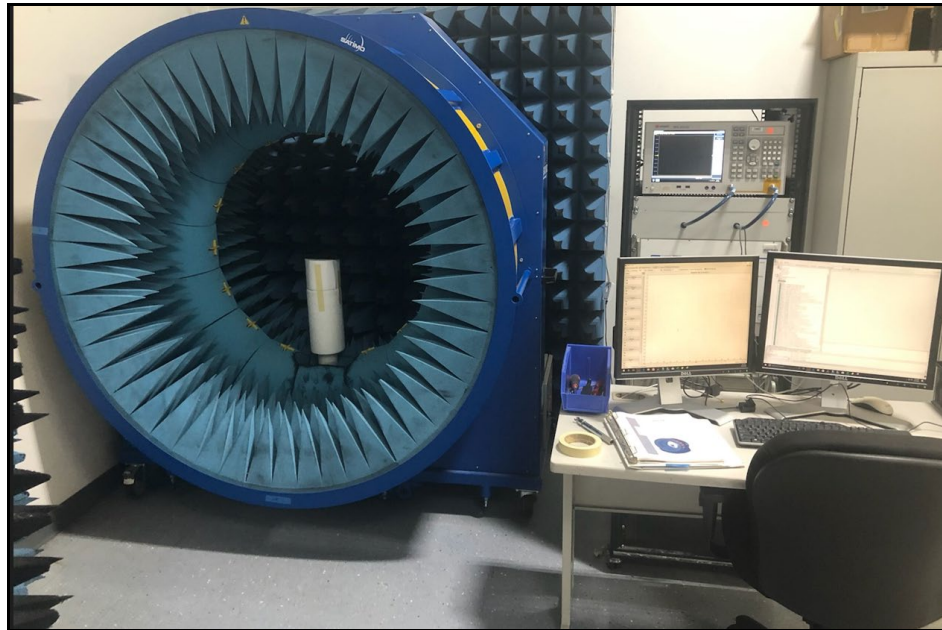


**Inseego Corp.**


9710 Scranton Road Suite 200, San Diego CA 92121, USA

Toll Free: 888.888.9231 • Main 858.812.3400

[www.inseego.com](http://www.inseego.com)

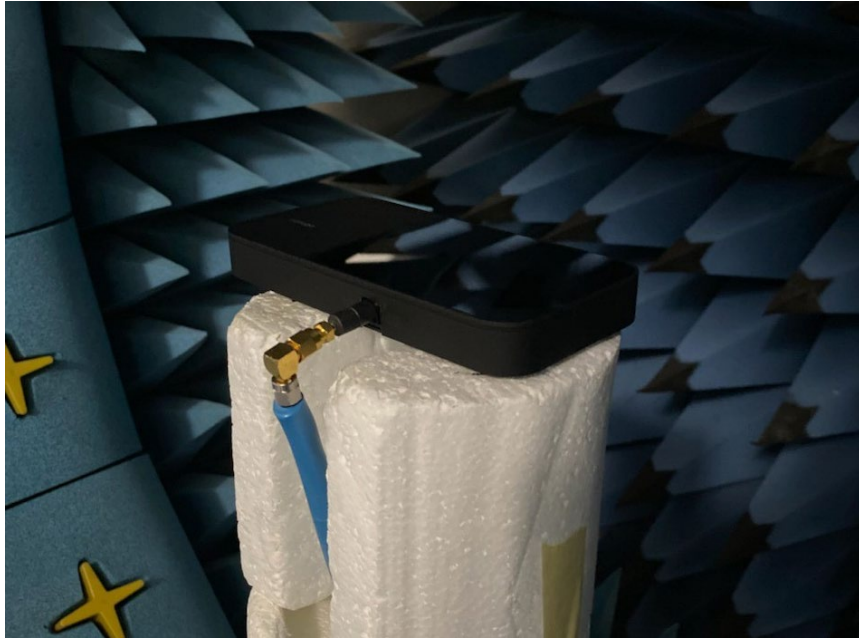

DUT connection Photo 1

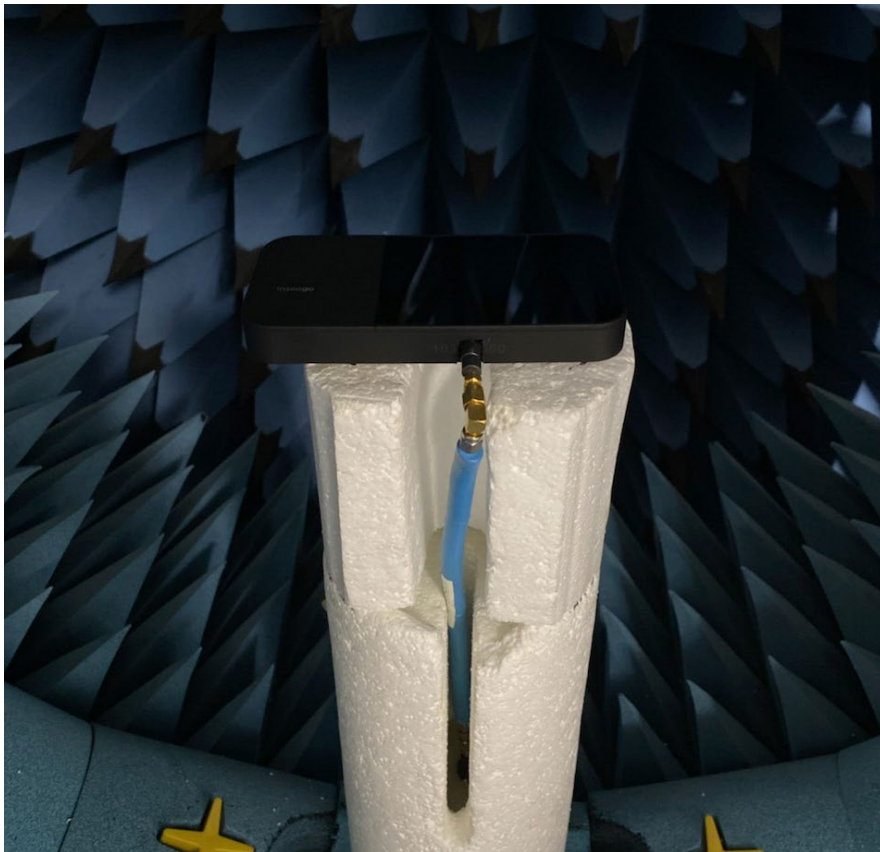

DUT connection Photo 2

## 6. Measurement Equipment calibration:

- MVG StarLab Multi-Probe Compact Passive Antenna Measurement Chamber Calibration Certificate:

		
<h3>Calibration Certificate</h3>		
Manufacturer's Name :	MVG Industries	
Manufacturer's Address :	13, rue du Zéphir Parc d'Activité de l'Océane 91140 Villejust FRANCE	
Declares that product		
Customer name :	INSEEGO	
Product Name:	SL v1	
Serial Number :	C253	
Calibration date	19/02/2022	
Has been calibrated according MVG procedure and \ Or according ISO 9001 requirements.		
19 February, 2022	MVG Quality Manager	
		
<b>MICROWAVE VISION</b> <a href="http://www.microwavevision.com">www.microwavevision.com</a>	Société Anonyme Capital Social: 691 041€ RCS Evry B 340 342 163 Numéro SIREN : 340 342 153	47, Blvd St Michel 75006 Paris, FRANCE Tel. : +33 (0)1 75 77 58 50 Fax : +33 (0)1 48 33 39 02

- E5071C Network Analyzer Calibration Certificate:

## Certificate of Calibration



ISO/IEC 17025:2017 and ANSI/NCSL Z540.1-1994

Certificate Number 1-13571508236-1



**Model Number** E5071C  
**Manufacturer** Keysight Technologies Inc  
**Description** ENA Series Network analyzer  
**Serial Number** MY46103762

**Date of Calibration** 17 Dec 2020  
**Procedure** STE-50114528-C.06.06  
**Temperature** (23 ± 5) °C  
**Humidity** (50 ± 30) %RH

**Customer**  
Inseego Corp  
9710 Scranton Rd Ste 200  
SAN DIEGO CA 92121-1744  
United States

**Location of Calibration**  
Keysight Technologies Inc  
10090 Foothills Blvd.  
Roseville CA 95747-7102  
UNITED STATES

This certifies that the equipment has been calibrated using applicable Keysight Technologies procedures and in compliance with ISO/IEC 17025:2017 and ANSI/NCSL Z540.1-1994 (R2002). The quality management system is registered to ISO 9001:2015.

**Inseego Corp.**

9710 Scranton Road Suite 200, San Diego CA 92121, USA

Toll Free: 888.888.9231 • Main 858.812.3400

[www.inseego.com](http://www.inseego.com)