

RF Exposure Lab

802 N. Twin Oaks Valley Road, Suite 105 • San Marcos, CA 92069 • U.S.A.

TEL (760) 471-2100 • FAX (760) 471-2121

<http://www.rfexposurelab.com>

CERTIFICATE OF COMPLIANCE SAR EVALUATION

Inseego
9645 Scranton Road, Suite 205
San Diego, CA 92121

Dates of Test:
Test Report Number:

May 21-28, July 1, 2022
SAR.20220615
Revision D

| | |
|------------------------------|---|
| FCC ID: | PKRISGM3100 |
| HVIN/Model(s): | M3100 |
| Product Market Number (PMN): | M3100 |
| Test Sample: | Engineering Unit Same as Production |
| Serial Number: | BB110122F00134 |
| Equipment Type: | Portable Router (Hotspot) |
| Classification: | Portable Transmitter Next to Body |
| TX Frequency Range: | 37 – 40 GHz, 27.5 – 28.35 GHz |
| Frequency Tolerance: | ± 2.5 ppm |
| Maximum RF Output: | 10.5 dBm |
| Signal Modulation: | DFT-s-OFDM/CP-OFDM |
| Antenna Type: | Internal |
| Application Type: | Certification |
| FCC Rule Parts: | Part 2 |
| KDB Test Methodology: | KDB 447498 D01 v07, KDB 941225 D06 v02r01, IEC 63195-1:2022 |
| Industry Canada: | RSS-102 Issue 5, Safety Code 6 |
| Max. Stand Alone LPD Value: | 0.27 mW/cm ² |
| Max. Simultaneous SAR Value: | 1.36 W/kg Reported |
| Max. Simultaneous Value: | 0.79 Ratio |
| Separation Distance: | 10 mm |

This wireless mobile and/or portable device has been shown to be compliant for localized specific absorption rate (LPD) exposure limits specified in 47 CFR 1.1310 and has been tested in accordance with the measurement procedures specified in KDB Guidance and IEC 63195-1:2022 (See test report).

I attest to the accuracy of the data. All measurements were performed by myself or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RF Exposure Lab, LLC certifies that no party to this application is subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).



Jay M. Moulton
Vice President



Testing Cert. # 2387.01

Table of Contents

| | |
|--|----|
| 1. Introduction | 4 |
| 2. SAR Measurement Setup | 7 |
| Robotic System | 7 |
| System Hardware | 7 |
| System Electronics | 8 |
| Probe Measurement System | 8 |
| 3. Probe and Dipole Calibration | 9 |
| 4. System Verification Source | 10 |
| 5. ANSI/IEEE C95.1 – 1992 RF Exposure Limits [2] | 11 |
| Uncontrolled Environment..... | 11 |
| Controlled Environment | 11 |
| 6. Measurement Uncertainty | 12 |
| 7. Power Density System Validation | 13 |
| Settings for measurement of verification sources..... | 13 |
| Verification Setup photo | 13 |
| Test System Verification | 13 |
| 8. SAR Test Data Summary..... | 14 |
| Procedures Used To Establish Test Signal..... | 14 |
| Device Test Condition..... | 14 |
| 8.1 Computation of the Electric Field Polarization Ellipse | 15 |
| 8.2 Total Field and Power Flux Density Reconstruction..... | 16 |
| 9. RF Exposure Evaluation Results | 17 |
| 10. Simultaneous Transmission Analysis | 33 |
| 11. Test Equipment List | 39 |
| 12. Conclusion | 40 |
| 13. References | 41 |
| Appendix A – System Validation Plots..... | 42 |
| Appendix B – SAR Test Data Plots..... | 48 |
| Appendix C – SAR Test Setup Photos..... | 53 |
| Appendix D – Probe Calibration Data Sheets | 62 |
| Appendix E – Dipole Calibration Data Sheets..... | 82 |
| Appendix F – DAE Calibration Data Sheets..... | 90 |

| Comment/Revision | Date |
|---|---------------|
| Original Release | June 17, 2022 |
| Revision A – Correct all simultaneous combination tables with the correct power level for n48, add the proximity sensor information, correct the tables of SAR/ratio values and add the test setup photos for 20 mm testing | June 28, 2022 |
| Revision B – Add proximity sensor data, add point SAR data and tolerance for reported SAR, added the test procedure for determining the applicable test configurations, added table correlating the PD simulation report sides to the sides in this report, added power reduction data, added test configuration labels to the PD summary table, added LPD point measurement notes on how it was measured, change the units on page 1 to mW/cm ² , add table of power settings on page 4, add the data for 20 mm gap at full power and add measurement of PD power description | July 7, 2022 |
| Revision C – Add TDD duty cycle | July 21, 2022 |
| Revision D – Add note for test control | July 21, 2022 |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

Note: The latest version supersedes all previous versions listed in the above table. The latest version shall be used.

1. Introduction

This measurement report shows compliance of the Inseego Model M3100 FCC ID: PKRISGM3100 with FCC Part 1, 1310 for portable devices. The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation to protect the public and workers from the potential hazards of RF emissions due to FCC regulated portable devices. [1], [6]

The test results recorded herein are based on a single type test of Inseego Model M3100 and therefore apply only to the tested sample.

The 3G/4G/WiFi and FR1 data has been extracted from the reports SAR.20220610 and SAR.20220611.

| Band | Technology | Power | SISO Max Port Power dBm | SISO Max Module Power dBm | MIMO Max Port Power dBm | MIMO Max Module Power |
|--------------------------|------------|---------|-------------------------|---------------------------|-------------------------|-----------------------|
| Band n260 – 39 GHz QTM-0 | FR2 | Full | 10.5 | 17.49 | 13.5 | 20.5 |
| Band n260 – 39 GHz QTM-0 | FR2 | Backoff | 6.5 | 13.49 | 9.5 | 16.5 |
| Band n260 – 39 GHz QTM-1 | FR2 | Full | 10.5 | 17.49 | 13.5 | 20.5 |
| Band n260 – 39 GHz QTM-1 | FR2 | Backoff | 8.5 | 15.49 | 11.5 | 18.5 |
| Band n261 – 28 GHz QTM-0 | FR2 | Full | 10.5 | 17.49 | 13.5 | 20.5 |
| Band n261 – 28 GHz QTM-0 | FR2 | Backoff | 2.0 | 8.99 | 5.0 | 12.0 |
| Band n261 – 28 GHz QTM-1 | FR2 | Full | 10.5 | 17.49 | 13.5 | 20.5 |
| Band n261 – 28 GHz QTM-1 | FR2 | Backoff | 6.0 | 12.99 | 9.0 | 16.0 |

LTE UL CA Combinations (Aggregate Power)

| Band UL 2CA Combination | Technology | Class | Nominal dBm | Tolerance dBm | Lower Tolerance dBm | Upper Tolerance dBm |
|-------------------------|------------|-------|-------------|---------------|---------------------|---------------------|
| 2A-4A | LTE | 3 | 23.0 | +1.0/-1.3 | 21.7 | 24.0 |
| 2A-5A | LTE | 3 | 23.0 | +1.0/-1.3 | 21.7 | 24.0 |
| 2A-13A | LTE | 3 | 23.0 | +1.0/-1.3 | 21.7 | 24.0 |
| 2A-66A | LTE | 3 | 23.0 | +1.0/-1.3 | 21.7 | 24.0 |
| 4A-5A | LTE | 3 | 23.0 | +1.0/-1.3 | 21.7 | 24.0 |
| 4A-13A | LTE | 3 | 23.0 | +1.0/-1.3 | 21.7 | 24.0 |
| 5A-66A | LTE | 3 | 23.0 | +1.0/-1.3 | 21.7 | 24.0 |
| 5B | LTE | 3 | 23.0 | +1.0/-1.3 | 21.7 | 24.0 |
| 13A-66A | LTE | 3 | 23.0 | +1.0/-1.3 | 21.7 | 24.0 |
| 48C | LTE | 3 | 16.0 | +1.0/-1.3 | 14.7 | 17.0 |
| 66B | LTE | 3 | 23.0 | +1.0/-1.3 | 21.7 | 24.0 |
| 66C | LTE | 3 | 23.0 | +1.0/-1.3 | 21.7 | 24.0 |

FR1 SA 2x2 UL (Aggregated Power)

| FR1 SA 2x2 UL | Technology | Class | Nominal dBm | Tolerance dBm | Lower Tolerance dBm | Upper Tolerance dBm |
|---------------|------------|-------|-------------|---------------|---------------------|---------------------|
| n48 | FR1 | 3 | 15.5 | +1.5/-3.0 | 12.5 | 17.0 |
| n77 | FR1 | 3 | 23.0 | +1.5/-3.0 | 20.0 | 24.5 |

FR1 NSA UL ENDC Combinations (Aggregate Power)

| Band UL ENDC Combination | Technology | Class | Nominal dBm | Tolerance dBm | Lower Tolerance dBm | Upper Tolerance dBm |
|--------------------------|------------|-------|-------------|---------------|---------------------|---------------------|
| 5A-n2A | LTE+FR1 | 3 | 23.0 | +1.5/-1.3 | 21.7 | 24.5 |
| 13A-n2A | LTE+FR1 | 3 | 23.0 | +1.5/-1.3 | 21.7 | 24.5 |
| 66A-n2A | LTE+FR1 | 3 | 23.0 | +1.5/-1.3 | 21.7 | 24.5 |
| 2A-n5A | LTE+FR1 | 3 | 23.0 | +1.5/-1.3 | 21.7 | 24.5 |
| 48A-n5A | LTE+FR1 | 3 | 20.0 | +1.5/-1.3 | 17.0 | 21.5 |
| 66A-n5A | LTE+FR1 | 3 | 23.0 | +1.5/-1.3 | 21.7 | 24.5 |
| 2A-n66A | LTE+FR1 | 3 | 23.0 | +1.5/-1.3 | 21.7 | 24.5 |
| 5A-n66A | LTE+FR1 | 3 | 23.0 | +1.5/-1.3 | 21.7 | 24.5 |
| 7A-n66A | LTE+FR1 | 3 | 23.0 | +1.5/-1.3 | 21.7 | 24.5 |
| 13A-n66A | LTE+FR1 | 3 | 23.0 | +1.5/-1.3 | 21.7 | 24.5 |
| 48A-n66A | LTE+FR1 | 3 | 20.0 | +1.5/-1.3 | 17.0 | 21.5 |
| 2A-n77A | LTE+FR1 | 3 | 23.0 | +1.5/-1.3 | 21.7 | 24.5 |
| 5A-n77A | LTE+FR1 | 3 | 23.0 | +1.0/-1.3 | 21.7 | 24.0 |
| 7A-n77A | LTE+FR1 | 3 | 23.0 | +1.0/-1.3 | 21.7 | 24.0 |
| 13A-n77A | LTE+FR1 | 3 | 23.0 | +1.0/-1.3 | 21.7 | 24.0 |
| 66A-n77A | LTE+FR1 | 3 | 23.0 | +1.5/-1.3 | 21.7 | 24.5 |

FR2 UL ENDC LTE Combinations

| Band UL ENDC Combination | | Technology |
|--------------------------|-----------|------------|
| 1CC | 2A-n260A | LTE+FR2 |
| | 5A-n260A | LTE+FR2 |
| | 13A-n260A | LTE+FR2 |
| | 48A-n260A | LTE+FR2 |
| | 66A-n260A | LTE+FR2 |
| 2CC | 2A-n260G | LTE+FR2 |
| | 5A-n260G | LTE+FR2 |
| | 13A-n260G | LTE+FR2 |
| | 48A-n260G | LTE+FR2 |
| | 66A-n260G | LTE+FR2 |
| 1CC | 2A-n261A | LTE+FR2 |
| | 5A-n261A | LTE+FR2 |
| | 13A-n261A | LTE+FR2 |
| | 48A-n261A | LTE+FR2 |
| | 66A-n261A | LTE+FR2 |
| 2CC | 2A-n261G | LTE+FR2 |
| | 5A-n261G | LTE+FR2 |
| | 13A-n261G | LTE+FR2 |
| | 48A-n261G | LTE+FR2 |
| | 66A-n261G | LTE+FR2 |

2. SAR Measurement Setup

Robotic System

These measurements are performed using the DASY52 automated dosimetric assessment system. The DASY52 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Intel Core2 computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 2.1).

System Hardware

A cell controller system contains the power supply, robot controller teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the HP Intel Core2 computer with Windows XP system and SAR Measurement Software DASY52, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

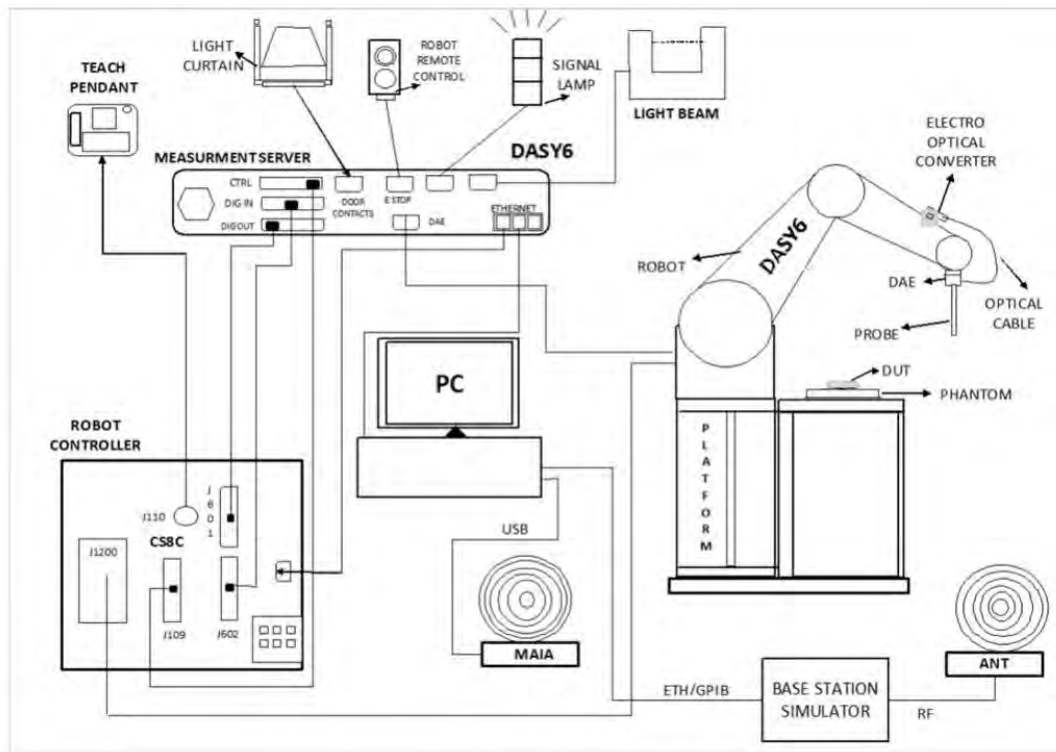


Figure 2.1 SAR Measurement System Setup


System Electronics

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in.

Probe Measurement System

The probe design allows measurements at distances as small as 2 mm from the sensors to the surface of the device under test (DUT). The typical sensor to probe tip distance is 1.5 mm.

| | |
|---|--|
| Frequency | 750 MHz – 110 GHz |
| Probe Overall Length | 320 mm |
| Probe Body Diameter | 8.0 mm |
| Tip Length | 23.0 mm |
| Tip Diameter | 8.0 mm |
| Probe's two dipoles length | 0.9 mm – Diode loaded |
| Dynamic Range | < 20 V/m - 10000 V/m with PRE-10 (min < 50 V/m - 3000 V/m) |
| Position Precision | < 0.2 mm |
| Distance between diode sensors and probe's tip | 1.5 mm |
| Minimum Mechanical separation between probe tip and a Surface | 0.5 mm |
| Applications | E-field measurements of 5G devices and other mm-wave transmitters operating above 10GHz in < 2 mm distance from device (free-space) Power density, H-field and far-field analysis using total field reconstruction. |
| Compatibility | cDASY6 + 5G-Module SW1.0 and higher |

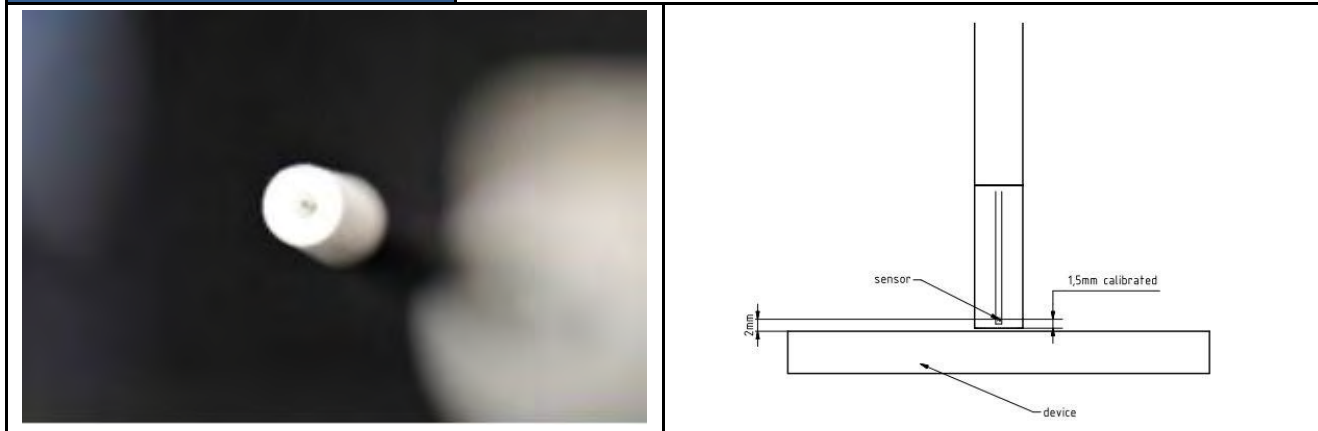

Scanning procedure

Fine-resolution scans on 2 different planes are performed to reconstruct the E- and H-fields as well as the power density; the z-distance between the 2 planes is set to $\lambda/4$.

The (x, y) grid step is also set $\lambda/4$, the grid extent is set to sufficiently large to identify the field pattern and the peak.


3. Probe and Dipole Calibration

See Appendix D and E.

4. System Verification Source

The System Verification sources at 30 GHz and above comprise of horn antennas and have a very stable signal generators built in.

| | |
|------------------------------|--------------------------------------|
| Model | Ka-band horn antenna |
| Calibrated frequency: | 30 GHz at 10mm from the case surface |
| Frequency accuracy | ± 100 MHz |
| E-field polarization | linear |
| Harmonics | -20 dBc |
| Total radiated power | 14 dBm |
| Power stability | 0.05 dB |
| Power consumption | 5 W |
| Size | 00 x 100 x 100 mm |
| Weight | 1 kg |

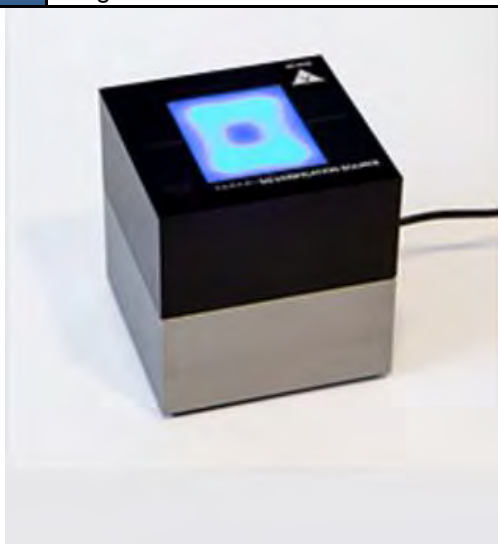

5. ANSI/IEEE C95.1 – 1992 RF Exposure Limits [2]

Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure above 6GHz to radio frequency (RF) radiation as specified in §1.1310.

General Population Basic restriction for power density for frequencies between 1.5GHz and 100 GHz is $1.0 \text{ mW/cm}^2 = 10 \text{ W/m}^2$

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm^2) | Averaging time (minutes) |
|--|-------------------------------|-------------------------------|------------------------------------|--------------------------|
| (A) Limits for Occupational/Controlled Exposures | | | | |
| 0.3-3.0 | 614 | 1.63 | *(100) | 6 |
| 3.0-30 | $1842/f$ | $4.89/f$ | *($900/f^2$) | 6 |
| 30-300 | 61.4 | 0.163 | 1.0 | 6 |
| 300-1500 | | | $f/300$ | 6 |
| 1500-100,000 | | | 5 | 6 |
| (B) Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3-1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34-30 | $824/f$ | $2.19/f$ | *($180/f^2$) | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | | | $f/1500$ | 30 |
| 1500-100,000 | | | 1.0 | 30 |

6. Measurement Uncertainty

The budget is valid for evaluation distances $> \lambda/2\pi$. For specific tests and configurations, the Uncertainty could be considerably smaller.

| Preliminary Module mmWave Uncertainty Budget Evaluation Distances to the Antennas $> \lambda / 2\pi$ | | | | | | |
|---|-------------------------------|-------------|---------|------|----------------------------------|-----------|
| Error Description | Uncertainty Value (\pm dB) | Probability | Divisor | (Ci) | Standard Uncertainty (\pm dB) | (Vi) Veff |
| Measurement System | | | | | | |
| Probe Calibration | 0.49 | N | 1 | 1 | 0.49 | ∞ |
| Hemispherical Isotropy | 0.50 | R | 1.732 | 1 | 0.29 | ∞ |
| Linearity | 0.20 | R | 1.732 | 0 | 0.12 | ∞ |
| System Detection Limits | 0.04 | R | 1.732 | 1 | 0.02 | ∞ |
| Modulation Response | 0.40 | R | 1.732 | 1 | 0.23 | ∞ |
| Readout Electronics | 0.03 | N | 1 | 1 | 0.03 | ∞ |
| Response Time | 0.00 | R | 1.732 | 1 | 0.00 | ∞ |
| Integration Time | 0.00 | R | 1.732 | 1 | 0.00 | ∞ |
| RF Ambient Noise | 0.2 | R | 1.732 | 1 | 0.12 | ∞ |
| RF Ambient Reflections | 0.21 | R | 1.732 | 1 | 0.12 | ∞ |
| Probe Positioner | 0.04 | R | 1.732 | 1 | 0.02 | ∞ |
| Probe Positioning | 0.30 | R | 1.732 | 1 | 0.17 | ∞ |
| S _{avg} Reconstruction | 0.60 | R | 1.732 | 1 | 0.35 | ∞ |
| Test Sample Related | | | | | | |
| Power Drift | 0.2 | R | 1.732 | 1 | 0.12 | ∞ |
| Input Power | 0 | N | 1 | 0 | 0.00 | ∞ |
| Combined Std. Uncertainty | | | | | 0.76 dB | ∞ |
| Coverage Factor for 95 % | | | | | K=2 | |
| Expanded STD Uncertainty | | | | | 1.52 dB | |

7. Power Density System Validation

The system performance check verifies that the system operates within its specifications.

The EUT is replaced by a calibrated source, the same spatial resolution, measurement region and the test separation used in the calibration was applied to system check. Through visual inspection into the measured power density distribution, both spatially (shape) and numerically (level) have no noticeable difference. The measured results should be within 0.66dB of the calibrated targets.

| Frequency [GHz] | Grid step | Grid extent X/Y [mm] | Measurement points |
|-----------------|------------------------------|----------------------|--------------------|
| 10 | 0.25 ($\frac{\lambda}{4}$) | 120/120 | 16 × 16 |
| 30 | 0.25 ($\frac{\lambda}{4}$) | 60/60 | 24 × 24 |
| 60 | 0.25 ($\frac{\lambda}{4}$) | 32.5/32.5 | 26 × 26 |
| 90 | 0.25 ($\frac{\lambda}{4}$) | 30/30 | 36 × 36 |

Settings for measurement of verification sources



Verification Setup photo

Test System Verification

| Date | Frequency (GHz) | 5G Verification Source | Probe S/N | DAE S/N | Distance (mm) | Measured 4 cm ² (W/m ²) | Targeted 4 cm ² (W/m ²) | Deviation (dB) |
|------------|-----------------|------------------------|-----------|---------|---------------|--|--|----------------|
| 05/21/2022 | 30 | 30GHz_1091 | 9611 | 759 | 10 | 41.8 | 40.6 | +2.96% |
| 05/23/2022 | 30 | 30GHz_1091 | 9611 | 759 | 10 | 41.7 | 40.6 | +2.71% |
| 05/25/2022 | 30 | 30GHz_1091 | 9611 | 759 | 10 | 41.2 | 40.6 | +1.48% |
| 05/27/2022 | 30 | 30GHz_1091 | 9611 | 759 | 10 | 41.5 | 40.6 | +2.22% |
| 07/01/2022 | 30 | 30GHz_1091 | 9611 | 759 | 10 | 42.5 | 40.6 | + 4.68 |

8. SAR Test Data Summary

See Measurement Result Data Pages

See Appendix B for SAR Test Data Plots.
 See Appendix C for SAR Test Setup Photos.

Procedures Used To Establish Test Signal

The device was either placed into simulated transmit mode using the manufacturer's test codes or the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

Device Test Condition

The device was tested fully on Side A, Side B and Side D using the mid channel for each measurement from the simulation data. The testing was conducted with the highest simulation data for the vertical, horizontal beam and MIMO configuration with each transmitting. The highest measured configuration in each band was then tested on the low and high channel. The Side C, Side E and Side F positions were tested on the highest measured value of all the configurations to show the value is significantly lower than all other sides

| Required Test Positions | | | | | | |
|-------------------------|--------|--------|--------|--------|--------|--------|
| Antenna | Side A | Side B | Side C | Side D | Side E | Side F |
| QTM-0 | Yes | No | Yes | Yes | No | Yes |
| QTM-1 | Yes | Yes | Yes | No | Yes | No |

8.1 Computation of the Electric Field Polarization Ellipse

For the numerical description of an arbitrarily oriented ellipse in three-dimensional space, five parameters are needed: the semi-major axis (a), the semi-minor axis (b), two angles describing the orientation of the normal vector of the ellipse (ϕ , θ), and one angle describing the tilt of the semi-major axis (ψ). For the two extreme cases, i.e., circular and linear polarizations, three parameters only (a , ϕ and θ) are sufficient for the description of the incident field.

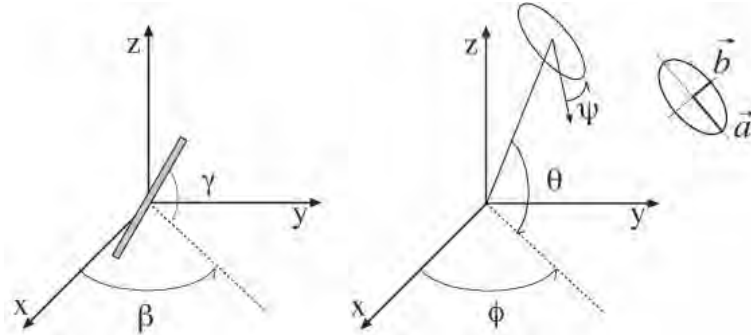


Illustration of the angles used for the numerical description of the sensor and the orientation of an ellipse in 3-D space.

For the reconstruction of the ellipse parameters from measured data, the problem can be reformulated as a nonlinear search problem. The semi-major and semi-minor axes of an elliptical field can be expressed as functions of the three angles (ϕ , θ and ψ). The parameters can be uniquely determined towards minimizing the error based on least-squares for the given set of angles and the measured data. In this way, the number of free parameters is reduced from five to three, which means that at least three sensor readings are necessary to gain sufficient information for the reconstruction of the ellipse parameters. However, to suppress the noise and increase the reconstruction accuracy, it is desirable that the system of equations be over determined. The solution to use a probe consisting of two sensors angled by r_1 and r_2 toward the probe axis and to perform measurements at three angular positions of the probe, i.e., at β_1 , β_2 and β_3 , results in over-determinations by a factor of two. If there is a need for more information or increased accuracy, more rotation angles can be added. The reconstruction of the ellipse parameters can be separated into linear and non-linear parts that are best solved by the Givens algorithm combined with a downhill simplex algorithm. To minimize the mutual coupling, sensor angles are set with a shift of 90 degree ($r_2 = r_1 + 90$ degree), and to simplify, the first rotation angle of the probe (β_1) can be set to 0 degree.

8.2 Total Field and Power Flux Density Reconstruction

Computation of the power density in general requires knowledge of the electric and magnetic field amplitudes and phases in the plane of incidence. Reconstruction of these quantities from pseudo-vector E-field measurements is feasible, as they are constrained by Maxwell's equations. SPEAG have developed a reconstruction approach based on the Gerchberg-Saxton algorithm, which benefits from the availability of the E-field polarization ellipse information obtained with the EUMWV2 probe.

The average of the reconstructed power density is evaluated over a circular area in each measurement plane. Two average power density values can be computed, the average total power density and the average incident power density, and the average total power density is used to determine compliance.

- $|Re\{S\}|$ is the total Poynting vector
- $n \cdot Re\{S\}$ is the normal Poynting vector

The software post-processing reports to values, "S avg tot" and "S avg inc". "S avg tot" represents average total power density (all three xyz components included), and "S avg inc" represents average normal power density. The average total power density "S avg tot" is reported to determine the device compliance.

9. RF Exposure Evaluation Results

1. The PD test was performed at a 10 mm separation between sensor and the EUT surface (the probe tip is 0.5mm to the EUT surface). The 10mm separation distance PD testing is for Body exposure condition.
2. According to TCBC Workshop in October 2018, 4 cm² averaging area are used.
3. Power density measurements were performed with DUT transmitting at input power limit for one single beam for each polarization (H & V) and one beam-pair, for each antenna type and for each antenna module (0,1) on the worst-surfaces.
4. The Beam ID with one of the highest initial simulated power density for that surface and distance was selected for Part 1 Power Density measurements.
5. The sides listed in this report are correlated to the sides listed in the PD simulation report by the following table:

| PD Simulation Report | FR2 PD Measurement Report |
|----------------------|---------------------------|
| S1 | Side A |
| S2 | Side E |
| S3 | Side C |
| S5 | Side D |
| S6 | Side A |
| S7 | Side B |
| S8 | Side C |
| S9 | Side F |

6. Performance of the PD measurement testing was conducted from the beam ID with the highest simulated value for the selected side
 - (a) Horizontal polarization (H-only), CW tone signal
 - (b) Vertical polarization (V-only), CW tone signal
 - (c) Horizontal + Vertical polarization (H+V), CW tone signal
 - (d) If step a to c results in >50% of the limit, then repeat for the 2nd highest beam ID and is higher than 50% of the limit then repeat for the 3rd highest beam ID
 - (e) Test all other sides for a to d where the antenna is within 2.5 cm of the side
 - (f) For the highest value for all the measurements, test the low and high channel
 - (g) Repeat a to f for all antennas and in both bands
7. Due to test setup limitations, LPD testing for FR2 was performed using Factory Test Mode software to establish the connection and perform LPD with 100% duty cycle. The Qualcomm QRCT program was used to establish the connection.

This device uses a power reduction mechanism to reduce output powers in certain use conditions when the device is used close the user's body.

When the device's antenna is within a certain distance of the user, the sensor activates and reduces the maximum allowed output power. However, the sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, additional evaluation is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional test positions. Sensor triggering distance summary data is included below.

The sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the sensor entirely covers the antennas. The device form factor will not allow the device to be sitting at an angle. Therefore, tilt measurements were not conducted on this device.

Per the May 2017 TCBC Workshop Notes, demonstration of proper functioning of the power reduction mechanisms is required to support the corresponding SAR configurations. The verification process was divided into two parts: (1) evaluation of the output power levels for individual or multiple triggering mechanisms and (2) evaluation of the triggering distances for proximity-based sensors.

9.1 Power Verification Procedure

The power verification was performed according to the following procedure.

- A base station simulator (Anritsu MT8000) was used to establish a radiated RF connection and the output power was monitored. The power measurements were confirmed to be within the expected tolerances for all states before and after a power reduction mechanism was triggered using the power measurement of the base station.
- Step 1 was repeated for all relevant modes and frequency bands for the mechanism being investigated.
- Steps 1 and 2 were repeated for all individual power reduction mechanisms and combinations thereof. For the combination cases, one mechanism was switched to a “triggered” state at a time; powers were confirmed to be within the tolerances after each additional mechanism was activated.

9.2 Distance Verification Procedure

The distance verification procedure was performed according to the following procedure.

- A base station simulator (MT8000) was used to establish an RF connection and to monitor the power levels. The device being tested was placed below the relevant section of the phantom with the relevant side or edge of the device facing toward the phantom.
- The device was moved toward and away from the phantom to determine the distance at which the mechanism triggers and the output power is reduced, per KDB Publication 616217 D04v01r02 and FCC Guidance. Each applicable test position was evaluated. The distances were confirmed to be the same or larger (more conservative) than the minimum distances provided by the manufacturer.
- Steps 1 and 2 were repeated for both bands and antennas, as appropriate.
- Steps 1 through 3 were repeated for all distance-based power reduction mechanisms.

9.3 FR2 Antenna Verification Summary


**Table 9.1
Power Measurement Verification for FR2 Antenna**

| Mechanism | Mode/Band/Antenna | Port Power (dBm) | |
|-----------------|-------------------|--------------------|------------------------|
| | | Un-triggered (Max) | Mechanism #1 (Reduced) |
| 1 st | | | |
| Capacitive | FR2/n260/QTM-0 | 10.5 | 6.5 |
| | FR2/n260/QTM-1 | 10.5 | 8.5 |
| | FR2/n261/QTM-0 | 10.5 | 2.0 |
| | FR2/n261/QTM-1 | 10.5 | 6.0 |


**Table 9.2
Distance Measurement Verification for FR2 Antenna**

| Mechanism | Test Condition | Band | Distance Measurements (mm) | | Minimum Distance per Manufacturer (mm) |
|------------|----------------|------|----------------------------|-------------|--|
| | | | Moving Toward | Moving Away | |
| Capacitive | Side A | Mid | 24 | 23 | 20 |
| | Side C | Mid | 24 | 23 | 20 |
| | Side D | Mid | 25 | 24 | 20 |
| | Side F | Mid | 23 | 22 | 20 |
| | Side A | High | 23 | 22 | 20 |
| | Side C | High | 23 | 22 | 20 |
| | Side D | High | 22 | 21 | 20 |
| | Side F | High | 24 | 23 | 20 |


Side A
(moving toward phantom)

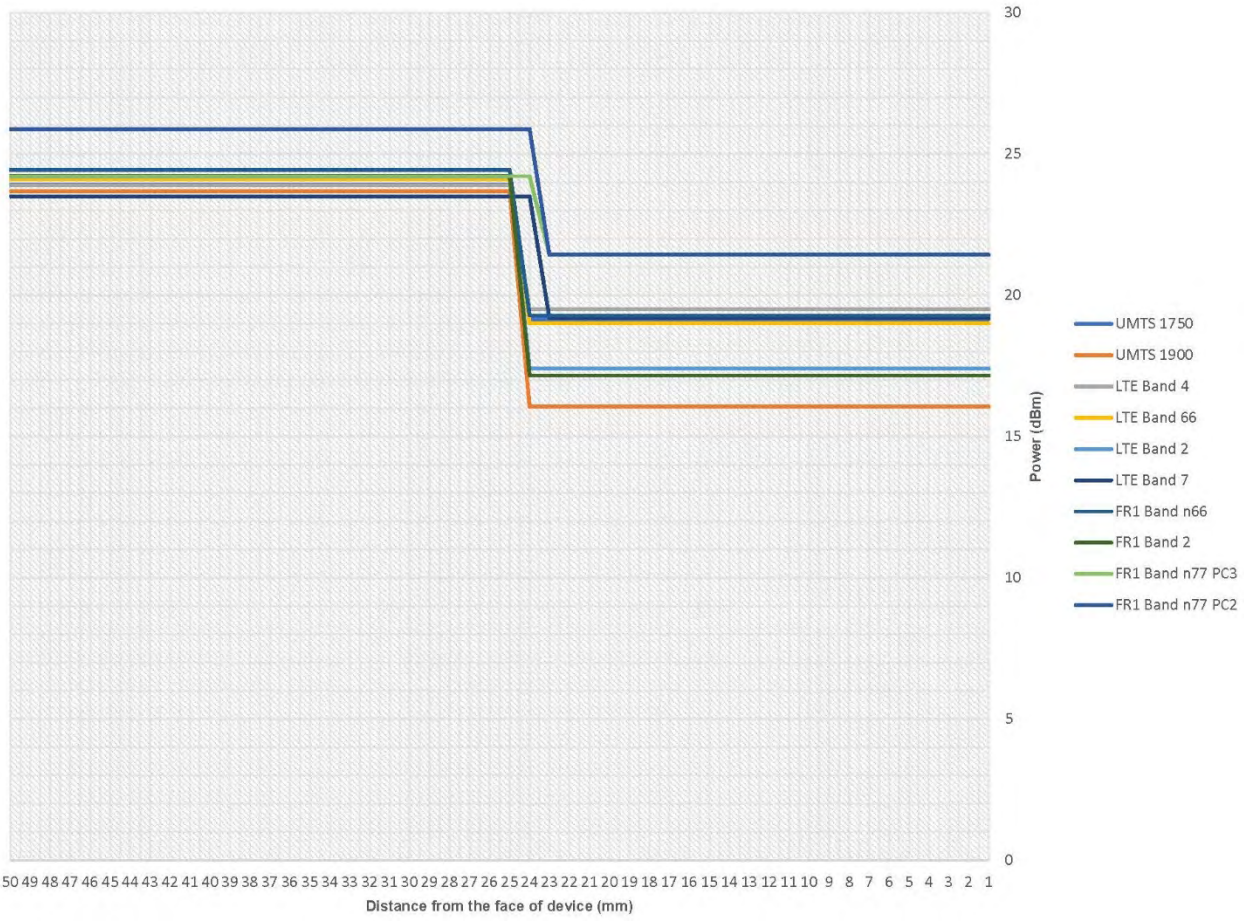


Side A
(moving away from phantom)

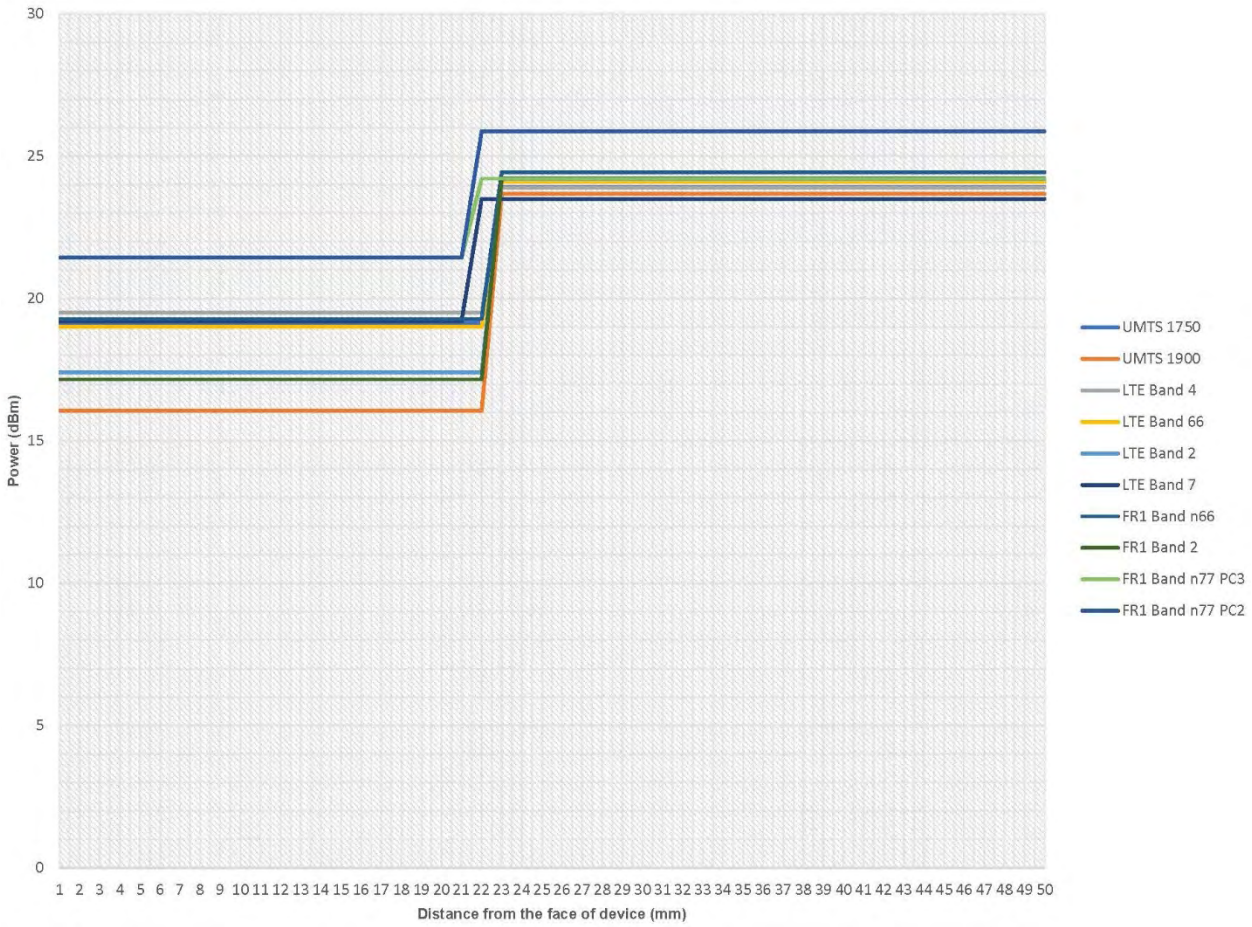


Side C
(moving toward phantom)

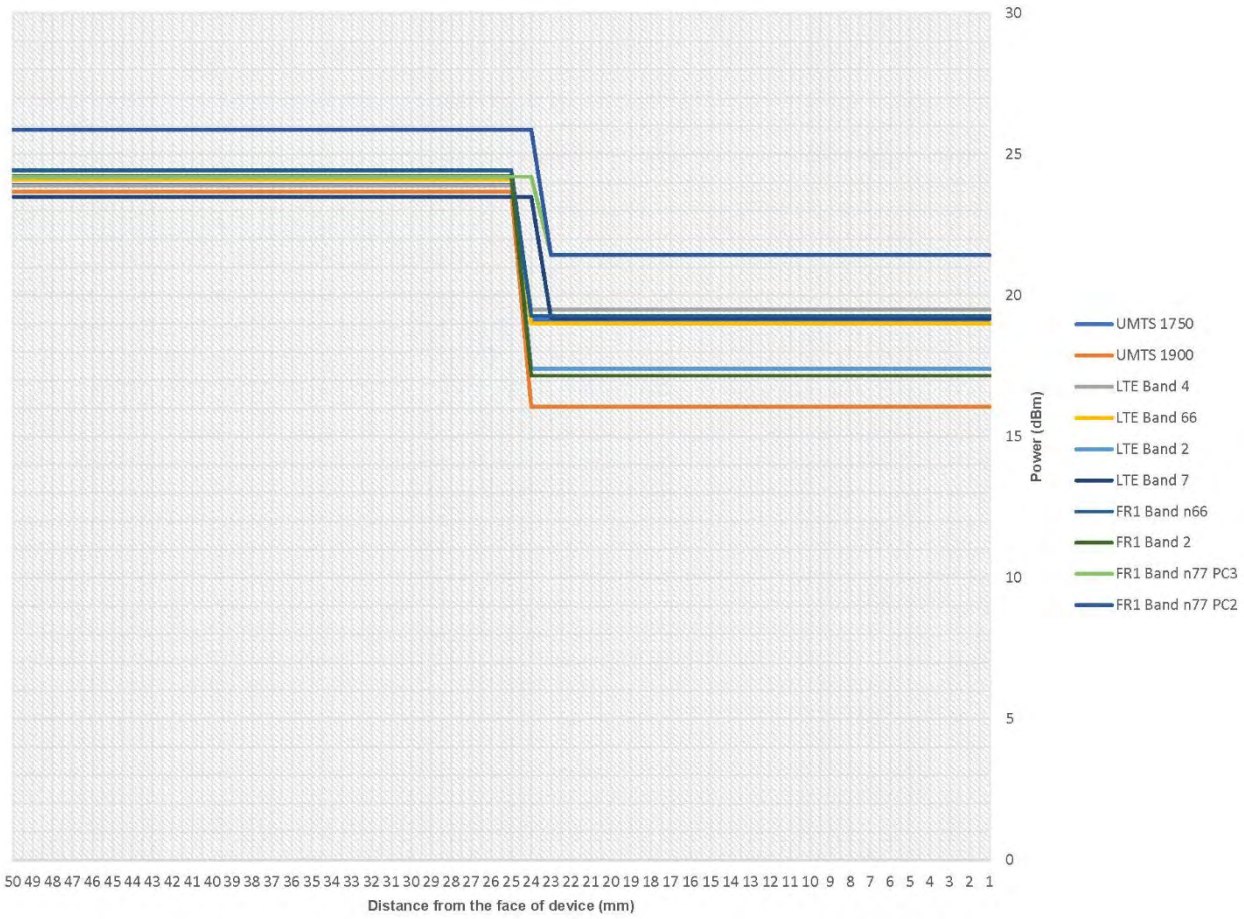


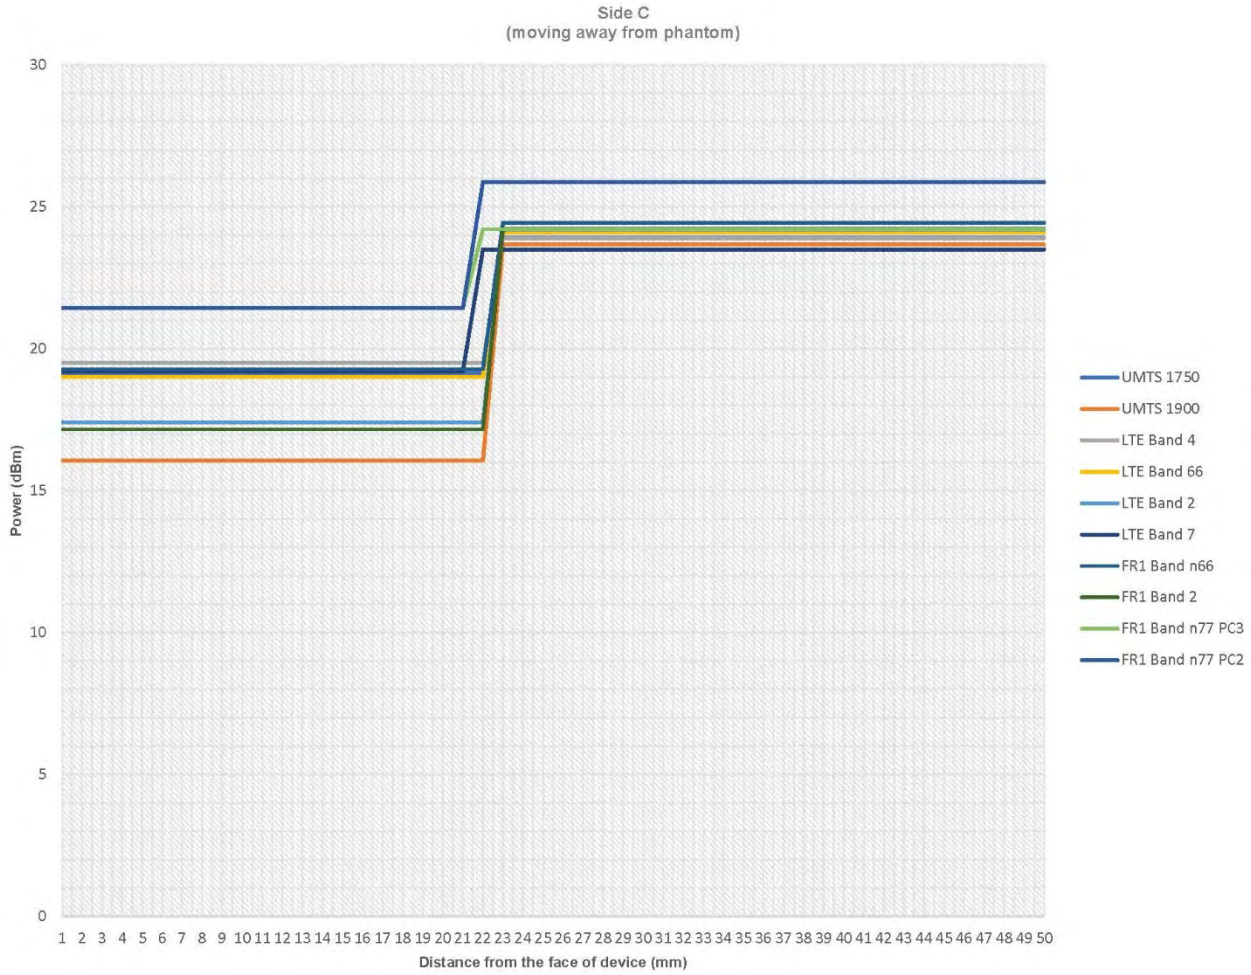


Side D
(moving toward phantom)

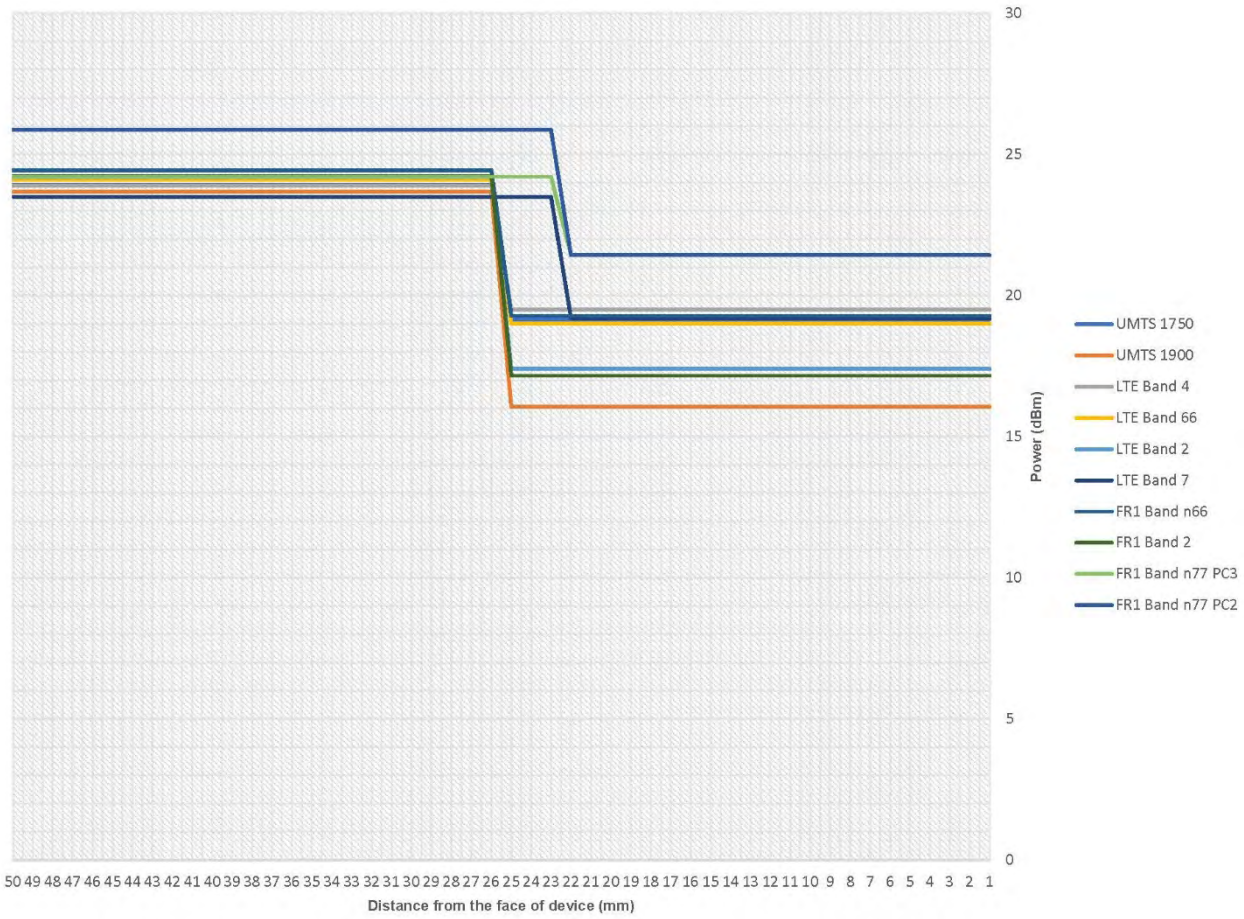


Side D
(moving away from phantom)

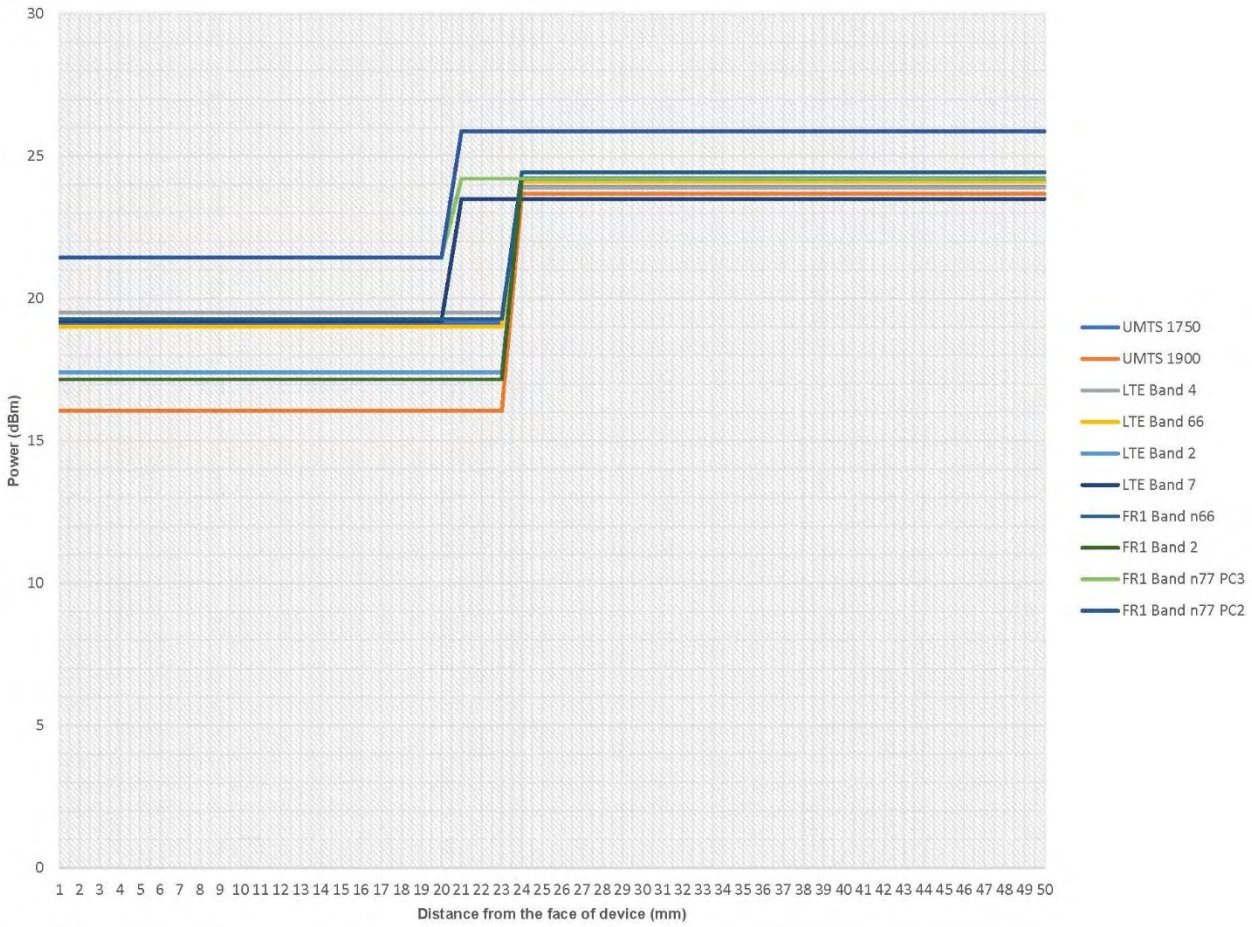

Side F
(moving toward phantom)

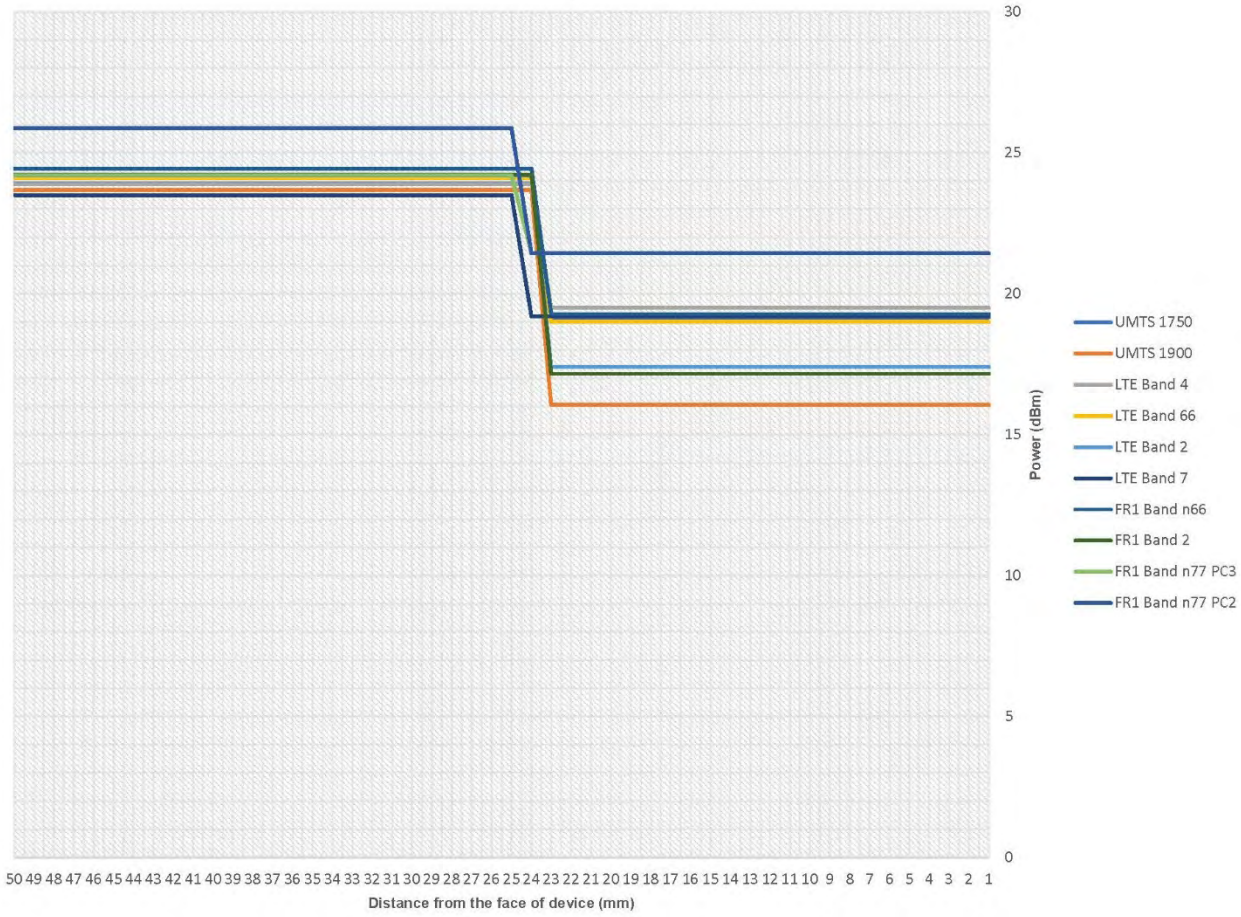

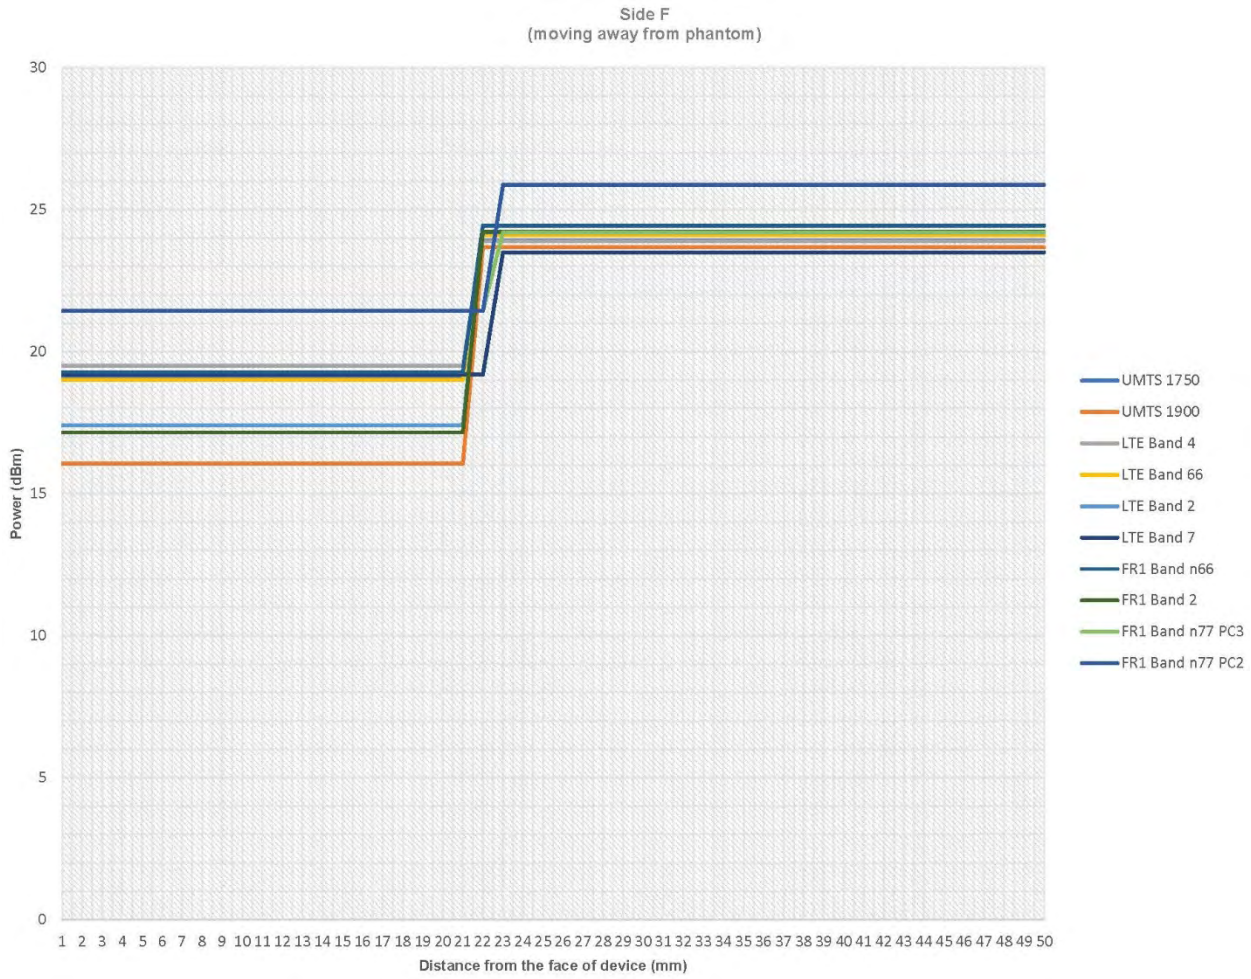

| Plot No. | 5G FR2 | Antenna Module | Beam ID 1 | Beam ID 2 | Frequency (GHz) | RB | Mod. | BW (MHz) | SCS (kHz) | Test Position | Gap (mm) | Port Power | Port Power Limit | E _{peak} V/m | H _{peak} [A/m] | S _{avg} inc 4 cm ² [W/m ²] | S _{avg} tot 4 cm ² [W/m ²] | Reported |
|----------|--------|----------------|-----------|-----------|-----------------|----|------|----------|-----------|---------------|----------|------------|------------------|-----------------------|-------------------------|--|--|----------|
| | n260 | QTM-0 | 29 | ----- | 38.5 | 1 | QPSK | 400 | 120 | Side A | 10mm | 6.5 | 6.5 | 44.8 | 0.113 | 0.80 | 0.93 | 0.93 |
| | n260 | QTM-0 | 157 | ----- | 38.5 | 1 | QPSK | 400 | 120 | Side A | 10mm | 6.4 | 6.5 | 44.8 | 0.120 | 0.83 | 0.98 | 1.00 |
| | n260 | QTM-0 | 157 | 29 | 37.0 | 1 | QPSK | 400 | 120 | Side A | 10mm | 9.4 | 9.5 | 73.2 | 0.167 | 1.89 | 2.54 | 2.60 |
| 1 | n260 | QTM-0 | 157 | 29 | 38.5 | 1 | QPSK | 400 | 120 | Side A | 10mm | 9.5 | 9.5 | 74.0 | 0.176 | 1.95 | 2.61 | 2.61 |
| | n260 | QTM-0 | 157 | 29 | 40.0 | 1 | QPSK | 400 | 120 | Side A | 10mm | 9.5 | 9.5 | 73.4 | 0.159 | 1.82 | 2.49 | 2.49 |
| | n260 | QTM-1 | 156 | ----- | 38.5 | 1 | QPSK | 400 | 120 | Side A | 10mm | 8.5 | 8.5 | 50.3 | 0.110 | 0.59 | 0.72 | 0.72 |
| | n260 | QTM-1 | 28 | ----- | 38.5 | 1 | QPSK | 400 | 120 | Side A | 10mm | 8.5 | 8.5 | 35.0 | 0.099 | 0.46 | 0.51 | 0.51 |
| | n260 | QTM-1 | 34 | 162 | 38.5 | 1 | QPSK | 400 | 120 | Side A | 10mm | 11.5 | 11.5 | 59.2 | 0.144 | 1.24 | 1.44 | 1.44 |
| | n260 | QTM-1 | 156 | ----- | 38.5 | 1 | QPSK | 400 | 120 | Side B | 10mm | 8.5 | 8.5 | 41.1 | 0.102 | 0.75 | 0.78 | 0.78 |
| | n260 | QTM-1 | 24 | ----- | 38.5 | 1 | QPSK | 400 | 120 | Side B | 10mm | 8.5 | 8.5 | 28.8 | 0.075 | 0.42 | 0.44 | 0.44 |
| | n260 | QTM-1 | 34 | 162 | 40.0 | 1 | QPSK | 400 | 120 | Side B | 10mm | 11.5 | 11.5 | 36.4 | 0.104 | 0.84 | 0.90 | 0.90 |
| | n260 | QTM-0 | 32 | ----- | 38.5 | 1 | QPSK | 400 | 120 | Side D | 10mm | 6.5 | 6.5 | 28.9 | 0.074 | 0.32 | 0.34 | 0.34 |
| | n260 | QTM-0 | 160 | ----- | 38.5 | 1 | QPSK | 400 | 120 | Side D | 10mm | 6.5 | 6.5 | 32.5 | 0.088 | 0.49 | 0.51 | 0.51 |
| | n260 | QTM-0 | 160 | 32 | 38.5 | 1 | QPSK | 400 | 120 | Side D | 10mm | 9.5 | 9.5 | 56.8 | 0.147 | 1.30 | 1.37 | 1.37 |
| | n260 | QTM-0 | 157 | 29 | 38.5 | 1 | QPSK | 400 | 120 | Side A | 20mm | 13.5 | 13.5 | 62.6 | 0.158 | 1.81 | 2.43 | 2.43 |
| | n260 | QTM-1 | 34 | 162 | 40.0 | 1 | QPSK | 400 | 120 | Side B | 20mm | 13.4 | 13.5 | 26.7 | 0.095 | 0.74 | 0.81 | 0.83 |
| | n260 | QTM-0 | 160 | 32 | 38.5 | 1 | QPSK | 400 | 120 | Side D | 20mm | 13.4 | 13.5 | 44.9 | 0.132 | 1.15 | 1.21 | 1.24 |
| | n261 | QTM-0 | 159 | ----- | 27.9 | 1 | QPSK | 400 | 120 | Side A | 10mm | 1.9 | 2.0 | 44.5 | 0.113 | 0.86 | 0.91 | 0.93 |
| | n261 | QTM-0 | 40 | ----- | 27.9 | 1 | QPSK | 400 | 120 | Side A | 10mm | 1.9 | 2.0 | 44.1 | 0.109 | 0.93 | 1.02 | 1.04 |
| | n261 | QTM-0 | 168 | 40 | 27.9 | 1 | QPSK | 400 | 120 | Side A | 10mm | 4.9 | 5.0 | 71.2 | 0.181 | 2.38 | 2.42 | 2.48 |
| | n261 | QTM-1 | 154 | ----- | 27.9 | 1 | QPSK | 400 | 120 | Side A | 10mm | 5.8 | 6.0 | 52.4 | 0.144 | 1.23 | 1.29 | 1.35 |
| | n261 | QTM-1 | 26 | ----- | 27.9 | 1 | QPSK | 400 | 120 | Side A | 10mm | 5.8 | 6.0 | 53.7 | 0.146 | 1.39 | 1.52 | 1.59 |
| | n261 | QTM-1 | 154 | 26 | 27.3 | 1 | QPSK | 400 | 120 | Side A | 10mm | 8.9 | 9.0 | 73.4 | 0.172 | 2.51 | 2.55 | 2.61 |
| 2 | n261 | QTM-1 | 154 | 26 | 27.5 | 1 | QPSK | 400 | 120 | Side A | 10mm | 9.0 | 9.0 | 74.2 | 0.181 | 2.67 | 2.70 | 2.70 |
| | n261 | QTM-1 | 154 | 26 | 28.3 | 1 | QPSK | 400 | 120 | Side A | 10mm | 8.9 | 9.0 | 73.9 | 0.168 | 2.59 | 2.62 | 2.68 |
| | n261 | QTM-1 | 153 | ----- | 27.9 | 1 | QPSK | 400 | 120 | Side B | 10mm | 5.8 | 6.0 | 38.9 | 0.093 | 0.81 | 0.83 | 0.87 |
| | n261 | QTM-1 | 27 | ----- | 27.9 | 1 | QPSK | 400 | 120 | Side B | 10mm | 5.8 | 6.0 | 41.0 | 0.107 | 1.07 | 1.13 | 1.18 |
| | n261 | QTM-1 | 155 | 27 | 27.9 | 1 | QPSK | 400 | 120 | Side B | 10mm | 8.8 | 9.0 | 33.2 | 0.142 | 1.27 | 1.29 | 1.35 |
| | n261 | QTM-0 | 39 | ----- | 27.9 | 1 | QPSK | 400 | 120 | Side D | 10mm | 1.9 | 2.0 | 9.41 | 0.035 | 0.03 | 0.03 | 0.03 |
| | n261 | QTM-0 | 160 | ----- | 27.9 | 1 | QPSK | 400 | 120 | Side D | 10mm | 1.9 | 2.0 | 11.5 | 0.038 | 0.06 | 0.06 | 0.06 |
| | n261 | QTM-0 | 160 | 32 | 27.9 | 1 | QPSK | 400 | 120 | Side D | 10mm | 4.9 | 5.0 | 16.7 | 0.055 | 0.12 | 0.17 | 0.17 |
| | n261 | QTM-1 | 154 | 26 | 27.5 | 1 | QPSK | 400 | 120 | Side A | 20mm | 13.5 | 13.5 | 63.4 | 0.159 | 2.57 | 2.61 | 2.61 |
| | n261 | QTM-1 | 155 | 27 | 27.9 | 1 | QPSK | 400 | 120 | Side B | 20mm | 13.4 | 13.5 | 31.5 | 0.125 | 1.08 | 1.12 | 1.15 |
| | n261 | QTM-0 | 160 | 32 | 27.9 | 1 | QPSK | 400 | 120 | Side D | 20mm | 13.4 | 13.5 | 14.3 | 0.043 | 0.08 | 0.11 | 0.11 |
| | n260 | QTM-0 | 157 | 29 | 38.5 | 1 | QPSK | 400 | 120 | Side C | 10mm | 9.5 | 9.5 | 11.6 | 0.031 | 0.04 | 0.04 | 0.04 |
| | n261 | QTM-1 | 154 | 26 | 27.9 | 1 | QPSK | 400 | 120 | Side C | 10mm | 9.0 | 9.0 | 21.6 | 0.058 | 0.23 | 0.24 | 0.24 |
| | n261 | QTM-0 | 154 | 26 | 27.9 | 1 | QPSK | 400 | 120 | Side F | 10mm | 9.0 | 9.0 | 8.98 | 0.029 | 0.05 | 0.05 | 0.05 |
| | n260 | QTM-0 | 157 | 29 | 38.5 | 1 | QPSK | 400 | 120 | Side E | 10mm | 9.5 | 9.5 | 28.1 | 0.075 | 0.33 | 0.38 | 0.38 |
| | n261 | QTM-1 | 154 | 26 | 27.9 | 1 | QPSK | 400 | 120 | Side C | 20mm | 13.4 | 13.5 | 17.9 | 0.043 | 0.15 | 0.17 | 0.17 |
| | n261 | QTM-0 | 154 | 26 | 27.9 | 1 | QPSK | 400 | 120 | Side F | 20mm | 13.4 | 13.5 | 6.59 | 0.021 | 0.03 | 0.03 | 0.03 |
| | n260 | QTM-0 | 157 | 29 | 38.5 | 1 | QPSK | 400 | 120 | Side E | 20mm | 13.4 | 13.5 | 21.3 | 0.068 | 0.25 | 0.28 | 0.29 |

LPD Single Point Measurement Notes:

- 1) For the maximum value among the table above, test the 50% and 100% RB configurations
- 2) For the maximum value among the table above and step 1, test all other modulations in this configuration
- 3) For the maximum value among the table above and step 1-2, test all other bandwidths in this configuration
- 4) For the maximum value among the table above and step 1-3, test all other component carriers in this configuration
- 5) For the maximum value among the table above and step 1-4, conduct a full LPD measurement for the low and high channel in this configuration

Point LPD Measurements

| | | | | | |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Band n261, QTM-1, Beam 154/26, 27.5 GHz, Side A | | | | | |
| 60 kHz | | | | | |
| 100 MHz | | | | | |
| 16QAM | | 64QAM | | 256QAM | |
| 50% RB | 100% RB | 50% RB | 100% RB | 50% RB | 100% RB |
| 2.31 W/m ² | 2.15 W/m ² | 2.32 W/m ² | 2.38 W/m ² | 2.15 W/m ² | 2.31 W/m ² |

| | | | | | |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Band n261, QTM-1, Beam 154/26, 27.5 GHz, Side A | | | | | |
| 60 kHz | | | | | |
| 200 MHz | | | | | |
| 16QAM | | 64QAM | | 256QAM | |
| 50% RB | 100% RB | 50% RB | 100% RB | 50% RB | 100% RB |
| 2.29 W/m ² | 2.24 W/m ² | 2.36 W/m ² | 2.27 W/m ² | 2.19 W/m ² | 2.15 W/m ² |

| | | | | | |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Band n261, QTM-1, Beam 154/26, 27.5 GHz, Side A | | | | | |
| 60 kHz | | | | | |
| 400 MHz | | | | | |
| 16QAM | | 64QAM | | 256QAM | |
| 50% RB | 100% RB | 50% RB | 100% RB | 50% RB | 100% RB |
| 2.36 W/m ² | 2.30 W/m ² | 2.28 W/m ² | 2.23 W/m ² | 2.22 W/m ² | 2.17 W/m ² |

| | | | | | |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Band n261, QTM-1, Beam 154/26, 27.5 GHz, Side A | | | | | |
| 240 kHz | | | | | |
| 100 MHz | | | | | |
| 16QAM | | 64QAM | | 256QAM | |
| 50% RB | 100% RB | 50% RB | 100% RB | 50% RB | 100% RB |
| 2.16 W/m ² | 2.12 W/m ² | 2.25 W/m ² | 2.13 W/m ² | 2.27 W/m ² | 2.21 W/m ² |

| | | | | | |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Band n261, QTM-1, Beam 154/26, 27.5 GHz, Side A | | | | | |
| 240 kHz | | | | | |
| 200 MHz | | | | | |
| 16QAM | | 64QAM | | 256QAM | |
| 50% RB | 100% RB | 50% RB | 100% RB | 50% RB | 100% RB |
| 2.31 W/m ² | 2.26 W/m ² | 2.15 W/m ² | 2.19 W/m ² | 2.11 W/m ² | 2.02 W/m ² |

| | | | | | |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Band n261, QTM-1, Beam 154/26, 27.5 GHz, Side A | | | | | |
| 240 kHz | | | | | |
| 400 MHz | | | | | |
| 16QAM | | 64QAM | | 256QAM | |
| 50% RB | 100% RB | 50% RB | 100% RB | 50% RB | 100% RB |
| 2.33 W/m ² | 2.26 W/m ² | 2.39 W/m ² | 2.27 W/m ² | 2.26 W/m ² | 2.15 W/m ² |

| Band n261, QTM-1, Beam 155/27, 27.9 GHz, Side B | | | | | |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 60 kHz | | | | | |
| 100 MHz | | | | | |
| 16QAM | | 64QAM | | 256QAM | |
| 50% RB | 100% RB | 50% RB | 100% RB | 50% RB | 100% RB |
| 1.15 W/m ² | 1.05 W/m ² | 1.21 W/m ² | 1.16 W/m ² | 1.14 W/m ² | 1.09 W/m ² |

| Band n261, QTM-1, Beam 155/27, 27.9 GHz, Side B | | | | | |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 60 kHz | | | | | |
| 200 MHz | | | | | |
| 16QAM | | 64QAM | | 256QAM | |
| 50% RB | 100% RB | 50% RB | 100% RB | 50% RB | 100% RB |
| 1.21 W/m ² | 1.14 W/m ² | 1.27 W/m ² | 1.22 W/m ² | 1.30 W/m ² | 1.24 W/m ² |

| Band n261, QTM-1, Beam 155/27, 27.9 GHz, Side B | | | | | |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 60 kHz | | | | | |
| 400 MHz | | | | | |
| 16QAM | | 64QAM | | 256QAM | |
| 50% RB | 100% RB | 50% RB | 100% RB | 50% RB | 100% RB |
| 1.11 W/m ² | 1.03 W/m ² | 1.08 W/m ² | 1.02 W/m ² | 1.11 W/m ² | 1.09 W/m ² |

| Band n261, QTM-1, Beam 155/27, 27.9 GHz, Side B | | | | | |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 240 kHz | | | | | |
| 100 MHz | | | | | |
| 16QAM | | 64QAM | | 256QAM | |
| 50% RB | 100% RB | 50% RB | 100% RB | 50% RB | 100% RB |
| 1.23 W/m ² | 1.17 W/m ² | 1.13 W/m ² | 1.11 W/m ² | 1.17 W/m ² | 1.12 W/m ² |

| Band n261, QTM-1, Beam 155/27, 27.9 GHz, Side B | | | | | |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 240 kHz | | | | | |
| 200 MHz | | | | | |
| 16QAM | | 64QAM | | 256QAM | |
| 50% RB | 100% RB | 50% RB | 100% RB | 50% RB | 100% RB |
| 1.26 W/m ² | 1.21 W/m ² | 1.28 W/m ² | 1.23 W/m ² | 1.16 W/m ² | 1.15 W/m ² |

| Band n261, QTM-1, Beam 155/27, 27.9 GHz, Side B | | | | | |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 240 kHz | | | | | |
| 400 MHz | | | | | |
| 16QAM | | 64QAM | | 256QAM | |
| 50% RB | 100% RB | 50% RB | 100% RB | 50% RB | 100% RB |
| 1.32 W/m ² | 1.24 W/m ² | 1.19 W/m ² | 1.15 W/m ² | 1.22 W/m ² | 1.13 W/m ² |

| Band n260, QTM-0, Beam 160/32, 38.5 GHz, Side D | | | | | |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 60 kHz | | | | | |
| 100 MHz | | | | | |
| 16QAM | | 64QAM | | 256QAM | |
| 50% RB | 100% RB | 50% RB | 100% RB | 50% RB | 100% RB |
| 1.26 W/m ² | 1.22 W/m ² | 1.29 W/m ² | 1.24 W/m ² | 1.18 W/m ² | 1.13 W/m ² |

| Band n260, QTM-0, Beam 160/32, 38.5 GHz, Side D | | | | | |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 60 kHz | | | | | |
| 200 MHz | | | | | |
| 16QAM | | 64QAM | | 256QAM | |
| 50% RB | 100% RB | 50% RB | 100% RB | 50% RB | 100% RB |
| 1.31 W/m ² | 1.25 W/m ² | 1.20 W/m ² | 1.17 W/m ² | 1.14 W/m ² | 1.11 W/m ² |

| Band n260, QTM-0, Beam 160/32, 38.5 GHz, Side D | | | | | |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 60 kHz | | | | | |
| 400 MHz | | | | | |
| 16QAM | | 64QAM | | 256QAM | |
| 50% RB | 100% RB | 50% RB | 100% RB | 50% RB | 100% RB |
| 1.22 W/m ² | 1.16 W/m ² | 1.15 W/m ² | 1.09 W/m ² | 1.07 W/m ² | 1.02 W/m ² |

| Band n260, QTM-0, Beam 160/32, 38.5 GHz, Side D | | | | | |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 240 kHz | | | | | |
| 100 MHz | | | | | |
| 16QAM | | 64QAM | | 256QAM | |
| 50% RB | 100% RB | 50% RB | 100% RB | 50% RB | 100% RB |
| 1.30 W/m ² | 1.26 W/m ² | 1.24 W/m ² | 1.22 W/m ² | 1.20 W/m ² | 1.17 W/m ² |

| Band n260, QTM-0, Beam 160/32, 38.5 GHz, Side D | | | | | |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 240 kHz | | | | | |
| 200 MHz | | | | | |
| 16QAM | | 64QAM | | 256QAM | |
| 50% RB | 100% RB | 50% RB | 100% RB | 50% RB | 100% RB |
| 1.26 W/m ² | 1.14 W/m ² | 1.28 W/m ² | 1.25 W/m ² | 1.13 W/m ² | 1.11 W/m ² |

| Band n260, QTM-0, Beam 160/32, 38.5 GHz, Side D | | | | | |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 240 kHz | | | | | |
| 400 MHz | | | | | |
| 16QAM | | 64QAM | | 256QAM | |
| 50% RB | 100% RB | 50% RB | 100% RB | 50% RB | 100% RB |
| 1.33 W/m ² | 1.24 W/m ² | 1.26 W/m ² | 1.20 W/m ² | 1.14 W/m ² | 1.08 W/m ² |

10. Simultaneous Transmission Analysis

All the data below is referenced from the original reports under FCC ID: PKRISGM3000A in report numbers SAR.20220610 and SAR.20220611 for the 3G/4G/WiFi and FR1. The data listed in the tables below was extracted from these reports.

Sim-Tx configuration

| No. | Simultaneous Transmission Configuration | Exposure Positions |
|-----|---|--------------------|
| | | Body |
| 1 | UMTS + 2.4 GHz Wifi 0 + 2.4 GHz WiFi 1 | Yes |
| 2 | UMTS + 5 GHz Wifi 0 + 5 GHz WiFi 1 | Yes |
| 3 | LTE + 2.4 GHz Wifi 0 + 2.4 GHz WiFi 1 | Yes |
| 4 | LTE + 5 GHz Wifi 0 + 5 GHz WiFi 1 | Yes |
| 5 | FR1 + 2.4 GHz Wifi 0 + 2.4 GHz WiFi 1 | Yes |
| 6 | FR1 + 5 GHz Wifi 0 + 5 GHz WiFi 1 | Yes |
| 7 | LTE + FR2 + 2.4 GHz WiFi 0 + 2.4 GHz WiFi 1 | Yes |
| 8 | LTE + FR2 + 5 GHz WiFi 0 + 5 GHz WiFi 1 | Yes |

General Note:

1. The worst case WLAN reported SAR for each configuration was used for SAR summation, regardless of whether the WLAN channel has Hotspot capability. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
2. The Scaled SAR summation is calculated based on the same configuration and test position.

Body Exposure Conditions

| WWAN Band | Exposure Position | 1 | 2 | 3 | 4 | 5 | 1+2+3 Summed 1g SAR (W/kg) | 1+4+5 Summed 1g SAR (W/kg) |
|-------------------|-------------------|---------------|----------------|----------------|---------------|---------------|----------------------------|----------------------------|
| | | WWAN | 2.4GHz Wi-Fi 0 | 2.4GHz Wi-Fi 1 | 5GHz Wi-Fi 0 | 5GHz Wi-Fi 1 | | |
| | | 1g SAR (W/kg) | 1g SAR (W/kg) | 1g SAR (W/kg) | 1g SAR (W/kg) | 1g SAR (W/kg) | | |
| WCDMA II Ant 0 | Side A | 0.24 | 0.19 | 0.20 | 0.22 | 0.19 | 0.63 | 0.65 |
| | Side B | 0.01 | | 0.09 | | 0.21 | 0.10 | 0.22 |
| | Side C | 0.28 | 0.13 | 0.18 | 0.25 | 0.21 | 0.59 | 0.74 |
| | Side D | 0.16 | 0.21 | | 0.26 | | 0.37 | 0.42 |
| | Side E | | 0.04 | | 0.17 | | 0.04 | 0.17 |
| | Side F | 0.87 | | 0.07 | | 0.17 | 0.94 | 1.04 |
| WCDMA IV Ant 0 | Side A | 0.73 | 0.19 | 0.20 | 0.22 | 0.19 | 1.12 | 1.14 |
| | Side B | 0.09 | | 0.09 | | 0.21 | 0.18 | 0.30 |
| | Side C | 0.88 | 0.13 | 0.18 | 0.25 | 0.21 | 1.19 | 1.34 |
| | Side D | 0.03 | 0.21 | | 0.26 | | 0.24 | 0.29 |
| | Side E | | 0.04 | | 0.17 | | 0.04 | 0.17 |
| | Side F | 0.60 | | 0.07 | | 0.17 | 0.67 | 0.77 |
| WCDMA V Ant 0 | Side A | 0.88 | 0.19 | 0.20 | 0.22 | 0.19 | 1.27 | 1.29 |
| | Side B | 0.58 | | 0.09 | | 0.21 | 0.67 | 0.79 |
| | Side C | 0.87 | 0.13 | 0.18 | 0.25 | 0.21 | 1.18 | 1.33 |
| | Side D | 0.40 | 0.21 | | 0.26 | | 0.61 | 0.66 |
| | Side E | | 0.04 | | 0.17 | | 0.04 | 0.17 |
| | Side F | 0.07 | | 0.07 | | 0.17 | 0.14 | 0.24 |
| LTE Band 2 Ant 0 | Side A | 0.19 | 0.19 | 0.20 | 0.22 | 0.19 | 0.58 | 0.60 |
| | Side B | 0.18 | | 0.09 | | 0.21 | 0.27 | 0.39 |
| | Side C | 0.40 | 0.13 | 0.18 | 0.25 | 0.21 | 0.71 | 0.86 |
| | Side D | 0.54 | 0.21 | | 0.26 | | 0.75 | 0.80 |
| | Side E | | 0.04 | | 0.17 | | 0.04 | 0.17 |
| | Side F | 0.80 | | 0.07 | | 0.17 | 0.87 | 0.97 |
| LTE Band 5 Ant 0 | Side A | 0.75 | 0.19 | 0.20 | 0.22 | 0.19 | 1.14 | 1.16 |
| | Side B | 0.48 | | 0.09 | | 0.21 | 0.57 | 0.69 |
| | Side C | 0.78 | 0.13 | 0.18 | 0.25 | 0.21 | 1.09 | 1.24 |
| | Side D | 0.35 | 0.21 | | 0.26 | | 0.56 | 0.61 |
| | Side E | | 0.04 | | 0.17 | | 0.04 | 0.17 |
| | Side F | 0.08 | | 0.07 | | 0.17 | 0.15 | 0.25 |
| LTE Band 7 Ant 0 | Side A | 0.60 | 0.19 | 0.20 | 0.22 | 0.19 | 0.99 | 1.01 |
| | Side B | 0.03 | | 0.09 | | 0.21 | 0.12 | 0.24 |
| | Side C | 0.26 | 0.13 | 0.18 | 0.25 | 0.21 | 0.57 | 0.72 |
| | Side D | 0.10 | 0.21 | | 0.26 | | 0.31 | 0.36 |
| | Side E | | 0.04 | | 0.17 | | 0.04 | 0.17 |
| | Side F | 0.84 | | 0.07 | | 0.17 | 0.91 | 1.01 |
| LTE Band 12 Ant 0 | Side A | 0.17 | 0.19 | 0.20 | 0.22 | 0.19 | 0.56 | 0.58 |
| | Side B | 0.10 | | 0.09 | | 0.21 | 0.19 | 0.31 |
| | Side C | 0.16 | 0.13 | 0.18 | 0.25 | 0.21 | 0.47 | 0.62 |
| | Side D | 0.10 | 0.21 | | 0.26 | | 0.31 | 0.36 |
| | Side E | | 0.04 | | 0.17 | | 0.04 | 0.17 |
| | Side F | 0.09 | | 0.07 | | 0.17 | 0.16 | 0.26 |
| LTE Band 13 Ant 0 | Side A | 0.50 | 0.19 | 0.20 | 0.22 | 0.19 | 0.89 | 0.91 |
| | Side B | 0.35 | | 0.09 | | 0.21 | 0.44 | 0.56 |
| | Side C | 0.44 | 0.13 | 0.18 | 0.25 | 0.21 | 0.75 | 0.90 |
| | Side D | 0.24 | 0.21 | | 0.26 | | 0.45 | 0.50 |
| | Side E | | 0.04 | | 0.17 | | 0.04 | 0.17 |
| | Side F | 0.06 | | 0.07 | | 0.17 | 0.13 | 0.23 |

| WWAN Band | Exposure Position | 1 | 2 | 3 | 4 | 5 | 1+2+3 Summed 1g SAR (W/kg) | 1+4+5 Summed 1g SAR (W/kg) |
|--------------------|-------------------|---------------|----------------|----------------|---------------|---------------|----------------------------|----------------------------|
| | | WWAN | 2.4GHz Wi-Fi 0 | 2.4GHz Wi-Fi 1 | 5GHz Wi-Fi 0 | 5GHz Wi-Fi 1 | | |
| | | 1g SAR (W/kg) | 1g SAR (W/kg) | 1g SAR (W/kg) | 1g SAR (W/kg) | 1g SAR (W/kg) | | |
| LTE Band 48 Ant 4 | Side A | 0.61 | 0.19 | 0.20 | 0.22 | 0.19 | 1.00 | 1.02 |
| | Side B | 0.14 | | 0.09 | | 0.21 | 0.23 | 0.35 |
| | Side C | 0.33 | 0.13 | 0.18 | 0.25 | 0.21 | 0.64 | 0.79 |
| | Side D | | 0.21 | | 0.26 | | 0.21 | 0.26 |
| | Side E | | 0.04 | | 0.17 | | 0.04 | 0.17 |
| | Side F | 0.68 | | 0.07 | | 0.17 | 0.75 | 0.85 |
| LTE Band 66 Ant 0 | Side A | 0.52 | 0.19 | 0.20 | 0.22 | 0.19 | 0.91 | 0.93 |
| | Side B | 0.06 | | 0.09 | | 0.21 | 0.15 | 0.27 |
| | Side C | 0.66 | 0.13 | 0.18 | 0.25 | 0.21 | 0.97 | 1.12 |
| | Side D | 0.19 | 0.21 | | 0.26 | | 0.40 | 0.45 |
| | Side E | | 0.04 | | 0.17 | | 0.04 | 0.17 |
| | Side F | 0.80 | | 0.07 | | 0.17 | 0.87 | 0.97 |
| FR1 Band n2 Ant 0 | Side A | 0.28 | 0.19 | 0.20 | 0.22 | 0.19 | 0.67 | 0.69 |
| | Side B | 0.06 | | 0.09 | | 0.21 | 0.15 | 0.27 |
| | Side C | 0.32 | 0.13 | 0.18 | 0.25 | 0.21 | 0.63 | 0.78 |
| | Side D | 0.15 | 0.21 | | 0.26 | | 0.36 | 0.41 |
| | Side E | | 0.04 | | 0.17 | | 0.04 | 0.17 |
| | Side F | 0.87 | | 0.07 | | 0.17 | 0.94 | 1.04 |
| FR1 Band n5 Ant 0 | Side A | 0.40 | 0.19 | 0.20 | 0.22 | 0.19 | 0.79 | 0.81 |
| | Side B | 0.33 | | 0.09 | | 0.21 | 0.42 | 0.54 |
| | Side C | 0.49 | 0.13 | 0.18 | 0.25 | 0.21 | 0.80 | 0.95 |
| | Side D | 0.20 | 0.21 | | 0.26 | | 0.41 | 0.46 |
| | Side E | | 0.04 | | 0.17 | | 0.04 | 0.17 |
| | Side F | 0.03 | | 0.07 | | 0.17 | 0.10 | 0.20 |
| FR1 Band n48 Ant 4 | Side A | 0.90 | 0.19 | 0.20 | 0.22 | 0.19 | 1.29 | 1.31 |
| | Side B | 0.74 | | 0.09 | | 0.21 | 0.83 | 0.95 |
| | Side C | 0.39 | 0.13 | 0.18 | 0.25 | 0.21 | 0.70 | 0.85 |
| | Side D | | 0.21 | | 0.26 | | 0.21 | 0.26 |
| | Side E | | 0.04 | | 0.17 | | 0.04 | 0.17 |
| | Side F | 0.64 | | 0.07 | | 0.17 | 0.71 | 0.81 |
| FR1 Band n66 Ant 0 | Side A | 0.68 | 0.19 | 0.20 | 0.22 | 0.19 | 1.07 | 1.09 |
| | Side B | 0.10 | | 0.09 | | 0.21 | 0.19 | 0.31 |
| | Side C | 0.83 | 0.13 | 0.18 | 0.25 | 0.21 | 1.14 | 1.29 |
| | Side D | 0.20 | 0.21 | | 0.26 | | 0.41 | 0.46 |
| | Side E | | 0.04 | | 0.17 | | 0.04 | 0.17 |
| | Side F | 0.89 | | 0.07 | | 0.17 | 0.96 | 1.06 |
| FR1 Band n77 Ant 4 | Side A | 0.69 | 0.19 | 0.20 | 0.22 | 0.19 | 1.08 | 1.10 |
| | Side B | 0.74 | | 0.09 | | 0.21 | 0.83 | 0.95 |
| | Side C | 0.34 | 0.13 | 0.18 | 0.25 | 0.21 | 0.65 | 0.80 |
| | Side D | | 0.21 | | 0.26 | | 0.21 | 0.26 |
| | Side E | | 0.04 | | 0.17 | | 0.04 | 0.17 |
| | Side F | 0.51 | | 0.07 | | 0.17 | 0.58 | 0.68 |

| LTE UL CA | SAR ₁ | SAR ₂ | WiFi Sum of Tx0 and Tx1 | Total |
|-----------|------------------|------------------|-------------------------|-------|
| 2A-4A | 0.14 | 0.31 | 0.47 | 0.92 |
| 2A-5A | 0.14 | 0.38 | 0.47 | 0.99 |
| 2A-13A | 0.33 | 0.26 | 0.47 | 1.06 |
| 2A-66A | 0.14 | 0.32 | 0.47 | 0.93 |
| 4A-5A | 0.37 | 0.38 | 0.47 | 1.22 |
| 4A-13A | 0.31 | 0.26 | 0.47 | 1.04 |
| 5A-66A | 0.38 | 0.35 | 0.47 | 1.20 |
| 13A-66A | 0.26 | 0.32 | 0.47 | 1.05 |

| FR1 UL ENDC-LTE (NSA) | SAR ₁ | SAR ₂ | WiFi Sum of Tx0 and Tx1 | Total |
|-----------------------|------------------|------------------|-------------------------|-------|
| 5A-n2A | 0.38 | 0.38 | 0.47 | 1.23 |
| 13A-n2A | 0.26 | 0.54 | 0.47 | 1.27 |
| 66A-n2A | 0.35 | 0.54 | 0.47 | 1.36 |
| 2A-n5A | 0.14 | 0.50 | 0.47 | 1.11 |
| 48A-n5A | 0.34 | 0.54 | 0.47 | 1.35 |
| 66A-n5A | 0.35 | 0.50 | 0.47 | 1.32 |
| 2A-n66A | 0.14 | 0.41 | 0.47 | 1.02 |
| 5A-n66A | 0.38 | 0.39 | 0.47 | 1.24 |
| 7A-n66A | 0.43 | 0.41 | 0.47 | 1.31 |
| 13A-n66A | 0.26 | 0.41 | 0.47 | 1.14 |
| 48A-n66A | 0.34 | 0.38 | 0.47 | 1.19 |
| 2A-n77A | 0.14 | 0.37 | 0.47 | 0.98 |
| 5A-n77A | 0.35 | 0.37 | 0.47 | 1.19 |
| 7A-n77A | 0.43 | 0.37 | 0.47 | 1.27 |
| 13A-n77A | 0.26 | 0.37 | 0.47 | 1.10 |
| 66A-n77A | 0.35 | 0.37 | 0.47 | 1.19 |

| FR2 UL ENDC-LTE (NSA) | | Ratio to Limit ₁ | Ratio to Limit | WiFi Ratio of Tx0 and Tx1 | Total |
|-----------------------|-----------|-----------------------------|----------------|---------------------------|-------|
| 1CC | 2A-n260A | 0.09 | 0.10 | 0.30 | 0.49 |
| | 5A-n260A | 0.22 | 0.10 | 0.30 | 0.62 |
| | 13A-n260A | 0.16 | 0.10 | 0.30 | 0.56 |
| | 48A-n260A | 0.21 | 0.10 | 0.30 | 0.61 |
| | 66A-n260A | 0.22 | 0.10 | 0.30 | 0.62 |
| 2CC | 2A-n260G | 0.09 | 0.26 | 0.30 | 0.65 |
| | 5A-n260G | 0.22 | 0.26 | 0.30 | 0.78 |
| | 13A-n260G | 0.16 | 0.26 | 0.30 | 0.72 |
| | 48A-n260G | 0.21 | 0.26 | 0.30 | 0.77 |
| | 66A-n260G | 0.22 | 0.26 | 0.30 | 0.78 |
| 1CC | 2A-n261A | 0.09 | 0.15 | 0.30 | 0.54 |
| | 5A-n261A | 0.22 | 0.15 | 0.30 | 0.67 |
| | 13A-n261A | 0.16 | 0.15 | 0.30 | 0.61 |
| | 48A-n261A | 0.21 | 0.15 | 0.30 | 0.66 |
| | 66A-n261A | 0.22 | 0.15 | 0.30 | 0.67 |
| 2CC | 2A-n261G | 0.09 | 0.27 | 0.30 | 0.66 |
| | 5A-n261G | 0.22 | 0.27 | 0.30 | 0.79 |
| | 13A-n261G | 0.16 | 0.27 | 0.30 | 0.73 |
| | 48A-n261G | 0.21 | 0.27 | 0.30 | 0.78 |
| | 66A-n261G | 0.22 | 0.27 | 0.30 | 0.79 |

11. Test Equipment List

Table 11.1 Equipment Specifications

| Type | Calibration Due Date | Calibration Done Date | Serial Number |
|--------------------------------|-----------------------------|------------------------------|----------------------|
| Staubli Robot TX60L | N/A | N/A | F07/55M6A1/A/01 |
| Measurement Controller CS8c | N/A | N/A | 1012 |
| mmWave Phantom | N/A | N/A | 1091 |
| Device Holder | N/A | N/A | N/A |
| Data Acquisition Electronics 4 | 08/06/2022 | 08/06/2021 | 759 |
| SPEAG mmW Probe EUmmWV4 | 01/03/2023 | 01/03/2022 | 9611 |
| 5G Verification Source 30 GHz | 11/05/2021 | 11/05/2022 | 1091 |

12. Conclusion

The LPD measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

13. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [3] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.
- [4] FCC KDB 648474 D04 v01r03, “SAR Evaluation Considerations for Wireless Handsets”, Oct 2015.

Appendix A – System Validation Plots

Test Laboratory: RF Exposure Lab
Device under Test Properties

Plot 1

| Model, Manufacturer | Dimensions [mm] | IMEI | DUT Type |
|----------------------------------|-----------------------|------|---------------------|
| 30 GHz Verification Source Speag | 100.0 x 100.0 x 100.0 | | Verification Source |

Exposure Conditions

| Phantom Section | Position | Test Distance [mm] | Band | Group | UID | Rev | Frequency [MHz] | Channel Number |
|-----------------|----------|--------------------|-----------------|-------|-----|-----|-----------------|----------------|
| 5G Air | Front | 5.50 | Validation band | CW | 0 | - | 30000.000 | 30000 |

Hardware Setup

| Phantom | Medium | Probe | Calibration Date | DAE | Calibration Date |
|---------|--------|---------------------------|------------------|------------|------------------|
| mmWave | Air | EUmmWV4 - SN9611_F1-55GHz | 2022-01-03 | DAE4 Sn759 | 2021-08-06 |

Scan Setup


| Scan Name | Grid Extents [mm] | Grid Steps [lambda] | Sensor Surface [mm] | MAIA |
|----------------|---------------------|---------------------|---------------------|------|
| Fast Area Scan | 132.0 x 132.0 x 0.0 | 0.5 x 0.5 x 1.0 | 5.5 | N/A |
| 5G Scan | 60.0 x 60.0 x 0.0 | 0.25 x 0.25 x 0.0 | 5.5 | N/A |

Measurement Results

| Date | Scan Name | Avg. Area [cm ²] | psPDn+ [W/m ²] | psPDtot+ [W/m ²] | Power Drift [dB] |
|-------------------|----------------|------------------------------|----------------------------|------------------------------|------------------|
| 2022-05-21, 06:22 | Fast Area Scan | 1 | N/A | N/A | N/A |
| 2022-05-21, 07:29 | 5G Scan | 1 | 41.2 | 41.8 | -0.03 |

Warning(s) / Error(s)

| Job Name | Warning(s) | Error(s) |
|---------------------------|------------|----------|
| Fast Area Scan 5G Scan | | |

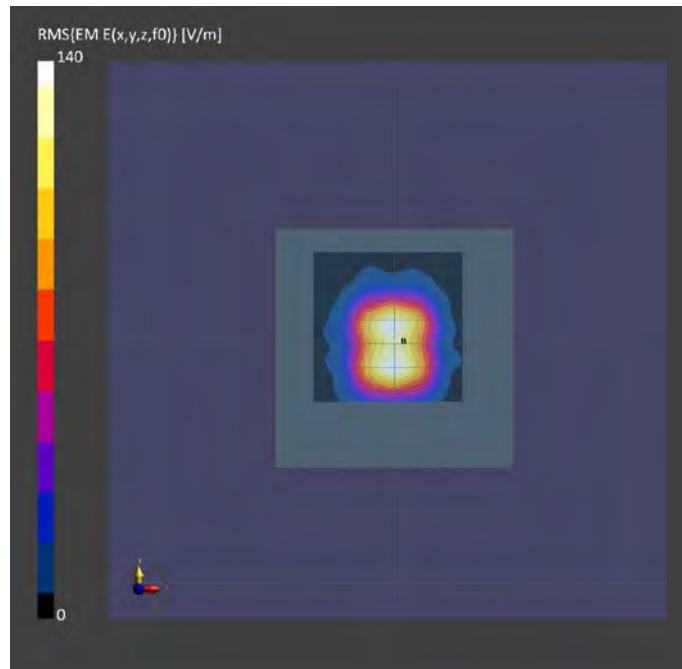

Test Laboratory: RF Exposure Lab
Device under Test Properties

Plot 2

| Model, Manufacturer | Dimensions [mm] | IMEI | DUT Type |
|----------------------------------|-----------------------|------|---------------------|
| 30 GHz Verification Source Speag | 100.0 x 100.0 x 100.0 | | Verification Source |

Exposure Conditions

| Phantom Section | Position | Test Distance [mm] | Band | Group | UID | Rev | Frequency [MHz] | Channel Number |
|-----------------|----------|--------------------|-----------------|-------|-----|-----|-----------------|----------------|
| 5G Air | Front | 5.50 | Validation band | CW | 0 | - | 30000.000 | 30000 |

Hardware Setup

| Phantom | Medium | Probe | Calibration Date | DAE | Calibration Date |
|---------|--------|---------------------------|------------------|------------|------------------|
| mmWave | Air | EUmmWV4 - SN9611_F1-55GHz | 2022-01-03 | DAE4 Sn759 | 2021-08-06 |

Scan Setup


| Scan Name | Grid Extents [mm] | Grid Steps [lambda] | Sensor Surface [mm] | MAIA |
|----------------|---------------------|---------------------|---------------------|------|
| Fast Area Scan | 132.0 x 132.0 x 0.0 | 0.5 x 0.5 x 1.0 | 5.5 | N/A |
| 5G Scan | 60.0 x 60.0 x 0.0 | 0.25 x 0.25 x 0.0 | 5.5 | Y |

Measurement Results

| Date | Scan Name | Avg. Area [cm ²] | psPDn+ [W/m ²] | psPDtot+ [W/m ²] | Power Drift [dB] |
|-------------------|----------------|------------------------------|----------------------------|------------------------------|------------------|
| 2022-05-23, 06:25 | Fast Area Scan | 1 | N/A | N/A | N/A |
| 2022-05-23, 07:22 | 5G Scan | 1 | 41.4 | 41.7 | -0.03 |

Warning(s) / Error(s)

| Job Name | Warning(s) | Error(s) |
|---------------------------|------------|----------|
| Fast Area Scan 5G Scan | | |

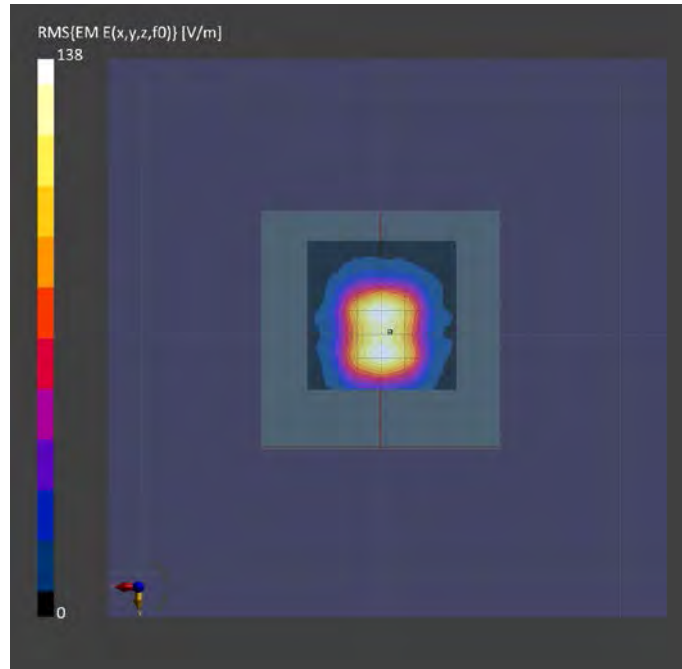

Test Laboratory: RF Exposure Lab
Device under Test Properties

Plot 3

| Model, Manufacturer | Dimensions [mm] | IMEI | DUT Type |
|----------------------------------|-----------------------|------|---------------------|
| 30 GHz Verification Source Speag | 100.0 x 100.0 x 100.0 | | Verification Source |

Exposure Conditions

| Phantom Section | Position | Test Distance [mm] | Band | Group | UID | Rev | Frequency [MHz] | Channel Number |
|-----------------|----------|--------------------|-----------------|-------|-----|-----|-----------------|----------------|
| 5G Air | Front | 5.50 | Validation band | CW | 0 | - | 30000.000 | 30000 |

Hardware Setup

| Phantom | Medium | Probe | Calibration Date | DAE | Calibration Date |
|---------|--------|---------------------------|------------------|------------|------------------|
| mmWave | Air | EUmmWV4 - SN9611_F1-55GHz | 2022-01-03 | DAE4 Sn759 | 2021-08-06 |

Scan Setup


| Scan Name | Grid Extents [mm] | Grid Steps [lambda] | Sensor Surface [mm] | MAIA |
|----------------|---------------------|---------------------|---------------------|------|
| Fast Area Scan | 132.0 x 132.0 x 0.0 | 0.5 x 0.5 x 1.0 | 5.5 | N/A |
| 5G Scan | 60.0 x 60.0 x 0.0 | 0.25 x 0.25 x 0.0 | 5.5 | Y |

Measurement Results

| Date | Scan Name | Avg. Area [cm ²] | psPDn+ [W/m ²] | psPDtot+ [W/m ²] | Power Drift [dB] |
|-------------------|----------------|------------------------------|----------------------------|------------------------------|------------------|
| 2022-05-25, 06:05 | Fast Area Scan | 1 | N/A | N/A | N/A |
| 2022-05-25, 07:12 | 5G Scan | 1 | 40.7 | 41.2 | -0.02 |

Warning(s) / Error(s)

| Job Name | Warning(s) | Error(s) |
|---------------------------|------------|----------|
| Fast Area Scan 5G Scan | | |

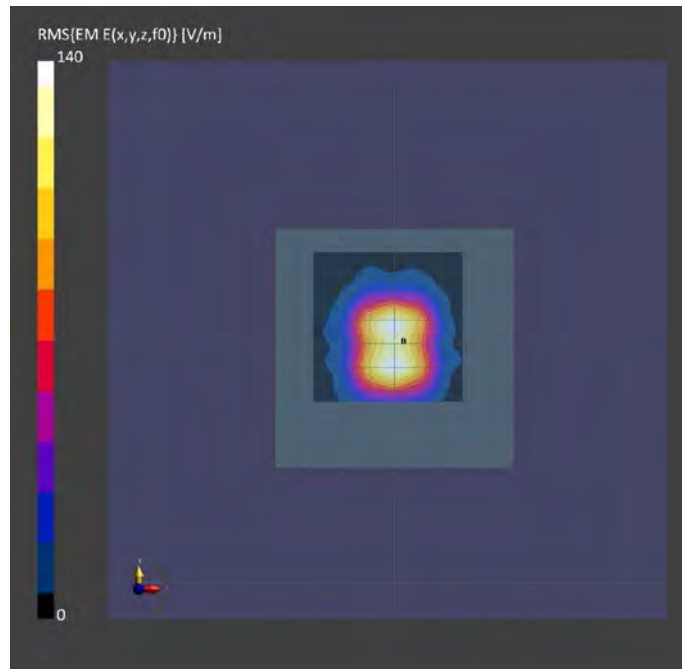

Test Laboratory: RF Exposure Lab
Device under Test Properties

Plot 4

| Model, Manufacturer | Dimensions [mm] | IMEI | DUT Type |
|----------------------------------|-----------------------|------|---------------------|
| 30 GHz Verification Source Speag | 100.0 x 100.0 x 100.0 | | Verification Source |

Exposure Conditions

| Phantom Section | Position | Test Distance [mm] | Band | Group | UID | Rev | Frequency [MHz] | Channel Number |
|-----------------|----------|--------------------|-----------------|-------|-----|-----|-----------------|----------------|
| 5G Air | Front | 5.50 | Validation band | CW | 0 | - | 30000.000 | 30000 |

Hardware Setup

| Phantom | Medium | Probe | Calibration Date | DAE | Calibration Date |
|---------|--------|---------------------------|------------------|------------|------------------|
| mmWave | Air | EUmmWV4 - SN9611_F1-55GHz | 2022-01-03 | DAE4 Sn759 | 2021-08-06 |

Scan Setup


| Scan Name | Grid Extents [mm] | Grid Steps [lambda] | Sensor Surface [mm] | MAIA |
|----------------|---------------------|---------------------|---------------------|------|
| Fast Area Scan | 132.0 x 132.0 x 0.0 | 0.5 x 0.5 x 1.0 | 5.5 | N/A |
| 5G Scan | 60.0 x 60.0 x 0.0 | 0.25 x 0.25 x 0.0 | 5.5 | Y |

Measurement Results

| Date | Scan Name | Avg. Area [cm ²] | psPDn+ [W/m ²] | psPDtot+ [W/m ²] | Power Drift [dB] |
|-------------------|----------------|------------------------------|----------------------------|------------------------------|------------------|
| 2022-05-27, 06:18 | Fast Area Scan | 1 | N/A | N/A | N/A |
| 2022-05-27, 07:26 | 5G Scan | 1 | 41.0 | 41.5 | -0.04 |

Warning(s) / Error(s)

| Job Name | Warning(s) | Error(s) |
|----------------|------------|----------|
| Fast Area Scan | | |
| 5G Scan | | |

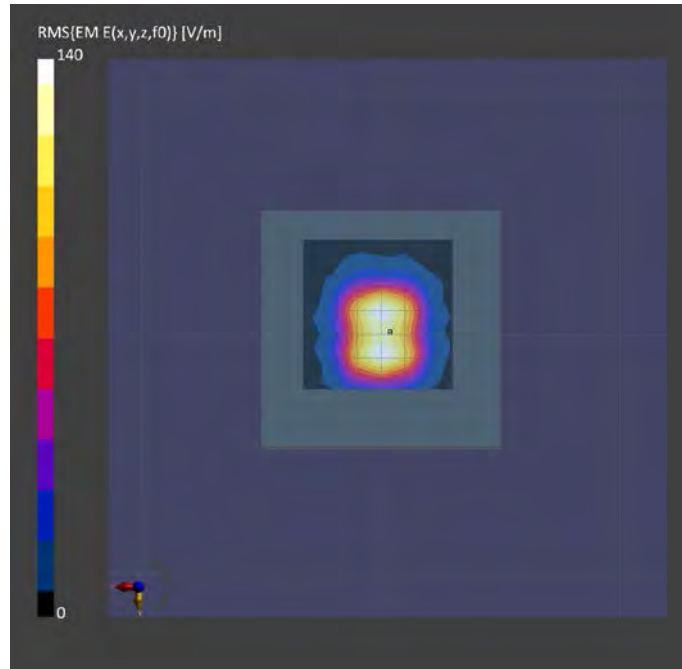

Test Laboratory: RF Exposure Lab
Device under Test Properties

Plot 5

| Model, Manufacturer | Dimensions [mm] | IMEI | DUT Type |
|----------------------------------|-----------------------|------|---------------------|
| 30 GHz Verification Source Speag | 100.0 x 100.0 x 100.0 | | Verification Source |

Exposure Conditions

| Phantom Section | Position | Test Distance [mm] | Band | Group | UID | Rev | Frequency [MHz] | Channel Number |
|-----------------|----------|--------------------|-----------------|-------|-----|-----|-----------------|----------------|
| 5G Air | Front | 5.50 | Validation band | CW | 0 | - | 30000.000 | 30000 |

Hardware Setup

| Phantom | Medium | Probe | Calibration Date | DAE | Calibration Date |
|---------|--------|---------------------------|------------------|------------|------------------|
| mmWave | Air | EUmmWV4 - SN9611_F1-55GHz | 2022-01-03 | DAE4 Sn759 | 2021-08-06 |

Scan Setup


| Scan Name | Grid Extents [mm] | Grid Steps [lambda] | Sensor Surface [mm] | MAIA |
|----------------|---------------------|---------------------|---------------------|------|
| Fast Area Scan | 132.0 x 132.0 x 0.0 | 0.5 x 0.5 x 1.0 | 5.5 | N/A |
| 5G Scan | 60.0 x 60.0 x 0.0 | 0.25 x 0.25 x 0.0 | 5.5 | N/A |

Measurement Results

| Date | Scan Name | Avg. Area [cm ²] | psPDn+ [W/m ²] | psPDtot+ [W/m ²] | Power Drift [dB] |
|-------------------|----------------|------------------------------|----------------------------|------------------------------|------------------|
| 2022-07-01, 08:11 | Fast Area Scan | 1 | N/A | N/A | N/A |
| 2022-07-01, 08:18 | 5G Scan | 1 | 42.1 | 42.5 | -0.03 |

Warning(s) / Error(s)

| Job Name | Warning(s) | Error(s) |
|----------------|------------|----------|
| Fast Area Scan | | |
| 5G Scan | | |

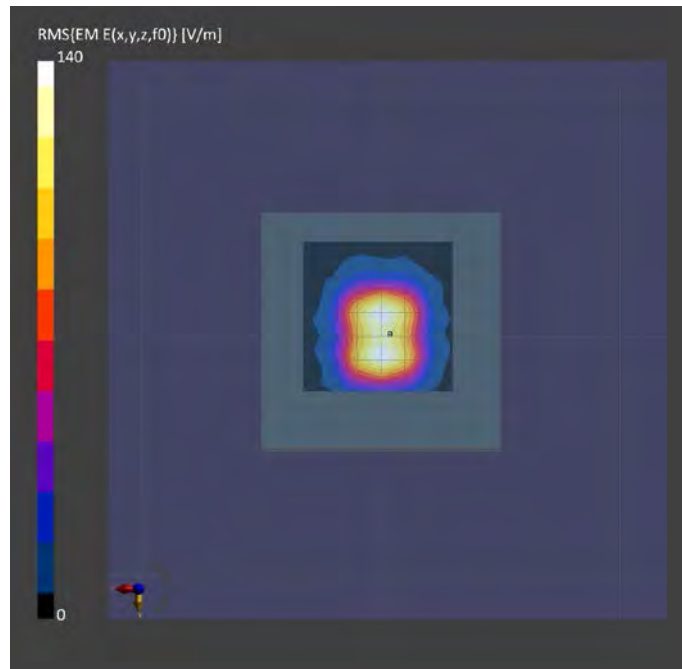

Appendix B – SAR Test Data Plots

Test Laboratory: RF Exposure Lab
Device under Test Properties
Plot 1

| Model, Manufacturer | Dimensions [mm] | IMEI | DUT Type |
|---------------------|---------------------|------|----------|
| M3100 Inseego | 150.0 x 74.0 x 18.0 | | Hotspot |

Exposure Conditions

| Phantom Section | Position | Test Distance [mm] | Band | Group | UID | Rev | Frequency [MHz] | Channel Number |
|-----------------|----------|--------------------|-----------|------------------|-------|-----|-----------------|----------------|
| 5G Air | Side A | 10.00 | Band n260 | 5G NR FR2 TDD | 10869 | AAD | 38500.060 | 2254167 |

Hardware Setup

| Phantom | Medium | Probe | Calibration Date | DAE | Calibration Date |
|---------|--------|-------------------------------|------------------|------------|------------------|
| mmWave | Air | EUmmWV4 - SN9611_F1- 55GHz | 2022-01-03 | DAE4 Sn759 | 2021-08-06 |

Scan Setup


| Scan Name | Grid Extents [mm] | Grid Steps [lambda] | Sensor Surface [mm] | MAIA |
|----------------|---------------------|---------------------|---------------------|------|
| Fast Area Scan | 108.0 x 180.0 x 0.0 | 0.5 x 0.5 x 1.0 | 10.0 | N/A |
| 5G Scan | 60.0 x 60.0 x 0.0 | 0.25 x 0.25 x 0.0 | 10.0 | N/A |

Measurement Results

| Date | Scan Name | Avg. Area [cm ²] | psPDn+ [W/m ²] | psPDtot+ [W/m ²] | Power Drift [dB] |
|-------------------|----------------|------------------------------|----------------------------|------------------------------|------------------|
| 2022-05-23, 06:59 | Fast Area Scan | 4 | N/A | N/A | N/A |
| 2022-05-23, 08:34 | 5G Scan | 4 | 1.95 | 2.61 | -0.00 |

Warning(s) / Error(s)

| Job Name | Warning(s) | Error(s) |
|----------------|------------|----------|
| Fast Area Scan | | |
| 5G Scan | | |

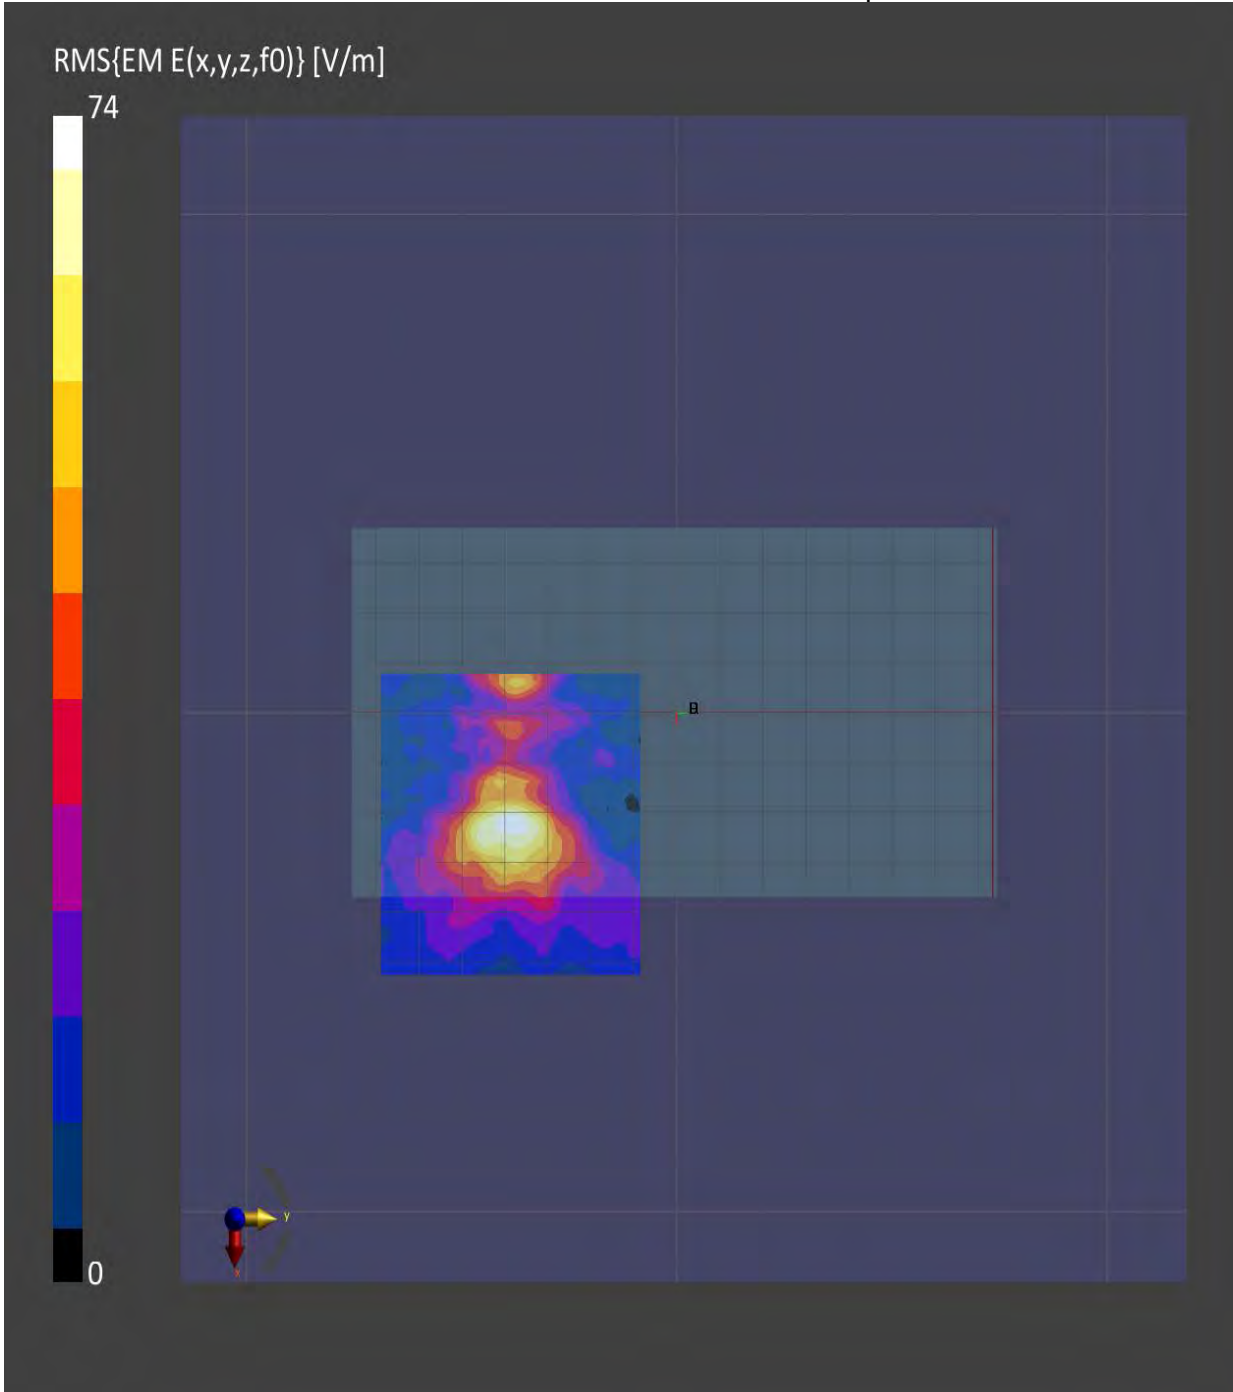

Test Laboratory: RF Exposure Lab
Device under Test Properties
Plot 2

| Model, Manufacturer | Dimensions [mm] | IMEI | DUT Type |
|---------------------|---------------------|------|----------|
| M3100 Inseego | 150.0 x 74.0 x 18.0 | | Hotspot |

Exposure Conditions

| Phantom Section | Position | Test Distance [mm] | Band | Group | UID | Rev | Frequency [MHz] | Channel Number |
|-----------------|----------|--------------------|-----------|------------------|-------|-----|-----------------|----------------|
| 5G Air | Side A | 10.00 | Band n261 | 5G NR FR2 TDD | 10869 | AAD | 28299.920 | 2084165 |

Hardware Setup

| Phantom | Medium | Probe | Calibration Date | DAE | Calibration Date |
|---------|--------|-------------------------------|------------------|------------|------------------|
| mmWave | Air | EUmmWV4 - SN9611_F1- 55GHz | 2022-01-03 | DAE4 Sn759 | 2021-08-06 |

Scan Setup


| Scan Name | Grid Extents [mm] | Grid Steps [lambda] | Sensor Surface [mm] | MAIA |
|----------------|---------------------|---------------------|---------------------|------|
| Fast Area Scan | 108.0 x 180.0 x 0.0 | 0.5 x 0.5 x 1.0 | 10.0 | N/A |
| 5G Scan | 60.0 x 60.0 x 0.0 | 0.25 x 0.25 x 0.0 | 10.0 | N/A |

Measurement Results


| Date | Scan Name | Avg. Area [cm ²] | psPDn+ [W/m ²] | psPDtot+ [W/m ²] | Power Drift [dB] |
|-------------------|----------------|------------------------------|----------------------------|------------------------------|------------------|
| 2022-05-24, 08:59 | Fast Area Scan | 4 | N/A | N/A | N/A |
| 2022-05-24, 09:57 | 5G Scan | 4 | 2.67 | 2.70 | 0.03 |

Warning(s) / Error(s)


| Job Name | Warning(s) | Error(s) |
|----------------|------------|----------|
| Fast Area Scan | | |
| 5G Scan | | |

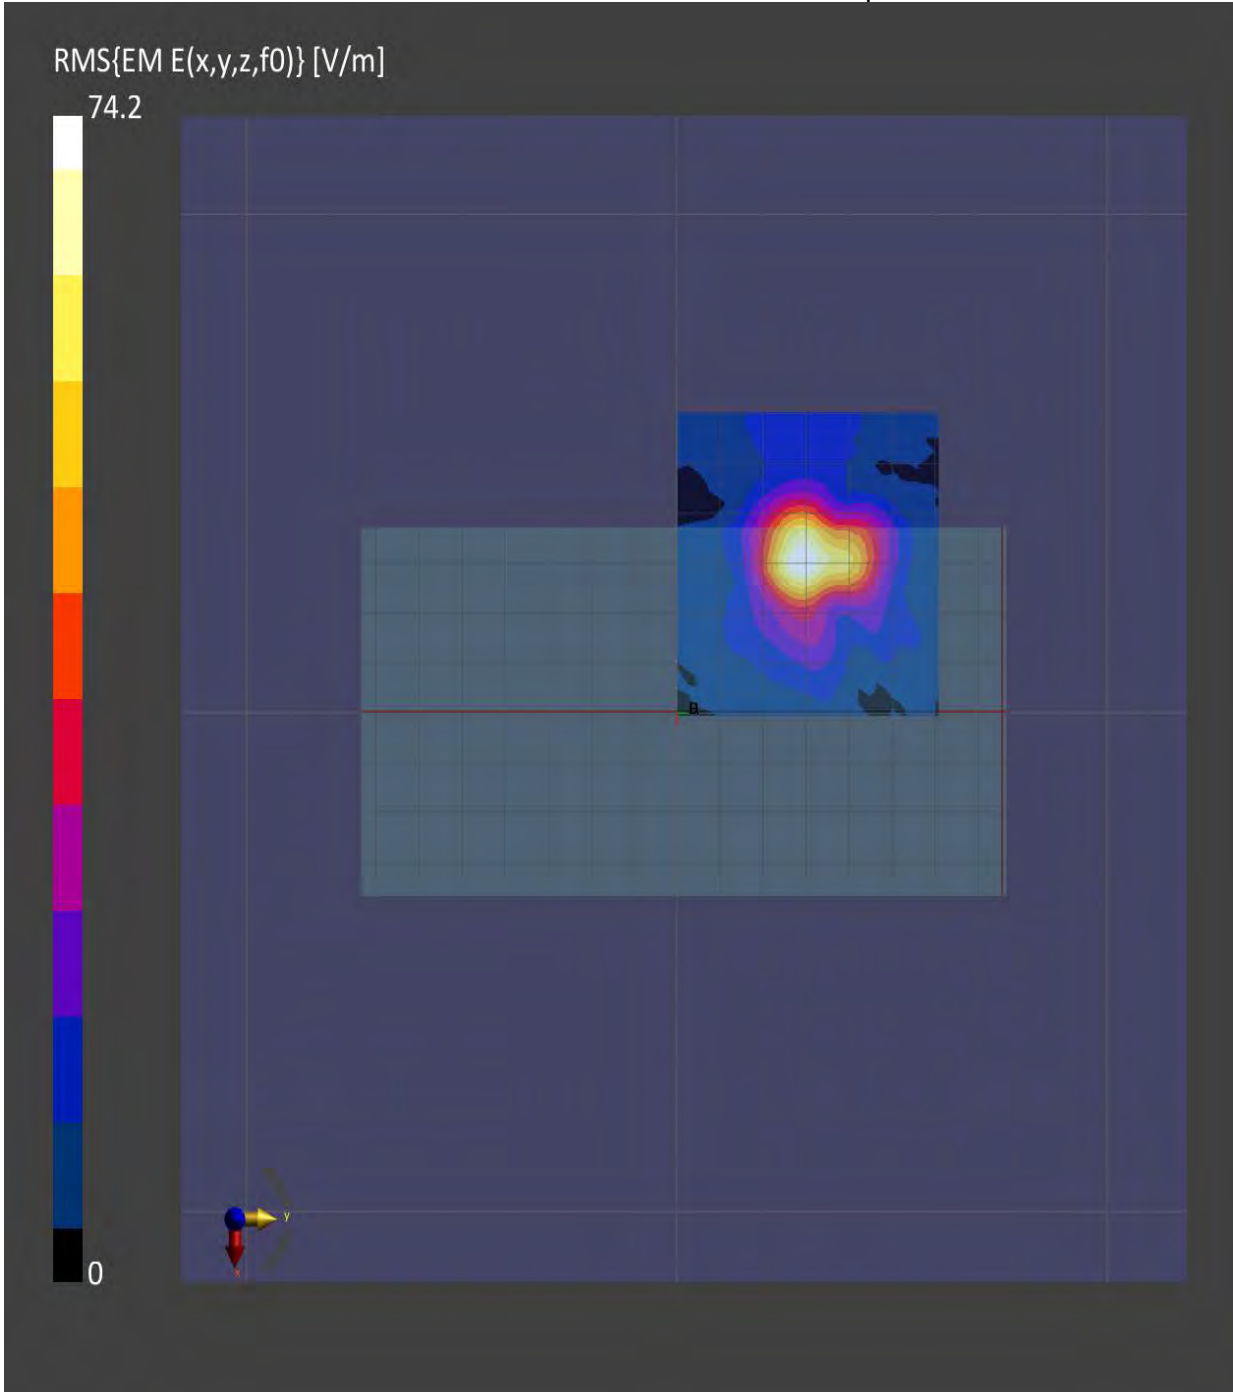

Appendix C – SAR Test Setup Photos

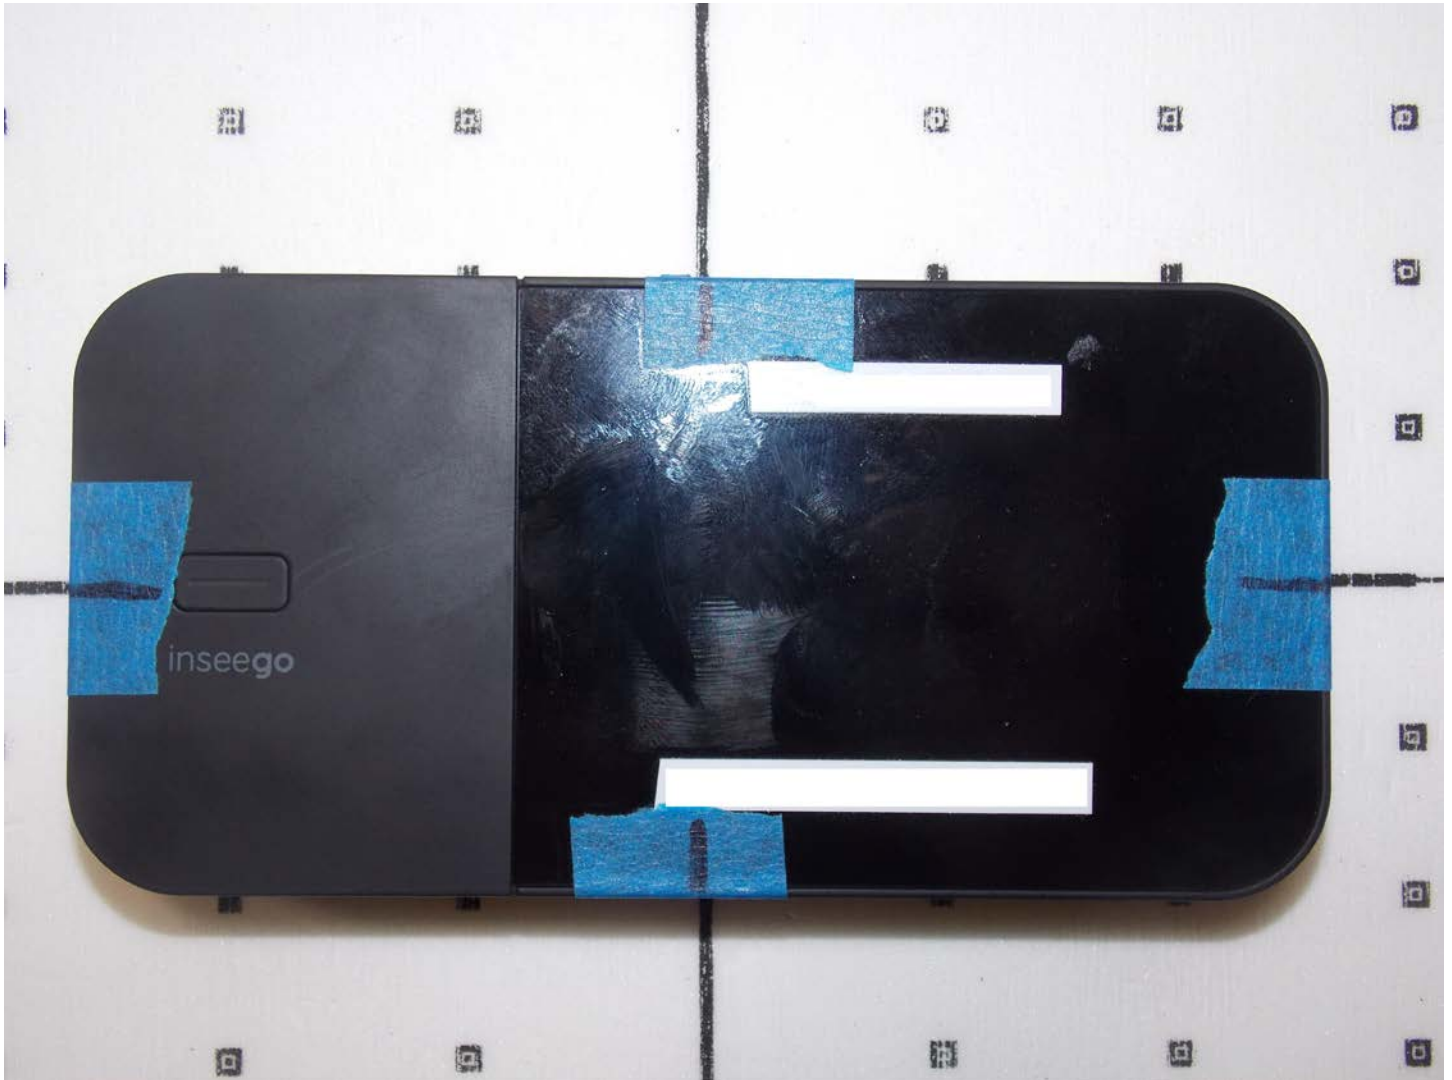


Test Position Side A 10 & 20 mm Gap

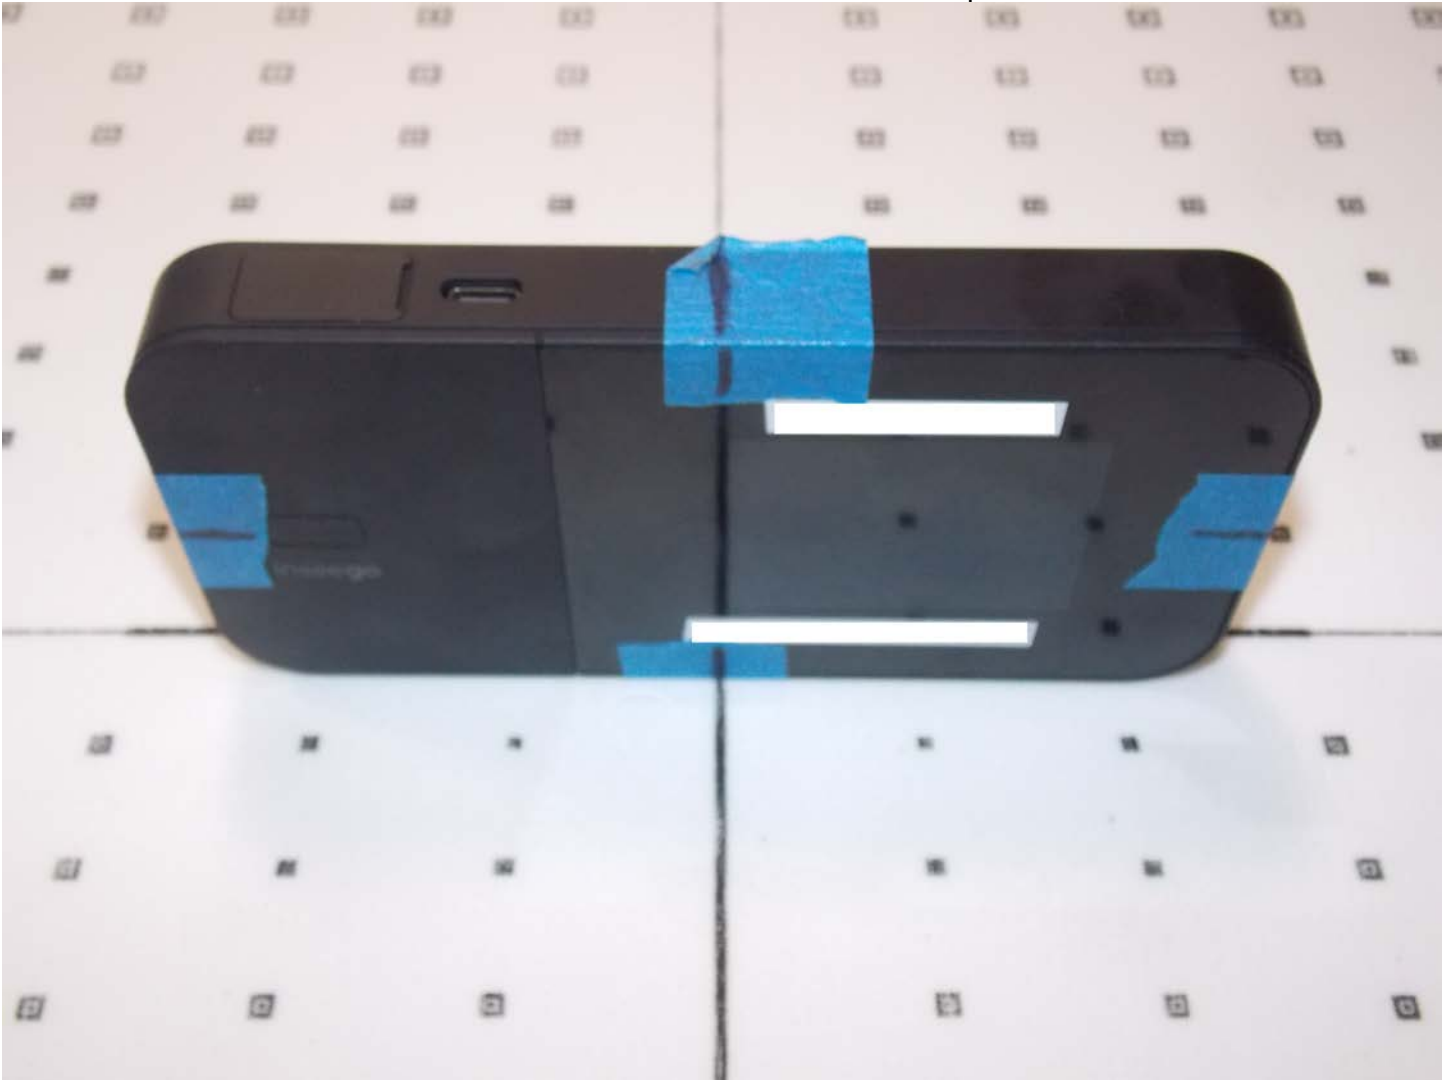


Test Position Side B 10 & 20 mm Gap



Test Position Side C 10 & 20 mm Gap

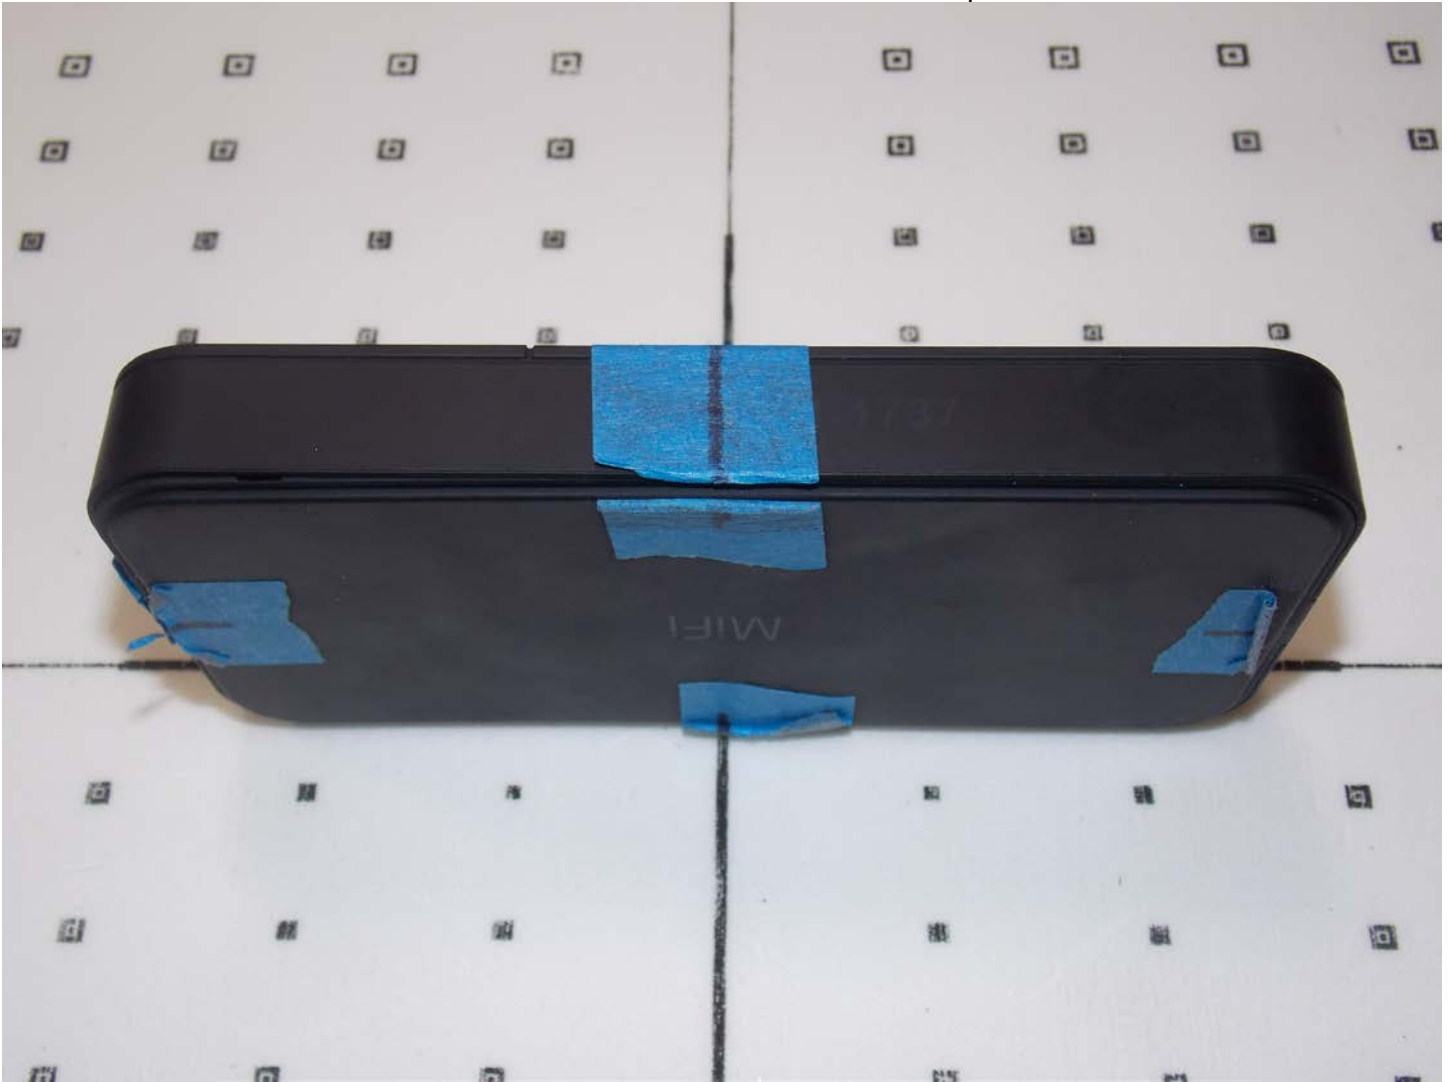


Test Position Side D 10 & 20 mm Gap

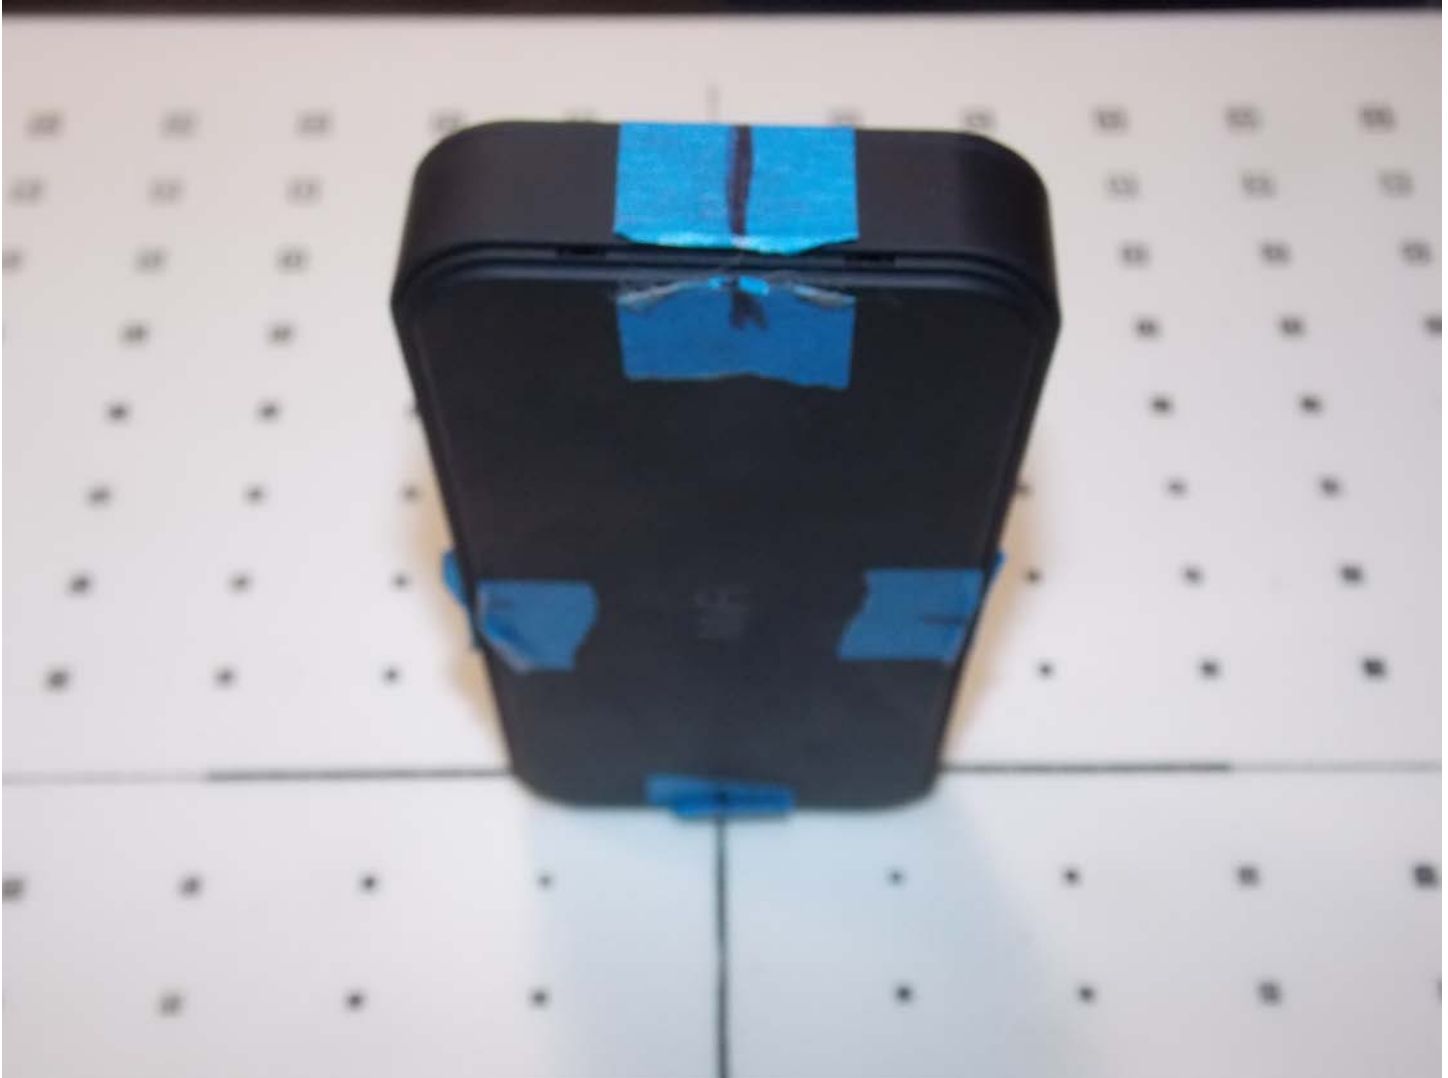

Test Position Side E 10 & 20 mm Gap



Test Position Side F 10 & 20 mm Gap

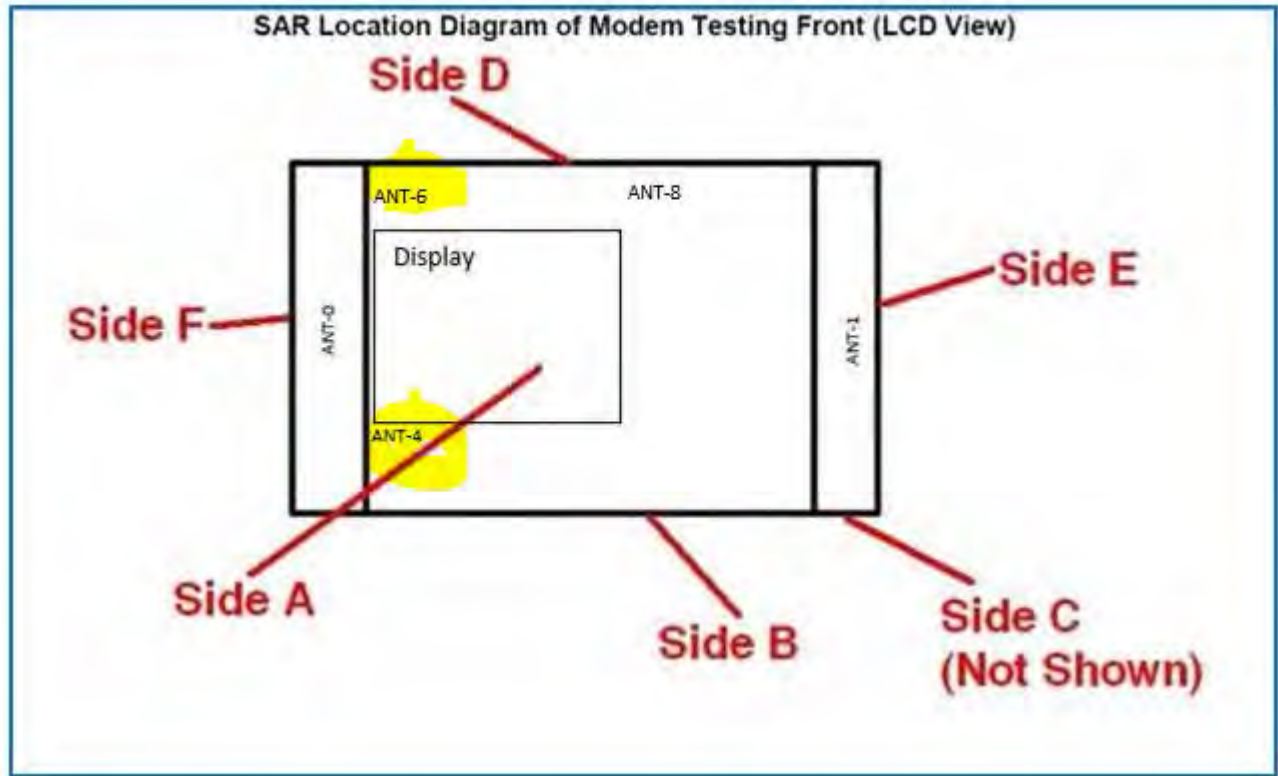

Test Positions



Front of Device



Back of Device

Appendix D – Probe Calibration Data Sheets

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **EUmmWV4-9611_Jan22**

CALIBRATION CERTIFICATE

Object **EUmmWV4 - SN:9611**

Calibration procedure(s) **QA CAL-02.v8, QA CAL-25.v7, QA CAL-42.v2**
Calibration procedure for E-field probes optimized for close near field
evaluations in air

Calibration date: **January 03, 2022**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP | SN: 104778 | 09-Apr-21 (No. 217-03291/0292) | Apr-22 |
| Power sensor NRP-Z91 | SN: 103244 | 09-Apr-21 (No. 217-03291) | Apr-22 |
| Power sensor NRP-Z91 | SN: 103245 | 09-Apr-21 (No. 217-03292) | Apr-22 |
| Reference 20 dB Attenuator | SN: CC2552 (20x) | 09-Apr-21 (No. 217-03343) | Apr-22 |
| Reference Probe ER3DV6 | SN: 2328 | 08-Oct-21 (No. ER3-2328_Oct21) | Oct-22 |
| DAE4 | SN: 789 | 24-Dec-21 (No. DAE4-789_Dec21) | Dec-22 |
| | | | |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| Power meter E4419B | SN: GB41293874 | 06-Apr-16 (in house check Jun-20) | In house check: Jun-22 |
| Power sensor E4412A | SN: MY41498087 | 06-Apr-16 (in house check Jun-20) | In house check: Jun-22 |
| Power sensor E4412A | SN: 000110210 | 06-Apr-16 (in house check Jun-20) | In house check: Jun-22 |
| RF generator HP 8648C | SN: US3642U01700 | 04-Aug-99 (in house check Jun-20) | In house check: Jun-22 |
| Network Analyzer E8358A | SN: US41080477 | 31-Mar-14 (in house check Oct-20) | In house check: Oct-22 |

| | | | |
|----------------|-----------------------------|--|---------------|
| Calibrated by: | Name Leif Klysner | Function Laboratory Technician | Signature |
| Approved by: | Name Niels Kuster | Function Quality Manager | |

Issued: January 3, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

**The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates**

Glossary:

| | |
|--------------------------|---|
| NORM _{x,y,z} | sensitivity in free space |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |
| Sensor Angles | sensor deviation from the probe axis, used to calculate the field orientation and polarization |
| k | is the wave propagation direction |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ for XY sensors and $\vartheta = 90$ for Z sensor ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). For frequencies > 6 GHz, the far field in front of waveguide horn antennas is measured for a set of frequencies in various waveguide bands up to 110 GHz.
- **DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- The frequency sensor model parameters are determined prior to calibration based on a frequency sweep (sensor model involving resistors R, R_p, inductance L and capacitors C, C_p).
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **Sensor Offset**: The sensor offset corresponds to the mechanical from the probe tip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).
- **Equivalent Sensor Angle**: The two probe sensors are mounted in the same plane at different angles. The angles are assessed using the information gained by determining the NORM_x (no uncertainty required).
- **Spherical isotropy (3D deviation from isotropy)**: in a locally homogeneous field realized using an open waveguide / horn setup.

DASY - Parameters of Probe: EUmmWV4 - SN:9611

Basic Calibration Parameters

| | Sensor X | Sensor Y | Unc (k=2) |
|--|----------|----------|--------------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) | 0.01993 | 0.02210 | $\pm 10.1\%$ |
| DCP (mV) ^B | 107.0 | 109.0 | |
| Equivalent Sensor Angle | -60.5 | 33.5 | |

Calibration results for Frequency Response (750 MHz – 110 GHz)

| Frequency GHz | Target E-Field V/m | Deviation Sensor X dB | Deviation Sensor Y dB | Unc (k=2) dB |
|---------------|--------------------|-----------------------|-----------------------|---------------|
| 0.75 | 77.2 | -0.32 | -0.21 | ± 0.43 dB |
| 1.8 | 140.4 | 0.06 | 0.09 | ± 0.43 dB |
| 2 | 133.0 | 0.03 | 0.07 | ± 0.43 dB |
| 2.2 | 124.8 | 0.03 | 0.04 | ± 0.43 dB |
| 2.5 | 123.0 | 0.00 | -0.02 | ± 0.43 dB |
| 3.5 | 256.2 | 0.22 | 0.04 | ± 0.43 dB |
| 3.7 | 249.8 | 0.29 | 0.08 | ± 0.43 dB |
| 6.6 | 41.8 | 0.25 | 0.46 | ± 0.98 dB |
| 8 | 48.4 | -0.05 | -0.13 | ± 0.98 dB |
| 10 | 54.4 | -0.02 | -0.01 | ± 0.98 dB |
| 15 | 71.5 | 0.17 | -0.42 | ± 0.98 dB |
| 18 | 85.3 | -0.23 | 0.14 | ± 0.98 dB |
| 26.6 | 96.9 | -0.43 | -0.11 | ± 0.98 dB |
| 30 | 92.6 | 0.11 | 0.06 | ± 0.98 dB |
| 35 | 93.7 | -0.15 | -0.03 | ± 0.98 dB |
| 40 | 91.5 | -0.14 | -0.21 | ± 0.98 dB |
| 50 | 19.6 | -0.01 | -0.01 | ± 0.98 dB |
| 55 | 22.4 | 0.03 | 0.04 | ± 0.98 dB |
| 60 | 23.0 | 0.01 | 0.00 | ± 0.98 dB |
| 65 | 27.4 | -0.33 | -0.23 | ± 0.98 dB |
| 70 | 23.9 | -0.01 | -0.28 | ± 0.98 dB |
| 75 | 20.0 | -0.02 | 0.03 | ± 0.98 dB |
| 75 | 14.8 | -0.14 | -0.03 | ± 0.98 dB |
| 80 | 22.5 | -0.01 | 0.18 | ± 0.98 dB |
| 85 | 22.8 | 0.05 | -0.06 | ± 0.98 dB |
| 90 | 23.8 | 0.07 | 0.08 | ± 0.98 dB |
| 92 | 23.9 | -0.09 | -0.16 | ± 0.98 dB |
| 95 | 20.5 | -0.29 | -0.23 | ± 0.98 dB |
| 97 | 24.4 | -0.12 | -0.16 | ± 0.98 dB |
| 100 | 22.6 | -0.11 | -0.10 | ± 0.98 dB |
| 105 | 22.7 | 0.06 | 0.09 | ± 0.98 dB |
| 110 | 19.7 | 0.28 | 0.17 | ± 0.98 dB |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY - Parameters of Probe: EUmmWV4 - SN:9611

Calibration Results for Modulation Response

| UID | Communication System Name | | A dB | B dB/μV | C | D dB | VR mV | Max dev. | Max Unc ^E (k=2) |
|-----------|-----------------------------|---|---------|------------|-------|---------|----------|-------------|----------------------------------|
| 0 | CW | X | 0.00 | 0.00 | 1.00 | 0.00 | 135.0 | ± 3.0 % | ± 4.7 % |
| | | Y | 0.00 | 0.00 | 1.00 | | 65.1 | | |
| 10352-AAA | Pulse Waveform (200Hz, 10%) | X | 2.94 | 60.00 | 14.78 | 10.00 | 6.0 | ± 1.1 % | ± 9.6 % |
| | | Y | 2.74 | 60.00 | 15.55 | | 6.0 | | |
| 10353-AAA | Pulse Waveform (200Hz, 20%) | X | 2.14 | 60.46 | 13.75 | 6.99 | 12.0 | ± 1.1 % | ± 9.6 % |
| | | Y | 1.89 | 60.00 | 14.51 | | 12.0 | | |
| 10354-AAA | Pulse Waveform (200Hz, 40%) | X | 1.30 | 60.58 | 12.43 | 3.98 | 23.0 | ± 1.7 % | ± 9.6 % |
| | | Y | 1.18 | 60.00 | 13.24 | | 23.0 | | |
| 10355-AAA | Pulse Waveform (200Hz, 60%) | X | 0.73 | 60.00 | 11.41 | 2.22 | 27.0 | ± 1.3 % | ± 9.6 % |
| | | Y | 0.85 | 60.00 | 12.06 | | 27.0 | | |
| 10387-AAA | QPSK Waveform, 1 MHz | X | 1.20 | 60.00 | 11.92 | 1.00 | 22.0 | ± 1.5 % | ± 9.6 % |
| | | Y | 1.43 | 60.00 | 11.65 | | 22.0 | | |
| 10388-AAA | QPSK Waveform, 10 MHz | X | 1.28 | 60.00 | 11.71 | 0.00 | 22.0 | ± 0.9 % | ± 9.6 % |
| | | Y | 1.69 | 60.00 | 11.33 | | 22.0 | | |
| 10396-AAA | 64-QAM Waveform, 100 kHz | X | 2.65 | 62.64 | 14.63 | 3.01 | 17.0 | ± 0.7 % | ± 9.6 % |
| | | Y | 2.23 | 60.00 | 13.86 | | 17.0 | | |
| 10399-AAA | 64-QAM Waveform, 40 MHz | X | 2.10 | 60.00 | 12.25 | 0.00 | 19.0 | ± 1.1 % | ± 9.6 % |
| | | Y | 2.46 | 60.00 | 12.00 | | 19.0 | | |
| 10414-AAA | WLAN CCDF, 64-QAM, 40MHz | X | 3.25 | 60.00 | 12.70 | 0.00 | 12.0 | ± 0.9 % | ± 9.6 % |
| | | Y | 3.69 | 60.00 | 12.46 | | 12.0 | | |

Note: For details on all calibrated UID parameters see Appendix

Calibration Results for Linearity Response

| Frequency GHz | Target E-Field V/m | Deviation Sensor X dB | Deviation Sensor Y dB | Unc (k=2) dB |
|------------------|-----------------------|-----------------------|-----------------------|-----------------|
| 0.9 | 50.0 | -0.02 | 0.13 | ± 0.2 dB |
| 0.9 | 100.0 | -0.02 | -0.08 | ± 0.2 dB |
| 0.9 | 500.0 | 0.03 | 0.01 | ± 0.2 dB |
| 0.9 | 1000.0 | 0.05 | 0.05 | ± 0.2 dB |
| 0.9 | 1500.0 | 0.04 | 0.04 | ± 0.2 dB |
| 0.9 | 2000.0 | 0.01 | 0.01 | ± 0.2 dB |

Sensor Frequency Model Parameters (750 MHz – 55 GHz)

| | Sensor X | Sensor Y |
|---------------------|----------|----------|
| R (Ω) | 82.20 | 75.87 |
| R _p (Ω) | 88.02 | 93.68 |
| L (nH) | 0.10878 | 0.09857 |
| C (pF) | 0.2816 | 0.2895 |
| C _p (pF) | 0.0790 | 0.0728 |

Sensor Frequency Model Parameters (55 GHz – 110 GHz)

| | Sensor X | Sensor Y |
|---------------------|----------|----------|
| R (Ω) | 35.40 | 35.11 |
| R _p (Ω) | 94.84 | 94.93 |
| L (nH) | 0.03424 | 0.03384 |
| C (pF) | 0.1984 | 0.2127 |
| C _p (pF) | 0.1267 | 0.1283 |

DASY - Parameters of Probe: EUmmWV4 - SN:9611

Sensor Model Parameters



| | C1 fF | C2 fF | α V ⁻¹ | T1 ms.V ⁻² | T2 ms.V ⁻¹ | T3 ms | T4 V ⁻² | T5 V ⁻¹ | T6 |
|---|----------|----------|-----------------------------|--------------------------|--------------------------|----------|-----------------------|-----------------------|------|
| X | 53.2 | 383.64 | 33.25 | 0.92 | 7.60 | 5.01 | 0.00 | 1.64 | 1.01 |
| Y | 47.7 | 338.49 | 32.39 | 0.92 | 7.25 | 5.03 | 1.96 | 2.00 | 1.01 |

Other Probe Parameters

| | |
|---|-------------|
| Sensor Arrangement | Rectangular |
| Connector Angle (°) | -138.2 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 320 mm |
| Probe Body Diameter | 8 mm |
| Tip Length | 23 mm |
| Tip Diameter | 8.0 mm |
| Probe Tip to Sensor X Calibration Point | 1.5 mm |
| Probe Tip to Sensor Y Calibration Point | 1.5 mm |

Deviation from Isotropy in Air

f = 30, 60 GHz

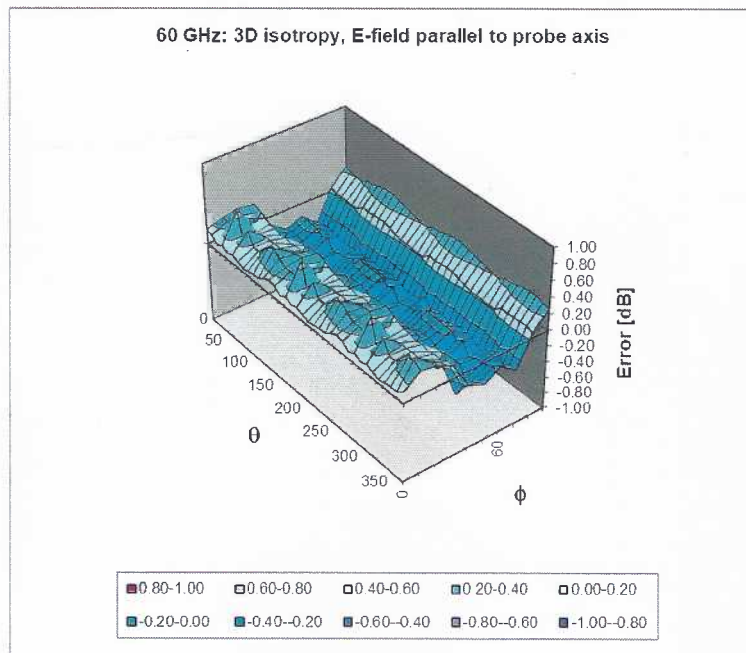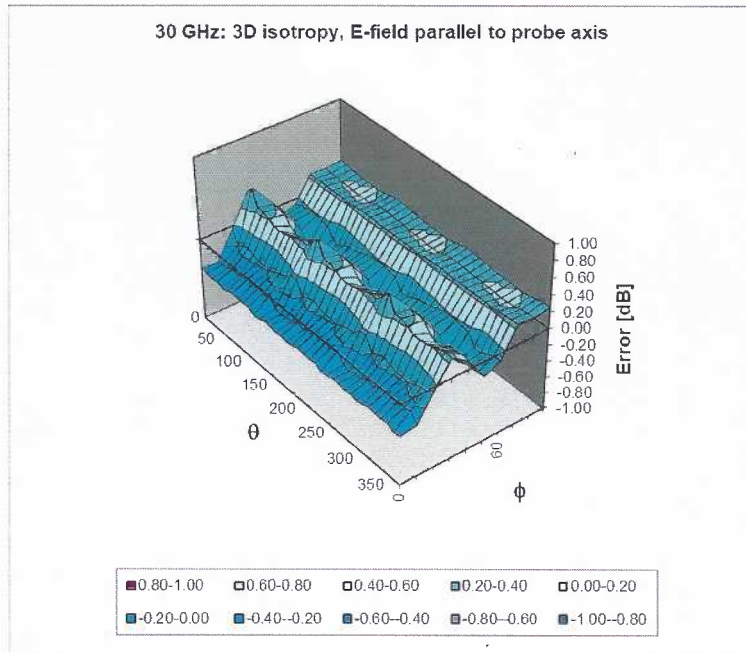

Probe isotropy for E_{tot} : probe rotated $\varphi = 0^\circ$ to 360° , tilted from field propagation direction \vec{k}
 Parallel to the field propagation ($\psi = 0^\circ - 90^\circ$) at 30 GHz: deviation within ± 0.42 dB
 Parallel to the field propagation ($\psi = 0^\circ - 90^\circ$) at 60 GHz: deviation within ± 0.45 dB

Appendix: Modulation Calibration Parameters

| UID | Rev | Communication System Name | Group | PAR (dB) | Unc ^E (k=2) |
|-------|-----|---|-----------|----------|------------------------|
| 0 | - | CW | CW | 0.00 | ± 4.7 % |
| 10010 | CAA | SAR Validation (Square, 100ms, 10ms) | Test | 10.00 | ± 9.6 % |
| 10011 | CAB | UMTS-FDD (WCDMA) | WCDMA | 2.91 | ± 9.6 % |
| 10012 | CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | WLAN | 1.87 | ± 9.6 % |
| 10013 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | WLAN | 9.46 | ± 9.6 % |
| 10021 | DAC | GSM-FDD (TDMA, GMSK) | GSM | 9.39 | ± 9.6 % |
| 10023 | DAC | GPRS-FDD (TDMA, GMSK, TN 0) | GSM | 9.57 | ± 9.6 % |
| 10024 | DAC | GPRS-FDD (TDMA, GMSK, TN 0-1) | GSM | 6.56 | ± 9.6 % |
| 10025 | DAC | EDGE-FDD (TDMA, 8PSK, TN 0) | GSM | 12.62 | ± 9.6 % |
| 10026 | DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1) | GSM | 9.55 | ± 9.6 % |
| 10027 | DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2) | GSM | 4.80 | ± 9.6 % |
| 10028 | DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) | GSM | 3.55 | ± 9.6 % |
| 10029 | DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2) | GSM | 7.78 | ± 9.6 % |
| 10030 | CAA | IEEE 802.15.1 Bluetooth (GFSK, DH1) | Bluetooth | 5.30 | ± 9.6 % |
| 10031 | CAA | IEEE 802.15.1 Bluetooth (GFSK, DH3) | Bluetooth | 1.87 | ± 9.6 % |
| 10032 | CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5) | Bluetooth | 1.16 | ± 9.6 % |
| 10033 | CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1) | Bluetooth | 7.74 | ± 9.6 % |
| 10034 | CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3) | Bluetooth | 4.53 | ± 9.6 % |
| 10035 | CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5) | Bluetooth | 3.83 | ± 9.6 % |
| 10036 | CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH1) | Bluetooth | 8.01 | ± 9.6 % |
| 10037 | CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH3) | Bluetooth | 4.77 | ± 9.6 % |
| 10038 | CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH5) | Bluetooth | 4.10 | ± 9.6 % |
| 10039 | CAB | CDMA2000 (1xRTT, RC1) | CDMA2000 | 4.57 | ± 9.6 % |
| 10042 | CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate) | AMPS | 7.78 | ± 9.6 % |
| 10044 | CAA | IS-91/EIA/TIA-553 FDD (FDMA, FM) | AMPS | 0.00 | ± 9.6 % |
| 10048 | CAA | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24) | DECT | 13.80 | ± 9.6 % |
| 10049 | CAA | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12) | DECT | 10.79 | ± 9.6 % |
| 10056 | CAA | UMTS-TDD (TD-SCDMA, 1.28 Mcps) | TD-SCDMA | 11.01 | ± 9.6 % |
| 10058 | DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3) | GSM | 6.52 | ± 9.6 % |
| 10059 | CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps) | WLAN | 2.12 | ± 9.6 % |
| 10060 | CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps) | WLAN | 2.83 | ± 9.6 % |
| 10061 | CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps) | WLAN | 3.60 | ± 9.6 % |
| 10062 | CAD | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps) | WLAN | 8.68 | ± 9.6 % |
| 10063 | CAD | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps) | WLAN | 8.63 | ± 9.6 % |
| 10064 | CAD | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps) | WLAN | 9.09 | ± 9.6 % |
| 10065 | CAD | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps) | WLAN | 9.00 | ± 9.6 % |
| 10066 | CAD | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps) | WLAN | 9.38 | ± 9.6 % |
| 10067 | CAD | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps) | WLAN | 10.12 | ± 9.6 % |
| 10068 | CAD | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps) | WLAN | 10.24 | ± 9.6 % |
| 10069 | CAD | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps) | WLAN | 10.56 | ± 9.6 % |
| 10071 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps) | WLAN | 9.83 | ± 9.6 % |
| 10072 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps) | WLAN | 9.62 | ± 9.6 % |
| 10073 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps) | WLAN | 9.94 | ± 9.6 % |
| 10074 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps) | WLAN | 10.30 | ± 9.6 % |
| 10075 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps) | WLAN | 10.77 | ± 9.6 % |
| 10076 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps) | WLAN | 10.94 | ± 9.6 % |
| 10077 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps) | WLAN | 11.00 | ± 9.6 % |
| 10081 | CAB | CDMA2000 (1xRTT, RC3) | CDMA2000 | 3.97 | ± 9.6 % |
| 10082 | CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate) | AMPS | 4.77 | ± 9.6 % |
| 10090 | DAC | GPRS-FDD (TDMA, GMSK, TN 0-4) | GSM | 6.56 | ± 9.6 % |
| 10097 | CAB | UMTS-FDD (HSDPA) | WCDMA | 3.98 | ± 9.6 % |
| 10098 | CAB | UMTS-FDD (HSUPA, Subtest 2) | WCDMA | 3.98 | ± 9.6 % |
| 10099 | DAC | EDGE-FDD (TDMA, 8PSK, TN 0-4) | GSM | 9.55 | ± 9.6 % |

| | | | | | |
|-------|-----|--|---------|-------|---------|
| 10100 | CAE | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | LTE-FDD | 5.67 | ± 9.6 % |
| 10101 | CAE | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | LTE-FDD | 6.42 | ± 9.6 % |
| 10102 | CAE | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | LTE-FDD | 6.60 | ± 9.6 % |
| 10103 | CAG | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | LTE-TDD | 9.29 | ± 9.6 % |
| 10104 | CAG | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | LTE-TDD | 9.97 | ± 9.6 % |
| 10105 | CAG | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | LTE-TDD | 10.01 | ± 9.6 % |
| 10108 | CAG | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | LTE-FDD | 5.80 | ± 9.6 % |
| 10109 | CAG | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | LTE-FDD | 6.43 | ± 9.6 % |
| 10110 | CAG | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | LTE-FDD | 5.75 | ± 9.6 % |
| 10111 | CAG | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | LTE-FDD | 6.44 | ± 9.6 % |
| 10112 | CAG | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | LTE-FDD | 6.59 | ± 9.6 % |
| 10113 | CAG | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | LTE-FDD | 6.62 | ± 9.6 % |
| 10114 | CAD | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK) | WLAN | 8.10 | ± 9.6 % |
| 10115 | CAD | IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM) | WLAN | 8.46 | ± 9.6 % |
| 10116 | CAD | IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM) | WLAN | 8.15 | ± 9.6 % |
| 10117 | CAD | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | WLAN | 8.07 | ± 9.6 % |
| 10118 | CAD | IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM) | WLAN | 8.59 | ± 9.6 % |
| 10119 | CAD | IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM) | WLAN | 8.13 | ± 9.6 % |
| 10140 | CAE | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | LTE-FDD | 6.49 | ± 9.6 % |
| 10141 | CAE | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | LTE-FDD | 6.53 | ± 9.6 % |
| 10142 | CAE | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | LTE-FDD | 5.73 | ± 9.6 % |
| 10143 | CAE | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | LTE-FDD | 6.35 | ± 9.6 % |
| 10144 | CAE | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | LTE-FDD | 6.65 | ± 9.6 % |
| 10145 | CAF | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | LTE-FDD | 5.76 | ± 9.6 % |
| 10146 | CAF | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | LTE-FDD | 6.41 | ± 9.6 % |
| 10147 | CAF | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | LTE-FDD | 6.72 | ± 9.6 % |
| 10149 | CAE | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | LTE-FDD | 6.42 | ± 9.6 % |
| 10150 | CAE | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | LTE-FDD | 6.60 | ± 9.6 % |
| 10151 | CAG | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | LTE-TDD | 9.28 | ± 9.6 % |
| 10152 | CAG | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | LTE-TDD | 9.92 | ± 9.6 % |
| 10153 | CAG | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | LTE-TDD | 10.05 | ± 9.6 % |
| 10154 | CAG | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | LTE-FDD | 5.75 | ± 9.6 % |
| 10155 | CAG | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | LTE-FDD | 6.43 | ± 9.6 % |
| 10156 | CAG | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | LTE-FDD | 5.79 | ± 9.6 % |
| 10157 | CAG | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | LTE-FDD | 6.49 | ± 9.6 % |
| 10158 | CAG | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | LTE-FDD | 6.62 | ± 9.6 % |
| 10159 | CAG | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | LTE-FDD | 6.56 | ± 9.6 % |
| 10160 | CAE | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | LTE-FDD | 5.82 | ± 9.6 % |
| 10161 | CAE | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | LTE-FDD | 6.43 | ± 9.6 % |
| 10162 | CAE | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | LTE-FDD | 6.58 | ± 9.6 % |
| 10166 | CAF | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | LTE-FDD | 5.46 | ± 9.6 % |
| 10167 | CAF | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | LTE-FDD | 6.21 | ± 9.6 % |
| 10168 | CAF | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | LTE-FDD | 6.79 | ± 9.6 % |
| 10169 | CAE | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | LTE-FDD | 5.73 | ± 9.6 % |
| 10170 | CAE | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | LTE-FDD | 6.52 | ± 9.6 % |
| 10171 | AAE | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM) | LTE-FDD | 6.49 | ± 9.6 % |
| 10172 | CAG | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | LTE-TDD | 9.21 | ± 9.6 % |
| 10173 | CAG | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | LTE-TDD | 9.48 | ± 9.6 % |
| 10174 | CAG | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM) | LTE-TDD | 10.25 | ± 9.6 % |
| 10175 | CAG | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | LTE-FDD | 5.72 | ± 9.6 % |
| 10176 | CAG | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | LTE-FDD | 6.52 | ± 9.6 % |
| 10177 | CAI | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | LTE-FDD | 5.73 | ± 9.6 % |
| 10178 | CAG | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | LTE-FDD | 6.52 | ± 9.6 % |
| 10179 | CAG | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | LTE-FDD | 6.50 | ± 9.6 % |
| 10180 | CAG | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | LTE-FDD | 6.50 | ± 9.6 % |
| 10181 | CAE | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | LTE-FDD | 5.73 | ± 9.6 % |

| | | | | | |
|-------|-----|---|---------|-------|---------|
| 10182 | CAE | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | LTE-FDD | 6.52 | ± 9.6 % |
| 10183 | AAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | LTE-FDD | 6.50 | ± 9.6 % |
| 10184 | CAE | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | LTE-FDD | 5.73 | ± 9.6 % |
| 10185 | CAE | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | LTE-FDD | 6.51 | ± 9.6 % |
| 10186 | AAE | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | LTE-FDD | 6.50 | ± 9.6 % |
| 10187 | CAF | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | LTE-FDD | 5.73 | ± 9.6 % |
| 10188 | CAF | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | LTE-FDD | 6.52 | ± 9.6 % |
| 10189 | AAF | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | LTE-FDD | 6.50 | ± 9.6 % |
| 10193 | CAD | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK) | WLAN | 8.09 | ± 9.6 % |
| 10194 | CAD | IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM) | WLAN | 8.12 | ± 9.6 % |
| 10195 | CAD | IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM) | WLAN | 8.21 | ± 9.6 % |
| 10196 | CAD | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK) | WLAN | 8.10 | ± 9.6 % |
| 10197 | CAD | IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM) | WLAN | 8.13 | ± 9.6 % |
| 10198 | CAD | IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM) | WLAN | 8.27 | ± 9.6 % |
| 10219 | CAD | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK) | WLAN | 8.03 | ± 9.6 % |
| 10220 | CAD | IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM) | WLAN | 8.13 | ± 9.6 % |
| 10221 | CAD | IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM) | WLAN | 8.27 | ± 9.6 % |
| 10222 | CAD | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK) | WLAN | 8.06 | ± 9.6 % |
| 10223 | CAD | IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM) | WLAN | 8.48 | ± 9.6 % |
| 10224 | CAD | IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM) | WLAN | 8.08 | ± 9.6 % |
| 10225 | CAB | UMTS-FDD (HSPA+) | WCDMA | 5.97 | ± 9.6 % |
| 10226 | CAB | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | LTE-TDD | 9.49 | ± 9.6 % |
| 10227 | CAB | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | LTE-TDD | 10.26 | ± 9.6 % |
| 10228 | CAB | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | LTE-TDD | 9.22 | ± 9.6 % |
| 10229 | CAD | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | LTE-TDD | 9.48 | ± 9.6 % |
| 10230 | CAD | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | LTE-TDD | 10.25 | ± 9.6 % |
| 10231 | CAD | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | LTE-TDD | 9.19 | ± 9.6 % |
| 10232 | CAG | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | LTE-TDD | 9.48 | ± 9.6 % |
| 10233 | CAG | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | LTE-TDD | 10.25 | ± 9.6 % |
| 10234 | CAG | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | LTE-TDD | 9.21 | ± 9.6 % |
| 10235 | CAG | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | LTE-TDD | 9.48 | ± 9.6 % |
| 10236 | CAG | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | LTE-TDD | 10.25 | ± 9.6 % |
| 10237 | CAG | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | LTE-TDD | 9.21 | ± 9.6 % |
| 10238 | CAF | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | LTE-TDD | 9.48 | ± 9.6 % |
| 10239 | CAF | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | LTE-TDD | 10.25 | ± 9.6 % |
| 10240 | CAF | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | LTE-TDD | 9.21 | ± 9.6 % |
| 10241 | CAB | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | LTE-TDD | 9.82 | ± 9.6 % |
| 10242 | CAB | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | LTE-TDD | 9.86 | ± 9.6 % |
| 10243 | CAB | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | LTE-TDD | 9.46 | ± 9.6 % |
| 10244 | CAD | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | LTE-TDD | 10.06 | ± 9.6 % |
| 10245 | CAD | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | LTE-TDD | 10.06 | ± 9.6 % |
| 10246 | CAD | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | LTE-TDD | 9.30 | ± 9.6 % |
| 10247 | CAG | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | LTE-TDD | 9.91 | ± 9.6 % |
| 10248 | CAG | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | LTE-TDD | 10.09 | ± 9.6 % |
| 10249 | CAG | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | LTE-TDD | 9.29 | ± 9.6 % |
| 10250 | CAG | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | LTE-TDD | 9.81 | ± 9.6 % |
| 10251 | CAG | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | LTE-TDD | 10.17 | ± 9.6 % |
| 10252 | CAG | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | LTE-TDD | 9.24 | ± 9.6 % |
| 10253 | CAF | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | LTE-TDD | 9.90 | ± 9.6 % |
| 10254 | CAF | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | LTE-TDD | 10.14 | ± 9.6 % |
| 10255 | CAF | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | LTE-TDD | 9.20 | ± 9.6 % |
| 10256 | CAB | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | LTE-TDD | 9.96 | ± 9.6 % |
| 10257 | CAB | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | LTE-TDD | 10.08 | ± 9.6 % |
| 10258 | CAB | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | LTE-TDD | 9.34 | ± 9.6 % |
| 10259 | CAD | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | LTE-TDD | 9.98 | ± 9.6 % |
| 10260 | CAD | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | LTE-TDD | 9.97 | ± 9.6 % |

| | | | | | |
|-------|-----|---|----------|-------|---------|
| 10261 | CAD | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | LTE-TDD | 9.24 | ± 9.6 % |
| 10262 | CAG | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | LTE-TDD | 9.83 | ± 9.6 % |
| 10263 | CAG | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | LTE-TDD | 10.16 | ± 9.6 % |
| 10264 | CAG | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | LTE-TDD | 9.23 | ± 9.6 % |
| 10265 | CAG | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | LTE-TDD | 9.92 | ± 9.6 % |
| 10266 | CAG | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | LTE-TDD | 10.07 | ± 9.6 % |
| 10267 | CAG | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | LTE-TDD | 9.30 | ± 9.6 % |
| 10268 | CAF | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | LTE-TDD | 10.06 | ± 9.6 % |
| 10269 | CAF | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | LTE-TDD | 10.13 | ± 9.6 % |
| 10270 | CAF | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | LTE-TDD | 9.58 | ± 9.6 % |
| 10274 | CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10) | WCDMA | 4.87 | ± 9.6 % |
| 10275 | CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4) | WCDMA | 3.96 | ± 9.6 % |
| 10277 | CAA | PHS (QPSK) | PHS | 11.81 | ± 9.6 % |
| 10278 | CAA | PHS (QPSK, BW 884MHz, Rolloff 0.5) | PHS | 11.81 | ± 9.6 % |
| 10279 | CAA | PHS (QPSK, BW 884MHz, Rolloff 0.38) | PHS | 12.18 | ± 9.6 % |
| 10290 | AAB | CDMA2000, RC1, SO55, Full Rate | CDMA2000 | 3.91 | ± 9.6 % |
| 10291 | AAB | CDMA2000, RC3, SO55, Full Rate | CDMA2000 | 3.46 | ± 9.6 % |
| 10292 | AAB | CDMA2000, RC3, SO32, Full Rate | CDMA2000 | 3.39 | ± 9.6 % |
| 10293 | AAB | CDMA2000, RC3, SO3, Full Rate | CDMA2000 | 3.50 | ± 9.6 % |
| 10295 | AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr. | CDMA2000 | 12.49 | ± 9.6 % |
| 10297 | AAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | LTE-FDD | 5.81 | ± 9.6 % |
| 10298 | AAD | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | LTE-FDD | 5.72 | ± 9.6 % |
| 10299 | AAD | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | LTE-FDD | 6.39 | ± 9.6 % |
| 10300 | AAD | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | LTE-FDD | 6.60 | ± 9.6 % |
| 10301 | AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC) | WiMAX | 12.03 | ± 9.6 % |
| 10302 | AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3CTRL) | WiMAX | 12.57 | ± 9.6 % |
| 10303 | AAA | IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC) | WiMAX | 12.52 | ± 9.6 % |
| 10304 | AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC) | WiMAX | 11.86 | ± 9.6 % |
| 10305 | AAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC) | WiMAX | 15.24 | ± 9.6 % |
| 10306 | AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC) | WiMAX | 14.67 | ± 9.6 % |
| 10307 | AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC) | WiMAX | 14.49 | ± 9.6 % |
| 10308 | AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC) | WiMAX | 14.46 | ± 9.6 % |
| 10309 | AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3) | WiMAX | 14.58 | ± 9.6 % |
| 10310 | AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3) | WiMAX | 14.57 | ± 9.6 % |
| 10311 | AAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | LTE-FDD | 6.06 | ± 9.6 % |
| 10313 | AAA | iDEN 1:3 | iDEN | 10.51 | ± 9.6 % |
| 10314 | AAA | iDEN 1:6 | iDEN | 13.48 | ± 9.6 % |
| 10315 | AAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc dc) | WLAN | 1.71 | ± 9.6 % |
| 10316 | AAB | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc dc) | WLAN | 8.36 | ± 9.6 % |
| 10317 | AAD | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc dc) | WLAN | 8.36 | ± 9.6 % |
| 10352 | AAA | Pulse Waveform (200Hz, 10%) | Generic | 10.00 | ± 9.6 % |
| 10353 | AAA | Pulse Waveform (200Hz, 20%) | Generic | 6.99 | ± 9.6 % |
| 10354 | AAA | Pulse Waveform (200Hz, 40%) | Generic | 3.98 | ± 9.6 % |
| 10355 | AAA | Pulse Waveform (200Hz, 60%) | Generic | 2.22 | ± 9.6 % |
| 10356 | AAA | Pulse Waveform (200Hz, 80%) | Generic | 0.97 | ± 9.6 % |
| 10387 | AAA | QPSK Waveform, 1 MHz | Generic | 5.10 | ± 9.6 % |
| 10388 | AAA | QPSK Waveform, 10 MHz | Generic | 5.22 | ± 9.6 % |
| 10396 | AAA | 64-QAM Waveform, 100 kHz | Generic | 6.27 | ± 9.6 % |
| 10399 | AAA | 64-QAM Waveform, 40 MHz | Generic | 6.27 | ± 9.6 % |
| 10400 | AAE | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc dc) | WLAN | 8.37 | ± 9.6 % |
| 10401 | AAE | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc dc) | WLAN | 8.60 | ± 9.6 % |
| 10402 | AAE | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc dc) | WLAN | 8.53 | ± 9.6 % |
| 10403 | AAB | CDMA2000 (1xEV-DO, Rev. 0) | CDMA2000 | 3.76 | ± 9.6 % |
| 10404 | AAB | CDMA2000 (1xEV-DO, Rev. A) | CDMA2000 | 3.77 | ± 9.6 % |
| 10406 | AAB | CDMA2000, RC3, SO32, SCH0, Full Rate | CDMA2000 | 5.22 | ± 9.6 % |
| 10410 | AAG | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub=2,3,4,7,8,9) | LTE-TDD | 7.82 | ± 9.6 % |

| | | | | | |
|-------|-----|--|----------|-------|---------|
| 10414 | AAA | WLAN CCDF, 64-QAM, 40MHz | Generic | 8.54 | ± 9.6 % |
| 10415 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc dc) | WLAN | 1.54 | ± 9.6 % |
| 10416 | AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc dc) | WLAN | 8.23 | ± 9.6 % |
| 10417 | AAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc dc) | WLAN | 8.23 | ± 9.6 % |
| 10418 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc, Long) | WLAN | 8.14 | ± 9.6 % |
| 10419 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc, Short) | WLAN | 8.19 | ± 9.6 % |
| 10422 | AAC | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK) | WLAN | 8.32 | ± 9.6 % |
| 10423 | AAC | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM) | WLAN | 8.47 | ± 9.6 % |
| 10424 | AAC | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM) | WLAN | 8.40 | ± 9.6 % |
| 10425 | AAC | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK) | WLAN | 8.41 | ± 9.6 % |
| 10426 | AAC | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM) | WLAN | 8.45 | ± 9.6 % |
| 10427 | AAC | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM) | WLAN | 8.41 | ± 9.6 % |
| 10430 | AAD | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1) | LTE-FDD | 8.28 | ± 9.6 % |
| 10431 | AAD | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1) | LTE-FDD | 8.38 | ± 9.6 % |
| 10432 | AAC | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1) | LTE-FDD | 8.34 | ± 9.6 % |
| 10433 | AAC | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1) | LTE-FDD | 8.34 | ± 9.6 % |
| 10434 | AAA | W-CDMA (BS Test Model 1, 64 DPCH) | WCDMA | 8.60 | ± 9.6 % |
| 10435 | AAF | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Sub) | LTE-TDD | 7.82 | ± 9.6 % |
| 10447 | AAD | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%) | LTE-FDD | 7.56 | ± 9.6 % |
| 10448 | AAD | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%) | LTE-FDD | 7.53 | ± 9.6 % |
| 10449 | AAC | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%) | LTE-FDD | 7.51 | ± 9.6 % |
| 10450 | AAC | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%) | LTE-FDD | 7.48 | ± 9.6 % |
| 10451 | AAA | W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%) | WCDMA | 7.59 | ± 9.6 % |
| 10453 | AAD | Validation (Square, 10ms, 1ms) | Test | 10.00 | ± 9.6 % |
| 10456 | AAC | IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc dc) | WLAN | 8.63 | ± 9.6 % |
| 10457 | AAA | UMTS-FDD (DC-HSDPA) | WCDMA | 6.62 | ± 9.6 % |
| 10458 | AAA | CDMA2000 (1xEV-DO, Rev. B, 2 carriers) | CDMA2000 | 6.55 | ± 9.6 % |
| 10459 | AAA | CDMA2000 (1xEV-DO, Rev. B, 3 carriers) | CDMA2000 | 8.25 | ± 9.6 % |
| 10460 | AAA | UMTS-FDD (WCDMA, AMR) | WCDMA | 2.39 | ± 9.6 % |
| 10461 | AAB | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Sub) | LTE-TDD | 7.82 | ± 9.6 % |
| 10462 | AAB | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.30 | ± 9.6 % |
| 10463 | AAB | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.56 | ± 9.6 % |
| 10464 | AAC | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Sub) | LTE-TDD | 7.82 | ± 9.6 % |
| 10465 | AAC | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.32 | ± 9.6 % |
| 10466 | AAC | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.57 | ± 9.6 % |
| 10467 | AAF | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Sub) | LTE-TDD | 7.82 | ± 9.6 % |
| 10468 | AAF | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.32 | ± 9.6 % |
| 10469 | AAF | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.56 | ± 9.6 % |
| 10470 | AAF | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub) | LTE-TDD | 7.82 | ± 9.6 % |
| 10471 | AAF | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.32 | ± 9.6 % |
| 10472 | AAF | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.57 | ± 9.6 % |
| 10473 | AAE | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Sub) | LTE-TDD | 7.82 | ± 9.6 % |
| 10474 | AAE | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.32 | ± 9.6 % |
| 10475 | AAE | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.57 | ± 9.6 % |
| 10477 | AAF | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.32 | ± 9.6 % |
| 10478 | AAF | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.57 | ± 9.6 % |
| 10479 | AAB | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Sub) | LTE-TDD | 7.74 | ± 9.6 % |
| 10480 | AAB | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.18 | ± 9.6 % |
| 10481 | AAB | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.45 | ± 9.6 % |
| 10482 | AAC | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Sub) | LTE-TDD | 7.71 | ± 9.6 % |
| 10483 | AAC | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, Sub) | LTE-TDD | 8.39 | ± 9.6 % |
| 10484 | AAC | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.47 | ± 9.6 % |
| 10485 | AAF | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Sub) | LTE-TDD | 7.59 | ± 9.6 % |
| 10486 | AAF | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.38 | ± 9.6 % |
| 10487 | AAF | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.60 | ± 9.6 % |
| 10488 | AAF | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Sub) | LTE-TDD | 7.70 | ± 9.6 % |

| | | | | | |
|-------|-----|---|---------|------|---------|
| 10489 | AAF | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.31 | ± 9.6 % |
| 10490 | AAF | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.54 | ± 9.6 % |
| 10491 | AAE | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Sub) | LTE-TDD | 7.74 | ± 9.6 % |
| 10492 | AAE | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.41 | ± 9.6 % |
| 10493 | AAE | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.55 | ± 9.6 % |
| 10494 | AAF | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Sub) | LTE-TDD | 7.74 | ± 9.6 % |
| 10495 | AAF | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.37 | ± 9.6 % |
| 10496 | AAF | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.54 | ± 9.6 % |
| 10497 | AAB | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Sub) | LTE-TDD | 7.67 | ± 9.6 % |
| 10498 | AAB | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.40 | ± 9.6 % |
| 10499 | AAB | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.68 | ± 9.6 % |
| 10500 | AAC | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Sub) | LTE-TDD | 7.67 | ± 9.6 % |
| 10501 | AAC | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.44 | ± 9.6 % |
| 10502 | AAC | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.52 | ± 9.6 % |
| 10503 | AAF | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Sub) | LTE-TDD | 7.72 | ± 9.6 % |
| 10504 | AAF | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.31 | ± 9.6 % |
| 10505 | AAF | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.54 | ± 9.6 % |
| 10506 | AAF | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Sub) | LTE-TDD | 7.74 | ± 9.6 % |
| 10507 | AAF | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.36 | ± 9.6 % |
| 10508 | AAF | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.55 | ± 9.6 % |
| 10509 | AAE | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Sub) | LTE-TDD | 7.99 | ± 9.6 % |
| 10510 | AAE | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.49 | ± 9.6 % |
| 10511 | AAE | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.51 | ± 9.6 % |
| 10512 | AAF | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Sub) | LTE-TDD | 7.74 | ± 9.6 % |
| 10513 | AAF | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.42 | ± 9.6 % |
| 10514 | AAF | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.45 | ± 9.6 % |
| 10515 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc dc) | WLAN | 1.58 | ± 9.6 % |
| 10516 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc dc) | WLAN | 1.57 | ± 9.6 % |
| 10517 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc dc) | WLAN | 1.58 | ± 9.6 % |
| 10518 | AAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc dc) | WLAN | 8.23 | ± 9.6 % |
| 10519 | AAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc dc) | WLAN | 8.39 | ± 9.6 % |
| 10520 | AAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc dc) | WLAN | 8.12 | ± 9.6 % |
| 10521 | AAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc dc) | WLAN | 7.97 | ± 9.6 % |
| 10522 | AAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc dc) | WLAN | 8.45 | ± 9.6 % |
| 10523 | AAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc dc) | WLAN | 8.08 | ± 9.6 % |
| 10524 | AAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc dc) | WLAN | 8.27 | ± 9.6 % |
| 10525 | AAC | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc dc) | WLAN | 8.36 | ± 9.6 % |
| 10526 | AAC | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc dc) | WLAN | 8.42 | ± 9.6 % |
| 10527 | AAC | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc dc) | WLAN | 8.21 | ± 9.6 % |
| 10528 | AAC | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc dc) | WLAN | 8.36 | ± 9.6 % |
| 10529 | AAC | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc dc) | WLAN | 8.36 | ± 9.6 % |
| 10531 | AAC | IEEE 802.11ac WiFi (20MHz, MCS6, 99pc dc) | WLAN | 8.43 | ± 9.6 % |
| 10532 | AAC | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc dc) | WLAN | 8.29 | ± 9.6 % |
| 10533 | AAC | IEEE 802.11ac WiFi (20MHz, MCS8, 99pc dc) | WLAN | 8.38 | ± 9.6 % |
| 10534 | AAC | IEEE 802.11ac WiFi (40MHz, MCS0, 99pc dc) | WLAN | 8.45 | ± 9.6 % |
| 10535 | AAC | IEEE 802.11ac WiFi (40MHz, MCS1, 99pc dc) | WLAN | 8.45 | ± 9.6 % |
| 10536 | AAC | IEEE 802.11ac WiFi (40MHz, MCS2, 99pc dc) | WLAN | 8.32 | ± 9.6 % |
| 10537 | AAC | IEEE 802.11ac WiFi (40MHz, MCS3, 99pc dc) | WLAN | 8.44 | ± 9.6 % |
| 10538 | AAC | IEEE 802.11ac WiFi (40MHz, MCS4, 99pc dc) | WLAN | 8.54 | ± 9.6 % |
| 10540 | AAC | IEEE 802.11ac WiFi (40MHz, MCS6, 99pc dc) | WLAN | 8.39 | ± 9.6 % |
| 10541 | AAC | IEEE 802.11ac WiFi (40MHz, MCS7, 99pc dc) | WLAN | 8.46 | ± 9.6 % |
| 10542 | AAC | IEEE 802.11ac WiFi (40MHz, MCS8, 99pc dc) | WLAN | 8.65 | ± 9.6 % |
| 10543 | AAC | IEEE 802.11ac WiFi (40MHz, MCS9, 99pc dc) | WLAN | 8.65 | ± 9.6 % |
| 10544 | AAC | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc dc) | WLAN | 8.47 | ± 9.6 % |
| 10545 | AAC | IEEE 802.11ac WiFi (80MHz, MCS1, 99pc dc) | WLAN | 8.55 | ± 9.6 % |
| 10546 | AAC | IEEE 802.11ac WiFi (80MHz, MCS2, 99pc dc) | WLAN | 8.35 | ± 9.6 % |

| | | | | | |
|-------|-----|---|------|------|---------|
| 10547 | AAC | IEEE 802.11ac WiFi (80MHz, MCS3, 99pc dc) | WLAN | 8.49 | ± 9.6 % |
| 10548 | AAC | IEEE 802.11ac WiFi (80MHz, MCS4, 99pc dc) | WLAN | 8.37 | ± 9.6 % |
| 10550 | AAC | IEEE 802.11ac WiFi (80MHz, MCS6, 99pc dc) | WLAN | 8.39 | ± 9.6 % |
| 10551 | AAC | IEEE 802.11ac WiFi (80MHz, MCS7, 99pc dc) | WLAN | 8.50 | ± 9.6 % |
| 10552 | AAC | IEEE 802.11ac WiFi (80MHz, MCS8, 99pc dc) | WLAN | 8.42 | ± 9.6 % |
| 10553 | AAC | IEEE 802.11ac WiFi (80MHz, MCS9, 99pc dc) | WLAN | 8.45 | ± 9.6 % |
| 10554 | AAD | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc dc) | WLAN | 8.48 | ± 9.6 % |
| 10555 | AAD | IEEE 802.11ac WiFi (160MHz, MCS1, 99pc dc) | WLAN | 8.47 | ± 9.6 % |
| 10556 | AAD | IEEE 802.11ac WiFi (160MHz, MCS2, 99pc dc) | WLAN | 8.50 | ± 9.6 % |
| 10557 | AAD | IEEE 802.11ac WiFi (160MHz, MCS3, 99pc dc) | WLAN | 8.52 | ± 9.6 % |
| 10558 | AAD | IEEE 802.11ac WiFi (160MHz, MCS4, 99pc dc) | WLAN | 8.61 | ± 9.6 % |
| 10560 | AAD | IEEE 802.11ac WiFi (160MHz, MCS6, 99pc dc) | WLAN | 8.73 | ± 9.6 % |
| 10561 | AAD | IEEE 802.11ac WiFi (160MHz, MCS7, 99pc dc) | WLAN | 8.56 | ± 9.6 % |
| 10562 | AAD | IEEE 802.11ac WiFi (160MHz, MCS8, 99pc dc) | WLAN | 8.69 | ± 9.6 % |
| 10563 | AAD | IEEE 802.11ac WiFi (160MHz, MCS9, 99pc dc) | WLAN | 8.77 | ± 9.6 % |
| 10564 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc dc) | WLAN | 8.25 | ± 9.6 % |
| 10565 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc dc) | WLAN | 8.45 | ± 9.6 % |
| 10566 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc dc) | WLAN | 8.13 | ± 9.6 % |
| 10567 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc dc) | WLAN | 8.00 | ± 9.6 % |
| 10568 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc dc) | WLAN | 8.37 | ± 9.6 % |
| 10569 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc dc) | WLAN | 8.10 | ± 9.6 % |
| 10570 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc dc) | WLAN | 8.30 | ± 9.6 % |
| 10571 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc dc) | WLAN | 1.99 | ± 9.6 % |
| 10572 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc dc) | WLAN | 1.99 | ± 9.6 % |
| 10573 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc dc) | WLAN | 1.98 | ± 9.6 % |
| 10574 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc dc) | WLAN | 1.98 | ± 9.6 % |
| 10575 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc dc) | WLAN | 8.59 | ± 9.6 % |
| 10576 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc dc) | WLAN | 8.60 | ± 9.6 % |
| 10577 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc dc) | WLAN | 8.70 | ± 9.6 % |
| 10578 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc dc) | WLAN | 8.49 | ± 9.6 % |
| 10579 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc dc) | WLAN | 8.36 | ± 9.6 % |
| 10580 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc dc) | WLAN | 8.76 | ± 9.6 % |
| 10581 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc dc) | WLAN | 8.35 | ± 9.6 % |
| 10582 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc dc) | WLAN | 8.67 | ± 9.6 % |
| 10583 | AAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc dc) | WLAN | 8.59 | ± 9.6 % |
| 10584 | AAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc dc) | WLAN | 8.60 | ± 9.6 % |
| 10585 | AAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc dc) | WLAN | 8.70 | ± 9.6 % |
| 10586 | AAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc dc) | WLAN | 8.49 | ± 9.6 % |
| 10587 | AAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc dc) | WLAN | 8.36 | ± 9.6 % |
| 10588 | AAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc dc) | WLAN | 8.76 | ± 9.6 % |
| 10589 | AAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc dc) | WLAN | 8.35 | ± 9.6 % |
| 10590 | AAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc dc) | WLAN | 8.67 | ± 9.6 % |
| 10591 | AAC | IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc dc) | WLAN | 8.63 | ± 9.6 % |
| 10592 | AAC | IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc dc) | WLAN | 8.79 | ± 9.6 % |
| 10593 | AAC | IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc dc) | WLAN | 8.64 | ± 9.6 % |
| 10594 | AAC | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc dc) | WLAN | 8.74 | ± 9.6 % |
| 10595 | AAC | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc dc) | WLAN | 8.74 | ± 9.6 % |
| 10596 | AAC | IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc dc) | WLAN | 8.71 | ± 9.6 % |
| 10597 | AAC | IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc dc) | WLAN | 8.72 | ± 9.6 % |
| 10598 | AAC | IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc dc) | WLAN | 8.50 | ± 9.6 % |
| 10599 | AAC | IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc dc) | WLAN | 8.79 | ± 9.6 % |
| 10600 | AAC | IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc dc) | WLAN | 8.88 | ± 9.6 % |
| 10601 | AAC | IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc dc) | WLAN | 8.82 | ± 9.6 % |
| 10602 | AAC | IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc dc) | WLAN | 8.94 | ± 9.6 % |
| 10603 | AAC | IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc dc) | WLAN | 9.03 | ± 9.6 % |
| 10604 | AAC | IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc dc) | WLAN | 8.76 | ± 9.6 % |

| | | | | | |
|-------|-----|---|-----------|-------|---------|
| 10605 | AAC | IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc dc) | WLAN | 8.97 | ± 9.6 % |
| 10606 | AAC | IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc dc) | WLAN | 8.82 | ± 9.6 % |
| 10607 | AAC | IEEE 802.11ac WiFi (20MHz, MCS0, 90pc dc) | WLAN | 8.64 | ± 9.6 % |
| 10608 | AAC | IEEE 802.11ac WiFi (20MHz, MCS1, 90pc dc) | WLAN | 8.77 | ± 9.6 % |
| 10609 | AAC | IEEE 802.11ac WiFi (20MHz, MCS2, 90pc dc) | WLAN | 8.57 | ± 9.6 % |
| 10610 | AAC | IEEE 802.11ac WiFi (20MHz, MCS3, 90pc dc) | WLAN | 8.78 | ± 9.6 % |
| 10611 | AAC | IEEE 802.11ac WiFi (20MHz, MCS4, 90pc dc) | WLAN | 8.70 | ± 9.6 % |
| 10612 | AAC | IEEE 802.11ac WiFi (20MHz, MCS5, 90pc dc) | WLAN | 8.77 | ± 9.6 % |
| 10613 | AAC | IEEE 802.11ac WiFi (20MHz, MCS6, 90pc dc) | WLAN | 8.94 | ± 9.6 % |
| 10614 | AAC | IEEE 802.11ac WiFi (20MHz, MCS7, 90pc dc) | WLAN | 8.59 | ± 9.6 % |
| 10615 | AAC | IEEE 802.11ac WiFi (20MHz, MCS8, 90pc dc) | WLAN | 8.82 | ± 9.6 % |
| 10616 | AAC | IEEE 802.11ac WiFi (40MHz, MCS0, 90pc dc) | WLAN | 8.82 | ± 9.6 % |
| 10617 | AAC | IEEE 802.11ac WiFi (40MHz, MCS1, 90pc dc) | WLAN | 8.81 | ± 9.6 % |
| 10618 | AAC | IEEE 802.11ac WiFi (40MHz, MCS2, 90pc dc) | WLAN | 8.58 | ± 9.6 % |
| 10619 | AAC | IEEE 802.11ac WiFi (40MHz, MCS3, 90pc dc) | WLAN | 8.86 | ± 9.6 % |
| 10620 | AAC | IEEE 802.11ac WiFi (40MHz, MCS4, 90pc dc) | WLAN | 8.87 | ± 9.6 % |
| 10621 | AAC | IEEE 802.11ac WiFi (40MHz, MCS5, 90pc dc) | WLAN | 8.77 | ± 9.6 % |
| 10622 | AAC | IEEE 802.11ac WiFi (40MHz, MCS6, 90pc dc) | WLAN | 8.68 | ± 9.6 % |
| 10623 | AAC | IEEE 802.11ac WiFi (40MHz, MCS7, 90pc dc) | WLAN | 8.82 | ± 9.6 % |
| 10624 | AAC | IEEE 802.11ac WiFi (40MHz, MCS8, 90pc dc) | WLAN | 8.96 | ± 9.6 % |
| 10625 | AAC | IEEE 802.11ac WiFi (40MHz, MCS9, 90pc dc) | WLAN | 8.96 | ± 9.6 % |
| 10626 | AAC | IEEE 802.11ac WiFi (80MHz, MCS0, 90pc dc) | WLAN | 8.83 | ± 9.6 % |
| 10627 | AAC | IEEE 802.11ac WiFi (80MHz, MCS1, 90pc dc) | WLAN | 8.88 | ± 9.6 % |
| 10628 | AAC | IEEE 802.11ac WiFi (80MHz, MCS2, 90pc dc) | WLAN | 8.71 | ± 9.6 % |
| 10629 | AAC | IEEE 802.11ac WiFi (80MHz, MCS3, 90pc dc) | WLAN | 8.85 | ± 9.6 % |
| 10630 | AAC | IEEE 802.11ac WiFi (80MHz, MCS4, 90pc dc) | WLAN | 8.72 | ± 9.6 % |
| 10631 | AAC | IEEE 802.11ac WiFi (80MHz, MCS5, 90pc dc) | WLAN | 8.81 | ± 9.6 % |
| 10632 | AAC | IEEE 802.11ac WiFi (80MHz, MCS6, 90pc dc) | WLAN | 8.74 | ± 9.6 % |
| 10633 | AAC | IEEE 802.11ac WiFi (80MHz, MCS7, 90pc dc) | WLAN | 8.83 | ± 9.6 % |
| 10634 | AAC | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc dc) | WLAN | 8.80 | ± 9.6 % |
| 10635 | AAC | IEEE 802.11ac WiFi (80MHz, MCS9, 90pc dc) | WLAN | 8.81 | ± 9.6 % |
| 10636 | AAD | IEEE 802.11ac WiFi (160MHz, MCS0, 90pc dc) | WLAN | 8.83 | ± 9.6 % |
| 10637 | AAD | IEEE 802.11ac WiFi (160MHz, MCS1, 90pc dc) | WLAN | 8.79 | ± 9.6 % |
| 10638 | AAD | IEEE 802.11ac WiFi (160MHz, MCS2, 90pc dc) | WLAN | 8.86 | ± 9.6 % |
| 10639 | AAD | IEEE 802.11ac WiFi (160MHz, MCS3, 90pc dc) | WLAN | 8.85 | ± 9.6 % |
| 10640 | AAD | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc dc) | WLAN | 8.98 | ± 9.6 % |
| 10641 | AAD | IEEE 802.11ac WiFi (160MHz, MCS5, 90pc dc) | WLAN | 9.06 | ± 9.6 % |
| 10642 | AAD | IEEE 802.11ac WiFi (160MHz, MCS6, 90pc dc) | WLAN | 9.06 | ± 9.6 % |
| 10643 | AAD | IEEE 802.11ac WiFi (160MHz, MCS7, 90pc dc) | WLAN | 8.89 | ± 9.6 % |
| 10644 | AAD | IEEE 802.11ac WiFi (160MHz, MCS8, 90pc dc) | WLAN | 9.05 | ± 9.6 % |
| 10645 | AAD | IEEE 802.11ac WiFi (160MHz, MCS9, 90pc dc) | WLAN | 9.11 | ± 9.6 % |
| 10646 | AAG | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Sub=2,7) | LTE-TDD | 11.96 | ± 9.6 % |
| 10647 | AAF | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Sub=2,7) | LTE-TDD | 11.96 | ± 9.6 % |
| 10648 | AAA | CDMA2000 (1x Advanced) | CDMA2000 | 3.45 | ± 9.6 % |
| 10652 | AAE | LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%) | LTE-TDD | 6.91 | ± 9.6 % |
| 10653 | AAE | LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%) | LTE-TDD | 7.42 | ± 9.6 % |
| 10654 | AAD | LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%) | LTE-TDD | 6.96 | ± 9.6 % |
| 10655 | AAE | LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%) | LTE-TDD | 7.21 | ± 9.6 % |
| 10658 | AAA | Pulse Waveform (200Hz, 10%) | Test | 10.00 | ± 9.6 % |
| 10659 | AAA | Pulse Waveform (200Hz, 20%) | Test | 6.99 | ± 9.6 % |
| 10660 | AAA | Pulse Waveform (200Hz, 40%) | Test | 3.98 | ± 9.6 % |
| 10661 | AAA | Pulse Waveform (200Hz, 60%) | Test | 2.22 | ± 9.6 % |
| 10662 | AAA | Pulse Waveform (200Hz, 80%) | Test | 0.97 | ± 9.6 % |
| 10670 | AAA | Bluetooth Low Energy | Bluetooth | 2.19 | ± 9.6 % |
| 10671 | AAC | IEEE 802.11ax (20MHz, MCS0, 90pc dc) | WLAN | 9.09 | ± 9.6 % |
| 10672 | AAC | IEEE 802.11ax (20MHz, MCS1, 90pc dc) | WLAN | 8.57 | ± 9.6 % |

| | | | | | |
|-------|-----|---------------------------------------|------|------|---------|
| 10673 | AAC | IEEE 802.11ax (20MHz, MCS2, 90pc dc) | WLAN | 8.78 | ± 9.6 % |
| 10674 | AAC | IEEE 802.11ax (20MHz, MCS3, 90pc dc) | WLAN | 8.74 | ± 9.6 % |
| 10675 | AAC | IEEE 802.11ax (20MHz, MCS4, 90pc dc) | WLAN | 8.90 | ± 9.6 % |
| 10676 | AAC | IEEE 802.11ax (20MHz, MCS5, 90pc dc) | WLAN | 8.77 | ± 9.6 % |
| 10677 | AAC | IEEE 802.11ax (20MHz, MCS6, 90pc dc) | WLAN | 8.73 | ± 9.6 % |
| 10678 | AAC | IEEE 802.11ax (20MHz, MCS7, 90pc dc) | WLAN | 8.78 | ± 9.6 % |
| 10679 | AAC | IEEE 802.11ax (20MHz, MCS8, 90pc dc) | WLAN | 8.89 | ± 9.6 % |
| 10680 | AAC | IEEE 802.11ax (20MHz, MCS9, 90pc dc) | WLAN | 8.80 | ± 9.6 % |
| 10681 | AAC | IEEE 802.11ax (20MHz, MCS10, 90pc dc) | WLAN | 8.62 | ± 9.6 % |
| 10682 | AAC | IEEE 802.11ax (20MHz, MCS11, 90pc dc) | WLAN | 8.83 | ± 9.6 % |
| 10683 | AAC | IEEE 802.11ax (20MHz, MCS0, 99pc dc) | WLAN | 8.42 | ± 9.6 % |
| 10684 | AAC | IEEE 802.11ax (20MHz, MCS1, 99pc dc) | WLAN | 8.26 | ± 9.6 % |
| 10685 | AAC | IEEE 802.11ax (20MHz, MCS2, 99pc dc) | WLAN | 8.33 | ± 9.6 % |
| 10686 | AAC | IEEE 802.11ax (20MHz, MCS3, 99pc dc) | WLAN | 8.28 | ± 9.6 % |
| 10687 | AAC | IEEE 802.11ax (20MHz, MCS4, 99pc dc) | WLAN | 8.45 | ± 9.6 % |
| 10688 | AAC | IEEE 802.11ax (20MHz, MCS5, 99pc dc) | WLAN | 8.29 | ± 9.6 % |
| 10689 | AAC | IEEE 802.11ax (20MHz, MCS6, 99pc dc) | WLAN | 8.55 | ± 9.6 % |
| 10690 | AAC | IEEE 802.11ax (20MHz, MCS7, 99pc dc) | WLAN | 8.29 | ± 9.6 % |
| 10691 | AAC | IEEE 802.11ax (20MHz, MCS8, 99pc dc) | WLAN | 8.25 | ± 9.6 % |
| 10692 | AAC | IEEE 802.11ax (20MHz, MCS9, 99pc dc) | WLAN | 8.29 | ± 9.6 % |
| 10693 | AAC | IEEE 802.11ax (20MHz, MCS10, 99pc dc) | WLAN | 8.25 | ± 9.6 % |
| 10694 | AAC | IEEE 802.11ax (20MHz, MCS11, 99pc dc) | WLAN | 8.57 | ± 9.6 % |
| 10695 | AAC | IEEE 802.11ax (40MHz, MCS0, 90pc dc) | WLAN | 8.78 | ± 9.6 % |
| 10696 | AAC | IEEE 802.11ax (40MHz, MCS1, 90pc dc) | WLAN | 8.91 | ± 9.6 % |
| 10697 | AAC | IEEE 802.11ax (40MHz, MCS2, 90pc dc) | WLAN | 8.61 | ± 9.6 % |
| 10698 | AAC | IEEE 802.11ax (40MHz, MCS3, 90pc dc) | WLAN | 8.89 | ± 9.6 % |
| 10699 | AAC | IEEE 802.11ax (40MHz, MCS4, 90pc dc) | WLAN | 8.82 | ± 9.6 % |
| 10700 | AAC | IEEE 802.11ax (40MHz, MCS5, 90pc dc) | WLAN | 8.73 | ± 9.6 % |
| 10701 | AAC | IEEE 802.11ax (40MHz, MCS6, 90pc dc) | WLAN | 8.86 | ± 9.6 % |
| 10702 | AAC | IEEE 802.11ax (40MHz, MCS7, 90pc dc) | WLAN | 8.70 | ± 9.6 % |
| 10703 | AAC | IEEE 802.11ax (40MHz, MCS8, 90pc dc) | WLAN | 8.82 | ± 9.6 % |
| 10704 | AAC | IEEE 802.11ax (40MHz, MCS9, 90pc dc) | WLAN | 8.56 | ± 9.6 % |
| 10705 | AAC | IEEE 802.11ax (40MHz, MCS10, 90pc dc) | WLAN | 8.69 | ± 9.6 % |
| 10706 | AAC | IEEE 802.11ax (40MHz, MCS11, 90pc dc) | WLAN | 8.66 | ± 9.6 % |
| 10707 | AAC | IEEE 802.11ax (40MHz, MCS0, 99pc dc) | WLAN | 8.32 | ± 9.6 % |
| 10708 | AAC | IEEE 802.11ax (40MHz, MCS1, 99pc dc) | WLAN | 8.55 | ± 9.6 % |
| 10709 | AAC | IEEE 802.11ax (40MHz, MCS2, 99pc dc) | WLAN | 8.33 | ± 9.6 % |
| 10710 | AAC | IEEE 802.11ax (40MHz, MCS3, 99pc dc) | WLAN | 8.29 | ± 9.6 % |
| 10711 | AAC | IEEE 802.11ax (40MHz, MCS4, 99pc dc) | WLAN | 8.39 | ± 9.6 % |
| 10712 | AAC | IEEE 802.11ax (40MHz, MCS5, 99pc dc) | WLAN | 8.67 | ± 9.6 % |
| 10713 | AAC | IEEE 802.11ax (40MHz, MCS6, 99pc dc) | WLAN | 8.33 | ± 9.6 % |
| 10714 | AAC | IEEE 802.11ax (40MHz, MCS7, 99pc dc) | WLAN | 8.26 | ± 9.6 % |
| 10715 | AAC | IEEE 802.11ax (40MHz, MCS8, 99pc dc) | WLAN | 8.45 | ± 9.6 % |
| 10716 | AAC | IEEE 802.11ax (40MHz, MCS9, 99pc dc) | WLAN | 8.30 | ± 9.6 % |
| 10717 | AAC | IEEE 802.11ax (40MHz, MCS10, 99pc dc) | WLAN | 8.48 | ± 9.6 % |
| 10718 | AAC | IEEE 802.11ax (40MHz, MCS11, 99pc dc) | WLAN | 8.24 | ± 9.6 % |
| 10719 | AAC | IEEE 802.11ax (80MHz, MCS0, 90pc dc) | WLAN | 8.81 | ± 9.6 % |
| 10720 | AAC | IEEE 802.11ax (80MHz, MCS1, 90pc dc) | WLAN | 8.87 | ± 9.6 % |
| 10721 | AAC | IEEE 802.11ax (80MHz, MCS2, 90pc dc) | WLAN | 8.76 | ± 9.6 % |
| 10722 | AAC | IEEE 802.11ax (80MHz, MCS3, 90pc dc) | WLAN | 8.55 | ± 9.6 % |
| 10723 | AAC | IEEE 802.11ax (80MHz, MCS4, 90pc dc) | WLAN | 8.70 | ± 9.6 % |
| 10724 | AAC | IEEE 802.11ax (80MHz, MCS5, 90pc dc) | WLAN | 8.90 | ± 9.6 % |
| 10725 | AAC | IEEE 802.11ax (80MHz, MCS6, 90pc dc) | WLAN | 8.74 | ± 9.6 % |
| 10726 | AAC | IEEE 802.11ax (80MHz, MCS7, 90pc dc) | WLAN | 8.72 | ± 9.6 % |
| 10727 | AAC | IEEE 802.11ax (80MHz, MCS8, 90pc dc) | WLAN | 8.66 | ± 9.6 % |
| 10728 | AAC | IEEE 802.11ax (80MHz, MCS9, 90pc dc) | WLAN | 8.65 | ± 9.6 % |

| | | | | | |
|-------|-----|--|---------------|------|---------|
| 10729 | AAC | IEEE 802.11ax (80MHz, MCS10, 90pc dc) | WLAN | 8.64 | ± 9.6 % |
| 10730 | AAC | IEEE 802.11ax (80MHz, MCS11, 90pc dc) | WLAN | 8.67 | ± 9.6 % |
| 10731 | AAC | IEEE 802.11ax (80MHz, MCS0, 99pc dc) | WLAN | 8.42 | ± 9.6 % |
| 10732 | AAC | IEEE 802.11ax (80MHz, MCS1, 99pc dc) | WLAN | 8.46 | ± 9.6 % |
| 10733 | AAC | IEEE 802.11ax (80MHz, MCS2, 99pc dc) | WLAN | 8.40 | ± 9.6 % |
| 10734 | AAC | IEEE 802.11ax (80MHz, MCS3, 99pc dc) | WLAN | 8.25 | ± 9.6 % |
| 10735 | AAC | IEEE 802.11ax (80MHz, MCS4, 99pc dc) | WLAN | 8.33 | ± 9.6 % |
| 10736 | AAC | IEEE 802.11ax (80MHz, MCS5, 99pc dc) | WLAN | 8.27 | ± 9.6 % |
| 10737 | AAC | IEEE 802.11ax (80MHz, MCS6, 99pc dc) | WLAN | 8.36 | ± 9.6 % |
| 10738 | AAC | IEEE 802.11ax (80MHz, MCS7, 99pc dc) | WLAN | 8.42 | ± 9.6 % |
| 10739 | AAC | IEEE 802.11ax (80MHz, MCS8, 99pc dc) | WLAN | 8.29 | ± 9.6 % |
| 10740 | AAC | IEEE 802.11ax (80MHz, MCS9, 99pc dc) | WLAN | 8.48 | ± 9.6 % |
| 10741 | AAC | IEEE 802.11ax (80MHz, MCS10, 99pc dc) | WLAN | 8.40 | ± 9.6 % |
| 10742 | AAC | IEEE 802.11ax (80MHz, MCS11, 99pc dc) | WLAN | 8.43 | ± 9.6 % |
| 10743 | AAC | IEEE 802.11ax (160MHz, MCS0, 90pc dc) | WLAN | 8.94 | ± 9.6 % |
| 10744 | AAC | IEEE 802.11ax (160MHz, MCS1, 90pc dc) | WLAN | 9.16 | ± 9.6 % |
| 10745 | AAC | IEEE 802.11ax (160MHz, MCS2, 90pc dc) | WLAN | 8.93 | ± 9.6 % |
| 10746 | AAC | IEEE 802.11ax (160MHz, MCS3, 90pc dc) | WLAN | 9.11 | ± 9.6 % |
| 10747 | AAC | IEEE 802.11ax (160MHz, MCS4, 90pc dc) | WLAN | 9.04 | ± 9.6 % |
| 10748 | AAC | IEEE 802.11ax (160MHz, MCS5, 90pc dc) | WLAN | 8.93 | ± 9.6 % |
| 10749 | AAC | IEEE 802.11ax (160MHz, MCS6, 90pc dc) | WLAN | 8.90 | ± 9.6 % |
| 10750 | AAC | IEEE 802.11ax (160MHz, MCS7, 90pc dc) | WLAN | 8.79 | ± 9.6 % |
| 10751 | AAC | IEEE 802.11ax (160MHz, MCS8, 90pc dc) | WLAN | 8.82 | ± 9.6 % |
| 10752 | AAC | IEEE 802.11ax (160MHz, MCS9, 90pc dc) | WLAN | 8.81 | ± 9.6 % |
| 10753 | AAC | IEEE 802.11ax (160MHz, MCS10, 90pc dc) | WLAN | 9.00 | ± 9.6 % |
| 10754 | AAC | IEEE 802.11ax (160MHz, MCS11, 90pc dc) | WLAN | 8.94 | ± 9.6 % |
| 10755 | AAC | IEEE 802.11ax (160MHz, MCS0, 99pc dc) | WLAN | 8.64 | ± 9.6 % |
| 10756 | AAC | IEEE 802.11ax (160MHz, MCS1, 99pc dc) | WLAN | 8.77 | ± 9.6 % |
| 10757 | AAC | IEEE 802.11ax (160MHz, MCS2, 99pc dc) | WLAN | 8.77 | ± 9.6 % |
| 10758 | AAC | IEEE 802.11ax (160MHz, MCS3, 99pc dc) | WLAN | 8.69 | ± 9.6 % |
| 10759 | AAC | IEEE 802.11ax (160MHz, MCS4, 99pc dc) | WLAN | 8.58 | ± 9.6 % |
| 10760 | AAC | IEEE 802.11ax (160MHz, MCS5, 99pc dc) | WLAN | 8.49 | ± 9.6 % |
| 10761 | AAC | IEEE 802.11ax (160MHz, MCS6, 99pc dc) | WLAN | 8.58 | ± 9.6 % |
| 10762 | AAC | IEEE 802.11ax (160MHz, MCS7, 99pc dc) | WLAN | 8.49 | ± 9.6 % |
| 10763 | AAC | IEEE 802.11ax (160MHz, MCS8, 99pc dc) | WLAN | 8.53 | ± 9.6 % |
| 10764 | AAC | IEEE 802.11ax (160MHz, MCS9, 99pc dc) | WLAN | 8.54 | ± 9.6 % |
| 10765 | AAC | IEEE 802.11ax (160MHz, MCS10, 99pc dc) | WLAN | 8.54 | ± 9.6 % |
| 10766 | AAC | IEEE 802.11ax (160MHz, MCS11, 99pc dc) | WLAN | 8.51 | ± 9.6 % |
| 10767 | AAE | 5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 7.99 | ± 9.6 % |
| 10768 | AAD | 5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.01 | ± 9.6 % |
| 10769 | AAD | 5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.01 | ± 9.6 % |
| 10770 | AAD | 5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.02 | ± 9.6 % |
| 10771 | AAD | 5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.02 | ± 9.6 % |
| 10772 | AAD | 5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.23 | ± 9.6 % |
| 10773 | AAD | 5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.03 | ± 9.6 % |
| 10774 | AAD | 5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.02 | ± 9.6 % |
| 10775 | AAD | 5G NR (CP-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.31 | ± 9.6 % |
| 10776 | AAD | 5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.30 | ± 9.6 % |
| 10777 | AAC | 5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.30 | ± 9.6 % |
| 10778 | AAD | 5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.34 | ± 9.6 % |
| 10779 | AAC | 5G NR (CP-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.42 | ± 9.6 % |
| 10780 | AAD | 5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.38 | ± 9.6 % |
| 10781 | AAD | 5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.38 | ± 9.6 % |
| 10782 | AAD | 5G NR (CP-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.43 | ± 9.6 % |
| 10783 | AAE | 5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.31 | ± 9.6 % |
| 10784 | AAD | 5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.29 | ± 9.6 % |

| | | | | | |
|-------|-----|---|---------------|------|---------|
| 10785 | AAD | 5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.40 | ± 9.6 % |
| 10786 | AAD | 5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.35 | ± 9.6 % |
| 10787 | AAD | 5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.44 | ± 9.6 % |
| 10788 | AAD | 5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.39 | ± 9.6 % |
| 10789 | AAD | 5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.37 | ± 9.6 % |
| 10790 | AAD | 5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.39 | ± 9.6 % |
| 10791 | AAE | 5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 7.83 | ± 9.6 % |
| 10792 | AAD | 5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 7.92 | ± 9.6 % |
| 10793 | AAD | 5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 7.95 | ± 9.6 % |
| 10794 | AAD | 5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 7.82 | ± 9.6 % |
| 10795 | AAD | 5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 7.84 | ± 9.6 % |
| 10796 | AAD | 5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 7.82 | ± 9.6 % |
| 10797 | AAD | 5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.01 | ± 9.6 % |
| 10798 | AAD | 5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 7.89 | ± 9.6 % |
| 10799 | AAD | 5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 7.93 | ± 9.6 % |
| 10801 | AAD | 5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 7.89 | ± 9.6 % |
| 10802 | AAD | 5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 7.87 | ± 9.6 % |
| 10803 | AAD | 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 7.93 | ± 9.6 % |
| 10805 | AAD | 5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.34 | ± 9.6 % |
| 10806 | AAD | 5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.37 | ± 9.6 % |
| 10809 | AAD | 5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.34 | ± 9.6 % |
| 10810 | AAD | 5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.34 | ± 9.6 % |
| 10812 | AAD | 5G NR (CP-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.35 | ± 9.6 % |
| 10817 | AAE | 5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.35 | ± 9.6 % |
| 10818 | AAD | 5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.34 | ± 9.6 % |
| 10819 | AAD | 5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.33 | ± 9.6 % |
| 10820 | AAD | 5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.30 | ± 9.6 % |
| 10821 | AAD | 5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.41 | ± 9.6 % |
| 10822 | AAD | 5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.41 | ± 9.6 % |
| 10823 | AAD | 5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.36 | ± 9.6 % |
| 10824 | AAD | 5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.39 | ± 9.6 % |
| 10825 | AAD | 5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.41 | ± 9.6 % |
| 10827 | AAD | 5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.42 | ± 9.6 % |
| 10828 | AAD | 5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.43 | ± 9.6 % |
| 10829 | AAD | 5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.40 | ± 9.6 % |
| 10830 | AAD | 5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 7.63 | ± 9.6 % |
| 10831 | AAD | 5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 7.73 | ± 9.6 % |
| 10832 | AAD | 5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 7.74 | ± 9.6 % |
| 10833 | AAD | 5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 7.70 | ± 9.6 % |
| 10834 | AAD | 5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 7.75 | ± 9.6 % |
| 10835 | AAD | 5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 7.70 | ± 9.6 % |
| 10836 | AAD | 5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 7.66 | ± 9.6 % |
| 10837 | AAD | 5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 7.68 | ± 9.6 % |
| 10839 | AAD | 5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 7.70 | ± 9.6 % |
| 10840 | AAD | 5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 7.67 | ± 9.6 % |
| 10841 | AAD | 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 7.71 | ± 9.6 % |
| 10843 | AAD | 5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 8.49 | ± 9.6 % |
| 10844 | AAD | 5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 8.34 | ± 9.6 % |
| 10846 | AAD | 5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 8.41 | ± 9.6 % |
| 10854 | AAD | 5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 8.34 | ± 9.6 % |
| 10855 | AAD | 5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 8.36 | ± 9.6 % |
| 10856 | AAD | 5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 8.37 | ± 9.6 % |
| 10857 | AAD | 5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 8.35 | ± 9.6 % |
| 10858 | AAD | 5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 8.36 | ± 9.6 % |
| 10859 | AAD | 5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 8.34 | ± 9.6 % |
| 10860 | AAD | 5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 8.41 | ± 9.6 % |

| | | | | | |
|-------|-----|--|---------------|------|---------|
| 10861 | AAD | 5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 8.40 | ± 9.6 % |
| 10863 | AAD | 5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 8.41 | ± 9.6 % |
| 10864 | AAD | 5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 8.37 | ± 9.6 % |
| 10865 | AAD | 5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 8.41 | ± 9.6 % |
| 10866 | AAD | 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.68 | ± 9.6 % |
| 10868 | AAD | 5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.89 | ± 9.6 % |
| 10869 | AAD | 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz) | 5G NR FR2 TDD | 5.75 | ± 9.6 % |
| 10870 | AAD | 5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz) | 5G NR FR2 TDD | 5.86 | ± 9.6 % |
| 10871 | AAD | 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz) | 5G NR FR2 TDD | 5.75 | ± 9.6 % |
| 10872 | AAD | 5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz) | 5G NR FR2 TDD | 6.52 | ± 9.6 % |
| 10873 | AAD | 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz) | 5G NR FR2 TDD | 6.61 | ± 9.6 % |
| 10874 | AAD | 5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz) | 5G NR FR2 TDD | 6.65 | ± 9.6 % |
| 10875 | AAD | 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz) | 5G NR FR2 TDD | 7.78 | ± 9.6 % |
| 10876 | AAD | 5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz) | 5G NR FR2 TDD | 8.39 | ± 9.6 % |
| 10877 | AAD | 5G NR (CP-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz) | 5G NR FR2 TDD | 7.95 | ± 9.6 % |
| 10878 | AAD | 5G NR (CP-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz) | 5G NR FR2 TDD | 8.41 | ± 9.6 % |
| 10879 | AAD | 5G NR (CP-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz) | 5G NR FR2 TDD | 8.12 | ± 9.6 % |
| 10880 | AAD | 5G NR (CP-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz) | 5G NR FR2 TDD | 8.38 | ± 9.6 % |
| 10881 | AAD | 5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz) | 5G NR FR2 TDD | 5.75 | ± 9.6 % |
| 10882 | AAD | 5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz) | 5G NR FR2 TDD | 5.96 | ± 9.6 % |
| 10883 | AAD | 5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz) | 5G NR FR2 TDD | 6.57 | ± 9.6 % |
| 10884 | AAD | 5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz) | 5G NR FR2 TDD | 6.53 | ± 9.6 % |
| 10885 | AAD | 5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz) | 5G NR FR2 TDD | 6.61 | ± 9.6 % |
| 10886 | AAD | 5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz) | 5G NR FR2 TDD | 6.65 | ± 9.6 % |
| 10887 | AAD | 5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz) | 5G NR FR2 TDD | 7.78 | ± 9.6 % |
| 10888 | AAD | 5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz) | 5G NR FR2 TDD | 8.35 | ± 9.6 % |
| 10889 | AAD | 5G NR (CP-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz) | 5G NR FR2 TDD | 8.02 | ± 9.6 % |
| 10890 | AAD | 5G NR (CP-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz) | 5G NR FR2 TDD | 8.40 | ± 9.6 % |
| 10891 | AAD | 5G NR (CP-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz) | 5G NR FR2 TDD | 8.13 | ± 9.6 % |
| 10892 | AAD | 5G NR (CP-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz) | 5G NR FR2 TDD | 8.41 | ± 9.6 % |
| 10897 | AAC | 5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.66 | ± 9.6 % |
| 10898 | AAB | 5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.67 | ± 9.6 % |
| 10899 | AAB | 5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.67 | ± 9.6 % |
| 10900 | AAB | 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.68 | ± 9.6 % |
| 10901 | AAB | 5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.68 | ± 9.6 % |
| 10902 | AAB | 5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.68 | ± 9.6 % |
| 10903 | AAB | 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.68 | ± 9.6 % |
| 10904 | AAB | 5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.68 | ± 9.6 % |
| 10905 | AAB | 5G NR (DFT-s-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.68 | ± 9.6 % |
| 10906 | AAB | 5G NR (DFT-s-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.68 | ± 9.6 % |
| 10907 | AAC | 5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.78 | ± 9.6 % |
| 10908 | AAB | 5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.93 | ± 9.6 % |
| 10909 | AAB | 5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.96 | ± 9.6 % |
| 10910 | AAB | 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.83 | ± 9.6 % |
| 10911 | AAB | 5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.93 | ± 9.6 % |
| 10912 | AAB | 5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.84 | ± 9.6 % |
| 10913 | AAB | 5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.84 | ± 9.6 % |
| 10914 | AAB | 5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.85 | ± 9.6 % |
| 10915 | AAB | 5G NR (DFT-s-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.83 | ± 9.6 % |
| 10916 | AAB | 5G NR (DFT-s-OFDM, 50% RB, 80 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.87 | ± 9.6 % |
| 10917 | AAB | 5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.94 | ± 9.6 % |
| 10918 | AAC | 5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.86 | ± 9.6 % |
| 10919 | AAB | 5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.86 | ± 9.6 % |
| 10920 | AAB | 5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.87 | ± 9.6 % |
| 10921 | AAB | 5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.84 | ± 9.6 % |
| 10922 | AAB | 5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.82 | ± 9.6 % |

| | | | | | |
|-------|-----|---|---------------|-------|---------|
| 10923 | AAB | 5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.84 | ± 9.6 % |
| 10924 | AAB | 5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.84 | ± 9.6 % |
| 10925 | AAB | 5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.95 | ± 9.6 % |
| 10926 | AAB | 5G NR (DFT-s-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.84 | ± 9.6 % |
| 10927 | AAB | 5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.94 | ± 9.6 % |
| 10928 | AAC | 5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.52 | ± 9.6 % |
| 10929 | AAC | 5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.52 | ± 9.6 % |
| 10930 | AAC | 5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.52 | ± 9.6 % |
| 10931 | AAC | 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.51 | ± 9.6 % |
| 10932 | AAC | 5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.51 | ± 9.6 % |
| 10933 | AAC | 5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.51 | ± 9.6 % |
| 10934 | AAC | 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.51 | ± 9.6 % |
| 10935 | AAD | 5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.51 | ± 9.6 % |
| 10936 | AAC | 5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.90 | ± 9.6 % |
| 10937 | AAC | 5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.77 | ± 9.6 % |
| 10938 | AAC | 5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.90 | ± 9.6 % |
| 10939 | AAC | 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.82 | ± 9.6 % |
| 10940 | AAC | 5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.89 | ± 9.6 % |
| 10941 | AAC | 5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.83 | ± 9.6 % |
| 10942 | AAC | 5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.85 | ± 9.6 % |
| 10943 | AAD | 5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.95 | ± 9.6 % |
| 10944 | AAC | 5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.81 | ± 9.6 % |
| 10945 | AAC | 5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.85 | ± 9.6 % |
| 10946 | AAC | 5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.83 | ± 9.6 % |
| 10947 | AAC | 5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.87 | ± 9.6 % |
| 10948 | AAC | 5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.94 | ± 9.6 % |
| 10949 | AAC | 5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.87 | ± 9.6 % |
| 10950 | AAC | 5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.94 | ± 9.6 % |
| 10951 | AAD | 5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz) | 5G NR FR1 FDD | 5.92 | ± 9.6 % |
| 10952 | AAA | 5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz) | 5G NR FR1 FDD | 8.25 | ± 9.6 % |
| 10953 | AAA | 5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz) | 5G NR FR1 FDD | 8.15 | ± 9.6 % |
| 10954 | AAA | 5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz) | 5G NR FR1 FDD | 8.23 | ± 9.6 % |
| 10955 | AAA | 5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz) | 5G NR FR1 FDD | 8.42 | ± 9.6 % |
| 10956 | AAA | 5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz) | 5G NR FR1 FDD | 8.14 | ± 9.6 % |
| 10957 | AAA | 5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz) | 5G NR FR1 FDD | 8.31 | ± 9.6 % |
| 10958 | AAA | 5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) | 5G NR FR1 FDD | 8.61 | ± 9.6 % |
| 10959 | AAA | 5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz) | 5G NR FR1 FDD | 8.33 | ± 9.6 % |
| 10960 | AAC | 5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz) | 5G NR FR1 TDD | 9.32 | ± 9.6 % |
| 10961 | AAB | 5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz) | 5G NR FR1 TDD | 9.36 | ± 9.6 % |
| 10962 | AAB | 5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz) | 5G NR FR1 TDD | 9.40 | ± 9.6 % |
| 10963 | AAB | 5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz) | 5G NR FR1 TDD | 9.55 | ± 9.6 % |
| 10964 | AAC | 5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz) | 5G NR FR1 TDD | 9.29 | ± 9.6 % |
| 10965 | AAB | 5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz) | 5G NR FR1 TDD | 9.37 | ± 9.6 % |
| 10966 | AAB | 5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) | 5G NR FR1 TDD | 9.55 | ± 9.6 % |
| 10967 | AAB | 5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz) | 5G NR FR1 TDD | 9.42 | ± 9.6 % |
| 10968 | AAB | 5G NR DL (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 kHz) | 5G NR FR1 TDD | 9.49 | ± 9.6 % |
| 10972 | AAB | 5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 11.59 | ± 9.6 % |
| 10973 | AAB | 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 9.06 | ± 9.6 % |
| 10974 | AAB | 5G NR (CP-OFDM, 100% RB, 100 MHz, 256-QAM, 30 kHz) | 5G NR FR1 TDD | 10.28 | ± 9.6 % |
| 10978 | AAA | ULLA BDR | ULLA | 2.23 | ± 9.6 % |
| 10979 | AAA | ULLA HDR4 | ULLA | 7.02 | ± 9.6 % |
| 10980 | AAA | ULLA HDR8 | ULLA | 8.82 | ± 9.6 % |
| 10981 | AAA | ULLA HDRp4 | ULLA | 1.50 | ± 9.6 % |
| 10982 | AAA | ULLA HDRp8 | ULLA | 1.44 | ± 9.6 % |

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Appendix E – Dipole Calibration Data Sheets

gm

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **5G-Veri30-1091_Nov21**

CALIBRATION CERTIFICATE

Object **5G Verification Source 30 GHz - SN: 1091**

Calibration procedure(s) **QA CAL-45.v3
Calibration procedure for sources in air above 6 GHz**

Calibration date: **November 05, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-------------------------|----------|-------------------------------------|-----------------------|
| Reference Probe EUmmWV3 | SN: 9374 | 2020-12-30 (No. EUmmWV3-9374_Dec20) | Dec-21 |
| DAE4ip | SN: 1602 | 2021-06-25 (No. DAE4ip-1602_Jun21) | Jun-22 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---------------------|------|-----------------------|-----------------|
| | | | |

| | | |
|----------------|------------------------------|--|
| Calibrated by: | Name Leif Klysner | Function Laboratory Technician |
| Approved by: | Name Katja Pokovic | Function Technical Manager |

Signature

Issued: November 5, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary

CW Continuous wave

Calibration is Performed According to the Following Standards

- Internal procedure QA CAL-45-5Gsources
- IEC TR 63170 ED1, "Measurement procedure for the evaluation of power density related to human exposure to radio frequency fields from wireless communication devices operating between 6 GHz and 100 GHz", January 2018

Methods Applied and Interpretation of Parameters

- *Coordinate System:* z-axis in the waveguide horn boresight, x-axis is in the direction of the E-field, y-axis normal to the others in the field scanning plane parallel to the horn flare and horn flange.
- *Measurement Conditions:* (1) 10 GHz: The radiated power is the forward power to the horn antenna minus ohmic and mismatch loss. During the measurements, the horn is directly connected to the cable and the antenna ohmic and mismatch losses are determined by far-field measurements. (2) 30, 45, 60 and 90 GHz: The verification sources are switched on for at least 30 minutes. Absorbers are used around the probe cub and at the ceiling to minimize reflections.
- *Horn Positioning:* The waveguide horn is mounted vertically on the flange of the waveguide source to allow vertical positioning of the EUmmW probe during the scan. The plane is parallel to the phantom surface. Probe distance is verified using mechanical gauges positioned on the flare of the horn.
- *E- field distribution:* E field is measured in two x-y-plane (10mm, 10mm + $\lambda/4$) with a vectorial E-field probe. The E-field value stated as calibration value represents the E-field-maxima and the averaged (1cm² and 4cm²) power density values at 10mm in front of the horn.
- *Field polarization:* Above the open horn, linear polarization of the field is expected. This is verified graphically in the field representation.

Calibrated Quantity

- Local peak E-field (V/m) and average of peak spatial components of the poynting vector (W/m²) averaged over the surface area of 1 cm² and 4cm² at the nominal operational frequency of the verification source. Both square and circular averaging results are listed.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|---------------------------------------|-------------------------------|------|
| DASY Version | cDASY6 Module mmWave | V2.4 |
| Phantom | 5G Phantom | |
| Distance Horn Aperture - plane | 10 mm | |
| XY Scan Resolution | dx, dy = 2.5 mm | |
| Number of measured planes | 2 (10mm, 10mm + $\lambda/4$) | |
| Frequency | 30 GHz \pm 100 MHz | |

Calibration Parameters, 30 GHz

Circular Averaging

| Distance Horn Aperture to Measured Plane | <i>Prad</i>¹ (mW) | Max E-field (V/m) | Uncertainty (k = 2) | Avg Power Density Avg (psPDn+, psPDtot+, psPDmod+) (W/m ²) | | Uncertainty (k = 2) |
|--|---|------------------------------------|------------------------|--|-------------------|------------------------|
| | | | | 1 cm ² | 4 cm ² | |
| 10 mm | 38.2 | 142 | 1.27 dB | 46.9 | 40.6 | 1.28 dB |

Square Averaging

| Distance Horn Aperture to Measured Plane | <i>Prad</i>¹ (mW) | Max E-field (V/m) | Uncertainty (k = 2) | Avg Power Density Avg (psPDn+, psPDtot+, psPDmod+) (W/m ²) | | Uncertainty (k = 2) |
|--|---|------------------------------------|------------------------|--|-------------------|------------------------|
| | | | | 1 cm ² | 4 cm ² | |
| 10 mm | 38.2 | 142 | 1.27 dB | 46.9 | 40.4 | 1.28 dB |

¹ derived from far-field data

DASY Report

Measurement Report for 5G Verification Source 30 GHz, UID 0 -, Channel 30000 (30000.0MHz)

Device under Test Properties

| Name, Manufacturer | Dimensions [mm] | IMEI | DUT Type |
|-------------------------------|-----------------------|----------|----------|
| 5G Verification Source 30 GHz | 100.0 x 100.0 x 100.0 | SN: 1091 | - |

Exposure Conditions

| Phantom Section | Position, Test Distance [mm] | Band | Group, | Frequency [MHz], Channel Number | Conversion Factor |
|-----------------|------------------------------|-----------------|--------|---------------------------------|-------------------|
| 5G - | 5.55 mm | Validation band | CW | 30000.0, 30000 | 1.0 |


Hardware Setup

| Phantom | Medium | Probe, Calibration Date | DAE, Calibration Date |
|-----------------------|--------|---------------------------------------|---------------------------|
| mmWave Phantom - 1002 | Air | EUmmWV3 - SN9374_F1-78GHz, 2020-12-30 | DAE4ip Sn1602, 2021-06-25 |

Scan Setup

| | 5G Scan | | 5G Scan |
|---------------------|---------------|------------------------------|-------------------|
| Grid Extents [mm] | 60.0 x 60.0 | Date | 2021-11-05, 15:31 |
| Grid Steps [lambda] | 0.25 x 0.25 | Avg. Area [cm ²] | 1.00 |
| Sensor Surface [mm] | 5.55 | psPDn+ [W/m ²] | 46.6 |
| MAIA | MAIA not used | psPDtot+ [W/m ²] | 47.0 |
| | | psPDmod+ [W/m ²] | 47.1 |
| | | E _{max} [V/m] | 142 |
| | | Power Drift [dB] | -0.01 |

Measurement Results

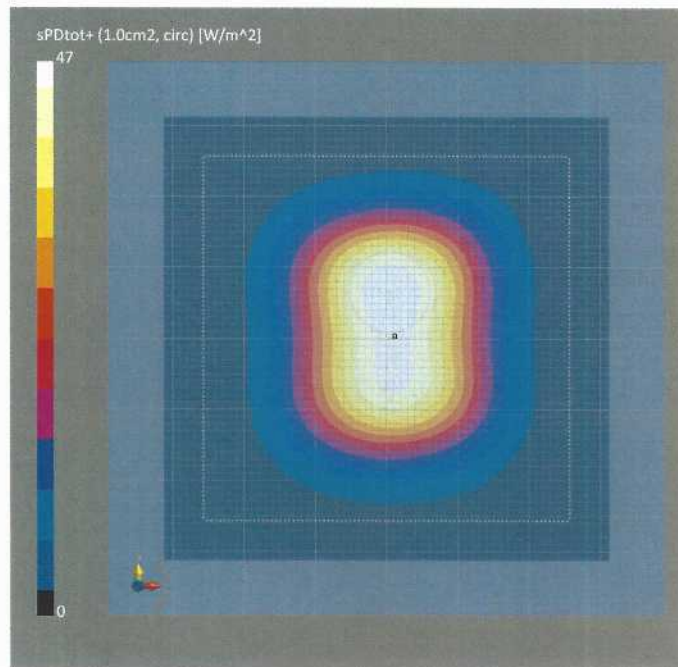

DASY Report

Measurement Report for 5G Verification Source 30 GHz, UID 0 -, Channel 30000 (30000.0MHz)

Device under Test Properties

| Name, Manufacturer | Dimensions [mm] | IMEI | DUT Type |
|-------------------------------|-----------------------|----------|----------|
| 5G Verification Source 30 GHz | 100.0 x 100.0 x 100.0 | SN: 1091 | - |

Exposure Conditions

| Phantom Section | Position, Test Distance [mm] | Band | Group, | Frequency [MHz], Channel Number | Conversion Factor |
|-----------------|------------------------------|-----------------|--------|---------------------------------|-------------------|
| 5G - | 5.55 mm | Validation band | CW | 30000.0, 30000 | 1.0 |

Hardware Setup


| Phantom | Medium | Probe, Calibration Date | DAE, Calibration Date |
|-----------------------|--------|---------------------------------------|---------------------------|
| mmWave Phantom - 1002 | Air | EUmmWV3 - SN9374_F1-78GHz, 2020-12-30 | DAE4ip Sn1602, 2021-06-25 |

Scan Setup

| | 5G Scan |
|---------------------|---------------|
| Grid Extents [mm] | 60.0 x 60.0 |
| Grid Steps [lambda] | 0.25 x 0.25 |
| Sensor Surface [mm] | 5.55 |
| MAIA | MAIA not used |

Measurement Results

| | 5G Scan |
|------------------------------|-------------------|
| Date | 2021-11-05, 15:31 |
| Avg. Area [cm ²] | 4.00 |
| psPDn+ [W/m ²] | 40.2 |
| psPDtot+ [W/m ²] | 40.7 |
| psPDmod+ [W/m ²] | 40.8 |
| E _{max} [V/m] | 142 |
| Power Drift [dB] | -0.01 |

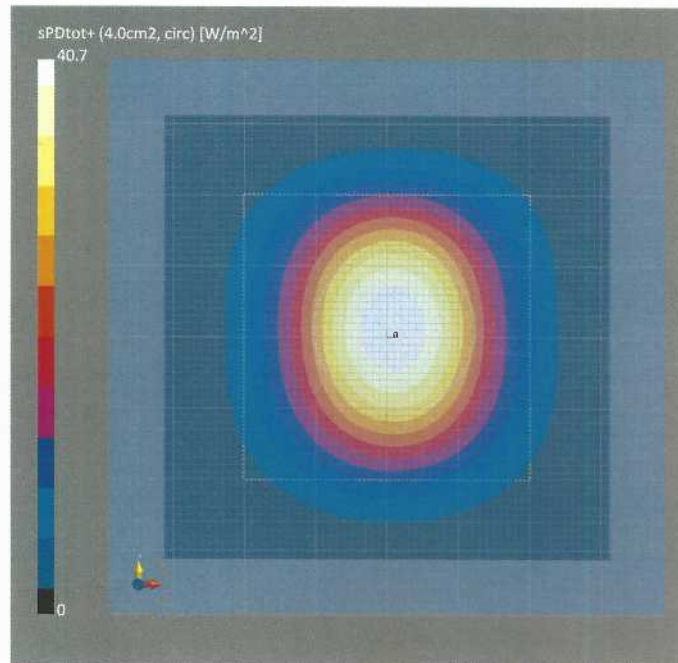

DASY Report

Measurement Report for 5G Verification Source 30 GHz, UID 0 -, Channel 30000 (30000.0MHz)

Device under Test Properties

| Name, Manufacturer | Dimensions [mm] | IMEI | DUT Type |
|-------------------------------|-----------------------|----------|----------|
| 5G Verification Source 30 GHz | 100.0 x 100.0 x 100.0 | SN: 1091 | - |

Exposure Conditions

| Phantom Section | Position, Test Distance [mm] | Band | Group, | Frequency [MHz], Channel Number | Conversion Factor |
|-----------------|------------------------------|-----------------|--------|---------------------------------|-------------------|
| 5G - | 5.55 mm | Validation band | CW | 30000.0, 30000 | 1.0 |

Hardware Setup


| Phantom | Medium | Probe, Calibration Date | DAE, Calibration Date |
|-----------------------|--------|---------------------------------------|---------------------------|
| mmWave Phantom - 1002 | Air | EUmmWV3 - SN9374_F1-78GHz, 2020-12-30 | DAE4ip Sn1602, 2021-06-25 |

Scan Setup

| | 5G Scan |
|---------------------|---------------|
| Grid Extents [mm] | 60.0 x 60.0 |
| Grid Steps [lambda] | 0.25 x 0.25 |
| Sensor Surface [mm] | 5.55 |
| MAIA | MAIA not used |

Measurement Results

| | 5G Scan |
|------------------------------|-------------------|
| Date | 2021-11-05, 15:31 |
| Avg. Area [cm ²] | 1.00 |
| psPDn+ [W/m ²] | 46.6 |
| psPDtot+ [W/m ²] | 47.0 |
| psPDmod+ [W/m ²] | 47.1 |
| E _{max} [V/m] | 142 |
| Power Drift [dB] | -0.01 |

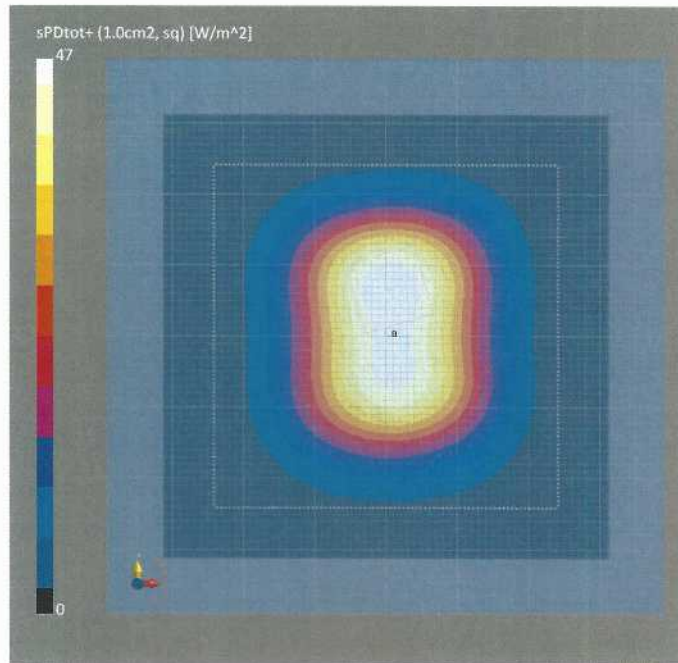

DASY Report

Measurement Report for 5G Verification Source 30 GHz, UID 0 -, Channel 30000 (30000.0MHz)

Device under Test Properties

| Name, Manufacturer | Dimensions [mm] | IMEI | DUT Type |
|-------------------------------|-----------------------|----------|----------|
| 5G Verification Source 30 GHz | 100.0 x 100.0 x 100.0 | SN: 1091 | - |

Exposure Conditions


| Phantom Section | Position, Test Distance [mm] | Band | Group, | Frequency [MHz], Channel Number | Conversion Factor |
|-----------------|------------------------------|-----------------|--------|---------------------------------|-------------------|
| 5G - | 5.55 mm | Validation band | CW | 30000.0, 30000 | 1.0 |

Hardware Setup

| Phantom | Medium | Probe, Calibration Date | DAE, Calibration Date |
|-----------------------|--------|---------------------------------------|---------------------------|
| mmWave Phantom - 1002 | Air | EUmmWV3 - SN9374_F1-78GHz, 2020-12-30 | DAE4ip Sn1602, 2021-06-25 |

Scan Setup

| | 5G Scan | Measurement Results | 5G Scan |
|---------------------|---------------|------------------------------|-------------------|
| Grid Extents [mm] | 60.0 x 60.0 | Date | 2021-11-05, 15:31 |
| Grid Steps [lambda] | 0.25 x 0.25 | Avg. Area [cm ²] | 4.00 |
| Sensor Surface [mm] | 5.55 | psPDn+ [W/m ²] | 40.0 |
| MAIA | MAIA not used | psPDtot+ [W/m ²] | 40.6 |
| | | psPDmod+ [W/m ²] | 40.7 |
| | | E _{max} [V/m] | 142 |
| | | Power Drift [dB] | -0.01 |

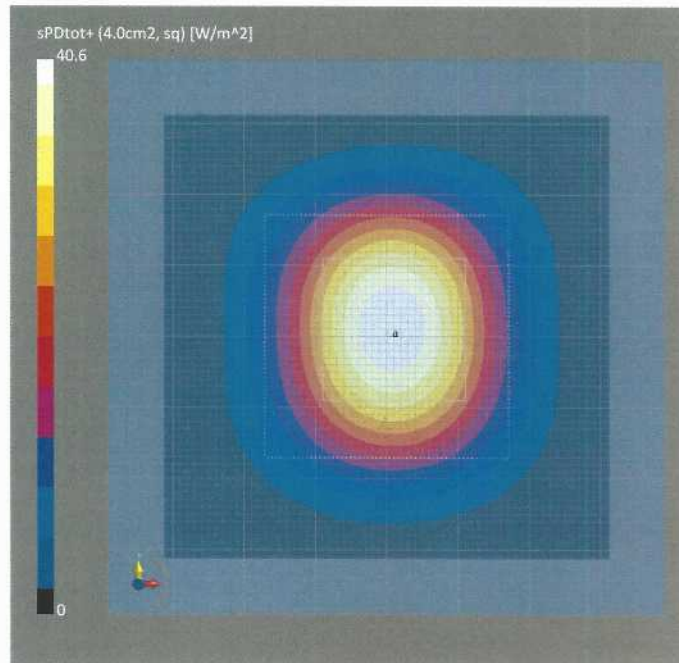

Appendix F – DAE Calibration Data Sheets

gm

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **DAE4-759_Aug21**

CALIBRATION CERTIFICATE

Object **DAE4 - SD 000 D04 BM - SN: 759**

Calibration procedure(s) **QA CAL-06.v30
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **August 06, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-------------------------------|--------------------|----------------------------|------------------------|
| Keithley Multimeter Type 2001 | SN: 0810278 | 07-Sep-20 (No:28647) | Sep-21 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Auto DAE Calibration Unit | SE UWS 053 AA 1001 | 07-Jan-21 (in house check) | In house check: Jan-22 |
| Calibrator Box V2.1 | SE UMS 006 AA 1002 | 07-Jan-21 (in house check) | In house check: Jan-22 |

Calibrated by: **Name** **Adrian Gehring** **Function** **Laboratory Technician**

Signature

Approved by: **Name** **Sven Kühn** **Function** **Deputy Manager**

Issued: August 6, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary

| | |
|-----------------|---|
| DAE | data acquisition electronics |
| Connector angle | information used in DASY system to align probe sensor X to the robot coordinate system. |

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - *DC Voltage Measurement Linearity:* Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - *Common mode sensitivity:* Influence of a positive or negative common mode voltage on the differential measurement.
 - *Channel separation:* Influence of a voltage on the neighbor channels not subject to an input voltage.
 - *AD Converter Values with inputs shorted:* Values on the internal AD converter corresponding to zero input voltage
 - *Input Offset Measurement:* Output voltage and statistical results over a large number of zero voltage measurements.
 - *Input Offset Current:* Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - *Input resistance:* Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - *Low Battery Alarm Voltage:* Typical value for information. Below this voltage, a battery alarm signal is generated.
 - *Power consumption:* Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X | Y | Z |
|---------------------|---------------------------|---------------------------|---------------------------|
| High Range | 406.182 \pm 0.02% (k=2) | 406.040 \pm 0.02% (k=2) | 406.445 \pm 0.02% (k=2) |
| Low Range | 3.94427 \pm 1.50% (k=2) | 4.00885 \pm 1.50% (k=2) | 3.98588 \pm 1.50% (k=2) |

Connector Angle

| | |
|---|-------------------------------------|
| Connector Angle to be used in DASY system | 215.0 $^{\circ}$ \pm 1 $^{\circ}$ |
|---|-------------------------------------|

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

| High Range | Reading (μV) | Difference (μV) | Error (%) |
|-------------------|---------------------------|------------------------------|-----------|
| Channel X + Input | 199994.92 | 0.64 | 0.00 |
| Channel X + Input | 20001.02 | -1.00 | -0.00 |
| Channel X - Input | -19997.18 | 4.49 | -0.02 |
| Channel Y + Input | 199992.26 | -1.79 | -0.00 |
| Channel Y + Input | 19999.15 | -2.88 | -0.01 |
| Channel Y - Input | -20000.35 | 1.33 | -0.01 |
| Channel Z + Input | 199991.45 | -2.41 | -0.00 |
| Channel Z + Input | 20000.30 | -1.58 | -0.01 |
| Channel Z - Input | -20000.57 | 1.13 | -0.01 |

| Low Range | Reading (μV) | Difference (μV) | Error (%) |
|-------------------|---------------------------|------------------------------|-----------|
| Channel X + Input | 2001.40 | 0.21 | 0.01 |
| Channel X + Input | 201.61 | 0.02 | 0.01 |
| Channel X - Input | -198.67 | -0.34 | 0.17 |
| Channel Y + Input | 2001.23 | 0.17 | 0.01 |
| Channel Y + Input | 202.03 | 0.61 | 0.30 |
| Channel Y - Input | -198.26 | 0.29 | -0.15 |
| Channel Z + Input | 2001.20 | 0.24 | 0.01 |
| Channel Z + Input | 200.63 | -0.68 | -0.34 |
| Channel Z - Input | -199.57 | -0.95 | 0.48 |

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | Common mode Input Voltage (mV) | High Range Average Reading (μV) | Low Range Average Reading (μV) |
|-----------|--------------------------------|--|---|
| Channel X | 200 | 4.14 | 3.47 |
| | - 200 | -2.62 | -3.68 |
| Channel Y | 200 | 8.10 | 7.77 |
| | - 200 | -8.17 | -8.30 |
| Channel Z | 200 | -15.31 | -15.20 |
| | - 200 | 14.52 | 14.37 |

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | Input Voltage (mV) | Channel X (μV) | Channel Y (μV) | Channel Z (μV) |
|-----------|--------------------|-----------------------------|-----------------------------|-----------------------------|
| Channel X | 200 | - | -1.28 | -2.90 |
| Channel Y | 200 | 7.84 | - | -0.31 |
| Channel Z | 200 | 5.21 | 6.87 | - |

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | High Range (LSB) | Low Range (LSB) |
|-----------|------------------|-----------------|
| Channel X | 15741 | 17394 |
| Channel Y | 15669 | 15298 |
| Channel Z | 15954 | 14899 |

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

| | Average (μ V) | min. Offset (μ V) | max. Offset (μ V) | Std. Deviation (μ V) |
|-----------|--------------------|------------------------|------------------------|---------------------------|
| Channel X | 1.11 | -0.52 | 2.46 | 0.59 |
| Channel Y | 0.42 | -0.88 | 1.59 | 0.51 |
| Channel Z | 0.15 | -1.20 | 1.36 | 0.61 |

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

| | Zeroing (kOhm) | Measuring (MOhm) |
|-----------|----------------|------------------|
| Channel X | 200 | 200 |
| Channel Y | 200 | 200 |
| Channel Z | 200 | 200 |

8. Low Battery Alarm Voltage (Typical values for information)

| Typical values | Alarm Level (VDC) |
|----------------|-------------------|
| Supply (+ Vcc) | +7.9 |
| Supply (- Vcc) | -7.6 |

9. Power Consumption (Typical values for information)

| Typical values | Switched off (mA) | Stand by (mA) | Transmitting (mA) |
|----------------|-------------------|---------------|-------------------|
| Supply (+ Vcc) | +0.01 | +6 | +14 |
| Supply (- Vcc) | -0.01 | -8 | -9 |