



## HYUNDAI CALIBRATION & CERTIFICATION TECH. CO., LTD.

PRODUCT COMPLIANCE DIVISION  
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA  
TEL: +82 31 639 8518 FAX: +82 31 639 8525 [www.hct.co.kr](http://www.hct.co.kr)



# HEARING AID COMPATIBILITY CERTIFICATE

## FCC Class II Permissive Change

PANTECH&CURITEL COMMUNICATIONS, INC.

110-1, ONGJEONG-RI, TONGJIN-EUP, GIMPO-SI,  
GYOUNGGI-DO, 415-865, KOREA

Date of Issue: March 16, 2007

Test Report No.: HCT-SAR07-0307

Test Site: HYUNDAI CALIBRATION &  
CERTIFICATIONTECHNOLOGIES CO., LTD.

### FCC ID: PP4OVAL

### APPLICANT: PANTECH&CURITEL COMMUNICATION, INC.

#### Change of contents:

Application Type:

EUT Type:

Tx Frequency:

Maximum Conducted

Power (HAC):

Trade Name/Model(s):

FCC Classification:

FCC Rule Part(s):

HAC Standard:

#### Antenna/ Hardware have been changed

Certification

Dual-Band CDMA Phone with Bluetooth- Prototype

824.70 — 848.31 MHz (CDMA)

1851.25 — 1908.75 MHz (PCS CDMA)

0.316W CDMA (25.0dBm)

0.316W PCS CDMA (25.0dBm)

PANTECH&CURITEL / OVAL

Licensed Portable Transmitter Held to Ear (PCE)

§20.19

ANSI C63.19-2006 V3.12

### Hearing Aid Near-Field Category: M4

This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2006 and had been tested in accordance with the specified measurement procedures. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Hyundai C-Tech Co., Ltd. Certifies that no party to this application has been denied FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 862

Report prepared by: Ki-Soo Kim

Manager of Product Compliance Team

This report only relates to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Table of Contents

---

|  |       |
|--|-------|
| 1. APLICANT / EUT DESCRIPTION .....              | 3     |
| 2. HAC MEASUREMENT SET- UP .....                 | 4     |
| 3. SYSTEM SPECIFICATIONS .....                   | 5-6   |
| 4. EUT ARRANGEMENT .....                         | 7     |
| 5. SYSTEM VALIDATION .....                       | 8-9   |
| 6. PROBE MODULATION FACTOR .....                 | 10-12 |
| 7. FCC 3G MEASUREMENTS – MAY / JUNE 2006 .....   | 13    |
| 8. TEST PROCEDURE .....                          | 14-15 |
| 9. ANSI/IEEE C63.19 PERFORMANCE CATEGORIES ..... | 16    |
| 10. MEASUREMENT UNCERTAINTIES .....              | 17    |
| 11. HAC TEST DATA SUMMARY .....                  | 18-20 |
| 12. HAC TEST EQUIPMENT LIST .....                | 21    |
| 13. CONCLUSION .....                             | 22    |

### Appendix 1 –HAC Data Plots

# HAC MEASUREMENT REPORT

## 1. APPLICANT / EUT DESCRIPTION

### 1.1 Applicant

|               |   |
|---------------|---|
| Company Name: | PANTECH&CURITEL COMMUNICATION, INC.                                       |
| Address:      | 110-1, ONGJEONG-RI, TONGJIN-EUP, GIMPO-SI,<br>GYOUNGGI-DO, 415-865, KOREA |
| Attention:    | Ki Yeoul, LEE   |
| Tel. / Fax :  | +82-31-999-8801 / +82-31-984-9771   |
| E-Mail :      | leekiyeoul@pantech.com  |

### 1.2 EUT Description

- |                         |  |
|-------------------------|--|
| • EUT Type:             | Dual-Band CDMA Phone with Bluetooth - Prototype                |
| • Trade Name:           | PANTECH&CURITEL  |
| • Model(s):             | OVAL   |
| • FCC ID:               | PP4OVAL  |
| • Serial Number(s):     | PP4OVAL2007-0301   |
| • Tx Frequency:         | 824.70 — 848.31 MHz (CDMA)<br>1851.25 — 1908.75 MHz (PCS CDMA) |
| • FCC Classification:   | Licensed Portable Transmitter Held to Ear (PCE)                |
| • FCC Rule Part(s):     | §2.1093; FCC/ OET Bulletin Supplement C [July 2001]            |
| • Modulation(s):        | CDMA/ PCS CDMA   |
| • Antenna Type:         | Intenna  |
| • Date(s) of Tests:     | March 16, 2007   |
| • Place of Tests:       | Hyundai C-Tech. EMC Lab.<br>Icheon, Kyoungki-Do, KOREA         |
| • Report Serial No.:    | HCT-SAR07-0307   |
| • Max E-Field Emission: | channel 1175, 1908.75 MHz= 30.2dBV/m (M4)                      |
| • Max H-Field Emission: | channel 25, 1851.25 MHz = -19.3 dBA/m (M4)                     |

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The PC consists of the HP Pentium IV 3.0 GHz computer with Windows XP system and HAC Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

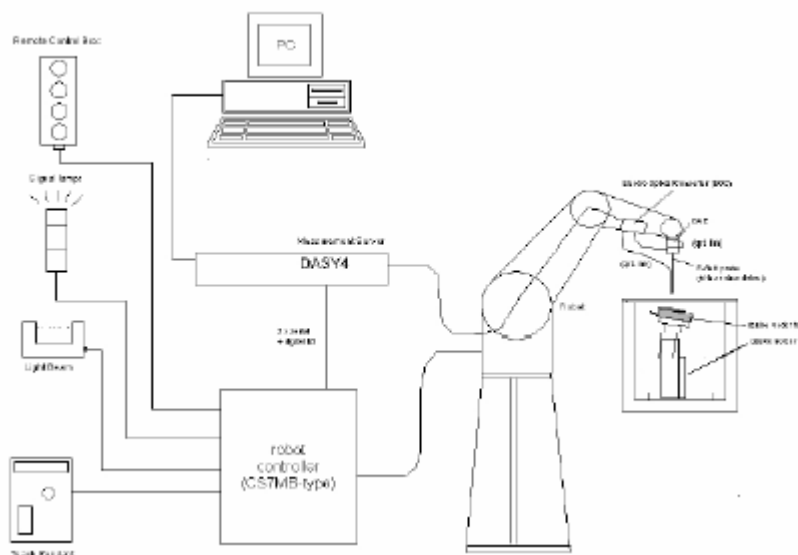



Figure 1. HAC Test Measurement Set-up

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.


### 3. SYSTEM SPECIFICATIONS

#### 3.1 Probe

##### 3.1.1 E-Field Probe Description

|               |   |  |
|---------------|---|--|
| Construction  | One dipole parallel, two dipoles normal to probe axis<br>Built-in shielding against static charges                          |  <p>[ E-Field Probe ]</p> |
| Calibration   | In air from 100 MHz to 3.0 GHz (absolute accuracy $\pm 6.0\%$ , $k=2$ )   |  |
| Frequency     | 100 MHz to > 6 GHz; Linearity: $\pm 0.2\text{dB}$ (100 MHz to 3 GHz)  |  |
| Directivity   | $\pm 0.2\text{ dB}$ in air (rotation around probe axis)<br>$\pm 0.4\text{ dB}$ in air (rotation normal to probe axis)       |  |
| Dynamic Range | 2 V/m to > 1000 V/m<br>(M3 or better device readings fall well below diode compression point)                               |  |
| Linearity     | $\pm 0.2\text{ dB}$   |  |
| Dimensions    | Overall length: 330 mm (Tip: 16mm)<br>Tip diameter: 8 mm (Body: 12 mm)<br>Distance from probe tip to dipole centers: 2.5 mm |  |

##### 3.1.2 H-Field Probe Description

|                      |   |  |
|----------------------|---|--|
| Construction         | Three concentric loop sensors with 3.8 mm loop diameters resistively loaded detector diodes for linear response Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycoether) |  <p>[ H-Field Probe ]</p> |
| Frequency            | 200 MHz to > 3 GHz (absolute accuracy $\pm 6.0\%$ , $k=2$ ); Output linearized  |  |
| Directivity          | $\pm 0.25\text{ dB}$ (spherical isotropy error)   |  |
| Dynamic Range        | 10 mA/m to 2 A/m at 1 GHz   |  |
| E-Field Interference | < 10% at 3 GHz (for plane wave)   |  |
| Dimensions           | Overall length: 330 mm (Tip: 40mm)<br>Tip diameter: 6 mm (Body: 12 mm)<br>Distance from probe tip to dipole centers: 3 mm<br>The closest part of the sensor element is 1.9 mm closer to the tip                                     |  |

### 3.2 Phantom & Device Holder



Figure 2. HAC Phantom & Device Holder

The Test Arch phantom should be positioned horizontally on a stable surface. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

The devices can be easily, accurately, and repeatably positioned according to the FCC specifications.

### 3.3 Robotic System Specifications

#### **Specifications**

**POSITIONER:** Stäubli Unimation Corp. Robot Model: RX90LB

**Repeatability:** 0.02 mm

**No. of axis:** 6

#### **Data Acquisition Electronic (DAE) System**

##### **Cell Controller**

**Processor:** Pentium IV

**Clock Speed:** 3.0 GHz

**Operating System:** Windows XP

**Data Card:** DASY4 PC-Board

##### **Data Converter**

**Features:** Signal Amplifier, multiplexer, A/D converter, and control logic

**Software:** DASY4 software

**Connecting Lines:** Optical downlink for data and status info.

Optical uplink for commands and clock

#### **PC Interface Card**

**Function:** 24 bit (64 MHz) DSP for real time processing  
Link to DAE3  
16 bit A/D converter for surface detection system  
serial link to robot  
direct emergency stop output for robot

## 4. EUT ARRANGEMENT

### 4.1 WD RF Emission Measurements Reference and Plane

Figure 3. Illustrate the references and reference plane that shall be used in the WD emissions measurement.

- The grid is 5 cm by 5 cm area that is divided into 9 evenly sized blocks or sub-grids.
- The grid is centered on the audio frequency output transducer of the WD (speaker or T-coil).
- The grid is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the WD handset, which, in normal handset use, rest against the ear.
- The measurement plane is parallel to, and 1.0 cm in front of, the reference plane.



Figure 3. WD reference and plane for RF emission measurements

## 5. SYSTEM VALIDATION

The test setup was validated when configured and verified periodically thereafter to ensure proper function. The procedure is a validation procedure using dipole antennas for which the field levels were computed by FDTD modeling.

### 5.1 Validation Procedure

Place a dipole antenna meeting the requirements given in ANSI-PC63.19 in the position normally occupied by the WD. The dipole antenna serves as a known source for an electrical and magnetic output. Position the E-field and H-field probes so that:

- the probes and their cables are parallel to the coaxial feed of the dipole antenna
- the probe cables and the coaxial feed of the dipole antenna approach the measurement area from opposite directions; and
- the probes are 10 mm from the surface of the dipole elements.

Scan the length of the dipole with both E-field and H-field probes and record the maximum values for each. Compare the readings to expected values.

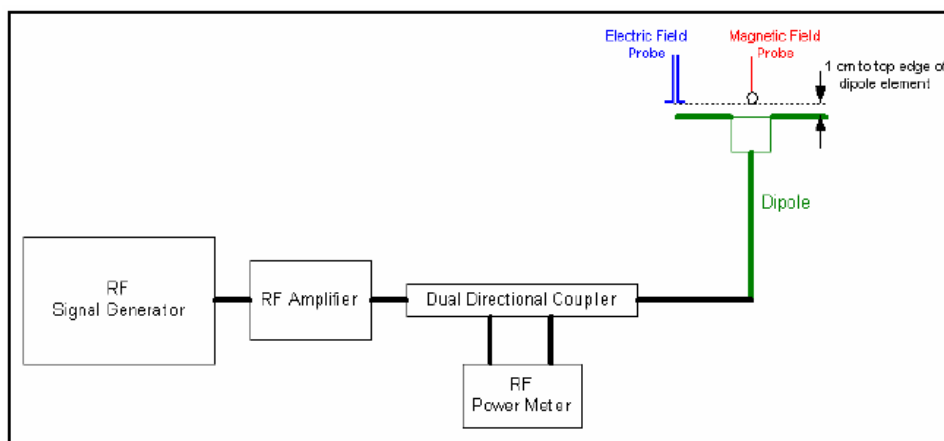


Figure 5. WD dipole calibration procedure

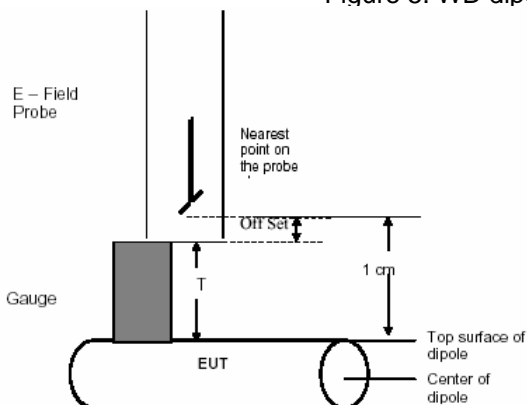


Figure 6. Gauge Block with E-Field Probe

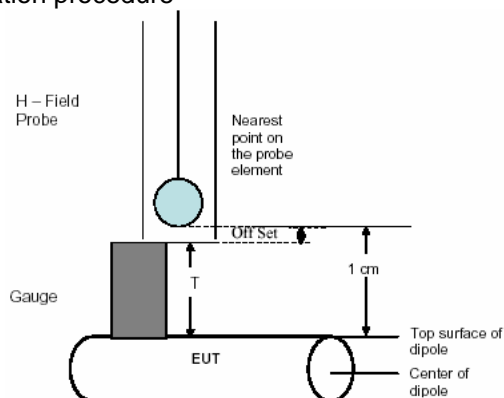


Figure 7. Gauge Block with H-Field Probe



## 5.2 Validation Result

### 5.2.1 E-Field Scan

| Mode | Freq. [MHz] | Input Power (dBm) | Measured Value (V/m) | Target Value (V/m)<br>SPEAG | Deviation [%] | Limit [%] |
|------|-------------|-------------------|----------------------|-----------------------------|---------------|-----------|
| CW   | 835         | 20                | 166.35               | 160.45                      | +3.68         | ±25       |
| CW   | 1880        | 20                | 145.9                | 136.55                      | +6.85         | ±25       |

### 5.2.2 H-Field Scan

| Mode | Freq. [MHz] | Input Power (dBm) | Measured Value (A/m) | Target Value (A/m)<br>SPEAG | Deviation [%] | Limit [%] |
|------|-------------|-------------------|----------------------|-----------------------------|---------------|-----------|
| CW   | 835         | 20                | 0.465                | 0.454                       | +2.42         | ±25       |
| CW   | 1880        | 20                | 0.485                | 0.458                       | +5.90         | ±25       |

#### Notes:

- 1) Deviation (%) = 100 \* (Measured value minus Target value) divided by Target value.  
ANSI-PC63.19 requires values to be within 25% of their targets. 12% is deviation and 13% is measurement uncertainty.
- 2) The maximum E-field or H-field were evaluated and compared to the target values provided by SPEAD in the calibration certificate of specific dipoles.
- 3) Please refer to the attachment for detailed measurement data and plot.

## 6. Probe Modulation Factor

A calibration was made of the modulation response of the probe and its instrumentation chain. This calibration was performed with the field probe, attached to its instrumentation. The response of the probe system to a CW field at the frequency of interest is compared to its response to a modulated signal with equal peak amplitude to that of a CW signal. The field level of the test signals are ensured to be more than 10 dB above the ambient level and the noise floor of the instrumentation being used. The ratio of the CW reading to that taken with a modulated reading was applied to the DUT measurements.

All voice modes for this device have been investigated in this section of the report. According to the FCC 3G Measurement Procedures, May 2006 for RF Emissions, variations in peak field and power readings.

**This was done using the following procedure:**


1. The probe was illuminated with a CW signal at the intended measurement frequency and wireless device power.
2. The probe was positioned at the field maxima over the dipole antenna (determined after an area scan over the dipole) illuminated with the CW signal.
3. The reading of the probe measurement system of the CW signal at the maximum point was recorded.
4. Using a Spectrum Analyzer, the modulated signal adjusted with the same peak level of the CW signal was determined.
5. The probe measurement system reading was recorded with the modulated signal. The appropriate system crest factors for the modulation type were configured in the software to the system measurements.
6. The ratio of the CW reading to modulated signal reading is the probe modulation factor (PMF) for the modulation and field probe combination. This was repeated for 80% AM.
7. Steps 1-6 were repeated at all frequency bands and for both E and H field probes.

The modulation factors obtained were applied to readings taken of the actual wireless device, in order to obtain an accurate peak field reading using the formula:

$$\text{Peak} = 20 \cdot \log (\text{Raw} \cdot \text{PMF})$$


This method correlates well with the modulation using the DUT in the alternative substitution method.

See below for correlation of signal:

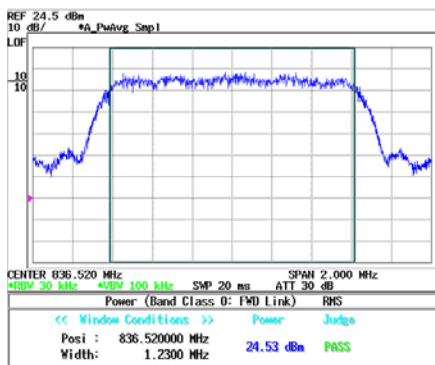

**Figure 19**

Signal Generator Modulated Signal

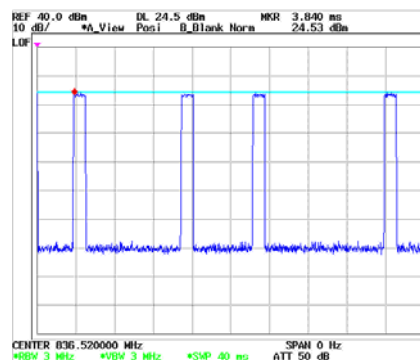

**Figure 20**

Wireless Device Modulated Signal

## 6.2 Modulation Factor

### 6.2.1 E-Field

| Mode             | Freq. [MHz] | Input Power (dB) | E-Field measured value (V/m) | Probe Modulation Factor |
|------------------|-------------|------------------|------------------------------|-------------------------|
| CW               | 835         | 25.0             | 248.6                        | -                       |
| 80% AM           |             | 25.0             | 164.7                        | 1.509                   |
| CDMA (Full Rate) |             | 25.0             | 256.3                        | 0.97                    |
| CDMA (1/8 Rate)  |             | 25.0             | 86.56                        | 2.872                   |
| CW               | 1880        | 25.0             | 258.9                        | -                       |
| 80% AM           |             | 25.0             | 170.2                        | 1.521                   |
| CDMA (Full Rate) |             | 25.0             | 269.7                        | 0.96                    |
| CDMA (1/8 Rate)  |             | 25.0             | 87.47                        | 2.96                    |

### 6.2.2 H-Field


| Mode             | Freq. [MHz] | Input Power (dB) | H-Field measured value (A/m) | Probe Modulation Factor |
|------------------|-------------|------------------|------------------------------|-------------------------|
| CW               | 835         | 25.0             | 1.039                        | -                       |
| 80% AM           |             | 25.0             | 0.742                        | 1.400                   |
| CDMA (Full Rate) |             | 25.0             | 1.21                         | 0.859                   |
| CDMA (1/8 Rate)  |             | 25.0             | 0.370                        | 2.810                   |
| CW               | 1880        | 25.0             | 0.861                        | -                       |
| 80% AM           |             | 25.0             | 0.606                        | 1.42                    |
| CDMA (Full Rate) |             | 25.0             | 1.060                        | 0.812                   |
| CDMA (1/8 Rate)  |             | 25.0             | 0.298                        | 2.89                    |

Notes:

- 1) Modulation Factor = CW / WD\_CDMA


## 6.2.3 PMF Peak Power Measurement Plots

### Probe Modulation Factor (CW)

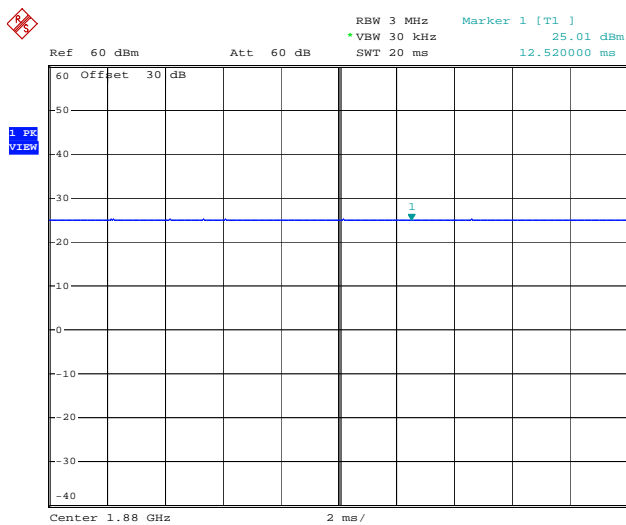


Comment: CW\_83MHz  
 Date: 15.DEC.2006 08:38:35

### Probe Modulation Factor (AM 80%)

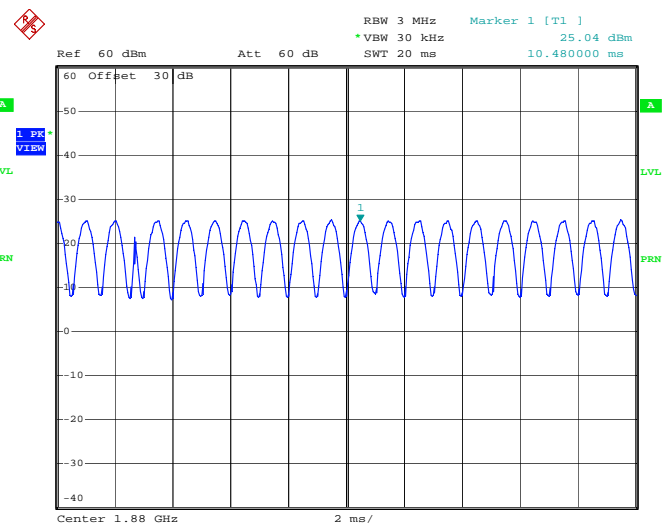


Date: 15.DEC.2006 09:28:04

### Probe Modulation Factor (CDMA: full rate)

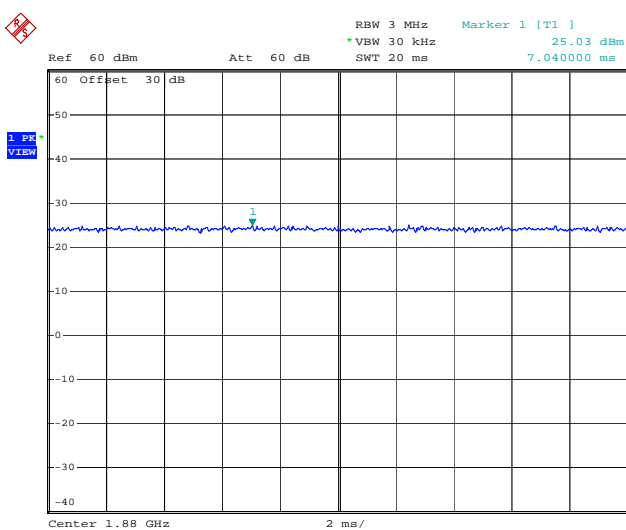

Date: 15.DEC.2006 09:17:16

### Probe Modulation Factor (CDMA: 1/8 rate)

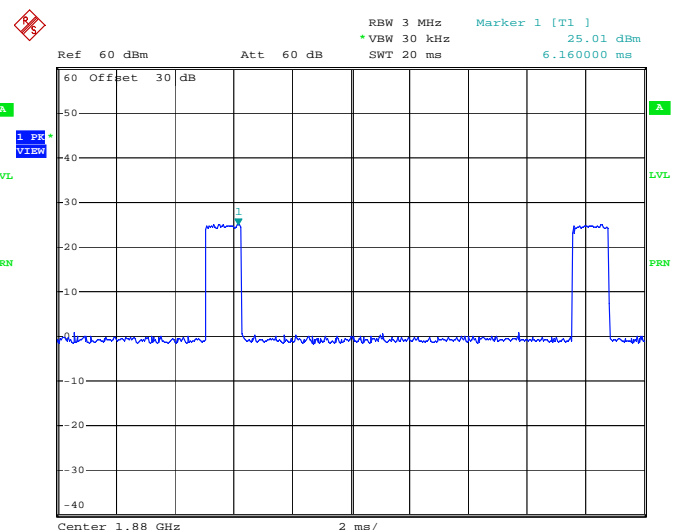

Date: 15.DEC.2006 09:18:54

## Spectrum Analyzer Settings

- Input Power: 25.0dBm
- RBW: 3MHz
- Video Bandwidth: 30 kHz
- Span: Zero
- Sweep Time: 20ms
- Detection: Peak detection

## 7. FCC 3G MEASUREMENTS – MAY / JUNE 2006

Sample pre-testing of the various modes were performed at the worst case probe location as part of subset testing justification. See below for measured conducted power for applicable device modes:

### 7.1 Handset Measured Conducted Powers

FCC 3G Measured Conducted Powers for FCC ID: PP40VAL

| Mode                           | CDMA800 (ch384) |               | CDMA1900 (ch600) |               |
|--------------------------------|-----------------|---------------|------------------|---------------|
|                                | Peak (dBm)      | Average (dBm) | Peak (dBm)       | Average (dBm) |
| RC1, SO2, Full Rate            | 28.64           | 24.96         | 28.53            | 24.89         |
| RC1, SO55, Full Rate           | 28.74           | 24.95         | 28.51            | 24.89         |
| RC2, SO9, Full Rate            | 28.70           | 24.87         | 28.48            | 24.87         |
| RC2, SO55, Full Rate           | 28.68           | 24.83         | 28.46            | 24.83         |
| RC3, SO2, Full Rate            | 28.67           | 24.97         | 28.41            | 24.86         |
| RC3, SO55, Full Rate           | 28.65           | 25.08         | 28.38            | 24.97         |
| RC43, SO2, Full Rate           | 28.64           | 24.91         | 28.35            | 24.83         |
| RC43, SO55, Full Rate          | 28.59           | 24.89         | 28.33            | 24.82         |
| RC54, SO9, Full Rate           | 28.57           | 24.88         | 28.29            | 24.85         |
| RC54, SO55, Full Rate          | 28.56           | 24.85         | 28.25            | 24.86         |
| RC3, SO32, (+ F-SCH) Full Rate | 28.51           | 24.92         | 28.23            | 24.85         |
| RC3, SO32, (+ SCH) Full Rate   | 28.49           | 24.91         | 28.22            | 24.83         |

### 7.2 Worst-Case Probe Location Measurements

Below are RC/SO mode investigation results of the device at the worst-case (maximum) field point location. The worst-case RC/SO was used for T-coil testing.

| Mode | Channel | SO       | Antenna | Conducted Power (dBm) | Time Avg. Field (A/m) | Peak Field (dBV/m) | FCC Limit (dBV/m) | FCC MARGIN (dB) | RESULT    |
|------|---------|----------|---------|-----------------------|-----------------------|--------------------|-------------------|-----------------|-----------|
| PCS  | 25      | SO2/RC1  | Intenna | 24.96                 | 0.135                 | -19.2              | -9.4              | -9.80           | <b>M4</b> |
| PCS  | 25      | SO3/RC1  | Intenna | 24.97                 | 0.050                 | -16.8              | -9.4              | -7.40           | <b>M4</b> |
| PCS  | 25      | SO55/RC1 | Intenna | 24.97                 | 0.137                 | -19.1              | -9.4              | -9.67           | <b>M4</b> |
| PCS  | 25      | SO9/RC2  | Intenna | 24.96                 | 0.136                 | -19.1              | -9.4              | -9.74           | <b>M4</b> |
| PCS  | 25      | SO17/RC2 | Intenna | 24.98                 | 0.051                 | -27.7              | -9.4              | -18.26          | <b>M4</b> |
| PCS  | 25      | SO2/RC3  | Intenna | 24.97                 | 0.136                 | -19.1              | -9.4              | -9.74           | <b>M4</b> |
| PCS  | 25      | SO3/RC3  | Intenna | 24.98                 | 0.137                 | -19.1              | -9.4              | -9.67           | <b>M4</b> |
| PCS  | 25      | SO55/RC3 | Intenna | 24.98                 | 0.140                 | -18.9              | -9.4              | -9.49           | <b>M4</b> |

## 8. TEST PROCEDURE

### Test Instructions

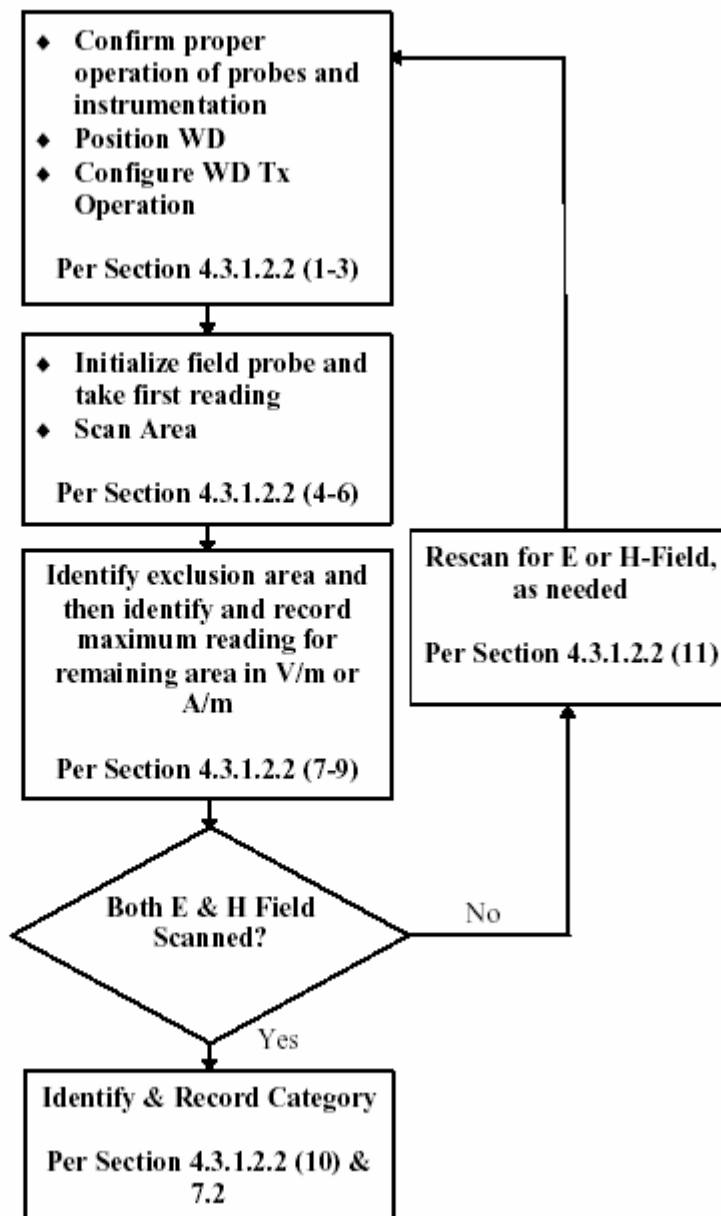


Figure 9. WD near-field emission automated test flowchart

**The evaluation was performed with the following procedure:**

1. Confirm proper operation of the field probe, probe measurement system and other instrumentation and the positioning system.
2. Position the WD in its intended test position. The gauge block, depicted in Section A.2.1, can simplify this positioning. Note that a separate E- and H-field gauge block will be needed if the edges of the probe sensors are at different distances from the tip of the probe.
3. Configure the WD normal operation for maximum rated RF output power, at the desired channel and other operating parameters, (e.g. call simulation) as intended for the test.
4. The center sub-grid shall be centered on the center of the WD output (acoustic or T-Coil output), as appropriate. Locate the field probe at the initial test position in the 5 x 5 cm grid, which is contained in the measurement plane.
5. Record the reading.
6. Scan the entire 5 x 5 cm region in equally spaced increments and record the reading at each measurement point. The distance between measurement points shall be sufficient to assure the identification of the peak reading.
7. Identify the five contiguous sub-grids around the center sub-grid with the lowest maximum field strength readings. Thus the 6 areas to be used to determine the WD's peak emissions are identified and outlined for the final manual scan. Please note that a maximum of five blocks can be excluded for both E- and H-field measurements for the WD output being measured. State another way, the center sub-grid and 3 other must be common to both the E- and H-field measurements.
8. Identify the highest field reading within the non-excluded sub-grids identified in step 7.
9. Convert the highest field strength reading identified in step 8 to peak V/m or A/m, as appropriate. This conversion shall be done using the appropriate probe modulation factor.
10. Repeat steps 1-10 for both the E- and H-field measurements.
11. Compare this reading to the categories in ANSI-PC63.19 and record the resulting category. The lowest category number listed in ANSI-PC63.19, obtained in step 10 for either E or H field determines the M category for the audio coupling mode assessment. Record the WD category rating.

## 9. ANSI/IEEE C63.19 PERFORMANCE CATEGORIES

The EUT must meet the following M3 or M4 category:

| Category            | Telephone RF Parameters |                            |                        |
|---------------------|-------------------------|----------------------------|------------------------|
| Near Field          | AWF (dB)                | E-Field Emissions dB (V/m) | H-Field Emissions(A/m) |
| Frequency < 960 MHz |                         |                            |                        |
| M1                  | 0                       | 56 to 61                   | +5.6 to +10.6          |
|                     | -5                      | 53.5 to 58.5               | +3.1 to +8.1           |
| M2                  | 0                       | 51 to 56                   | +0.6 to +5.6           |
|                     | -5                      | 48.5 to 53.5               | -1.9 to +3.1           |
| M3                  | 0                       | 46 to 51                   | -4.4 to +0.6           |
|                     | -5                      | 43.5 to 48.5               | -6.9 to -1.9           |
| M4                  | 0                       | < 46                       | < -4.4                 |
|                     | -5                      | < 43.5                     | < -6.9                 |
| Frequency > 960 MHz |                         |                            |                        |
| M1                  | 0                       | 46 to 51                   | -4.4 to 0.6            |
|                     | -5                      | 43.5 to 48.5               | -6.9 to -1.9           |
| M2                  | 0                       | 41 to 46                   | -9.4 to -4.4           |
|                     | -5                      | 38.5 to 43.5               | -11.9 to -6.9          |
| M3                  | 0                       | 36 to 41                   | -14.4 to -9.4          |
|                     | -5                      | 33.5 to 38.5               | -16.9 to -11.9         |
| M4                  | 0                       | <36                        | <-14.4                 |
|                     | -5                      | <33.5                      | <-16.9                 |

Table 1. Telephone near-field categories in linear units



## 10. MEASUREMENT UNCERTAINTIES

| HAC Uncertainty Budget [According to ANSI C63.19] |                 |                          |         |        |        |                          |                          |       |
|---|-----------------|--------------------------|---------|--------|--------|--------------------------|--------------------------|-------|
| Error Description                                 | Uncertainty (%) | Probability Distribution | Divisor | ci (E) | ci (H) | Standard Uncertainty (E) | Standard Uncertainty (H) | Notes |
| <b>Measurement system</b>                         |                 |                          |         |        |        |                          |                          |       |
| Probe Calibration                                 | 5.1%            | Normal                   | 1.00    | 1      | 1      | 5.1%                     | 5.1%                     |       |
| Axial Isotropy                                    | 4.7%            | Rectangular              | 1.73    | 1      | 1      | 2.7%                     | 2.7%                     | *     |
| Sensor Displacement                               | 16.5%           | Rectangular              | 1.73    | 1      | 0.145  | 9.5%                     | 1.4%                     | *     |
| Boundary effect                                   | 2.4%            | Rectangular              | 1.73    | 1      | 1      | 1.4%                     | 1.4%                     | *     |
| Field Probe Frequency Response                    | 3.2%            | Normal                   | 1.00    | 1      | 1      | 3.2%                     | 3.2%                     |       |
| Linearity   | 4.7%            | Rectangular              | 1.73    | 1      | 1      | 2.7%                     | 2.7%                     | *     |
| Scaling to peak Envelope Power                    | 2.0%            | Rectangular              | 1.73    | 1      | 1      | 1.2%                     | 1.2%                     | *     |
| System Detection limits                           | 1.0%            | Rectangular              | 1.73    | 1      | 1      | 0.6%                     | 0.6%                     | *     |
| Readout Electronics                               | 0.3%            | Normal                   | 1.00    | 1      | 1      | 0.3%                     | 0.3%                     | *     |
| Response time                                     | 0.8%            | Rectangular              | 1.73    | 1      | 1      | 0.5%                     | 0.5%                     | *     |
| Integration time                                  | 2.6%            | Rectangular              | 1.73    | 1      | 1      | 1.5%                     | 1.5%                     | *     |
| RF Ambient Conditions                             | 3.0%            | Rectangular              | 1.73    | 1      | 1      | 1.7%                     | 1.7%                     | *     |
| RF Reflections                                    | 12.0%           | Rectangular              | 1.73    | 1      | 1      | 6.9%                     | 6.9%                     | *     |
| Probe positioner                                  | 1.2%            | Rectangular              | 1.73    | 1      | 0.67   | 0.7%                     | 0.5%                     | *     |
| Probe positioning                                 | 4.7%            | Rectangular              | 1.73    | 1      | 0.67   | 2.7%                     | 1.8%                     | *     |
| Extrap. And Interpolation                         | 1.0%            | Rectangular              | 1.73    | 1      | 1      | 0.6%                     | 0.6%                     | *     |
| <b>Test Sample Related</b>                        |                 |                          |         |        |        |                          |                          |       |
| Test Positioning Vertical                         | 4.7%            | Rectangular              | 1.73    | 1      | 0.67   | 2.7%                     | 1.8%                     | *     |
| Test Positioning Lateral                          | 1.0%            | Rectangular              | 1.73    | 1      | 1      | 0.6%                     | 0.6%                     | *     |
| Device Holder and Phantom                         | 2.4%            | Rectangular              | 1.73    | 1      | 1      | 1.4%                     | 1.4%                     | *     |
| Power drift                                       | 5.0%            | Rectangular              | 1.73    | 1      | 1      | 2.9%                     | 2.9%                     | *     |
| <b>Phantom and Setup Related</b>                  |                 |                          |         |        |        |                          |                          |       |
| Phantom Thickness                                 | 2.4%            | Rectangular              | 1.73    | 1      | 0.67   | 1.4%                     | 0.9%                     | *     |
| <b>Combined standard Uncertainty (%)</b>          |                 |                          |         |        |        | 15.0%                    | 11.1%                    |       |
| <b>Expanded standard Uncertainty (%)</b>          |                 |                          |         |        |        | <b>30.1%</b>             | <b>22.3%</b>             |       |

**Table 2. Uncertainties**

Notes:

1. Worst-Case uncertainty budget for HAC free field assessment according to ANSI-C 63.19[1].The budget is valid for the frequency range 800MHz-3GHz and represents a worst-Case analysis. For specific test sand configurations, the uncertainty could be considerably smaller. Some of the parameters are dependent on the user situations and need adjustment according to the actual laboratory conditions.

2. \* Uncertainty specifications from Schmidt & Partner Engineering AG (not site specific)

## 11. HAC TEST DATA SUMMARY

Ambient TEMPERATURE (°C): 22.0

S/N: PP4OVAL2007-0301

### 11.1 Measurement Results (E-Field CDMA / PCS DATA)

| Mode | Channel | Backlight | SO       | Antenna | Conducted Power (dBm) | Time Avg. Field (V/m) | Peak Field (dBV/m) | FCC Limit (dBV/m) | FCC MARGIN (dB) | Exclusion Block | RESULT    |
|------|---------|-----------|----------|---------|-----------------------|-----------------------|--------------------|-------------------|-----------------|-----------------|-----------|
| CDMA | 1013    | off       | SO55/RC3 | Intenna | 24.88                 | 79.2                  | 37.7               | 51                | -13.29          | none            | <b>M4</b> |
| CDMA | 384     | off       | SO55/RC3 | Intenna | 24.86                 | 73.0                  | 37.0               | 51                | -14.00          | none            | <b>M4</b> |
| CDMA | 777     | off       | SO55/RC3 | Intenna | 24.88                 | 82.6                  | 38.1               | 51                | -12.92          | none            | <b>M4</b> |
| PCS  | 25      | off       | SO55/RC3 | Intenna | 24.96                 | 32.3                  | 29.8               | 41                | -11.17          | none            | <b>M4</b> |
| PCS  | 600     | off       | SO55/RC3 | Intenna | 24.94                 | 27.0                  | 28.3               | 41                | -12.73          | none            | <b>M4</b> |
| PCS  | 1175    | off       | SO55/RC3 | Intenna | 24.93                 | 33.6                  | 30.2               | 41                | -10.83          | none            | <b>M4</b> |

#### NOTES:

- All modes of operation were investigated and the worst-case are reported.
- Battery Type ☒ Standard ☐ Extended ☐ Fixed
- Power Measured ☒ Conducted ☐ EIRP ☐ ERP
- Test Signal Call Mode ☐ Manual Test cord ☒ Base Station Simulator
- SAR Measurement System ☒ SPEAG

## 11. HAC TEST DATA SUMMARY

Ambient TEMPERATURE (°C): 22.0

S/N: PP4OVAL2007-0301

### 11.4 Measurement Results (H-Field CDMA / PCS DATA)

| Mode       | Channel   | Backlight  | SO              | Antenna        | Conducted Power (dBm) | Time Avg. Field (A/m) | Peak Field (dBA/m) | FCC Limit (dBA/m) | FCC MARGIN (dB) | Exclusion Block | RESULT    |
|------------|-----------|------------|-----------------|----------------|-----------------------|-----------------------|--------------------|-------------------|-----------------|-----------------|-----------|
| CDMA       | 1013      | off        | SO55/RC3        | Intenna        | 24.87                 | 0.153                 | -17.6              | 0.6               | -18.23          | none            | M4        |
| CDMA       | 384       | off        | SO55/RC3        | Intenna        | 24.89                 | 0.137                 | -18.6              | 0.6               | -19.19          | none            | M4        |
| CDMA       | 777       | off        | SO55/RC3        | Intenna        | 24.92                 | 0.167                 | -16.9              | 0.6               | -17.47          | none            | M4        |
| <b>PCS</b> | <b>25</b> | <b>off</b> | <b>SO55/RC3</b> | <b>Intenna</b> | <b>24.93</b>          | <b>0.134</b>          | <b>-19.3</b>       | <b>-9.4</b>       | <b>-9.87</b>    | <b>none</b>     | <b>M4</b> |
| PCS        | 600       | off        | SO55/RC3        | Intenna        | 24.90                 | 0.105                 | -21.4              | -9.4              | -11.99          | none            | M4        |
| PCS        | 1175      | off        | SO55/RC3        | Intenna        | 24.92                 | 0.118                 | -20.4              | -9.4              | -10.97          | none            | M4        |
| PCS        | 25        | on         | SO55/RC3        | Intenna        | 24.89                 | 0.135                 | -19.2              | -9.4              | -9.80           | none            | M4        |

#### NOTES:

- All modes of operation were investigated and the worst-case are reported.
- Battery Type ☒ Standard ☐ Extended ☐ Fixed
- Power Measured ☒ Conducted ☐ EIRP ☐ ERP
- Test Signal Call Mode ☐ Manual Test cord ☒ Base Station Simulator
- SAR Measurement System ☒ SPEAG

## 11. HAC TEST DATA SUMMARY


Ambient TEMPERATURE (°C): 21.6

S/N: PP4OVAL2007-0301

### 11.5 Worst-case Configuration Evaluation

#### Peak Reading 360° Probe Rotation at Azimuth axis

| Mode | Channel | Backlight | SO       | Antenna | Conducted Power (dBm) | Time Avg. Field (A/m) | Peak Field (dBA/m) | FCC Limit (dBA/m) | FCC MARGIN (dB) | Exclusion Block | RESULT |
|------|---------|-----------|----------|---------|-----------------------|-----------------------|--------------------|-------------------|-----------------|-----------------|--------|
| PCS  | 25      | on        | SO55/RC3 | Intenna | 24.92                 | 0.135                 | -19.2              | -9.4              | -9.80           | none            | M4     |

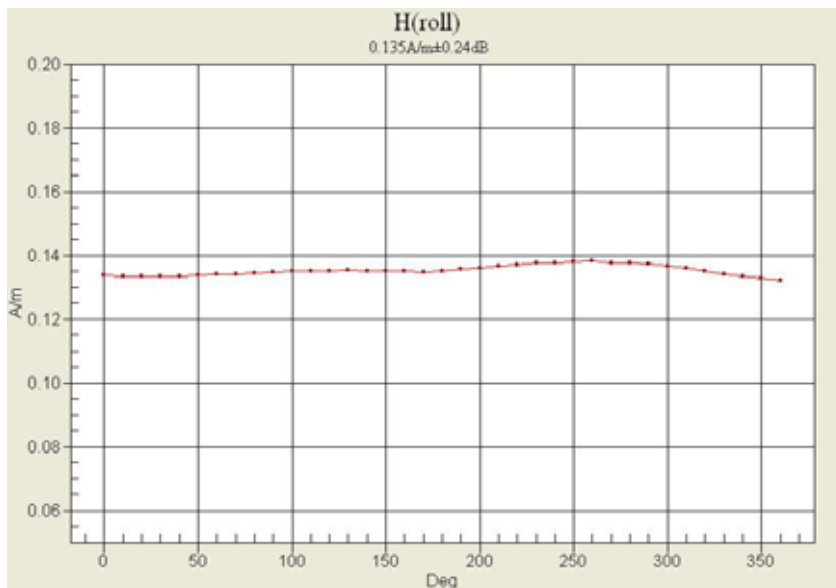

#### Worst-Case Probe Rotation about Azimuth axis

## 12. HAC TEST EQUIPMENT LIST

| Manufacturer | Type / Model                  | S/N              | Calib. Date | Calib. Interval | Calib. Due |
|--------------|-------------------------------|------------------|-------------|-----------------|------------|
| Staubli      | Robot RX90L                   | F01/ 5K09A1/A/01 | N/A         | N/A             | N/A        |
| Staubli      | Robot ControllerCS7MB         | F99/5A82A1/C/01  | N/A         | N/A             | N/A        |
| Staubli      | Teach Pendant (Joystick)      | D221340.01       | N/A         | N/A             | N/A        |
| HP           | Pavilion t000_puffer          | KRJ51201TV       | N/A         | N/A             | N/A        |
| SPEAG        | SPEAG HAC Phantom             | -                | N/A         | N/A             | N/A        |
| SPEAG        | Light Alignment Sensor        | 265              | N/A         | N/A             | N/A        |
| SPEAG        | DAE4V1                        | 614              | 08/22/06    | Annual          | 08/22/07   |
| SPEAG        | DAE3V1                        | 466              | 01/25/07    | Annual          | 01/25/08   |
| SPEAG        | E-Field Probe                 | 2343             | 02/21/07    | Annual          | 02/21/08   |
| SPEAG        | H-Field Probe                 | 6101             | 07/12/06    | Annual          | 07/12/07   |
| SPEAG        | Validation Dipole D835V2      | 1024             | 02/13/07    | Annual          | 02/13/08   |
| SPEAG        | Validation Dipole D1880V2     | 1019             | 02/19/07    | Annual          | 02/19/08   |
| Agilent      | Power Meter(F) E4419B         | MY40330223       | 11/08/06    | Annual          | 11/08/07   |
| Agilent      | Power Sensor(G) 8481          | MY41090870       | 11/21/06    | Annual          | 11/21/07   |
| HP           | Signal Generator 8664A        | 3744A02069       | 04/11/06    | Annual          | 04/11/07   |
| EM POWER     | Power Amp BBS3Q7ELU           | 1013-D/C-0127    | 04/05/06    | Annual          | 04/05/07   |
| HP           | Network Analyzer 8753ES       | JP39240221       | 04/06/06    | Annual          | 04/06/07   |
| HP           | Dielectric Probe Kit 85070C   | 00721521         | N/A         | N/A             | N/A        |
| HP           | Dual Directional Coupler 778D | 16072            | 11/09/06    | Annual          | 11/09/07   |
| R&S          | Base Station CMU200           | 838207/050       | 11/14/06    | Annual          | 11/14/07   |
| Agilent      | Base Station E5515C           | US41070189       | 05/03/06    | Annual          | 05/03/07   |
| Tescom       | Bluetooth TC-3000             | 3000A490112      | 01/24/07    | Annual          | 01/24/08   |
| R&S          | Spectrum Analyzer FSP30       | 839117/011       | 06/28/06    | Annual          | 06/28/07   |

### NOTE:

The probe was calibrated by SPEAG, by the waveguide technique procedure. Dipole Validation measurement is performed by HCT Lab. before each test. The brain simulating material is calibrated by HCT using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material.

## **13. CONCLUSION**

The HAC measurement indicates that the EUT complies with the HAC limits of the ANSI-PC63.19-2006.

These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise Laboratory measures were taken to assure repeatability of the tests.

## Appendix 1

### HAC Data Plots

Test Laboratory: HCT  
Ambient Temperature: 22.0  
Date Tested : March 16, 2007

**DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1024**  
**Program Name: HAC E Dipole**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Dipole Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2007-02-21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn614; Calibrated: 2006-08-22
- Phantom: HAC Test Arch; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**E Scan 10mm above CD 835 MHz/Hearing Aid Compatibility Test (41x361x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 167.3 V/m


Probe Modulation Factor = 1.00

Reference Value = 122.0 V/m; Power Drift = 0.008 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

|        |        |        |
|--------|--------|--------|
| Grid 1 | Grid 2 | Grid 3 |
| 164.2  | 165.4  | 159.3  |
| Grid 4 | Grid 5 | Grid 6 |
| 87.4   | 90.8   | 88.3   |
| Grid 7 | Grid 8 | Grid 9 |
| 158.4  | 167.3  | 161.1  |

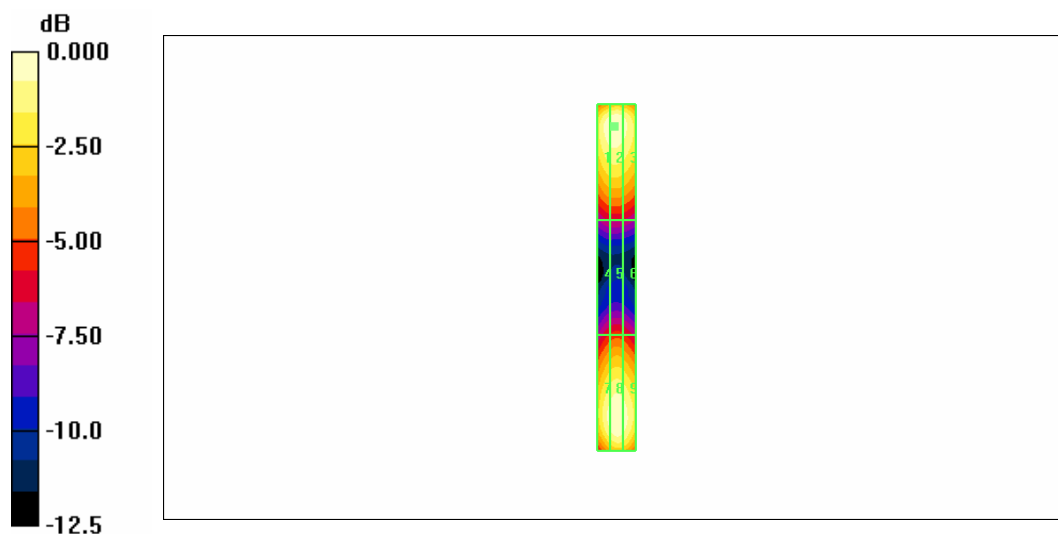

0 dB = 167.3V/m



Test Laboratory: HCT  
Ambient Temperature : 22.0  
Date Tested : March 16, 2007

**DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1019**  
**Program Name: HAC E Dipole**

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Dipole Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2007-02-21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn614; Calibrated: 2006-08-22
- Phantom: HAC Test Arch; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**E Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (41x181x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 148.1 V/m


Probe Modulation Factor = 1.00

Reference Value = 150.4 V/m; Power Drift = 0.020 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

| Grid 1 | Grid 2 | Grid 3 |
|--------|--------|--------|
| 128.8  | 143.7  | 143.4  |
| Grid 4 | Grid 5 | Grid 6 |
| 86.6   | 96.1   | 96.0   |
| Grid 7 | Grid 8 | Grid 9 |
| 133.2  | 148.1  | 148.1  |

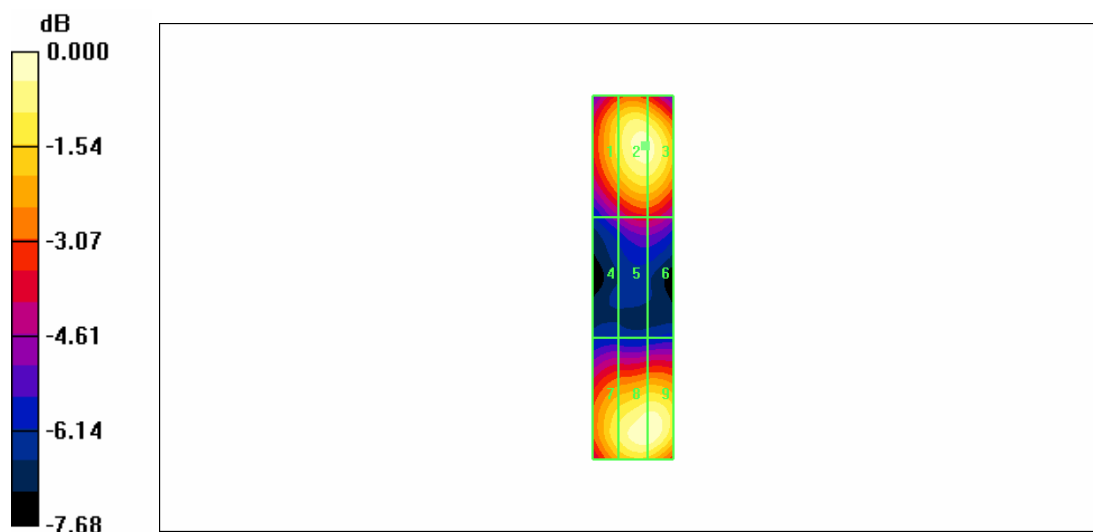

0 dB = 148.1V/m

Test Laboratory: HCT  
Ambient Temperature: 22.0  
Date Tested : March 16, 2007

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial:1024  
Program Name: HAC H Dipole

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: E Dipole Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2007-02-21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn614; Calibrated: 2006-08-22
- Phantom: HAC Test Arch; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

H Scan 10mm above CD 835 MHz/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.465 A/m



Probe Modulation Factor = 1.00

Reference Value = 0.408 A/m; Power Drift = -0.020 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| Grid 1 | Grid 2 | Grid 3 |
|--------|--------|--------|
| 0.379  | 0.401  | 0.386  |
| Grid 4 | Grid 5 | Grid 6 |
| 0.440  | 0.465  | 0.448  |
| Grid 7 | Grid 8 | Grid 9 |
| 0.384  | 0.413  | 0.403  |

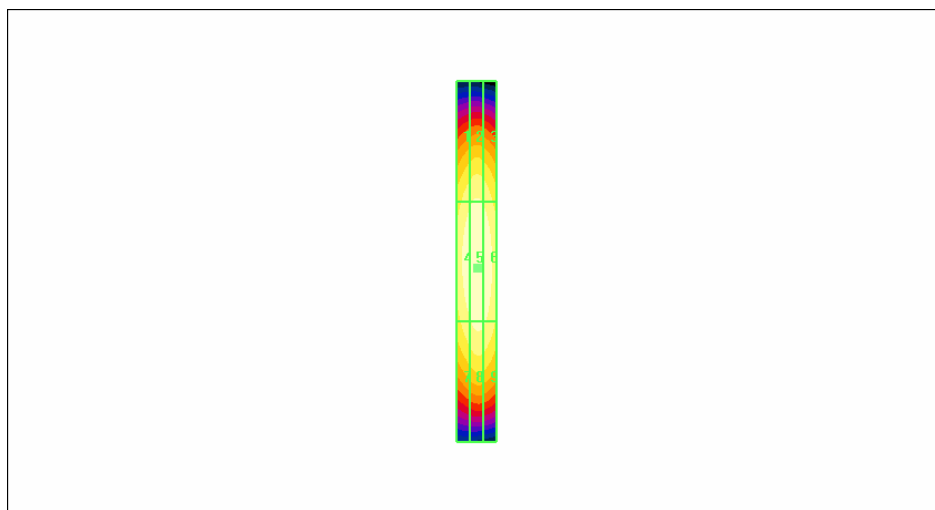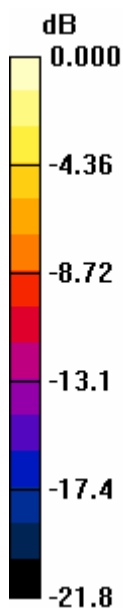

0 dB = 0.465A/m

Test Laboratory: HCT  
Ambient Temperature: 22.0  
Date Tested : March 16, 2007

**DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial:1019**  
**Program Name: HAC H Dipole**

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Dipole Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2007-02-21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn614; Calibrated: 2006-08-22
- Phantom: HAC Test Arch; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**E Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (41x181x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.485 A/m



Probe Modulation Factor = 1.00

Reference Value = 0.495 A/m; Power Drift = -0.010 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

| Grid 1 | Grid 2 | Grid 3 |
|--------|--------|--------|
| 0.398  | 0.431  | 0.423  |
| Grid 4 | Grid 5 | Grid 6 |
| 0.446  | 0.485  | 0.475  |
| Grid 7 | Grid 8 | Grid 9 |
| 0.410  | 0.453  | 0.442  |

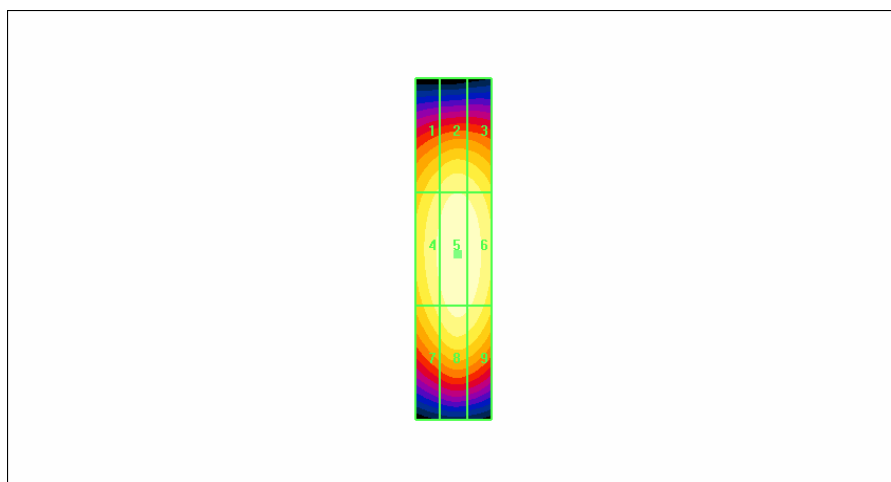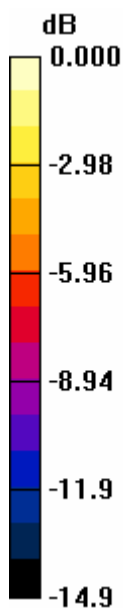

0 dB = 0.485A/m

Test Laboratory: HCT

Ambient Temperature: 22.0

Date Tested : March 16, 2007

**DUT: OVAL; Type: Folder; Serial: #1**

**Program Name: HAC E Device**

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz;Duty Cycle: 1:1

Medium parameters used:  $\rho = 0$  mho/m,  $r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: E Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2007-02-21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn614; Calibrated: 2006-08-22
- Phantom: HAC Test Arch; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 53; Post processing SW: SEMCAD, V1.8 Build 172

**E Scan 10mm above Device Reference/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 80.2 V/m



Probe Modulation Factor = 0.970

Reference Value = 86.8 V/m; Power Drift = 0.199 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

|             |               |             |
|-------------|---------------|-------------|
| Grid 1      | Grid 2        | Grid 3      |
| <b>68.0</b> | <b>71.6</b>   | <b>68.6</b> |
| Grid 4      | <b>Grid 5</b> | Grid 6      |
| <b>76.2</b> | <b>80.2</b>   | <b>76.7</b> |
| Grid 7      | Grid 8        | Grid 9      |
| <b>72.8</b> | <b>76.8</b>   | <b>72.5</b> |

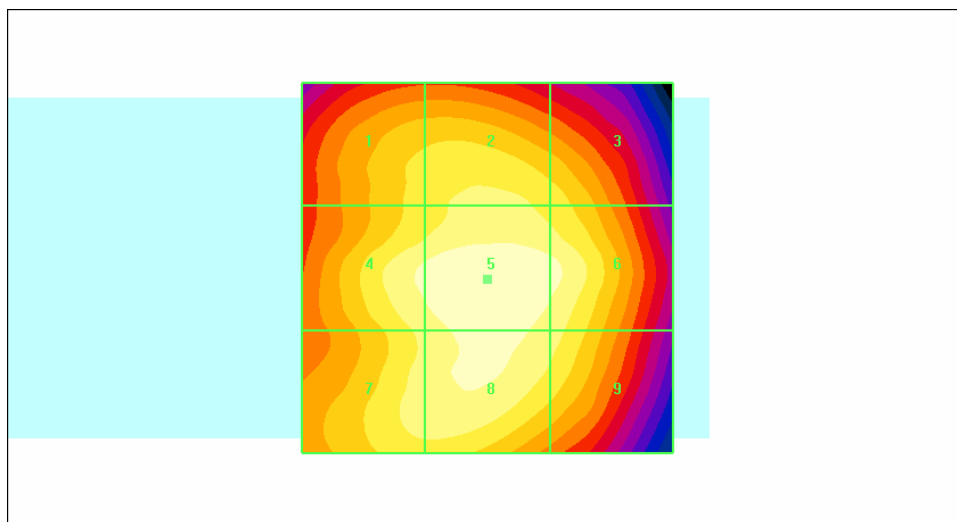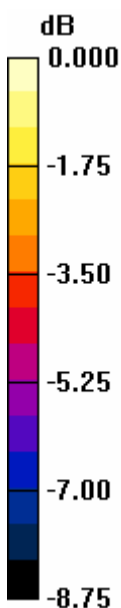

0 dB = 80.2V/m

Test Laboratory: HCT  
Ambient Temperature: 22.0  
Date Tested : March 16, 2007

DUT: OVAL; Type: Folder; Serial: #1  
Program Name: HAC E Device

Communication System: PCS 1900MHz FCC; Frequency: 1908.75 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: E Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2007-02-21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn614; Calibrated: 2006-08-22
- Phantom: HAC Test Arch; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 53; Post processing SW: SEMCAD, V1.8 Build 172

**E Scan 10mm above Device Reference/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 32.2 V/m


Probe Modulation Factor = 0.960

Reference Value = 23.3 V/m; Power Drift = -0.019 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

| Grid 1 | Grid 2 | Grid 3 |
|--------|--------|--------|
| 18.2   | 22.8   | 22.8   |
| Grid 4 | Grid 5 | Grid 6 |
| 18.5   | 25.6   | 25.6   |
| Grid 7 | Grid 8 | Grid 9 |
| 32.2   | 25.7   | 25.0   |

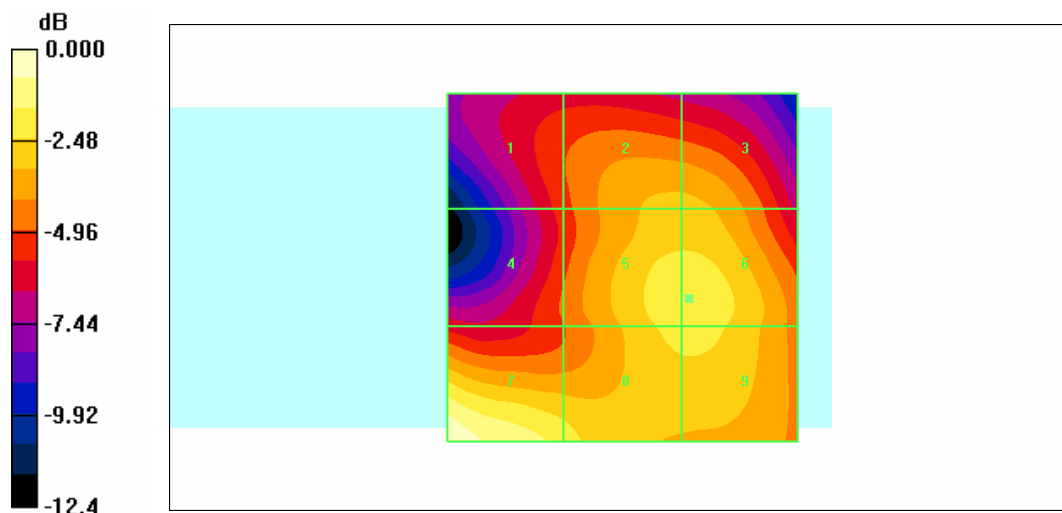

0 dB = 32.6V/m

Test Laboratory: HCT  
Ambient Temperature: 22.0  
Date Tested : March 16, 2007

**DUT: OVAL; Type: Folder; Serial: #1**  
**Program Name: HAC H Device**

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\rho = 0$  rho/m,  $\mu_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section

**DASY4 Configuration:**

- Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2007-02-21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn614; Calibrated: 2006-08-22
- Phantom: HAC Test Arch; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 53; Post processing SW: SEMCAD, V1.8 Build 172

**H Scan 10mm above Device Reference/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.144 A/m


Probe Modulation Factor = 0.859

Reference Value = 0.083 A/m; Power Drift = 0.014 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

|              |               |              |
|--------------|---------------|--------------|
| Grid 1       | Grid 2        | Grid 3       |
| <b>0.144</b> | <b>0.098</b>  | <b>0.058</b> |
| Grid 4       | <b>Grid 5</b> | Grid 6       |
| <b>0.135</b> | <b>0.093</b>  | <b>0.057</b> |
| Grid 7       | Grid 8        | Grid 9       |
| <b>0.136</b> | <b>0.093</b>  | <b>0.056</b> |

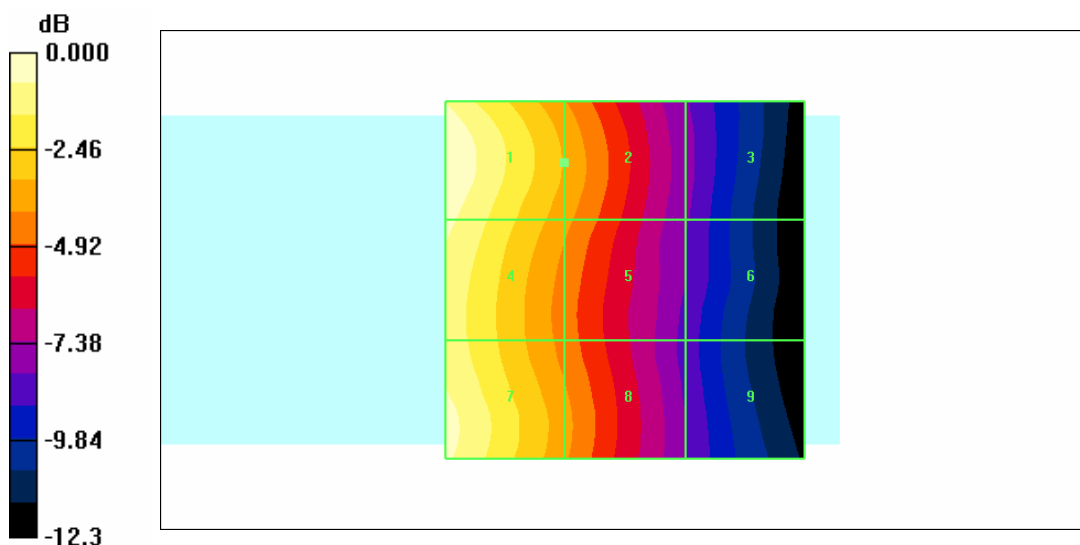

0 dB = 0.144A/m

Test Laboratory: HCT  
Ambient Temperature: 22.0  
Date Tested : March 16, 2007

DUT: OVAL; Type: Folder; Serial: #1

Program Name: HAC H Device

Communication System: PCS 1900MHz FCC; Frequency: 1851.25 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\mu = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
Phantom section: H Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2007-02-21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn614; Calibrated: 2006-08-22
- Phantom: HAC Test Arch; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**H Scan 10mm above Device Reference/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.109 A/m


Probe Modulation Factor = 0.812

Reference Value = 0.077 A/m; Power Drift = -0.102 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

| Grid 1 | Grid 2 | Grid 3 |
|--------|--------|--------|
| 0.058  | 0.057  | 0.039  |
| Grid 4 | Grid 5 | Grid 6 |
| 0.083  | 0.076  | 0.065  |
| Grid 7 | Grid 8 | Grid 9 |
| 0.109  | 0.097  | 0.075  |

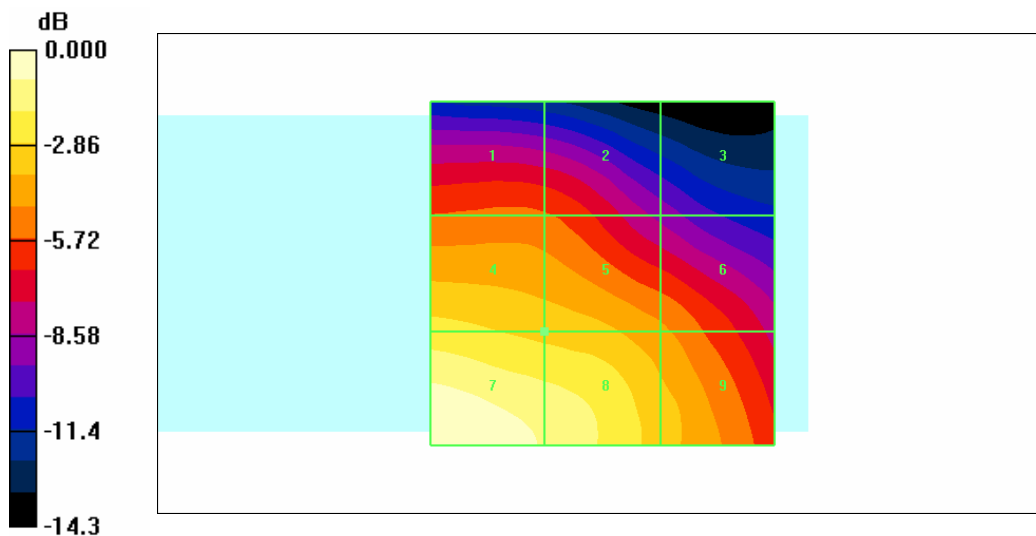

0 dB = 0.109A/m