

FCC Test Report (Part 24 – GSM, Cat-M1 B2/B25, NB-IoT B2/B25)

Report No.: RFBBDJ-WTW-P23050444-1

FCC ID: PPQ202005BG95M5

Test Model: BG95-M5

Received Date: May 17, 2023

Test Date: May 27 ~ Jun. 29, 2023

Issued Date: Jul. 20, 2023

Applicant: LITE-ON Technology Corp.

Address: Bldg. C, 90, Chien 1 Rd., Chung-Ho, New Taipei City 23585, Taiwan
(R.O.C.)

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)

**FCC Registration /
Designation Number:** 281270 / TW0032



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Test Site and Instruments	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Configuration of System under Test	9
3.2.1 Description of Support Units	9
3.3 Test Mode Applicability and Tested Channel Detail	10
3.4 EUT Operating Conditions	14
3.5 General Description of Applied Standards and References	14
4 Test Types and Results	15
4.1 Output Power Measurement	15
4.1.1 Limits of Output Power Measurement	15
4.1.2 Test Procedures	15
4.1.3 Test Setup	15
4.1.4 Test Results	16
4.2 Radiated Emission Measurement	26
4.2.1 Limits of Radiated Emission Measurement	26
4.2.2 Test Procedure	26
4.2.3 Deviation from Test Standard	26
4.2.4 Test Setup	27
4.2.5 Test Results	28
Appendix – Information of the Testing Laboratories	56



BUREAU
VERITAS

Release Control Record

Issue No.	Description	Date Issued
RFBBDJ-WTW-P23050444-1	Original Release	Jul. 20, 2023

1 Certificate of Conformity

Product: Quectel BG95-M5
Brand: LITEON
Test Model: BG95-M5
Sample Status: Engineering Sample
Applicant: LITE-ON Technology Corp.
Test Date: May 27 ~ Jun. 29, 2023
Standards: FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : *Lena Wang*, **Date:** Jul. 20, 2023
Lena Wang / Specialist

Approved by : *Jeremy Lin*, **Date:** Jul. 20, 2023
Jeremy Lin / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Equivalent Isotropically Radiated Power	Pass	Meet the requirement of limit.
2.1046 24.232 (d)	Peak To Average Ratio	N/A	Refer to Note
2.1047	Modulation Characteristics	N/A	Refer to Note
2.1055 24.235	Frequency Stability	N/A	Refer to Note
2.1049	Occupied Bandwidth	N/A	Refer to Note
24.238	Band Edge Measurements	N/A	Refer to Note
2.1051 24.238	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -12.45 dB at 38.73 MHz.

Note:

- Only test item of Effective Isotropic Radiated Power & Radiated Emissions were performed for this report. Other testing data please refer to TA Technology (Shanghai) Co., Ltd. report no.: R2005A0283-R2V1 and R2005A0283-R6.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.00 dB
	30MHz ~ 200MHz	2.91 dB
	200MHz ~ 1000MHz	2.93 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	1.76 dB
	18GHz ~ 40GHz	1.77 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver Rohde & Schwarz	N9038A	MY55420137	May 03, 2023	May 02, 2024
Spectrum Analyzer KEYSIGHT	N9020B	MY60110440	Mar. 16, 2023	Mar. 15, 2024
Loop Antenna TESEQ	HLA 6121	45745	Jul. 27, 2022	Jul. 26, 2023
BILOG Antenna SCHWARZBECK	VULB9168	1213	Oct. 20, 2022	Oct. 19, 2023
HORN Antenna RF SPIN	DRH18-E	210103A18E	Nov. 13, 2022	Nov. 12, 2023
HORN Antenna SCHWARZBECK	BBHA 9170	9170	Nov. 13, 2022	Nov. 12, 2023
Loop Antenna EMCI	EM-6879	269	Sep. 19, 2022	Sep. 18, 2023
Preamplifier EMCI	EMC330N	980782	Jan. 16, 2023	Jan. 15, 2024
Preamplifier EMCI	EMC118A45SE	980808	Dec. 29, 2022	Dec. 28, 2023
Preamplifier EMCI	EMC184045SE	980788	Jan. 16, 2023	Jan. 15, 2024
RF signal cable EMCI	EMC104-SM-SM- (9000+2000+1000)	201243+ 201231+ 210102	Jan. 16, 2023	Jan. 15, 2024
RF signal cable EMCI	EMCCFD400-NM- NM- (9000+300+500)	201236+ 201235+ 201233	Jan. 16, 2023	Jan. 15, 2024
RF signal cable EMCI	EMC101G-KM-KM- (5000+3000+2000)	201260+201257+20125 4	Jan. 16, 2023	Jan. 15, 2024
Software BV ADT	ADT_Radiated_V7. 6.15.9.5	NA	NA	NA
Antenna Tower Max-Full	MFT-151SS-0.5T	NA	NA	NA
Turn Table Max-Full	MF-7802BS	NA	NA	NA
Turn Table Controller Max-Full	MF-7802BS	MF780208674	NA	NA
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY55190004 /MY55190007/MY5521000 5	Jul. 13, 2022	Jul. 12, 2023
Radio Communication Analyzer Anritsu	MT8821C	6201462755	Mar. 03, 2023	Mar. 02, 2024

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in WM Chamber 8.

3 General Information

3.1 General Description of EUT

Product	Quectel BG95-M5			
Brand	LITEON			
Test Model	BG95-M5			
Sample Status	Engineering Sample			
Power Supply Rating	208-240 Vac			
Modulation Type	GSM/GPRS: GMSK EDGE: GMSK, 8PSK Cat-M1: QPSK, 16QAM NB-IoT: BPSK, QPSK (Subcarrier Spacing: 3.75kHz, 15kHz)			
Operating Frequency	GSM1900	1850.2MHz ~ 1909.8MHz		
	Cat-M1			
	Cat-M1 Band 2 (Channel Bandwidth: 1.4 MHz)	1850.7MHz ~ 1909.3MHz		
	Cat-M1 Band 2 (Channel Bandwidth: 3 MHz)	1851.5MHz ~ 1908.5MHz		
	Cat-M1 Band 2 (Channel Bandwidth: 5 MHz)	1852.5MHz ~ 1907.5MHz		
	Cat-M1 Band 2 (Channel Bandwidth: 10 MHz)	1855.0MHz ~ 1905.0MHz		
	Cat-M1 Band 2 (Channel Bandwidth: 15 MHz)	1857.5MHz ~ 1902.5MHz		
	Cat-M1 Band 2 (Channel Bandwidth: 20 MHz)	1860.0MHz ~ 1900.0MHz		
	Cat-M1 Band 25 (Channel Bandwidth: 1.4 MHz)	1850.7MHz ~ 1914.3MHz		
	Cat-M1 Band 25 (Channel Bandwidth: 3 MHz)	1851.5MHz ~ 1913.5MHz		
	Cat-M1 Band 25 (Channel Bandwidth: 5 MHz)	1852.5MHz ~ 1912.5MHz		
	Cat-M1 Band 25 (Channel Bandwidth: 10 MHz)	1855.0MHz ~ 1910.0MHz		
	Cat-M1 Band 25 (Channel Bandwidth: 15 MHz)	1857.5MHz ~ 1907.5MHz		
	Cat-M1 Band 25 (Channel Bandwidth: 20 MHz)	1860.0MHz ~ 1905.0MHz		
	NB-IoT Standalone			
	NB-IoT Band 2	1850.2MHz ~ 1909.8MHz		
	NB-IoT Band 25	1850.2MHz ~ 1914.8MHz		
Max. EIRP Power	GSM/GPRS	1534.617mW (31.86dBm)		
	EDGE	580.764mW (27.64dBm)		
	Cat-M1			
		QPSK	16QAM	
	Cat-M1 Band 2 (Channel Bandwidth: 1.4 MHz)	307.610mW (24.88dBm)	289.734mW (24.62dBm)	
	Cat-M1 Band 2 (Channel Bandwidth: 3 MHz)	326.588mW (25.14dBm)	300.608mW (24.78dBm)	
	Cat-M1 Band 2 (Channel Bandwidth: 5 MHz)	306.902mW (24.87dBm)	304.789mW (24.84dBm)	
	Cat-M1 Band 2 (Channel Bandwidth: 10 MHz)	320.627mW (25.06dBm)	314.051mW (24.97dBm)	
	Cat-M1 Band 2 (Channel Bandwidth: 15 MHz)	319.890mW (25.05dBm)	314.775mW (24.98dBm)	
	Cat-M1 Band 2 (Channel Bandwidth: 20 MHz)	328.095mW (25.16dBm)	320.627mW (25.06dBm)	
Cat-M1 Band 25 (Channel Bandwidth: 1.4 MHz)	299.916mW (24.77dBm)	256.448mW (24.09dBm)		

	Cat-M1 Band 25 (Channel Bandwidth: 3 MHz)	304.089mW (24.83 dBm)	270.396mW (24.32dBm)
	Cat-M1 Band 25 (Channel Bandwidth: 5 MHz)	309.742mW (24.91dBm)	286.418mW (24.57dBm)
	Cat-M1 Band 25 (Channel Bandwidth: 10 MHz)	310.456mW (24.92dBm)	284.446mW (24.54dBm)
	Cat-M1 Band 25 (Channel Bandwidth: 15 MHz)	309.742mW (24.91dBm)	290.402mW (24.63dBm)
	Cat-M1 Band 25 (Channel Bandwidth: 20 MHz)	316.228mW (25.00dBm)	285.102mW (24.55dBm)
	NB-IoT Standalone		
		BPSK	QPSK
	NB-IoT Band 2	350.752mW (25.45dBm)	348.337mW (25.42dBm)
NB-IoT Band 25	326.588mW (25.14dBm)	324.340mW (25.11dBm)	
Antenna Type	Refer to Note		
Antenna Connector	Refer to Note		
Accessory Device	Refer to Note		
Cable Supplied	N/A		

Note:

- The EUT is authorized for use in specific End-product. Please refer to below for more details. The model of 'EX-1193-MFD-80' was chosen for final test.

Brand	Model	WWAN	RFID	WIFI	Difference
LITEON	EX-1193-MFD-80	FCC ID: PPQ202005BG95M	FCC ID: PPQRYORR2L	FCC ID: PPQLILYW131	The difference between EX-1193-MFD-80 and EX-1193-MFD-48 in the rated current (80A/48A)
	EX-1193-MFD-48	5			

- The End-product contains following accessory devices.

Product	Brand	Model	Description
holster	Liteon	N/A	-


- The antenna information for host is listed as below.

Type		Monopole Coupling											
Connector		ipex(MHF)											
Antenna gain (dBi)													
GSM 850	GSM 1900	Cat-M1 Band 26 (Part 22)	Cat-M1 Band 26 (Part 90)	NB-IoT Band 71	Cat-M1 / NB-IoT Band								
					2	4	5	12	13	25	66	85	
1.9	1.7	1.9	1.1	1.3	1.7	1.5	1.9	1.1	0.7	1.7	1.5	1.1	

* Detail antenna specification please refer to antenna datasheet or an antenna gain measurement report.

- The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.
- NB-IoT test method refers to 3GPP TS 36.521-1 V17.4.0 (2022-09) section 6.1. For NB-IoT tests in all operating frequency bands, standalone is used as the default operating mode unless otherwise specified by the test case.

3.2 Configuration of System under Test

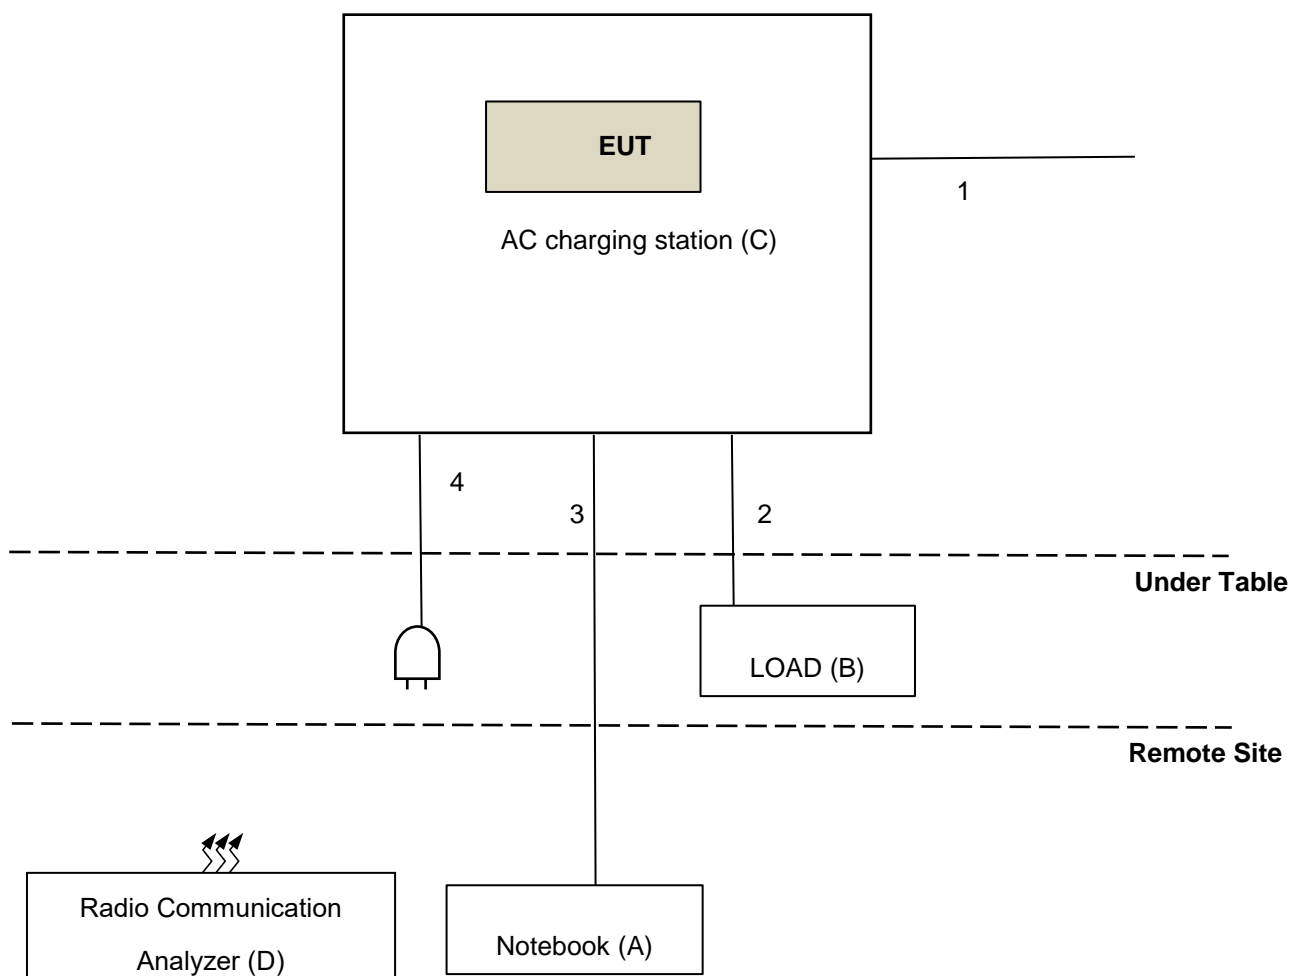

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Notebook	Lenovo	L440	R9-0GFJKK	N/A	Provided by Lab
B	LOAD	NA	NA	NA	N/A	Provided by Lab
C	AC charging station	LITEON	X-1193-MFD-80	NA	N/A	Provided by Client
D	Radio Communication Analyzer	Anritsu	MT8821C	6201462755	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	POWER CABLE(DC out)	1	5	Y	0	Accessory of EUT
2	RJ-45 Cable	1	1.8	N	0	Provided by Lab
3	LAN Cable	1	10	N	0	Provided by Lab
4	POWER CABLE(AC in)	1	1.8	Y	0	Accessory of EUT

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned on Z axis. Following channel(s) was (were) selected for the final test as listed below:

GSM1900

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	512 to 810	512 (1850.2MHz), 661 (1880.0MHz), 810 (1909.8MHz)	GSM, GPRS, EDGE
-	Radiated Emission Below 1GHz	512 to 810	512 (1850.2MHz)	GSM, EDGE
-	Radiated Emission Above 1GHz	512 to 810	512 (1850.2MHz), 661 (1880.0MHz), 810 (1909.8MHz)	GSM, EDGE

Note: For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.

Cat-M1 Band 2

EUT Configure Mode	Test item	Available channel	Tested Channel	Channel Bandwidth	Modulation	RB #
-	EIRP	18607 to 19193	18607 (1850.7MHz), 18900 (1880.0MHz), 19193 (1909.3MHz)	1.4MHz	QPSK / 16QAM	1 Full
		18615 to 19185	18615 (1851.5MHz), 18900 (1880.0MHz), 19185 (1908.5MHz)	3MHz	QPSK / 16QAM	1 Full
		18625 to 19175	18625 (1852.5MHz), 18900 (1880.0MHz), 19175 (1907.5MHz)	5MHz	QPSK / 16QAM	1 Full
		18650 to 19150	18650 (1855.0MHz), 18900 (1880.0MHz), 19150 (1905.0MHz)	10MHz	QPSK / 16QAM	1 Full
		18675 to 19125	18675 (1857.5MHz), 18900 (1880.0MHz), 19125 (1902.5MHz)	15MHz	QPSK / 16QAM	1 Full
		18700 to 19100	18700 (1860.0MHz), 18900 (1880.0MHz), 19100 (1900.0MHz)	20MHz	QPSK / 16QAM	1 Full
-	Radiated Emission Below 1GHz	18700 to 19100	18900 (1880.0MHz)	20MHz	QPSK	1
-	Radiated Emission Above 1GHz	18607 to 19193	18607 (1850.7MHz), 18900 (1880.0MHz), 19193 (1909.3MHz)	1.4MHz	QPSK	1
		18625 to 19175	18625 (1852.5MHz), 18900 (1880.0MHz), 19175 (1907.5MHz)	5MHz	QPSK	1
		18700 to 19100	18700 (1860.0MHz), 18900 (1880.0MHz), 19100 (1900.0MHz)	20MHz	QPSK	1

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation. Therefore, only EIRP had been tested under QPSK, 16QAM mode, the other items were performed under QPSK mode only.
2. For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.
3. For radiated emission above 1GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5MHz & highest channel bandwidth for final test.

Cat-M1 Band 25

EUT Configure Mode	Test item	Available channel	Tested Channel	Channel Bandwidth	Modulation	RB #
-	EIRP	26047 to 26683	26047 (1850.7MHz), 26365 (1882.5MHz), 26683 (1914.3MHz)	1.4MHz	QPSK / 16QAM	1 Full
		26055 to 26675	26055 (1851.5MHz), 26365 (1882.5MHz), 26675 (1913.5MHz)	3MHz	QPSK / 16QAM	1 Full
		26065 to 26665	26065 (1852.5MHz), 26365 (1882.5MHz), 26665 (1912.5MHz)	5MHz	QPSK / 16QAM	1 Full
		26090 to 26640	26090 (1855.0MHz), 26365 (1882.5MHz), 26640 (1910.0MHz)	10MHz	QPSK / 16QAM	1 Full
		26115 to 26615	26115 (1857.5MHz), 26365 (1882.5MHz), 26615 (1907.5MHz)	15MHz	QPSK / 16QAM	1 Full
		26140 to 26590	26140 (1860.0MHz), 26365 (1882.5MHz), 26590 (1905.0MHz)	20MHz	QPSK / 16QAM	1 Full
-	Radiated Emission Below 1GHz	26140 to 26590	26365 (1882.5MHz)	20MHz	QPSK	1
-	Radiated Emission Above 1GHz	26047 to 26683	26047 (1850.7MHz), 26365 (1882.5MHz), 26683 (1914.3MHz)	1.4MHz	QPSK	1
		26065 to 26665	26065 (1852.5MHz), 26365 (1882.5MHz), 26665 (1912.5MHz)	5MHz	QPSK	1
		26140 to 26590	26140 (1860.0MHz), 26365 (1882.5MHz), 26590 (1905.0MHz)	20MHz	QPSK	1

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation. Therefore, only EIRP had been tested under QPSK, 16QAM mode, the other items were performed under QPSK mode only.
2. For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.
3. For radiated emission above 1GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5MHz & highest channel bandwidth for final test.

NB-IoT Band 2

EUT Configure Mode	Test item	Available channel		Tested Channel	Channel Bandwidth	Subcarrier Spacing	Modulation	Number of Subcarrier / Starting Subcarrier
-	EIRP	Standalone	18602 to 19198	18602 (1850.2MHz), 18900 (1880.0MHz), 19198 (1909.8MHz)	-	3.75kHz	BPSK	1@0 1@47
							QPSK	1@0 1@47
						15kHz	BPSK	1@0 1@11
							QPSK	1@0 1@11 3@3 12@0
-	Radiated Emission Below 1GHz	Standalone	18602 to 19198	19198 (1909.8MHz)	-	15kHz	BPSK	1@0
-	Radiated Emission Above 1GHz	Standalone	18602 to 19198	18602 (1850.2MHz), 18900 (1880.0MHz), 19198 (1909.8MHz)	-	15kHz	BPSK	1@0

Note: For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.

NB-IoT Band 25

EUT Configure Mode	Test item	Available channel		Tested Channel	Channel Bandwidth	Subcarrier Spacing	Modulation	Number of Subcarrier / Starting Subcarrier
-	EIRP	Standalone	26042 to 26688	26042 (1850.2MHz), 26365 (1882.5MHz), 26688 (1914.8MHz)	-	3.75kHz	BPSK	1@0 1@47
							QPSK	1@0 1@47
						15kHz	BPSK	1@0 1@11
							QPSK	1@0 1@11 12@0
-	Radiated Emission Below 1GHz	Standalone	26042 to 26688	26688 (1914.8MHz)	-	15kHz	BPSK	1@11
-	Radiated Emission Above 1GHz	Standalone	26042 to 26688	26042 (1850.2MHz), 26365 (1882.5MHz), 26688 (1914.8MHz)	-	15kHz	BPSK	1@11

Note: For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	22deg. C, 67%RH	120 Vac, 60 Hz	Noah CHANG
Radiated Emission Below 1GHz	22deg. C, 67%RH	120 Vac, 60 Hz	Greg Lin
Radiated Emission Above 1GHz	22deg. C, 67%RH	120 Vac, 60 Hz	Greg Lin

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.

4.1.2 Test Procedures

Conducted Power Measurement:

The EUT was set up for the maximum power with GPRS, EDGE, NB-IoT and eMTC link data modulation and link up with simulator (Built-in power meter). Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator. The average (rms) power measurement was performed on emulator and power value was measured from power function on emulator. Power measurements use detector average (rms).

Maximum EIRP / ERP

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is

given in Equation as follows:

$$\text{EIRP} = P_{\text{Meas}} + G_T$$

$$\text{ERP} = P_{\text{Meas}} + G_T - 2.15$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively


(expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

4.1.3 Test Setup

Conducted Power Measurement:

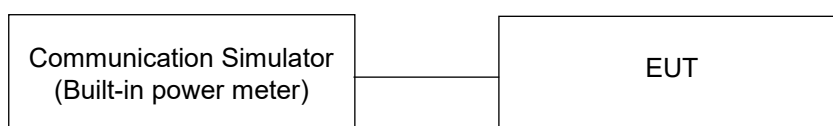

4.1.4 Test Results

Conducted Output Power (dBm)

Band	GSM1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880	1909.8
GSM	30.16	29.83	29.91
GPRS	29.86	29.84	29.82
EDGE	25.94	25.84	25.89

Cat-M1

Cat-M1 Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18700	18900	19100
		Frequency (MHz)		1860	1880	1900
20M	QPSK	1	0	23.40	23.46	23.40
		1	6	23.03	23.24	23.03
		6	0	23.09	23.21	23.13
	16QAM	1	0	23.28	23.36	23.25
		1	6	23.05	23.00	23.07
		6	0	22.04	22.36	22.59
BW	MCS Index	Channel		18675	18900	19125
		Frequency (MHz)		1857.5	1880	1902.5
15M	QPSK	1	0	23.20	23.30	23.35
		1	6	23.12	23.18	23.14
		6	0	23.00	23.22	23.13
	16QAM	1	0	23.28	23.26	23.22
		1	6	22.99	23.17	23.10
		6	0	22.05	22.18	22.30
BW	MCS Index	Channel		18650	18900	19150
		Frequency (MHz)		1855	1880	1905
10M	QPSK	1	0	23.21	23.36	23.09
		1	6	22.94	23.04	22.97
		6	0	22.41	22.40	22.42
	16QAM	1	0	23.27	23.22	23.18
		1	6	22.98	23.00	22.99
		6	0	21.48	21.35	21.41

Cat-M1 Band 2						
BW	MCS Index	Channel		18625	18900	19175
		Frequency (MHz)		1852.5	1880	1907.5
5M	QPSK	1	0	23.10	23.17	23.09
		1	6	23.08	23.10	22.94
		6	0	21.67	21.74	21.72
	16QAM	1	0	23.06	23.14	22.92
		1	6	22.97	23.05	22.90
		6	0	20.81	20.83	20.72
BW	MCS Index	Channel		18615	18900	19185
		Frequency (MHz)		1851.5	1880	1908.5
3M	QPSK	1	0	23.26	23.44	23.36
		1	6	23.27	23.32	23.28
		6	0	21.75	21.74	21.71
	16QAM	1	0	23.00	23.06	23.08
		1	6	23.08	23.02	22.97
		6	0	20.80	20.81	20.81
BW	MCS Index	Channel		18607	18900	19193
		Frequency (MHz)		1850.7	1880	1909.3
1.4M	QPSK	1	0	23.18	23.15	23.11
		1	6	22.97	23.03	23.01
		6	0	21.70	21.68	21.69
	16QAM	1	0	22.74	22.71	22.77
		1	6	22.74	22.92	22.69
		6	0	20.65	20.84	20.70

Cat-M1 Band 25						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		26140	26365	26590
		Frequency (MHz)		1860	1882.5	1905
20M	QPSK	1	0	22.86	23.30	22.91
		1	5	22.93	23.07	23.05
		6	0	22.91	22.89	22.73
	16QAM	1	0	22.75	22.77	22.81
		1	5	22.84	22.84	22.85
		5	0	21.94	22.02	21.67
BW	MCS Index	Channel		26115	26365	26615
		Frequency (MHz)		1857.5	1882.5	1907.5
15M	QPSK	1	0	23.19	23.21	23.04
		1	5	22.68	22.87	22.89
		6	0	23.06	23.10	22.96
	16QAM	1	0	22.87	22.93	22.78
		1	5	22.74	22.73	22.77
		5	0	21.96	22.05	22.03
BW	MCS Index	Channel		26090	26365	26640
		Frequency (MHz)		1855	1882.5	1910
10M	QPSK	1	0	22.88	22.89	22.75
		1	5	23.14	23.22	23.09
		6	0	22.43	22.47	22.55
	16QAM	1	0	22.74	22.80	22.84
		1	5	22.72	22.84	22.78
		5	0	21.48	21.52	21.44
BW	MCS Index	Channel		26065	26365	26665
		Frequency (MHz)		1852.5	1882.5	1912.5
5M	QPSK	1	0	23.13	23.21	23.05
		1	5	22.97	23.00	22.92
		6	0	22.34	22.51	22.38
	16QAM	1	0	22.71	22.87	22.87
		1	5	22.78	22.76	22.74
		5	0	21.38	21.57	21.55

Cat-M1 Band 25						
BW	MCS Index	Channel		26055	26365	26675
		Frequency (MHz)		1851.5	1882.5	1913.5
3M	QPSK	1	0	23.04	23.13	23.03
		1	5	22.72	22.93	22.72
		6	0	21.32	21.49	21.48
	16QAM	1	0	22.39	22.62	22.42
		1	5	22.29	22.29	22.18
		5	0	20.48	20.60	20.43
BW	MCS Index	Channel		26047	26365	26683
		Frequency (MHz)		1850.7	1882.5	1914.3
1.4M	QPSK	1	0	22.96	23.07	22.95
		1	5	22.97	22.99	22.77
		6	0	21.32	21.50	21.34
	16QAM	1	0	22.23	22.39	22.21
		1	5	22.10	22.12	22.06
		5	0	20.33	20.45	20.52

NB-IoT Band 2

NB-IoT Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18602	18900	19198
		Frequency (MHz)		1850.2	1880	1909.8
Stand-alone	3.75k BPSK	1	0	21.38	21.36	21.60
		1	47	21.13	20.93	21.29
	3.75k QPSK	1	0	21.42	21.57	21.32
		1	47	21.02	21.09	20.80
	15k BPSK	1	0	23.58	23.54	23.75
		1	11	23.20	23.45	23.70
	15k QPSK	1	0	23.28	23.51	23.72
		1	11	23.29	23.59	23.40
		12	0	21.51	21.48	21.39

NB-IoT Band 25

NB-IoT Band 25						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		26042	26365	26688
		Frequency (MHz)		1850.2	1882.5	1914.8
Stand-alone	3.75k BPSK	1	0	21.32	21.32	21.27
		1	47	20.91	20.90	20.97
	3.75k QPSK	1	0	21.19	21.33	21.22
		1	47	20.69	20.80	20.71
	15k BPSK	1	0	23.28	23.33	23.22
		1	11	23.14	23.42	23.44
	15k QPSK	1	0	23.26	23.41	23.39
		1	11	22.95	23.27	23.21
		12	0	21.34	21.43	21.33

EIRP Power (dBm)

Band	GSM1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880	1909.8
GSM	31.86	31.53	31.61
GPRS	31.56	31.54	31.52
EDGE	27.64	27.54	27.59

*EIRP = Conducted + antenna gain (1.7 dBi)

Cat-M1 Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18700	18900	19100
		Frequency (MHz)		1860	1880	1900
20M	QPSK	1	0	25.10	25.16	25.10
		1	6	24.73	24.94	24.73
		6	0	24.79	24.91	24.83
	16QAM	1	0	24.98	25.06	24.95
		1	6	24.75	24.70	24.77
		6	0	23.74	24.06	24.29
BW	MCS Index	Channel		18675	18900	19125
		Frequency (MHz)		1857.5	1880	1902.5
15M	QPSK	1	0	24.90	25.00	25.05
		1	6	24.82	24.88	24.84
		6	0	24.70	24.92	24.83
	16QAM	1	0	24.98	24.96	24.92
		1	6	24.69	24.87	24.80
		6	0	23.75	23.88	24.00
BW	MCS Index	Channel		18650	18900	19150
		Frequency (MHz)		1855	1880	1905
10M	QPSK	1	0	24.91	25.06	24.79
		1	6	24.64	24.74	24.67
		6	0	24.11	24.10	24.12
	16QAM	1	0	24.97	24.92	24.88
		1	6	24.68	24.70	24.69
		6	0	23.18	23.05	23.11

*EIRP = Conducted + antenna gain (1.7dBi)

Cat-M1 Band 2						
BW	MCS Index	Channel		18625	18900	19175
		Frequency (MHz)		1852.5	1880	1907.5
5M	QPSK	1	0	24.80	24.87	24.79
		1	6	24.78	24.80	24.64
		6	0	23.37	23.44	23.42
	16QAM	1	0	24.76	24.84	24.62
		1	6	24.67	24.75	24.60
		6	0	22.51	22.53	22.42
BW	MCS Index	Channel		18615	18900	19185
		Frequency (MHz)		1851.5	1880	1908.5
3M	QPSK	1	0	24.96	25.14	25.06
		1	6	24.97	25.02	24.98
		6	0	23.45	23.44	23.41
	16QAM	1	0	24.70	24.76	24.78
		1	6	24.78	24.72	24.67
		6	0	22.50	22.51	22.51
BW	MCS Index	Channel		18607	18900	19193
		Frequency (MHz)		1850.7	1880	1909.3
1.4M	QPSK	1	0	24.88	24.85	24.81
		1	6	24.67	24.73	24.71
		6	0	23.40	23.38	23.39
	16QAM	1	0	24.44	24.41	24.47
		1	6	24.44	24.62	24.39
		6	0	22.35	22.54	22.40

*EIRP = Conducted + antenna gain (1.7dBi)

Cat-M1 Band 25						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		26140	26365	26590
		Frequency (MHz)		1860	1882.5	1905
20M	QPSK	1	0	24.56	25.00	24.61
		1	5	24.63	24.77	24.75
		6	0	24.61	24.59	24.43
	16QAM	1	0	24.45	24.47	24.51
		1	5	24.54	24.54	24.55
		5	0	23.64	23.72	23.37
BW	MCS Index	Channel		26115	26365	26615
		Frequency (MHz)		1857.5	1882.5	1907.5
15M	QPSK	1	0	24.89	24.91	24.74
		1	5	24.38	24.57	24.59
		6	0	24.76	24.80	24.66
	16QAM	1	0	24.57	24.63	24.48
		1	5	24.44	24.43	24.47
		5	0	23.66	23.75	23.73
BW	MCS Index	Channel		26090	26365	26640
		Frequency (MHz)		1855	1882.5	1910
10M	QPSK	1	0	24.58	24.59	24.45
		1	5	24.84	24.92	24.79
		6	0	24.13	24.17	24.25
	16QAM	1	0	24.44	24.50	24.54
		1	5	24.42	24.54	24.48
		5	0	23.18	23.22	23.14
BW	MCS Index	Channel		26065	26365	26665
		Frequency (MHz)		1852.5	1882.5	1912.5
5M	QPSK	1	0	24.83	24.91	24.75
		1	5	24.67	24.70	24.62
		6	0	24.04	24.21	24.08
	16QAM	1	0	24.41	24.57	24.57
		1	5	24.48	24.46	24.44
		5	0	23.08	23.27	23.25

*EIRP = Conducted + antenna gain (1.7dBi)

Cat-M1 Band 25						
BW	MCS Index	Channel		26055	26365	26675
		Frequency (MHz)		1851.5	1882.5	1913.5
3M	QPSK	1	0	24.74	24.83	24.73
		1	5	24.42	24.63	24.42
		6	0	23.02	23.19	23.18
	16QAM	1	0	24.09	24.32	24.12
		1	5	23.99	23.99	23.88
		5	0	22.18	22.30	22.13
BW	MCS Index	Channel		26047	26365	26683
		Frequency (MHz)		1850.7	1882.5	1914.3
1.4M	QPSK	1	0	24.66	24.77	24.65
		1	5	24.67	24.69	24.47
		6	0	23.02	23.20	23.04
	16QAM	1	0	23.93	24.09	23.91
		1	5	23.80	23.82	23.76
		5	0	22.03	22.15	22.22

*EIRP = Conducted + antenna gain (1.7dBi)

NB-IoT Band 2

NB-IoT Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18602	18900	19198
		Frequency (MHz)		1850.2	1880	1909.8
Stand-alone	3.75k BPSK	1	0	23.08	23.06	23.30
		1	47	22.83	22.63	22.99
	3.75k QPSK	1	0	23.12	23.27	23.02
		1	47	22.72	22.79	22.50
	15k BPSK	1	0	25.28	25.24	25.45
		1	11	24.90	25.15	25.40
	15k QPSK	1	0	24.98	25.21	25.42
		1	11	24.99	25.29	25.10
		12	0	23.21	23.18	23.09

*EIRP = Conducted + antenna gain (1.7dBi)

NB-IoT Band 25

NB-IoT Band 25						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		26042	26365	26688
		Frequency (MHz)		1850.2	1882.5	1914.8
Stand-alone	3.75k BPSK	1	0	23.02	23.02	22.97
		1	47	22.61	22.60	22.67
	3.75k QPSK	1	0	22.89	23.03	22.92
		1	47	22.39	22.50	22.41
	15k BPSK	1	0	24.98	25.03	24.92
		1	11	24.84	25.12	25.14
	15k QPSK	1	0	24.96	25.11	25.09
		1	11	24.65	24.97	24.91
		12	0	23.04	23.13	23.03

*EIRP = Conducted + antenna gain (1.7dBi)

4.2 Radiated Emission Measurement

4.2.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

4.2.2 Test Procedure

- a. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7
 - $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
 - $ERP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz. Set detector = average.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

4.2.3 Deviation from Test Standard


No deviation.

4.2.4 Test Setup

For radiated emission 30MHz to 1GHz

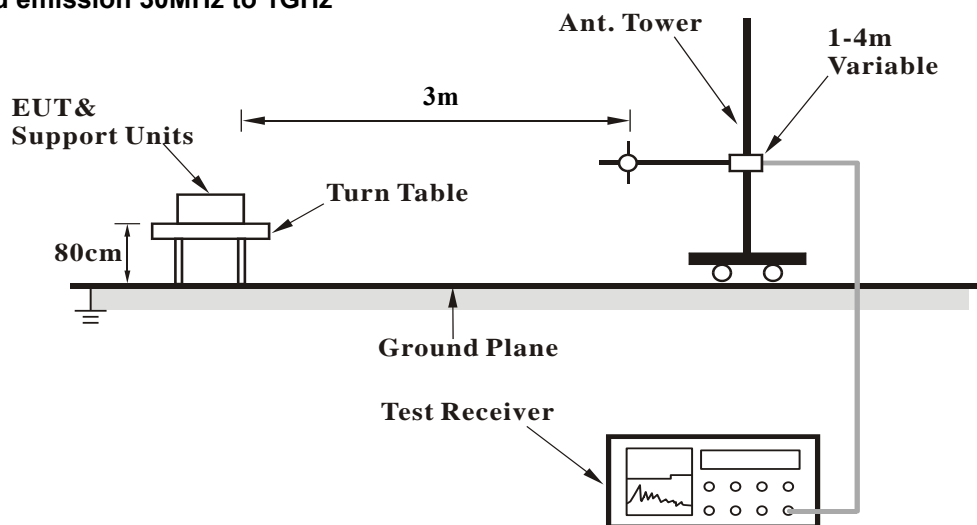

For radiated emission above 1GHz

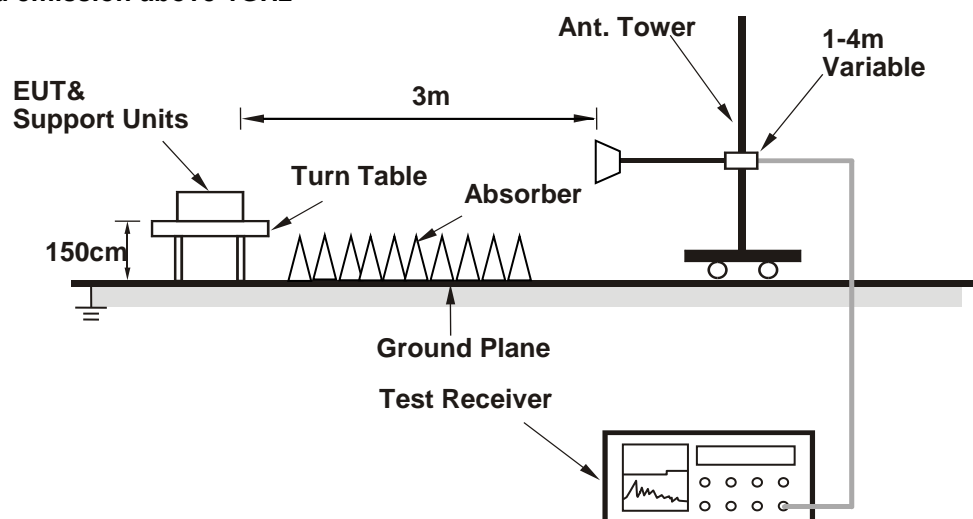

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results

Below 1GHz


PCS1900

RF Mode	TX PCS1900	Channel	CH 512 : 1850.2MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	-41.57	-13.00	-28.57	1.25 H	123	68.08	-109.65
2	152.22	-43.40	-13.00	-30.40	1.00 H	4	64.90	-108.30
3	246.31	-46.60	-13.00	-33.60	1.50 H	247	63.30	-109.90
4	456.80	-53.82	-13.00	-40.82	1.00 H	47	49.98	-103.80
5	656.62	-51.53	-13.00	-38.53	1.00 H	2	48.51	-100.04
6	938.89	-48.00	-13.00	-35.00	1.25 H	221	48.07	-96.07

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

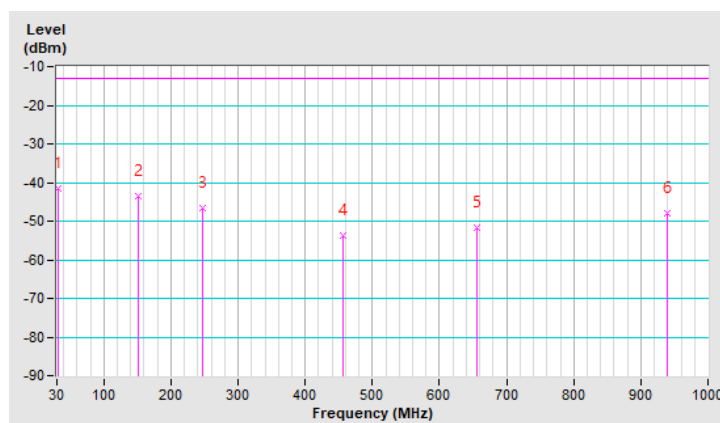


RF Mode	TX PCS1900	Channel	CH 512 : 1850.2MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.73	-25.45	-13.00	-12.45	1.50 V	174	83.50	-108.95
2	149.31	-43.30	-13.00	-30.30	1.50 V	118	65.02	-108.32
3	244.37	-52.67	-13.00	-39.67	1.00 V	274	57.27	-109.94
4	448.07	-51.57	-13.00	-38.57	1.25 V	268	52.43	-104.00
5	621.70	-53.37	-13.00	-40.37	1.00 V	43	47.17	-100.54
6	937.92	-41.67	-13.00	-28.67	1.50 V	18	54.42	-96.09

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

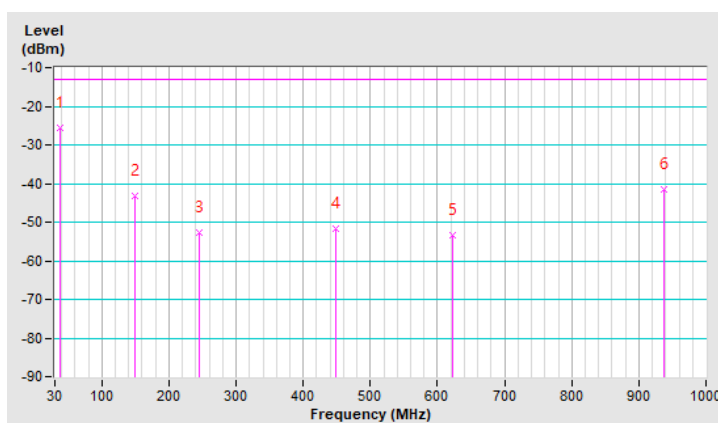


EDGE1900

RF Mode	TX PCS1900	Channel	CH 512 : 1850.2MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	40.67	-45.58	-13.00	-32.58	1.25 H	138	63.25	-108.83
2	122.15	-53.58	-13.00	-40.58	1.00 H	4	56.87	-110.45
3	267.65	-50.88	-13.00	-37.88	1.50 H	2	58.24	-109.12
4	381.14	-52.86	-13.00	-39.86	1.25 H	280	53.14	-106.00
5	664.38	-53.27	-13.00	-40.27	1.00 H	2	46.67	-99.94
6	923.37	-56.50	-13.00	-43.50	1.25 H	14	39.78	-96.28

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

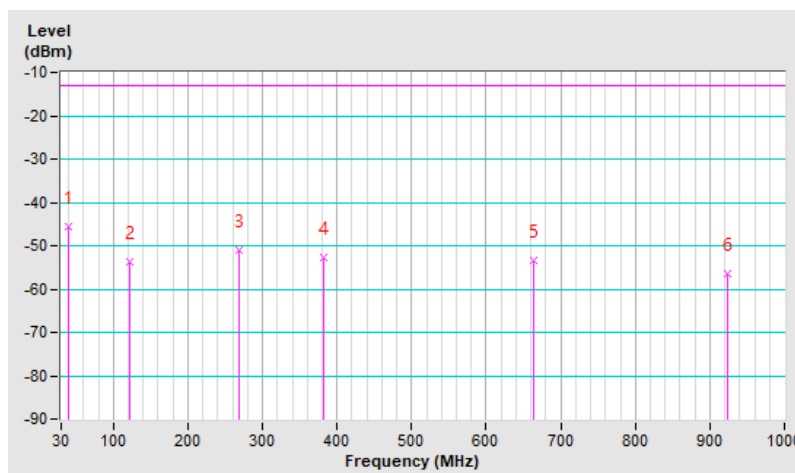


RF Mode	TX PCS1900	Channel	CH 512 : 1850.2MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.64	-31.23	-13.00	-18.23	1.25 V	18	77.45	-108.68
2	142.52	-46.36	-13.00	-33.36	1.50 V	124	62.27	-108.63
3	308.39	-55.37	-13.00	-42.37	1.00 V	199	52.33	-107.70
4	464.56	-52.77	-13.00	-39.77	1.25 V	264	50.93	-103.70
5	637.22	-55.05	-13.00	-42.05	1.00 V	18	45.17	-100.22
6	898.15	-54.25	-13.00	-41.25	1.25 V	310	42.38	-96.63

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

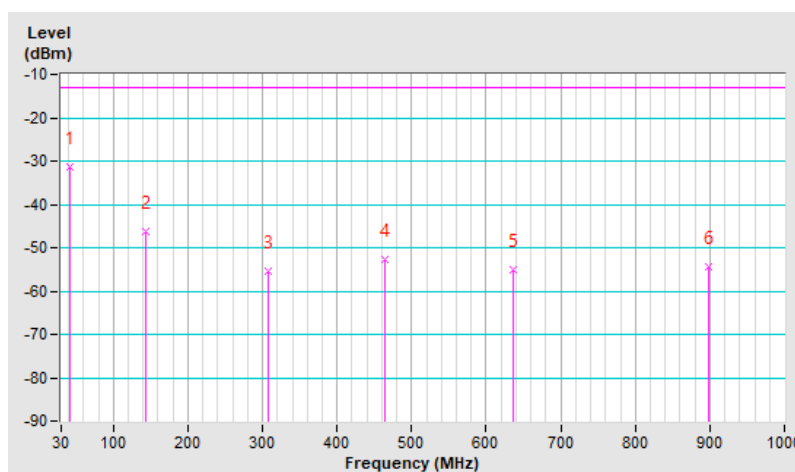

Cat-M1


Cat-M1 Band 2, Channel Bandwidth 20MHz

RF Mode	TX Cat-M1 Band 2	Channel	CH 18900 : 1880.0MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	38.73	-42.51	-13.00	-29.51	1.00 H	159	66.44	-108.95
2	148.34	-42.05	-13.00	-29.05	1.50 H	2	66.35	-108.40
3	243.40	-47.50	-13.00	-34.50	1.00 H	349	62.47	-109.97
4	400.54	-51.99	-13.00	-38.99	1.25 H	185	53.57	-105.56
5	621.70	-51.44	-13.00	-38.44	1.50 H	41	49.10	-100.54
6	800.18	-54.42	-13.00	-41.42	2.00 H	256	43.29	-97.71

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

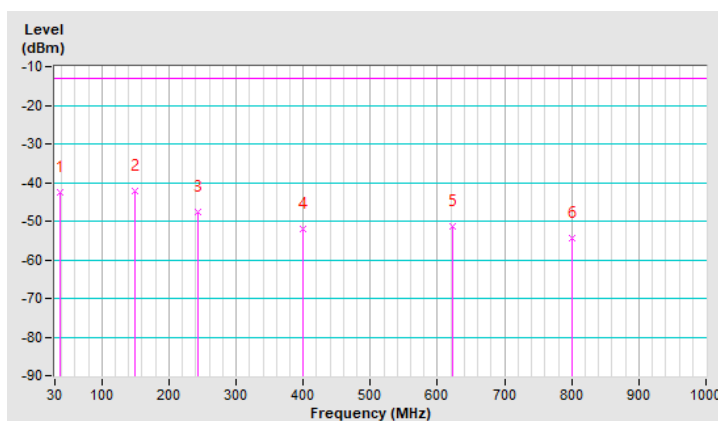


RF Mode	TX Cat-M1 Band 2	Channel	CH 18900 : 1880.0MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	-27.60	-13.00	-14.60	1.50 V	297	82.10	-109.70
2	179.38	-46.17	-13.00	-33.17	2.00 V	57	63.70	-109.87
3	301.60	-53.77	-13.00	-40.77	1.25 V	202	54.13	-107.90
4	482.02	-52.46	-13.00	-39.46	1.00 V	265	50.95	-103.41
5	628.49	-53.52	-13.00	-40.52	1.50 V	18	46.94	-100.46
6	903.00	-51.35	-13.00	-38.35	1.00 V	18	45.23	-96.58

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

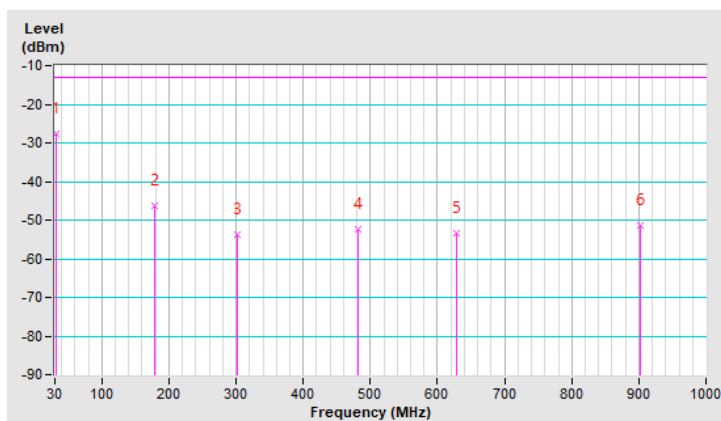


Cat-M1 Band 25, Channel Bandwidth 20MHz

RF Mode	TX Cat-M1 Band 25	Channel	CH 26365 : 1882.5MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	-43.48	-13.00	-30.48	1.25 H	63	66.17	-109.65
2	138.64	-46.31	-13.00	-33.31	1.00 H	212	62.58	-108.89
3	197.81	-46.64	-13.00	-33.64	1.25 H	227	65.36	-112.00
4	304.51	-51.04	-13.00	-38.04	1.00 H	42	56.78	-107.82
5	569.32	-52.00	-13.00	-39.00	1.50 H	17	49.84	-101.84
6	917.55	-55.78	-13.00	-42.78	1.25 H	283	40.58	-96.36

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

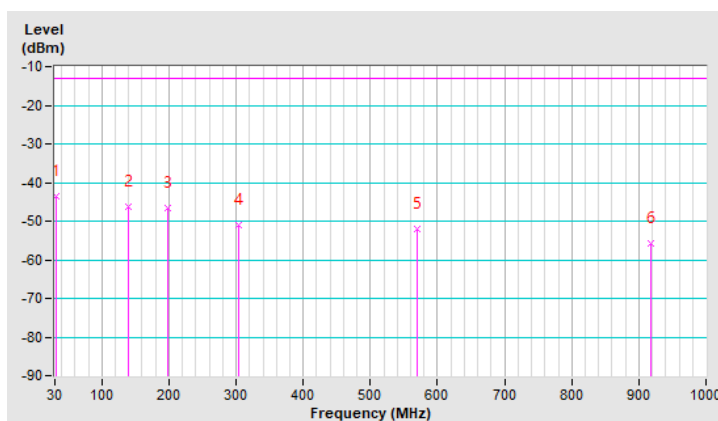


RF Mode	TX Cat-M1 Band 25	Channel	CH 26365 : 1882.5MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.64	-33.75	-13.00	-20.75	1.00 V	75	74.93	-108.68
2	148.34	-44.27	-13.00	-31.27	1.50 V	81	64.13	-108.40
3	269.59	-58.41	-13.00	-45.41	1.25 V	62	50.59	-109.00
4	311.30	-57.75	-13.00	-44.75	1.00 V	220	49.86	-107.61
5	569.32	-58.09	-13.00	-45.09	1.50 V	105	43.75	-101.84
6	956.35	-59.12	-13.00	-46.12	1.00 V	151	36.64	-95.76

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

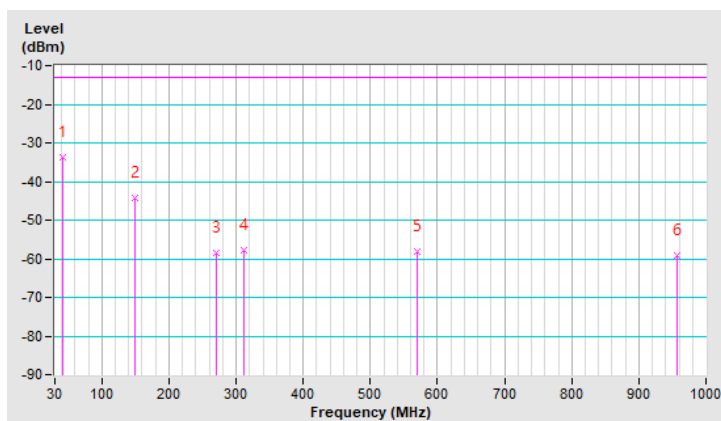


NB-IoT Band 2 Subcarrier Spacing 15kHz

RF Mode	TX NB-IoT Band 2, Subcarrier Spacing 15kHz	Channel	CH 19198 : 1909.8MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	-45.26	-13.00	-32.26	1.25 H	151	64.39	-109.65
2	127.97	-53.21	-13.00	-40.21	1.00 H	214	56.70	-109.91
3	188.11	-47.37	-13.00	-34.37	1.50 H	245	63.64	-111.01
4	297.72	-52.59	-13.00	-39.59	1.00 H	18	55.40	-107.99
5	569.32	-51.78	-13.00	-38.78	1.00 H	17	50.06	-101.84
6	802.12	-55.70	-13.00	-42.70	1.50 H	31	42.00	-97.70

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

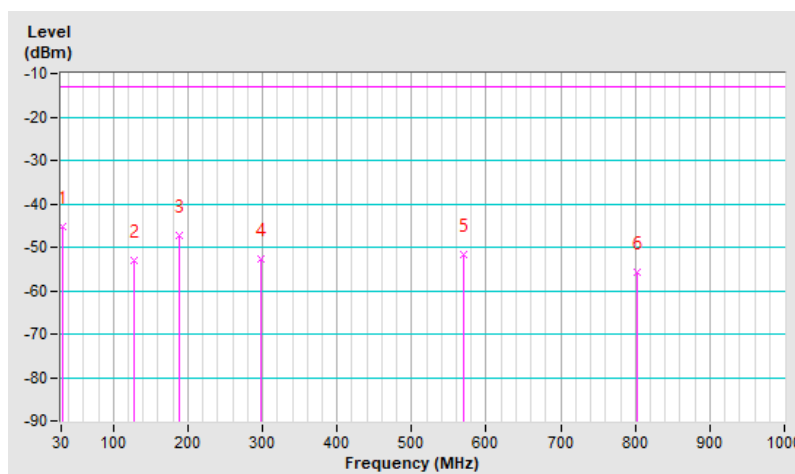


RF Mode	TX NB-IoT Band 2, Subcarrier Spacing 15kHz	Channel	CH 19198 : 1909.8MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.58	-34.71	-13.00	-21.71	1.00 V	158	73.92	-108.63
2	115.36	-53.76	-13.00	-40.76	1.50 V	36	57.24	-111.00
3	212.36	-56.60	-13.00	-43.60	1.25 V	133	55.52	-112.12
4	267.65	-56.60	-13.00	-43.60	2.00 V	56	52.52	-109.12
5	482.99	-57.83	-13.00	-44.83	1.50 V	10	45.59	-103.42
6	959.26	-58.57	-13.00	-45.57	1.00 V	75	37.15	-95.72

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

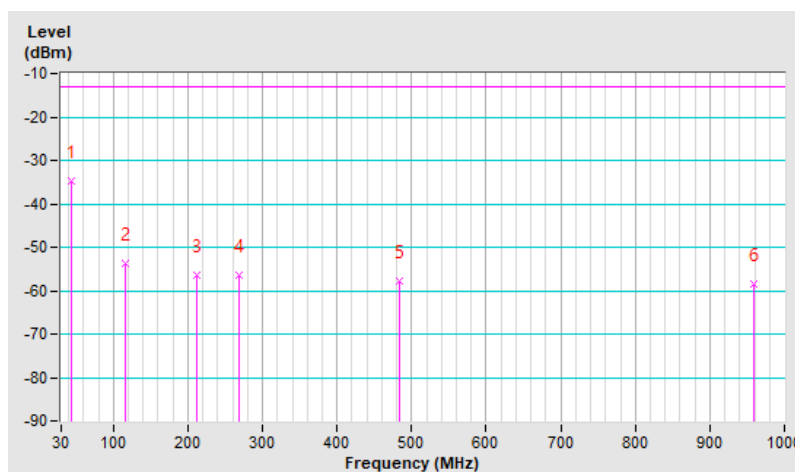


NB-IoT Band 25, Subcarrier Spacing 15kHz

RF Mode	TX NB-IoT Band 25, Subcarrier Spacing 15kHz	Channel	CH 26688 : 1914.8MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	60.07	-51.30	-13.00	-38.30	1.25 H	65	57.88	-109.18
2	151.25	-50.40	-13.00	-37.40	1.00 H	301	57.90	-108.30
3	216.24	-51.68	-13.00	-38.68	1.00 H	217	60.40	-112.08
4	311.30	-55.21	-13.00	-42.21	1.50 H	79	52.40	-107.61
5	596.48	-55.92	-13.00	-42.92	1.00 H	18	45.02	-100.94
6	958.29	-58.66	-13.00	-45.66	1.25 H	237	37.06	-95.72

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

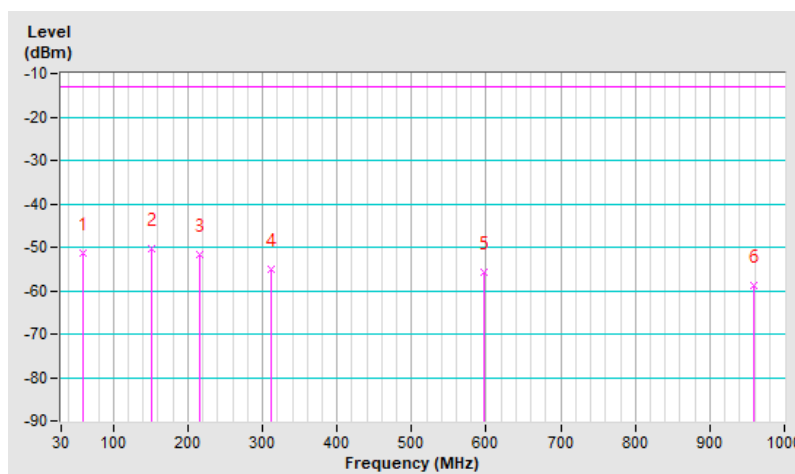


RF Mode	TX NB-IoT Band 25, Subcarrier Spacing 15kHz	Channel	CH 26688 : 1914.8MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	-36.44	-13.00	-23.44	1.50 V	172	73.26	-109.70
2	142.52	-47.38	-13.00	-34.38	1.00 V	2	61.25	-108.63
3	210.42	-49.99	-13.00	-36.99	1.25 V	143	62.16	-112.15
4	306.45	-54.30	-13.00	-41.30	1.25 V	220	53.47	-107.77
5	481.05	-52.73	-13.00	-39.73	1.00 V	39	50.70	-103.43
6	802.12	-52.71	-13.00	-39.71	2.00 V	99	44.99	-97.70

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

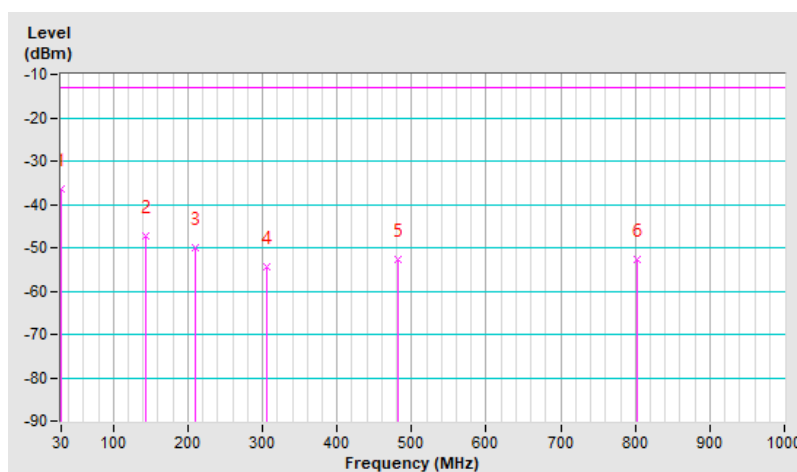

Above 1GHz

PCS1900

RF Mode	TX PCS1900	Channel	CH 512 : 1850.2MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3700.40	-33.60	-13.00	-20.60	1.23 H	183	61.49	-95.09

Antenna Polarity & Test Distance : Vertical at 3m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3700.40	-35.30	-13.00	-22.30	1.13 V	153	59.79	-95.09

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	TX PCS1900	Channel	CH 661 : 1880.0MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-33.86	-13.00	-20.86	1.17 H	184	60.96	-94.82

Antenna Polarity & Test Distance : Vertical at 3m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-34.60	-13.00	-21.60	1.06 V	158	60.22	-94.82

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	TX PCS1900	Channel	CH 810 : 1909.8MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3819.60	-33.02	-13.00	-20.02	1.18 H	187	61.56	-94.58
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3819.60	-34.80	-13.00	-21.80	1.08 V	156	59.78	-94.58

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

EDGE1900

RF Mode	TX EDGE1900	Channel	CH 512 : 1850.2MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3700.40	-35.69	-13.00	-22.69	1.23 H	190	59.40	-95.09
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3700.40	-37.92	-13.00	-24.92	1.20 V	155	57.17	-95.09

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX EDGE1900	Channel	CH 661 : 1880.0MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-34.69	-13.00	-21.69	1.21 H	192	60.13	-94.82
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-35.43	-13.00	-22.43	1.12 V	162	59.39	-94.82

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	TX EDGE1900	Channel	CH 810 : 1909.8MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3819.60	-35.37	-13.00	-22.37	1.29 H	188	59.21	-94.58
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3819.60	-36.24	-13.00	-23.24	1.22 V	160	58.34	-94.58

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Cat-M1

Cat-M1 Band 2, Channel Bandwidth 1.4MHz

RF Mode	TX Cat-M1 Band 2	Channel	CH 18607 : 1850.7MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-41.92	-13.00	-28.92	1.45 H	7	53.16	-95.08
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-44.01	-13.00	-31.01	1.91 V	343	51.07	-95.08

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX Cat-M1 Band 2	Channel	CH 18900 : 18900MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-41.45	-13.00	-28.45	1.40 H	6	53.37	-94.82
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-43.57	-13.00	-30.57	1.96 V	342	51.25	-94.82

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX Cat-M1 Band 2	Channel	CH 19193 : 1909.3MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3818.60	-41.31	-13.00	-28.31	1.38 H	4	53.26	-94.57
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3818.60	-43.62	-13.00	-30.62	1.93 V	341	50.95	-94.57

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Cat-M1 Band 2, Channel Bandwidth 5MHz

RF Mode	TX Cat-M1 Band 2	Channel	CH 18625 : 18625 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-41.69	-13.00	-28.69	1.41 H	5	53.37	-95.06

Antenna Polarity & Test Distance : Vertical at 3m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-43.40	-13.00	-30.40	1.94 V	346	51.66	-95.06

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	TX Cat-M1 Band 2	Channel	CH 18900 : 1880.0MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-41.43	-13.00	-28.43	1.46 H	6	53.39	-94.82

Antenna Polarity & Test Distance : Vertical at 3m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-43.68	-13.00	-30.68	1.92 V	343	51.14	-94.82

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	TX Cat-M1 Band 2	Channel	CH 19175 : 1907.5MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-40.88	-13.00	-27.88	1.39 H	3	53.71	-94.59
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-43.46	-13.00	-30.46	1.94 V	344	51.13	-94.59

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Cat-M1 Band 2, Channel Bandwidth 20MHz

RF Mode	TX Cat-M1 Band 2	Channel	CH 18700 : 1860.0MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-41.64	-13.00	-28.64	1.42 H	6	53.36	-95.00
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-43.94	-13.00	-30.94	1.93 V	342	51.06	-95.00

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	TX Cat-M1 Band 2	Channel	CH 18900 : 1880.0MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-41.11	-13.00	-28.11	1.39 H	7	53.71	-94.82
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-43.54	-13.00	-30.54	1.97 V	340	51.28	-94.82

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX Cat-M1 Band 2	Channel	CH 19100 : 1900.0MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-41.41	-13.00	-28.41	1.48 H	4	53.23	-94.64
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-43.86	-13.00	-30.86	1.93 V	343	50.78	-94.64

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Cat-M1 Band 25, Channel Bandwidth 1.4MHz

RF Mode	TX Cat-M1 Band 25	Channel	CH 26047 : 1850.7MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-41.13	-13.00	-28.13	1.47 H	3	53.95	-95.08
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-43.16	-13.00	-30.16	2.03 V	339	51.92	-95.08

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX Cat-M1 Band 25	Channel	CH 26365 : 1882.5MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-40.99	-13.00	-27.99	1.48 H	6	53.80	-94.79
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-43.33	-13.00	-30.33	1.96 V	334	51.46	-94.79

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX Cat-M1 Band 25	Channel	CH 26683 : 1914.3MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3828.60	-40.74	-13.00	-27.74	1.54 H	1	53.81	-94.55
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3828.60	-42.93	-13.00	-29.93	2.00 V	333	51.62	-94.55

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Cat-M1 Band 25, Channel Bandwidth 5MHz

RF Mode	TX Cat-M1 Band 25	Channel	CH 26065 : 1852.5MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-41.87	-13.00	-28.87	1.54 H	5	53.19	-95.06
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-43.68	-13.00	-30.68	1.99 V	332	51.38	-95.06

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	TX Cat-M1 Band 25	Channel	CH 26365 : 1882.5MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-41.61	-13.00	-28.61	1.56 H	6	53.18	-94.79
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-43.45	-13.00	-30.45	1.96 V	335	51.34	-94.79

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX Cat-M1 Band 25	Channel	CH 26665 : 1912.5MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3825.00	-41.19	-13.00	-28.19	1.49 H	6	53.37	-94.56
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3825.00	-43.31	-13.00	-30.31	2.01 V	340	51.25	-94.56

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Cat-M1 Band 25, Channel Bandwidth 20MHz

RF Mode	TX Cat-M1 Band 25	Channel	CH 26140 : 1860.0MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-41.63	-13.00	-28.63	1.46 H	6	53.37	-95.00

Antenna Polarity & Test Distance : Vertical at 3m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-43.11	-13.00	-30.11	1.95 V	338	51.89	-95.00

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	TX Cat-M1 Band 25	Channel	CH 26365 : 1882.5MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-41.14	-13.00	-28.14	1.49 H	3	53.65	-94.79

Antenna Polarity & Test Distance : Vertical at 3m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-43.05	-13.00	-30.05	2.01 V	337	51.74	-94.79

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	TX Cat-M1 Band 25	Channel	CH 26590 : 1905.0MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3810.00	-40.73	-13.00	-27.73	1.53 H	358	53.87	-94.60
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3810.00	-42.81	-13.00	-29.81	2.04 V	335	51.79	-94.60

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

NB-IoT Band 2, Subcarrier Spacing 15kHz

RF Mode	TX NB-IoT Band 2, Subcarrier Spacing 15kHz	Channel	CH 18602 : 1850.2MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3700.40	-40.82	-13.00	-27.82	1.54 H	14	54.27	-95.09
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3700.40	-43.68	-13.00	-30.68	1.95 V	341	51.41	-95.09

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	TX NB-IoT Band 2, Subcarrier Spacing 15kHz	Channel	CH 18900 : 1880.0MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-40.54	-13.00	-27.54	1.56 H	11	54.28	-94.82
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-43.04	-13.00	-30.04	1.87 V	338	51.78	-94.82

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX NB-IoT Band 2, Subcarrier Spacing 15kHz	Channel	CH 19198 : 1909.8MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3819.60	-40.55	-13.00	-27.55	1.55 H	7	54.03	-94.58
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3819.60	-43.60	-13.00	-30.60	1.83 V	336	50.98	-94.58

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

NB-IoT Band 25, Subcarrier Spacing 15kHz

RF Mode	TX NB-IoT Band 25, Subcarrier Spacing 15kHz	Channel	CH 26042 : 1850.2MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3700.40	-40.57	-13.00	-27.57	1.57 H	8	54.52	-95.09
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3700.40	-43.14	-13.00	-30.14	2.15 V	346	51.95	-95.09

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX NB-IoT Band 25, Subcarrier Spacing 15kHz	Channel	CH 26365 : 1882.5MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-40.30	-13.00	-27.30	1.61 H	14	54.49	-94.79
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-42.46	-13.00	-29.46	2.07 V	338	52.33	-94.79

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX NB-IoT Band 25, Subcarrier Spacing 15kHz	Channel	CH 26688 : 1914.8MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3829.60	-40.52	-13.00	-27.52	1.64 H	12	54.03	-94.55

Antenna Polarity & Test Distance : Vertical at 3m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3829.60	-42.84	-13.00	-29.84	2.08 V	340	51.71	-94.55

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---