
Table Top Order System

User's manual

Table Terminal	WP-D701
OST Cradle	WP-C424A
OSH Cradle	WP-C521A

Rev.20121206_R4

Importer: Global Network Resources, Inc.
Address: 2241 Calle de Luna, Santa Clara, CA 95054


Chapter 1. Terminal switch operation

**When the condition of the Terminal is not good,
it may be improved by ON/OFF of the main switch.**

[Example]

- Display screen does not change when you check-in or check-out.
- There is no response to touch a button on the screen that you want to order
(It seems like “freeze”)
- Even if the "clear error" from the MIS, will not stop flashing red.
(communication error)
- Do not be started.

Note: Please do not touch except when trouble shooting as much as possible.

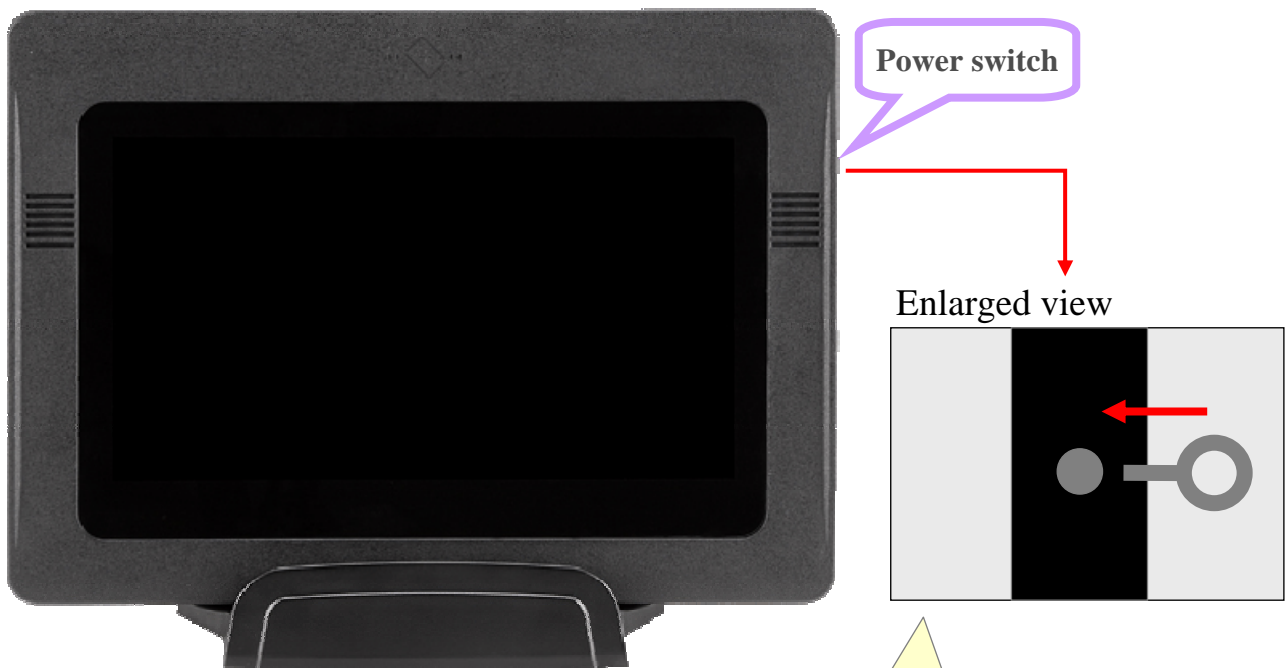

At the top right side of the Terminal, there's a hole
0.5 ~ 1 mm, it is the power switch.
Please don't use except when dealing with trouble.
The above switches, use the dedicated reset pin.



Chapter 2. Details of the front lower left side lamp



Two Power light Description (Left and Right)

(Left)

Green light ...Power ON, State is placed on the cradle, Ready for communication.

Green light blink ...Power ON, State is placed not on the cradle, Ready for communication.

Red light or blink...State is can not communication.

Unlitght...State is Power OFF.

Note: The wireless device is not working, until when you choose
"Operational mode" please read more information on next page.

(Right)

Orange light...Charging, State is on the cradle.

Unlitght...State is Fully charged.

Chapter 3. After start-up mode selection



- (1) Please wait until this screen appears when you turn on the power switch. Then you can choose "Setting mode", "Training mode" and "Operation mode".
- (2) When you choose "Setting mode" can be adjusted for volume tune, brightness or other condition of the terminal.
- (3) When you choose "Training mode" the menu can be operated as a stand-alone terminal demo.
The wireless network device is not working.
- (4) **When you choose "Operational mode" the terminal working on actual system environment with wireless network device.**
- (5) Please note that you can not start if there is no actual system environment wireless network for "Operation mode".



When put on the cradle, the terminal will charge.



Desktop type
WP-C424A

Cradle



Wall-mounted type
WP-C521A

This cradle designed for safety, voltage is only output from electric pin when the terminal state put on it .

Chapter 4. Products Specifications

Table Terminal

Model: WP-D701

Dimension: 300mm(W) × 219mm(H) × 40mm(D)

Weight: 1.2kg, 1.4kg (Option battery Operating)

Display: 10.1 WSVGA 1024 × 600 (200cd/m²)

Horizontal: 45° 45°

Vertical: 20° 45°

WiFi : IEEE-802.11b & g

Power: DC12V, 10W or less power consumption form built-in battery

Built-in battery: 6hours, Option battery Operating 12hours

(At the lowest brightness setting)

Charging method: Charging by dedicated cradle, DC input from AC adapter.

Touch screen: Projective Capacitive (multi-touch)

OS: LINUX 2.6.32

Wireless device (Inside Table Terminal)

- Operational frequency: 2412 to 2462 MHz (5MHz step, 11 channels)

- IEEE802.11 b/g compliant Wireless LAN

- Data rate

IEEE802.11b: 1, 2, 5.5 and 11 Mbps

IEEE802.11g: 6, 9, 12, 18, 24, 36, 48 and 54 Mbps

Cradle

Model: OST Cradle (WP-C424A) and OSH Cradle(WP-C521A)

Input/Output voltage: DC 12V \rightleftharpoons 2A

Battery

Model: 2UR18650-2-WRPC

Classification of the battery: Lithium Ion Battery

Rated voltage: 7.4V

Capacity: Typical 4800mA / Lowest 4600mA

Battery Type: 2UR18685F-2

Manufacturers: STANDARD ELECTRIC CO., LTD

Chapter 5. Operating Considerations

(§ 2.1077(a)(1))

Company: Worldpicom Corporation

Model name: Table Terminal

Model number: WP-D701

FCC ID: PRTJD712

(§ 2.1077(a)(3), § 2.909)

Subsidiary of the U.S. information: Global Network Resources, Inc.

Address: 2241 Calle de Luna, Santa Clara, CA 95054

Phone: 408.727.1900 / Fax: 408.727.1910

(§ 15.21)

Notice: The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

IMPORTANT NOTE:

To comply with the FCC RF exposure compliance requirements, no change to the antenna or the device is permitted. Any change to the antenna or the device could result in the device exceeding the RF exposure requirements and void user's authority to operate the device.

(§ 15.105)

FCC INFORMATION

The Federal Communication Commission Radio Frequency Interference Statement includes the following paragraph:

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The user should not modify or change this equipment without written approval from **Worldpicom Corporation**. Modification could void authority to use this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.