



# FCC Part 15C Test Report

## FCC ID: 2A74I-TLL331431

Applicant: ABN SYSTEMS INTERNATIONAL S.A.

Address: Str. Marinariilor, nr. 31, Sector 1 Bucuresti,Romania

Manufacturer: Shenzhen Rti-Tek Co., Ltd.

Address: 4th Floor, Factory 10, Xiaweyuan Industrial Zone, Gushu Community, Xixiang Street, Bao'an District, Shenzhen, Guangdong, P.R.C.

EUT: Thermostat-Transmitter

Trade Mark: TELLUR

Model Number: TLL331431

Date of Receipt: Aug. 30, 2022

Test Date: Aug. 30, 2022 - Oct. 17, 2022

Date of Report: Oct. 17 2022

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Applicable Standards: FCC PART 15 C 15.247  
ANSI C63.10:2013

Test Result: Pass

Report Number: DL-20220925013E

Prepared (Test Engineer): Pxing Huang

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



*This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.*



Table of Contents	Page
<b>1. SUMMARY OF TEST RESULTS .....</b>	<b>4</b>
1.1 MEASUREMENT UNCERTAINTY .....	4
1.2 TEST FACILITY .....	4
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
2.1 GENERAL DESCRIPTION OF EUT .....	5
2.2 DESCRIPTION OF TEST MODES .....	6
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED .....	6
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) .....	6
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING .....	7
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS .....	8
<b>3. EMC EMISSION TEST .....</b>	<b>9</b>
3.1 CONDUCTED EMISSION MEASUREMENT .....	9
3.2 POWER LINE CONDUCTED EMISSION Limits .....	9
3.3TEST PROCEDURE .....	9
3.4 DEVIATION FROM TEST STANDARD .....	9
3.5 TEST SETUP .....	10
3.6 EUT OPERATING CONDITIONS .....	10
3.7 TEST RESULTS .....	10
<b>4. RADIATED EMISSION MEASUREMENT .....</b>	<b>13</b>
4.1 RADIATED EMISSION LIMITS .....	13
4.2 TEST PROCEDURE .....	14
4.3 DEVIATION FROM TEST STANDARD .....	14
4.4 TEST SETUP .....	14
4.5 EUT OPERATING CONDITIONS .....	15
4.6 TEST RESULTS .....	15
<b>5. RADIATED BAND EMISSION MEASUREMENT .....</b>	<b>19</b>
5.1 TEST REQUIREMENT: .....	19
5.2 TEST PROCEDURE .....	19
5.3 DEVIATION FROM TEST STANDARD .....	19
5.4 TEST SETUP .....	20
5.5 EUT OPERATING CONDITIONS .....	20
5.6 TEST RESULT .....	21
<b>6. PEAK OUTPUT POWER .....</b>	<b>22</b>
6.1 APPLIED PROCEDURES / LIMIT .....	22
6.2 TEST PROCEDURE .....	22
6.3 DEVIATION FROM STANDARD .....	22



Table of Contents	Page
6.4 TEST SETUP .....	22
6.5 EUT OPERATION CONDITIONS .....	22
6.6 TEST RESULTS .....	22
7. POWER SPECTRAL DENSITY TEST .....	23
7.1 APPLIED PROCEDURES / LIMIT .....	23
7.2 TEST PROCEDURE .....	23
7.3 DEVIATION FROM STANDARD .....	23
7.4 TEST SETUP .....	23
7.5 EUT OPERATION CONDITIONS .....	23
7.6 TEST RESULTS .....	24
8. 6DB BANDWIDTH TEST .....	29
8.1 APPLIED PROCEDURES / LIMIT .....	29
8.2 TEST PROCEDURE .....	29
8.3 DEVIATION FROM STANDARD .....	29
8.4 TEST SETUP .....	29
8.5 EUT OPERATION CONDITIONS .....	29
8.6 TEST RESULTS .....	29
9. OUT OF BAND EMISSIONS TEST .....	35
9.1 APPLIED PROCEDURES / LIMIT .....	35
9.2 TEST PROCEDURE .....	35
9.3 DEVIATION FROM STANDARD .....	35
9.4 TEST SETUP .....	35
9.5 EUT OPERATION CONDITIONS .....	35
9.6 TEST RESULTS .....	35
10. SPURIOUS RF CONDUCTED EMISSION .....	39
10.1 APPLIED PROCEDURES / LIMIT .....	39
10.2 TEST PROCEDURE .....	39
10.3 DEVIATION FROM STANDARD .....	39
10.4 TEST SETUP .....	39
10.5 EUT OPERATION CONDITIONS .....	39
10.6 TEST RESULTS .....	40
11. ANTENNA REQUIREMENT .....	45
11.1 STANDARD REQUIREMENT .....	45
11.2 EUT ANTENNA .....	45
12. TEST SEUUP PHOTO .....	46



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(c)	Radiated Spurious Emission	PASS	
15.205	Band Edge Emission	PASS	
15.247(b)(1)	Peak Output Power	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(e)	Power Spectral Density	PASS	
15.247(d)	Band edge measurements	PASS	
15.247(d)	Conducted Spurious Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

### 1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$  providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

### 1.2 TEST FACILITY

Shenzhen DL Testing Technology Co., Ltd.

Add.: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: CN0118



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Thermostat-Transmitter
Trademark:	TELLUR
Model No.:	TLL331431
Model Difference:	N/A
Sample No.:	DL-20220925013E#
Operation Frequency:	2412~2462 MHz for 802.11b/g/nHT20
Channel Numbers:	11 Channels for 802.11b/g/n(HT20)
Channel Separation:	5MHz
Modulation Type:	DSSS, OFDM
Antenna Type:	PCB Antenna
Antenna Gain:	3dBi
Power Supply:	AC100-240V 50/60HZ DC 5V from Adapter (only power supply), DC 3V from Battery (Two AA batteries)

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.
- 3.Channel List(802.11b/g/nHT20)

Channel	Frequency (GHz)	Channel	Frequency (GHz)
01	2.412	06	2.437
02	2.417	07	2.442
03	2.422	08	2.447
04	2.427	09	2.452
05	2.432	10	2.457
11	2.462		



**2.2 DESCRIPTION OF TEST MODES**


To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
	802.11b/g/n (20MHz)
Low Channel	2412MHz
Middle Channel	2437MHz
High channel	2462MHz


Note: 1. The measurements are performed at the highest, middle, lowest available channels.  
 2. During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

**2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED**

Radiated Spurious Emission Test



Conducted Spurious Emission Test



**2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Thermostat-Transmitter	TLL331431	N/A	EUT
E-2	Adapter	JZB-050200E	N/A	AE
E-3	Thermostat-Receiver	TLL331431	N/A	AE

Item	Shielded Type	Ferrite Core	Length	Note
C1	No	No	No	No

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



## 2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Max output power Setting				
Test software Version	Test program: AmebaZ2_mptool_1V3			
Mode	802.11b	802.11g	802.11n HT20	802.11n HT40
Data Rate	1Mbps	1Mbps	MSC0	/
Power Setting of Software	60	60	60	/

**2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS**

## Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 06, 2021	Nov. 05, 2022
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 06, 2021	Nov. 05, 2022
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 06, 2021	Nov. 05, 2022
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 06, 2021	Nov. 05, 2022
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 06, 2021	Nov. 05, 2022
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 06, 2021	Nov. 05, 2022
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 06, 2021	Nov. 05, 2022
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 06, 2021	Nov. 05, 2022
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 06, 2021	Nov. 05, 2022
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 06, 2021	Nov. 05, 2022
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 06, 2021	Nov. 05, 2022
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 06, 2021	Nov. 05, 2022
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 06, 2021	Nov. 05, 2022
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 06, 2021	Nov. 05, 2022
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 06, 2021	Nov. 05, 2022
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 06, 2021	Nov. 05, 2022

## Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Nov. 25, 2019	Nov. 24, 2022
2	EMI Receiver	R&S	ESR	101421	Nov. 06, 2021	Nov. 05, 2022
3	LISN	R&S	ENV216	102417	Nov. 06, 2021	Nov. 05, 2022
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 06, 2021	Nov. 05, 2022

## Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0





3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.2 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.3TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.4 DEVIATION FROM TEST STANDARD

No deviation

### 3.5 TEST SETUP

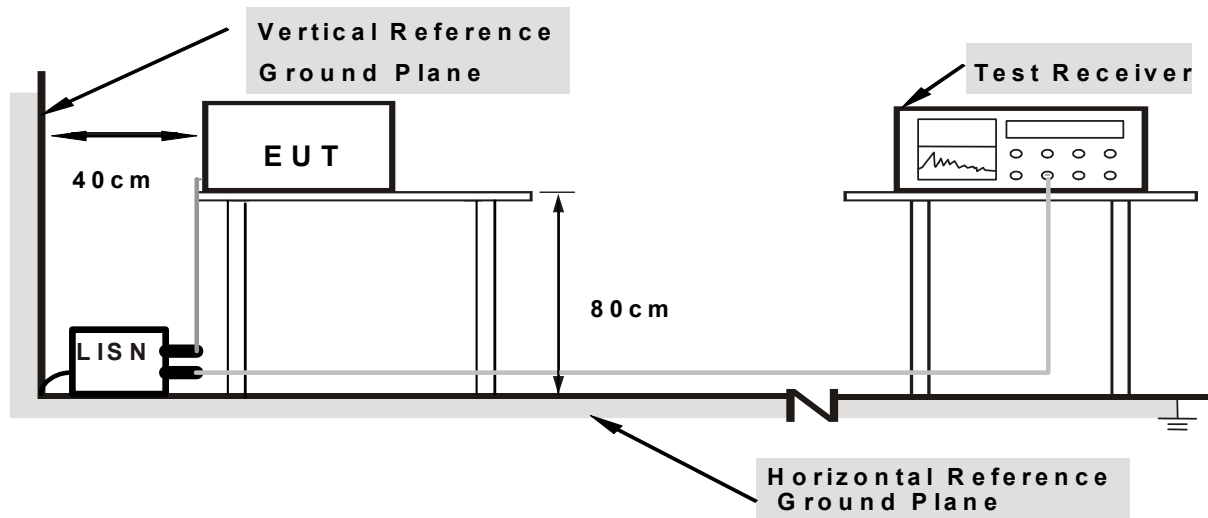

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

### 3.6 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

### 3.7 TEST RESULTS

Note: 1. All modes were tested at AC 120V and 240V, only the worst result of AC 120V was reported.  
2. All modes were tested at Low, Middle, and High channel, only the worst result of 802.11b Low Channel was reported.



Temperature:	24 °C	Relative Humidity:	52%
Pressure:	1010hPa	Phase :	L
Test Voltage:	AC 120V/60Hz		
Test Mode:	Transmitting mode of 802.11b 2412MHz		

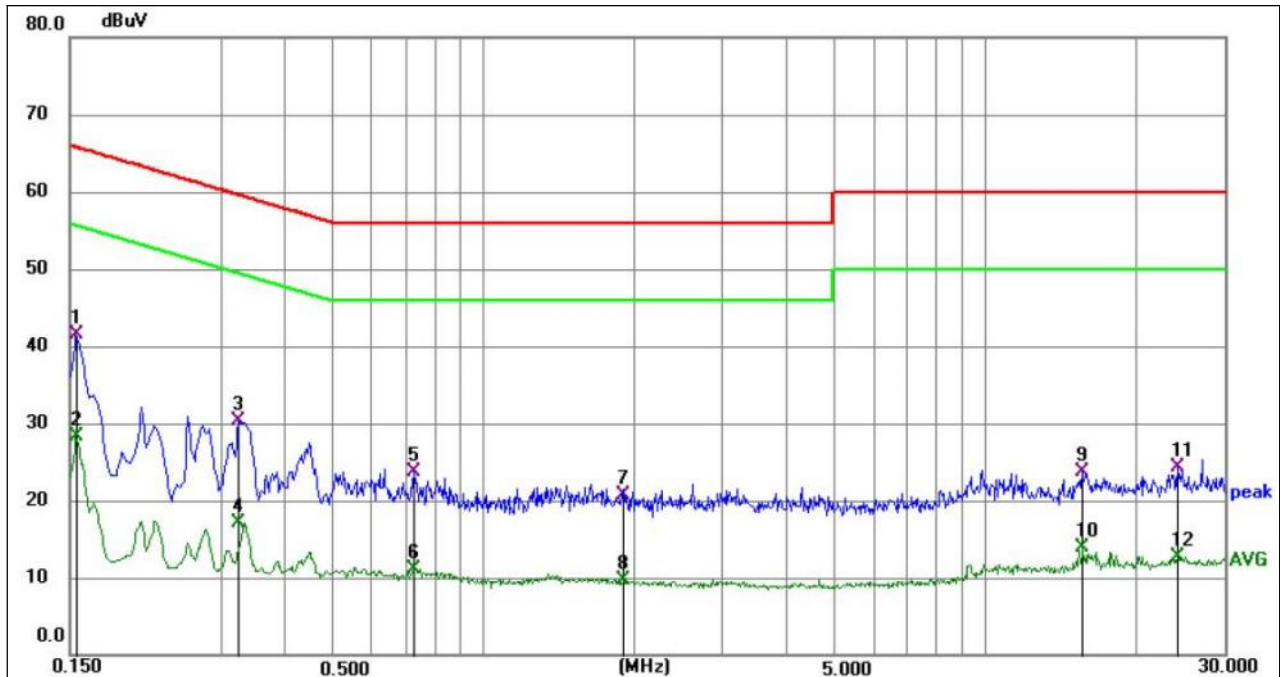


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1 *	0.1545	31.33	10.26	41.59	65.75	-24.16	QP
2	0.1545	17.97	10.26	28.23	55.75	-27.52	AVG
3	0.3255	20.06	10.27	30.33	59.57	-29.24	QP
4	0.3255	6.76	10.27	17.03	49.57	-32.54	AVG
5	0.7304	13.27	10.35	23.62	56.00	-32.38	QP
6	0.7304	0.81	10.35	11.16	46.00	-34.84	AVG
7	1.8960	10.26	10.46	20.72	56.00	-35.28	QP
8	1.8960	-0.69	10.46	9.77	46.00	-36.23	AVG
9	15.6345	13.00	10.73	23.73	60.00	-36.27	QP
10	15.6345	3.17	10.73	13.90	50.00	-36.10	AVG
11	24.2520	13.30	10.98	24.28	60.00	-35.72	QP
12	24.2520	1.68	10.98	12.66	50.00	-37.34	AVG



Temperature:	24 °C	Relative Humidity:	52%
Pressure:	1010hPa	Phase :	N
Test Voltage:	AC 120V/60Hz		
Test Mode:	Transmitting mode of 802.11b 2412MHz		

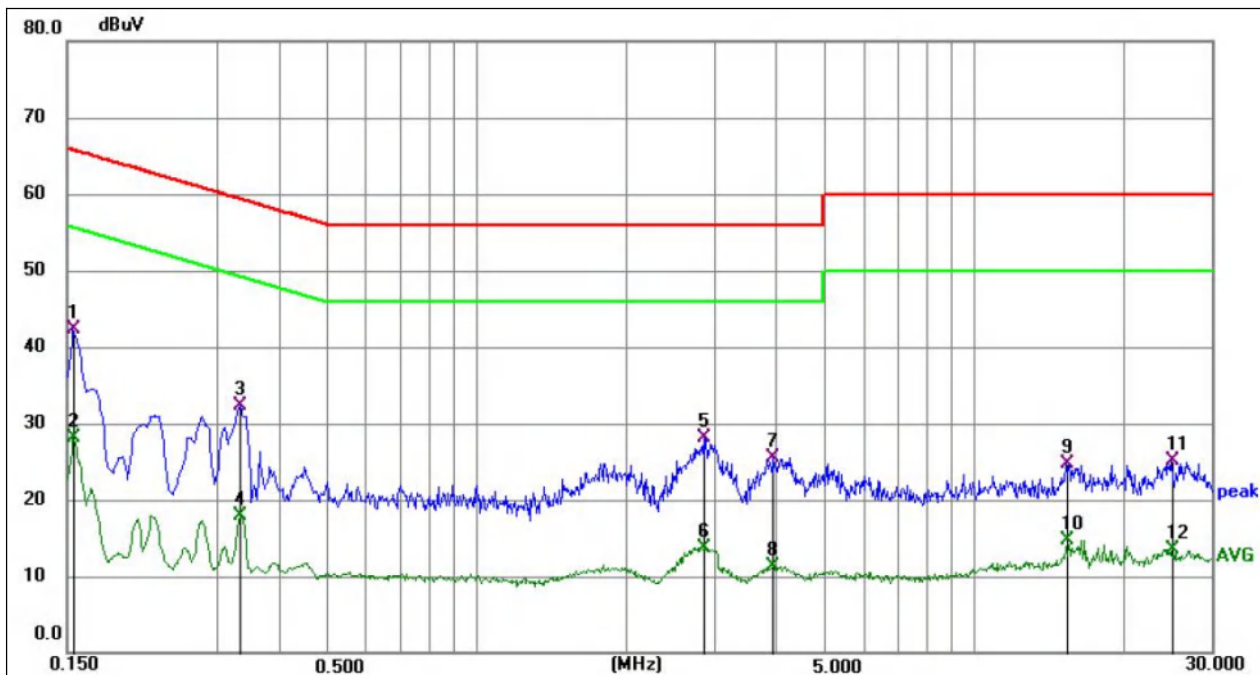

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1 *	0.1545	32.00	10.22	42.22	65.75	-23.53	QP
2	0.1545	17.92	10.22	28.14	55.75	-27.61	AVG
3	0.3345	22.01	10.25	32.26	59.34	-27.08	QP
4	0.3345	7.68	10.25	17.93	49.34	-31.41	AVG
5	2.8635	17.74	10.45	28.19	56.00	-27.81	QP
6	2.8635	3.34	10.45	13.79	46.00	-32.21	AVG
7	3.9525	15.01	10.50	25.51	56.00	-30.49	QP
8	3.9525	0.81	10.50	11.31	46.00	-34.69	AVG
9	15.3105	14.05	10.72	24.77	60.00	-35.23	QP
10	15.3105	4.07	10.72	14.79	50.00	-35.21	AVG
11	24.9360	14.14	10.93	25.07	60.00	-34.93	QP
12	24.9360	2.62	10.93	13.55	50.00	-36.45	AVG



**4. RADIATED EMISSION MEASUREMENT**

**4.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)**

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

## 4.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

## 4.3 DEVIATION FROM TEST STANDARD


No deviation

## 4.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

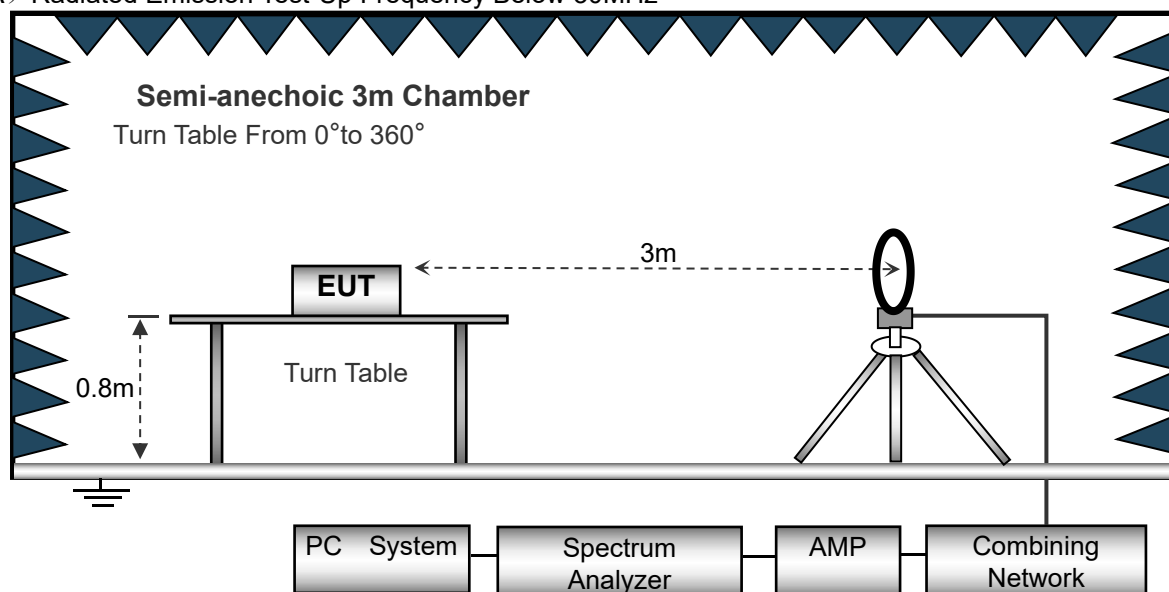

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

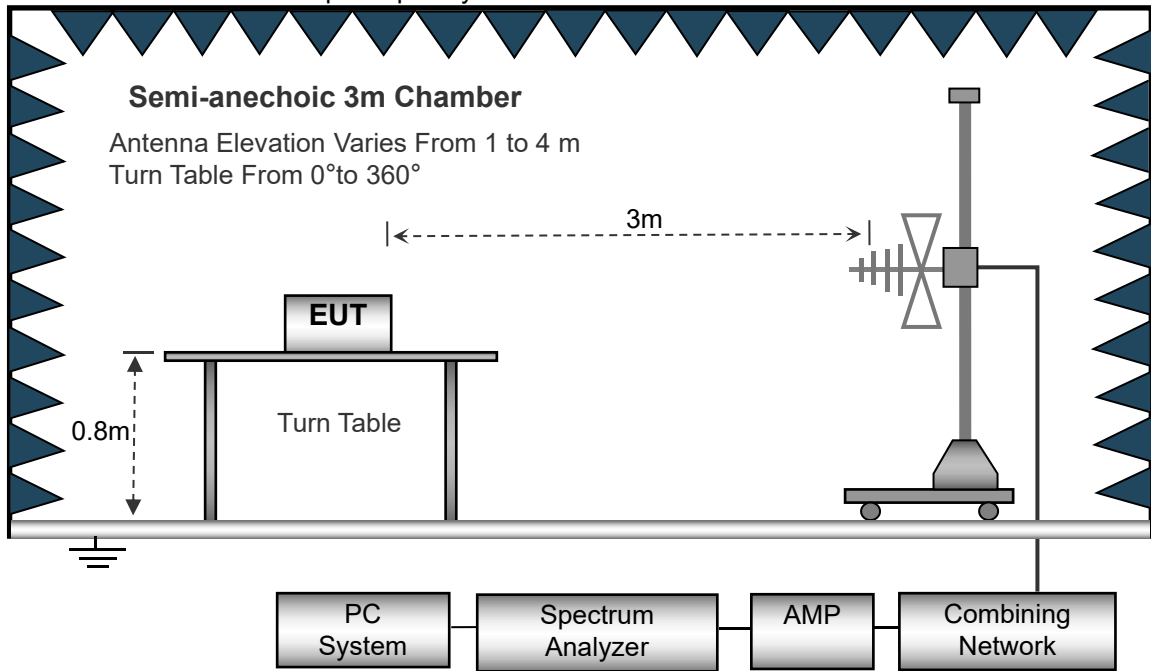

(C) Radiated Emission Test-Up Frequency Above 1GHz

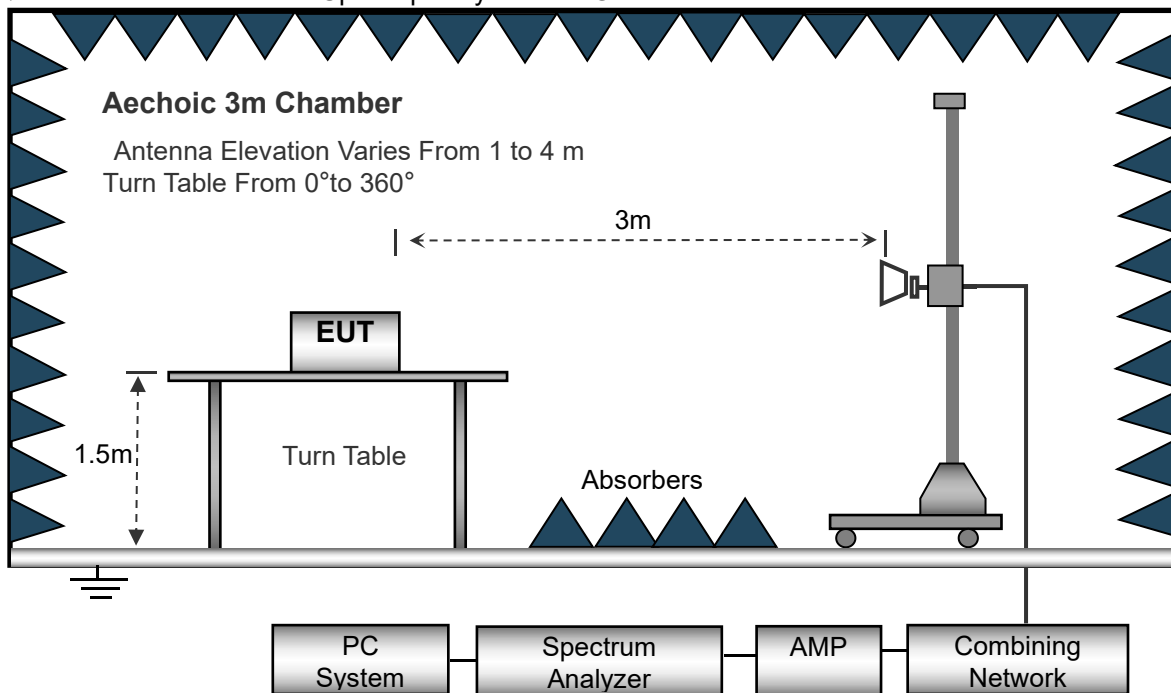

**4.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.


**4.6 TEST RESULTS**

- Note: 1. All modes of 802.11b/g/n20 were test at Low, Middle, and High channel, only the worst result of 802.11b Low Channel was reported for below 1GHz test.
2. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that “Z axis” position was the worst, and test data recorded in this report.



**Below 1GHz Test Results**

Temperature:	24°C	Relative Humidity:	62%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3V from Battery		
Test Mode :	Transmitting mode of 802.11b 2412MHz		

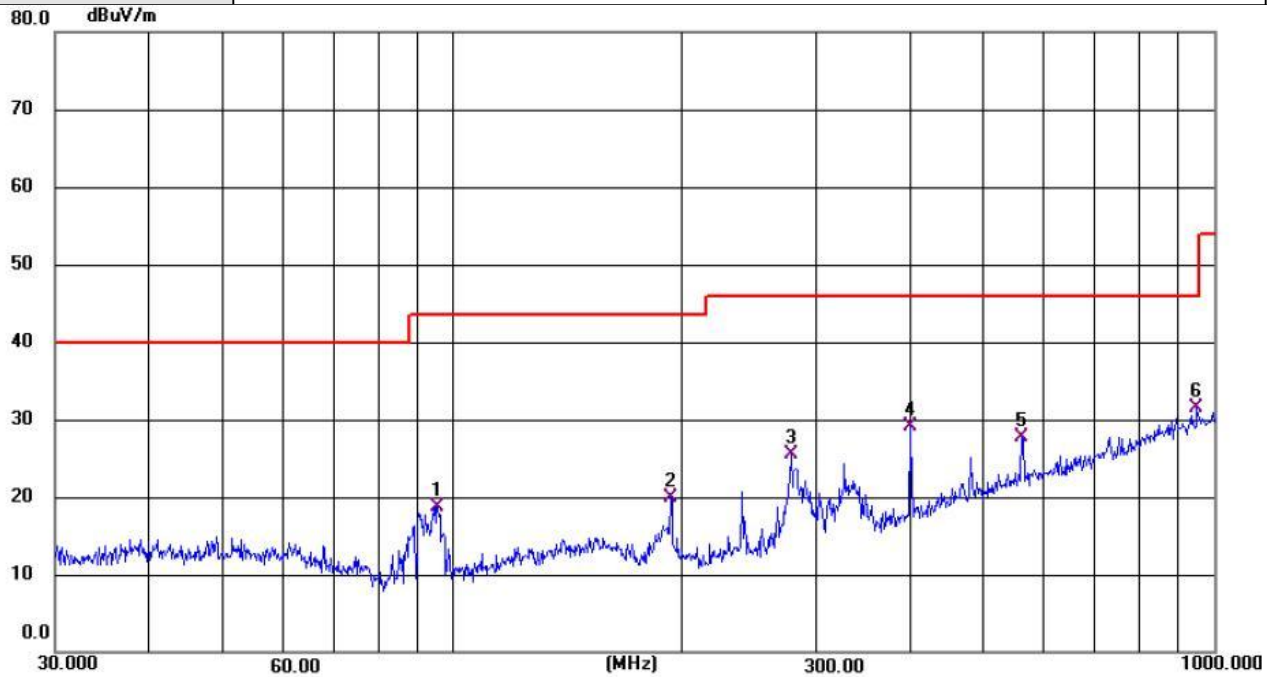

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	95.4270	37.71	-18.92	18.79	43.50	-24.71	QP
2	193.7728	37.96	-18.12	19.84	43.50	-23.66	QP
3	279.0436	40.25	-14.81	25.44	46.00	-20.56	QP
4	399.7304	40.90	-11.76	29.14	46.00	-16.86	QP
5	559.7106	35.90	-8.23	27.67	46.00	-18.33	QP
6 *	948.7610	33.39	-1.83	31.56	46.00	-14.44	QP

Remark:


Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;





Temperature:	24°C	Relative Humidity:	62%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3V from Battery		
Test Mode :	Transmitting mode of 802.11b 2412MHz		

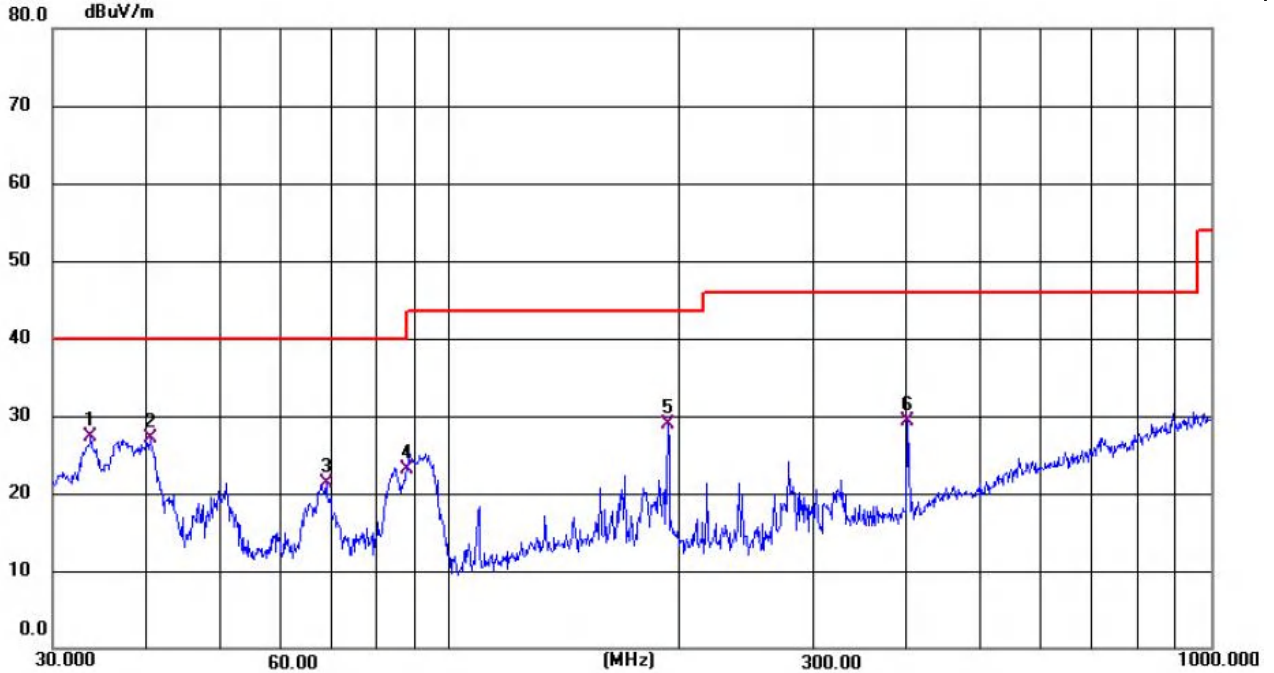

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	33.7394	42.83	-15.62	27.21	40.00	-12.79	QP
2	40.2756	41.83	-14.69	27.14	40.00	-12.86	QP
3	68.8721	38.52	-17.23	21.29	40.00	-18.71	QP
4	87.8786	42.91	-19.88	23.03	40.00	-16.97	QP
5	193.7727	46.71	-17.86	28.85	43.50	-14.65	QP
6	400.4318	41.48	-12.13	29.35	46.00	-16.65	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



**Above 1GHz Test Results  
(802.11b Worst Case)**

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBUV)	(dB)	(dB)	(dB/m)	(dBUV/m)	(dBUV/m)	(dB)	
<b>operation frequency:2412</b>									
V	4824.00	65.29	50.65	6.88	32.14	53.66	74.00	-20.34	PK
V	4824.00	50.29	50.65	6.88	32.14	38.66	54.00	-15.34	AV
V	7236.00	70.15	49.98	7.16	35.14	62.47	74.00	-11.53	PK
V	7236.00	52.18	49.98	7.16	35.14	44.5	54.00	-9.5	AV
V	16087.00	44.69	51.53	11.34	41.52	46.02	74.00	-27.98	PK
H	4824.00	61.69	50.65	6.88	31.29	49.21	74.00	-24.79	PK
H	4824.00	53.15	50.65	6.88	31.29	40.67	54.00	-13.33	AV
H	7236.00	62.36	49.98	7.16	36.63	56.17	74.00	-17.83	PK
H	7236.00	50.16	49.98	7.16	36.63	43.97	54.00	-10.03	AV
H	16087.00	54.36	51.53	9.56	41.52	53.91	74.00	-20.09	PK
<b>operation frequency:2437</b>									
V	4874.00	66.65	50.65	6.88	32.14	55.02	74.00	-18.98	PK
V	4874.00	52.14	50.65	6.88	32.14	40.51	54.00	-13.49	AV
V	7311.00	72.36	49.98	7.16	35.14	64.68	74.00	-9.32	PK
V	7311.00	52.14	49.98	7.16	35.14	44.46	54.00	-9.54	AV
V	16087.00	59.68	51.53	11.34	41.52	61.01	74.00	-12.99	PK
H	4874.00	61.69	50.65	6.88	31.29	49.21	74.00	-24.79	PK
H	4874.00	55.88	50.65	6.88	31.29	43.4	54.00	-10.6	AV
H	7311.00	65.47	49.98	7.16	36.63	59.28	74.00	-14.72	PK
H	7311.00	50.21	49.98	7.16	36.63	44.02	54.00	-9.98	AV
H	16087.00	59.36	51.53	9.56	41.52	58.91	74.00	-15.09	PK
<b>operation frequency:2462</b>									
V	4924.00	67.35	50.65	6.88	32.14	55.72	74.00	-18.28	PK
V	4924.00	55.17	50.65	6.88	32.14	43.54	54.00	-10.46	AV
V	7386.00	52.42	49.98	7.16	35.14	44.74	74.00	-29.26	PK
V	7386.00	49.56	49.98	7.16	35.14	41.88	54.00	-12.12	AV
V	16087.00	49.17	51.53	11.34	41.52	50.5	74.00	-23.5	PK
H	4924.00	67.35	50.65	6.88	31.29	54.87	74.00	-19.13	PK
H	4924.00	53.26	50.65	6.88	31.29	40.78	54.00	-13.22	AV
H	7386.00	49.17	49.98	7.16	36.63	42.98	74.00	-31.02	PK
H	7386.00	50.38	49.98	7.16	36.63	44.19	54.00	-9.81	AV
H	16087.00	52.56	51.53	9.56	41.52	52.11	74.00	-21.89	PK
<b>Remark:</b>									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-Amplifier, Margin= Emission Level - Limit									
2. If peak below the average limit, the average emission was no test.									
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									

**5. RADIATED BAND EMISSION MEASUREMENT****5.1 TEST REQUIREMENT:**

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

**5.2 TEST PROCEDURE**

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

**5.3 DEVIATION FROM TEST STANDARD**

No deviation

### 5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

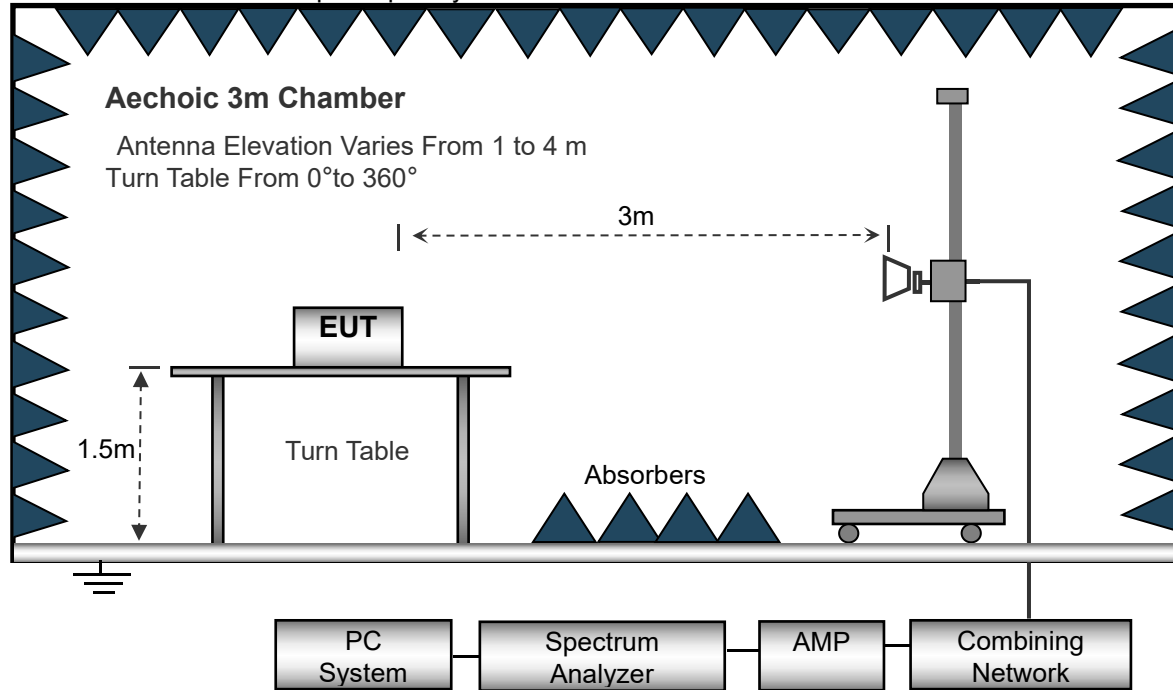

### 5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



## 5.6 TEST RESULT

## 802.11b Worst Case

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
<b>operation frequency:2412</b>									
V	2390.00	75.36	52.12	2.73	27.38	53.35	74.00	-20.65	PK
V	2390.00	67.15	52.12	2.73	27.38	45.14	54.00	-8.86	AV
V	2400.00	73.59	52.16	2.78	27.41	51.62	74.00	-22.38	PK
V	2400.00	66.53	52.16	2.78	27.41	44.56	54.00	-9.44	AV
H	2390.00	74.26	52.12	2.73	27.38	52.25	74.00	-21.75	PK
H	2390.00	64.12	52.12	2.73	27.38	42.11	54.00	-11.89	AV
H	2400.00	74.38	52.16	2.78	27.41	52.41	74.00	-21.59	PK
H	2400.00	66.66	52.16	2.78	27.41	44.69	54.00	-9.31	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
<b>operation frequency:2462</b>									
V	2483.50	77.14	52.12	2.73	27.38	55.13	74.00	-18.87	PK
V	2483.50	62.25	52.12	2.73	27.38	40.24	54.00	-13.76	AV
V	2500.00	73.59	52.16	2.78	27.41	51.62	74.00	-22.38	PK
V	2500.00	65.53	52.16	2.78	27.41	43.56	54.00	-10.44	AV
H	2483.50	74.17	52.12	2.73	27.38	52.16	74.00	-21.84	PK
H	2483.50	64.28	52.12	2.73	27.38	42.27	54.00	-11.73	AV
H	2500.00	70.83	52.16	2.78	27.41	48.86	74.00	-25.14	PK
H	2500.00	64.96	52.16	2.78	27.41	42.99	54.00	-11.01	AV

**Remark:**

1. Emission Level = Reading Level+Antenna Factor+Cable loss-Preamp Factor.
2. Over Limit= Absolute Level - Limit.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has not to be reported.
4. EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report (Z orientation)



6. PEAK OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.2 TEST PROCEDURE

a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

Test Mode	Channel	Peak Power[dBm]	Conducted Limit[dBm]	Verdict
11B	2412	-0.08	≤30	PASS
	2437	0.34	≤30	PASS
	2462	0.37	≤30	PASS
11G	2412	-2.58	≤30	PASS
	2437	-1.32	≤30	PASS
	2462	-1.26	≤30	PASS
11N20SISO	2412	-2.54	≤30	PASS
	2437	-2.07	≤30	PASS
	2462	-1.96	≤30	PASS



7. POWER SPECTRAL DENSITY TEST

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	RBW ≥ 3kHz
VB	VBW ≥ 3RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

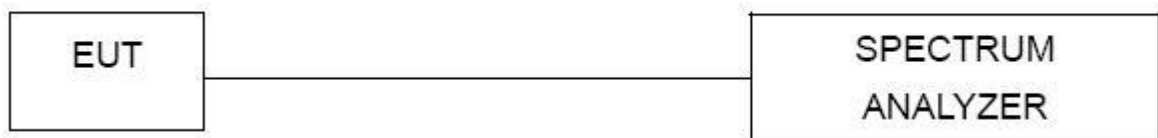

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULTS

TestMode	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	2412	-31.76	≤8	PASS
	2437	-31.71	≤8	PASS
	2462	-31.49	≤8	PASS
11G	2412	-36.21	≤8	PASS
	2437	-34.5	≤8	PASS
	2462	-34.98	≤8	PASS
11N20SISO	2412	-36.25	≤8	PASS
	2437	-36.2	≤8	PASS
	2462	-35.71	≤8	PASS







11B Ant1\_2437




11B Ant1\_2462






11G Ant1\_2412

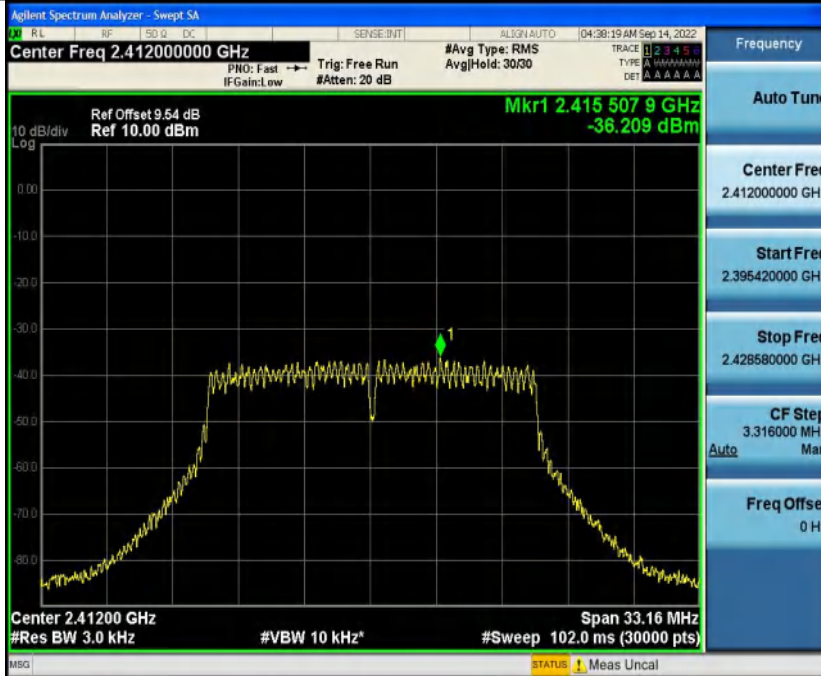


11G Ant1\_2437

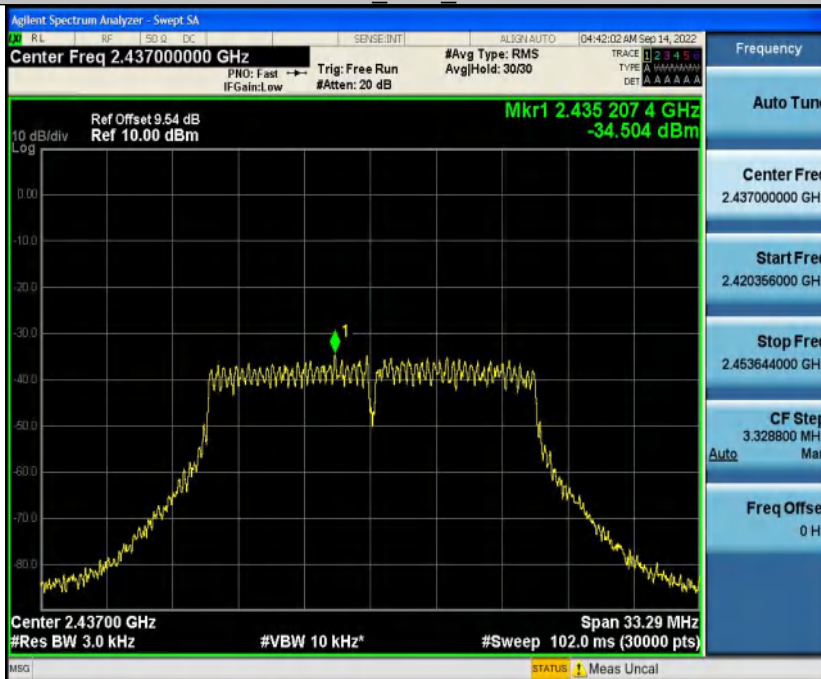




11G Ant1\_2462

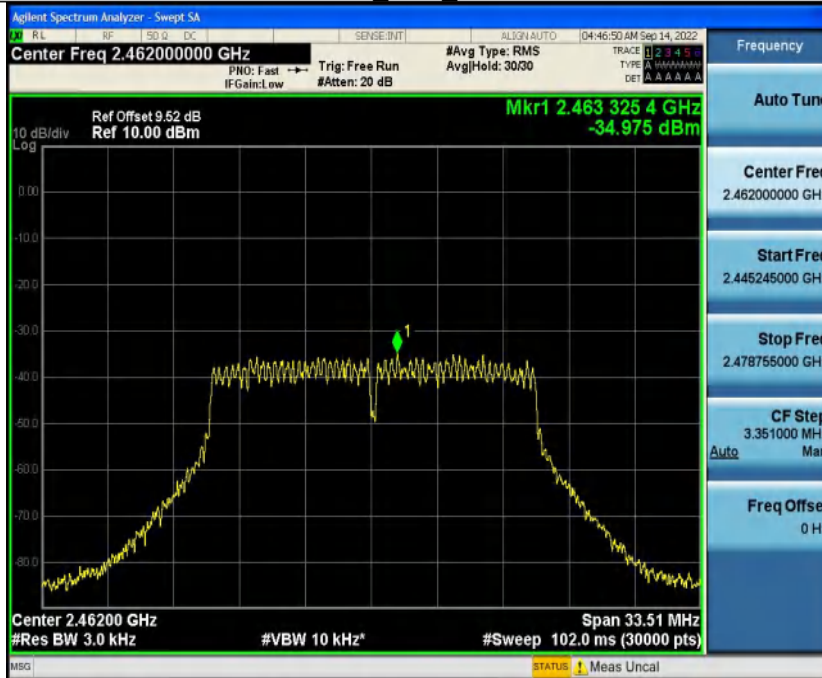


11N20SISO Ant1\_2412

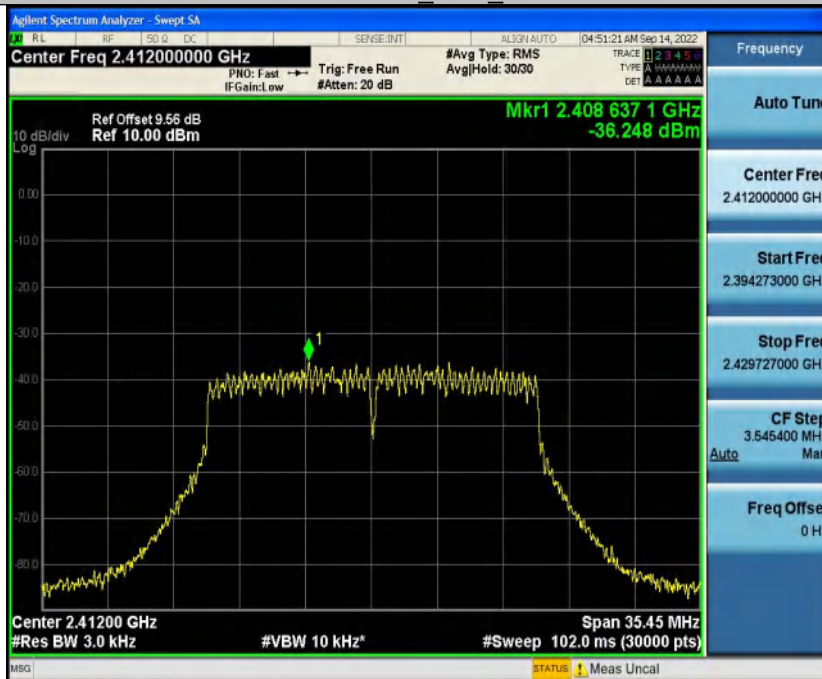




11N20SISO Ant1 2437

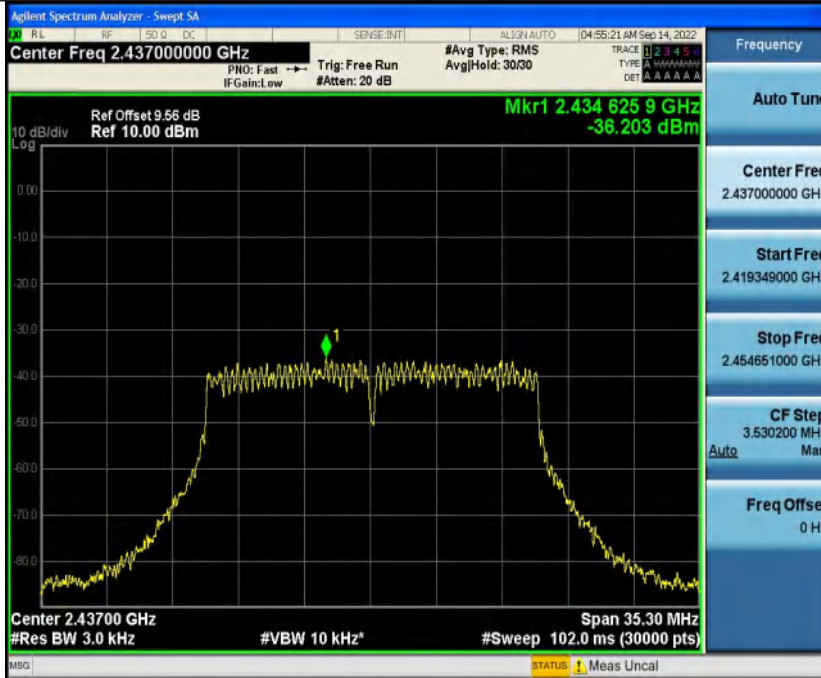

11N20SISO Ant1 2462

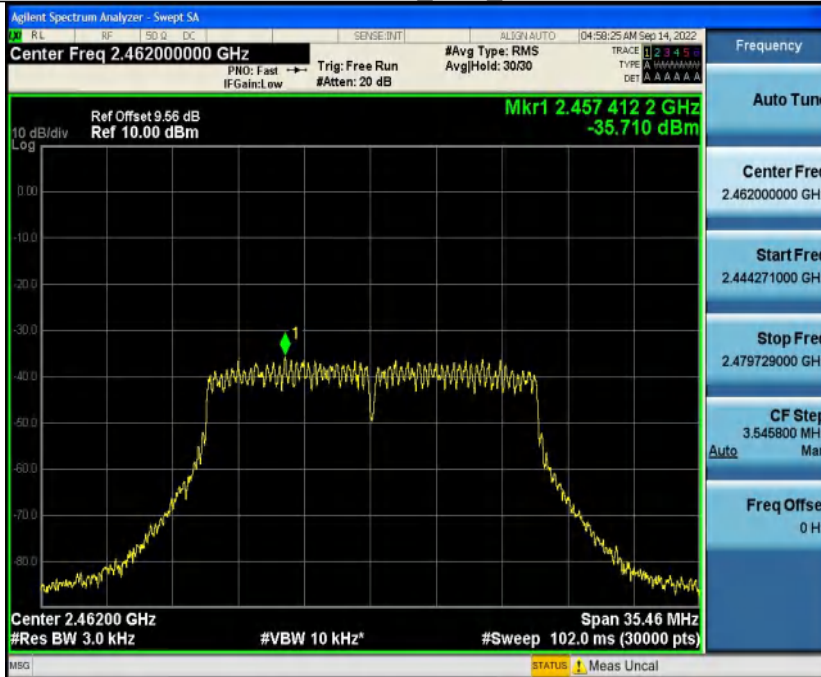



## 8. 6DB BANDWIDTH TEST

### 8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range(MHz)	Result
15.247(a)(2)	Bandwidth	≥500KHz	2400-2483.5	PASS

### 8.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP



### 8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

### 8.6 TEST RESULTS

Test Mode	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	2412	10.000	2407.080	2417.080	≥0.5	PASS
	2437	9.560	2432.560	2442.120	≥0.5	PASS
	2462	9.560	2457.560	2467.120	≥0.5	PASS
11G	2412	16.280	2403.960	2420.240	≥0.5	PASS
	2437	16.280	2428.960	2445.240	≥0.5	PASS
	2462	16.280	2453.960	2470.240	≥0.5	PASS
11N20SISO	2412	17.080	2403.560	2420.640	≥0.5	PASS
	2437	16.880	2428.720	2445.600	≥0.5	PASS
	2462	16.840	2453.600	2470.440	≥0.5	PASS



11B Ant1\_2412



11B Ant1\_2437






11B Ant1 2462



11G Ant1 2412

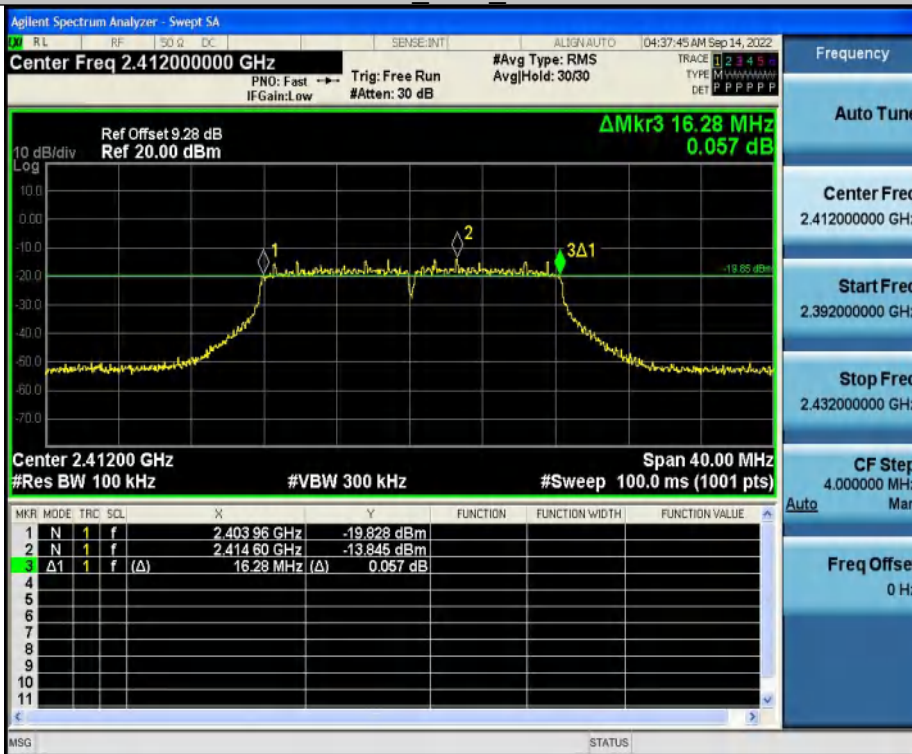



11G\_Ant1\_2437



11G\_Ant1\_2462







11N20SISO Ant1\_2412




11N20SISO Ant1\_2437





11N20SISO Ant1 2462

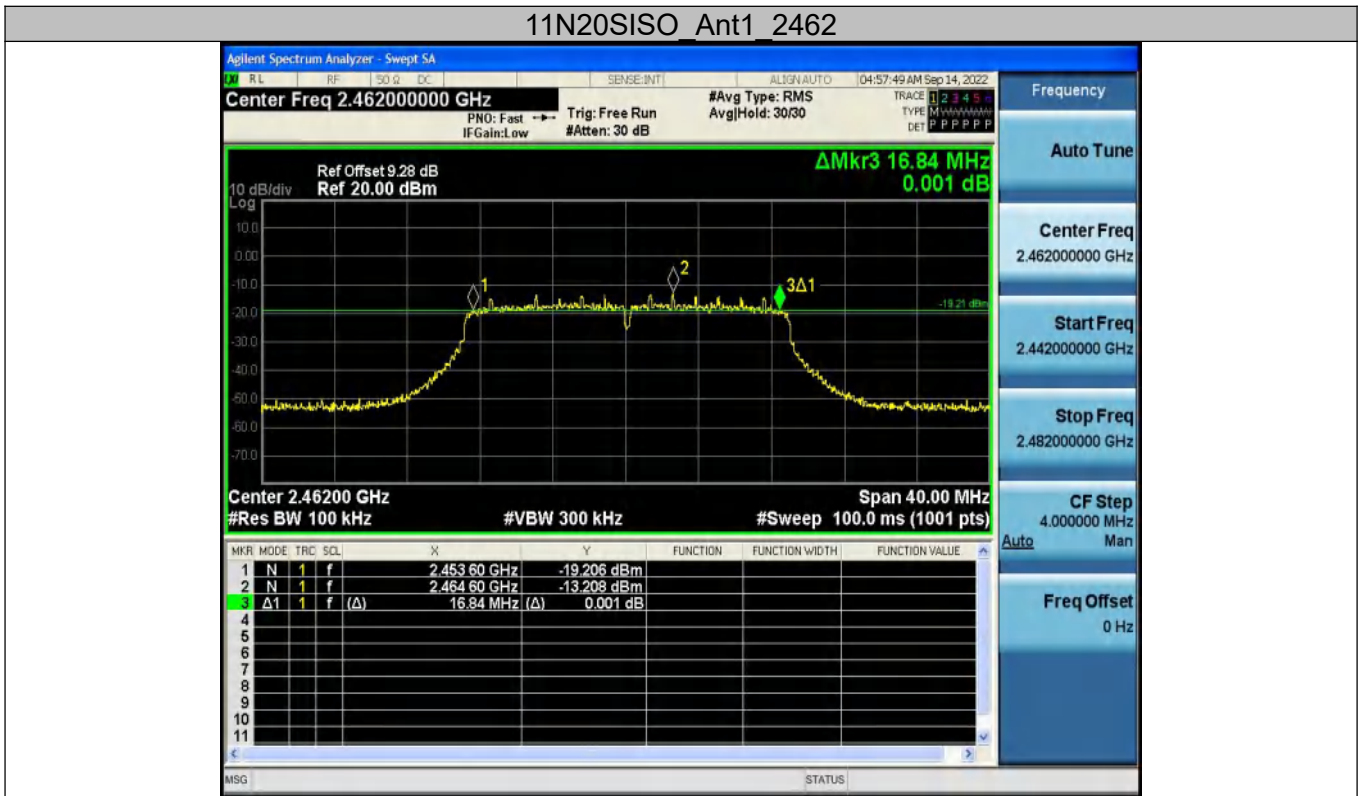



### 9. OUT OF BAND EMISSIONS TEST

#### 9.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

#### 9.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.

#### 9.3 DEVIATION FROM STANDARD

No deviation.

#### 9.4 TEST SETUP



#### 9.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 9.6 TEST RESULTS


TestMode	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Low	2412	-8.83	-49.17	≤-38.83	PASS
	High	2462	-8.41	-49.28	≤-38.41	PASS
11G	Low	2412	-14.49	-49.59	≤-44.49	PASS
	High	2462	-12.48	-49.82	≤-42.48	PASS
11N20SISO	Low	2412	-14.36	-48.09	≤-44.36	PASS
	High	2462	-13.79	-50.62	≤-43.79	PASS



11B Ant1 Low 2412

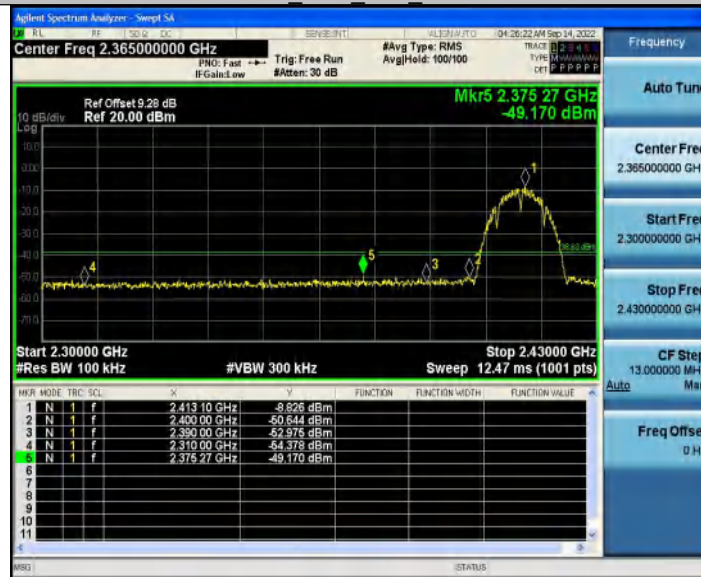


11B Ant1 High 2462

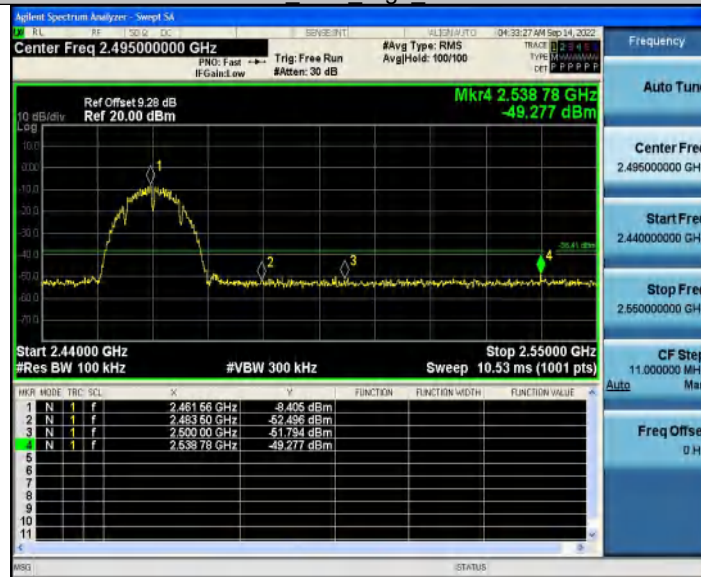



11G Ant1\_Low 2412

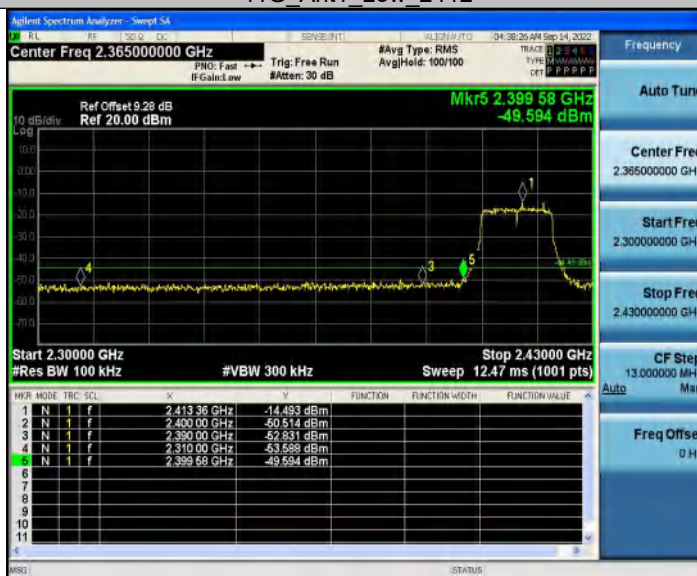


11G Ant1\_High 2462






11N20SISO\_Ant1\_Low\_2412

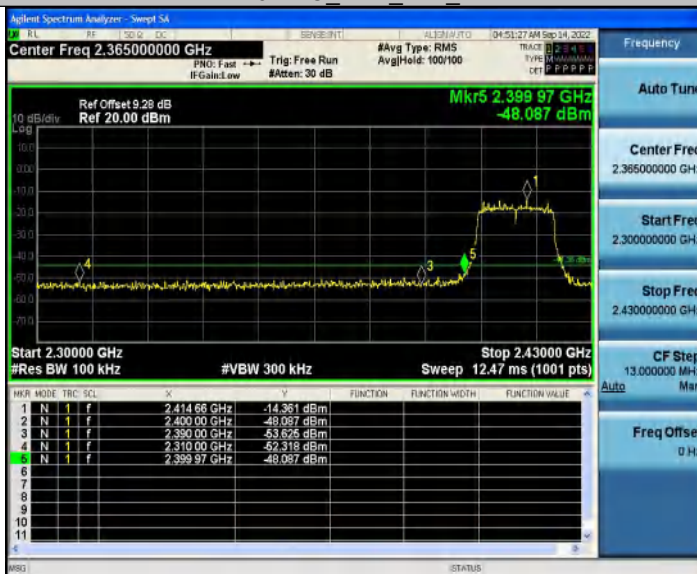

11N20SISO\_Ant1\_High\_2462

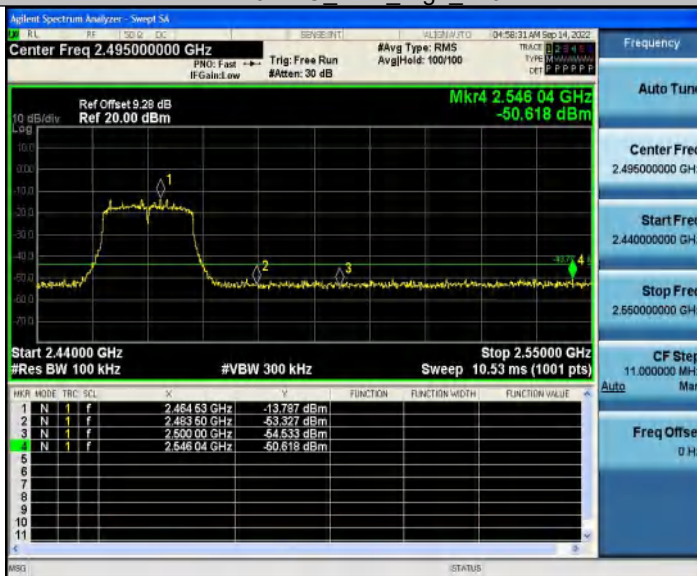



## 10. SPURIOUS RF CONDUCTED EMISSION

### 10.1 APPLIED PROCEDURES / LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.
3. For below 30MHz, For 9KHz-150kHz, 150K-10MHz, We use the RBW 1KHz, 10KHz, So the limit need to be calculated by " $10\lg(BW1/BW2)$ ". for example For 9KHz-150kHz, RBW 1KHz, The Limit= the highest emission level-20-10log(100/1)= the highest emission level-40.

### 10.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.

### 10.3 DEVIATION FROM STANDARD

No deviation.

### 10.4 TEST SETUP



### 10.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




### 10.6 TEST RESULTS

#### 802.11b Worst Case

11B Ant1 2412 0~Reference

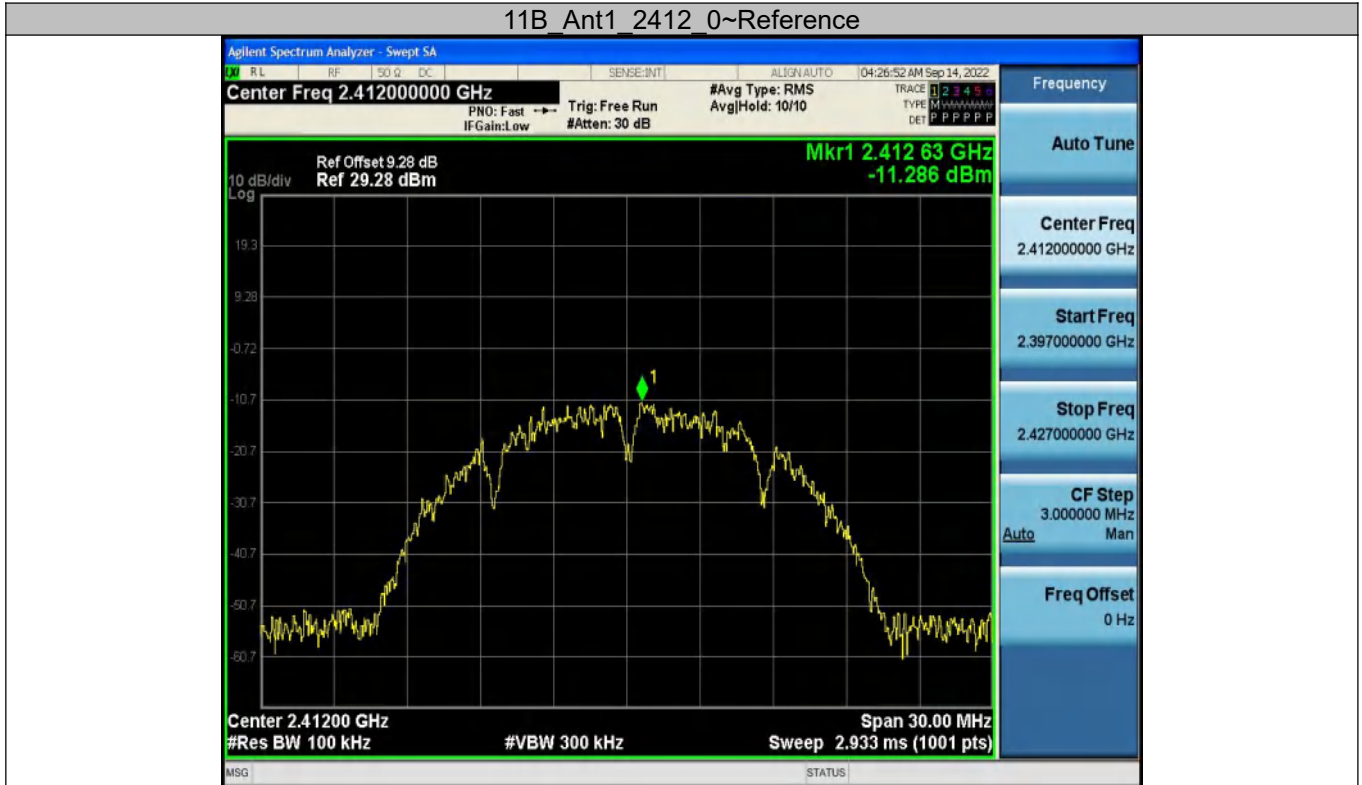

11B Ant1 2412 30~1000

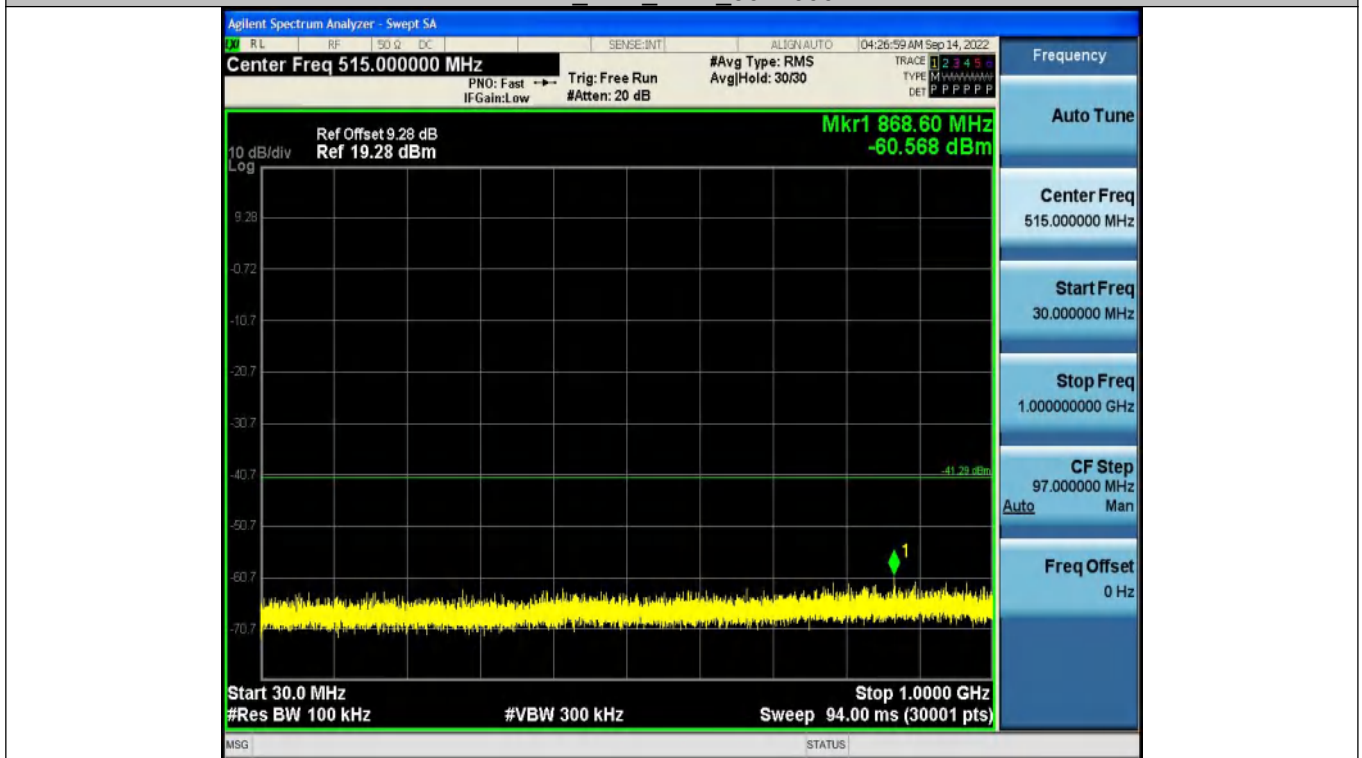






11B Ant1 2412 1000~26500



11B Ant1 2437 0~Reference



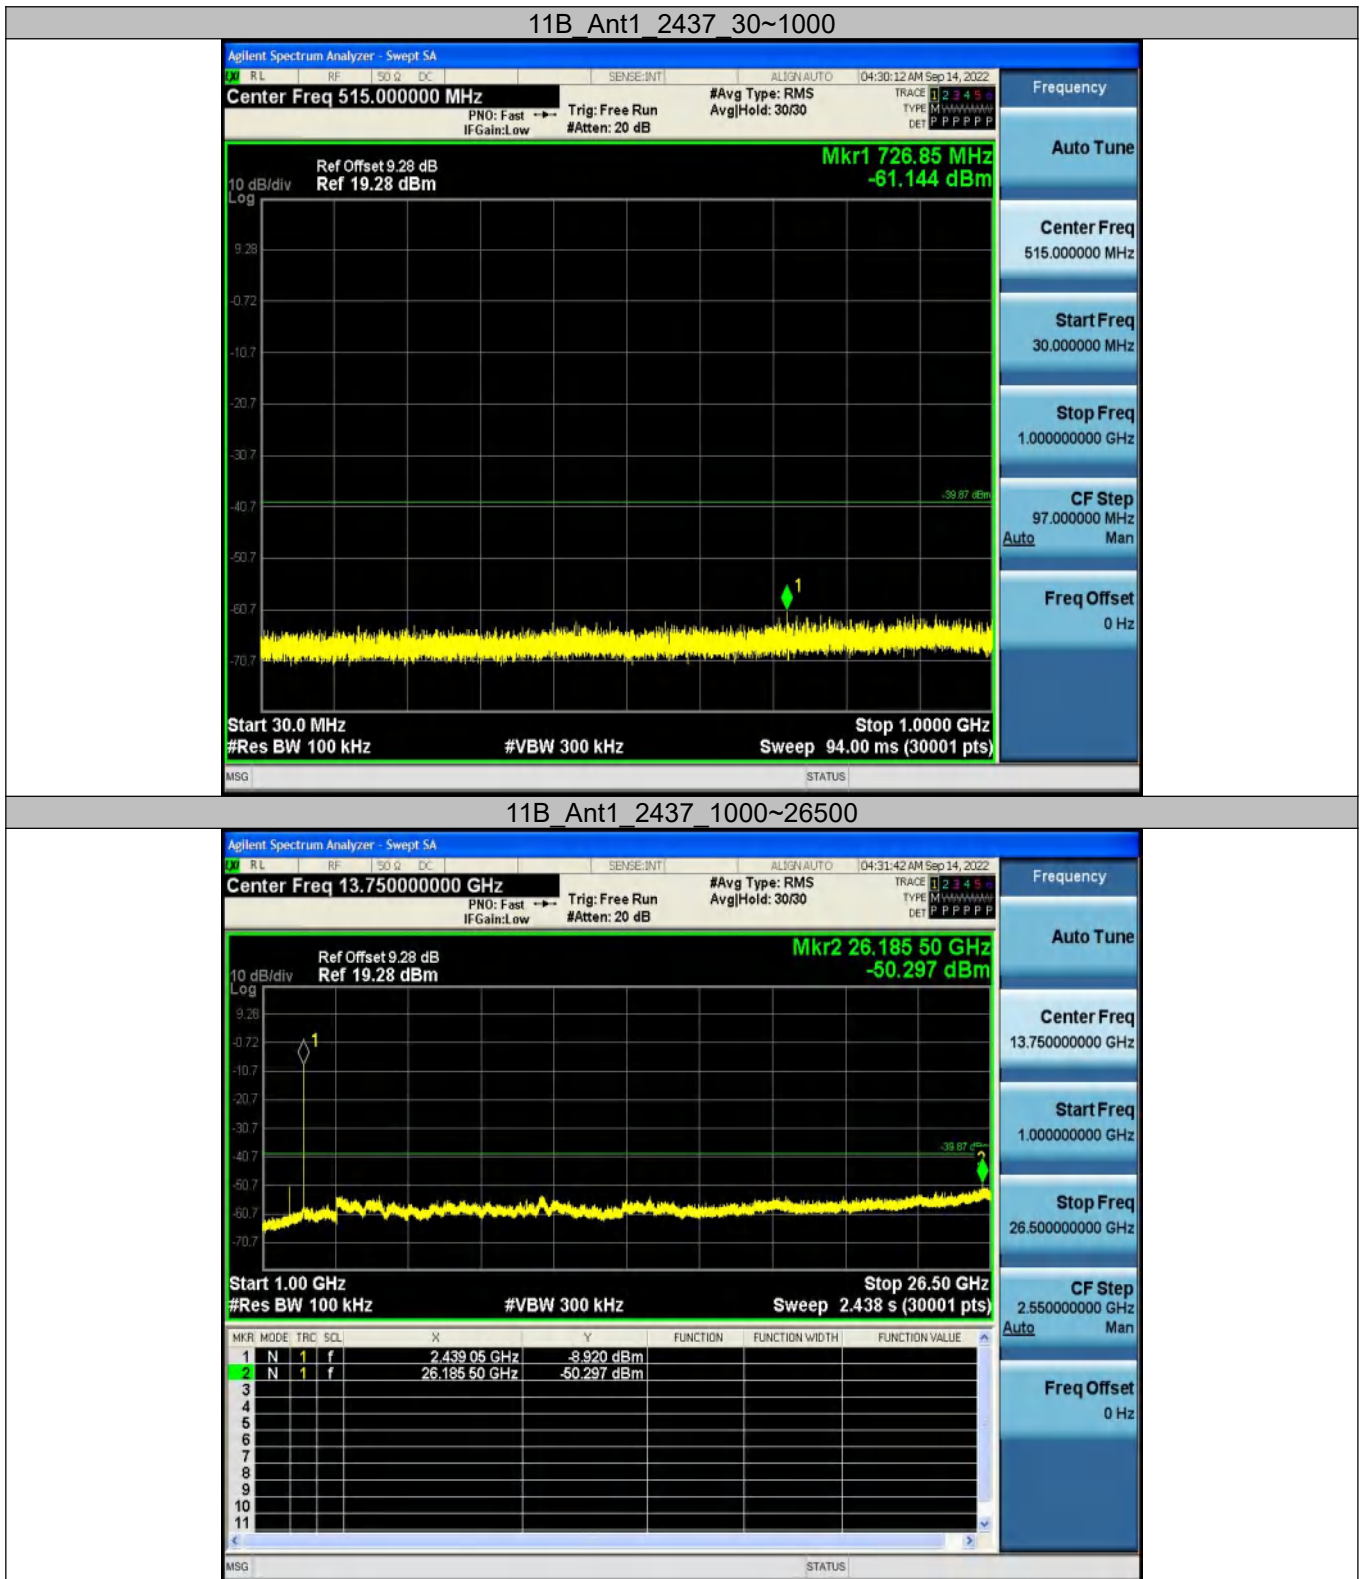





11B\_Ant1\_2462\_0~Reference



11B\_Ant1\_2462\_30~1000

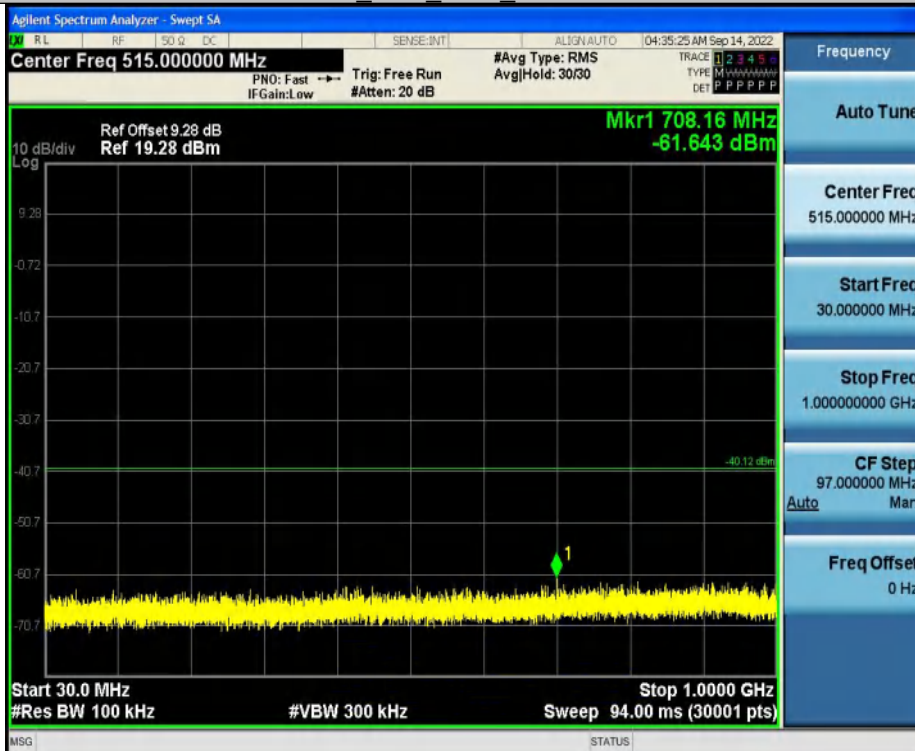

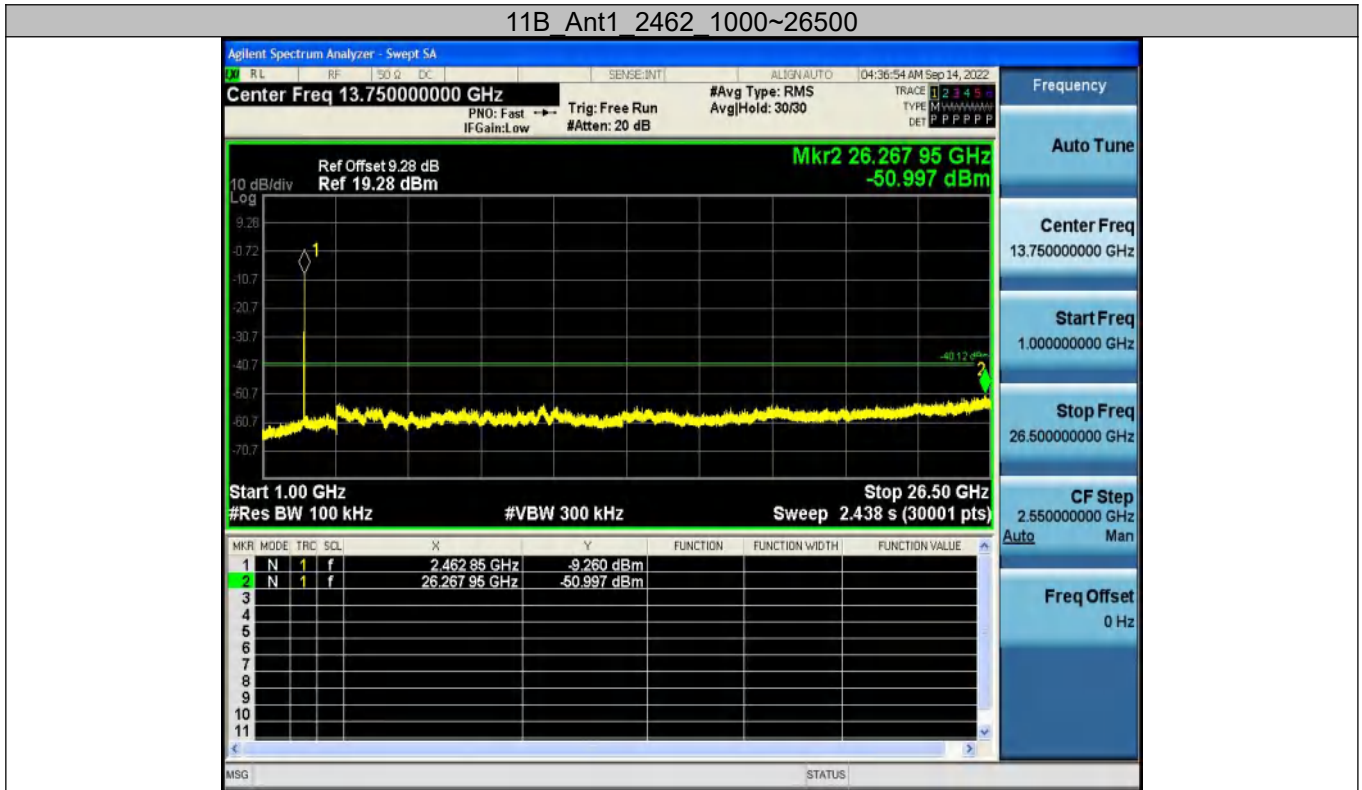


## 11. ANTENNA REQUIREMENT

### 11.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.



### 11.2 EUT ANTENNA

The EUT antenna is PCB Antenna,. It comply with the standard requirement.

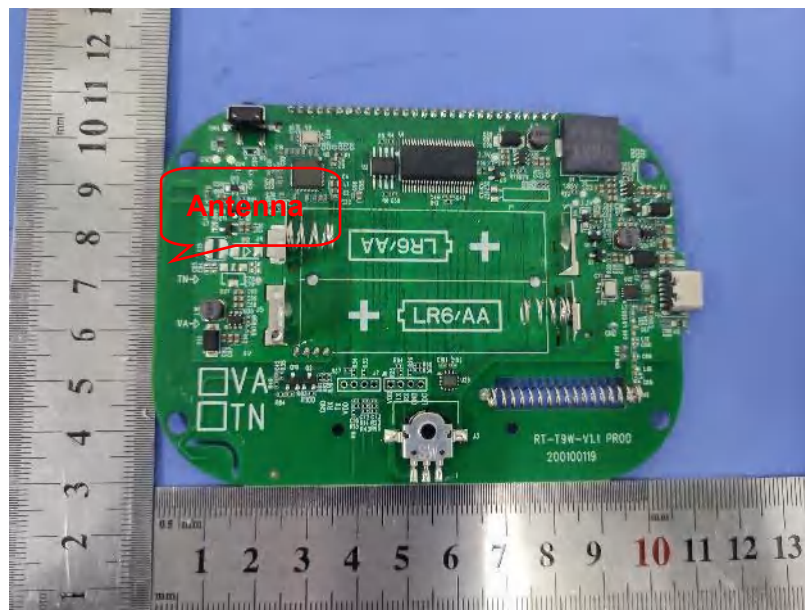

## 12. TEST SEUUP PHOTO

Radiated Measurement Photos

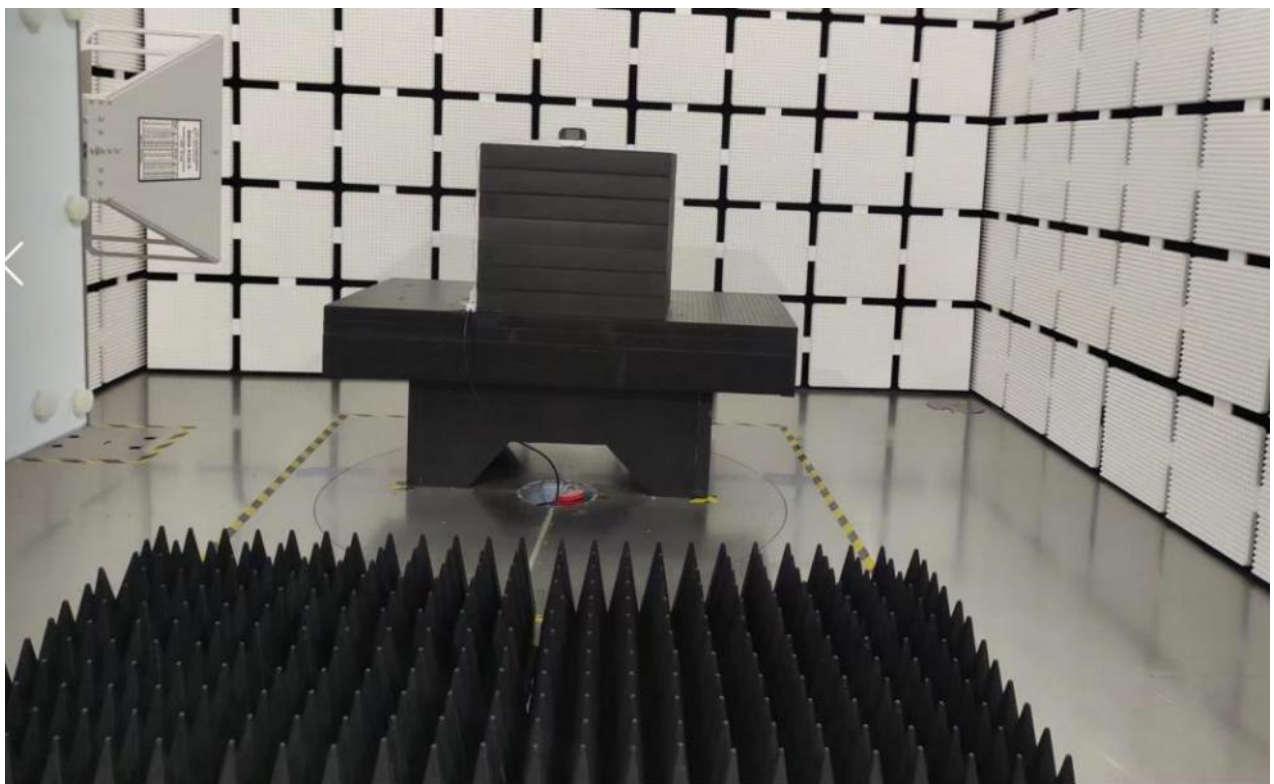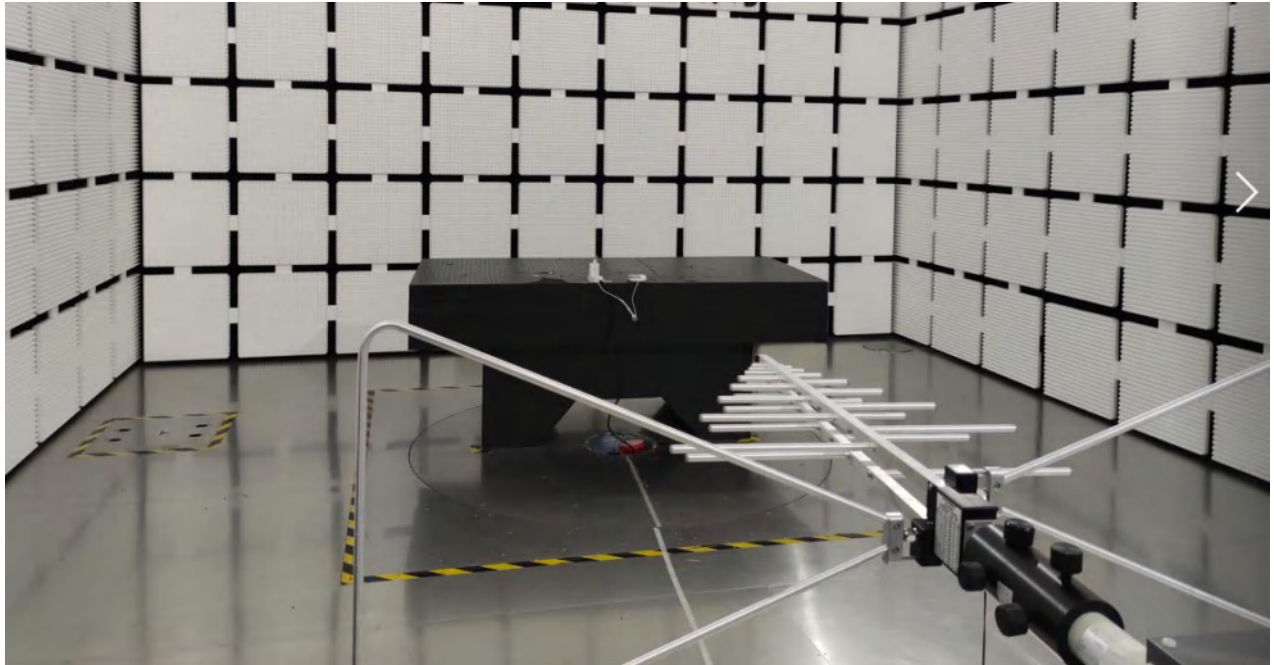



**Conducted Measurement Photos**



**\*\*\*\*\* END OF REPORT \*\*\*\*\***