




FCC SAR TEST REPORT

FCC ID : PU5-TP00111A
Equipment : Notebook Computer
Brand Name : Lenovo
Model Name : TP00111A
Applicant : Wistron Corporation
21F, No. 88, Sec. 1, Hsin Tai Wu Rd.,
Hsichih Dist, New Taipei City 221, Taiwan
Manufacturer : Wistron Corporation
21F, No. 88, Sec. 1, Hsin Tai Wu Rd.,
Hsichih Dist, New Taipei City 221, Taiwan
Standard : FCC 47 CFR Part 2 (2.1093)

Equipment: Fibocom L850-GL tested inside of Lenovo Notebook Computer

The product was received on Sep. 29, 2020 and testing was started from Oct. 08, 2020 and completed on Oct. 24, 2020. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory



Table of Contents

1. Statement of Compliance 4
2. Guidance Applied..... 4
3. Equipment Under Test (EUT) Information 5
3.1 General Information 5
3.2 General LTE SAR Test and Reporting Considerations 6
4. Proximity Sensor Triggering Test..... 9
5. RF Exposure Limits.....16
5.1 Uncontrolled Environment.....16
5.2 Controlled Environment.....16
6. Specific Absorption Rate (SAR).....17
6.1 Introduction17
6.2 SAR Definition.....17
7. System Description and Setup18
7.1 Test Site Location.....18
7.2 E-Field Probe19
7.3 Data Acquisition Electronics (DAE)19
7.4 Phantom.....20
7.5 Device Holder.....21
8. Measurement Procedures22
8.1 Spatial Peak SAR Evaluation.....22
8.2 Power Reference Measurement.....23
8.3 Area Scan23
8.4 Zoom Scan.....24
8.5 Volume Scan Procedures.....24
8.6 Power Drift Monitoring.....24
9. Test Equipment List25
10. System Verification26
10.1 Tissue Simulating Liquids.....26
10.2 Tissue Verification27
10.3 System Performance Check Results.....28
11. RF Exposure Positions28
11.1 SAR Testing for Tablet28
12. UMTS/LTE Output Power (Unit: dBm)29
13. SAR Test Results77
13.1 Body SAR79
13.2 Repeated SAR Measurement83
14. Simultaneous Transmission Analysis.....84
14.1 Body Exposure Conditions85
14.2 SPLSR Evaluation and Analysis.....87
15. Uncertainty Assessment98
16. References.....98
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASYS Calibration Certificate
Appendix D. Test Setup Photos & Antenna Location



History of this test report

Report No.	Version	Description	Issued Date
FA092420	01	Initial issue of report	Dec. 16, 2020



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Wistron Corporation, Notebook Computer, TP00111A, are as follows.

Table with 4 columns: Equipment Class, Frequency Band, Highest SAR Summary (Body, 1g SAR (W/kg)), and Highest Simultaneous Transmission (1g SAR (W/kg)). Rows include WCDMA II-IV, LTE Bands 2, 7, 12/17, 13, 5/26, 30, 41, 4/66, and Date of Testing: 2020/10/8 - 2020/10/24.

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Daisy Peng

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013
FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
FCC KDB 865664 D02 SAR Reporting v01r02
FCC KDB 447498 D01 General RF Exposure Guidance v06
FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
FCC KDB 616217 D04 SAR for laptop and tablets v01r02
FCC KDB 941225 D01 3G SAR Procedures v03r01
FCC KDB 941225 D05 SAR for LTE Devices v02r05
FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Notebook Computer
Brand Name	Lenovo
Model Name	TP00111A
FCC ID	PU5-TP00111A
IMEI Code	015550002948138
Integrated WWAN Module	Brand Name: Fibocom Model Name: L850-GL
Wireless Technology and Frequency Range	WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz
Mode	RMC 12.2Kbps HSDPA HSUPA DC-HSDPA LTE: QPSK, 16QAM, 64QAM
EUT Stage	Production Unit

Antenna Information				
WWAN				3F + LTE + 5GNR(dBi)
Antenna 1	Manufacturer	WNC	Peak gain	CE: -0.06 FCC: 0.26
	Part number	025.901NX.0001	Type	PIFA
Antenna 2	Manufacturer	WNC	Peak gain	CE: 0.98 FCC:1.17
	Part number	025.901O0.0001	Type	PIFA

WLAN Module Information	
Brand Name	Intel WiFi 6 AX201
Model Name	AX201D2W
FCC ID	PU5AX201D2
Wireless Technology and Frequency Range	WLAN 2.4GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8GHz Band: 5725 MHz ~ 5825 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Mode	WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
EUT Stage	Production Unit
Remark:	
1. The WLAN/BT module is also integrated into Lenove TP00111A host. The WLAN and Bluetooth SAR results are referenced from Sporton SAR report, report number: FA000204-01 (FCC ID: PU5AX201D2) and these SAR results are also used to perform simultaneous transmission analysis.	



3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	PU5-TP00111A																																																														
Equipment Name	Notebook Computer																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz																																																														
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 30: 5MHz, 10MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM																																																														
LTE Voice / Data requirements	Data only																																																														
LTE MPR permanently built-in by design	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	Yes, Proximity Sensor.																																																														
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power measurement please referred to section 12.																																																														
LTE Carrier Aggregation Additional Information	This device supports maximum of 3 carriers in the downlink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																														



Transmission (H, M, L) channel numbers and frequencies in each LTE band																
LTE Band 2																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860				
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880				
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900				
LTE Band 4																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720				
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5				
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745				
LTE Band 5																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844				
LTE Band 7																
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560				
LTE Band 12																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23060	704	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23130	711	23130	711				
LTE Band 13																
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23205		779.5		23230		782		23255		784.5		23280		787	
M	23230		782		23255		784.5		23280		787		23305		789.5	
H	23255		784.5		23280		787		23305		789.5		23330		792	
LTE Band 17																
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23755		706.5		23780		709		23805		712		23830		715	
M	23790		710		23815		714		23840		718		23865		722	
H	23825		713.5		23850		717		23875		721		23900		725	



LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 30												
	Bandwidth 5 MHz					Bandwidth 10 MHz						
	Channel #		Freq.(MHz)			Channel #		Freq.(MHz)				
L	27685		2307.5			27710		2310				
M	27710		2310									
H	27735		2312.5									
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770


4. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance (KDB 616217 D04 section 6.2)>:

For the device is fully integrated, touch sensing capacitive sensor. It uses a charge transfer capacitive acquisition method that is capable of near range proximity detection. In this device offers a state of the art capacitive sensing engine with an embedded sampling capacitor and voltage regulator allowing the overall solution cost to be reduced and improving system immunity in noisy environments.

Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed. The details are illustrated as following, and the shortest triggering distances were reported and used for SAR assessment.

In the preliminary triggering distance testing, the tissue-equivalent medium for different frequency bands were used for verification; no other frequency bands tissue-equivalent medium was found to result in shortest triggering distance than that for 1900MHz, and the tissue-equivalent medium for 1900MHz was used for formal proximity sensor triggering testing.

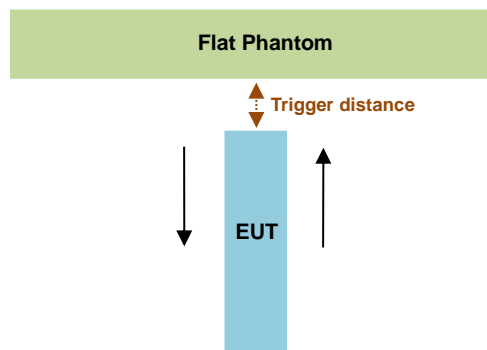


Proximity Sensor Trigger Distance (mm)								
Position	Bottom Face		Bottom of Laptop		Edge 1		Edge 2	
Position	Moving towards	Moving away	Moving towards	Moving towards	Moving towards	Moving towards	Moving towards	Moving towards
Minimum	20	14	17	17	23	25	20	15

<Proximity Sensor Triggering Coverage (KDB 616217 D04 section 6.3)>:

Since the antenna and sensor are collocated and all of the peak SAR location is overlapping with the sensor pad for this device, therefore, According to KDB 616217 section6.3, these procedures do not apply and are not required for Bottom of Laptop, Bottom face, Edge 1 and Edge 2 due to the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor on this device.

<Tablet Tilt angle influences to proximity sensor triggering (KDB 616217 D04 section 6.4)>:

The influence of table tilt angles to proximity sensor triggering was determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom, at above separation distance. Rotating the tablet around the edge next to the phantom in $\leq 10^\circ$ increments until the tablet is $\pm 45^\circ$ from the vertical position at 0° , and the maximum output power remains in the reduced mode.

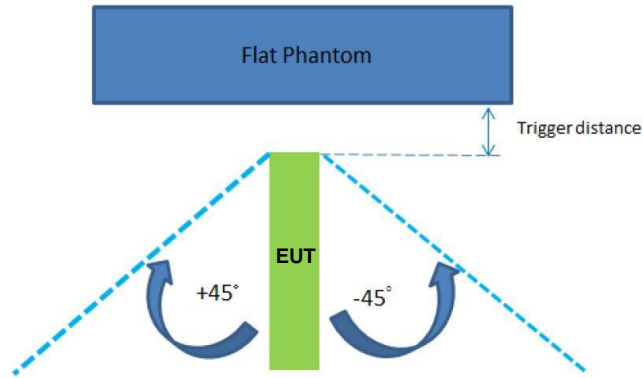

The Sensor Trigger Distance (mm)		
Position	Edge 1	Edge 2
Minimum	23	15

Proximity sensor power reduction



Exposure Position / wireless mode	⁽¹⁾ Bottom Face / Bottom of Laptop / Edge 1 / Edge 2
WCDMA Band V	8.5 dB
WCDMA Band II	7 dB
WCDMA Band IV	7 dB
LTE Band 2	6.5 dB
LTE Band 4/66	6.5 dB
LTE Band 5/26	8 dB
LTE Band 7	11.5 dB
LTE Band 12/17	7 dB
LTE Band 13	8.5 dB
LTE Band 30	9.5 dB
LTE Band 41	9.5 dB



Remark:



1. ⁽¹⁾: Reduced maximum limit applied by activation of proximity sensor.
2. Tests were performed in accordance with KDB 616217 D04 section 6.1, 6.2, 6.3, 6.4 and 6.5 and compliant results are shown as below
3. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance -1 was performed:
 - Bottom Face: [13 mm](#)
 - Bottom of Laptop: [16mm](#)
 - Edge1: [22 mm](#)
 - Edge2: [14mm](#)





Power Measurement during Sensor Trigger distance testing

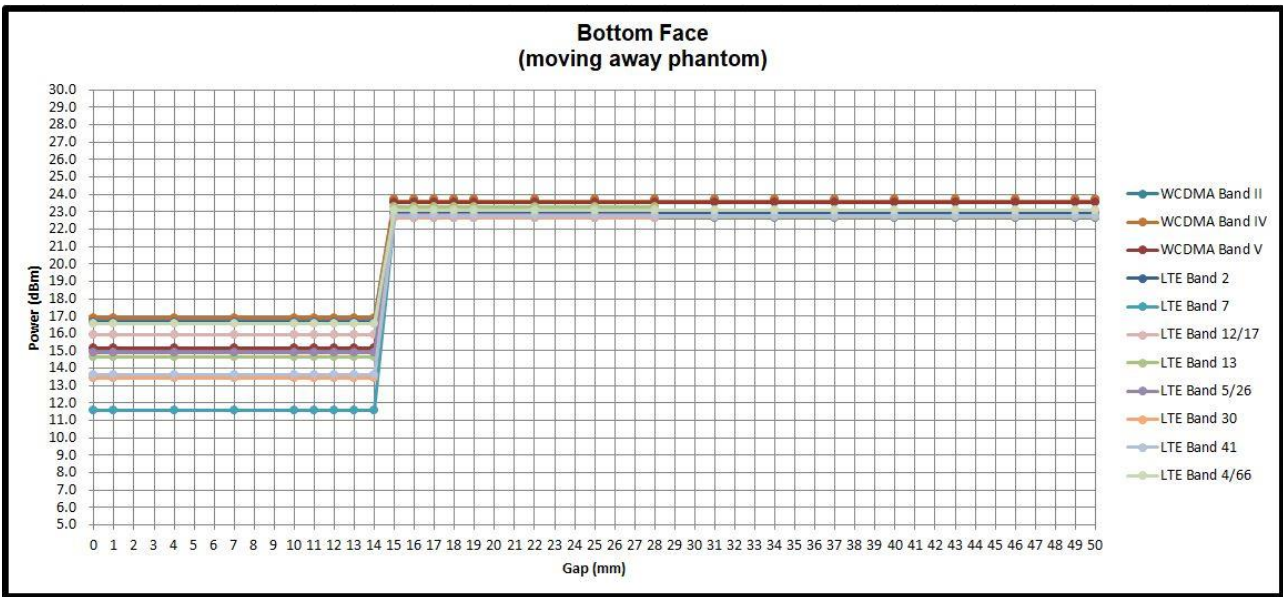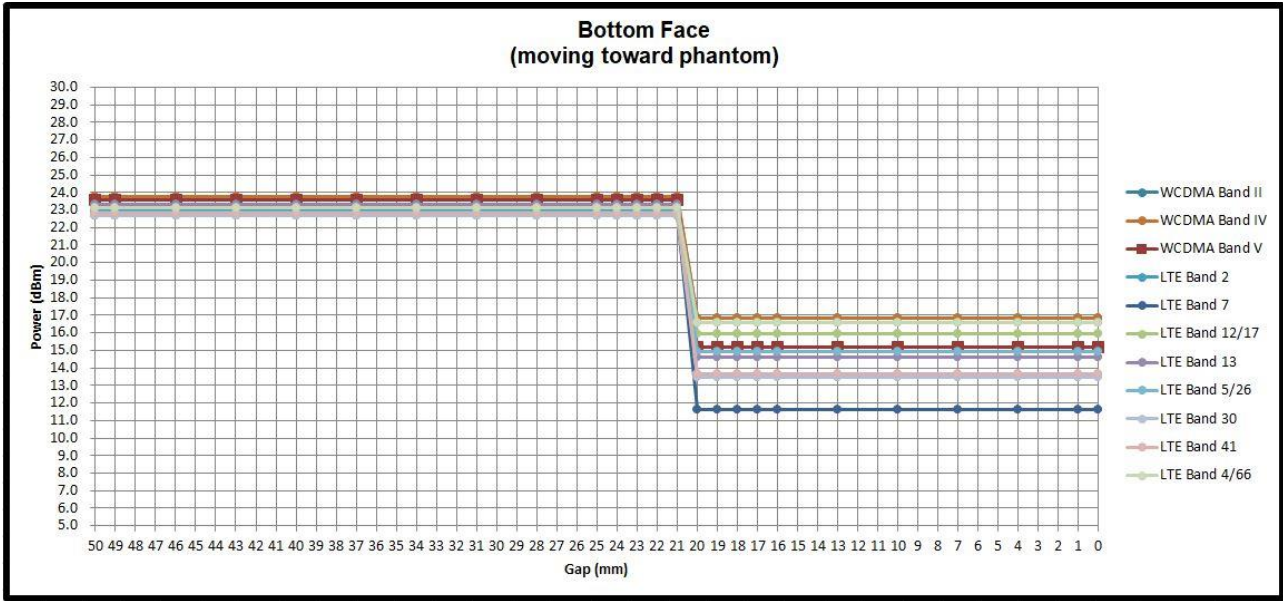

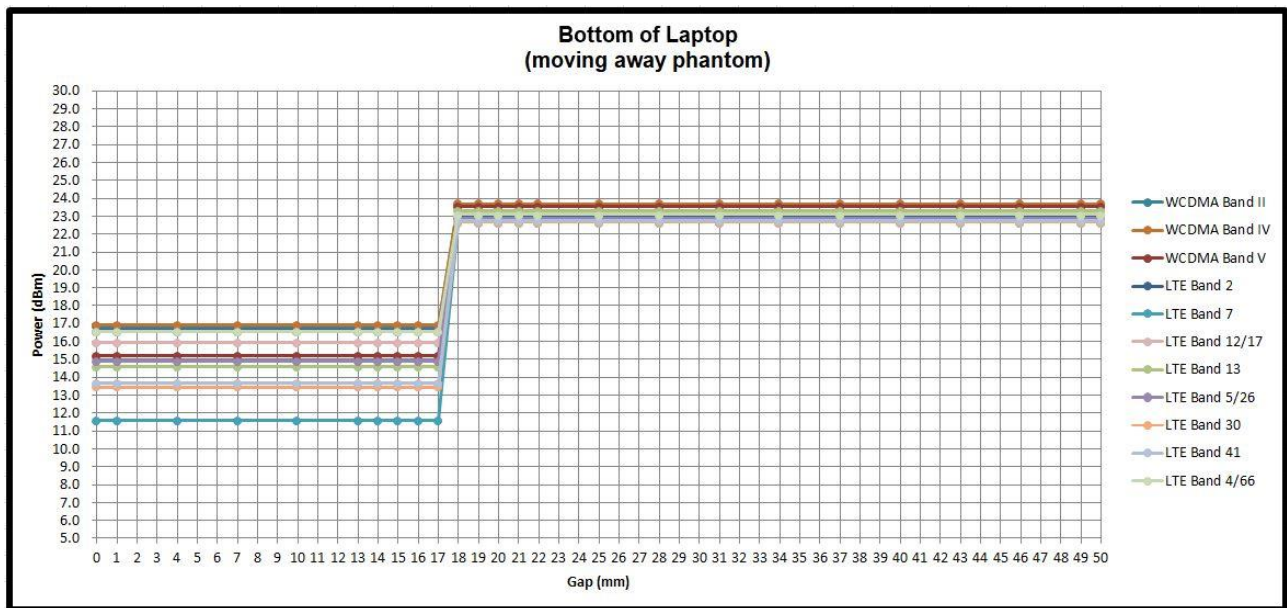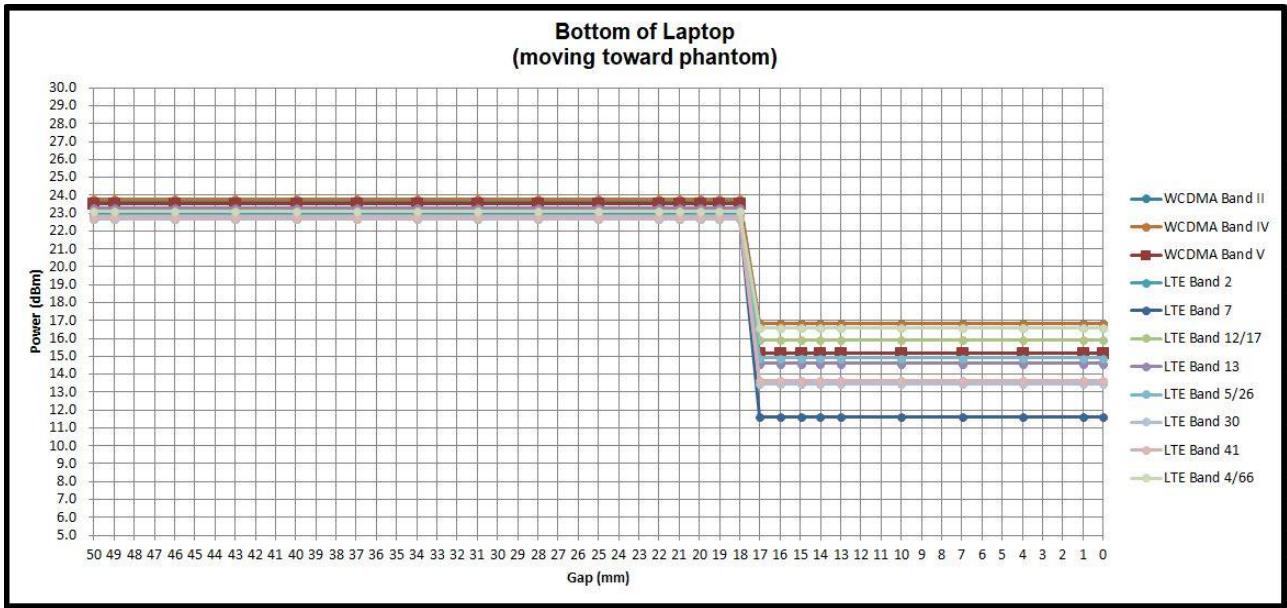

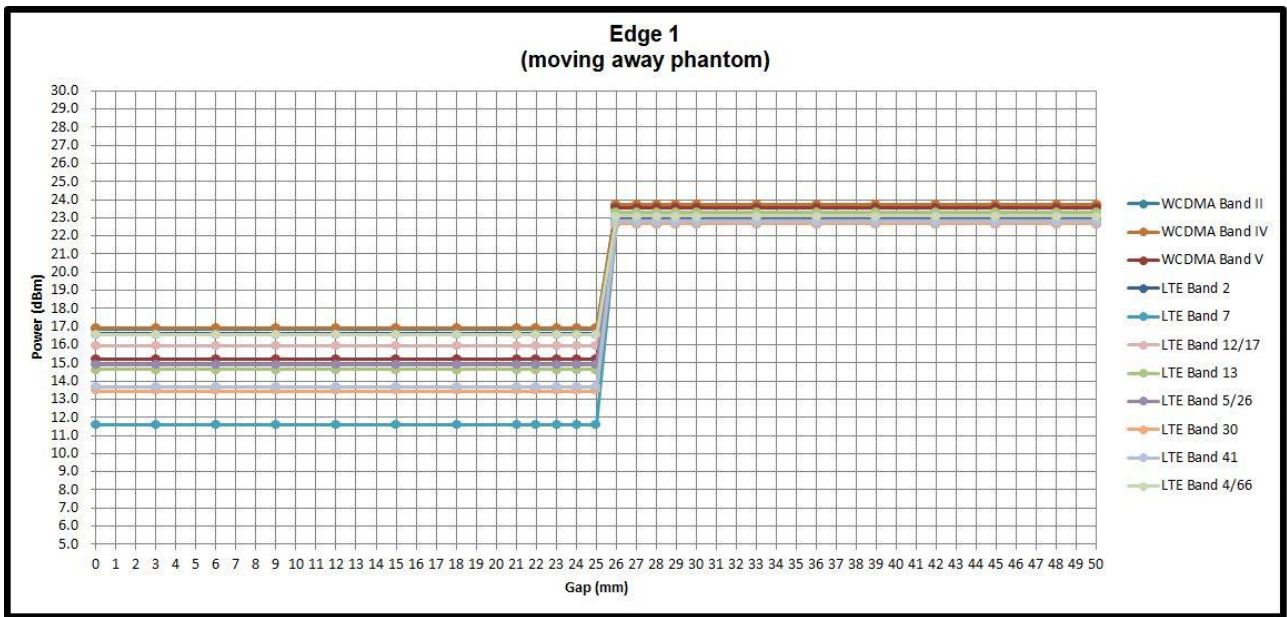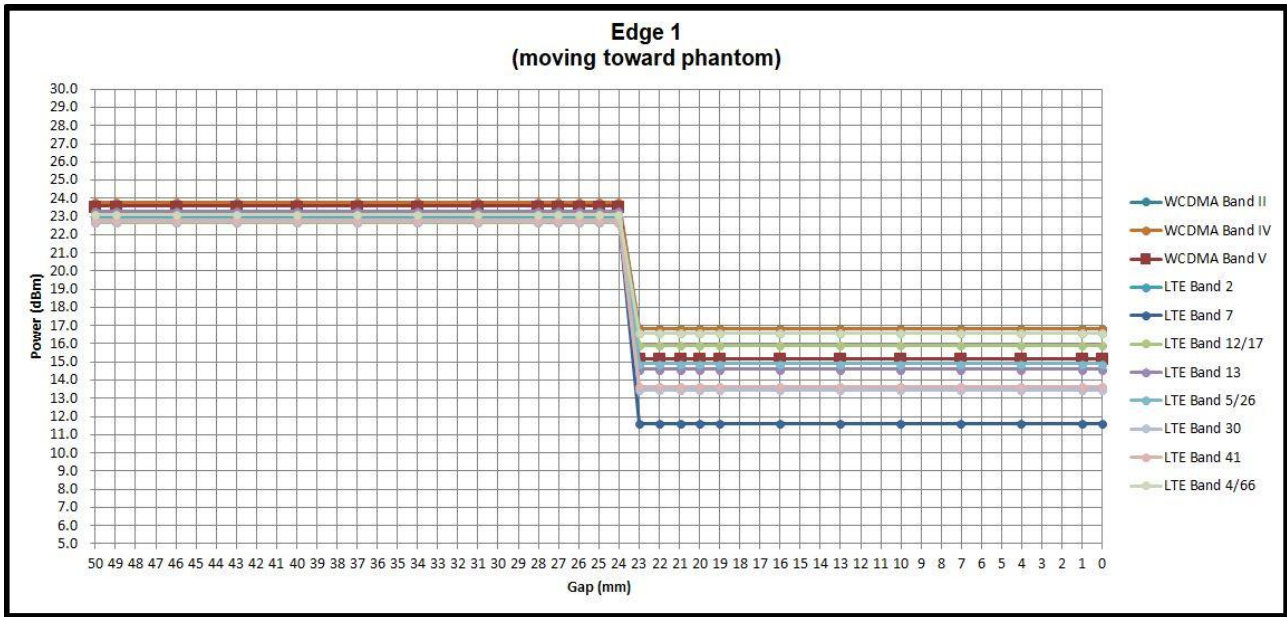

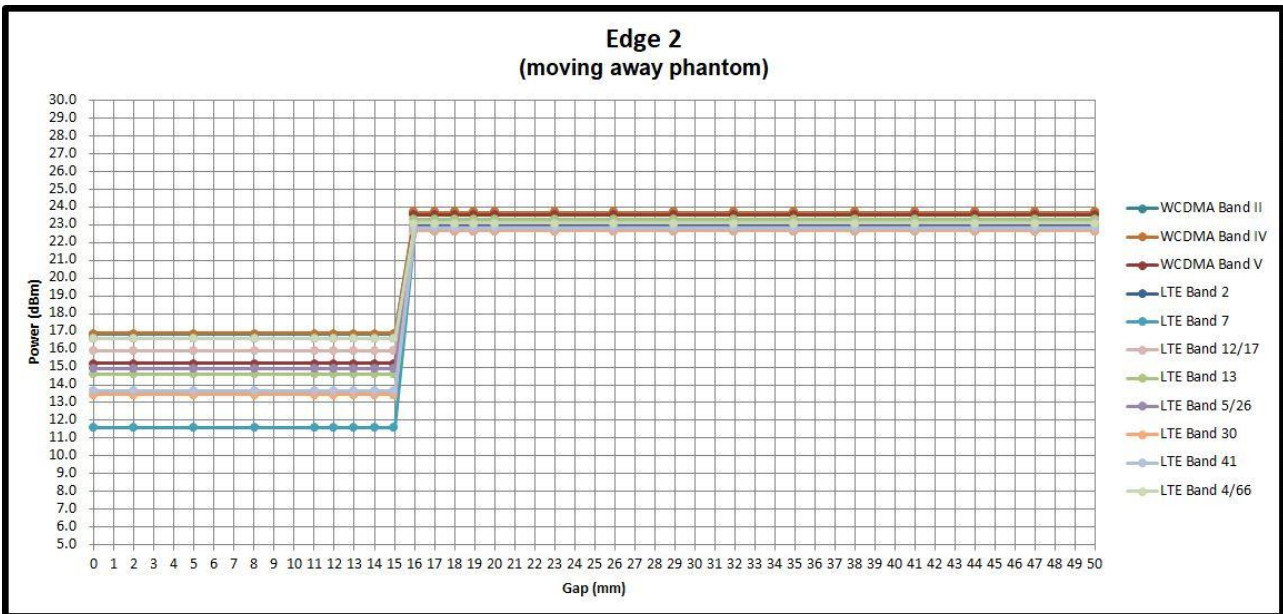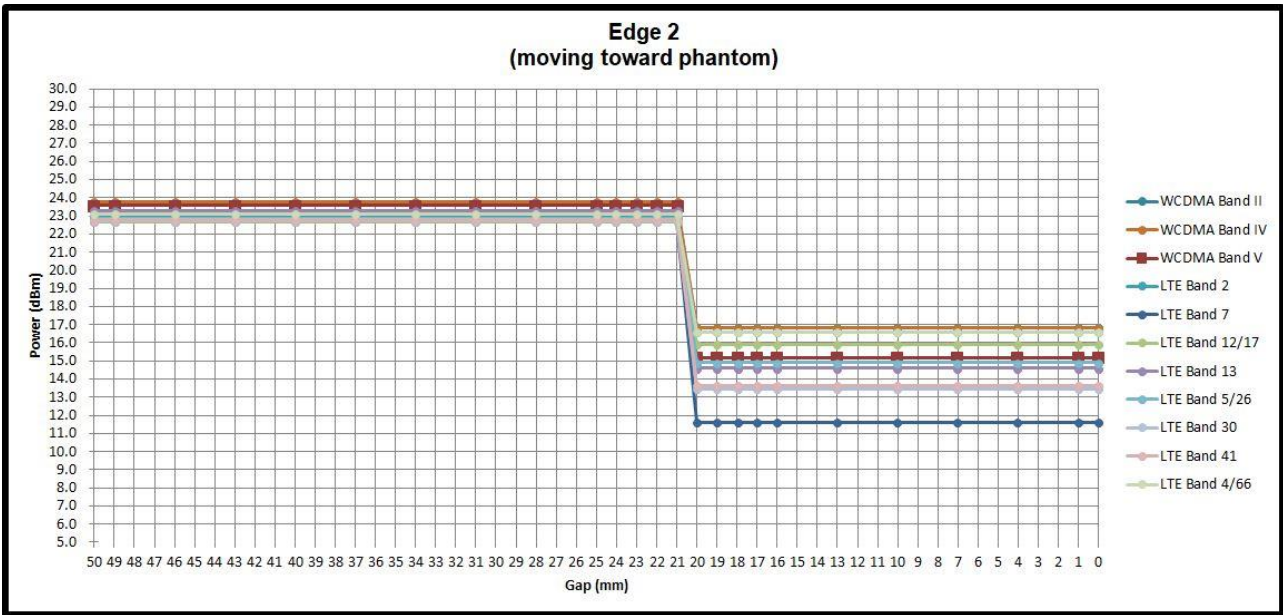



5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASYS system used for performing compliance tests consists of the following items:

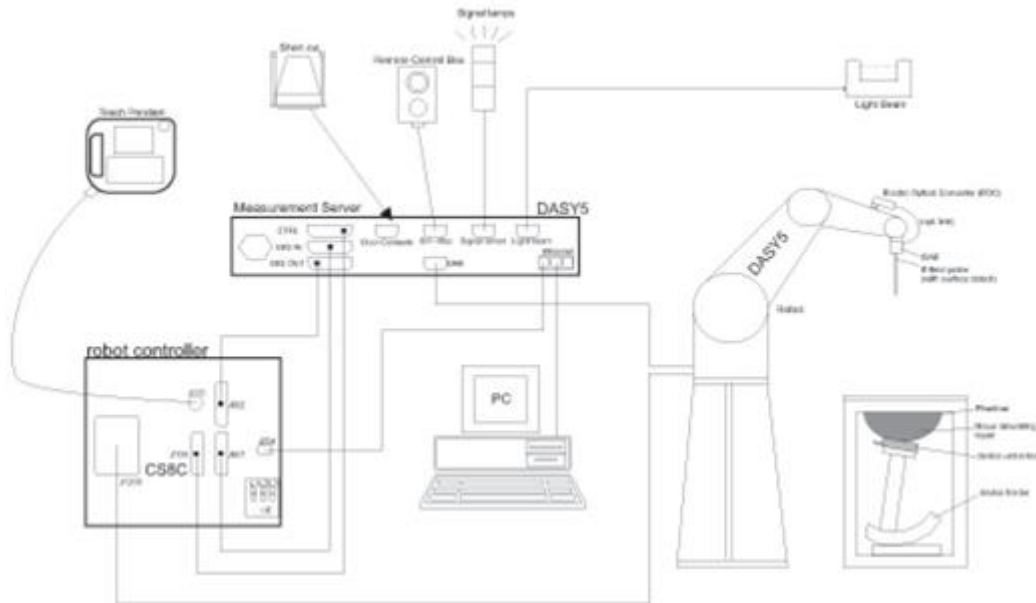

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASYS5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 Test Site Location


The SAR measurement facilities used to collect data are within Sporton Lab and below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 0007) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory			
Test Site Location	TW1190 No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, CHINESE TAIPEI		TW0007 No. 58, Aly. 75, Ln. 564, Wehnuia 3rd, Rd., Guishan Dist., Taoyuan City, CHINESE TAIPEI	
	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY
Test Site No.	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY
	SAR06-HY	SAR10-HY		


7.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE


7.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit ⁽²⁾	D750V3	1107	Mar. 08, 2019	Mar. 06, 2021
SPEAG	835MHz System Validation Kit	D835V2	4d167	Nov. 25, 2019	Nov. 24, 2020
SPEAG	1750MHz System Validation Kit ⁽²⁾	D1750V2	1112	Mar. 07, 2019	Mar. 05, 2021
SPEAG	1900MHz System Validation Kit ⁽²⁾	D1900V2	5d185	Mar. 07, 2019	Mar. 05, 2021
SPEAG	2300MHz System Validation Kit ⁽²⁾	D2300V2	1006	Jan. 28, 2019	Jan. 26, 2021
SPEAG	2600MHz System Validation Kit ⁽²⁾	D2600V2	1078	Mar. 06, 2019	Mar. 04, 2021
SPEAG	Data Acquisition Electronics	DAE4	915	Jun. 22, 2020	Jun. 21, 2021
SPEAG	Data Acquisition Electronics	DAE4	916	Dec. 17, 2019	Dec. 16, 2020
SPEAG	Dosimetric E-Field Probe	ES3DV3	3184	Sep. 23, 2020	Sep. 22, 2021
SPEAG	Dosimetric E-Field Probe	ES3DV3	3071	Dec. 18, 2019	Dec. 17, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	7590	Apr. 14, 2020	Apr. 13, 2021
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 12, 2019	Nov. 11, 2020
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 12, 2019	Nov. 11, 2020
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Oct. 31, 2019	Oct. 30, 2020
Agilent	Wireless Communication Test Set	E5515C	MY50267236	Mar. 18, 2020	Mar. 17, 2021
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Nov. 20, 2019	Nov. 19, 2020
Agilent	ENA Network Analyzer	E5071C	MY46101588	Jun. 10, 2020	Jun. 09, 2021
SPEAG	Dielectric Probe Kit	DAK-3.5	1146	Jul. 22, 2020	Jul. 21, 2021
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Nov. 18, 2019	Nov. 17, 2020
Anritsu	Power Meter	ML2495A	1419002	Aug. 19, 2020	Aug. 18, 2021
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2020	Aug. 17, 2021
Anritsu	Power Meter	ML2495A	1240001	Sep. 01, 2020	Aug. 31, 2021
Anritsu	Power Sensor	MA2411B	1207349	Sep. 01, 2020	Aug. 31, 2021
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 30, 2020	Jun. 29, 2021
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Mar. 12, 2020	Mar. 11, 2021
Mini-Circuits	Power Amplifier	ZHL-42W+	321501827	Aug. 06, 2020	Aug. 05, 2021
Mini-Circuits	Power Amplifier	ZHL-42W+	715701915	May. 07, 2020	May. 06, 2021
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005-3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

10. System Verification

10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.



Fig 10.1 Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR

10.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	22.6	0.894	41.411	0.89	41.90	0.45	-1.17	±5	2020/10/13
835	22.4	0.873	42.949	0.90	41.50	-3.00	3.49	±5	2020/10/12
835	22.1	0.929	43.356	0.90	41.50	3.22	4.47	±5	2020/10/14
1750	22.6	1.394	41.422	1.37	40.10	1.75	3.30	±5	2020/10/10
1750	22.2	1.368	39.743	1.37	40.10	-0.15	-0.89	±5	2020/10/11
1750	22.1	1.358	40.982	1.37	40.10	-0.88	2.20	±5	2020/10/24
1900	22.5	1.457	39.815	1.40	40.00	4.07	-0.46	±5	2020/10/8
1900	22.2	1.439	41.036	1.40	40.00	2.79	2.59	±5	2020/10/11
1900	22.1	1.403	40.296	1.40	40.00	0.21	0.74	±5	2020/10/24
2300	22.3	1.638	38.807	1.67	39.50	-1.92	-1.75	±5	2020/10/14
2600	22.3	2.041	38.741	1.96	39.00	4.13	-0.66	±5	2020/10/9
2600	22.3	1.990	37.766	1.96	39.00	1.53	-3.16	±5	2020/10/11
2600	22.3	1.952	37.541	1.96	39.00	-0.41	-3.74	±5	2020/10/14

10.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020/10/13	750	250	D750V3-1107	ES3DV3 - SN3071	DAE4 Sn916	2.13	8.32	8.52	2.40
2020/10/12	835	250	D835V2-4d167	ES3DV3 - SN3071	DAE4 Sn916	2.30	9.55	9.2	-3.66
2020/10/14	835	250	D835V2-4d167	EX3DV4 - SN7590	DAE4 Sn915	2.51	9.55	10.04	5.13
2020/10/10	1750	250	D1750V2-1112	EX3DV4 - SN7590	DAE4 Sn915	8.83	36.70	35.32	-3.76
2020/10/11	1750	250	D1750V2-1112	ES3DV3 - SN3071	DAE4 Sn916	8.75	36.70	35	-4.63
2020/10/24	1750	250	D1750V2-1112	ES3DV3 - SN3184	DAE4 Sn916	8.63	36.70	34.52	-5.94
2020/10/8	1900	250	D1900V2-5d185	ES3DV3 - SN3071	DAE4 Sn916	10.00	39.40	40	1.52
2020/10/11	1900	250	D1900V2-5d185	ES3DV3 - SN3071	DAE4 Sn916	9.89	39.40	39.56	0.41
2020/10/24	1900	250	D1900V2-5d185	ES3DV3 - SN3184	DAE4 Sn916	9.51	39.40	38.04	-3.45
2020/10/14	2300	250	D2300V2-1006	ES3DV3 - SN3071	DAE4 Sn916	11.70	48.70	46.8	-3.90
2020/10/9	2600	250	D2600V2-1078	ES3DV3 - SN3071	DAE4 Sn916	15.40	57.60	61.6	6.94
2020/10/11	2600	250	D2600V2-1078	ES3DV3 - SN3071	DAE4 Sn916	15.00	57.60	60	4.17
2020/10/14	2600	250	D2600V2-1078	ES3DV3 - SN3071	DAE4 Sn916	15.30	57.60	61.2	6.25

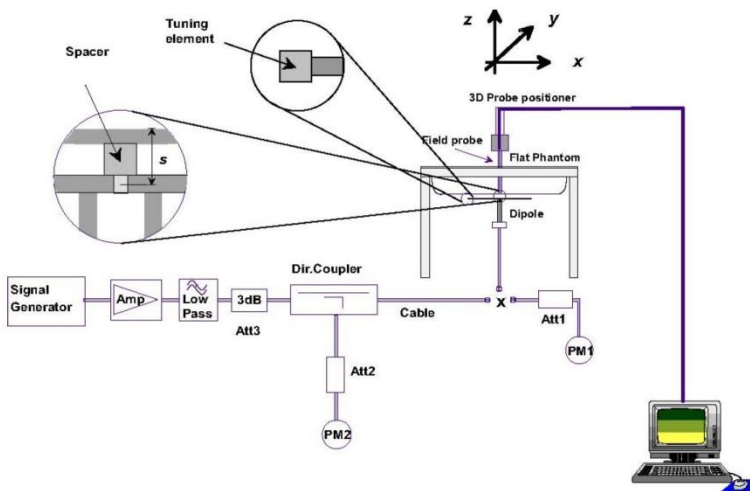


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

12. UMTS/LTE Output Power (Unit: dBm)

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

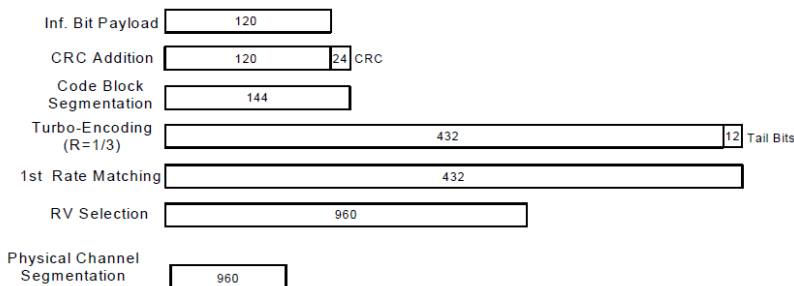


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



<WCDMA Conducted Power>

General Note:

- Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
- Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

Default Power Mode

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938	1537	1638	1738	4357	4407	4458			
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	RMC 12.2Kbps	23.63	23.57	23.67	24.50	23.53	23.70	23.75	24.50	23.46	23.34	23.56	24.50
3GPP Rel 6	HSDPA Subtest-1	23.10	23.04	23.16	24.50	23.06	22.85	22.86	24.50	23.30	23.28	23.42	24.50
3GPP Rel 6	HSDPA Subtest-2	22.77	22.68	22.82	23.50	23.01	22.86	22.89	23.50	22.78	22.80	23.11	23.50
3GPP Rel 6	HSDPA Subtest-3	22.26	22.23	22.46	23.00	22.70	22.60	22.81	23.00	22.78	22.77	22.90	23.00
3GPP Rel 6	HSDPA Subtest-4	22.33	22.25	22.27	23.00	22.82	22.62	22.76	23.00	22.88	22.79	22.86	23.00
3GPP Rel 8	DC-HSDPA Subtest-1	22.51	22.53	22.54	23.50	22.67	22.64	22.75	23.50	23.26	23.35	23.15	23.50
3GPP Rel 8	DC-HSDPA Subtest-2	22.60	22.55	22.58	23.50	22.81	22.50	22.77	23.50	22.86	22.83	23.13	23.50
3GPP Rel 8	DC-HSDPA Subtest-3	22.04	22.00	22.19	23.00	22.21	22.01	22.17	23.00	22.71	22.84	22.91	23.00
3GPP Rel 8	DC-HSDPA Subtest-4	22.12	22.09	22.24	23.00	22.79	22.59	22.71	23.00	21.36	21.25	22.12	23.00
3GPP Rel 6	HSUPA Subtest-1	21.63	21.52	21.66	23.50	21.56	21.52	21.54	23.50	21.87	21.77	22.14	23.50
3GPP Rel 6	HSUPA Subtest-2	21.13	20.81	20.94	21.50	20.28	20.12	20.27	21.50	21.21	21.21	21.36	21.50
3GPP Rel 6	HSUPA Subtest-3	21.12	21.07	21.17	22.50	20.81	20.64	20.81	22.50	21.33	21.27	21.68	22.50
3GPP Rel 6	HSUPA Subtest-4	20.92	20.78	20.86	21.50	20.40	20.25	20.27	21.50	21.12	21.09	21.34	21.50
3GPP Rel 6	HSUPA Subtest-5	22.12	22.04	22.02	23.50	21.52	21.57	21.60	23.50	22.05	22.00	22.32	23.50


Reduced Power Mode

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938	1537	1638	1738	4357	4407	4458			
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	RMC 12.2Kbps	16.71	16.62	16.83	17.50	16.61	16.91	16.82	17.50	15.15	15.10	15.19	16.00
3GPP Rel 6	HSDPA Subtest-1	16.73	16.58	16.63	17.50	16.60	16.85	16.81	17.50	15.15	15.05	15.32	16.00
3GPP Rel 6	HSDPA Subtest-2	16.69	16.55	16.60	17.50	16.62	16.86	16.85	17.50	15.16	15.10	15.32	16.00
3GPP Rel 6	HSDPA Subtest-3	16.69	16.56	16.61	17.50	16.61	16.88	16.87	17.50	15.20	15.14	15.29	16.00
3GPP Rel 6	HSDPA Subtest-4	16.72	16.56	16.58	17.50	16.63	16.88	16.86	17.50	15.21	15.14	15.31	16.00
3GPP Rel 8	DC-HSDPA Subtest-1	16.73	16.51	16.61	17.50	16.68	16.75	16.77	17.50	15.09	15.00	15.30	16.00
3GPP Rel 8	DC-HSDPA Subtest-2	16.64	16.49	16.53	17.50	16.63	16.77	16.75	17.50	15.12	15.02	15.28	16.00
3GPP Rel 8	DC-HSDPA Subtest-3	16.59	16.55	16.52	17.50	16.69	16.84	16.84	17.50	15.20	15.13	15.29	16.00
3GPP Rel 8	DC-HSDPA Subtest-4	16.67	16.50	16.55	17.50	16.72	16.78	16.78	17.50	15.17	15.14	15.34	16.00
3GPP Rel 6	HSUPA Subtest-1	16.23	16.34	16.17	17.50	16.35	16.46	16.41	17.50	15.21	15.13	15.33	16.00
3GPP Rel 6	HSUPA Subtest-2	16.36	16.51	16.16	17.50	16.79	16.90	16.85	17.50	15.22	15.14	15.29	16.00
3GPP Rel 6	HSUPA Subtest-3	16.48	16.36	16.23	17.50	16.33	16.67	16.52	17.50	13.13	13.05	13.41	16.00
3GPP Rel 6	HSUPA Subtest-4	16.74	16.67	16.52	17.50	16.79	16.70	16.64	17.50	15.20	15.10	15.32	16.00
3GPP Rel 6	HSUPA Subtest-5	16.60	16.60	16.50	17.50	16.70	16.90	16.90	17.50	15.20	15.10	15.30	16.00


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B5/B12/B17/B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 4/5/17 SAR test was covered by Band 66/26/12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

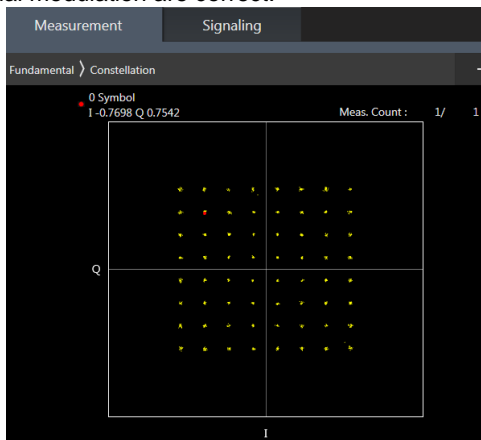

64QAM

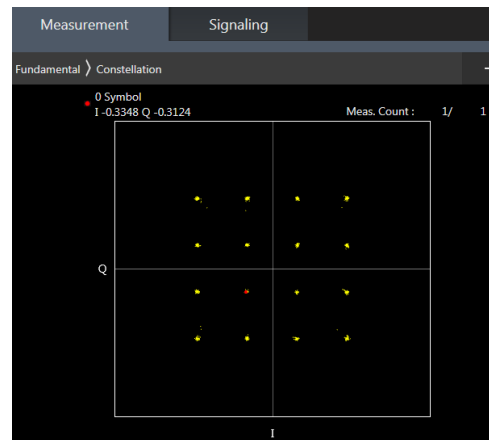

16QAM



Default Power Mode

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.96	22.82	22.83	24	0
20	QPSK	1	49	22.77	22.89	22.66		
20	QPSK	1	99	22.75	22.77	22.94		
20	QPSK	50	0	21.78	21.79	21.63	23	1
20	QPSK	50	24	21.68	21.84	21.66		
20	QPSK	50	50	21.57	21.77	21.80		
20	QPSK	100	0	21.75	21.99	21.93	23	1
20	16QAM	1	0	22.17	22.08	21.97		
20	16QAM	1	49	21.91	22.16	21.88		
20	16QAM	1	99	22.00	22.05	22.21	22	2
20	16QAM	50	0	20.81	20.82	20.68		
20	16QAM	50	24	20.71	20.88	20.71		
20	16QAM	50	50	20.65	20.82	20.83	22	2
20	16QAM	100	0	20.81	21.00	20.97		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.94	22.79	22.83	24	0
15	QPSK	1	37	22.72	22.84	22.57		
15	QPSK	1	74	22.65	22.70	22.86		
15	QPSK	36	0	21.77	21.77	21.61	23	1
15	QPSK	36	20	21.61	21.80	21.59		
15	QPSK	36	39	21.48	21.76	21.75		
15	QPSK	75	0	21.75	21.99	21.90	23	1
15	16QAM	1	0	22.11	22.06	21.96		
15	16QAM	1	37	21.90	22.13	21.85		
15	16QAM	1	74	21.96	21.98	22.11	22	2
15	16QAM	36	0	20.80	20.80	20.61		
15	16QAM	36	20	20.70	20.78	20.64		
15	16QAM	36	39	20.56	20.77	20.74	22	2
15	16QAM	75	0	20.79	20.90	20.96		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.89	22.81	22.83	24	0
10	QPSK	1	25	22.71	22.85	22.56		
10	QPSK	1	49	22.75	22.74	22.86		
10	QPSK	25	0	21.76	21.72	21.61	23	1
10	QPSK	25	12	21.68	21.84	21.63		
10	QPSK	25	25	21.55	21.67	21.72		
10	QPSK	50	0	21.75	21.90	21.86	23	1
10	16QAM	1	0	22.11	22.06	21.95		
10	16QAM	1	25	21.86	22.06	21.84		
10	16QAM	1	49	21.96	21.98	22.17	22	2
10	16QAM	25	0	20.77	20.79	20.61		
10	16QAM	25	12	20.62	20.85	20.67		
10	16QAM	25	25	20.59	20.80	20.80	22	2
10	16QAM	50	0	20.81	20.94	20.94		
Channel				18625	18900	19175		
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.93	22.76	22.77	24	0
5	QPSK	1	12	22.67	22.85	22.65		



5	QPSK	1	24	22.66	22.70	22.84		
5	QPSK	12	0	21.70	21.79	21.57	23	1
5	QPSK	12	7	21.64	21.74	21.66		
5	QPSK	12	13	21.52	21.67	21.78		
5	QPSK	25	0	21.67	21.99	21.87		
5	16QAM	1	0	22.17	22.04	21.91	23	1
5	16QAM	1	12	21.90	22.11	21.85		
5	16QAM	1	24	22.00	22.04	22.16		
5	16QAM	12	0	20.76	20.74	20.66	22	2
5	16QAM	12	7	20.67	20.80	20.64		
5	16QAM	12	13	20.64	20.73	20.80		
5	16QAM	25	0	20.76	20.90	20.89		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.87	22.80	22.79	24	0
3	QPSK	1	8	22.69	22.89	22.60		
3	QPSK	1	14	22.69	22.68	22.94		
3	QPSK	8	0	21.77	21.70	21.56	23	1
3	QPSK	8	4	21.66	21.78	21.61		
3	QPSK	8	7	21.52	21.71	21.78		
3	QPSK	15	0	21.73	21.90	21.90		
3	16QAM	1	0	22.12	22.01	21.87	23	1
3	16QAM	1	8	21.83	22.07	21.78		
3	16QAM	1	14	21.96	22.01	22.19		
3	16QAM	8	0	20.75	20.72	20.64	22	2
3	16QAM	8	4	20.61	20.87	20.63		
3	16QAM	8	7	20.58	20.78	20.81		
3	16QAM	15	0	20.72	20.96	20.91		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.87	22.73	22.82	24	0
1.4	QPSK	1	3	22.71	22.81	22.64		
1.4	QPSK	1	5	22.75	22.69	22.93		
1.4	QPSK	3	0	22.96	22.77	22.75		
1.4	QPSK	3	1	22.76	22.84	22.59		
1.4	QPSK	3	3	22.72	22.74	22.92		
1.4	QPSK	6	0	21.66	21.90	21.92	23	1
1.4	16QAM	1	0	22.10	22.02	21.88	23	1
1.4	16QAM	1	3	21.82	22.11	21.88		
1.4	16QAM	1	5	21.90	22.04	22.21		
1.4	16QAM	3	0	22.15	22.04	21.97		
1.4	16QAM	3	1	21.86	22.15	21.80		
1.4	16QAM	3	3	21.91	22.03	22.13		
1.4	16QAM	6	0	20.72	20.93	20.94	22	2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.85	23.05	22.92	24	0
20	QPSK	1	49	23.02	22.81	22.94		
20	QPSK	1	99	22.88	22.72	23.02		
20	QPSK	50	0	21.98	21.88	21.85	23	1
20	QPSK	50	24	21.97	21.82	21.89		
20	QPSK	50	50	21.89	21.71	21.87		
20	QPSK	100	0	22.08	21.90	22.07	23	1
20	16QAM	1	0	22.18	22.28	22.20		
20	16QAM	1	49	22.20	22.02	22.13		
20	16QAM	1	99	22.10	21.98	22.25	22	2
20	16QAM	50	0	21.03	20.91	20.89		
20	16QAM	50	24	21.02	20.90	20.94		
20	16QAM	50	50	20.90	20.79	20.90	22	2
20	16QAM	100	0	21.08	20.94	21.11		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.82	23.01	22.86	24	0
15	QPSK	1	37	22.92	22.75	22.87		
15	QPSK	1	74	22.81	22.67	22.92		
15	QPSK	36	0	21.93	21.83	21.85	23	1
15	QPSK	36	20	21.90	21.75	21.85		
15	QPSK	36	39	21.81	21.69	21.77		
15	QPSK	75	0	22.07	21.90	22.04	23	1
15	16QAM	1	0	22.10	22.22	22.12		
15	16QAM	1	37	22.15	21.98	22.07		
15	16QAM	1	74	22.08	21.93	22.17	22	2
15	16QAM	36	0	21.03	20.91	20.83		
15	16QAM	36	20	20.92	20.83	20.84		
15	16QAM	36	39	20.88	20.77	20.81	22	2
15	16QAM	75	0	21.04	20.84	21.11		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.76	22.95	22.89	24	0
10	QPSK	1	25	22.95	22.71	22.85		
10	QPSK	1	49	22.84	22.63	23.01		
10	QPSK	25	0	21.96	21.80	21.82	23	1
10	QPSK	25	12	21.87	21.81	21.85		
10	QPSK	25	25	21.83	21.67	21.81		
10	QPSK	50	0	22.07	21.89	22.07	23	1
10	16QAM	1	0	22.12	22.18	22.14		
10	16QAM	1	25	22.11	21.97	22.08		
10	16QAM	1	49	22.05	21.96	22.24	22	2
10	16QAM	25	0	20.97	20.89	20.86		
10	16QAM	25	12	21.00	20.83	20.90		
10	16QAM	25	25	20.82	20.73	20.90	22	2
10	16QAM	50	0	20.99	20.91	21.07		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.79	22.97	22.89	24	0
5	QPSK	1	12	22.95	22.73	22.91		
5	QPSK	1	24	22.79	22.68	23.01		



5	QPSK	12	0	21.96	21.85	21.82	23	1
5	QPSK	12	7	21.95	21.81	21.83		
5	QPSK	12	13	21.81	21.67	21.78		
5	QPSK	25	0	22.08	21.89	22.03	23	1
5	16QAM	1	0	22.10	22.25	22.18		
5	16QAM	1	12	22.18	21.99	22.03		
5	16QAM	1	24	22.07	21.90	22.15	22	2
5	16QAM	12	0	20.94	20.88	20.88		
5	16QAM	12	7	20.92	20.85	20.91		
5	16QAM	12	13	20.81	20.73	20.84		
5	16QAM	25	0	21.02	20.91	21.11	Tune-up limit (dBm)	MPR (dB)
Channel				19965	20175	20385		
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.80	22.94	22.84	24	0
3	QPSK	1	8	22.97	22.75	22.88		
3	QPSK	1	14	22.81	22.68	23.00		
3	QPSK	8	0	21.95	21.86	21.83	23	1
3	QPSK	8	4	21.92	21.73	21.85		
3	QPSK	8	7	21.88	21.62	21.80		
3	QPSK	15	0	22.03	21.83	21.99		
3	16QAM	1	0	22.18	22.20	22.10	23	1
3	16QAM	1	8	22.12	21.97	22.08		
3	16QAM	1	14	22.00	21.90	22.19		
3	16QAM	8	0	21.01	20.84	20.80	22	2
3	16QAM	8	4	20.95	20.85	20.87		
3	16QAM	8	7	20.81	20.78	20.83		
3	16QAM	15	0	21.04	20.94	21.11		
Channel				19957	20175	20393		
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.82	23.01	22.85	24	0
1.4	QPSK	1	3	22.96	22.81	22.88		
1.4	QPSK	1	5	22.86	22.62	22.98		
1.4	QPSK	3	0	22.85	23.03	22.82		
1.4	QPSK	3	1	22.97	22.76	22.85		
1.4	QPSK	3	3	22.85	22.70	22.97		
1.4	QPSK	6	0	22.04	21.80	22.01	23	1
1.4	16QAM	1	0	22.12	22.22	22.10	23	1
1.4	16QAM	1	3	22.13	21.95	22.11		
1.4	16QAM	1	5	22.09	21.88	22.20		
1.4	16QAM	3	0	22.17	22.23	22.17		
1.4	16QAM	3	1	22.16	21.97	22.07		
1.4	16QAM	3	3	22.01	21.96	22.19		
1.4	16QAM	6	0	20.99	20.86	21.10		



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.74	22.55	22.87		
10	QPSK	1	25	22.57	22.65	22.84	24	0
10	QPSK	1	49	22.56	22.77	22.78		
10	QPSK	25	0	21.65	21.63	21.80		
10	QPSK	25	12	21.59	21.64	21.81	23	1
10	QPSK	25	25	21.51	21.76	21.91		
10	QPSK	50	0	21.63	21.66	21.91		
10	16QAM	1	0	22.12	21.87	22.13	23	1
10	16QAM	1	25	21.97	21.89	22.19		
10	16QAM	1	49	21.98	22.08	22.35		
10	16QAM	25	0	20.77	20.72	20.84	22	2
10	16QAM	25	12	20.73	20.72	20.85		
10	16QAM	25	25	20.65	20.82	20.97		
10	16QAM	50	0	20.74	20.76	20.97		
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.74	22.50	22.82		
5	QPSK	1	12	22.56	22.60	22.81	24	0
5	QPSK	1	24	22.54	22.70	22.72		
5	QPSK	12	0	21.57	21.53	21.70		
5	QPSK	12	7	21.49	21.55	21.79	23	1
5	QPSK	12	13	21.49	21.75	21.83		
5	QPSK	25	0	21.54	21.65	21.89		
5	16QAM	1	0	22.09	21.85	22.08	23	1
5	16QAM	1	12	21.93	21.85	22.18		
5	16QAM	1	24	21.89	22.04	22.26		
5	16QAM	12	0	20.74	20.71	20.76	22	2
5	16QAM	12	7	20.63	20.63	20.84		
5	16QAM	12	13	20.57	20.74	20.94		
5	16QAM	25	0	20.74	20.74	20.88		
Channel				20415	20525	20635		
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.69	22.46	22.80		
3	QPSK	1	8	22.51	22.64	22.81	24	0
3	QPSK	1	14	22.51	22.77	22.69		
3	QPSK	8	0	21.59	21.57	21.74		
3	QPSK	8	4	21.50	21.61	21.72	23	1
3	QPSK	8	7	21.45	21.75	21.86		
3	QPSK	15	0	21.56	21.59	21.87		
3	16QAM	1	0	22.10	21.77	22.07	23	1
3	16QAM	1	8	21.95	21.79	22.12		
3	16QAM	1	14	21.97	22.07	22.31		
3	16QAM	8	0	20.71	20.69	20.74	22	2
3	16QAM	8	4	20.73	20.67	20.76		
3	16QAM	8	7	20.65	20.82	20.90		
3	16QAM	15	0	20.67	20.69	20.94		
Channel				20407	20525	20643		
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.71	22.46	22.80		
1.4	QPSK	1	3	22.49	22.62	22.77	24	0
1.4	QPSK	1	5	22.51	22.74	22.69		



1.4	QPSK	3	0	22.74	22.48	22.80		
1.4	QPSK	3	1	22.48	22.61	22.81		
1.4	QPSK	3	3	22.50	22.71	22.78		
1.4	QPSK	6	0	21.54	21.66	21.91	23	1
1.4	16QAM	1	0	22.06	21.79	22.03	23	1
1.4	16QAM	1	3	21.93	21.89	22.19		
1.4	16QAM	1	5	21.88	22.07	22.35		
1.4	16QAM	3	0	22.07	21.83	22.11		
1.4	16QAM	3	1	21.95	21.87	22.14		
1.4	16QAM	3	3	21.91	22.04	22.33		
1.4	16QAM	6	0	20.71	20.69	20.93	22	2



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350	24	0
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.99	23.03	22.89		
20	QPSK	1	49	22.87	22.95	22.75	23	1
20	QPSK	1	99	22.98	22.93	22.98		
20	QPSK	50	0	22.02	22.06	21.86		
20	QPSK	50	24	21.94	22.09	21.84	23	1
20	QPSK	50	50	21.97	22.05	21.94		
20	QPSK	100	0	22.04	22.21	21.97		
20	16QAM	1	0	22.14	22.16	22.11	23	1
20	16QAM	1	49	22.11	22.25	22.05		
20	16QAM	1	99	22.32	22.26	22.28		
20	16QAM	50	0	21.09	21.09	20.92	22	2
20	16QAM	50	24	21.03	21.11	20.91		
20	16QAM	50	50	21.08	21.10	21.00		
20	16QAM	100	0	21.11	21.25	21.02		
Channel				20825	21100	21375	24	0
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.92	22.98	22.85		
15	QPSK	1	37	22.78	22.92	22.73	23	1
15	QPSK	1	74	22.91	22.90	22.88		
15	QPSK	36	0	21.93	22.04	21.77		
15	QPSK	36	20	21.90	22.00	21.83	23	1
15	QPSK	36	39	21.92	22.02	21.92		
15	QPSK	75	0	21.96	22.12	21.92		
15	16QAM	1	0	22.10	22.16	22.03	23	1
15	16QAM	1	37	22.03	22.18	22.00		
15	16QAM	1	74	22.27	22.22	22.23		
15	16QAM	36	0	21.08	21.00	20.86	22	2
15	16QAM	36	20	20.99	21.06	20.87		
15	16QAM	36	39	21.08	21.04	20.96		
15	16QAM	75	0	21.02	21.16	20.96		
Channel				20800	21100	21400	24	0
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.92	22.95	22.89		
10	QPSK	1	25	22.87	22.86	22.69	23	1
10	QPSK	1	49	22.95	22.93	22.91		
10	QPSK	25	0	21.92	22.03	21.85		
10	QPSK	25	12	21.85	21.99	21.77	23	1
10	QPSK	25	25	21.93	21.99	21.92		
10	QPSK	50	0	21.94	22.13	21.96		
10	16QAM	1	0	22.06	22.15	22.09	23	1
10	16QAM	1	25	22.09	22.21	22.00		
10	16QAM	1	49	22.32	22.19	22.24		
10	16QAM	25	0	21.08	21.00	20.85	22	2
10	16QAM	25	12	21.02	21.03	20.89		
10	16QAM	25	25	21.04	21.00	20.95		
10	16QAM	50	0	21.04	21.17	20.98		
Channel				20775	21100	21425	24	0
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.95	22.96	22.82		
5	QPSK	1	12	22.86	22.89	22.75	24	0
5	QPSK	1	24	22.89	22.83	22.94		



FCC SAR TEST REPORT

Report No. : FA092420

5	QPSK	12	0	21.98	21.96	21.77	23	1
5	QPSK	12	7	21.91	22.01	21.80		
5	QPSK	12	13	21.94	22.00	21.88		
5	QPSK	25	0	21.94	22.18	21.91		
5	16QAM	1	0	22.06	22.07	22.07	23	1
5	16QAM	1	12	22.08	22.16	22.00		
5	16QAM	1	24	22.22	22.26	22.25		
5	16QAM	12	0	21.05	21.02	20.82	22	2
5	16QAM	12	7	20.99	21.06	20.91		
5	16QAM	12	13	21.08	21.10	20.96		
5	16QAM	25	0	21.03	21.22	21.02		



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	22.50	22.66	22.69		
10	QPSK	1	25	22.59	22.64	22.55	24	0
10	QPSK	1	49	22.60	22.65	22.65		
10	QPSK	25	0	21.58	21.65	21.58		
10	QPSK	25	12	21.73	21.63	21.54	23	1
10	QPSK	25	25	21.76	21.62	21.66		
10	QPSK	50	0	21.80	21.71	21.71		
10	16QAM	1	0	21.85	21.98	21.95	23	1
10	16QAM	1	25	22.06	22.05	21.93		
10	16QAM	1	49	22.04	22.06	22.19		
10	16QAM	25	0	20.65	20.71	20.62	22	2
10	16QAM	25	12	20.84	20.74	20.58		
10	16QAM	25	25	20.85	20.68	20.69		
10	16QAM	50	0	20.87	20.80	20.78		
Channel				23035	23095	23155	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.44	22.56	22.61	24	0
5	QPSK	1	12	22.51	22.56	22.47		
5	QPSK	1	24	22.57	22.60	22.64		
5	QPSK	12	0	21.52	21.55	21.52	23	1
5	QPSK	12	7	21.71	21.64	21.52		
5	QPSK	12	13	21.68	21.59	21.63		
5	QPSK	25	0	21.70	21.63	21.71		
5	16QAM	1	0	21.85	21.95	21.91	23	1
5	16QAM	1	12	21.96	21.97	21.89		
5	16QAM	1	24	21.99	21.98	22.15		
5	16QAM	12	0	20.60	20.62	20.58	22	2
5	16QAM	12	7	20.74	20.67	20.58		
5	16QAM	12	13	20.80	20.63	20.60		
5	16QAM	12	13	20.80	20.63	20.60		
5	16QAM	25	0	20.81	20.76	20.71		
Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.46	22.62	22.64	24	0
3	QPSK	1	8	22.53	22.54	22.49		
3	QPSK	1	14	22.55	22.58	22.63		
3	QPSK	8	0	21.50	21.63	21.57	23	1
3	QPSK	8	4	21.72	21.66	21.54		
3	QPSK	8	7	21.75	21.52	21.62		
3	QPSK	15	0	21.78	21.62	21.71		
3	16QAM	1	0	21.81	21.88	21.92	23	1
3	16QAM	1	8	21.97	22.00	21.92		
3	16QAM	1	14	21.99	22.06	22.13		
3	16QAM	8	0	20.59	20.69	20.57	22	2
3	16QAM	8	4	20.75	20.64	20.51		
3	16QAM	8	7	20.85	20.59	20.62		
3	16QAM	15	0	20.82	20.71	20.78		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.41	22.60	22.69	24	0
1.4	QPSK	1	3	22.53	22.64	22.46		
1.4	QPSK	1	5	22.56	22.64	22.65		



1.4	QPSK	3	0	22.50	22.53	22.67		
1.4	QPSK	3	1	22.54	22.54	22.51		
1.4	QPSK	3	3	22.58	22.60	22.65		
1.4	QPSK	6	0	21.80	21.61	21.66	23	1
1.4	16QAM	1	0	21.85	21.98	21.94		
1.4	16QAM	1	3	22.04	21.96	21.93		
1.4	16QAM	1	5	22.04	21.96	22.18		
1.4	16QAM	3	0	21.80	21.96	21.87	23	1
1.4	16QAM	3	1	22.02	22.05	21.86		
1.4	16QAM	3	3	22.04	21.99	22.19		
1.4	16QAM	6	0	20.80	20.77	20.70	22	2



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		23.30		24	0
10	QPSK	1	25		23.25			
10	QPSK	1	49		23.26			
10	QPSK	25	0		22.29		23	1
10	QPSK	25	12		22.23			
10	QPSK	25	25		22.29			
10	QPSK	50	0		22.38		23	1
10	16QAM	1	0		22.48			
10	16QAM	1	25		22.51			
10	16QAM	1	49		22.59		22	2
10	16QAM	25	0		21.33			
10	16QAM	25	12		21.30			
10	16QAM	25	25		21.39		22	2
10	16QAM	50	0		21.45			
Channel				23205	23230	23255		
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	23.24	23.27	23.26	24	0
5	QPSK	1	12	23.17	23.24	23.24		
5	QPSK	1	24	23.23	23.21	23.23		
5	QPSK	12	0	22.26	22.25	22.20	23	1
5	QPSK	12	7	22.16	22.17	22.14		
5	QPSK	12	13	22.28	22.27	22.22		
5	QPSK	25	0	22.29	22.30	22.31	23	1
5	16QAM	1	0	22.40	22.39	22.40		
5	16QAM	1	12	22.49	22.45	22.48		
5	16QAM	1	24	22.56	22.59	22.56	22	2
5	16QAM	12	0	21.24	21.30	21.23		
5	16QAM	12	7	21.30	21.21	21.23		
5	16QAM	12	13	21.32	21.29	21.29	22	2
5	16QAM	25	0	21.40	21.41	21.41		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.70	22.79	22.67		
10	QPSK	1	25	22.57	22.50	22.59	24	0
10	QPSK	1	49	22.68	22.63	22.70		
10	QPSK	25	0	21.66	21.67	21.63		
10	QPSK	25	12	21.60	21.60	21.62	23	1
10	QPSK	25	25	21.65	21.66	21.70		
10	QPSK	50	0	21.66	21.67	21.74		
10	16QAM	1	0	21.99	22.05	22.01	23	1
10	16QAM	1	25	21.91	21.93	21.97		
10	16QAM	1	49	22.04	22.20	22.17		
10	16QAM	25	0	20.76	20.77	20.71	22	2
10	16QAM	25	12	20.69	20.66	20.67		
10	16QAM	25	25	20.74	20.74	20.75		
10	16QAM	50	0	20.76	20.78	20.79		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.60	22.70	22.64	24	0
5	QPSK	1	12	22.49	22.43	22.58		
5	QPSK	1	24	22.60	22.57	22.70		
5	QPSK	12	0	21.66	21.58	21.57	23	1
5	QPSK	12	7	21.56	21.52	21.60		
5	QPSK	12	13	21.56	21.58	21.63		
5	QPSK	25	0	21.58	21.58	21.74		
5	16QAM	1	0	21.95	22.05	22.00	23	1
5	16QAM	1	12	21.84	21.92	21.89		
5	16QAM	1	24	22.03	22.13	22.10		
5	16QAM	12	0	20.70	20.75	20.64	22	2
5	16QAM	12	7	20.65	20.61	20.57		
5	16QAM	12	13	20.66	20.70	20.70		
5	16QAM	12	13	20.66	20.70	20.70		
5	16QAM	25	0	20.74	20.75	20.77		



<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	22.69	22.86	22.70		
15	QPSK	1	37	22.74	22.48	22.77	24	0
15	QPSK	1	74	22.65	22.72	22.78		
15	QPSK	36	0	21.88	21.65	21.70		
15	QPSK	36	20	21.93	21.61	21.76	23	1
15	QPSK	36	39	21.78	21.63	21.84		
15	QPSK	75	0	22.00	21.64	21.85		
15	16QAM	1	0	22.02	22.12	21.86	23	1
15	16QAM	1	37	22.25	21.77	22.04		
15	16QAM	1	74	22.03	22.11	22.22		
15	16QAM	36	0	20.98	20.74	20.80	22	2
15	16QAM	36	20	21.04	20.59	20.86		
15	16QAM	36	39	20.88	20.75	20.95		
15	16QAM	75	0	21.09	20.73	20.90		
Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	22.67	22.85	22.62	24	0
10	QPSK	1	25	22.74	22.39	22.73		
10	QPSK	1	49	22.58	22.71	22.75		
10	QPSK	25	0	21.86	21.60	21.68	23	1
10	QPSK	25	12	21.93	21.49	21.70		
10	QPSK	25	25	21.70	21.57	21.82		
10	QPSK	50	0	21.91	21.63	21.82		
10	16QAM	1	0	21.97	22.06	21.76	23	1
10	16QAM	1	25	22.25	21.70	21.96		
10	16QAM	1	49	21.95	22.09	22.19		
10	16QAM	25	0	20.96	20.66	20.72	22	2
10	16QAM	25	12	20.99	20.52	20.80		
10	16QAM	25	25	20.79	20.74	20.86		
10	16QAM	50	0	21.03	20.73	20.88		
Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	22.68	22.85	22.64	24	0
5	QPSK	1	12	22.70	22.39	22.68		
5	QPSK	1	24	22.58	22.62	22.71		
5	QPSK	12	0	21.88	21.64	21.60	23	1
5	QPSK	12	7	21.85	21.49	21.67		
5	QPSK	12	13	21.75	21.56	21.79		
5	QPSK	25	0	21.94	21.56	21.77		
5	16QAM	1	0	21.99	22.02	21.80	23	1
5	16QAM	1	12	22.20	21.69	22.02		
5	16QAM	1	24	21.99	22.10	22.20		
5	16QAM	12	0	20.98	20.74	20.76	22	2
5	16QAM	12	7	21.04	20.49	20.76		
5	16QAM	12	13	20.87	20.68	20.95		
5	16QAM	25	0	21.02	20.67	20.81		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	22.66	22.81	22.64	24	0
3	QPSK	1	8	22.66	22.42	22.71		
3	QPSK	1	14	22.60	22.65	22.72		



3	QPSK	8	0	21.78	21.59	21.70	23	1
3	QPSK	8	4	21.84	21.45	21.68		
3	QPSK	8	7	21.75	21.60	21.77		
3	QPSK	15	0	21.95	21.60	21.78		
3	16QAM	1	0	21.99	22.03	21.81	23	1
3	16QAM	1	8	22.25	21.76	21.98		
3	16QAM	1	14	21.99	22.08	22.21		
3	16QAM	8	0	20.90	20.65	20.80	22	2
3	16QAM	8	4	21.02	20.54	20.84		
3	16QAM	8	7	20.85	20.72	20.87		
3	16QAM	15	0	21.06	20.69	20.83		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	22.62	22.76	22.65	24	0
1.4	QPSK	1	3	22.73	22.38	22.73		
1.4	QPSK	1	5	22.58	22.64	22.72		
1.4	QPSK	3	0	22.64	22.76	22.65		
1.4	QPSK	3	1	22.68	22.42	22.70		
1.4	QPSK	3	3	22.62	22.72	22.75		
1.4	QPSK	6	0	21.94	21.55	21.78	23	1
1.4	16QAM	1	0	21.94	22.04	21.79	23	1
1.4	16QAM	1	3	22.22	21.73	21.98		
1.4	16QAM	1	5	22.03	22.05	22.16		
1.4	16QAM	3	0	22.00	22.07	21.81		
1.4	16QAM	3	1	22.17	21.71	22.03		
1.4	16QAM	3	3	22.02	22.11	22.15		
1.4	16QAM	6	0	21.08	20.64	20.83	22	2



<LTE Band 30>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710				
Frequency (MHz)				2310				
10	QPSK	1	0		22.70		24	0
10	QPSK	1	25		22.69			
10	QPSK	1	49		22.59			
10	QPSK	25	0		21.72		23	1
10	QPSK	25	12		21.71			
10	QPSK	25	25		21.72			
10	QPSK	50	0		21.71		23	1
10	16QAM	1	0		22.06			
10	16QAM	1	25		22.04			
10	16QAM	1	49		21.85		22	2
10	16QAM	25	0		20.68			
10	16QAM	25	12		20.72			
10	16QAM	25	25		20.73		22	2
10	16QAM	50	0		20.72			
Channel				27685	27710	27735		
Frequency (MHz)				2307.5	2310	2312.5		
5	QPSK	1	0	22.60	22.64	22.67	24	0
5	QPSK	1	12	22.59	22.66	22.63		
5	QPSK	1	24	22.50	22.55	22.53		
5	QPSK	12	0	21.72	21.64	21.69	23	1
5	QPSK	12	7	21.70	21.71	21.66		
5	QPSK	12	13	21.71	21.69	21.62		
5	QPSK	25	0	21.67	21.62	21.68	23	1
5	16QAM	1	0	22.02	22.04	22.06		
5	16QAM	1	12	22.02	22.02	22.04		
5	16QAM	1	24	21.78	21.79	21.78	22	2
5	16QAM	12	0	20.66	20.58	20.60		
5	16QAM	12	7	20.68	20.62	20.66		
5	16QAM	12	13	20.66	20.71	20.66	22	2
5	16QAM	25	0	20.71	20.65	20.70		



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572	24	0
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	22.84	22.80	23.10		
20	QPSK	1	49	22.97	22.73	22.73	23	1
20	QPSK	1	99	22.83	23.01	22.99		
20	QPSK	50	0	21.96	21.82	21.99		
20	QPSK	50	24	22.08	21.81	21.80	23	1
20	QPSK	50	50	21.96	21.98	21.77		
20	QPSK	100	0	22.25	22.07	22.00		
20	16QAM	1	0	22.03	22.20	22.50	23	1
20	16QAM	1	49	22.34	22.06	22.15		
20	16QAM	1	99	22.41	22.40	22.34		
20	16QAM	50	0	20.94	20.80	20.96	22	2
20	16QAM	50	24	21.08	20.80	20.77		
20	16QAM	50	50	20.96	20.98	20.79		
20	16QAM	100	0	21.27	21.08	21.06		
Channel				132047	132322	132597	24	0
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	22.82	22.74	23.05		
15	QPSK	1	37	22.93	22.70	22.73	23	1
15	QPSK	1	74	22.82	22.92	22.98		
15	QPSK	36	0	21.94	21.72	21.92		
15	QPSK	36	20	22.05	21.75	21.76	23	1
15	QPSK	36	39	21.87	21.94	21.74		
15	QPSK	75	0	22.19	22.00	21.95		
15	16QAM	1	0	21.96	22.17	22.41	23	1
15	16QAM	1	37	22.29	21.98	22.10		
15	16QAM	1	74	22.40	22.35	22.29		
15	16QAM	36	0	20.91	20.80	20.93	22	2
15	16QAM	36	20	21.05	20.74	20.68		
15	16QAM	36	39	20.91	20.90	20.74		
15	16QAM	75	0	21.24	21.04	21.01		
Channel				132022	132322	132622	24	0
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	22.77	22.79	23.05		
10	QPSK	1	25	22.93	22.63	22.66	23	1
10	QPSK	1	49	22.77	22.99	22.89		
10	QPSK	25	0	21.96	21.73	21.96		
10	QPSK	25	12	21.99	21.81	21.70	23	1
10	QPSK	25	25	21.91	21.88	21.73		
10	QPSK	50	0	22.22	22.05	21.91		
10	16QAM	1	0	21.95	22.10	22.43	23	1
10	16QAM	1	25	22.24	22.03	22.08		
10	16QAM	1	49	22.38	22.36	22.30		
10	16QAM	25	0	20.88	20.80	20.89	22	2
10	16QAM	25	12	21.06	20.73	20.75		
10	16QAM	25	25	20.95	20.88	20.69		
10	16QAM	50	0	21.24	21.00	20.98		
Channel				131997	132322	132647	24	0
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	22.76	22.78	23.04		
5	QPSK	1	12	22.88	22.73	22.66	24	0
5	QPSK	1	24	22.82	23.01	22.99		



5	QPSK	12	0	21.94	21.77	21.98	23	1
5	QPSK	12	7	22.02	21.72	21.75		
5	QPSK	12	13	21.94	21.88	21.75		
5	QPSK	25	0	22.22	22.06	22.00	23	1
5	16QAM	1	0	21.96	22.18	22.46		
5	16QAM	1	12	22.28	22.04	22.15		
5	16QAM	1	24	22.40	22.40	22.32	22	2
5	16QAM	12	0	20.85	20.72	20.86		
5	16QAM	12	7	21.04	20.75	20.75		
5	16QAM	12	13	20.93	20.89	20.72		
5	16QAM	25	0	21.27	21.05	21.03	Tune-up limit (dBm)	MPR (dB)
Channel				131987	132322	132657		
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	22.82	22.77	23.09	24	0
3	QPSK	1	8	22.93	22.69	22.66		
3	QPSK	1	14	22.82	22.96	22.94		
3	QPSK	8	0	21.88	21.74	21.97	23	1
3	QPSK	8	4	22.00	21.77	21.79		
3	QPSK	8	7	21.90	21.89	21.71		
3	QPSK	15	0	22.25	22.01	21.93		
3	16QAM	1	0	22.01	22.13	22.42	23	1
3	16QAM	1	8	22.25	22.06	22.14		
3	16QAM	1	14	22.37	22.39	22.27		
3	16QAM	8	0	20.85	20.75	20.91	22	2
3	16QAM	8	4	21.06	20.75	20.71		
3	16QAM	8	7	20.88	20.93	20.78		
3	16QAM	15	0	21.24	21.00	20.99		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	22.82	22.71	23.02	24	0
1.4	QPSK	1	3	22.97	22.73	22.68		
1.4	QPSK	1	5	22.82	22.94	22.90		
1.4	QPSK	3	0	22.77	22.73	23.06		
1.4	QPSK	3	1	22.87	22.72	22.63		
1.4	QPSK	3	3	22.79	22.91	22.91		
1.4	QPSK	6	0	22.25	21.99	21.96	23	1
1.4	16QAM	1	0	22.03	22.18	22.46	23	1
1.4	16QAM	1	3	22.32	22.04	22.11		
1.4	16QAM	1	5	22.36	22.33	22.26		
1.4	16QAM	3	0	21.96	22.10	22.48		
1.4	16QAM	3	1	22.33	21.96	22.14		
1.4	16QAM	3	3	22.31	22.37	22.24		
1.4	16QAM	6	0	21.20	20.98	20.98		



Reduced Power Mode

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	16.60	16.43	16.39	17.5	0
20	QPSK	1	49	16.39	16.37	16.22		
20	QPSK	1	99	16.43	16.34	16.38		
20	QPSK	50	0	16.52	16.44	16.41	17.5	0
20	QPSK	50	24	16.42	16.43	16.33		
20	QPSK	50	50	16.39	16.38	16.39		
20	QPSK	100	0	16.58	16.55	16.57	17.5	0
20	16QAM	1	0	16.84	16.75	16.74		
20	16QAM	1	49	16.69	16.63	16.51		
20	16QAM	1	99	16.74	16.66	16.72	17.5	0
20	16QAM	50	0	16.56	16.47	16.39		
20	16QAM	50	24	16.47	16.49	16.37		
20	16QAM	50	50	16.44	16.43	16.47	17.5	0
20	16QAM	100	0	16.57	16.63	16.62		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	16.51	16.34	16.32	17.5	0
15	QPSK	1	37	16.39	16.36	16.35		
15	QPSK	1	74	16.32	16.34	16.35		
15	QPSK	36	0	16.49	16.41	16.36	17.5	0
15	QPSK	36	20	16.45	16.44	16.42		
15	QPSK	36	39	16.36	16.42	16.40		
15	QPSK	75	0	16.46	16.49	16.54	17.5	0
15	16QAM	1	0	16.81	16.68	16.61		
15	16QAM	1	37	16.72	16.67	16.66		
15	16QAM	1	74	16.66	16.65	16.63	17.5	0
15	16QAM	36	0	16.54	16.47	16.43		
15	16QAM	36	20	16.52	16.50	16.50		
15	16QAM	36	39	16.43	16.48	16.45	17.5	0
15	16QAM	75	0	16.50	16.52	16.59		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	16.51	16.36	16.28	17.5	0
10	QPSK	1	25	16.41	16.36	16.27		
10	QPSK	1	49	16.37	16.38	16.38		
10	QPSK	25	0	16.52	16.42	16.33	17.5	0
10	QPSK	25	12	16.44	16.44	16.31		
10	QPSK	25	25	16.42	16.42	16.44		
10	QPSK	50	0	16.42	16.42	16.35	17.5	0
10	16QAM	1	0	16.66	16.68	16.58		
10	16QAM	1	25	16.66	16.63	16.55		
10	16QAM	1	49	16.59	16.71	16.64	17.5	0
10	16QAM	25	0	16.56	16.48	16.38		
10	16QAM	25	12	16.50	16.50	16.35		
10	16QAM	25	25	16.48	16.49	16.47	17.5	0
10	16QAM	50	0	16.46	16.47	16.37		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	16.52	16.32	16.32	17.5	0
5	QPSK	1	12	16.46	16.33	16.32		



5	QPSK	1	24	16.41	16.33	16.39		
5	QPSK	12	0	16.49	16.36	16.31	17.5	0
5	QPSK	12	7	16.49	16.37	16.38		
5	QPSK	12	13	16.42	16.41	16.40		
5	QPSK	25	0	16.51	16.40	16.42	17.5	0
5	16QAM	1	0	16.67	16.60	16.53		
5	16QAM	1	12	16.63	16.61	16.59		
5	16QAM	1	24	16.67	16.67	16.66	17.5	0
5	16QAM	12	0	16.52	16.39	16.33		
5	16QAM	12	7	16.52	16.41	16.40		
5	16QAM	12	13	16.44	16.44	16.43	17.5	0
5	16QAM	25	0	16.54	16.42	16.42		
Channel				18615	18900	19185		
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	16.44	16.26	16.30	17.5	0
3	QPSK	1	8	16.44	16.33	16.35		
3	QPSK	1	14	16.42	16.33	16.33		
3	QPSK	8	0	16.44	16.35	16.35	17.5	0
3	QPSK	8	4	16.43	16.35	16.35		
3	QPSK	8	7	16.44	16.38	16.39		
3	QPSK	15	0	16.46	16.36	16.39	17.5	0
3	16QAM	1	0	16.69	16.55	16.52		
3	16QAM	1	8	16.71	16.59	16.59		
3	16QAM	1	14	16.69	16.57	16.60	17.5	0
3	16QAM	8	0	16.48	16.39	16.43		
3	16QAM	8	4	16.48	16.40	16.40		
3	16QAM	8	7	16.51	16.40	16.44	17.5	0
3	16QAM	15	0	16.49	16.39	16.43		
Channel				18607	18900	19193		
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	16.47	16.34	16.35	17.5	0
1.4	QPSK	1	3	16.38	16.30	16.30		
1.4	QPSK	1	5	16.43	16.35	16.36		
1.4	QPSK	3	0	16.49	16.34	16.37	17.5	0
1.4	QPSK	3	1	16.42	16.34	16.36		
1.4	QPSK	3	3	16.44	16.36	16.37		
1.4	QPSK	6	0	16.46	16.36	16.39	17.5	0
1.4	16QAM	1	0	16.83	16.60	16.64	17.5	0
1.4	16QAM	1	3	16.67	16.57	16.62		
1.4	16QAM	1	5	16.69	16.67	16.68		
1.4	16QAM	3	0	16.55	16.39	16.45	17.5	0
1.4	16QAM	3	1	16.52	16.37	16.40		
1.4	16QAM	3	3	16.48	16.39	16.40		
1.4	16QAM	6	0	16.54	16.42	16.44	17.5	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300	17.5	0
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	16.58	16.73	16.66		
20	QPSK	1	49	16.65	16.67	16.58	17.5	0
20	QPSK	1	99	16.62	16.55	16.63		
20	QPSK	50	0	16.72	16.69	16.62		
20	QPSK	50	24	16.70	16.65	16.64	17.5	0
20	QPSK	50	50	16.66	16.54	16.59		
20	QPSK	100	0	16.77	16.74	16.80		
20	16QAM	1	0	16.90	16.96	16.98	17.5	0
20	16QAM	1	49	16.93	16.93	16.90		
20	16QAM	1	99	16.97	16.82	16.93		
20	16QAM	50	0	16.76	16.74	16.67	17.5	0
20	16QAM	50	24	16.73	16.71	16.69		
20	16QAM	50	50	16.68	16.60	16.62		
20	16QAM	100	0	16.83	16.76	16.85		
Channel				20025	20175	20325	17.5	0
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	16.53	16.73	16.67		
15	QPSK	1	37	16.65	16.70	16.60	17.5	0
15	QPSK	1	74	16.62	16.57	16.68		
15	QPSK	36	0	16.62	16.68	16.69		
15	QPSK	36	20	16.73	16.66	16.60	17.5	0
15	QPSK	36	39	16.66	16.55	16.67		
15	QPSK	75	0	16.77	16.64	16.62		
15	16QAM	1	0	16.78	16.92	16.92	17.5	0
15	16QAM	1	37	16.92	16.95	16.87		
15	16QAM	1	74	16.88	16.79	16.90		
15	16QAM	36	0	16.67	16.73	16.76	17.5	0
15	16QAM	36	20	16.79	16.74	16.68		
15	16QAM	36	39	16.71	16.63	16.75		
15	16QAM	75	0	16.81	16.69	16.67		
Channel				20000	20175	20350	17.5	0
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	16.57	16.73	16.66		
10	QPSK	1	25	16.66	16.67	16.53	17.5	0
10	QPSK	1	49	16.71	16.56	16.67		
10	QPSK	25	0	16.65	16.75	16.62		
10	QPSK	25	12	16.65	16.71	16.63	17.5	0
10	QPSK	25	25	16.77	16.64	16.74		
10	QPSK	50	0	16.71	16.67	16.62		
10	16QAM	1	0	16.84	16.97	16.93	17.5	0
10	16QAM	1	25	16.96	16.91	16.82		
10	16QAM	1	49	16.97	16.85	16.94		
10	16QAM	25	0	16.71	16.83	16.69	17.5	0
10	16QAM	25	12	16.71	16.77	16.67		
10	16QAM	25	25	16.82	16.71	16.79		
10	16QAM	50	0	16.75	16.72	16.66		
Channel				19975	20175	20375	17.5	0
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	16.53	16.68	16.54		
5	QPSK	1	12	16.51	16.61	16.65	17.5	0
5	QPSK	1	24	16.55	16.59	16.65		



5	QPSK	12	0	16.51	16.65	16.65	17.5	0
5	QPSK	12	7	16.56	16.62	16.68		
5	QPSK	12	13	16.56	16.60	16.64		
5	QPSK	25	0	16.57	16.64	16.70	17.5	0
5	16QAM	1	0	16.82	16.96	16.77		
5	16QAM	1	12	16.75	16.84	16.94		
5	16QAM	1	24	16.84	16.83	16.91	17.5	0
5	16QAM	12	0	16.52	16.69	16.69		
5	16QAM	12	7	16.58	16.66	16.71		
5	16QAM	12	13	16.58	16.63	16.67	17.5	0
5	16QAM	25	0	16.61	16.66	16.73		
Channel				19965	20175	20385		
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	16.44	16.66	16.67	17.5	0
3	QPSK	1	8	16.45	16.65	16.65		
3	QPSK	1	14	16.53	16.62	16.67		
3	QPSK	8	0	16.53	16.68	16.71	17.5	0
3	QPSK	8	4	16.52	16.66	16.64		
3	QPSK	8	7	16.59	16.66	16.67		
3	QPSK	15	0	16.55	16.68	16.65	17.5	0
3	16QAM	1	0	16.73	16.97	16.88		
3	16QAM	1	8	16.73	16.97	16.89		
3	16QAM	1	14	16.76	16.92	16.83	17.5	0
3	16QAM	8	0	16.57	16.73	16.76		
3	16QAM	8	4	16.56	16.72	16.69		
3	16QAM	8	7	16.63	16.72	16.72	17.5	0
3	16QAM	15	0	16.58	16.73	16.68		
Channel				19957	20175	20393		
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	16.53	16.72	16.68	17.5	0
1.4	QPSK	1	3	16.50	16.68	16.67		
1.4	QPSK	1	5	16.52	16.71	16.72		
1.4	QPSK	3	0	16.54	16.70	16.68	17.5	0
1.4	QPSK	3	1	16.52	16.68	16.68		
1.4	QPSK	3	3	16.51	16.69	16.70		
1.4	QPSK	6	0	16.53	16.71	16.71	17.5	0
1.4	16QAM	1	0	16.78	16.93	16.94	17.5	0
1.4	16QAM	1	3	16.77	16.96	16.90		
1.4	16QAM	1	5	16.82	16.97	16.95		
1.4	16QAM	3	0	16.53	16.75	16.72	17.5	0
1.4	16QAM	3	1	16.54	16.74	16.77		
1.4	16QAM	3	3	16.51	16.78	16.74		
1.4	16QAM	6	0	16.56	16.77	16.77	17.5	0



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)		
Channel				20450	20525	20600				
Frequency (MHz)				829	836.5	844				
10	QPSK	1	0	14.93	14.97	14.85	16	0		
10	QPSK	1	25	14.74	14.95	14.92				
10	QPSK	1	49	14.72	14.92	14.90				
10	QPSK	25	0	14.86	14.95	14.91	16	0		
10	QPSK	25	12	14.80	14.91	14.89				
10	QPSK	25	25	14.74	14.89	14.85				
10	QPSK	50	0	14.85	14.83	14.92	16	0		
10	16QAM	1	0	14.91	15.03	14.87				
10	16QAM	1	25	14.88	14.93	14.89				
10	16QAM	1	49	14.82	14.90	14.83	16	0		
10	16QAM	25	0	14.94	14.89	14.94				
10	16QAM	25	12	14.85	14.91	14.89				
10	16QAM	25	25	14.79	14.88	14.85	16	0		
10	16QAM	50	0	14.89	14.92	14.94				
Channel				20425	20525	20625			Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5				
5	QPSK	1	0	14.89	14.69	14.90				
5	QPSK	1	12	14.73	14.67	14.91	16	0		
5	QPSK	1	24	14.68	14.85	14.98				
5	QPSK	12	0	14.75	14.66	14.83				
5	QPSK	12	7	14.70	14.67	14.91	16	0		
5	QPSK	12	13	14.67	14.77	14.93				
5	QPSK	25	0	14.72	14.68	14.96				
5	16QAM	1	0	14.92	14.71	14.89	16	0		
5	16QAM	1	12	14.69	14.71	14.89				
5	16QAM	1	24	14.67	14.93	15.01				
5	16QAM	12	0	14.51	14.43	14.59	16	0		
5	16QAM	12	7	14.46	14.45	14.66				
5	16QAM	12	13	14.44	14.57	14.67				
5	16QAM	25	0	14.78	14.75	14.96	16	0		
Channel				20415	20525	20635			Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5				
3	QPSK	1	0	14.86	14.68	14.86				
3	QPSK	1	8	14.66	14.62	14.86	16	0		
3	QPSK	1	14	14.61	14.83	14.88				
3	QPSK	8	0	14.70	14.60	14.83				
3	QPSK	8	4	14.60	14.58	14.84	16	0		
3	QPSK	8	7	14.62	14.75	14.89				
3	QPSK	15	0	14.68	14.63	14.88				
3	16QAM	1	0	14.82	14.69	14.80	16	0		
3	16QAM	1	8	14.61	14.61	14.82				
3	16QAM	1	14	14.61	14.83	14.96				
3	16QAM	8	0	14.45	14.42	14.50	16	0		
3	16QAM	8	4	14.38	14.38	14.59				
3	16QAM	8	7	14.38	14.56	14.61				



3	16QAM	15	0	14.70	14.69	14.88		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	14.89	14.67	14.95	16	0
1.4	QPSK	1	3	14.83	14.66	14.89		
1.4	QPSK	1	5	14.78	14.69	14.96		
1.4	QPSK	3	0	14.85	14.66	14.92		
1.4	QPSK	3	1	14.83	14.65	14.91		
1.4	QPSK	3	3	14.83	14.66	14.92		
1.4	QPSK	6	0	14.82	14.66	14.89		
1.4	16QAM	1	0	14.89	14.73	15.01	16	0
1.4	16QAM	1	3	14.85	14.71	14.98		
1.4	16QAM	1	5	14.82	14.75	15.02		
1.4	16QAM	3	0	14.62	14.50	14.76		
1.4	16QAM	3	1	14.58	14.48	14.71		
1.4	16QAM	3	3	14.62	14.48	14.76		
1.4	16QAM	6	0	14.90	14.76	14.99	16	0



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350	12.5	0
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	11.46	11.61	11.52		
20	QPSK	1	49	11.41	11.56	11.38	12.5	0
20	QPSK	1	99	11.45	11.58	11.51		
20	QPSK	50	0	11.52	11.64	11.46		
20	QPSK	50	24	11.53	11.66	11.52	12.5	0
20	QPSK	50	50	11.51	11.63	11.50		
20	QPSK	100	0	11.56	11.79	11.48		
20	16QAM	1	0	11.64	11.77	11.77	12.5	0
20	16QAM	1	49	11.69	11.82	11.67		
20	16QAM	1	99	11.75	11.79	11.86		
20	16QAM	50	0	11.57	11.67	11.50	12.5	0
20	16QAM	50	24	11.54	11.70	11.45		
20	16QAM	50	50	11.59	11.66	11.54		
20	16QAM	100	0	11.60	11.79	11.51		
Channel				20825	21100	21375	12.5	0
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	11.31	11.30	11.41		
15	QPSK	1	37	11.40	11.38	11.30	12.5	0
15	QPSK	1	74	11.47	11.45	11.31		
15	QPSK	36	0	11.35	11.36	11.18		
15	QPSK	36	20	11.36	11.43	11.19	12.5	0
15	QPSK	36	39	11.36	11.39	11.18		
15	QPSK	75	0	11.35	11.44	11.18		
15	16QAM	1	0	11.69	11.65	12.04	12.5	0
15	16QAM	1	37	11.90	11.76	11.85		
15	16QAM	1	74	11.96	11.88	11.72		
15	16QAM	36	0	11.45	11.44	11.32	12.5	0
15	16QAM	36	20	11.44	11.50	11.32		
15	16QAM	36	39	11.46	11.47	11.29		
15	16QAM	75	0	11.39	11.48	11.24		
Channel				20800	21100	21400	12.5	0
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	11.35	11.51	11.32		
10	QPSK	1	25	11.47	11.53	11.25	12.5	0
10	QPSK	1	49	11.52	11.52	11.32		
10	QPSK	25	0	11.38	11.54	11.19		
10	QPSK	25	12	11.42	11.56	11.20	12.5	0
10	QPSK	25	25	11.41	11.60	11.22		
10	QPSK	50	0	11.40	11.55	11.16		
10	16QAM	1	0	11.71	11.89	11.98	12.5	0
10	16QAM	1	25	11.95	11.90	11.83		
10	16QAM	1	49	12.00	11.91	11.81		
10	16QAM	25	0	11.45	11.61	11.29	12.5	0
10	16QAM	25	12	11.49	11.62	11.31		
10	16QAM	25	25	11.50	11.65	11.32		
10	16QAM	50	0	11.50	11.60	11.28		
Channel				20775	21100	21425	12.5	0
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	11.40	11.56	11.23		
5	QPSK	1	12	11.43	11.52	11.21	12.5	0
5	QPSK	1	24	11.53	11.58	11.25		



FCC SAR TEST REPORT

Report No. : FA092420

5	QPSK	12	0	11.35	11.51	11.11	12.5	0
5	QPSK	12	7	11.37	11.50	11.10		
5	QPSK	12	13	11.40	11.52	11.13		
5	QPSK	25	0	11.37	11.52	11.08	12.5	0
5	16QAM	1	0	11.74	11.94	11.74		
5	16QAM	1	12	11.81	11.88	11.67		
5	16QAM	1	24	11.99	11.93	11.71	12.5	0
5	16QAM	12	0	11.39	11.56	11.19		
5	16QAM	12	7	11.41	11.54	11.18		
5	16QAM	12	13	11.47	11.58	11.18	12.5	0
5	16QAM	25	0	11.42	11.53	11.13		



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130	17	0
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	15.74	15.92	15.84	17	0
10	QPSK	1	25	15.89	15.90	15.75		
10	QPSK	1	49	15.91	15.87	15.91		
10	QPSK	25	0	15.77	15.82	15.78	17	0
10	QPSK	25	12	15.80	15.83	15.70		
10	QPSK	25	25	15.81	15.82	15.78		
10	QPSK	50	0	15.94	15.95	15.86	17	0
10	16QAM	1	0	16.21	16.15	16.29		
10	16QAM	1	25	16.31	16.36	16.19		
10	16QAM	1	49	16.39	16.26	16.34	17	0
10	16QAM	25	0	15.84	15.90	15.86		
10	16QAM	25	12	15.97	15.99	15.78		
10	16QAM	25	25	16.01	15.91	15.83	17	0
10	16QAM	50	0	15.98	16.01	15.97		
Channel				23035	23095	23155	17	0
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	15.63	15.74	15.70	17	0
5	QPSK	1	12	15.60	15.81	15.71		
5	QPSK	1	24	15.77	15.77	15.92		
5	QPSK	12	0	15.48	15.72	15.66	17	0
5	QPSK	12	7	15.52	15.75	15.63		
5	QPSK	12	13	15.65	15.71	15.74		
5	QPSK	25	0	15.57	15.75	15.70	17	0
5	16QAM	1	0	16.06	16.17	16.12		
5	16QAM	1	12	16.01	16.29	16.12		
5	16QAM	1	24	16.18	16.22	16.35	17	0
5	16QAM	12	0	15.58	15.81	15.72		
5	16QAM	12	7	15.59	15.88	15.73		
5	16QAM	12	13	15.72	15.82	15.81	17	0
5	16QAM	25	0	15.59	15.82	15.71		
Channel				23025	23095	23165	17	0
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	15.57	15.68	15.62	17	0
3	QPSK	1	8	15.52	15.78	15.69		
3	QPSK	1	14	15.72	15.68	15.82		
3	QPSK	8	0	15.42	15.65	15.65	17	0
3	QPSK	8	4	15.46	15.69	15.61		
3	QPSK	8	7	15.58	15.66	15.67		
3	QPSK	15	0	15.56	15.70	15.61	17	0
3	16QAM	1	0	16.03	16.11	16.07		
3	16QAM	1	8	15.94	16.22	16.02		
3	16QAM	1	14	16.17	16.16	16.28	17	0
3	16QAM	8	0	15.52	15.80	15.70		
3	16QAM	8	4	15.58	15.84	15.65		
3	16QAM	8	7	15.72	15.82	15.75	17	0
3	16QAM	15	0	15.55	15.81	15.68		
Channel				23017	23095	23173	17	0
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	15.55	15.73	15.62	17	0
1.4	QPSK	1	3	15.57	15.78	15.61		
1.4	QPSK	1	5	15.67	15.67	15.84		



1.4	QPSK	3	0	15.44	15.69	15.66		
1.4	QPSK	3	1	15.51	15.72	15.56		
1.4	QPSK	3	3	15.63	15.63	15.66		
1.4	QPSK	6	0	15.51	15.75	15.70	17	0
1.4	16QAM	1	0	15.98	16.15	16.10		
1.4	16QAM	1	3	15.94	16.22	16.11		
1.4	16QAM	1	5	16.12	16.13	16.29		
1.4	16QAM	3	0	15.51	15.76	15.65	17	0
1.4	16QAM	3	1	15.57	15.78	15.63		
1.4	16QAM	3	3	15.68	15.77	15.81		
1.4	16QAM	6	0	15.57	15.76	15.63	17	0



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		14.62		15.5	0
10	QPSK	1	25		14.56			
10	QPSK	1	49		14.61			
10	QPSK	25	0		14.68		15.5	0
10	QPSK	25	12		14.59			
10	QPSK	25	25		14.67			
10	QPSK	50	0		14.72		15.5	0
10	16QAM	1	0		15.02			
10	16QAM	1	25		14.98			
10	16QAM	1	49		15.07		15.5	0
10	16QAM	25	0		14.77			
10	16QAM	25	12		14.65			
10	16QAM	25	25		14.74		15.5	0
10	16QAM	50	0		14.86			
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	14.62	14.77	14.68	15.5	0
5	QPSK	1	12	14.71	14.64	14.68		
5	QPSK	1	24	14.68	14.66	14.70		
5	QPSK	12	0	14.61	14.66	14.52	15.5	0
5	QPSK	12	7	14.66	14.60	14.63		
5	QPSK	12	13	14.67	14.52	14.68		
5	QPSK	25	0	14.66	14.63	14.66	15.5	0
5	16QAM	1	0	15.00	15.15	15.02		
5	16QAM	1	12	15.12	14.99	15.04		
5	16QAM	1	24	15.03	15.03	15.08	15.5	0
5	16QAM	12	0	14.60	14.70	14.55		
5	16QAM	12	7	14.66	14.64	14.66		
5	16QAM	12	13	14.69	14.57	14.70	15.5	0
5	16QAM	25	0	14.68	14.64	14.65		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	15.87	15.88	15.84	17	0
10	QPSK	1	25	15.86	15.73	15.75		
10	QPSK	1	49	15.88	15.87	15.87		
10	QPSK	25	0	15.92	15.86	15.78	17	0
10	QPSK	25	12	15.86	15.74	15.70		
10	QPSK	25	25	15.86	15.79	15.79		
10	QPSK	50	0	15.88	15.80	15.84	17	0
10	16QAM	1	0	16.32	16.25	16.27		
10	16QAM	1	25	16.34	16.17	16.19		
10	16QAM	1	49	16.29	16.27	16.32	17	0
10	16QAM	25	0	15.96	15.94	15.86		
10	16QAM	25	12	15.89	15.82	15.79		
10	16QAM	25	25	15.91	15.86	15.83	17	0
10	16QAM	50	0	15.98	15.96	15.94		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	15.75	15.82	15.70	17	0
5	QPSK	1	12	15.78	15.69	15.71		
5	QPSK	1	24	15.78	15.76	15.93		
5	QPSK	12	0	15.66	15.68	15.64	17	0
5	QPSK	12	7	15.73	15.60	15.62		
5	QPSK	12	13	15.78	15.65	15.70		
5	QPSK	25	0	15.74	15.63	15.66	17	0
5	16QAM	1	0	16.13	16.27	16.08		
5	16QAM	1	12	16.18	16.12	16.07		
5	16QAM	1	24	16.22	16.16	16.32	17	0
5	16QAM	12	0	15.80	15.76	15.64		
5	16QAM	12	7	15.83	15.74	15.67		
5	16QAM	12	13	15.86	15.77	15.80	17	0
5	16QAM	25	0	15.75	15.71	15.69		



<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	14.84	14.91	14.75	16	0
15	QPSK	1	37	14.89	14.58	14.88		
15	QPSK	1	74	14.83	14.88	14.90		
15	QPSK	36	0	14.95	14.98	14.92	16	0
15	QPSK	36	20	14.96	14.68	14.93		
15	QPSK	36	39	14.92	14.78	14.94		
15	QPSK	75	0	14.93	15.02	14.91	16	0
15	16QAM	1	0	15.18	15.22	15.06		
15	16QAM	1	37	15.41	14.89	15.27		
15	16QAM	1	74	15.14	15.25	15.41	16	0
15	16QAM	36	0	15.19	14.89	14.98		
15	16QAM	36	20	15.19	14.77	15.02		
15	16QAM	36	39	15.04	14.88	15.14	16	0
15	16QAM	75	0	15.26	14.87	15.13		
Channel				26740	26865	26990		
Frequency (MHz)				819	831.5	844	16	0
10	QPSK	1	0	14.82	14.71	14.84		
10	QPSK	1	25	14.92	14.45	14.87		
10	QPSK	1	49	14.96	14.66	14.98	16	0
10	QPSK	25	0	15.01	14.71	14.89		
10	QPSK	25	12	15.04	14.58	14.89		
10	QPSK	25	25	15.02	14.65	14.95	16	0
10	QPSK	50	0	14.99	14.59	14.96		
10	16QAM	1	0	15.11	15.02	15.18		
10	16QAM	1	25	15.24	14.77	15.18	16	0
10	16QAM	1	49	15.23	14.99	15.30		
10	16QAM	25	0	15.08	14.76	14.95		
10	16QAM	25	12	15.10	14.63	14.93	16	0
10	16QAM	25	25	15.09	14.69	14.97		
10	16QAM	50	0	15.09	14.67	15.01		
Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5	16	0
5	QPSK	1	0	14.75	14.67	14.77		
5	QPSK	1	12	14.85	14.43	14.77		
5	QPSK	1	24	14.96	14.58	14.96	16	0
5	QPSK	12	0	14.95	14.71	14.84		
5	QPSK	12	7	14.94	14.56	14.88		
5	QPSK	12	13	14.92	14.64	14.93	16	0
5	QPSK	25	0	14.97	14.50	14.95		
5	16QAM	1	0	15.07	15.00	15.08		
5	16QAM	1	12	15.14	14.75	15.11	16	0
5	16QAM	1	24	15.15	14.95	15.25		
5	16QAM	12	0	15.03	14.68	14.93		
5	16QAM	12	7	15.06	14.56	14.92	16	0
5	16QAM	12	13	15.04	14.64	14.89		
5	16QAM	25	0	15.06	14.63	14.91		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5	16	0
3	QPSK	1	0	14.77	14.66	14.81		
3	QPSK	1	8	14.92	14.45	14.77		
3	QPSK	1	14	14.94	14.64	14.94	16	0



3	QPSK	8	0	15.01	14.62	14.89	16	0
3	QPSK	8	4	14.94	14.55	14.81		
3	QPSK	8	7	15.00	14.65	14.93		
3	QPSK	15	0	14.96	14.50	14.92	16	0
3	16QAM	1	0	15.02	14.99	15.09		
3	16QAM	1	8	15.21	14.68	15.10		
3	16QAM	1	14	15.17	14.91	15.27	16	0
3	16QAM	8	0	15.06	14.68	14.89		
3	16QAM	8	4	15.05	14.53	14.88		
3	16QAM	8	7	15.08	14.60	14.96		
3	16QAM	15	0	15.07	14.62	14.97	Tune-up limit (dBm)	MPR (dB)
Channel				26697	26865	27033		
Frequency (MHz)				814.7	831.5	848.3	16	0
1.4	QPSK	1	0	14.79	14.47	14.92		
1.4	QPSK	1	3	14.72	14.40	14.86		
1.4	QPSK	1	5	14.82	14.43	14.95		
1.4	QPSK	3	0	14.75	14.43	14.89		
1.4	QPSK	3	1	14.74	14.41	14.87		
1.4	QPSK	3	3	14.72	14.42	14.89		
1.4	QPSK	6	0	14.73	14.45	14.87		
1.4	16QAM	1	0	15.15	14.75	15.29		
1.4	16QAM	1	3	15.08	14.67	15.23		
1.4	16QAM	1	5	15.19	14.72	15.31	16	0
1.4	16QAM	3	0	14.87	14.58	15.01		
1.4	16QAM	3	1	14.85	14.54	14.98		
1.4	16QAM	3	3	14.84	14.56	15.01		
1.4	16QAM	6	0	14.82	14.53	14.96	16	0



<LTE Band 30>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710			14.5	0
Frequency (MHz)				2310				
10	QPSK	1	0		13.45		14.5	0
10	QPSK	1	25		13.33			
10	QPSK	1	49		13.27			
10	QPSK	25	0		13.44		14.5	0
10	QPSK	25	12		13.43			
10	QPSK	25	25		13.33			
10	QPSK	50	0		13.24		14.5	0
10	16QAM	1	0		13.69			
10	16QAM	1	25		13.59			
10	16QAM	1	49		13.49		14.5	0
10	16QAM	25	0		13.48			
10	16QAM	25	12		13.46			
10	16QAM	25	25		13.46		14.5	0
10	16QAM	50	0		13.53			
Channel				27685	27710	27735	14.5	0
Frequency (MHz)				2307.5	2310	2312.5		
5	QPSK	1	0	13.13	13.10	13.04	14.5	0
5	QPSK	1	12	13.05	13.04	13.08		
5	QPSK	1	24	13.12	13.08	13.00		
5	QPSK	12	0	13.09	13.06	13.09	14.5	0
5	QPSK	12	7	13.09	13.03	13.11		
5	QPSK	12	13	13.07	13.07	13.09		
5	QPSK	25	0	13.14	13.05	13.17	14.5	0
5	16QAM	1	0	13.30	13.21	13.25		
5	16QAM	1	12	13.23	13.17	13.25		
5	16QAM	1	24	13.28	13.23	13.20	14.5	0
5	16QAM	12	0	13.06	13.03	13.12		
5	16QAM	12	7	13.09	13.02	13.13		
5	16QAM	12	13	13.07	13.08	13.09	14.5	0
5	16QAM	25	0	13.13	13.06	13.17		



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572	17.5	0
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	16.32	16.55	16.58		
20	QPSK	1	49	16.26	16.32	16.39	17.5	0
20	QPSK	1	99	16.27	16.54	16.50		
20	QPSK	50	0	16.48	16.44	16.59		
20	QPSK	50	24	16.61	16.51	16.60	17.5	0
20	QPSK	50	50	16.57	16.48	16.36		
20	QPSK	100	0	16.76	16.63	16.59		
20	16QAM	1	0	16.66	16.86	16.92	17.5	0
20	16QAM	1	49	16.83	16.60	16.73		
20	16QAM	1	99	16.90	16.81	16.85		
20	16QAM	50	0	16.45	16.37	16.55	17.5	0
20	16QAM	50	24	16.55	16.31	16.37		
20	16QAM	50	50	16.50	16.43	16.31		
20	16QAM	100	0	16.80	16.60	16.60		
Channel				132047	132322	132597	17.5	0
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	16.32	16.40	16.52		
15	QPSK	1	37	16.37	16.36	16.21	17.5	0
15	QPSK	1	74	16.44	16.40	16.37		
15	QPSK	36	0	16.43	16.36	16.42		
15	QPSK	36	20	16.47	16.40	16.26	17.5	0
15	QPSK	36	39	16.52	16.40	16.37		
15	QPSK	75	0	16.59	16.50	16.41		
15	16QAM	1	0	16.65	16.73	16.90	17.5	0
15	16QAM	1	37	16.67	16.72	16.55		
15	16QAM	1	74	16.79	16.75	16.77		
15	16QAM	36	0	16.33	16.29	16.35	17.5	0
15	16QAM	36	20	16.37	16.31	16.18		
15	16QAM	36	39	16.42	16.33	16.28		
15	16QAM	75	0	16.54	16.46	16.39		
Channel				132022	132322	132622	17.5	0
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	16.35	16.39	16.34		
10	QPSK	1	25	16.33	16.35	16.27	17.5	0
10	QPSK	1	49	16.50	16.37	16.49		
10	QPSK	25	0	16.29	16.27	16.12		
10	QPSK	25	12	16.29	16.21	16.15	17.5	0
10	QPSK	25	25	16.34	16.23	16.31		
10	QPSK	50	0	16.41	16.39	16.36		
10	16QAM	1	0	16.66	16.63	16.66	17.5	0
10	16QAM	1	25	16.68	16.62	16.58		
10	16QAM	1	49	16.79	16.63	16.77		
10	16QAM	25	0	16.23	16.19	16.07	17.5	0
10	16QAM	25	12	16.21	16.13	16.08		
10	16QAM	25	25	16.26	16.17	16.24		
10	16QAM	50	0	16.37	16.36	16.28		
Channel				131997	132322	132647	17.5	0
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	16.30	16.37	16.35		
5	QPSK	1	12	16.29	16.34	16.38	17.5	0
5	QPSK	1	24	16.32	16.36	16.52		



5	QPSK	12	0	16.14	16.18	16.15	17.5	0
5	QPSK	12	7	16.17	16.22	16.16		
5	QPSK	12	13	16.18	16.21	16.26		
5	QPSK	25	0	16.33	16.34	16.32		
5	16QAM	1	0	16.63	16.66	16.61	17.5	0
5	16QAM	1	12	16.60	16.64	16.56		
5	16QAM	1	24	16.69	16.62	16.72		
5	16QAM	12	0	16.09	16.09	16.03	17.5	0
5	16QAM	12	7	16.10	16.12	16.06		
5	16QAM	12	13	16.13	16.11	16.15		
5	16QAM	25	0	16.25	16.25	16.22		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	16.32	16.29	16.35	17.5	0
3	QPSK	1	8	16.29	16.36	16.43		
3	QPSK	1	14	16.29	16.32	16.46		
3	QPSK	8	0	16.16	16.16	16.22	17.5	0
3	QPSK	8	4	16.14	16.18	16.30		
3	QPSK	8	7	16.21	16.20	16.30		
3	QPSK	15	0	16.19	16.24	16.32		
3	16QAM	1	0	16.53	16.55	16.61	17.5	0
3	16QAM	1	8	16.54	16.60	16.78		
3	16QAM	1	14	16.53	16.52	16.70		
3	16QAM	8	0	16.10	16.09	16.16	17.5	0
3	16QAM	8	4	16.10	16.14	16.22		
3	16QAM	8	7	16.17	16.15	16.27		
3	16QAM	15	0	16.14	16.19	16.27		
Channel				131979	132322	132665		
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	16.27	16.25	16.34	17.5	0
1.4	QPSK	1	3	16.25	16.35	16.48		
1.4	QPSK	1	5	16.27	16.36	16.47		
1.4	QPSK	3	0	16.19	16.20	16.35		
1.4	QPSK	3	1	16.23	16.21	16.36		
1.4	QPSK	3	3	16.20	16.28	16.38		
1.4	QPSK	6	0	16.09	16.25	16.26	17.5	0
1.4	16QAM	1	0	16.51	16.51	16.81	17.5	0
1.4	16QAM	1	3	16.51	16.68	16.75		
1.4	16QAM	1	5	16.50	16.62	16.80		
1.4	16QAM	3	0	16.09	16.22	16.24		
1.4	16QAM	3	1	16.16	16.14	16.21		
1.4	16QAM	3	3	16.11	16.28	16.21		
1.4	16QAM	6	0	16.10	16.20	16.27	17.5	0

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

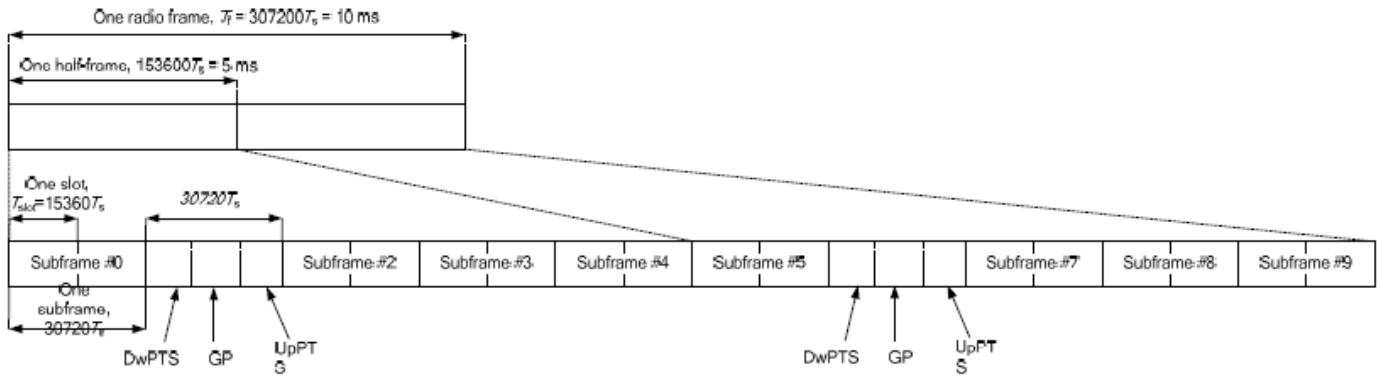


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink				
	DwPTS	UpPTS		DwPTS	UpPTS			
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$		
1	$19760 \cdot T_s$			$20480 \cdot T_s$				
2	$21952 \cdot T_s$			$23040 \cdot T_s$				
3	$24144 \cdot T_s$			$25600 \cdot T_s$				
4	$26336 \cdot T_s$			$7680 \cdot T_s$				
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$				
7	$21952 \cdot T_s$			$12800 \cdot T_s$				
8	$24144 \cdot T_s$			-			-	-
9	$13168 \cdot T_s$			-			-	-

Special subframe (30720·T_s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T_s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

Default Power Mode

<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	22.58	22.78	22.70	22.66	22.72	24	0
20	QPSK	1	49	22.54	22.55	22.59	22.37	22.48		
20	QPSK	1	99	22.74	22.62	22.66	22.43	22.49		
20	QPSK	50	0	21.76	21.82	21.71	21.63	21.74	23	1
20	QPSK	50	24	21.76	21.75	21.74	21.58	21.66		
20	QPSK	50	50	21.88	21.78	21.80	21.60	21.62		
20	QPSK	100	0	21.84	21.76	21.80	21.60	21.76	23	1
20	16QAM	1	0	21.94	22.16	22.06	22.06	22.11		
20	16QAM	1	49	22.05	22.07	22.12	21.91	22.03		
20	16QAM	1	99	22.26	22.14	22.19	21.97	22.05	22	2
20	16QAM	50	0	20.83	20.92	20.81	20.76	20.81		
20	16QAM	50	24	20.85	20.84	20.85	20.69	20.77		
20	16QAM	50	50	20.96	20.86	20.91	20.70	20.74	22	2
20	16QAM	100	0	20.94	20.88	20.90	20.74	20.86		
Channel				39725	40173	40620	41068	41515		
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	22.55	22.74	22.67	22.61	22.68	24	0
15	QPSK	1	37	22.50	22.51	22.54	22.30	22.43		
15	QPSK	1	74	22.74	22.57	22.63	22.43	22.46		
15	QPSK	36	0	21.73	21.72	21.64	21.58	21.72	23	1
15	QPSK	36	20	21.73	21.67	21.66	21.52	21.66		
15	QPSK	36	39	21.82	21.71	21.72	21.58	21.62		
15	QPSK	75	0	21.84	21.73	21.78	21.56	21.70	23	1
15	16QAM	1	0	21.94	22.10	21.99	22.05	22.06		
15	16QAM	1	37	21.95	22.04	22.08	21.87	22.00		
15	16QAM	1	74	22.18	22.08	22.15	21.93	22.03	22	2
15	16QAM	36	0	20.77	20.83	20.78	20.73	20.80		
15	16QAM	36	20	20.80	20.76	20.82	20.61	20.75		
15	16QAM	36	39	20.91	20.77	20.85	20.68	20.72	22	2
15	16QAM	75	0	20.92	20.78	20.83	20.71	20.80		
Channel				39700	40160	40620	41080	41540		
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	22.54	22.75	22.67	22.64	22.65	24	0
10	QPSK	1	25	22.50	22.47	22.52	22.35	22.42		
10	QPSK	1	49	22.71	22.53	22.59	22.36	22.44		
10	QPSK	25	0	21.76	21.74	21.70	21.55	21.70	23	1
10	QPSK	25	12	21.69	21.72	21.68	21.48	21.61		
10	QPSK	25	25	21.80	21.77	21.79	21.55	21.60		
10	QPSK	50	0	21.84	21.72	21.74	21.59	21.73	23	1
10	16QAM	1	0	21.85	22.15	21.98	22.04	22.07		
10	16QAM	1	25	21.97	22.06	22.03	21.88	21.93		
10	16QAM	1	49	22.25	22.04	22.17	21.95	22.02	22	2
10	16QAM	25	0	20.75	20.85	20.76	20.66	20.72		
10	16QAM	25	12	20.84	20.75	20.78	20.68	20.77		
10	16QAM	25	25	20.96	20.82	20.88	20.60	20.68	22	2
10	16QAM	50	0	20.90	20.80	20.90	20.74	20.84		
Channel				39675	40148	40620	41093	41565		
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	22.48	22.72	22.70	22.60	22.64	24	0
5	QPSK	1	12	22.51	22.51	22.55	22.36	22.44		



FCC SAR TEST REPORT

Report No. : FA092420

5	QPSK	1	24	22.66	22.52	22.58	22.38	22.40		
5	QPSK	12	0	21.67	21.81	21.61	21.60	21.69	23	1
5	QPSK	12	7	21.68	21.68	21.73	21.51	21.63		
5	QPSK	12	13	21.85	21.77	21.77	21.57	21.59		
5	QPSK	25	0	21.82	21.76	21.80	21.51	21.69		
5	16QAM	1	0	21.93	22.12	22.06	22.06	22.08	23	1
5	16QAM	1	12	22.03	22.01	22.02	21.91	21.96		
5	16QAM	1	24	22.19	22.07	22.09	21.87	21.95		
5	16QAM	12	0	20.82	20.87	20.73	20.66	20.73	22	2
5	16QAM	12	7	20.80	20.77	20.77	20.64	20.77		
5	16QAM	12	13	20.88	20.79	20.81	20.62	20.69		
5	16QAM	25	0	20.86	20.80	20.87	20.71	20.86		



Reduced Power Mode

<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	13.64	13.65	12.97	12.91	13.23	14.5	0
20	QPSK	1	49	13.63	13.37	12.89	12.77	13.08		
20	QPSK	1	99	13.63	13.31	12.96	12.90	13.21		
20	QPSK	50	0	13.64	13.43	12.89	12.74	13.11	14.5	0
20	QPSK	50	24	13.63	13.31	12.90	12.74	13.08		
20	QPSK	50	50	13.70	13.45	12.95	12.80	13.12		
20	QPSK	100	0	13.73	13.33	12.93	12.75	13.15	14.5	0
20	16QAM	1	0	13.66	13.55	12.92	12.88	13.11		
20	16QAM	1	49	13.68	13.37	12.90	12.83	13.10		
20	16QAM	1	99	13.83	13.32	12.99	12.94	13.23	14.5	0
20	16QAM	50	0	13.68	13.48	12.94	12.79	13.12		
20	16QAM	50	24	13.68	13.36	12.96	12.77	13.11		
20	16QAM	50	50	13.76	13.33	13.01	12.83	13.17	14.5	0
20	16QAM	100	0	13.76	13.34	12.96	12.76	13.19		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	13.62	13.52	12.89	12.77	13.13	14.5	0
15	QPSK	1	37	13.66	13.47	12.92	12.81	13.14		
15	QPSK	1	74	13.75	13.34	12.98	12.89	13.16		
15	QPSK	36	0	13.56	13.44	12.89	12.75	13.07	14.5	0
15	QPSK	36	20	13.64	13.41	12.92	12.76	13.13		
15	QPSK	36	39	13.65	13.32	12.95	12.78	13.13		
15	QPSK	75	0	13.64	13.39	12.89	12.73	13.12	14.5	0
15	16QAM	1	0	13.62	13.53	12.89	12.78	13.13		
15	16QAM	1	37	13.67	13.47	12.93	12.83	13.15		
15	16QAM	1	74	13.73	13.34	12.99	12.89	13.12	14.5	0
15	16QAM	36	0	13.65	13.50	12.96	12.80	13.14		
15	16QAM	36	20	13.73	13.48	12.98	12.82	13.17		
15	16QAM	36	39	13.73	13.39	13.00	12.84	13.15	14.5	0
15	16QAM	75	0	13.64	13.41	12.91	12.76	13.19		
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	13.57	13.65	12.95	12.87	13.17	14.5	0
10	QPSK	1	25	13.57	13.35	12.80	12.77	13.02		
10	QPSK	1	49	13.54	13.25	12.94	12.81	13.14		
10	QPSK	25	0	13.60	13.42	12.80	12.66	13.08	14.5	0
10	QPSK	25	12	13.57	13.24	12.89	12.74	13.07		
10	QPSK	25	25	13.64	13.25	12.86	12.74	13.06		
10	QPSK	50	0	13.70	13.31	12.83	12.73	13.14	14.5	0
10	16QAM	1	0	13.65	13.53	12.82	12.85	13.02		
10	16QAM	1	25	13.66	13.30	12.86	12.80	13.07		
10	16QAM	1	49	13.77	13.24	12.91	12.84	13.22	14.5	0
10	16QAM	25	0	13.64	13.38	12.93	12.76	13.03		
10	16QAM	25	12	13.58	13.26	12.93	12.77	13.03		
10	16QAM	25	25	13.68	13.31	13.00	12.77	13.10	14.5	0
10	16QAM	50	0	13.71	13.29	12.93	12.68	13.12		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	13.59	13.46	12.88	12.78	13.13	14.5	0
5	QPSK	1	12	13.51	13.40	12.85	12.74	13.11		



FCC SAR TEST REPORT

Report No. : FA092420

5	QPSK	1	24	13.57	13.43	12.89	12.80	13.11		
5	QPSK	12	0	13.50	13.38	12.85	12.70	13.13	14.5	0
5	QPSK	12	7	13.47	13.36	12.85	12.70	13.14		
5	QPSK	12	13	13.47	13.36	12.88	12.72	13.17		
5	QPSK	25	0	13.50	13.39	12.85	12.73	13.11		
5	16QAM	1	0	13.55	13.42	12.83	12.75	13.08	14.5	0
5	16QAM	1	12	13.47	13.34	12.79	12.70	13.04		
5	16QAM	1	24	13.53	13.37	12.84	12.77	13.04		
5	16QAM	12	0	13.51	13.38	12.84	12.73	13.10	14.5	0
5	16QAM	12	7	13.50	13.36	12.83	12.72	13.10		
5	16QAM	12	13	13.48	13.38	12.86	12.74	13.11		
5	16QAM	25	0	13.51	13.42	12.90	12.76	13.17		



<LTE Carrier Aggregation combinations>

General Note:

1. In applying the existing power measurement procedure of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of the frequency band and CCs in each row need consideration, and that configurations require power measurement should be highlighted in the below table.
2. All permutations exist. No restrictions on Pcell & Scell combinations. Only LTE Band 29A is limited to Scell.

2CC Downlink Carrier Aggregation				3CC Downlink Carrier Aggregation			
Number	Combination	Restriction	Covered by Measurement Superset	Number	Combination	Restriction	Covered by Measurement Superset
1	CA_2A-4A		3CC-49	44	CA_2A-2A-5A		3CC-49
2	CA_2A-5A		3CC-49	45	CA_2A-2A-13A		3CC-50
3	CA_2A-12A		3CC-53	46	CA_2A_66B		3CC-52
4	CA_2A-13A		3CC-45	47	CA_2A_66C		3CC-52
5	CA_2A-17A			48	CA_2C-5A		3CC-49
6	CA_2A-29A		3CC-55	49	CA_2A-4A-5A		
7	CA_2A-30A		3CC-55	50	CA_2A-4A-13A		
8	CA_2A-66A		3CC-46	51	CA_2A-5A-30A		
9	CA_4A-2A		3CC-58	52	CA_2A-5A-66A		
10	CA_4A_5A		3CC-56	53	CA_2A-12A-30A		
11	CA_4A_12A		3CC-61	54	CA_2A_13A_66A		
12	CA_4A_13A		3CC-57	55	CA_2A_29A_30A		
13	CA_4A_17A			56	CA_4A_4A_5A		3CC-58
14	CA_4A_29A		3CC-62	57	CA_4A_4A_13A		3CC-59
15	CA_4A_30A		3CC-62	58	CA_4A_5A_30A		
16	CA_5A_2A		3CC-63	59	CA_4A_12A_30A		
17	CA_5A_4A		3CC-64	60	CA_4A_29A_30A		
18	CA_5A_7A			61	CA_5A_66A_66A		3CC-52
19	CA_5A_30A		3CC-69	62	CA_5A_66B		3CC-52
20	CA_5A_66A		3CC-67	63	CA_5A_66C		3CC-52
21	CA_7A_5A		2CC-18	64	CA_13A_66A_66A		3CC-54
22	CA_12A-2A		3CC-71	65	CA_13A_66B		3CC-54
23	CA_12A_4A		3CC-72	66	CA_13A_66C		3CC-54
24	CA_12A_30A		3CC-72	67	CA_66D		3CC-52
25	CA_13A-2A		3CC-73				
26	CA_13A_4A		3CC-74				
27	CA_13A_66A		3CC-76				
28	CA_17A-2A		2CC-5				
29	CA_17A_4A		2CC-13				
30	CA_30A-2A		3CC-55				
31	CA_30A_4A		3CC-62				
32	CA_30A_5A		3CC-69				
33	CA_30A_12A		3CC-83				
34	CA_30A_29A		3CC-82				
35	CA_66A-2A		3CC-87				
36	CA_66A_5A		3CC-88				
37	CA_66A_13A		3CC-89				
38	CA_2C		3CC-48				
39	CA_2A_2A		3CC-44				
40	CA_4A_4A		3CC-56				
41	CA_7B		2CC-18				
42	CA_7C		2CC-18				
43	CA_7A_7A		2CC-18				
95	CA_41C						
96	CA_41A_41A						

<Power verification when LTE Carrier Aggregation Active>

General Note:

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Two Carrier power verification>

Configure	CA Configuration (BCS)	PCC							SCC				Power		
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)	
Inter-Band	2A-17A	2	10	1880	18900	16QAM	1	49	17	10	740	5790	16.69	16.71	
	4A-17A	4	10	1732.5	20175	16QAM	1	25	17	10	740	5790	16.88	16.97	
	5A-7A	5	10	836.5	20525	16QAM	1	0	7	20	2655	3100	15.02	15.03	
Intra-Band	Non-Contiguous	41A-41A	41	20	2510	39790	16QAM	1	99	41	5	2687.5	41565	13.63	13.83
		41A-41A	41	20	2506	39750	16QAM	1	99	41	5	2687.5	41565	13.78	13.79
	Contiguous	41C	41	20	2510	39790	16QAM	1	99	41	20	2529.8	39988	13.70	13.83
		41C	41	20	2506	39750	16QAM	1	99	41	20	2525.8	39948	13.72	13.79

<Three Carrier power verification>

Configure	CA Configuration (BCS)	PCC							SCC1				SCC2				Power	
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	2A-4A-5A	2	20	1860	18700	16QAM	1	0	4	20	2132.5	2175	5	10	881.5	2525	16.82	16.84
	2A-4A-13A	2	20	1860	18700	16QAM	1	0	4	20	2132.5	2175	13	10	751	5230	16.64	16.84
	2A-5A-30A	2	20	1860	18700	16QAM	1	0	5	10	881.5	2525	30	10	2355	9820	16.68	16.84
	2A-5A-66A	2	20	1860	18700	16QAM	1	0	5	10	881.5	2525	66	20	2155	66886	16.68	16.84
	2A-12A-30A	2	20	1860	18700	16QAM	1	0	12	10	737.5	5095	30	10	2355	9820	16.81	16.84
	2A-13A-66A	2	20	1860	18700	16QAM	1	0	13	10	751	5230	66	20	2155	66886	16.71	16.84
	2A-29A-30A	2	20	1860	18700	16QAM	1	0	29	10	722.5	9715	30	10	2355	9820	16.64	16.84
	4A-5A-30A	4	20	1745	20300	16QAM	1	0	5	10	881.5	2525	30	10	2355	9820	16.87	16.98
	4A-12A-30A	4	20	1745	20300	16QAM	1	0	12	10	737.5	5095	30	10	2355	9820	16.81	16.98
	4A-29A-30A	4	20	1745	20300	16QAM	1	0	29	10	722.5	9715	30	10	2355	9820	16.95	16.98



<SAR test exclusion table>

General Note:

- The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
- Maximum power is the source-based time-average power and represents the maximum RF output power among production units
- Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
- Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:
 - $[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] \cdot [\sqrt{f(GHz)}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
- Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm)·(f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm)·10] mW at > 1500 MHz and ≤ 6 GHz

Exposure Position	Wireless Interface	WCDMA Band V	WCDMA Band IV	WCDMA Band II	LTE Band 12	LTE Band 17	LTE Band 13	LTE Band 26	LTE Band 4	LTE Band 66	LTE Band 2	LTE Band 30	LTE Band 7	LTE Band 41
	Calculated Frequency	846MHz	1750MHz	1907MHz	715MHz	713MHz	784MHz	848MHz	1754MHz	1779MHz	1909MHz	2312MHz	2567MHz	2687MHz
	Maximum power (dBm)	24.5	24.5	24.5	24	24	24	24	24	24	24	24	24	24
	Maximum rated power(mW)	282.0	282.0	282.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0
Bottom Face	Separation distance(mm)	5.0												
	exclusion threshold	51.9	74.6	77.9	42.5	42.4	44.5	46.2	66.5	67.0	69.4	76.3	80.4	82.3
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	5.0												
	exclusion threshold	51.9	74.6	77.9	42.5	42.4	44.5	46.2	66.5	67.0	69.4	76.3	80.4	82.3
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 2	Separation distance(mm)	5.0												
	exclusion threshold	51.9	74.6	77.9	42.5	42.4	44.5	46.2	66.5	67.0	69.4	76.3	80.4	82.3
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 3	Separation distance(mm)	210.2												
	exclusion threshold	1067.0	1715.0	1711.0	941.0	939.0	1007.0	1069.0	1715.0	1714.0	1711.0	1701.0	1696.0	1694.0
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No
Edge 4	Separation distance(mm)	225.5												
	exclusion threshold	1153.0	1868.0	1864.0	1014.0	1012.0	1087.0	1155.0	1868.0	1867.0	1864.0	1854.0	1849.0	1847.0
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No
Bottom of Laptop	Separation distance(mm)	5.0												
	exclusion threshold	51.9	74.6	77.9	42.5	42.4	44.5	46.2	66.5	67.0	69.4	76.3	80.4	82.3
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes



13. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. For the exposure positions that proximity sensor power reduction is applied for SAR compliance, additional SAR testing with EUT transmitting full power in normal mode was performed; 13mm for bottom face, 16mm for bottom of laptop, 22mm for edge1, 14mm for Edge2

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $1/4$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.



LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B5/B12/B17/B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 4/5/17 SAR test was covered by Band 66/26/12; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.



13.1 Body SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	16mm	OFF	9538	1907.6	23.67	24.50	1.211	0.08	0.393	0.476
	WCDMA II	RMC 12.2Kbps	Bottom Face	13mm	OFF	9538	1907.6	23.67	24.50	1.211	0.05	0.409	0.495
	WCDMA II	RMC 12.2Kbps	Edge 1	22mm	OFF	9538	1907.6	23.67	24.50	1.211	0	0.001	0.001
	WCDMA II	RMC 12.2Kbps	Edge 2	14mm	OFF	9538	1907.6	23.67	24.50	1.211	0.07	0.090	0.109
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	9538	1907.6	16.83	17.50	1.167	-0.09	0.881	1.028
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	9262	1852.4	16.71	17.50	1.199	-0.15	0.868	1.041
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	9400	1880	16.62	17.50	1.225	-0.19	0.857	1.049
	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	ON	9538	1907.6	16.83	17.50	1.167	0.06	0.923	1.077
	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	ON	9262	1852.4	16.71	17.50	1.199	0	0.861	1.033
01	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	ON	9400	1880	16.62	17.50	1.225	-0.14	0.927	1.135
	WCDMA II	RMC 12.2Kbps	Edge 1	0mm	ON	9538	1907.6	16.83	17.50	1.167	0.07	0.107	0.125
	WCDMA II	RMC 12.2Kbps	Edge 2	0mm	ON	9538	1907.6	16.83	17.50	1.167	-0.09	0.301	0.351
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	16mm	OFF	1513	1752.6	23.75	24.50	1.189	0.06	0.478	0.568
	WCDMA IV	RMC 12.2Kbps	Bottom Face	13mm	OFF	1513	1752.6	23.75	24.50	1.189	-0.11	0.388	0.461
	WCDMA IV	RMC 12.2Kbps	Edge 1	22mm	OFF	1513	1752.6	23.75	24.50	1.189	0	0.001	0.001
	WCDMA IV	RMC 12.2Kbps	Edge 2	14mm	OFF	1513	1752.6	23.75	24.50	1.189	0.01	0.090	0.107
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	1413	1732.6	16.91	17.50	1.146	0.07	0.941	1.078
02	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	1312	1712.4	16.61	17.50	1.227	0.07	0.953	1.170
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	1513	1752.6	16.82	17.50	1.169	0.17	0.837	0.979
	WCDMA IV	RMC 12.2Kbps	Bottom Face	0mm	ON	1413	1732.6	16.91	17.50	1.146	0.08	0.825	0.945
	WCDMA IV	RMC 12.2Kbps	Bottom Face	0mm	ON	1312	1712.4	16.61	17.50	1.227	0.05	0.812	0.997
	WCDMA IV	RMC 12.2Kbps	Bottom Face	0mm	ON	1513	1752.6	16.82	17.50	1.169	0.09	0.762	0.891
	WCDMA IV	RMC 12.2Kbps	Edge 1	0mm	ON	1413	1732.6	16.91	17.50	1.146	0.12	0.155	0.178
	WCDMA IV	RMC 12.2Kbps	Edge 2	0mm	ON	1413	1732.6	16.91	17.50	1.146	-0.05	0.503	0.576
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	16mm	OFF	4233	846.6	23.56	24.50	1.242	-0.18	0.397	0.493
	WCDMA V	RMC 12.2Kbps	Bottom Face	13mm	OFF	4233	846.6	23.56	24.50	1.242	0.02	0.583	0.724
	WCDMA V	RMC 12.2Kbps	Edge 1	22mm	OFF	4233	846.6	23.56	24.50	1.242	-0.09	0.141	0.175
	WCDMA V	RMC 12.2Kbps	Edge 2	14mm	OFF	4233	846.6	23.56	24.50	1.242	0	0.001	0.001
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	4233	846.6	15.19	16.00	1.205	-0.02	0.316	0.381
03	WCDMA V	RMC 12.2Kbps	Bottom Face	0mm	ON	4233	846.6	15.19	16.00	1.205	0.1	0.832	1.003
	WCDMA V	RMC 12.2Kbps	Bottom Face	0mm	ON	4132	826.4	15.15	16.00	1.216	-0.02	0.724	0.880
	WCDMA V	RMC 12.2Kbps	Bottom Face	0mm	ON	4182	836.4	15.10	16.00	1.230	-0.18	0.814	1.001
	WCDMA V	RMC 12.2Kbps	Edge 1	0mm	ON	4233	846.6	15.19	16.00	1.205	0.16	0.345	0.416
	WCDMA V	RMC 12.2Kbps	Edge 2	0mm	ON	4233	846.6	15.19	16.00	1.205	-0.03	0.052	0.063



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Bottom of Laptop	16mm	OFF	18700	1860	22.96	24.00	1.271	-0.08	0.393	0.499
	LTE Band 2	20M	QPSK	50	24	Bottom of Laptop	16mm	OFF	18900	1880	21.84	23.00	1.306	-0.05	0.364	0.475
	LTE Band 2	20M	QPSK	1	0	Bottom Face	13mm	OFF	18700	1860	22.96	24.00	1.271	-0.02	0.414	0.526
	LTE Band 2	20M	QPSK	50	24	Bottom Face	13mm	OFF	18900	1880	21.84	23.00	1.306	0.01	0.402	0.525
	LTE Band 2	20M	QPSK	1	0	Edge 1	22mm	OFF	18700	1860	22.96	24.00	1.271	0	0.001	0.001
	LTE Band 2	20M	QPSK	50	24	Edge 1	22mm	OFF	18900	1880	21.84	23.00	1.306	0	0.001	0.001
	LTE Band 2	20M	QPSK	1	0	Edge 2	14mm	OFF	18700	1860	22.96	24.00	1.271	-0.06	0.111	0.141
	LTE Band 2	20M	QPSK	50	24	Edge 2	14mm	OFF	18900	1880	21.84	23.00	1.306	0.08	0.099	0.129
	LTE Band 2	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	18700	1860	16.60	17.50	1.230	0.08	0.810	0.997
	LTE Band 2	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	18900	1880	16.43	17.50	1.279	0.11	0.801	1.025
	LTE Band 2	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	19100	1900	16.39	17.50	1.291	0.06	0.790	1.020
	LTE Band 2	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	18700	1860	16.52	17.50	1.253	-0.17	0.821	1.029
	LTE Band 2	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	18900	1880	16.44	17.50	1.276	0.08	0.805	1.028
	LTE Band 2	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	19100	1900	16.41	17.50	1.285	-0.08	0.799	1.027
	LTE Band 2	20M	QPSK	100	0	Bottom of Laptop	0mm	ON	18700	1860	16.58	17.50	1.236	0.14	0.759	0.938
	LTE Band 2	20M	QPSK	1	0	Bottom Face	0mm	ON	18700	1860	16.60	17.50	1.230	0.15	0.723	0.889
	LTE Band 2	20M	QPSK	1	0	Bottom Face	0mm	ON	18900	1880	16.43	17.50	1.279	0.13	0.811	1.038
04	LTE Band 2	20M	QPSK	1	0	Bottom Face	0mm	ON	19100	1900	16.39	17.50	1.291	-0.12	0.867	1.119
	LTE Band 2	20M	QPSK	50	0	Bottom Face	0mm	ON	18700	1860	16.52	17.50	1.253	0.01	0.791	0.991
	LTE Band 2	20M	QPSK	50	0	Bottom Face	0mm	ON	18900	1880	16.44	17.50	1.276	0.08	0.822	1.049
	LTE Band 2	20M	QPSK	50	0	Bottom Face	0mm	ON	19100	1900	16.41	17.50	1.285	0.07	0.836	1.074
	LTE Band 2	20M	QPSK	100	0	Bottom Face	0mm	ON	18700	1860	16.58	17.50	1.236	0.14	0.753	0.931
	LTE Band 2	20M	QPSK	1	0	Edge 1	0mm	ON	18700	1860	16.60	17.50	1.230	0	0.096	0.118
	LTE Band 2	20M	QPSK	50	0	Edge 1	0mm	ON	18700	1860	16.52	17.50	1.253	0.15	0.082	0.103
	LTE Band 2	20M	QPSK	1	0	Edge 2	0mm	ON	18700	1860	16.60	17.50	1.230	0.05	0.312	0.384
	LTE Band 2	20M	QPSK	50	0	Edge 2	0mm	ON	18700	1860	16.52	17.50	1.253	-0.08	0.319	0.400
	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	16mm	OFF	21100	2535	23.03	24.00	1.250	0.12	0.482	0.602
	LTE Band 7	20M	QPSK	50	24	Bottom of Laptop	16mm	OFF	21100	2535	22.09	23.00	1.233	0.15	0.383	0.473
	LTE Band 7	20M	QPSK	1	0	Bottom Face	13mm	OFF	21100	2535	23.03	24.00	1.250	-0.06	0.565	0.706
	LTE Band 7	20M	QPSK	50	24	Bottom Face	13mm	OFF	21100	2535	22.09	23.00	1.233	0.11	0.419	0.517
	LTE Band 7	20M	QPSK	1	0	Edge 1	22mm	OFF	21100	2535	23.03	24.00	1.250	-0.02	0.045	0.056
	LTE Band 7	20M	QPSK	50	24	Edge 1	22mm	OFF	21100	2535	22.09	23.00	1.233	0.11	0.040	0.050
	LTE Band 7	20M	QPSK	1	0	Edge 2	14mm	OFF	21100	2535	23.03	24.00	1.250	-0.03	0.083	0.104
	LTE Band 7	20M	QPSK	50	24	Edge 2	14mm	OFF	21100	2535	22.09	23.00	1.233	0.18	0.061	0.076
	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	21100	2535	11.61	12.50	1.227	-0.13	0.346	0.425
	LTE Band 7	20M	QPSK	50	24	Bottom of Laptop	0mm	ON	21100	2535	11.66	12.50	1.213	-0.11	0.321	0.389
	LTE Band 7	20M	QPSK	1	0	Bottom Face	0mm	ON	21100	2535	11.61	12.50	1.227	0.1	0.812	0.997
05	LTE Band 7	20M	QPSK	1	0	Bottom Face	0mm	ON	20850	2510	11.46	12.50	1.271	-0.16	0.821	1.043
	LTE Band 7	20M	QPSK	1	0	Bottom Face	0mm	ON	21350	2560	11.52	12.50	1.253	-0.19	0.747	0.936
	LTE Band 7	20M	QPSK	50	24	Bottom Face	0mm	ON	21100	2535	11.66	12.50	1.213	0.02	0.792	0.961
	LTE Band 7	20M	QPSK	50	24	Bottom Face	0mm	ON	20850	2510	11.53	12.50	1.250	0.03	0.753	0.942
	LTE Band 7	20M	QPSK	50	24	Bottom Face	0mm	ON	21350	2560	11.52	12.50	1.253	-0.16	0.654	0.820
	LTE Band 7	20M	QPSK	100	0	Bottom Face	0mm	ON	21100	2535	11.79	12.50	1.178	-0.19	0.784	0.923
	LTE Band 7	20M	QPSK	1	0	Edge 1	0mm	ON	21100	2535	11.61	12.50	1.227	-0.13	0.131	0.161
	LTE Band 7	20M	QPSK	50	24	Edge 1	0mm	ON	21100	2535	11.66	12.50	1.213	0.01	0.109	0.133
	LTE Band 7	20M	QPSK	1	0	Edge 2	0mm	ON	21100	2535	11.61	12.50	1.227	-0.02	0.117	0.143
	LTE Band 7	20M	QPSK	50	24	Edge 2	0mm	ON	21100	2535	11.66	12.50	1.213	0.18	0.123	0.149



FCC SAR TEST REPORT

Report No. : FA092420

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1	0	Bottom of Laptop	16mm	OFF	23095	707.5	22.66	24.00	1.361	-0.19	0.126	0.172
	LTE Band 12	10M	QPSK	25	0	Bottom of Laptop	16mm	OFF	23095	707.5	21.65	23.00	1.365	0.14	0.095	0.130
	LTE Band 12	10M	QPSK	1	0	Bottom Face	13mm	OFF	23095	707.5	22.66	24.00	1.361	0.19	0.161	0.219
	LTE Band 12	10M	QPSK	25	0	Bottom Face	13mm	OFF	23095	707.5	21.65	23.00	1.365	-0.13	0.121	0.165
	LTE Band 12	10M	QPSK	1	0	Edge 1	22mm	OFF	23095	707.5	22.66	24.00	1.361	0	0.001	0.001
	LTE Band 12	10M	QPSK	25	0	Edge 1	22mm	OFF	23095	707.5	21.65	23.00	1.365	0	0.001	0.001
	LTE Band 12	10M	QPSK	1	0	Edge 2	14mm	OFF	23095	707.5	22.66	24.00	1.361	0	0.001	0.001
	LTE Band 12	10M	QPSK	25	0	Edge 2	14mm	OFF	23095	707.5	21.65	23.00	1.365	0	0.001	0.001
	LTE Band 12	10M	QPSK	1	0	Bottom of Laptop	0mm	ON	23095	707.5	15.92	17.00	1.282	-0.02	0.210	0.269
	LTE Band 12	10M	QPSK	25	12	Bottom of Laptop	0mm	ON	23095	707.5	15.83	17.00	1.309	-0.09	0.202	0.264
	LTE Band 12	10M	QPSK	1	0	Bottom Face	0mm	ON	23095	707.5	15.92	17.00	1.282	-0.02	0.729	0.934
06	LTE Band 12	10M	QPSK	25	12	Bottom Face	0mm	ON	23095	707.5	15.83	17.00	1.309	0.07	0.749	0.981
	LTE Band 12	10M	QPSK	50	0	Bottom Face	0mm	ON	23095	707.5	15.95	17.00	1.274	0.1	0.722	0.919
	LTE Band 12	10M	QPSK	1	0	Edge 1	0mm	ON	23095	707.5	15.92	17.00	1.282	0.18	0.262	0.336
	LTE Band 12	10M	QPSK	25	12	Edge 1	0mm	ON	23095	707.5	15.83	17.00	1.309	-0.06	0.267	0.349
	LTE Band 12	10M	QPSK	1	0	Edge 2	0mm	ON	23095	707.5	15.92	17.00	1.282	0.19	0.075	0.096
	LTE Band 12	10M	QPSK	25	12	Edge 2	0mm	ON	23095	707.5	15.83	17.00	1.309	0.12	0.052	0.068
	LTE Band 13	10M	QPSK	1	0	Bottom of Laptop	16mm	OFF	23230	782	23.30	24.00	1.175	0.01	0.228	0.268
	LTE Band 13	10M	QPSK	25	0	Bottom of Laptop	16mm	OFF	23230	782	22.29	23.00	1.178	0.04	0.196	0.231
	LTE Band 13	10M	QPSK	1	0	Bottom Face	13mm	OFF	23230	782	23.30	24.00	1.175	-0.19	0.255	0.300
	LTE Band 13	10M	QPSK	25	0	Bottom Face	13mm	OFF	23230	782	22.29	23.00	1.178	0.08	0.217	0.256
	LTE Band 13	10M	QPSK	1	0	Edge 1	22mm	OFF	23230	782	23.30	24.00	1.175	0.13	0.058	0.068
	LTE Band 13	10M	QPSK	25	0	Edge 1	22mm	OFF	23230	782	22.29	23.00	1.178	0.17	0.050	0.059
	LTE Band 13	10M	QPSK	1	0	Edge 2	14mm	OFF	23230	782	23.30	24.00	1.175	0	0.001	0.001
	LTE Band 13	10M	QPSK	25	0	Edge 2	14mm	OFF	23230	782	22.29	23.00	1.178	0	0.001	0.001
	LTE Band 13	10M	QPSK	1	0	Bottom of Laptop	0mm	ON	23230	782	14.62	15.50	1.225	0.17	0.263	0.322
	LTE Band 13	10M	QPSK	25	0	Bottom of Laptop	0mm	ON	23230	782	14.68	15.50	1.208	-0.02	0.279	0.337
	LTE Band 13	10M	QPSK	1	0	Bottom Face	0mm	ON	23230	782	14.62	15.50	1.225	0.02	0.820	1.004
07	LTE Band 13	10M	QPSK	25	0	Bottom Face	0mm	ON	23230	782	14.68	15.50	1.208	-0.12	0.841	1.016
	LTE Band 13	10M	QPSK	50	0	Bottom Face	0mm	ON	23230	782	14.72	15.50	1.197	-0.07	0.836	1.000
	LTE Band 13	10M	QPSK	1	0	Edge 1	0mm	ON	23230	782	14.62	15.50	1.225	-0.01	0.369	0.452
	LTE Band 13	10M	QPSK	25	0	Edge 1	0mm	ON	23230	782	14.68	15.50	1.208	-0.14	0.394	0.476
	LTE Band 13	10M	QPSK	1	0	Edge 2	0mm	ON	23230	782	14.62	15.50	1.225	0	0.001	0.001
	LTE Band 13	10M	QPSK	25	0	Edge 2	0mm	ON	23230	782	14.68	15.50	1.208	0	0.001	0.001
	LTE Band 26	15M	QPSK	1	0	Bottom of Laptop	16mm	OFF	26865	831.5	22.86	24.00	1.300	0.03	0.309	0.402
	LTE Band 26	15M	QPSK	36	0	Bottom of Laptop	16mm	OFF	26865	831.5	21.65	23.00	1.365	0.1	0.232	0.317
	LTE Band 26	15M	QPSK	1	0	Bottom Face	13mm	OFF	26865	831.5	22.86	24.00	1.300	-0.12	0.430	0.559
	LTE Band 26	15M	QPSK	36	0	Bottom Face	13mm	OFF	26865	831.5	21.65	23.00	1.365	-0.07	0.346	0.472
	LTE Band 26	15M	QPSK	1	0	Edge 1	22mm	OFF	26865	831.5	22.86	24.00	1.300	0.11	0.105	0.137
	LTE Band 26	15M	QPSK	36	0	Edge 1	22mm	OFF	26865	831.5	21.65	23.00	1.365	-0.19	0.083	0.113
	LTE Band 26	15M	QPSK	1	0	Edge 2	14mm	OFF	26865	831.5	22.86	24.00	1.300	0	0.001	0.001
	LTE Band 26	15M	QPSK	36	0	Edge 2	14mm	OFF	26865	831.5	21.65	23.00	1.365	0	0.001	0.001
	LTE Band 26	15M	QPSK	1	0	Bottom of Laptop	0mm	ON	26865	831.5	14.91	16.00	1.285	-0.02	0.285	0.366
	LTE Band 26	15M	QPSK	36	0	Bottom of Laptop	0mm	ON	26865	831.5	14.98	16.00	1.265	0.14	0.281	0.355
08	LTE Band 26	15M	QPSK	1	0	Bottom Face	0mm	ON	26865	831.5	14.91	16.00	1.285	0.04	0.780	1.003
	LTE Band 26	15M	QPSK	36	0	Bottom Face	0mm	ON	26865	831.5	14.98	16.00	1.265	-0.08	0.753	0.952
	LTE Band 26	15M	QPSK	75	0	Bottom Face	0mm	ON	26865	831.5	15.02	16.00	1.253	0.1	0.758	0.950
	LTE Band 26	15M	QPSK	1	0	Edge 1	0mm	ON	26865	831.5	14.91	16.00	1.285	-0.06	0.431	0.554
	LTE Band 26	15M	QPSK	36	0	Edge 1	0mm	ON	26865	831.5	14.98	16.00	1.265	0.06	0.455	0.575
	LTE Band 26	15M	QPSK	1	0	Edge 2	0mm	ON	26865	831.5	14.91	16.00	1.285	0	0.001	0.001
	LTE Band 26	15M	QPSK	36	0	Edge 2	0mm	ON	26865	831.5	14.98	16.00	1.265	0	0.001	0.001



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 30	10M	QPSK	1	0	Bottom of Laptop	16mm	OFF	27710	2310	22.70	24.00	1.349	0.12	0.398	0.537
	LTE Band 30	10M	QPSK	25	0	Bottom of Laptop	16mm	OFF	27710	2310	21.72	23.00	1.343	-0.02	0.338	0.454
	LTE Band 30	10M	QPSK	1	0	Bottom Face	13mm	OFF	27710	2310	22.70	24.00	1.349	0.02	0.323	0.436
	LTE Band 30	10M	QPSK	25	0	Bottom Face	13mm	OFF	27710	2310	21.72	23.00	1.343	-0.02	0.254	0.341
	LTE Band 30	10M	QPSK	1	0	Edge 1	22mm	OFF	27710	2310	22.70	24.00	1.349	0.05	0.066	0.089
	LTE Band 30	10M	QPSK	25	0	Edge 1	22mm	OFF	27710	2310	21.72	23.00	1.343	0.15	0.051	0.068
	LTE Band 30	10M	QPSK	1	0	Edge 2	14mm	OFF	27710	2310	22.70	24.00	1.349	0.15	0.068	0.092
	LTE Band 30	10M	QPSK	25	0	Edge 2	14mm	OFF	27710	2310	21.72	23.00	1.343	-0.08	0.051	0.068
	LTE Band 30	10M	QPSK	1	0	Bottom of Laptop	0mm	ON	27710	2310	13.45	14.50	1.274	-0.06	0.444	0.565
	LTE Band 30	10M	QPSK	25	0	Bottom of Laptop	0mm	ON	27710	2310	13.44	14.50	1.276	-0.02	0.421	0.537
	LTE Band 30	10M	QPSK	1	0	Bottom Face	0mm	ON	27710	2310	13.45	14.50	1.274	0.07	0.741	0.943
	LTE Band 30	10M	QPSK	25	0	Bottom Face	0mm	ON	27710	2310	13.44	14.50	1.276	-0.08	0.728	0.929
09	LTE Band 30	10M	QPSK	50	0	Bottom Face	0mm	ON	27710	2310	13.24	14.50	1.337	-0.13	0.748	1.000
	LTE Band 30	10M	QPSK	1	0	Edge 1	0mm	ON	27710	2310	13.45	14.50	1.274	0.05	0.101	0.128
	LTE Band 30	10M	QPSK	25	0	Edge 1	0mm	ON	27710	2310	13.44	14.50	1.276	-0.02	0.104	0.133
	LTE Band 30	10M	QPSK	1	0	Edge 2	0mm	ON	27710	2310	13.45	14.50	1.274	-0.08	0.094	0.119
	LTE Band 30	10M	QPSK	25	0	Edge 2	0mm	ON	27710	2310	13.44	14.50	1.276	-0.18	0.069	0.088
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	16mm	OFF	132572	1770	23.10	24.00	1.230	0.03	0.356	0.438
	LTE Band 66	20M	QPSK	50	24	Bottom of Laptop	16mm	OFF	132072	1720	22.08	23.00	1.236	-0.09	0.348	0.430
	LTE Band 66	20M	QPSK	1	0	Bottom Face	13mm	OFF	132572	1770	23.10	24.00	1.230	-0.07	0.210	0.258
	LTE Band 66	20M	QPSK	50	24	Bottom Face	13mm	OFF	132072	1720	22.08	23.00	1.236	-0.11	0.174	0.215
	LTE Band 66	20M	QPSK	1	0	Edge 1	22mm	OFF	132572	1770	23.10	24.00	1.230	-0.04	0.062	0.076
	LTE Band 66	20M	QPSK	50	24	Edge 1	22mm	OFF	132072	1720	22.08	23.00	1.236	0.06	0.050	0.062
	LTE Band 66	20M	QPSK	1	0	Edge 2	14mm	OFF	132572	1770	23.10	24.00	1.230	0.13	0.113	0.139
	LTE Band 66	20M	QPSK	50	24	Edge 2	14mm	OFF	132072	1720	22.08	23.00	1.236	0.09	0.106	0.131
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	132572	1770	16.58	17.50	1.236	0.15	0.865	1.069
10	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	132072	1720	16.32	17.50	1.312	0.03	0.890	1.168
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	132322	1745	16.55	17.50	1.245	0	0.888	1.105
	LTE Band 66	20M	QPSK	50	24	Bottom of Laptop	0mm	ON	132072	1720	16.61	17.50	1.227	0.1	0.928	1.139
	LTE Band 66	20M	QPSK	50	24	Bottom of Laptop	0mm	ON	132322	1745	16.51	17.50	1.256	0.18	0.865	1.086
	LTE Band 66	20M	QPSK	50	24	Bottom of Laptop	0mm	ON	132572	1770	16.60	17.50	1.230	0.13	0.813	1.000
	LTE Band 66	20M	QPSK	100	0	Bottom of Laptop	0mm	ON	132072	1720	16.76	17.50	1.186	0.13	0.952	1.129
	LTE Band 66	20M	QPSK	1	0	Bottom Face	0mm	ON	132572	1770	16.58	17.50	1.236	0.06	0.681	0.842
	LTE Band 66	20M	QPSK	1	0	Bottom Face	0mm	ON	132072	1720	16.32	17.50	1.312	-0.18	0.739	0.970
	LTE Band 66	20M	QPSK	1	0	Bottom Face	0mm	ON	132322	1745	16.55	17.50	1.245	0.03	0.724	0.901
	LTE Band 66	20M	QPSK	50	24	Bottom Face	0mm	ON	132072	1720	16.61	17.50	1.227	0.16	0.777	0.954
	LTE Band 66	20M	QPSK	50	24	Bottom Face	0mm	ON	132322	1745	16.51	17.50	1.256	0.09	0.696	0.874
	LTE Band 66	20M	QPSK	50	24	Bottom Face	0mm	ON	132572	1770	16.60	17.50	1.230	0.16	0.690	0.849
	LTE Band 66	20M	QPSK	100	0	Bottom Face	0mm	ON	132072	1720	16.76	17.50	1.186	0.03	0.721	0.855
	LTE Band 66	20M	QPSK	1	0	Edge 1	0mm	ON	132572	1770	16.58	17.50	1.236	0.15	0.149	0.184
	LTE Band 66	20M	QPSK	50	24	Edge 1	0mm	ON	132072	1720	16.61	17.50	1.227	0.01	0.198	0.243
	LTE Band 66	20M	QPSK	1	0	Edge 2	0mm	ON	132572	1770	16.58	17.50	1.236	0.02	0.444	0.549
	LTE Band 66	20M	QPSK	50	24	Edge 2	0mm	ON	132072	1720	16.61	17.50	1.227	0.17	0.401	0.492



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	16mm	OFF	40185	2549.5	22.78	24.00	1.324	62.9	1.006	0.02	0.292	0.389
	LTE Band 41	20M	QPSK	50	50	Bottom of Laptop	16mm	OFF	39750	2506	21.88	23.00	1.294	62.9	1.006	-0.02	0.222	0.289
	LTE Band 41	20M	QPSK	1	0	Bottom Face	13mm	OFF	40185	2549.5	22.78	24.00	1.324	62.9	1.006	-0.05	0.253	0.337
	LTE Band 41	20M	QPSK	50	50	Bottom Face	13mm	OFF	39750	2506	21.88	23.00	1.294	62.9	1.006	0.05	0.185	0.241
	LTE Band 41	20M	QPSK	1	0	Edge 1	22mm	OFF	40185	2549.5	22.78	24.00	1.324	62.9	1.006	0	0.001	0.001
	LTE Band 41	20M	QPSK	50	50	Edge 1	22mm	OFF	39750	2506	21.88	23.00	1.294	62.9	1.006	0	0.001	0.001
	LTE Band 41	20M	QPSK	1	0	Edge 2	14mm	OFF	40185	2549.5	22.78	24.00	1.324	62.9	1.006	-0.15	0.074	0.099
	LTE Band 41	20M	QPSK	50	50	Edge 2	14mm	OFF	39750	2506	21.88	23.00	1.294	62.9	1.006	-0.08	0.059	0.077
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	40185	2549.5	13.65	14.50	1.216	62.9	1.006	0.05	0.286	0.350
	LTE Band 41	20M	QPSK	50	50	Bottom of Laptop	0mm	ON	39750	2506	13.70	14.50	1.202	62.9	1.006	0.09	0.299	0.362
	LTE Band 41	20M	QPSK	1	0	Bottom Face	0mm	ON	40185	2549.5	13.65	14.50	1.216	62.9	1.006	-0.16	0.855	1.046
	LTE Band 41	20M	QPSK	1	0	Bottom Face	0mm	ON	39750	2506	13.64	14.50	1.219	62.9	1.006	-0.07	0.794	0.974
	LTE Band 41	20M	QPSK	1	0	Bottom Face	0mm	ON	40620	2593	12.97	14.50	1.422	62.9	1.006	-0.05	0.550	0.787
	LTE Band 41	20M	QPSK	1	0	Bottom Face	0mm	ON	41055	2636.5	12.91	14.50	1.442	62.9	1.006	-0.09	0.478	0.693
	LTE Band 41	20M	QPSK	1	0	Bottom Face	0mm	ON	41490	2680	13.23	14.50	1.340	62.9	1.006	0.05	0.506	0.682
11	LTE Band 41	20M	QPSK	50	50	Bottom Face	0mm	ON	39750	2506	13.70	14.50	1.202	62.9	1.006	-0.02	0.883	1.068
	LTE Band 41	20M	QPSK	50	50	Bottom Face	0mm	ON	40185	2549.5	13.45	14.50	1.274	62.9	1.006	0.02	0.707	0.906
	LTE Band 41	20M	QPSK	50	50	Bottom Face	0mm	ON	40620	2593	12.95	14.50	1.429	62.9	1.006	0.11	0.507	0.729
	LTE Band 41	20M	QPSK	50	50	Bottom Face	0mm	ON	41055	2636.5	12.80	14.50	1.479	62.9	1.006	0.13	0.447	0.665
	LTE Band 41	20M	QPSK	50	50	Bottom Face	0mm	ON	41490	2680	13.12	14.50	1.374	62.9	1.006	-0.05	0.519	0.717
	LTE Band 41	20M	QPSK	100	0	Bottom Face	0mm	ON	39750	2506	13.73	14.50	1.194	62.9	1.006	0.07	0.841	1.010
	LTE Band 41	20M	QPSK	1	0	Edge 1	0mm	ON	40185	2549.5	13.65	14.50	1.216	62.9	1.006	-0.02	0.122	0.149
	LTE Band 41	20M	QPSK	50	50	Edge 1	0mm	ON	39750	2506	13.70	14.50	1.202	62.9	1.006	-0.08	0.099	0.120
	LTE Band 41	20M	QPSK	1	0	Edge 2	0mm	ON	40185	2549.5	13.65	14.50	1.216	62.9	1.006	0.16	0.144	0.176
	LTE Band 41	20M	QPSK	50	50	Edge 2	0mm	ON	39750	2506	13.70	14.50	1.202	62.9	1.006	-0.04	0.101	0.122

13.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	ON	9400	1880	16.62	17.50	1.225			-0.14	0.927		1.135
2nd	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	ON	9400	1880	16.62	17.50	1.225			-0.06	0.880	1.05	1.078
1st	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	1312	1712.4	16.61	17.50	1.227			0.07	0.953		1.170
2nd	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	1312	1712.4	16.61	17.50	1.227			0.04	0.917	1.04	1.126
1st	WCDMA V	RMC 12.2Kbps	Bottom Face	0mm	ON	4233	846.6	15.19	16.00	1.205			0.1	0.832		1.003
2nd	WCDMA V	RMC 12.2Kbps	Bottom Face	0mm	ON	4233	846.6	15.19	16.00	1.205			0.08	0.811	1.03	0.977
1st	LTE Band 13	10M_QPSK_25_0	Bottom Face	0mm	ON	23230	782	14.68	15.50	1.208			-0.12	0.841		1.016
2nd	LTE Band 13	10M_QPSK_25_0	Bottom Face	0mm	ON	23230	782	14.68	15.50	1.208			-0.06	0.811	1.04	0.980
1st	LTE Band 41	20M_QPSK_50_50	Bottom Face	0mm	ON	39750	2506	13.70	14.50	1.202	62.9	1.006	-0.02	0.883		1.068
2nd	LTE Band 41	20M_QPSK_50_50	Bottom Face	0mm	ON	39750	2506	13.70	14.50	1.202	62.9	1.006	-0.11	0.871	1.01	1.053
1st	LTE Band 41	20M_QPSK_50_50	Bottom Face	0mm	ON	39790	2510	13.70	14.50	1.202	62.9	1.006	-0.02	0.883		1.068
2nd	LTE Band 41	20M_QPSK_50_50	Bottom Face	0mm	ON	39790	2510	13.70	14.50	1.202	62.9	1.006	-0.11	0.871	1.01	1.053

General Note:

- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
- Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
- The ratio is the difference in percentage between original and repeated *measured* SAR.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.



14. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body
1.	WWAN + 2.4GHz WLAN ANT 1 + 2.4GHz WLAN ANT 2	Yes
2.	WWAN + 5GHz WLAN ANT 1	Yes
3.	WWAN + 2.4GHz WLAN ANT 2 + Bluetooth ANT 1	Yes
4.	WWAN + 5GHz WLAN ANT 2 + Bluetooth ANT 1	Yes
5.	WWAN + 5GHz WLAN ANT 1+2 + Bluetooth ANT 1	Yes

General Note:

1. The WLAN and Bluetooth SAR results are referenced from Sporton SAR report, report number: FA000204-01 (FCC ID: PU5AX201D2) and these SAR results are also used to perform simultaneous transmission analysis.
2. The Scaled SAR summation is calculated based on the same configuration and test position.
3. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 15.2.



14.1 Body Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	5	6	7	1+2+3 Summed 1g SAR (W/kg)	1+3+6 Summed 1g SAR (W/kg)	1+5+6 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+6+7 Summed 1g SAR (W/kg)	Case No	SPLSR
		WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2	Bluetooth Ant 1	5GHz WLAN Ant 1+2							
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
WCDMA II	Bottom Face at 0mm	1.135	1.189	0.921	1.020	1.066	0.494	0.770	3.245	2.550	2.695	2.155	2.399	Case 1	0.04
	Edge 1 at 0mm	0.125							0.125	0.125	0.125	0.125	0.125		
	Edge 2 at 0mm	0.351	0.240		1.107		0.156	0.573	0.591	0.507	0.507	1.458	1.080		
	Edge 3 at 0mm								0.000	0.000	0.000	0.000	0.000		
	Edge 4 at 0mm			0.288		0.724		0.474	0.288	0.288	0.724	0.000	0.474		
	Bottom of Laptop at 0mm	1.049	0.789	0.659	0.594	0.310	0.365	0.360	2.497	2.073	1.724	1.643	1.774	Case 2	0.03
WCDMA IV	Bottom Face at 0mm	0.997	1.189	0.921	1.020	1.066	0.494	0.770	3.107	2.412	2.557	2.017	2.261	Case 3	0.03
	Edge 1 at 0mm	0.178							0.178	0.178	0.178	0.178	0.178		
	Edge 2 at 0mm	0.576	0.240		1.107		0.156	0.573	0.816	0.732	0.732	1.683	1.305	Case 4	0.02
	Edge 3 at 0mm								0.000	0.000	0.000	0.000	0.000		
	Edge 4 at 0mm			0.288		0.724		0.474	0.288	0.288	0.724	0.000	0.474		
	Bottom of Laptop at 0mm	1.170	0.789	0.659	0.594	0.310	0.365	0.360	2.618	2.194	1.845	1.764	1.895	Case 5	0.03
WCDMA V	Bottom Face at 0mm	1.003	1.189	0.921	1.020	1.066	0.494	0.770	3.113	2.418	2.563	2.023	2.267	Case 6	0.04
	Edge 1 at 0mm	0.416							0.416	0.416	0.416	0.416	0.416		
	Edge 2 at 0mm	0.063	0.240		1.107		0.156	0.573	0.303	0.219	0.219	1.170	0.792		
	Edge 3 at 0mm								0.000	0.000	0.000	0.000	0.000		
	Edge 4 at 0mm			0.288		0.724		0.474	0.288	0.288	0.724	0.000	0.474		
	Bottom of Laptop at 0mm	0.381	0.789	0.659	0.594	0.310	0.365	0.360	1.829	1.405	1.056	0.975	1.106	Case 7	0.01
LTE Band 2	Bottom Face at 0mm	1.119	1.189	0.921	1.020	1.066	0.494	0.770	3.229	2.534	2.679	2.139	2.383	Case 8	0.04
	Edge 1 at 0mm	0.118							0.118	0.118	0.118	0.118	0.118		
	Edge 2 at 0mm	0.400	0.240		1.107		0.156	0.573	0.640	0.556	0.556	1.507	1.129		
	Edge 3 at 0mm								0.000	0.000	0.000	0.000	0.000		
	Edge 4 at 0mm			0.288		0.724		0.474	0.288	0.288	0.724	0.000	0.474		
	Bottom of Laptop at 0mm	1.029	0.789	0.659	0.594	0.310	0.365	0.360	2.477	2.053	1.704	1.623	1.754	Case 9	0.03
LTE Band 7	Bottom Face at 0mm	1.043	1.189	0.921	1.020	1.066	0.494	0.770	3.153	2.458	2.603	2.063	2.307	Case 10	0.03
	Edge 1 at 0mm	0.161							0.161	0.161	0.161	0.161	0.161		
	Edge 2 at 0mm	0.149	0.240		1.107		0.156	0.573	0.389	0.305	0.305	1.256	0.878		
	Edge 3 at 0mm								0.000	0.000	0.000	0.000	0.000		
	Edge 4 at 0mm			0.288		0.724		0.474	0.288	0.288	0.724	0.000	0.474		
	Bottom of Laptop at 0mm	0.425	0.789	0.659	0.594	0.310	0.365	0.360	1.873	1.449	1.100	1.019	1.150	Case 11	0.01
LTE Band 12	Bottom Face at 0mm	0.981	1.189	0.921	1.020	1.066	0.494	0.770	3.091	2.396	2.541	2.001	2.245	Case 12	0.03
	Edge 1 at 0mm	0.349							0.349	0.349	0.349	0.349	0.349		
	Edge 2 at 0mm	0.096	0.240		1.107		0.156	0.573	0.336	0.252	0.252	1.203	0.825		
	Edge 3 at 0mm								0.000	0.000	0.000	0.000	0.000		
	Edge 4 at 0mm			0.288		0.724		0.474	0.288	0.288	0.724	0.000	0.474		
	Bottom of Laptop at 0mm	0.269	0.789	0.659	0.594	0.310	0.365	0.360	1.717	1.293	0.944	0.863	0.994	Case 13	0.01
LTE Band 13	Bottom Face at 0mm	1.016	1.189	0.921	1.020	1.066	0.494	0.770	3.126	2.431	2.576	2.036	2.280	Case 14	0.03
	Edge 1 at 0mm	0.476							0.476	0.476	0.476	0.476	0.476		
	Edge 2 at 0mm	0.001	0.240		1.107		0.156	0.573	0.241	0.157	0.157	1.108	0.730		
	Edge 3 at 0mm								0.000	0.000	0.000	0.000	0.000		
	Edge 4 at 0mm			0.288		0.724		0.474	0.288	0.288	0.724	0.000	0.474		
	Bottom of Laptop at 0mm	0.337	0.789	0.659	0.594	0.310	0.365	0.360	1.785	1.361	1.012	0.931	1.062	Case 15	0.01
LTE Band 26	Bottom Face at 0mm	1.003	1.189	0.921	1.020	1.066	0.494	0.770	3.113	2.418	2.563	2.023	2.267	Case 16	0.03
	Edge 1 at 0mm	0.575							0.575	0.575	0.575	0.575	0.575		
	Edge 2 at 0mm	0.001	0.240		1.107		0.156	0.573	0.241	0.157	0.157	1.108	0.730		
	Edge 3 at 0mm								0.000	0.000	0.000	0.000	0.000		
	Edge 4 at 0mm			0.288		0.724		0.474	0.288	0.288	0.724	0.000	0.474		
	Bottom of Laptop at 0mm	0.366	0.789	0.659	0.594	0.310	0.365	0.360	1.814	1.390	1.041	0.960	1.091	Case 17	0.01






WWAN Band	Exposure Position	1	2	3	4	5	6	7	1+2+3 Summed 1g SAR (W/kg)	1+3+6 Summed 1g SAR (W/kg)	1+5+6 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+6+7 Summed 1g SAR (W/kg)	Case No	SPLSR
		WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2	Bluetooth Ant 1	5GHz WLAN Ant 1+2							
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
LTE Band 30	Bottom Face at 0mm	1.000	1.189	0.921	1.020	1.066	0.494	0.770	3.110	2.415	2.560	2.020	2.264	Case 20	0.03
	Edge 1 at 0mm	0.133							0.133	0.133	0.133	0.133	0.133		
	Edge 2 at 0mm	0.119	0.240		1.107		0.156	0.573	0.359	0.275	0.275	1.226	0.848		
	Edge 3 at 0mm								0.000	0.000	0.000	0.000	0.000		
	Edge 4 at 0mm			0.288		0.724		0.474	0.288	0.288	0.724	0.000	0.474		
	Bottom of Laptop at 0mm	0.565	0.789	0.659	0.594	0.310	0.365	0.360	2.013	1.589	1.240	1.159	1.290	Case 21	0.02
LTE Band 41	Bottom Face at 0mm	1.068	1.189	0.921	1.020	1.066	0.494	0.770	3.178	2.483	2.628	2.088	2.332	Case 22	0.03
	Edge 1 at 0mm	0.149							0.149	0.149	0.149	0.149	0.149		
	Edge 2 at 0mm	0.176	0.240		1.107		0.156	0.573	0.416	0.332	0.332	1.283	0.905		
	Edge 3 at 0mm								0.000	0.000	0.000	0.000	0.000		
	Edge 4 at 0mm			0.288		0.724		0.474	0.288	0.288	0.724	0.000	0.474		
	Bottom of Laptop at 0mm	0.362	0.789	0.659	0.594	0.310	0.365	0.360	1.810	1.386	1.037	0.956	1.087	Case 23	0.01
LTE Band 66	Bottom Face at 0mm	0.970	1.189	0.921	1.020	1.066	0.494	0.770	3.080	2.385	2.530	1.990	2.234	Case 24	0.03
	Edge 1 at 0mm	0.243							0.243	0.243	0.243	0.243	0.243		
	Edge 2 at 0mm	0.549	0.240		1.107		0.156	0.573	0.789	0.705	0.705	1.656	1.278	Case 25	0.02
	Edge 3 at 0mm								0.000	0.000	0.000	0.000	0.000		
	Edge 4 at 0mm			0.288		0.724		0.474	0.288	0.288	0.724	0.000	0.474		
	Bottom of Laptop at 0mm	1.168	0.789	0.659	0.594	0.310	0.365	0.360	2.616	2.192	1.843	1.762	1.893	Case 26	0.03

14.2 SPLSR Evaluation and Analysis

General Note:

1. $SPLSR = (SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary
2. The detail hotspot point for each transmitter in each exposure condition are showing as below figure and the minimum 3D distance for each sum combination is used for SPLSR analysis.

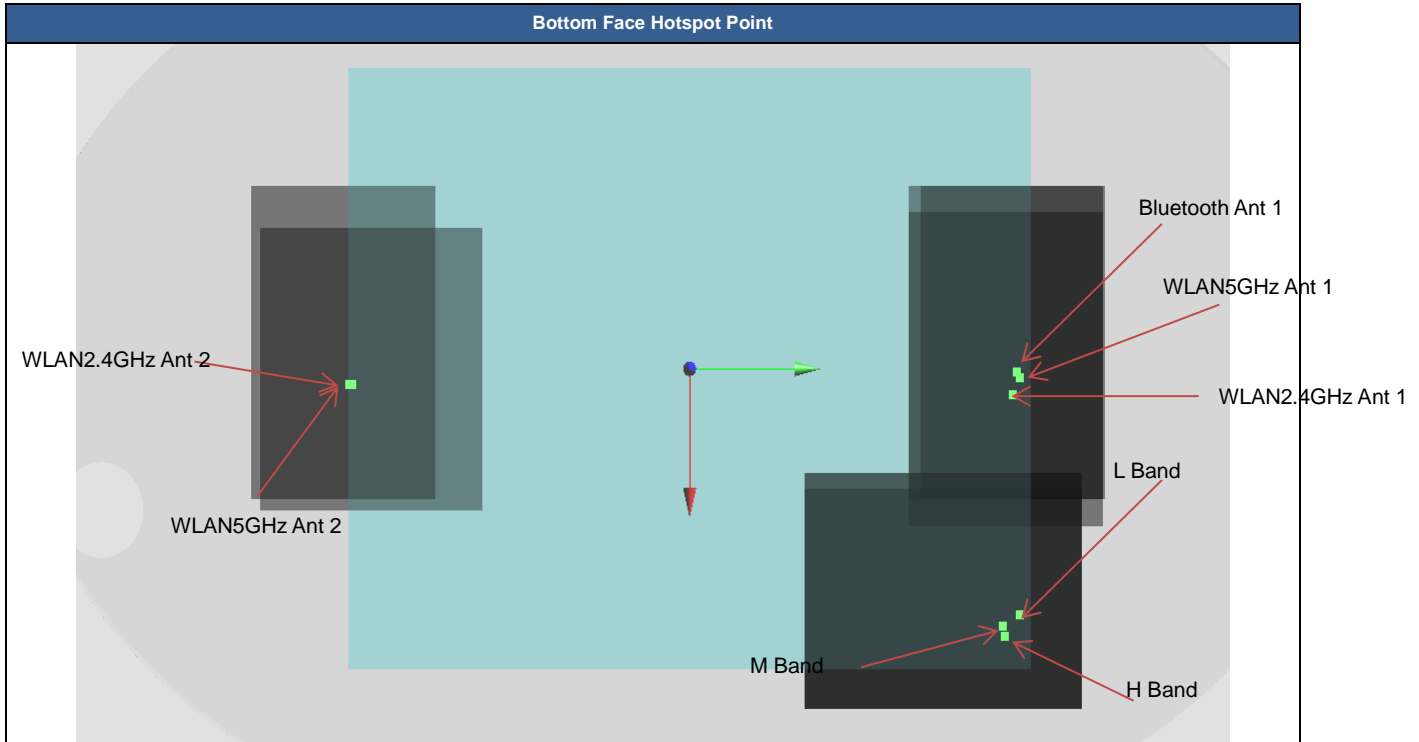

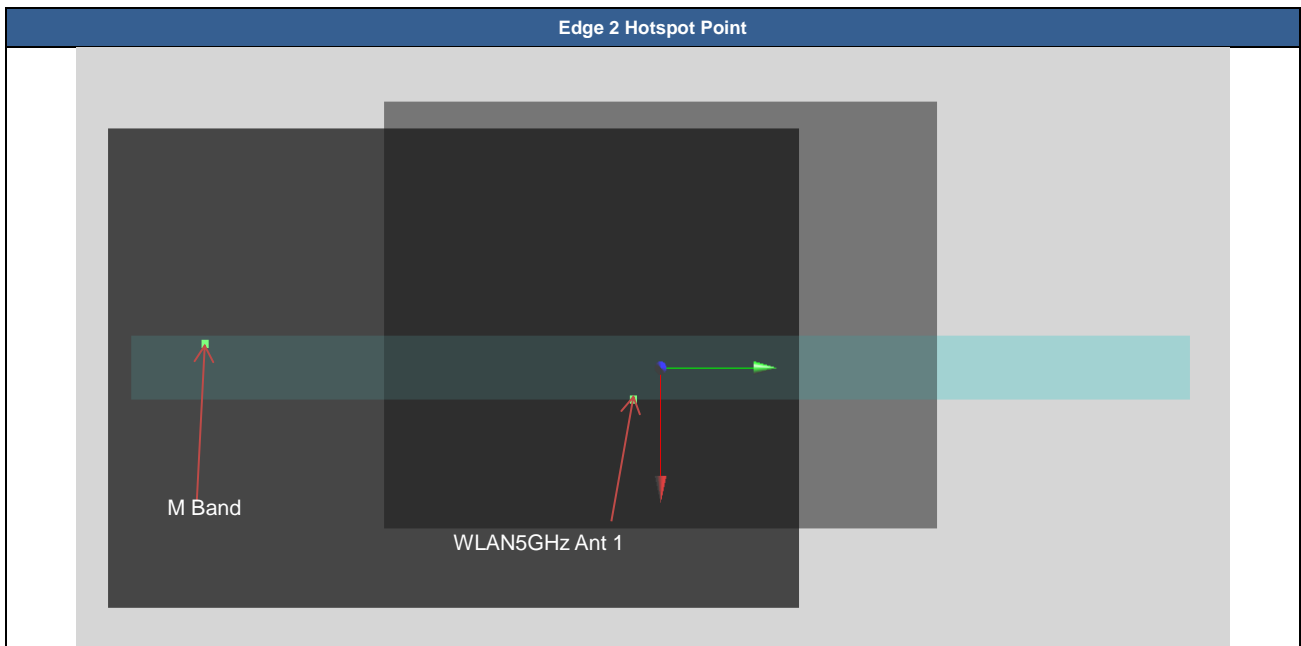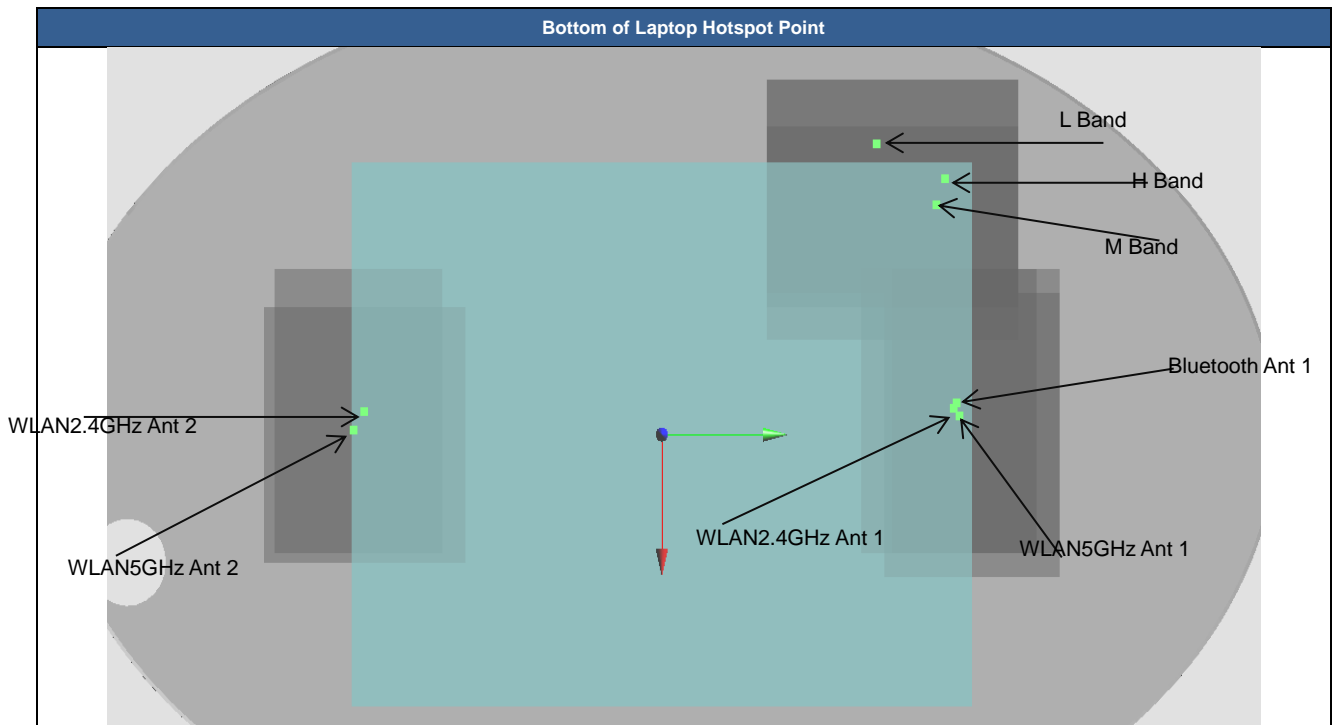



	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 1	WCDMA II	Bottom Face	1.135	0mm	101.7	130.7	2.5	296.2	2.06	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	WCDMA II	Bottom Face	1.135	0mm	101.7	130.7	2.5	101.4	1.63	0.02	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	WCDMA II	Bottom Face	1.135	0mm	101.7	130.7	2.5	100.5	2.32	0.04	Not required
	WLAN2.4GHz_Ant 1		1.189	0mm	2.2	145	1.81				
	WCDMA II	Bottom Face	1.135	0mm	101.7	130.7	2.5	292.0	2.20	0.01	Not required
	WLAN5GHz_Ant 2		1.066	0mm	8.4	-146	0.81				
	WCDMA II	Bottom Face	1.135	0mm	101.7	130.7	2.5	90.7	2.16	0.03	Not required
	WLAN5GHz_Ant 1		1.02	0mm	11.6	140.8	1.05				
	WLAN2.4GHz_Ant 2	Bottom Face	0.921	0mm	3	-148.6	1.84	292.4	1.42	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	WLAN2.4GHz_Ant 1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	WLAN5GHz_Ant 2	Bottom Face	1.066	0mm	8.4	-146	0.81	289.9	1.56	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	WCDMA II	Bottom Face	1.135	0mm	101.7	130.7	2.5	295.2	1.91	0.01	Not required
	WLAN5GHz_Ant 1+2		0.77	0mm	6.8	-148.8	4.23				
Bluetooth_Ant 1	Bottom Face	0.494	0mm	1.2	143.8	1.71	292.7	1.26	0.00	Not required	
WLAN5GHz_Ant 1+2		0.77	0mm	6.8	-148.8	4.23					
Case 2	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II	Bottom of Laptop	1.049	0mm	-100.2	131	4	288.3	1.71	0.01	Not required
	WLAN2.4GHz_Ant 2		0.659	0mm	-7.6	-142	3.07				
	WCDMA II	Bottom of Laptop	1.049	0mm	-100.2	131	4	88.9	1.41	0.02	Not required
	Bluetooth_Ant 1		0.365	0mm	-12.2	143.8	2.22				
	WCDMA II	Bottom of Laptop	1.049	0mm	-100.2	131	4	90.7	1.84	0.03	Not required
	WLAN2.4GHz_Ant 1		0.789	0mm	-10.2	141.4	0.21				
	WCDMA II	Bottom of Laptop	1.049	0mm	-100.2	131	4	294.6	1.36	0.01	Not required
	WLAN5GHz_Ant 2		0.31	0mm	-5.2	-147.8	-0.07				
	WCDMA II	Bottom of Laptop	1.049	0mm	-100.2	131	4	96.5	1.64	0.02	Not required
	WLAN5GHz_Ant 1		0.594	0mm	-4.8	145.2	0.29				
	WLAN2.4GHz_Ant 2	Bottom of Laptop	0.659	0mm	-7.6	-142	3.07	285.8	1.02	0.00	Not required
	Bluetooth_Ant 1		0.365	0mm	-12.2	143.8	2.22				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
	WLAN2.4GHz_Ant 2		0.659	0mm	-7.6	-142	3.07				
	WLAN5GHz_Ant 2	Bottom of Laptop	0.31	0mm	-5.2	-147.8	-0.07	291.7	0.68	0.00	Not required
	Bluetooth_Ant 1		0.365	0mm	-12.2	143.8	2.22				
	WCDMA II	Bottom of Laptop	1.049	0mm	-100.2	131	4	298.0	1.41	0.01	Not required
WLAN5GHz_Ant 1+2	0.36		0mm	-5.6	-151.6	-0.6					
Bluetooth_Ant 1	Bottom of Laptop	0.365	0mm	-12.2	143.8	2.22	295.5	0.73	0.00	Not required	
WLAN5GHz_Ant 1+2		0.36	0mm	-5.6	-151.6	-0.6					

	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 3	WCDMA IV	Bottom Face	0.997	0mm	101.5	134.2	2.65	299.5	1.92	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	WCDMA IV	Bottom Face	0.997	0mm	101.5	134.2	2.65	100.8	1.49	0.02	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	WCDMA IV	Bottom Face	0.997	0mm	101.5	134.2	2.65	99.9	2.19	0.03	Not required
	WLAN2.4GHz_Ant 1		1.189	0mm	2.2	145	1.81				
	WCDMA IV	Bottom Face	0.997	0mm	101.5	134.2	2.65	295.3	2.06	0.01	Not required
	WLAN5GHz_Ant 2		1.066	0mm	8.4	-146	0.81				
	WCDMA IV	Bottom Face	0.997	0mm	101.5	134.2	2.65	90.2	2.02	0.03	Not required
	WLAN5GHz_Ant 1		1.02	0mm	11.6	140.8	1.05				
	WLAN2.4GHz_Ant 2	Bottom Face	0.921	0mm	3	-148.6	1.84	292.4	1.42	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	WLAN2.4GHz_Ant 1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	WLAN5GHz_Ant 2	Bottom Face	1.066	0mm	8.4	-146	0.81	289.9	1.56	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	WCDMA IV	Bottom Face	0.997	0mm	101.5	134.2	2.65	298.4	1.77	0.01	Not required
	WLAN5GHz_Ant 1+2		0.77	0mm	6.8	-148.8	4.23				
	Bluetooth_Ant 1	Bottom Face	0.494	0mm	1.2	143.8	1.71	292.7	1.26	0.00	Not required
WLAN5GHz_Ant 1+2	0.77		0mm	6.8	-148.8	4.23					
Case 4	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV	Edge 2	0.576	0mm	-9.3	-105.4	0.09	94.3	1.68	0.02	Not required
	WLAN5GHz_Ant 1		1.107	0mm	0.4	-11.6	-0.57				
Case 5	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV	Bottom of Laptop	1.17	0mm	-103.2	129.3	3.63	287.7	1.83	0.01	Not required
	WLAN2.4GHz_Ant 2		0.659	0mm	-7.6	-142	3.07				
	WCDMA IV	Bottom of Laptop	1.17	0mm	-103.2	129.3	3.63	92.2	1.54	0.02	Not required
	Bluetooth_Ant 1		0.365	0mm	-12.2	143.8	2.22				
	WCDMA IV	Bottom of Laptop	1.17	0mm	-103.2	129.3	3.63	93.8	1.96	0.03	Not required
	WLAN2.4GHz_Ant 1		0.789	0mm	-10.2	141.4	0.21				
	WCDMA IV	Bottom of Laptop	1.17	0mm	-103.2	129.3	3.63	293.9	1.48	0.01	Not required
	WLAN5GHz_Ant 2		0.31	0mm	-5.2	-147.8	-0.07				
	WCDMA IV	Bottom of Laptop	1.17	0mm	-103.2	129.3	3.63	99.7	1.76	0.02	Not required
	WLAN5GHz_Ant 1		0.594	0mm	-4.8	145.2	0.29				
	WLAN2.4GHz_Ant 2	Bottom of Laptop	0.659	0mm	-7.6	-142	3.07	285.8	1.02	0.00	Not required
	Bluetooth_Ant 1		0.365	0mm	-12.2	143.8	2.22				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
	WLAN2.4GHz_Ant 2		0.659	0mm	-7.6	-142	3.07				
	WLAN5GHz_Ant 2	Bottom of Laptop	0.31	0mm	-5.2	-147.8	-0.07	291.7	0.68	0.00	Not required
	Bluetooth_Ant 1		0.365	0mm	-12.2	143.8	2.22				
	WCDMA IV	Bottom of Laptop	1.17	0mm	-103.2	129.3	3.63	297.4	1.53	0.01	Not required
	WLAN5GHz_Ant 1+2		0.36	0mm	-5.6	-151.6	-0.6				
Bluetooth_Ant 1	Bottom of Laptop	0.365	0mm	-12.2	143.8	2.22	295.5	0.73	0.00	Not required	
WLAN5GHz_Ant 1+2		0.36	0mm	-5.6	-151.6	-0.6					

	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 6	WCDMA V	Bottom Face	1.003	0mm	92.4	147.8	0.89	309.6	1.92	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	WCDMA V	Bottom Face	1.003	0mm	92.4	147.8	0.89	91.3	1.50	0.02	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	WCDMA V	Bottom Face	1.003	0mm	92.4	147.8	0.89	90.2	2.19	0.04	Not required
	WLAN2.4GHz_Ant 1		1.189	0mm	2.2	145	1.81				
	WCDMA V	Bottom Face	1.003	0mm	92.4	147.8	0.89	305.6	2.07	0.01	Not required
	WLAN5GHz_Ant 2		1.066	0mm	8.4	-146	0.81				
	WCDMA V	Bottom Face	1.003	0mm	92.4	147.8	0.89	81.1	2.02	0.04	Not required
	WLAN5GHz_Ant 1		1.02	0mm	11.6	140.8	1.05				
	WLAN2.4GHz_Ant 2	Bottom Face	0.921	0mm	3	-148.6	1.84	292.4	1.42	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	WLAN2.4GHz_Ant 1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	WLAN5GHz_Ant 2	Bottom Face	1.066	0mm	8.4	-146	0.81	289.9	1.56	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	WCDMA V	Bottom Face	1.003	0mm	92.4	147.8	0.89	308.7	1.77	0.01	Not required
	WLAN5GHz_Ant 1+2		0.77	0mm	6.8	-148.8	4.23				
Bluetooth_Ant 1	Bottom Face	0.494	0mm	1.2	143.8	1.71	292.7	1.26	0.00	Not required	
WLAN5GHz_Ant 1+2		0.77	0mm	6.8	-148.8	4.23					
Case 7	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA V	Bottom of Laptop	0.381	0mm	-118.2	110.5	3.95	112.4	1.17	0.01	Not required
	WLAN2.4GHz_Ant 1		0.789	0mm	-10.2	141.4	0.21				
	WCDMA V	Bottom of Laptop	0.381	0mm	-118.2	110.5	3.95	275.7	1.04	0.00	Not required
	WLAN2.4GHz_Ant 2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
WLAN2.4GHz_Ant 2	0.659		0mm	-7.6	-142	3.07					
Case 8	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 2	Bottom Face	1.119	0mm	98.6	140.3	2.76	304.3	2.04	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	LTE Band 2	Bottom Face	1.119	0mm	98.6	140.3	2.76	97.5	1.61	0.02	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	LTE Band 2	Bottom Face	1.119	0mm	98.6	140.3	2.76	96.5	2.31	0.04	Not required
	WLAN2.4GHz_Ant 1		1.189	0mm	2.2	145	1.81				
	LTE Band 2	Bottom Face	1.119	0mm	98.6	140.3	2.76	300.2	2.19	0.01	Not required
	WLAN5GHz_Ant 2		1.066	0mm	8.4	-146	0.81				
	LTE Band 2	Bottom Face	1.119	0mm	98.6	140.3	2.76	87.0	2.14	0.04	Not required
	WLAN5GHz_Ant 1		1.02	0mm	11.6	140.8	1.05				
	WLAN2.4GHz_Ant 2	Bottom Face	0.921	0mm	3	-148.6	1.84	292.4	1.42	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	WLAN2.4GHz_Ant 1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	WLAN5GHz_Ant 2	Bottom Face	1.066	0mm	8.4	-146	0.81	289.9	1.56	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	LTE Band 2	Bottom Face	1.119	0mm	98.6	140.3	2.76	303.3	1.89	0.01	Not required
WLAN5GHz_Ant 1+2	0.77		0mm	6.8	-148.8	4.23					
Bluetooth_Ant 1	Bottom Face	0.494	0mm	1.2	143.8	1.71	292.7	1.26	0.00	Not required	
WLAN5GHz_Ant 1+2		0.77	0mm	6.8	-148.8	4.23					



	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 9	LTE Band 2	Bottom of Laptop	1.029	0mm	-100.2	129.4	4.01	286.8	1.69	0.01	Not required
	WLAN2.4GHz_Ant 2		0.659	0mm	-7.6	-142	3.07				
	LTE Band 2	Bottom of Laptop	1.029	0mm	-100.2	129.4	4.01	89.2	1.39	0.02	Not required
	Bluetooth_Ant 1		0.365	0mm	-12.2	143.8	2.22				
	LTE Band 2	Bottom of Laptop	1.029	0mm	-100.2	129.4	4.01	90.9	1.82	0.03	Not required
	WLAN2.4GHz_Ant 1		0.789	0mm	-10.2	141.4	0.21				
	LTE Band 2	Bottom of Laptop	1.029	0mm	-100.2	129.4	4.01	293.1	1.34	0.01	Not required
	WLAN5GHz_Ant 2		0.31	0mm	-5.2	-147.8	-0.07				
	LTE Band 2	Bottom of Laptop	1.029	0mm	-100.2	129.4	4.01	96.8	1.62	0.02	Not required
	WLAN5GHz_Ant 1		0.594	0mm	-4.8	145.2	0.29				
	WLAN2.4GHz_Ant 2	Bottom of Laptop	0.659	0mm	-7.6	-142	3.07	285.8	1.02	0.00	Not required
	Bluetooth_Ant 1		0.365	0mm	-12.2	143.8	2.22				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
	WLAN2.4GHz_Ant 2		0.659	0mm	-7.6	-142	3.07				
	WLAN5GHz_Ant 2	Bottom of Laptop	0.31	0mm	-5.2	-147.8	-0.07	291.7	0.68	0.00	Not required
	Bluetooth_Ant 1		0.365	0mm	-12.2	143.8	2.22				
	LTE Band 2	Bottom of Laptop	1.029	0mm	-100.2	129.4	4.01	296.5	1.39	0.01	Not required
WLAN5GHz_Ant 1+2	0.36		0mm	-5.6	-151.6	-0.6					
Bluetooth_Ant 1	Bottom of Laptop	0.365	0mm	-12.2	143.8	2.22	295.5	0.73	0.00	Not required	
WLAN5GHz_Ant 1+2		0.36	0mm	-5.6	-151.6	-0.6					
Case 10	LTE Band 7	Bottom Face	1.043	0mm	102.4	132.4	2.24	298.1	1.96	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	LTE Band 7	Bottom Face	1.043	0mm	102.4	132.4	2.24	101.8	1.54	0.02	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	LTE Band 7	Bottom Face	1.043	0mm	102.4	132.4	2.24	101.0	2.23	0.03	Not required
	WLAN2.4GHz_Ant 1		1.189	0mm	2.2	145	1.81				
	LTE Band 7	Bottom Face	1.043	0mm	102.4	132.4	2.24	293.8	2.11	0.01	Not required
	WLAN5GHz_Ant 2		1.066	0mm	8.4	-146	0.81				
	LTE Band 7	Bottom Face	1.043	0mm	102.4	132.4	2.24	91.2	2.06	0.03	Not required
	WLAN5GHz_Ant 1		1.02	0mm	11.6	140.8	1.05				
	WLAN2.4GHz_Ant 2	Bottom Face	0.921	0mm	3	-148.6	1.84	292.4	1.42	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	WLAN2.4GHz_Ant 1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	WLAN5GHz_Ant 2	Bottom Face	1.066	0mm	8.4	-146	0.81	289.9	1.56	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	LTE Band 7	Bottom Face	1.043	0mm	102.4	132.4	2.24	297.0	1.81	0.01	Not required
WLAN5GHz_Ant 1+2	0.77		0mm	6.8	-148.8	4.23					
Bluetooth_Ant 1	Bottom Face	0.494	0mm	1.2	143.8	1.71	292.7	1.26	0.00	Not required	
WLAN5GHz_Ant 1+2		0.77	0mm	6.8	-148.8	4.23					
Case 11	LTE Band 7	Bottom of Laptop	0.425	0mm	-108	133.2	3.87	98.2	1.21	0.01	Not required
	WLAN2.4GHz_Ant 1		0.789	0mm	-10.2	141.4	0.21				
	LTE Band 7	Bottom of Laptop	0.425	0mm	-108	133.2	3.87	292.9	1.08	0.00	Not required
	WLAN2.4GHz_Ant 2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
	WLAN2.4GHz_Ant 2		0.659	0mm	-7.6	-142	3.07				

	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 12	LTE Band 12	Bottom Face	0.981	0mm	103.2	142.1	2.19	307.5	1.90	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	LTE Band 12	Bottom Face	0.981	0mm	103.2	142.1	2.19	102.0	1.48	0.02	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	LTE Band 12	Bottom Face	0.981	0mm	103.2	142.1	2.19	101.0	2.17	0.03	Not required
	WLAN2.4GHz_Ant 1		1.189	0mm	2.2	145	1.81				
	LTE Band 12	Bottom Face	0.981	0mm	103.2	142.1	2.19	303.3	2.05	0.01	Not required
	WLAN5GHz_Ant 2		1.066	0mm	8.4	-146	0.81				
	LTE Band 12	Bottom Face	0.981	0mm	103.2	142.1	2.19	91.6	2.00	0.03	Not required
	WLAN5GHz_Ant 1		1.02	0mm	11.6	140.8	1.05				
	WLAN2.4GHz_Ant 2	Bottom Face	0.921	0mm	3	-148.6	1.84	292.4	1.42	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	WLAN2.4GHz_Ant 1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	WLAN5GHz_Ant 2	Bottom Face	1.066	0mm	8.4	-146	0.81	289.9	1.56	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	LTE Band 12	Bottom Face	0.981	0mm	103.2	142.1	2.19	306.5	1.75	0.01	Not required
	WLAN5GHz_Ant 1+2		0.77	0mm	6.8	-148.8	4.23				
Bluetooth_Ant 1	Bottom Face	0.494	0mm	1.2	143.8	1.71	292.7	1.26	0.00	Not required	
WLAN5GHz_Ant 1+2		0.77	0mm	6.8	-148.8	4.23					
Case 13	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 12	Bottom of Laptop	0.269	0mm	-118.6	114.1	3.87	111.8	1.06	0.01	Not required
	WLAN2.4GHz_Ant 1		0.789	0mm	-10.2	141.4	0.21				
	LTE Band 12	Bottom of Laptop	0.269	0mm	-118.6	114.1	3.87	279.1	0.93	0.00	Not required
	WLAN2.4GHz_Ant 2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
WLAN2.4GHz_Ant 2	0.659		0mm	-7.6	-142	3.07					
Case 14	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 13	Bottom Face	1.016	0mm	103.2	142.1	2.21	307.5	1.94	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	LTE Band 13	Bottom Face	1.016	0mm	103.2	142.1	2.21	102.0	1.51	0.02	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	LTE Band 13	Bottom Face	1.016	0mm	103.2	142.1	2.21	101.0	2.21	0.03	Not required
	WLAN2.4GHz_Ant 1		1.189	0mm	2.2	145	1.81				
	LTE Band 13	Bottom Face	1.016	0mm	103.2	142.1	2.21	303.3	2.08	0.01	Not required
	WLAN5GHz_Ant 2		1.066	0mm	8.4	-146	0.81				
	LTE Band 13	Bottom Face	1.016	0mm	103.2	142.1	2.21	91.6	2.04	0.03	Not required
	WLAN5GHz_Ant 1		1.02	0mm	11.6	140.8	1.05				
	WLAN2.4GHz_Ant 2	Bottom Face	0.921	0mm	3	-148.6	1.84	292.4	1.42	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	WLAN2.4GHz_Ant 1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	WLAN5GHz_Ant 2	Bottom Face	1.066	0mm	8.4	-146	0.81	289.9	1.56	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	LTE Band 13	Bottom Face	1.016	0mm	103.2	142.1	2.21	306.5	1.79	0.01	Not required
WLAN5GHz_Ant 1+2	0.77		0mm	6.8	-148.8	4.23					
Bluetooth_Ant 1	Bottom Face	0.494	0mm	1.2	143.8	1.71	292.7	1.26	0.00	Not required	
WLAN5GHz_Ant 1+2		0.77	0mm	6.8	-148.8	4.23					

Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 15	LTE Band 13	Bottom of Laptop	0.337	0mm	-118.3	109.9	3.89	112.7	1.13	0.01	Not required
	WLAN2.4GHz_Ant 1		0.789	0mm	-10.2	141.4	0.21				
	LTE Band 13	Bottom of Laptop	0.337	0mm	-118.3	109.9	3.89	275.2	1.00	0.00	Not required
	WLAN2.4GHz_Ant 2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
	WLAN2.4GHz_Ant 2		0.659	0mm	-7.6	-142	3.07				
Case 16	LTE Band 26	Bottom Face	1.003	0mm	103.2	142.1	2.18	307.5	1.92	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	LTE Band 26	Bottom Face	1.003	0mm	103.2	142.1	2.18	102.0	1.50	0.02	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	LTE Band 26	Bottom Face	1.003	0mm	103.2	142.1	2.18	101.0	2.19	0.03	Not required
	WLAN2.4GHz_Ant 1		1.189	0mm	2.2	145	1.81				
	LTE Band 26	Bottom Face	1.003	0mm	103.2	142.1	2.18	303.3	2.07	0.01	Not required
	WLAN5GHz_Ant 2		1.066	0mm	8.4	-146	0.81				
	LTE Band 26	Bottom Face	1.003	0mm	103.2	142.1	2.18	91.6	2.02	0.03	Not required
	WLAN5GHz_Ant 1		1.02	0mm	11.6	140.8	1.05				
	WLAN2.4GHz_Ant 2	Bottom Face	0.921	0mm	3	-148.6	1.84	292.4	1.42	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	WLAN2.4GHz_Ant 1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	WLAN5GHz_Ant 2	Bottom Face	1.066	0mm	8.4	-146	0.81	289.9	1.56	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	LTE Band 26	Bottom Face	1.003	0mm	103.2	142.1	2.18	306.5	1.77	0.01	Not required
	WLAN5GHz_Ant 1+2		0.77	0mm	6.8	-148.8	4.23				
	Bluetooth_Ant 1	Bottom Face	0.494	0mm	1.2	143.8	1.71	292.7	1.26	0.00	Not required
	WLAN5GHz_Ant 1+2		0.77	0mm	6.8	-148.8	4.23				
Case 17	LTE Band 26	Bottom of Laptop	0.366	0mm	-118.2	110.5	3.88	112.4	1.16	0.01	Not required
	WLAN2.4GHz_Ant 1		0.789	0mm	-10.2	141.4	0.21				
	LTE Band 26	Bottom of Laptop	0.366	0mm	-118.2	110.5	3.88	275.7	1.03	0.00	Not required
	WLAN2.4GHz_Ant 2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
	WLAN2.4GHz_Ant 2		0.659	0mm	-7.6	-142	3.07				

	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 20	LTE Band 30	Bottom Face	1	0mm	102.4	132.6	2.24	298.3	1.92	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	LTE Band 30	Bottom Face	1	0mm	102.4	132.6	2.24	101.8	1.49	0.02	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	LTE Band 30	Bottom Face	1	0mm	102.4	132.6	2.24	101.0	2.19	0.03	Not required
	WLAN2.4GHz_Ant 1		1.189	0mm	2.2	145	1.81				
	LTE Band 30	Bottom Face	1	0mm	102.4	132.6	2.24	294.0	2.07	0.01	Not required
	WLAN5GHz_Ant 2		1.066	0mm	8.4	-146	0.81				
	LTE Band 30	Bottom Face	1	0mm	102.4	132.6	2.24	91.2	2.02	0.03	Not required
	WLAN5GHz_Ant 1		1.02	0mm	11.6	140.8	1.05				
	WLAN2.4GHz_Ant 2	Bottom Face	0.921	0mm	3	-148.6	1.84	292.4	1.42	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	WLAN2.4GHz_Ant 1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	WLAN5GHz_Ant 2	Bottom Face	1.066	0mm	8.4	-146	0.81	289.9	1.56	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	LTE Band 30	Bottom Face	1	0mm	102.4	132.6	2.24	297.2	1.77	0.01	Not required
	WLAN5GHz_Ant 1+2		0.77	0mm	6.8	-148.8	4.23				
Bluetooth_Ant 1	Bottom Face	0.494	0mm	1.2	143.8	1.71	292.7	1.26	0.00	Not required	
WLAN5GHz_Ant 1+2		0.77	0mm	6.8	-148.8	4.23					
Case 21	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 30	Bottom of Laptop	0.565	0mm	-98.8	135.6	3.93	88.9	1.35	0.02	Not required
	WLAN2.4GHz_Ant 1		0.789	0mm	-10.2	141.4	0.21				
	LTE Band 30	Bottom of Laptop	0.565	0mm	-98.8	135.6	3.93	292.2	1.22	0.00	Not required
	WLAN2.4GHz_Ant 2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
WLAN2.4GHz_Ant 2	0.659		0mm	-7.6	-142	3.07					
Case 22	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 41	Bottom Face	1.068	0mm	103.2	130.4	1.97	296.4	1.99	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	LTE Band 41	Bottom Face	1.068	0mm	103.2	130.4	1.97	102.9	1.56	0.02	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	LTE Band 41	Bottom Face	1.068	0mm	103.2	130.4	1.97	102.0	2.26	0.03	Not required
	WLAN2.4GHz_Ant 1		1.189	0mm	2.2	145	1.81				
	LTE Band 41	Bottom Face	1.068	0mm	103.2	130.4	1.97	292.2	2.13	0.01	Not required
	WLAN5GHz_Ant 2		1.066	0mm	8.4	-146	0.81				
	LTE Band 41	Bottom Face	1.068	0mm	103.2	130.4	1.97	92.2	2.09	0.03	Not required
	WLAN5GHz_Ant 1		1.02	0mm	11.6	140.8	1.05				
	WLAN2.4GHz_Ant 2	Bottom Face	0.921	0mm	3	-148.6	1.84	292.4	1.42	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	WLAN2.4GHz_Ant 1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	WLAN5GHz_Ant 2	Bottom Face	1.066	0mm	8.4	-146	0.81	289.9	1.56	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	LTE Band 41	Bottom Face	1.068	0mm	103.2	130.4	1.97	295.4	1.84	0.01	Not required
WLAN5GHz_Ant 1+2	0.77		0mm	6.8	-148.8	4.23					
Bluetooth_Ant 1	Bottom Face	0.494	0mm	1.2	143.8	1.71	292.7	1.26	0.00	Not required	
WLAN5GHz_Ant 1+2		0.77	0mm	6.8	-148.8	4.23					

Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 23	LTE Band 41	Bottom of Laptop	0.362	0mm	-108	133	3.83	98.2	1.15	0.01	Not required
	WLAN2.4GHz_Ant 1		0.789	0mm	-10.2	141.4	0.21				
	LTE Band 41	Bottom of Laptop	0.362	0mm	-108	133	3.83	292.8	1.02	0.00	Not required
	WLAN2.4GHz_Ant 2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
	WLAN2.4GHz_Ant 2		0.659	0mm	-7.6	-142	3.07				
Case 24	LTE Band 66	Bottom Face	0.97	0mm	101.5	135.8	2.65	301.0	1.89	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	LTE Band 66	Bottom Face	0.97	0mm	101.5	135.8	2.65	100.6	1.46	0.02	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	LTE Band 66	Bottom Face	0.97	0mm	101.5	135.8	2.65	99.7	2.16	0.03	Not required
	WLAN2.4GHz_Ant 1		1.189	0mm	2.2	145	1.81				
	LTE Band 66	Bottom Face	0.97	0mm	101.5	135.8	2.65	296.8	2.04	0.01	Not required
	WLAN5GHz_Ant 2		1.066	0mm	8.4	-146	0.81				
	LTE Band 66	Bottom Face	0.97	0mm	101.5	135.8	2.65	90.1	1.99	0.03	Not required
	WLAN5GHz_Ant 1		1.02	0mm	11.6	140.8	1.05				
	WLAN2.4GHz_Ant 2	Bottom Face	0.921	0mm	3	-148.6	1.84	292.4	1.42	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	WLAN2.4GHz_Ant 1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4GHz_Ant 2		0.921	0mm	3	-148.6	1.84				
	WLAN5GHz_Ant 2	Bottom Face	1.066	0mm	8.4	-146	0.81	289.9	1.56	0.01	Not required
	Bluetooth_Ant 1		0.494	0mm	1.2	143.8	1.71				
	LTE Band 66	Bottom Face	0.97	0mm	101.5	135.8	2.65	299.9	1.74	0.01	Not required
	WLAN5GHz_Ant 1+2		0.77	0mm	6.8	-148.8	4.23				
	Bluetooth_Ant 1	Bottom Face	0.494	0mm	1.2	143.8	1.71	292.7	1.26	0.00	Not required
	WLAN5GHz_Ant 1+2		0.77	0mm	6.8	-148.8	4.23				
Case 25	LTE Band 66	Edge 2	0.549	0mm	-9.3	-105.4	1	94.3	1.66	0.02	Not required
	WLAN5GHz_Ant 1		1.107	0mm	0.4	-11.6	-0.57				

	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 26	LTE Band 66	Bottom of Laptop	1.168	0mm	-103.1	130.9	3.66	289.1	1.83	0.01	Not required
	WLAN2.4GHz_Ant 2		0.659	0mm	-7.6	-142	3.07				
	LTE Band 66	Bottom of Laptop	1.168	0mm	-103.1	130.9	3.66	91.8	1.53	0.02	Not required
	Bluetooth_Ant 1		0.365	0mm	-12.2	143.8	2.22				
	LTE Band 66	Bottom of Laptop	1.168	0mm	-103.1	130.9	3.66	93.6	1.96	0.03	Not required
	WLAN2.4GHz_Ant 1		0.789	0mm	-10.2	141.4	0.21				
	LTE Band 66	Bottom of Laptop	1.168	0mm	-103.1	130.9	3.66	295.4	1.48	0.01	Not required
	WLAN5GHz_Ant 2		0.31	0mm	-5.2	-147.8	-0.07				
	LTE Band 66	Bottom of Laptop	1.168	0mm	-103.1	130.9	3.66	99.4	1.76	0.02	Not required
	WLAN5GHz_Ant 1		0.594	0mm	-4.8	145.2	0.29				
	WLAN2.4GHz_Ant 2	Bottom of Laptop	0.659	0mm	-7.6	-142	3.07	285.8	1.02	0.00	Not required
	Bluetooth_Ant 1		0.365	0mm	-12.2	143.8	2.22				
	WLAN2.4GHz_Ant 1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
	WLAN2.4GHz_Ant 2		0.659	0mm	-7.6	-142	3.07				
	WLAN5GHz_Ant 2	Bottom of Laptop	0.31	0mm	-5.2	-147.8	-0.07	291.7	0.68	0.00	Not required
	Bluetooth_Ant 1		0.365	0mm	-12.2	143.8	2.22				
	LTE Band 66	Bottom of Laptop	1.168	0mm	-103.1	130.9	3.66	298.9	1.53	0.01	Not required
	WLAN5GHz_Ant 1+2		0.36	0mm	-5.6	-151.6	-0.6				
Bluetooth_Ant 1	Bottom of Laptop	0.365	0mm	-12.2	143.8	2.22	295.5	0.73	0.00	Not required	
WLAN5GHz_Ant 1+2		0.36	0mm	-5.6	-151.6	-0.6					

Test Engineer : Charles Shen, Jack Yang, Jerry Hsu and Ray Sun



15. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

16. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [8] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [9] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [10] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [11] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [12] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.