



Applicant: ABN SYSTEMS INTERNATIONAL S.A.

Product: Mouse Dongle

Model No.: ST-800, TLL491161

Trademark: N/A

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 & FCC Part 15 Subpart C,

Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Terry Tang

, ,

Manager

Dated: October 19, 2022

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2210014E Page 2 of 38

Date: 2022-10-19



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number: 5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Date: 2022-10-19



Test Report Conclusion

1 'an	tant
v .com	tent
0011	

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT.	13
6.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit.	13
6.5	Test Result.	15
7.0	Band Edge	23
7.1	Test Method and Test Procedure.	23
7.2	Radiated Test Setup.	23
7.3	Configuration of the EUT.	23
7.4	EUT Operating Condition.	23
7.5	Band Edge Limit.	23
7.6	Band Edge Test Result.	24
8.0	Antenna Requirement	28
9.0	20dB bandwidth measurement	29
10.0	FCC ID Label	32
11.0	Photo of Test Setup and EUT View.	33

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2210014E Page 4 of 38

Date: 2022-10-19



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: ABN SYSTEMS INTERNATIONAL S.A.

Address: Str. Marinarilor, nr. 31, Sector 1 Bucuresti, Romania

Telephone: --Fax: --

1.3 Description of EUT

Product: Mouse Dongle

Manufacturer: Star Technology Industrial Co., Ltd.

Address: Room 2102, Block 1st, Yi Luan Building, Xixiang Road 230, BaoAn District,

Shenzhen, China

Trademark: N/A
Model Number: ST-800
Additional Model Name TLL491161

Rating: DC5.0V (Hosted from the USB Port)

Modulation Type: GFSK

Operation Frequency: 2402-2480MHz

Channel Number: 40
Channel Separation: 2MHz
Hardware Version: V7.0
Software Version: V6.9.1
Serial No.: TL61

Antenna Designation PCB antenna with gain -2.36dBi Max (Get from the antenna specification)

1.4 Submitted Sample: 2 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2210014E Page 5 of 38

Date: 2022-10-19



1.5 Test Duration

2022-10-09 to 2022-10-19

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Conducted Emissions Uncertainty = 3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Page 6 of 38

Report No.: TW2210014E

Date: 2022-10-19



2.0 Test Equipment								
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date			
ESPI Test Receiver	SPI Test Receiver R&S ESPI 3		100379	2022-07-15	2023-07-14			
LISN	R&S	EZH3-Z5	100294	2022-07-18	2023-07-17			
LISN	R&S	EZH3-Z5	100253	2022-07-18	2023-07-17			
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2022-07-18	2023-07-17			
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17			
Spectrum	R&S	FSIQ26	100292	2022-07-15	2023-07-14			
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17			
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2024-07-17			
Power meter	Anritsu	ML2487A	6K00003613	2022-07-18	2023-07-17			
Power sensor	Anritsu	MA2491A	32263	2022-07-18	2023-07-17			
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17			
9*6*6 Anechoic			N/A	2022-07-26	2025-07-25			
EMI Test Receiver	RS	ESVB	826156/011	2022-07-15	2023-07-14			
EMI Test Receiver	RS	ESCS 30	834115/006	2022-07-15	2023-07-14			
Spectrum	HP/Agilent	E4407B	MY50441392	2022-07-15	2023-07-14			
Spectrum	RS	FSP	1164.4391.38	2022-07-15	2023-07-14			
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA	1	2022-07-15	2023-07-14			
RF Cable	Zhengdi	7m		2022-07-15	2023-07-14			
Pre-Amplifier	Schwarebeck	BBV9743	#218	2022-07-15	2023-07-14			
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2022-07-15	2023-07-14			
LISN	SCHAFFNER	NNB42	00012	2022-08-18	2023-07-17			

2.2 Automation Test Software

For Conducted Emission Test

Name	Version		
EZ-EMC	Ver.EMC-CON 3A1.1		

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

Report No.: TW2210014E Page 7 of 38

Date: 2022-10-19



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna Requirement	Pass	Complies
FCC Part 15, Paragraph 15.207	Conducted Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	Pass	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	Pass	Complies

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2022-10-19



5. Power Line Conducted Emission Test

5.1 Schematics of the test

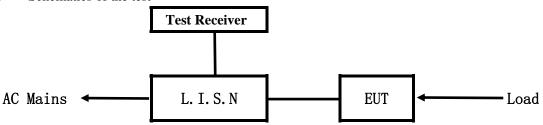


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10 -2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

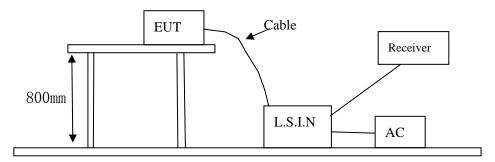

5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.4-2014. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

40 channels are provided to the EUT

A. EUT

Device	Manufacturer Model		FCC ID
Maysa Danala	Stor Toobnology Industrial Co. Ltd.	CT 900 TH 1 401161	2A74I-TLL4
Mouse Dongle	Star Technology Industrial Co., Ltd.	echnology Industrial Co., Ltd. ST-800, TLL491161	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2210014E Page 9 of 38

Date: 2022-10-19



B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

ĺ	Danier	Manufacturar	M - J - 1	D - 4'
	Device	Manufacturer	Model	Rating
	PC	DELL	P54G	

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB μ V)			
(MHz)	Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	56.0	46.0		
5.00 ~ 30.00	60.0	50.0		

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

5.6 Test Results:

Pass

Date: 2022-10-19



A: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Keep Transmitting

Results: Pass

Please refer to following diagram for individual

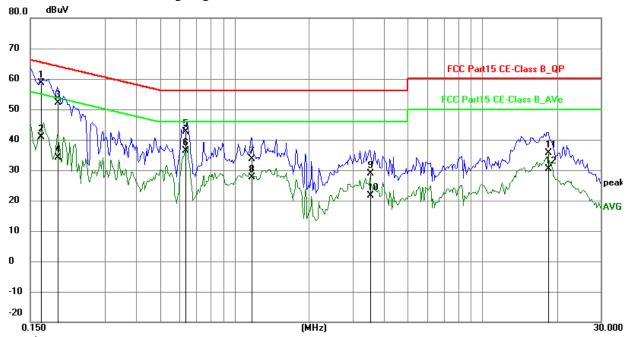

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1655	48.87	9.77	58.64	65.18	-6.54	QP	Р
2	0.1655	31.17	9.77	40.94	55.18	-14.24	AVG	Р
3	0.1929	42.41	9.75	52.16	63.91	-11.75	QP	Р
4	0.1929	24.41	9.75	34.16	53.91	-19.75	AVG	Р
5	0.6336	32.82	9.78	42.60	56.00	-13.40	QP	Р
6	0.6336	26.51	9.78	36.29	46.00	-9.71	AVG	Р
7	1.1718	23.76	9.79	33.55	56.00	-22.45	QP	Р
8	1.1718	17.96	9.79	27.75	46.00	-18.25	AVG	Р
9	3.5109	19.05	9.87	28.92	56.00	-27.08	QP	Р
10	3.5109	11.72	9.87	21.59	46.00	-24.41	AVG	Р
11	18.4479	25.01	10.59	35.60	60.00	-24.40	QP	Р
12	18.4479	19.90	10.59	30.49	50.00	-19.51	AVG	Р

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2022-10-19



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Keep Transmitting

Results: Pass

Please refer to following diagram for individual

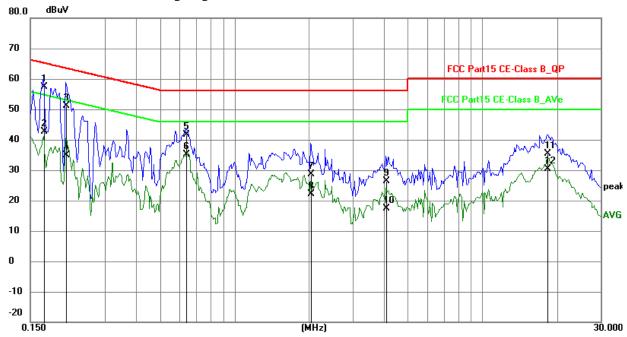

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1695	47.67	9.77	57.44	64.98	-7.54	QP	Р
2	0.1695	32.90	9.77	42.67	54.98	-12.31	AVG	Р
3	0.2085	41.40	9.75	51.15	63.26	-12.11	QP	Р
4	0.2085	25.08	9.75	34.83	53.26	-18.43	AVG	Р
5	0.6375	31.86	9.78	41.64	56.00	-14.36	QP	Р
6	0.6375	25.33	9.78	35.11	46.00	-10.89	AVG	Р
7	2.0259	18.89	9.80	28.69	56.00	-27.31	QP	Р
8	2.0259	12.45	9.80	22.25	46.00	-23.75	AVG	Р
9	4.0764	16.49	9.89	26.38	56.00	-29.62	QP	Р
10	4.0764	7.41	9.89	17.30	46.00	-28.70	AVG	Р
11	18.2997	24.70	10.58	35.28	60.00	-24.72	QP	Р
12	18.2997	19.74	10.58	30.32	50.00	-19.68	AVG	Р

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2210014E Page 12 of 38

Date: 2022-10-19




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz (Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup


For radiated emissions from 9kHz to 30MHz

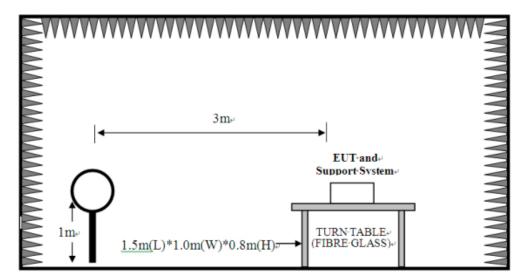


Date: 2022-10-19



For radiated emissions from 30MHz to1GHz

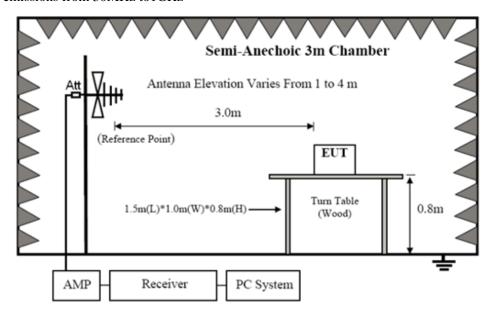

For radiated emissions above 1GHz

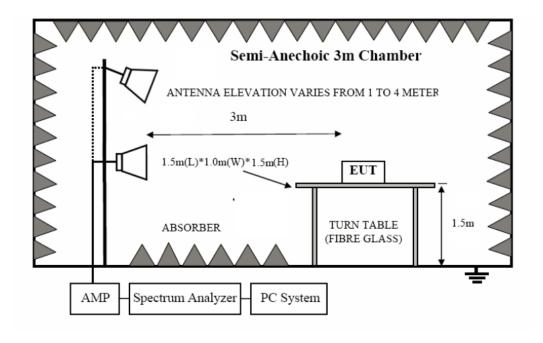

6.2 Configuration of The EUT Same as section 5.3 of this report

6.3 EUT Operating Condition

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Date: 2022-10-19



Same as section 5.4 of this report.

6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Stre	ength of Fundame	ntal (3m)	Field Strength of Harmonics (3m)			
(MHz)	mV/m	dBu	V/m	uV/m	dBuV/m		
2400-2483.5	50	94 (Average) 114 (Peak		500	54 (Average)	74 (Peak)	

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
0.009-0.490	3	20log(2400/F(kHz)) +40log (300/3)
0.490-1.705	3	20log(24000/F(kHz)) +40log (30/3)
1.705-30	3	69.5
30-80	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. For radiated emissions from 9kHz to 30MHz, the emission level is much less than the limit for more than 20dB. No necessary to take down the record.

Report No.: TW2210014E Page 15 of 38

Date: 2022-10-19




6.5 Test result

A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2402MHz

Horizontal

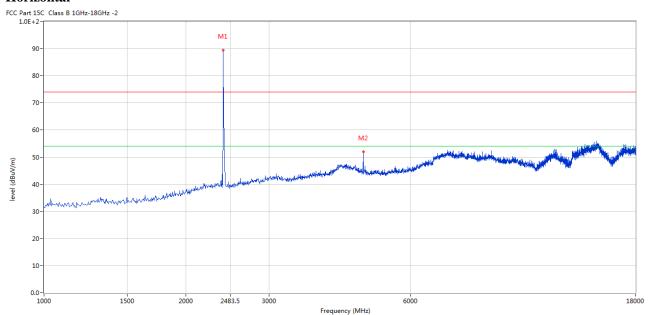


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402	89.33	-3.57	114.0	-24.67	Peak	288.00	100	Horizontal	Pass
2	4803.310	52.06	3.03	74.0	-21.94	Peak	128.00	100	Horizontal	Pass

Report No.: TW2210014E Page 16 of 38

Date: 2022-10-19



Vertical

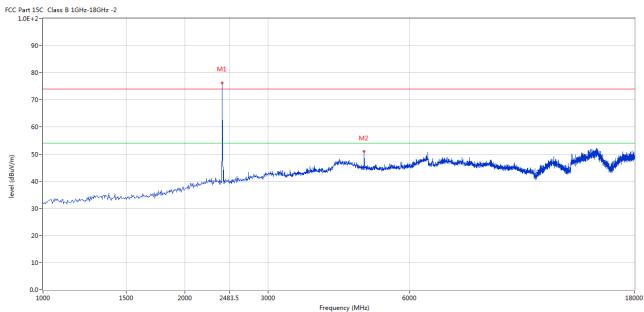

					• •					
No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402	76.17	-3.57	114.0	-37.83	Peak	290.00	100	Vertical	Pass
2	4802.799	51.02	3.12	74.0	-22.98	Peak	0.00	100	Vertical	Pass


Report No.: TW2210014E Page 17 of 38

Date: 2022-10-19



Please refer to the following test plots for details: Middle Channel-2440MHz

Horizontal

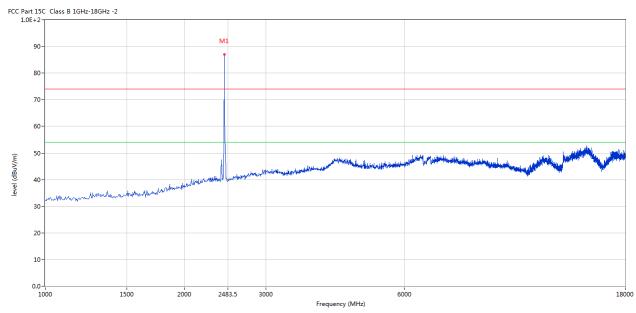


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2440	87.01	-3.57	114.0	-26.99	Peak	241.00	100	Horizontal	Pass

Report No.: TW2210014E Page 18 of 38

Date: 2022-10-19



Vertical

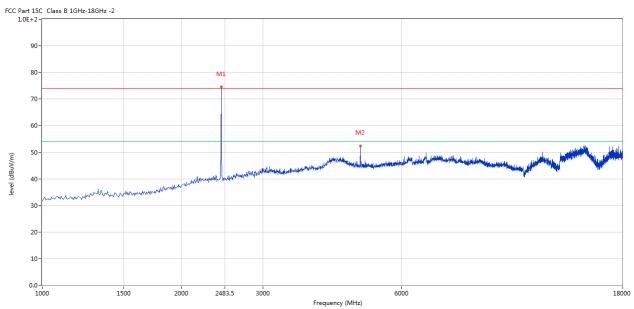

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2440	74.49	-3.57	114.0	-39.51	Peak	11.00	100	Vertical	Pass
2	4879.280	52.36	3.20	74.0	-21.64	Peak	147.00	100	Vertical	Pass


Report No.: TW2210014E Page 19 of 38

Date: 2022-10-19



Please refer to the following test plots for details: High Channel-2480MHz

Horizontal

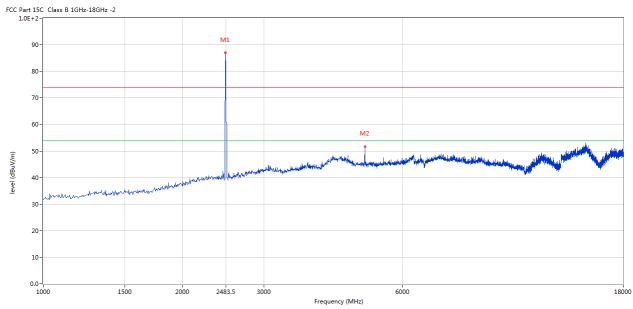


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2480	87.03	-3.57	114.0	-26.97	Peak	336.00	100	Horizontal	Pass
2	4968.508	51.59	3.38	74.0	-22.41	Peak	0.00	100	Horizontal	Pass

Report No.: TW2210014E Page 20 of 38

Date: 2022-10-19



Vertical

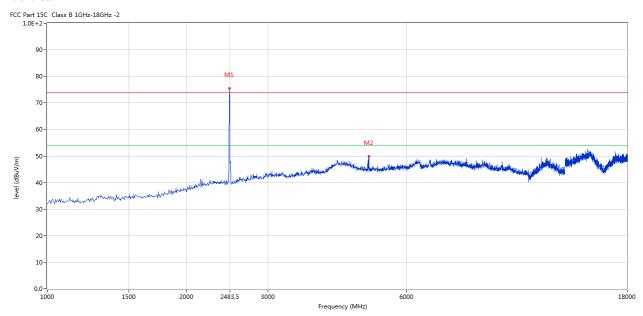

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2480	75.44	-3.57	114.0	-38.56	Peak	218.00	100	Vertical	Pass
2	4968.508	49.97	3.38	74.0	-24.03	Peak	313.00	100	Vertical	Pass

Note: (2) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (3)Margin=Emission-Limits
- (4)According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TW2210014E Page 21 of 38

Date: 2022-10-19




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

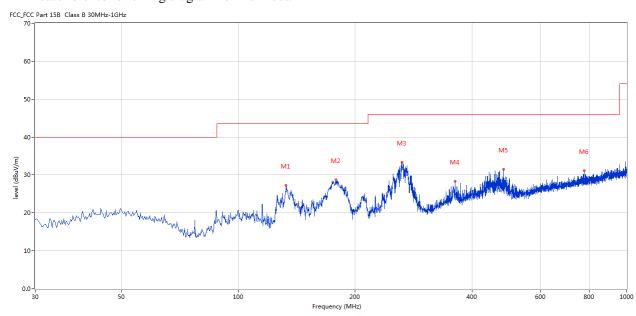

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	132.794	27.26	-17.01	43.5	-16.24	Peak	310.00	200	Horizontal	Pass
2	178.373	28.75	-15.46	43.5	-14.75	Peak	0.00	200	Horizontal	Pass
3	263.712	33.32	-11.77	46.0	-12.68	Peak	75.00	100	Horizontal	Pass
4	361.415	28.32	-9.51	46.0	-17.68	Peak	181.00	100	Horizontal	Pass
5	482.149	31.52	-7.35	46.0	-14.48	Peak	273.00	200	Horizontal	Pass
6	777.441	31.13	-3.11	46.0	-14.87	Peak	0.00	200	Horizontal	Pass

Report No.: TW2210014E Page 22 of 38

Date: 2022-10-19




Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

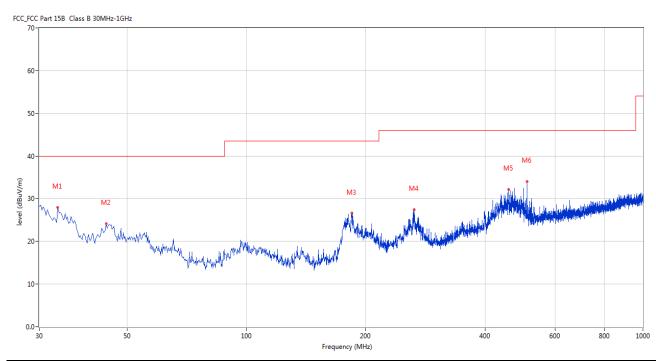

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	33.394	27.93	-14.35	40.0	-12.07	Peak	303.00	100	Vertical	Pass
2	44.304	24.18	-11.46	40.0	-15.82	Peak	1.00	100	Vertical	Pass
3	184.191	26.57	-14.98	43.5	-16.93	Peak	263.00	100	Vertical	Pass
4	264.924	27.45	-11.85	46.0	-18.55	Peak	209.00	100	Vertical	Pass
5	457.906	32.20	-7.76	46.0	-13.80	Peak	198.00	100	Vertical	Pass
6	510.030	34.03	-6.83	46.0	-11.97	Peak	195.00	100	Vertical	Pass

Report No.: TW2210014E Page 23 of 38

Date: 2022-10-19




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

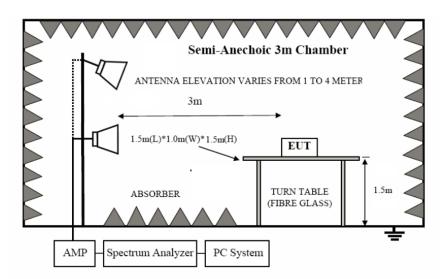

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of The EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Report No.: TW2210014E Page 24 of 38

Date: 2022-10-19



7.6 Test Result

Product:	Mouse Dongle	Polarity	Horizontal
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

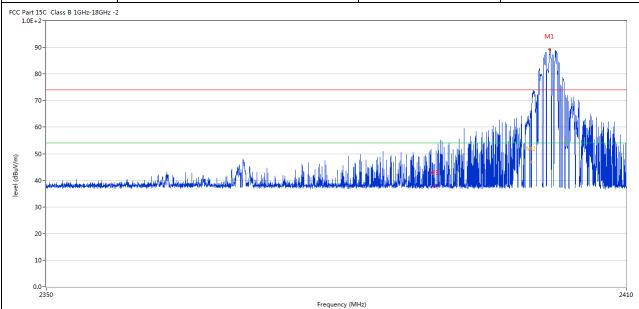


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402.007	89.21	-3.57	74.0	15.21	Peak	143.00	100	Horizontal	N/A
2	2400.057	61.90	-3.57	74.0	-12.10	Peak	172.00	100	Horizontal	Pass
2**	2400.057	46.85	-3.57	54.0	-7.15	AV	172.00	100	Horizontal	Pass
3	2390.025	37.92	-3.53	74.0	-36.08	Peak	58.00	100	Horizontal	Pass

Report No.: TW2210014E Page 25 of 38



Product:	Mouse Dongle	Detector	Vertical
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

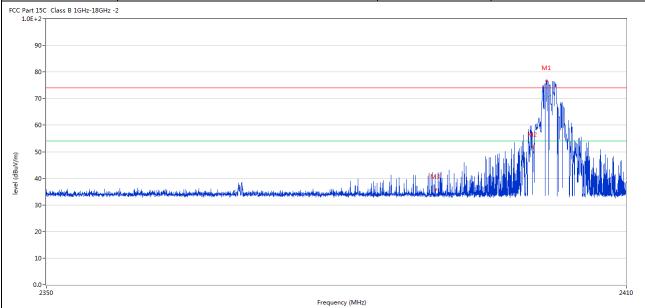

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2401.662	75.72	-3.57	74.0	1.72	Peak	170.00	100	Vertical	N/A
2	2400.207	50.66	-3.57	74.0	-23.34	Peak	354.00	100	Vertical	Pass
3	2390.085	34.74	-3.53	74.0	-38.26	Peak	240.00	100	Vertical	Pass

Report No.: TW2210014E Page 26 of 38

Date: 2022-10-19

2**

2483.392

46.31

-3.57

54.0



			Č			Polarity		Horizo			
Mode		Keeping Transmi				Test Vol	tage	e DC5.0V			
Temperature	nperature 24 deg. C,			24 deg. C,			ity	56% RH			
Test Result:			Pass								
Part 15C Class B 1GHz-18GHz	:-2										
90- 80- 70-											
50- 40- 30- 20- 10- 2470			2483.5	Frequency (MHz)					2500		
50 - 40 - 30 - 20 - 10 - 0.0	Results	Factor		Frequency (MHz) Over Limit	Detector	Table	Height	ANT	ı		
50- 40- 30- 20- 10- 2470	Results (dBuV/m)	Factor (dB)	F		Detector	Table (o)	Height (cm)	ANT	2500 Verd		
30- 20- 10- 2470 No. Frequency			Limit	Over Limit	Detector Peak			ANT	ı		

-7.69

ΑV

98.00

100

Horizontal

Pass

Report No.: TW2210014E Page 27 of 38



I	Product:		Mo	ouse Dongle		Detecto	or	Vertical				
	Mode Keeping Transm				ng		Test Voltage		DC5.0V			
Te	mperature		2	24 deg. C,			Humidi	ty	56% RH			
Te	est Result:			Pass								
C Part 1 1.0E+2	5C Class B 1GHz-18GHz	-2										
90	0-											
80	0-		M1									
70	0-		,	An.								
				KMM u								
60	0-			AUU N.								
_					<u> </u>							
_	0-						ud eth linusa	منال الله		1111		
_	0-								helinek was da jida jida jida jida jida jida jida j	1111111		
50 40	0-								halfaath,aisaach-alda-daifhba	I M. J.i.		
50 40 30 20									kilonikoisen koolen, kietoloo	111.114		
50 40 30 20									kiloshana da ba la	11/11		
50 40 30 20				2483.5 Fre	equency (MHz)				<u> </u>	2500		
5(4) 4(4) 3(7) 2(7) 1(7)		Results	Factor		equency (MHz) Over Limit	Detector	Table	Height	ANT	2500		
5(4) 4(4) 3(1) 2(1) 0.0	0-	Results (dBuV/m)	Factor (dB)	Fre	1							
50 40 30 20	Frequency			Limit	Over Limit		Table	Height		2500		

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

Report No.: TW2210014E Page 28 of 38

Date: 2022-10-19



8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a PCB antenna. The antenna gain is -2.36dBi Max. It fulfills the requirement of this section. Test Result: Pass

Report No.: TW2210014E Page 29 of 38



9.0 20dB Bandwidt	h Measurement								
Product:	M	Mouse Dongle			est Mode:	Keep transmitting			
Mode	Keep	Keeping Transmitting				DC5.0V			
Temperature		24 deg. C,		Humidity Detector			56%	RH	
Test Result:		Pass					PK		
20dB Bandwidth		2.174MHz							
(R)	Marker	1 [T1 ndB]	R	BW	100 ki	Hz RI	F Att	20 dB	
Ref Lvl	ndB	20.00 dB		BW	300 ki			_	
10 dBm	BW	2.17434870 MHz	S	WT	5 ms	s Uı	nit	dBm	1
					v ₁	[T1]	- 9	.75 dBm	A
0								509 GHz	
					ndB BW		20	.00 dB 870 MHz	
1.0			1		$oldsymbol{ abla}_{\mathrm{T1}}$	[T1]	-29	.74 dBm	
-10		\					2.40096	293 GHz	
				\neg	$ abla_{\mathrm{T2}}$	[T1]	-29	.70 dBm	
-20					\sim		2.40313	727 GHz	1MA
	T				\-\	<u>F2</u>			
-30						(
-40						<u>~</u>			
50	~~						\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	American de la constitución de l	
-50									
-60				\dashv					
-70			1						
-80									
-90								_	ļ
Center 2.	402 GHz	500	kHz/				Spa	n 5 MHz	
Date: 14.	OCT.2022 1	1:05:22							

Page 30 of 38

Report No.: TW2210014E



Product:	Mouse Dongle			Test N	Iode:							
Mode	Keepin	Keeping Transmitting			oltage		DC5.0V					
Temperature	2	4 deg. C,		Hum	idity	56% RH		RH				
Test Result:		Pass		Dete	ctor		PK					
20dB Bandwidth	2.	208MHz			-							
Ŕ	Delta 1	[T1]	F	BW 1	00 kH	z RI	7 Att	20 dB				
Ref Lvl		-0.56			00 kH							
10 dBm	2	2.20841683	MHz S	WT	5 ms	Ur	nit	dBm				
					v 1 [[T1]	-29	.04 dBm	A			
							2.43894	289 GHz				
0					<u>1</u> [T1]	- C	.56 dB				
			2 V		∇2 [TT 1	2.20841	683 MHz .47 dBm				
-10		/	V V				2.44005					
				\searrow								
-20									1MA			
	<u> </u>				/m	1			IMA			
-30 D1 -29	47 dBm	,				1						
-40	han han					W.	<u> </u>					
								"Malle				
-50								WILL				
-60												
-00												
-70												
- 70												
-80												
-90												
Center 2	2.44 GHz	•	500 kHz/	•	<u>'</u>		Spa	n 5 MHz				
Date: 14	4.OCT.2022 14	:01:50										

Page 31 of 38

Report No.: TW2210014E



Product:	t: Mouse Dongle				Test Mode:			Keep transmitting			
Mode					Test V	Voltage	,	DC	5.0V		
Temperature		24 deg. C,			Humidity			56% RH			
Test Result:		Pass			Detector		PK				
20dB Bandwidth		2.214MHz									
	Del	ta 1 [T1]		RE	sw :	100 k	Hz	RF Att	20 dB		
Ref Lvl			31 dB	VE	sw :	300 k					
10 dBm		2.214428	886 MHz	SW	ΙΤ	5 m	ıs	Unit	dBm	1	
10						\mathbf{v}_1	[T1]	-29	.46 dBm	,	
								2.47893	287 GHz	A	
0						<u>1</u>	[T1]	C	.31 dB		
				2		∇ ₂		2.21442			
-10						v 2	[T1]	2.48005	.14 dBm 511 GHz		
					$\sqrt{}$			2.46003	SII GHZ		
-20 1MAX		1//~/			\sim	٧,	$\sqrt{1}$			1MA	
-30 -D1 -29.	14 dBm-	/ /					+				
-40							کر				
-40								~	~~~		
-50											
-60											
-70											
-80											
-90 Center 2	.48 GHz		500	kHz/				Spa	n 5 MHz		
Date: 14	1.OCT.2022	14:28:19									

Report No.: TW2210014E Page 32 of 38

Date: 2022-10-19




10.0 FCC ID Label

FCC ID: 2A74I-TLL491161D

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

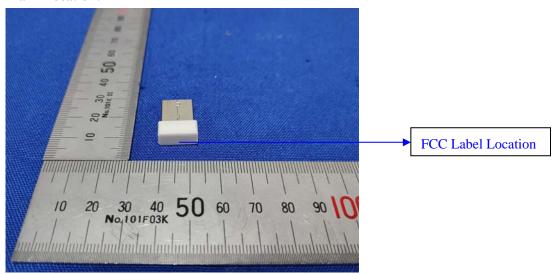


Report No.: TW2210014E Page 33 of 38

Date: 2022-10-19



11.0 Photo of testing

11.1 Conducted test View--

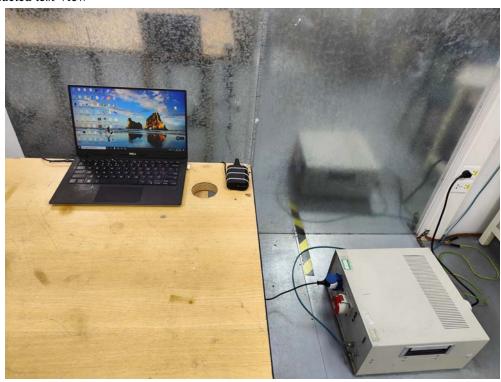

Page 34 of 38

Report No.: TW2210014E

Date: 2022-10-19



Radiated emission test view



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2022-10-19



11.2 Photographs – EUT

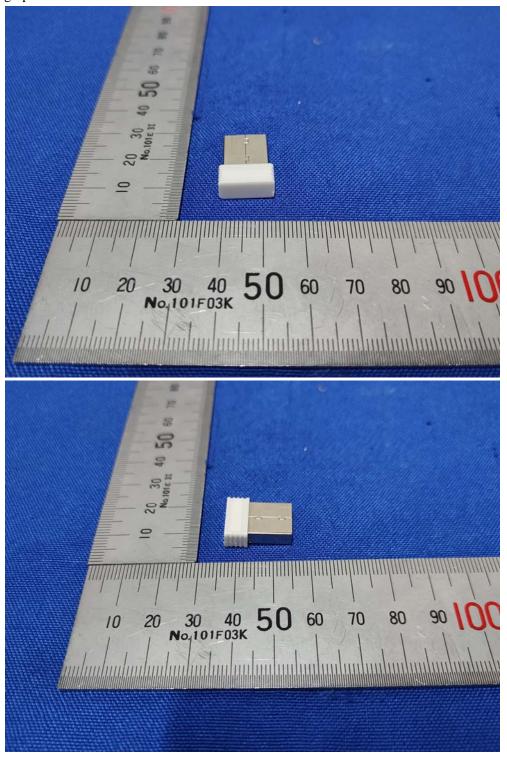


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2022-10-19



Photographs-EUT

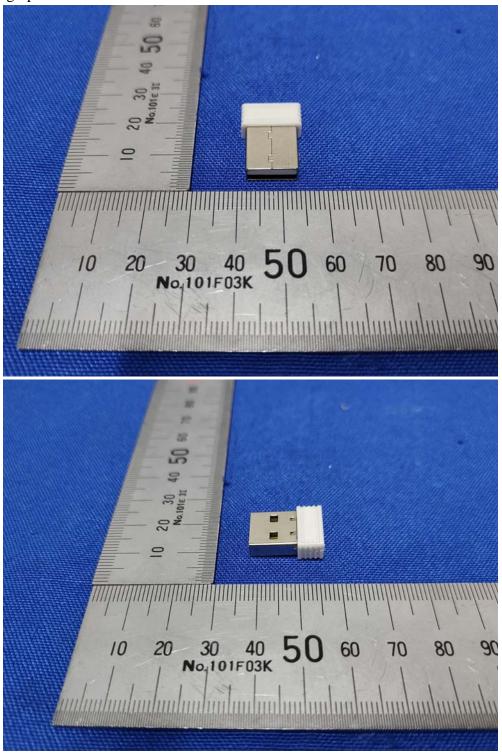

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 37 of 38

Report No.: TW2210014E

Date: 2022-10-19



Photographs - EUT

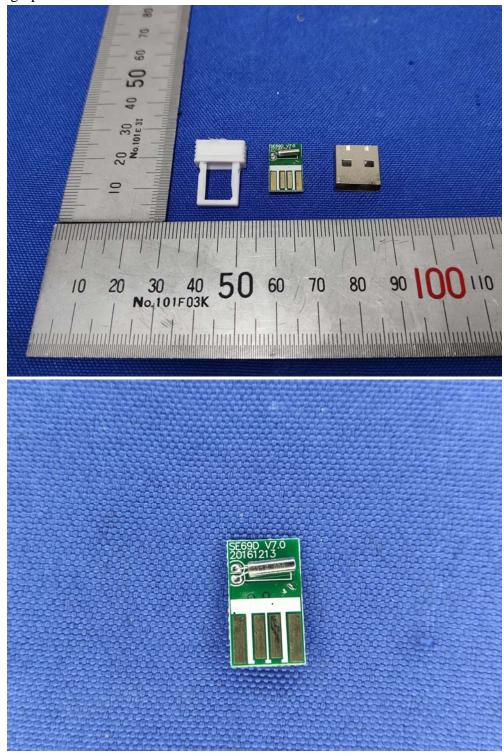

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2210014E Page 38 of 38

Date: 2022-10-19



Photographs-EUT

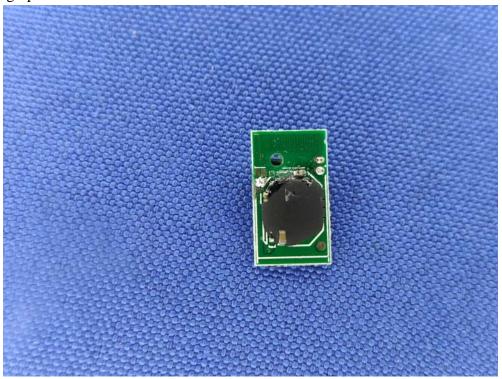

---End of the Report--