

Test report No: 4394326.50

TEST REPORT

Radio Spectrum Matters (RF)

Identification of item tested	Module
Trademark	/
Model and /or type reference	ZXWCAK801AE-M3-01
FCC ID	PUU-CAN06DW
Features	3.3 Vdc
Applicant's name / address	Savant Technologies LLC dba GE Lighting, a Savant company 1975 Noble Road, Cleveland, Ohio, United States, 44112
Test method requested, standard	FCC CFR Title 47 Part15 Subpart C Section 15.247; KDB558074 D01v05r02;
Verdict Summary	COMPLIANCE
Tested by (name & signature)	Johnny Bo
Approved by (name & signature)	Jazz Liang
Date of issue	2023-02-05
Report template No	TRF_EMG 2017-06- FCC_Part15C_247

INDEX

	page
General conditions.....	4
Uncertainty.....	4
Environmental conditions.....	4
Possible test case verdicts	4
Definition of symbols used in this test report.....	5
Abbreviations	5
Document History	5
Remarks and Comments	5
1 General Information.....	6
1.1 General Description of the Item(s)	6
1.2 Test data	7
1.3 The environment(s) in which the EUT is intended to be used	7
1.4 Channel List	7
2 Description of Test Setup	8
2.1 Operating mode(s) used for tests.....	8
2.2 Support / Auxiliary equipment / unit / software for the EUT	8
2.3 Test Configuration / Block diagram used for tests	8
2.4 Measurement procedure	8
3 Verdict summary section	9
3.1 Standards	9
3.2 Deviation(s) from the Standard(s) / Test Specification(s)	9
3.3 Overview of results.....	9
4 Transmitter Test Results	10
4.1 AC Power Line Conducted Emission	10
4.2 Emissions in non-restricted frequency bands	13
4.3 Emissions in restricted frequency bands	22
4.4 Band Edge.....	29
4.5 Duty cycle.....	32
4.6 DTS Bandwidth	34
4.7 Fundamental emission output power	37
4.8 Power Density	40
5 Identification of the Equipment Under Test	43
Annex 1 – Measurement Uncertainty	44
Annex 2 - Used Equipment.....	45

Annex 3 - Test Photos46

GENERAL CONDITIONS

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.
5. This report will not be used for social proof function in China market.

UNCERTAINTY

For all measurements where guidance for the calculation of the instrumentation uncertainty of a measurement is specified in EN 55016-4-2 (CISPR 16-4-2), EN/IEC 61000-4 series or a product standard, the measurement instrumentation uncertainty has been calculated and applied in accordance with these standards.

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	-40 °C – 105 °C
Relative Humidity air	30% - 60%
Atmospheric pressure	86 kPa – 106 kPa

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not tested	N/T

DEFINITION OF SYMBOLS USED IN THIS TEST REPORT

<input checked="" type="checkbox"/> Indicates that the listed condition, standard or equipment is applicable for this report/test/EUT.			
<input type="checkbox"/> Indicates that the listed condition, standard or equipment is not applicable for this report/test/EUT.			
Decimal separator used in this report	<input checked="" type="checkbox"/>	Comma (,)	<input type="checkbox"/> Point (.)

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
T_x	: Transmitter
R_x	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report nr.	Date	Description
4394326.50	2023-02-05	First release.

REMARKS AND COMMENTS

The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Description of the item	Module
Trademark.....	/
Model / Type number	ZXWCAK801AE-M3-01
FCC ID	PUU-CAN06DW
PMN	Module
HVIN	ZXWCAK801AE-M3-01
FVIN.....	N/A
Hardware	Witch-AK801-A1.0
Software.....	N/A
Firmware	Witch-AK801-A1.0
Ratings.....	3.3 Vdc
Manufacturer.....	Same as applicant
Factory	Same as applicant

The product contains wireless RF module and the characteristics of wireless module for BLE mode:

Operating frequency range(s).....	2402 MHz – 2480 MHz
Type of Modulation	GFSK
Maximum e.i.r.p	-2.6 dBm
Antenna type.....	Integral PCB Antenna
Operating Temperature Range.....	-40 °C – 105 °C
Antenna gain.....	2.1 dBi
Adaptive/ non-adaptive equipment	Adaptive

Rated power supply	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	DC:					
	<input checked="" type="checkbox"/>	Battery: 3.3 Vdc					
Mounting position.....	<input type="checkbox"/>	Table top equipment					
	<input type="checkbox"/>	Wall/Ceiling mounted equipment					
	<input type="checkbox"/>	Floor standing equipment					
	<input type="checkbox"/>	Hand-held equipment					
	<input checked="" type="checkbox"/>	Other: Built-in					

Intended use of the Equipment Under Test (EUT)
The apparatus as supplied for the test is Module intended for residential use.
Model ZXWCAK801AE-M3-01 was chosen for full test.

Copy of marking plate:
No provide.

1.2 Test data

Test Location	DEKRA Testing and Certification (Shanghai) Ltd. Guangzhou Branch Block 5, No.3, Qiyun Road, Huangpu District, Guangzhou, Guangdong, China FCC Designation Number: CN1324;
Date of receipt of test item	2022-09-29
Date (s) of performance of tests	2022-09-29 to 2022-10-28
Test sample	Normal sample: ZXWCAK801AE-M3-01 (lab on.4394326-1) RF conducted sample: ZXWCAK801AE-M3-01 (lab on.4394326-2) RF radiated sample: ZXWCAK801AE-M3-01 (lab on.4394326-3)

1.3 The environment(s) in which the EUT is intended to be used

The equipment under test (EUT) is intended to be used in the following environment(s):

<input checked="" type="checkbox"/>	Residential (domestic) environment.
<input checked="" type="checkbox"/>	Commercial and light-industrial environment.
<input type="checkbox"/>	Industrial environment.

1.4 Channel List

The radio module (Bluetooth) operating channels are:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466
5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474
9	2420	23	2448	37	2476
10	2422	24	2450	38	2478

11	2424	25	2452	39	2480
12	2426	26	2454	-	-
13	2428	27	2456	-	-

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Operating mode	Operating mode description	Used for methos	
		Conducted	Radiated
1	Transmitting at BLE	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
2			
3			
4			
<u>Supplemental information:</u> ---			

2.2 Support / Auxiliary equipment / unit / software for the EUT

The EUT has been tested with the following auxiliary equipment / unit / software:

Auxiliary equipment / unit / software	Type / Version	Manufacturer	Supplied by
Laptop	Latitude 5488	DELL	DEKRA
EMI Test Tool (soft ware)	V1.1	-	Client
<u>Supplemental information:</u> ---			

2.3 Test Configuration / Block diagram used for tests

Refer to Annex 3.

2.4 Measurement procedure

The EUT was controlled by a serial PCB(TELINK BDT) which provided by manufacturer which connected to laptop through the com port. After connected, run the software "EMI Test Tool V1.1" supplied by manufacturer to control the EUT work in required test mode as below table.

RF Mode	Set_channel(MHz)
BLE_1M	2402
	2440
	2480

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C Section 15.247	2022	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
KDB 558074 D01 v05r02	2019	Guidance for performing compliance measurements on Digital Transmission System (DTS) operating under section 15.247
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

3.3 Overview of results

FCC measurement			
Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	FCC 15.207	PASS	---
Emissions in non-restricted frequency bands	FCC 15.247(d), FCC 15.209	PASS	---
Emissions in restricted frequency bands	FCC 15.247(b)(3)	PASS	---
Duty cycle	ANSI C63.10:2013	PASS	---
Band Edge	FCC 15.247(d)	PASS	---
Fundamental emission output power	FCC 15.247(d), FCC 15.209	PASS	---
DTS Bandwidth	FCC 15.247(a)(2)	PASS	---
Power Spectral Density	FCC 15.247(e)	PASS	---
Antenna Requirement	FCC 15.203	PASS	---
Supplementary information: ---			

The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to calculate the uncertainty associated with the measurement result.

4 TRANSMITTER TEST RESULTS


4.1 AC Power Line Conducted Emission	VERDICT: PASS
---	----------------------

Limits

FCC Part 15 Subpart C Paragraph 15.207				
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾	Limit: AV [dB(μV) ¹⁾	IF BW	Detector(s)
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾	9 KHz	QP, AV
0,50 - 5,0	56	46	9 KHz	QP, AV
5,0 - 30	60	50	9 KHz	QP, AV

¹⁾ At the transition frequency, the lower limit applies.
²⁾ The limit decreases linearly with the logarithm of the frequency.

Test Configuration

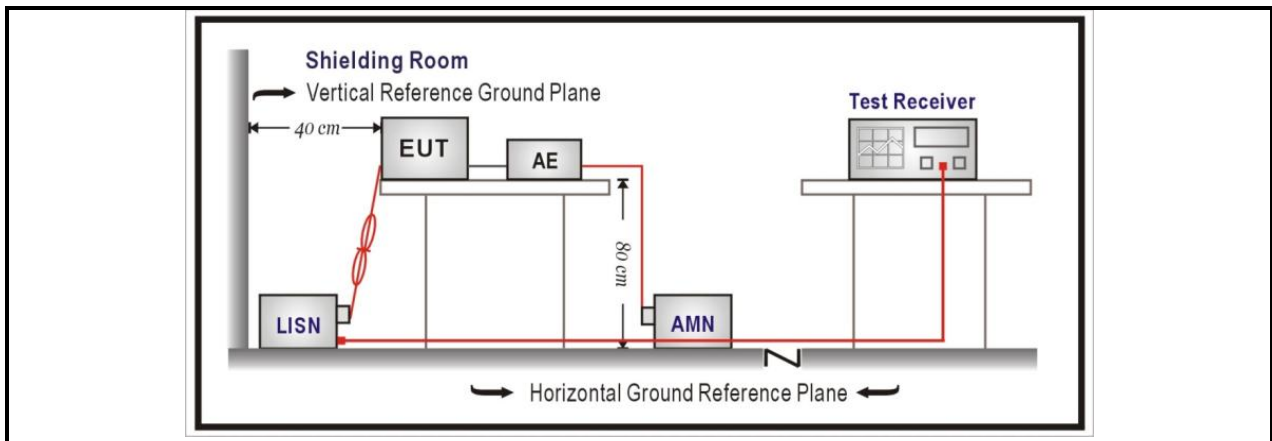


Performed measurements

Port under test		Terminal							
<input checked="" type="checkbox"/>	AC mains input power	<input checked="" type="checkbox"/>	N	<input checked="" type="checkbox"/>	L1	<input type="checkbox"/>	L2	<input type="checkbox"/>	L3
<input type="checkbox"/>	DC input power	<input type="checkbox"/>	Positive (+)	<input type="checkbox"/>	Negative (-)				
Test method applied	<input checked="" type="checkbox"/>	Artificial mains network							
	<input type="checkbox"/>	Voltage probe							
Test setup	<input checked="" type="checkbox"/>	Table top	<input type="checkbox"/>	Artificial hand applied					
	<input type="checkbox"/>	Floor standing	<input type="checkbox"/>	Other:					
Refer to the Annex 2 for test setup photo(s).									
Operating mode(s) used	Mode 1								
Environment condition (temperature; humidity)	23,0 °C; 45,0 %								
Remark	---								

Model	ZXWCAK801AE-M3-01
Operation Mode (worst case)	Mode 1
Test voltage	120Vac, 60Hz

Results

Live

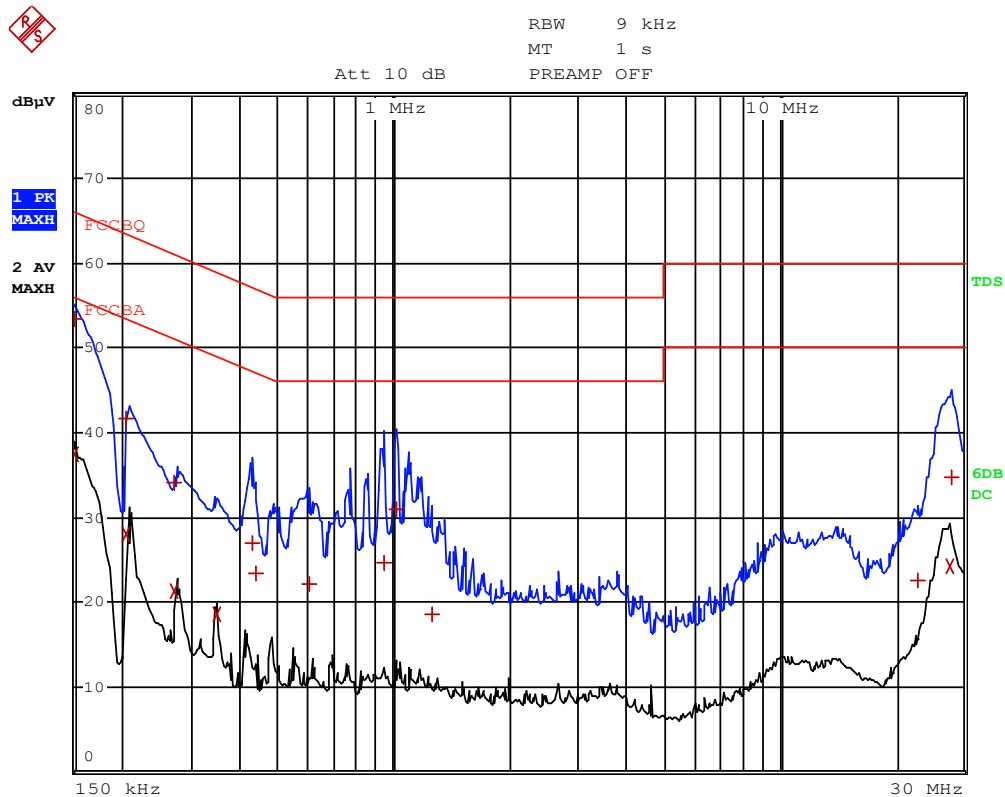


EDIT PEAK LIST (Final Measurement Results)			
TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
Trace1:	FCCBQ		
Trace2:	FCCBA		
Trace3:	---		
1 Quasi Peak	150 kHz	53.51	-12.48
2 Average	150 kHz	37.42	-18.57
1 Quasi Peak	206 kHz	41.71	-21.65
1 Quasi Peak	1.014 MHz	30.86	-25.13
2 Average	206 kHz	28.12	-25.24
1 Quasi Peak	27.806 MHz	34.66	-25.33
2 Average	27.67 MHz	24.34	-25.66
1 Quasi Peak	274 kHz	34.02	-26.97
2 Average	274 kHz	21.31	-29.67

Remarks:

- 1) Level (final measurement) = received value + transducer (Lisn+cable)
- 2) Delta = Level – Limit

No other significant emissions were measured at the frequency range of interest employing both the QP and AV detectors.

Neutral

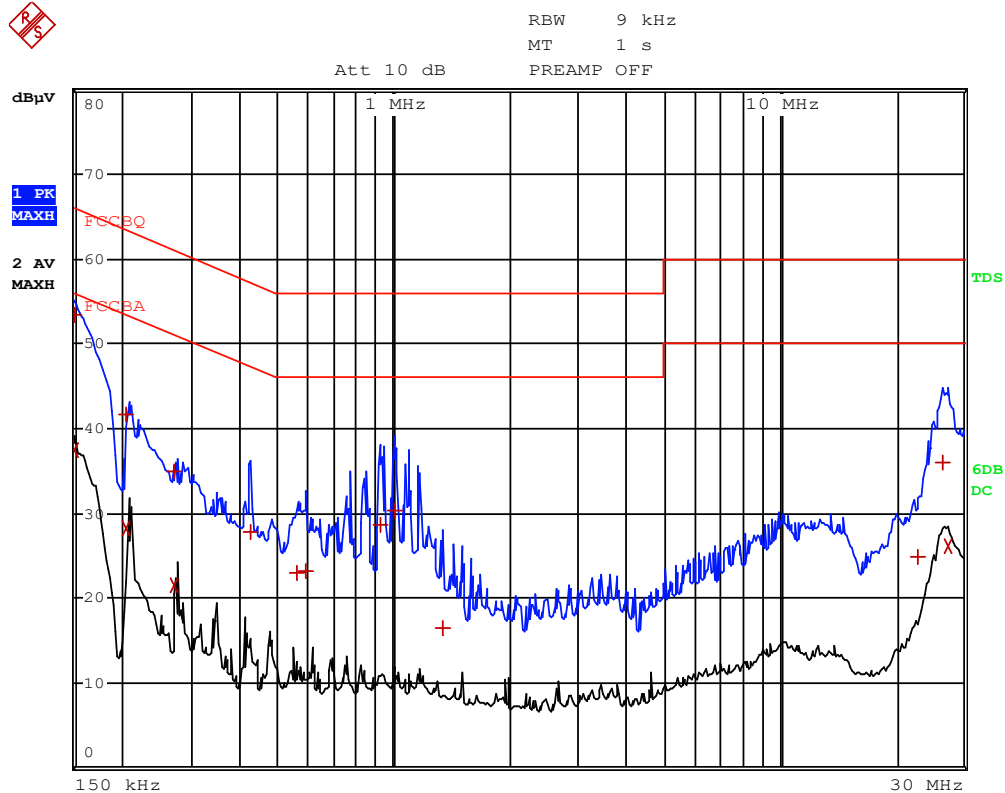

EDIT PEAK LIST (Final Measurement Results)			
TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
Trace1:	FCCBQ		
Trace2:	FCCBA		
Trace3:	---		
1 Quasi Peak	150 kHz	53.47	-12.52
2 Average	150 kHz	37.44	-18.55
1 Quasi Peak	206 kHz	41.67	-21.69
2 Average	27.33 MHz	26.22	-23.77
1 Quasi Peak	26.43 MHz	35.94	-24.05
2 Average	206 kHz	28.28	-25.07
1 Quasi Peak	1.006 MHz	30.39	-25.60
1 Quasi Peak	274 kHz	34.86	-26.12
1 Quasi Peak	922 kHz	28.57	-27.42
2 Average	274 kHz	21.52	-29.47
1 Quasi Peak	422 kHz	27.84	-29.56
1 Quasi Peak	590 kHz	23.10	-32.89
1 Quasi Peak	558 kHz	23.08	-32.91
1 Quasi Peak	22.91 MHz	24.85	-35.14
1 Quasi Peak	1.346 MHz	16.48	-39.51

Remarks:

- 1) Level (final measurement) = received value + transducer (Lisn+cable)
- 2) Delta = Level – Limit

No other significant emissions were measured at the frequency range of interest employing both the QP and AV detectors.


4.2 Emissions in non-restricted frequency bands	VERDICT: PASS
--	----------------------

Emissions Limit 15.209(a)			
Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Field strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 ^(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 ^(Note 1)
1.705 - 30	30	29.5	30 ^(Note 1)
30 - 88	100	40	3 ^(Note 2)
88 - 216	150	43.5	3 ^(Note 2)
216 - 960	200	46	3 ^(Note 2)
Above 960	500	54	3 ^(Note 2)

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

Test Configuration

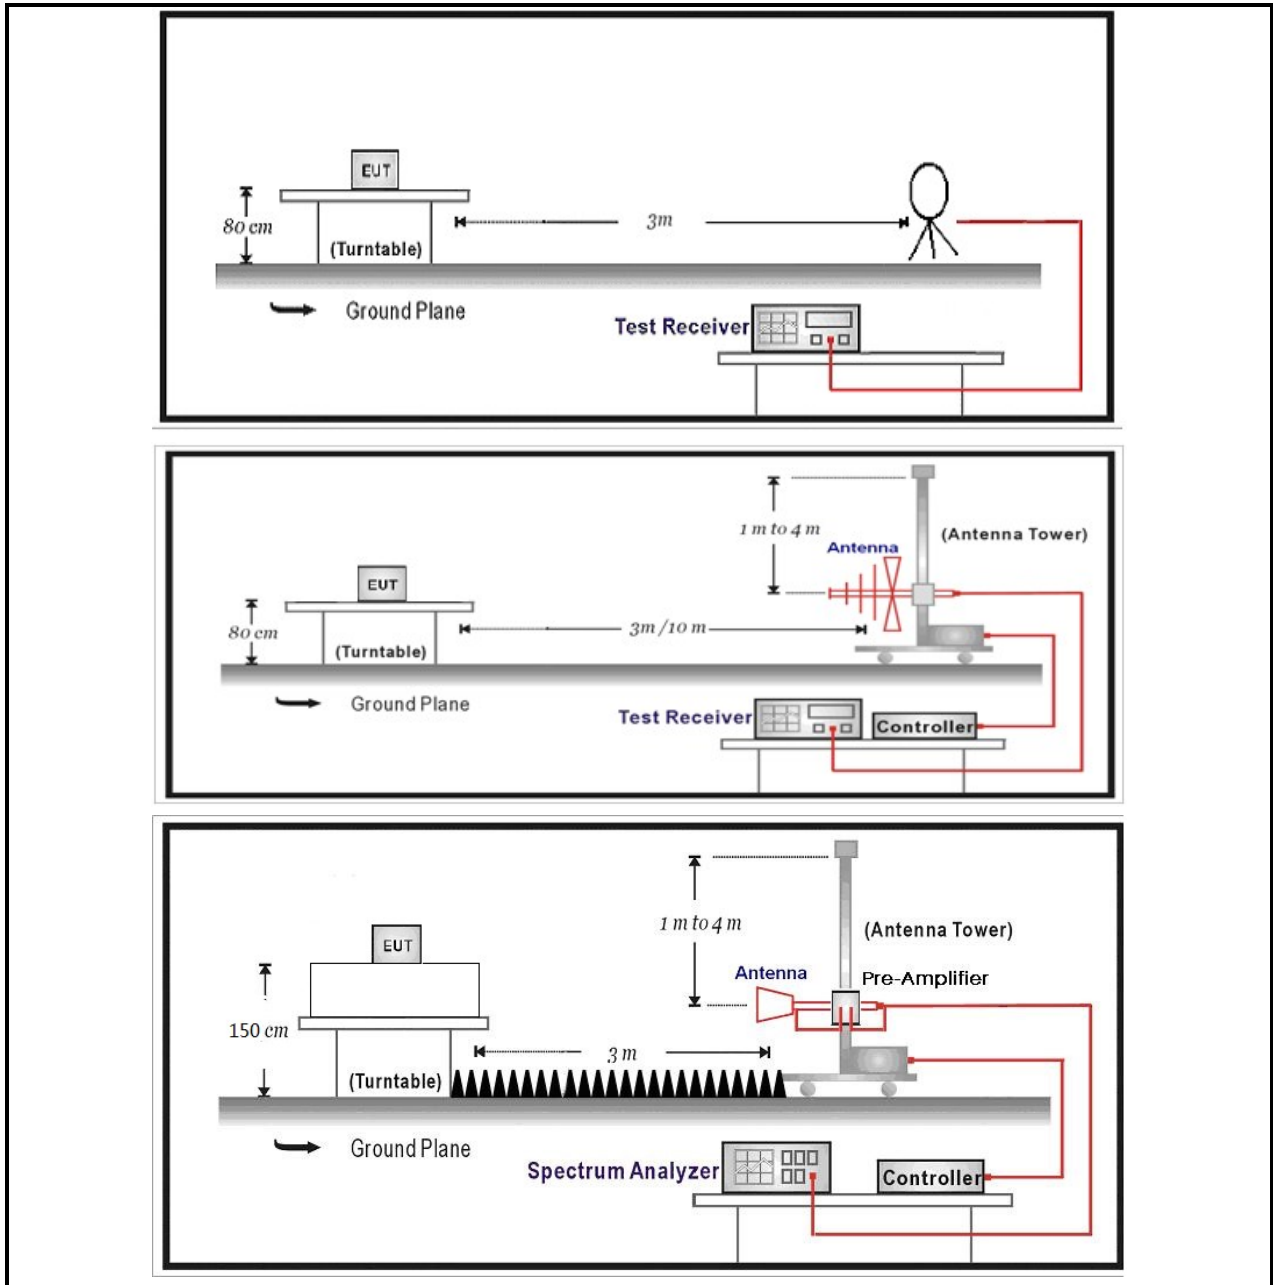

Performed measurements


Port under test	Enclosure port	
Test method applied	<input type="checkbox"/>	Conducted measurement
	<input checked="" type="checkbox"/>	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 1	
Remark	<p>1)The test frequency range, 9kHz~30MHz, 18GHz~26GHz, both of the worst case are at least 20dB below the limits, therefore no data appear in the report.</p> <p>2)The EUT are tested in three orientations. The record is the worst orientation which refer to the Annex 3 for test setup photo(s).</p>	

Results of 30 – 1000 MHz

Model	ZXWCAK801AE-M3-01
Operation Mode	Mode 1
Test voltage	120Vac, 60Hz

Results

Horizontal

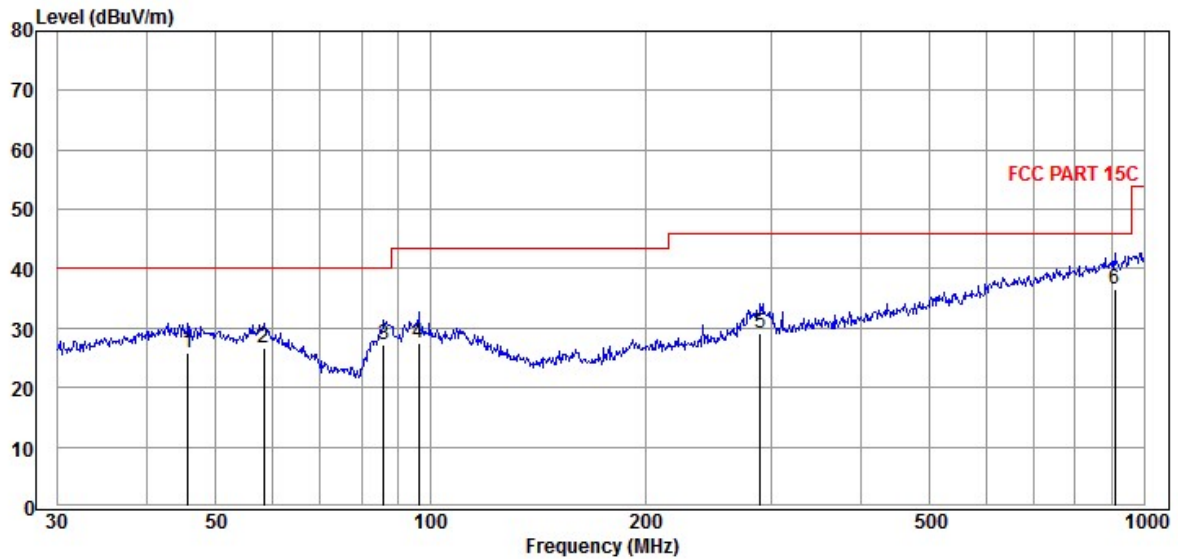


Freq (MHz)	Reading (dBuV)	C.F (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin=limit-result (dB)
45.70	10.13	15.63	25.76	40.00	14.24
58.41	10.71	16.03	26.74	40.00	13.26
85.90	17.09	10.26	27.35	40.00	12.65
96.10	14.32	13.29	27.61	43.50	15.89
290.02	13.22	15.84	29.06	46.00	16.94
909.67	10.27	26.28	36.55	46.00	9.45

Remarks:

- 1) C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
- 2) Result = Reading + C.F (Correction Factor)

No other significant emissions were measured at the frequency range of interest employing the QP detectors.

Vertical

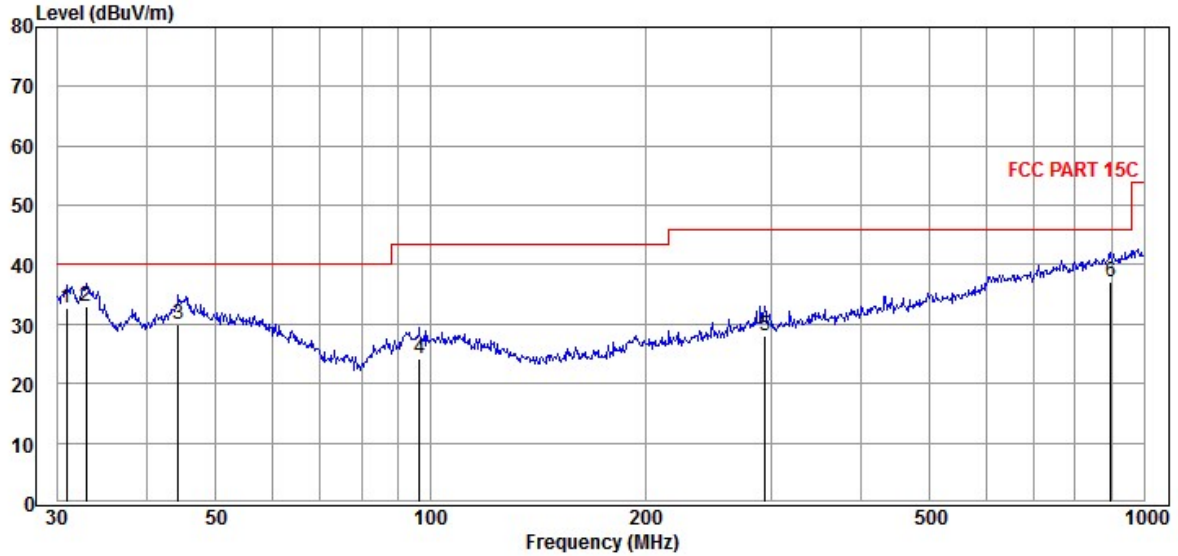

Freq (MHz)	Reading (dBuV)	C.F (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin=limit-result (dB)
30.85	19.45	13.20	32.65	40.00	7.35
32.86	19.23	13.74	32.97	40.00	7.03
44.28	14.17	15.83	30.00	40.00	10.00
96.44	10.97	13.34	24.31	43.50	19.19
294.11	12.26	15.71	27.97	46.00	18.03
897.00	10.75	26.29	37.04	46.00	8.96

Remarks:

- 1) C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
- 2) Result = Reading + C.F (Correction Factor)


No other significant emissions were measured at the frequency range of interest employing the QP detectors.

Results of 1 – 18 GHz

Model	ZXWCAK801AE-M3-01
Operation Mode (worst case)	Mode 1 @2402 MHz
Test voltage	3.3 Vdc

Results


Horizontal

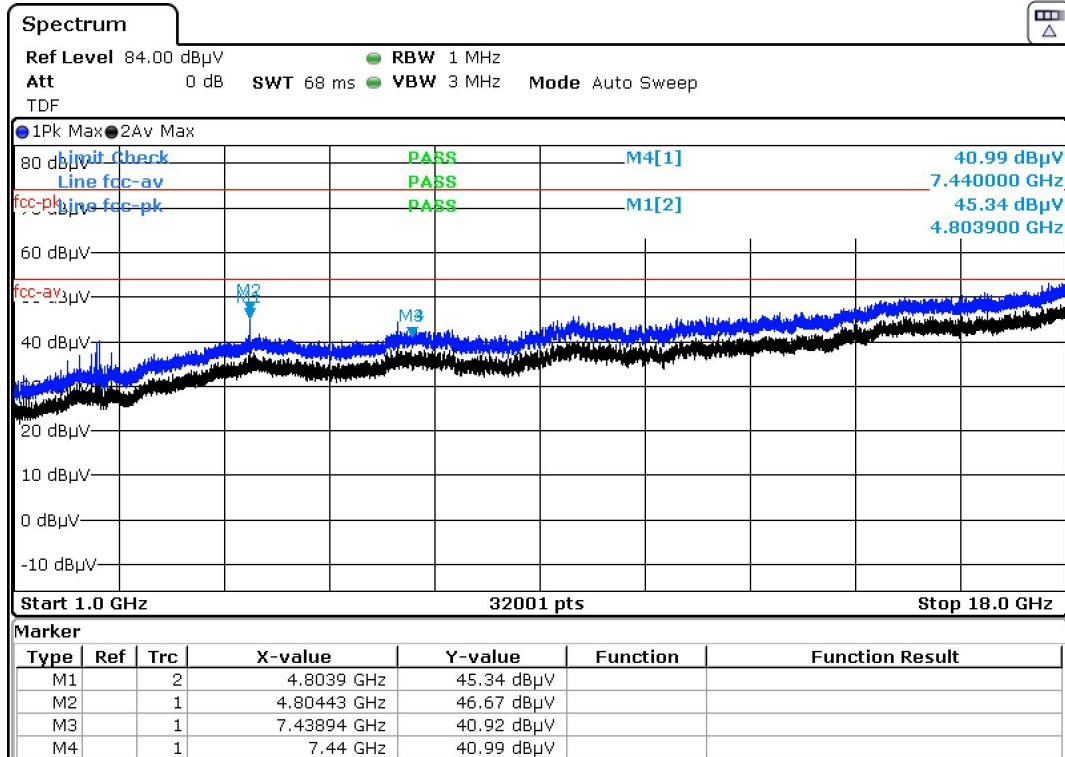

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

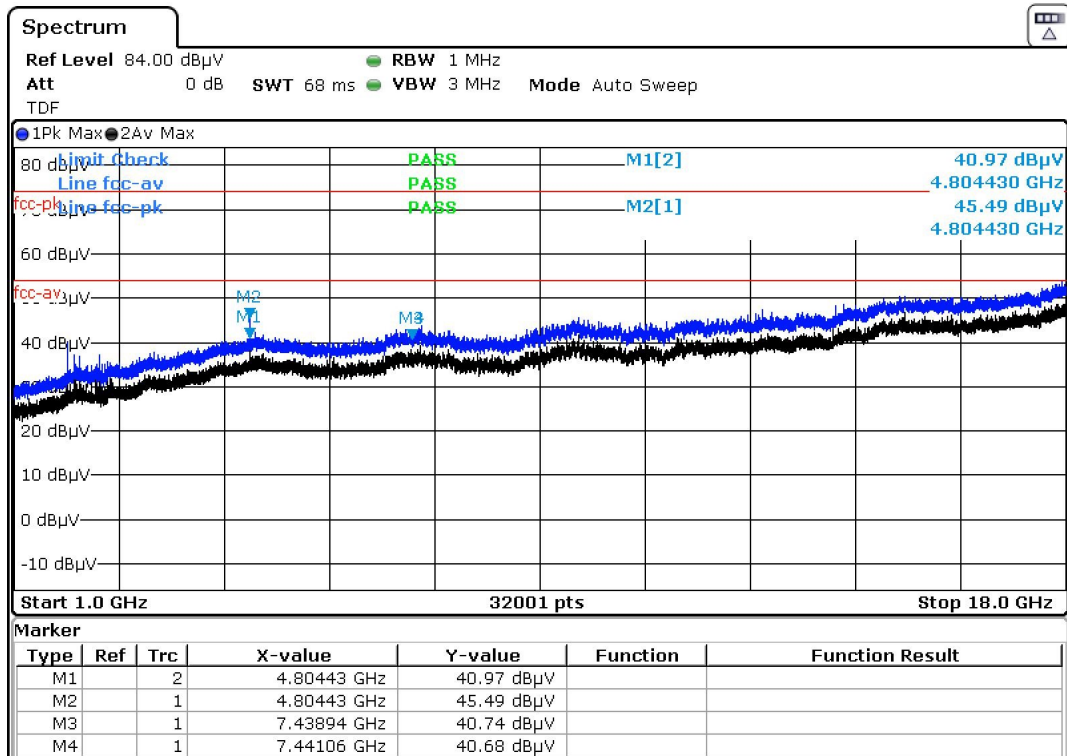


Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	ZXWCAK801AE-M3-01
Operation Mode (worst case)	Mode 1 @2480 MHz
Test voltage	3.3 Vdc

Results


Horizontal

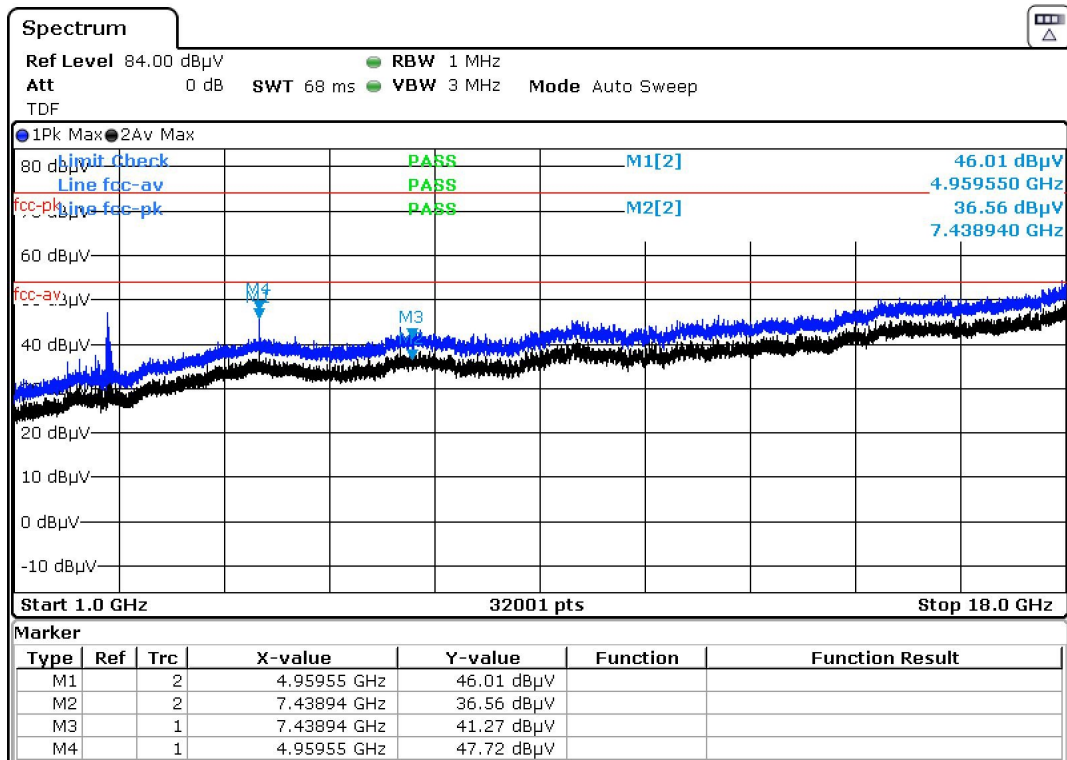

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

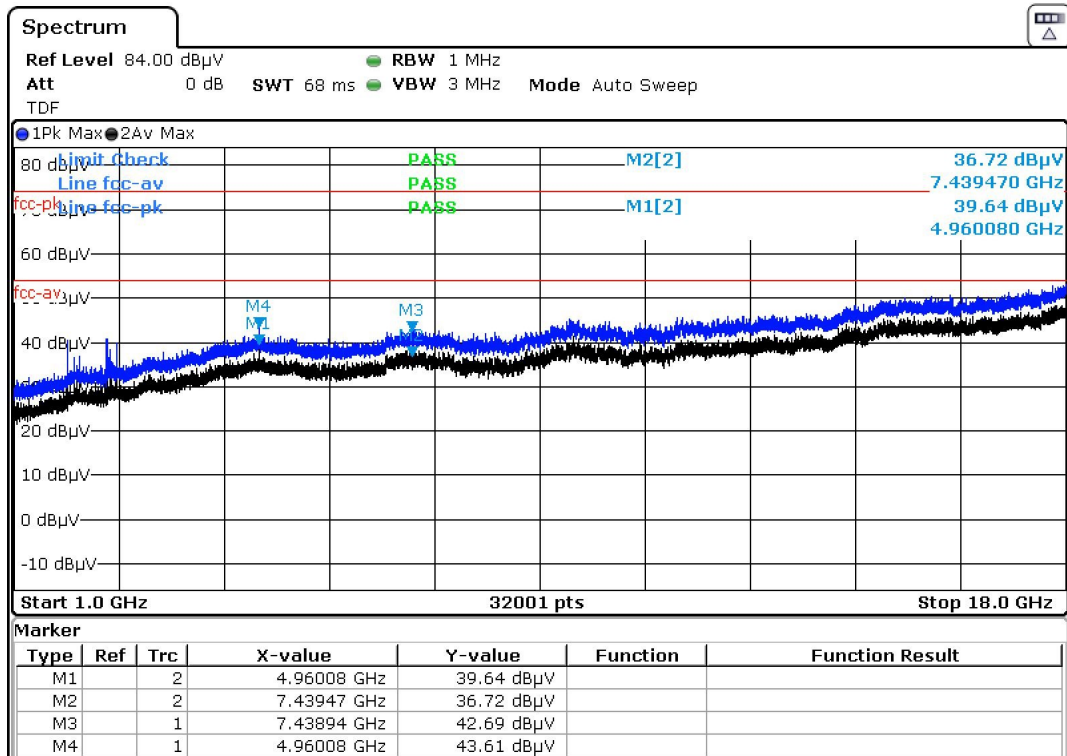

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

4.3 Emissions in restricted frequency bands	VERDICT: PASS
--	----------------------

Restricted Bands of operation of FCC			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			
Restricted Bands of operation for IC			
0.090 - 0.110	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475 - 156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	
8.41425 - 8.41475	240 - 285	5350 - 5460	
12.29 - 12.293	322 - 335.4	7250 - 7750	
12.51975 - 12.52025	399.9 - 410	8025 - 8500	
12.57675 - 12.57725	608 - 614	--	


Restricted Band Emissions Limit

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

Test Configuration

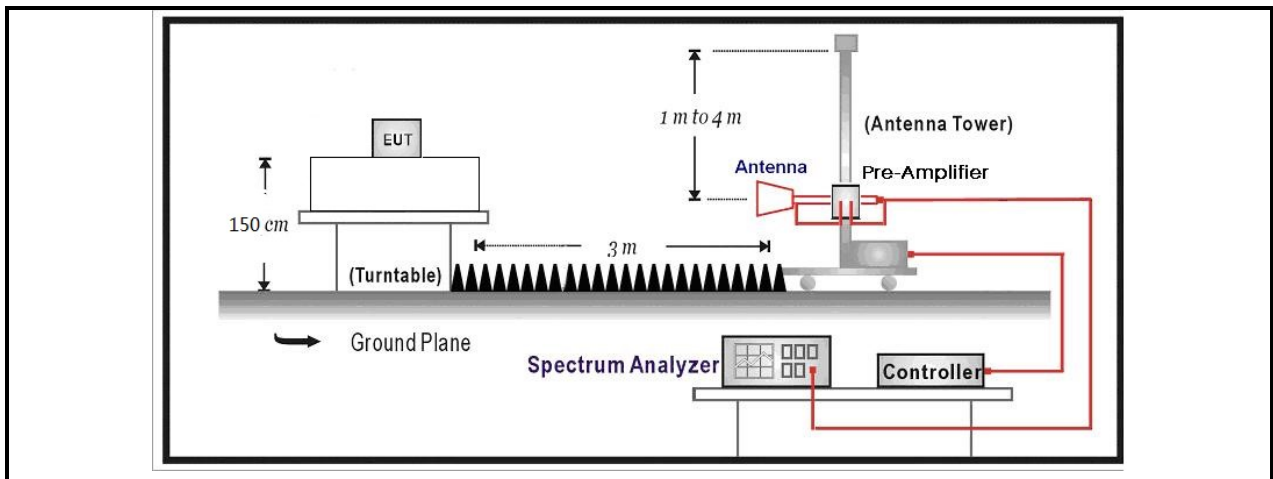


Performed measurements

Port under test	Enclosure port	
Test method applied	<input type="checkbox"/>	Conducted measurement
	<input checked="" type="checkbox"/>	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 1	
Remark	---	

Model	ZXWCAK801AE-M3-01
Operation Mode (worst case)	Mode 1 @2402 MHz
Test voltage	3.3 Vdc

Results


Horizontal

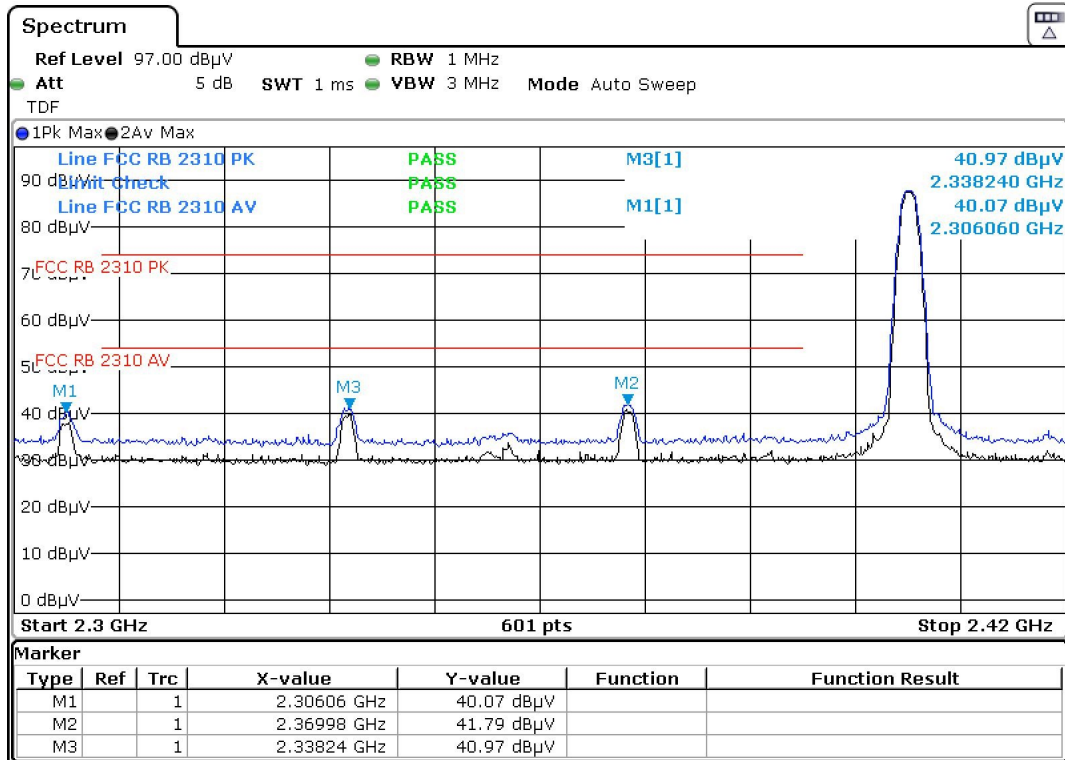

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

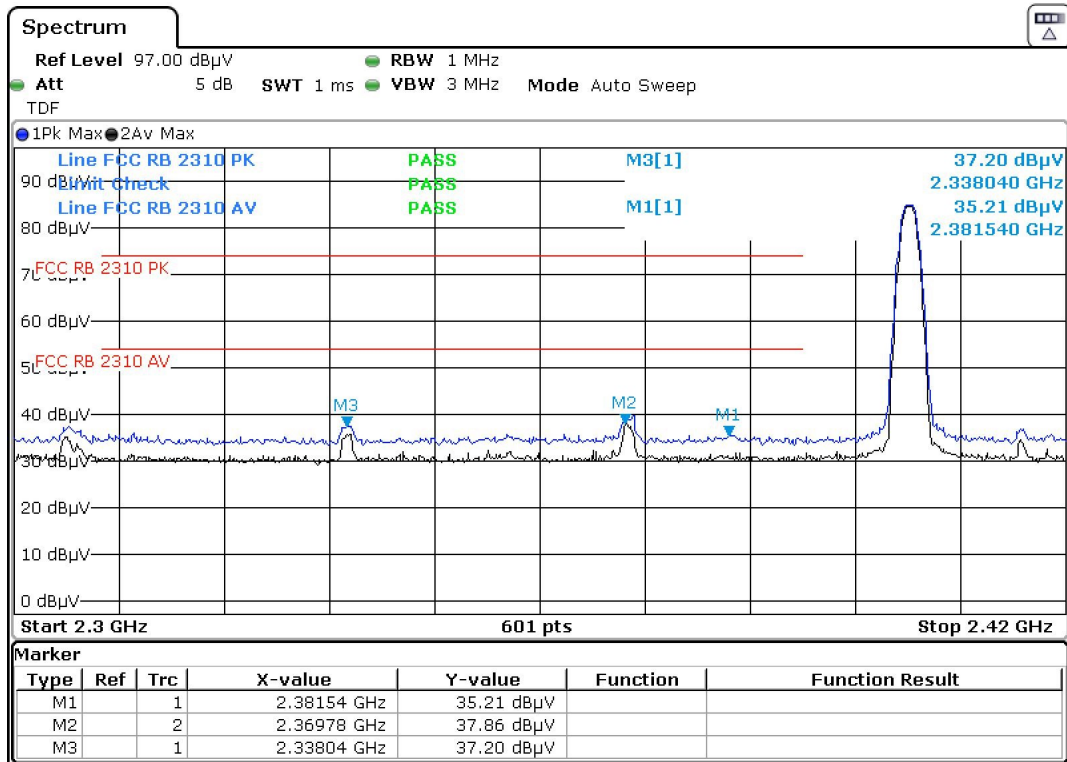


Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Model	ZXWCAK801AE-M3-01
Operation Mode (worst case)	Mode 1 @2480 MHz
Test voltage	3.3 Vdc

Results


Horizontal

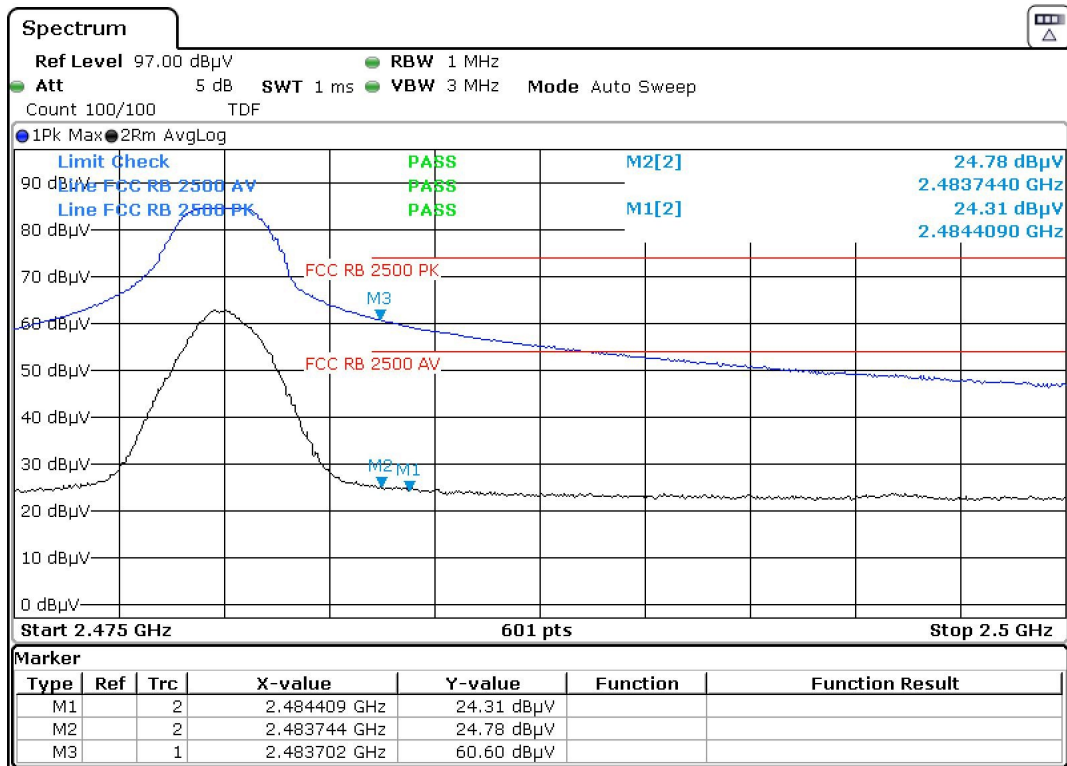

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

Vertical

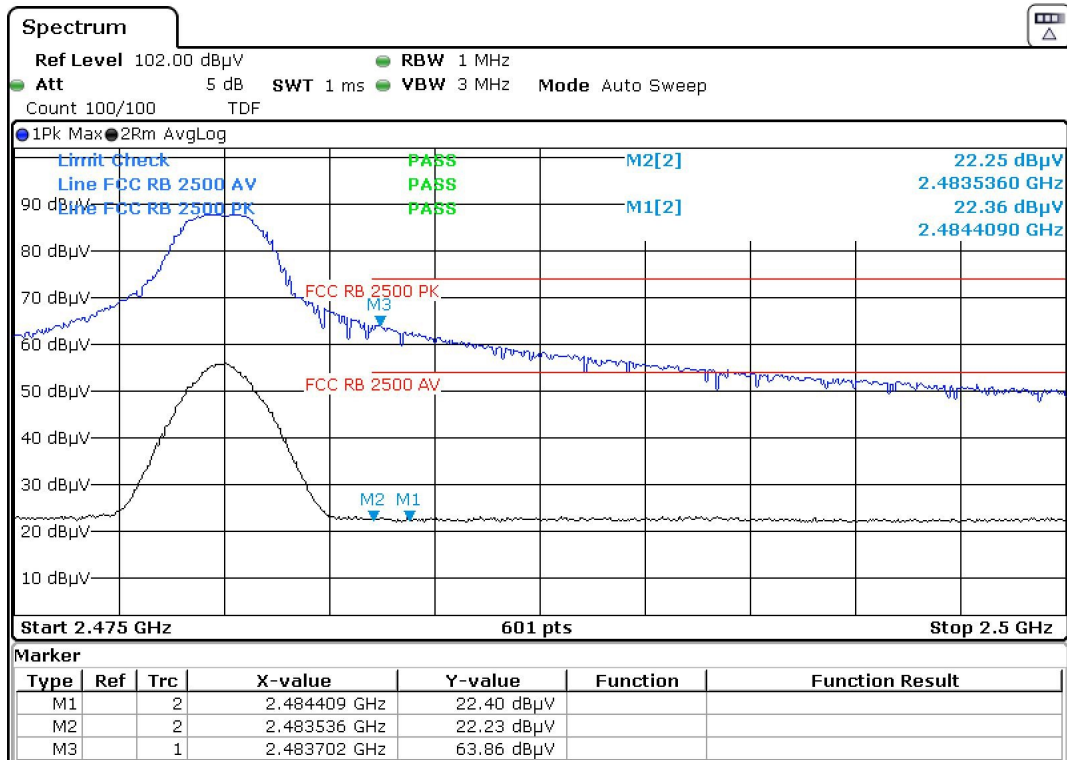


Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)

No other significant emissions were measured at the frequency range of interest employing the PK and AV detectors.

4.4 Band Edge	VERDICT: PASS
----------------------	----------------------

Standard	FCC Part 15 Subpart C Paragraph 15.247(d)
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)
<p>Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD by level in 100 kHz (i.e., 30 dBc).</p> <p>Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD by level in 100 kHz (i.e., 20 dBc).</p>	


Test Configuration

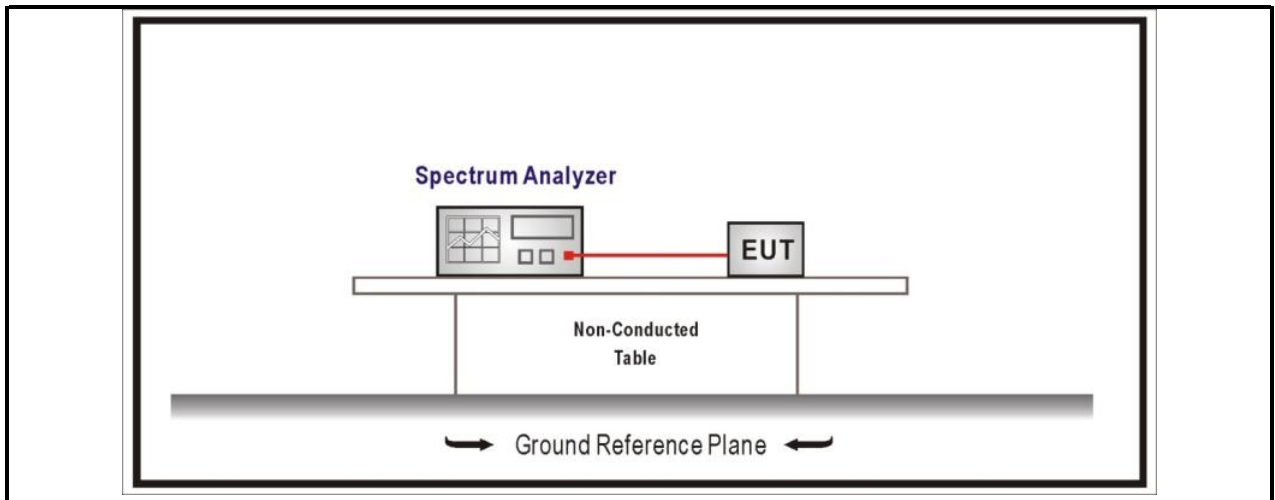

Performed measurements

Port under test	Antenna port
Test method applied	<input checked="" type="checkbox"/> Conducted measurement
	<input type="checkbox"/> Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).
Operating mode(s) used	Mode 1
Remark	---

Results @2402 MHz

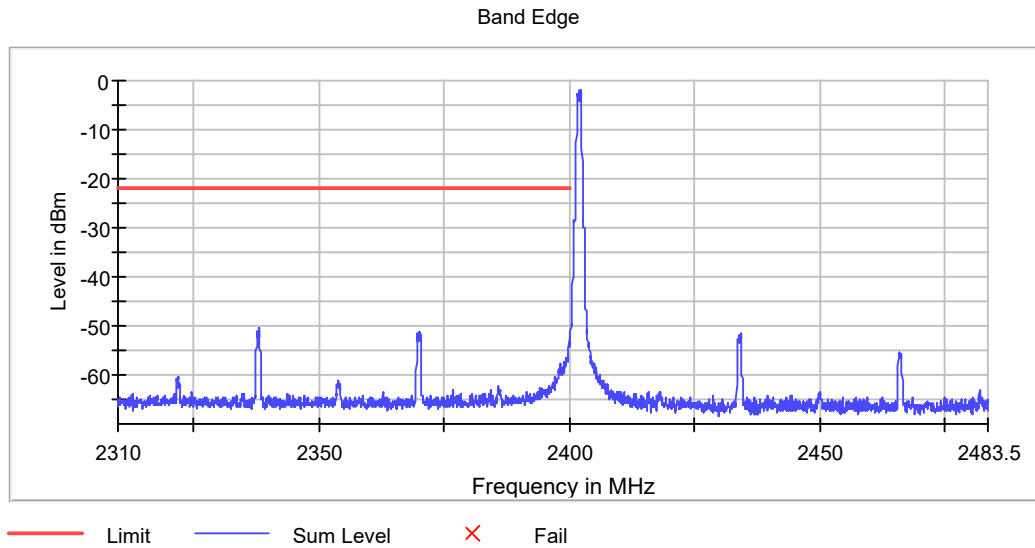


Inband Peak

Frequency (MHz)	Level (dBm)
2412.0000	-1.7

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2338.225000	-50.4	28.7	-21.7	PASS
2338.175000	-50.6	28.9	-21.7	PASS
2337.975000	-51.0	29.2	-21.7	PASS
2370.225000	-51.0	29.3	-21.7	PASS
2338.025000	-51.2	29.4	-21.7	PASS
2337.725000	-51.2	29.5	-21.7	PASS
2337.925000	-51.3	29.6	-21.7	PASS
2337.775000	-51.4	29.6	-21.7	PASS
2369.975000	-51.5	29.8	-21.7	PASS
2370.175000	-51.6	29.8	-21.7	PASS
2338.275000	-51.6	29.9	-21.7	PASS
2369.725000	-51.7	29.9	-21.7	PASS
2369.775000	-51.7	30.0	-21.7	PASS
2338.075000	-51.9	30.1	-21.7	PASS
2370.275000	-51.9	30.1	-21.7	PASS

Results @2480 MHz

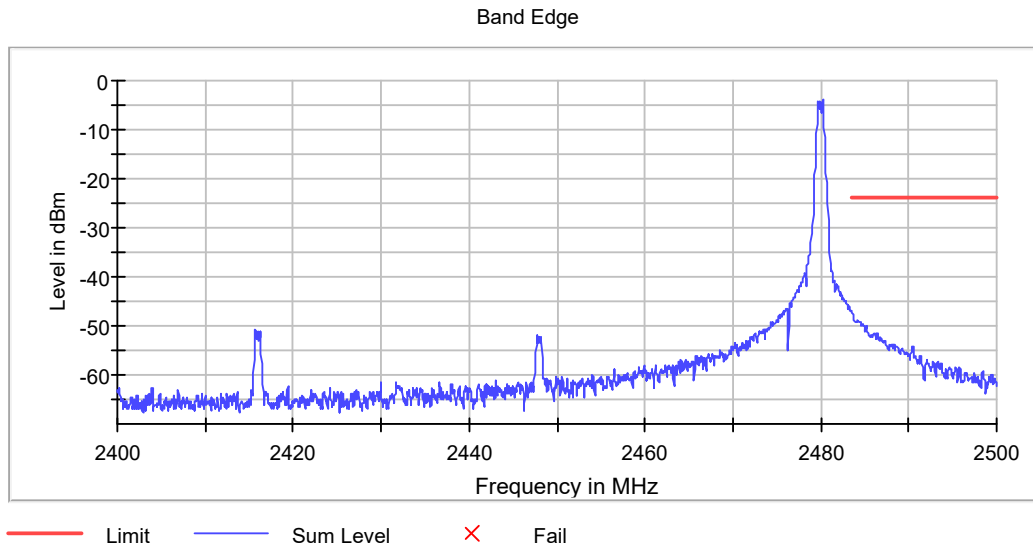

Inband Peak


Frequency (MHz)	Level (dBm)
2462.0000	-3.9

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2483.525000	-47.1	23.1	-23.9	PASS
2483.575000	-47.3	23.4	-23.9	PASS
2483.625000	-47.6	23.7	-23.9	PASS
2483.675000	-47.9	24.0	-23.9	PASS
2483.725000	-48.3	24.3	-23.9	PASS
2483.775000	-48.6	24.7	-23.9	PASS
2484.175000	-48.8	24.9	-23.9	PASS
2483.825000	-48.9	25.0	-23.9	PASS
2484.125000	-48.9	25.0	-23.9	PASS
2484.225000	-49.0	25.1	-23.9	PASS
2483.975000	-49.1	25.1	-23.9	PASS
2483.875000	-49.1	25.2	-23.9	PASS
2483.925000	-49.1	25.2	-23.9	PASS
2484.375000	-49.1	25.2	-23.9	PASS
2484.325000	-49.1	25.2	-23.9	PASS

4.5 Duty cycle	VERDICT: PASS
-----------------------	----------------------

Test Configuration

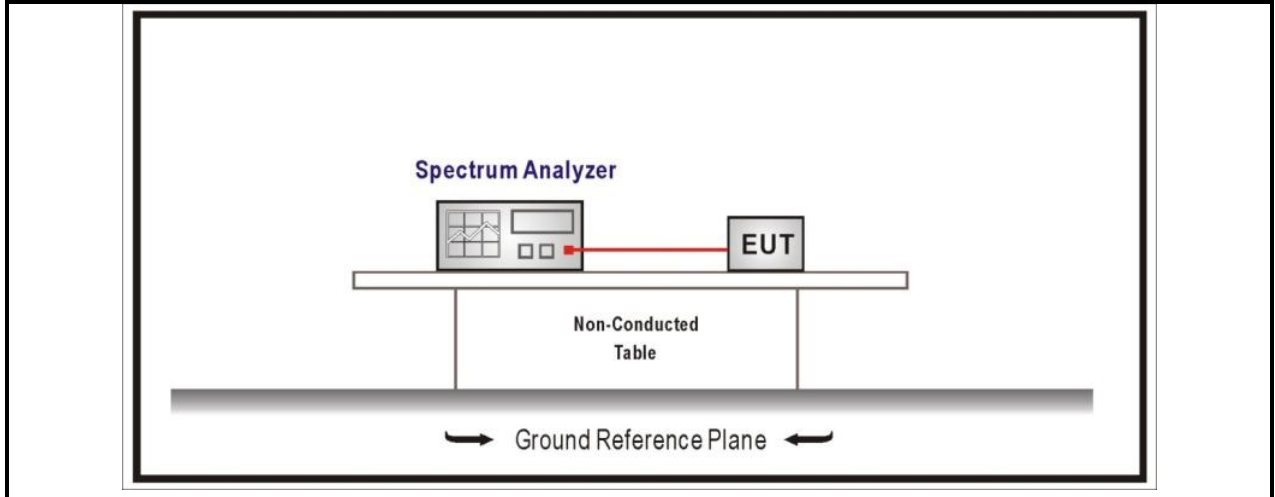

Performed measurements


Port under test	Antenna port	
Test method applied	<input checked="" type="checkbox"/>	Conducted measurement
	<input type="checkbox"/>	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 1	
Remark	---	

Results

Test Mode	Tx On (ms)	Tx On + Tx Off (ms)	Duty Cycle
1	---	---	100%

Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control Level for the tested mode of operation.


Note 2: According to KDB 558074, when test for Radiated Emission Band Edge and Radiated Emission, for average detector set: VBW \geq 1/T will be used.

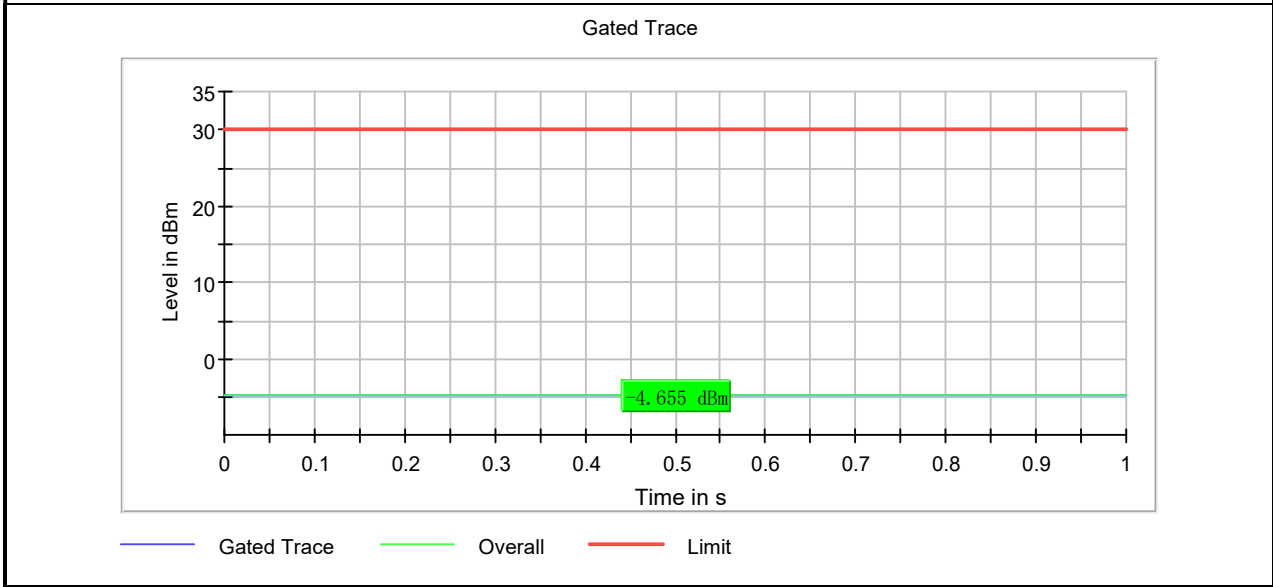

4.6 DTS Bandwidth	VERDICT: PASS
--------------------------	----------------------

Standard	FCC Part 15 Subpart C Paragraph 15.247 (a)(2)
Systems using digital modulation techniques operate in the 2400-2483.5 MHz .The minimum 6 dB bandwidth shall be at by least 500 kHz	

Test Configuration

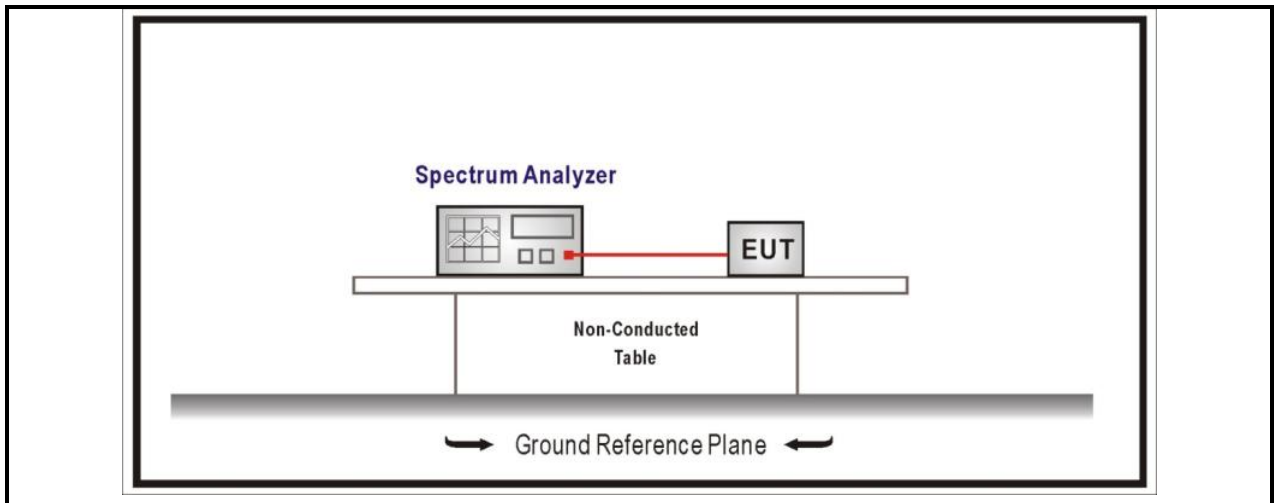

Performed measurements


Port under test	Antenna port	
Test method applied	<input checked="" type="checkbox"/>	Conducted measurement
	<input type="checkbox"/>	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 1	
Remark	---	

Results

Mode	CH.	Test Freq. (MHz)	6dB Occupied Bandwidth (MHz)	Limit (kHz)	Result
1	1	2402	0.851	>500	Pass
	39	2480	0.811	>500	Pass


6dB Occupied Bandwidth
 Mode 1 / CH1 (2402MHz)

6 dB Bandwidth

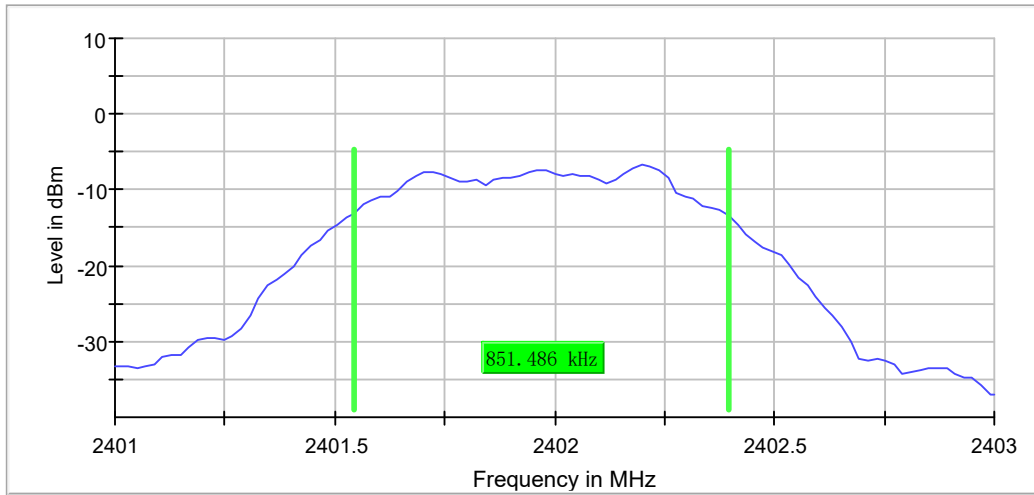

Mode 1 / CH39 (2480MHz)

6 dB Bandwidth

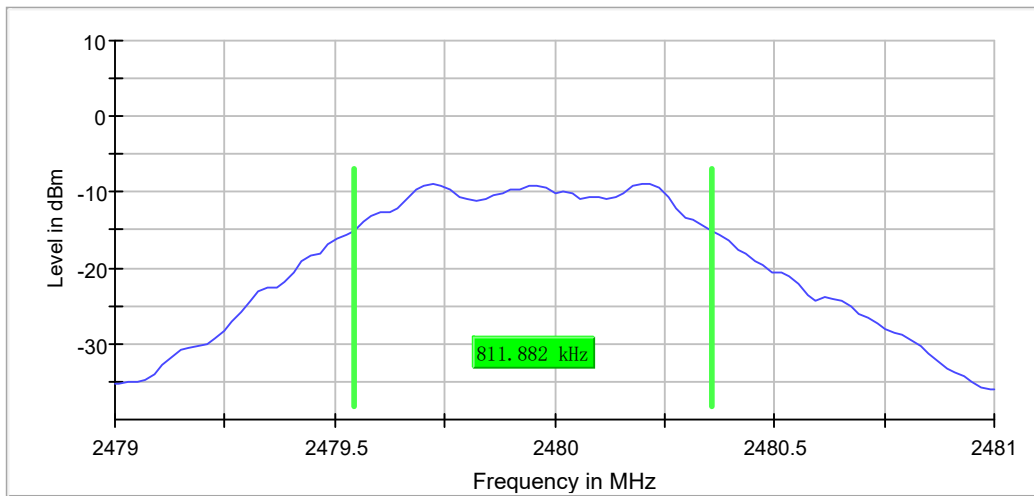


Remark: RBW=100 KHz, VBW=300 KHz

Mode	CH.	Test Freq. (MHz)	99% Occupied Bandwidth (MHz)	Limit	Result
1	1	2402	1.140	Within frequency range	Pass
	39	2480	1.180	Within frequency range	Pass


99% Occupied Bandwidth
 Mode 2 / CH1 (2402 MHz)

99 % Bandwidth

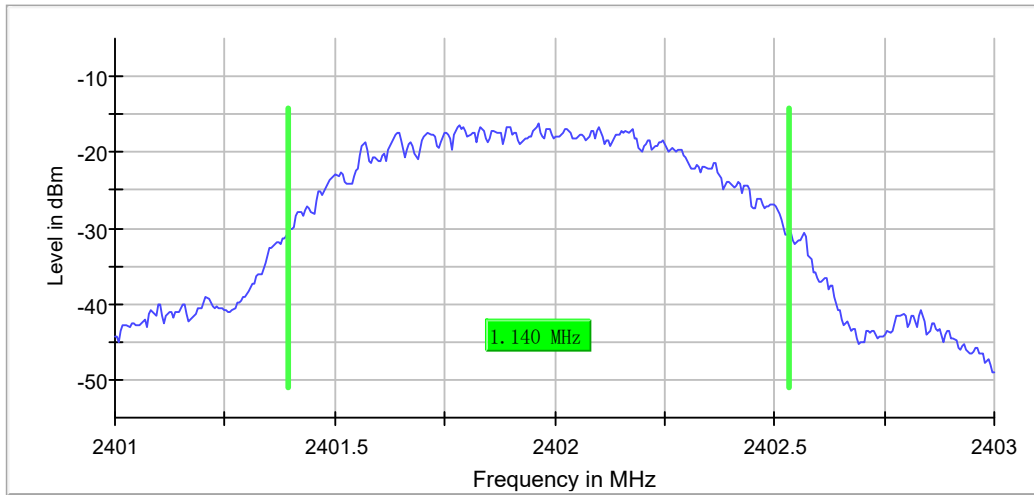

Mode 2 / CH39 (2480 MHz)

99 % Bandwidth

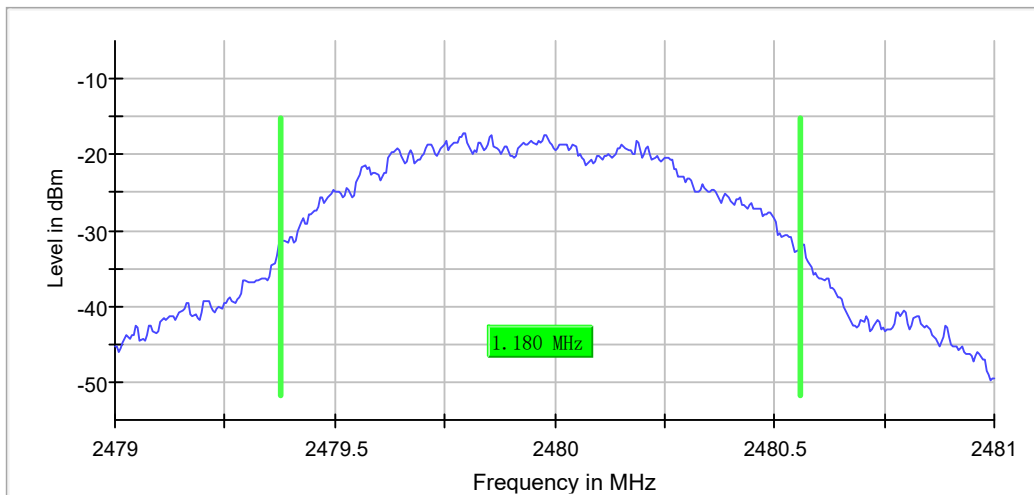


Remark: RBW=10 KHz, VBW=30 KHz

4.7 Fundamental emission output power	VERDICT: PASS
--	----------------------

Standard	FCC Part 15 Subpart C Paragraph 15.247 (b)(3)	
<input checked="" type="checkbox"/>	GTX < 6dBi	Pout≤30dBm
<input type="checkbox"/>	GTX > 6dBi	
<input type="checkbox"/>	Non-Fix point-point	Pout≤30-(GTX -6)
<input type="checkbox"/>	Fix point-point	Pout≤30-[(GTX-6)]/3
<input type="checkbox"/>	Point-to-multipoint	Pout≤30-(GTX-6)
<input type="checkbox"/>	Overlap Beams	Pout≤30-[(GTX-6)]/3
<input type="checkbox"/>	Aggregate power transmitted simultaneously on all beams	Pout≤30-[(GTX-6)]/3
<input type="checkbox"/>	single LE directional beam	Pout≤30-[(GTX-6)]/3+8dB

Note 1 : GTX directional gain of transmitting antennas.
 Note 2 : Pout is maximum peak conducted output power .

Test Configuration

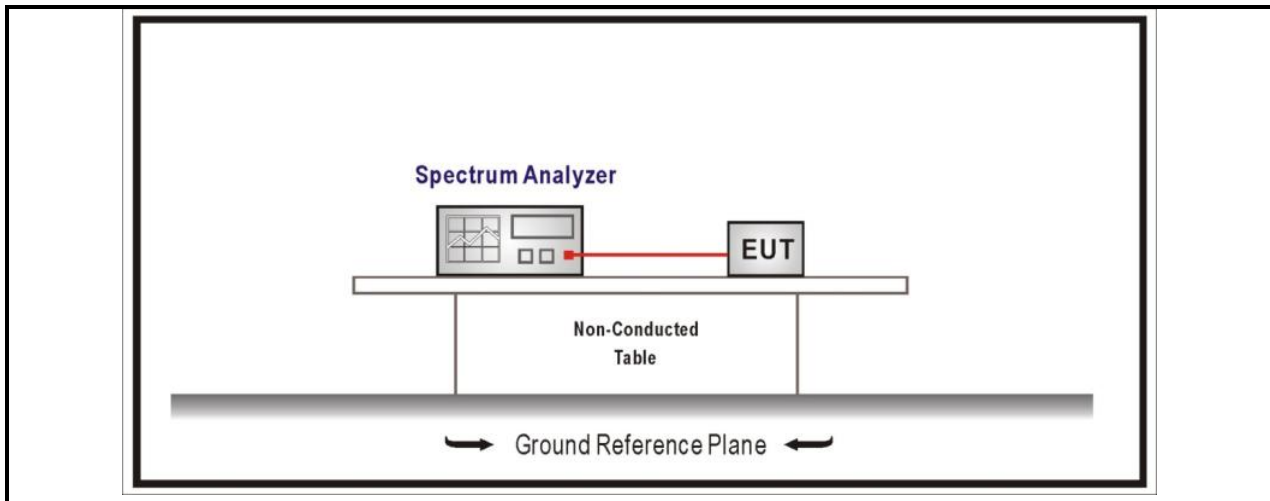


Performed measurements

Port under test	Antenna port
Test method applied	<input checked="" type="checkbox"/> Conducted measurement
	<input type="checkbox"/> Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).
Operating mode(s) used	Mode 1
Remark	---

Results


Mode	Channel	Test Frequency (MHz)	Power Output (dBm)	Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Result
1	1	2402	-4.7	≤30	-2.6	≤36	Pass
	17	2440	-5,1	≤30	-3.0	≤36	Pass
	39	2480	-6.9	≤30	-4.8	≤36	Pass

Gated Trace

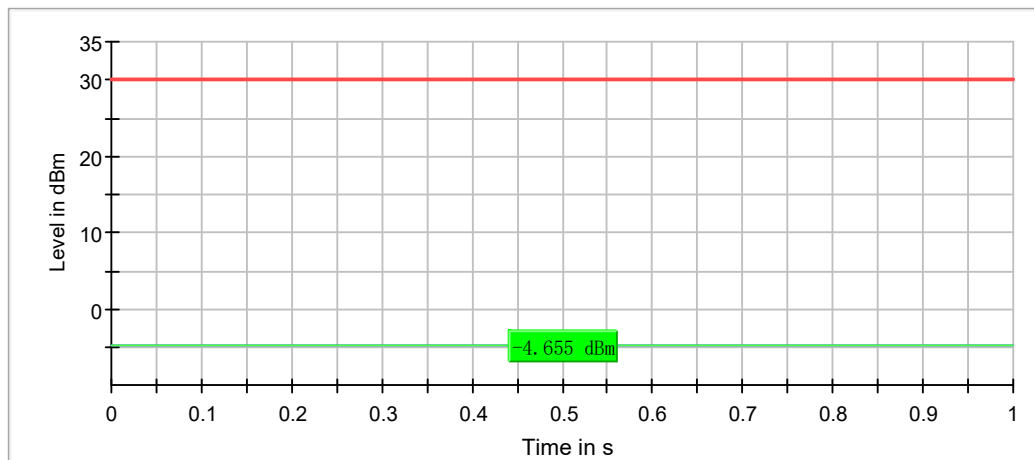


RBW=1 MHz, VBW=3MHz

Gated Trace

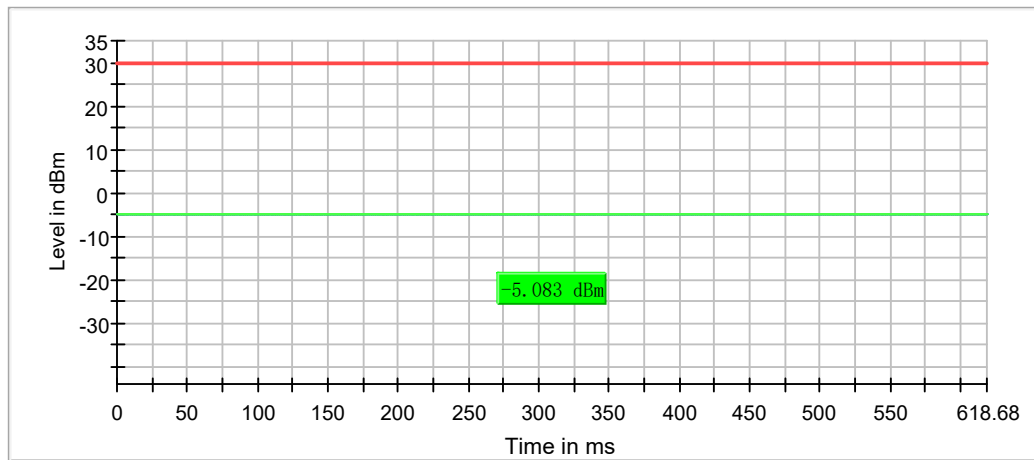

RBW=1 MHz, VBW=3MHz

Gated Trace

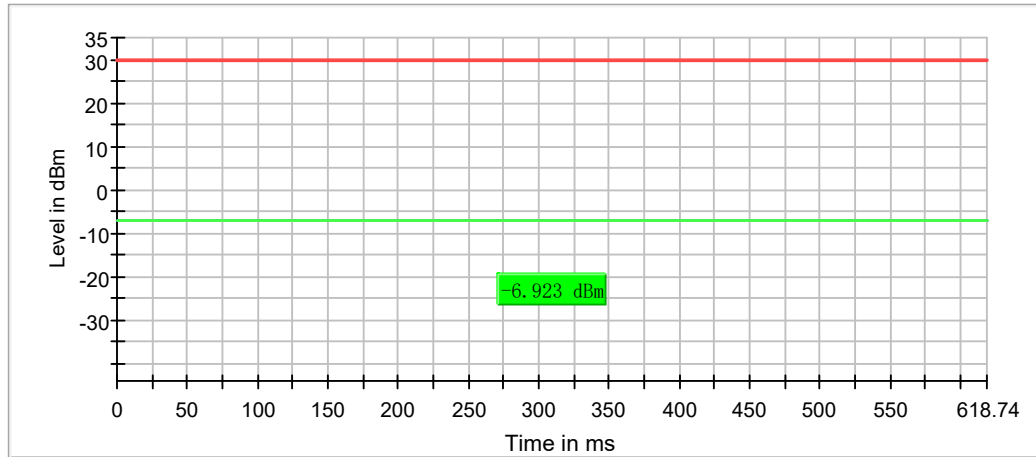


— Gated Trace — Overall — Limit

RBW=1 MHz, VBW=3MHz

4.8 Power Density	VERDICT: PASS
--------------------------	----------------------

Standard	FCC Part 15 Subpart C Paragraph 15.247 (b)(3)
Power Spectral Density ≤ 8 dBm/3kHz	

Test Configuration

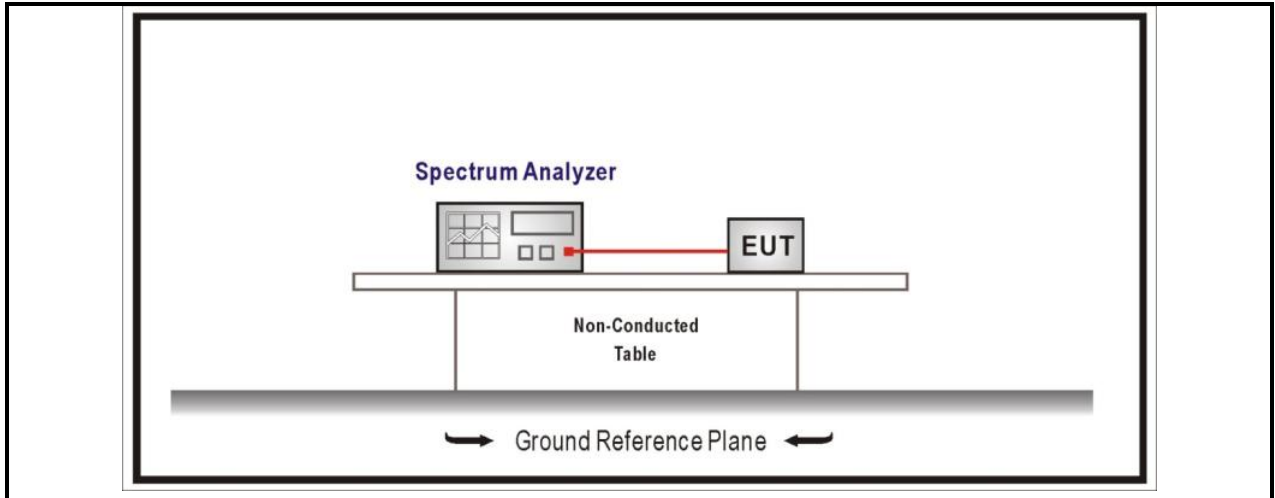


Performed measurements

Port under test	Antenna port	
Test method applied	<input checked="" type="checkbox"/>	Conducted measurement
	<input type="checkbox"/>	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 1	
Remark	---	

Results

Mode	Channel	Test Frequency (MHz)	Power Output (dBm)	Limit (dBm/3kHz)	Result
1	1	2402	-16.073	≤ 8	Pass
	19	2440	-15.994	≤ 8	Pass
	39	2480	-17.126	≤ 8	Pass


Peak Power Spectral Density

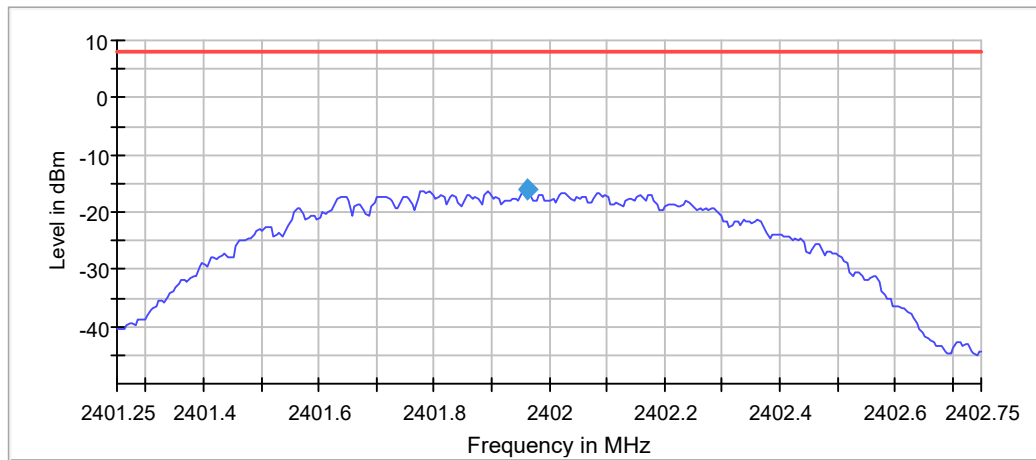

— Limit — Sum Level ◆ PSD

RBW=10 KHz, VBW=30 KHz


Peak Power Spectral Density

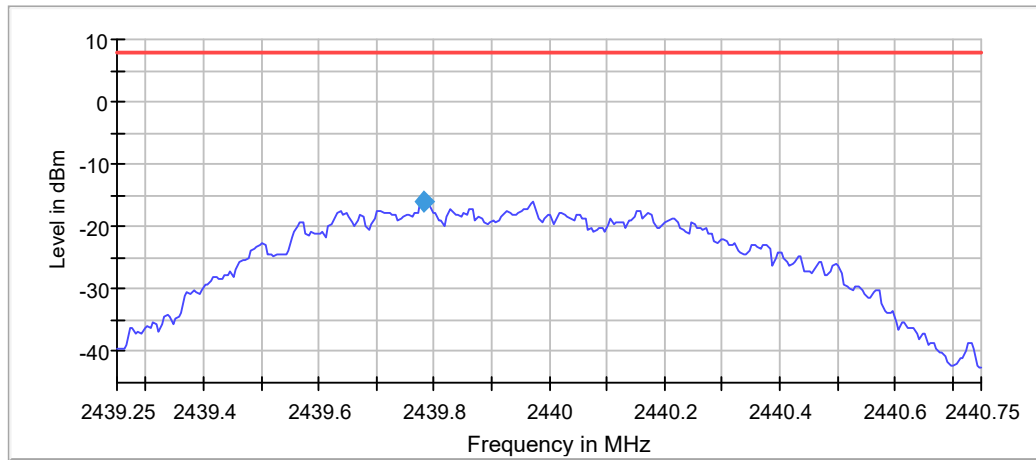

— Limit — Sum Level ◆ PSD

RBW=10 KHz, VBW=30 KHz

Peak Power Spectral Density

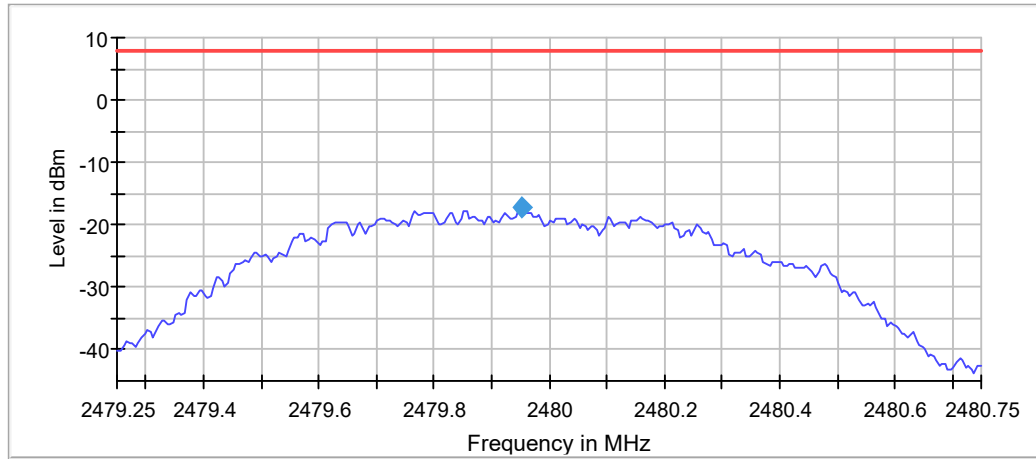

— Limit — Sum Level ◆ PSD

RBW=10 KHz, VBW=30 KHz

5 IDENTIFICATION OF THE EQUIPMENT UNDER TEST

The photographs show the tested device.

Refer to documents External photo and Internal photo.

ANNEX 1 – MEASUREMENT UNCERTAINTY

Test Item	Uncertainty
Occupied Channel Bandwidth	±0,7%
RF Output power, conducted	±0,6dB
Power Spectral Density, Conducted	±0,6dB
Unwanted Emissions, Conducted	±0.7dB
Spurious (30-1000MHz)	±4,4dB
Spurious (1-12,75GHz)	±4,4dB

ANNEX 2 - USED EQUIPMENT

Continuous disturbances conducted (150 kHz to 30 MHz)

Item	Instrumentation	Manufacturer	Model No.	Serial No.	DEKRA No.	Cal. Due date
1	EMI Receiver	R&S	ESCI	101206	G/L858	2023/07/21
2	LISN	R&S	ENV216	101336	G/L859	2023/07/21
3	Shielding Room	Changzhou Feite	/	/	G/L861	2023/06/17

Emissions in non-restricted frequency bands/ Emissions in restricted frequency bands

Item	Instrumentation	Manufacturer	Model No.	Serial No.	DEKRA No.	Cal. Due date
1	EMI receiver	R&S	ESCI	101205	G/L857	2023/07/21
2	Antenna (30MHz-3GHz)	SCHWARZBECK	VULB9168	01229	GZ2018	2023/01/25
3	Chamber	ETS	/	/	G/L856	2024/06/10
4	Antenna (1GHz-18GHz)	R&S	HF907	102306	G/L1236	2023/02/23
5	Horn antenna preamplifier	Schwarzbeek	SCU-18	102234	G/L1236-1	2023/02/21
6	Spectrum analyzer	R&S	FSV	SN101012	G/L1235	2023/01/17
7	HF antenna (18 – 26.5 GHz)	ETS	3160-09	00164643	G/L1237	2023/01/16
8	High frequency antenna preamplifier (18 – 26.5 GHz)	Schwarzbeck	SCU-26	1879064	G/L1237-1	2023/01/10
9	Broadband horn antenna (15 – 40 GHz)	Schwarzbeck	BBHA9170	00908	GZ1901	2023/05/06
10	High frequency antenna preamplifier (18 – 26.5 GHz)	Schwarzbeck	SCU-26	1879064	G/L1237-1	2023/01/10
11	Annular magnetic field antenna	TESEQ	HLA6121	540045	GZ1905	2023/05/12

Duty cycle/Band Edge/Fundamental emission output power/DTS Bandwidth/Power Spectral Density

Item	Instrumentation	Manufacturer	Model	Serial no.	DEKRA No.	Cal Due date
1	Spectrum analyzer	R&S	FSV	SN101012	G/L1235	2023/01/17
2	Chamber	ETS	/	/	G/L856	2024/06/10
3	OSP	R&S	OSP 150	101907	GZ1894	2023/04/27

ANNEX 3 - TEST PHOTOS

Refer to document Test setup.

--- END ---