



# FCC DFS Test Report

**Equipment** : WiFi Range Extender  
**Brand Name** : NETGEAR  
**Model No.** : EX6100, EX6000  
**FCC ID** : PY313200231  
**Standard** : 47 CFR FCC Part 15.407  
**Frequency Range** : 5250 MHz – 5350 MHz  
5470 MHz – 5725 MHz  
**Applicant** : NETGEAR, Inc.  
350 East Plumeria Drive, San Jose, California 95134, USA  
**Operate Mode** : Master  
Client without radar detection

The product sample received on Oct. 14, 2013 and completely tested on Apr. 09, 2015. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in FCC 06-96 Appendix & FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v01r01 and shown compliance with the applicable technical standards. The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

  
Sam Chen  
SPORTON INTERNATIONAL INC.





## Table of Contents

|          |  |                |
|----------|--|----------------|
| <b>1</b> | <b>GENERAL DESCRIPTION .....</b>                           | <b>5</b>       |
| 1.1      | Information.....   | 5              |
| 1.2      | Accessories .....  | 10             |
| 1.3      | Support Equipment.....                                     | 10             |
| 1.4      | Testing Applied Standards .....                            | 10             |
| 1.5      | Testing Location Information .....                         | 10             |
| <b>2</b> | <b>TEST CONFIGURATION OF EUT .....</b>                     | <b>11</b>      |
| 2.1      | Test Channel Frequencies Configuration.....                | 11             |
| 2.2      | The Worst Case Measurement Configuration.....              | 11             |
| <b>3</b> | <b>DYNAMIC FREQUENCY SELECTION (DFS) TEST RESULT .....</b> | <b>12</b>      |
| 3.1      | General DFS Information .....                              | 12             |
| 3.2      | Radar Test Waveform Calibration .....                      | 15             |
| 3.3      | UNII Detection Bandwidth .....                             | 37             |
| 3.4      | Channel Availability Check (CAC).....                      | 40             |
| 3.5      | In-service Monitoring .....                                | 44             |
| 3.6      | Statistical Performance Check .....                        | 54             |
| <b>4</b> | <b>TEST EQUIPMENT AND CALIBRATION DATA .....</b>           | <b>73</b>      |
| <b>5</b> | <b>MEASUREMENT UNCERTAINTY .....</b>                       | <b>74</b>      |
|          | <b>APPENDIX A. TEST PHOTOS .....</b>                       | <b>A1 ~ A3</b> |



### Summary of Test Result

| Conformance Test Specifications (FCC 06-96 Appendix) |                  |  |                                    |          |
|--|------------------|--|------------------------------------|----------|
| Report Clause  | Ref. Std. Clause | Description  | Limit                              | Result   |
| 3.3  | 7.8.1            | DFS: UNII Detection Bandwidth Measurement                                | 100% of the 99% BW                 | Complied |
| 3.4  | 7.8.2.1          | DFS: Initial Channel Availability Check Time                             | CAC ≥ 60 sec                       | Complied |
| 3.4  | 7.8.2.2          | DFS: Radar Burst at the Beginning of the Channel Availability Check Time | Detection Threshold: -63 dBm       | Complied |
| 3.4  | 7.8.2.3          | DFS: Radar Burst at the End of the Channel Availability Check Time       | Detection Threshold: -63 dBm       | Complied |
| 3.5  | 7.8.3            | DFS: In-Service Monitoring for Channel Move Time (CMT)                   | CMT ≤ 10sec                        | Complied |
| 3.5  | 7.8.3            | DFS: In-Service Monitoring for Channel Closing Transmission Time (CCTT)  | CCTT ≤ 60 ms starting at CMT 200ms | Complied |
| 3.5  | 7.8.3            | DFS: In-Service Monitoring for Non-Occupancy Period (NOP)                | NOP ≥ 30 min                       | Complied |
| 3.6  | 7.8.4            | DFS: Statistical Performance Check                                       | Table 5 - 7 (KDB 905462)           | Complied |
| 3.1.4  | 5.8.1            | DFS: Uniform Spreading   | Uniform Spreading for DFS Band     | Complied |
| 3.1.5  | 8.1              | User Access Restrictions   | DFS controls                       | Complied |

Note: For Client without radar detection: Since the product is client without radar detection function, only Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period are required to be performed.





# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

| Specification Items         | Description  |
|-----------------------------|--|
| Product Type                | WLAN (1TX, 1RX)  |
| Radio Type                  | Intentional Transceiver  |
| Power Type                  | From internal power supply   |
| Modulation                  | see the below table for 802.11n/ac<br>OFDM (BPSK / QPSK / 16QAM / 64QAM) for IEEE 802.11a  |
| Data Rate (Mbps)            | see the below table for 802.11n/ac<br>OFDM (6/9/12/18/24/36/48/54) for IEEE 802.11a  |
| Channel Bandwidth           | 20/40/80 MHz operating channel bandwidth   |
| Operating Mode              | <input checked="" type="checkbox"/> Master   |
|                             | <input type="checkbox"/> Client with radar detection   |
|                             | <input checked="" type="checkbox"/> Client without radar detection   |
| Communication Mode          | <input checked="" type="checkbox"/> IP Based (Load Based) <input type="checkbox"/> Frame Based   |
| TPC Function                | <input checked="" type="checkbox"/> With TPC <input type="checkbox"/> Without TPC  |
| Weather Band (5600~5650MHz) | <input type="checkbox"/> With 5600~5650MHz <input checked="" type="checkbox"/> Without 5600~5650MHz  |
| Max. Con. Power (DFS band)  | Band 2:<br>IEEE 802.11a: 23.84 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT20): 23.98 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT40): 23.87 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT80): 15.09 dBm<br>Band 3:<br>IEEE 802.11a: 23.81 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT20): 23.81 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT40): 23.81 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT80): 16.22 dBm |



|  |  |
|--|--|
| <b>Min. Con. Power (DFS band)</b>  | Band 2:<br>IEEE 802.11a: 17.84 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT20): 17.98 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT40): 17.87 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT80): 9.09 dBm<br>Band 3:<br>IEEE 802.11a: 17.81 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT20): 17.81 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT40): 17.81 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT80): 10.22 dBm  |
| <b>Max. EIRP Power (DFS band)</b>  | Band 2:<br>IEEE 802.11a: 27.84 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT20): 27.68 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT40): 27.57 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT80): 19.09 dBm<br>Band 3:<br>IEEE 802.11a: 26.81 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT20): 26.71 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT40): 27.41 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT80): 19.82 dBm |
| <b>Min. EIRP Power (DFS band)</b>  | Band 2:<br>IEEE 802.11a: 21.84 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT20): 21.68 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT40): 21.57 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT80): 13.09 dBm<br>Band 3:<br>IEEE 802.11a: 20.81 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT20): 20.71 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT40): 21.41 dBm<br>IEEE 802.11ac MCS0/Nss1 (VHT80): 13.82 dBm |
| <b>Power-on cycle</b>  | <u>For Master:</u><br>80MHz: Requires 38.9 seconds to complete its power-on cycle.<br><u>For Client without radar detection:</u><br>NA (No Channel Availability Check Function)  |
| <b>Software / Firmware Version</b>   | v1.0.0.33_1.0.111  |
| Note: EUT employ a TPC mechanism and TPC have the capability to operate at least 6 dB below highest RF output power. |  |



Antenna & Band width

| Antenna         | Single (TX) |        |        |
|-----------------|-------------|--------|--------|
|                 | 20 MHz      | 40 MHz | 80 MHz |
| Band width Mode |             |        |        |
| IEEE 802.11a    | V           | X      | X      |
| IEEE 802.11n    | V           | V      | X      |
| IEEE 802.11ac   | V           | V      | V      |

IEEE 11n/ac Spec.

| Protocol         | Number of Transmit Chains (NTX) | Data Rate / MCS |
|------------------|---------------------------------|-----------------|
| 802.11n (HT20)   | 1                               | MCS0-7          |
| 802.11n (HT40)   | 1                               | MCS0-7          |
| 802.11ac (VHT20) | 1                               | MCS 0-9/Nss1    |
| 802.11ac (VHT40) | 1                               | MCS 0-9/Nss1    |
| 802.11ac (VHT80) | 1                               | MCS 0-9/Nss1    |

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:

11a: IEEE 802.11a, HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

1.1.2 Antenna Information

| Ant. | Brand       | Model No.     | Type   | Connector | Gain (dBi) |                     | Remark   |
|------|-------------|---------------|--------|-----------|------------|---------------------|----------|
|      |             |               |        |           | 2.4GHz     | 5GHz Band 1, Band 4 |          |
| 1    | Master Wave | X6100-98242   | Dipole | I-PEX     | 3.31       | -                   | External |
| 2    | Foxconn     | FX01H74-0G-EF | PCB    | I-PEX     | 3.66       | -                   | Internal |
| 3    | Master Wave | X6100-98242   | Dipole | I-PEX     | -          | 5                   | External |

| Ant. | 5GHz Band 2~Band 3 |            |           |            |
|------|--------------------|------------|-----------|------------|
|      | Frequency          | Gain (dBi) | Frequency | Gain (dBi) |
| 3    | 5260 MHz           | 3.7        | 5510 MHz  | 3.4        |
|      | 5270 MHz           | 3.7        | 5530 MHz  | 3.6        |
|      | 5290 MHz           | 4.0        | 5550 MHz  | 3.6        |
|      | 5300 MHz           | 4.0        | 5580 MHz  | 2.9        |
|      | 5310 MHz           | 4.1        | 5670 MHz  | 3.3        |
|      | 5320 MHz           | 4.1        | 5700 MHz  | 3.5        |
|      | 5500 MHz           | 3.2        | -         | -          |


Note: There are three antennas provided to this EUT and all of them can be used as transmitting and receiving antenna

**For 2.4GHz Band (2TX/2RX):**

Chain 1 and Chain 2 could transmit/receive simultaneously.

**For 5GHz Band (1TX/1RX):**

Only Chain 3 can be used as transmitting/receiving antenna.

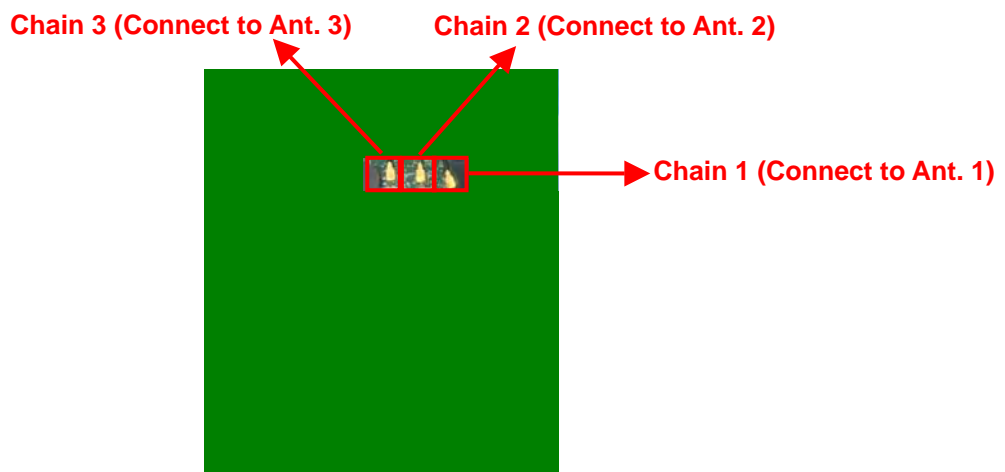





### 1.1.3 DFS Band Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 52, 56, 60, 64, 100, 104, 108, 112, 116, 132, 136, 140.

For 40MHz bandwidth systems, use Channel 54, 62, 102, 110, 134.

For 80MHz bandwidth systems, use Channel 58, 106.

| Frequency Band          | Channel No. | Frequency | Channel No. | Frequency |
|-------------------------|-------------|-----------|-------------|-----------|
| 5250~5350 MHz<br>Band 2 | 52          | 5260 MHz  | 60          | 5300 MHz  |
|                         | 54          | 5270 MHz  | 62          | 5310 MHz  |
|                         | 56          | 5280 MHz  | 64          | 5320 MHz  |
|                         | 58          | 5290 MHz  | -           | -         |
| 5470~5725 MHz<br>Band 3 | 100         | 5500 MHz  | 112         | 5560 MHz  |
|                         | 102         | 5510 MHz  | 116         | 5580 MHz  |
|                         | 104         | 5520 MHz  | 132         | 5660 MHz  |
|                         | 106         | 5530 MHz  | 134         | 5670 MHz  |
|                         | 108         | 5540 MHz  | 136         | 5680 MHz  |
|                         | 110         | 5550 MHz  | 140         | 5700 MHz  |

### 1.1.4 Table for Multiple Listing

The model numbers in the following table are all refer to the identical product.

| Model No. | Description   |
|-----------|---|
| EX6100    | The models are identical except for the housing colors as marketing strategy. |
| EX6000    |   |

### 1.1.5 Table for Class II Change

This product is an extension of original one reported under Sporton project number: 3O1622

Below is the table for the change of the product with respect to the original one.

| Modifications  | Performance Checking |
|--|----------------------|
| <ol style="list-style-type: none"> <li>Adding Band 2 and Band 3 (5250~5350 MHz, 5470~5725 MHz) for this device.</li> <li>Adding a new model number "EX6000", and it shares the same PCBA as original model number "EX6100". It only changes housing color for different marketing strategy.</li> </ol> | DFS test.            |



## 1.2 Accessories

| Accessories                       |  |
|-----------------------------------|--|
| RJ-45 cable*1: Non-shielded, 1.5m |  |

## 1.3 Support Equipment

For Master:

| Support Equipment |                |            |            |           |
|-------------------|----------------|------------|------------|-----------|
| No.               | Equipment      | Brand Name | Model Name | FCC ID    |
| 1                 | Notebook       | DELL       | E4300      | DoC       |
| 2                 | Notebook       | DELL       | D400       | E2K24GBRL |
| 3                 | WLAN ac Dongle | abocom     | AU5200     | Q87-AE600 |

For Client without radar detection:

| Support Equipment |             |            |            |                |
|-------------------|-------------|------------|------------|----------------|
| No.               | Equipment   | Brand Name | Model Name | FCC ID         |
| 1                 | Notebook    | DELL       | E4300      | DoC            |
| 2                 | Notebook    | DELL       | D400       | E2K24GBRL      |
| 3                 | Wireless AP | D-Link     | DIR-860L   | RRK-2012070022 |

## 1.4 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ FCC 06-96 Appendix
- ◆ FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v01r01
- ◆ FCC KDB 443999 D01 Approval of DFS UNII Devices v01r03

## 1.5 Testing Location Information

| Testing Location                    |               |   |                  |                       |
|-------------------------------------|---------------|---|------------------|-----------------------|
| <input type="checkbox"/>            | HWA YA        | ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.<br>TEL : 886-3-327-3456 FAX : 886-3-327-0973   |                  |                       |
| <input checked="" type="checkbox"/> | JHUBEI        | ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.<br>TEL : 886-3-656-9065 FAX : 886-3-656-9085 |                  |                       |
| Test Condition                      | Test Site No. | Test Engineer   | Test Environment | Test Date             |
| DFS Site                            | DF01-CB       | Jim Huang   | 19°C / 60%       | 01-Apr-15 ~ 09-Apr-15 |



## 2 Test Configuration of EUT

### 2.1 Test Channel Frequencies Configuration

| Test Channel Frequencies Configuration |                          |
|--|--------------------------|
| IEEE Std.                              | Test Channel Freq. (MHz) |
| 802.11ac (VHT20)                       | 5500 MHz                 |
| 802.11ac (VHT40)                       | 5510 MHz                 |
| 802.11ac (VHT80)                       | 5530 MHz                 |

### 2.2 The Worst Case Measurement Configuration

| The Worst Case Mode for Following Conformance Tests |   |
|---|---|
| <b>Tests Item</b>                                   | Dynamic Frequency Selection (DFS)   |
| <b>Test Condition</b>                               | Radiated measurement<br>The EUT shall be configured to operate at the highest transmitter output power setting. If more than one antenna assembly is intended for this power setting, the gain of the antenna assembly with the lowest gain shall be used. The DFS radar test signals have been aligned to the direction corresponding to the EUT's maximum antenna gain. |
| <b>Modulation Mode</b>                              | 802.11ac (VHT20), 802.11ac (VHT40), 802.11ac (VHT80)  |



### 3 Dynamic Frequency Selection (DFS) Test Result

#### 3.1 General DFS Information

##### 3.1.1 DFS Parameters

| Table D.1: DFS requirement values |   |
|-----------------------------------|---|
| Parameter                         | Value   |
| Non-occupancy period              | Minimum 30 minutes  |
| Channel Availability Check Time   | 60 seconds  |
| Channel Move Time                 | 10 seconds (Note 1).  |
| Channel Closing Transmission Time | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second periods. (Notes 1 and 2). |
| U-NII Detection Bandwidth         | Minimum 100% of the 99% power bandwidth (Note 3).   |

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

| Table D.2: Interference threshold values |                  |
|--|------------------|
| Maximum Transmit Power                   | Value (see note) |
| EIRP ≥ 200 mW                            | -64 dBm          |
| EIRP < 200 mW and PSD < 10dBm/MHz        | -62 dBm          |
| EIRP < 200 mW and PSD ≥ 10dBm/MHz        | -64 dBm          |

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911D01.



**3.1.2 Applicability of DFS Requirements Prior to Use of a Channel**

| Requirement                            | DFS Operational mode |                                |                             |
|--|----------------------|--------------------------------|-----------------------------|
|  | Master               | Client without radar detection | Client with radar detection |
| <i>Non-Occupancy Period</i>            | Yes                  | Not required                   | Yes                         |
| <i>DFS Detection Threshold</i>         | Yes                  | Not required                   | Yes                         |
| <i>Channel Availability Check Time</i> | Yes                  | Not required                   | Not required                |
| <i>U-NII Detection Bandwidth</i>       | Yes                  | Not required                   | Yes                         |

**3.1.3 Applicability of DFS Requirements during Normal Operation**

| Requirement                              | DFS Operational mode |                                |                             |
|--|----------------------|--------------------------------|-----------------------------|
|  | Master               | Client without radar detection | Client with radar detection |
| <i>DFS Detection Threshold</i>           | Yes                  | Not required                   | Yes                         |
| <i>Channel Closing Transmission Time</i> | Yes                  | Yes                            | Yes                         |
| <i>Channel Move Time</i>                 | Yes                  | Yes                            | Yes                         |
| <i>U-NII Detection Bandwidth</i>         | Yes                  | Not required                   | Yes                         |

| Additional requirements for devices with multiple bandwidth modes | Master Device or Client with Radar Detection | Client Without Radar Detection                       |
|---|--|--|
| U-NII Detection Bandwidth and Statistical Performance Check       | All BW modes must be tested                  | Not required   |
| Channel Move Time and Channel Closing Transmission Time           | Test using widest BW mode available          | Test using the widest BW mode available for the link |
| All other tests   | Any single BW mode                           | Not required   |

**Note:** Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.



### 3.1.4 Uniform Spreading

| Manufacturer Declare the Uniform Spreading |   |
|--|---|
| <input checked="" type="checkbox"/>        | For the 5250-5350 MHz and 5470-5725 MHz bands, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a Gaussian random algorithm. |

### 3.1.5 User Access Restrictions

| User Access Restrictions            |  |
|-------------------------------------|--|
| <input checked="" type="checkbox"/> | DFS controls (hardware or software) related to radar detection are NOT accessible to the user. Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user. |

### 3.1.6 Channel Loading/Data Streaming

|                                     |  |
|-------------------------------------|--|
| <input checked="" type="checkbox"/> | IP Based (Load Based) - stream the test file from the Master to the Client.                    |
| <input type="checkbox"/>            | The data file (MPEG-4) has been transmitting in a streaming mode.                              |
| <input type="checkbox"/>            | Software to ping the client is permitted to simulate data transfer with random ping intervals. |
| <input checked="" type="checkbox"/> | Minimum channel loading of approximately 17%.  |
| <input type="checkbox"/>            | Unicast protocol has been used.  |
| <input type="checkbox"/>            | Frame Based - stream the test file from the Master to the Client.                              |
| <input type="checkbox"/>            | fixed talk/listen ratio, set the ratio to 45%/55%  |

### 3.2 Radar Test Waveform Calibration

#### 3.2.1 Short Pulse Radar Test Waveforms

| Radar Type  | Pulse Width (µsec) | PRI (µsec)                                      | Number of Pulses   | Minimum Percentage of Successful Detection | Minimum Trials |
|---|--------------------|---|--|--|----------------|
| 0   | 1                  | 1428  | 18   | See Note 1                                 | See Note 1     |
| 1A  | 1                  | 15 unique PRI in KDB 905462 D02 Table 5a        | $\text{Roundup}\left\{\left(\frac{1}{360}\right) \times \left(\frac{19 \times 10^6}{PRI}\right)\right\}$ | 60%  | 15             |
| 1B  | 1                  | 15 unique PRI within 518-3066, Excluding 1A PRI |  | 60%  | 15             |
| 2   | 1-5                | 150-230   | 23-29  | 60%  | 30             |
| 3   | 6-10               | 200-500   | 16-18  | 60%  | 30             |
| 4   | 11-20              | 200-500   | 12-16  | 60%  | 30             |
| Aggregate (Radar Types 1-4)   |                    |   |  | 80%  | 120            |
| <b>Note 1:</b> Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. |                    |   |  |  |                |

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

#### 3.2.2 Long Pulse Radar Test Waveform

| Radar Type | Pulse Width (µsec) | Chirp Width (MHz) | PRI (µsec) | Number of Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Trials |
|------------|--------------------|-------------------|------------|----------------------------|------------------|--|----------------|
| 5          | 50-100             | 5-20              | 1000-2000  | 1-3                        | 8-20             | 80%  | 30             |

Each waveform is defined as follows:

- ◆ The transmission period for the Long Pulse Radar test signal is 12 seconds.
- ◆ There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst\_Count.
- ◆ Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- ◆ The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- ◆ Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulses in different Bursts may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- ◆ If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000



microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.

- The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst\_Count. Each interval is of length (12,000,000 / Burst\_Count) microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and [(12,000,000 / Burst\_Count) – (Total Burst Length) + (One Random PRI Interval)] microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

### 3.2.3 Frequency Hopping Radar Test Waveform

| Radar Type | Pulse Width (µsec) | PRI (µsec) | Pulses per Hop | Hopping Rate (kHz) | Hopping Sequence Length (ms) | Minimum Percentage of Successful Detection | Minimum Trials |
|------------|--------------------|------------|----------------|--------------------|------------------------------|--|----------------|
| 6          | 1                  | 333        | 9              | 0.333              | 300                          | 70%  | 30             |



The FCC Type 6 waveform uses a static waveform with 100 bursts in the instruments ARB. In addition, the RF list mode is operated with a list containing 100 frequencies from a randomly generated list and it had be ensured that at least one of the random frequencies falls into the UNII Detection Bandwidth of the DUT. Each burst from the waveform file initiates a trigger pulse at the beginning that switches the RF list from one item to the next one.

### 3.2.4 DFS Threshold Level

| DFS Threshold Level  |  |
|--|--|
| DFS Threshold level: -63 dBm   | <input checked="" type="checkbox"/> at the antenna connector |
|  | <input type="checkbox"/> in front of the antenna             |
| The Interference <b>Radar Detection Threshold Level</b> is is $-64 \text{ dBm} + 0 \text{ [dBi]} + 1 \text{ dB} = -63 \text{ dBm}$ . That had been taken into account the output power range and antenna gain. |  |





### 3.2.5 Calibration Setup

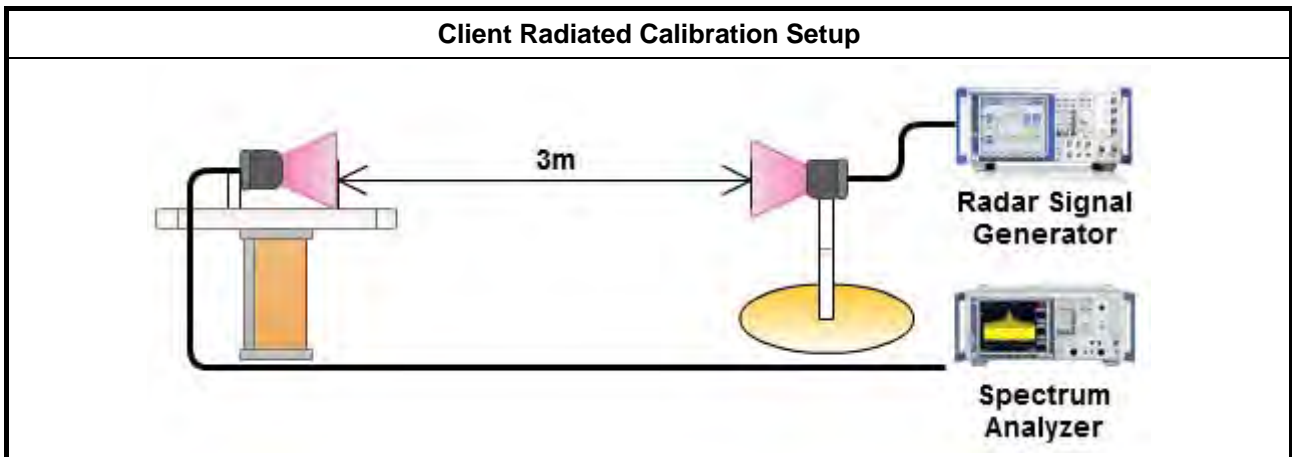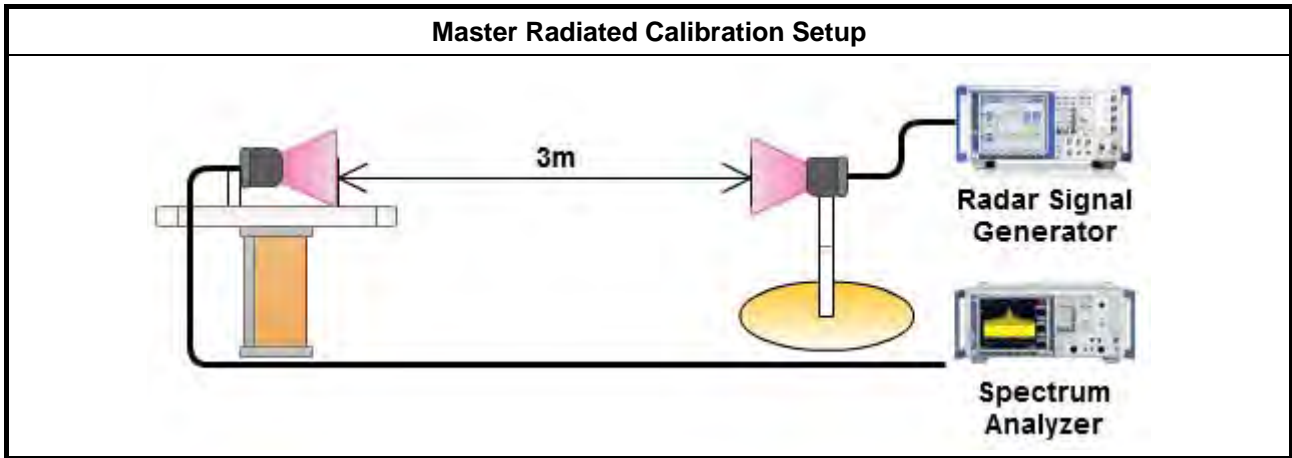




### 3.2.6 Radar Waveform calibration Plot

For Master:

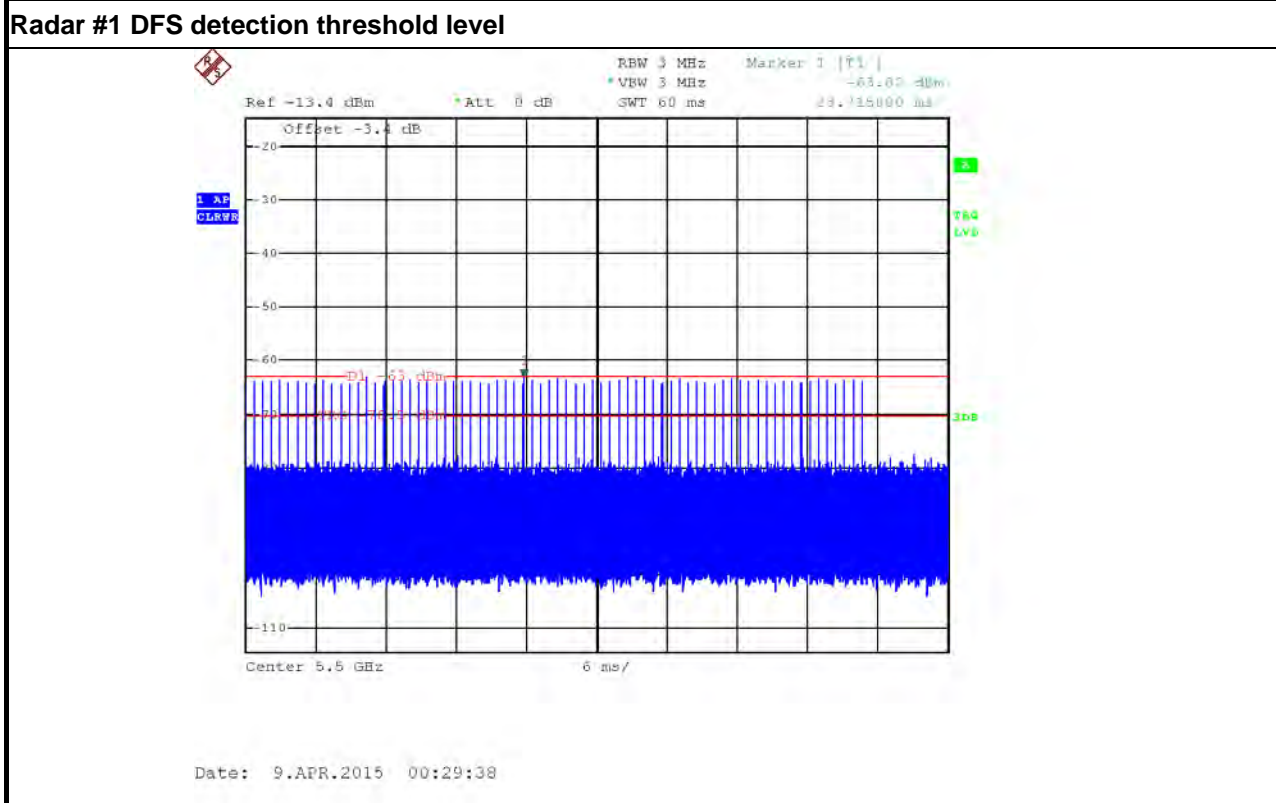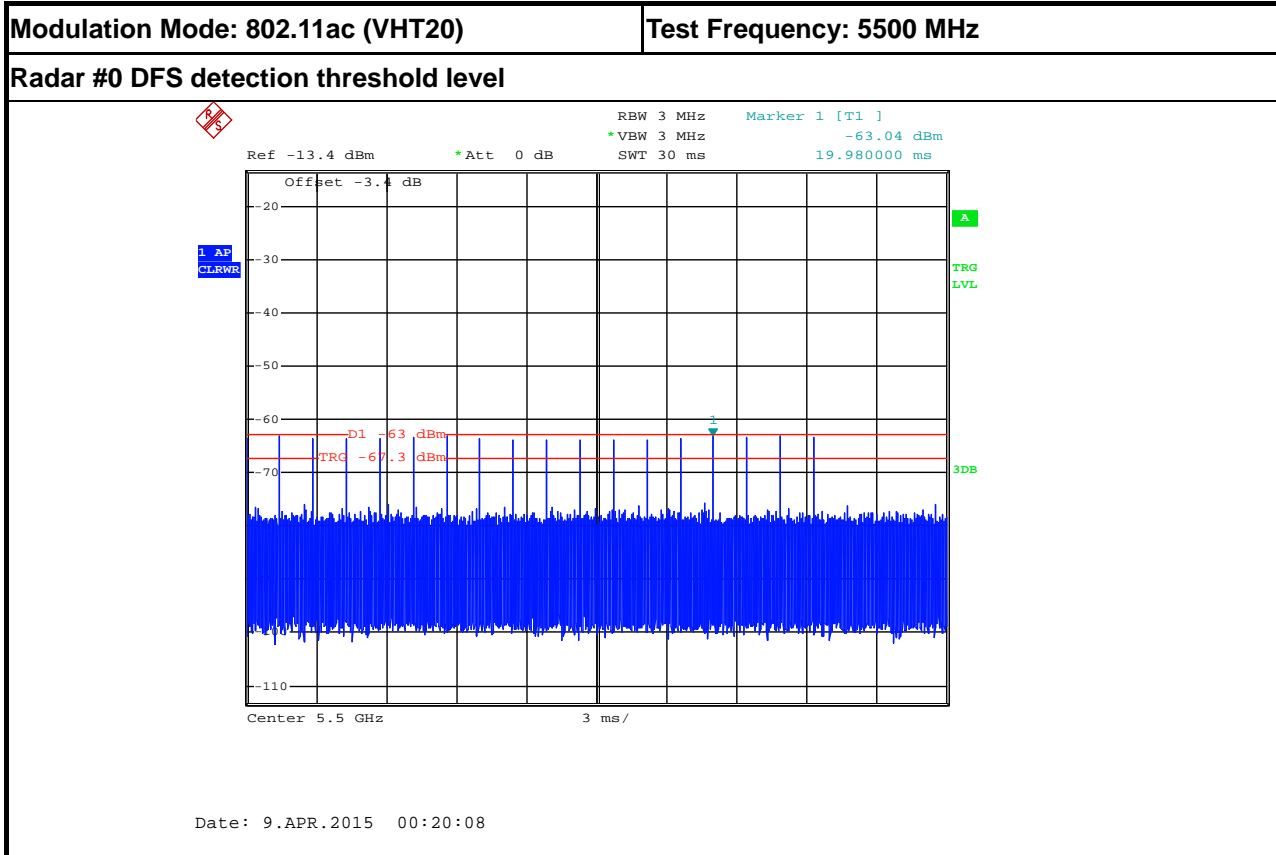




Radar #2 DFS detection threshold level

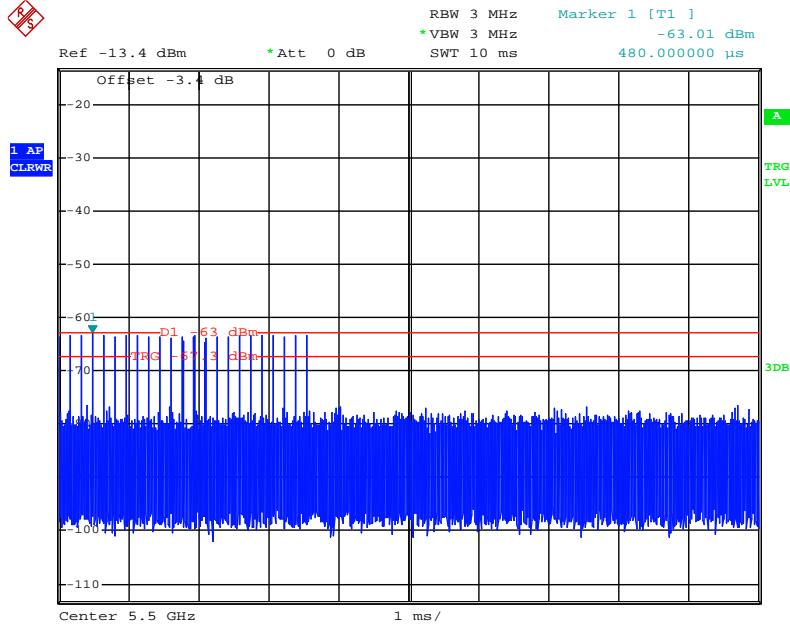

Date: 9.APR.2015 00:40:11


Radar #3 DFS detection threshold level

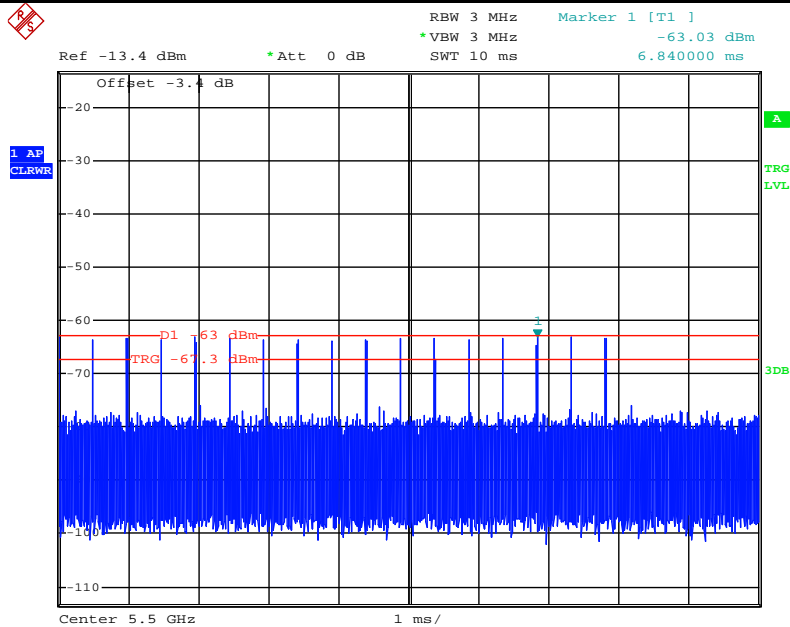

Date: 9.APR.2015 00:41:07




Radar #4 DFS detection threshold level

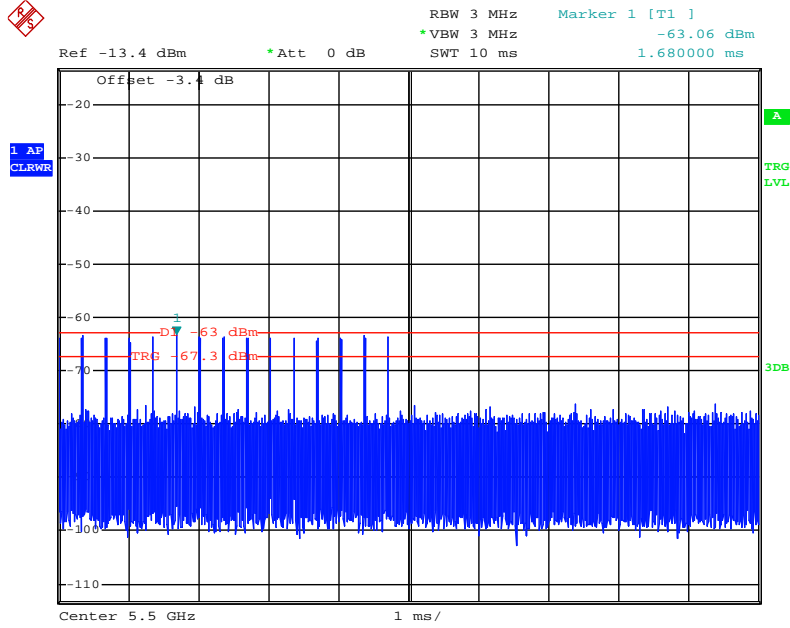

Date: 9.APR.2015 00:45:38


Radar #5 DFS detection threshold level

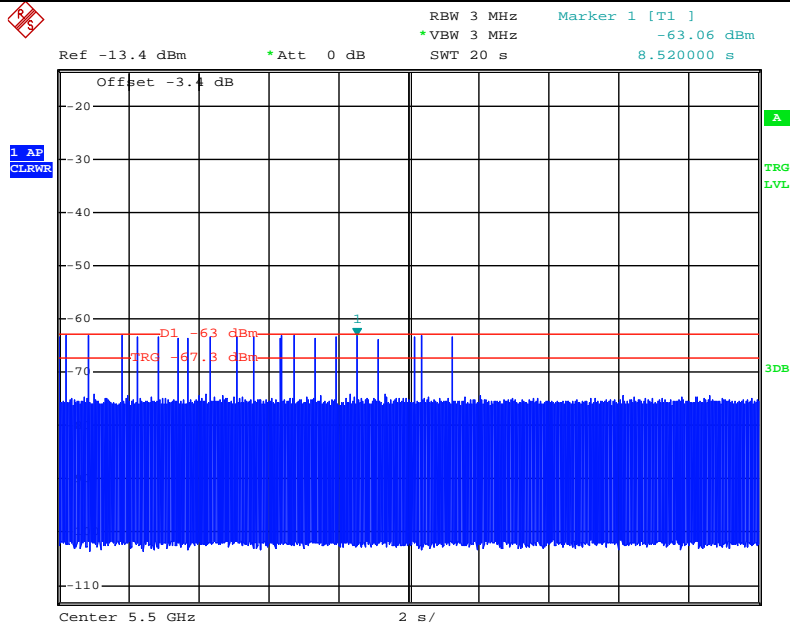

Date: 9.APR.2015 01:02:42



Radar #6 DFS detection threshold level

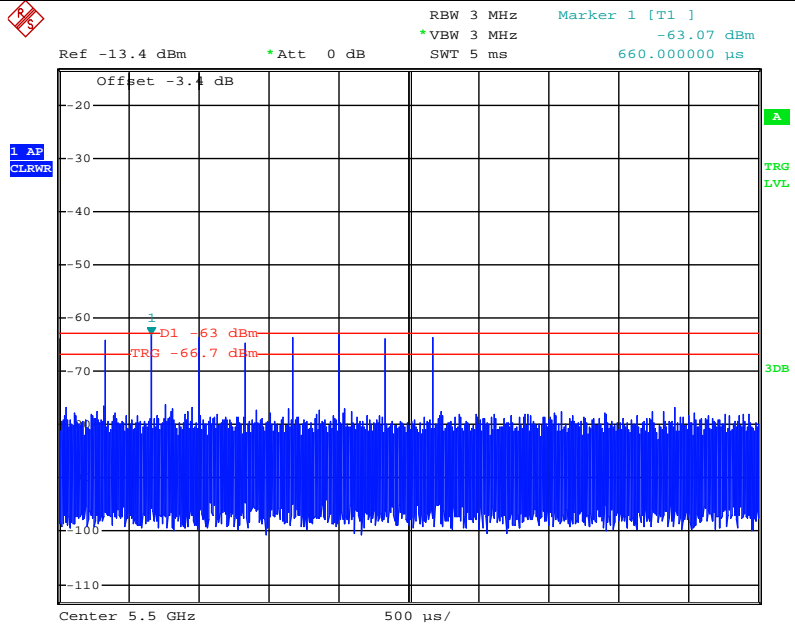


Date: 9.APR.2015 01:05:45



Modulation Mode: 802.11ac (VHT40)


Test Frequency: 5510 MHz

Radar #0 DFS detection threshold level

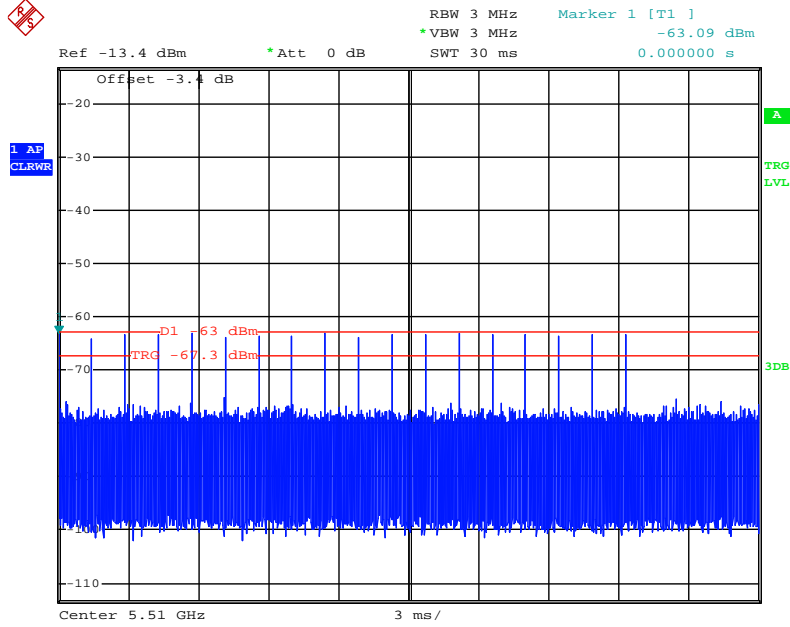

Date: 9.APR.2015 00:21:34


Radar #1 DFS detection threshold level

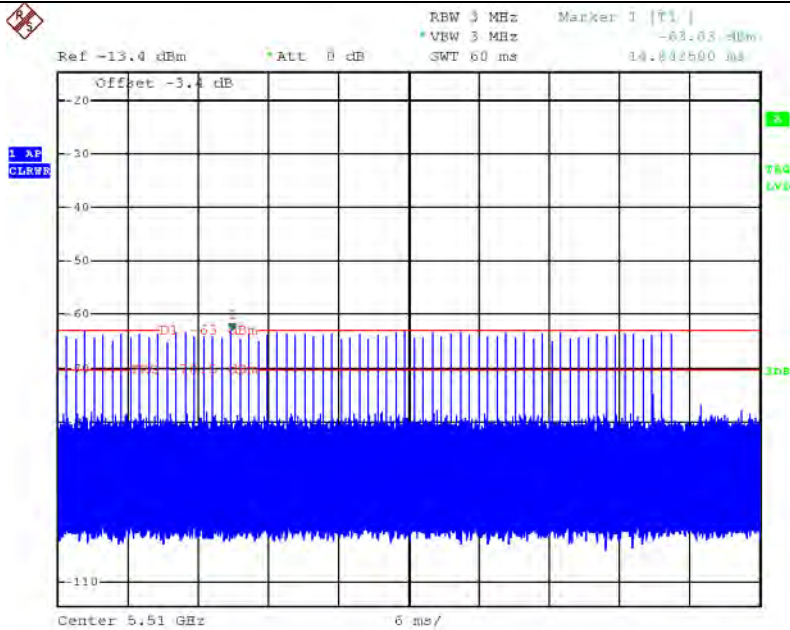

Date: 9.APR.2015 00:28:40




Radar #2 DFS detection threshold level

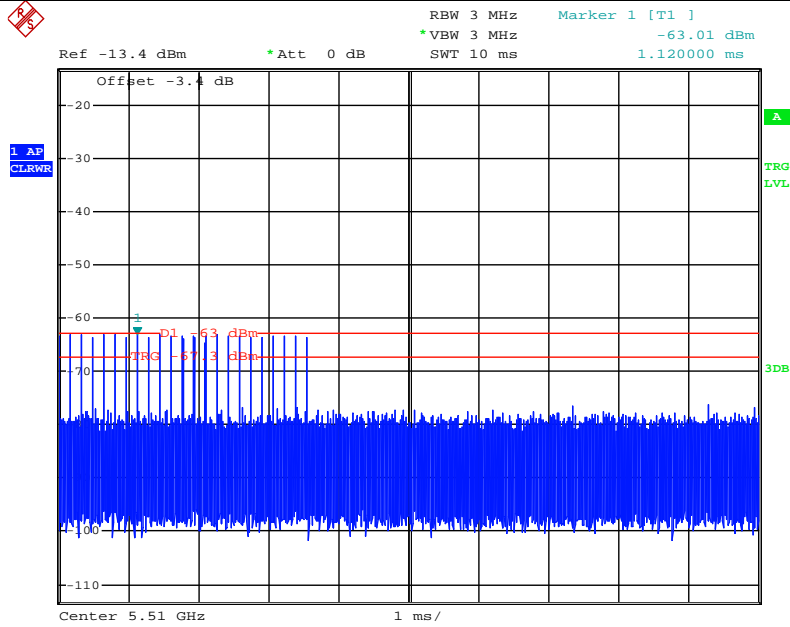

Date: 9.APR.2015 00:39:37


Radar #3 DFS detection threshold level

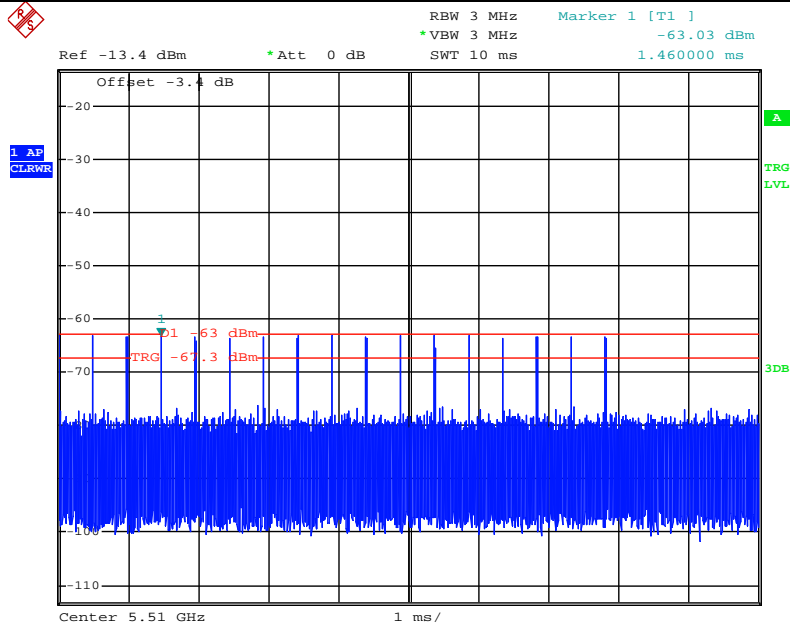

Date: 9.APR.2015 00:42:10




Radar #4 DFS detection threshold level

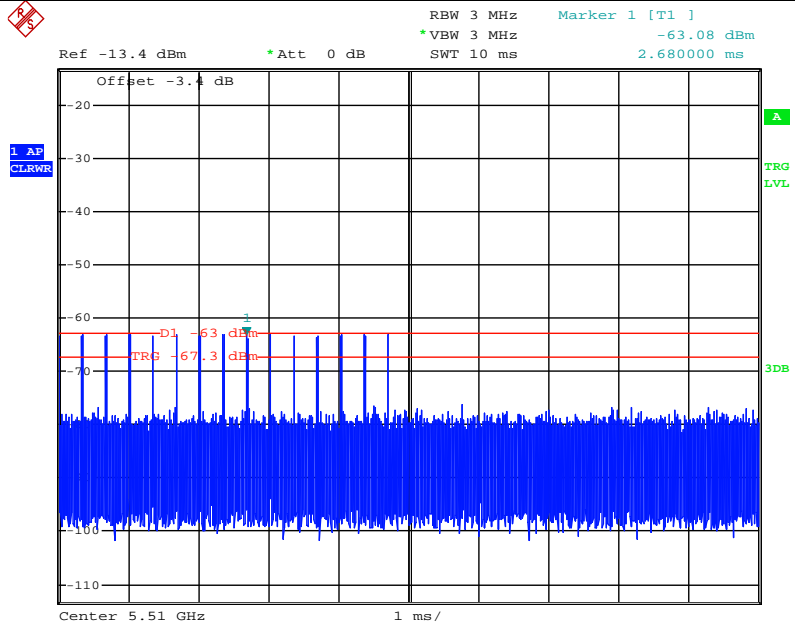

Date: 9.APR.2015 00:44:45

Radar #5 DFS detection threshold level

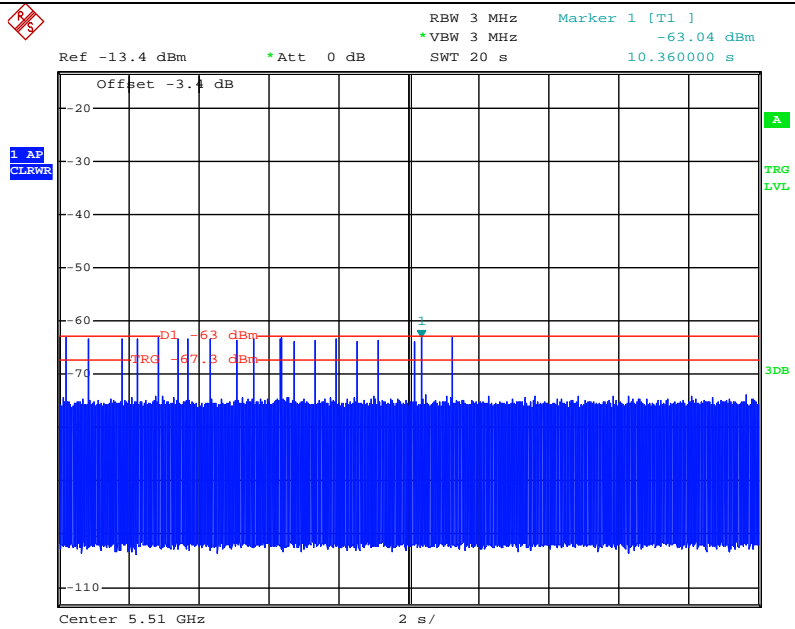


Date: 9.APR.2015 00:55:52





Radar #6 DFS detection threshold level

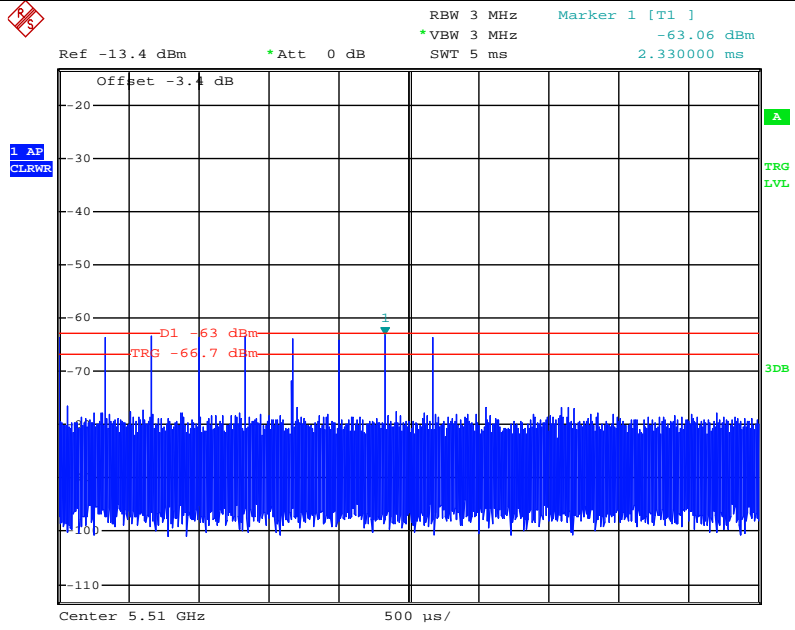


Date: 9.APR.2015 01:14:03




Modulation Mode: 802.11ac (VHT80) Test Frequency: 5530 MHz

Radar #0 DFS detection threshold level

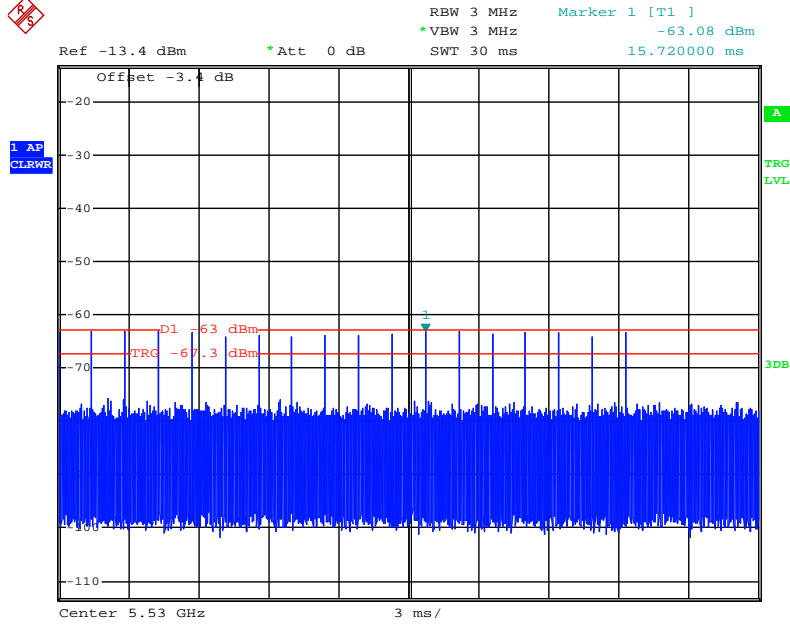

Date: 9.APR.2015 00:37:30


Radar #1 DFS detection threshold level

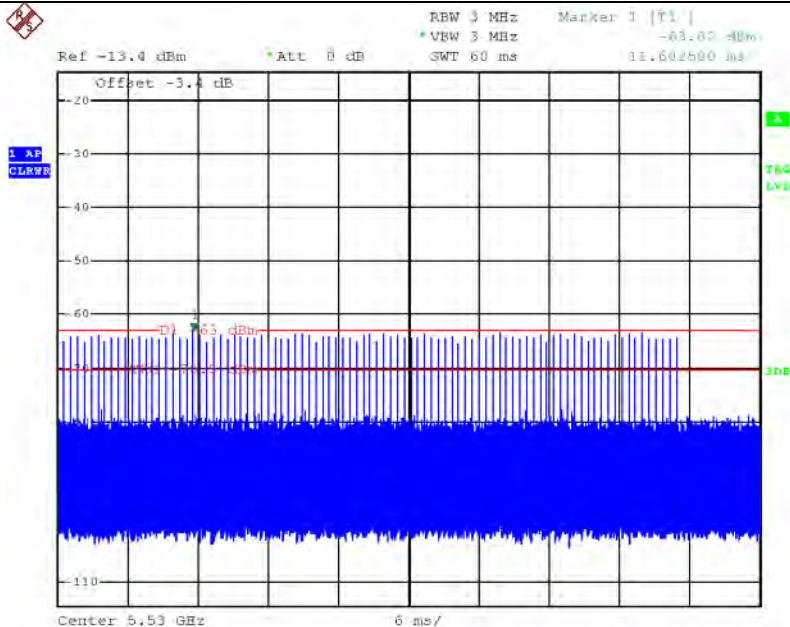

Date: 9.APR.2015 00:28:16




Radar #2 DFS detection threshold level

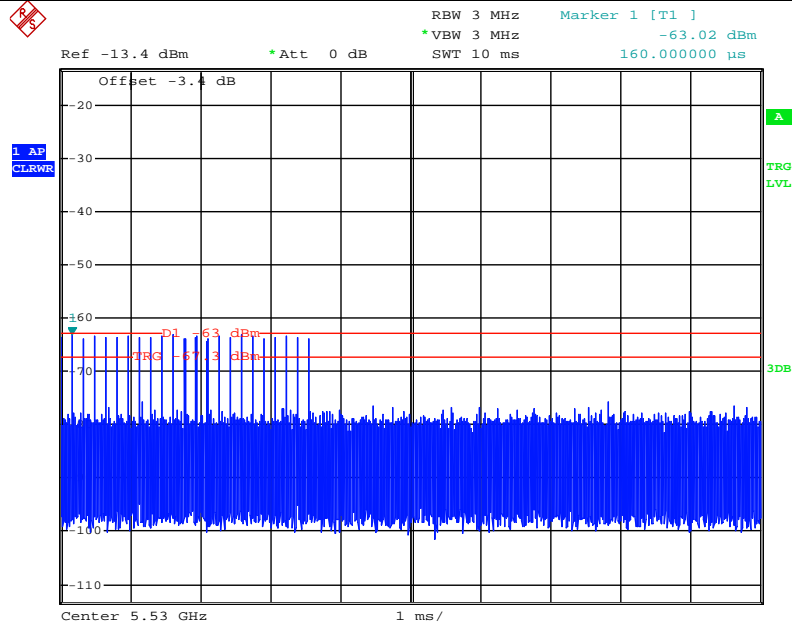

Date: 9.APR.2015 00:38:55


Radar #3 DFS detection threshold level

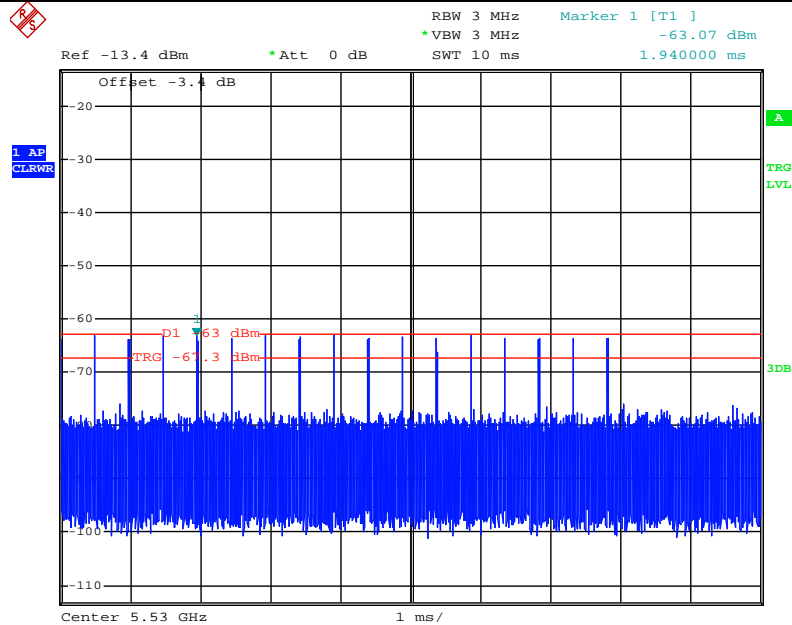

Date: 9.APR.2015 00:43:04




Radar #4 DFS detection threshold level

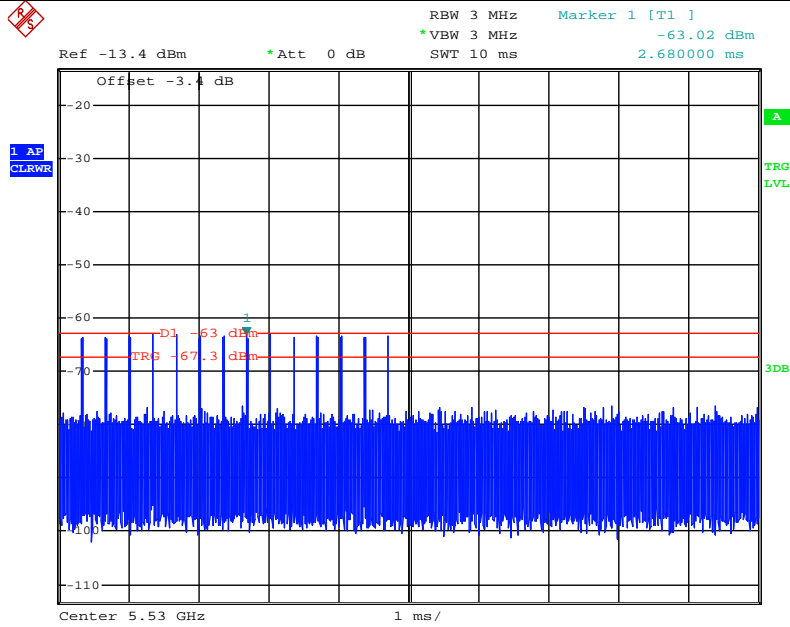

Date: 9.APR.2015 00:43:38


Radar #5 DFS detection threshold level

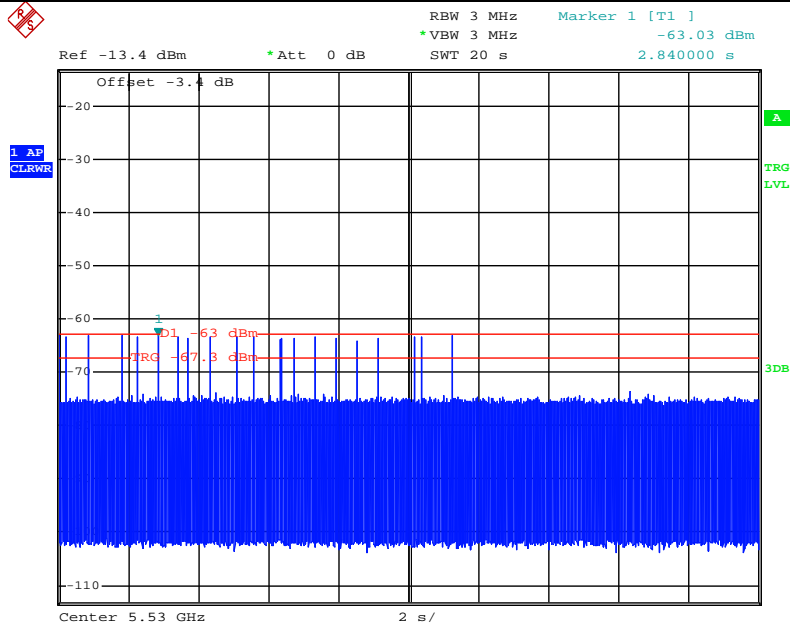

Date: 9.APR.2015 00:57:58





Radar #6 DFS detection threshold level

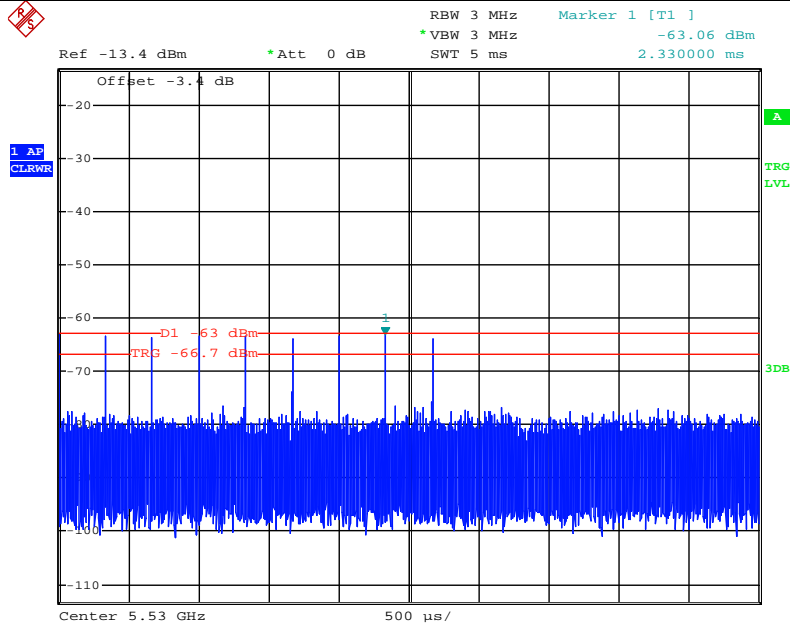


Date: 9.APR.2015 01:09:24





For Client without radar detection:

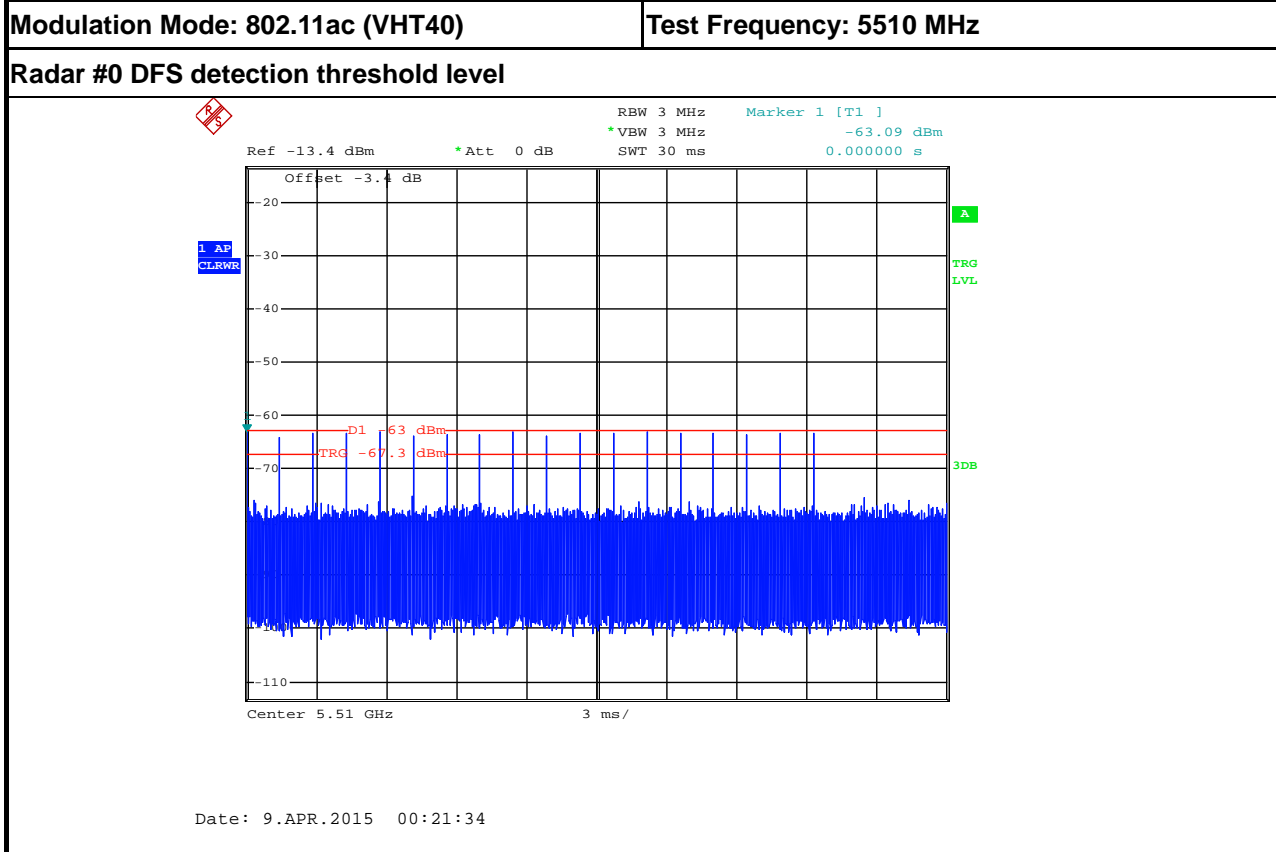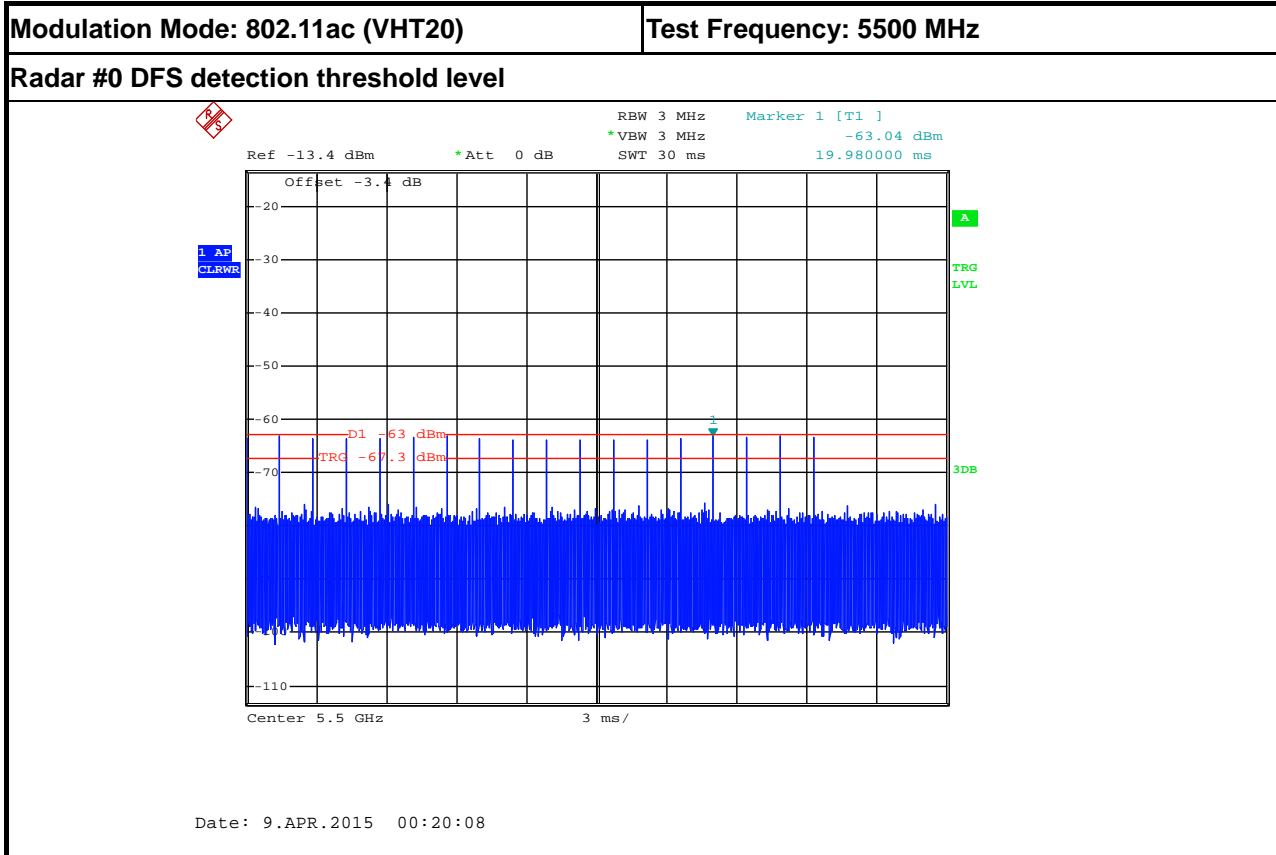

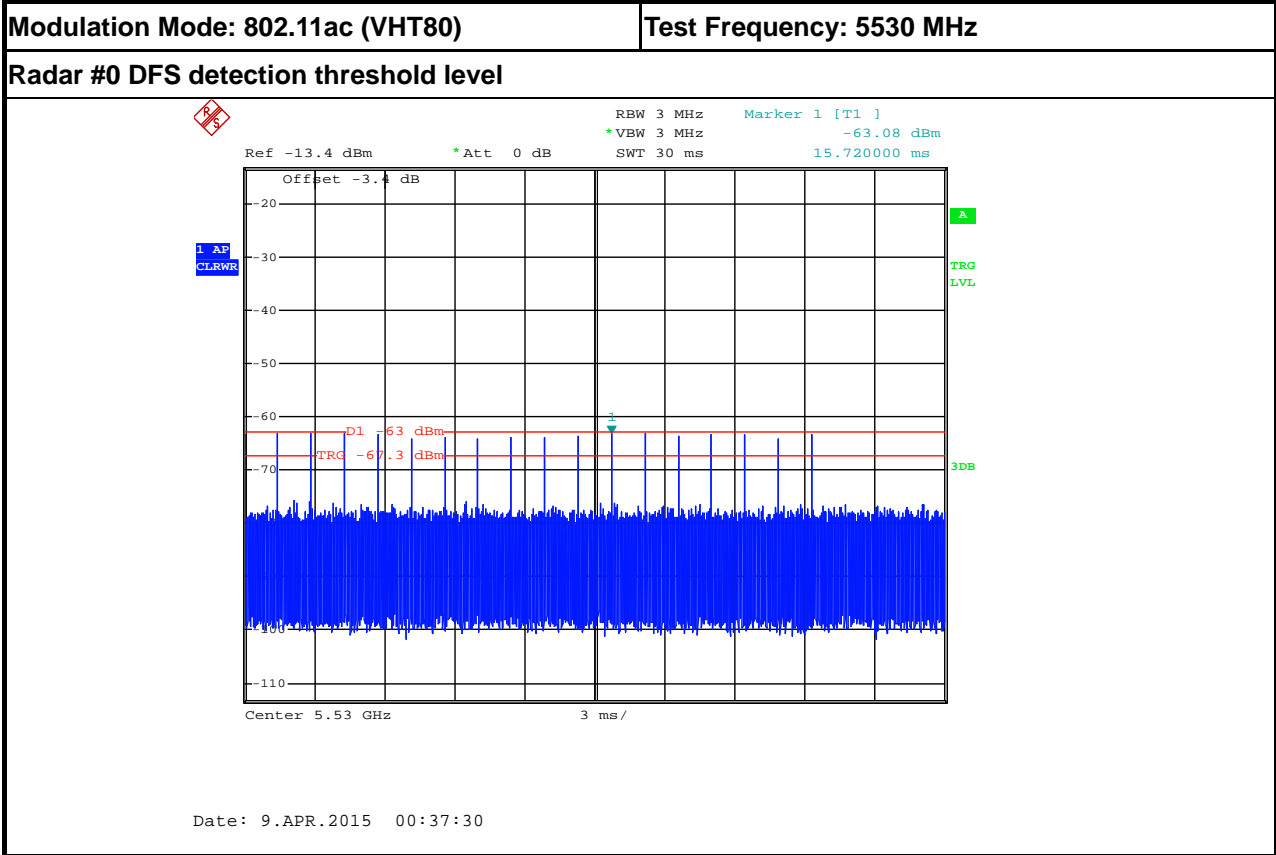

### 3.2.7 Test Setup

A spectrum analyzer is used as a monitor to verify that the EUT has vacated the Channel within the (Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and Channel move.

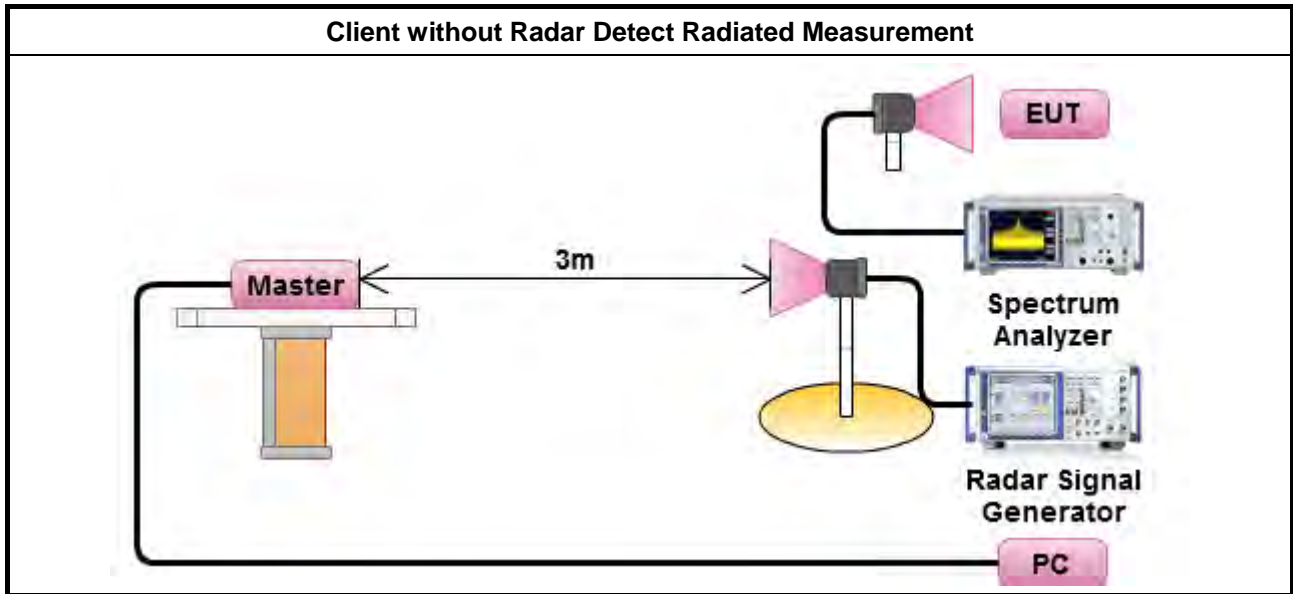
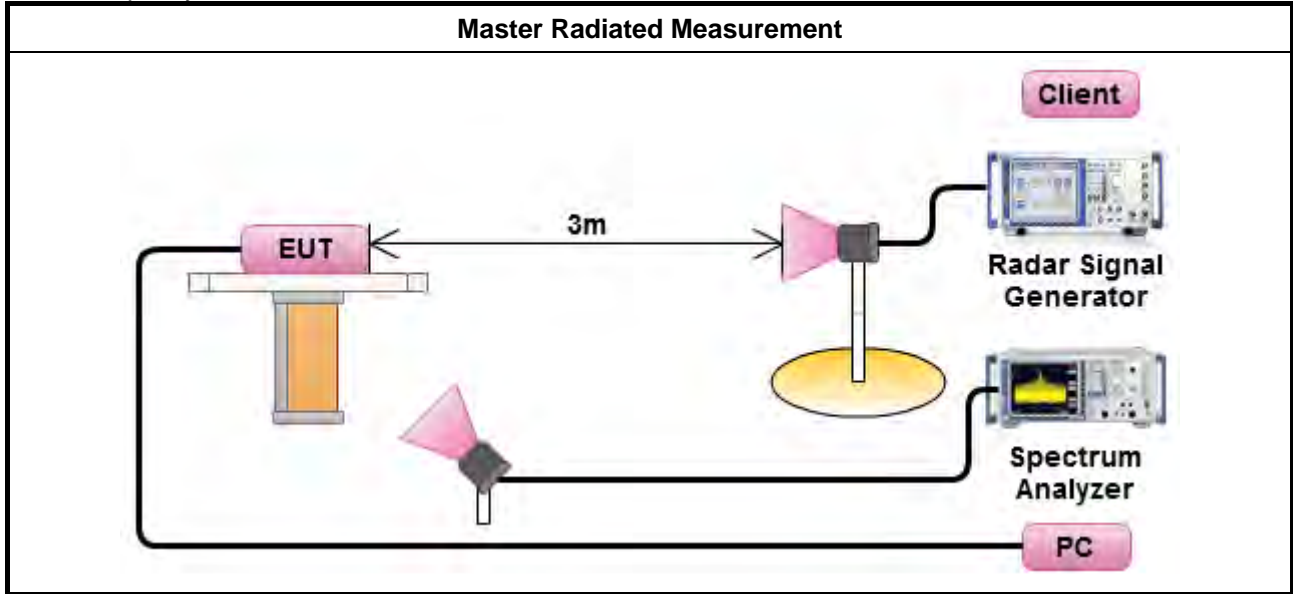







### 3.2.8 Data traffic Plot



For Master:

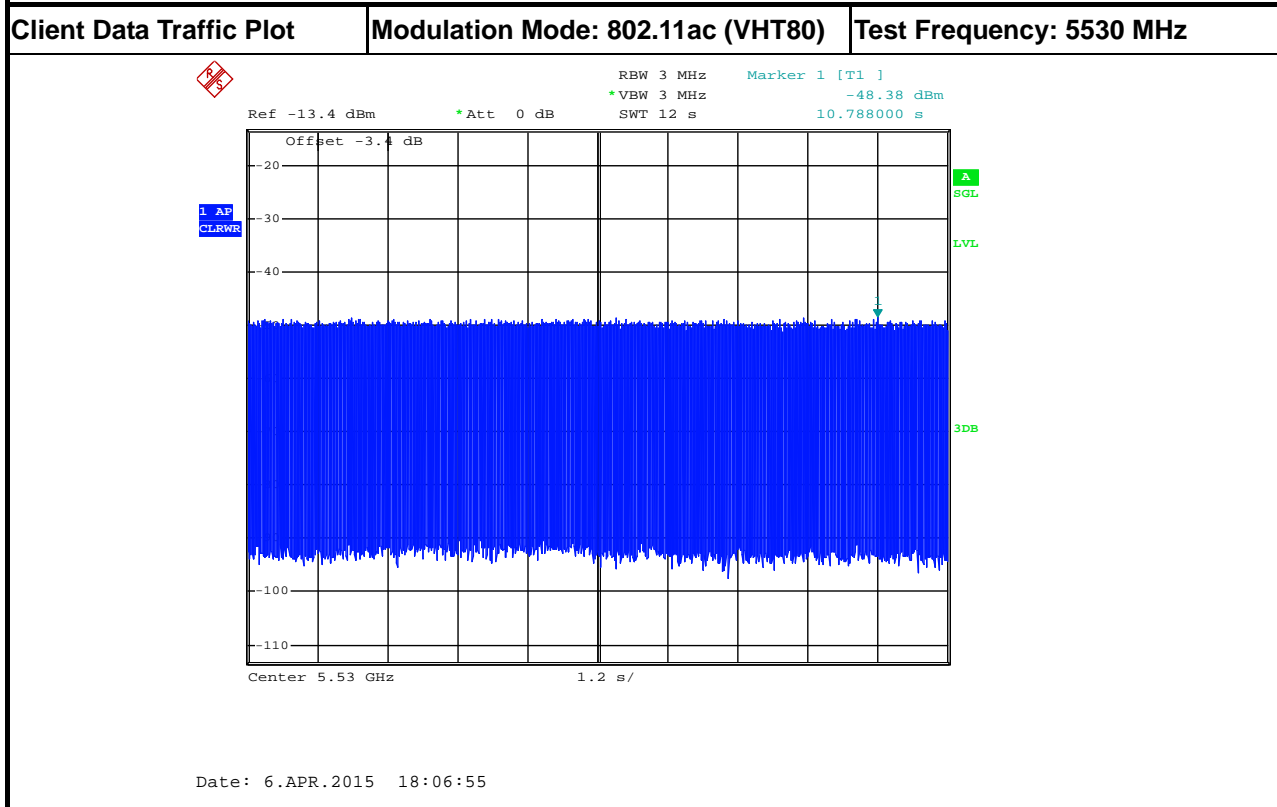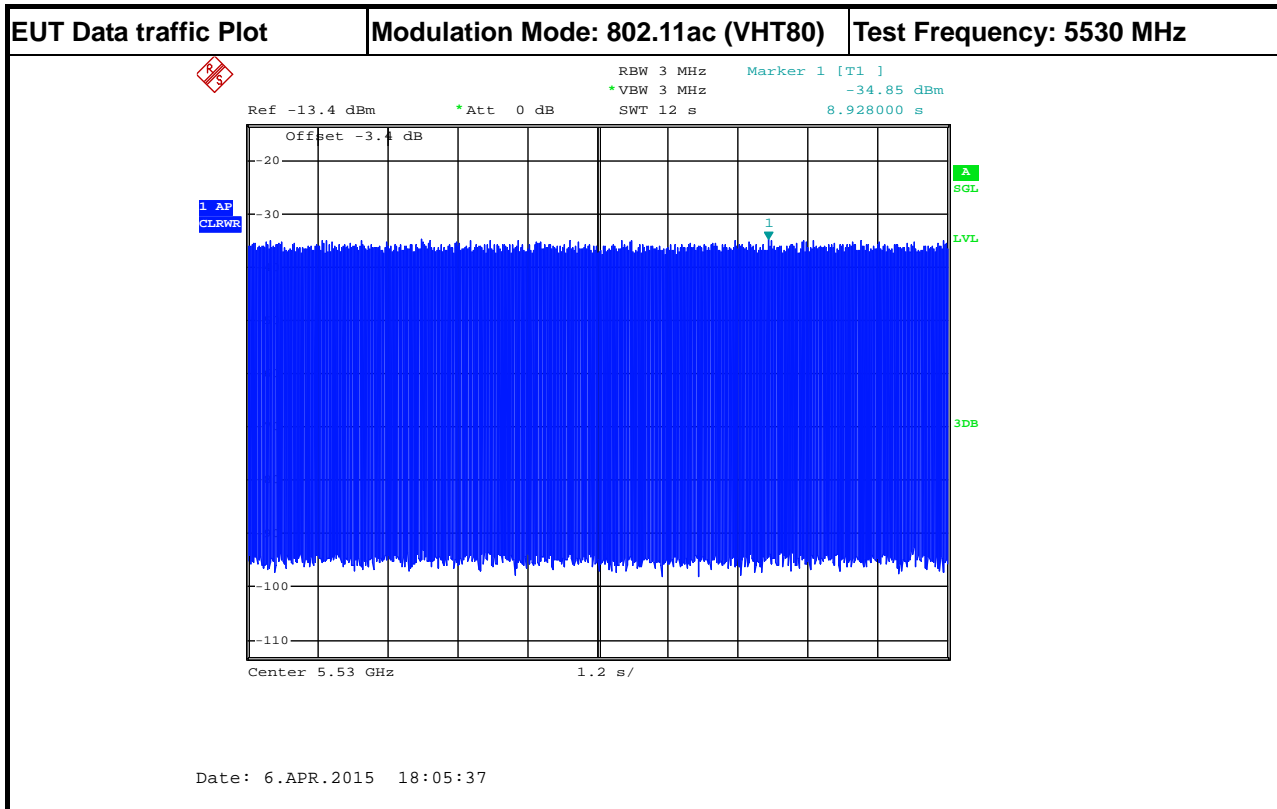


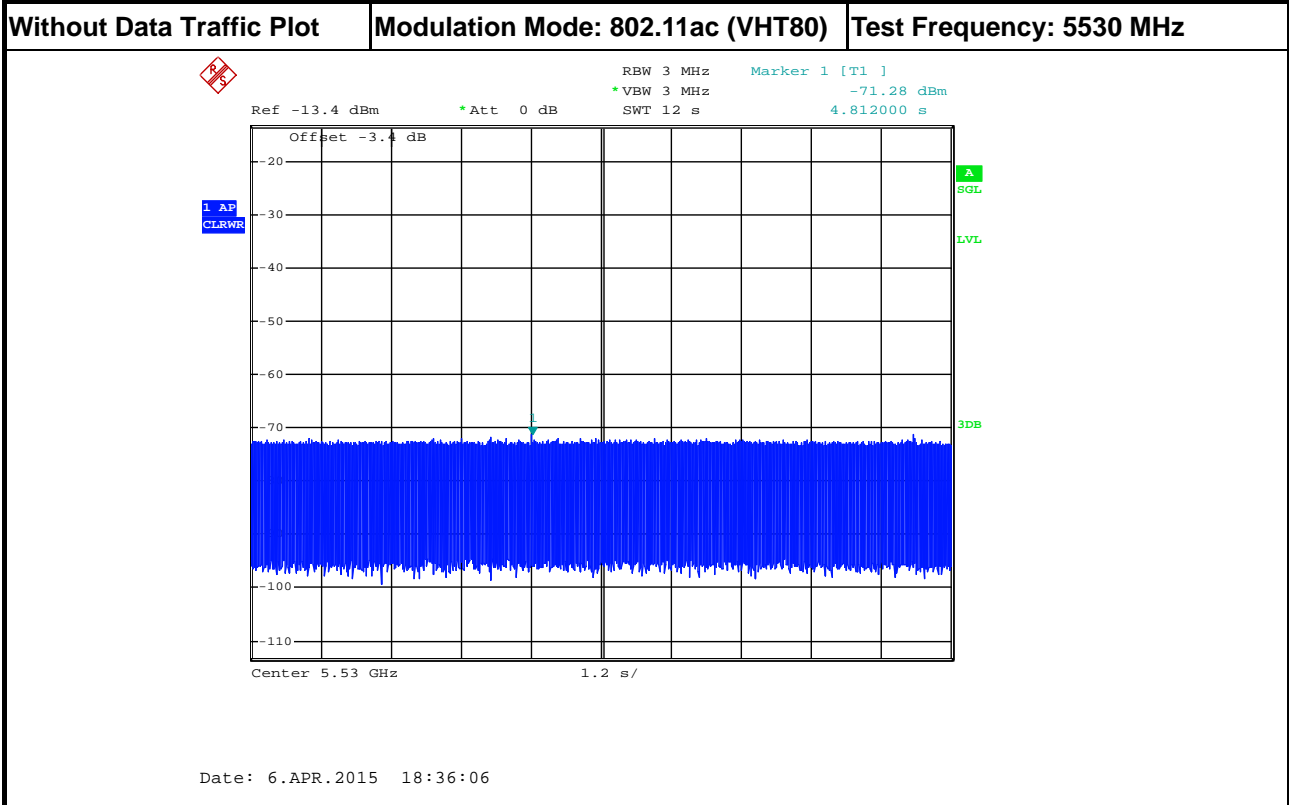



For Client without radar detection:

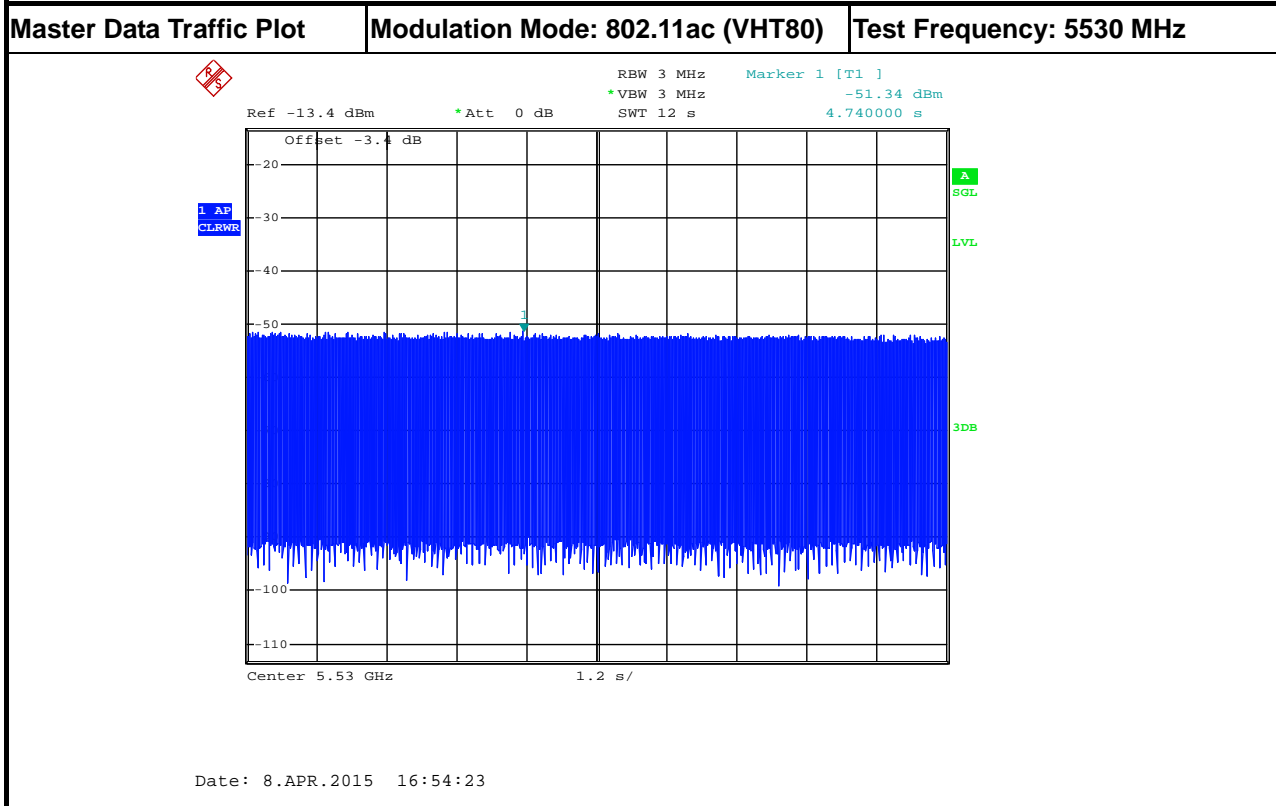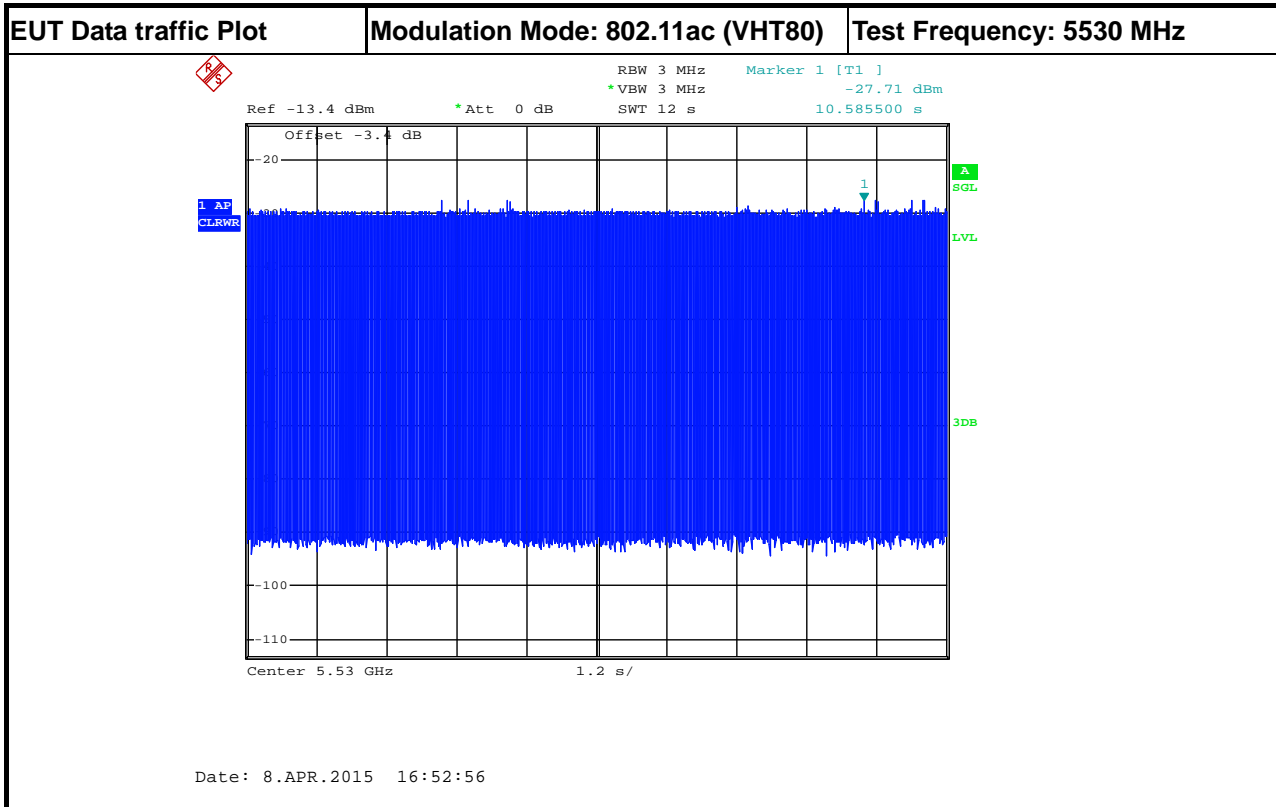

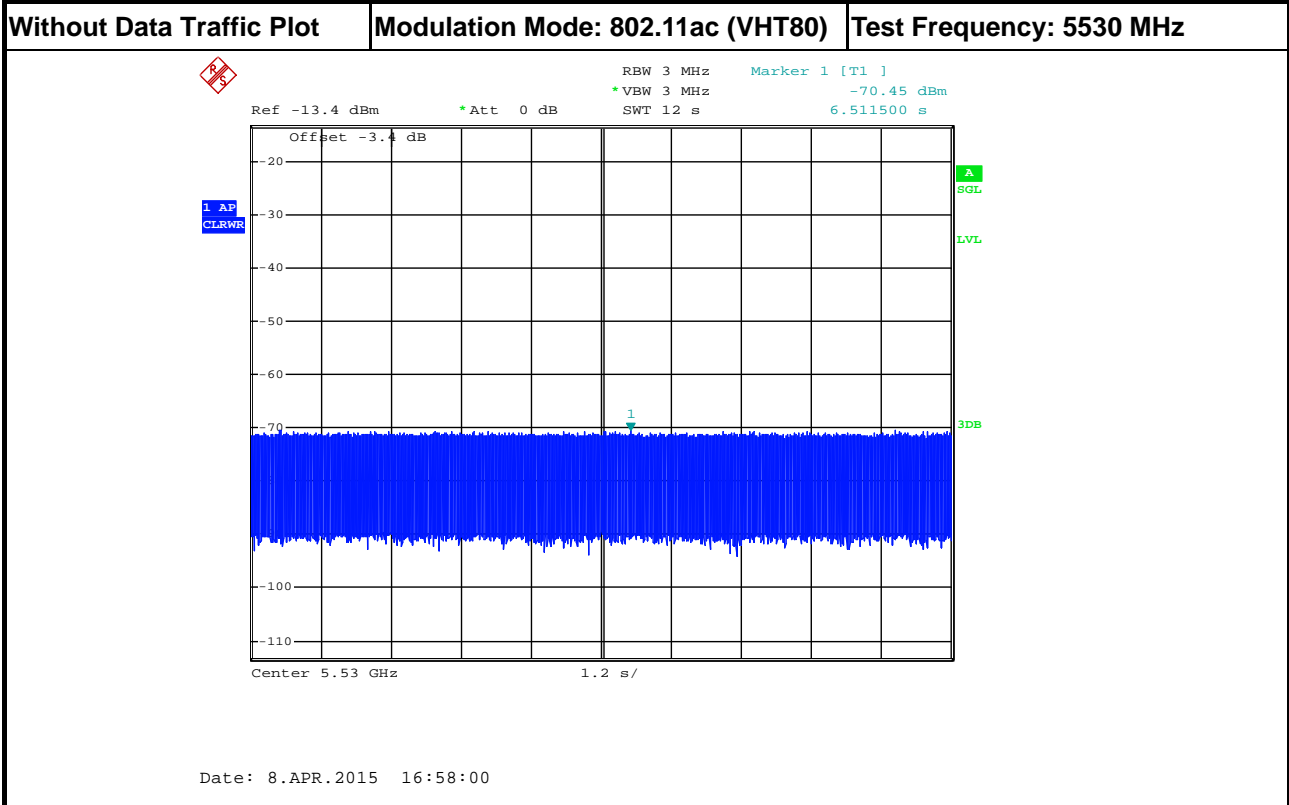



### 3.3 UNII Detection Bandwidth

#### 3.3.1 UNII Detection Bandwidth Limit

| Channel Bandwidth (MHz) | 99% Power Bandwidth (MHz) | UNII Detection Bandwidth (MHz) |
|-------------------------|---------------------------|--------------------------------|
| 20                      | 17.76                     | 18                             |
| 40                      | 35.4                      | 36                             |
| 80                      | 75.2                      | 76                             |

UNII Detection Bandwidth is minimum 100% of the 99% power bandwidth. A single radar Burst is generated for a minimum of 10 trials, and the response of the UUT is noted. The UUT must detect the Radar Waveform 90% or more of the time.

#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.3.3 Test Procedures

| Test Method  |
|--|
| <input checked="" type="checkbox"/> Refer as FCC 06-96 Appendix, clause 7.8.1 for UNII Detection Bandwidth test. During the U-NII Detection Bandwidth detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic. The EUT is set up as a standalone device (no associated Client and no traffic). The radar frequency is increased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The highest frequency at which detection is greater than or equal to 90% is denoted as $F_H$ . The radar frequency is decreased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The lowest frequency at which detection is greater than or equal to 90% is denoted as $F_L$ . UNII Detection Bandwidth = $F_H - F_L$ . |



3.3.4 Test Result of UNII Detection Bandwidth

For Master:

| EUT Frequency=5500 MHz                                   |   |   |   |   |   |   |   |   |   |    |                    |     |
|--|---|---|---|---|---|---|---|---|---|----|--------------------|-----|
| Radar Type   | 0   |   |   |   |   |   |   |   |   |    |                    |     |
| Channel Bandwidth (MHz)                                  | 20  |   |   |   |   |   |   |   |   |    |                    |     |
| Radar Frequency (MHz)                                    | DFS Detection Trials (1=Detection, 0= No Detection) |   |   |   |   |   |   |   |   |    | Detection Rate (%) |     |
|  | 1   | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |                    |     |
| 5488   | 0   | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0  | 0                  | 0   |
| 5489   | 1   | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 0 | 0  | 0                  | 70  |
| 5490   | 1   | 1 | 0 | 1 | 0 | 1 | 1 | 0 | 1 | 1  | 1                  | 70  |
| 5491(FL)   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 1                  | 100 |
| 5495   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 1                  | 100 |
| 5500   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 1                  | 100 |
| 5505   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 1                  | 100 |
| 5510(FH)   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 1                  | 100 |
| 5511   | 1   | 1 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 1  | 1                  | 70  |
| 5512   | 0   | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0  | 0                  | 0   |
| Detection Bandwidth (MHz) = (FH-FL) = (5510MHz-5491MHz)= |   |   |   |   |   |   |   |   |   |    | 19                 |     |
| Limit (MHz)  |   |   |   |   |   |   |   |   |   |    | 18                 |     |
| Test Result  |   |   |   |   |   |   |   |   |   |    | Complied           |     |

| EUT Frequency=5510 MHz                                  |   |   |   |   |   |   |   |   |   |    |                    |     |
|---|---|---|---|---|---|---|---|---|---|----|--------------------|-----|
| Radar Type  | 0   |   |   |   |   |   |   |   |   |    |                    |     |
| Channel Bandwidth (MHz)                                 | 40  |   |   |   |   |   |   |   |   |    |                    |     |
| Radar Frequency (MHz)                                   | DFS Detection Trials (1=Detection, 0= No Detection) |   |   |   |   |   |   |   |   |    | Detection Rate (%) |     |
|   | 1   | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |                    |     |
| 5488  | 0   | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0  | 0                  | 0   |
| 5489  | 1   | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 1  | 1                  | 50  |
| 5490  | 1   | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 1 | 1  | 1                  | 60  |
| 5491(FL)  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 1                  | 100 |
| 5495  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 1                  | 100 |
| 5500  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 1                  | 100 |
| 5505  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 1                  | 100 |
| 5510  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 1                  | 100 |
| 5515  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 1                  | 100 |
| 5520  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 1                  | 100 |
| 5525  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 1                  | 100 |
| 5530(FH)  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 1                  | 100 |
| 5531  | 1   | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 1  | 1                  | 50  |
| 5532  | 0   | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0  | 0                  | 0   |
| Detection Bandwidth (MHz) = (FH-FL)= (5530MHz-5491MHz)= |   |   |   |   |   |   |   |   |   |    | 39                 |     |
| Limit (MHz)   |   |   |   |   |   |   |   |   |   |    | 36                 |     |
| Test Result   |   |   |   |   |   |   |   |   |   |    | Complied           |     |



| EUT Frequency=5530 MHz                                 |   |   |   |   |   |   |   |   |   |    |                    |
|--|---|---|---|---|---|---|---|---|---|----|--------------------|
| Radar Type   | 0   |   |   |   |   |   |   |   |   |    |                    |
| Channel Bandwidth (MHz)                                | 80  |   |   |   |   |   |   |   |   |    |                    |
| Radar Frequency (MHz)                                  | DFS Detection Trials (1=Detection, 0= No Detection) |   |   |   |   |   |   |   |   |    | Detection Rate (%) |
|  | 1   | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |                    |
| 5488   | 0   | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0  | 0                  |
| 5489   | 1   | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 1  | 50                 |
| 5490(FL)   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5495   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5500   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5505   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5510   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5515   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5520   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5525   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5530   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5535   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5540   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5545   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5550   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5555   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5560   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5565   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5568   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5569   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5570(FH)   | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100                |
| 5571   | 0   | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0  | 0                  |
| Detection Bandwidth (MHz) = (FH-FL)=(5570MHz-5490MHz)= |   |   |   |   |   |   |   |   |   |    | 80                 |
| Limit (MHz)  |   |   |   |   |   |   |   |   |   |    | 76                 |
| <b>Test Result</b>                                     |   |   |   |   |   |   |   |   |   |    | <b>Complied</b>    |



### 3.4 Channel Availability Check (CAC)

#### 3.4.1 Channel Availability Check Limit

| Channel Availability Check Limit    |  |
|-------------------------------------|--|
| <input checked="" type="checkbox"/> | The EUT shall perform a Channel Availability Check to ensure that there is no radar operating on the channel. After power-up sequence, receive at least 1 minute (60 sec) on the intended operating frequency. |

#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

| Test Method                         |   |
|-------------------------------------|---|
| <input checked="" type="checkbox"/> | Refer as FCC 06-96 Appendix, clause 7.8.2.1 for Initial Channel Availability Check Time. The EUT does not emit beacon, control, or data signals on the test Channel until the power-up sequence has been completed and the UNII device checks for Radar Waveforms for one minute on the test Channel. This test does not use any Radar Waveforms. |
| <input checked="" type="checkbox"/> | Refer as FCC 06-96 Appendix, clause 7.8.2.2 for Radar Burst at the Beginning of the Channel Availability Check Time. To verify successful radar detection on the selected Channel during a period equal to the Beginning of the Channel Availability Check Time.  |
| <input checked="" type="checkbox"/> | Refer as FCC 06-96 Appendix, clause 7.8.2.3 for Radar Burst at the End of the Channel Availability Check Time. To verify successful radar detection on the selected Channel during a period equal to the End of the Channel Availability Check Time.  |





3.4.4 Test Result of Initial Channel Availability Check Time

For Master:

| Modulation Mode  | Freq.           | Radar Test Signal |
|--|-----------------|-------------------|
| 802.11ac (VHT80)   | 5530 MHz        | N/A               |
| <p>The EUT does not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle (38.9 sec). The initial power up time of the EUT is indicated by marker 1 (38.9 sec). Initial beacons/data transmissions are indicated by marker 2 (98.9 sec).</p>  |                 |                   |
| <p>RBW 3 MHz Marker 1 [T1 ]<br/>       *VBW 3 MHz -72.29 dBm<br/>       SWF 300 s 38.900000 s<br/>       Ref -13.4 dBm *Att 0 dB<br/>       Offset -3.4 dB<br/>       Marker 2 [T1 ]<br/>       -53.56 dBm<br/>       98.900000 s<br/>       1 AP CLEAR<br/>       3DB<br/>       SGL<br/>       EVL<br/>       Center 5.53 GHz 30 s/</p> <p>Date: 6.APR.2015 18:27:18</p> |                 |                   |
| <b>Test Result</b>   | <b>Complied</b> |                   |



### 3.4.5 Test Result of Radar Burst at the Beginning of the Channel Availability Check Time

For Master:

| Modulation Mode   | Freq. (MHz) | Radar Type Signal |
|---|-------------|-------------------|
| 802.11ac (VHT80)  | 5530 MHz    | 0                 |
| <p>Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions will continue for 260.4 seconds after the radar Burst has been generated. Verify that during the 300 seconds measurement window no EUT transmissions occurred.</p> |             |                   |
|   |             |                   |
| <p>Date: 6.APR.2015 18:42:07</p>  |             |                   |
| <b>Test Result</b>  |             | <b>Complied</b>   |



**3.4.6 Test Result of Radar Burst at the End of the Channel Availability Check Time**

For Master:

| Modulation Mode   | Freq. (MHz)     | Radar Type Signal |
|---|-----------------|-------------------|
| 802.11ac (VHT80)  | 5530 MHz        | 0                 |
| <p>Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions will continue for 202.8 seconds after the radar Burst has been generated. Verify that during the 300 seconds measurement window no EUT transmissions occurred.</p> |                 |                   |
|   |                 |                   |
| <b>Test Result</b>  | <b>Complied</b> |                   |



### 3.5 In-service Monitoring

#### 3.5.1 In-service Monitoring Limit

| In-service Monitoring Limit       |   |
|-----------------------------------|---|
| Channel Move Time                 | 10 sec  |
| Channel Closing Transmission Time | 200 ms + an aggregate of 60 ms over remaining 10 sec periods. |
| Non-occupancy period              | Minimum 30 minutes  |

#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures

| Test Method  |
|--|
| <input checked="" type="checkbox"/> Refer as FCC 06-96 Appendix, clause 7.8.3 verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing Transmission Time limits. |
| <input checked="" type="checkbox"/> Refer as FCC 06-96 Appendix, clause 8.3 verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. One 12 sec plot needs to be reported for the Short Pulse Radar Types 0 and one for the Long Pulse Radar Type in a 22 sec plot. And zoom-in a 600 ms plot verified channel closing time for the aggregate transmission time starting from 200ms after the end of the radar signal to the completion of the channel move.                                       |
| <input checked="" type="checkbox"/> Refer as FCC 06-96 Appendix, clause 7.8.3 verified during In-Service Monitoring; Non-Occupancy Period. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Non-Occupancy Period). Compare the Non-Occupancy Period limits.   |



### 3.5.4 Test Result of In-service Monitoring

For Master:

**Modulation Mode: 802.11ac (VHT80)**

| Parameter                                     | Test Result |          | Limit    |
|---|-------------|----------|----------|
|   | Type 0      | Type 5   |          |
| Test Channel (MHz)                            | 5530 MHz    | 5530 MHz | -        |
| Channel Move Time (sec.)                      | 0.72        | 0        | < 10s    |
| Channel Closing Transmission Time (ms) (Note) | 9           | 0        | < 60ms   |
| Non-Occupancy Period (min.)                   | ≥ 30        | -        | ≥ 30 min |

Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.

For Client without radar detection:


**Modulation Mode: 802.11ac (VHT80)**

| Parameter                                     | Test Result | Limit    |
|---|-------------|----------|
|   | Type 0      |          |
| Test Channel (MHz)                            | 5530 MHz    | -        |
| Channel Move Time (sec.)                      | 4.0125      | < 10s    |
| Channel Closing Transmission Time (ms) (Note) | 48          | < 60ms   |
| Non-Occupancy Period (min.)                   | ≥ 30        | ≥ 30 min |

Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.


### 3.5.5 Test Plot of In-Service Monitoring for Channel Move Time

For Master:

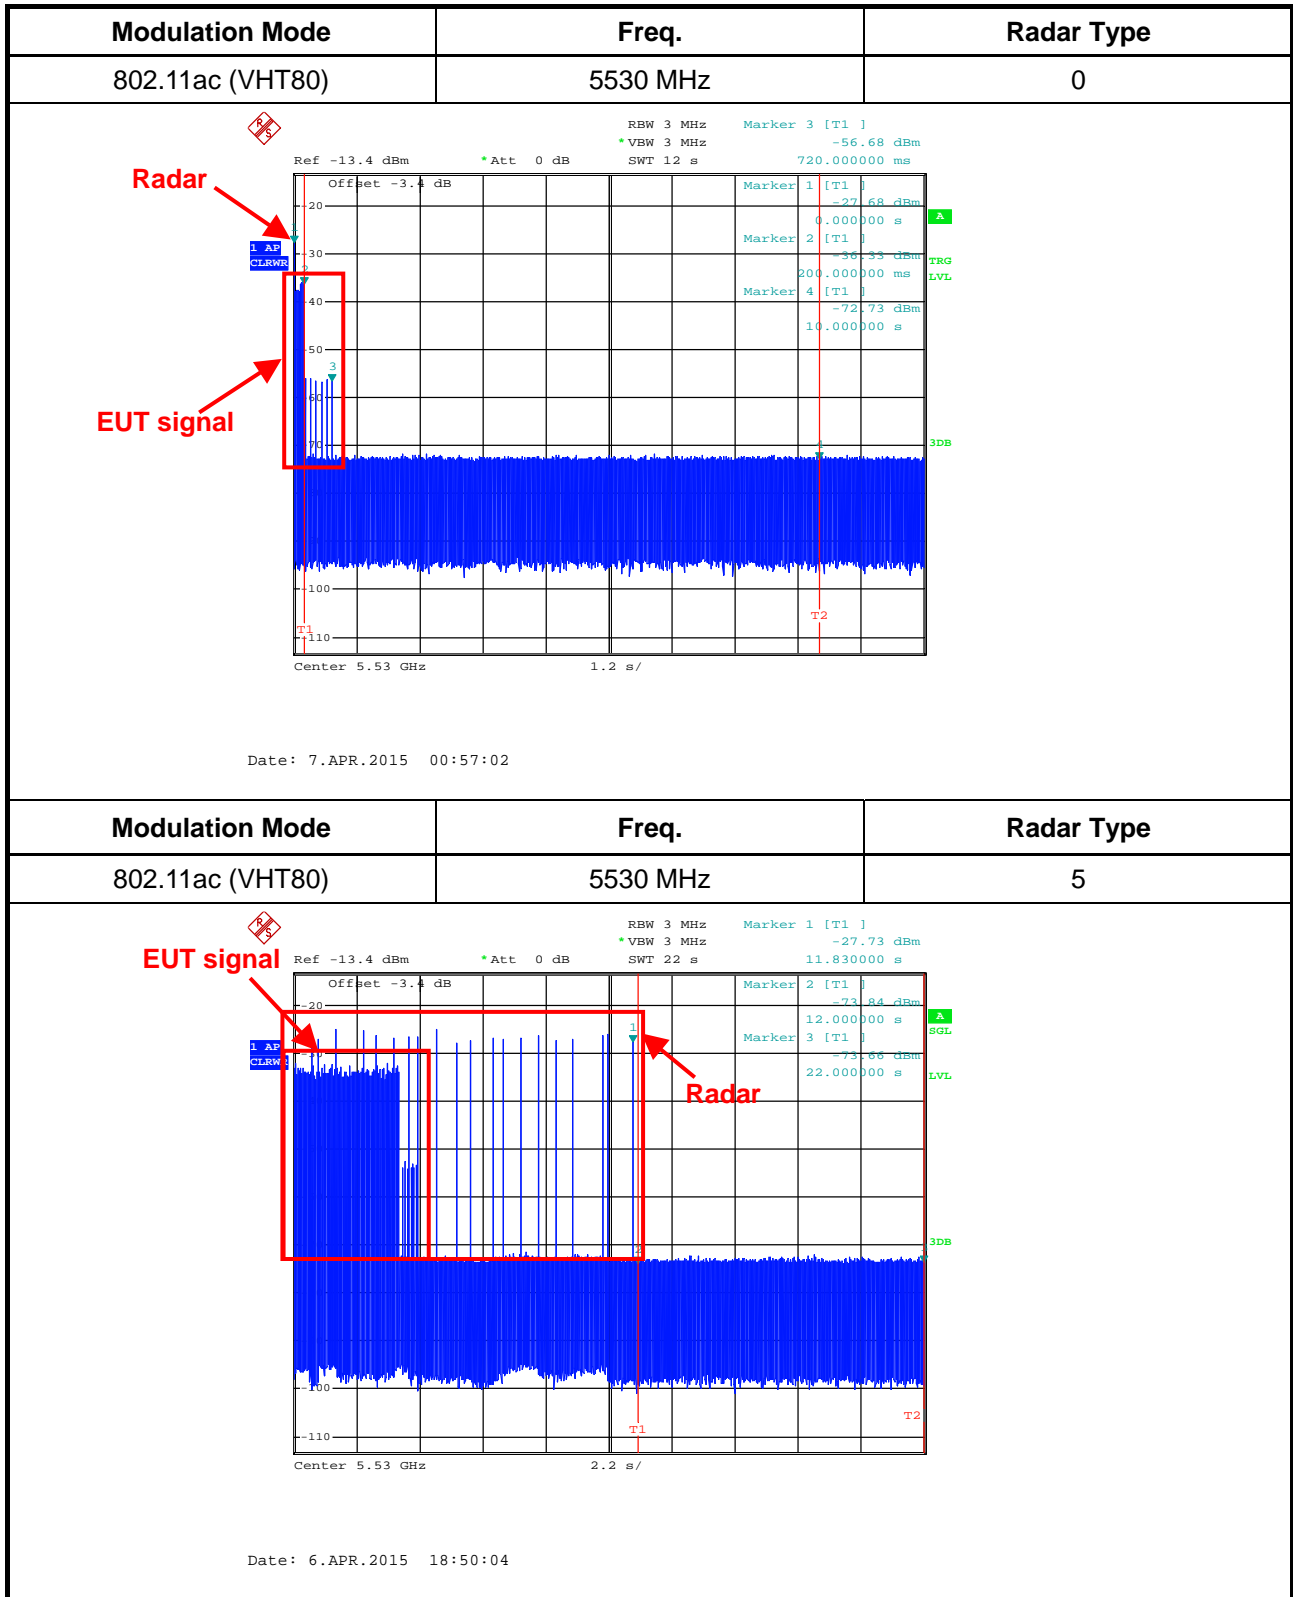




For Client without radar detection:

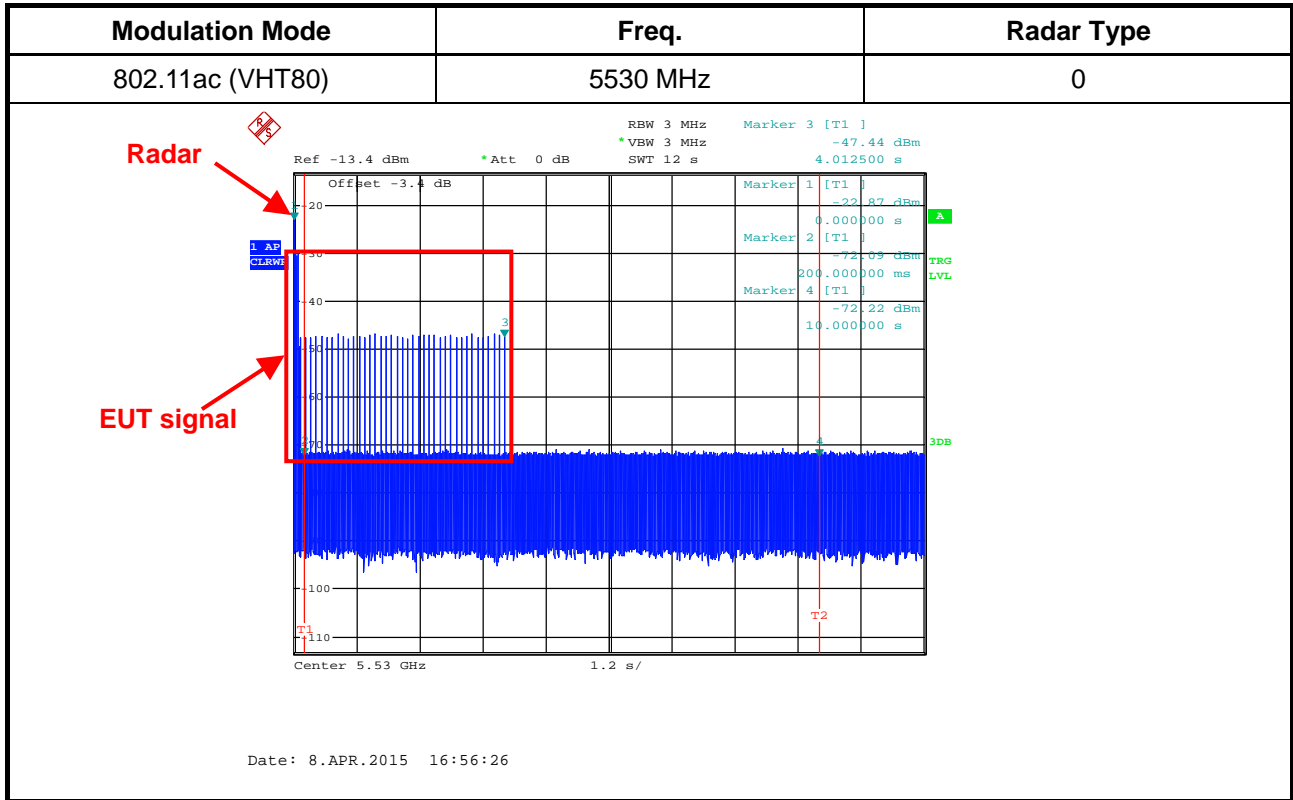

### 3.5.6 Test Plot of In-Service Monitoring for Channel Closing Transmission Time

For Master:

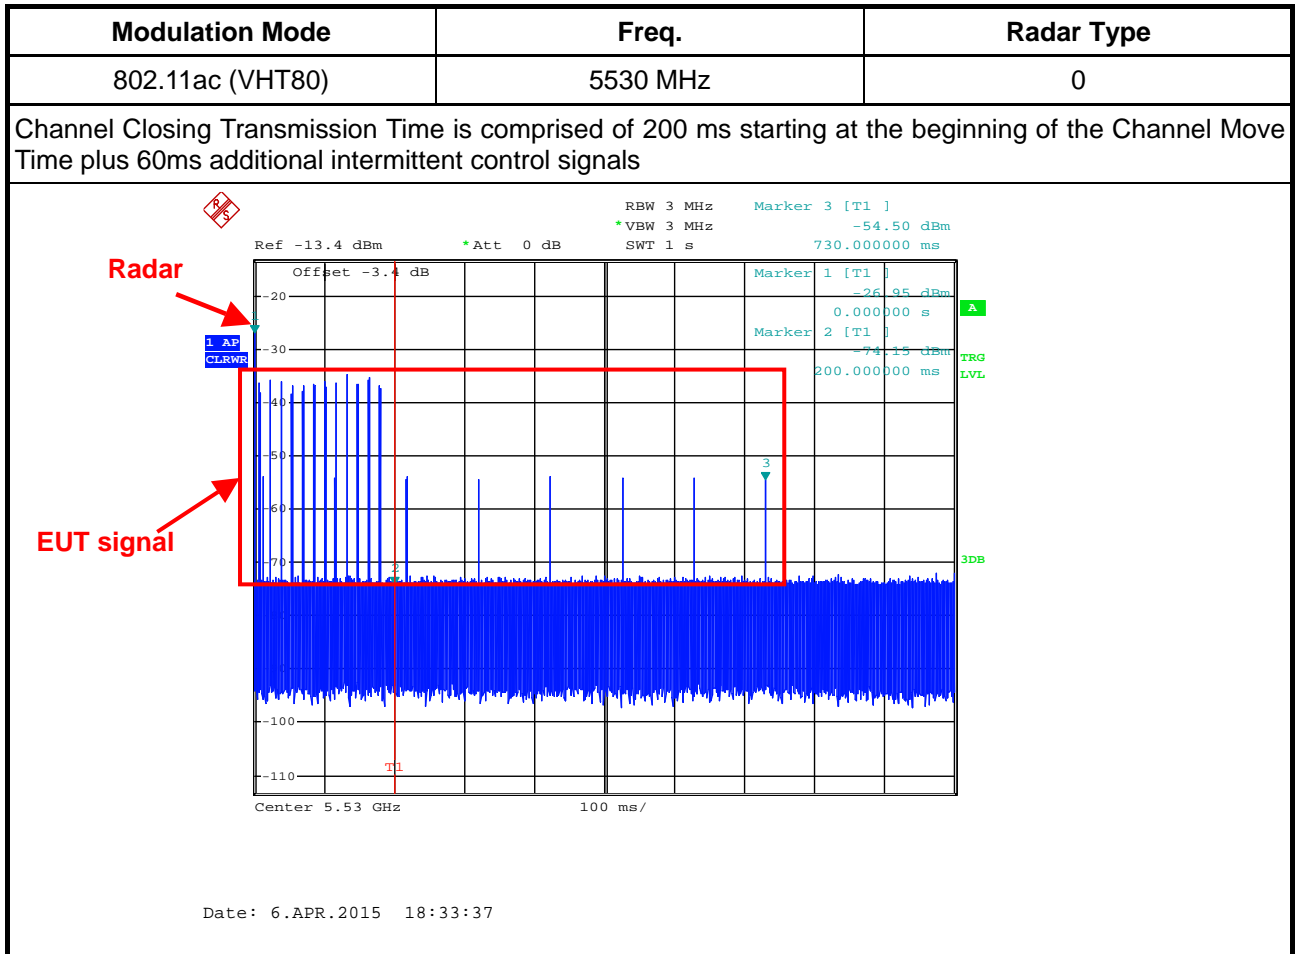

Dwell is the dwell time per spectrum analyzer sampling bin.

S is the sweep time

B is the number of spectrum analyzer sampling bins


C is the intermittent control signals of Channel Closing Transmission Time

N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission

$$\text{Dwell (1 ms)} = S (1000 \text{ ms}) / B (1000)$$

$$C (9 \text{ ms}) = N (9) \times \text{Dwell (1 ms)}$$



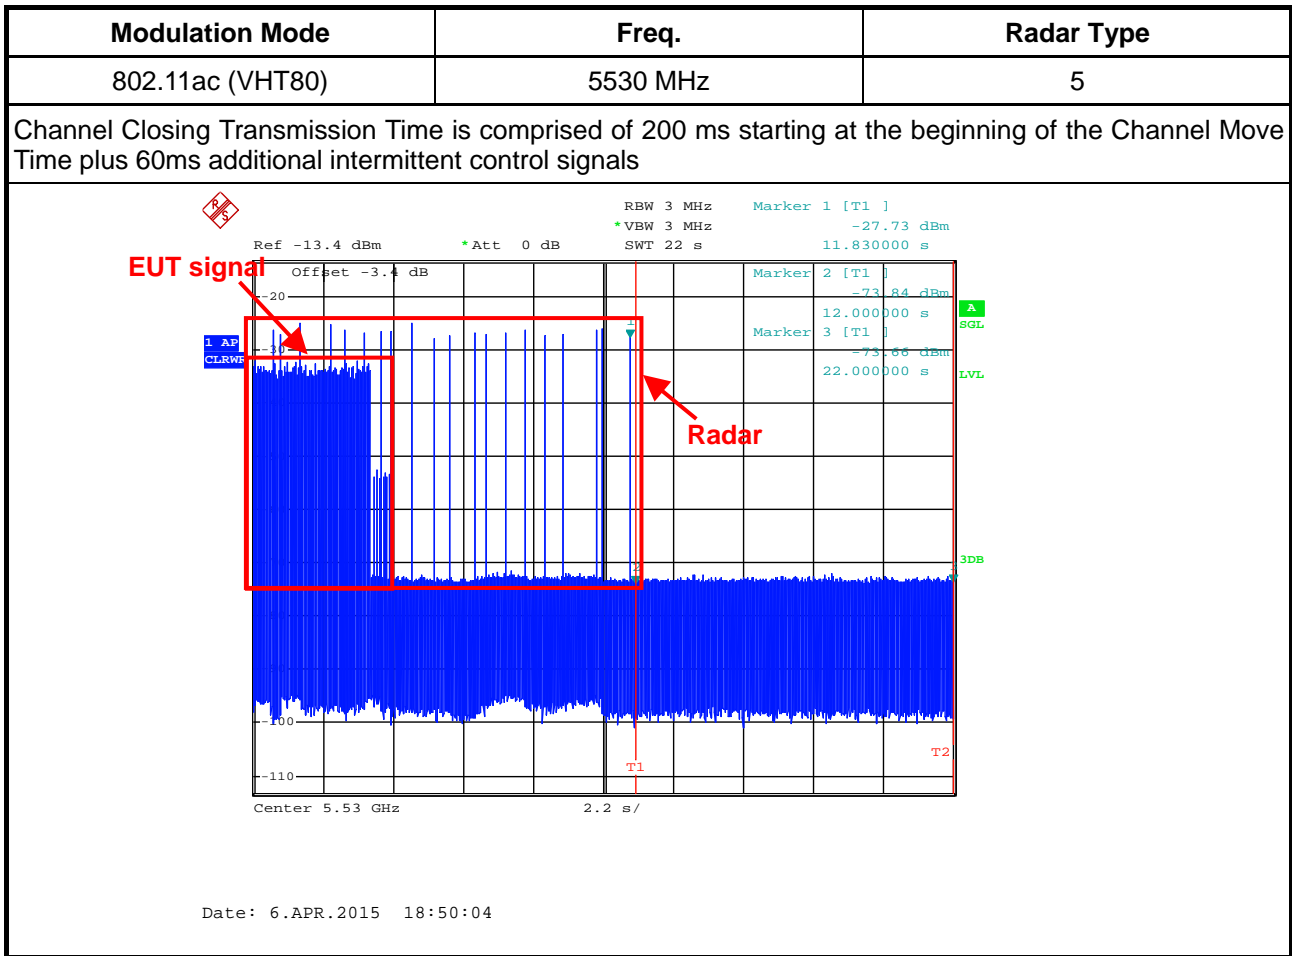

Dwell is the dwell time per spectrum analyzer sampling bin.

S is the sweep time

B is the number of spectrum analyzer sampling bins

C is the intermittent control signals of Channel Closing Transmission Time

N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission


$$\text{Dwell (22 ms)} = S (22000 \text{ ms}) / B (1000)$$

$$C (0 \text{ ms}) = N (0) \times \text{Dwell (22 ms)}$$

For Client without radar detection:

| Modulation Mode  | Freq.    | Radar Type |
|------------------|----------|------------|
| 802.11ac (VHT80) | 5530 MHz | 0          |

Channel Closing Transmission Time is comprised of 200 ms starting at the beginning of the Channel Move Time plus 60ms additional intermittent control signals

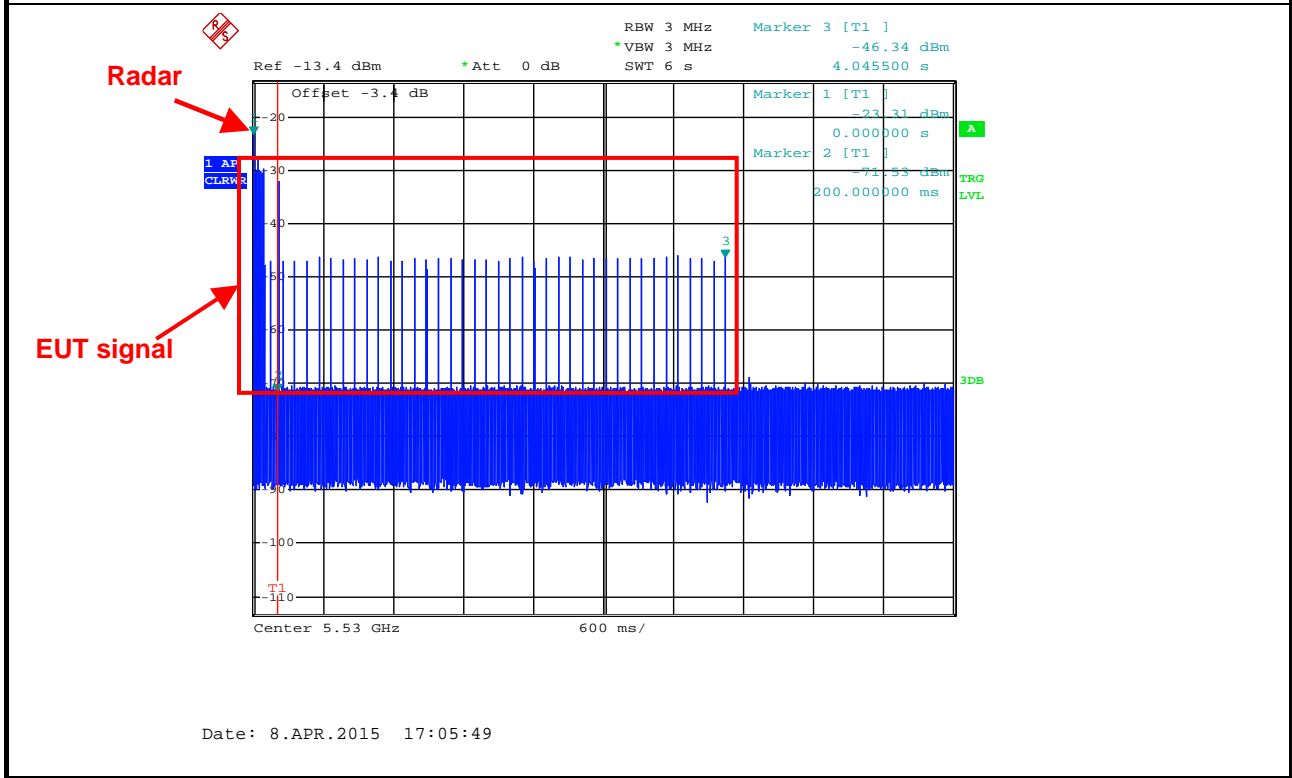

Dwell is the dwell time per spectrum analyzer sampling bin.

S is the sweep time

B is the number of spectrum analyzer sampling bins

C is the intermittent control signals of Channel Closing Transmission Time

N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission

$$\text{Dwell (0.75 ms)} = \text{S (6000 ms)} / \text{B (8000)}$$

$$\text{C (48 ms)} = \text{N (64)} \times \text{Dwell (0.75 ms)}$$




### 3.5.7 Test Plot of In-Service Monitoring for Non-Occupancy Period

For Master:

| Modulation Mode  | Freq.    |
|------------------|----------|
| 802.11ac (VHT80) | 5530 MHz |

#### Non-Occupancy Period

During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring.

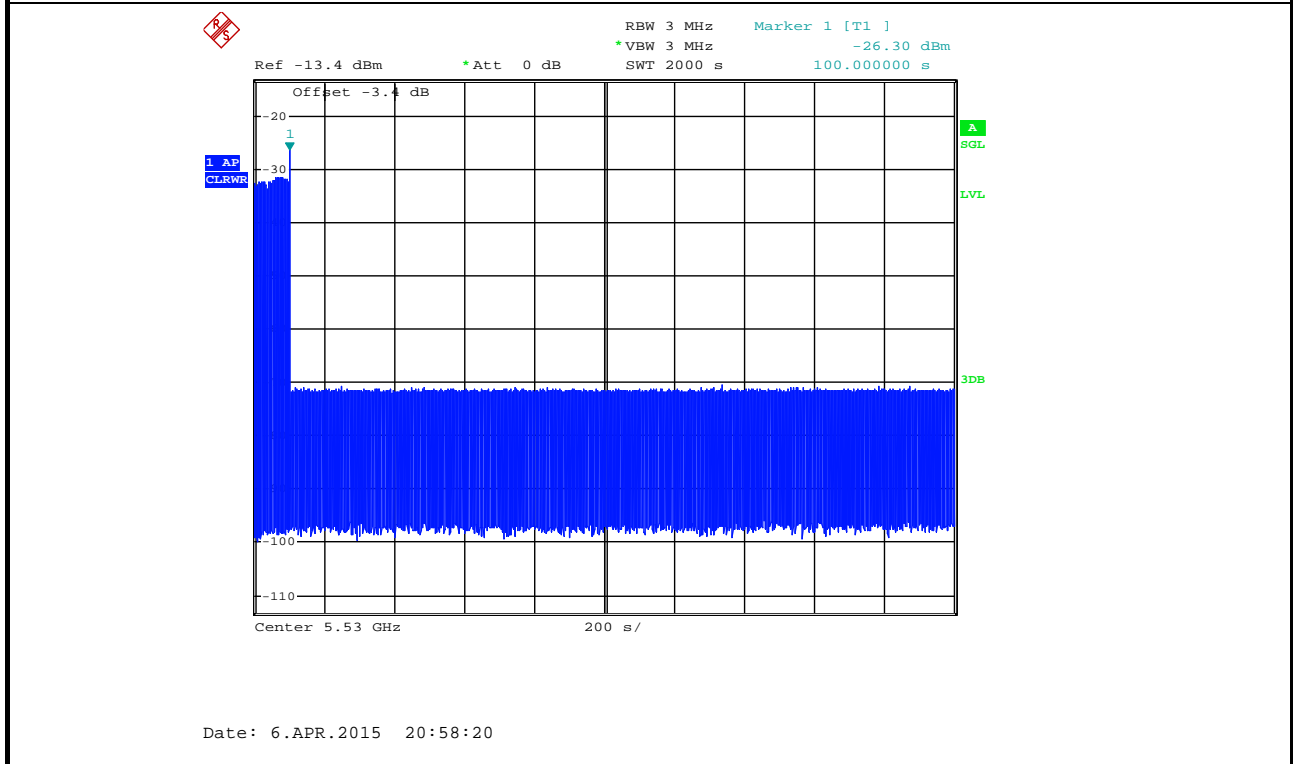




For Client without radar detection:

| Modulation Mode  | Freq.    |
|------------------|----------|
| 802.11ac (VHT80) | 5530 MHz |

**Non-Occupancy Period**

During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring.

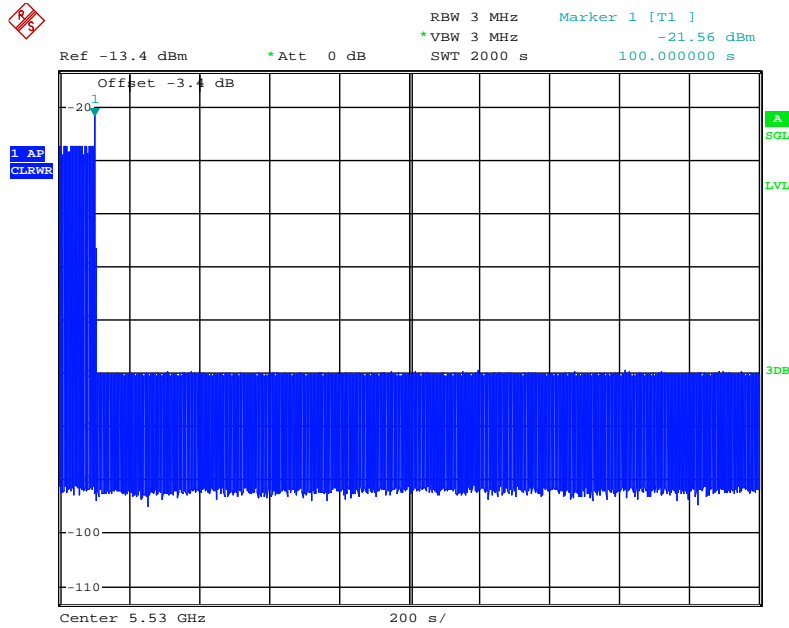


Date: 8.APR.2015 17:47:26



**Non-associated test**

Master was off.

During the 30 minutes observation time, The UUT did not make any transmissions in the DFS band after UUT power up.

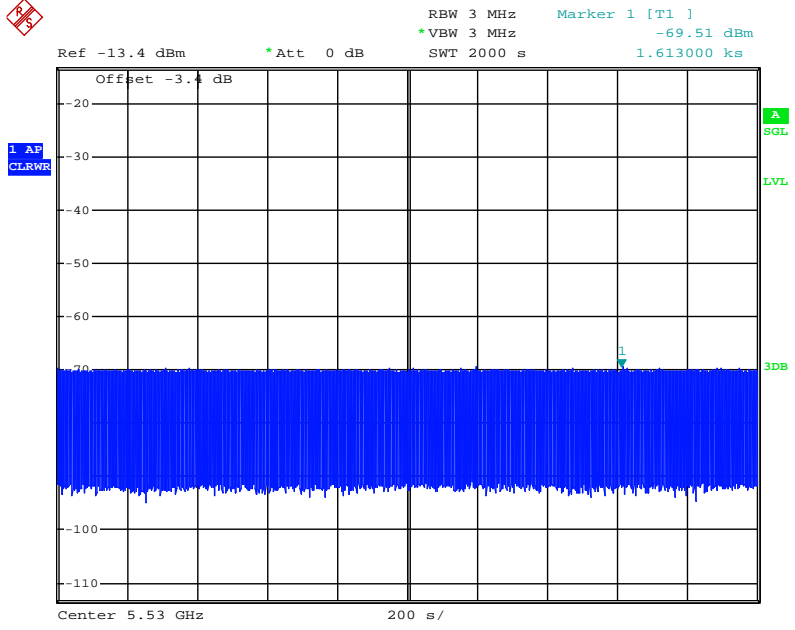

Date: 8.APR.2015 17:49:41



### 3.6 Statistical Performance Check

#### 3.6.1 Statistical Performance Check Limit

| Radar Type                  | Minimum Percentage of Successful Detection (Pd) | Minimum Trials |
|-----------------------------|---|----------------|
| 1                           | 60%   | 30             |
| 2                           | 60%   | 30             |
| 3                           | 60%   | 30             |
| 4                           | 60%   | 30             |
| Aggregate (Radar Types 1-4) | 80%   | 120            |
| 5                           | 80%   | 30             |
| 6                           | 70%   | 30             |

The percentage of successful detection is calculated by:

$$\frac{TotalWaveformDetections}{TotalWaveformTrails} \times 100 = \text{Probability of Detection Radar Waveform}$$

In addition an aggregate minimum percentage of successful detection across all Short Pulse Radar Types 1-4 is required and is calculated as follows:

$$\frac{Pd1 + Pd2 + Pd3 + Pd4}{4}$$

#### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.6.3 Test Procedures

| Test Method   |
|---|
| <input checked="" type="checkbox"/> Refer as FCC 06-96 Appendix, clause 7.8.4 for Statistical Performance Check test. Stream the MPEG test file from the Master Device to the Client Device on the test Channel for the entire period of the test. Observe the transmissions of the UUT at the end of the Burst on the Operating Channel for duration greater than 10 seconds for Short Pulse Radar Types 1-4 and 6 to ensure detection occurs. Then Observe the transmissions of the UUT at the end of the Burst on the Operating Channel for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs. |



### 3.6.4 Test Result of Statistical Performance Check

For Master:

Modulation Mode: 802.11ac (VHT20)

Type 1 Radar Statistical Performance

| Trail #                  | Test Freq. (MHz) | Pulse Width (us) | PRI (us) | Pulses / Burst | 1=Detection<br>0=No Detection |
|--------------------------|------------------|------------------|----------|----------------|-------------------------------|
| 1                        | 5496             | 1                | 1930.5   | 518            | 1                             |
| 2                        | 5497             | 23               | 326.2    | 3066           | 1                             |
| 3                        | 5498             | 19               | 1139.0   | 878            | 1                             |
| 4                        | 5499             | 12               | 1355.0   | 738            | 1                             |
| 5                        | 5500             | 4                | 1730.1   | 578            | 1                             |
| 6                        | 5501             | 8                | 1519.8   | 658            | 1                             |
| 7                        | 5502             | 15               | 1253.1   | 798            | 0                             |
| 8                        | 5503             | 6                | 1618.1   | 618            | 1                             |
| 9                        | 5504             | 14               | 1285.3   | 778            | 1                             |
| 10                       | 5505             | 3                | 1792.1   | 558            | 1                             |
| 11                       | 5506             | 13               | 1319.3   | 758            | 1                             |
| 12                       | 5507             | 9                | 1474.9   | 678            | 1                             |
| 13                       | 5508             | 7                | 1567.4   | 638            | 1                             |
| 14                       | 5509             | 17               | 1193.3   | 838            | 1                             |
| 15                       | 5510             | 10               | 1432.7   | 698            | 1                             |
| 16                       | 5511             | 1                | 1692.0   | 591            | 1                             |
| 17                       | 5512             | 2                | 328.1    | 3048           | 1                             |
| 18                       | 5513             | 3                | 373.4    | 2678           | 1                             |
| 19                       | 5514             | 4                | 574.4    | 1741           | 1                             |
| 20                       | 5515             | 5                | 1216.5   | 822            | 1                             |
| 21                       | 5516             | 6                | 801.3    | 1248           | 1                             |
| 22                       | 5517             | 7                | 488.5    | 2047           | 1                             |
| 23                       | 5518             | 8                | 956.0    | 1046           | 1                             |
| 24                       | 5519             | 9                | 517.6    | 1932           | 1                             |
| 25                       | 5520             | 10               | 1422.5   | 703            | 1                             |
| 26                       | 5521             | 11               | 542.0    | 1845           | 1                             |
| 27                       | 5522             | 12               | 741.3    | 1349           | 1                             |
| 28                       | 5523             | 13               | 881.8    | 1134           | 1                             |
| 29                       | 5524             | 14               | 427.4    | 2340           | 1                             |
| 30                       | 5525             | 15               | 628.9    | 1590           | 1                             |
| Detection Percentage (%) |                  |                  |          |                | 96.67                         |



Type 2 Radar Statistical Performance

| Trail #                  | Test Freq. (MHz) | Pulse Width (us) | PRI (us) | Pulses / Burst | 1=Detection<br>0=No Detection |
|--------------------------|------------------|------------------|----------|----------------|-------------------------------|
| 1                        | 5493             | 2.6              | 221      | 23             | 1                             |
| 2                        | 5494             | 4.6              | 198      | 27             | 1                             |
| 3                        | 5495             | 1.1              | 184      | 29             | 1                             |
| 4                        | 5496             | 4.8              | 203      | 24             | 1                             |
| 5                        | 5497             | 2.4              | 162      | 25             | 1                             |
| 6                        | 5498             | 3.4              | 204      | 28             | 1                             |
| 7                        | 5499             | 2.3              | 170      | 27             | 1                             |
| 8                        | 5500             | 3.5              | 184      | 23             | 1                             |
| 9                        | 5501             | 4.9              | 150      | 27             | 1                             |
| 10                       | 5502             | 4.6              | 211      | 29             | 1                             |
| 11                       | 5503             | 2.9              | 158      | 23             | 1                             |
| 12                       | 5504             | 2.6              | 226      | 27             | 1                             |
| 13                       | 5505             | 1.6              | 204      | 26             | 1                             |
| 14                       | 5506             | 3.9              | 181      | 25             | 0                             |
| 15                       | 5507             | 4.6              | 202      | 24             | 1                             |
| 16                       | 5506             | 4.1              | 194      | 27             | 1                             |
| 17                       | 5505             | 2.3              | 193      | 28             | 1                             |
| 18                       | 5504             | 3.9              | 173      | 29             | 1                             |
| 19                       | 5503             | 4.3              | 188      | 23             | 1                             |
| 20                       | 5502             | 1.5              | 215      | 26             | 1                             |
| 21                       | 5501             | 4.9              | 227      | 27             | 1                             |
| 22                       | 5500             | 1.1              | 199      | 23             | 1                             |
| 23                       | 5499             | 4.5              | 155      | 29             | 1                             |
| 24                       | 5498             | 4.0              | 190      | 27             | 1                             |
| 25                       | 5497             | 2.4              | 151      | 23             | 1                             |
| 26                       | 5496             | 2.5              | 180      | 28             | 1                             |
| 27                       | 5495             | 2.5              | 228      | 23             | 1                             |
| 28                       | 5494             | 2.5              | 203      | 25             | 1                             |
| 29                       | 5493             | 1.5              | 188      | 25             | 1                             |
| 30                       | 5494             | 1.9              | 217      | 24             | 1                             |
| Detection Percentage (%) |                  |                  |          |                | 96.67                         |





Type 3 Radar Statistical Performance

| Trail #                  | Test Freq. (MHz) | Pulse Width (us) | PRI (us) | Pulses / Burst | 1=Detection ;<br>0=No Detection |
|--------------------------|------------------|------------------|----------|----------------|---------------------------------|
| 1                        | 5493             | 8.0              | 205      | 16             | 0                               |
| 2                        | 5494             | 6.7              | 382      | 18             | 1                               |
| 3                        | 5495             | 8.6              | 418      | 16             | 1                               |
| 4                        | 5496             | 9.4              | 351      | 17             | 0                               |
| 5                        | 5497             | 7.4              | 383      | 18             | 1                               |
| 6                        | 5498             | 9.8              | 232      | 16             | 1                               |
| 7                        | 5499             | 9.1              | 377      | 17             | 1                               |
| 8                        | 5500             | 9.6              | 457      | 16             | 1                               |
| 9                        | 5501             | 8.0              | 471      | 18             | 1                               |
| 10                       | 5502             | 9.0              | 304      | 18             | 1                               |
| 11                       | 5503             | 8.0              | 316      | 17             | 1                               |
| 12                       | 5504             | 9.8              | 325      | 16             | 1                               |
| 13                       | 5505             | 8.0              | 409      | 17             | 1                               |
| 14                       | 5506             | 9.9              | 200      | 17             | 1                               |
| 15                       | 5507             | 8.8              | 458      | 16             | 1                               |
| 16                       | 5506             | 8.0              | 232      | 18             | 1                               |
| 17                       | 5505             | 8.3              | 250      | 16             | 1                               |
| 18                       | 5504             | 8.7              | 270      | 16             | 1                               |
| 19                       | 5503             | 7.7              | 350      | 17             | 1                               |
| 20                       | 5502             | 7.1              | 230      | 16             | 0                               |
| 21                       | 5501             | 7.3              | 416      | 18             | 1                               |
| 22                       | 5500             | 7.6              | 498      | 18             | 1                               |
| 23                       | 5499             | 7.3              | 286      | 17             | 1                               |
| 24                       | 5498             | 7.3              | 287      | 16             | 1                               |
| 25                       | 5497             | 7.5              | 462      | 17             | 1                               |
| 26                       | 5496             | 6.2              | 300      | 17             | 1                               |
| 27                       | 5495             | 6.4              | 323      | 18             | 1                               |
| 28                       | 5494             | 7.1              | 420      | 16             | 1                               |
| 29                       | 5493             | 7.2              | 395      | 18             | 0                               |
| 30                       | 5494             | 8.4              | 377      | 16             | 1                               |
| Detection Percentage (%) |                  |                  |          |                | 86.67                           |



Type 4 Radar Statistical Performance

| Trail #                  | Test Freq. (MHz) | Pulse Width (us) | PRI (us) | Pulses / Burst | 1=Detection<br>0=No Detection |
|--------------------------|------------------|------------------|----------|----------------|-------------------------------|
| 1                        | 5493             | 18.0             | 242      | 15             | 1                             |
| 2                        | 5494             | 19.9             | 279      | 12             | 1                             |
| 3                        | 5495             | 12.9             | 487      | 14             | 1                             |
| 4                        | 5496             | 15.0             | 452      | 13             | 1                             |
| 5                        | 5497             | 16.3             | 230      | 12             | 1                             |
| 6                        | 5498             | 19.8             | 238      | 13             | 0                             |
| 7                        | 5499             | 18.2             | 420      | 16             | 1                             |
| 8                        | 5500             | 16.3             | 452      | 15             | 1                             |
| 9                        | 5501             | 14.2             | 495      | 12             | 1                             |
| 10                       | 5502             | 17.8             | 228      | 16             | 1                             |
| 11                       | 5503             | 19.1             | 211      | 16             | 1                             |
| 12                       | 5504             | 18.4             | 283      | 15             | 1                             |
| 13                       | 5505             | 11.8             | 411      | 12             | 0                             |
| 14                       | 5506             | 14.2             | 284      | 13             | 1                             |
| 15                       | 5507             | 13.9             | 202      | 12             | 1                             |
| 16                       | 5506             | 17.8             | 340      | 14             | 1                             |
| 17                       | 5505             | 15.6             | 290      | 16             | 0                             |
| 18                       | 5504             | 14.6             | 250      | 16             | 1                             |
| 19                       | 5503             | 14.4             | 484      | 15             | 1                             |
| 20                       | 5502             | 18.9             | 387      | 13             | 1                             |
| 21                       | 5501             | 11.1             | 348      | 15             | 1                             |
| 22                       | 5500             | 13.8             | 291      | 16             | 1                             |
| 23                       | 5499             | 14.3             | 295      | 12             | 1                             |
| 24                       | 5498             | 12.5             | 300      | 12             | 0                             |
| 25                       | 5497             | 12.5             | 322      | 14             | 1                             |
| 26                       | 5496             | 12.5             | 383      | 13             | 1                             |
| 27                       | 5495             | 15.7             | 322      | 16             | 1                             |
| 28                       | 5494             | 19.8             | 469      | 13             | 0                             |
| 29                       | 5493             | 18.6             | 406      | 15             | 1                             |
| 30                       | 5494             | 15.9             | 238      | 14             | 1                             |
| Detection Percentage (%) |                  |                  |          |                | 83.33                         |



**Total Type 1~4 Radar Statistical Performance**

| Radar Type # | Detection Percentage (%) |
|--------------|--------------------------|
| 1            | 96.67                    |
| 2            | 96.67                    |
| 3            | 86.67                    |
| 4            | 83.33                    |
| Total 1~4    | 90.83                    |

**Type 5 Radar Statistical Performance**

| Trail #                  | 1=Detection<br>0=No Detection | Trail # | 1=Detection<br>0=No Detection | Trail # | 1=Detection<br>0=No Detection |
|--------------------------|-------------------------------|---------|-------------------------------|---------|-------------------------------|
| 1                        | 1                             | 11      | 1                             | 21      | 1                             |
| 2                        | 1                             | 12      | 1                             | 22      | 1                             |
| 3                        | 0                             | 13      | 1                             | 23      | 0                             |
| 4                        | 1                             | 14      | 1                             | 24      | 1                             |
| 5                        | 1                             | 15      | 1                             | 25      | 1                             |
| 6                        | 1                             | 16      | 0                             | 26      | 1                             |
| 7                        | 1                             | 17      | 1                             | 27      | 0                             |
| 8                        | 1                             | 18      | 1                             | 28      | 1                             |
| 9                        | 1                             | 19      | 0                             | 29      | 1                             |
| 10                       | 1                             | 20      | 1                             | 30      | 1                             |
| Detection Percentage (%) |                               |         |                               |         | 83.33                         |



Type 6 Radar Statistical Performance

| Trail #                  | Test Freq. (MHz) | Pulses / Hop | Pulse Width (us) | PRI (us) | 1=Detection<br>0=No Detection |
|--------------------------|------------------|--------------|------------------|----------|-------------------------------|
| 1                        | 5500             | 9            | 1                | 333      | 1                             |
| 2                        | 5500             | 9            | 1                | 333      | 1                             |
| 3                        | 5500             | 9            | 1                | 333      | 1                             |
| 4                        | 5500             | 9            | 1                | 333      | 1                             |
| 5                        | 5500             | 9            | 1                | 333      | 1                             |
| 6                        | 5500             | 9            | 1                | 333      | 1                             |
| 7                        | 5500             | 9            | 1                | 333      | 1                             |
| 8                        | 5500             | 9            | 1                | 333      | 1                             |
| 9                        | 5500             | 9            | 1                | 333      | 1                             |
| 10                       | 5500             | 9            | 1                | 333      | 1                             |
| 11                       | 5500             | 9            | 1                | 333      | 1                             |
| 12                       | 5500             | 9            | 1                | 333      | 1                             |
| 13                       | 5500             | 9            | 1                | 333      | 1                             |
| 14                       | 5500             | 9            | 1                | 333      | 1                             |
| 15                       | 5500             | 9            | 1                | 333      | 1                             |
| 16                       | 5500             | 9            | 1                | 333      | 0                             |
| 17                       | 5500             | 9            | 1                | 333      | 1                             |
| 18                       | 5500             | 9            | 1                | 333      | 1                             |
| 19                       | 5500             | 9            | 1                | 333      | 1                             |
| 20                       | 5500             | 9            | 1                | 333      | 1                             |
| 21                       | 5500             | 9            | 1                | 333      | 1                             |
| 22                       | 5500             | 9            | 1                | 333      | 1                             |
| 23                       | 5500             | 9            | 1                | 333      | 1                             |
| 24                       | 5500             | 9            | 1                | 333      | 1                             |
| 25                       | 5500             | 9            | 1                | 333      | 1                             |
| 26                       | 5500             | 9            | 1                | 333      | 1                             |
| 27                       | 5500             | 9            | 1                | 333      | 1                             |
| 28                       | 5500             | 9            | 1                | 333      | 1                             |
| 29                       | 5500             | 9            | 1                | 333      | 1                             |
| 30                       | 5500             | 9            | 1                | 333      | 1                             |
| Detection Percentage (%) |                  |              |                  |          | 96.67                         |



Modulation Mode: 802.11ac (VHT40)

Type 1 Radar Statistical Performance

| Trail #                  | Test Freq. (MHz) | Pulse Width (us) | PRI (us) | Pulses / Burst | 1=Detection<br>0=No Detection |
|--------------------------|------------------|------------------|----------|----------------|-------------------------------|
| 1                        | 5496             | 1                | 1930.5   | 518            | 1                             |
| 2                        | 5497             | 23               | 326.2    | 3066           | 1                             |
| 3                        | 5498             | 19               | 1139.0   | 878            | 1                             |
| 4                        | 5499             | 12               | 1355.0   | 738            | 1                             |
| 5                        | 5500             | 4                | 1730.1   | 578            | 1                             |
| 6                        | 5501             | 8                | 1519.8   | 658            | 1                             |
| 7                        | 5502             | 15               | 1253.1   | 798            | 1                             |
| 8                        | 5503             | 6                | 1618.1   | 618            | 1                             |
| 9                        | 5504             | 14               | 1285.3   | 778            | 1                             |
| 10                       | 5505             | 3                | 1792.1   | 558            | 1                             |
| 11                       | 5506             | 13               | 1319.3   | 758            | 1                             |
| 12                       | 5507             | 9                | 1474.9   | 678            | 1                             |
| 13                       | 5508             | 7                | 1567.4   | 638            | 1                             |
| 14                       | 5509             | 17               | 1193.3   | 838            | 1                             |
| 15                       | 5510             | 10               | 1432.7   | 698            | 1                             |
| 16                       | 5511             | 1                | 1692.0   | 591            | 1                             |
| 17                       | 5512             | 2                | 328.1    | 3048           | 1                             |
| 18                       | 5513             | 3                | 373.4    | 2678           | 1                             |
| 19                       | 5514             | 4                | 574.4    | 1741           | 1                             |
| 20                       | 5515             | 5                | 1216.5   | 822            | 0                             |
| 21                       | 5516             | 6                | 801.3    | 1248           | 1                             |
| 22                       | 5517             | 7                | 488.5    | 2047           | 1                             |
| 23                       | 5518             | 8                | 956.0    | 1046           | 1                             |
| 24                       | 5519             | 9                | 517.6    | 1932           | 1                             |
| 25                       | 5520             | 10               | 1422.5   | 703            | 1                             |
| 26                       | 5521             | 11               | 542.0    | 1845           | 1                             |
| 27                       | 5522             | 12               | 741.3    | 1349           | 1                             |
| 28                       | 5523             | 13               | 881.8    | 1134           | 1                             |
| 29                       | 5524             | 14               | 427.4    | 2340           | 1                             |
| 30                       | 5525             | 15               | 628.9    | 1590           | 1                             |
| Detection Percentage (%) |                  |                  |          |                | 96.67                         |



Type 2 Radar Statistical Performance

| Trail #                  | Test Freq. (MHz) | Pulse Width (us) | PRI (us) | Pulses / Burst | 1=Detection<br>0=No Detection |
|--------------------------|------------------|------------------|----------|----------------|-------------------------------|
| 1                        | 5496             | 2.6              | 221      | 23             | 1                             |
| 2                        | 5497             | 4.6              | 198      | 27             | 1                             |
| 3                        | 5498             | 1.1              | 184      | 29             | 1                             |
| 4                        | 5499             | 4.8              | 203      | 24             | 1                             |
| 5                        | 5500             | 2.4              | 162      | 25             | 1                             |
| 6                        | 5501             | 3.4              | 204      | 28             | 0                             |
| 7                        | 5502             | 2.3              | 170      | 27             | 1                             |
| 8                        | 5503             | 3.5              | 184      | 23             | 1                             |
| 9                        | 5504             | 4.9              | 150      | 27             | 1                             |
| 10                       | 5505             | 4.6              | 211      | 29             | 1                             |
| 11                       | 5506             | 2.9              | 158      | 23             | 1                             |
| 12                       | 5507             | 2.6              | 226      | 27             | 1                             |
| 13                       | 5508             | 1.6              | 204      | 26             | 1                             |
| 14                       | 5509             | 3.9              | 181      | 25             | 1                             |
| 15                       | 5510             | 4.6              | 202      | 24             | 1                             |
| 16                       | 5511             | 4.1              | 194      | 27             | 1                             |
| 17                       | 5512             | 2.3              | 193      | 28             | 1                             |
| 18                       | 5513             | 3.9              | 173      | 29             | 1                             |
| 19                       | 5514             | 4.3              | 188      | 23             | 1                             |
| 20                       | 5515             | 1.5              | 215      | 26             | 1                             |
| 21                       | 5516             | 4.9              | 227      | 27             | 1                             |
| 22                       | 5517             | 1.1              | 199      | 23             | 1                             |
| 23                       | 5518             | 4.5              | 155      | 29             | 1                             |
| 24                       | 5519             | 4.0              | 190      | 27             | 0                             |
| 25                       | 5520             | 2.4              | 151      | 23             | 1                             |
| 26                       | 5521             | 2.5              | 180      | 28             | 0                             |
| 27                       | 5522             | 2.5              | 228      | 23             | 1                             |
| 28                       | 5523             | 2.5              | 203      | 25             | 1                             |
| 29                       | 5524             | 1.5              | 188      | 25             | 1                             |
| 30                       | 5525             | 1.9              | 217      | 24             | 1                             |
| Detection Percentage (%) |                  |                  |          |                | 90.00                         |



Type 3 Radar Statistical Performance

| Trail #                  | Test Freq. (MHz) | Pulse Width (us) | PRI (us) | Pulses / Burst | 1=Detection<br>0=No Detection |
|--------------------------|------------------|------------------|----------|----------------|-------------------------------|
| 1                        | 5496             | 8.0              | 205      | 16             | 1                             |
| 2                        | 5497             | 6.7              | 382      | 18             | 1                             |
| 3                        | 5498             | 8.6              | 418      | 16             | 1                             |
| 4                        | 5499             | 9.4              | 351      | 17             | 1                             |
| 5                        | 5500             | 7.4              | 383      | 18             | 1                             |
| 6                        | 5501             | 9.8              | 232      | 16             | 1                             |
| 7                        | 5502             | 9.1              | 377      | 17             | 1                             |
| 8                        | 5503             | 9.6              | 457      | 16             | 1                             |
| 9                        | 5504             | 8.0              | 471      | 18             | 0                             |
| 10                       | 5505             | 9.0              | 304      | 18             | 1                             |
| 11                       | 5506             | 8.0              | 316      | 17             | 1                             |
| 12                       | 5507             | 9.8              | 325      | 16             | 1                             |
| 13                       | 5508             | 8.0              | 409      | 17             | 1                             |
| 14                       | 5509             | 9.9              | 200      | 17             | 1                             |
| 15                       | 5510             | 8.8              | 458      | 16             | 1                             |
| 16                       | 5511             | 8.0              | 232      | 18             | 1                             |
| 17                       | 5512             | 8.3              | 250      | 16             | 1                             |
| 18                       | 5529             | 8.7              | 270      | 16             | 1                             |
| 19                       | 5514             | 7.7              | 350      | 17             | 1                             |
| 20                       | 5515             | 7.1              | 230      | 16             | 1                             |
| 21                       | 5516             | 7.3              | 416      | 18             | 1                             |
| 22                       | 5517             | 7.6              | 498      | 18             | 1                             |
| 23                       | 5491             | 7.3              | 286      | 17             | 1                             |
| 24                       | 5519             | 7.3              | 287      | 16             | 0                             |
| 25                       | 5520             | 7.5              | 462      | 17             | 1                             |
| 26                       | 5521             | 6.2              | 300      | 17             | 1                             |
| 27                       | 5522             | 6.4              | 323      | 18             | 1                             |
| 28                       | 5523             | 7.1              | 420      | 16             | 0                             |
| 29                       | 5524             | 7.2              | 395      | 18             | 1                             |
| 30                       | 5525             | 8.4              | 377      | 16             | 1                             |
| Detection Percentage (%) |                  |                  |          |                | 90.00                         |



Type 4 Radar Statistical Performance

| Trail #                  | Test Freq. (MHz) | Pulse Width (us) | PRI (us) | Pulses / Burst | 1=Detection<br>0=No Detection |
|--------------------------|------------------|------------------|----------|----------------|-------------------------------|
| 1                        | 5496             | 18.0             | 242      | 15             | 1                             |
| 2                        | 5497             | 19.9             | 279      | 12             | 1                             |
| 3                        | 5498             | 12.9             | 487      | 14             | 1                             |
| 4                        | 5499             | 15.0             | 452      | 13             | 1                             |
| 5                        | 5500             | 16.3             | 230      | 12             | 1                             |
| 6                        | 5501             | 19.8             | 238      | 13             | 1                             |
| 7                        | 5502             | 18.2             | 420      | 16             | 1                             |
| 8                        | 5529             | 16.3             | 452      | 15             | 1                             |
| 9                        | 5504             | 14.2             | 495      | 12             | 1                             |
| 10                       | 5505             | 17.8             | 228      | 16             | 1                             |
| 11                       | 5506             | 19.1             | 211      | 16             | 1                             |
| 12                       | 5507             | 18.4             | 283      | 15             | 1                             |
| 13                       | 5508             | 11.8             | 411      | 12             | 1                             |
| 14                       | 5509             | 14.2             | 284      | 13             | 0                             |
| 15                       | 5510             | 13.9             | 202      | 12             | 0                             |
| 16                       | 5511             | 17.8             | 340      | 14             | 1                             |
| 17                       | 5512             | 15.6             | 290      | 16             | 1                             |
| 18                       | 5513             | 14.6             | 250      | 16             | 1                             |
| 19                       | 5514             | 14.4             | 484      | 15             | 1                             |
| 20                       | 5515             | 18.9             | 387      | 13             | 1                             |
| 21                       | 5516             | 11.1             | 348      | 15             | 1                             |
| 22                       | 5517             | 13.8             | 291      | 16             | 1                             |
| 23                       | 5518             | 14.3             | 295      | 12             | 1                             |
| 24                       | 5519             | 12.5             | 300      | 12             | 1                             |
| 25                       | 5520             | 12.5             | 322      | 14             | 0                             |
| 26                       | 5521             | 12.5             | 383      | 13             | 1                             |
| 27                       | 5522             | 15.7             | 322      | 16             | 1                             |
| 28                       | 5523             | 19.8             | 469      | 13             | 1                             |
| 29                       | 5524             | 18.6             | 406      | 15             | 1                             |
| 30                       | 5491             | 15.9             | 238      | 14             | 1                             |
| Detection Percentage (%) |                  |                  |          |                | 90.00                         |





**Total Type 1~4 Radar Statistical Performance**

| Radar Type # | Detection Percentage (%) |
|--------------|--------------------------|
| 1            | 96.67                    |
| 2            | 90.00                    |
| 3            | 90.00                    |
| 4            | 90.00                    |
| Total 1~4    | 90.00                    |

**Type 5 Radar Statistical Performance**

| Trail #                  | 1=Detection<br>0=No Detection | Trail # | 1=Detection<br>0=No Detection | Trail # | 1=Detection<br>0=No Detection |
|--------------------------|-------------------------------|---------|-------------------------------|---------|-------------------------------|
| 1                        | 1                             | 11      | 1                             | 21      | 1                             |
| 2                        | 0                             | 12      | 1                             | 22      | 1                             |
| 3                        | 1                             | 13      | 1                             | 23      | 1                             |
| 4                        | 1                             | 14      | 1                             | 24      | 1                             |
| 5                        | 1                             | 15      | 1                             | 25      | 0                             |
| 6                        | 0                             | 16      | 1                             | 26      | 0                             |
| 7                        | 1                             | 17      | 0                             | 27      | 1                             |
| 8                        | 1                             | 18      | 1                             | 28      | 1                             |
| 9                        | 1                             | 19      | 1                             | 29      | 1                             |
| 10                       | 1                             | 20      | 1                             | 30      | 1                             |
| Detection Percentage (%) |                               |         |                               |         | 83.33                         |



Type 6 Radar Statistical Performance

| Trail #                  | Test Freq. (MHz) | Pulses / Hop | Pulse Width (us) | PRI (us) | 1=Detection<br>0=No Detection |
|--------------------------|------------------|--------------|------------------|----------|-------------------------------|
| 1                        | 5510             | 9            | 1                | 333      | 1                             |
| 2                        | 5510             | 9            | 1                | 333      | 1                             |
| 3                        | 5510             | 9            | 1                | 333      | 1                             |
| 4                        | 5510             | 9            | 1                | 333      | 1                             |
| 5                        | 5510             | 9            | 1                | 333      | 1                             |
| 6                        | 5510             | 9            | 1                | 333      | 1                             |
| 7                        | 5510             | 9            | 1                | 333      | 1                             |
| 8                        | 5510             | 9            | 1                | 333      | 1                             |
| 9                        | 5510             | 9            | 1                | 333      | 1                             |
| 10                       | 5510             | 9            | 1                | 333      | 1                             |
| 11                       | 5510             | 9            | 1                | 333      | 1                             |
| 12                       | 5510             | 9            | 1                | 333      | 1                             |
| 13                       | 5510             | 9            | 1                | 333      | 1                             |
| 14                       | 5510             | 9            | 1                | 333      | 1                             |
| 15                       | 5510             | 9            | 1                | 333      | 1                             |
| 16                       | 5510             | 9            | 1                | 333      | 1                             |
| 17                       | 5510             | 9            | 1                | 333      | 1                             |
| 18                       | 5510             | 9            | 1                | 333      | 1                             |
| 19                       | 5510             | 9            | 1                | 333      | 1                             |
| 20                       | 5510             | 9            | 1                | 333      | 1                             |
| 21                       | 5510             | 9            | 1                | 333      | 1                             |
| 22                       | 5510             | 9            | 1                | 333      | 0                             |
| 23                       | 5510             | 9            | 1                | 333      | 1                             |
| 24                       | 5510             | 9            | 1                | 333      | 1                             |
| 25                       | 5510             | 9            | 1                | 333      | 1                             |
| 26                       | 5510             | 9            | 1                | 333      | 1                             |
| 27                       | 5510             | 9            | 1                | 333      | 1                             |
| 28                       | 5510             | 9            | 1                | 333      | 1                             |
| 29                       | 5510             | 9            | 1                | 333      | 1                             |
| 30                       | 5510             | 9            | 1                | 333      | 1                             |
| Detection Percentage (%) |                  |              |                  |          | 96.67                         |



Modulation Mode: 802.11ac (VHT80)

Type 1 Radar Statistical Performance

| Trail #                  | Test Freq. (MHz) | Pulse Width (us) | PRI (us) | Pulses / Burst | 1=Detection<br>0=No Detection |
|--------------------------|------------------|------------------|----------|----------------|-------------------------------|
| 1                        | 5516             | 1                | 1930.5   | 518            | 1                             |
| 2                        | 5517             | 23               | 326.2    | 3066           | 1                             |
| 3                        | 5518             | 19               | 1139.0   | 878            | 1                             |
| 4                        | 5519             | 12               | 1355.0   | 738            | 1                             |
| 5                        | 5520             | 4                | 1730.1   | 578            | 1                             |
| 6                        | 5521             | 8                | 1519.8   | 658            | 1                             |
| 7                        | 5522             | 15               | 1253.1   | 798            | 1                             |
| 8                        | 5523             | 6                | 1618.1   | 618            | 1                             |
| 9                        | 5524             | 14               | 1285.3   | 778            | 1                             |
| 10                       | 5525             | 3                | 1792.1   | 558            | 1                             |
| 11                       | 5526             | 13               | 1319.3   | 758            | 1                             |
| 12                       | 5527             | 9                | 1474.9   | 678            | 1                             |
| 13                       | 5528             | 7                | 1567.4   | 638            | 0                             |
| 14                       | 5529             | 17               | 1193.3   | 838            | 1                             |
| 15                       | 5530             | 10               | 1432.7   | 698            | 1                             |
| 16                       | 5531             | 1                | 1692.0   | 591            | 1                             |
| 17                       | 5532             | 2                | 328.1    | 3048           | 1                             |
| 18                       | 5533             | 3                | 373.4    | 2678           | 1                             |
| 19                       | 5534             | 4                | 574.4    | 1741           | 0                             |
| 20                       | 5535             | 5                | 1216.5   | 822            | 1                             |
| 21                       | 5536             | 6                | 801.3    | 1248           | 1                             |
| 22                       | 5537             | 7                | 488.5    | 2047           | 1                             |
| 23                       | 5538             | 8                | 956.0    | 1046           | 1                             |
| 24                       | 5539             | 9                | 517.6    | 1932           | 1                             |
| 25                       | 5540             | 10               | 1422.5   | 703            | 1                             |
| 26                       | 5541             | 11               | 542.0    | 1845           | 1                             |
| 27                       | 5542             | 12               | 741.3    | 1349           | 1                             |
| 28                       | 5543             | 13               | 881.8    | 1134           | 1                             |
| 29                       | 5544             | 14               | 427.4    | 2340           | 1                             |
| 30                       | 5545             | 15               | 628.9    | 1590           | 1                             |
| Detection Percentage (%) |                  |                  |          |                | 93.33                         |



Type 2 Radar Statistical Performance

| Trail #                  | Test Freq. (MHz) | Pulse Width (us) | PRI (us) | Pulses / Burst | 1=Detection<br>0=No Detection |
|--------------------------|------------------|------------------|----------|----------------|-------------------------------|
| 1                        | 5516             | 2.6              | 221      | 23             | 1                             |
| 2                        | 5517             | 4.6              | 198      | 27             | 1                             |
| 3                        | 5518             | 1.1              | 184      | 29             | 1                             |
| 4                        | 5519             | 4.8              | 203      | 24             | 1                             |
| 5                        | 5520             | 2.4              | 162      | 25             | 1                             |
| 6                        | 5521             | 3.4              | 204      | 28             | 1                             |
| 7                        | 5522             | 2.3              | 170      | 27             | 1                             |
| 8                        | 5523             | 3.5              | 184      | 23             | 1                             |
| 9                        | 5524             | 4.9              | 150      | 27             | 1                             |
| 10                       | 5525             | 4.6              | 211      | 29             | 1                             |
| 11                       | 5526             | 2.9              | 158      | 23             | 1                             |
| 12                       | 5527             | 2.6              | 226      | 27             | 1                             |
| 13                       | 5528             | 1.6              | 204      | 26             | 1                             |
| 14                       | 5529             | 3.9              | 181      | 25             | 1                             |
| 15                       | 5530             | 4.6              | 202      | 24             | 1                             |
| 16                       | 5531             | 4.1              | 194      | 27             | 0                             |
| 17                       | 5532             | 2.3              | 193      | 28             | 1                             |
| 18                       | 5533             | 3.9              | 173      | 29             | 1                             |
| 19                       | 5534             | 4.3              | 188      | 23             | 1                             |
| 20                       | 5535             | 1.5              | 215      | 26             | 1                             |
| 21                       | 5536             | 4.9              | 227      | 27             | 1                             |
| 22                       | 5537             | 1.1              | 199      | 23             | 1                             |
| 23                       | 5538             | 4.5              | 155      | 29             | 1                             |
| 24                       | 5539             | 4.0              | 190      | 27             | 1                             |
| 25                       | 5540             | 2.4              | 151      | 23             | 1                             |
| 26                       | 5541             | 2.5              | 180      | 28             | 1                             |
| 27                       | 5542             | 2.5              | 228      | 23             | 1                             |
| 28                       | 5543             | 2.5              | 203      | 25             | 1                             |
| 29                       | 5544             | 1.5              | 188      | 25             | 1                             |
| 30                       | 5545             | 1.9              | 217      | 24             | 0                             |
| Detection Percentage (%) |                  |                  |          |                | 93.33                         |



Type 3 Radar Statistical Performance

| Trail #                  | Test Freq. (MHz) | Pulse Width (us) | PRI (us) | Pulses / Burst | 1=Detection<br>0=No Detection |
|--------------------------|------------------|------------------|----------|----------------|-------------------------------|
| 1                        | 5516             | 8.0              | 205      | 16             | 1                             |
| 2                        | 5517             | 6.7              | 382      | 18             | 1                             |
| 3                        | 5518             | 8.6              | 418      | 16             | 0                             |
| 4                        | 5519             | 9.4              | 351      | 17             | 1                             |
| 5                        | 5520             | 7.4              | 383      | 18             | 1                             |
| 6                        | 5521             | 9.8              | 232      | 16             | 1                             |
| 7                        | 5522             | 9.1              | 377      | 17             | 0                             |
| 8                        | 5523             | 9.6              | 457      | 16             | 1                             |
| 9                        | 5524             | 8.0              | 471      | 18             | 1                             |
| 10                       | 5525             | 9.0              | 304      | 18             | 1                             |
| 11                       | 5526             | 8.0              | 316      | 17             | 1                             |
| 12                       | 5527             | 9.8              | 325      | 16             | 1                             |
| 13                       | 5528             | 8.0              | 409      | 17             | 1                             |
| 14                       | 5529             | 9.9              | 200      | 17             | 1                             |
| 15                       | 5530             | 8.8              | 458      | 16             | 1                             |
| 16                       | 5531             | 8.0              | 232      | 18             | 1                             |
| 17                       | 5532             | 8.3              | 250      | 16             | 1                             |
| 18                       | 5533             | 8.7              | 270      | 16             | 1                             |
| 19                       | 5534             | 7.7              | 350      | 17             | 1                             |
| 20                       | 5535             | 7.1              | 230      | 16             | 1                             |
| 21                       | 5536             | 7.3              | 416      | 18             | 1                             |
| 22                       | 5537             | 7.6              | 498      | 18             | 1                             |
| 23                       | 5538             | 7.3              | 286      | 17             | 1                             |
| 24                       | 5539             | 7.3              | 287      | 16             | 1                             |
| 25                       | 5540             | 7.5              | 462      | 17             | 0                             |
| 26                       | 5541             | 6.2              | 300      | 17             | 1                             |
| 27                       | 5542             | 6.4              | 323      | 18             | 1                             |
| 28                       | 5543             | 7.1              | 420      | 16             | 1                             |
| 29                       | 5544             | 7.2              | 395      | 18             | 1                             |
| 30                       | 5545             | 8.4              | 377      | 16             | 1                             |
| Detection Percentage (%) |                  |                  |          |                | 90.00                         |



Type 4 Radar Statistical Performance

| Trail #                  | Test Freq. (MHz) | Pulse Width (us) | PRI (us) | Pulses / Burst | 1=Detection<br>0=No Detection |
|--------------------------|------------------|------------------|----------|----------------|-------------------------------|
| 1                        | 5516             | 18.0             | 242      | 15             | 1                             |
| 2                        | 5517             | 19.9             | 279      | 12             | 0                             |
| 3                        | 5518             | 12.9             | 487      | 14             | 1                             |
| 4                        | 5519             | 15.0             | 452      | 13             | 1                             |
| 5                        | 5520             | 16.3             | 230      | 12             | 1                             |
| 6                        | 5521             | 19.8             | 238      | 13             | 1                             |
| 7                        | 5522             | 18.2             | 420      | 16             | 1                             |
| 8                        | 5523             | 16.3             | 452      | 15             | 1                             |
| 9                        | 5524             | 14.2             | 495      | 12             | 1                             |
| 10                       | 5525             | 17.8             | 228      | 16             | 1                             |
| 11                       | 5526             | 19.1             | 211      | 16             | 1                             |
| 12                       | 5527             | 18.4             | 283      | 15             | 0                             |
| 13                       | 5528             | 11.8             | 411      | 12             | 1                             |
| 14                       | 5529             | 14.2             | 284      | 13             | 1                             |
| 15                       | 5530             | 13.9             | 202      | 12             | 1                             |
| 16                       | 5531             | 17.8             | 340      | 14             | 1                             |
| 17                       | 5532             | 15.6             | 290      | 16             | 0                             |
| 18                       | 5533             | 14.6             | 250      | 16             | 1                             |
| 19                       | 5534             | 14.4             | 484      | 15             | 1                             |
| 20                       | 5535             | 18.9             | 387      | 13             | 1                             |
| 21                       | 5536             | 11.1             | 348      | 15             | 1                             |
| 22                       | 5537             | 13.8             | 291      | 16             | 1                             |
| 23                       | 5538             | 14.3             | 295      | 12             | 1                             |
| 24                       | 5539             | 12.5             | 300      | 12             | 1                             |
| 25                       | 5540             | 12.5             | 322      | 14             | 1                             |
| 26                       | 5541             | 12.5             | 383      | 13             | 1                             |
| 27                       | 5542             | 15.7             | 322      | 16             | 1                             |
| 28                       | 5543             | 19.8             | 469      | 13             | 0                             |
| 29                       | 5544             | 18.6             | 406      | 15             | 1                             |
| 30                       | 5545             | 15.9             | 238      | 14             | 1                             |
| Detection Percentage (%) |                  |                  |          |                | 86.67                         |



**Total Type 1~4 Radar Statistical Performance**

| Radar Type # | Detection Percentage (%) |
|--------------|--------------------------|
| 1            | 93.33                    |
| 2            | 93.33                    |
| 3            | 86.67                    |
| 4            | 86.67                    |
| Total 1~4    | 90.00                    |

**Type 5 Radar Statistical Performance**

| Trail #                  | 1=Detection<br>0=No Detection | Trail # | 1=Detection<br>0=No Detection | Trail # | 1=Detection<br>0=No Detection |
|--------------------------|-------------------------------|---------|-------------------------------|---------|-------------------------------|
| 1                        | 1                             | 11      | 1                             | 21      | 1                             |
| 2                        | 0                             | 12      | 1                             | 22      | 0                             |
| 3                        | 1                             | 13      | 1                             | 23      | 1                             |
| 4                        | 1                             | 14      | 1                             | 24      | 1                             |
| 5                        | 1                             | 15      | 1                             | 25      | 1                             |
| 6                        | 1                             | 16      | 1                             | 26      | 1                             |
| 7                        | 0                             | 17      | 1                             | 27      | 1                             |
| 8                        | 1                             | 18      | 1                             | 28      | 1                             |
| 9                        | 1                             | 19      | 1                             | 29      | 1                             |
| 10                       | 1                             | 20      | 1                             | 30      | 1                             |
| Detection Percentage (%) |                               |         |                               |         | 90.00                         |



Type 6 Radar Statistical Performance

| Trail #                  | Test Freq. (MHz) | Pulses / Hop | Pulse Width (us) | PRI (us) | 1=Detection<br>0=No Detection |
|--------------------------|------------------|--------------|------------------|----------|-------------------------------|
| 1                        | 5530             | 9            | 1                | 333      | 1                             |
| 2                        | 5530             | 9            | 1                | 333      | 1                             |
| 3                        | 5530             | 9            | 1                | 333      | 1                             |
| 4                        | 5530             | 9            | 1                | 333      | 1                             |
| 5                        | 5530             | 9            | 1                | 333      | 1                             |
| 6                        | 5530             | 9            | 1                | 333      | 1                             |
| 7                        | 5530             | 9            | 1                | 333      | 1                             |
| 8                        | 5530             | 9            | 1                | 333      | 1                             |
| 9                        | 5530             | 9            | 1                | 333      | 1                             |
| 10                       | 5530             | 9            | 1                | 333      | 1                             |
| 11                       | 5530             | 9            | 1                | 333      | 1                             |
| 12                       | 5530             | 9            | 1                | 333      | 1                             |
| 13                       | 5530             | 9            | 1                | 333      | 1                             |
| 14                       | 5530             | 9            | 1                | 333      | 1                             |
| 15                       | 5530             | 9            | 1                | 333      | 1                             |
| 16                       | 5530             | 9            | 1                | 333      | 1                             |
| 17                       | 5530             | 9            | 1                | 333      | 1                             |
| 18                       | 5530             | 9            | 1                | 333      | 1                             |
| 19                       | 5530             | 9            | 1                | 333      | 1                             |
| 20                       | 5530             | 9            | 1                | 333      | 1                             |
| 21                       | 5530             | 9            | 1                | 333      | 1                             |
| 22                       | 5530             | 9            | 1                | 333      | 1                             |
| 23                       | 5530             | 9            | 1                | 333      | 1                             |
| 24                       | 5530             | 9            | 1                | 333      | 1                             |
| 25                       | 5530             | 9            | 1                | 333      | 1                             |
| 26                       | 5530             | 9            | 1                | 333      | 1                             |
| 27                       | 5530             | 9            | 1                | 333      | 1                             |
| 28                       | 5530             | 9            | 1                | 333      | 1                             |
| 29                       | 5530             | 9            | 1                | 333      | 1                             |
| 30                       | 5530             | 9            | 1                | 333      | 1                             |
| Detection Percentage (%) |                  |              |                  |          | 100.00                        |





### 4 Test Equipment and Calibration Data

| Instrument        | Manufacturer | Model No. | Serial No.    | Characteristics | Calibration Date | Remark              |
|-------------------|--------------|-----------|---------------|-----------------|------------------|---------------------|
| Spectrum analyzer | R&S          | FSP40     | 100142        | 9kHz~40GHz      | Oct. 15, 2014    | Conducted (DF01-CB) |
| Signal generator  | R&S          | SMU200A   | 102782        | 25MHz-6GHz      | Nov. 29, 2014    | Conducted (DF01-CB) |
| RF Power Divider  | ANAREN       | 2 Way     | DFS-01-DV-02  | 1GHz ~ 6GHz     | Jan. 10, 2015    | Conducted (DF01-CB) |
| RF Power Divider  | MTJ          | 2Way      | DFS-01-DV-03  | 1GHz ~ 6GHz     | Jan. 10, 2015    | Conducted (DF01-CB) |
| RF Power Divider  | ANAREN       | 4 Way     | DFS-01-DV-01  | 1GHz ~ 6GHz     | Jan. 10, 2015    | Conducted (DF01-CB) |
| Horn Antenna      | COM-POWER    | AH-118    | 071187        | 1GHz – 18GHz    | Aug. 26, 2014    | Conducted (DF01-CB) |
| Horn Antenna      | COM-POWER    | AH-118    | 071042        | 1GHz – 18GHz    | Dec. 03, 2014    | Conducted (DF01-CB) |
| RF Cable-high     | Woken        | RG402     | High Cable-53 | 1 GHz –18 GHz   | Nov. 15, 2014    | Conducted (DF01-CB) |
| RF Cable-high     | Woken        | RG402     | High Cable-54 | 1 GHz –18 GHz   | Nov. 15, 2014    | Conducted (DF01-CB) |
| RF Cable-high     | Woken        | RG402     | High Cable-56 | 1 GHz –18 GHz   | Nov. 15, 2014    | Conducted (DF01-CB) |
| RF Cable-high     | Woken        | RG402     | High Cable-57 | 1 GHz –18 GHz   | Nov. 15, 2014    | Conducted (DF01-CB) |
| RF Cable-high     | Woken        | RG402     | High Cable-58 | 1 GHz –18 GHz   | Nov. 15, 2014    | Conducted (DF01-CB) |
| RF Cable-high     | Woken        | RG402     | High Cable-60 | 1 GHz –18 GHz   | Nov. 15, 2014    | Conducted (DF01-CB) |
| Thermometer       | HTC-1        | HTC-1     | TP-11         | -50°C~70°C      | Mar. 05, 2015    | Conducted (DF01-CB) |

Note: Calibration Interval of instruments listed above is one year.



## **5 Measurement Uncertainty**

| <b>Test Items</b> | <b>Uncertainty</b> | <b>Remark</b>            |
|-------------------|--------------------|--------------------------|
| Radiated Emission | 2.9 dB             | Confidence levels of 95% |