


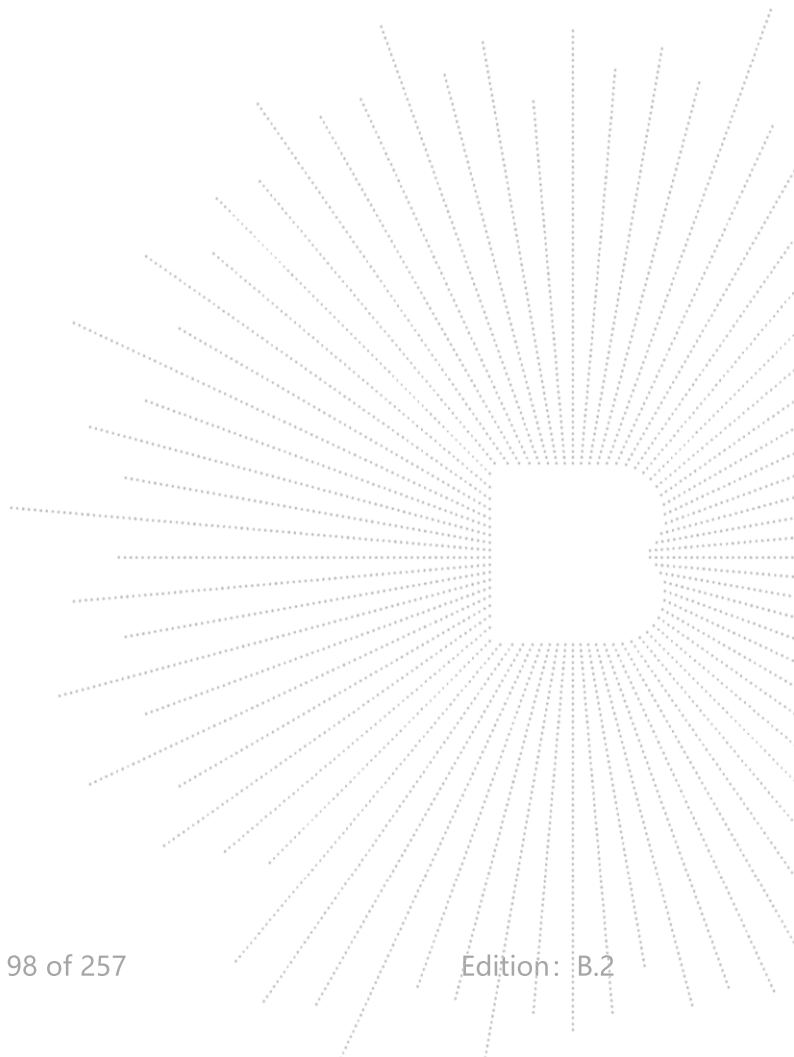
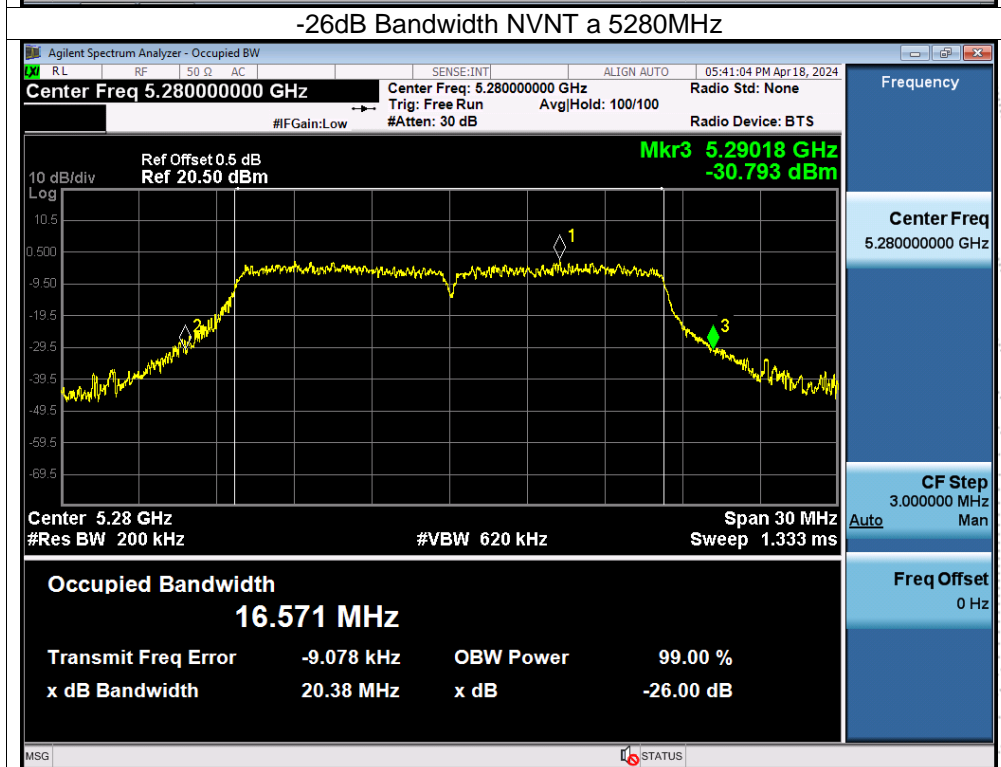




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 24V
Test Mode:	(5260-5320MHz)		



Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	99% OBW (MHz)	Verdict
NVNT	a	5260	19.941	16.533	Pass
NVNT	a	5280	20.378	16.583	Pass
NVNT	a	5320	20.633	16.569	Pass
NVNT	n20	5260	21.194	17.699	Pass
NVNT	n20	5280	20.993	17.694	Pass
NVNT	n20	5320	21.283	17.684	Pass
NVNT	n40	5270	41.656	36.171	Pass
NVNT	n40	5310	41.949	36.223	Pass
NVNT	ac20	5260	21.155	17.669	Pass
NVNT	ac20	5280	21.057	17.678	Pass
NVNT	ac20	5320	21.119	17.69	Pass
NVNT	ac40	5270	41.782	36.175	Pass
NVNT	ac40	5310	41.791	36.216	Pass
NVNT	ac80	5290	82.29	75.674	Pass


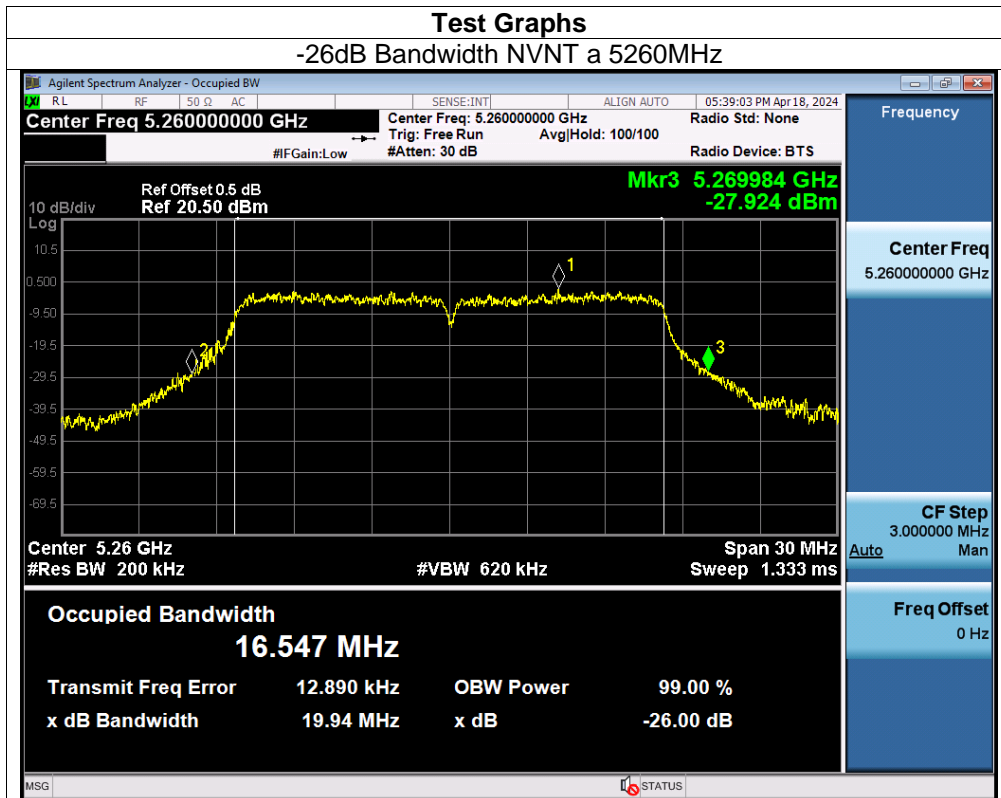



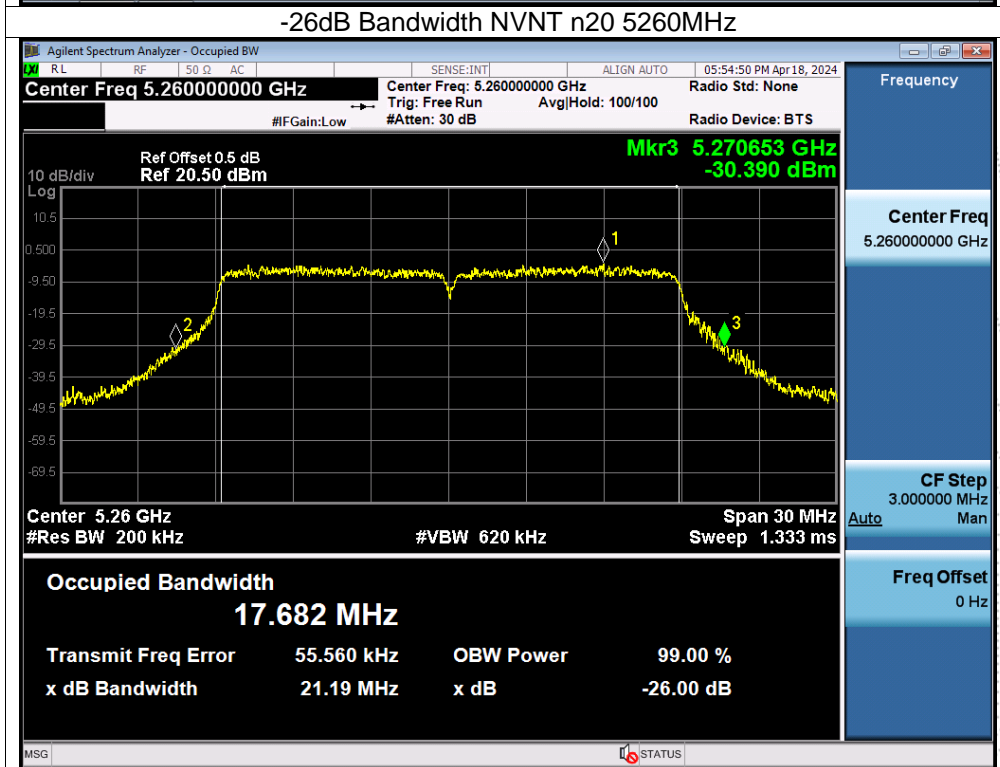



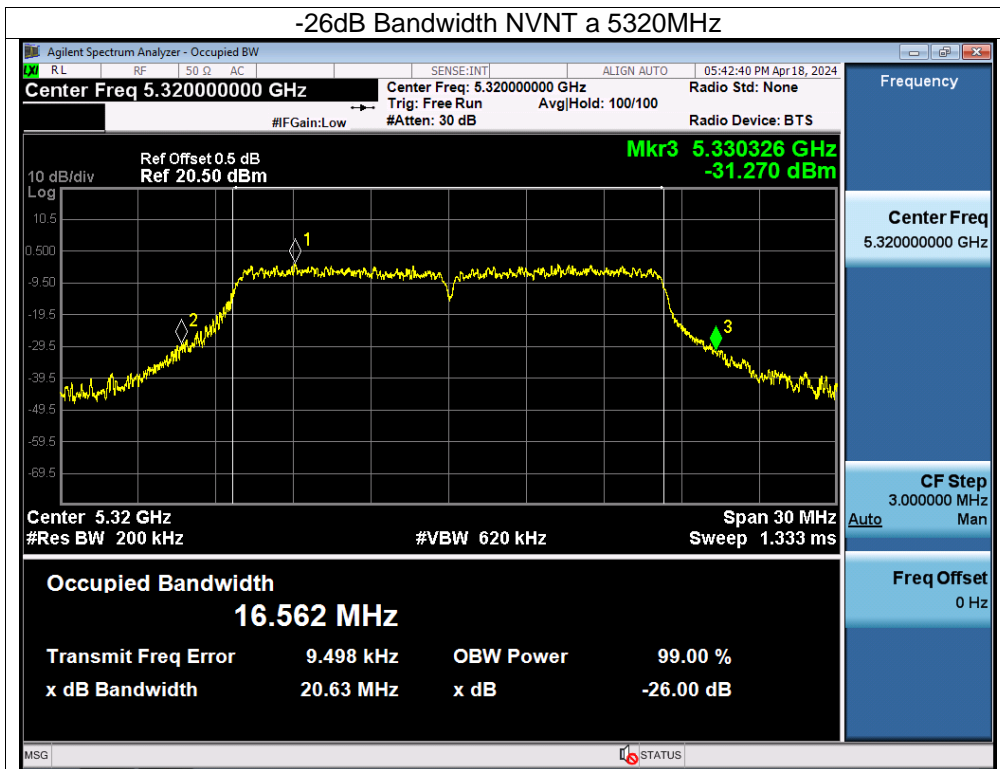


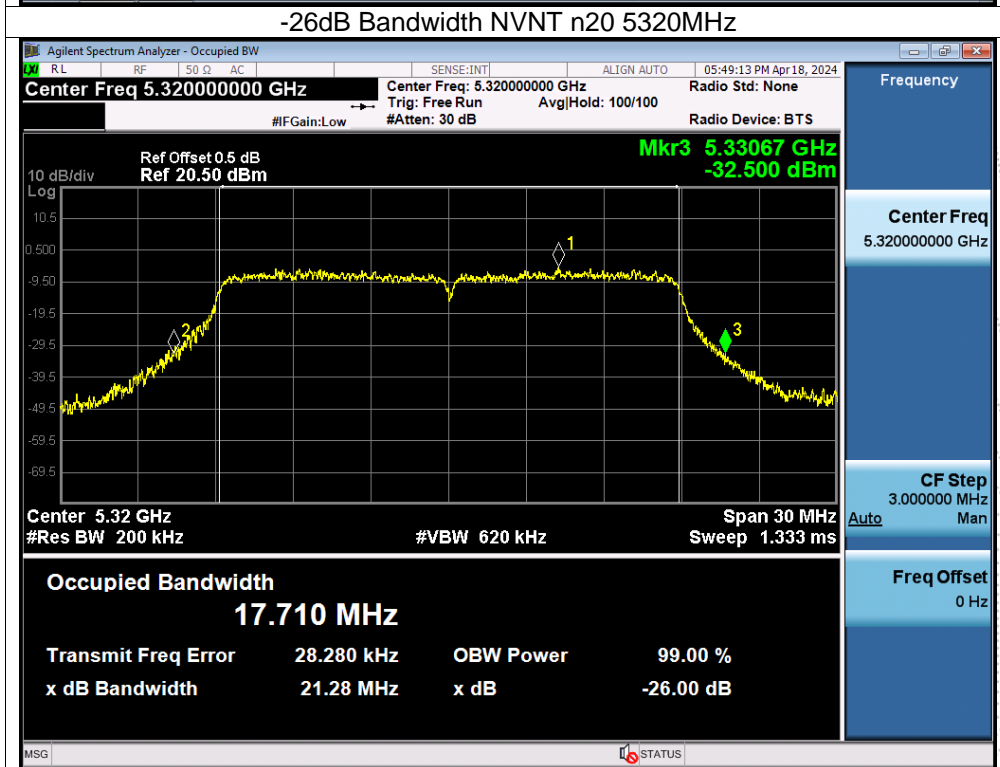
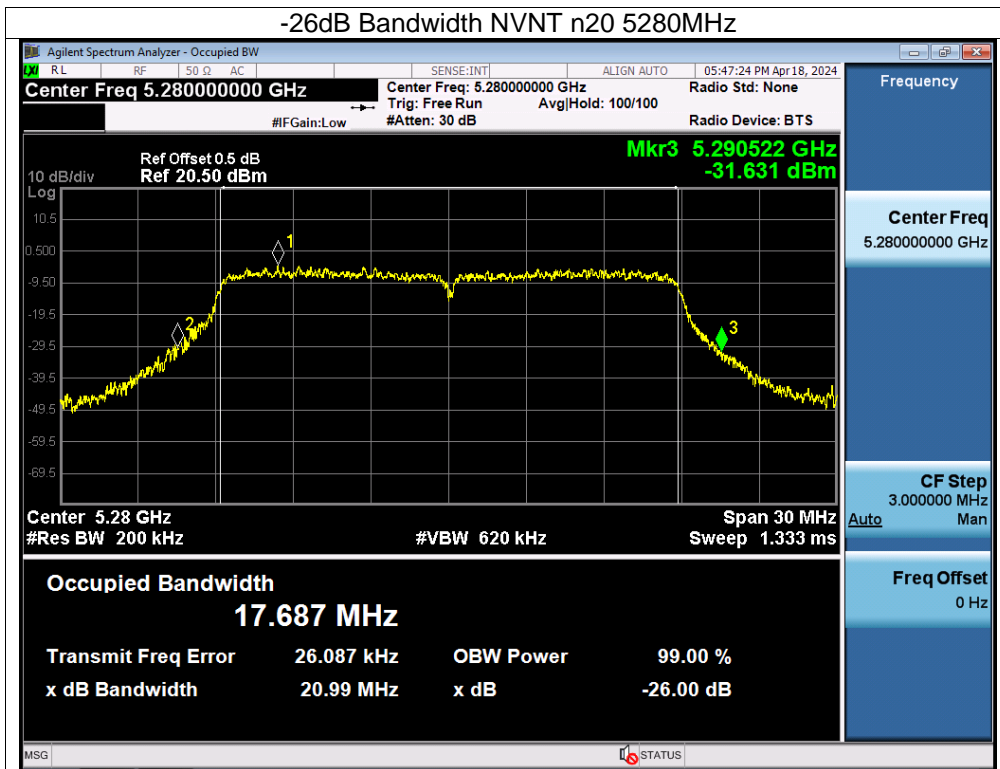


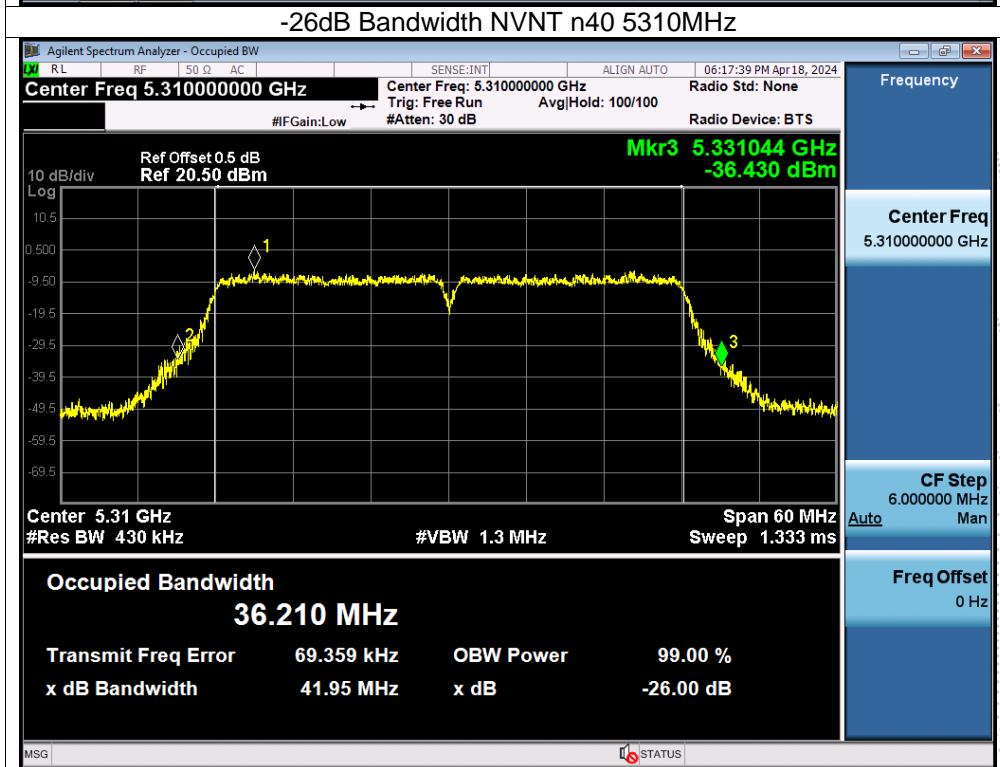
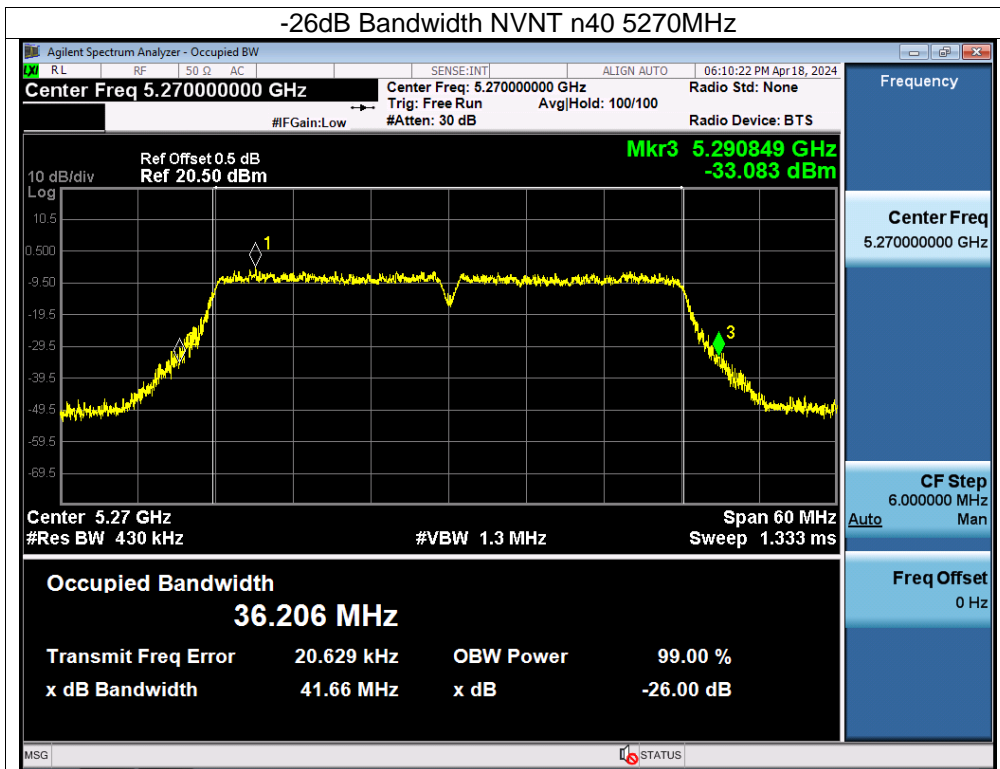


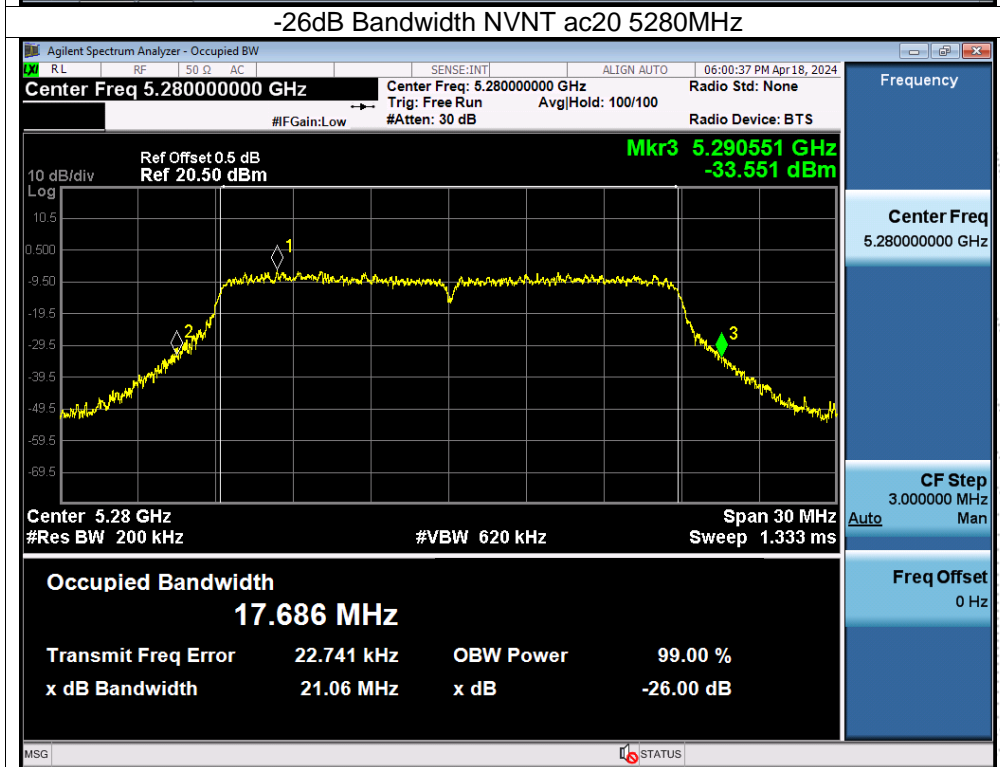
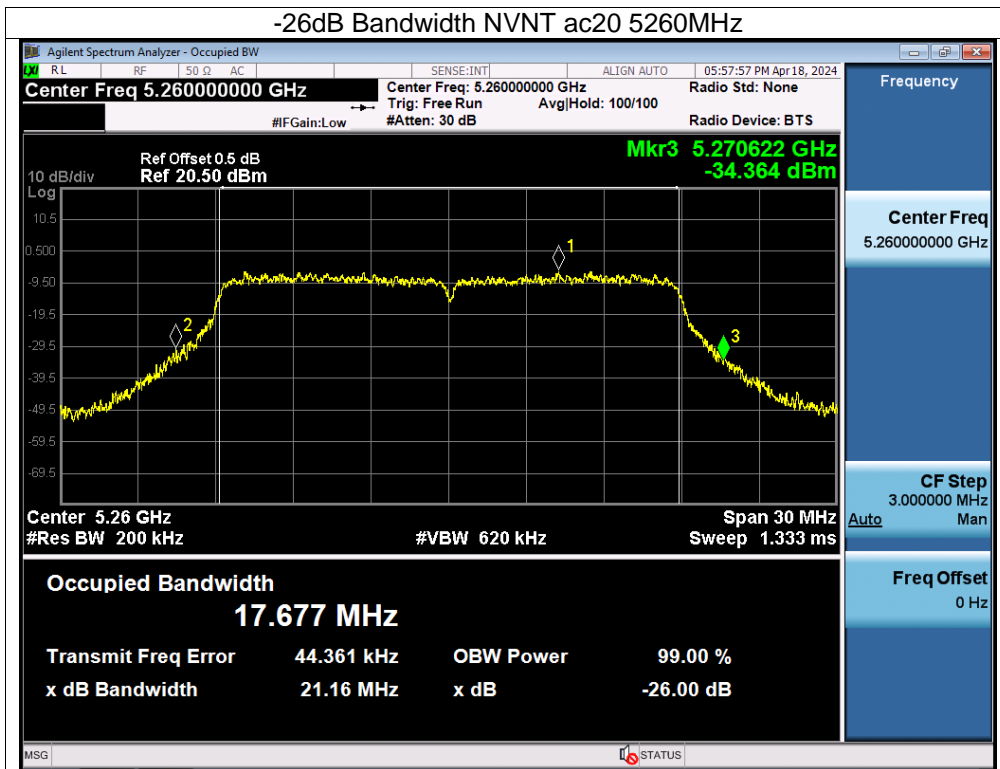


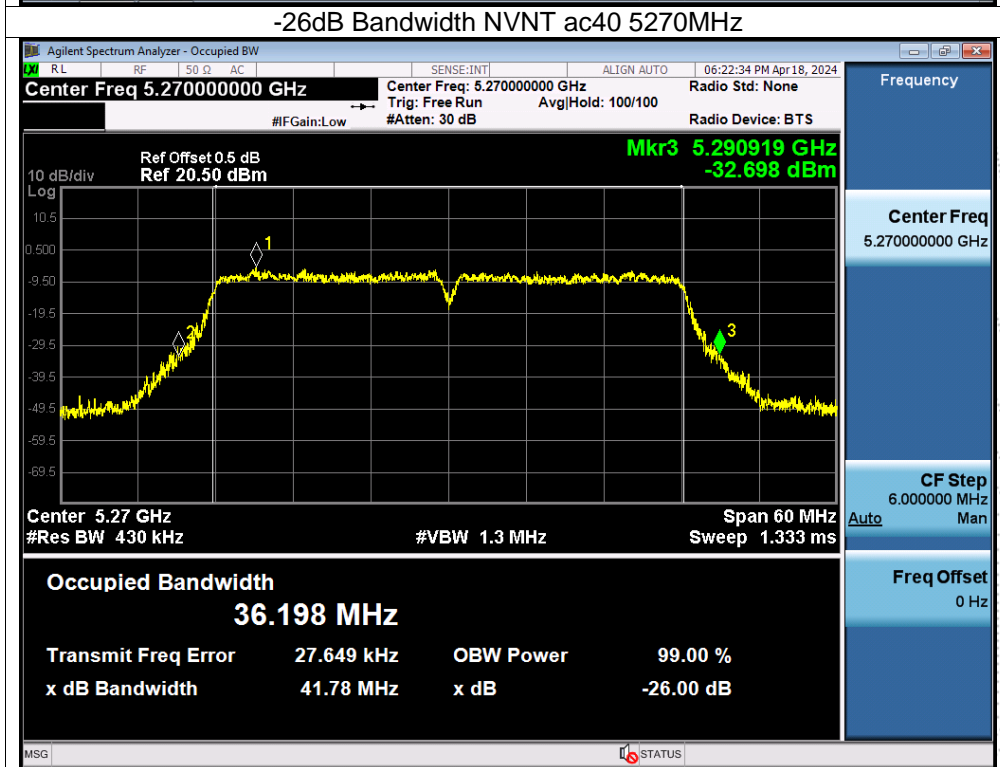
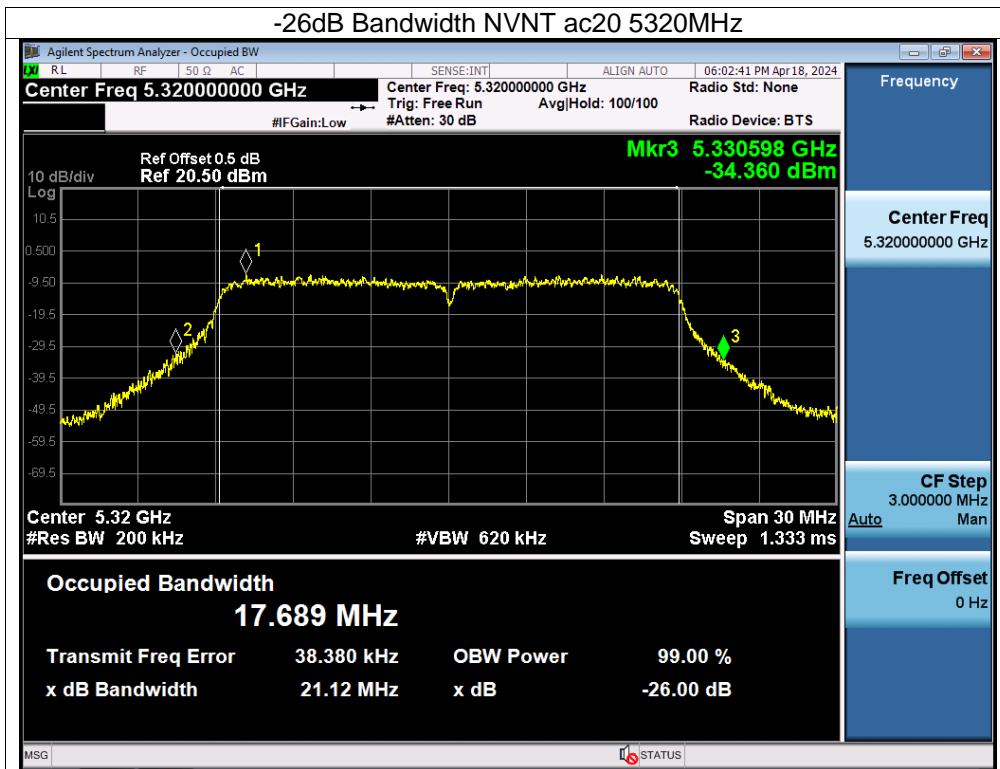


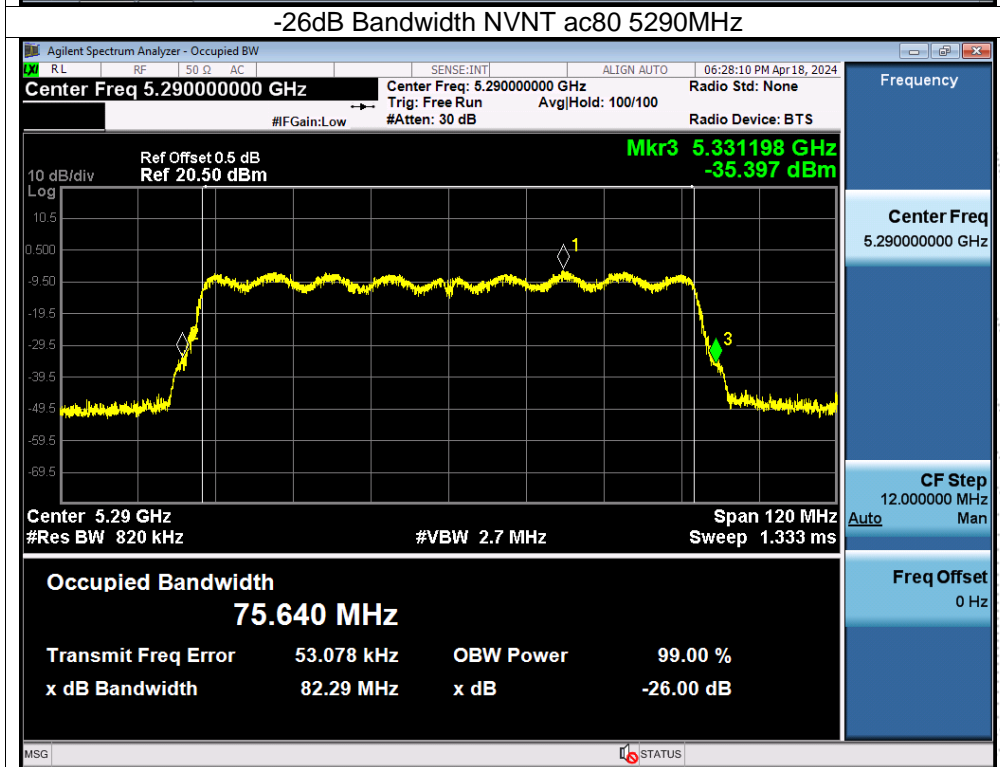
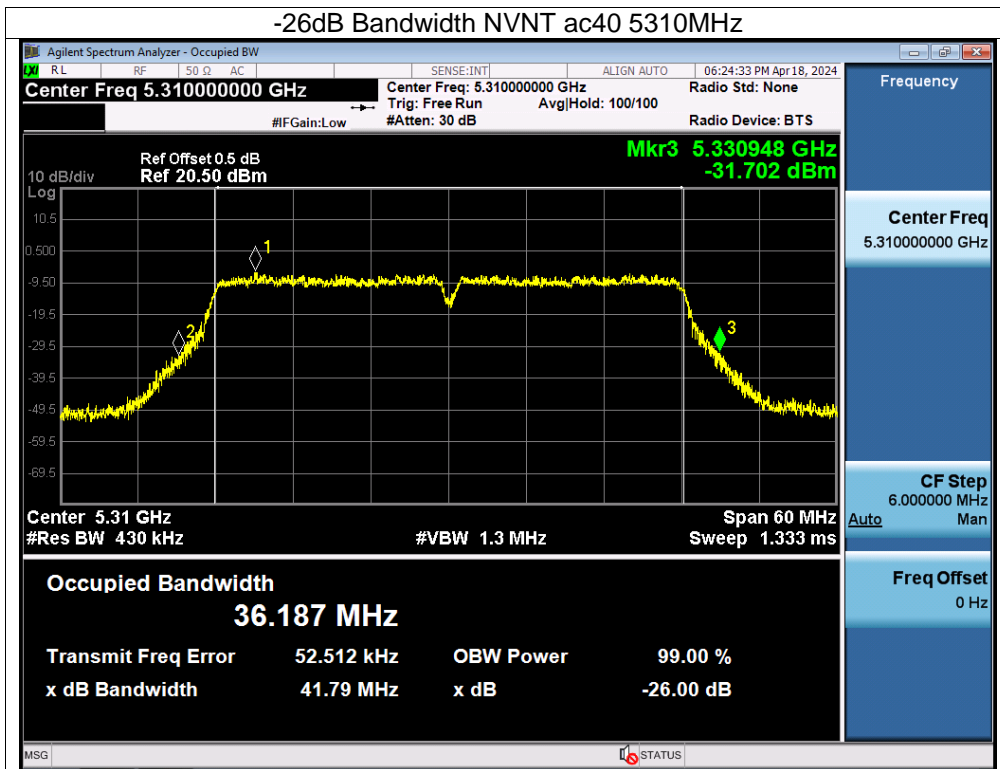


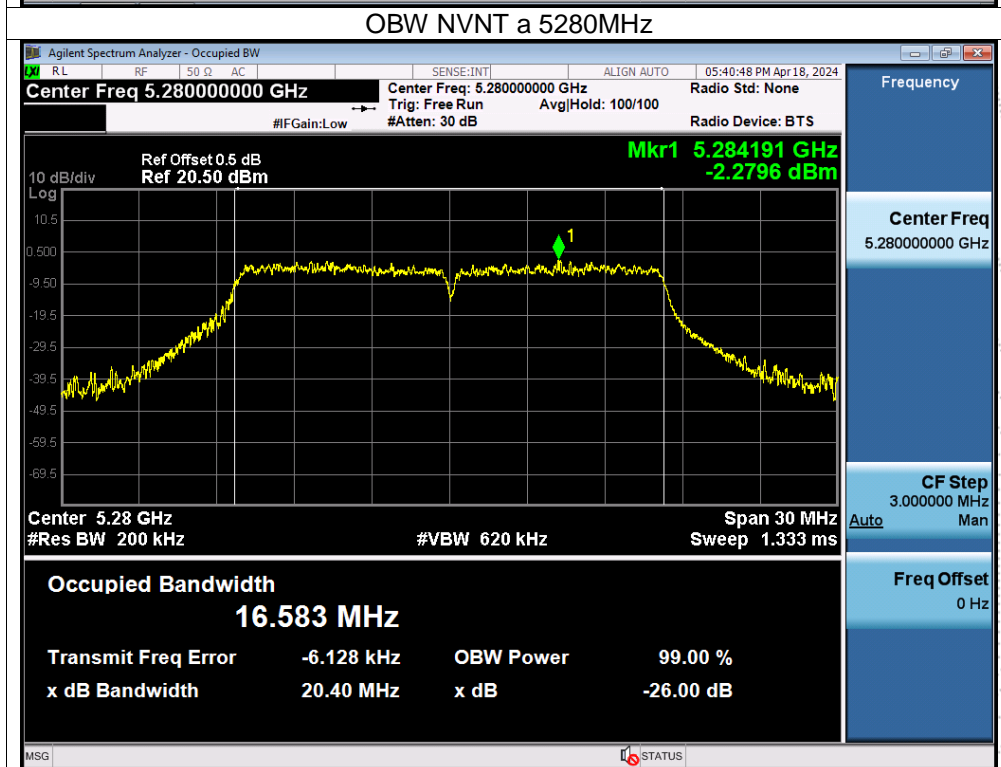
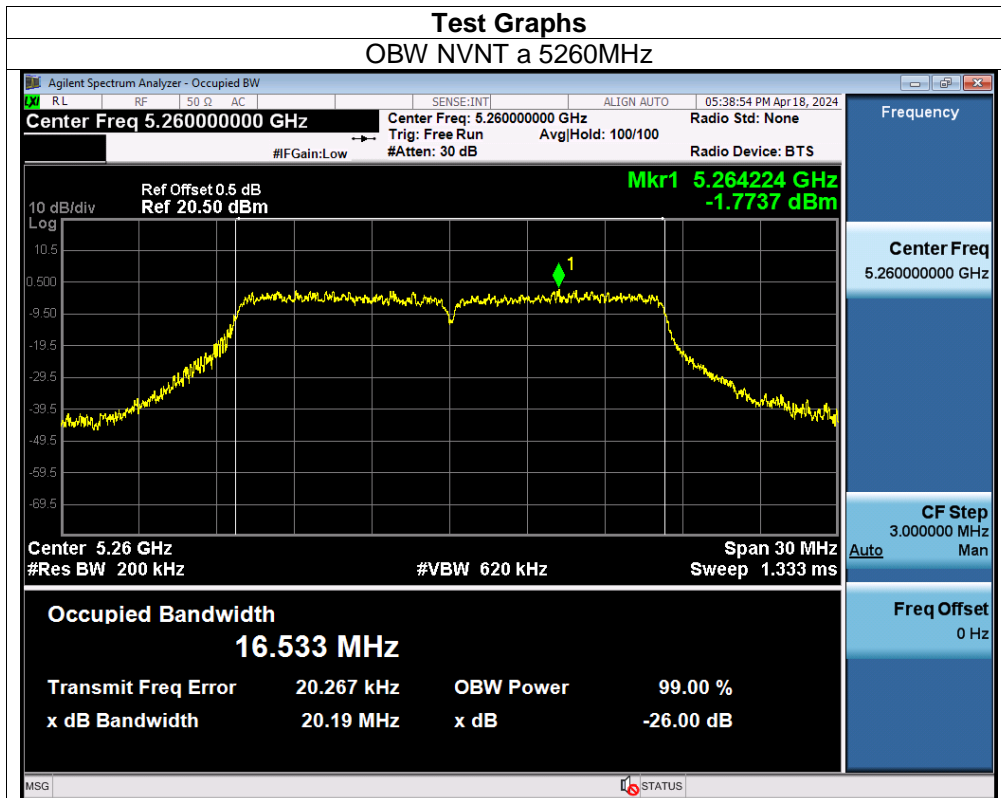


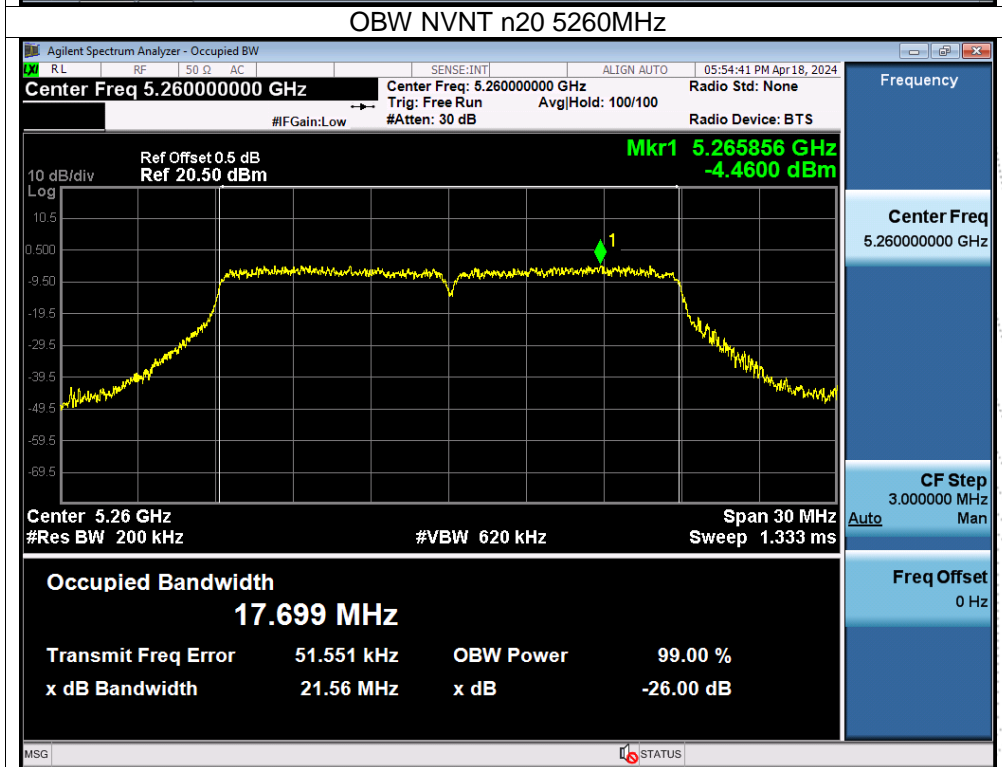
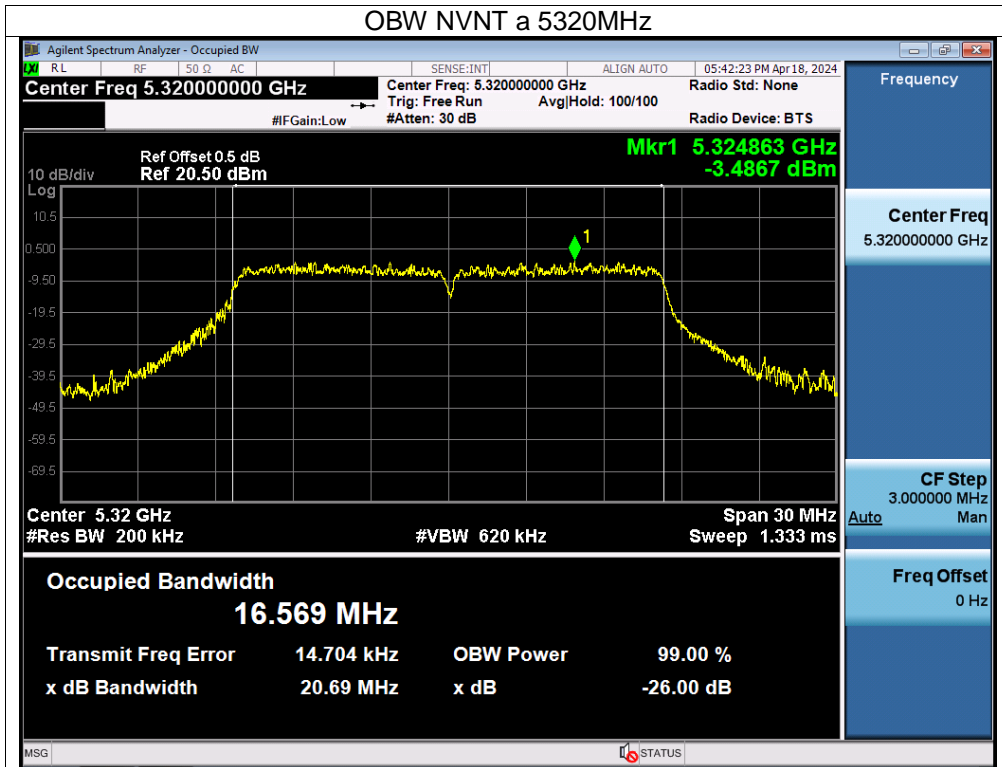


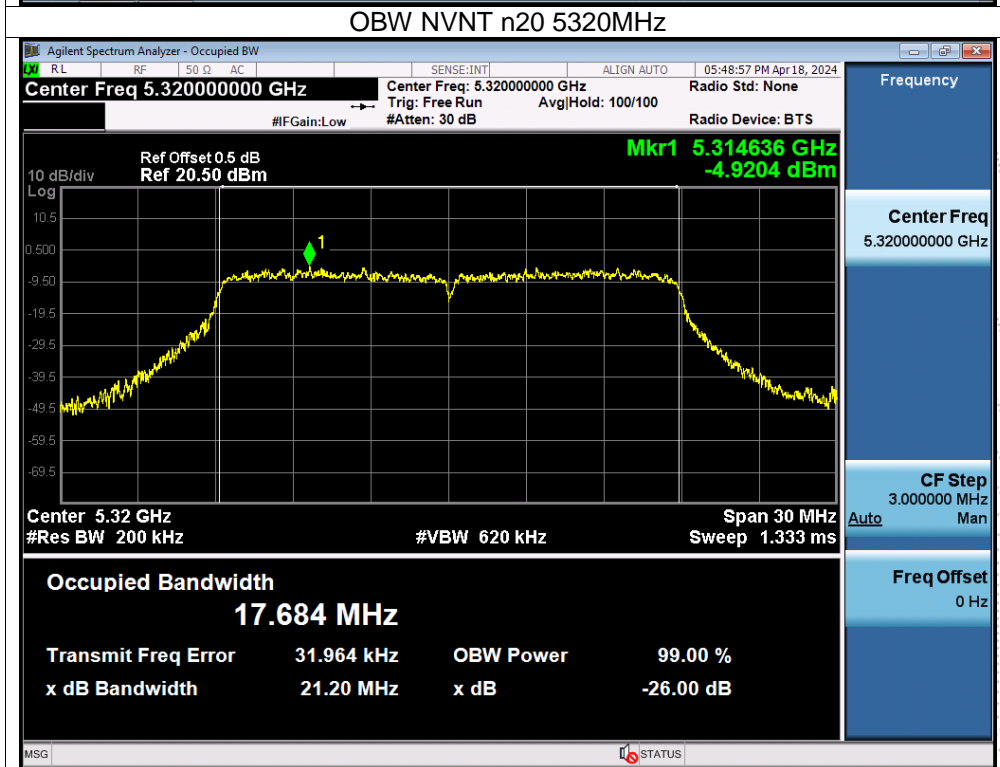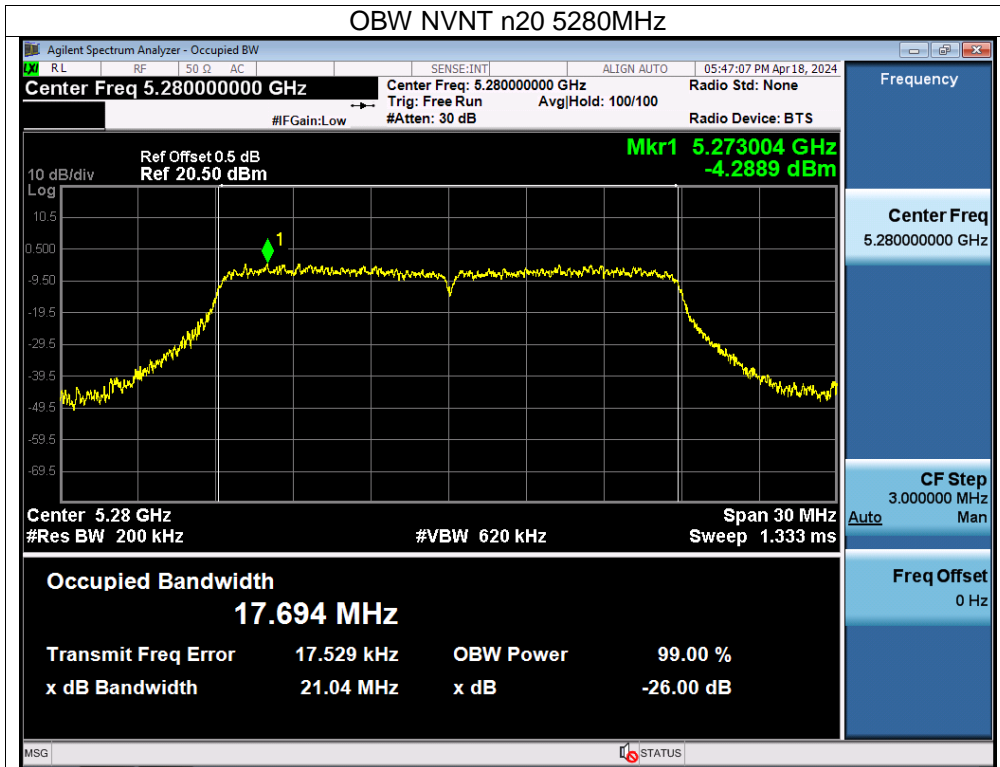

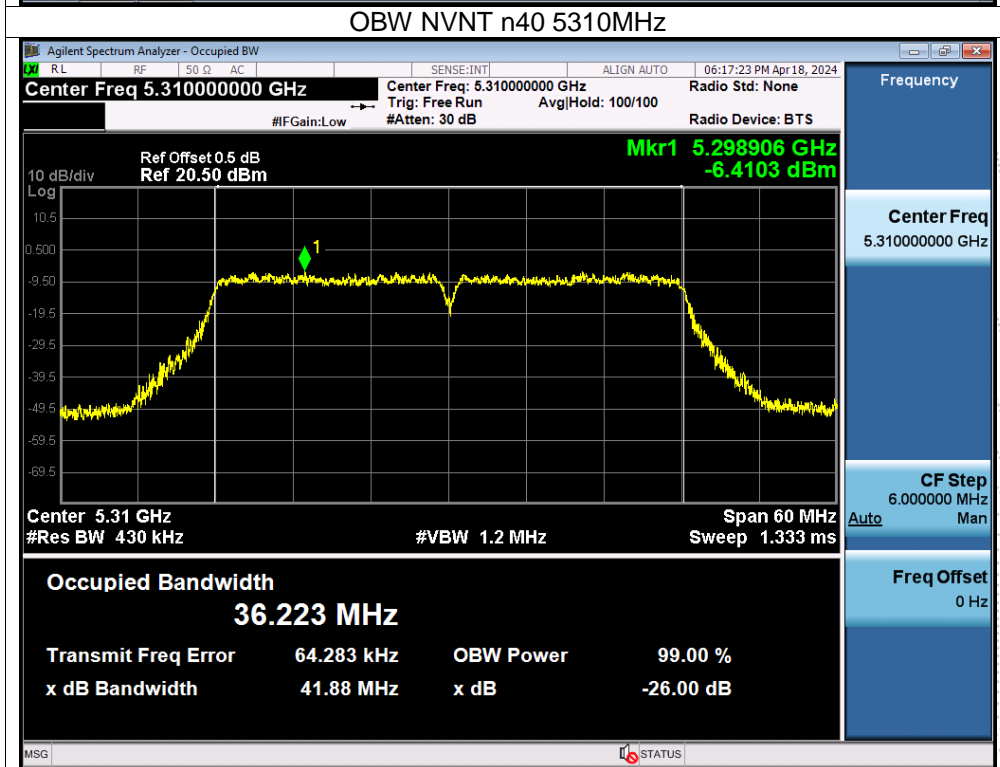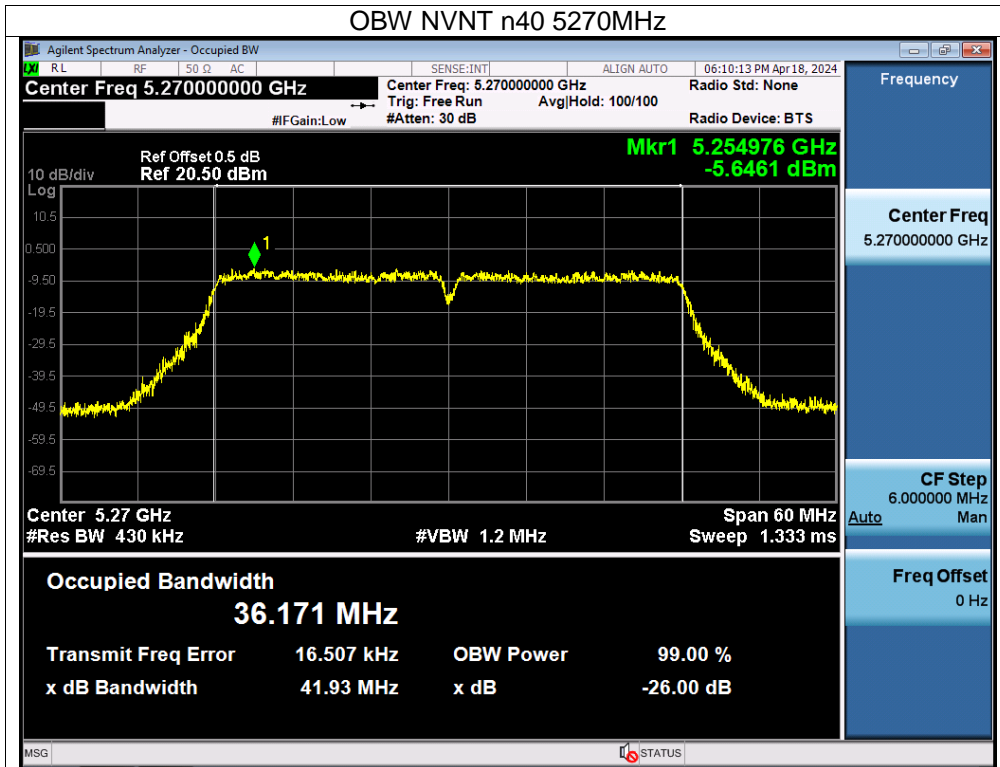

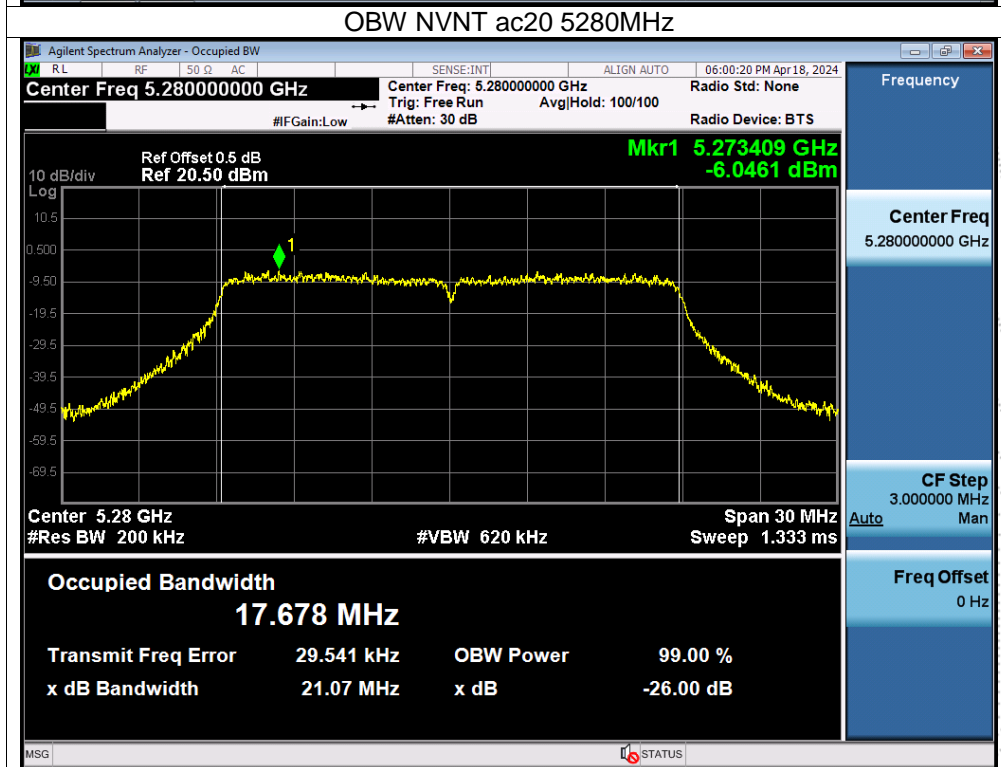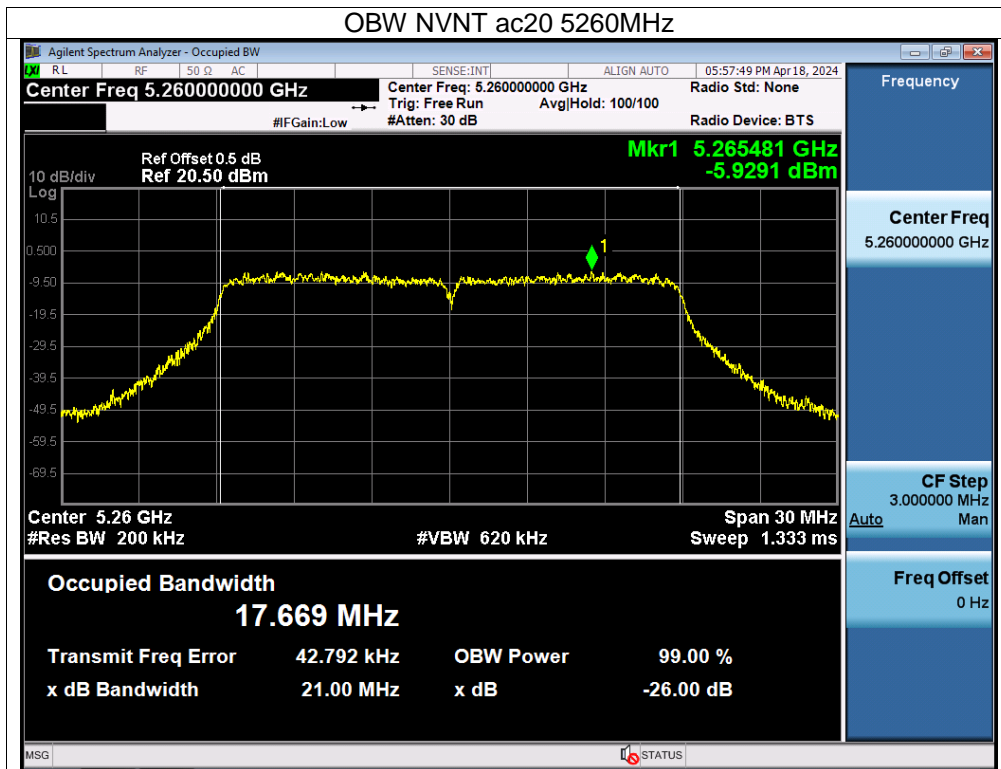


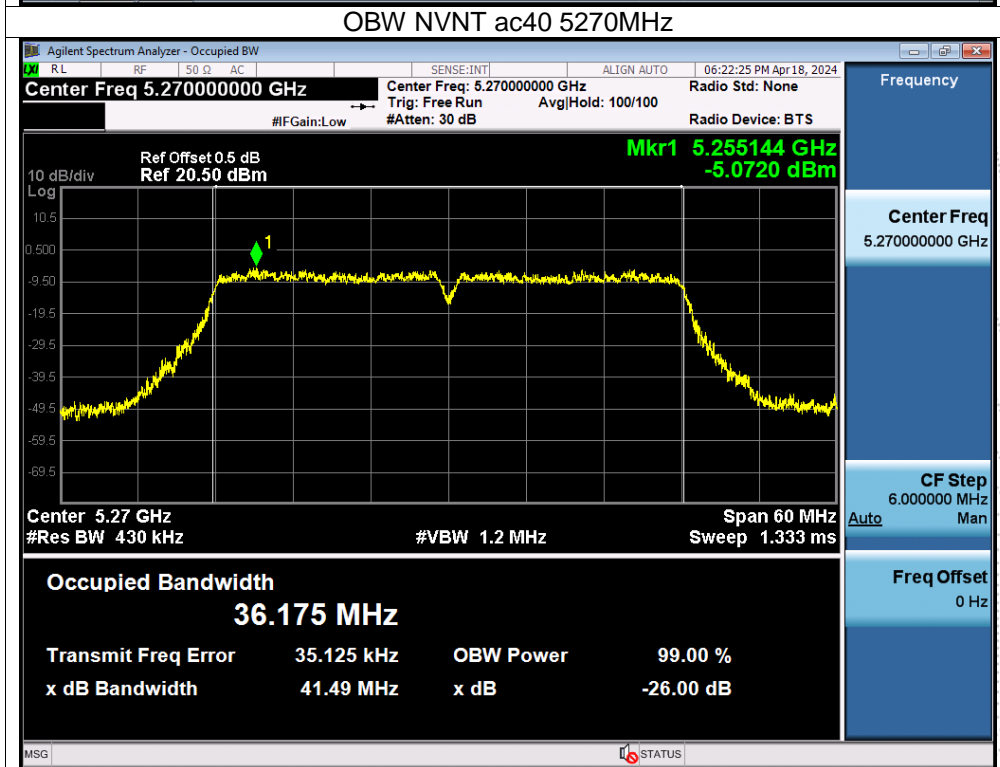
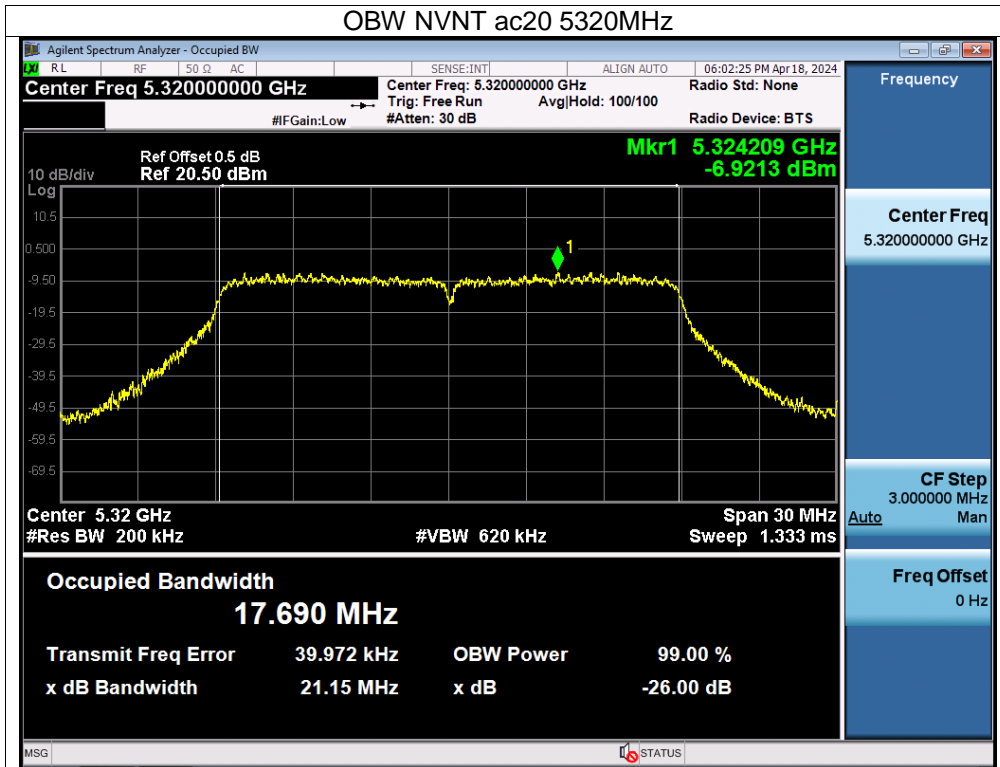


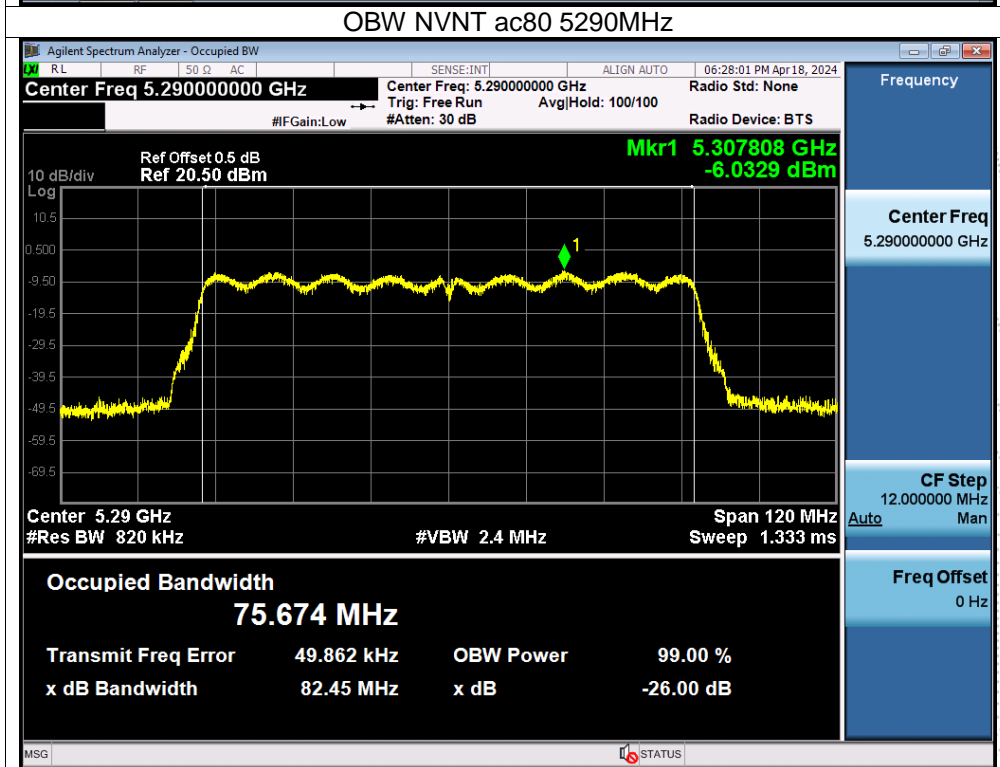
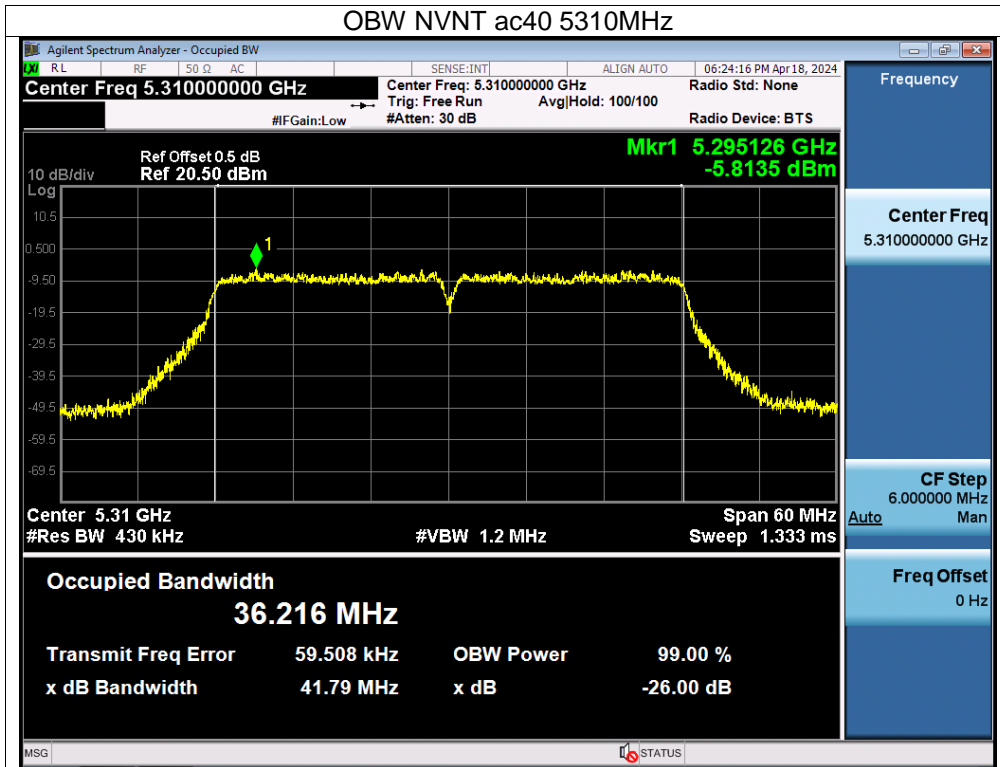




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 24V
Test Mode:	(5500-5700MHz)		



Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	99% OBW (MHz)	Verdict
NVNT	a	5500	29.597	16.929	Pass
NVNT	a	5580	29.884	17.193	Pass
NVNT	a	5700	26.068	16.801	Pass
NVNT	n20	5500	23.344	17.788	Pass
NVNT	n20	5580	27.383	17.855	Pass
NVNT	n20	5700	22.331	17.802	Pass
NVNT	n40	5510	41.577	36.205	Pass
NVNT	n40	5550	51.04	36.318	Pass
NVNT	n40	5670	55.618	36.386	Pass
NVNT	ac20	5500	23.139	17.772	Pass
NVNT	ac20	5580	25.669	17.912	Pass
NVNT	ac20	5700	21.602	17.822	Pass
NVNT	ac40	5510	41.266	36.206	Pass
NVNT	ac40	5550	51.02	36.305	Pass
NVNT	ac40	5670	52.084	36.364	Pass
NVNT	ac80	5530	80.997	75.587	Pass


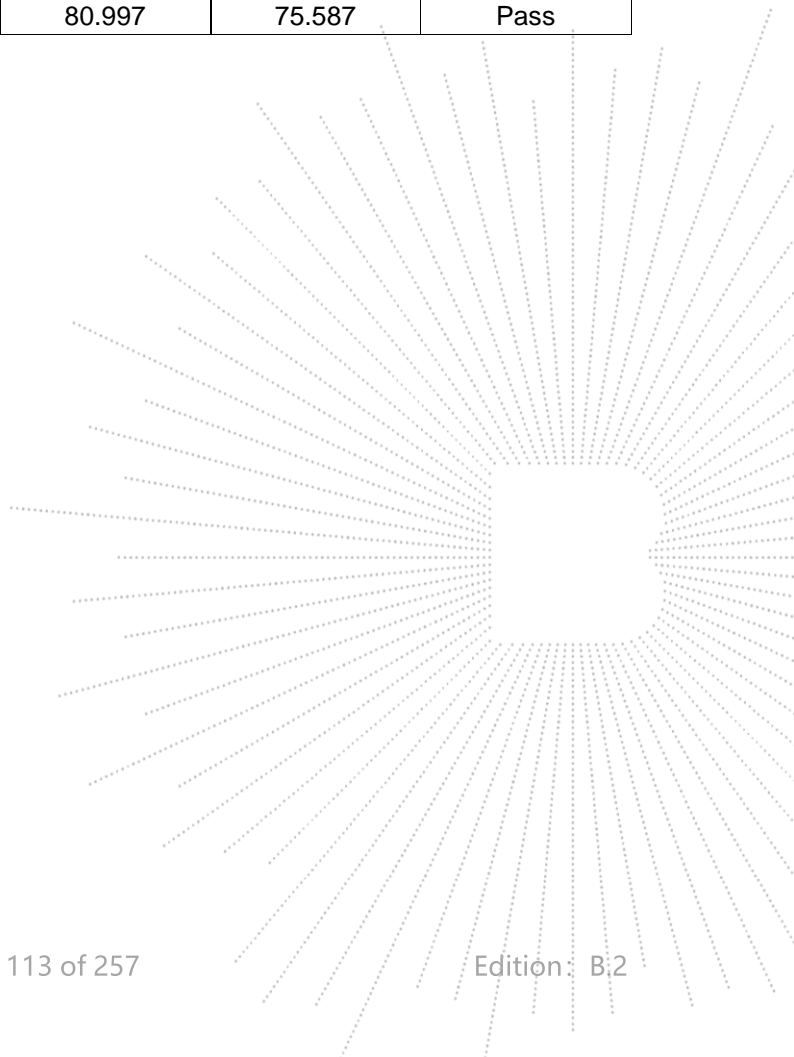


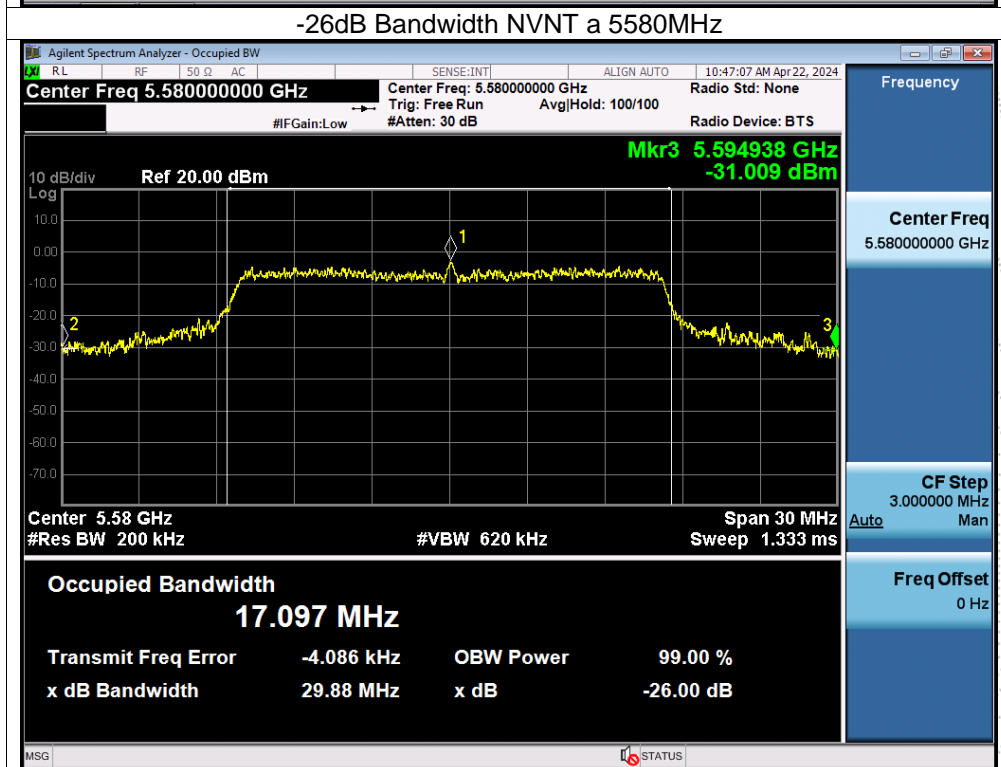
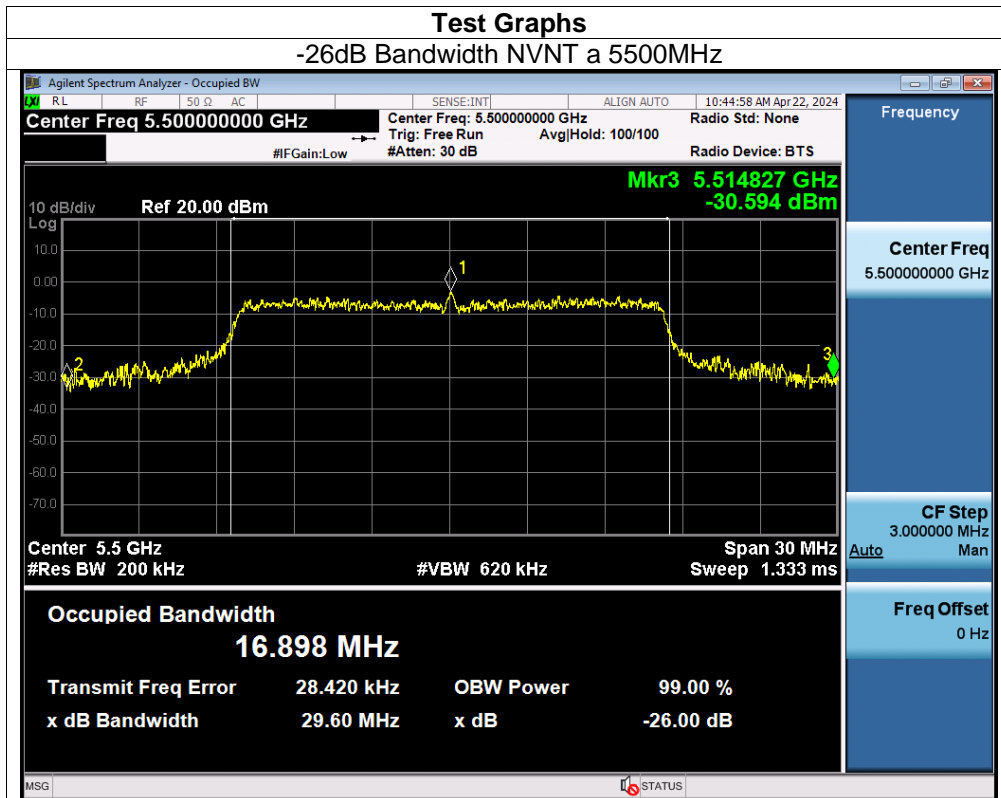


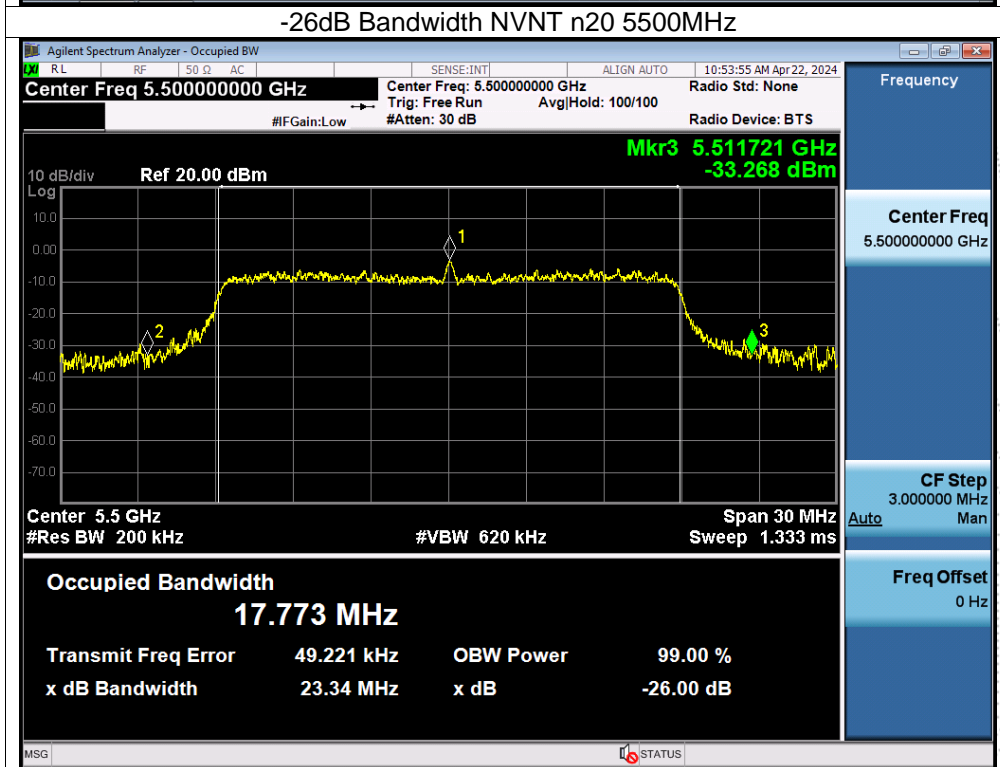
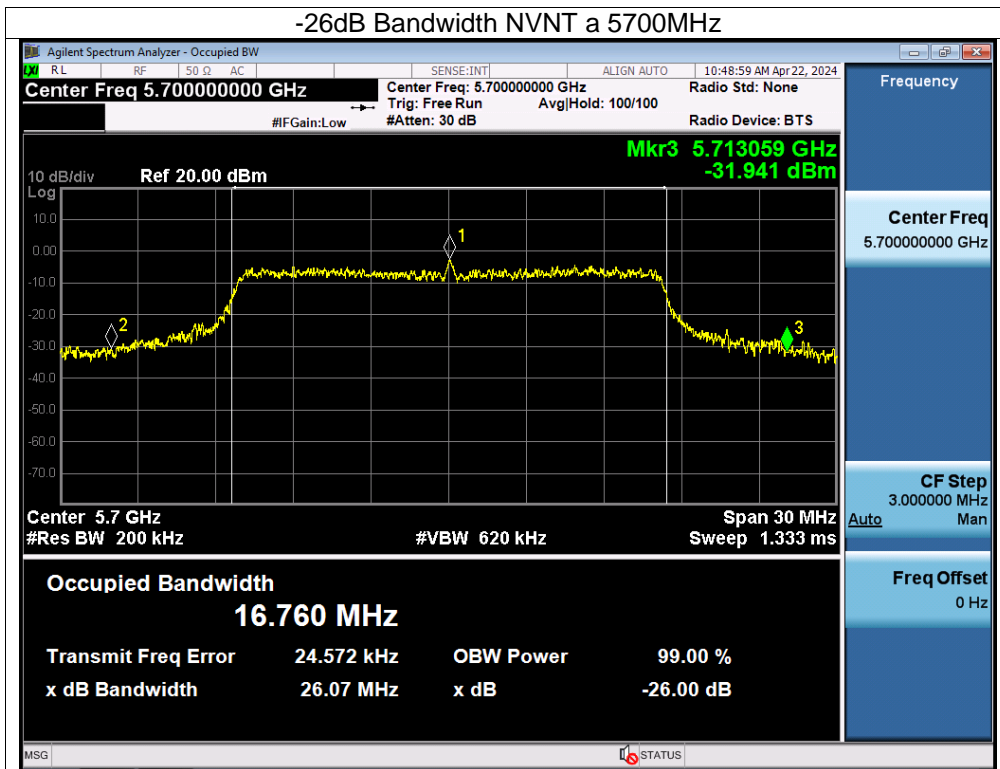


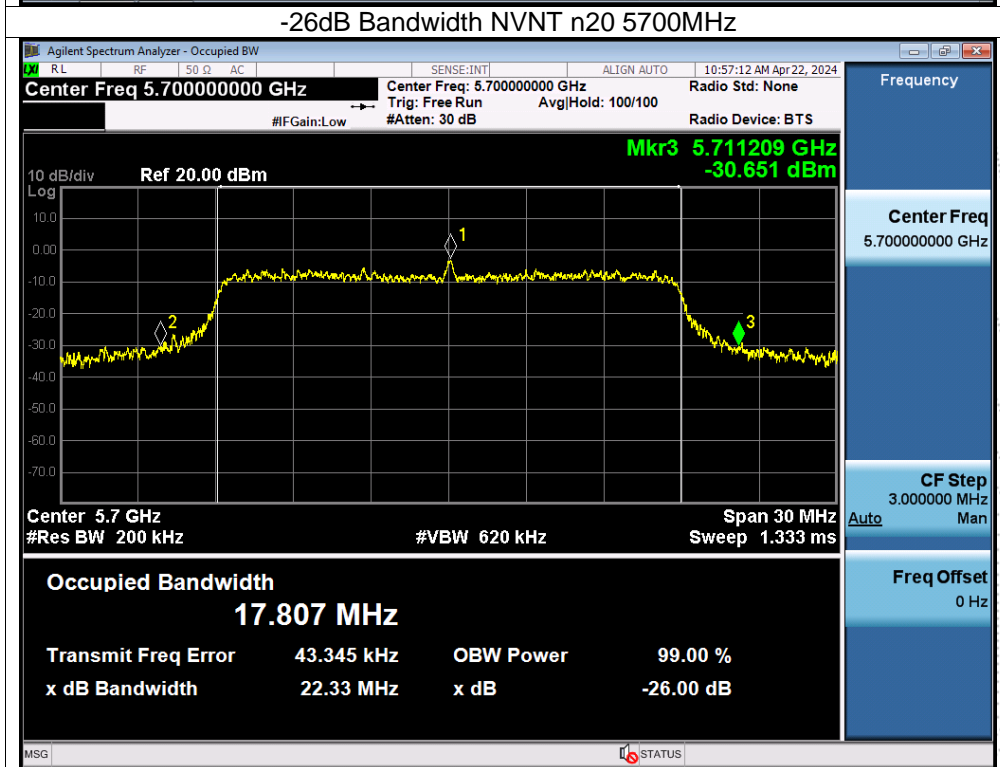
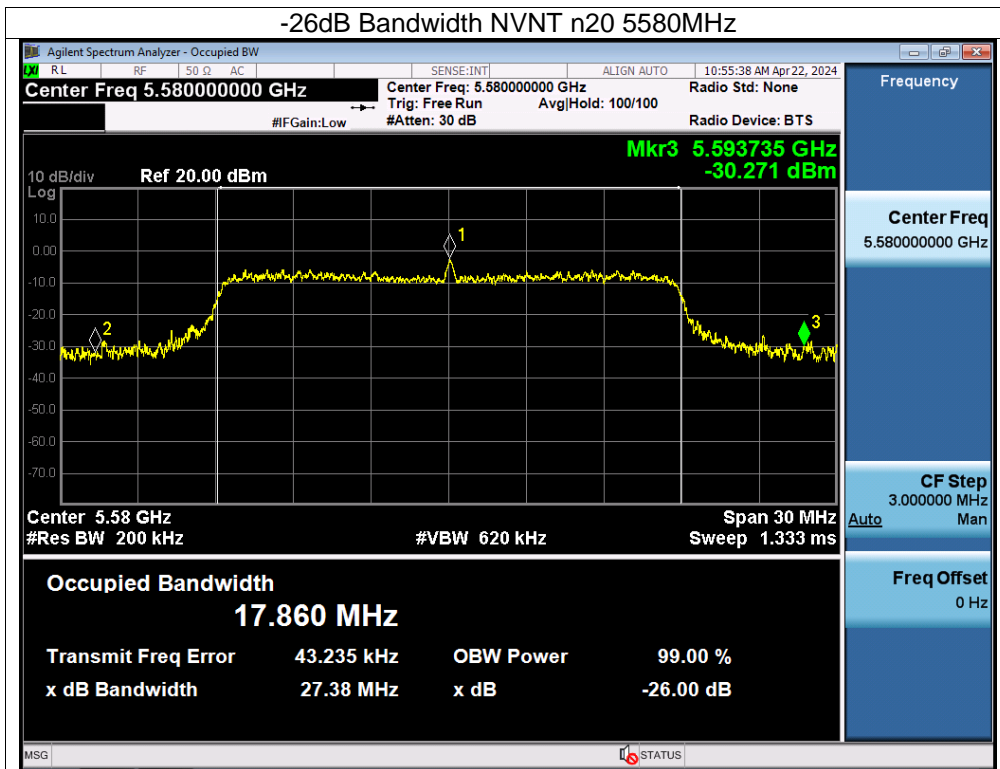


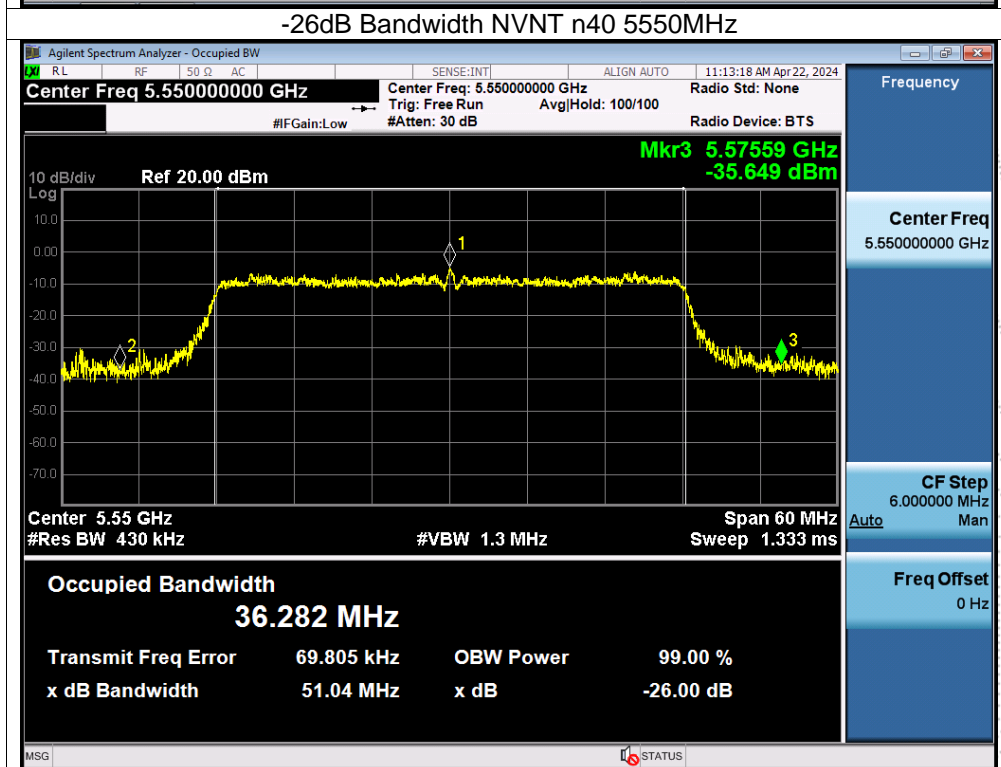
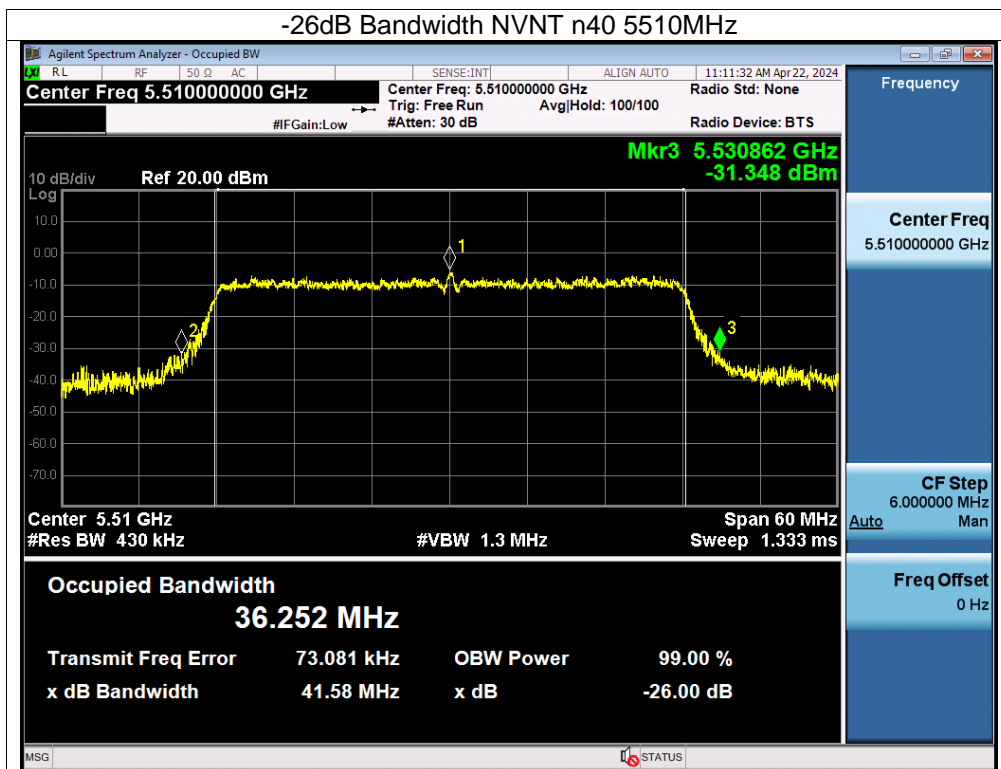


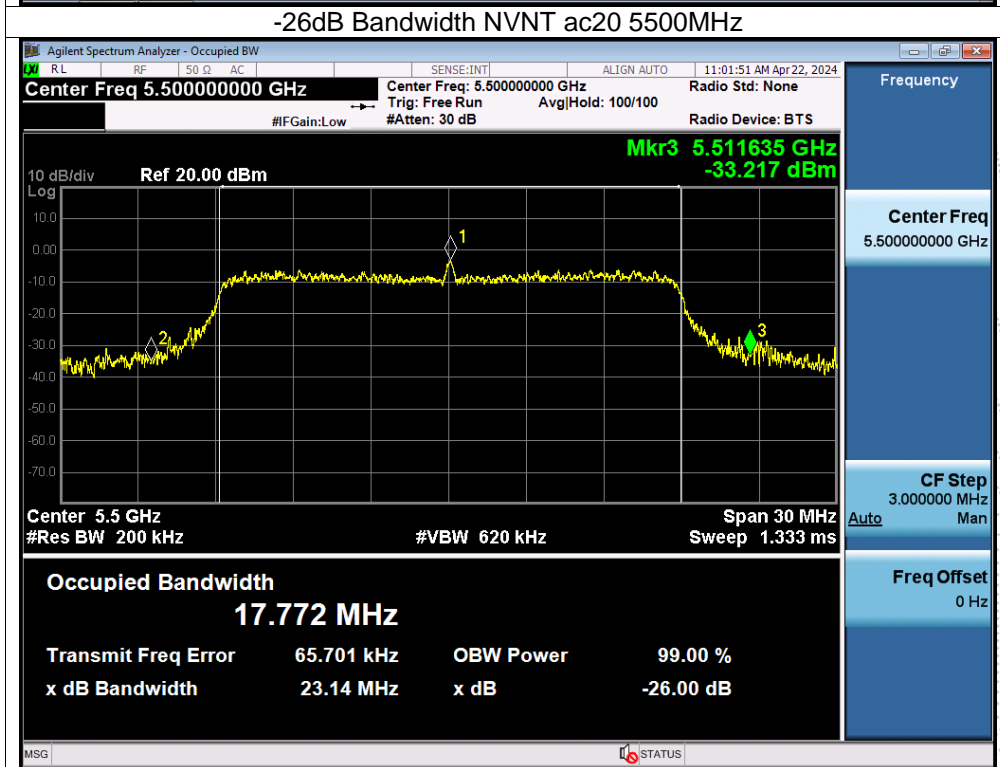
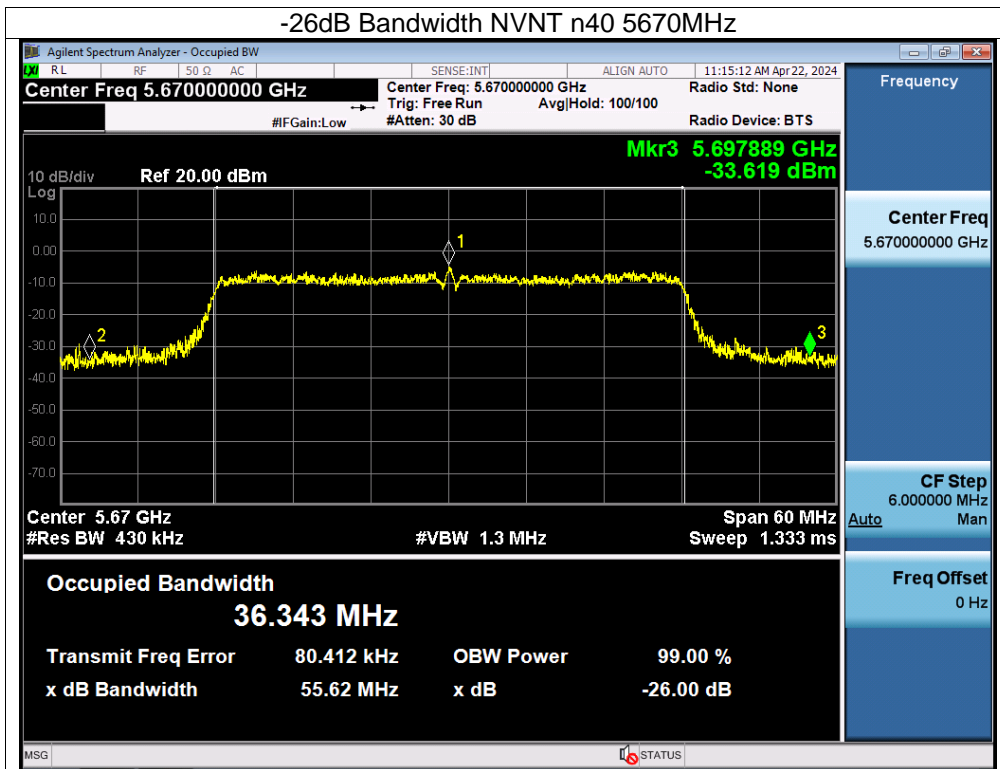


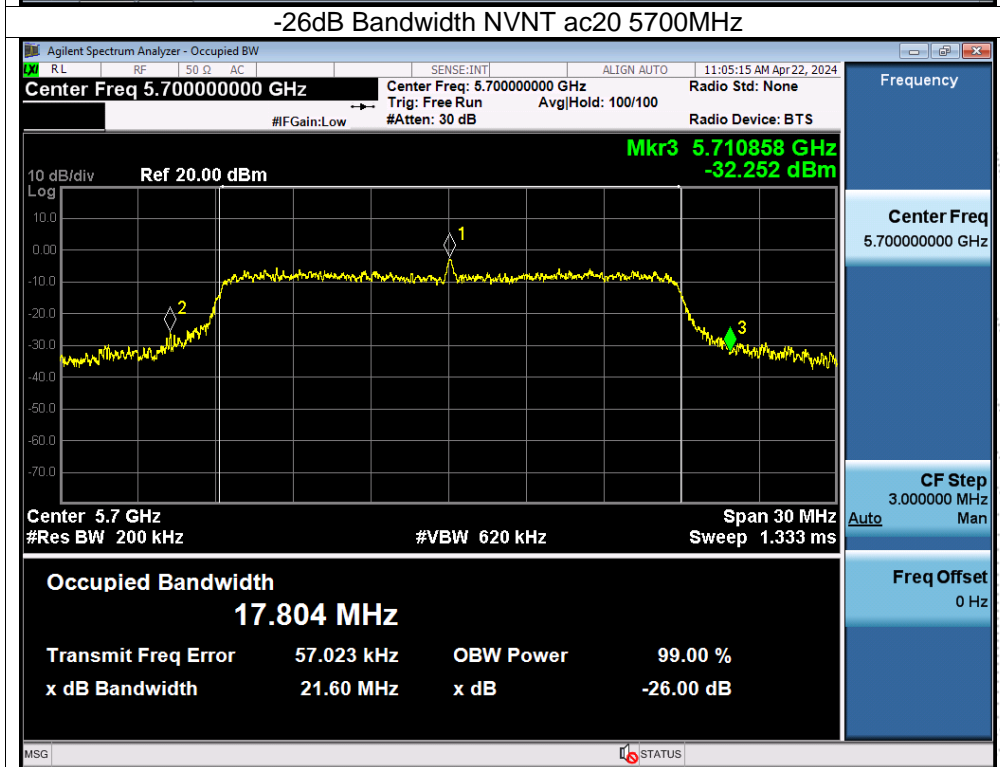
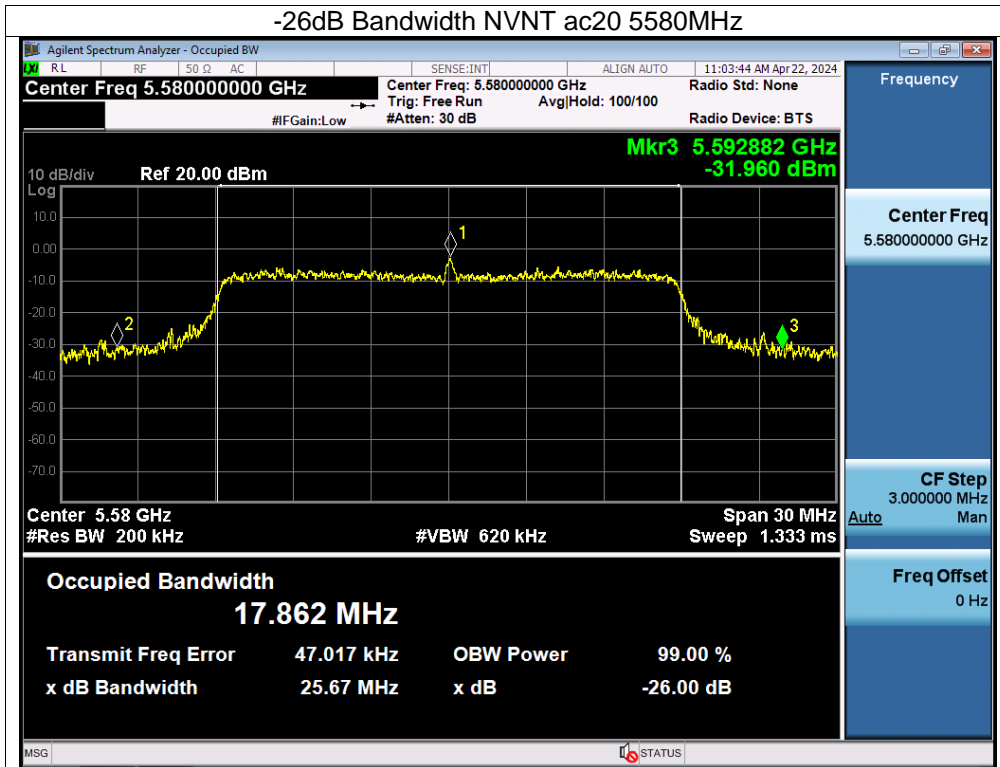


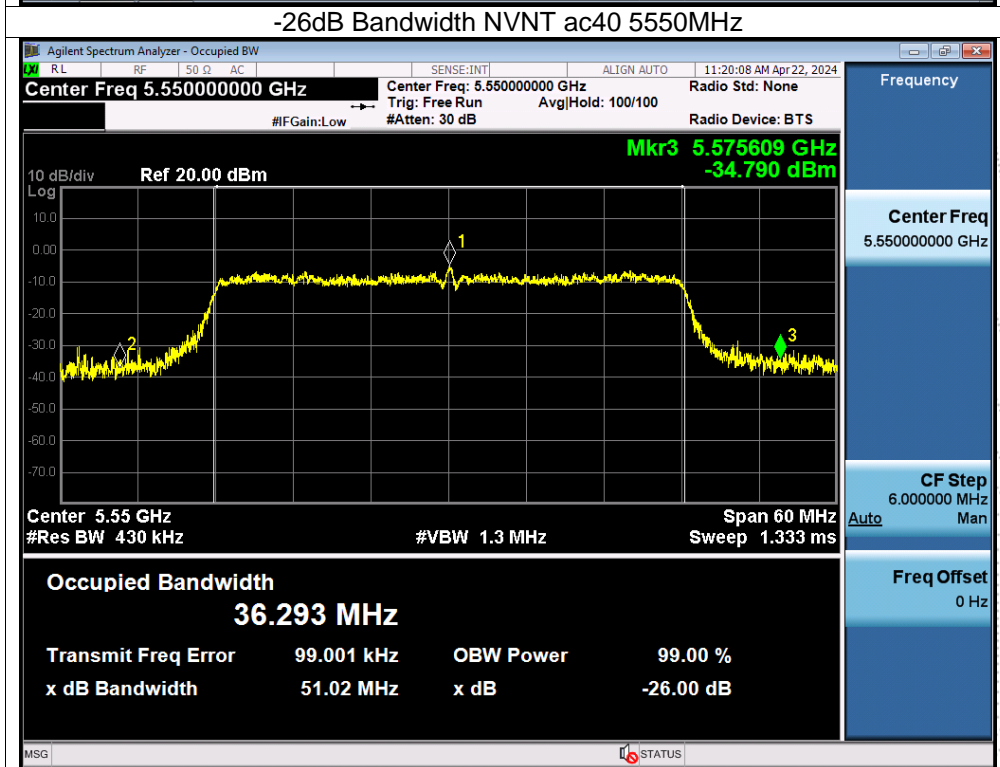
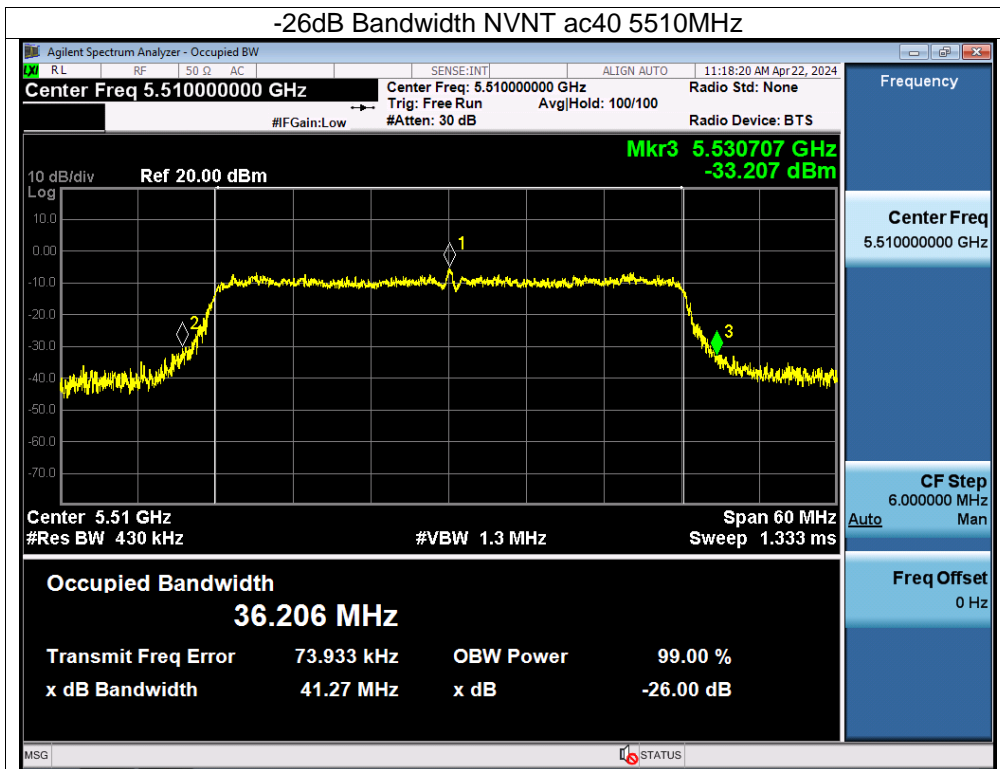


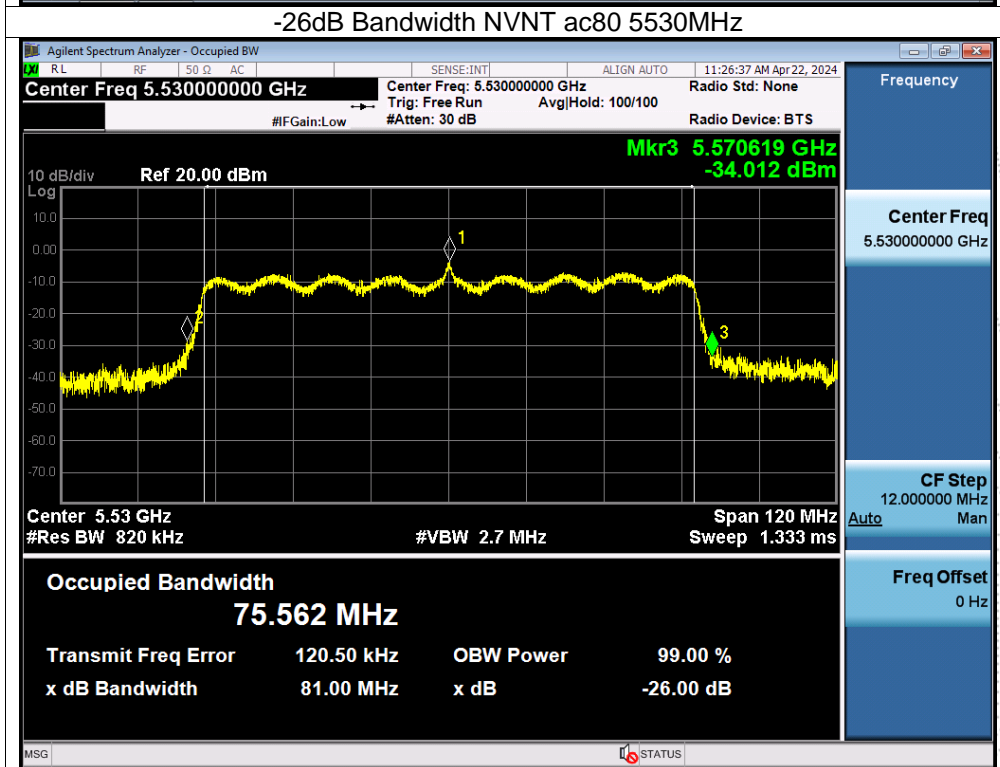
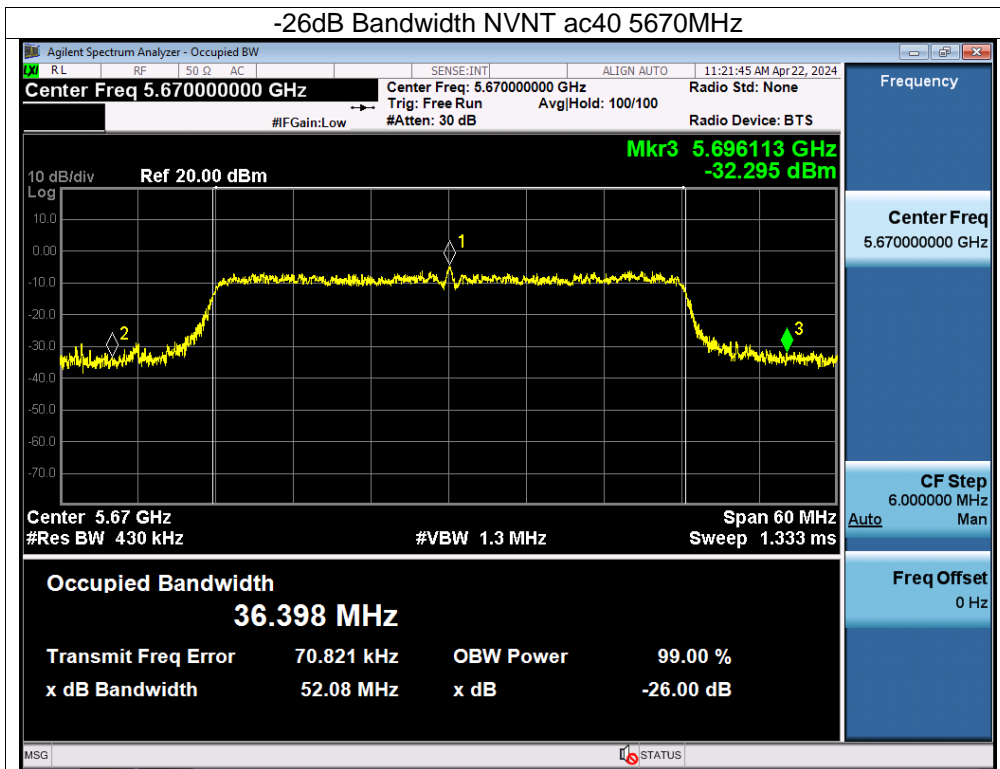


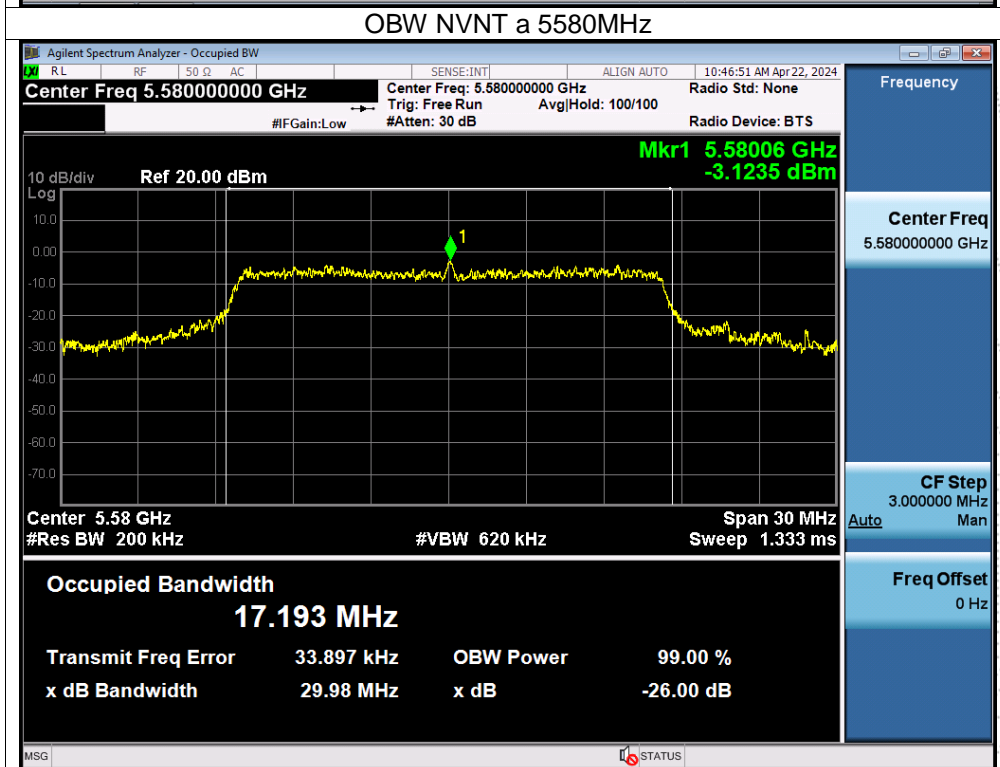
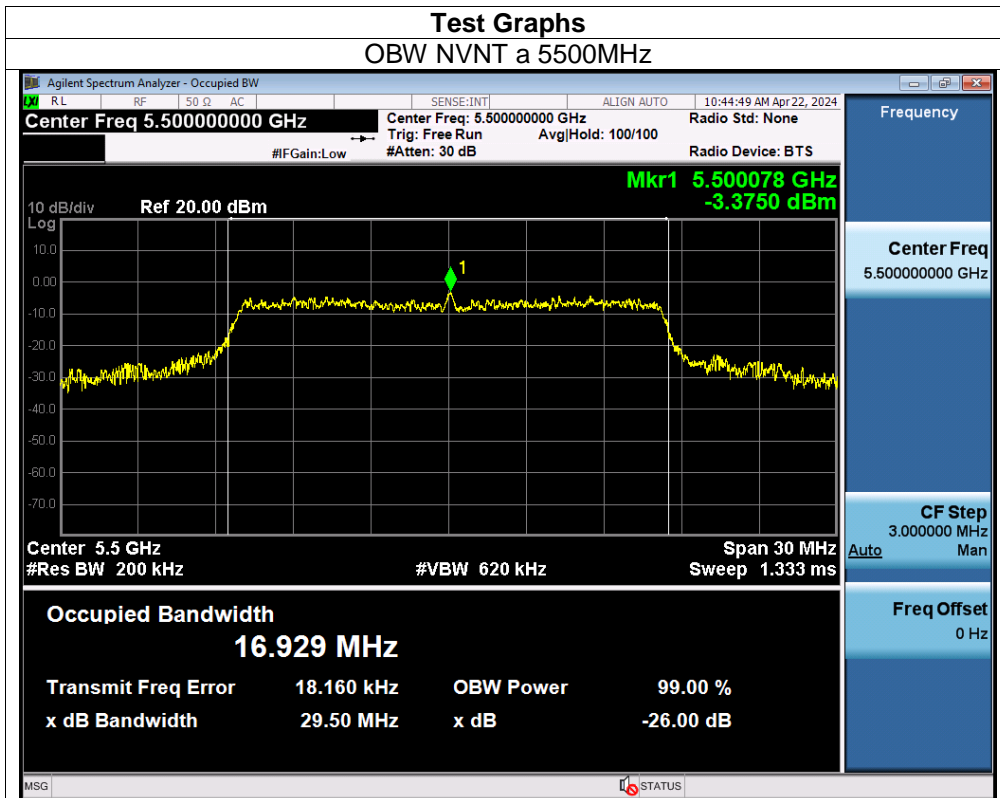


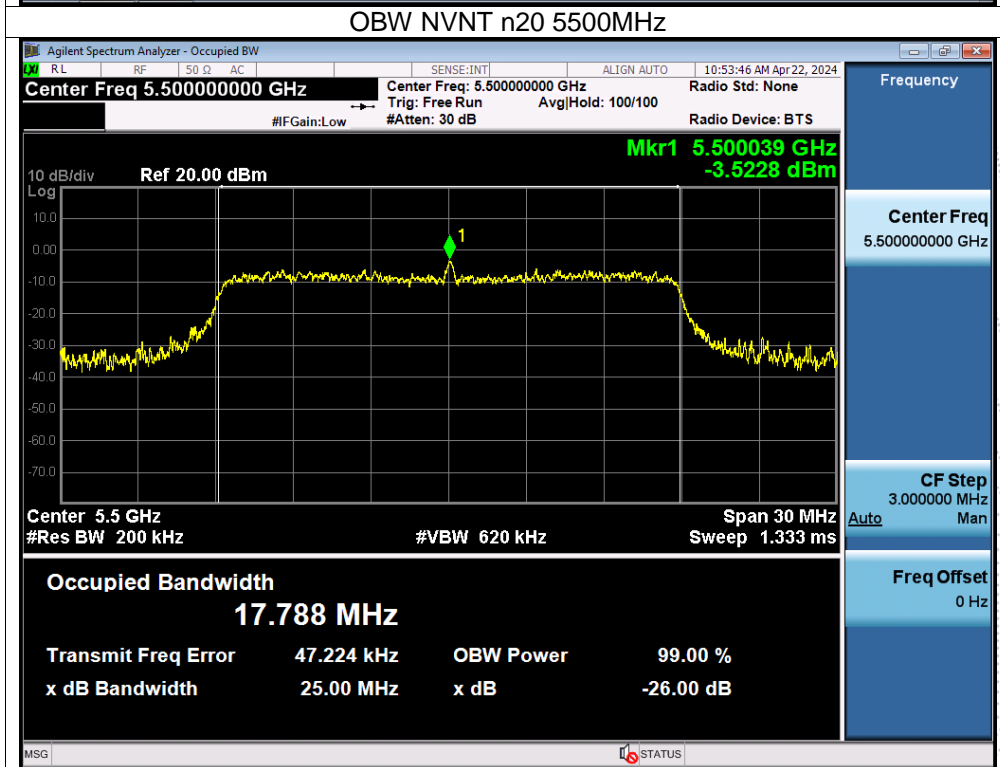
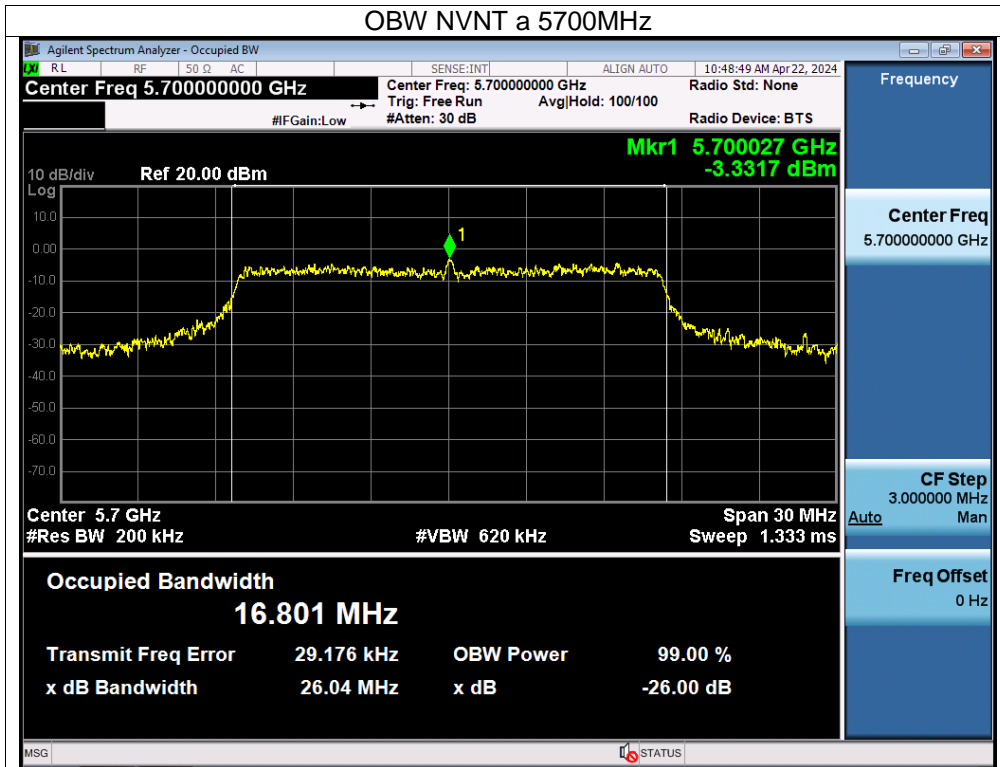


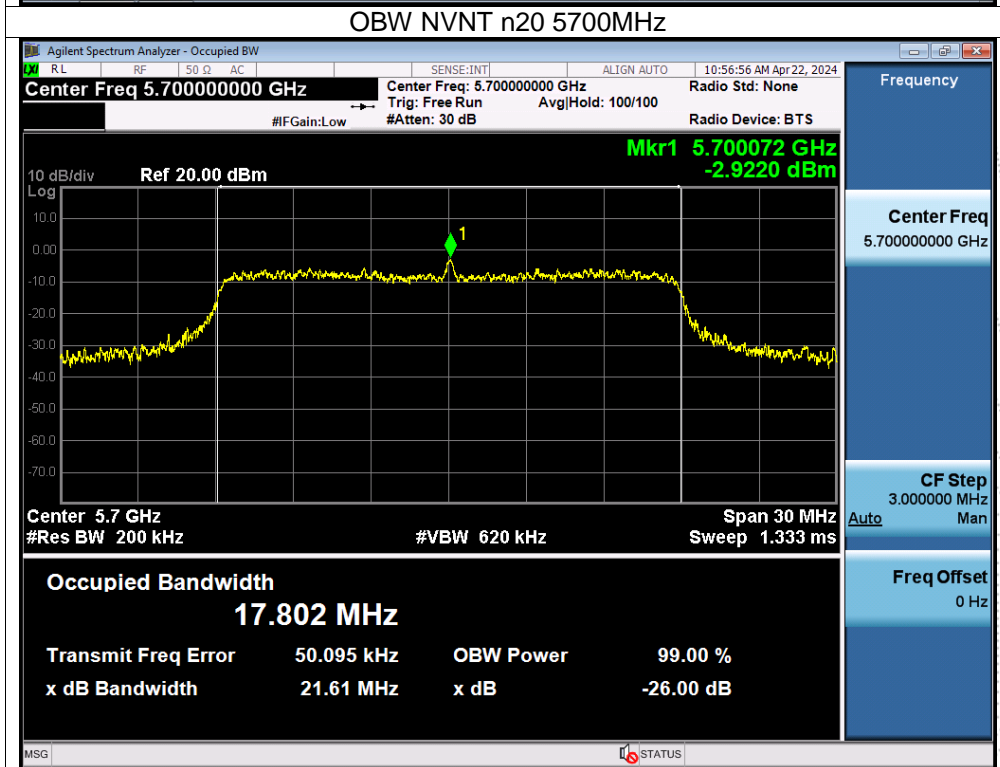
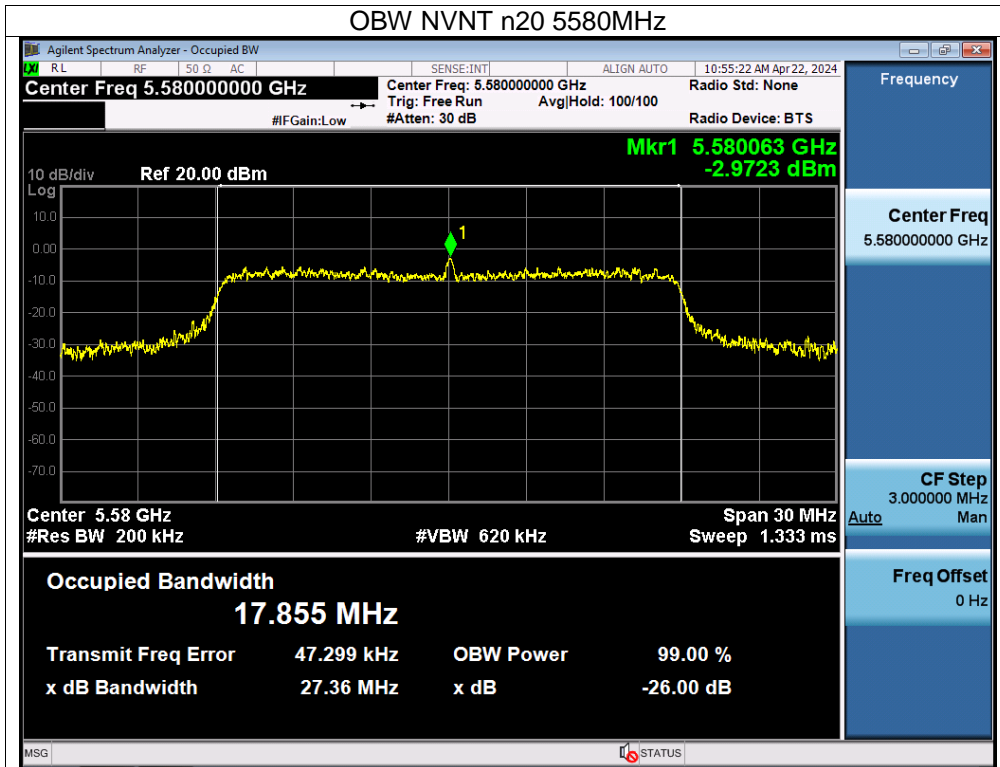


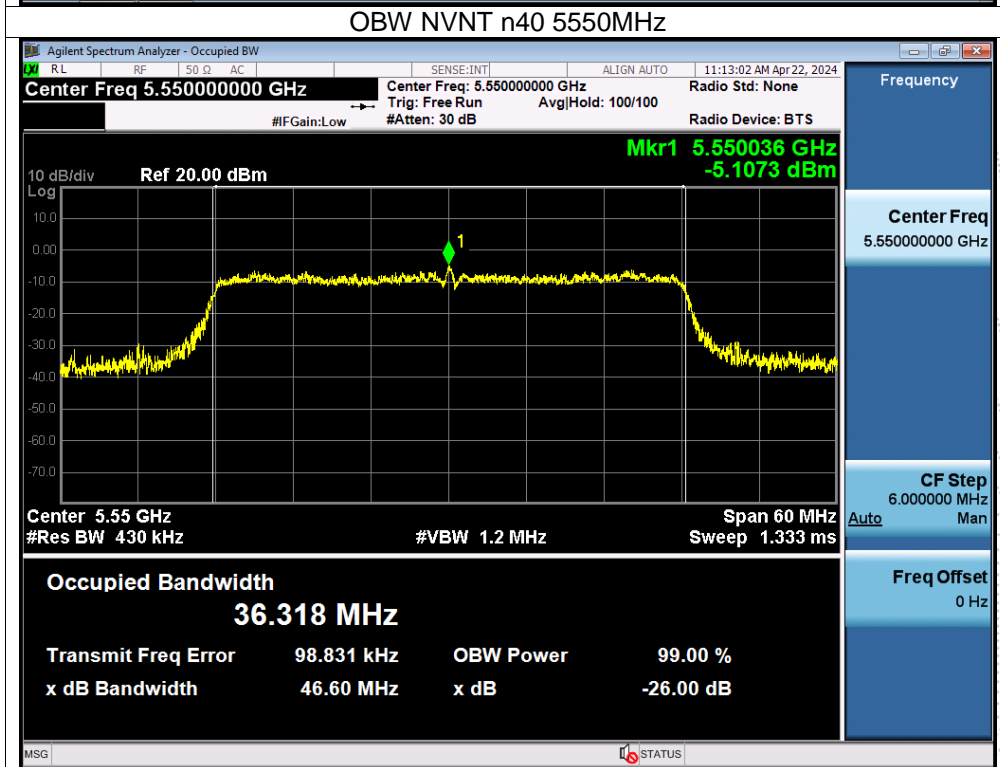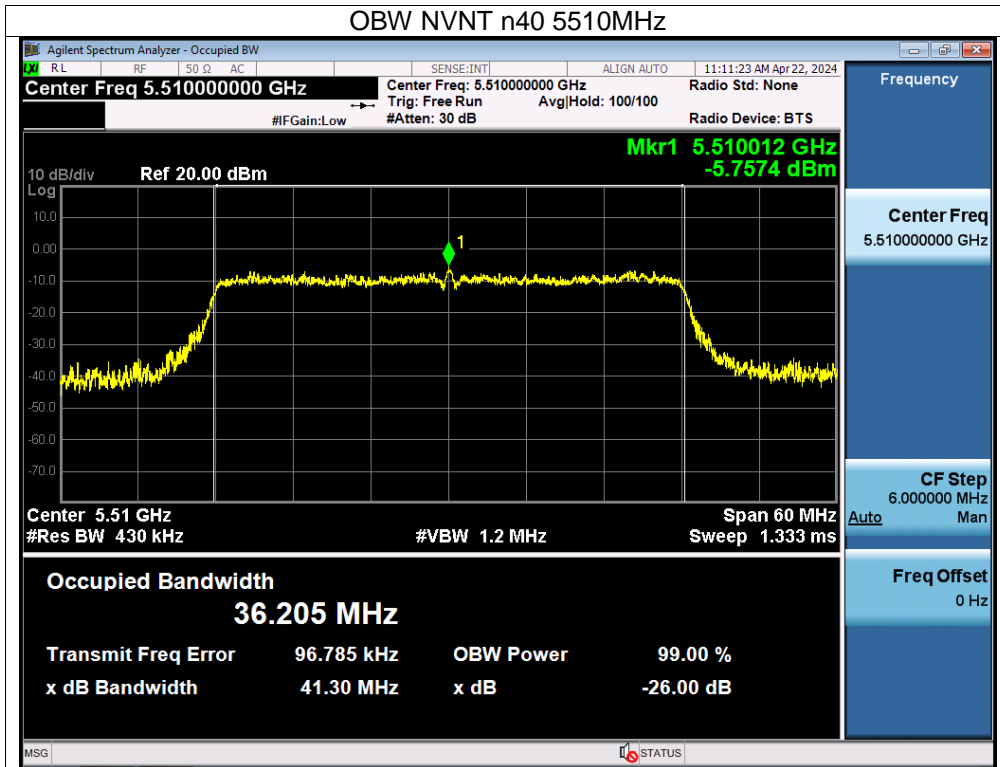

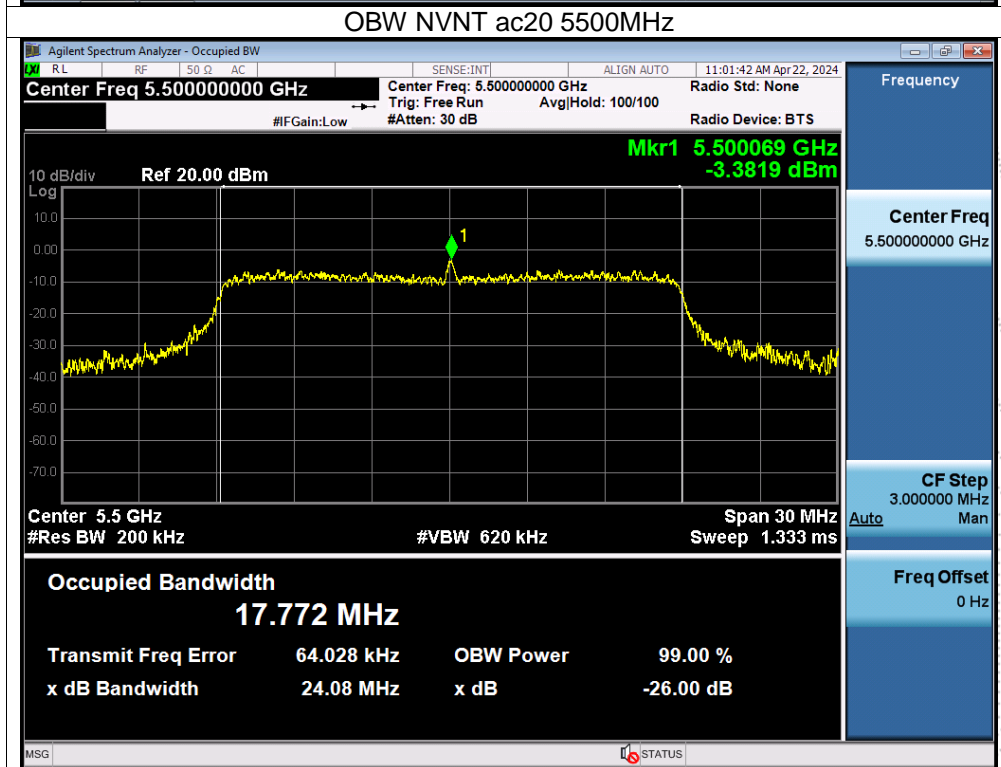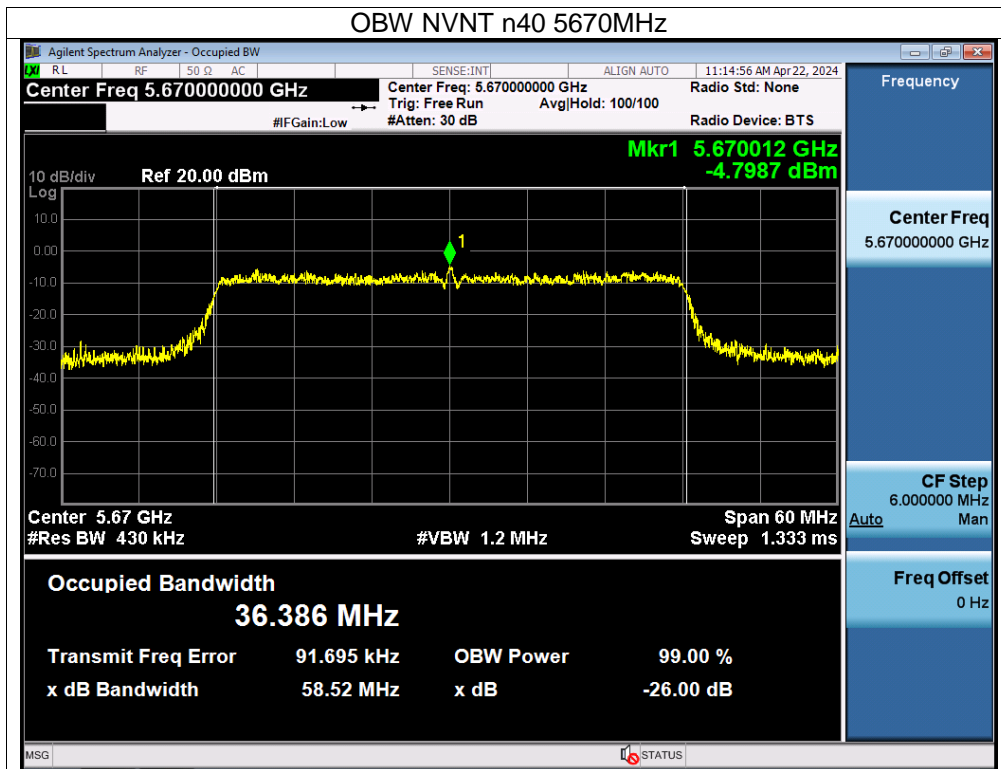

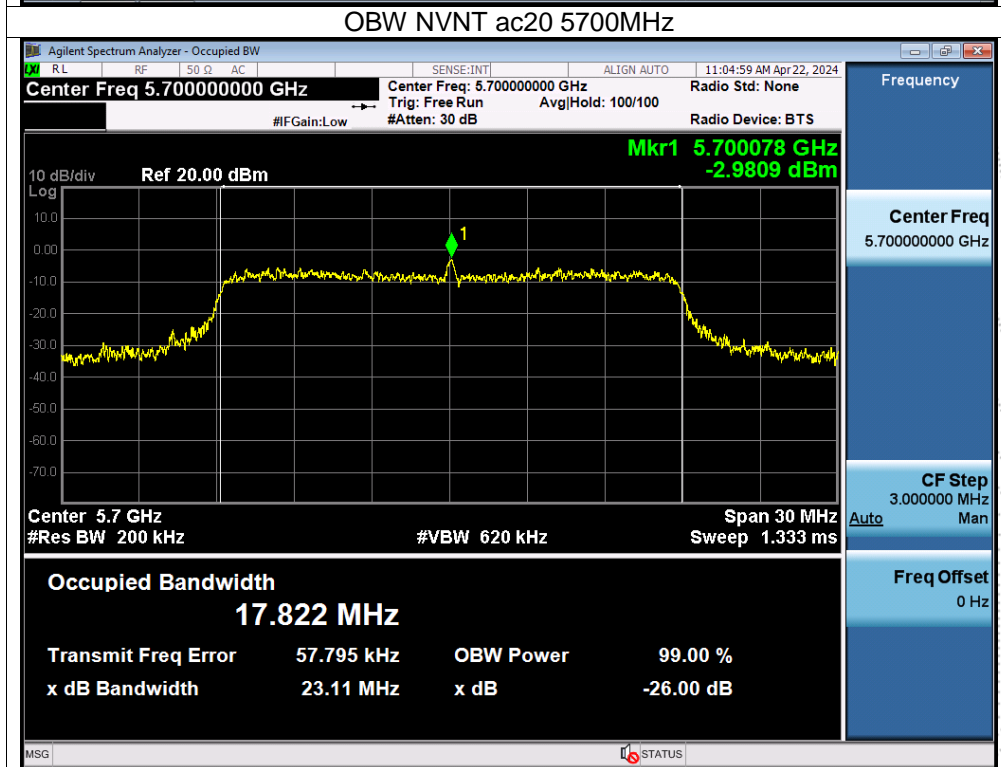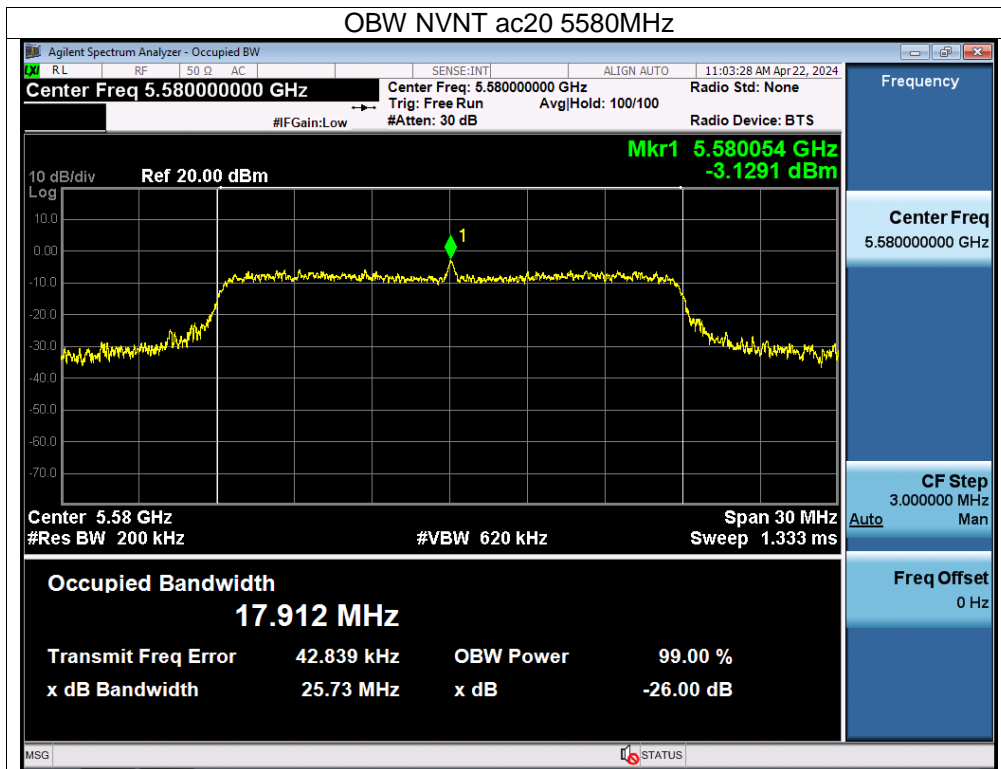

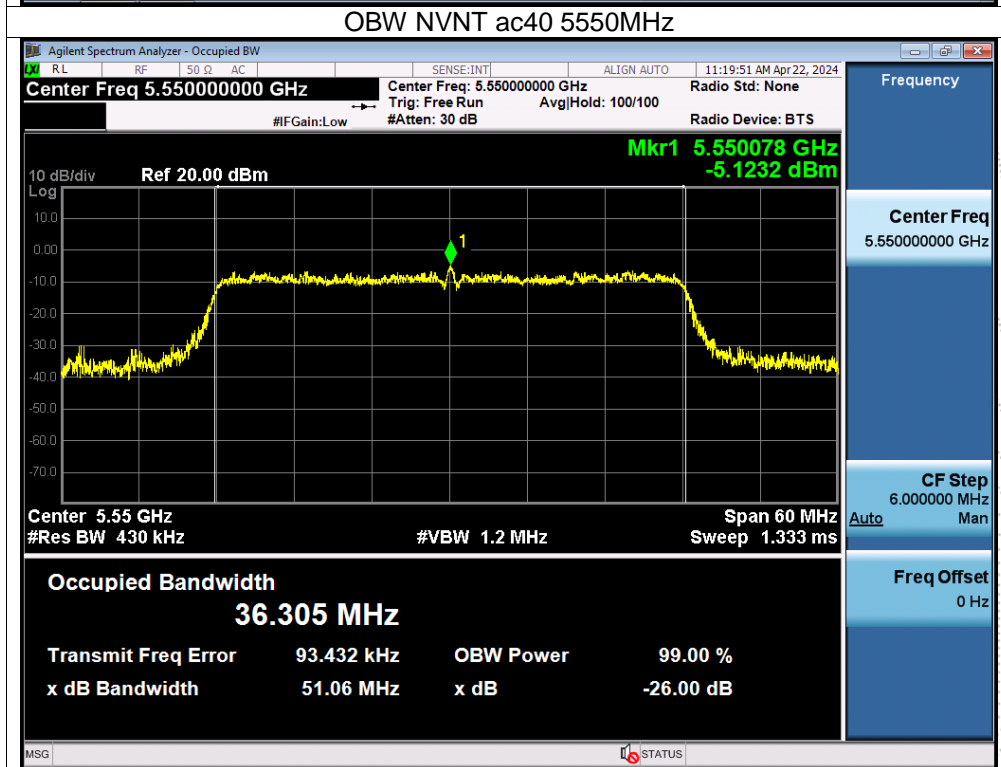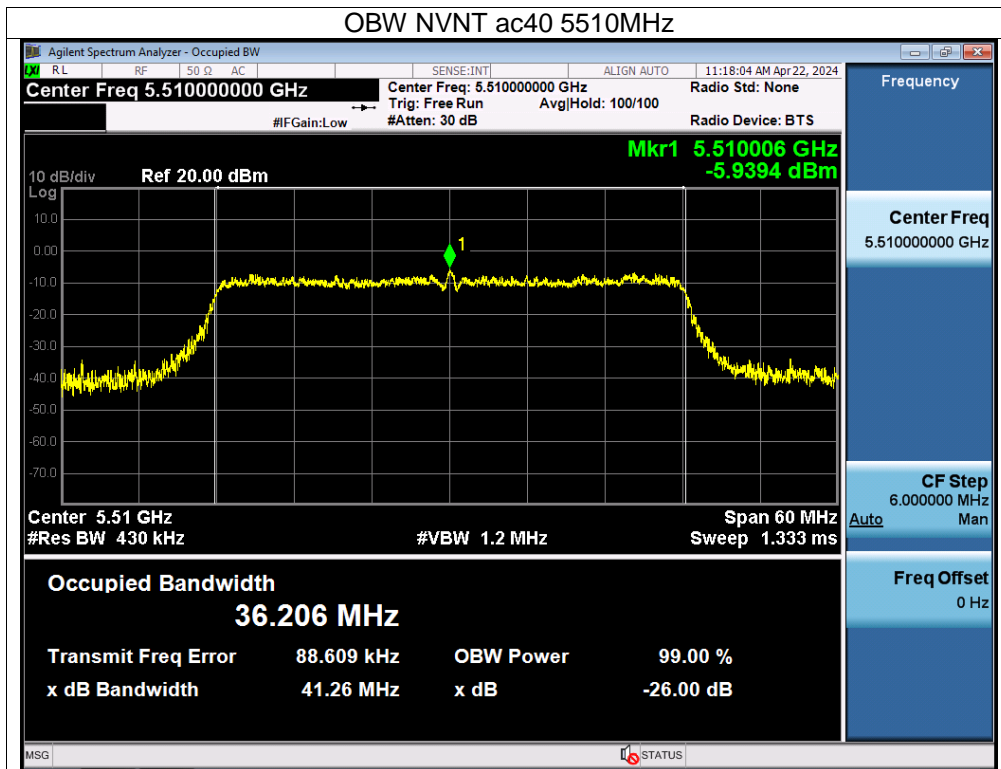

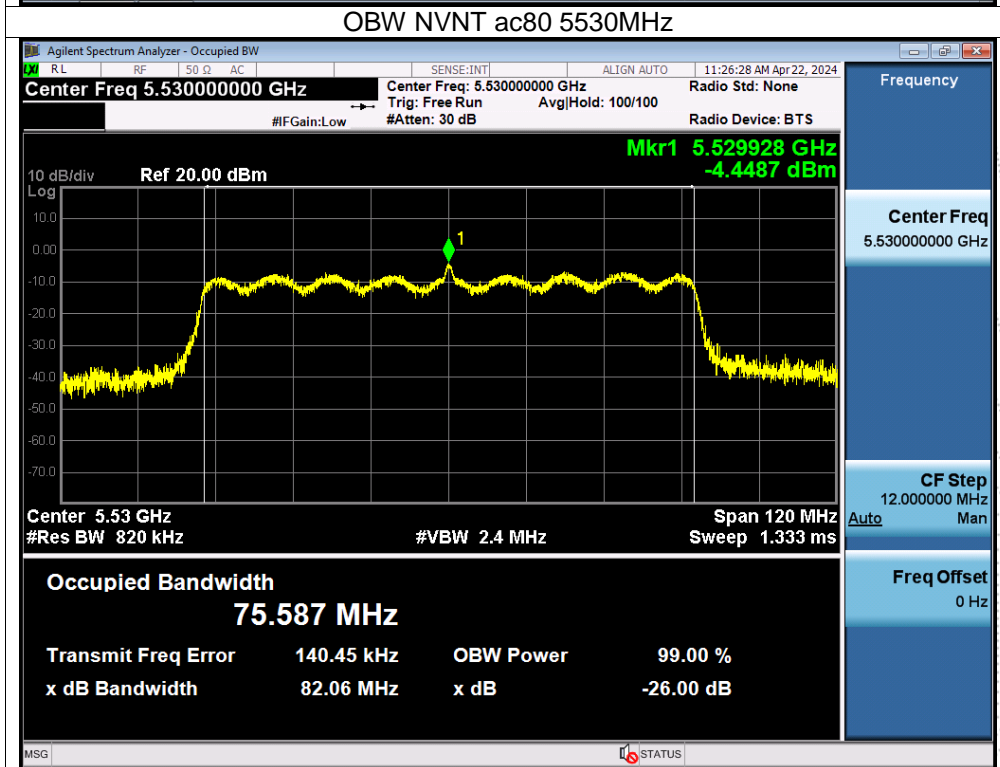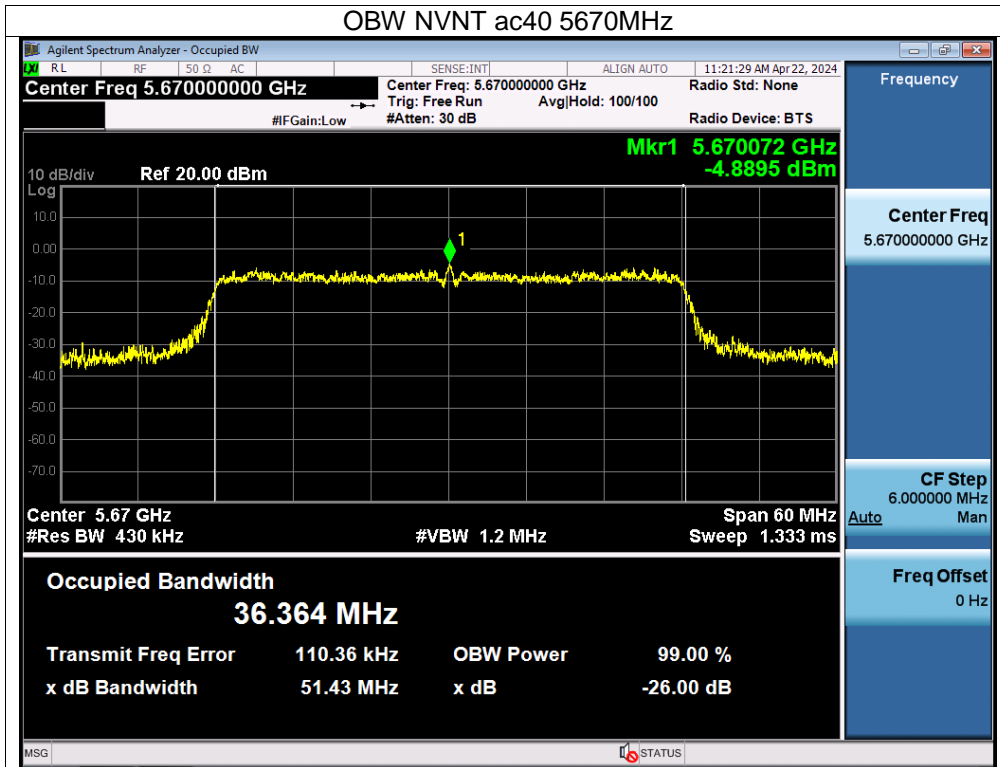

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 24V
Test Mode:	(5745-5825MHz)		

Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	99% OBW (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	16.534	16.664	0.5	Pass
NVNT	a	5785	16.513	16.613	0.5	Pass
NVNT	a	5825	16.547	16.595	0.5	Pass
NVNT	n20	5745	17.649	17.743	0.5	Pass
NVNT	n20	5785	17.654	17.714	0.5	Pass
NVNT	n20	5825	17.666	17.709	0.5	Pass
NVNT	n40	5755	36.422	36.247	0.5	Pass
NVNT	n40	5795	36.412	36.228	0.5	Pass
NVNT	ac20	5745	17.641	17.79	0.5	Pass
NVNT	ac20	5785	17.676	17.746	0.5	Pass
NVNT	ac20	5825	17.659	17.719	0.5	Pass
NVNT	ac40	5755	36.492	36.161	0.5	Pass
NVNT	ac40	5795	36.468	36.133	0.5	Pass
NVNT	ac80	5775	76.003	75.57	0.5	Pass

