



# FCC RF Test Report

APPLICANT : Ningbo Lingzhu Technology CO., Ltd.  
EQUIPMENT : Smart Control Panel L  
MODEL NAME : TPP05-Z(US)  
FCC ID : 2A789-TPP05  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DTS) Digital Transmission System  
TEST DATE(S) : Mar. 23, 2024 ~ Apr. 15, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test..... 5

    1.5 Modification of EUT ..... 5

    1.6 Testing Location ..... 6

    1.7 Test Software ..... 6

    1.8 Applicable Standards..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7**

    2.1 Carrier Frequency Channel ..... 7

    2.2 Test Mode ..... 8

    2.3 Connection Diagram of Test System ..... 9

    2.4 Support Unit used in test configuration and system ..... 10

    2.5 EUT Operation Test Setup ..... 10

    2.6 Measurement Results Explanation Example..... 10

**3 TEST RESULT ..... 11**

    3.1 6dB and 99% Bandwidth Measurement ..... 11

    3.2 Output Power Measurement..... 18

    3.3 Power Spectral Density Measurement ..... 19

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 26

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 35

    3.6 AC Conducted Emission Measurement..... 39

    3.7 Antenna Requirements ..... 41

**4 LIST OF MEASURING EQUIPMENT ..... 42**

**5 MEASUREMENT UNCERTAINTY ..... 43**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION AND PLOTS**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR372501-01	Rev. 01	Initial issue of report	Apr. 23, 2024



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.29 dB at 324.880 MHz for Quasi-peak
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.27 dB at 0.532 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

<b>Conformity Assessment Condition:</b>
1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"
<b>Disclaimer:</b>
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1 General Description

## 1.1 Applicant

Ningbo Lingzhu Technology CO., Ltd.

No.578,Building 7,No.535 Kangqiao South Road,Jiangbei District,Ningbo,PRC

## 1.2 Manufacturer

Ningbo Lingzhu Technology CO., Ltd.

No.578,Building 7,No.535 Kangqiao South Road,Jiangbei District,Ningbo,PRC

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Control Panel L
Model Name	TPP05-Z(US)
FCC ID	2A789-TPP05

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	BLE 1Mbps: 7.56 dBm (0.0057 W) BLE 2Mbps: 7.83 dBm (0.0061 W)
99% Occupied Bandwidth	BLE 1Mbps:1.020MHz BLE 2Mbps:2.040MHz
Antenna Type / Gain	IPEX Antenna with gain -2.07 dBi
Type of Modulation	Bluetooth LE : GFSK

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH07-KS TH01-KS	CN1257	314309

### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	SPORTON	FCC 15C-15E Test Tools Ver10.0_210607	10.0
2.	03CH07-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



## 2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
<b>Conducted TCs</b>	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps Mode 4: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps Mode 6: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps
<b>Radiated TCs</b>	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps Mode 4: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps Mode 6: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps
<b>AC Conducted Emission</b>	Mode 1: BT Link + WLAN Link(2.4G) + L1+L2 light link + RS485 Link + AC Power




## 2.3 Connection Diagram of Test System

Conducted Emission:

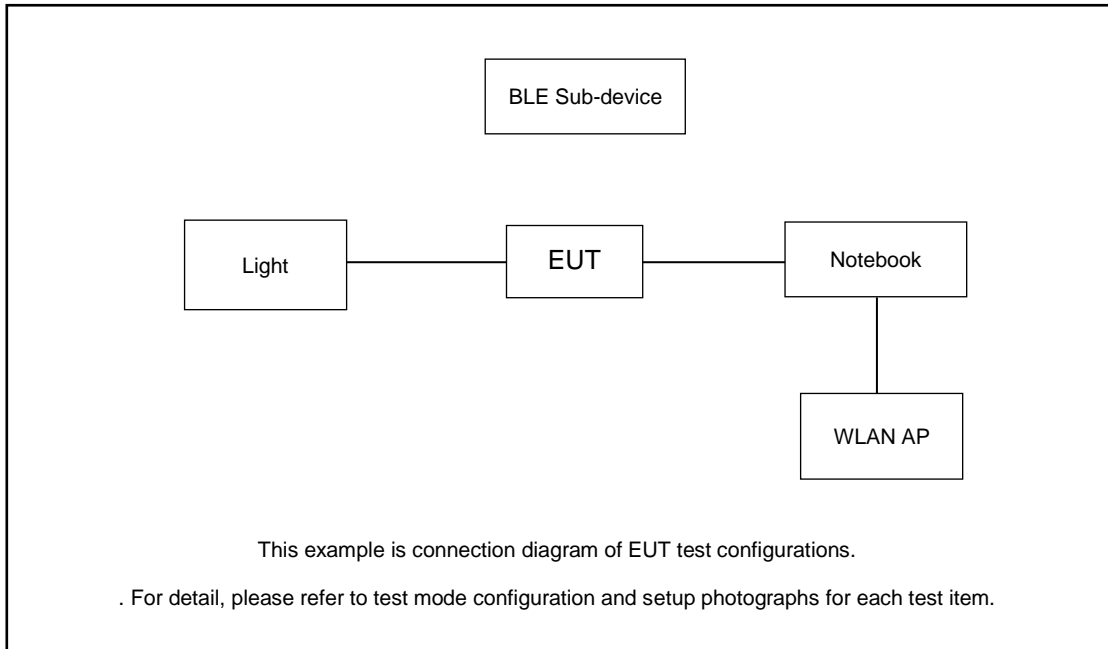

Radiated Emission:

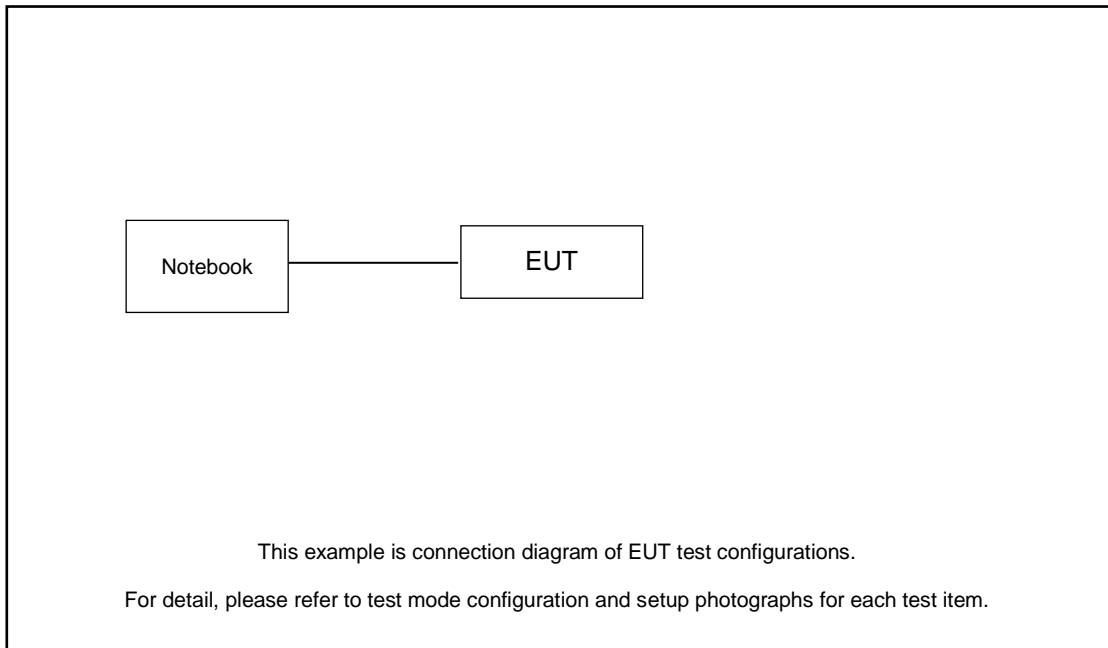

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	Shielded cable DC O/P 1.8m, Unshielded AC I/P cable 1.8m
3.	Light	N/A	N/A	N/A	N/A	N/A
4.	AC Power	N/A	N/A	N/A	N/A	N/A
5.	BLE Sub-device	N/A	N/A	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the BLE Sub-device under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 5.80 dB

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 5.80(\text{dB}) \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

##### 3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

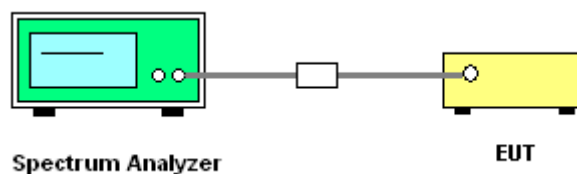




### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.


#### BLE 1Mbps

#### 6 dB Bandwidth Plot on Channel 00

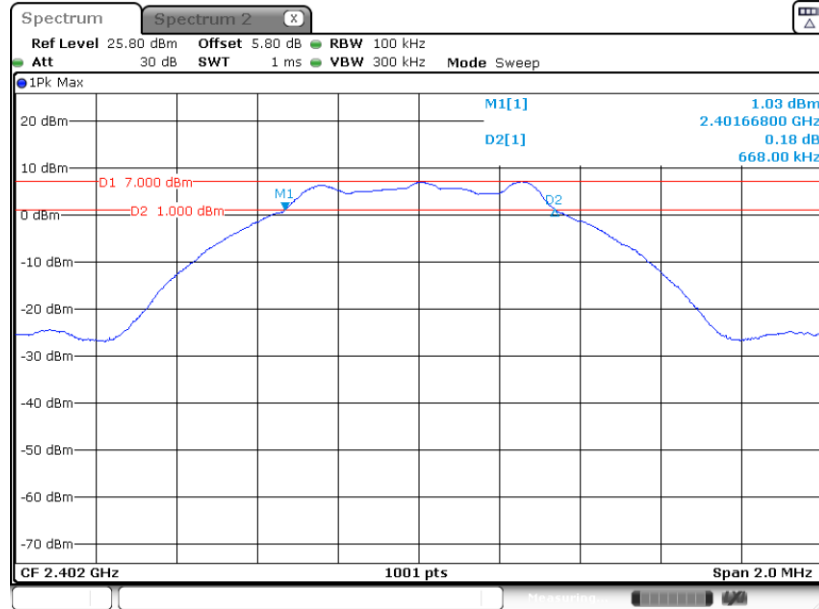

Date: 23.MAR.2024 04:33:52


#### 6 dB Bandwidth Plot on Channel 19

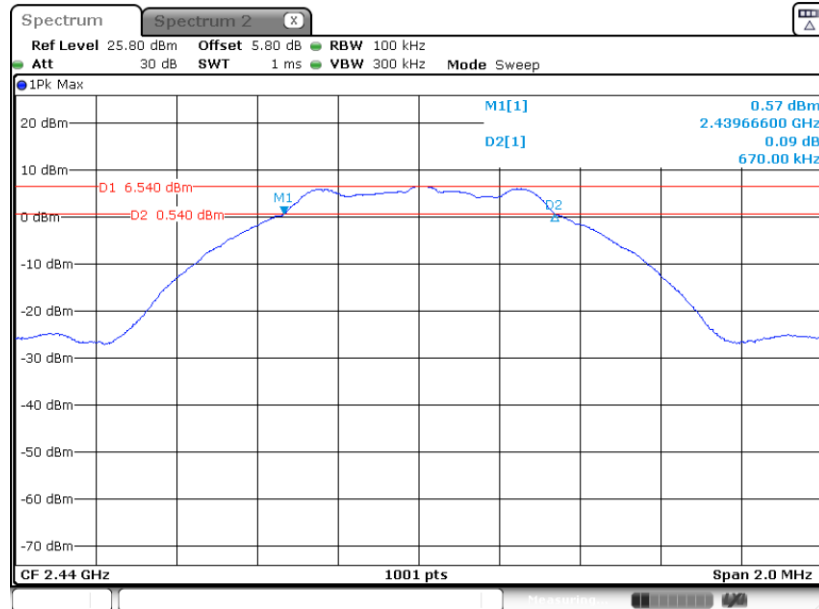

Date: 23.MAR.2024 04:37:08




### 6 dB Bandwidth Plot on Channel 39

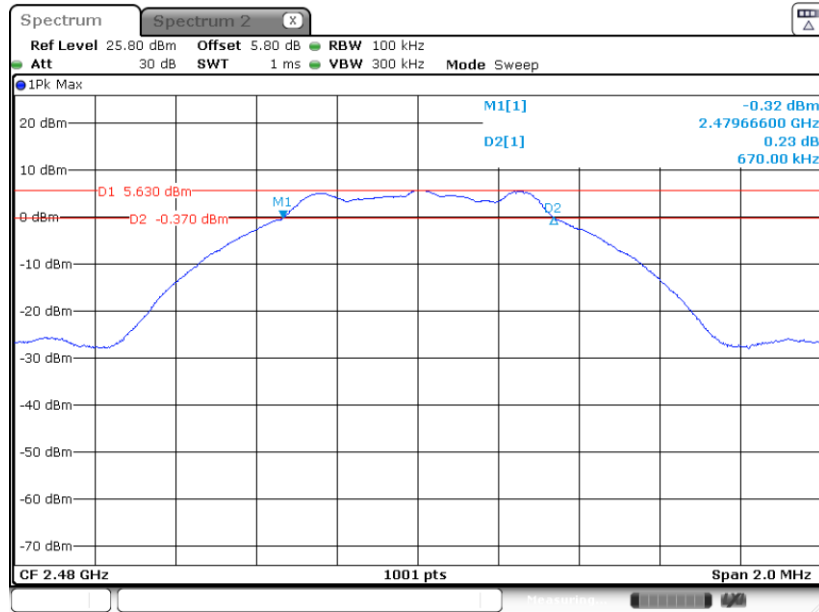

Date: 23.MAR.2024 04:42:20

### BLE 2Mbps


### 6 dB Bandwidth Plot on Channel 00

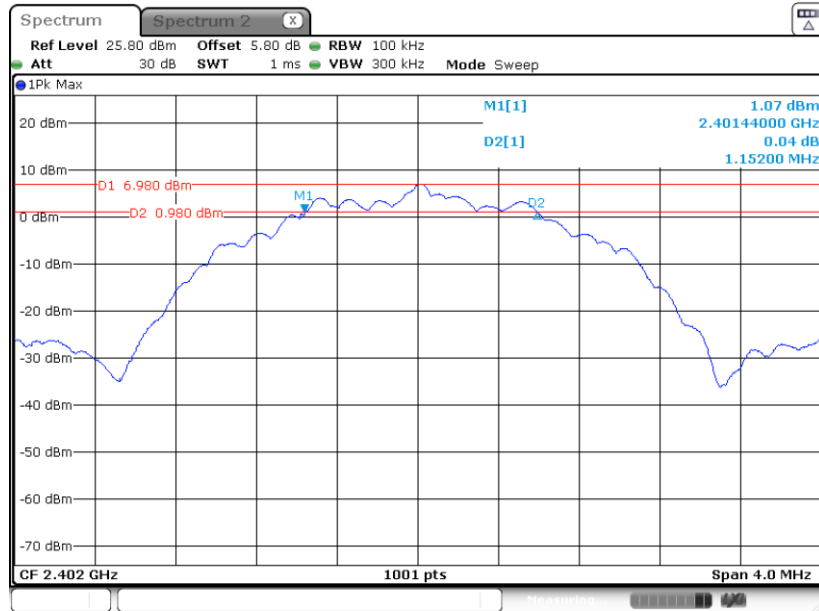

Date: 23.MAR.2024 04:46:50




### 6 dB Bandwidth Plot on Channel 19

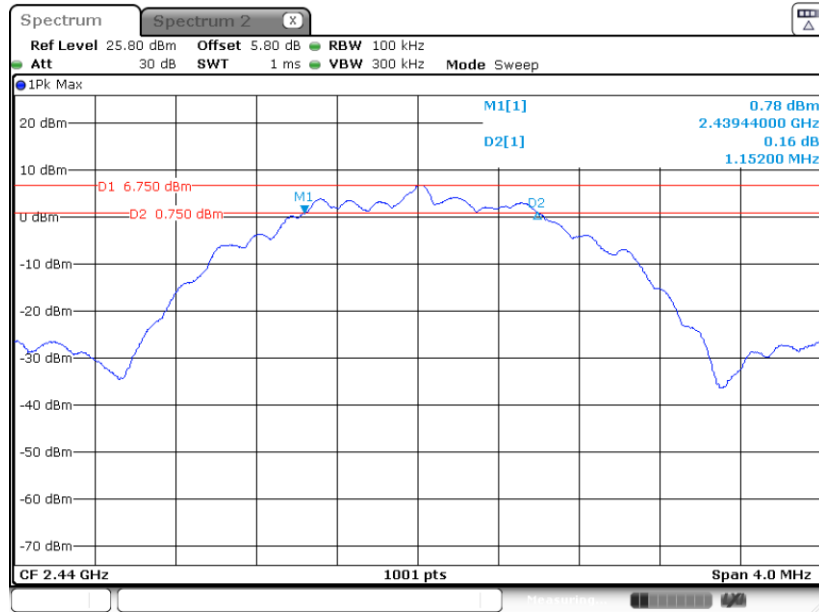

Date: 23.MAR.2024 05:26:20

### 6 dB Bandwidth Plot on Channel 39

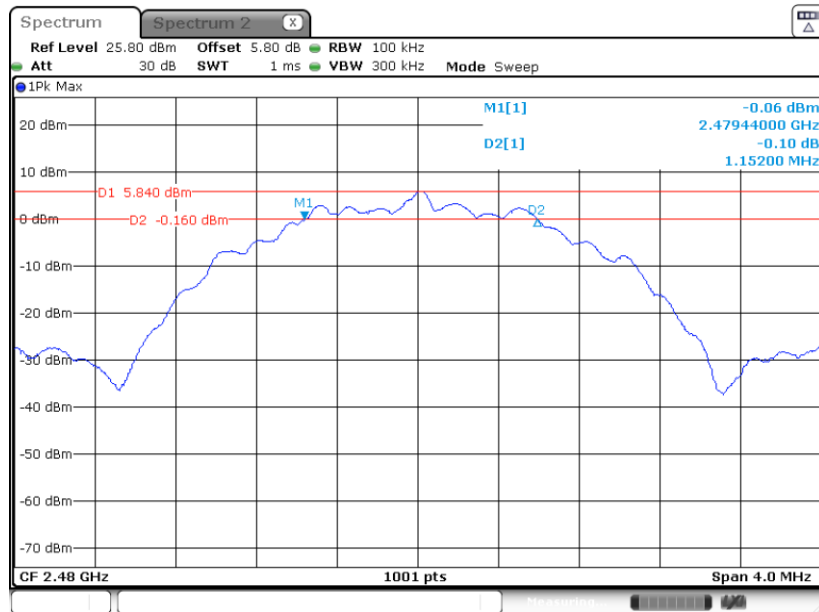

Date: 23.MAR.2024 05:30:29




### 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


#### BLE 1Mbps

#### 99% Occupied Bandwidth Plot on Channel 00

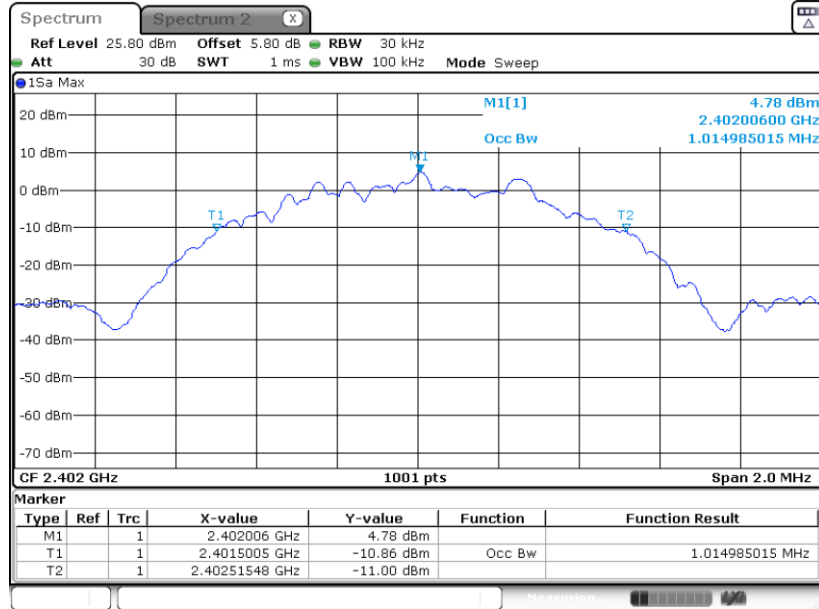

Date: 23.MAR.2024 04:35:39


#### 99% Occupied Bandwidth Plot on Channel 19

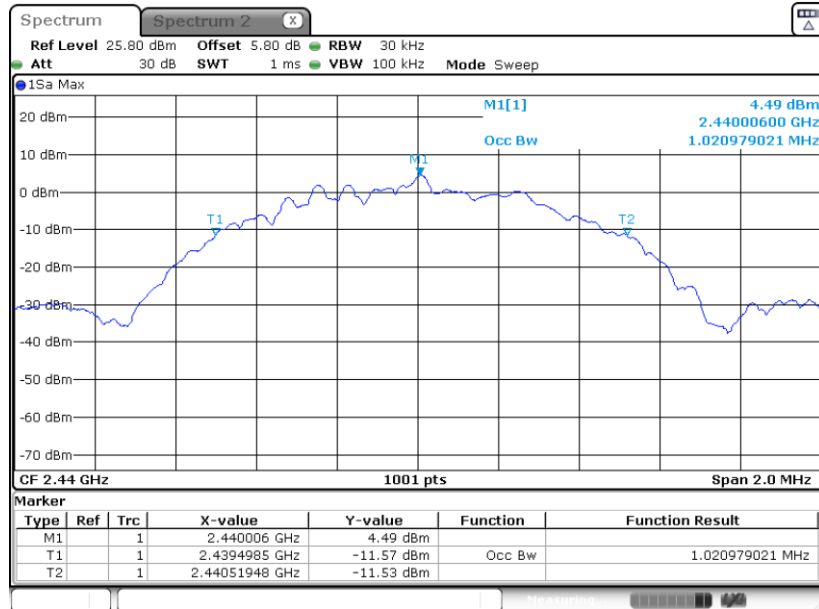

Date: 23.MAR.2024 04:38:36




99% Occupied Bandwidth Plot on Channel 39

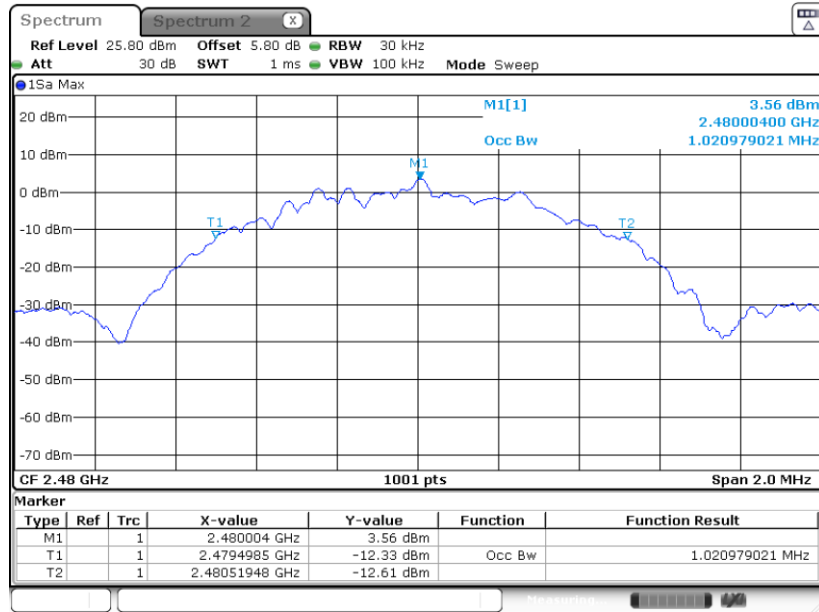

Date: 23.MAR.2024 04:44:07

BLE 2Mbps

99% Occupied Bandwidth Plot on Channel 00

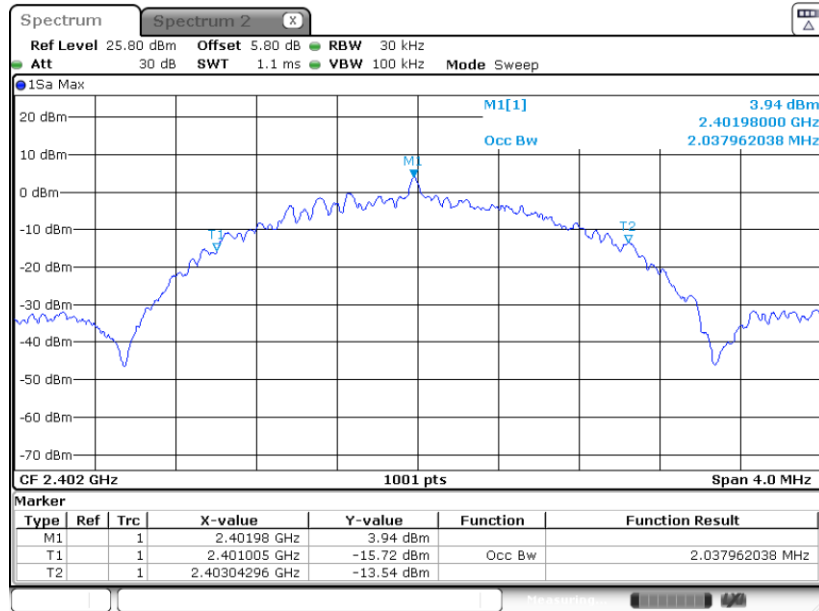


Date: 23.MAR.2024 04:48:37






99% Occupied Bandwidth Plot on Channel 19

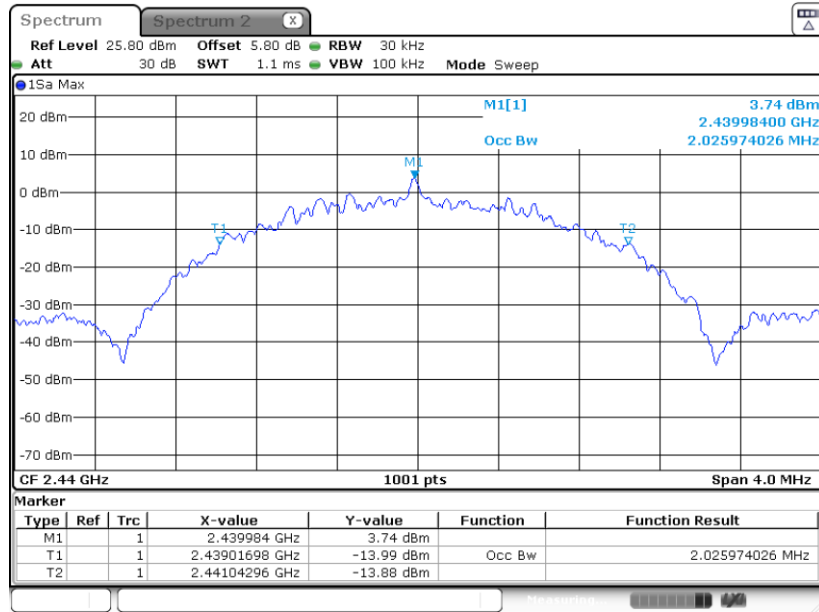

Date: 23.MAR.2024 05:27:48

99% Occupied Bandwidth Plot on Channel 39

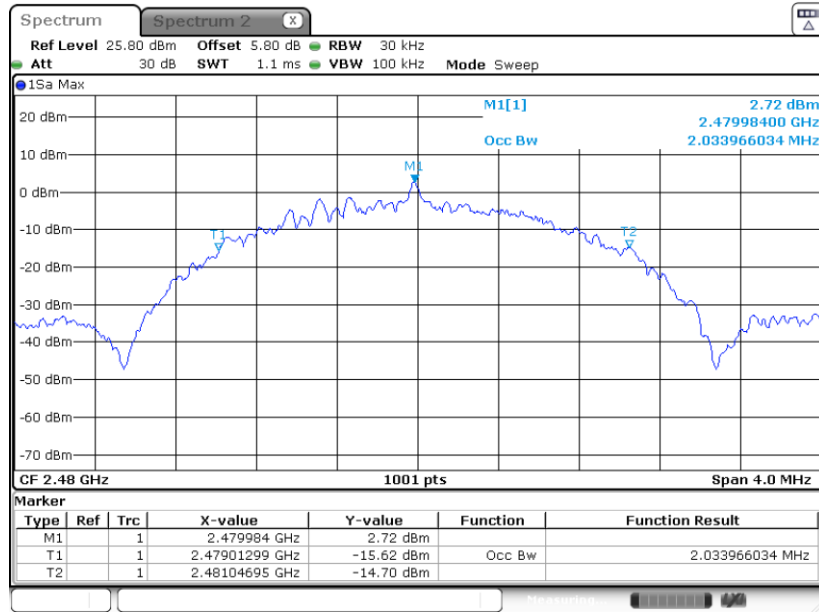

Date: 23.MAR.2024 05:32:16

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

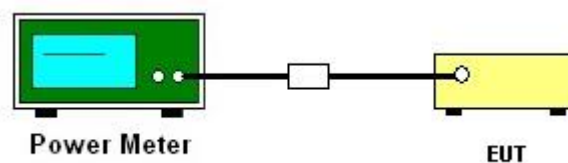

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

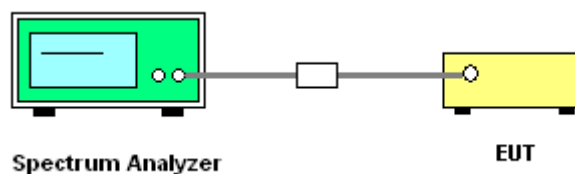

#### 3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.



### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)


#### BLE 1Mbps

#### PSD 100kHz Plot on Channel 00

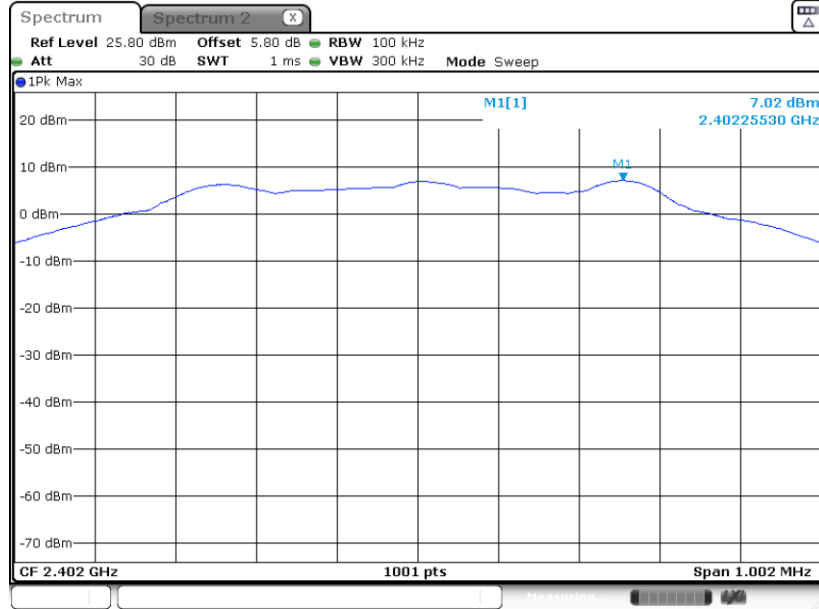

Date: 23.MAR.2024 04:34:30


#### PSD 100kHz Plot on Channel 19

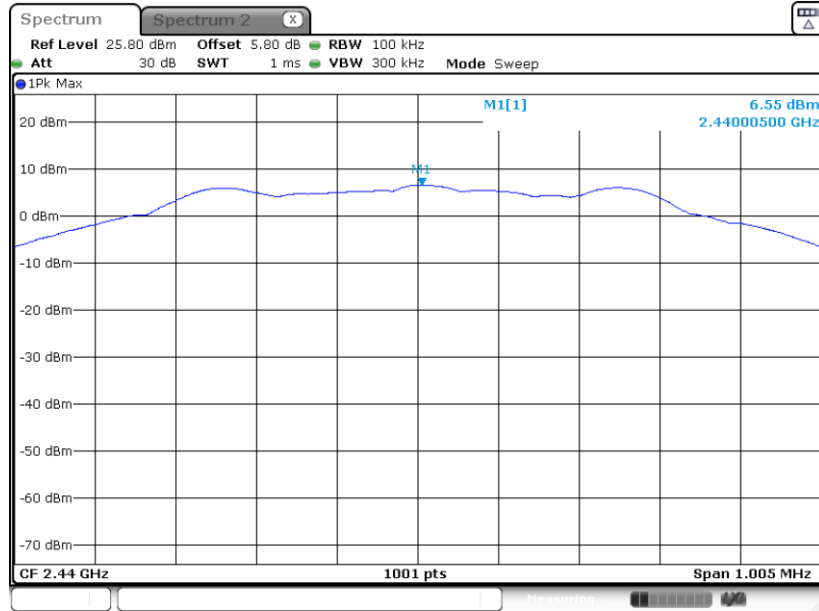

Date: 23.MAR.2024 04:37:46




PSD 100kHz Plot on Channel 39

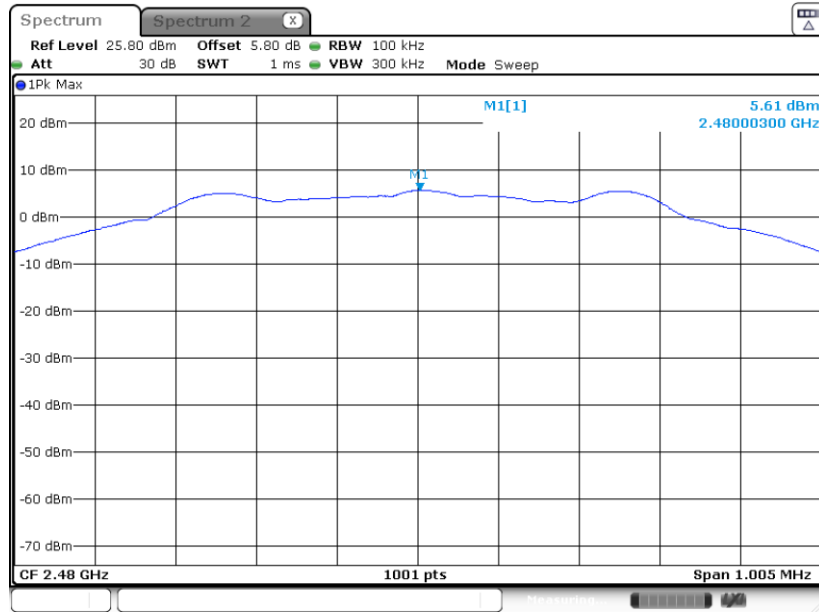

Date: 23.MAR.2024 04:42:58

BLE 2Mbps


PSD 100kHz Plot on Channel 00

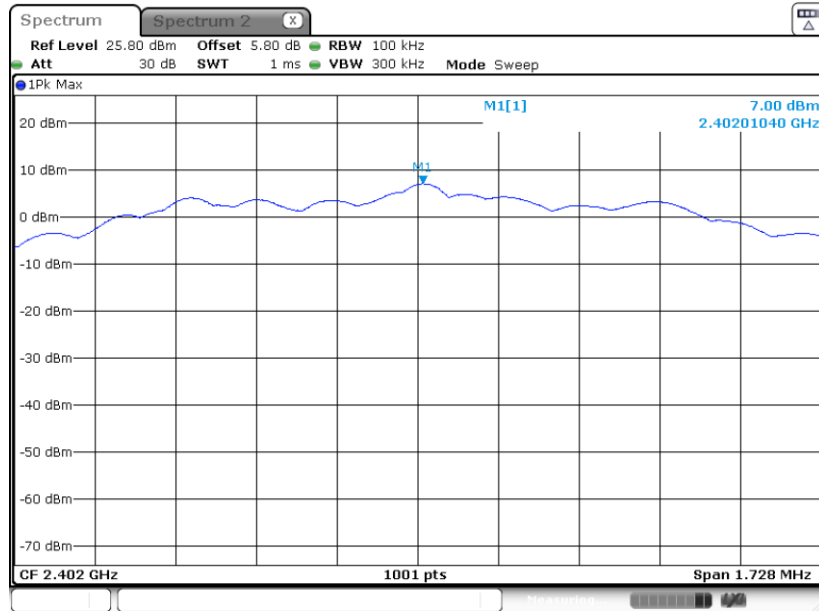

Date: 23.MAR.2024 04:47:28




PSD 100kHz Plot on Channel 19

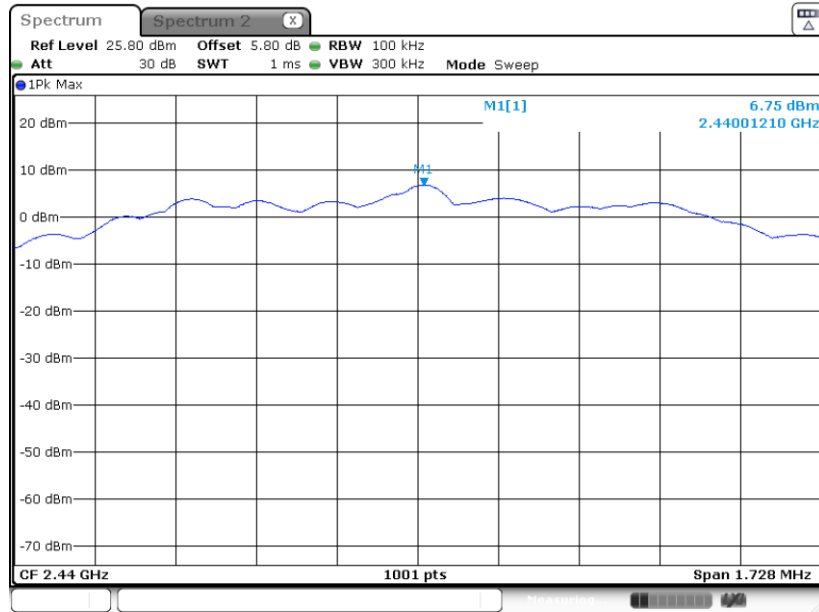

Date: 23.MAR.2024 05:26:58

PSD 100kHz Plot on Channel 39

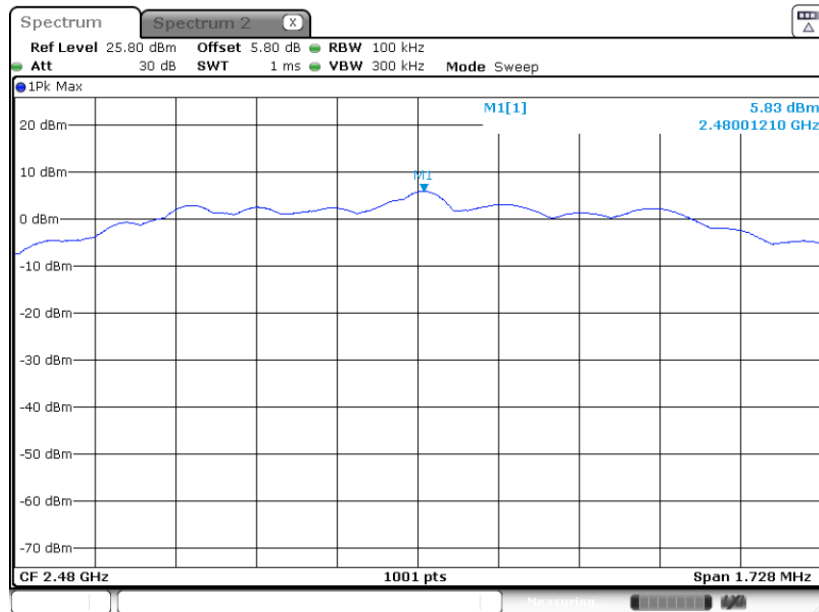


Date: 23.MAR.2024 05:31:07



### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)


#### BLE 1Mbps

#### PSD 3kHz Plot on Channel 00

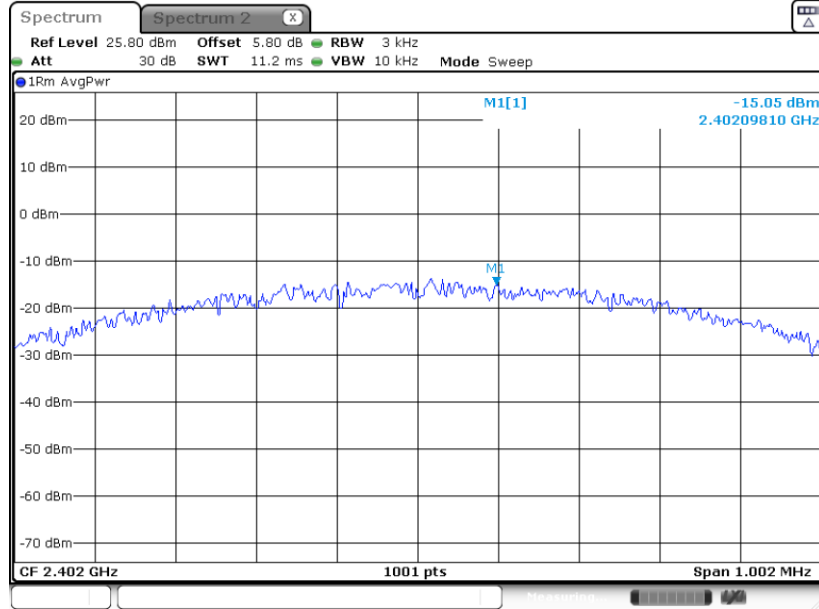

Date: 23.MAR.2024 04:34:11


#### PSD 3kHz Plot on Channel 19

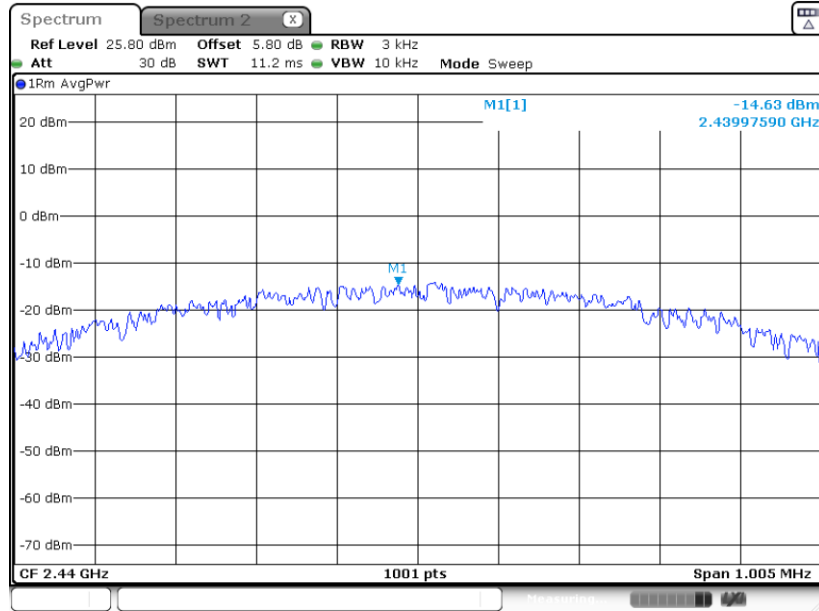

Date: 23.MAR.2024 04:37:27




PSD 3kHz Plot on Channel 39

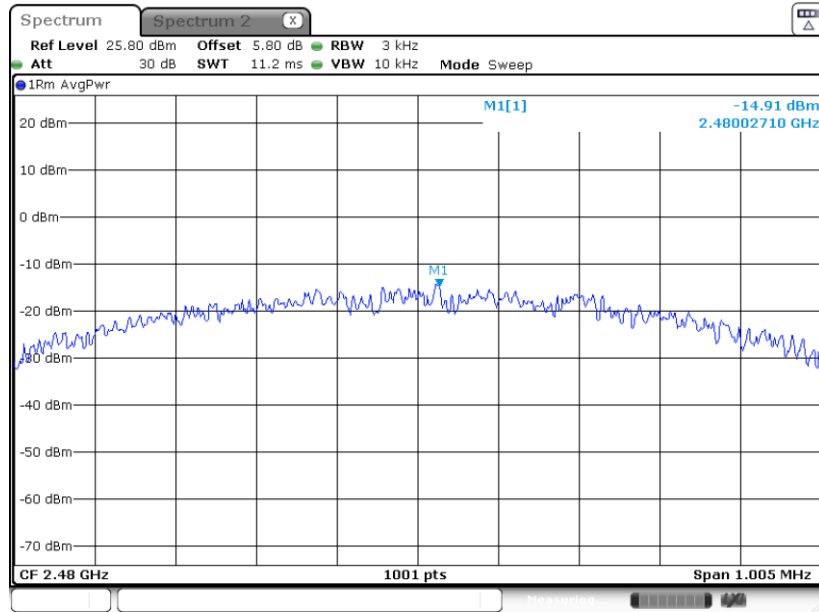

Date: 23.MAR.2024 04:42:39

BLE 2Mbps

PSD 3kHz Plot on Channel 00

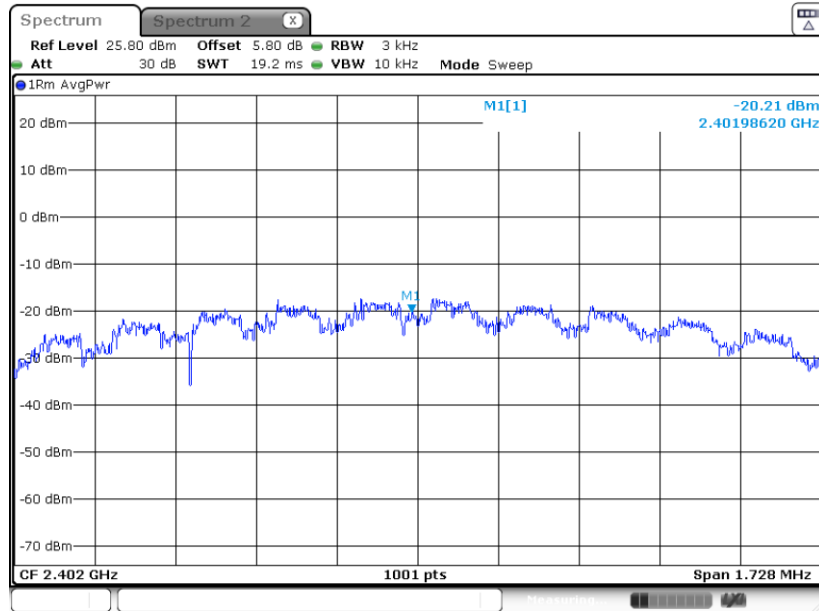


Date: 23.MAR.2024 04:47:09






PSD 3kHz Plot on Channel 19

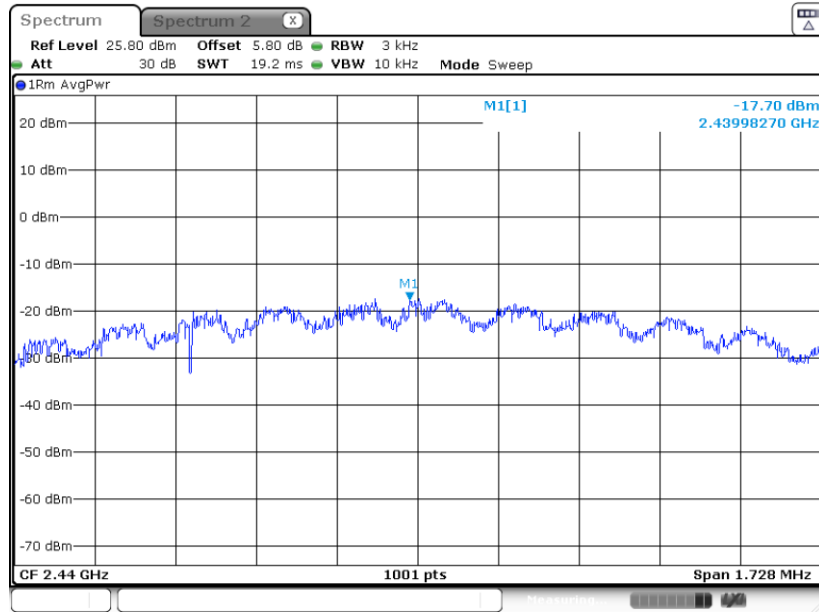

Date: 23.MAR.2024 05:26:39

PSD 3kHz Plot on Channel 39

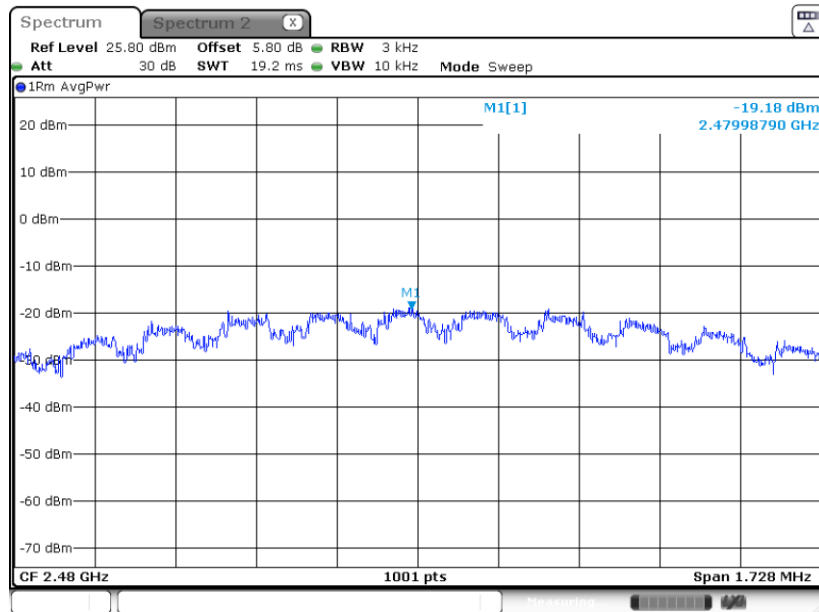

Date: 23.MAR.2024 05:30:48

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

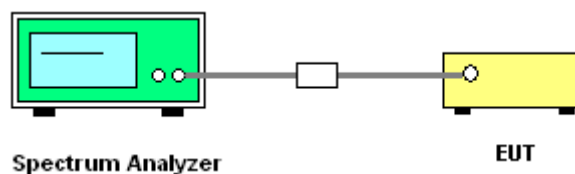




### 3.4.5 Test Result of Conducted Band Edges Plots


#### BLE 1Mbps

#### Low Band Edge Plot on Channel 00

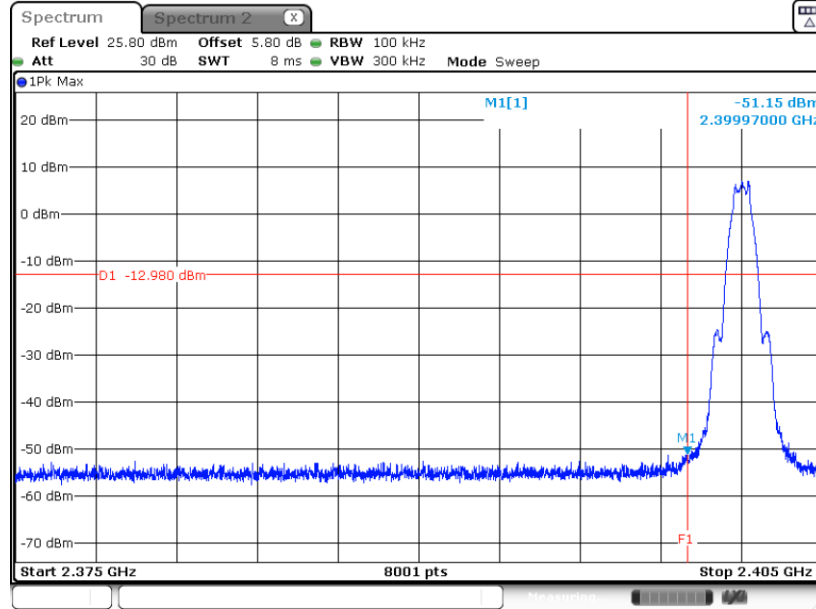

Date: 23.MAR.2024 04:34:49

#### High Band Edge Plot on Channel 39

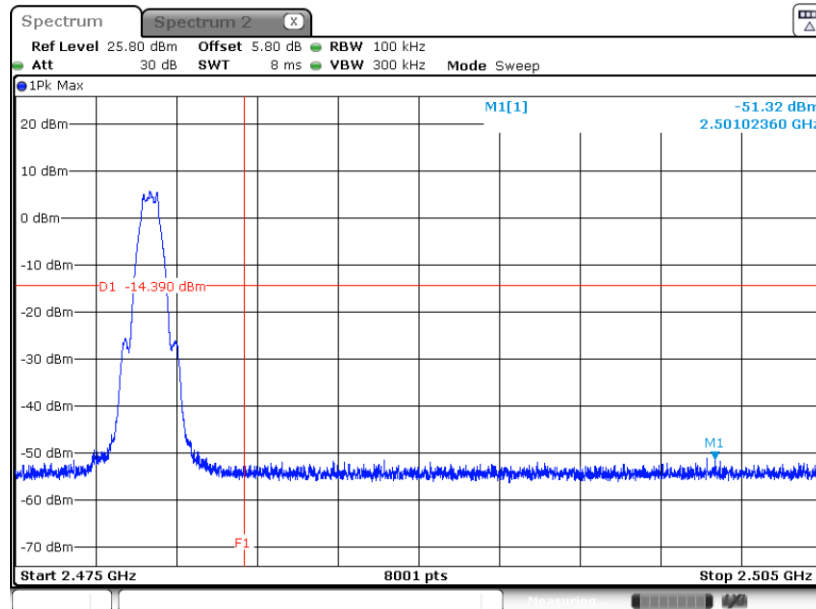


Date: 23.MAR.2024 04:43:17




BLE 2Mbps

Low Band Edge Plot on Channel 00

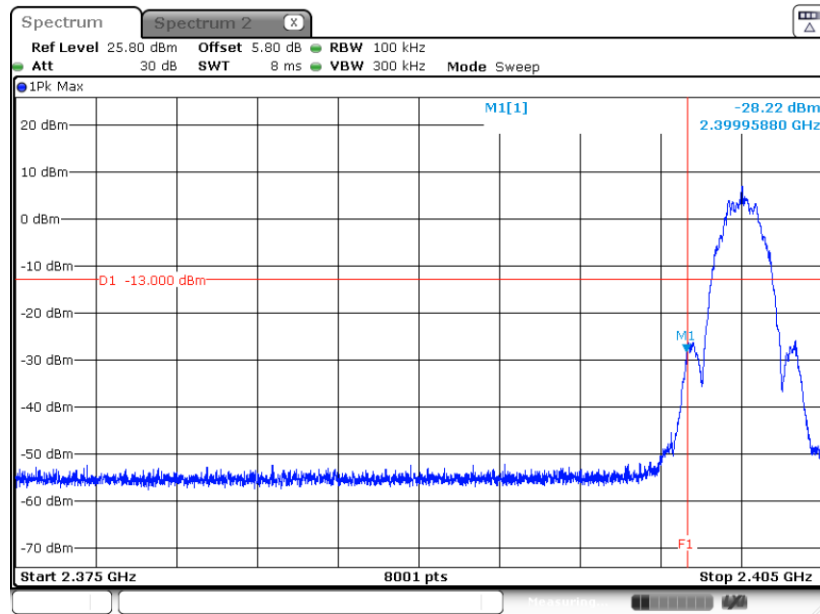

Date: 23.MAR.2024 04:47:47

High Band Edge Plot on Channel 39

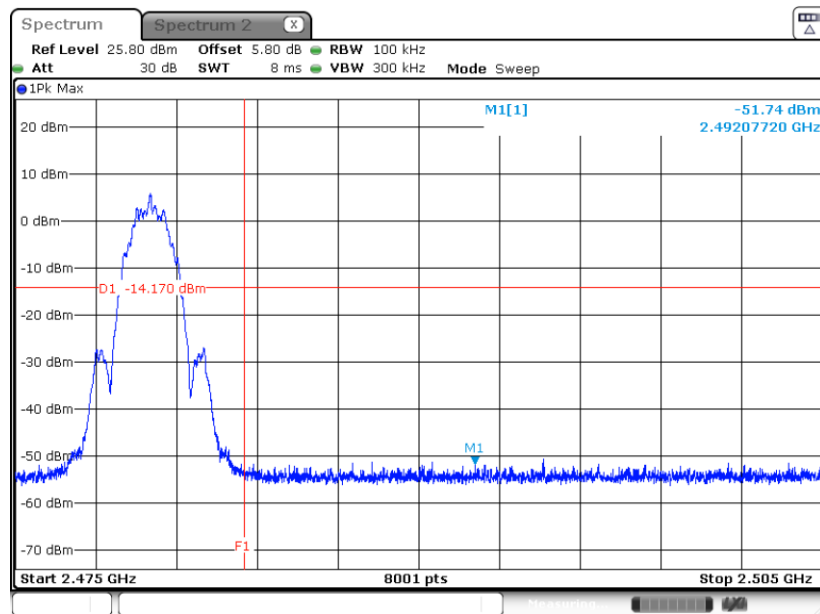


Date: 23.MAR.2024 05:31:26




### 3.4.6 Test Result of Conducted Spurious Emission Plots

#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

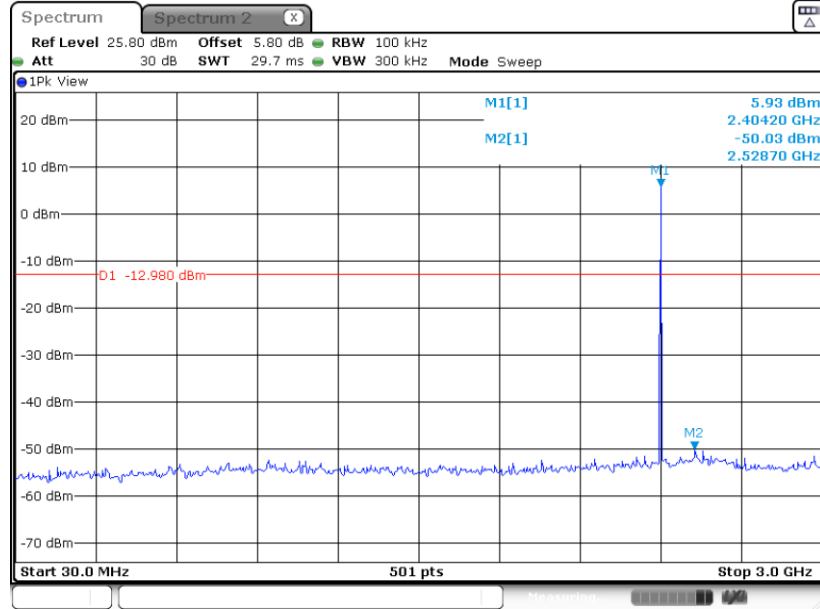

Date: 23.MAR.2024 04:35:10


#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

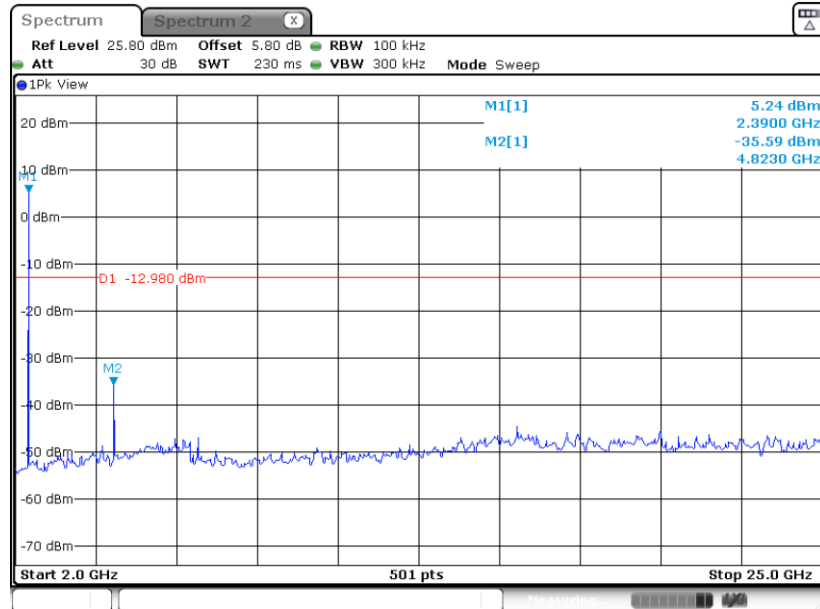

Date: 23.MAR.2024 04:35:30




### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

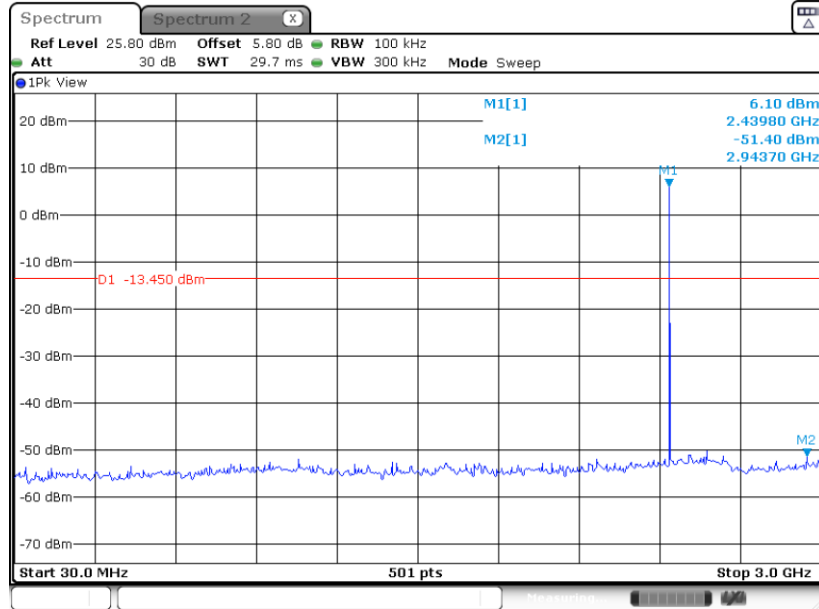

Date: 23.MAR.2024 04:38:07


### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

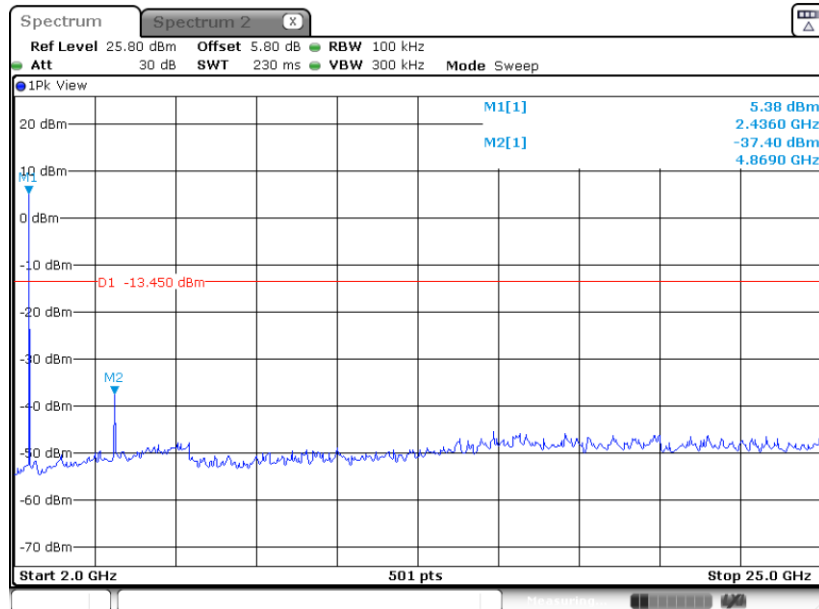

Date: 23.MAR.2024 04:38:27




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

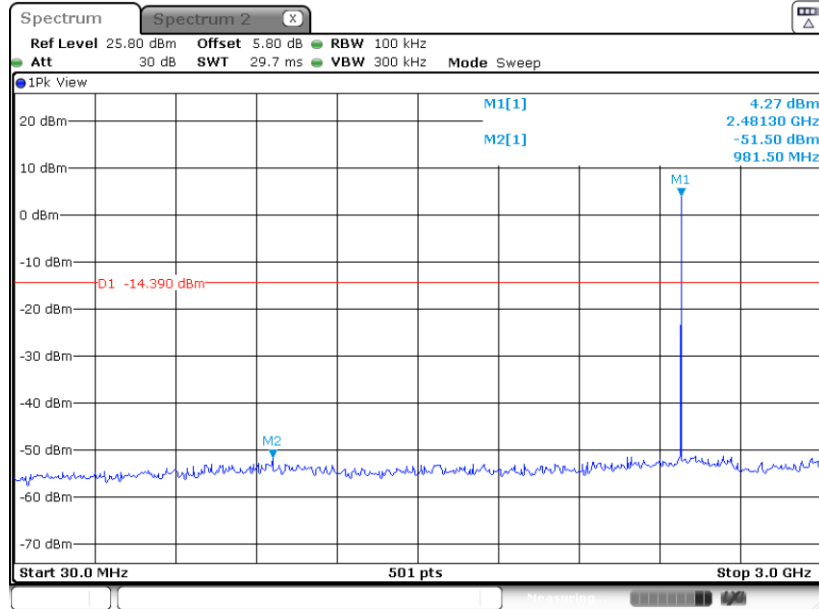

Date: 23.MAR.2024 04:43:38


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

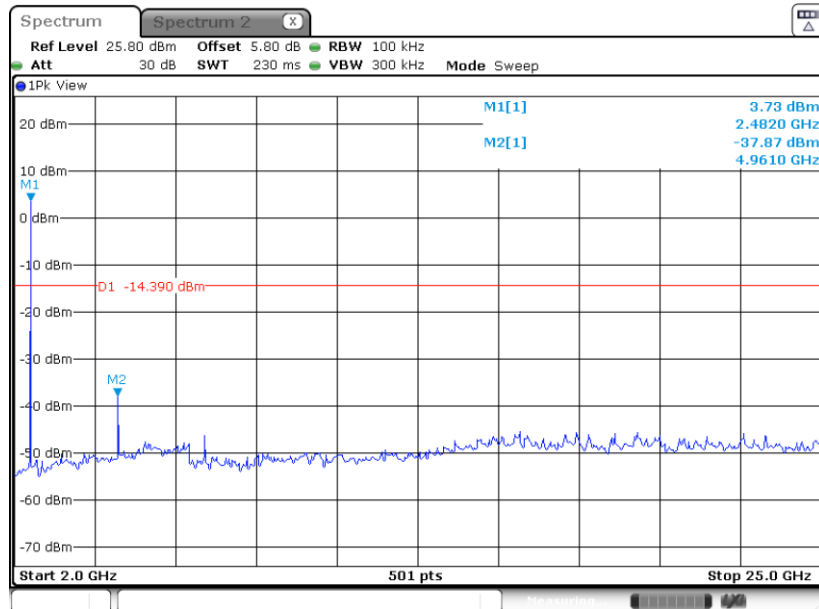

Date: 23.MAR.2024 04:43:58




### Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 00

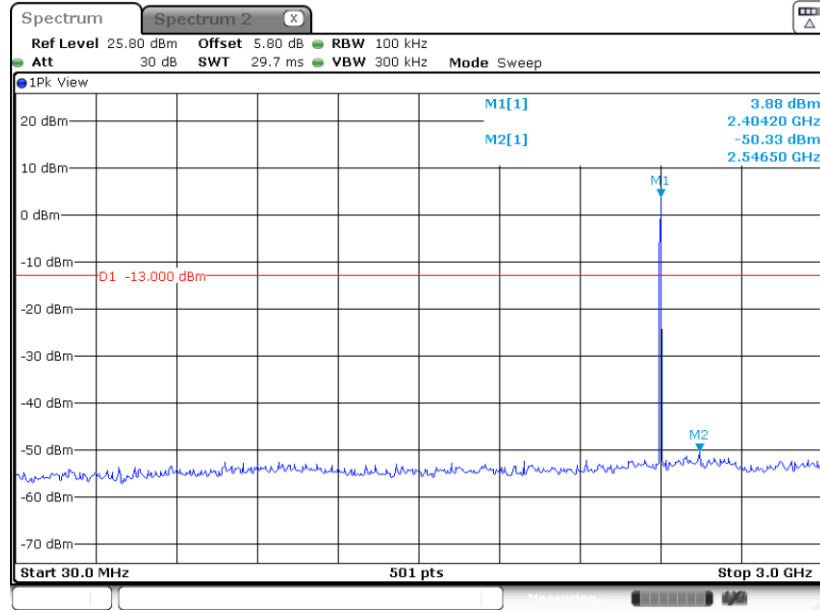

Date: 23.MAR.2024 04:48:08

### Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 00

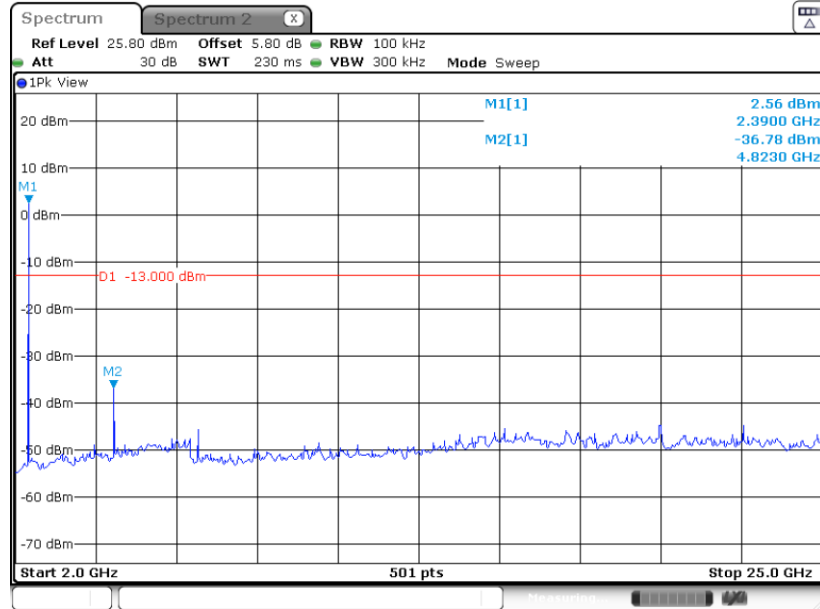


Date: 23.MAR.2024 04:48:28






Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 19

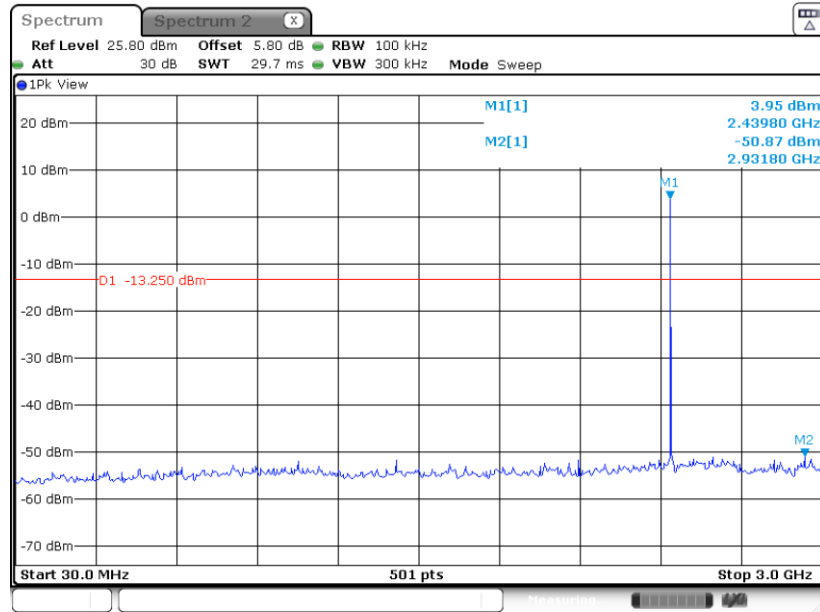

Date: 23.MAR.2024 05:27:19


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 19

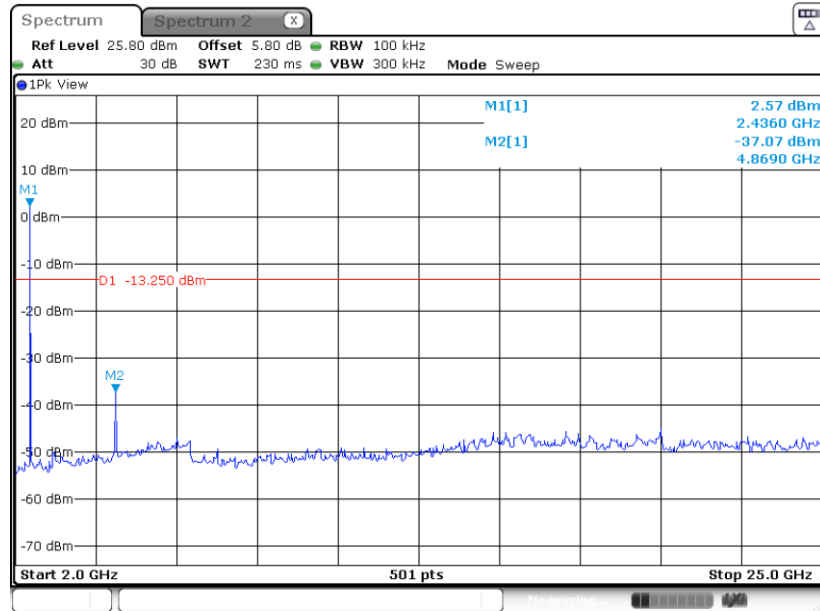

Date: 23.MAR.2024 05:27:39




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 39

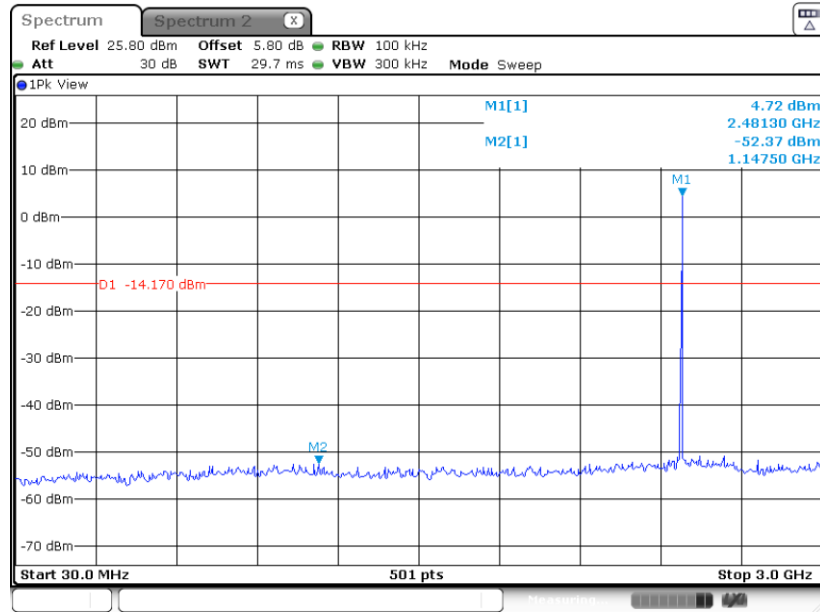

Date: 23.MAR.2024 05:31:47

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 39

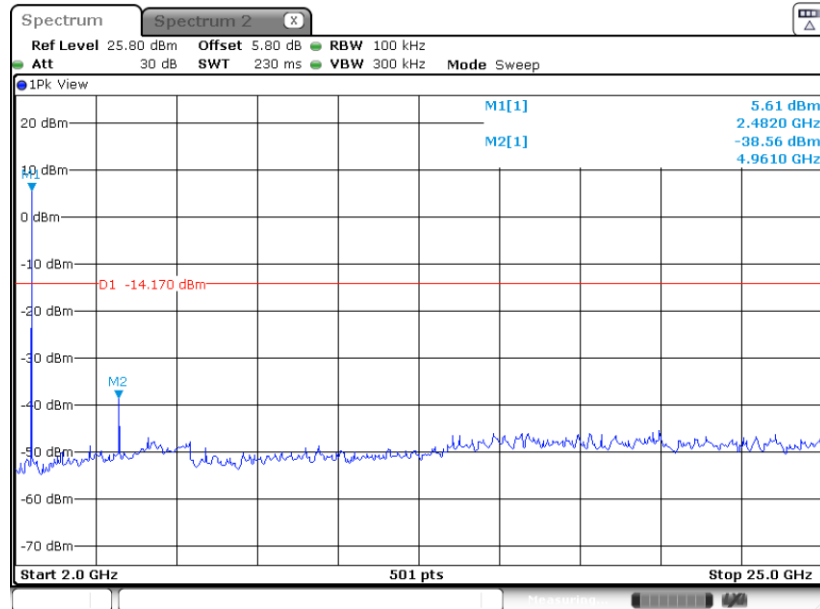

Date: 23.MAR.2024 05:32:07



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




### 3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

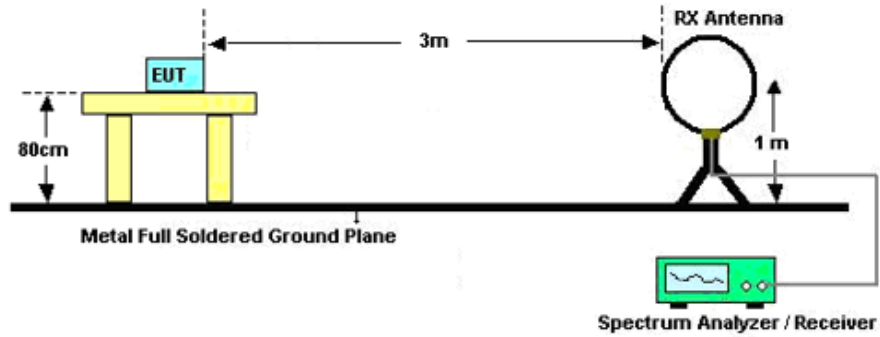

For radiated emissions from 30MHz to 1GHz

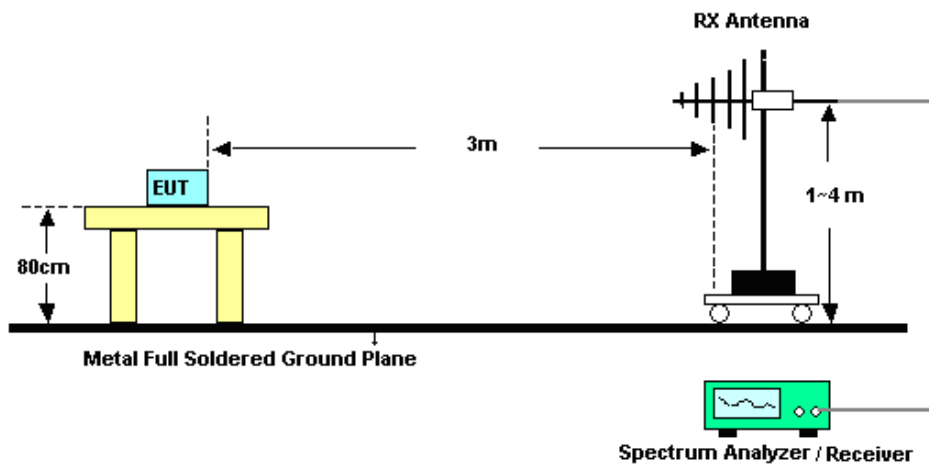

For radiated emissions above 1GHz

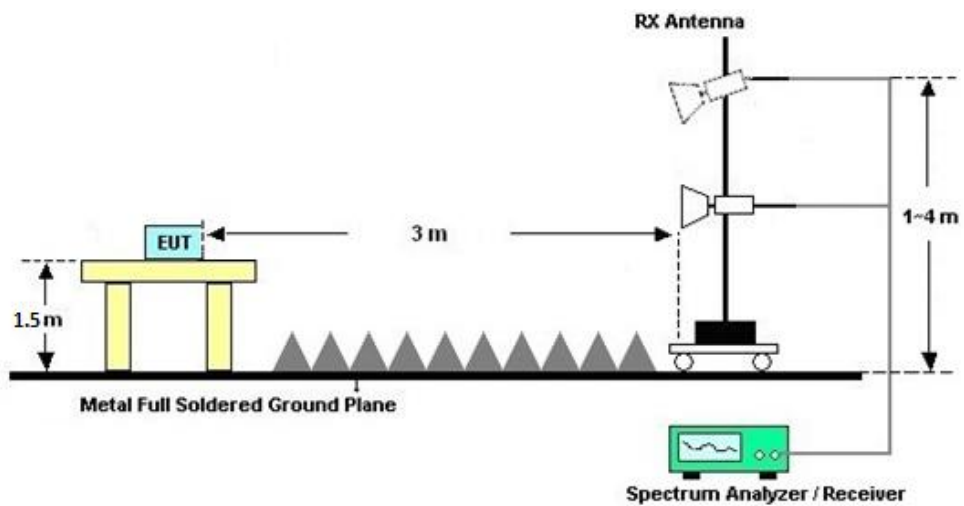



### **3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C

### **3.5.7 Duty Cycle**

Please refer to Appendix D.

### **3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

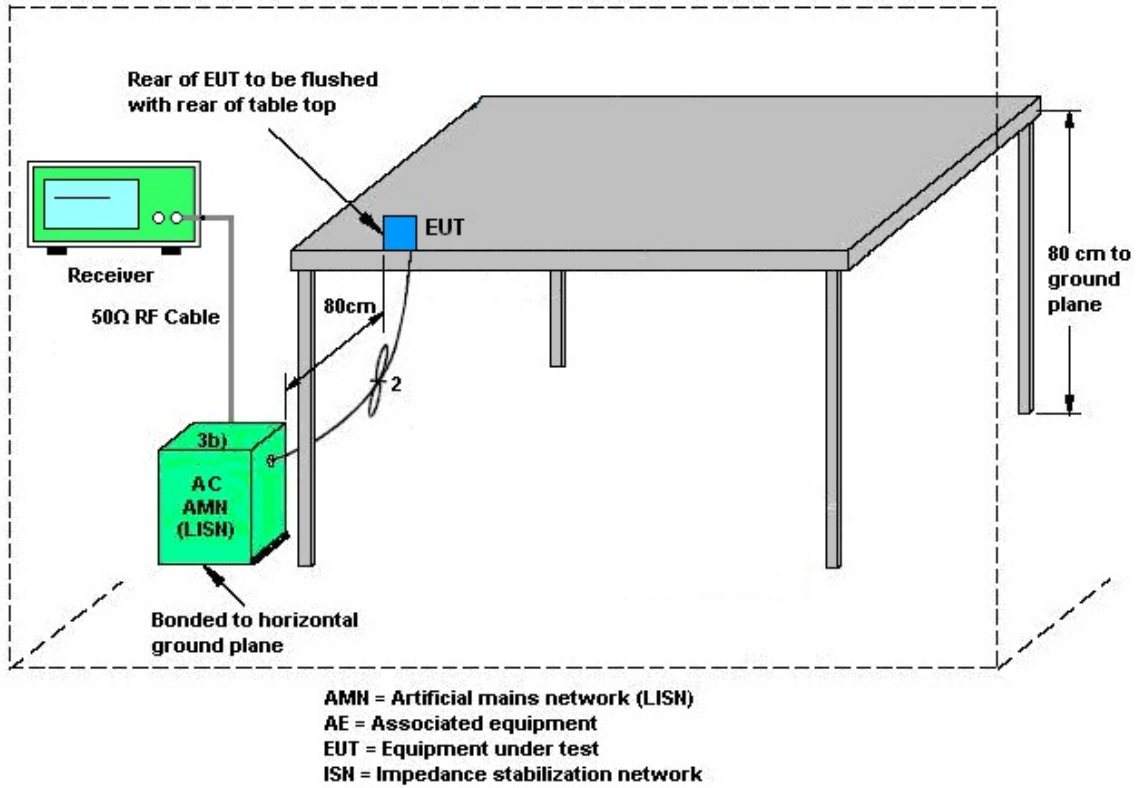

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.





## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Mar. 23, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Mar. 23, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Mar. 23, 2024	Jan. 01, 2025	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Oct. 10, 2023	Apr. 15, 2024	Oct. 09, 2024	Radiation (03CH07-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G, MAX 30dB	Oct. 10, 2023	Apr. 15, 2024	Oct. 09, 2024	Radiation (03CH07-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Oct. 10, 2023	Apr. 15, 2024	Oct. 09, 2024	Radiation (03CH07-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Aug. 12, 2023	Apr. 15, 2024	Aug. 11, 2024	Radiation (03CH07-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 06, 2023	Apr. 15, 2024	Apr. 05, 2024	Radiation (03CH07-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz-18Ghz	Oct. 10, 2023	Apr. 15, 2024	Oct. 09, 2024	Radiation (03CH07-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Oct. 10, 2023	Apr. 15, 2024	Oct. 09, 2024	Radiation (03CH07-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 04, 2024	Apr. 15, 2024	Jan. 03, 2025	Radiation (03CH07-KS)
Amplifier	EM	EM01G18GA	060834	1Ghz-18Ghz	Oct. 10, 2023	Apr. 15, 2024	Oct. 09, 2024	Radiation (03CH07-KS)
Amplifier	EM	EM18G40GG A	060851	18~40GHz	Jan. 04, 2024	Apr. 15, 2024	Jan. 03, 2025	Radiation (03CH07-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Apr. 15, 2024	NCR	Radiation (03CH07-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Apr. 15, 2024	NCR	Radiation (03CH07-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Apr. 15, 2024	NCR	Radiation (03CH07-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 16, 2023	Mar. 27, 2024	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Mar. 27, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Mar. 27, 2024	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Mar. 27, 2024	Oct. 10, 2024	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.26 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.46 dB
Conducted Power Spectral Density	±0.88 dB
Frequency	±0.4 Hz

### Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84dB
---	--------

### Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.20dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.86dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.24dB
---	--------

----- THE END -----



## Appendix A. Conducted Test Results

**Bluetooth Low Energy**

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2024/3/23	Relative Humidity:	40~51	%

**BLE1M****TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.010	0.67	0.50	Pass
BLE	1Mbps	1	19	2440	1.020	0.67	0.50	Pass
BLE	1Mbps	1	39	2480	1.020	0.67	0.50	Pass

**TEST RESULTS DATA****Peak Power Table**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	7.56	30.00	-2.07	5.49	36.00	Pass
BLE	1Mbps	1	19	2440	7.28	30.00	-2.07	5.21	36.00	Pass
BLE	1Mbps	1	39	2480	6.35	30.00	-2.07	4.28	36.00	Pass

**TEST RESULTS DATA****Average Power Table**  
**(Reporting Only)**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	0.68	7.50
BLE	1Mbps	1	19	2440	0.68	7.25
BLE	1Mbps	1	39	2480	0.68	6.23

**TEST RESULTS DATA****Peak Power Density**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	7.02	-15.05	-2.07	8.00	Pass
BLE	1Mbps	1	19	2440	6.55	-14.63	-2.07	8.00	Pass
BLE	1Mbps	1	39	2480	5.61	-14.91	-2.07	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

**Bluetooth Low Energy**

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2024/3/23	Relative Humidity:	40~51	%

**BLE2M****TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	1000	2.040	1.15	0.50	Pass
BLE	2Mbps	1	19	2440	2.025	1.15	0.50	Pass
BLE	2Mbps	1	39	2480	2.030	1.15	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	7.83	30.00	-2.07	5.76	36.00	Pass
BLE	2Mbps	1	19	2440	7.69	30.00	-2.07	5.62	36.00	Pass
BLE	2Mbps	1	39	2480	6.69	30.00	-2.07	4.62	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	2Mbps	1	0	2402	2.40	7.25
BLE	2Mbps	1	19	2440	2.40	7.23
BLE	2Mbps	1	39	2480	2.40	6.52

**TEST RESULTS DATA**  
**Peak Power Density**


Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	7.00	-20.21	-2.07	8.00	Pass
BLE	2Mbps	1	19	2440	6.75	-17.70	-2.07	8.00	Pass
BLE	2Mbps	1	39	2480	5.83	-19.18	-2.07	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

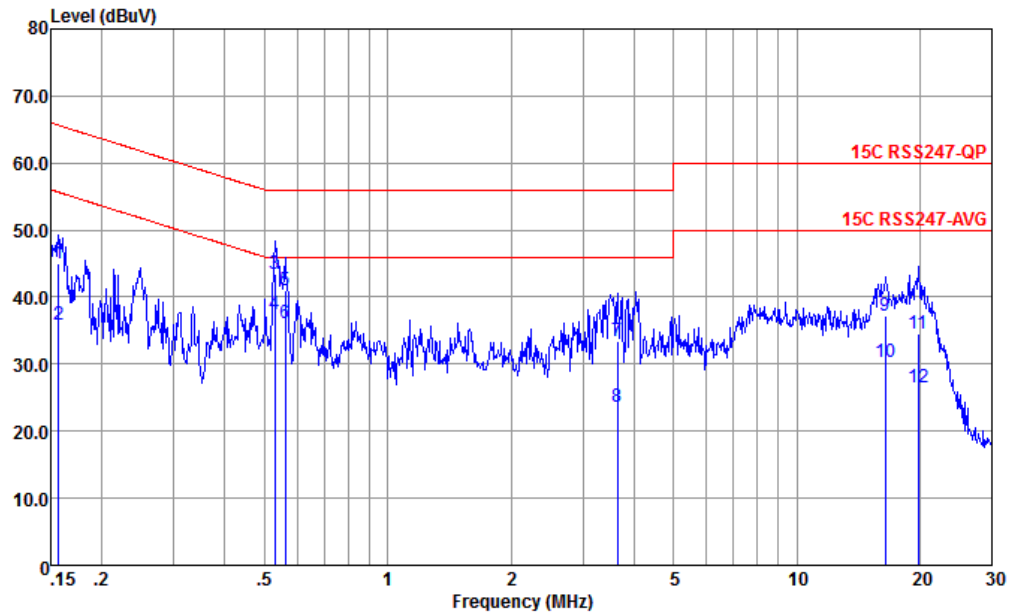


Site : CO01-KS  
 Condition : 15C RSS247-QP LISN-060105-L 2023 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.156	45.08	-20.57	65.65	34.60	0.05	10.43	QP
2	0.156	35.98	-19.67	55.65	25.50	0.05	10.43	Average
3	0.529	43.46	-12.54	56.00	33.30	-0.04	10.20	QP
4 *	0.529	37.46	-8.54	46.00	27.30	-0.04	10.20	Average
5	0.561	40.95	-15.05	56.00	30.80	-0.04	10.19	QP
6	0.561	36.05	-9.95	46.00	25.90	-0.04	10.19	Average
7	3.642	33.45	-22.55	56.00	23.49	-0.10	10.06	QP
8	3.642	23.55	-22.45	46.00	13.59	-0.10	10.06	Average
9	16.486	37.27	-22.73	60.00	26.21	-0.20	11.26	QP
10	16.486	30.37	-19.63	50.00	19.31	-0.20	11.26	Average
11	19.845	34.46	-25.54	60.00	23.50	-0.36	11.32	QP
12	19.845	26.56	-23.44	50.00	15.60	-0.36	11.32	Average



Test Engineer :	Amos zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

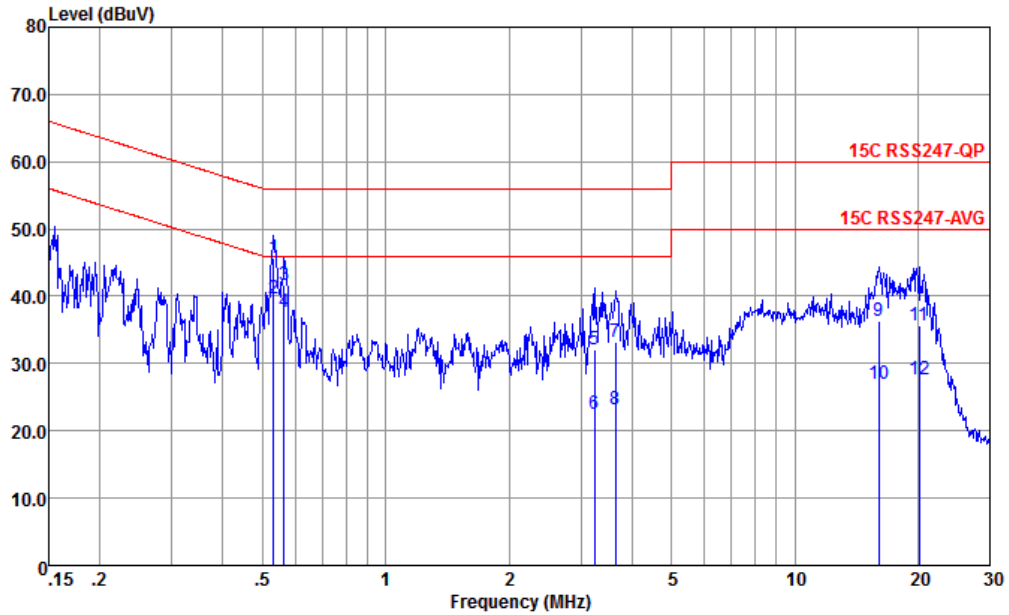

Site : CO01-KS  
 Condition : 15C RSS247-QP LISN-060105-N 2023 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.532	45.63	-10.37	56.00	35.50	-0.07	10.20	QP
2 *	0.532	39.73	-6.27	46.00	29.60	-0.07	10.20	Average
3	0.564	41.62	-14.38	56.00	31.50	-0.07	10.19	QP
4	0.564	37.62	-8.38	46.00	27.50	-0.07	10.19	Average
5	3.241	32.13	-23.87	56.00	22.20	-0.13	10.06	QP
6	3.241	22.53	-23.47	46.00	12.60	-0.13	10.06	Average
7	3.642	33.13	-22.87	56.00	23.20	-0.13	10.06	QP
8	3.642	23.13	-22.87	46.00	13.20	-0.13	10.06	Average
9	16.055	36.32	-23.68	60.00	25.20	-0.14	11.26	QP
10	16.055	27.02	-22.98	50.00	15.90	-0.14	11.26	Average
11	20.162	35.66	-24.34	60.00	24.61	-0.28	11.33	QP
12	20.162	27.66	-22.34	50.00	16.61	-0.28	11.33	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)





## Appendix C. Radiated Spurious Emission

Test Engineer :	Jake Zhou	Relative Humidity :	41 ~ 42 %
		Temperature :	22 ~ 23 °C

### Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	Bluetooth-LE_GSKF	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	Bluetooth-LE_GSKF	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	Bluetooth-LE_GSKF	39	2480	1Mbps	-	-
Mode 4	2400-2483.5	Bluetooth-LE_GSKF	00	2402	2Mbps	-	-
Mode 5	2400-2483.5	Bluetooth-LE_GSKF	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	Bluetooth-LE_GSKF	39	2480	2Mbps	-	-
Co-Location	2400-2483.5	Bluetooth-LE_GSKF	00	2402	1Mbps	-	-
	2400-2483.5	Zigbee	26	2480	250Kbps	-	-

### Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE_GSKF	00	2386.57	37.55	54.00	-16.45	H	AVERAGE	Pass	Band Edge
1	Bluetooth-LE_GSKF	00	4804.00	47.92	54.00	-6.08	H	AVERAGE	Pass	Harmonic
2	Bluetooth-LE_GSKF	19	-	-	-	-	-	-	-	Band Edge
2	Bluetooth-LE_GSKF	19	5371.00	41.21	54.00	-12.79	V	Average	Pass	Harmonic
3	Bluetooth-LE_GSKF	39	2483.50	39.20	54.00	-14.80	H	AVERAGE	Pass	Band Edge
3	Bluetooth-LE_GSKF	39	5073.00	41.85	54.00	-12.15	V	Average	Pass	Harmonic
4	Bluetooth-LE_GSKF	00	2369.28	37.84	54.00	-16.16	H	AVERAGE	Pass	Band Edge
4	Bluetooth-LE_GSKF	00	4954.00	41.44	54.00	-12.56	V	Average	Pass	Harmonic
5	Bluetooth-LE_GSKF	19	-	-	-	-	-	-	-	Band Edge
5	Bluetooth-LE_GSKF	19	5073.00	41.85	54.00	-12.15	H	Average	Pass	Harmonic
6	Bluetooth-LE_GSKF	39	2483.50	42.28	54.00	-11.72	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSKF	39	5071.00	41.14	54.00	-12.86	H	Average	Pass	Harmonic
Co-Location	Zigbee	00	2480.00	100.63	54.00	46.63	V	Average	Fail	Band Edge
		26	2483.50	47.47	54.00	-6.53	H	AVERAGE	Pass	Band Edge
		26	5367.00	41.29	54.00	-12.71	V	Average	Pass	Harmonic

Note: The following frequencies of Harmonic which fall in the non-restricted frequency band, the limit is 100kHz-PSD down 20dB.



		1																																																																																																			
Mode	Band Edge																																																																																																				
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																				
Pol.	Horizontal					Fundamental																																																																																															
Peak																																																																																																					
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2384.23</td> <td>49.58</td> <td>74.00</td> <td>-24.42</td> <td>41.50</td> <td>31.79</td> <td>7.15</td> <td>36.86</td> <td>6.00</td> <td>150</td> <td>0 PEAK</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2384.23	49.58	74.00	-24.42	41.50	31.79	7.15	36.86	6.00	150	0 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>99.32</td> <td>-----</td> <td>-----</td> <td>91.09</td> <td>31.91</td> <td>7.18</td> <td>36.86</td> <td>6.00</td> <td>150</td> <td>0 PEAK</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	99.32	-----	-----	91.09	31.91	7.18	36.86	6.00	150
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	2384.23	49.58	74.00	-24.42	41.50	31.79	7.15	36.86	6.00	150	0 PEAK																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	2402.00	99.32	-----	-----	91.09	31.91	7.18	36.86	6.00	150	0 PEAK																																																																																										
Avg																																																																																																					
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2386.57</td> <td>37.55</td> <td>54.00</td> <td>-16.45</td> <td>29.44</td> <td>31.81</td> <td>7.16</td> <td>36.86</td> <td>6.00</td> <td>150</td> <td>0 AVERAGE</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2386.57	37.55	54.00	-16.45	29.44	31.81	7.16	36.86	6.00	150	0 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>90.25</td> <td>-----</td> <td>-----</td> <td>90.02</td> <td>31.91</td> <td>7.18</td> <td>36.86</td> <td>6.00</td> <td>150</td> <td>0 AVERAGE</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	90.25	-----	-----	90.02	31.91	7.18	36.86	6.00	150
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	2386.57	37.55	54.00	-16.45	29.44	31.81	7.16	36.86	6.00	150	0 AVERAGE																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	2402.00	90.25	-----	-----	90.02	31.91	7.18	36.86	6.00	150	0 AVERAGE																																																																																										







		1																																																																												
Mode	Band Edge																																																																													
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2358.75</td> <td>50.14</td> <td>74.00</td> <td>-23.86</td> <td>42.29</td> <td>31.61</td> <td>7.11</td> <td>36.87</td> <td>6.00</td> <td>297</td> <td>262 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2358.75	50.14	74.00	-23.86	42.29	31.61	7.11	36.87	6.00	297	262 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>95.54</td> <td>-----</td> <td>-----</td> <td>87.31</td> <td>31.91</td> <td>7.18</td> <td>36.86</td> <td>6.00</td> <td>297</td> <td>262 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	95.54	-----	-----	87.31	31.91	7.18	36.86	6.00	297	262 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2358.75	50.14	74.00	-23.86	42.29	31.61	7.11	36.87	6.00	297	262 PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2402.00	95.54	-----	-----	87.31	31.91	7.18	36.86	6.00	297	262 PEAK																																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>37.43</td> <td>54.00</td> <td>-16.57</td> <td>29.30</td> <td>31.83</td> <td>7.16</td> <td>36.86</td> <td>6.00</td> <td>297</td> <td>262 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	37.43	54.00	-16.57	29.30	31.83	7.16	36.86	6.00	297	262 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>94.45</td> <td>-----</td> <td>-----</td> <td>86.22</td> <td>31.91</td> <td>7.18</td> <td>36.86</td> <td>6.00</td> <td>297</td> <td>262 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	94.45	-----	-----	86.22	31.91	7.18	36.86	6.00	297	262 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2389.95	37.43	54.00	-16.57	29.30	31.83	7.16	36.86	6.00	297	262 AVERAGE																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2402.00	94.45	-----	-----	86.22	31.91	7.18	36.86	6.00	297	262 AVERAGE																																																																			



Mode	1																																																																																																																																																																																																																																																																																																																																						
	Harmonic																																																																																																																																																																																																																																																																																																																																						
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																																																																																																																																																																																																																																																						
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																																																																																																																					
Peak Avg	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>3247.50</td><td>47.05</td><td>76.54</td><td>-29.49</td><td>68.97</td><td>32.92</td><td>8.41</td><td>63.25</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>3509.50</td><td>47.85</td><td>76.54</td><td>-28.69</td><td>69.79</td><td>32.95</td><td>8.86</td><td>63.75</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>3847.50</td><td>55.25</td><td>74.00</td><td>-18.75</td><td>76.37</td><td>33.45</td><td>9.20</td><td>63.77</td><td>0.00</td><td>398</td><td>259</td><td>Peak</td></tr> <tr><td>4</td><td>3847.50</td><td>37.81</td><td>54.00</td><td>-16.19</td><td>58.93</td><td>33.45</td><td>9.20</td><td>63.77</td><td>0.00</td><td>398</td><td>259</td><td>Average</td></tr> <tr><td>5</td><td>4123.50</td><td>51.71</td><td>74.00</td><td>-22.29</td><td>72.55</td><td>33.27</td><td>9.49</td><td>63.60</td><td>0.00</td><td>395</td><td>249</td><td>Peak</td></tr> <tr><td>6</td><td>4123.50</td><td>35.08</td><td>54.00</td><td>-18.92</td><td>55.92</td><td>33.27</td><td>9.49</td><td>63.60</td><td>0.00</td><td>395</td><td>249</td><td>Average</td></tr> <tr><td>7</td><td>4804.00</td><td>50.87</td><td>74.00</td><td>-23.13</td><td>69.99</td><td>34.09</td><td>10.27</td><td>63.48</td><td>0.00</td><td>300</td><td>172</td><td>PEAK</td></tr> <tr><td>8</td><td>4804.00</td><td>47.92</td><td>54.00</td><td>-6.08</td><td>67.04</td><td>34.09</td><td>10.27</td><td>63.48</td><td>0.00</td><td>300</td><td>172</td><td>AVERAGE</td></tr> <tr><td>9</td><td>5058.00</td><td>51.27</td><td>74.00</td><td>-22.73</td><td>70.22</td><td>34.00</td><td>10.55</td><td>63.50</td><td>0.00</td><td>158</td><td>32</td><td>Peak</td></tr> <tr><td>10</td><td>5058.00</td><td>35.51</td><td>54.00</td><td>-18.49</td><td>54.46</td><td>34.00</td><td>10.55</td><td>63.50</td><td>0.00</td><td>158</td><td>32</td><td>Average</td></tr> <tr><td>11</td><td>5289.00</td><td>47.78</td><td>76.54</td><td>-28.76</td><td>66.21</td><td>34.37</td><td>10.78</td><td>63.50</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	3247.50	47.05	76.54	-29.49	68.97	32.92	8.41	63.25	0.00	--	--	Peak	2	3509.50	47.85	76.54	-28.69	69.79	32.95	8.86	63.75	0.00	--	--	Peak	3	3847.50	55.25	74.00	-18.75	76.37	33.45	9.20	63.77	0.00	398	259	Peak	4	3847.50	37.81	54.00	-16.19	58.93	33.45	9.20	63.77	0.00	398	259	Average	5	4123.50	51.71	74.00	-22.29	72.55	33.27	9.49	63.60	0.00	395	249	Peak	6	4123.50	35.08	54.00	-18.92	55.92	33.27	9.49	63.60	0.00	395	249	Average	7	4804.00	50.87	74.00	-23.13	69.99	34.09	10.27	63.48	0.00	300	172	PEAK	8	4804.00	47.92	54.00	-6.08	67.04	34.09	10.27	63.48	0.00	300	172	AVERAGE	9	5058.00	51.27	74.00	-22.73	70.22	34.00	10.55	63.50	0.00	158	32	Peak	10	5058.00	35.51	54.00	-18.49	54.46	34.00	10.55	63.50	0.00	158	32	Average	11	5289.00	47.78	76.54	-28.76	66.21	34.37	10.78	63.50	0.00	--	--	Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>3228.00</td><td>45.22</td><td>76.54</td><td>-31.32</td><td>67.04</td><td>33.03</td><td>8.37</td><td>63.22</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>3526.50</td><td>47.39</td><td>76.54</td><td>-29.15</td><td>69.60</td><td>32.63</td><td>8.82</td><td>63.66</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>3789.00</td><td>56.19</td><td>74.00</td><td>-17.81</td><td>77.38</td><td>33.47</td><td>9.14</td><td>63.00</td><td>0.00</td><td>104</td><td>351</td><td>Peak</td></tr> <tr><td>4</td><td>3789.00</td><td>38.98</td><td>54.00</td><td>-15.02</td><td>60.17</td><td>33.47</td><td>9.14</td><td>63.00</td><td>0.00</td><td>104</td><td>351</td><td>Average</td></tr> <tr><td>5</td><td>4080.00</td><td>47.65</td><td>74.00</td><td>-26.35</td><td>68.61</td><td>33.24</td><td>9.43</td><td>63.63</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>4804.00</td><td>46.13</td><td>74.00</td><td>-27.87</td><td>65.25</td><td>34.09</td><td>10.27</td><td>63.48</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr> <tr><td>7</td><td>5047.50</td><td>55.74</td><td>74.00</td><td>-18.26</td><td>74.69</td><td>34.00</td><td>10.54</td><td>63.49</td><td>0.00</td><td>100</td><td>177</td><td>Peak</td></tr> <tr><td>8</td><td>5047.50</td><td>39.03</td><td>54.00</td><td>-14.97</td><td>57.98</td><td>34.00</td><td>10.54</td><td>63.49</td><td>0.00</td><td>100</td><td>177</td><td>Average</td></tr> <tr><td>9</td><td>5370.00</td><td>55.00</td><td>74.00</td><td>-19.00</td><td>73.22</td><td>34.54</td><td>10.86</td><td>63.62</td><td>0.00</td><td>256</td><td>129</td><td>Peak</td></tr> <tr><td>10</td><td>5370.00</td><td>37.68</td><td>54.00</td><td>-16.32</td><td>55.90</td><td>34.54</td><td>10.86</td><td>63.62</td><td>0.00</td><td>256</td><td>129</td><td>Average</td></tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	3228.00	45.22	76.54	-31.32	67.04	33.03	8.37	63.22	0.00	--	--	Peak	2	3526.50	47.39	76.54	-29.15	69.60	32.63	8.82	63.66	0.00	--	--	Peak	3	3789.00	56.19	74.00	-17.81	77.38	33.47	9.14	63.00	0.00	104	351	Peak	4	3789.00	38.98	54.00	-15.02	60.17	33.47	9.14	63.00	0.00	104	351	Average	5	4080.00	47.65	74.00	-26.35	68.61	33.24	9.43	63.63	0.00	--	--	Peak	6	4804.00	46.13	74.00	-27.87	65.25	34.09	10.27	63.48	0.00	--	--	PEAK	7	5047.50	55.74	74.00	-18.26	74.69	34.00	10.54	63.49	0.00	100	177	Peak	8	5047.50	39.03	54.00	-14.97	57.98	34.00	10.54	63.49	0.00	100	177	Average	9	5370.00	55.00	74.00	-19.00	73.22	34.54	10.86	63.62	0.00	256	129	Peak	10	5370.00	37.68	54.00	-16.32	55.90	34.54	10.86	63.62	0.00	256	129	Average
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																																																																																																																																																																																											
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																																																																												
1	3247.50	47.05	76.54	-29.49	68.97	32.92	8.41	63.25	0.00	--	--	Peak																																																																																																																																																																																																																																																																																																																											
2	3509.50	47.85	76.54	-28.69	69.79	32.95	8.86	63.75	0.00	--	--	Peak																																																																																																																																																																																																																																																																																																																											
3	3847.50	55.25	74.00	-18.75	76.37	33.45	9.20	63.77	0.00	398	259	Peak																																																																																																																																																																																																																																																																																																																											
4	3847.50	37.81	54.00	-16.19	58.93	33.45	9.20	63.77	0.00	398	259	Average																																																																																																																																																																																																																																																																																																																											
5	4123.50	51.71	74.00	-22.29	72.55	33.27	9.49	63.60	0.00	395	249	Peak																																																																																																																																																																																																																																																																																																																											
6	4123.50	35.08	54.00	-18.92	55.92	33.27	9.49	63.60	0.00	395	249	Average																																																																																																																																																																																																																																																																																																																											
7	4804.00	50.87	74.00	-23.13	69.99	34.09	10.27	63.48	0.00	300	172	PEAK																																																																																																																																																																																																																																																																																																																											
8	4804.00	47.92	54.00	-6.08	67.04	34.09	10.27	63.48	0.00	300	172	AVERAGE																																																																																																																																																																																																																																																																																																																											
9	5058.00	51.27	74.00	-22.73	70.22	34.00	10.55	63.50	0.00	158	32	Peak																																																																																																																																																																																																																																																																																																																											
10	5058.00	35.51	54.00	-18.49	54.46	34.00	10.55	63.50	0.00	158	32	Average																																																																																																																																																																																																																																																																																																																											
11	5289.00	47.78	76.54	-28.76	66.21	34.37	10.78	63.50	0.00	--	--	Peak																																																																																																																																																																																																																																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																																																																																																																																																																																											
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																																																																												
1	3228.00	45.22	76.54	-31.32	67.04	33.03	8.37	63.22	0.00	--	--	Peak																																																																																																																																																																																																																																																																																																																											
2	3526.50	47.39	76.54	-29.15	69.60	32.63	8.82	63.66	0.00	--	--	Peak																																																																																																																																																																																																																																																																																																																											
3	3789.00	56.19	74.00	-17.81	77.38	33.47	9.14	63.00	0.00	104	351	Peak																																																																																																																																																																																																																																																																																																																											
4	3789.00	38.98	54.00	-15.02	60.17	33.47	9.14	63.00	0.00	104	351	Average																																																																																																																																																																																																																																																																																																																											
5	4080.00	47.65	74.00	-26.35	68.61	33.24	9.43	63.63	0.00	--	--	Peak																																																																																																																																																																																																																																																																																																																											
6	4804.00	46.13	74.00	-27.87	65.25	34.09	10.27	63.48	0.00	--	--	PEAK																																																																																																																																																																																																																																																																																																																											
7	5047.50	55.74	74.00	-18.26	74.69	34.00	10.54	63.49	0.00	100	177	Peak																																																																																																																																																																																																																																																																																																																											
8	5047.50	39.03	54.00	-14.97	57.98	34.00	10.54	63.49	0.00	100	177	Average																																																																																																																																																																																																																																																																																																																											
9	5370.00	55.00	74.00	-19.00	73.22	34.54	10.86	63.62	0.00	256	129	Peak																																																																																																																																																																																																																																																																																																																											
10	5370.00	37.68	54.00	-16.32	55.90	34.54	10.86	63.62	0.00	256	129	Average																																																																																																																																																																																																																																																																																																																											
Peak Avg																																																																																																																																																																																																																																																																																																																																							

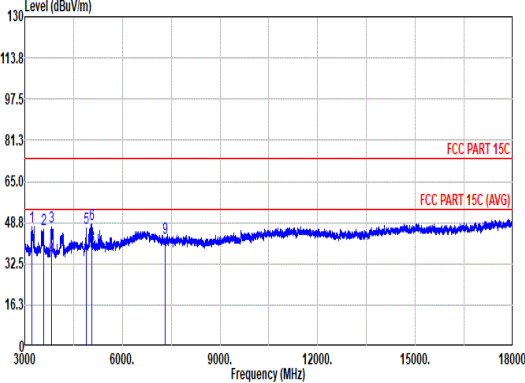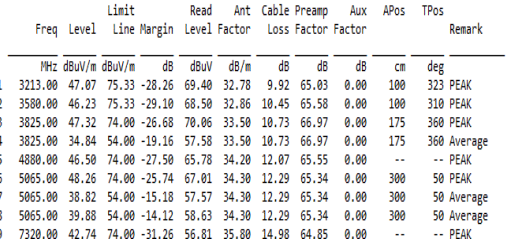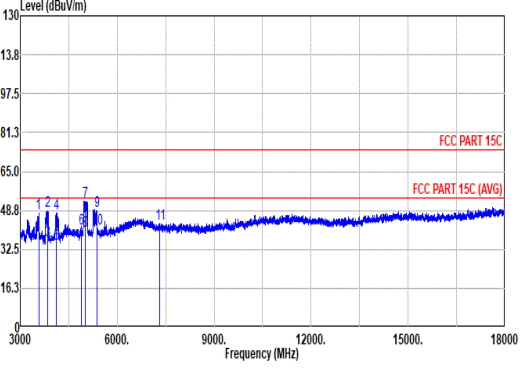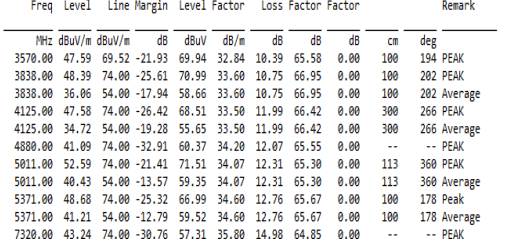

Mode	2																																																																																																																																																																																																																																																																																																																													
	Harmonic																																																																																																																																																																																																																																																																																																																													
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																																																																																																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																																																																																																												
Peak																																																																																																																																																																																																																																																																																																																														
Avg																																																																																																																																																																																																																																																																																																																														
																																																																																																																																																																																																																																																																																																																														
																																																																																																																																																																																																																																																																																																																														
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>3213.00</td><td>47.07</td><td>75.33</td><td>-28.26</td><td>69.40</td><td>32.78</td><td>9.92</td><td>65.03</td><td>0.00</td><td>100</td><td>323</td><td>PEAK</td></tr> <tr><td>2</td><td>3580.00</td><td>46.23</td><td>75.33</td><td>-29.10</td><td>68.50</td><td>32.86</td><td>10.45</td><td>65.58</td><td>0.00</td><td>100</td><td>310</td><td>PEAK</td></tr> <tr><td>3</td><td>3825.00</td><td>47.32</td><td>74.00</td><td>-26.68</td><td>70.06</td><td>33.50</td><td>10.73</td><td>66.97</td><td>0.00</td><td>175</td><td>360</td><td>PEAK</td></tr> <tr><td>4</td><td>3825.00</td><td>34.84</td><td>54.00</td><td>-19.16</td><td>57.58</td><td>33.50</td><td>10.73</td><td>66.97</td><td>0.00</td><td>175</td><td>360</td><td>Average</td></tr> <tr><td>5</td><td>4880.00</td><td>46.50</td><td>74.00</td><td>-27.50</td><td>65.78</td><td>34.20</td><td>12.07</td><td>65.55</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr> <tr><td>6</td><td>5065.00</td><td>48.26</td><td>74.00</td><td>-25.74</td><td>67.01</td><td>34.30</td><td>12.29</td><td>65.34</td><td>0.00</td><td>300</td><td>50</td><td>PEAK</td></tr> <tr><td>7</td><td>5065.00</td><td>38.82</td><td>54.00</td><td>-15.18</td><td>57.57</td><td>34.30</td><td>12.29</td><td>65.34</td><td>0.00</td><td>300</td><td>50</td><td>Average</td></tr> <tr><td>8</td><td>5065.00</td><td>39.88</td><td>54.00</td><td>-14.12</td><td>58.63</td><td>34.30</td><td>12.29</td><td>65.34</td><td>0.00</td><td>300</td><td>50</td><td>Average</td></tr> <tr><td>9</td><td>7320.00</td><td>42.74</td><td>74.00</td><td>-31.26</td><td>56.81</td><td>35.80</td><td>14.98</td><td>64.85</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3213.00	47.07	75.33	-28.26	69.40	32.78	9.92	65.03	0.00	100	323	PEAK	2	3580.00	46.23	75.33	-29.10	68.50	32.86	10.45	65.58	0.00	100	310	PEAK	3	3825.00	47.32	74.00	-26.68	70.06	33.50	10.73	66.97	0.00	175	360	PEAK	4	3825.00	34.84	54.00	-19.16	57.58	33.50	10.73	66.97	0.00	175	360	Average	5	4880.00	46.50	74.00	-27.50	65.78	34.20	12.07	65.55	0.00	--	--	PEAK	6	5065.00	48.26	74.00	-25.74	67.01	34.30	12.29	65.34	0.00	300	50	PEAK	7	5065.00	38.82	54.00	-15.18	57.57	34.30	12.29	65.34	0.00	300	50	Average	8	5065.00	39.88	54.00	-14.12	58.63	34.30	12.29	65.34	0.00	300	50	Average	9	7320.00	42.74	74.00	-31.26	56.81	35.80	14.98	64.85	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>3570.00</td><td>47.59</td><td>69.52</td><td>-21.93</td><td>69.94</td><td>32.84</td><td>10.39</td><td>65.58</td><td>0.00</td><td>100</td><td>194</td><td>PEAK</td></tr> <tr><td>2</td><td>3838.00</td><td>48.39</td><td>74.00</td><td>-25.61</td><td>70.99</td><td>33.60</td><td>10.75</td><td>66.95</td><td>0.00</td><td>100</td><td>202</td><td>PEAK</td></tr> <tr><td>3</td><td>3838.00</td><td>36.06</td><td>54.00</td><td>-17.94</td><td>58.66</td><td>33.60</td><td>10.75</td><td>66.95</td><td>0.00</td><td>100</td><td>202</td><td>Average</td></tr> <tr><td>4</td><td>4125.00</td><td>47.58</td><td>74.00</td><td>-26.42</td><td>68.51</td><td>33.50</td><td>11.99</td><td>66.42</td><td>0.00</td><td>300</td><td>266</td><td>PEAK</td></tr> <tr><td>5</td><td>4125.00</td><td>34.72</td><td>54.00</td><td>-19.28</td><td>55.65</td><td>33.50</td><td>11.99</td><td>66.42</td><td>0.00</td><td>300</td><td>266</td><td>Average</td></tr> <tr><td>6</td><td>4880.00</td><td>41.09</td><td>74.00</td><td>-32.91</td><td>60.37</td><td>34.20</td><td>12.07</td><td>65.55</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr> <tr><td>7</td><td>5011.00</td><td>52.59</td><td>74.00</td><td>-21.41</td><td>71.51</td><td>34.07</td><td>12.31</td><td>65.30</td><td>0.00</td><td>113</td><td>360</td><td>PEAK</td></tr> <tr><td>8</td><td>5011.00</td><td>40.43</td><td>54.00</td><td>-13.57</td><td>59.35</td><td>34.07</td><td>12.31</td><td>65.30</td><td>0.00</td><td>113</td><td>360</td><td>Average</td></tr> <tr><td>9</td><td>5371.00</td><td>48.68</td><td>74.00</td><td>-25.32</td><td>66.99</td><td>34.60</td><td>12.76</td><td>65.67</td><td>0.00</td><td>100</td><td>178</td><td>Peak</td></tr> <tr><td>10</td><td>5371.00</td><td>41.21</td><td>54.00</td><td>-12.79</td><td>59.52</td><td>34.60</td><td>12.76</td><td>65.67</td><td>0.00</td><td>100</td><td>178</td><td>Average</td></tr> <tr><td>11</td><td>7320.00</td><td>43.24</td><td>74.00</td><td>-30.76</td><td>57.31</td><td>35.80</td><td>14.98</td><td>64.85</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3570.00	47.59	69.52	-21.93	69.94	32.84	10.39	65.58	0.00	100	194	PEAK	2	3838.00	48.39	74.00	-25.61	70.99	33.60	10.75	66.95	0.00	100	202	PEAK	3	3838.00	36.06	54.00	-17.94	58.66	33.60	10.75	66.95	0.00	100	202	Average	4	4125.00	47.58	74.00	-26.42	68.51	33.50	11.99	66.42	0.00	300	266	PEAK	5	4125.00	34.72	54.00	-19.28	55.65	33.50	11.99	66.42	0.00	300	266	Average	6	4880.00	41.09	74.00	-32.91	60.37	34.20	12.07	65.55	0.00	--	--	PEAK	7	5011.00	52.59	74.00	-21.41	71.51	34.07	12.31	65.30	0.00	113	360	PEAK	8	5011.00	40.43	54.00	-13.57	59.35	34.07	12.31	65.30	0.00	113	360	Average	9	5371.00	48.68	74.00	-25.32	66.99	34.60	12.76	65.67	0.00	100	178	Peak	10	5371.00	41.21	54.00	-12.79	59.52	34.60	12.76	65.67	0.00	100	178	Average	11	7320.00	43.24	74.00	-30.76	57.31	35.80	14.98	64.85	0.00	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																																																																																																																					
1	3213.00	47.07	75.33	-28.26	69.40	32.78	9.92	65.03	0.00	100	323	PEAK																																																																																																																																																																																																																																																																																																																		
2	3580.00	46.23	75.33	-29.10	68.50	32.86	10.45	65.58	0.00	100	310	PEAK																																																																																																																																																																																																																																																																																																																		
3	3825.00	47.32	74.00	-26.68	70.06	33.50	10.73	66.97	0.00	175	360	PEAK																																																																																																																																																																																																																																																																																																																		
4	3825.00	34.84	54.00	-19.16	57.58	33.50	10.73	66.97	0.00	175	360	Average																																																																																																																																																																																																																																																																																																																		
5	4880.00	46.50	74.00	-27.50	65.78	34.20	12.07	65.55	0.00	--	--	PEAK																																																																																																																																																																																																																																																																																																																		
6	5065.00	48.26	74.00	-25.74	67.01	34.30	12.29	65.34	0.00	300	50	PEAK																																																																																																																																																																																																																																																																																																																		
7	5065.00	38.82	54.00	-15.18	57.57	34.30	12.29	65.34	0.00	300	50	Average																																																																																																																																																																																																																																																																																																																		
8	5065.00	39.88	54.00	-14.12	58.63	34.30	12.29	65.34	0.00	300	50	Average																																																																																																																																																																																																																																																																																																																		
9	7320.00	42.74	74.00	-31.26	56.81	35.80	14.98	64.85	0.00	--	--	PEAK																																																																																																																																																																																																																																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																																																																																																																					
1	3570.00	47.59	69.52	-21.93	69.94	32.84	10.39	65.58	0.00	100	194	PEAK																																																																																																																																																																																																																																																																																																																		
2	3838.00	48.39	74.00	-25.61	70.99	33.60	10.75	66.95	0.00	100	202	PEAK																																																																																																																																																																																																																																																																																																																		
3	3838.00	36.06	54.00	-17.94	58.66	33.60	10.75	66.95	0.00	100	202	Average																																																																																																																																																																																																																																																																																																																		
4	4125.00	47.58	74.00	-26.42	68.51	33.50	11.99	66.42	0.00	300	266	PEAK																																																																																																																																																																																																																																																																																																																		
5	4125.00	34.72	54.00	-19.28	55.65	33.50	11.99	66.42	0.00	300	266	Average																																																																																																																																																																																																																																																																																																																		
6	4880.00	41.09	74.00	-32.91	60.37	34.20	12.07	65.55	0.00	--	--	PEAK																																																																																																																																																																																																																																																																																																																		
7	5011.00	52.59	74.00	-21.41	71.51	34.07	12.31	65.30	0.00	113	360	PEAK																																																																																																																																																																																																																																																																																																																		
8	5011.00	40.43	54.00	-13.57	59.35	34.07	12.31	65.30	0.00	113	360	Average																																																																																																																																																																																																																																																																																																																		
9	5371.00	48.68	74.00	-25.32	66.99	34.60	12.76	65.67	0.00	100	178	Peak																																																																																																																																																																																																																																																																																																																		
10	5371.00	41.21	54.00	-12.79	59.52	34.60	12.76	65.67	0.00	100	178	Average																																																																																																																																																																																																																																																																																																																		
11	7320.00	43.24	74.00	-30.76	57.31	35.80	14.98	64.85	0.00	--	--	PEAK																																																																																																																																																																																																																																																																																																																		



		3																																																																																							
Mode	Band Edge																																																																																								
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																								
Pol.	Horizontal		Fundamental																																																																																						
Peak																																																																																									
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2492.92</td> <td>50.61</td> <td>74.00</td> <td>-23.39</td> <td>41.84</td> <td>32.27</td> <td>7.35</td> <td>36.85</td> <td>6.00</td> <td>176</td> <td>0 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2492.92	50.61	74.00	-23.39	41.84	32.27	7.35	36.85	6.00	176	0 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>103.05</td> <td>-----</td> <td>-----</td> <td>94.36</td> <td>32.22</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>176</td> <td>0 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	103.05	-----	-----	94.36	32.22	7.32	36.85	6.00	176
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2492.92	50.61	74.00	-23.39	41.84	32.27	7.35	36.85	6.00	176	0 PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2480.00	103.05	-----	-----	94.36	32.22	7.32	36.85	6.00	176	0 PEAK																																																																														
Avg																																																																																									
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>39.20</td> <td>54.00</td> <td>-14.80</td> <td>30.49</td> <td>32.23</td> <td>7.33</td> <td>36.85</td> <td>6.00</td> <td>176</td> <td>0 AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	39.20	54.00	-14.80	30.49	32.23	7.33	36.85	6.00	176	0 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>101.90</td> <td>-----</td> <td>-----</td> <td>93.21</td> <td>32.22</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>176</td> <td>0 AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	101.90	-----	-----	93.21	32.22	7.32	36.85	6.00	176
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2483.50	39.20	54.00	-14.80	30.49	32.23	7.33	36.85	6.00	176	0 AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2480.00	101.90	-----	-----	93.21	32.22	7.32	36.85	6.00	176	0 AVERAGE																																																																														



		3																																																																																		
Mode	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2489.08</td> <td>50.37</td> <td>74.00</td> <td>-23.63</td> <td>41.62</td> <td>32.26</td> <td>7.34</td> <td>36.85</td> <td>6.00</td> <td>399</td> <td>308</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.08	50.37	74.00	-23.63	41.62	32.26	7.34	36.85	6.00	399	308	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>96.44</td> <td>-----</td> <td>-----</td> <td>87.75</td> <td>32.22</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>399</td> <td>308</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	96.44	-----	-----	87.75	32.22	7.32	36.85	6.00	399	308	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2489.08	50.37	74.00	-23.63	41.62	32.26	7.34	36.85	6.00	399	308	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	96.44	-----	-----	87.75	32.22	7.32	36.85	6.00	399	308	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>38.39</td> <td>54.00</td> <td>-15.61</td> <td>29.68</td> <td>32.23</td> <td>7.33</td> <td>36.85</td> <td>6.00</td> <td>399</td> <td>308</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	38.39	54.00	-15.61	29.68	32.23	7.33	36.85	6.00	399	308	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>95.38</td> <td>-----</td> <td>-----</td> <td>86.69</td> <td>32.22</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>399</td> <td>308</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	95.38	-----	-----	86.69	32.22	7.32	36.85	6.00	399	308	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2483.56	38.39	54.00	-15.61	29.68	32.23	7.33	36.85	6.00	399	308	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	95.38	-----	-----	86.69	32.22	7.32	36.85	6.00	399	308	AVERAGE																																																																								



Mode	3																																																																																																																																																																																																																																																																						
	Harmonic																																																																																																																																																																																																																																																																						
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																																																																																																																																																																						
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																																																					
Peak Avg																																																																																																																																																																																																																																																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3871.00</td> <td>46.75</td> <td>74.00</td> <td>-27.25</td> <td>69.16</td> <td>33.57</td> <td>10.90</td> <td>66.88</td> <td>0.00</td> <td>100</td> <td>319</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>3871.00</td> <td>35.13</td> <td>54.00</td> <td>-18.87</td> <td>57.54</td> <td>33.57</td> <td>10.90</td> <td>66.88</td> <td>0.00</td> <td>100</td> <td>319</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4177.00</td> <td>49.44</td> <td>74.00</td> <td>-24.56</td> <td>70.35</td> <td>33.50</td> <td>11.91</td> <td>66.32</td> <td>0.00</td> <td>300</td> <td>307</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>4177.00</td> <td>37.64</td> <td>54.00</td> <td>-16.36</td> <td>58.55</td> <td>33.50</td> <td>11.91</td> <td>66.32</td> <td>0.00</td> <td>300</td> <td>307</td> <td>Average</td> </tr> <tr> <td>5</td> <td>4960.00</td> <td>45.19</td> <td>74.00</td> <td>-28.81</td> <td>64.28</td> <td>34.24</td> <td>12.07</td> <td>65.40</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>6</td> <td>7440.00</td> <td>42.70</td> <td>74.00</td> <td>-31.30</td> <td>56.88</td> <td>35.00</td> <td>15.21</td> <td>65.19</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3871.00	46.75	74.00	-27.25	69.16	33.57	10.90	66.88	0.00	100	319	Peak	2	3871.00	35.13	54.00	-18.87	57.54	33.57	10.90	66.88	0.00	100	319	Average	3	4177.00	49.44	74.00	-24.56	70.35	33.50	11.91	66.32	0.00	300	307	Peak	4	4177.00	37.64	54.00	-16.36	58.55	33.50	11.91	66.32	0.00	300	307	Average	5	4960.00	45.19	74.00	-28.81	64.28	34.24	12.07	65.40	0.00	--	--	PEAK	6	7440.00	42.70	74.00	-31.30	56.88	35.00	15.21	65.19	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3535.00</td> <td>47.02</td> <td>69.52</td> <td>-22.50</td> <td>69.45</td> <td>32.80</td> <td>10.32</td> <td>65.55</td> <td>0.00</td> <td>100</td> <td>199</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>3792.00</td> <td>48.38</td> <td>74.00</td> <td>-25.62</td> <td>71.48</td> <td>33.24</td> <td>10.69</td> <td>67.03</td> <td>0.00</td> <td>100</td> <td>206</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>3792.00</td> <td>36.43</td> <td>54.00</td> <td>-17.57</td> <td>59.53</td> <td>33.24</td> <td>10.69</td> <td>67.03</td> <td>0.00</td> <td>100</td> <td>206</td> <td>Average</td> </tr> <tr> <td>4</td> <td>4176.00</td> <td>48.39</td> <td>74.00</td> <td>-25.61</td> <td>69.30</td> <td>33.50</td> <td>11.91</td> <td>66.32</td> <td>0.00</td> <td>100</td> <td>245</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>4176.00</td> <td>36.63</td> <td>54.00</td> <td>-17.37</td> <td>57.54</td> <td>33.50</td> <td>11.91</td> <td>66.32</td> <td>0.00</td> <td>100</td> <td>245</td> <td>Average</td> </tr> <tr> <td>6</td> <td>4960.00</td> <td>53.13</td> <td>74.00</td> <td>-20.87</td> <td>72.22</td> <td>34.24</td> <td>12.07</td> <td>65.40</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>7</td> <td>4960.00</td> <td>38.70</td> <td>54.00</td> <td>-15.30</td> <td>57.79</td> <td>34.24</td> <td>12.07</td> <td>65.40</td> <td>0.00</td> <td>100</td> <td>0</td> <td>AVERAGE</td> </tr> <tr> <td>8</td> <td>5073.00</td> <td>54.27</td> <td>74.00</td> <td>-19.73</td> <td>72.99</td> <td>34.30</td> <td>12.33</td> <td>65.35</td> <td>0.00</td> <td>220</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>9</td> <td>5073.00</td> <td>41.85</td> <td>54.00</td> <td>-12.15</td> <td>60.57</td> <td>34.30</td> <td>12.33</td> <td>65.35</td> <td>0.00</td> <td>220</td> <td>360</td> <td>Average</td> </tr> <tr> <td>10</td> <td>7440.00</td> <td>42.18</td> <td>74.00</td> <td>-31.82</td> <td>56.36</td> <td>35.00</td> <td>15.21</td> <td>65.19</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3535.00	47.02	69.52	-22.50	69.45	32.80	10.32	65.55	0.00	100	199	Peak	2	3792.00	48.38	74.00	-25.62	71.48	33.24	10.69	67.03	0.00	100	206	Peak	3	3792.00	36.43	54.00	-17.57	59.53	33.24	10.69	67.03	0.00	100	206	Average	4	4176.00	48.39	74.00	-25.61	69.30	33.50	11.91	66.32	0.00	100	245	Peak	5	4176.00	36.63	54.00	-17.37	57.54	33.50	11.91	66.32	0.00	100	245	Average	6	4960.00	53.13	74.00	-20.87	72.22	34.24	12.07	65.40	0.00	100	0	PEAK	7	4960.00	38.70	54.00	-15.30	57.79	34.24	12.07	65.40	0.00	100	0	AVERAGE	8	5073.00	54.27	74.00	-19.73	72.99	34.30	12.33	65.35	0.00	220	360	Peak	9	5073.00	41.85	54.00	-12.15	60.57	34.30	12.33	65.35	0.00	220	360	Average	10	7440.00	42.18	74.00	-31.82	56.36	35.00	15.21	65.19	0.00	--	--
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																																																																															
1	3871.00	46.75	74.00	-27.25	69.16	33.57	10.90	66.88	0.00	100	319	Peak																																																																																																																																																																																																																																																											
2	3871.00	35.13	54.00	-18.87	57.54	33.57	10.90	66.88	0.00	100	319	Average																																																																																																																																																																																																																																																											
3	4177.00	49.44	74.00	-24.56	70.35	33.50	11.91	66.32	0.00	300	307	Peak																																																																																																																																																																																																																																																											
4	4177.00	37.64	54.00	-16.36	58.55	33.50	11.91	66.32	0.00	300	307	Average																																																																																																																																																																																																																																																											
5	4960.00	45.19	74.00	-28.81	64.28	34.24	12.07	65.40	0.00	--	--	PEAK																																																																																																																																																																																																																																																											
6	7440.00	42.70	74.00	-31.30	56.88	35.00	15.21	65.19	0.00	--	--	PEAK																																																																																																																																																																																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																																																																															
1	3535.00	47.02	69.52	-22.50	69.45	32.80	10.32	65.55	0.00	100	199	Peak																																																																																																																																																																																																																																																											
2	3792.00	48.38	74.00	-25.62	71.48	33.24	10.69	67.03	0.00	100	206	Peak																																																																																																																																																																																																																																																											
3	3792.00	36.43	54.00	-17.57	59.53	33.24	10.69	67.03	0.00	100	206	Average																																																																																																																																																																																																																																																											
4	4176.00	48.39	74.00	-25.61	69.30	33.50	11.91	66.32	0.00	100	245	Peak																																																																																																																																																																																																																																																											
5	4176.00	36.63	54.00	-17.37	57.54	33.50	11.91	66.32	0.00	100	245	Average																																																																																																																																																																																																																																																											
6	4960.00	53.13	74.00	-20.87	72.22	34.24	12.07	65.40	0.00	100	0	PEAK																																																																																																																																																																																																																																																											
7	4960.00	38.70	54.00	-15.30	57.79	34.24	12.07	65.40	0.00	100	0	AVERAGE																																																																																																																																																																																																																																																											
8	5073.00	54.27	74.00	-19.73	72.99	34.30	12.33	65.35	0.00	220	360	Peak																																																																																																																																																																																																																																																											
9	5073.00	41.85	54.00	-12.15	60.57	34.30	12.33	65.35	0.00	220	360	Average																																																																																																																																																																																																																																																											
10	7440.00	42.18	74.00	-31.82	56.36	35.00	15.21	65.19	0.00	--	--	PEAK																																																																																																																																																																																																																																																											





		4																																																																																																				
Mode		Band Edge																																																																																																				
		2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																				
Pol.		Horizontal					Fundamental																																																																																															
Peak																																																																																																						
		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2374.48</td> <td>50.41</td> <td>74.00</td> <td>-23.59</td> <td>42.42</td> <td>31.72</td> <td>7.14</td> <td>36.87</td> <td>6.00</td> <td>149</td> <td>0 PEAK</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2374.48	50.41	74.00	-23.59	42.42	31.72	7.14	36.87	6.00	149	0 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>99.40</td> <td>-----</td> <td>-----</td> <td>91.17</td> <td>31.91</td> <td>7.18</td> <td>36.86</td> <td>6.00</td> <td>149</td> <td>0 PEAK</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	99.40	-----	-----	91.17	31.91	7.18	36.86	6.00	149
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	2374.48	50.41	74.00	-23.59	42.42	31.72	7.14	36.87	6.00	149	0 PEAK																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	2402.00	99.40	-----	-----	91.17	31.91	7.18	36.86	6.00	149	0 PEAK																																																																																											
Avg																																																																																																						
		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2369.28</td> <td>37.84</td> <td>54.00</td> <td>-16.16</td> <td>29.90</td> <td>31.68</td> <td>7.13</td> <td>36.87</td> <td>6.00</td> <td>149</td> <td>0 AVERAGE</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2369.28	37.84	54.00	-16.16	29.90	31.68	7.13	36.87	6.00	149	0 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>96.83</td> <td>-----</td> <td>-----</td> <td>88.60</td> <td>31.91</td> <td>7.18</td> <td>36.86</td> <td>6.00</td> <td>149</td> <td>0 AVERAGE</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	96.83	-----	-----	88.60	31.91	7.18	36.86	6.00	149
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	2369.28	37.84	54.00	-16.16	29.90	31.68	7.13	36.87	6.00	149	0 AVERAGE																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	2402.00	96.83	-----	-----	88.60	31.91	7.18	36.86	6.00	149	0 AVERAGE																																																																																											







		4																																																					
Mode		Band Edge																																																					
		2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																					
Pol.		Vertical					Fundamental																																																
Peak																																																							
		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2344.06</td> <td>49.89</td> <td>74.00</td> <td>-24.11</td> <td>42.16</td> <td>31.51</td> <td>7.09</td> <td>36.87</td> <td>6.00</td> <td>388</td> <td>263 PEAK</td> </tr> </tbody> </table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2344.06	49.89	74.00	-24.11	42.16	31.51	7.09	36.87	6.00	388
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			cm	deg																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2344.06	49.89	74.00	-24.11	42.16	31.51	7.09	36.87	6.00	388	263 PEAK																																												
Avg																																																							
		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2364.21</td> <td>37.79</td> <td>54.00</td> <td>-16.21</td> <td>29.89</td> <td>31.65</td> <td>7.12</td> <td>36.87</td> <td>6.00</td> <td>388</td> <td>263 AVERAGE</td> </tr> </tbody> </table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2364.21	37.79	54.00	-16.21	29.89	31.65	7.12	36.87	6.00	388
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			cm	deg																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2364.21	37.79	54.00	-16.21	29.89	31.65	7.12	36.87	6.00	388	263 AVERAGE																																												
Peak																																																							
		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>95.70</td> <td>-----</td> <td>-----</td> <td>87.47</td> <td>31.91</td> <td>7.18</td> <td>36.86</td> <td>6.00</td> <td>388</td> <td>263 PEAK</td> </tr> </tbody> </table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	95.70	-----	-----	87.47	31.91	7.18	36.86	6.00	388
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			cm	deg																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2402.00	95.70	-----	-----	87.47	31.91	7.18	36.86	6.00	388	263 PEAK																																												
Avg																																																							
		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>93.16</td> <td>-----</td> <td>-----</td> <td>84.93</td> <td>31.91</td> <td>7.18</td> <td>36.86</td> <td>6.00</td> <td>388</td> <td>263 AVERAGE</td> </tr> </tbody> </table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	93.16	-----	-----	84.93	31.91	7.18	36.86	6.00	388
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			cm	deg																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2402.00	93.16	-----	-----	84.93	31.91	7.18	36.86	6.00	388	263 AVERAGE																																												



Mode	4																																																																																																																																																																																																																																																							
	Harmonic																																																																																																																																																																																																																																																							
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																																						
Peak Avg																																																																																																																																																																																																																																																								
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 3879.00</td> <td>49.41</td> <td>74.00</td> <td>-24.59</td> <td>71.81</td> <td>33.53</td> <td>10.94</td> <td>66.87</td> <td>0.00</td> <td>100</td> <td>39 Peak</td> </tr> <tr> <td>2 3879.00</td> <td>35.14</td> <td>54.00</td> <td>-18.86</td> <td>57.54</td> <td>33.53</td> <td>10.94</td> <td>66.87</td> <td>0.00</td> <td>100</td> <td>39 Average</td> </tr> <tr> <td>3 4081.00</td> <td>46.28</td> <td>74.00</td> <td>-27.72</td> <td>67.50</td> <td>33.46</td> <td>11.82</td> <td>66.50</td> <td>0.00</td> <td>100</td> <td>238 Peak</td> </tr> <tr> <td>4 4081.00</td> <td>37.65</td> <td>54.00</td> <td>-16.35</td> <td>58.87</td> <td>33.46</td> <td>11.82</td> <td>66.50</td> <td>0.00</td> <td>100</td> <td>238 Average</td> </tr> <tr> <td>5 4084.00</td> <td>47.11</td> <td>74.00</td> <td>-26.89</td> <td>65.97</td> <td>34.29</td> <td>12.54</td> <td>65.69</td> <td>0.00</td> <td>200</td> <td>245 PEAk</td> </tr> <tr> <td>6 4084.00</td> <td>41.39</td> <td>54.00</td> <td>-12.61</td> <td>60.25</td> <td>34.29</td> <td>12.54</td> <td>65.69</td> <td>0.00</td> <td>200</td> <td>245 Average</td> </tr> <tr> <td>7 5071.00</td> <td>49.91</td> <td>74.00</td> <td>-24.09</td> <td>68.64</td> <td>34.30</td> <td>12.32</td> <td>65.35</td> <td>0.00</td> <td>100</td> <td>48 Peak</td> </tr> <tr> <td>8 5071.00</td> <td>40.96</td> <td>54.00</td> <td>-13.04</td> <td>59.69</td> <td>34.30</td> <td>12.32</td> <td>65.35</td> <td>0.00</td> <td>100</td> <td>48 Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 3879.00	49.41	74.00	-24.59	71.81	33.53	10.94	66.87	0.00	100	39 Peak	2 3879.00	35.14	54.00	-18.86	57.54	33.53	10.94	66.87	0.00	100	39 Average	3 4081.00	46.28	74.00	-27.72	67.50	33.46	11.82	66.50	0.00	100	238 Peak	4 4081.00	37.65	54.00	-16.35	58.87	33.46	11.82	66.50	0.00	100	238 Average	5 4084.00	47.11	74.00	-26.89	65.97	34.29	12.54	65.69	0.00	200	245 PEAk	6 4084.00	41.39	54.00	-12.61	60.25	34.29	12.54	65.69	0.00	200	245 Average	7 5071.00	49.91	74.00	-24.09	68.64	34.30	12.32	65.35	0.00	100	48 Peak	8 5071.00	40.96	54.00	-13.04	59.69	34.30	12.32	65.35	0.00	100	48 Average	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 3825.00</td> <td>48.40</td> <td>74.00</td> <td>-25.60</td> <td>71.14</td> <td>33.50</td> <td>10.73</td> <td>66.97</td> <td>0.00</td> <td>100</td> <td>220 Peak</td> </tr> <tr> <td>2 4144.00</td> <td>50.61</td> <td>74.00</td> <td>-23.39</td> <td>71.55</td> <td>33.50</td> <td>11.94</td> <td>66.38</td> <td>0.00</td> <td>300</td> <td>250 Peak</td> </tr> <tr> <td>3 4144.00</td> <td>38.58</td> <td>54.00</td> <td>-15.42</td> <td>59.52</td> <td>33.50</td> <td>11.94</td> <td>66.38</td> <td>0.00</td> <td>300</td> <td>250 Average</td> </tr> <tr> <td>4 4804.00</td> <td>42.24</td> <td>74.00</td> <td>-31.76</td> <td>61.10</td> <td>34.29</td> <td>12.54</td> <td>65.69</td> <td>0.00</td> <td>--</td> <td>-- PEAk</td> </tr> <tr> <td>5 4954.00</td> <td>53.50</td> <td>74.00</td> <td>-20.50</td> <td>72.59</td> <td>34.28</td> <td>12.04</td> <td>65.41</td> <td>0.00</td> <td>227</td> <td>0 Peak</td> </tr> <tr> <td>6 4954.00</td> <td>41.44</td> <td>54.00</td> <td>-12.56</td> <td>60.53</td> <td>34.28</td> <td>12.04</td> <td>65.41</td> <td>0.00</td> <td>227</td> <td>0 Average</td> </tr> <tr> <td>7 5247.00</td> <td>51.44</td> <td>74.00</td> <td>-22.56</td> <td>70.27</td> <td>34.19</td> <td>12.52</td> <td>65.54</td> <td>0.00</td> <td>100</td> <td>169 Peak</td> </tr> <tr> <td>8 5371.00</td> <td>50.36</td> <td>74.00</td> <td>-23.64</td> <td>68.67</td> <td>34.60</td> <td>12.76</td> <td>65.67</td> <td>0.00</td> <td>100</td> <td>344 Peak</td> </tr> <tr> <td>9 5371.00</td> <td>40.34</td> <td>54.00</td> <td>-13.66</td> <td>58.65</td> <td>34.60</td> <td>12.76</td> <td>65.67</td> <td>0.00</td> <td>100</td> <td>344 Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 3825.00	48.40	74.00	-25.60	71.14	33.50	10.73	66.97	0.00	100	220 Peak	2 4144.00	50.61	74.00	-23.39	71.55	33.50	11.94	66.38	0.00	300	250 Peak	3 4144.00	38.58	54.00	-15.42	59.52	33.50	11.94	66.38	0.00	300	250 Average	4 4804.00	42.24	74.00	-31.76	61.10	34.29	12.54	65.69	0.00	--	-- PEAk	5 4954.00	53.50	74.00	-20.50	72.59	34.28	12.04	65.41	0.00	227	0 Peak	6 4954.00	41.44	54.00	-12.56	60.53	34.28	12.04	65.41	0.00	227	0 Average	7 5247.00	51.44	74.00	-22.56	70.27	34.19	12.52	65.54	0.00	100	169 Peak	8 5371.00	50.36	74.00	-23.64	68.67	34.60	12.76	65.67	0.00	100	344 Peak	9 5371.00	40.34	54.00	-13.66	58.65	34.60	12.76	65.67	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																																															
1 3879.00	49.41	74.00	-24.59	71.81	33.53	10.94	66.87	0.00	100	39 Peak																																																																																																																																																																																																																																														
2 3879.00	35.14	54.00	-18.86	57.54	33.53	10.94	66.87	0.00	100	39 Average																																																																																																																																																																																																																																														
3 4081.00	46.28	74.00	-27.72	67.50	33.46	11.82	66.50	0.00	100	238 Peak																																																																																																																																																																																																																																														
4 4081.00	37.65	54.00	-16.35	58.87	33.46	11.82	66.50	0.00	100	238 Average																																																																																																																																																																																																																																														
5 4084.00	47.11	74.00	-26.89	65.97	34.29	12.54	65.69	0.00	200	245 PEAk																																																																																																																																																																																																																																														
6 4084.00	41.39	54.00	-12.61	60.25	34.29	12.54	65.69	0.00	200	245 Average																																																																																																																																																																																																																																														
7 5071.00	49.91	74.00	-24.09	68.64	34.30	12.32	65.35	0.00	100	48 Peak																																																																																																																																																																																																																																														
8 5071.00	40.96	54.00	-13.04	59.69	34.30	12.32	65.35	0.00	100	48 Average																																																																																																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																																															
1 3825.00	48.40	74.00	-25.60	71.14	33.50	10.73	66.97	0.00	100	220 Peak																																																																																																																																																																																																																																														
2 4144.00	50.61	74.00	-23.39	71.55	33.50	11.94	66.38	0.00	300	250 Peak																																																																																																																																																																																																																																														
3 4144.00	38.58	54.00	-15.42	59.52	33.50	11.94	66.38	0.00	300	250 Average																																																																																																																																																																																																																																														
4 4804.00	42.24	74.00	-31.76	61.10	34.29	12.54	65.69	0.00	--	-- PEAk																																																																																																																																																																																																																																														
5 4954.00	53.50	74.00	-20.50	72.59	34.28	12.04	65.41	0.00	227	0 Peak																																																																																																																																																																																																																																														
6 4954.00	41.44	54.00	-12.56	60.53	34.28	12.04	65.41	0.00	227	0 Average																																																																																																																																																																																																																																														
7 5247.00	51.44	74.00	-22.56	70.27	34.19	12.52	65.54	0.00	100	169 Peak																																																																																																																																																																																																																																														
8 5371.00	50.36	74.00	-23.64	68.67	34.60	12.76	65.67	0.00	100	344 Peak																																																																																																																																																																																																																																														
9 5371.00	40.34	54.00	-13.66	58.65	34.60	12.76	65.67	0.00	100	344 Average																																																																																																																																																																																																																																														

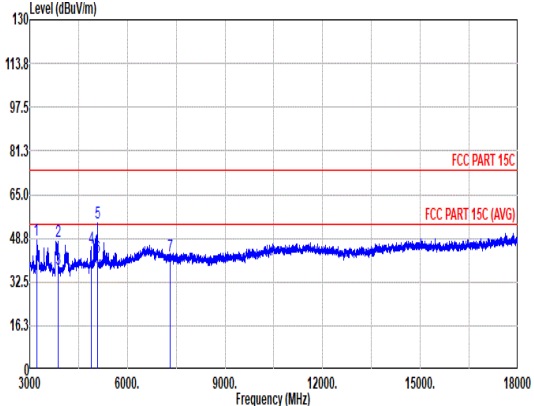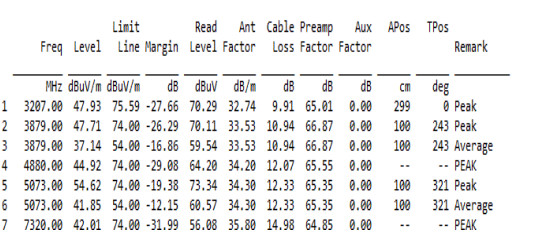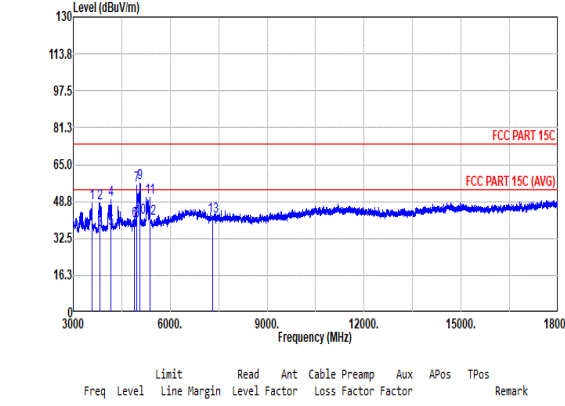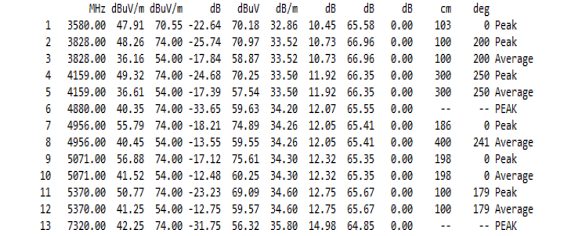

Mode	5	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz	
Pol.	Horizontal	Vertical
Peak		
Avg		
		
		



		6																																																				
Mode		Band Edge																																																				
		2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																				
Pol.	Horizontal					Fundamental																																																
Peak		<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>53.38</td> <td>74.00</td> <td>-20.62</td> <td>44.67</td> <td>32.23</td> <td>7.33</td> <td>36.85</td> <td>6.00</td> <td>163</td> <td>360 PEAK</td> </tr> </tbody> </table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.50	53.38	74.00	-20.62	44.67	32.23	7.33	36.85	6.00	163	360 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																												
1	2483.50	53.38	74.00	-20.62	44.67	32.23	7.33	36.85	6.00	163	360 PEAK																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>103.25</td> <td>-----</td> <td>-----</td> <td>94.56</td> <td>32.22</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>163</td> <td>360 PEAK</td> </tr> </tbody> </table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	103.25	-----	-----	94.56	32.22	7.32	36.85	6.00	163	360 PEAK	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																												
1	2480.00	103.25	-----	-----	94.56	32.22	7.32	36.85	6.00	163	360 PEAK																																											
Avg		<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>42.28</td> <td>54.00</td> <td>-11.72</td> <td>33.57</td> <td>32.23</td> <td>7.33</td> <td>36.85</td> <td>6.00</td> <td>163</td> <td>360 AVERAGE</td> </tr> </tbody> </table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.50	42.28	54.00	-11.72	33.57	32.23	7.33	36.85	6.00	163	360 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																												
1	2483.50	42.28	54.00	-11.72	33.57	32.23	7.33	36.85	6.00	163	360 AVERAGE																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>100.70</td> <td>-----</td> <td>-----</td> <td>92.01</td> <td>32.22</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>163</td> <td>360 AVERAGE</td> </tr> </tbody> </table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	100.70	-----	-----	92.01	32.22	7.32	36.85	6.00	163	360 AVERAGE	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																												
1	2480.00	100.70	-----	-----	92.01	32.22	7.32	36.85	6.00	163	360 AVERAGE																																											



		6																																																																												
Mode	Band Edge																																																																													
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.68</td> <td>50.86</td> <td>74.00</td> <td>-23.14</td> <td>42.15</td> <td>32.23</td> <td>7.33</td> <td>36.85</td> <td>6.00</td> <td>377</td> <td>248 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.68	50.86	74.00	-23.14	42.15	32.23	7.33	36.85	6.00	377	248 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>97.24</td> <td>-----</td> <td>-----</td> <td>88.55</td> <td>32.22</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>377</td> <td>248 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	97.24	-----	-----	88.55	32.22	7.32	36.85	6.00	377	248 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2483.68	50.86	74.00	-23.14	42.15	32.23	7.33	36.85	6.00	377	248 PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2480.00	97.24	-----	-----	88.55	32.22	7.32	36.85	6.00	377	248 PEAK																																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>39.47</td> <td>54.00</td> <td>-14.53</td> <td>30.76</td> <td>32.23</td> <td>7.33</td> <td>36.85</td> <td>6.00</td> <td>377</td> <td>248 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	39.47	54.00	-14.53	30.76	32.23	7.33	36.85	6.00	377	248 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>94.79</td> <td>-----</td> <td>-----</td> <td>86.10</td> <td>32.22</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>377</td> <td>248 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.79	-----	-----	86.10	32.22	7.32	36.85	6.00	377	248 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2483.50	39.47	54.00	-14.53	30.76	32.23	7.33	36.85	6.00	377	248 AVERAGE																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2480.00	94.79	-----	-----	86.10	32.22	7.32	36.85	6.00	377	248 AVERAGE																																																																			



Mode	6																																																																																																																																																																																																																																																																																					
	Harmonic																																																																																																																																																																																																																																																																																					
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																																																																				
Peak Avg																																																																																																																																																																																																																																																																																						
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3825.00</td> <td>46.99</td> <td>74.00</td> <td>-27.01</td> <td>69.73</td> <td>33.50</td> <td>10.73</td> <td>66.97</td> <td>0.00</td> <td>163</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>3825.00</td> <td>35.50</td> <td>54.00</td> <td>-18.50</td> <td>58.24</td> <td>33.50</td> <td>10.73</td> <td>66.97</td> <td>0.00</td> <td>163</td> <td>0</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4960.00</td> <td>45.48</td> <td>74.00</td> <td>-28.52</td> <td>64.57</td> <td>34.24</td> <td>12.07</td> <td>65.40</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5071.00</td> <td>49.49</td> <td>74.00</td> <td>-24.51</td> <td>68.22</td> <td>34.30</td> <td>12.32</td> <td>65.35</td> <td>0.00</td> <td>300</td> <td>295</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>5071.00</td> <td>41.14</td> <td>54.00</td> <td>-12.86</td> <td>59.87</td> <td>34.30</td> <td>12.32</td> <td>65.35</td> <td>0.00</td> <td>300</td> <td>295</td> <td>Average</td> </tr> <tr> <td>6</td> <td>7440.00</td> <td>42.33</td> <td>74.00</td> <td>-31.67</td> <td>56.51</td> <td>35.80</td> <td>15.21</td> <td>65.19</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3825.00	46.99	74.00	-27.01	69.73	33.50	10.73	66.97	0.00	163	0	Peak	2	3825.00	35.50	54.00	-18.50	58.24	33.50	10.73	66.97	0.00	163	0	Average	3	4960.00	45.48	74.00	-28.52	64.57	34.24	12.07	65.40	0.00	--	--	PEAK	4	5071.00	49.49	74.00	-24.51	68.22	34.30	12.32	65.35	0.00	300	295	Peak	5	5071.00	41.14	54.00	-12.86	59.87	34.30	12.32	65.35	0.00	300	295	Average	6	7440.00	42.33	74.00	-31.67	56.51	35.80	15.21	65.19	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3579.00</td> <td>47.52</td> <td>64.65</td> <td>-17.13</td> <td>69.80</td> <td>32.86</td> <td>10.44</td> <td>65.58</td> <td>0.00</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>3787.00</td> <td>48.72</td> <td>74.00</td> <td>-25.28</td> <td>71.87</td> <td>33.20</td> <td>10.69</td> <td>67.04</td> <td>0.00</td> <td>100</td> <td>208</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>3787.00</td> <td>37.08</td> <td>54.00</td> <td>-16.92</td> <td>60.23</td> <td>33.20</td> <td>10.69</td> <td>67.04</td> <td>0.00</td> <td>400</td> <td>208</td> <td>Average</td> </tr> <tr> <td>4</td> <td>4170.00</td> <td>50.54</td> <td>74.00</td> <td>-23.46</td> <td>71.45</td> <td>33.50</td> <td>11.92</td> <td>66.33</td> <td>0.00</td> <td>300</td> <td>263</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>4170.00</td> <td>37.75</td> <td>54.00</td> <td>-16.25</td> <td>58.66</td> <td>33.50</td> <td>11.92</td> <td>66.33</td> <td>0.00</td> <td>300</td> <td>263</td> <td>Average</td> </tr> <tr> <td>6</td> <td>4960.00</td> <td>52.73</td> <td>74.00</td> <td>-21.27</td> <td>71.82</td> <td>34.24</td> <td>12.07</td> <td>65.40</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>7</td> <td>4960.00</td> <td>38.22</td> <td>54.00</td> <td>-15.78</td> <td>57.31</td> <td>34.24</td> <td>12.07</td> <td>65.40</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> <tr> <td>8</td> <td>5245.00</td> <td>52.11</td> <td>74.00</td> <td>-21.89</td> <td>70.92</td> <td>34.19</td> <td>12.53</td> <td>65.53</td> <td>0.00</td> <td>105</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>9</td> <td>5370.00</td> <td>48.51</td> <td>74.00</td> <td>-25.49</td> <td>66.83</td> <td>34.60</td> <td>12.75</td> <td>65.67</td> <td>0.00</td> <td>100</td> <td>277</td> <td>Peak</td> </tr> <tr> <td>10</td> <td>5370.00</td> <td>40.22</td> <td>54.00</td> <td>-13.78</td> <td>58.54</td> <td>34.60</td> <td>12.75</td> <td>65.67</td> <td>0.00</td> <td>100</td> <td>277</td> <td>Average</td> </tr> <tr> <td>11</td> <td>7440.00</td> <td>42.58</td> <td>74.00</td> <td>-31.42</td> <td>56.76</td> <td>35.80</td> <td>15.21</td> <td>65.19</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3579.00	47.52	64.65	-17.13	69.80	32.86	10.44	65.58	0.00	100	360	Peak	2	3787.00	48.72	74.00	-25.28	71.87	33.20	10.69	67.04	0.00	100	208	Peak	3	3787.00	37.08	54.00	-16.92	60.23	33.20	10.69	67.04	0.00	400	208	Average	4	4170.00	50.54	74.00	-23.46	71.45	33.50	11.92	66.33	0.00	300	263	Peak	5	4170.00	37.75	54.00	-16.25	58.66	33.50	11.92	66.33	0.00	300	263	Average	6	4960.00	52.73	74.00	-21.27	71.82	34.24	12.07	65.40	0.00	300	360	PEAK	7	4960.00	38.22	54.00	-15.78	57.31	34.24	12.07	65.40	0.00	300	360	AVERAGE	8	5245.00	52.11	74.00	-21.89	70.92	34.19	12.53	65.53	0.00	105	0	Peak	9	5370.00	48.51	74.00	-25.49	66.83	34.60	12.75	65.67	0.00	100	277	Peak	10	5370.00	40.22	54.00	-13.78	58.54	34.60	12.75	65.67	0.00	100	277	Average	11	7440.00	42.58	74.00	-31.42	56.76	35.80	15.21	65.19	0.00	--	--
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																																																																													
1	3825.00	46.99	74.00	-27.01	69.73	33.50	10.73	66.97	0.00	163	0	Peak																																																																																																																																																																																																																																																																										
2	3825.00	35.50	54.00	-18.50	58.24	33.50	10.73	66.97	0.00	163	0	Average																																																																																																																																																																																																																																																																										
3	4960.00	45.48	74.00	-28.52	64.57	34.24	12.07	65.40	0.00	--	--	PEAK																																																																																																																																																																																																																																																																										
4	5071.00	49.49	74.00	-24.51	68.22	34.30	12.32	65.35	0.00	300	295	Peak																																																																																																																																																																																																																																																																										
5	5071.00	41.14	54.00	-12.86	59.87	34.30	12.32	65.35	0.00	300	295	Average																																																																																																																																																																																																																																																																										
6	7440.00	42.33	74.00	-31.67	56.51	35.80	15.21	65.19	0.00	--	--	PEAK																																																																																																																																																																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																																																																													
1	3579.00	47.52	64.65	-17.13	69.80	32.86	10.44	65.58	0.00	100	360	Peak																																																																																																																																																																																																																																																																										
2	3787.00	48.72	74.00	-25.28	71.87	33.20	10.69	67.04	0.00	100	208	Peak																																																																																																																																																																																																																																																																										
3	3787.00	37.08	54.00	-16.92	60.23	33.20	10.69	67.04	0.00	400	208	Average																																																																																																																																																																																																																																																																										
4	4170.00	50.54	74.00	-23.46	71.45	33.50	11.92	66.33	0.00	300	263	Peak																																																																																																																																																																																																																																																																										
5	4170.00	37.75	54.00	-16.25	58.66	33.50	11.92	66.33	0.00	300	263	Average																																																																																																																																																																																																																																																																										
6	4960.00	52.73	74.00	-21.27	71.82	34.24	12.07	65.40	0.00	300	360	PEAK																																																																																																																																																																																																																																																																										
7	4960.00	38.22	54.00	-15.78	57.31	34.24	12.07	65.40	0.00	300	360	AVERAGE																																																																																																																																																																																																																																																																										
8	5245.00	52.11	74.00	-21.89	70.92	34.19	12.53	65.53	0.00	105	0	Peak																																																																																																																																																																																																																																																																										
9	5370.00	48.51	74.00	-25.49	66.83	34.60	12.75	65.67	0.00	100	277	Peak																																																																																																																																																																																																																																																																										
10	5370.00	40.22	54.00	-13.78	58.54	34.60	12.75	65.67	0.00	100	277	Average																																																																																																																																																																																																																																																																										
11	7440.00	42.58	74.00	-31.42	56.76	35.80	15.21	65.19	0.00	--	--	PEAK																																																																																																																																																																																																																																																																										




1

LF


2400-2483.5\_Bluetooth-LE\_GSKF\_CH00\_2402MHz

Horizontal

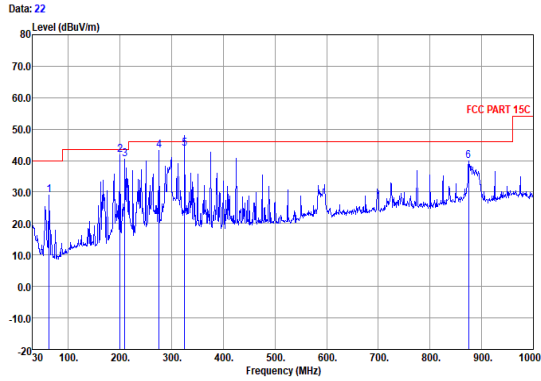

	Freq	Level	Over	Limit	ReadAntenna	Cable	Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB/m	cm	deg
1	62.9800	28.99	-11.01	40.00	48.80	11.77	1.12	-19.81	---	Peak
2 p	199.7500	41.87	-1.63	43.50	57.91	14.75	2.09	-16.04	---	Peak
3	209.4500	40.49	-3.01	43.50	56.41	14.91	2.09	-15.92	---	Peak
4	275.4100	43.21	-2.79	46.00	55.19	18.63	2.33	-11.98	---	Peak
5 q	324.8800	43.71	-2.29	46.00	54.50	19.47	2.65	-10.79	100	52 QP
6	874.8700	39.87	-6.13	46.00	39.08	29.13	4.37	0.79	---	Peak

Vertical

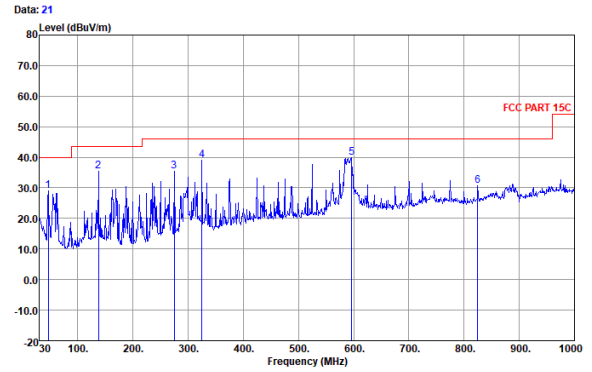

	Freq	Level	Over	Limit	ReadAntenna	Cable	Loss	Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB/m	cm	deg	
1	46.4900	29.10	-10.90	40.00	45.16	15.93	0.96	-16.06	---	Peak	
2	137.6700	35.50	-8.00	43.50	49.00	17.46	1.73	-13.50	---	Peak	
3	274.4400	35.53	-10.47	46.00	47.52	18.64	2.32	-11.99	---	Peak	
4	324.8800	38.98	-7.02	46.00	49.77	19.47	2.65	-10.79	---	Peak	
5 p	596.4800	39.90	-6.10	46.00	44.21	25.64	3.61	-4.31	---	Peak	
6	824.4301	30.68	-15.32	46.00	31.19	28.29	4.24	-0.51	---	Peak	





Mode		Co-Location mode																																																																																							
		Band Edge - L																																																																																							
		2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																							
Pol.	Horizontal	Fundamental																																																																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2370.58</td> <td>55.22</td> <td>74.00</td> <td>-18.78</td> <td>39.09</td> <td>32.34</td> <td>8.73</td> <td>30.94</td> <td>6.00</td> <td>250</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2370.58	55.22	74.00	-18.78	39.09	32.34	8.73	30.94	6.00	250	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>96.96</td> <td>-----</td> <td>-----</td> <td>80.68</td> <td>32.40</td> <td>8.81</td> <td>30.93</td> <td>6.00</td> <td>250</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>100.88</td> <td>-----</td> <td>-----</td> <td>84.57</td> <td>32.40</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>250</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2402.00	96.96	-----	-----	80.68	32.40	8.81	30.93	6.00	250	0	PEAK	2	2480.00	100.88	-----	-----	84.57	32.40	8.88	30.97	6.00	250	0	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	2370.58	55.22	74.00	-18.78	39.09	32.34	8.73	30.94	6.00	250	0	PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	2402.00	96.96	-----	-----	80.68	32.40	8.81	30.93	6.00	250	0	PEAK																																																																													
2	2480.00	100.88	-----	-----	84.57	32.40	8.88	30.97	6.00	250	0	Peak																																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.13</td> <td>43.37</td> <td>54.00</td> <td>-10.63</td> <td>27.15</td> <td>32.38</td> <td>8.77</td> <td>30.93</td> <td>6.00</td> <td>250</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2388.13	43.37	54.00	-10.63	27.15	32.38	8.77	30.93	6.00	250	0	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>95.91</td> <td>-----</td> <td>-----</td> <td>79.64</td> <td>32.40</td> <td>8.80</td> <td>30.93</td> <td>6.00</td> <td>250</td> <td>0</td> <td>AVERAGE</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>98.11</td> <td>-----</td> <td>-----</td> <td>81.80</td> <td>32.40</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>250</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2402.00	95.91	-----	-----	79.64	32.40	8.80	30.93	6.00	250	0	AVERAGE	2	2480.00	98.11	-----	-----	81.80	32.40	8.88	30.97	6.00	250	0	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	2388.13	43.37	54.00	-10.63	27.15	32.38	8.77	30.93	6.00	250	0	AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	2402.00	95.91	-----	-----	79.64	32.40	8.80	30.93	6.00	250	0	AVERAGE																																																																													
2	2480.00	98.11	-----	-----	81.80	32.40	8.88	30.97	6.00	250	0	Average																																																																													




Mode		Co-Location mode																																																																																															
		Band Edge - L																																																																																															
		2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																															
Pol.	Vertical	Fundamental																																																																																															
Peak	<p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. Shows a peak at 2402 MHz. FCC PART 15C limit line is at 74.00 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2377.34</td> <td>55.10</td> <td>74.00</td> <td>-18.90</td> <td>38.93</td> <td>32.35</td> <td>8.75</td> <td>30.93</td> <td>6.00</td> <td>112</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2377.34	55.10	74.00	-18.90	38.93	32.35	8.75	30.93	6.00	112	62	PEAK	<p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. Shows a peak at 2402 MHz. FCC PART 15C limit line is at 74.00 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>96.59</td> <td>-----</td> <td>-----</td> <td>80.31</td> <td>32.40</td> <td>8.81</td> <td>30.93</td> <td>6.00</td> <td>112</td> <td>62</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>101.51</td> <td>-----</td> <td>-----</td> <td>85.20</td> <td>32.40</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>112</td> <td>62</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	96.59	-----	-----	80.31	32.40	8.81	30.93	6.00	112	62	PEAK	2	2480.00	101.51	-----	-----	85.20	32.40	8.88	30.97	6.00	112	62	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2377.34	55.10	74.00	-18.90	38.93	32.35	8.75	30.93	6.00	112	62	PEAK																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2402.00	96.59	-----	-----	80.31	32.40	8.81	30.93	6.00	112	62	PEAK																																																																																					
2	2480.00	101.51	-----	-----	85.20	32.40	8.88	30.97	6.00	112	62	Peak																																																																																					
Avg	<p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization, Average. Shows a peak at 2402 MHz. FCC PART 15C (AVG) limit line is at 54.00 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.43</td> <td>43.40</td> <td>54.00</td> <td>-10.60</td> <td>27.18</td> <td>32.38</td> <td>8.77</td> <td>30.93</td> <td>6.00</td> <td>112</td> <td>62</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.43	43.40	54.00	-10.60	27.18	32.38	8.77	30.93	6.00	112	62	AVERAGE	<p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization, Average. Shows a peak at 2402 MHz. FCC PART 15C (AVG) limit line is at 54.00 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>95.50</td> <td>-----</td> <td>-----</td> <td>79.23</td> <td>32.40</td> <td>8.80</td> <td>30.93</td> <td>6.00</td> <td>112</td> <td>62</td> <td>AVERAGE</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>100.63</td> <td>-----</td> <td>-----</td> <td>84.32</td> <td>32.40</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>112</td> <td>62</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	95.50	-----	-----	79.23	32.40	8.80	30.93	6.00	112	62	AVERAGE	2	2480.00	100.63	-----	-----	84.32	32.40	8.88	30.97	6.00	112	62	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.43	43.40	54.00	-10.60	27.18	32.38	8.77	30.93	6.00	112	62	AVERAGE																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2402.00	95.50	-----	-----	79.23	32.40	8.80	30.93	6.00	112	62	AVERAGE																																																																																					
2	2480.00	100.63	-----	-----	84.32	32.40	8.88	30.97	6.00	112	62	Average																																																																																					



Mode		Co-Location mode																																																																																											
		Band Edge - L																																																																																											
		2400-2483.5_Zigbee_CH26_2480MHz																																																																																											
Pol.	Horizontal	Fundamental																																																																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>58.89</td> <td>74.00</td> <td>-15.11</td> <td>42.58</td> <td>32.40</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>161</td> <td>156</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2483.50	58.89	74.00	-15.11	42.58	32.40	8.88	30.97	6.00	161	156	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2404.00</td> <td>91.39</td> <td>-----</td> <td>75.11</td> <td>32.40</td> <td>8.81</td> <td>30.93</td> <td>6.00</td> <td>161</td> <td>156</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>100.07</td> <td>-----</td> <td>83.76</td> <td>32.40</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>161</td> <td>156</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2404.00	91.39	-----	75.11	32.40	8.81	30.93	6.00	161	156	Peak	2	2480.00	100.07	-----	83.76	32.40	8.88	30.97	6.00	161	156	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																					
1	2483.50	58.89	74.00	-15.11	42.58	32.40	8.88	30.97	6.00	161	156	PEAK																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																					
1	2404.00	91.39	-----	75.11	32.40	8.81	30.93	6.00	161	156	Peak																																																																																		
2	2480.00	100.07	-----	83.76	32.40	8.88	30.97	6.00	161	156	PEAK																																																																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>47.47</td> <td>54.00</td> <td>-6.53</td> <td>31.16</td> <td>32.40</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>161</td> <td>156</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2483.50	47.47	54.00	-6.53	31.16	32.40	8.88	30.97	6.00	161	156	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>90.24</td> <td>-----</td> <td>73.97</td> <td>32.40</td> <td>8.80</td> <td>30.93</td> <td>6.00</td> <td>161</td> <td>156</td> <td>Average</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>96.78</td> <td>-----</td> <td>80.47</td> <td>32.40</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>161</td> <td>156</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2402.00	90.24	-----	73.97	32.40	8.80	30.93	6.00	161	156	Average	2	2480.00	96.78	-----	80.47	32.40	8.88	30.97	6.00	161	156	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																					
1	2483.50	47.47	54.00	-6.53	31.16	32.40	8.88	30.97	6.00	161	156	AVERAGE																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																					
1	2402.00	90.24	-----	73.97	32.40	8.80	30.93	6.00	161	156	Average																																																																																		
2	2480.00	96.78	-----	80.47	32.40	8.88	30.97	6.00	161	156	AVERAGE																																																																																		



Mode		Co-Location mode																																																																																													
		Band Edge - L																																																																																													
		2400-2483.5_Zigbee_CH26_2480MHz																																																																																													
Pol.	Vertical	Fundamental																																																																																													
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>55.93</td> <td>74.00</td> <td>-18.07</td> <td>39.62</td> <td>32.40</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>300</td> <td>75</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	55.93	74.00	-18.07	39.62	32.40	8.88	30.97	6.00	300	75	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2404.00</td> <td>88.29</td> <td>-----</td> <td>72.01</td> <td>32.40</td> <td>8.81</td> <td>30.93</td> <td>6.00</td> <td>300</td> <td>75</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>95.05</td> <td>-----</td> <td>78.74</td> <td>32.40</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>300</td> <td>75</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	88.29	-----	72.01	32.40	8.81	30.93	6.00	300	75	Peak	2	2480.00	95.05	-----	78.74	32.40	8.88	30.97	6.00	300	75	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2483.50	55.93	74.00	-18.07	39.62	32.40	8.88	30.97	6.00	300	75	PEAK																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2404.00	88.29	-----	72.01	32.40	8.81	30.93	6.00	300	75	Peak																																																																																				
2	2480.00	95.05	-----	78.74	32.40	8.88	30.97	6.00	300	75	PEAK																																																																																				
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>44.95</td> <td>54.00</td> <td>-9.05</td> <td>28.64</td> <td>32.40</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>300</td> <td>75</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	44.95	54.00	-9.05	28.64	32.40	8.88	30.97	6.00	300	75	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>87.23</td> <td>-----</td> <td>70.96</td> <td>32.40</td> <td>8.80</td> <td>30.93</td> <td>6.00</td> <td>300</td> <td>75</td> <td>Average</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>91.76</td> <td>-----</td> <td>75.45</td> <td>32.40</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>300</td> <td>75</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	87.23	-----	70.96	32.40	8.80	30.93	6.00	300	75	Average	2	2480.00	91.76	-----	75.45	32.40	8.88	30.97	6.00	300	75	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2483.50	44.95	54.00	-9.05	28.64	32.40	8.88	30.97	6.00	300	75	AVERAGE																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2402.00	87.23	-----	70.96	32.40	8.80	30.93	6.00	300	75	Average																																																																																				
2	2480.00	91.76	-----	75.45	32.40	8.88	30.97	6.00	300	75	AVERAGE																																																																																				

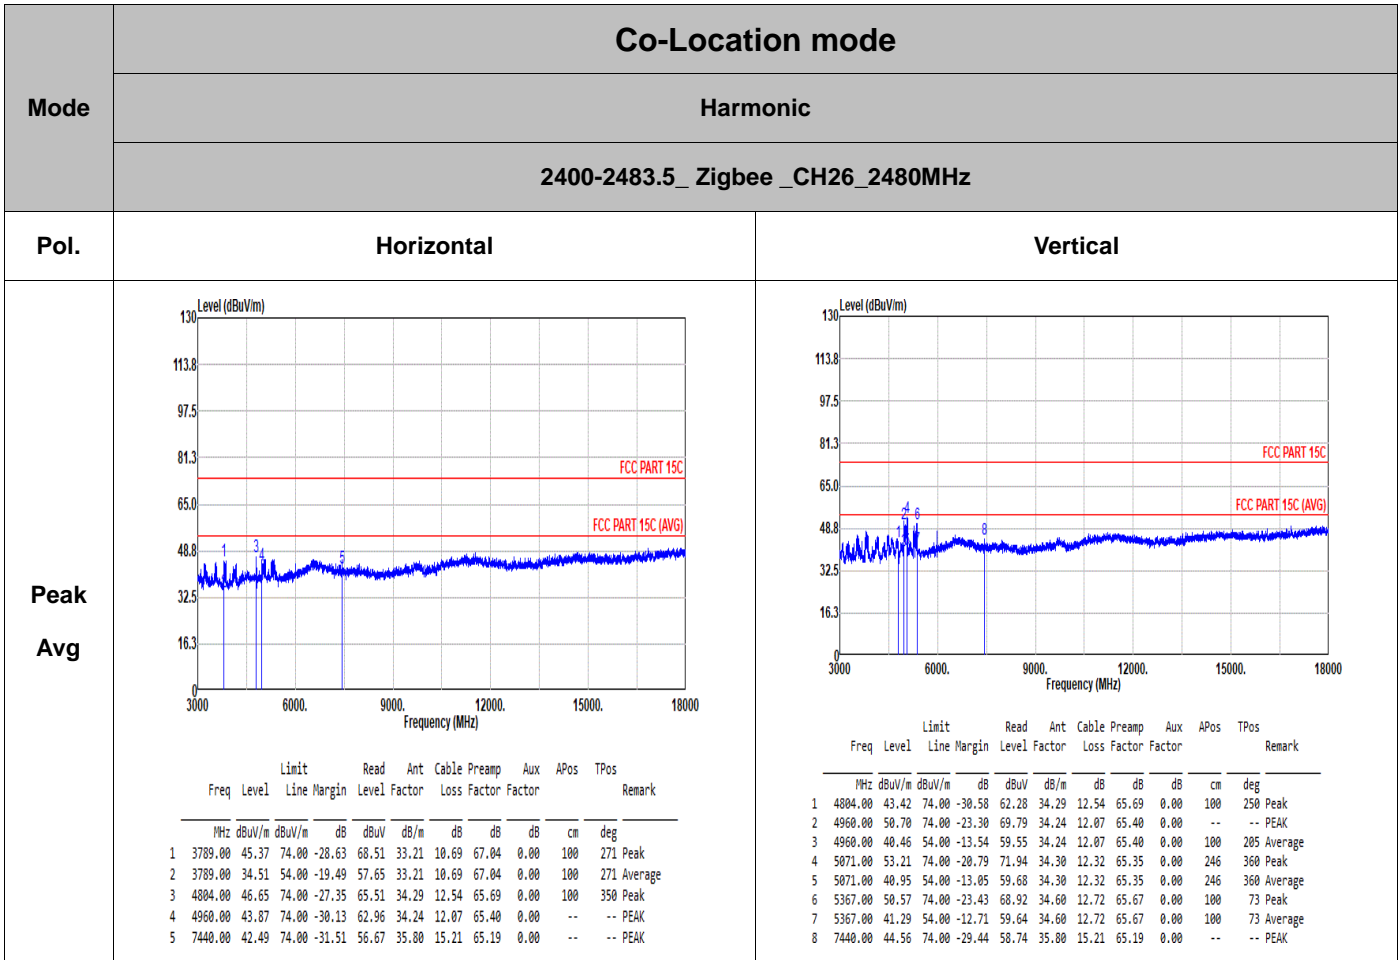




## Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	85.55	2.145	0.466	0.47kHz
Bluetooth LE 2Mbps	57.53	1.080	0.926	1kHz

### Bluetooth LE 1Mbps

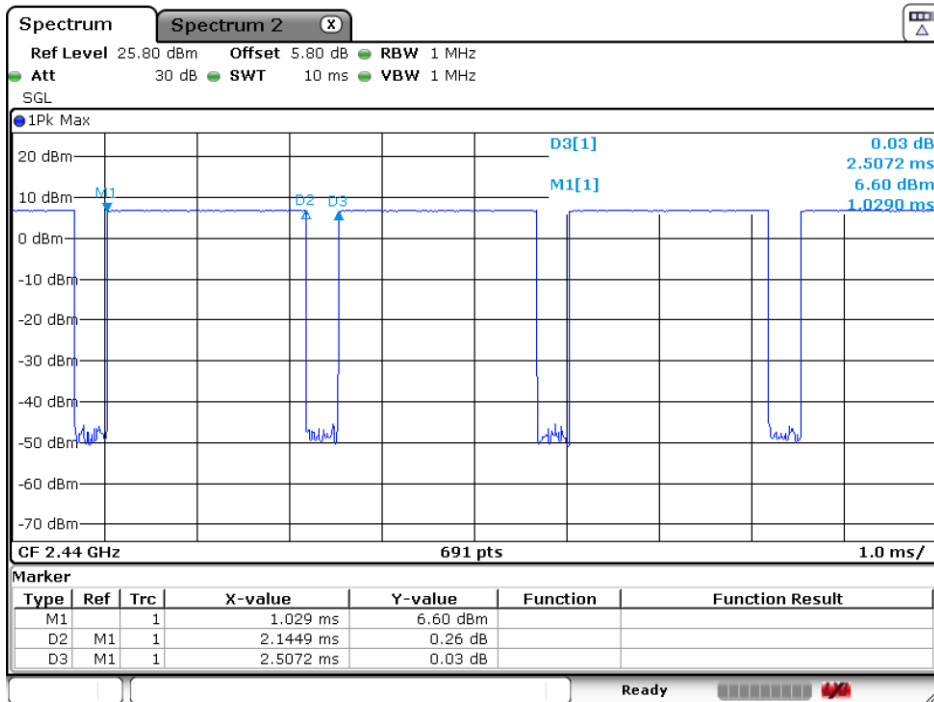



Bluetooth LE 2Mbps

