



FCC RADIO TEST REPORT

FCC ID : PY321100529
Equipment : Netgear 5G MHS Travel Router
Brand Name : Netgear
Model Name : MR6500
Applicant : Netgear Inc
350 E. Plumeria Drive, San Jose, CA
95134, United States
Manufacturer : Netgear Inc
350 E. Plumeria Drive, San Jose, CA
95134, United States
Standard : FCC 47 CFR Part 2, and 30

The product was received on Jan. 03, 2023 and testing was performed from Feb. 12, 2023 to Feb. 24, 2023. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures ANSI C63.26-2015 and has been in compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test	5
1.3 Modification of EUT	5
1.4 Testing Location	6
1.5 Applied Standards	6
2 Test Configuration of Equipment Under Test	7
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System	8
2.3 Support Unit used in test configuration	8
2.4 Measurement Results Explanation Example	8
2.5 Far Field Condition for Frequency above 18GHz.....	9
2.6 Frequency List of Low/Middle/High Channels.....	9
3 Radiated Test Items	10
3.1 Measuring Instruments.....	10
3.2 Test Setup	10
3.3 Test Result of Radiated Test.....	13
3.4 EIRP Measurement	14
3.5 Occupied Bandwidth	15
3.6 Radiated Spurious Emission Measurement.....	16
3.7 Frequency Stability Measurement.....	17
4 List of Measuring Equipment.....	18
5 Measurement Uncertainty	20
Appendix A. Test Results of Conducted and Radiated Test	
Appendix B. R&S Mixer and Horn Antenna Calibration Reports	
Appendix C. Test Lab Accreditation Scope	
Appendix D. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG190614-10	01	Initial issue of report	Mar. 21, 2023
FG190614-10	02	<ol style="list-style-type: none">1. Revise Testing Location note2. Add Test Lab Accreditation Scope3. This report is an updated version, replacing the report issued on Mar. 21, 2023.	Apr. 24, 2023



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Limit	Result (PASS/FAIL)	Remark
3.4	§2.1046 §30.202	EIRP Measurement	+43dBm	Pass	-
3.5	§2.1049	Occupied Bandwidth	Not Applicable	Reporting only	-
3.6	§2.1053 §30.203	Radiated Spurious Emission	-5dBm/MHz -13dBm/MHz	Pass	-
3.7	§2.1055	Frequency Stability for Temperature & Voltage	Within the band	Pass	-

Note: This is a variant report by SW updating FR2 4CC on n260. All the test cases were performed on original report which can be referred to Sporton Report Number FG190614K. Based on the original report, the test cases were verified.

Conformity Assessment Condition:
<ol style="list-style-type: none"> The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".
Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Avis Chuang

Report Producer: Lucy Wu



1 General Description

1.1 Feature of Equipment Under Test

LTE/5G NR, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, Wi-Fi 6GHz 802.11a/n/ac/ax, and GPS

Product Feature	
Antenna Type	WWAN: <Ant. 1>: Monopole Antenna <Ant. 2>: Monopole Antenna WLAN: <Ant. 3>: Monopole Antenna <Ant. 4>: Monopole Antenna GPS: PIFA Antenna

Remark: The above EUT's information is declared by manufacturer.

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Device Category in Part 30	Mobile station
Tx Frequency	NR band n260: 37GHz ~ 40GHz
Rx Frequency	NR band n260: 37GHz ~ 40GHz
Support Bandwidth	NR band n260: 50/100 MHz (1CC), 200 MHz (2CC), 300 MHz (3CC) and 400 MHz (4CC)
Maximum Number of contiguous CC	4
Maximum Aggregated Bandwidth	400MHz
Maximum Output Power (EIRP)	NR band n260: Module 0: 24.90 dBm Module 1: 25.06 dBm
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM

Remark: The above EUT's information is declared by manufacturer. Please refer to Disclaimer in report summary.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory			
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C) TEL: +886-3-327-0868 FAX: +886-3-327-0855			
Test Site Information	Site No.	Engineer	Temperature	Humidity
	03CH10-HY	Yu Wang	21.3~22.5°C	56.6~60.2%
	03CH18-HY	Eric Jeng and Yu Wang	20.5~23.7°C	58.6~61.3%

Note 1: FCC Designation No.: TW3786

Note 2: The highest accredited frequency is 280GHz.

Note 3: The test lab accreditation scope please refer appendix C, and the ISO 17025 accreditation letter can be found on TAF (Taiwan Accreditation Foundation) Website ([Website link](#)).

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR Part 2, 30
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 842590 D01 Upper Microwave Flexible Use Service v01r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

EUT has total 2 millimeter wave antenna modules and up to 2 beams operation for each module.

Any antenna module cannot transmit simultaneously with the other antenna modules.

Preliminary EIRP test was performed for all beam configurations in the anechoic chamber at the manufacturer’s facility so the EIRP worst case beam-pair were identified.

EIRP was investigated that the dual beam rated maximum EIRP is higher than single beam.

The NR radio operation is controlled via software tool QRCT FTM mode (Factory mode).

The EUT is forced to operate continuously (100% duty cycle) with maximum output power during the test.


2.1 Test Mode

For radiated measurement, the pre-scan is performed to find the worst cases EUT position.

Test Items	Band	Bandwidth (MHz)					Modulation				RB #			Test Channel		
		50	100	200	300	400	BPSK	QPSK	16QAM	64QAM	1	Inner Full	Outer Full	L	M	H
EIRP	n260			v	v	v	v	v	v	v	v	v	v	v	v	v
99% Occupied Bandwidth	n260			v	v	v	v	v	v	v	-	-	v	v	v	v
Out of Band Emission	n260			v	v	v	v	v	v	v	-	v	v	-	v	
Spurious Emission	n260			v	v	v	v	v	-	-	v	-	-	v	v	v
Frequency Stability	n260	CW tone											-	v	-	
Remark	<ol style="list-style-type: none"> The mark “v “ means that this configuration is chosen for testing. The device is investigated from 9kHz to 200GHz of fundamental signal for radiated spurious emission test under different RB size and modulations in exploratory test. Subsequently, only the worst case emissions are reported. Both modulation type DFT-s OFDM and CP-OFDM are evaluated and reported. The out of band emission were measured radiated EIRP. All the radiated test cases were performed with Adapter 2. 															

Note: EUT antenna gain information is not listed because all the measured results are radiated EIRP.

2.2 Connection Diagram of Test System

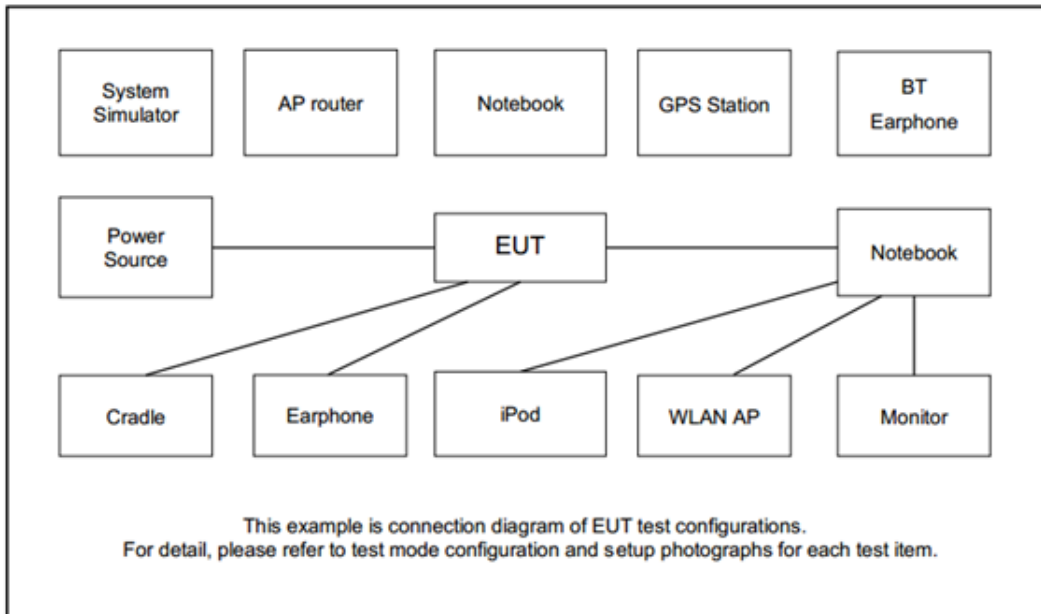

2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	USB Cable	Netgear	NA	NA	Unshielded,1m	NA
2.	Notebook	ACER	A515-54G-51QB	NA	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.4 Measurement Results Explanation Example

According to ANSI C63.26-2015 Section 5.2.7

$$EIRP \text{ (dBm)} = E \text{ (dBuV/m)} + 20\log(D) - 104.8.$$

- where D is the measurement distance (in the far field region) in m.
- $E \text{ (dBuV/m)} = \text{Spectrum Reading Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$

Hence, the spectrum analyzer *Offset* is derived including RF cable loss and antenna factor.

$$Offset = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$

The conversion loss of RF mixer is also included by the mixer table of spectrum analyzer when measurement frequency is above 40GHz.

Example :

$$\begin{aligned}
 Offset &= \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8 \\
 &= 42.3 + 3.0 + 107 + 20\log(1) - 104.8 \\
 &= 47.5 \text{ (dB)}
 \end{aligned}$$



2.5 Far Field Condition for Frequency above 18GHz

Horn Antenna	Frequency (GHz)	Antenna Dimension A (mm)	Wavelength (λ) (m)	Far field R (m) $\geq 2A^2 / \lambda$	Measurement Distance (D) (m)	Distance Factor $20\log(D)$ (dB)
BBHA 9170	18	60	0.0167	0.43	1	0.00
	40	60	0.0075	0.96		
QWH-UPRR00	40	48	0.0075	0.61	1	0.00
	60	48	0.0050	0.92		
QWH-EPRR00	60	31	0.0050	0.38	1	0.00
	90	31	0.0033	0.58		
QWH-FPRR00	90	21	0.0033	0.26	1	0.00
	140	21	0.0021	0.41		
QWH-GPRR00	140	15	0.0021	0.21	0.5	-6.02
	220	15	0.0014	0.33		

2.6 Frequency List of Low/Middle/High Channels

NR Band n260 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Frequency	37025	38500	39975
100	Frequency	37050	38500	39950
200	Frequency 1	37050	38450	39850
	Frequency 2	37150	38550	39950
300	Frequency 1	37050	38400	39750
	Frequency 2	37150	38500	39850
	Frequency 3	37250	38600	39950
400	Frequency 1	37050	38350	39650
	Frequency 2	37150	38450	39750
	Frequency 3	37250	38550	39850
	Frequency 4	37350	38650	39950


3 Radiated Test Items

3.1 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.2 Test Setup


For radiated emissions from 9kHz to 30MHz

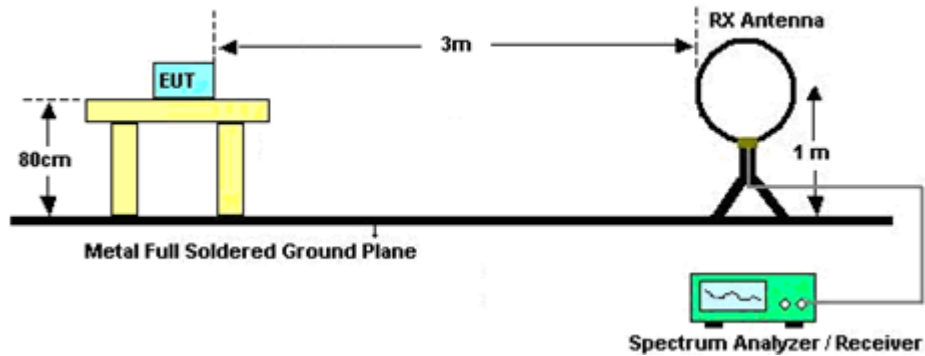


For radiated emissions from 30MHz to 1GHz

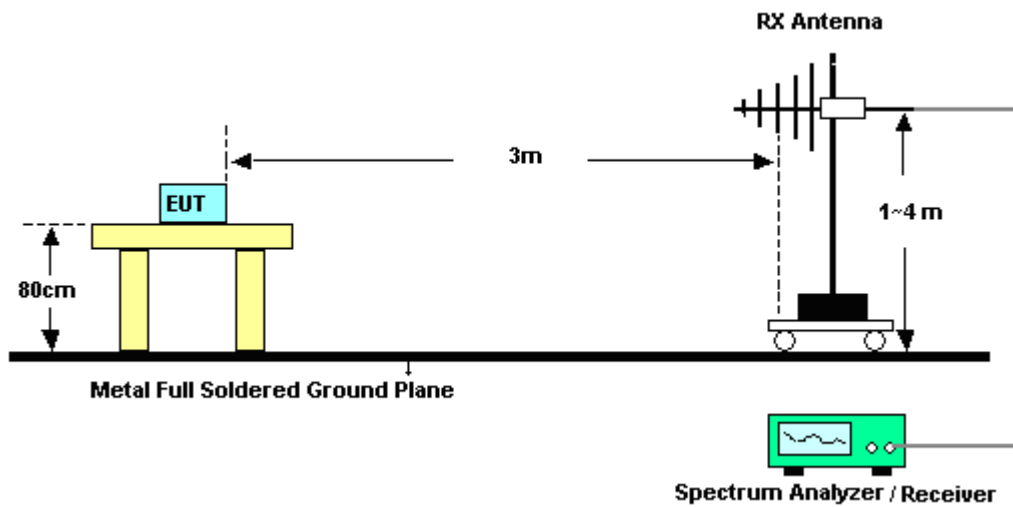


For radiated emissions 1GHz to 18GHz

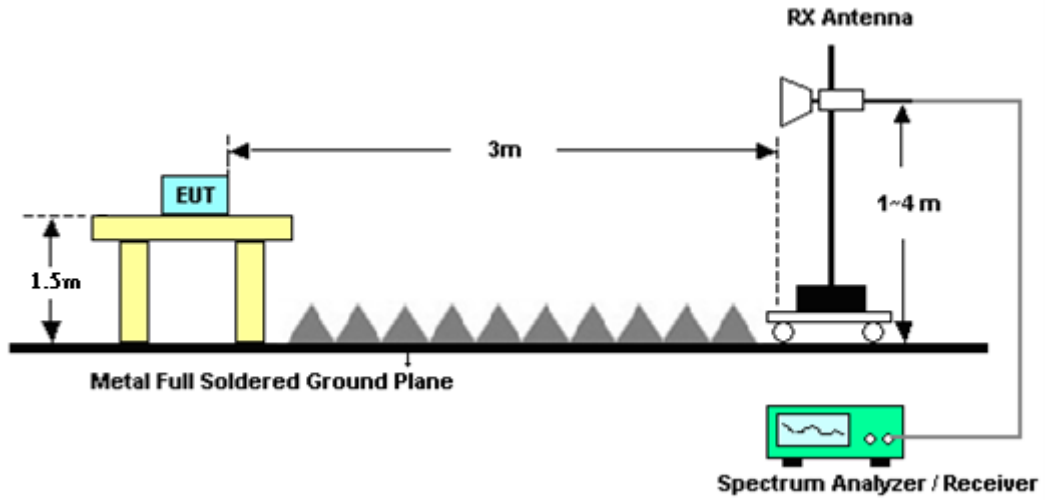


For radiated emissions from 18GHz to 40GHz

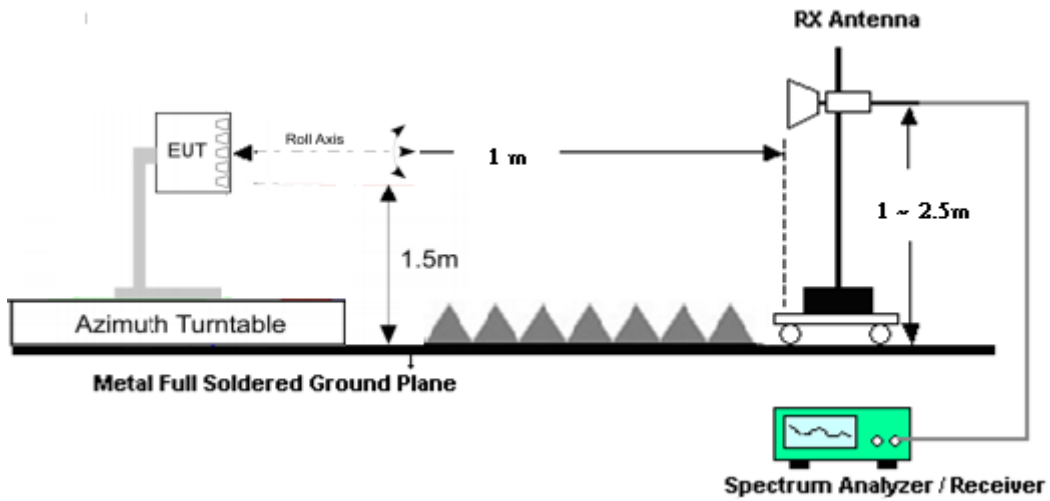


For radiated emissions above 40GHz up to 90GHz

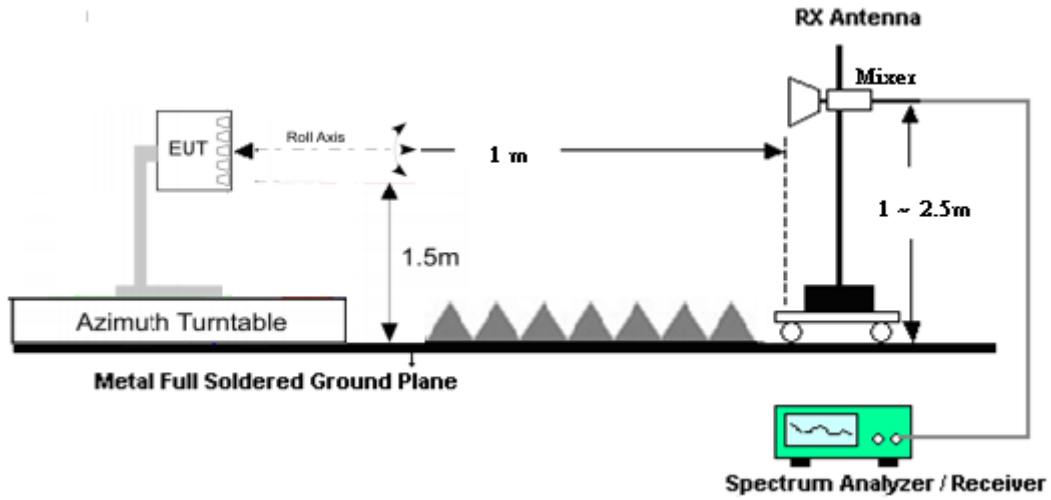

For radiated emissions above 90GHz up to 200GHz

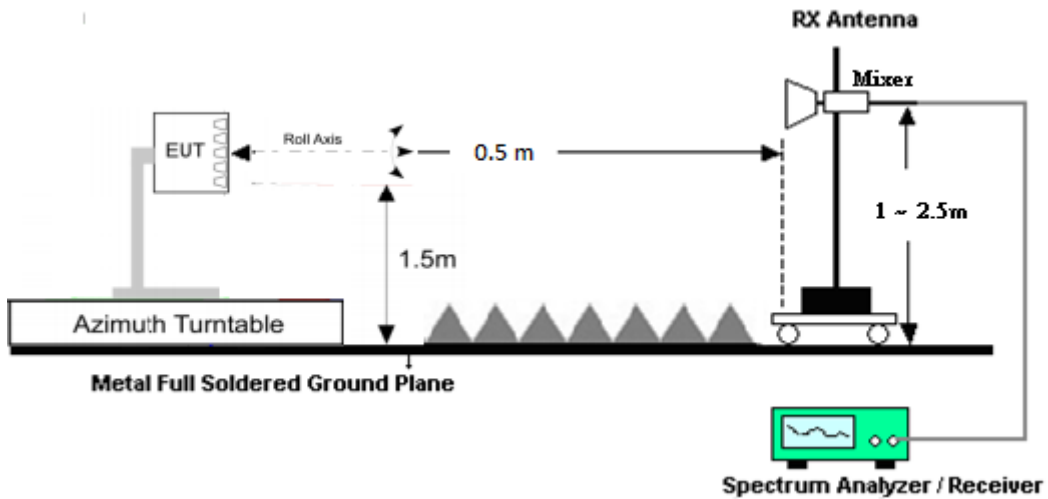

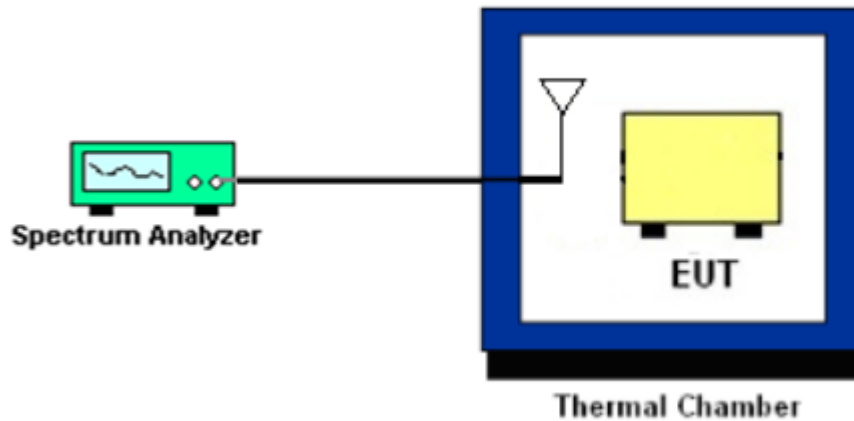Frequency stability Setup**3.3 Test Result of Radiated Test**

Please refer to Appendix A.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



3.4 EIRP Measurement

3.4.1 Description of EIRP Measurement

For mobile stations, the average power of the sum of all antenna elements is limited to a maximum EIRP of +43 dBm.

3.4.2 Test Procedures

1. Set EUT at maximum output power.
2. Select lowest, middle, and highest channels for each band and different modulation.
3. Enable channel power function of spectrum analyzer
4. Set frequency would like to be investigated.
5. Set Detector = RMS
6. Set Trace mode = trace average
7. Set Sweep time = auto couple
8. Set sweep points $\geq 2 \times \text{Span/RBW}$
9. Set sweep count 100 and wait until the trace to be stabilized
10. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
11. Measure and record the power level from the spectrum analyzer.
12. The test result is calculated according to

ANSI C63.26-2015 Section 5.2.7

$$\text{EIRP (dBm)} = E(\text{dBuV/m}) + 20\log(D) - 104.8.$$

where D is the measurement distance (in the far field region) in m.

$$E(\text{dBuV/m}) = \text{Spectrum Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$$

That is, set the spectrum offset including sum of

$$\text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$



3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

This is for reporting only.

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

3.5.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.4

1. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be at least 1.5 times the anticipated OBW.
2. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
3. Set the detection mode to peak, and the trace mode to max hold.
4. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.6 Radiated Spurious Emission Measurement

3.6.1 Description of Radiated Spurious Emission Measurement

The spectrum is scanned from 30 MHz up to 200GHz.

The conductive power or the total radiated power of any emission outside a licensee's frequency block shall be -13 dBm/MHz or lower. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be -5 dBm/MHz or lower.

3.6.2 Test Procedures

1. Set EUT at maximum output power..
2. Select lowest, middle, and highest channels for each band and different modulation.
3. Measure and record the power level from the spectrum analyzer.
4. Set frequency would like to be investigated.
5. Set Detector = RMS, Trace mode = trace average, sweep time = auto couple
6. Set sweep points $\geq 2 \times \text{Span}/\text{RBW}$, sweep count 100 and wait until the trace to be stabilized.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. For measurement frequency from 30MHz to 18GHz,
An antenna was substituted in place of the EUT and was driven by a signal generator.
Tune the output power of signal generator to the same emission level with EUT maximum spurious emission. Take record of output power and repeat for another polarization.
9. For measurement frequency above 18GHz, the test result is calculated according to ANSI C63.26-2015 Section 5.2.7 and 5.7.3 and 5.7.4
$$\text{EIRP (dBm)} = \text{E(dBuV/m)} + 20\log(D) - 104.8.$$
where D is the measurement distance (in the far field region) in m.
$$\text{E (dBuV/m)} = \text{Spectrum Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$$
That is, set the spectrum offset including sum of
$$\text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$
10. The conversion loss of RF mixer is also included in conversion loss table of the spectrum analyzer when measurement frequency is above 40GHz.
11. Two cut method is used to perform some spurious emissions where EIRP exceeds emission limit within 18-40GHz frequency range.



3.7 Frequency Stability Measurement

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.

1. The EUT was set up in the thermal chamber.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.

1. The EUT was placed in a temperature chamber at 20° C.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Amplifier	SONOMA	310N	187311	9kHz~1GHz	Oct. 19, 2022	Feb. 22, 2023	Oct. 18, 2023	Radiation (03CH10-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	35413 & 02	30MHz~1GHz	Nov. 06, 2022	Feb. 22, 2023	Nov. 05, 2023	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1325	1GHz~18GHz	Oct. 27, 2022	Feb. 22, 2023	Oct. 26, 2023	Radiation (03CH10-HY)
Preamplifier	Jet-Power	JAP00101800-30-10P	160118550004	1GHz~18GHz	Feb. 27, 2022	Feb. 22, 2023	Feb. 26, 2023	Radiation (03CH10-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 22, 2023	N/A	Radiation (03CH10-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Feb. 22, 2023	N/A	Radiation (03CH10-HY)
Turn Table	EMEC	TT 2200	N/A	0~360 Degree	N/A	Feb. 22, 2023	N/A	Radiation (03CH10-HY)
Software	Audix	E3 6.2009-8-24	RK-001042	N/A	N/A	Feb. 22, 2023	N/A	Radiation (03CH10-HY)
EMI Test Receiver	Keysight	N9038A	MY59053012	3Hz~26.5GHz	Nov. 18, 2022	Feb. 22, 2023	Nov. 17, 2023	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519226/2, 804014/2, 804026/2	30MHz~40GHz	Nov. 02, 2022	Feb. 22, 2023	Nov. 01, 2023	Radiation (03CH10-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170584	18GHz-40GHz	Dec. 14, 2022	Feb. 12, 2023~Feb. 23, 2023	Dec. 13, 2023	Radiation (03CH18-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV3044	101010	10Hz~44GHz	Nov. 24, 2021	Feb. 12, 2023~Feb. 23, 2023	Nov. 23, 2022	Radiation (03CH18-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV3044	101009	10Hz~44GHz	Nov. 22, 2022	Feb. 12, 2023~Feb. 24, 2023	Nov. 21, 2023	Radiation (03CH18-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801607/2	N/A	Nov. 29, 2022	Feb. 12, 2023~Feb. 24, 2023	Nov. 28, 2023	Radiation (03CH18-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801589/2	N/A	Nov. 29, 2022	Feb. 24, 2023	Nov. 28, 2023	Radiation (03CH18-HY)
Turn Table	EMEC	N/A	N/A	Phi/Theta 0~360 Degree	N/A	Feb. 12, 2023~Feb. 23, 2023	N/A	Radiation (03CH18-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table	N/A	Feb. 12, 2023~Feb. 23, 2023	N/A	Radiation (03CH18-HY)
Harmonic Mixer	Rohde & Schwarz	RPG FS-Z60	100986	40GHz to 60GHz	Apr. 09, 2021	Feb. 24, 2023	Apr. 08, 2024	Radiation (03CH18-HY)
Harmonic Mixer	Rohde & Schwarz	FSZ-90	101811	60GHz to 90GHz	Nov. 16, 2021	Feb. 24, 2023	Nov. 15, 2024	Radiation (03CH18-HY)
Harmonic Mixer	Rohde & Schwarz	RPG FS-Z140	101128	90GHz to 140GHz	Oct. 26, 2020	Feb. 24, 2023	Oct. 25, 2023	Radiation (03CH18-HY)
Harmonic Mixer	Rohde & Schwarz	RPG FS-Z220	101014	140GHz to 220GHz	Dec. 06, 2021	Feb. 24, 2023	Dec. 05, 2024	Radiation (03CH18-HY)
Antenna	Quinstar	QWH-UPRR00	1410300003	40-60 GHz	Jul. 06, 2021	Feb. 24, 2023	Jul. 05, 2024	Radiation (03CH18-HY)
Antenna	Quinstar	QWH-EPRR00	1372000000	60-90 GHz	Jul. 06, 2021	Feb. 24, 2023	Jul. 05, 2024	Radiation (03CH18-HY)
Antenna	Quinstar	QWH-FPRR00	1011500008	90-140 GHz	Jul. 06, 2021	Feb. 24, 2023	Jul. 05, 2024	Radiation (03CH18-HY)
Antenna	Quinstar	QWH-GPRR00	QWH-GPRR00-01	140-220 GHz	Jul. 06, 2021	Feb. 24, 2023	Jul. 05, 2024	Radiation (03CH18-HY)



Note 1: (*) Equipment manufacturer's Calibration Certificate.

Note 2: The Standard Gain Horn Antennas are calibrated by the ISO 17025 accredited test lab MWM Lab

<http://en.mwmlab.com/about>, a sub unit of Belarussian State University of Informatics and Radio electronics which is accredited by the Belarussian State Centre for Accreditation (BSCA). BSCA is the National accreditation body of the Republic of Belarus and an associated member of the International Laboratory Accreditation Cooperation (ILAC).

Note 3: The standard gain horn's critical dimensions is verified on an annual basis within the equipment specification according to KDB 842590 D01 v01r02 clause 2)a)2)iii).



5 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.33 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.44 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.41 dB
---	---------

Uncertainty of Radiated Emission Measurement (40 GHz ~ 140 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.64 dB
---	---------

Uncertainty of Radiated Emission Measurement (140 GHz ~ 200 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.62 dB
---	---------



Appendix A. Test Results of EIRP and Radiated Test

EIRP Power(Average power)

<Module 0>

NR Band n260 Module 0 AG0+1 (Beam ID: 31+159)					
Maximum Average EIRP [dBm]					
Lowest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	200	DFT-S	BPSK	22.27	24.35
	200	DFT-S	QPSK	22.61	24.41
	200	DFT-S	16QAM	21.82	22.97
	200	DFT-S	64QAM	20.84	20.53
	200	CP	QPSK	21.53	23.00
	300	DFT-S	BPSK	22.05	24.26
	300	DFT-S	QPSK	22.15	24.39
	300	DFT-S	16QAM	21.74	23.59
	300	DFT-S	64QAM	20.64	21.63
	300	CP	QPSK	21.46	23.72
	400	DFT-S	BPSK	22.77	24.90
	400	DFT-S	QPSK	22.13	24.75
	400	DFT-S	16QAM	21.71	23.42
	400	DFT-S	64QAM	21.52	21.32
400	CP	QPSK	22.60	23.31	

Note : The 200~400MHz BW is carrier aggregation by 2CC~4CC of 100MHz.




NR Band n260 Module 0 AG0+1 (Beam ID: 31+159)					
Maximum Average EIRP [dBm]					
Middle	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	200	DFT-S	BPSK	21.17	21.93
	200	DFT-S	QPSK	21.24	22.01
	200	DFT-S	16QAM	20.60	20.84
	200	DFT-S	64QAM	19.97	18.84
	200	CP	QPSK	20.95	21.39
	300	DFT-S	BPSK	21.3	22.45
	300	DFT-S	QPSK	21.38	22.54
	300	DFT-S	16QAM	20.79	21.24
	300	DFT-S	64QAM	19.92	19.29
	300	CP	QPSK	21.03	21.67
	400	DFT-S	BPSK	21.82	22.25
	400	DFT-S	QPSK	21.86	22.39
	400	DFT-S	16QAM	21.20	21.95
	400	DFT-S	64QAM	20.62	19.71
400	CP	QPSK	21.86	21.85	

Note : The 200~400MHz BW is carrier aggregation by 2CC~4CC of 100MHz.




NR Band n260 Module 0 AG0+1 (Beam ID: 31+159)					
Maximum Average EIRP [dBm]					
Highest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	200	DFT-S	BPSK	21.29	22.82
	200	DFT-S	QPSK	20.97	23.01
	200	DFT-S	16QAM	20.48	21.29
	200	DFT-S	64QAM	19.68	19.25
	200	CP	QPSK	20.90	21.42
	300	DFT-S	BPSK	20.11	22.39
	300	DFT-S	QPSK	20.57	22.72
	300	DFT-S	16QAM	19.87	21.10
	300	DFT-S	64QAM	18.79	19.08
	300	CP	QPSK	20.31	21.68
	400	DFT-S	BPSK	21.25	23.00
	400	DFT-S	QPSK	20.80	22.93
	400	DFT-S	16QAM	20.70	21.49
	400	DFT-S	64QAM	19.88	19.26
400	CP	QPSK	20.80	21.48	

Note : The 200~400MHz BW is carrier aggregation by 2CC~4CC of 100MHz.

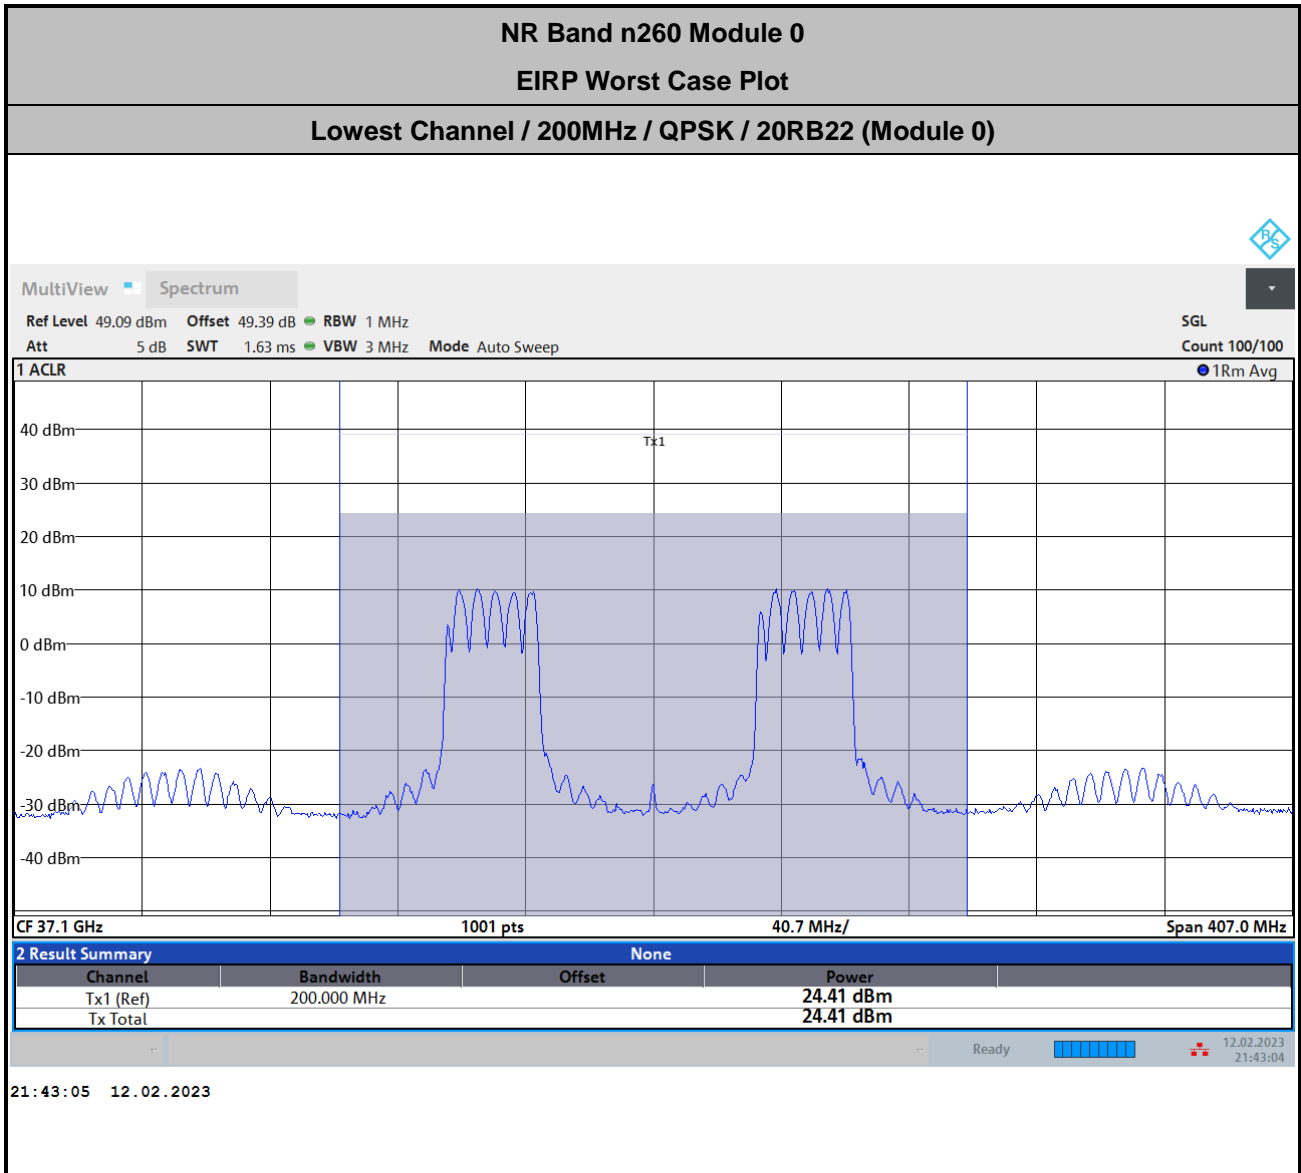


$$\text{Offset} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$

$$= 43.2 + 3.99 + 107 + 20\log(1) - 104.8 = 49.39 \text{ (dB)}$$

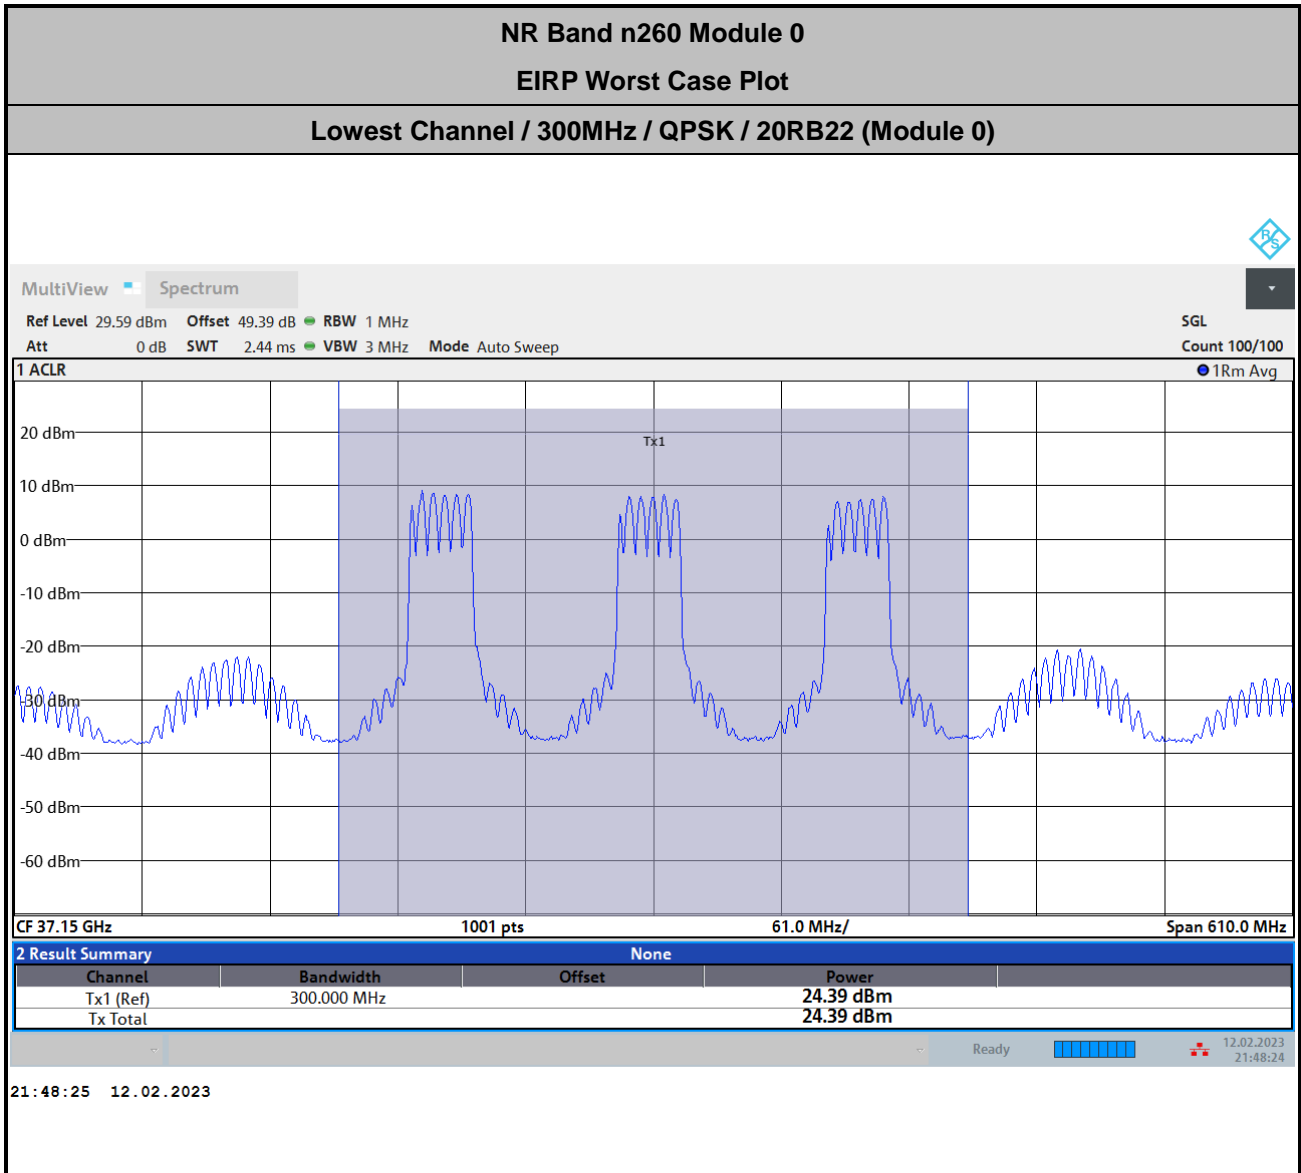

$$\text{Offset} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$

$$= 43.2 + 3.99 + 107 + 20\log(1) - 104.8 = 49.39 \text{ (dB)}$$

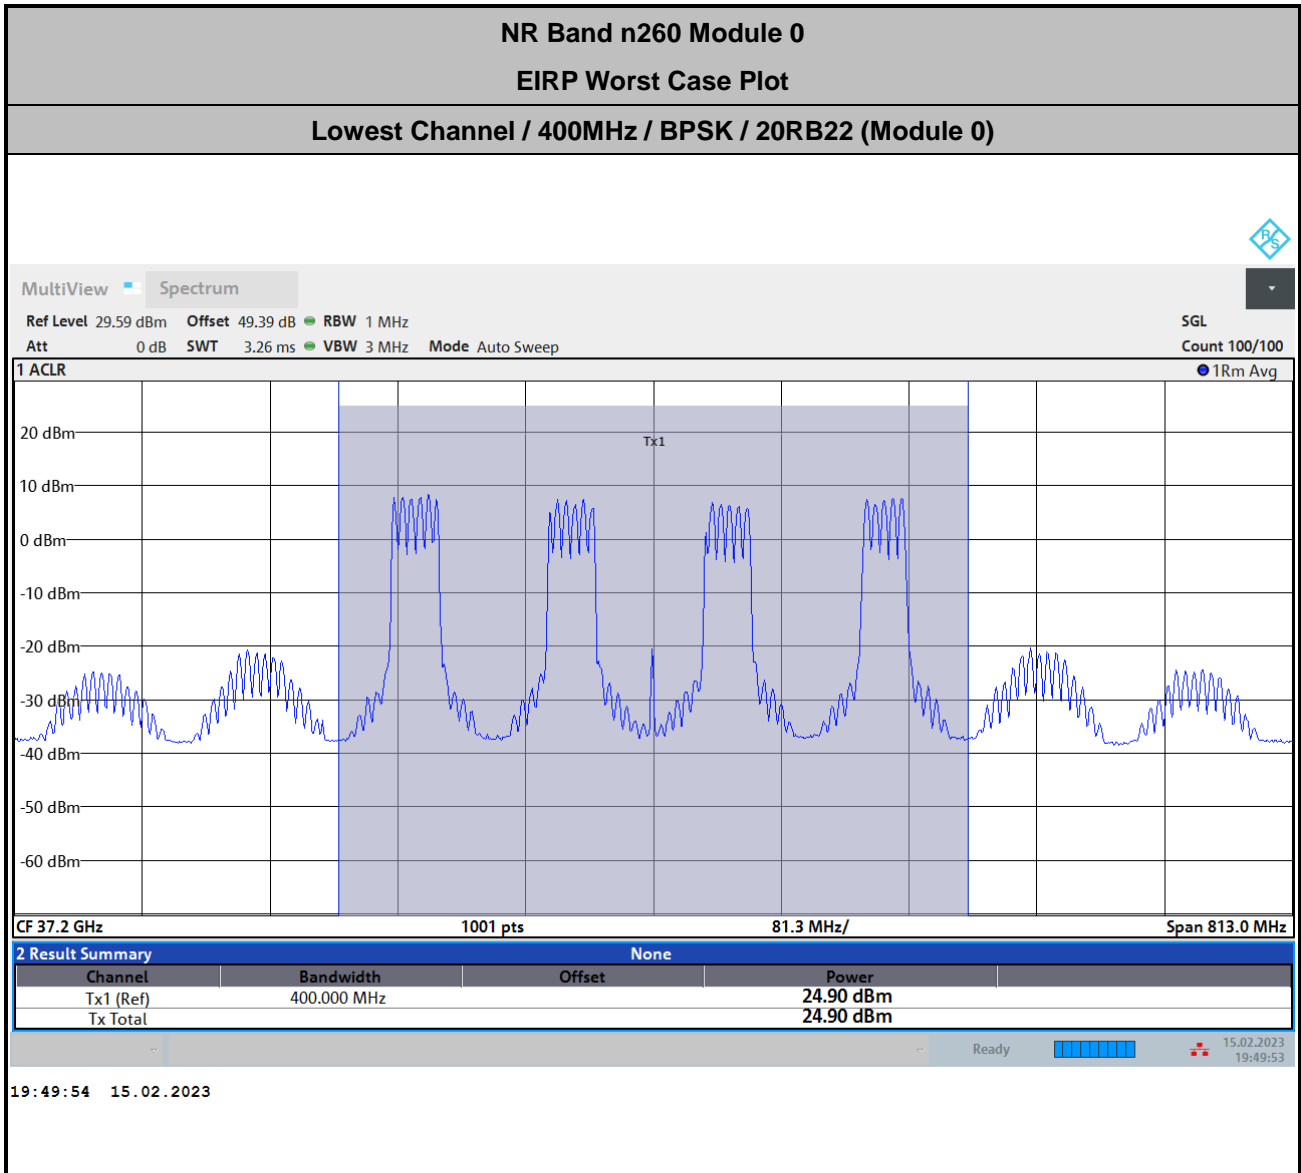

$$\text{Offset} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$

$$= 43.2 + 3.99 + 107 + 20\log(1) - 104.8 = 49.39 \text{ (dB)}$$



<Module 1>

NR Band n260 Module 1 AG0+1 (Beam ID: 36+164)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	200	DFT-S	BPSK	22.14	24.34
	200	DFT-S	QPSK	22.45	24.78
	200	DFT-S	16QAM	22.15	22.89
	200	DFT-S	64QAM	20.87	20.84
	200	CP	QPSK	21.62	20.48
	300	DFT-S	BPSK	21.86	24.8
	300	DFT-S	QPSK	22.86	24.86
	300	DFT-S	16QAM	22.24	23.54
	300	DFT-S	64QAM	20.78	21.32
	300	CP	QPSK	22.81	22.21
	400	DFT-S	BPSK	23.32	24.45
	400	DFT-S	QPSK	22.51	25.06
	400	DFT-S	16QAM	22.98	22.68
	400	DFT-S	64QAM	21.41	22.57
	400	CP	QPSK	23.55	23.01

Note : The 200~400MHz BW is carrier aggregation by 2CC~4CC of 100MHz.




NR Band n260 Module 1 AG0+1 (Beam ID: 36+164)					
Maximum Average EIRP [dBm]					
Middle	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	200	DFT-S	BPSK	20.97	23.68
	200	DFT-S	QPSK	21.05	23.41
	200	DFT-S	16QAM	20.96	22.12
	200	DFT-S	64QAM	19.96	20.20
	200	CP	QPSK	17.36	22.50
	300	DFT-S	BPSK	21.79	23.62
	300	DFT-S	QPSK	21.72	23.50
	300	DFT-S	16QAM	21.46	22.48
	300	DFT-S	64QAM	20.77	20.54
	300	CP	QPSK	21.62	22.35
	400	DFT-S	BPSK	21.60	23.83
	400	DFT-S	QPSK	20.77	23.77
	400	DFT-S	16QAM	19.17	22.29
	400	DFT-S	64QAM	19.04	20.21
400	CP	QPSK	22.28	22.38	

Note : The 200~400MHz BW is carrier aggregation by 2CC~4CC of 100MHz.




NR Band n260 Module 1 AG0+1 (Beam ID: 36+164)					
Maximum Average EIRP [dBm]					
Highest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	200	DFT-S	BPSK	23.21	23.28
	200	DFT-S	QPSK	23.38	23.42
	200	DFT-S	16QAM	23.09	21.76
	200	DFT-S	64QAM	21.95	19.69
	200	CP	QPSK	22.39	21.73
	300	DFT-S	BPSK	23.14	23.45
	300	DFT-S	QPSK	23.60	23.19
	300	DFT-S	16QAM	22.97	22.12
	300	DFT-S	64QAM	22.46	20.10
	300	CP	QPSK	22.34	21.83
	400	DFT-S	BPSK	21.47	23.51
	400	DFT-S	QPSK	23.61	23.35
	400	DFT-S	16QAM	21.73	22.00
	400	DFT-S	64QAM	20.22	20.07
400	CP	QPSK	21.73	22.03	

Note : The 200~400MHz BW is carrier aggregation by 2CC~4CC of 100MHz.

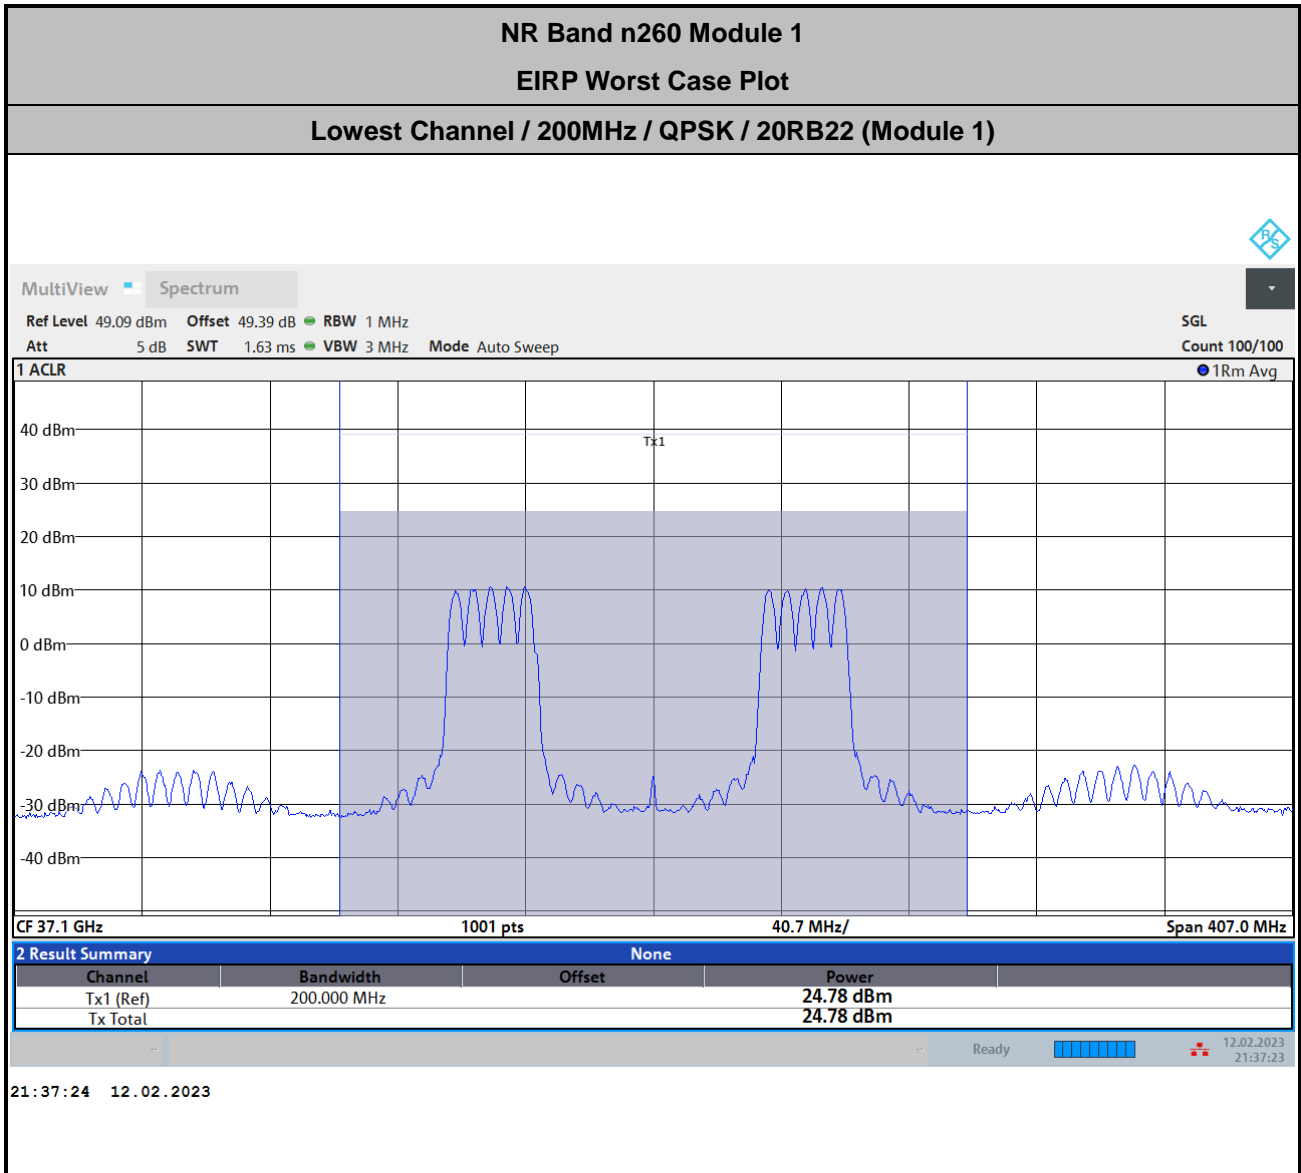


$$\text{Offset} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$

$$= 43.2 + 3.99 + 107 + 20\log(1) - 104.8 = 49.39 \text{ (dB)}$$

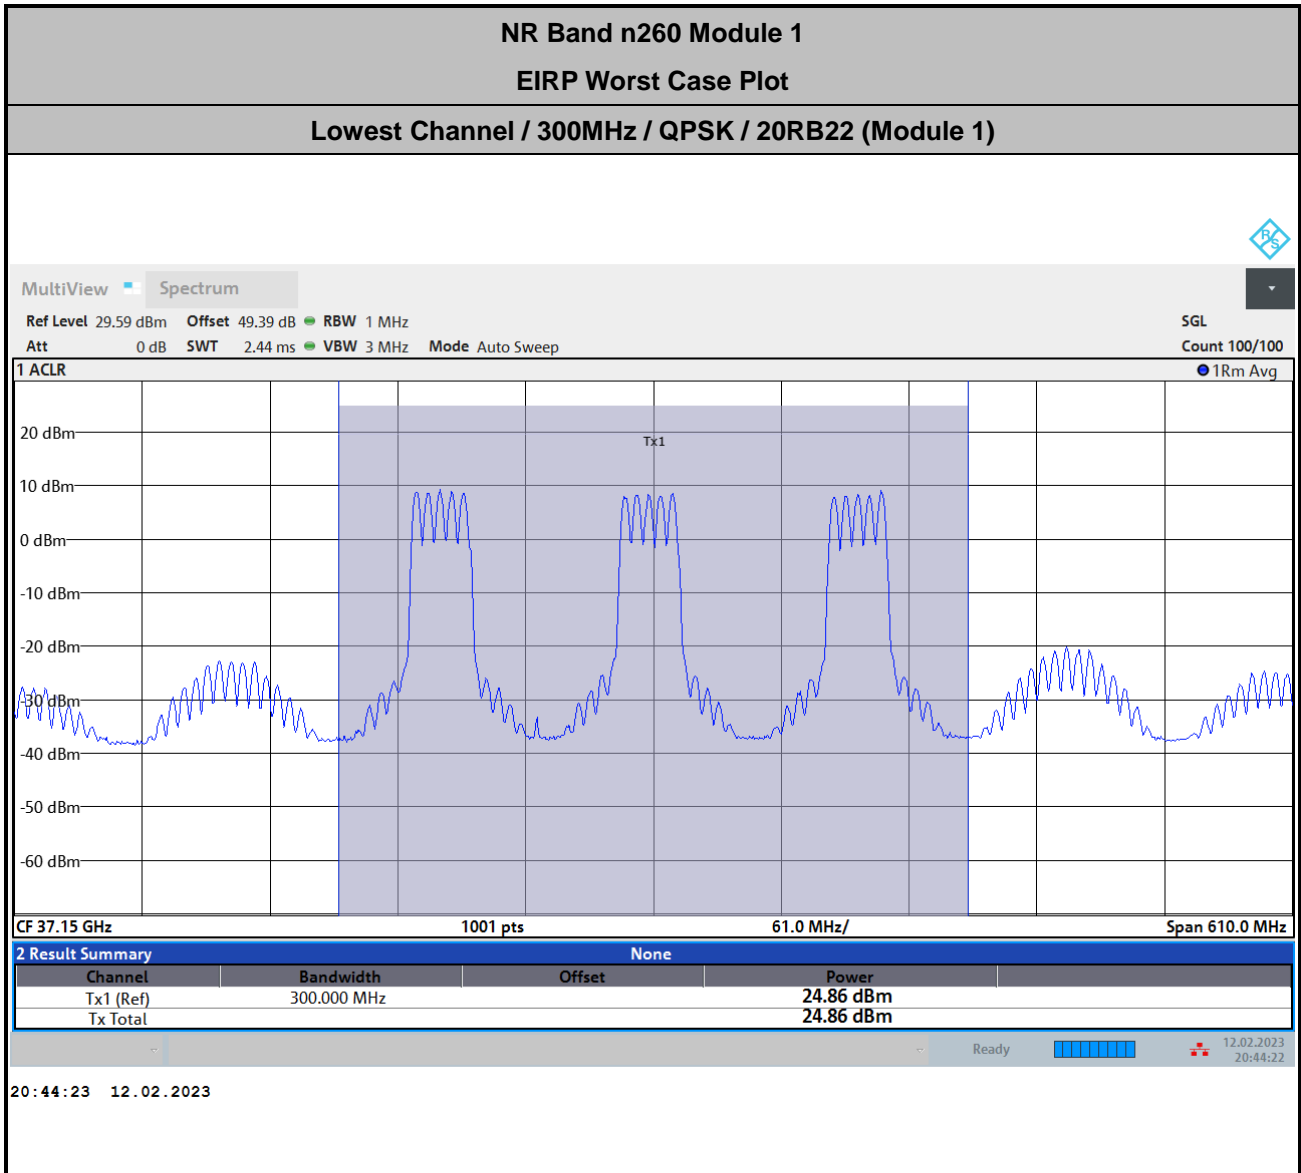

$$\text{Offset} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$

$$= 43.2 + 3.99 + 107 + 20\log(1) - 104.8 = 49.39 \text{ (dB)}$$

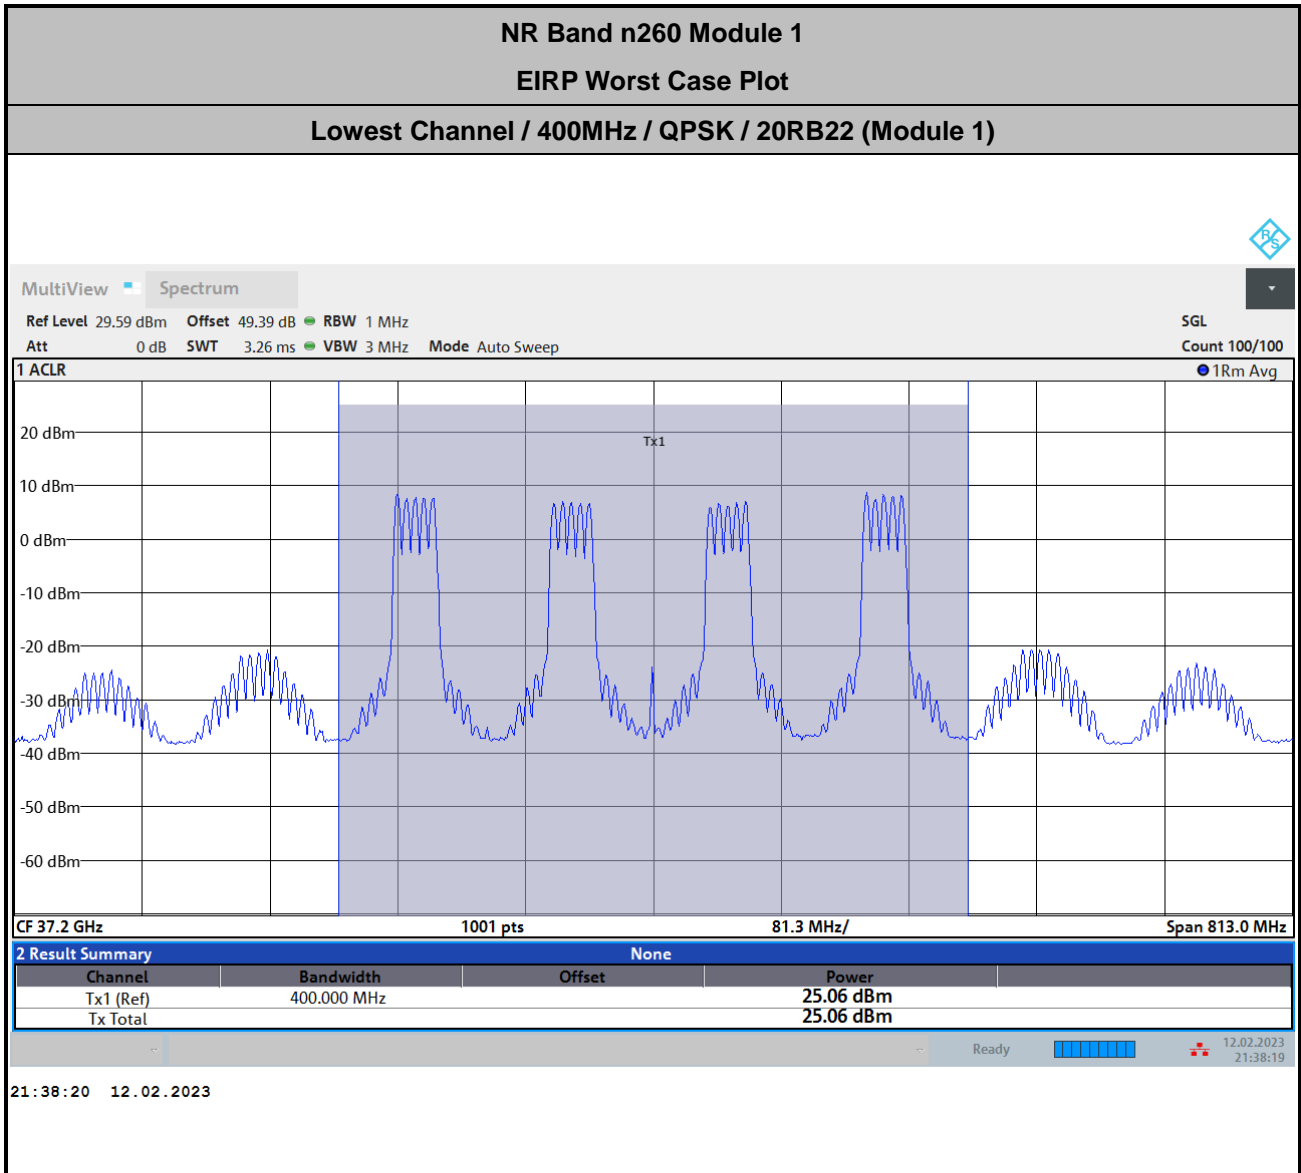

$$\text{Offset} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$

$$= 43.2 + 3.99 + 107 + 20\log(1) - 104.8 = 49.39 \text{ (dB)}$$



NR Band n260 Module 0 AG0+1

Occupied Bandwidth

Mode	DFT-s-OFDM Module 0 NR Band n260 : 99%OBW(MHz)											
BW	200MHz				300MHz				400MHz			
Mod.	BPSK	QPSK	16QAM	64QAM	BPSK	QPSK	16QAM	64QAM	BPSK	QPSK	16QAM	64QAM
Lowest CH	189.83	189.71	189.91	190.28	288.99	288.46	288.55	288.16	387.60	388.63	386.74	387.38
Middle CH	189.97	189.58	189.91	190.13	288.39	288.23	288.09	287.98	387.69	387.45	387.62	387.82
Highest CH	189.87	190.09	189.65	189.76	288.42	288.55	288.76	288.49	388.07	388.60	387.99	388.05


Mode	CP-OFDM Module 0 NR Band n260 : 99%OBW(MHz)					
BW	200MHz		300MHz		400MHz	
Mod.	QPSK		QPSK		QPSK	
Lowest CH	193.41		292.74		389.02	
Middle CH	193.05		292.15		390.52	
Highest CH	193.40		288.66		391.24	




DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 200MHz / BPSK

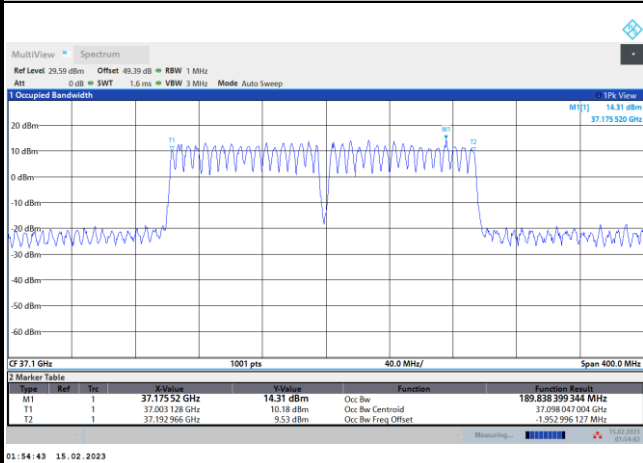


Lowest Channel / 200MHz / QPSK

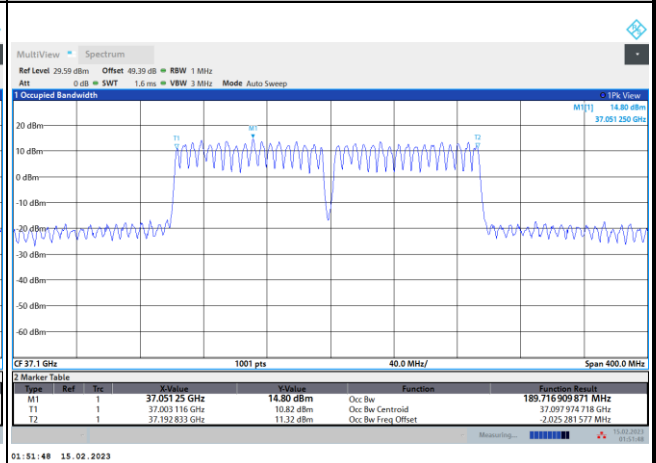


Middle Channel / 200MHz / BPSK

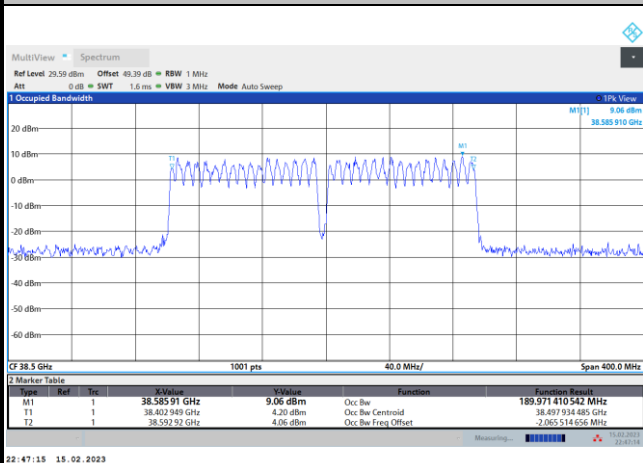


Middle Channel / 200MHz / QPSK

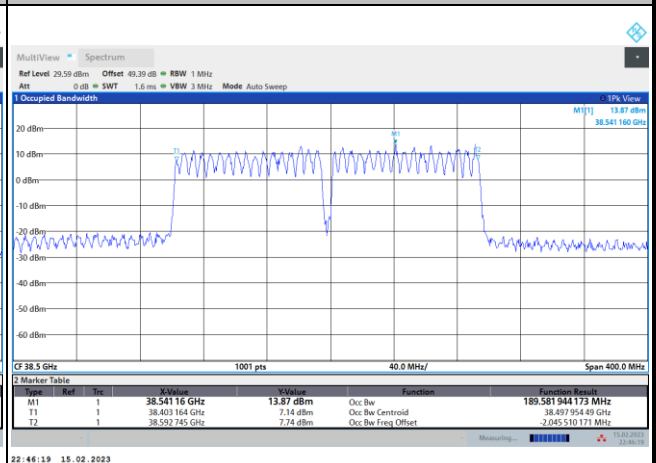

Highest Channel / 200MHz / BPSK

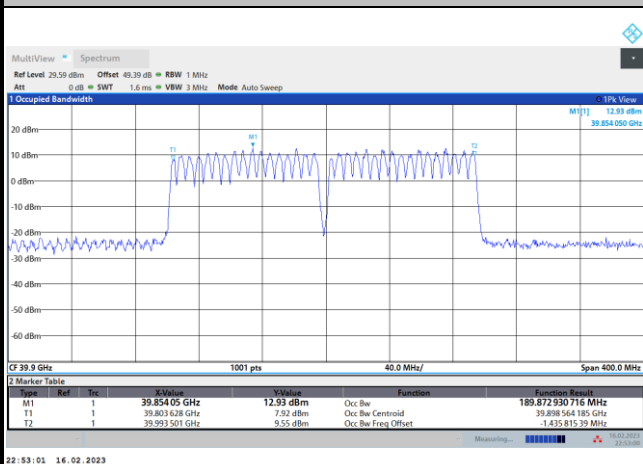

Highest Channel / 200MHz / QPSK

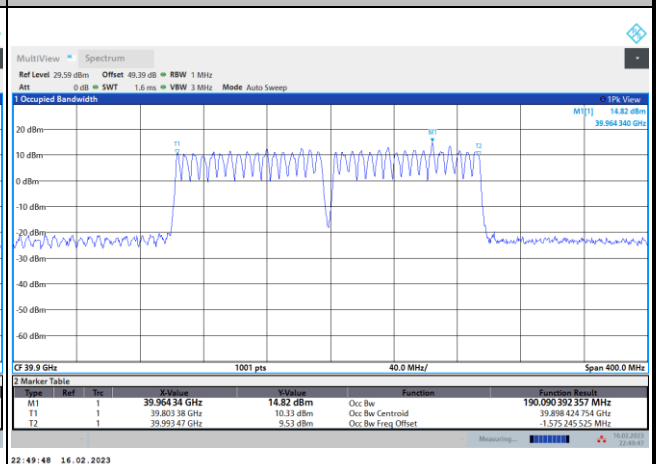





DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 200MHz / 16QAM

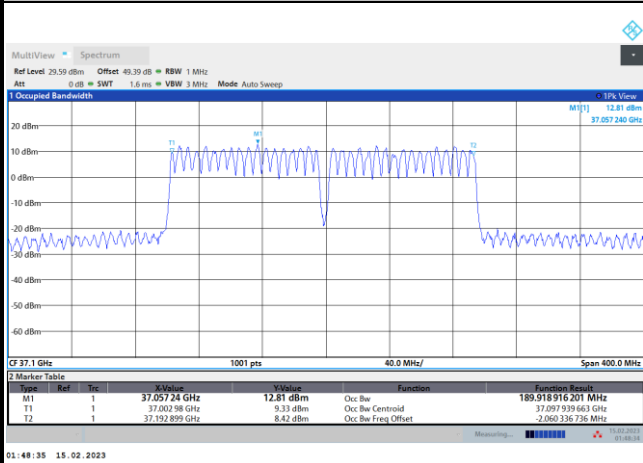


Lowest Channel / 200MHz / 64QAM

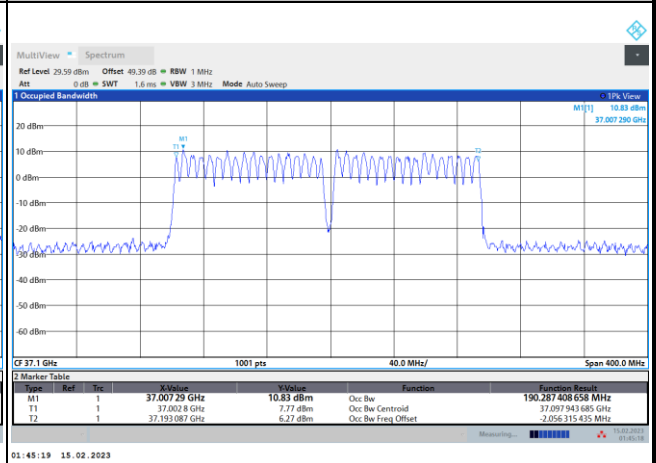


Middle Channel / 200MHz / 16QAM

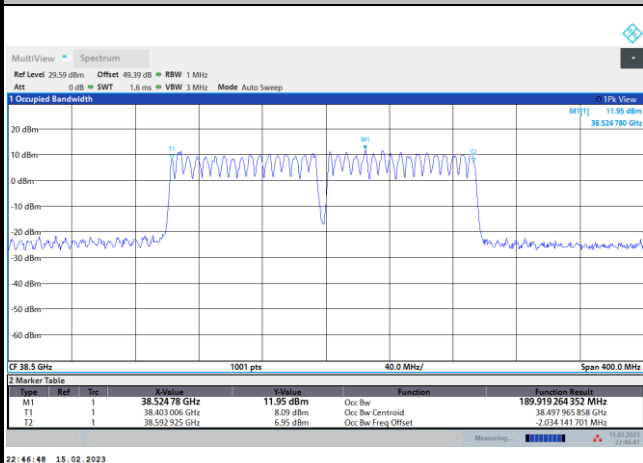


Middle Channel / 200MHz / 64QAM

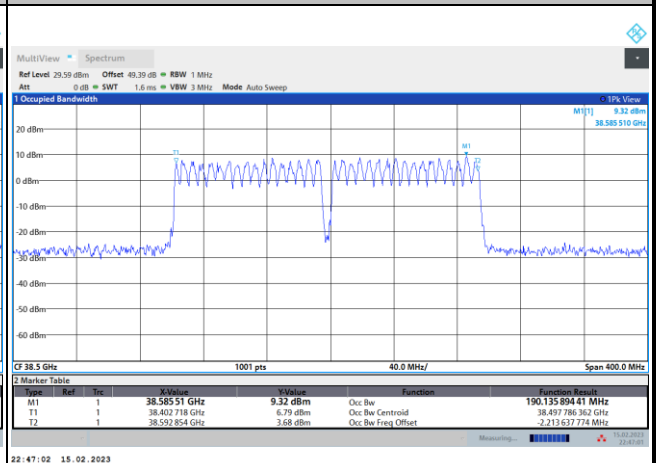

Highest Channel / 200MHz / 16QAM

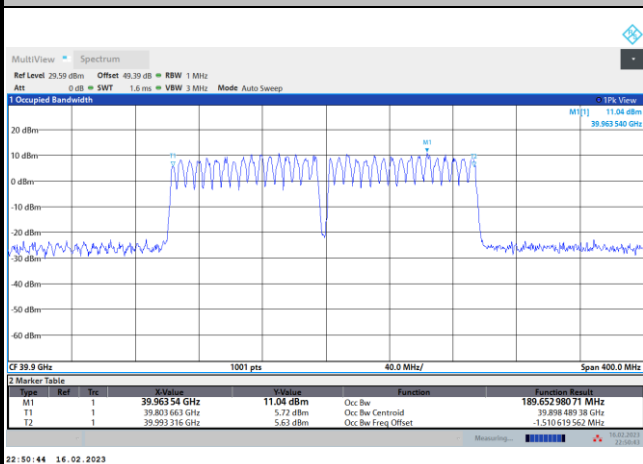

Highest Channel / 200MHz / 64QAM

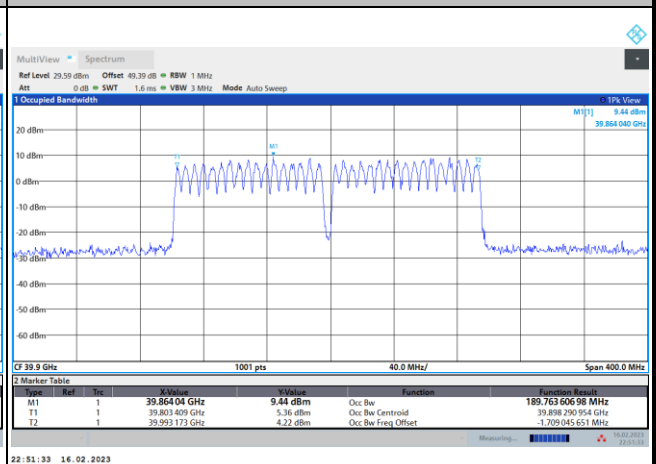





DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 300MHz / BPSK

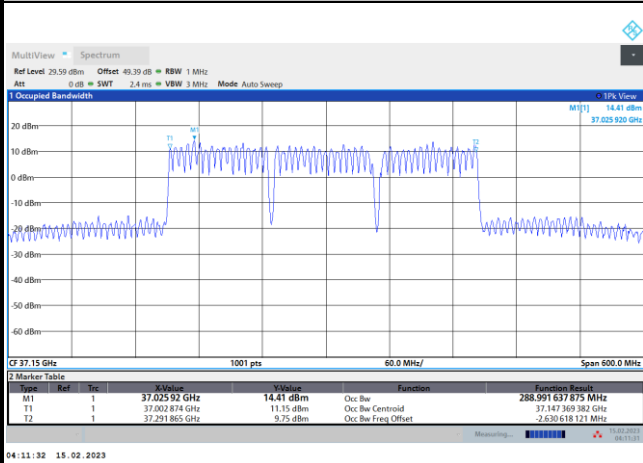


Lowest Channel / 300MHz / QPSK

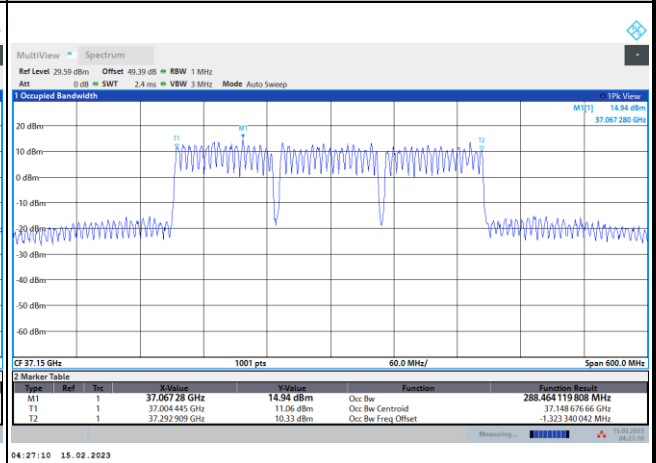


Middle Channel / 300MHz / BPSK

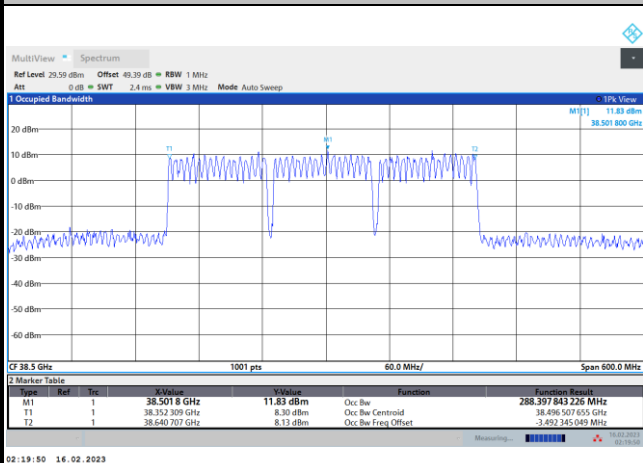


Middle Channel / 300MHz / QPSK

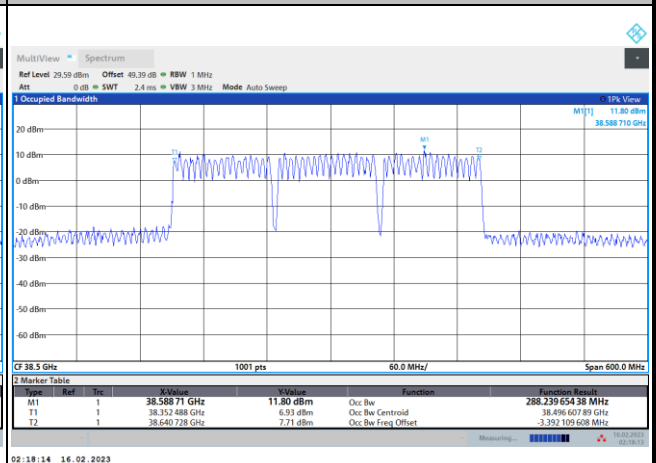

Highest Channel / 300MHz / BPSK

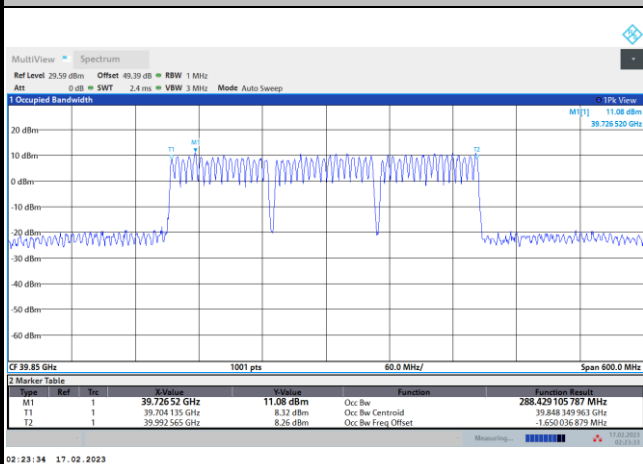

Highest Channel / 300MHz / QPSK

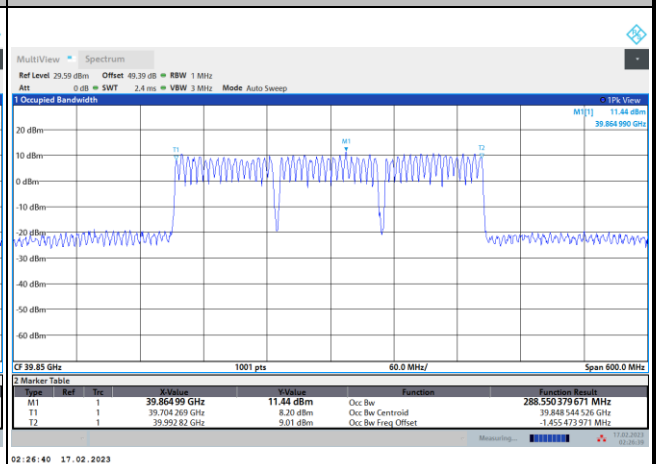





DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 300MHz / 16QAM

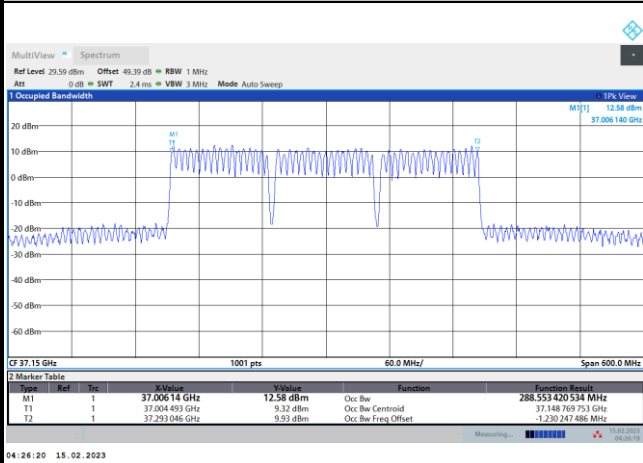


Lowest Channel / 300MHz / 64QAM

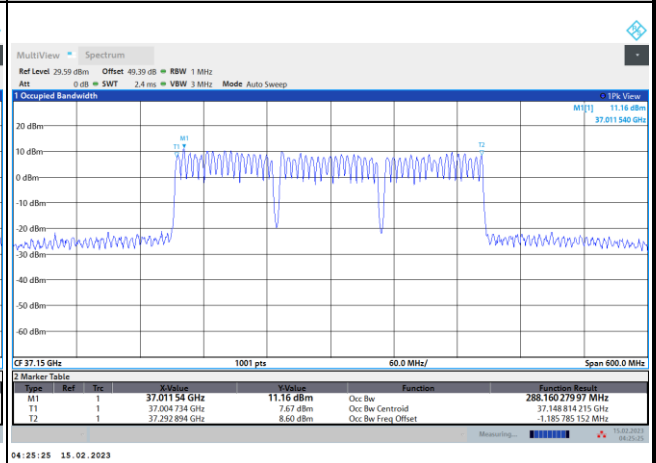


Middle Channel / 300MHz / 16QAM

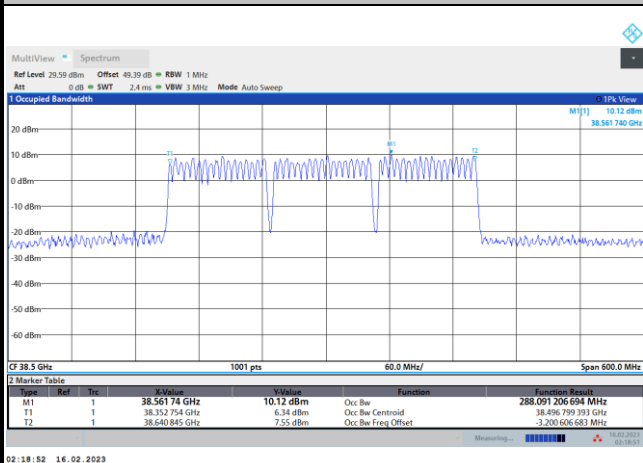


Middle Channel / 300MHz / 64QAM

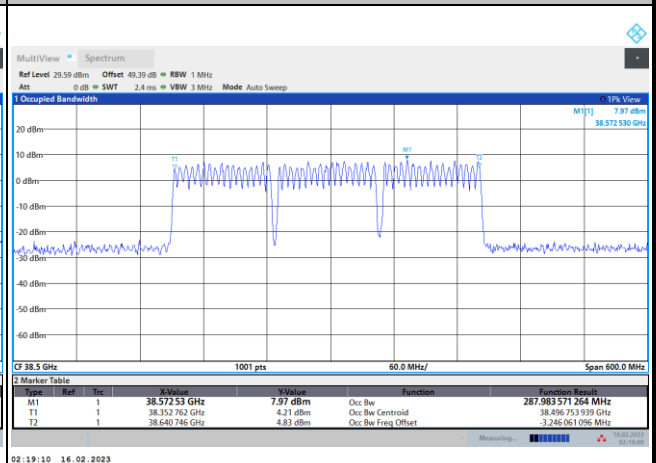

Highest Channel / 300MHz / 16QAM

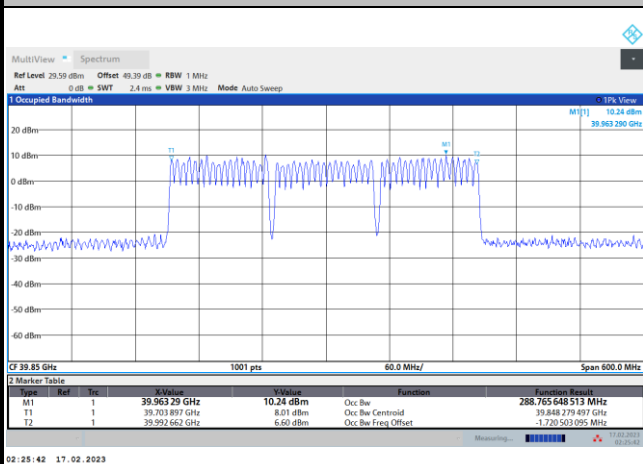

Highest Channel / 300MHz / 64QAM

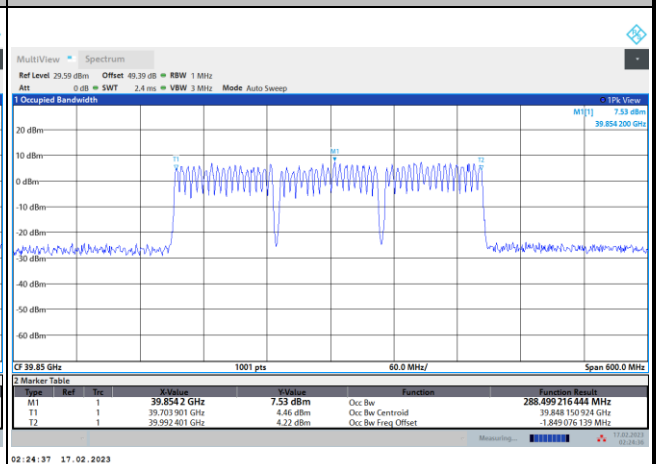





DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 400MHz / BPSK

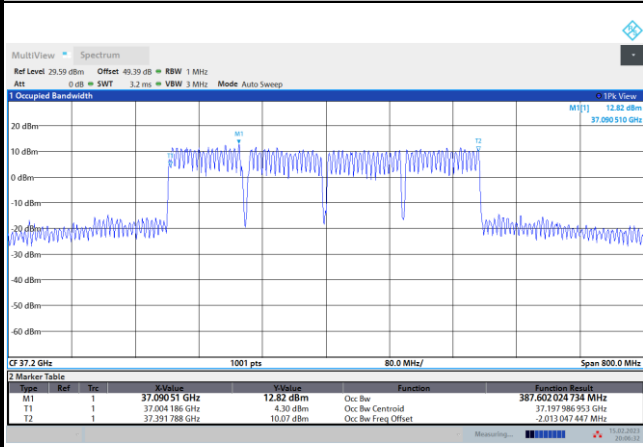


Lowest Channel / 400MHz / QPSK

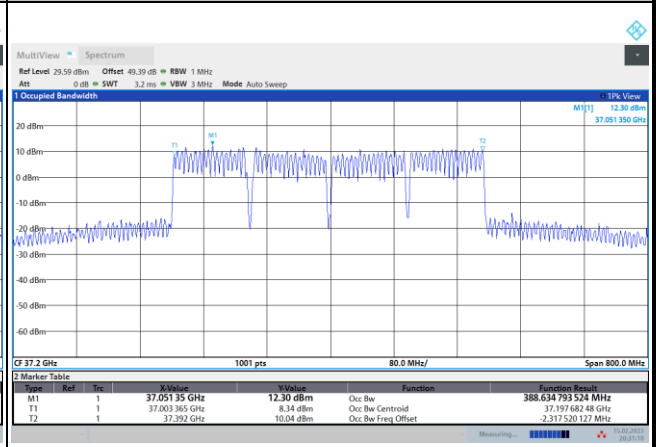


Middle Channel / 400MHz / BPSK

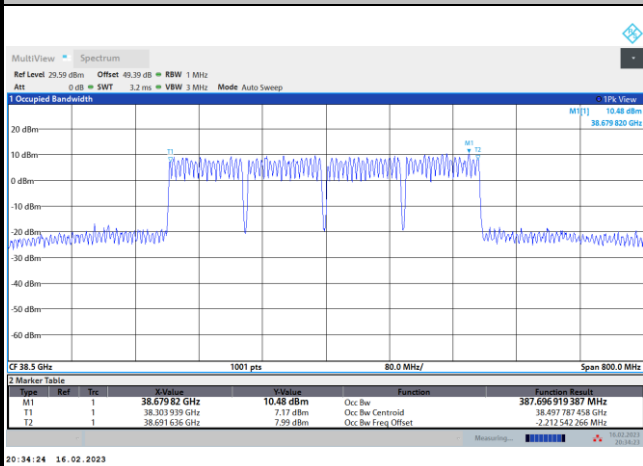


Middle Channel / 400MHz / QPSK

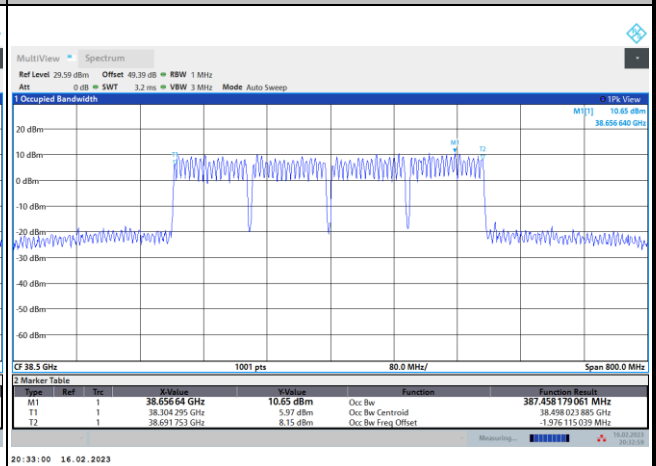

Highest Channel / 400MHz / BPSK

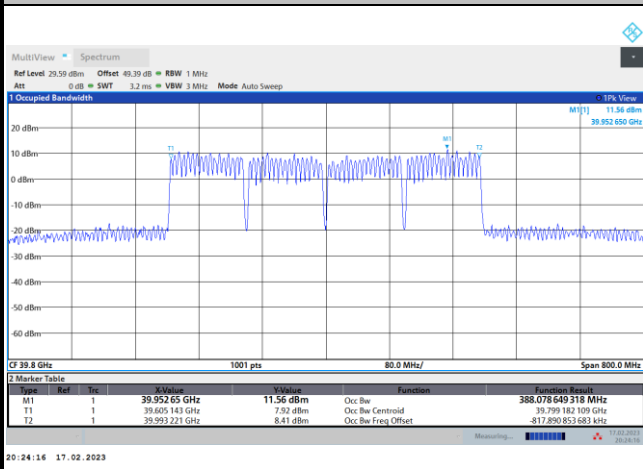


Highest Channel / 400MHz / QPSK

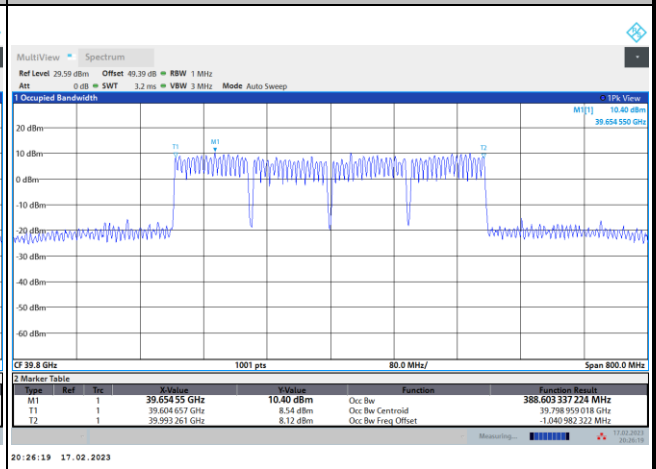



DFT-s-OFDM Module 0

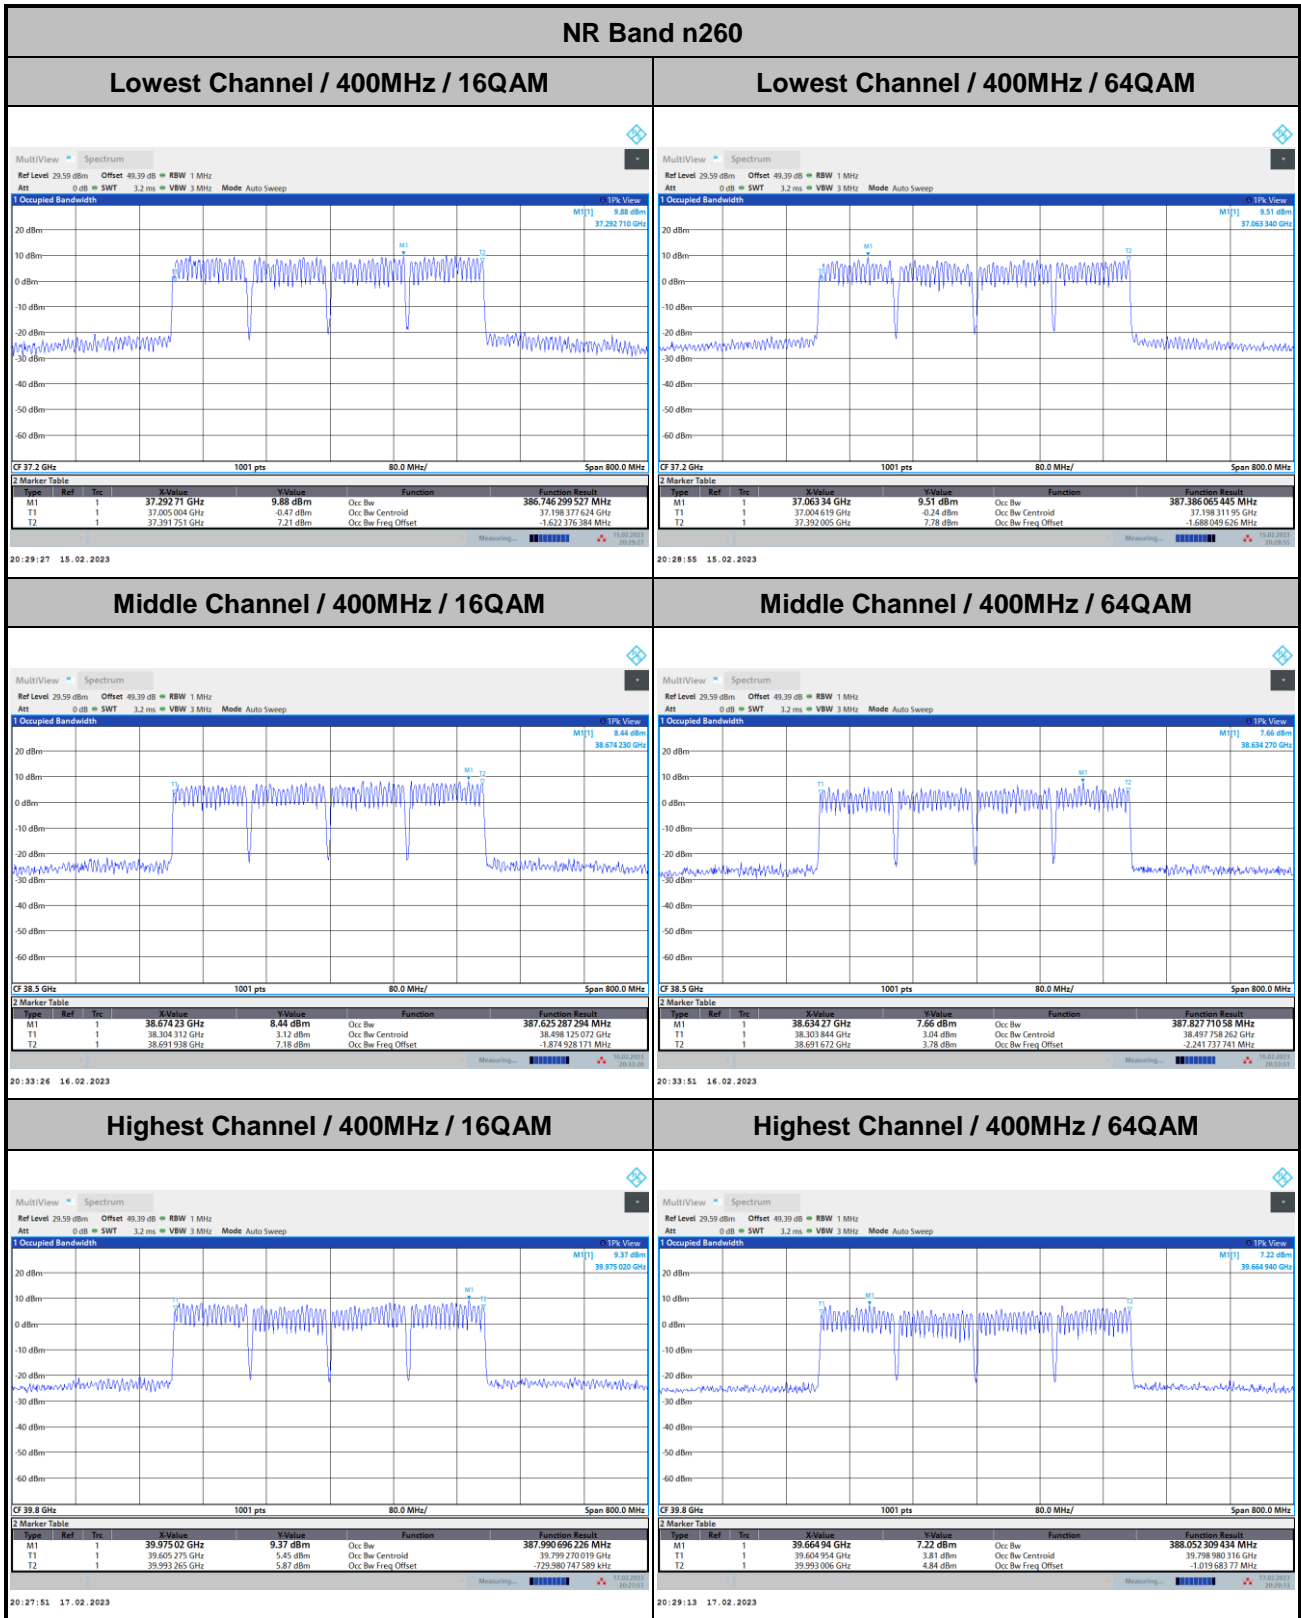





CP-OFDM Module 0

NR Band n260


Lowest Channel / 200MHz / QPSK

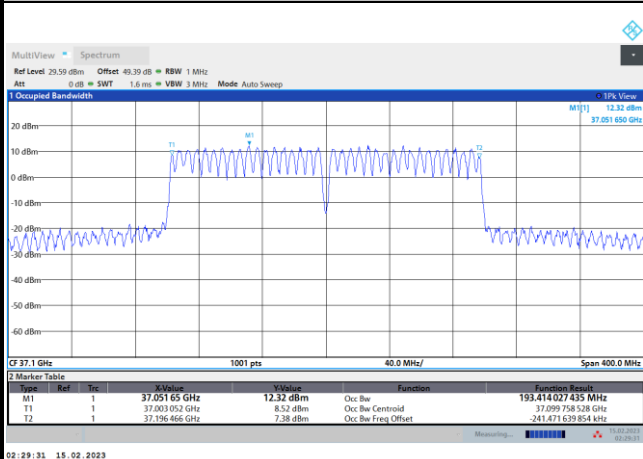


Lowest Channel / 300MHz / QPSK

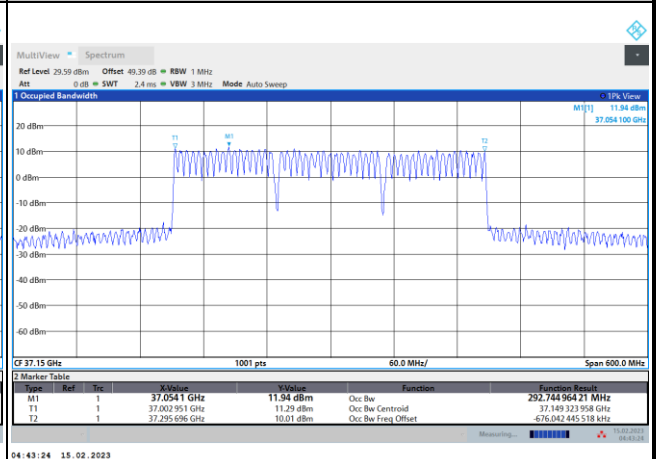


Middle Channel / 200MHz / QPSK

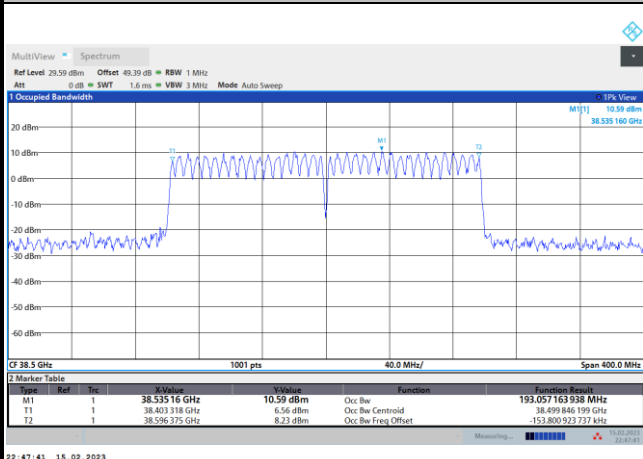


Middle Channel / 300MHz / QPSK

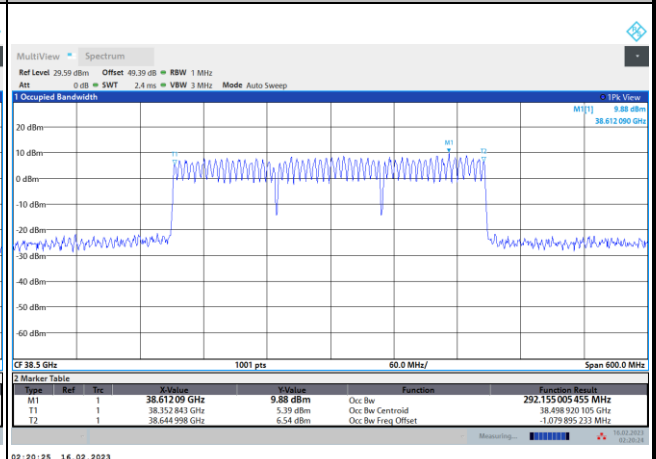

Highest Channel / 200MHz / QPSK

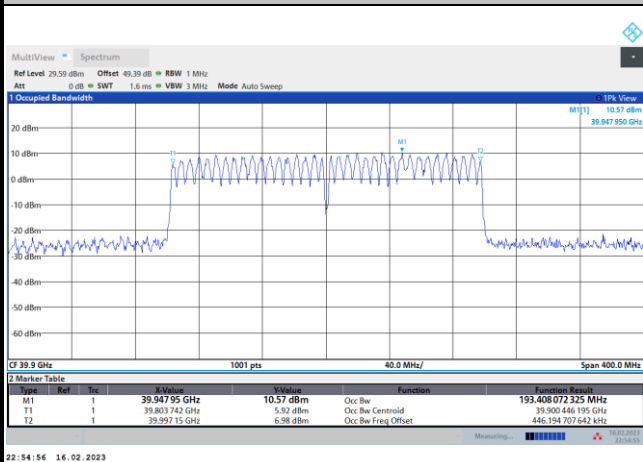

Highest Channel / 300MHz / QPSK

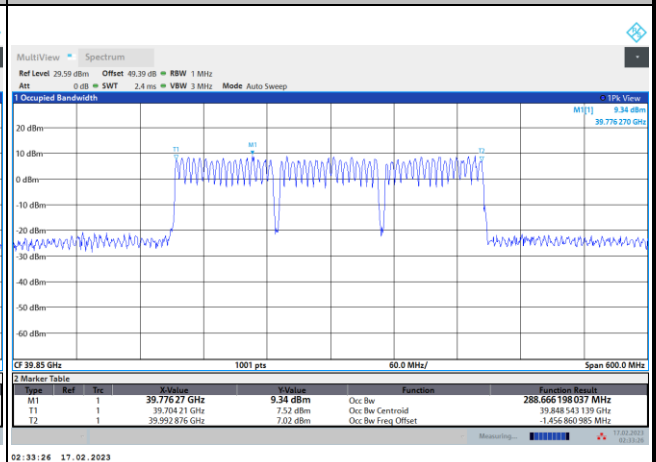




CP-OFDM Module 0


NR Band n260

Lowest Channel / 400MHz / QPSK

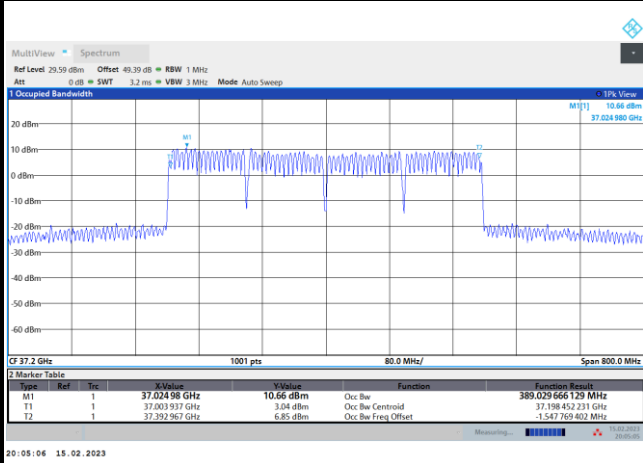


intentionally blank

Middle Channel / 400MHz / QPSK

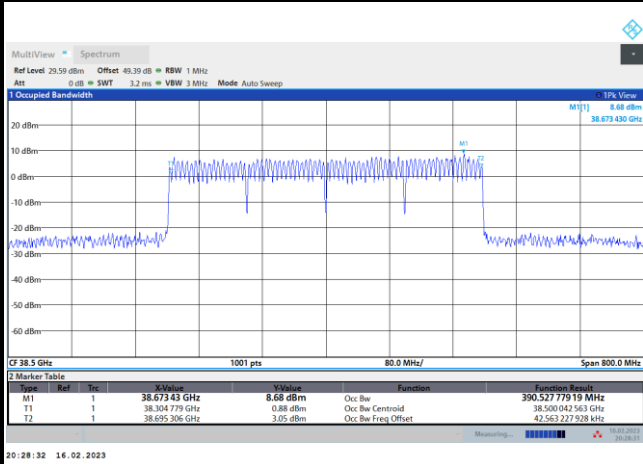

intentionally blank

Highest Channel / 400MHz / QPSK

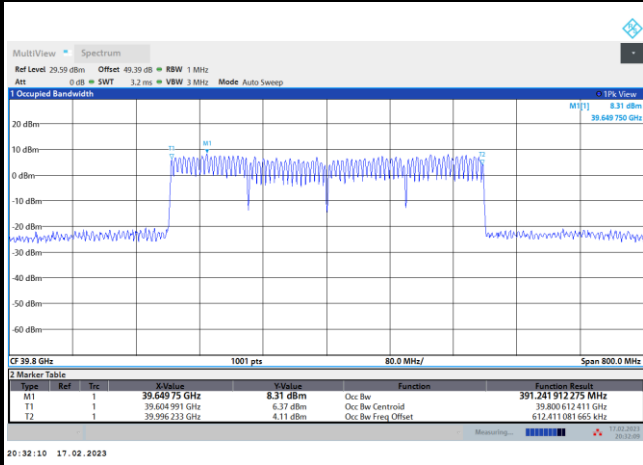

intentionally blank



Radiated Out of Band Emissions

Mode			DFT-s-OFDM Module 0 NR Band n260 : BE (dBm) 1 RB											
BW			200MHz				300MHz				400MHz			
Limit (dBm)			BPSK	QPSK	16QAM	64QAM	BPSK	QPSK	16QAM	64QAM	BPSK	QPSK	16QAM	64QAM
Low CH	0~10%OB	≤ -5	-11.64	-14.62	-14.13	-14.69	-15.13	-15.01	-14.69	-16.21	-16.61	-16.89	-15.70	-15.75
	>10%OB	≤ -13	-20.27	-19.38	-20.31	-21.87	-21.38	-20.07	-19.79	-21.22	-15.61	-15.05	-15.80	-17.25
High CH	0~10%OB	≤ -5	-17.05	-16.88	-15.99	-18.53	-16.47	-17.68	-17.68	-20.75	-19.02	-19.88	-21.98	-20.18
	>10%OB	≤ -13	-28.49	-24.79	-26.01	-28.37	-15.41	-14.71	-14.73	-16.97	-15.80	-14.53	-16.75	-17.35
Result			Compliance											

Mode			CP-OFDM Module 0 NR Band n260 : BE (dBm) 1 RB											
BW			200MHz				300MHz				400MHz			
Limit (dBm)			QPSK				QPSK				QPSK			
Low CH	0~10%OB	≤ -5	-13.19				-14.81				-17.38			
	>10%OB	≤ -13	-20.73				-18.30				-15.58			
High CH	0~10%OB	≤ -5	-15.67				-17.67				-20.12			
	>10%OB	≤ -13	-22.73				-14.00				-14.46			
Result			Compliance											

Mode			DFT-s-OFDM Module 0 NR Band n260 : BE (dBm) Full RB											
BW			200MHz				300MHz				400MHz			
Limit (dBm)			BPSK	QPSK	16QAM	64QAM	BPSK	QPSK	16QAM	64QAM	BPSK	QPSK	16QAM	64QAM
Low CH	0~10%OB	≤ -5	-26.73	-25.97	-28.38	-29.85	-24.97	-24.48	-27.62	-31.01	-24.94	-25.08	-29.12	-31.87
	>10%OB	≤ -13	-28.73	-27.00	-29.76	-32.86	-24.90	-25.10	-28.58	-31.68	-25.35	-25.75	-29.51	-32.81
High CH	0~10%OB	≤ -5	-31.41	-30.28	-32.12	-33.07	-28.58	-28.12	-31.43	-32.89	-28.34	-27.83	-30.98	-32.90
	>10%OB	≤ -13	-31.31	-31.20	-32.79	-33.54	-28.03	-27.98	-30.68	-32.79	-28.09	-27.70	-30.49	-32.89
Result			Compliance											

Mode			CP-OFDM Module 0 NR Band n260 : BE (dBm) Full RB											
BW			200MHz				300MHz				400MHz			
Limit (dBm)			QPSK				QPSK				QPSK			
Low CH	0~10%OB	≤ -5	-26.54				-26.90				-28.55			
	>10%OB	≤ -13	-28.51				-28.89				-29.54			
High CH	0~10%OB	≤ -5	-30.45				-30.64				-30.82			
	>10%OB	≤ -13	-31.65				-30.71				-30.82			
Result			Compliance											





DFT-s-OFDM Module 0

NR Band n260 / 200MHz / BPSK

Lowest Band Edge / 1 RB



Highest Band Edge / 1 RB

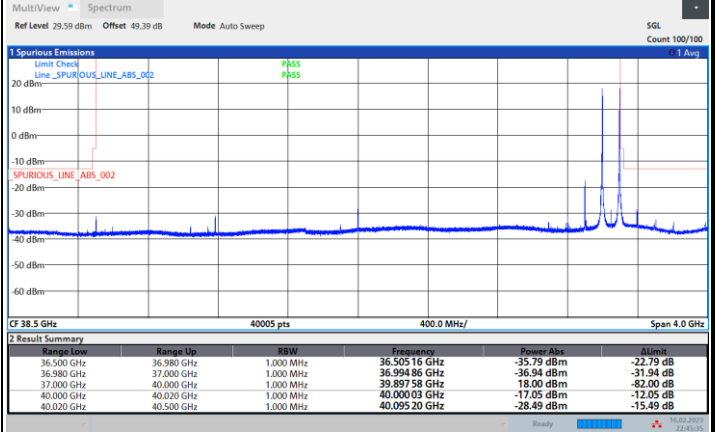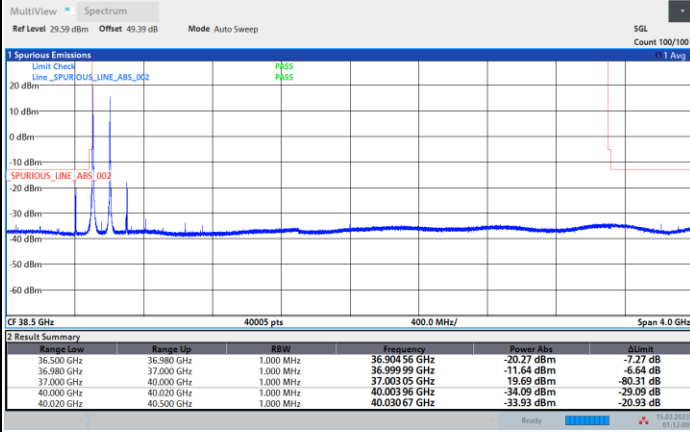

NR Band n260 / 200MHz / QPSK

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

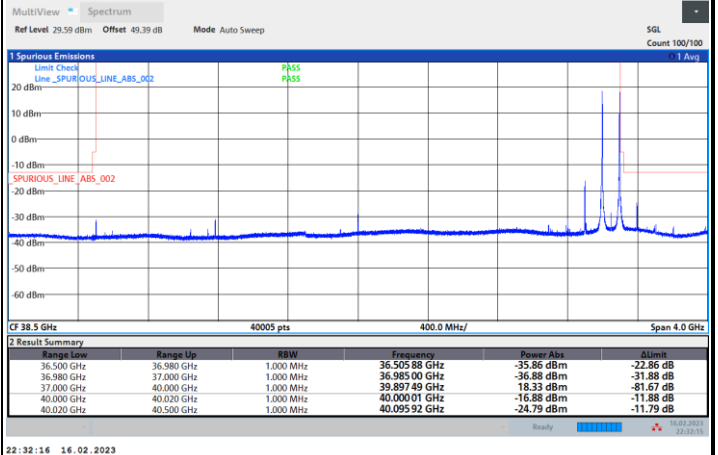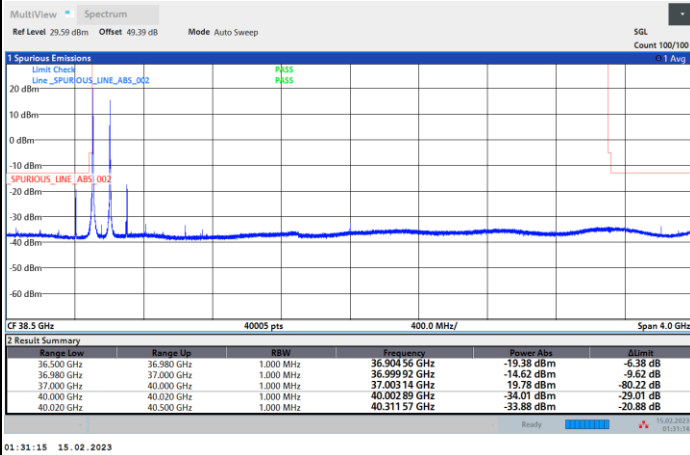





DFT-s-OFDM Module 0

NR Band n260 / 200MHz / 16QAM

Lowest Band Edge / 1 RB



Highest Band Edge / 1 RB

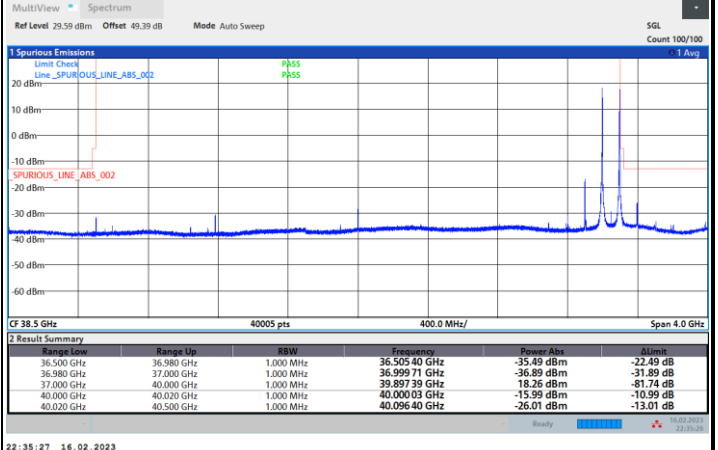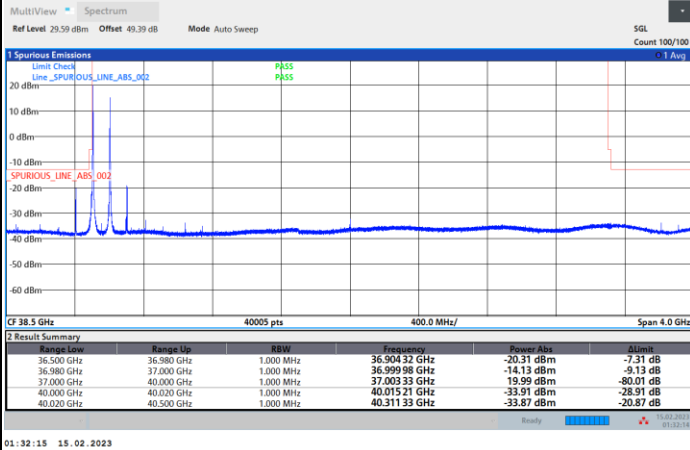

NR Band n260 / 200MHz / 64QAM

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

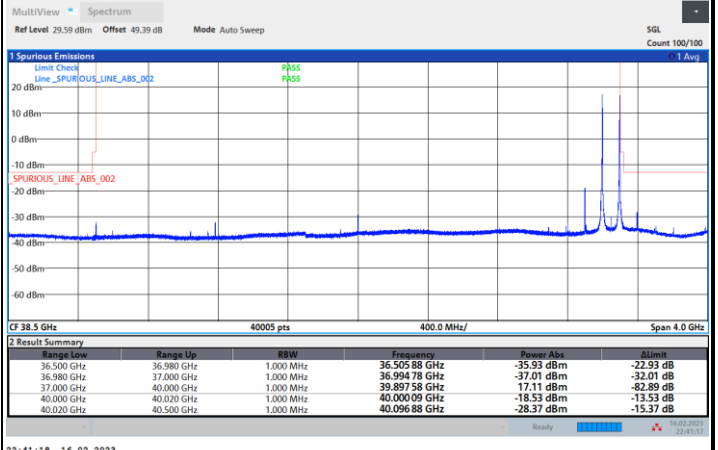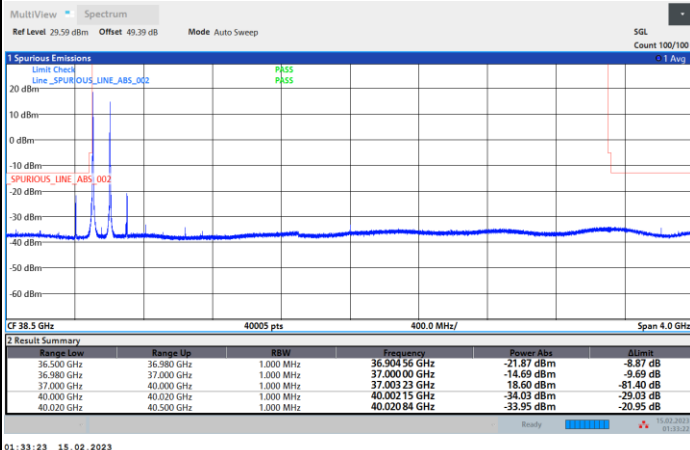





DFT-s-OFDM Module 0

NR Band n260 / 300MHz / BPSK

Lowest Band Edge / 1 RB



Highest Band Edge / 1 RB

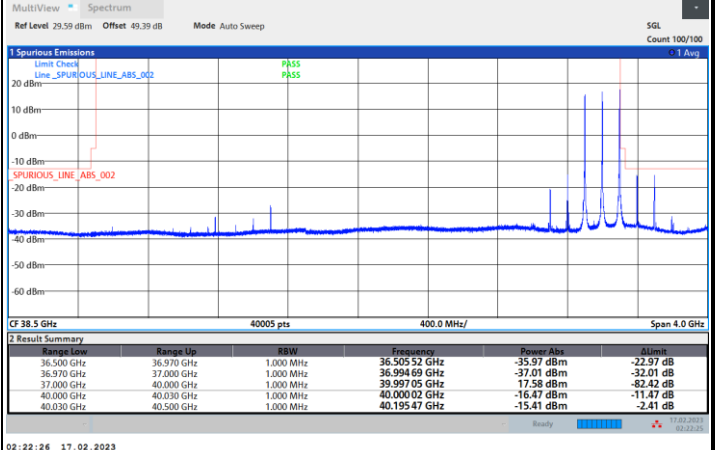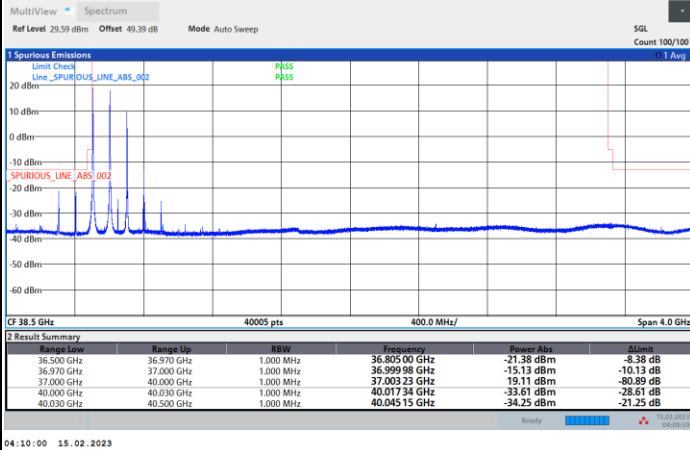

NR Band n260 / 300MHz / QPSK

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

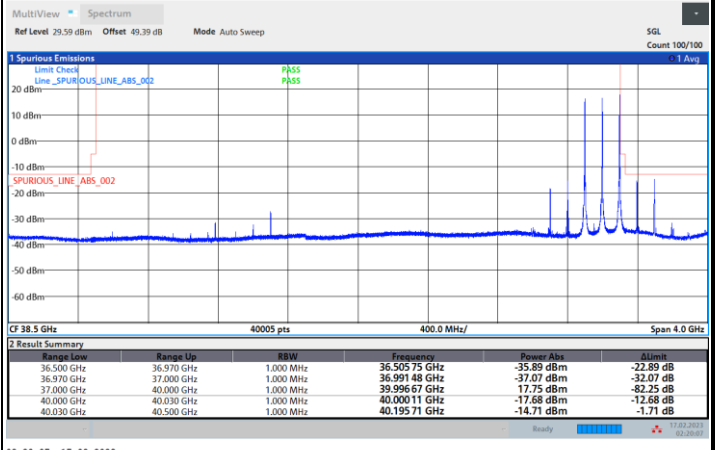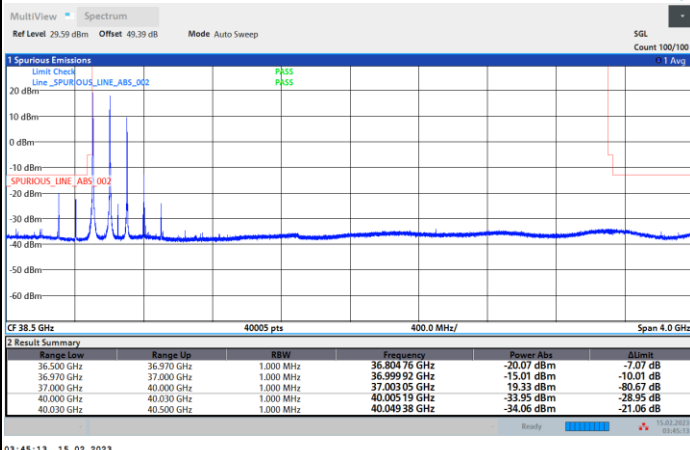





DFT-s-OFDM Module 0

NR Band n260 / 300MHz / 16QAM

Lowest Band Edge / 1 RB



Highest Band Edge / 1 RB

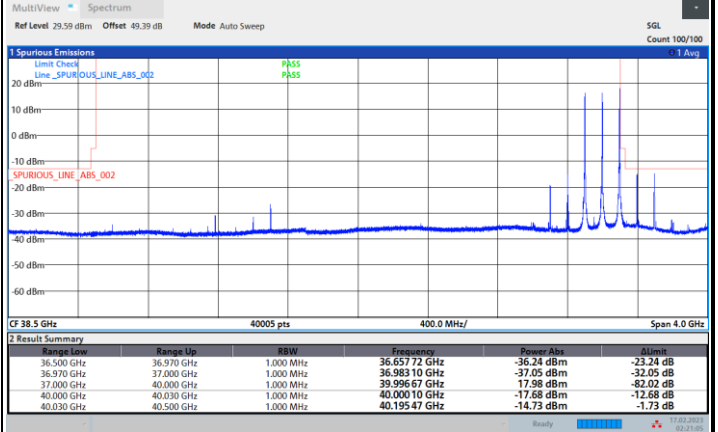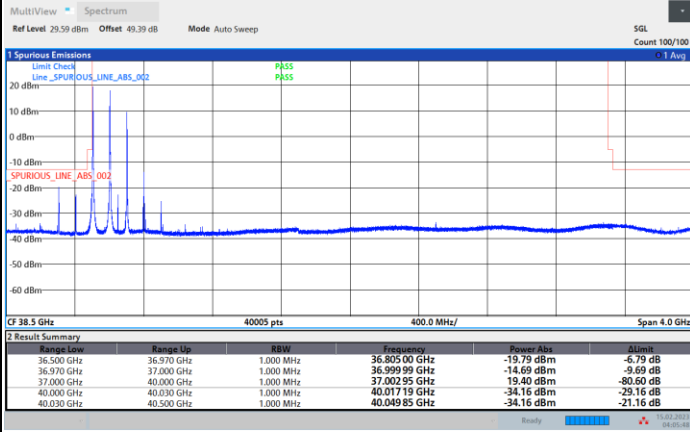

NR Band n260 / 300MHz / 64QAM

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

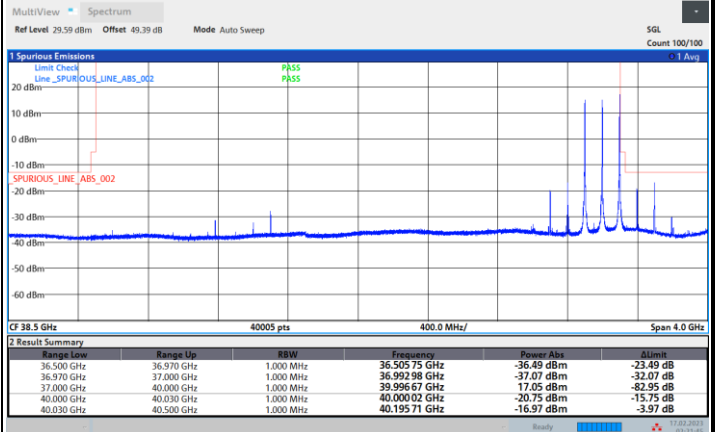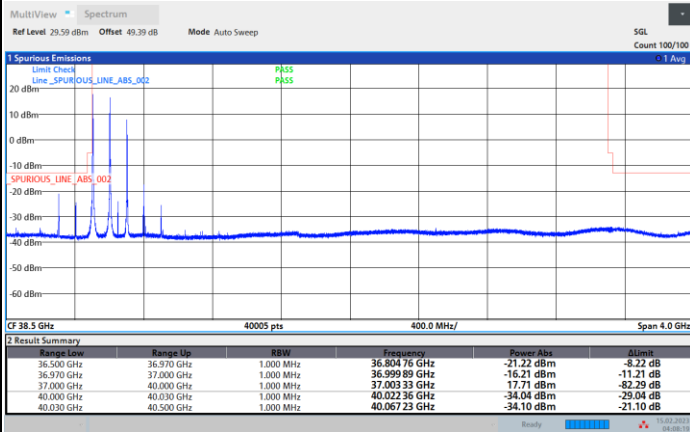





DFT-s-OFDM Module 0

NR Band n260 / 400MHz / BPSK

Lowest Band Edge / 1 RB



Highest Band Edge / 1 RB

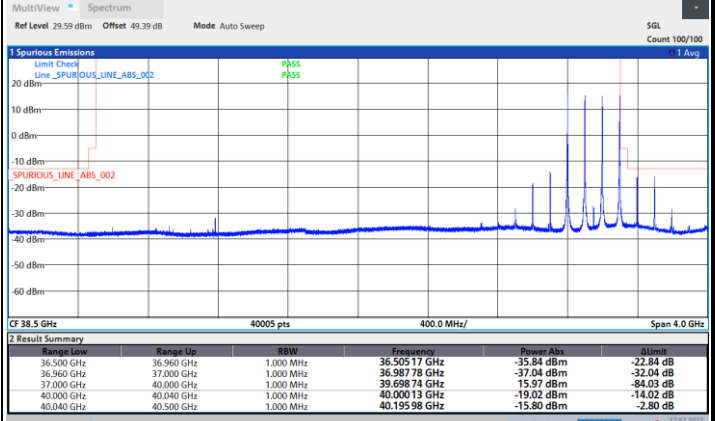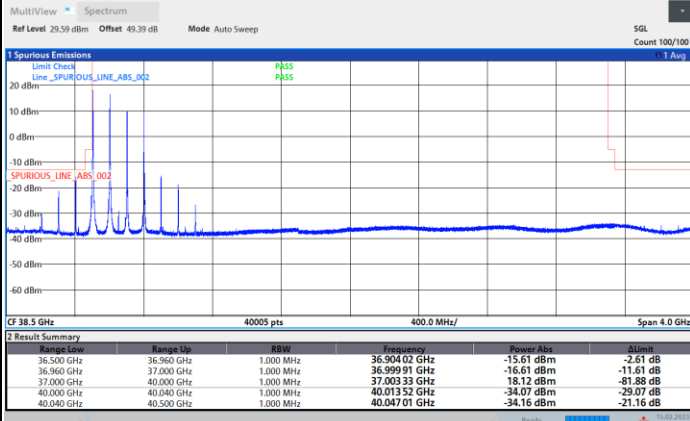

NR Band n260 / 400MHz / QPSK

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

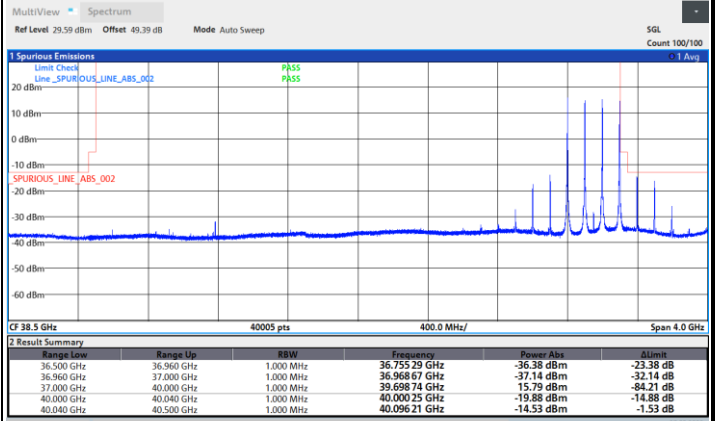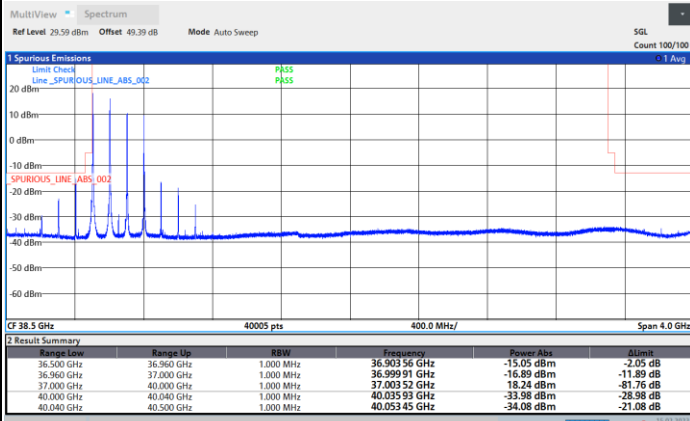





DFT-s-OFDM Module 0

NR Band n260 / 400MHz / 16QAM

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

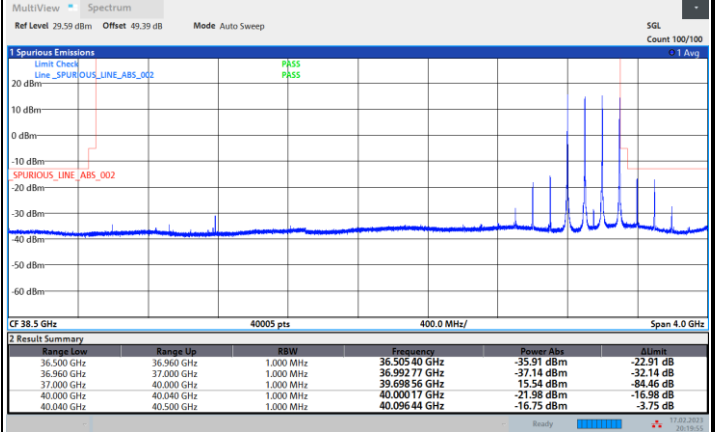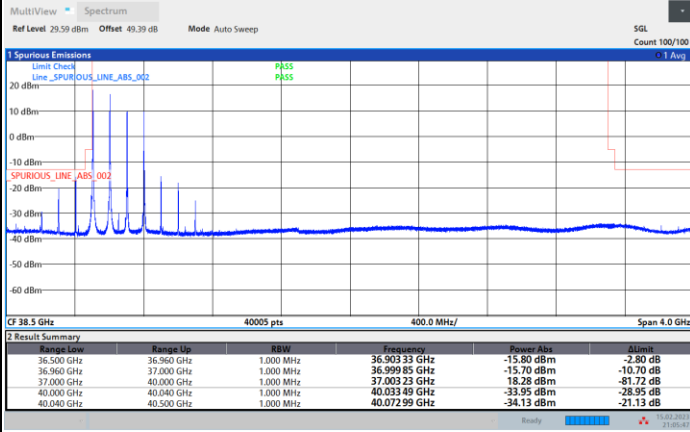

NR Band n260 / 400MHz / 64QAM

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

