

FCC SAR TEST REPORT

FCC ID : PY322100558
Equipment : Netgear 5G MHS Travel Router
Brand Name : Netgear
Model Name : MR6400
Applicant : Netgear Inc
350 E. Plumeria Drive, San Jose,
CA 95134, United States
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Dec. 21, 2021 and testing was started from Apr. 12, 2022 and completed on Apr. 27, 2022. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. EMC & Wireless Communications Laboratory
No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan



Table of Contents

1. Statement of Compliance 4

2. Data Reuse Approach 5

3. Model Difference Information 5

4. Reference detail Section 6

5. Guidance Applied 7

6. Equipment Under Test (EUT) Information 7

 6.1 General Information 7

 6.2 General LTE SAR Test and Reporting Considerations 8

 6.3 General 5G NR SAR Test and Reporting Considerations 11

7. Smart Transmit feature for RF Exposure compliance 13

8. RF Exposure Limits 16

 8.1 Uncontrolled Environment 16

 8.2 Controlled Environment 16

9. Specific Absorption Rate (SAR) 17

 9.1 Introduction 17

 9.2 SAR Definition 17

10. System Description and Setup 18

 10.1 Test Site Location 18

 10.2 E-Field Probe 19

 10.3 Data Acquisition Electronics (DAE) 19

 10.4 Phantom 20

 10.5 Device Holder 21

11. Measurement Procedures 22

 11.1 Spatial Peak SAR Evaluation 22

 11.2 Power Reference Measurement 23

 11.3 Area Scan 23

 11.4 Zoom Scan 24

 11.5 Volume Scan Procedures 24

 11.6 Power Drift Monitoring 24

12. Test Equipment List 25

13. System Verification 26

 13.1 Tissue Verification 26

 13.2 System Performance Check Results 27

14. LTE Output Power (Unit: dBm) 28

15. 5G NR Output Power (Unit: dBm) 47

16. Antenna Location 54

17. Spot Check SAR Results 55

18. SAR Test Results 58

 18.1 Hotspot SAR 59

19. Simultaneous Transmission Analysis 63

 19.1 5G NR + LTE + WLAN Sim-Tx analysis 64

 19.2 Body Exposure Conditions 65

20. Uncertainty Assessment 70

21. References 72

Appendix A. Plots of SAR System Performance Check

Appendix B. Plots of High SAR Measurement

Appendix C. DASy Calibration Certificate

Appendix D. Test Setup Photos



History of this test report

Report No.	Version	Description	Issued Date
FA190614-03B	01	Initial issue of report	May. 10, 2022



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Netgear Inc, Netgear 5G MHS Travel Router, MR6400, are as follows.

Equipment Class	Frequency Band		Highest SAR Summary		Highest Simultaneous Transmission 1g SAR (W/kg)
			(Separation 10mm)		
			1g SAR (W/kg)		
Licensed	LTE	LTE Band 2	1.17		1.43
		LTE Band 5	0.72		
		LTE Band 7	1.16		
		LTE Band 12	0.71		
		LTE Band 13	0.71		
		LTE Band 14	0.78		
		LTE Band 25	1.11		
		LTE Band 26	0.82		
		LTE Band 30	1.29		
		LTE Band 41	1.18		
	LTE Band 48	0.91			
	LTE Band 4 / 66	0.99			
	LTE Band 71	0.63			
	FR1	FR1 n2	1.13		
		FR1 n5	0.76		
		FR1 n12	0.68		
		FR1 n14	0.82		
		FR1 n25	0.92		
		FR1 n30	1.18		
		FR1 n41	1.26		
FR1 n48		1.26			
FR1 n66	0.92				
FR1 n71	0.51				
FR1 n77	1.29				
DTS	WLAN	2.4GHz WLAN	0.09		1.42
NII		5GHz WLAN	0.09		1.43
6XD		6GHz WLAN	0.06		1.43
Date of Testing:			2022/4/12 ~ 2022/4/27		

Equipment Class	Frequency Band		Reported SAR	APD	Reported PD
			1g SAR (W/kg)	(W/m^2)	(W/m^2)
6XD	WLAN	6GHz WLAN	0.06	0.55	1.88

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No.TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) and power density for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093), Human Exposure to RF Radiation Limits (1.0 mW/cm^2=10 W/m^2) specified in FCC 47 CFR part 1.1310 and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Carlie Tsai



2. Data Reuse Approach

FCC ID: PY321100529 (parent model) and FCC ID: PY322100558 (variant model) use the same identical internal printed circuit board layouts, while the variant model depopulates mmWave related components and SW , details are available in the operational description

Due to the same design of the antenna 1/2/3/4/5/6, SAR data reuse is requested and spot check data in this report is used to justify the SAR data reuse.

The applicant should take full responsibility that the test data as referenced in this report represent compliance for this FCC ID: PY322100558

3. Model Difference Information

PY321100529 and PY322100558 use the identical internal printed circuit board layout, and the major differences which may relate to RF are listed below:

- Removal of FR2 related components.
- Software enable LTE B13/25/2641/71, 5G NR n25/41/48/71

The details of similarity and difference can be found in the confidential documents.



4. Reference detail Section

Rule Part	Equipment Class	Wireless Technology	Frequency Band (MHz)	Reference FCC ID (Parent)	Type Grant/ Permissive Change	Reference Title	FCC ID Filling (Variant)	Spot Check Required
Part 2.1093 SAR	DTS	Wi-Fi	2400~2483.5	PY321100529	Original Grant	FA190614D	PY322100558	Spot check Ant 3 / 4
	NII	Wi-Fi	5150~5250 5250~5350 5470~5725 5725~5850 5925~6425 6425~6525 6525~6875 6875~7125	PY321100529	Original Grant	FA190614D	PY322100558	Spot check Ant 3 / 4
	PCB CBE	LTE	B2 /4 /5 /7 /12 /13 /14 /25 /26 30 /41 /48 /66 /71	PY321100529	Original Grant	FA190614D	PY322100558	Spot check at Ant 1 for LTE 2/5/12/14/48/66 Spot check at Ant 2 for LTE 2/4/7/30/66 Full test at Ant1 for LTE B13/26/71 Full test at Ant2 for LTE B25/41
		5G FR1	n2/ 5/ 12/ 14/ 25/ 30/ 41/ 48/ 66/ 71/ 77	PY321100529	Original Grant	FA190614D	PY322100558	Spot check at Ant 1 for NR n2/5/12/14/66/77 Spot Check at Ant 2 for NR n2/5/30/66/77 Spot Check at Ant 5 / 6 NR n77 Full test at Ant1 for NR n25/48/71 Full test at Ant2 for NR n25/41/48



5. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

6. Equipment Under Test (EUT) Information

6.1 General Information

Product Feature & Specification	
Equipment Name	Netgear 5G MHS Travel Router
Brand Name	Netgear
Model Name	MR6400
FCC ID	PY322100558
Wireless Technology and Frequency Range	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n14 : 788 MHz ~ 798 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n30 : 2305 MHz ~ 2315 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n77: 3700 MHz ~ 3980 MHz, 3450MHz ~ 3550MHz WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz WLAN 6E: 5925 MHz ~ 6425 MHz, 6425 MHz ~ 6525 MHz, 6525 MHz ~ 6875 MHz, 6875 MHz ~ 7125 MHz
Mode	LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160
EUT Stage	Identical Prototype



6.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	PY322100558																																																														
Equipment Name	Netgear 5G MHS Travel Router																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz																																																														
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 25: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 30: 5MHz, 10MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 48: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM / 256QAM																																																														
LTE Voice / Data requirements	Data only																																																														
LTE MPR permanently built-in by design	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	Yes, when operating in hotspot mode that FR1 n48 power reduction applied to satisfy SAR compliance.																																																														
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power measurement please referred to section 14.																																																														
LTE Carrier Aggregation Additional Information	This device supports maximum of 4 carriers in the downlink and 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICl, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																														



Transmission (H, M, L) channel numbers and frequencies in each LTE band													
LTE Band 2													
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860	
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900	
LTE Band 4													
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720	
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745	
LTE Band 5													
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829	
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844	
LTE Band 7													
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510	
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560	
LTE Band 12													
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23060	704	23060	704	
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23130	711	23130	711	
LTE Band 13													
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #
L	23205		779.5		23230		782		23255		784.5		782
M	23230		782		23230		782		23255		784.5		782
H	23255		784.5		23230		782		23255		784.5		782
LTE Band 14													
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz
	Channel #		Channel #		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #
L	23305		790.5		23330		793		23355		795.5		793
M	23330		793		23330		793		23355		795.5		793
H	23355		795.5		23330		793		23355		795.5		793
LTE Band 25													
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860	
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905	



LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 30												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)					
L	27685		2307.5		27710		2310					
M	27710		2310									
H	27735		2312.5									
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 48												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	55265	3552.5	55290	3555	55315	3557.5	55340	3560				
L	55810	3607	55815	3607.5	55820	3608	55830	3609				
M	56170	3643	56165	3642.5	56160	3642	56150	3641				
H	56715	3697.5	56690	3695	56665	3692.5	56640	3690				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770
LTE Band 71												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	133147	665.5	133172	668	133197	670.5	133222	673				
M	133297	680.5	133297	680.5	133297	680.5	133297	680.5				
H	133447	695.5	133422	693	133397	690.5	133372	688				



6.3 General 5G NR SAR Test and Reporting Considerations

5G NR Information									
FCC ID	PY322100558								
Equipment Name	Netgear 5G MHS Travel Router								
Operating Frequency Range of each 5G NR transmission band	5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n14 : 788 MHz ~ 798 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n30 : 2305 MHz ~ 2315 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n77: 3700 MHz ~ 3980 MHz, 3450MHz ~ 3550MHz								
Channel Bandwidth	5G NR n2: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n5: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n12: 5MHz, 10MHz, 15MHz 5G NR n14: 5MHz, 10MHz 5G NR n25: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n30: 5MHz, 10MHz 5G NR n41: 20MHz, 30MHz, 40MHz, 50MHz, 60MHz, 70MHz, 80MHz, 90MHz, 100MHz 5G NR n48: 10MHz, 20MHz 5G NR n66: 5MHz, 10MHz, 15MHz, 20MHz, 30MHz, 40MHz 5G NR n71: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n77: 10MHz, 15MHz, 20MHz, 30MHz, 40MHz, 50MHz, 60MHz, 70MHz, 80MHz, 90MHz, 100MHz								
SCS	FDD: SCS15KHz, TDD: SCS30KHz								
uplink modulations used	DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM CP-OFDM QPSK / 16QAM / 64QAM / 256QAM								
A-MPR (Additional MPR) disabled for SAR Testing?	Yes								
LTE Anchor Bands for n2	LTE B5/12/14/30								
LTE Anchor Bands for n5	LTE B2/12/30								
LTE Anchor Bands for n12	LTE B66								
LTE Anchor Bands for n14	LTE B66								
LTE Anchor Bands for n30	LTE B2/66								
LTE Anchor Bands for n41	LTE B2								
LTE Anchor Bands for n66	LTE B12/14								
LTE Anchor Bands for n77	LTE B2/5/12/14								
NR Band 2									
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860	
M	376000	1880	376000	1880	376000	1880	376000	1880	
H	381500	1907.5	381000	1905	380500	1902.5	380000	1900	
NR Band 5									
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	165300	826.5	165800	829	166300	831.5	166800	834	
M	167300	836.5	167300	836.5	167300	836.5	167300	836.5	
H	169300	846.5	168800	844	168300	841.5	167800	839	
NR Band 12									
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 15MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	140300	701.5	140800	704	141300	706.5	141300	706.5	
M	141500	707.5	141500	707.5	141500	707.5	141500	707.5	
H	142700	713.5	142200	711	141700	708.5	141700	708.5	
NR Band 14									
	Bandwidth 5MHz			Bandwidth 10MHz			Bandwidth 10MHz		
	Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)	
L	158100	790.5		158600	793		158600	793	
M	158600	793			793				
H	159100	795.5			793				



NR Band 25																						
	Bandwidth 5MHz			Bandwidth 10MHz			Bandwidth 15MHz			Bandwidth 20MHz												
	Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)											
L	370500	1852.5		371000	1855		371500	1857.5		372000	1860											
M	376500	1882.5		376500	1882.5		376500	1882.5		376500	1882.5											
H	382500	1912.5		382000	1910		381500	1907.5		381000	1905											
NR Band 30																						
	Bandwidth 5MHz						Bandwidth 10MHz															
	Ch. #		Freq. (MHz)				Ch. #		Freq. (MHz)													
L	461500		2307.5				462000		2310													
M	462000		2310																			
H	462500		2312.5																			
NR Band 41																						
	Bandwidth20MHz		Bandwidth30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth100MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	501204	2506.02	502200	2511	503202	2516.01	504204	2521.02	505200	2526	506202	2531.01	507204	2536.02	508200	2541	509202	2546.01				
M	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99				
H	535998	2679.99	534996	2674.98	534000	2670	532998	2664.99	531996	2659.98	531000	2655	529998	2649.99	528996	2644.98	528000	2640				
NR Band 48																						
	Bandwidth10MHz						Bandwidth20MHz															
	Ch. #		Freq. (MHz)				Ch. #		Freq. (MHz)													
L	637000		3555				637334		3560.01													
M	641666		3624.99				641666		3624.99													
H	646332		3694.98				646000		3690													
NR Band 66																						
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz											
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)										
L	342500	1712.5	343000	1715	343500	1717.5	344000	1720	345000	1725	346000	1730										
M	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745										
H	355500	1777.5	355000	1775	354500	1772.5	354000	1770	353000	1765	352000	1760										
NR Band 71																						
	Bandwidth 5MHz			Bandwidth 10MHz			Bandwidth 15MHz			Bandwidth 20MHz												
	Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)											
L	133100	665.5		133600	668		13410	670.5		134600	673											
M	136100	680.5		136100	680.5		136100	680.5		136100	680.5											
H	139100	695.5		138600	693		13810	690.5		137600	688											
NR Band 77(3700 MHz ~ 3980 MHz)																						
	Bandwidth10MHz		Bandwidth15MHz		Bandwidth 20MHz		Bandwidth30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	647000	3705	647168	3707.52	647334	3710.01	647668	3715.02	648000	3720	648334	3725.01	648668	3730.02	649000	3735	649334	3740.01	649668	3745.02	650000	3750
M	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840
H	665000	3975	664832	3972.48	664666	3969.99	664332	3964.98	664000	3960	663666	3954.99	663332	3949.98	663000	3945	662666	3939.99	662332	3934.98	662000	3930
NR Band 77(3450MHz ~ 3550MHz)																						
	Bandwidth10MHz		Bandwidth15MHz		Bandwidth 20MHz		Bandwidth30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	630334	3455.01	630500	3457.5	630668	3460.02	631000	3465	631334	3470.01	631668	3475.02	632000	3480	632334	3485.01	632668	3490.02	633000	3495	633334	3500.01
M	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98
H	636332	3544.98	636166	3542.49	636000	3540	635666	3534.99	635332	3529.98	635000	3525	634666	3519.99	634332	3514.98	634000	3510	633666	3504.99	633332	3499.98

7. Smart Transmit feature for RF Exposure compliance

The FCC RF exposure limit is defined based on time-averaged RF exposure. The product implements Qualcomm Smart Transmit feature which controls the instantaneous transmitting power for WWAN transmitter to ensure the product in compliance with FCC RF exposure limit over a defined time window, for SAR (transmit frequency ≤ 6 GHz). To control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is compliant to the regulation requirement.

This report describes the procedures for the SAR char generation, and the parameters obtained from SAR characterization (referred to as SAR char, respectively) will be used as input for Smart Transmit. SAR char will be entered via the Embedded File System (EFS) to enable the Smart Transmit Feature.

<Terminologies in this report>

P_{limit}	The time-averaged RF power which corresponds to SAR_design_target.
P_{max}	Maximum target power level
SAR_design_target:	The design target for SAR compliance. It should be less than regulatory power density limit to account for all device design related uncertainties.
SAR char	P_{limit} for all the technologies/bands for all applicable DSI

<SAR Characterization>

SAR char must be generated to cover all radio configurations and usage scenarios that the wireless device supports for operating at 6 GHz or below. It will then be used as input for Smart Transmit to control and manage RF exposure for $f < 6$ GHz.

The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR_design_target or PD_design_target, below the predefined time-averaged power limit (i.e., input.power.limit for 5G mmW NR), for each characterized technology and band (refer to RF exposure part0 report)

Smart Transmit allows the device to transmit at higher power instantaneously, as high as Pmax, when needed, but enforces power limiting to maintain time-averaged transmit power to Plimit. Below table shows Plimit EFS settings and maximum tune up output power Pmax configured for this EUT for various transmit conditions (Device State Index DSI).

<Plimit for supported technologies and bands (Plimit in EFS file)>

Band	Antenna	Measured Power (dBm)	1g measured SAR (W/kg)	SAR design Target (W/kg)	Duty cycle	Total Uncertainty (dB)	P limit (dBm) time-average power	P Max(*) time-average power
LTE B2	1	23.48	0.899	1.030	100.00%	1.00	24.00	22.50
LTE B5	1	23.27	0.607	1.030	100.00%	1.00	25.50	23.00
LTE B12	1	23.07	0.575	1.030	100.00%	1.00	25.60	23.00
LTE B13	1	23.04	0.572	1.030	100.00%	1.00	25.50	23.00
LTE B14	1	23.09	0.632	1.030	100.00%	1.00	25.20	23.00
LTE B26	1	22.51	0.594	1.030	100.00%	1.00	24.90	23.00
LTE B48**	1	22.78	0.800	1.030	63.30%	1.00	21.80	20.00
LTE B66	1	23.63	0.797	1.030	100.00%	1.00	24.70	23.00
LTE B71	1	22.90	0.491	1.030	100.00%	1.00	26.10	23.00
FR1 n2	1	23.25	0.876	1.030	100.00%	1.00	23.90	22.50
FR1 n5	1	23.50	0.673	1.030	100.00%	1.00	25.30	23.00
FR1 n12	1	23.42	0.591	1.030	100.00%	1.00	25.80	23.00
FR1 n14	1	23.17	0.680	1.030	100.00%	1.00	24.90	23.00
FR1 n25	1	23.22	0.786	1.030	100.00%	1.00	24.30	23.00
FR1 n48	1	22.00	1.360	1.030	100.00%	1.00	20.70	22.00
FR1 n66	1	23.88	0.897	1.030	100.00%	1.00	24.40	23.00
FR1 n71	1	23.30	0.432	1.030	100.00%	1.00	27.00	23.00
FR1 n77	1	22.51	1.350	1.030	100.00%	1.00	21.30	22.00

Band	Antenna	Measured Power (dBm)	1g measured SAR (W/kg)	SAR design Target (W/kg)	Duty cycle	Total Uncertainty (dB)	P limit (dBm) time-average power	P Max(*) time-average power
LTE B2	2	23.13	0.956	1.030	100.00%	1.00	23.40	23.00
LTE B7	2	22.94	1.020	1.030	100.00%	1.00	22.90	22.50
LTE B25	2	22.79	0.842	1.030	100.00%	1.00	23.60	23.00
LTE B30	2	21.97	1.020	1.030	100.00%	1.00	22.00	22.00
LTE B41**	2	22.85	0.900	1.030	63.30%	1.00	21.40	21.00
LTE B66/4	2	23.22	0.830	1.030	100.00%	1.00	24.10	23.00
FR1 n2	2	23.41	0.984	1.030	100.00%	1.00	23.60	23.00
FR1 n5	2	23.60	0.541	1.030	100.00%	1.00	26.30	23.00
FR1 n25	2	22.96	0.760	1.030	100.00%	1.00	24.20	23.00
FR1 n30	2	22.21	0.986	1.030	100.00%	1.00	22.30	22.00
FR1 n41	2	23.19	1.100	1.030	100.00%	1.00	22.90	22.50
FR1 n48	2	22.99	1.700	1.030	100.00%	1.00	20.80	22.00
FR1 n66	2	23.75	0.643	1.030	100.00%	1.00	25.70	23.00
FR1 n77	2	22.53	1.380	1.030	100.00%	1.00	21.20	22.00
FR1 n77 (SRS)	5	20.33	0.723	1.030	100.00%	1.00	21.80	20.50
FR1 n77 (SRS)	6	19.08	0.932	1.030	100.00%	1.00	19.50	19.50

*P_{max} is used for RF tune up procedure. The maximum allowed output power is equal to P_{max} + 1dB uncertainty.

**All P_{limit} power levels entered in the Table correspond to average power levels after accounting for duty cycle in the case TDD modulation schemes (for e.g., GSM & LTE TDD & NR TDD).

The max allowed output power is the P_{limit} + 1dB device uncertainty, and if P_{limit} is higher than P_{max}, the device output power will be P_{max} instead.

To account for total uncertainty, SAR_{design_target} should be determined as:

$$SAR_{design_target} < SAR_{regulatory_limit} \times 10^{\frac{-total\ uncertainty}{10}}$$



8. RF Exposure Limits

8.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

8.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

9. Specific Absorption Rate (SAR)

9.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

9.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

10. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

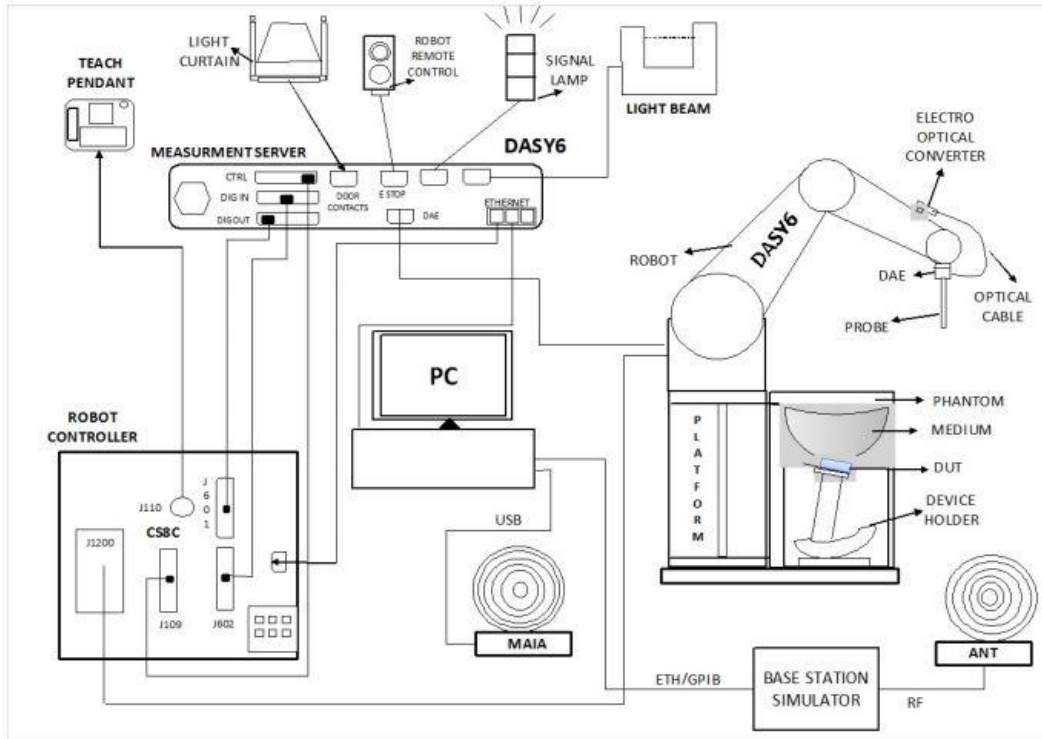

- The DASY system in DASY6/DASY5 V5.2 SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY5/DASY6 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

10.1 Test Site Location


The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No.TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	EMC & Wireless Communications Laboratory		Wensan Laboratory		
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan		
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	


10.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

10.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.


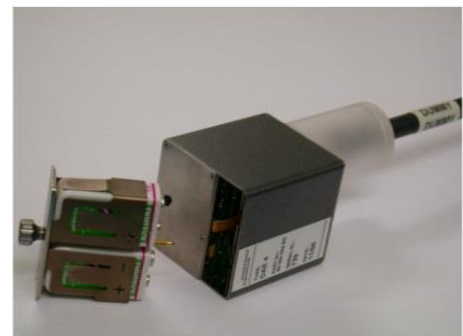


Fig 5.1 Photo of DAE

10.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Hand, Right Hand, Flat Phantom

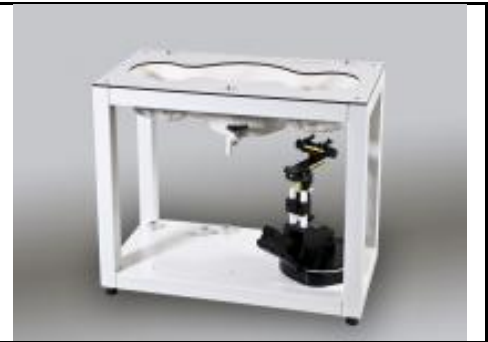

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)
Filling Volume	Approx. 30 liters
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm



The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

10.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops



11. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN power measurement, use engineering software to configure EUT WLAN continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

11.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values form the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

11.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

11.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

11.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
<p>Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.</p> <p>* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p>				

11.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

11.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



12. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	Aug. 18, 2021	Aug. 17, 2022
SPEAG	835MHz System Validation Kit ⁽²⁾	D835V2	4d167	Nov. 25, 2019	Nov. 22, 2022
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 25, 2021	Nov. 24, 2022
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Aug. 19, 2021	Aug. 18, 2022
SPEAG	2300MHz System Validation Kit	D2300V2	1088	Jul. 13, 2021	Jul. 12, 2022
SPEAG	2450MHz System Validation Kit	D2450V2	736	Aug. 17, 2021	Aug. 17, 2022
SPEAG	2600MHz System Validation Kit	D2600V2	1008	Aug. 17, 2021	Aug. 16, 2022
SPEAG	3500MHz System Validation Kit	D3500V2	1014	Jan. 17, 2022	Jan. 16, 2023
SPEAG	3500MHz System Validation Kit	D3500V2	1036	Mar. 23, 2022	Mar. 22, 2023
SPEAG	3700MHz System Validation Kit	D3700V2	1022	Jul. 14, 2021	Jul. 13, 2022
SPEAG	3900MHz System Validation Kit ⁽²⁾	D3900V2	1017	Apr. 29, 2019	Apr. 26, 2022
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 15, 2021	Sep. 14, 2022
SPEAG	6500MHz System Validation Kit	D6.5GHzV2		Sep. 24, 2021	Sep. 23, 2022
SPEAG	Data Acquisition Electronics	DAE4	376	Nov. 22, 2021	Nov. 21, 2022
SPEAG	Data Acquisition Electronics	DAE4	853	Jul. 14, 2021	Jul. 13, 2022
SPEAG	Dosimetric E-Field Probe	EX3DV4	7375	Dec. 20, 2021	Dec. 19, 2022
SPEAG	Dosimetric E-Field Probe	EX3DV4	7306	Jul. 26, 2021	Jul. 25, 2022
SPEAG	Dosimetric E-Field Probe	EX3DV4	7439	Mar. 02, 2022	Mar. 01, 2023
Testo	Hygro meter	608-H1	45196600	Oct. 22, 2021	Oct. 21, 2022
Testo	Hygro meter	608-H1	45207528	Oct. 22, 2021	Oct. 21, 2022
RCPTWN	Thermometer	HTC-1	TM685-1	Oct. 28, 2021	Oct. 27, 2022
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Oct. 21, 2021	Oct. 20, 2022
Keysight	Wireless Communication Test Set	E5515C	MY50266977	May. 12, 2021	May. 11, 2022
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Oct. 24, 2021	Oct. 23, 2022
Keysight	ENA Network Analyzer	E5071C	MY46104758	Sep. 19, 2021	Sep. 18, 2022
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 24, 2021	Sep. 23, 2022
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Oct. 26, 2021	Oct. 25, 2022
Anritsu	Power Meter	ML2495A	1419002	Aug. 18, 2021	Aug. 17, 2022
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2021	Aug. 17, 2022
Anritsu	Power Meter	ML2495A	1804003	Oct. 09, 2021	Oct. 08, 2022
Anritsu	Power Sensor	MA2411B	1726150	Oct. 09, 2021	Oct. 08, 2022
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Jan. 12, 2022	Jan. 11, 2023
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 19, 2021	Aug. 18, 2022
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 12, 2021	Oct. 11, 2022
Mini-Circuits	Power Amplifier	ZVE-8G+	479102029	Sep. 06, 2021	Sep. 05, 2022
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005-3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

13. System Verification

13.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing.

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
750	22.6	0.888	43.087	0.89	41.90	-0.22	2.83	±5	2022/4/13
835	22.6	0.918	42.671	0.90	41.50	2.00	2.82	±5	2022/4/13
1750	22.6	1.350	40.531	1.37	40.10	-1.46	1.07	±5	2022/4/12
1900	22.6	1.425	38.983	1.40	40.00	1.79	-2.54	±5	2022/4/12
2300	22.6	1.635	39.736	1.67	39.50	-2.10	0.60	±5	2022/4/14
2300	22.6	1.647	39.846	1.67	39.50	-1.38	0.88	±5	2022/4/23
2450	22.6	1.851	39.167	1.80	39.20	2.83	-0.08	±5	2022/4/20
2600	22.6	1.935	38.953	1.96	39.00	-1.28	-0.12	±5	2022/4/14
2600	22.6	1.978	39.248	1.96	39.00	0.92	0.64	±5	2022/4/22
3500	22.6	2.996	38.487	2.91	37.90	2.96	1.55	±5	2022/4/15
3500	22.6	3.008	38.597	2.91	37.90	3.37	1.84	±5	2022/4/22
3500	22.6	3.008	38.597	2.91	37.90	3.37	1.84	±5	2022/4/22
3500	22.7	2.916	38.043	2.91	37.90	0.21	0.38	±5	2022/4/27
3700	22.6	3.200	38.165	3.12	37.70	2.56	1.23	±5	2022/4/15
3900	22.6	3.428	38.117	3.33	37.51	2.94	1.62	±5	2022/4/15
3900	22.6	3.272	37.757	3.33	37.51	-1.74	0.66	±5	2022/4/22
5250	22.6	4.645	36.878	4.71	35.95	-1.38	2.58	±5	2022/4/19
5600	22.6	4.992	36.373	5.07	35.50	-1.54	2.46	±5	2022/4/19
5750	22.6	5.167	36.214	5.22	35.35	-1.02	2.44	±5	2022/4/19
6500	22.5	6.210	34.400	6.07	34.50	2.31	-0.29	±5	2022/4/21

13.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Test Site	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
SAR03	2022/4/13	750	50	D750V3-1012	EX3DV4 - SN7306	DAE4 Sn853	0.392	8.56	7.84	-8.41
SAR03	2022/4/13	835	50	D835V2-4d167	EX3DV4 - SN7306	DAE4 Sn853	0.459	9.55	9.18	-3.87
SAR03	2022/4/12	1750	50	D1750V2-1068	EX3DV4 - SN7306	DAE4 Sn853	1.76	36.60	35.2	-3.83
SAR03	2022/4/12	1900	50	D1900V2-5d041	EX3DV4 - SN7306	DAE4 Sn853	1.90	40.60	38	-6.40
SAR03	2022/4/14	2300	250	D2300V2-1088	EX3DV4 - SN7306	DAE4 Sn853	11.40	49.70	45.6	-8.25
SAR03	2022/4/23	2300	250	D2300V2-1088	EX3DV4 - SN7439	DAE4 Sn376	13.50	49.70	54	8.65
SAR03	2022/4/20	2450	50	D2450V2-736	EX3DV4 - SN7439	DAE4 Sn376	2.59	54.20	51.8	-4.43
SAR03	2022/4/14	2600	250	D2600V2-1008	EX3DV4 - SN7306	DAE4 Sn853	14.20	58.00	56.8	-2.07
SAR03	2022/4/22	2600	250	D2600V2-1008	EX3DV4 - SN7439	DAE4 Sn376	15.70	58.00	62.8	8.28
SAR03	2022/4/15	3500	50	D3500V2-1014	EX3DV4 - SN7439	DAE4 Sn376	3.25	67.20	65	-3.27
SAR03	2022/4/22	3500	50	D3500V2-1014	EX3DV4 - SN7375	DAE4 Sn376	3.10	67.20	62	-7.74
SAR03	2022/4/22	3500	50	D3500V2-1014	EX3DV4 - SN7439	DAE4 Sn376	3.26	67.20	65.2	-2.98
SAR03	2022/4/27	3500	50	D3500V2-1036	EX3DV4 - SN7375	DAE4 Sn853	3.09	67.40	61.8	-8.31
SAR03	2022/4/15	3700	50	D3700V2-1022	EX3DV4 - SN7375	DAE4 Sn376	3.51	68.20	70.2	2.93
SAR03	2022/4/15	3900	50	D3900V2-1017-3900	EX3DV4 - SN7375	DAE4 Sn376	3.43	69.50	68.6	-1.29
SAR03	2022/4/22	3900	50	D3900V2-1017-3900	EX3DV4 - SN7375	DAE4 Sn376	3.75	69.50	75	7.91
SAR03	2022/4/19	5250	50	D5GHzV2-1006-5250	EX3DV4 - SN7439	DAE4 Sn376	3.91	81.70	78.2	-4.28
SAR03	2022/4/19	5600	50	D5GHzV2-1006-5600	EX3DV4 - SN7439	DAE4 Sn376	4.10	85.10	82	-3.64
SAR03	2022/4/19	5750	50	D5GHzV2-1006-5750	EX3DV4 - SN7439	DAE4 Sn376	4.30	81.40	86	5.65
SAR03	2022/4/21	6500	50	D6.5GHzV2-1003	EX3DV4 - SN7375	DAE4 Sn853	15.70	292.00	314	7.53

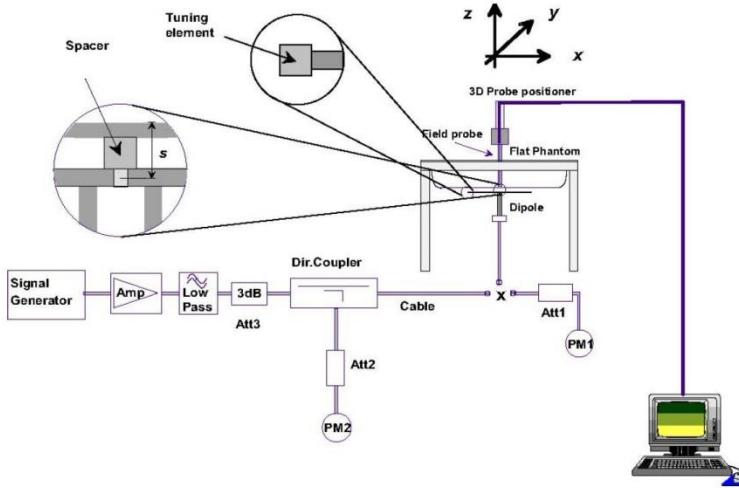


Fig 8.3.1 System Performance Check Setup




Fig 8.3.2 Setup Photo

14. LTE Output Power (Unit: dBm)

<LTE Conducted Power>

General Note:


1. Anritsu MT8821C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. According to 2017 TCB workshop, for 16QAM, 64QAM, 256QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM, 16QAM and 256QAM signal modulation are correct.

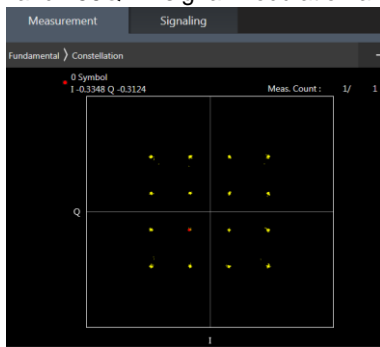

16QAM



64QAM

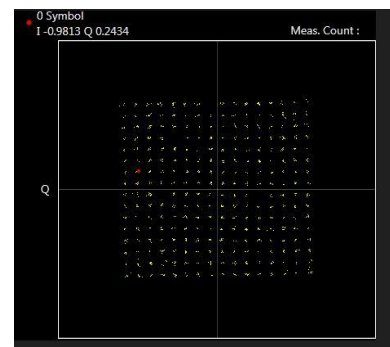

256QAM



<LTE Band 13_Ant 1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23230			
Frequency (MHz)				782			
10	QPSK	1	0		23.04		24
10	QPSK	1	25		22.66		
10	QPSK	1	49		22.91		
10	QPSK	25	0		21.61		23
10	QPSK	25	12		21.62		
10	QPSK	25	25		21.57		
10	QPSK	50	0		21.67		23
10	16QAM	1	0		22.85		
10	16QAM	1	25		22.58		
10	16QAM	1	49		22.63		22
10	16QAM	25	0		21.62		
10	16QAM	25	12		21.62		
10	16QAM	25	25		21.57		22
10	16QAM	50	0		21.56		
10	64QAM	1	0		21.79		
10	64QAM	1	25		21.89		22
10	64QAM	1	49		21.64		
10	64QAM	25	0		20.55		
10	64QAM	25	12		20.62		21
10	64QAM	25	25		20.49		
10	64QAM	50	0		20.56		
10	256QAM	1	0		18.57		19
10	256QAM	1	25		18.75		
10	256QAM	1	49		18.58		
10	256QAM	25	0		18.60		19
10	256QAM	25	12		18.58		
10	256QAM	25	25		18.63		
10	256QAM	50	0		18.54		
Channel				23205	23230	23255	Tune-up limit (dBm)
Frequency (MHz)				779.5	782	784.5	
5	QPSK	1	0	22.91	22.94	22.90	24
5	QPSK	1	12	22.58	22.66	22.57	
5	QPSK	1	24	22.86	22.88	22.79	
5	QPSK	12	0	21.61	21.53	21.55	23
5	QPSK	12	7	21.50	21.53	21.51	
5	QPSK	12	13	21.47	21.52	21.53	
5	QPSK	25	0	21.54	21.59	21.56	23
5	16QAM	1	0	22.74	22.75	22.65	
5	16QAM	1	12	22.52	22.55	22.45	
5	16QAM	1	24	22.53	22.56	22.54	23
5	16QAM	12	0	21.54	21.59	21.43	
5	16QAM	12	7	21.47	21.57	21.49	
5	16QAM	12	13	21.47	21.47	21.39	22
5	16QAM	25	0	21.55	21.47	21.51	
5	16QAM	12	0	21.55	21.47	21.51	
5	64QAM	1	0	21.67	21.75	21.67	22
5	64QAM	1	12	21.80	21.84	21.83	
5	64QAM	1	24	21.49	21.55	21.47	
5	64QAM	12	0	20.42	20.51	20.43	21
5	64QAM	12	7	20.45	20.56	20.47	
5	64QAM	12	13	20.31	20.45	20.38	



5	64QAM	25	0	20.52	20.51	20.44	
5	256QAM	1	0	18.48	18.53	18.50	19
5	256QAM	1	12	18.67	18.72	18.62	
5	256QAM	1	24	18.46	18.51	18.43	
5	256QAM	12	0	18.53	18.57	18.50	19
5	256QAM	12	7	18.50	18.55	18.47	
5	256QAM	12	13	18.54	18.62	18.47	
5	256QAM	25	0	18.36	18.53	18.45	

<LTE Band 25_Ant 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				26140	26340	26590	
Frequency (MHz)				1860	1880	1905	
20	QPSK	1	0	23.02	22.81	22.79	24
20	QPSK	1	49	22.88	22.77	22.80	
20	QPSK	1	99	22.77	22.76	22.94	
20	QPSK	50	0	21.87	21.64	21.58	23
20	QPSK	50	24	21.74	21.59	21.78	
20	QPSK	50	50	21.75	21.61	21.77	
20	QPSK	100	0	21.68	21.66	21.69	
20	16QAM	1	0	22.82	22.60	22.61	23
20	16QAM	1	49	22.71	22.59	22.83	
20	16QAM	1	99	22.76	22.44	22.86	
20	16QAM	50	0	21.81	21.61	21.62	22
20	16QAM	50	24	21.76	21.62	21.78	
20	16QAM	50	50	21.70	21.61	21.81	
20	16QAM	100	0	21.76	21.61	21.80	
20	64QAM	1	0	21.94	21.76	21.68	22
20	64QAM	1	49	21.83	21.66	21.90	
20	64QAM	1	99	21.70	21.63	21.81	
20	64QAM	50	0	20.80	20.57	20.69	21
20	64QAM	50	24	20.74	20.52	20.74	
20	64QAM	50	50	20.74	20.64	20.71	
20	64QAM	100	0	20.74	20.53	20.75	
20	256QAM	1	0	18.84	18.67	18.83	19
20	256QAM	1	49	18.75	18.77	18.69	
20	256QAM	1	99	18.63	18.67	18.87	
20	256QAM	50	0	18.87	18.61	18.64	19
20	256QAM	50	24	18.73	18.45	18.81	
20	256QAM	50	50	18.71	18.64	18.71	
20	256QAM	100	0	18.69	18.55	18.70	
Channel				26115	26340	26615	
Frequency (MHz)				1857.5	1880	1907.5	
15	QPSK	1	0	22.98	22.75	22.70	24
15	QPSK	1	37	22.87	22.68	22.80	
15	QPSK	1	74	22.68	22.68	22.94	
15	QPSK	36	0	21.78	21.63	21.53	23
15	QPSK	36	20	21.73	21.49	21.69	
15	QPSK	36	39	21.68	21.55	21.71	
15	QPSK	75	0	21.65	21.64	21.64	
15	16QAM	1	0	22.75	22.58	22.51	23
15	16QAM	1	37	22.65	22.53	22.75	
15	16QAM	1	74	22.71	22.34	22.82	



FCC SAR TEST REPORT

Report No. : FA190614-03B

15	16QAM	36	0	21.74	21.61	21.52	22
15	16QAM	36	20	21.68	21.58	21.74	
15	16QAM	36	39	21.67	21.55	21.79	
15	16QAM	75	0	21.75	21.51	21.80	22
15	64QAM	1	0	21.88	21.72	21.63	
15	64QAM	1	37	21.76	21.59	21.88	
15	64QAM	1	74	21.70	21.60	21.79	21
15	64QAM	36	0	20.75	20.54	20.59	
15	64QAM	36	20	20.67	20.50	20.68	
15	64QAM	36	39	20.66	20.58	20.69	
15	64QAM	75	0	20.66	20.45	20.66	19
15	256QAM	1	0	18.75	18.63	18.75	
15	256QAM	1	37	18.74	18.74	18.64	
15	256QAM	1	74	18.54	18.64	18.86	19
15	256QAM	36	0	18.83	18.57	18.56	
15	256QAM	36	20	18.70	18.41	18.79	
15	256QAM	36	39	18.62	18.63	18.62	
15	256QAM	75	0	18.68	18.52	18.64	Tune-up limit (dBm)
Channel				26090	26340	26640	
Frequency (MHz)				1855	1880	1910	
10	QPSK	1	0	22.94	22.76	22.75	24
10	QPSK	1	25	22.82	22.73	22.78	
10	QPSK	1	49	22.69	22.75	22.91	
10	QPSK	25	0	21.80	21.62	21.49	23
10	QPSK	25	12	21.72	21.50	21.69	
10	QPSK	25	25	21.67	21.59	21.73	
10	QPSK	50	0	21.63	21.60	21.66	23
10	16QAM	1	0	22.79	22.51	22.59	
10	16QAM	1	25	22.69	22.50	22.78	
10	16QAM	1	49	22.69	22.40	22.85	
10	16QAM	25	0	21.71	21.52	21.61	22
10	16QAM	25	12	21.69	21.58	21.76	
10	16QAM	25	25	21.70	21.51	21.72	
10	16QAM	50	0	21.76	21.55	21.77	
10	64QAM	1	0	21.88	21.70	21.65	22
10	64QAM	1	25	21.74	21.60	21.86	
10	64QAM	1	49	21.70	21.60	21.72	
10	64QAM	25	0	20.73	20.55	20.61	21
10	64QAM	25	12	20.66	20.50	20.69	
10	64QAM	25	25	20.69	20.62	20.68	
10	64QAM	50	0	20.67	20.49	20.68	
10	256QAM	1	0	18.75	18.62	18.79	19
10	256QAM	1	25	18.73	18.67	18.59	
10	256QAM	1	49	18.63	18.58	18.77	
10	256QAM	25	0	18.84	18.53	18.56	19
10	256QAM	25	12	18.73	18.38	18.76	
10	256QAM	25	25	18.65	18.55	18.70	
10	256QAM	50	0	18.63	18.48	18.67	
Channel				26065	26340	26665	Tune-up limit (dBm)
Frequency (MHz)				1852.5	1880	1912.5	
5	QPSK	1	0	23.01	22.71	22.78	24
5	QPSK	1	12	22.85	22.76	22.75	
5	QPSK	1	24	22.73	22.72	22.84	
5	QPSK	12	0	21.85	21.54	21.56	23
5	QPSK	12	7	21.69	21.49	21.69	
5	QPSK	12	13	21.69	21.55	21.76	



FCC SAR TEST REPORT

Report No. : FA190614-03B

5	QPSK	25	0	21.65	21.66	21.65	
5	16QAM	1	0	22.80	22.55	22.53	23
5	16QAM	1	12	22.68	22.57	22.81	
5	16QAM	1	24	22.75	22.42	22.86	
5	16QAM	12	0	21.81	21.53	21.52	22
5	16QAM	12	7	21.67	21.62	21.76	
5	16QAM	12	13	21.66	21.54	21.73	
5	16QAM	25	0	21.76	21.52	21.74	
5	64QAM	1	0	21.92	21.75	21.58	22
5	64QAM	1	12	21.83	21.63	21.86	
5	64QAM	1	24	21.62	21.53	21.76	
5	64QAM	12	0	20.78	20.49	20.69	21
5	64QAM	12	7	20.73	20.50	20.68	
5	64QAM	12	13	20.67	20.56	20.71	
5	64QAM	25	0	20.64	20.53	20.71	
5	256QAM	1	0	18.82	18.60	18.81	19
5	256QAM	1	12	18.69	18.75	18.68	
5	256QAM	1	24	18.58	18.61	18.86	
5	256QAM	12	0	18.83	18.55	18.58	19
5	256QAM	12	7	18.68	18.40	18.74	
5	256QAM	12	13	18.64	18.62	18.65	
5	256QAM	25	0	18.67	18.45	18.69	
Channel				26055	26340	26675	Tune-up limit (dBm)
Frequency (MHz)				1851.5	1880	1913.5	
3	QPSK	1	0	22.98	22.71	22.76	24
3	QPSK	1	8	22.82	22.67	22.77	
3	QPSK	1	14	22.67	22.71	22.84	
3	QPSK	8	0	21.77	21.62	21.51	23
3	QPSK	8	4	21.73	21.50	21.68	
3	QPSK	8	7	21.66	21.52	21.74	
3	QPSK	15	0	21.62	21.65	21.68	
3	16QAM	1	0	22.72	22.57	22.54	23
3	16QAM	1	8	22.70	22.56	22.78	
3	16QAM	1	14	22.73	22.40	22.86	
3	16QAM	8	0	21.75	21.61	21.60	22
3	16QAM	8	4	21.67	21.60	21.77	
3	16QAM	8	7	21.61	21.51	21.81	
3	16QAM	15	0	21.67	21.51	21.70	
3	64QAM	1	0	21.88	21.68	21.65	22
3	64QAM	1	8	21.83	21.58	21.84	
3	64QAM	1	14	21.68	21.59	21.77	
3	64QAM	8	0	20.80	20.57	20.65	21
3	64QAM	8	4	20.66	20.49	20.74	
3	64QAM	8	7	20.70	20.59	20.61	
3	64QAM	15	0	20.69	20.46	20.73	
3	256QAM	1	0	18.76	18.60	18.81	19
3	256QAM	1	8	18.75	18.77	18.66	
3	256QAM	1	14	18.55	18.63	18.77	
3	256QAM	8	0	18.86	18.57	18.62	19
3	256QAM	8	4	18.70	18.37	18.77	
3	256QAM	8	7	18.61	18.60	18.64	
3	256QAM	15	0	18.66	18.53	18.67	
Channel				26047	26340	26683	Tune-up limit (dBm)
Frequency (MHz)				1850.7	1880	1914.3	
1.4	QPSK	1	0	22.98	22.79	22.71	24
1.4	QPSK	1	3	22.86	22.77	22.79	



1.4	QPSK	1	5	22.69	22.73	22.89	
1.4	QPSK	3	0	22.93	22.73	22.69	
1.4	QPSK	3	1	22.86	22.67	22.73	
1.4	QPSK	3	3	22.71	22.66	22.85	
1.4	QPSK	6	0	21.61	21.58	21.69	23
1.4	16QAM	1	0	22.78	22.55	22.52	23
1.4	16QAM	1	3	22.69	22.55	22.79	
1.4	16QAM	1	5	22.66	22.37	22.76	
1.4	16QAM	3	0	22.80	22.55	22.55	
1.4	16QAM	3	1	22.66	22.56	22.74	
1.4	16QAM	3	3	22.72	22.41	22.86	
1.4	16QAM	6	0	21.76	21.56	21.73	22
1.4	64QAM	1	0	21.86	21.75	21.66	22
1.4	64QAM	1	3	21.81	21.63	21.81	
1.4	64QAM	1	5	21.60	21.57	21.74	
1.4	64QAM	3	0	21.89	21.74	21.67	
1.4	64QAM	3	1	21.83	21.62	21.84	
1.4	64QAM	3	3	21.61	21.63	21.79	
1.4	64QAM	6	0	20.65	20.47	20.72	21
1.4	256QAM	1	0	18.74	18.64	18.73	19
1.4	256QAM	1	3	18.67	18.76	18.62	
1.4	256QAM	1	5	18.57	18.64	18.78	
1.4	256QAM	3	0	18.86	18.53	18.61	
1.4	256QAM	3	1	18.68	18.35	18.79	
1.4	256QAM	3	3	18.66	18.57	18.66	
1.4	256QAM	6	0	18.62	18.45	18.68	19

<LTE Band 26_Ant 1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				26765	26865	26965	
Frequency (MHz)				821.5	831.5	841.5	
15	QPSK	1	0	22.51	22.64	22.81	24
15	QPSK	1	37	22.40	22.53	22.60	
15	QPSK	1	74	22.46	22.53	22.47	
15	QPSK	36	0	21.43	21.61	21.61	23
15	QPSK	36	20	21.55	21.48	21.63	
15	QPSK	36	39	21.58	21.59	21.69	
15	QPSK	75	0	21.55	21.53	21.59	23
15	16QAM	1	0	21.63	21.55	21.71	
15	16QAM	1	37	21.65	21.82	21.76	
15	16QAM	1	74	21.85	21.47	21.68	22
15	16QAM	36	0	20.50	20.55	20.58	
15	16QAM	36	20	20.47	20.45	20.63	
15	16QAM	36	39	20.54	20.63	20.68	22
15	16QAM	75	0	20.52	20.53	20.52	
15	64QAM	1	0	20.60	20.66	20.61	
15	64QAM	1	37	20.62	20.73	20.75	22
15	64QAM	1	74	20.61	20.91	20.76	
15	64QAM	36	0	19.44	19.59	19.67	
15	64QAM	36	20	19.58	19.48	19.54	21
15	64QAM	36	39	19.50	19.61	19.59	
15	64QAM	75	0	19.57	19.53	19.55	
15	256QAM	1	0	17.67	17.56	17.72	19



FCC SAR TEST REPORT

Report No. : FA190614-03B

15	256QAM	1	37	17.65	17.54	17.85	19
15	256QAM	1	74	17.73	17.81	17.84	
15	256QAM	36	0	17.46	17.60	17.60	
15	256QAM	36	20	17.53	17.56	17.67	
15	256QAM	36	39	17.54	17.61	17.61	
15	256QAM	75	0	17.54	17.58	17.63	
Channel				26740	26865	26990	Tune-up limit (dBm)
Frequency (MHz)				819	831.5	844	
10	QPSK	1	0	22.50	22.63	22.80	24
10	QPSK	1	25	22.33	22.50	22.58	
10	QPSK	1	49	22.43	22.47	22.40	
10	QPSK	25	0	21.38	21.52	21.55	23
10	QPSK	25	12	21.50	21.38	21.59	
10	QPSK	25	25	21.56	21.52	21.60	
10	QPSK	50	0	21.49	21.46	21.54	
10	16QAM	1	0	21.53	21.55	21.62	23
10	16QAM	1	25	21.56	21.78	21.75	
10	16QAM	1	49	21.85	21.47	21.60	
10	16QAM	25	0	20.48	20.51	20.58	22
10	16QAM	25	12	20.40	20.45	20.58	
10	16QAM	25	25	20.44	20.55	20.62	
10	16QAM	50	0	20.43	20.46	20.52	
10	64QAM	1	0	20.60	20.65	20.57	22
10	64QAM	1	25	20.54	20.64	20.74	
10	64QAM	1	49	20.56	20.81	20.74	
10	64QAM	25	0	19.43	19.58	19.60	21
10	64QAM	25	12	19.56	19.48	19.53	
10	64QAM	25	25	19.46	19.53	19.59	
10	64QAM	50	0	19.55	19.49	19.50	
10	256QAM	1	0	17.63	17.54	17.71	19
10	256QAM	1	25	17.63	17.46	17.75	
10	256QAM	1	49	17.73	17.79	17.82	
10	256QAM	25	0	17.40	17.54	17.55	19
10	256QAM	25	12	17.43	17.48	17.58	
10	256QAM	25	25	17.48	17.55	17.51	
10	256QAM	50	0	17.45	17.53	17.56	
Channel				26715	26865	27015	Tune-up limit (dBm)
Frequency (MHz)				816.5	831.5	846.5	
5	QPSK	1	0	22.44	22.63	22.73	24
5	QPSK	1	12	22.31	22.43	22.52	
5	QPSK	1	24	22.44	22.53	22.42	
5	QPSK	12	0	21.36	21.55	21.52	23
5	QPSK	12	7	21.45	21.40	21.57	
5	QPSK	12	13	21.48	21.55	21.64	
5	QPSK	25	0	21.48	21.49	21.52	
5	16QAM	1	0	21.55	21.45	21.70	23
5	16QAM	1	12	21.64	21.79	21.72	
5	16QAM	1	24	21.83	21.43	21.64	
5	16QAM	12	0	20.49	20.50	20.54	22
5	16QAM	12	7	20.40	20.41	20.54	
5	16QAM	12	13	20.53	20.55	20.59	
5	16QAM	25	0	20.42	20.46	20.52	
5	64QAM	1	0	20.57	20.57	20.58	22
5	64QAM	1	12	20.54	20.64	20.65	
5	64QAM	1	24	20.56	20.81	20.73	
5	64QAM	12	0	19.40	19.52	19.59	21



FCC SAR TEST REPORT

Report No. : FA190614-03B

5	64QAM	12	7	19.52	19.38	19.45	
5	64QAM	12	13	19.44	19.56	19.59	
5	64QAM	25	0	19.48	19.53	19.48	
5	256QAM	1	0	17.67	17.51	17.64	19
5	256QAM	1	12	17.58	17.48	17.81	
5	256QAM	1	24	17.63	17.81	17.82	
5	256QAM	12	0	17.46	17.56	17.60	19
5	256QAM	12	7	17.43	17.54	17.58	
5	256QAM	12	13	17.45	17.52	17.55	
5	256QAM	25	0	17.44	17.51	17.61	
Channel				26705	26865	27025	Tune-up limit (dBm)
Frequency (MHz)				815.5	831.5	847.5	
3	QPSK	1	0	22.48	22.61	22.74	24
3	QPSK	1	8	22.34	22.46	22.56	
3	QPSK	1	14	22.38	22.46	22.47	
3	QPSK	8	0	21.35	21.59	21.51	23
3	QPSK	8	4	21.54	21.40	21.54	
3	QPSK	8	7	21.52	21.49	21.65	
3	QPSK	15	0	21.54	21.48	21.50	
3	16QAM	1	0	21.62	21.53	21.69	23
3	16QAM	1	8	21.57	21.74	21.68	
3	16QAM	1	14	21.82	21.39	21.59	
3	16QAM	8	0	20.45	20.55	20.49	22
3	16QAM	8	4	20.37	20.40	20.60	
3	16QAM	8	7	20.50	20.56	20.60	
3	16QAM	15	0	20.50	20.43	20.43	
3	64QAM	1	0	20.56	20.60	20.59	22
3	64QAM	1	8	20.56	20.69	20.70	
3	64QAM	1	14	20.56	20.85	20.67	
3	64QAM	8	0	19.42	19.54	19.62	21
3	64QAM	8	4	19.54	19.41	19.49	
3	64QAM	8	7	19.45	19.58	19.57	
3	64QAM	15	0	19.53	19.48	19.54	
3	256QAM	1	0	17.65	17.51	17.64	19
3	256QAM	1	8	17.60	17.54	17.76	
3	256QAM	1	14	17.68	17.72	17.75	
3	256QAM	8	0	17.45	17.55	17.57	19
3	256QAM	8	4	17.49	17.52	17.60	
3	256QAM	8	7	17.50	17.51	17.59	
3	256QAM	15	0	17.46	17.52	17.63	
Channel				26697	26865	27033	Tune-up limit (dBm)
Frequency (MHz)				814.7	831.5	848.3	
1.4	QPSK	1	0	22.44	22.57	22.79	24
1.4	QPSK	1	3	22.36	22.53	22.55	
1.4	QPSK	1	5	22.45	22.50	22.37	
1.4	QPSK	3	0	22.44	22.63	22.71	
1.4	QPSK	3	1	22.31	22.45	22.53	
1.4	QPSK	3	3	22.44	22.46	22.43	
1.4	QPSK	6	0	21.47	21.47	21.50	23
1.4	16QAM	1	0	21.62	21.48	21.69	23
1.4	16QAM	1	3	21.61	21.79	21.66	
1.4	16QAM	1	5	21.83	21.47	21.58	
1.4	16QAM	3	0	21.60	21.52	21.69	
1.4	16QAM	3	1	21.64	21.75	21.69	
1.4	16QAM	3	3	21.77	21.41	21.63	
1.4	16QAM	6	0	20.49	20.49	20.48	22



1.4	64QAM	1	0	20.52	20.59	20.53	22
1.4	64QAM	1	3	20.58	20.73	20.72	
1.4	64QAM	1	5	20.52	20.88	20.69	
1.4	64QAM	3	0	20.51	20.59	20.53	
1.4	64QAM	3	1	20.57	20.63	20.75	
1.4	64QAM	3	3	20.58	20.85	20.71	
1.4	64QAM	6	0	19.50	19.48	19.46	21
1.4	256QAM	1	0	17.66	17.51	17.69	19
1.4	256QAM	1	3	17.55	17.48	17.79	
1.4	256QAM	1	5	17.70	17.73	17.79	
1.4	256QAM	3	0	17.59	17.55	17.63	
1.4	256QAM	3	1	17.56	17.52	17.81	
1.4	256QAM	3	3	17.69	17.79	17.78	
1.4	256QAM	6	0	17.54	17.52	17.62	19

<LTE Band 71_Ant 1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				133222	133297	133372	Tune-up limit (dBm)
Frequency (MHz)				673	680.5	688	
20	QPSK	1	0	22.69	22.90	23.05	24
20	QPSK	1	49	22.18	22.42	22.60	
20	QPSK	1	99	22.13	22.36	22.37	
20	QPSK	50	0	21.13	21.10	21.20	23
20	QPSK	50	24	21.19	21.15	21.23	
20	QPSK	50	50	21.15	21.19	21.28	
20	QPSK	100	0	21.14	21.12	21.20	23
20	16QAM	1	0	21.52	21.82	21.79	
20	16QAM	1	49	21.64	21.93	21.75	
20	16QAM	1	99	21.62	21.74	21.78	22
20	16QAM	50	0	20.64	20.62	20.68	
20	16QAM	50	24	20.63	20.62	20.65	
20	16QAM	50	50	20.57	20.73	20.80	22
20	16QAM	100	0	20.72	20.66	20.70	
20	64QAM	1	0	20.72	20.89	20.85	
20	64QAM	1	49	21.02	20.77	20.86	22
20	64QAM	1	99	20.78	20.83	20.79	
20	64QAM	50	0	19.58	19.67	19.72	
20	64QAM	50	24	19.58	19.66	19.72	21
20	64QAM	50	50	19.60	19.75	19.69	
20	64QAM	100	0	19.63	19.67	19.74	
20	256QAM	1	0	17.68	17.66	17.72	19
20	256QAM	1	49	17.78	17.57	17.79	
20	256QAM	1	99	17.76	17.70	17.95	
20	256QAM	50	0	17.57	17.67	17.64	19
20	256QAM	50	24	17.66	17.73	17.76	
20	256QAM	50	50	17.73	17.75	17.70	
20	256QAM	100	0	17.74	17.66	17.73	Tune-up limit (dBm)
Channel				133197	133297	133397	
Frequency (MHz)				670.5	680.5	690.5	
15	QPSK	1	0	22.66	22.82	23.02	24
15	QPSK	1	37	22.08	22.38	22.55	
15	QPSK	1	74	22.07	22.35	22.30	
15	QPSK	36	0	21.08	21.10	21.17	23



FCC SAR TEST REPORT

Report No. : FA190614-03B

15	QPSK	36	20	21.12	21.06	21.13	
15	QPSK	36	39	21.05	21.16	21.26	
15	QPSK	75	0	21.13	21.11	21.10	
15	16QAM	1	0	21.44	21.74	21.72	23
15	16QAM	1	37	21.55	21.84	21.68	
15	16QAM	1	74	21.62	21.68	21.75	
15	16QAM	36	0	20.54	20.53	20.58	22
15	16QAM	36	20	20.60	20.54	20.55	
15	16QAM	36	39	20.53	20.68	20.76	
15	16QAM	75	0	20.63	20.60	20.68	
15	64QAM	1	0	20.66	20.82	20.78	22
15	64QAM	1	37	21.01	20.69	20.76	
15	64QAM	1	74	20.76	20.82	20.76	
15	64QAM	36	0	19.50	19.58	19.69	21
15	64QAM	36	20	19.56	19.62	19.62	
15	64QAM	36	39	19.58	19.66	19.68	
15	64QAM	75	0	19.57	19.59	19.74	
15	256QAM	1	0	17.61	17.63	17.72	19
15	256QAM	1	37	17.73	17.52	17.73	
15	256QAM	1	74	17.66	17.60	17.91	
15	256QAM	36	0	17.57	17.65	17.64	19
15	256QAM	36	20	17.66	17.65	17.74	
15	256QAM	36	39	17.66	17.68	17.65	
15	256QAM	75	0	17.73	17.60	17.71	
Channel				133172	133297	133422	Tune-up limit (dBm)
Frequency (MHz)				668	680.5	693	
10	QPSK	1	0	22.64	22.89	23.02	24
10	QPSK	1	25	22.14	22.34	22.52	
10	QPSK	1	49	22.04	22.32	22.29	
10	QPSK	25	0	21.07	21.03	21.11	23
10	QPSK	25	12	21.12	21.09	21.18	
10	QPSK	25	25	21.11	21.15	21.28	
10	QPSK	50	0	21.10	21.04	21.20	
10	16QAM	1	0	21.51	21.72	21.78	23
10	16QAM	1	25	21.55	21.85	21.70	
10	16QAM	1	49	21.53	21.74	21.76	
10	16QAM	25	0	20.55	20.57	20.66	22
10	16QAM	25	12	20.62	20.58	20.60	
10	16QAM	25	25	20.47	20.66	20.79	
10	16QAM	50	0	20.72	20.56	20.60	
10	64QAM	1	0	20.65	20.84	20.79	22
10	64QAM	1	25	21.01	20.76	20.77	
10	64QAM	1	49	20.76	20.73	20.76	
10	64QAM	25	0	19.55	19.58	19.67	
10	64QAM	25	12	19.55	19.66	19.64	21
10	64QAM	25	25	19.53	19.71	19.60	
10	64QAM	50	0	19.58	19.63	19.67	
10	256QAM	1	0	17.67	17.57	17.70	19
10	256QAM	1	25	17.77	17.53	17.76	
10	256QAM	1	49	17.76	17.64	17.91	
10	256QAM	25	0	17.54	17.66	17.59	19
10	256QAM	25	12	17.58	17.69	17.72	
10	256QAM	25	25	17.67	17.73	17.61	
10	256QAM	50	0	17.69	17.61	17.72	
Channel				133147	133297	133447	Tune-up limit (dBm)
Frequency (MHz)				665.5	680.5	695.5	



5	QPSK	1	0	22.63	22.84	23.03	24
5	QPSK	1	12	22.14	22.34	22.50	
5	QPSK	1	24	22.03	22.33	22.37	
5	QPSK	12	0	21.03	21.01	21.17	23
5	QPSK	12	7	21.15	21.10	21.17	
5	QPSK	12	13	21.07	21.13	21.27	
5	QPSK	25	0	21.08	21.05	21.16	23
5	16QAM	1	0	21.49	21.82	21.76	
5	16QAM	1	12	21.58	21.88	21.75	
5	16QAM	1	24	21.55	21.72	21.78	22
5	16QAM	12	0	20.61	20.54	20.63	
5	16QAM	12	7	20.60	20.54	20.57	
5	16QAM	12	13	20.56	20.64	20.78	22
5	16QAM	25	0	20.71	20.57	20.64	
5	64QAM	1	0	20.67	20.88	20.85	
5	64QAM	1	12	20.98	20.72	20.78	22
5	64QAM	1	24	20.68	20.78	20.78	
5	64QAM	12	0	19.54	19.60	19.68	
5	64QAM	12	7	19.50	19.56	19.69	21
5	64QAM	12	13	19.53	19.74	19.60	
5	64QAM	25	0	19.56	19.65	19.68	
5	256QAM	1	0	17.65	17.57	17.72	19
5	256QAM	1	12	17.78	17.54	17.79	
5	256QAM	1	24	17.73	17.67	17.95	
5	256QAM	12	0	17.49	17.66	17.62	19
5	256QAM	12	7	17.63	17.71	17.70	
5	256QAM	12	13	17.73	17.68	17.66	
5	256QAM	25	0	17.66	17.63	17.69	

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

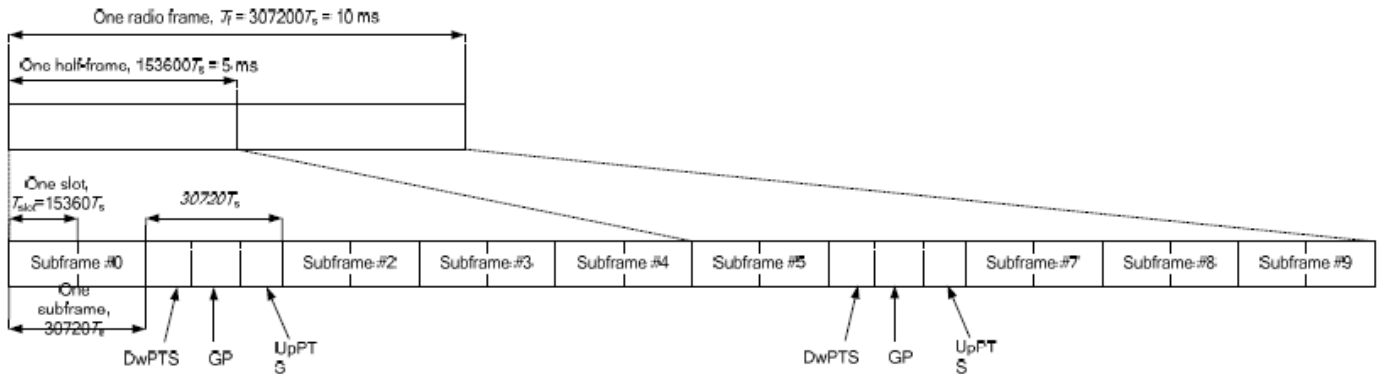


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink			
	DwPTS	UpPTS		DwPTS	UpPTS		
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	
1	$19760 \cdot T_s$			$20480 \cdot T_s$			
2	$21952 \cdot T_s$			$23040 \cdot T_s$			
3	$24144 \cdot T_s$			$25600 \cdot T_s$			
4	$26336 \cdot T_s$			$7680 \cdot T_s$			
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	
6	$19760 \cdot T_s$			$23040 \cdot T_s$			
7	$21952 \cdot T_s$			$12800 \cdot T_s$			
8	$24144 \cdot T_s$			-			-
9	$13168 \cdot T_s$			-			-

Special subframe (30720·T_s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T_s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<LTE Band 41_Ant 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				39750	40185	40620	41055	41490	
Frequency (MHz)				2506	2549.5	2593	2636.5	2680	
20	QPSK	1	0	23.15	23.09	23.06	22.85	23.07	24
20	QPSK	1	49	22.92	22.67	22.68	22.78	22.87	
20	QPSK	1	99	22.78	22.72	22.79	22.32	22.69	
20	QPSK	50	0	21.90	21.91	21.87	21.78	21.75	23
20	QPSK	50	24	21.93	21.93	21.80	21.86	21.88	
20	QPSK	50	50	21.95	21.88	21.84	21.69	21.91	
20	QPSK	100	0	21.98	21.93	21.89	21.79	21.78	24
20	16QAM	1	0	22.87	22.88	22.91	22.63	22.59	
20	16QAM	1	49	22.90	22.72	22.77	22.86	22.84	
20	16QAM	1	99	22.90	22.84	22.69	22.27	22.66	23
20	16QAM	50	0	21.98	21.95	21.86	21.77	21.74	
20	16QAM	50	24	21.96	21.95	21.77	21.87	21.85	
20	16QAM	50	50	21.94	21.87	21.83	21.68	21.89	23
20	16QAM	100	0	21.97	21.91	21.88	21.77	21.78	
20	64QAM	1	0	21.87	21.85	21.96	21.61	21.61	
20	64QAM	1	49	21.82	21.93	21.87	21.94	21.93	23
20	64QAM	1	99	21.81	21.82	21.68	21.25	21.61	
20	64QAM	50	0	20.94	20.91	20.86	20.80	20.77	
20	64QAM	50	24	20.99	20.90	20.83	20.89	20.86	22
20	64QAM	50	50	20.94	20.88	20.86	20.68	20.89	
20	64QAM	100	0	20.98	20.91	20.92	20.75	20.74	
20	256QAM	1	0	18.91	18.88	18.96	18.51	18.48	20
20	256QAM	1	49	18.88	18.86	18.79	18.72	18.89	
20	256QAM	1	99	18.96	18.74	18.88	18.25	18.71	
20	256QAM	50	0	19.00	18.93	18.87	18.77	18.77	20
20	256QAM	50	24	18.97	18.93	18.84	18.86	18.85	
20	256QAM	50	50	18.96	18.88	18.81	18.65	18.87	
20	256QAM	100	0	18.98	18.92	18.89	18.75	18.78	
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5	
15	QPSK	1	0	23.11	23.02	23.01	22.78	23.03	24.00
15	QPSK	1	37	22.87	22.67	22.61	22.70	22.77	
15	QPSK	1	74	22.77	22.67	22.72	22.30	22.63	
15	QPSK	36	0	21.99	21.89	21.81	21.72	21.73	23
15	QPSK	36	20	21.92	21.87	21.74	21.83	21.85	
15	QPSK	36	39	21.92	21.85	21.84	21.69	21.88	
15	QPSK	75	0	21.89	21.91	21.89	21.72	21.75	24
15	16QAM	1	0	22.78	22.85	22.89	22.63	22.57	
15	16QAM	1	37	22.89	22.70	22.71	22.82	22.83	
15	16QAM	1	74	22.88	22.79	22.65	22.23	22.64	23
15	16QAM	36	0	21.98	21.95	21.80	21.71	21.69	
15	16QAM	36	20	21.94	21.91	21.74	21.78	21.80	
15	16QAM	36	39	21.93	21.79	21.83	21.63	21.85	23
15	16QAM	75	0	21.94	21.86	21.84	21.69	21.72	
15	64QAM	1	0	21.77	21.78	21.89	21.52	21.61	
15	64QAM	1	37	21.73	21.86	21.79	21.89	21.87	23
15	64QAM	1	74	21.72	21.74	21.67	21.25	21.57	
15	64QAM	36	0	20.90	20.88	20.82	20.74	20.67	
15	64QAM	36	20	20.95	20.83	20.75	20.89	20.78	22
15	64QAM	36	39	20.84	20.87	20.78	20.67	20.81	
15	64QAM	75	0	20.89	20.88	20.86	20.68	20.74	



FCC SAR TEST REPORT

Report No. : FA190614-03B

15	256QAM	1	0	18.86	18.87	18.92	18.45	18.47	20
15	256QAM	1	37	18.80	18.78	18.69	18.62	18.79	
15	256QAM	1	74	18.86	18.64	18.81	18.22	18.65	
15	256QAM	36	0	18.91	18.85	18.79	18.75	18.70	20
15	256QAM	36	20	18.97	18.83	18.83	18.85	18.80	
15	256QAM	36	39	18.94	18.84	18.80	18.62	18.84	
15	256QAM	75	0	18.93	18.90	18.80	18.67	18.69	
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)
Frequency (MHz)				2501	2547	2593	2639	2685	
10	QPSK	1	0	23.14	23.03	22.96	22.81	23.06	24.00
10	QPSK	1	25	22.84	22.65	22.59	22.68	22.82	
10	QPSK	1	49	22.78	22.66	22.71	22.23	22.63	
10	QPSK	25	0	21.99	21.85	21.84	21.75	21.69	23
10	QPSK	25	12	21.90	21.90	21.73	21.83	21.81	
10	QPSK	25	25	21.95	21.82	21.74	21.62	21.90	
10	QPSK	50	0	21.98	21.92	21.84	21.70	21.78	
10	16QAM	1	0	22.80	22.88	22.86	22.59	22.55	24
10	16QAM	1	25	22.87	22.63	22.70	22.79	22.80	
10	16QAM	1	49	22.83	22.81	22.60	22.21	22.61	
10	16QAM	25	0	21.90	21.91	21.78	21.73	21.68	23
10	16QAM	25	12	21.87	21.88	21.73	21.83	21.85	
10	16QAM	25	25	21.88	21.79	21.74	21.60	21.82	
10	16QAM	50	0	21.87	21.85	21.78	21.68	21.71	
10	64QAM	1	0	21.80	21.78	21.95	21.53	21.53	23
10	64QAM	1	25	21.82	21.83	21.81	21.92	21.92	
10	64QAM	1	49	21.79	21.77	21.58	21.16	21.54	
10	64QAM	25	0	20.90	20.86	20.77	20.75	20.72	22
10	64QAM	25	12	20.92	20.90	20.80	20.79	20.76	
10	64QAM	25	25	20.93	20.86	20.81	20.67	20.80	
10	64QAM	50	0	20.90	20.83	20.82	20.69	20.74	
10	256QAM	1	0	18.87	18.83	18.86	18.47	18.48	20
10	256QAM	1	25	18.80	18.83	18.75	18.72	18.80	
10	256QAM	1	49	18.90	18.73	18.79	18.18	18.66	
10	256QAM	25	0	18.97	18.84	18.78	18.71	18.77	20
10	256QAM	25	12	18.90	18.86	18.83	18.80	18.76	
10	256QAM	25	25	18.93	18.80	18.81	18.63	18.77	
10	256QAM	50	0	18.97	18.88	18.83	18.67	18.76	
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5	
5	QPSK	1	0	23.13	23.04	22.97	22.76	23.05	24.00
5	QPSK	1	12	22.86	22.63	22.64	22.74	22.87	
5	QPSK	1	24	22.77	22.69	22.78	22.22	22.60	
5	QPSK	12	0	21.98	21.85	21.87	21.73	21.68	23
5	QPSK	12	7	21.94	21.84	21.77	21.76	21.86	
5	QPSK	12	13	21.90	21.83	21.80	21.60	21.81	
5	QPSK	25	0	21.94	21.85	21.87	21.70	21.68	
5	16QAM	1	0	22.78	22.84	22.84	22.59	22.51	24
5	16QAM	1	12	22.85	22.62	22.73	22.86	22.82	
5	16QAM	1	24	22.80	22.77	22.59	22.24	22.58	
5	16QAM	12	0	21.89	21.95	21.84	21.69	21.69	23
5	16QAM	12	7	21.91	21.90	21.77	21.79	21.76	
5	16QAM	12	13	21.87	21.83	21.75	21.64	21.88	
5	16QAM	25	0	21.90	21.81	21.83	21.68	21.77	
5	64QAM	1	0	21.80	21.78	21.92	21.61	21.55	23
5	64QAM	1	12	21.79	21.93	21.79	21.93	21.90	
5	64QAM	1	24	21.73	21.72	21.58	21.15	21.61	



FCC SAR TEST REPORT

Report No. : FA190614-03B

5	64QAM	12	0	20.84	20.88	20.86	20.73	20.75	22
5	64QAM	12	7	20.96	20.82	20.83	20.81	20.84	
5	64QAM	12	13	20.89	20.85	20.76	20.59	20.84	
5	64QAM	25	0	20.88	20.81	20.88	20.69	20.66	
5	256QAM	1	0	18.83	18.82	18.88	18.46	18.40	20
5	256QAM	1	12	18.81	18.83	18.72	18.64	18.82	
5	256QAM	1	24	18.96	18.67	18.82	18.24	18.67	
5	256QAM	12	0	19.00	18.86	18.78	18.75	18.74	20
5	256QAM	12	7	18.95	18.89	18.79	18.77	18.81	
5	256QAM	12	13	18.87	18.88	18.78	18.61	18.78	
5	256QAM	25	0	18.97	18.87	18.81	18.72	18.71	



<LTE Carrier Aggregation combinations>

General Note:

- 1. This device supports Carrier Aggregation on downlink only for inter and intra band. For the device supports combination bands and configurations are according to 3GPP.
- 2. In applying the existing power measurement procedure of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of the frequency band and CCs in each row need consideration, and that configurations require power measurement should be highlighted in the below table.

Intra-Band Contiguous	Intra-Band Non-Contiguous
CA_41D	CA_41A-41C

Inter Band		
2 bands/ 2CC	3 bands/ 3CC	4 bands/ 4CC
CA_25A-25A	CA_2A-4A-71A	CA_2A-2A-4A-71A
	CA_2A-66A-71A	CA_2A-2A-66A-71A
	CA_66A-66A-71A	CA_2A-66C-71A
	CA_4A-4A-71A	CA_2A-66A-66A-71A
	CA_2A-2A-71A	CA_25A-41D

<Power verification when LTE Carrier Aggregation Active>

General Note:

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Two Carrier power verification>

Configure		PCC							SCC				Power	
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Intra-Band	Non-Contiguous	25	20	1860	26140	QPSK	1	0	25	5	1992.5	8665	22.87	23.02

<Three Carrier power verification>

Configure		PCC							SCC1				SCC2				Power	
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band		71	20	688	133372	QPSK	1	0	2	20	1960	900	66	20	2155	66886	23.04	23.05
		71	20	688	133372	QPSK	1	0	4	20	2132.5	2175	4	20	2132.5	2175	23.02	23.05
Intra-Band	Non-Contiguous	41	20	2506	39750	QPSK	1	0	41	5	2687.5	41565	41	20	2680	41490	23.01	23.15

<Four Carrier power verification>

Configure		PCC							SCC1				SCC2				SCC3				Power	
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band		71	20	688	133372	QPSK	1	0	2	20	1980	1100	2	20	1960	900	4	20	2132.5	2175	22.91	23.05
		71	20	688	133372	QPSK	1	0	2	20	1980	1100	2	20	1960	900	66	20	2145	66786	22.90	23.05
		71	20	688	133372	QPSK	1	0	2	20	1980	1100	66	20	2145	66786	66	20	2170	67036	22.96	23.05
		66	20	1770	132572	QPSK	1	0	2	20	1980	1100	66	20	2145	66786	71	20	634.5	68761	22.95	23.13
		25	20	1860	26140	QPSK	1	0	41	20	2593	40620	41	20	2636.5	41055	41	20	2549.5	40185	22.99	23.02

<LTE Uplink carrier aggregation>

2CC Uplink Carrier Aggregation	
Number	Combination
1	41C

<Intra-band>

General Note:

- i. The device supports intra-band uplink carrier aggregation for LTE B41 with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre 3GPP requirement.
- ii. The device supports uplink carrier aggregation with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre the 3GPP requirement.
- iii. According TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- iv. According TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- v. Additional SAR measurement for LTE UL CA whit other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA active.

CA_41C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
39750	39948	QPSK	1	0	0	0	1	0	23.18	24
40185	39987	QPSK	1	0	1	99	2	0	23.76	24
40620	40422	QPSK	1	0	1	99	2	0	23.9	24
41055	40857	QPSK	1	0	1	99	2	0	23.96	24
41490	41292	QPSK	1	0	1	99	2	0	23.78	24

15. 5G NR Output Power (Unit: dBm)

General Note:

1. Referencing the procedure in KDB 941225, the test procedures are outlined as below
 - a. For DFT-OFDM output power measurement, full measurement was done for Pi/2 BPSK and QPSK and for the largest supported bandwidth, repeat test for 16QAM/64QAM/256QAM under 1RB 1Offset configuration. For smaller bandwidth, measure conducted power for Pi/2 BPSK and 1RB 1Offset configuration.
 - b. According to the tune-up, CP-OFDM output power is not ½ dB higher than DFT-OFDM mode, and the reported SAR of DFT-OFDM mode reported SAR is ≤ 1.45 W/kg, SAR test and thus conducted power for CP-OFDM mode is not required.
 - c. To start SAR test for the largest channel bandwidth for Pi/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. Also do SAR test for 50% RB allocation for Pi/2 BPSK SAR testing using 1RB Pi/2 BPSK allocation procedure
 - d. For Pi/2 BPSK with 100% RB allocation, SAR test is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - e. For higher modulation QPSK/16QAM/64QAM/256QAM, according to tune-up document the power level is not ½ dB higher than the same configuration in Pi/2 BPSK, also reported SAR for the Pi/2 BPSK configuration is less than 1.45 W/kg, QPSK/16QAM/64QAM/256QAM SAR testing are not required.
 - f. Smaller bandwidth output power for each RB allocation configuration for this device is not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
2. Due to test setup limitations, SAR testing for NR was performed using Factory Test Mode software to establish the connection and perform SAR with 100% transmission.

<3GPP 38.101 MPR for EN-DC>

Table 6.2.2-1 Maximum power reduction (MPR) for power class 3

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5 ¹	≤ 1.2 ¹	≤ 0.2 ¹
		≤ 0.5 ²	≤ 0.5 ²	0 ²
	QPSK	≤ 1		0
	16 QAM	≤ 2		≤ 1
	64 QAM	≤ 2.5		
CP-OFDM	256 QAM	≤ 4.5		
	QPSK	≤ 3		≤ 1.5
	16 QAM	≤ 3		≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

Table 6.2.2-2 Maximum power reduction (MPR) for power class 2

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5	≤ 2.5	
	256 QAM	≤ 4.5		
CP-OFDM	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		



<n25_Ant 1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				372000	376500	381000	Tune-up limit (dBm)
Frequency (MHz)				1860	1882.5	1905	
20	PI/2 BPSK	1	1	23.35	23.36	23.37	24.0
20	PI/2 BPSK	1	53	23.28	23.32	23.27	
20	PI/2 BPSK	1	104	23.20	23.30	23.24	
20	PI/2 BPSK	50	0	22.61	22.72	22.65	23.5
20	PI/2 BPSK	50	28	23.13	23.21	23.22	24.0
20	PI/2 BPSK	50	56	22.74	22.81	22.81	23.5
20	PI/2 BPSK	100	0	22.69	22.79	22.71	
20	QPSK	1	1	23.12	23.14	23.11	24.0
20	QPSK	1	53	23.24	23.31	23.25	
20	QPSK	1	104	23.16	23.27	23.18	
20	QPSK	50	0	22.14	22.23	22.22	23.0
20	QPSK	50	28	23.12	23.22	23.23	24.0
20	QPSK	50	56	22.25	22.34	22.34	23.0
20	QPSK	100	0	22.21	22.27	22.20	
20	16QAM	1	1	22.34	22.38	22.31	23.0
20	64QAM	1	1	20.81	20.88	20.86	21.5
20	256QAM	1	1	18.68	18.73	18.66	19.5
Channel				371500	376500	381500	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1882.5	1907.5	
15	PI/2 BPSK	1	1	23.16	23.07	23.19	24.0
Channel				371000	376500	382000	Tune-up limit (dBm)
Frequency (MHz)				1855	1882.5	1910	
10	PI/2 BPSK	1	1	22.94	22.95	22.98	24.0
Channel				370500	376500	382500	Tune-up limit (dBm)
Frequency (MHz)				1852.5	1882.5	1912.5	
5	PI/2 BPSK	1	1	23.04	23.00	22.94	24.0



<n25_Ant 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				372000	376500	381000	Tune-up limit (dBm)
Frequency (MHz)				1860	1882.5	1905	
20	PI/2 BPSK	1	1	23.46	23.33	23.16	24.0
20	PI/2 BPSK	1	53	23.14	23.10	22.87	
20	PI/2 BPSK	1	104	23.16	23.13	22.94	
20	PI/2 BPSK	50	0	22.85	22.72	22.48	23.5
20	PI/2 BPSK	50	28	23.17	23.13	22.96	24.0
20	PI/2 BPSK	50	56	22.75	22.65	22.43	23.5
20	PI/2 BPSK	100	0	22.80	22.72	22.46	
20	QPSK	1	1	23.39	23.31	23.13	24.0
20	QPSK	1	53	23.09	23.04	22.77	
20	QPSK	1	104	23.26	23.18	22.92	
20	QPSK	50	0	22.28	22.24	22.06	23.0
20	QPSK	50	28	23.19	23.14	22.95	24.0
20	QPSK	50	56	22.26	22.16	21.90	23.0
20	QPSK	100	0	22.32	22.25	22.02	
20	16QAM	1	1	22.65	22.60	22.35	23.0
20	64QAM	1	1	21.12	21.06	20.88	21.5
20	256QAM	1	1	18.94	18.91	18.68	19.5
Channel				371500	376500	381500	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1882.5	1907.5	
15	PI/2 BPSK	1	1	23.03	23.03	22.99	24.0
Channel				371000	376500	382000	Tune-up limit (dBm)
Frequency (MHz)				1855	1882.5	1910	
10	PI/2 BPSK	1	1	22.83	22.84	22.81	24.0
Channel				370500	376500	382500	Tune-up limit (dBm)
Frequency (MHz)				1852.5	1882.5	1912.5	
5	PI/2 BPSK	1	1	22.86	22.85	22.82	24.0



<n41_Ant 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				509202	518598	528000	24.0
Frequency (MHz)				2546.01	2592.99	2640	
100	PI/2 BPSK	1	1	23.34	23.06	23.16	24.0
100	PI/2 BPSK	1	137	23.32	23.15	23.12	
100	PI/2 BPSK	1	271	23.35	23.34	23.20	
100	PI/2 BPSK	135	0	22.66	22.95	23.00	23.5
100	PI/2 BPSK	135	69	23.14	23.20	23.19	24.0
100	PI/2 BPSK	135	138	22.98	22.95	23.00	23.5
100	PI/2 BPSK	270	0	22.65	22.98	22.88	
100	QPSK	1	1	23.00	23.15	23.07	24.0
100	QPSK	1	137	23.01	23.20	23.26	
100	QPSK	1	271	23.02	23.18	23.11	
100	QPSK	135	0	22.71	22.97	22.90	24.0
100	QPSK	135	69	22.77	23.02	23.09	
100	QPSK	135	138	22.83	23.02	23.11	
100	QPSK	270	0	22.77	22.95	22.95	24.0
100	16QAM	1	1	23.07	23.26	23.24	24.0
100	64QAM	1	1	22.69	22.90	22.92	24.0
100	256QAM	1	1	20.56	20.51	20.56	22.5
Channel				508200	518598	528996	Tune-up limit (dBm)
Frequency (MHz)				2541	2592.99	2644.98	
90	PI/2 BPSK	1	1	22.80	23.05	23.12	24.0
Channel				507204	518598	529998	Tune-up limit (dBm)
Frequency (MHz)				2536.02	2592.99	2649.99	
80	PI/2 BPSK	1	1	22.86	23.02	23.05	24.0
Channel				506202	518598	531000	Tune-up limit (dBm)
Frequency (MHz)				2531.01	2592.99	2655	
70	PI/2 BPSK	1	1	22.82	23.06	22.97	24.0
Channel				505200	518598	531996	Tune-up limit (dBm)
Frequency (MHz)				2526	2592.99	2659.98	
60	PI/2 BPSK	1	1	23.01	23.25	23.27	24.0
Channel				504204	518598	532998	Tune-up limit (dBm)
Frequency (MHz)				2521.02	2592.99	2664.99	
50	PI/2 BPSK	1	1	23.08	23.26	23.18	24.0
Channel				503202	518598	534000	Tune-up limit (dBm)
Frequency (MHz)				2516.01	2592.99	2670	
40	PI/2 BPSK	1	1	23.04	23.28	23.27	24.0
Channel				502200	518598	534996	Tune-up limit (dBm)
Frequency (MHz)				2511	2592.99	2674.98	
30	PI/2 BPSK	1	1	23.05	23.24	23.30	24.0
Channel				501204	518598	535998	Tune-up limit (dBm)
Frequency (MHz)				2506.02	2592.99	2679.99	
20	PI/2 BPSK	1	1	23.06	23.32	23.30	24.0



<n48_Ant 1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				637334	641666	646000	
Frequency (MHz)				3560.01	3624.99	3690	
20	PI/2 BPSK	1	1	20.39	21.29	21.43	21.7
20	PI/2 BPSK	1	26	20.12	21.01	21.32	
20	PI/2 BPSK	1	49	20.29	21.40	21.40	
20	PI/2 BPSK	25	0	19.84	21.00	21.12	21.2
20	PI/2 BPSK	25	13	20.05	21.23	21.34	21.7
20	PI/2 BPSK	25	26	20.03	21.04	21.03	21.2
20	PI/2 BPSK	50	0	20.01	21.06	21.11	
20	QPSK	1	1	19.87	20.95	21.12	21.7
20	QPSK	1	26	20.18	21.37	21.40	
20	QPSK	1	49	20.34	21.33	21.33	
20	QPSK	25	0	20.12	21.05	21.11	21.7
20	QPSK	25	13	20.16	21.28	21.31	
20	QPSK	25	26	20.26	21.31	21.29	
20	QPSK	50	0	19.90	21.02	21.20	21.2
20	16QAM	1	1	20.07	21.09	21.22	21.7
20	64QAM	1	1	18.45	19.55	19.54	19.7
20	256QAM	1	1	16.26	17.34	17.31	17.7
Channel				637000	641666	646332	Tune-up limit (dBm)
Frequency (MHz)				3555	3624.99	3694.98	
10	PI/2 BPSK	1	1	20.39	21.26	21.42	21.7



<n48_Ant 2>


BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				637334	641666	646000	
Frequency (MHz)				3560.01	3624.99	3690	
20	PI/2 BPSK	1	1	20.91	20.84	20.57	21.8
20	PI/2 BPSK	1	26	20.36	20.68	20.03	
20	PI/2 BPSK	1	49	20.19	20.56	19.83	
20	PI/2 BPSK	25	0	20.09	20.37	19.76	21.3
20	PI/2 BPSK	25	13	20.87	20.86	20.30	21.8
20	PI/2 BPSK	25	26	20.00	20.31	19.56	21.3
20	PI/2 BPSK	50	0	20.37	20.25	19.98	
20	QPSK	1	1	20.42	20.74	20.16	21.8
20	QPSK	1	26	20.29	20.63	20.01	
20	QPSK	1	49	20.16	20.50	19.83	
20	QPSK	25	0	20.34	20.61	20.12	21.8
20	QPSK	25	13	20.29	20.57	19.98	
20	QPSK	25	26	20.10	20.31	19.80	
20	QPSK	50	0	19.81	20.01	19.42	21.3
20	16QAM	1	1	19.91	20.09	19.52	21.8
20	64QAM	1	1	18.56	18.83	18.15	19.8
20	256QAM	1	1	16.66	16.77	16.25	17.8
Channel				637000	641666	646332	Tune-up limit (dBm)
Frequency (MHz)				3555	3624.99	3694.98	
10	PI/2 BPSK	1	1	20.90	20.80	20.20	21.8



<n71_Ant 1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				134600	136100	137600	Tune-up limit (dBm)
Frequency (MHz)				673	680.5	688	
20	PI/2 BPSK	1	1	23.27	23.21	23.39	
20	PI/2 BPSK	1	53	23.32	23.27	23.34	24.0
20	PI/2 BPSK	1	104	23.26	23.27	23.30	23.5
20	PI/2 BPSK	50	0	22.76	22.80	22.98	
20	PI/2 BPSK	50	28	23.27	23.30	23.34	24.0
20	PI/2 BPSK	50	56	22.74	22.77	22.95	23.5
20	PI/2 BPSK	100	0	22.76	22.77	22.86	
20	QPSK	1	1	23.23	23.22	23.38	24.0
20	QPSK	1	53	23.29	23.30	23.31	
20	QPSK	1	104	23.30	23.24	23.37	
20	QPSK	50	0	22.34	22.28	22.46	23.0
20	QPSK	50	28	23.28	23.29	23.36	24.0
20	QPSK	50	56	22.32	22.26	22.38	23.0
20	QPSK	100	0	22.32	22.30	22.47	
20	16QAM	1	1	22.43	22.41	22.55	23.0
20	64QAM	1	1	20.90	20.86	20.96	21.5
20	256QAM	1	1	18.65	18.60	18.78	19.5
Channel				134100	136100	138100	Tune-up limit (dBm)
Frequency (MHz)				670.5	680.5	690.5	
15	PI/2 BPSK	1	1	23.25	23.10	23.33	24.0
Channel				133600	136100	138600	Tune-up limit (dBm)
Frequency (MHz)				668	680.5	693	
10	PI/2 BPSK	1	1	23.25	23.06	23.33	24.0
Channel				133100	136100	139100	Tune-up limit (dBm)
Frequency (MHz)				665.5	680.5	695.5	
5	PI/2 BPSK	1	1	22.96	22.85	22.80	24.0

16. Antenna Location

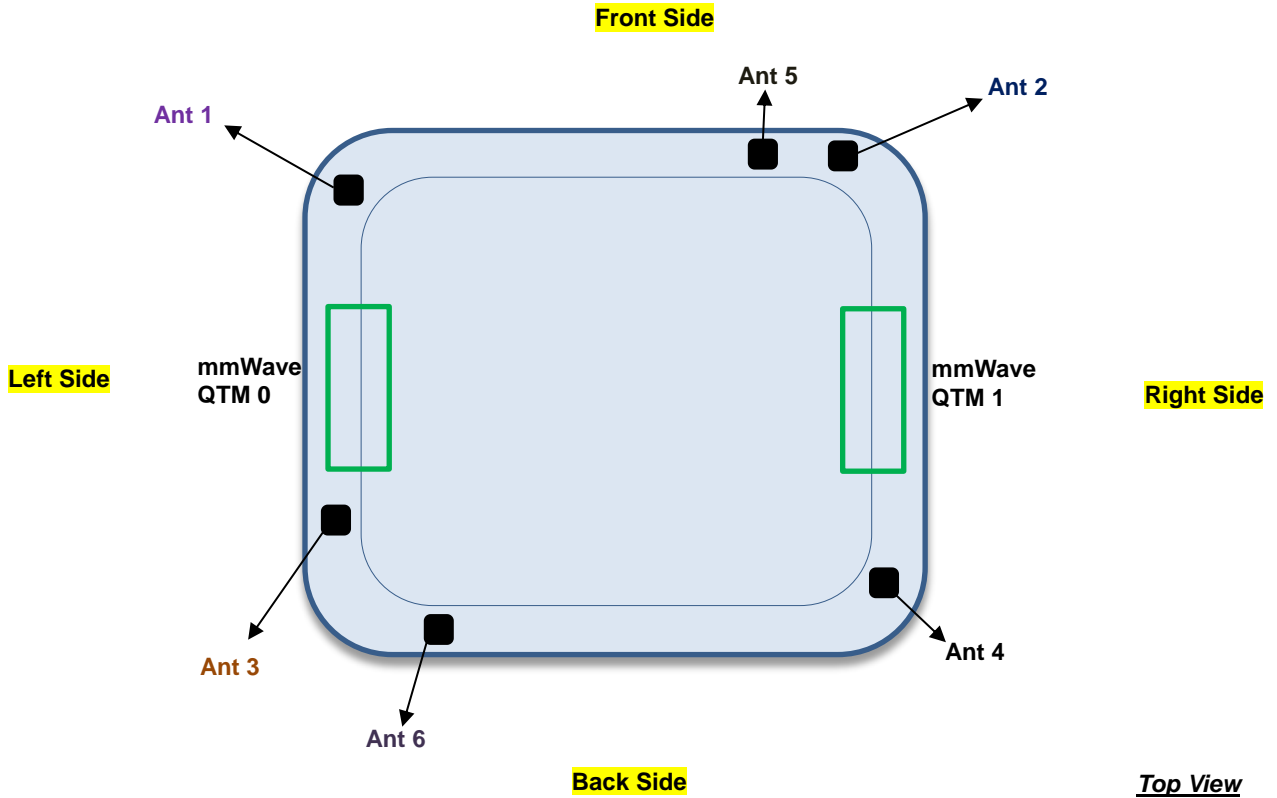

Antenna	Support Band-SA mode
Ant 1	Ant. Tx: LTE:5/12/13/14/26/71 FR1:5/12/14/25/48/71/77
Ant 2	Ant. Tx: LTE 2/4/7/25/30/41/48/66 FR1:2/25/30/41/48/66
Ant 3	Ant. Tx:WLAN2.4G & WLAN5G & 6E
Ant 4	Ant. Tx:WLAN2.4G & WLAN5G & 6E
Ant 5	FR1:n77(SRS only)
Ant 6	FR1:n77(SRS only)

17. Spot Check SAR Results

General Note:

1. SAR spot check verification on the worst cases from the original model was performed to demonstrate the test data from original model remains representative for the variant model.
2. If the 1-g SAR spot check result "does not exceed 30%, but larger than 1.2 W/kg", more spot check on the next-higher exposure position until the spot check result does not exceed 1.2 W/kg.
3. The spot check results don't show the SAR increase more than 30%, therefore referring to the guidance in the KDB inquiry, SAR data reuse is justified.

1st as parent model
2nd as variant model

<FDD LTE SAR>

Plot No.	No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation %
	1st	LTE Band 2_Ant 1	20M	QPSK	1	0	Top Surface	10mm	18900	1880	23.48	23.50	1.005	-0.11	0.899	0.903	-65.56%
	2nd	LTE Band 2_Ant 1	20M	QPSK	1	0	Top Surface	10mm	18900	1880	22.64	23.50	1.219	0.06	0.255	0.311	
01	1st	LTE Band 2_Ant 2	20M	QPSK	1	0	Top Surface	10mm	19100	1900	23.13	24.00	1.222	-0.19	0.956	1.168	-24.49%
	2nd	LTE Band 2_Ant 2	20M	QPSK	1	0	Top Surface	10mm	19100	1900	22.89	24.00	1.291	-0.04	0.683	0.882	
02	1st	LTE Band 5_Ant 1	10M	QPSK	1	0	Top Surface	10mm	20525	836.5	23.27	24.00	1.183	-0.13	0.607	0.718	-1.81%
	2nd	LTE Band 5_Ant 1	10M	QPSK	1	0	Top Surface	10mm	20525	836.5	23.71	24.00	1.069	-0.01	0.659	0.705	
03	1st	LTE Band 7_Ant 2	20M	QPSK	1	49	Right Side	10mm	21100	2535	22.94	23.50	1.138	0.07	1.020	1.160	-1.21%
	2nd	LTE Band 7_Ant 2	20M	QPSK	1	49	Right Side	10mm	21100	2535	22.95	23.50	1.135	0.06	1.010	1.146	
04	1st	LTE Band 12_Ant 1	10M	QPSK	1	25	Top Surface	10mm	23095	707.5	23.07	24.00	1.239	0.13	0.575	0.712	-23.74%
	2nd	LTE Band 12_Ant 1	10M	QPSK	1	25	Top Surface	10mm	23095	707.5	23.11	24.00	1.227	0.05	0.442	0.543	
05	1st	LTE Band 14_Ant 1	10M	QPSK	1	0	Top Surface	10mm	23330	793	23.09	24.00	1.233	-0.18	0.632	0.779	-1.80%
	2nd	LTE Band 14_Ant 1	10M	QPSK	1	0	Top Surface	10mm	23330	793	23.20	24.00	1.202	-0.04	0.636	0.765	
06	1st	LTE Band 30_Ant 2	10M	QPSK	1	0	Right Side	10mm	27710	2310	21.97	23.00	1.268	-0.18	1.020	1.293	-0.08%
	2nd	LTE Band 30_Ant 2	10M	QPSK	1	0	Right Side	10mm	27710	2310	22.38	23.00	1.153	0.05	1.120	1.292	
	2nd	LTE Band 30_Ant 2	10M	QPSK	1	0	Bottom Surface	10mm	27710	2310	22.38	23.00	1.153	-0.13	0.779	0.899	
07	1st	LTE Band 66_Ant 1	20M	QPSK	1	0	Top Surface	10mm	132072	1720	23.63	24.00	1.089	-0.11	0.797	0.868	-5.65%
	2nd	LTE Band 66_Ant 1	20M	QPSK	1	0	Top Surface	10mm	132072	1720	23.44	24.00	1.138	-0.09	0.720	0.819	
08	1st	LTE Band 66_Ant 2	20M	QPSK	1	0	Top Surface	10mm	132572	1770	23.22	24.00	1.197	-0.09	0.830	0.993	-24.97%
	2nd	LTE Band 66_Ant 2	20M	QPSK	1	0	Top Surface	10mm	132572	1770	23.13	24.00	1.222	-0.15	0.610	0.745	

<TDD LTE SAR>

Plot No.	No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation %
	1st	LTE Band 48_Ant 1	20M	QPSK	1	49	Top Surface	10mm	55340	3560	22.48	23.00	1.127	62.9	1.006	0.07	0.799	0.906	-1.10%
08	2nd	LTE Band 48_Ant 1	20M	QPSK	1	49	Top Surface	10mm	55340	3560	22.60	24.00	1.380	62.9	1.006	-0.18	0.645	0.896	



<5G NR SAR>

Plot No.	No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation %
	1st	FR1 n2_Ant 1	20M	BPSK	50	28	Top Surface	10mm	380000	1900	23.25	23.50	1.059	0.05	0.876	0.928	-9.16%
	2nd	FR1 n2_Ant 1	20M	BPSK	50	28	Top Surface	10mm	380000	1900	22.75	23.50	1.189	-0.12	0.709	0.843	
	1st	FR1 n2_Ant 2	20M	BPSK	1	1	Top Surface	10mm	380000	1900	23.41	24.00	1.146	-0.04	0.984	1.127	-15.44%
09	2nd	FR1 n2_Ant 2	20M	BPSK	1	1	Top Surface	10mm	380000	1900	23.17	24.00	1.211	-0.14	0.787	0.953	
	1st	FR1 n5_Ant 1	20M	BPSK	50	28	Top Surface	10mm	167300	836.5	23.50	24.00	1.122	-0.17	0.673	0.755	-4.11%
10	2nd	FR1 n5_Ant 1	20M	BPSK	50	28	Top Surface	10mm	167300	836.5	23.40	24.00	1.148	-0.1	0.631	0.724	
	1st	FR1 n5_Ant 2	20M	BPSK	1	1	Top Surface	10mm	167300	836.5	23.60	24.00	1.096	-0.1	0.541	0.593	-1.85%
	2nd	FR1 n5_Ant 2	20M	BPSK	1	1	Top Surface	10mm	167300	836.5	23.29	24.00	1.178	-0.14	0.494	0.582	
	1st	FR1 n12_Ant 1	15M	BPSK	36	22	Top Surface	10mm	141500	707.5	23.42	24.00	1.143	0.02	0.591	0.675	-11.56%
11	2nd	FR1 n12_Ant 1	15M	BPSK	36	22	Top Surface	10mm	141500	707.5	23.49	24.00	1.125	0	0.531	0.597	
	1st	FR1 n14_Ant 1	10M	BPSK	1	1	Top Surface	10mm	158600	793	23.17	24.00	1.211	0.16	0.680	0.823	-7.78%
12	2nd	FR1 n14_Ant 1	10M	BPSK	1	1	Top Surface	10mm	158600	793	23.18	24.00	1.208	0.04	0.628	0.759	
	1st	FR1 n30_Ant 2	10M	BPSK	25	14	Right Side	10mm	462000	2310	22.21	23.00	1.199	-0.16	0.986	1.183	-0.42%
13	2nd	FR1 n30_Ant 2	10M	BPSK	25	14	Right Side	10mm	462000	2310	22.33	23.00	1.167	0.07	1.010	1.178	
	1st	FR1 n66_Ant 1	40M	BPSK	1	1	Top Surface	10mm	349000	1745	23.88	24.00	1.028	-0.17	0.897	0.922	-0.43%
14	2nd	FR1 n66_Ant 1	40M	BPSK	1	1	Top Surface	10mm	349000	1745	23.46	24.00	1.132	-0.04	0.811	0.918	
	1st	FR1 n66_Ant 2	40M	BPSK	1	1	Top Surface	10mm	349000	1745	23.75	24.00	1.059	0.02	0.643	0.681	-33.04%
	2nd	FR1 n66_Ant 2	40M	BPSK	1	1	Top Surface	10mm	349000	1745	23.31	24.00	1.172	0.11	0.389	0.456	
	1st	FR1 n77_Ant 1	100M	BPSK	1	1	Top Surface	10mm	656000	3840	21.38	22.30	1.236	-0.12	0.766	0.947	-2.11%
	2nd	FR1 n77_Ant 1	100M	BPSK	1	1	Top Surface	10mm	656000	3840	21.24	22.30	1.276	-0.18	0.726	0.927	
	1st	FR1 n77_Ant 1	100M	BPSK	1	1	Top Surface	10mm	633332	3499.98	21.48	22.30	1.208	-0.12	0.954	1.152	-46.88%
	2nd	FR1 n77_Ant 1	100M	BPSK	1	1	Top Surface	10mm	633332	3499.98	21.04	22.30	1.337	-0.07	0.458	0.612	
	1st	FR1 n77_Ant 2	100M	BPSK	135	69	Top Surface	10mm	656000	3840	21.66	22.20	1.132	-0.19	0.724	0.820	-0.85%
	2nd	FR1 n77_Ant 2	100M	BPSK	135	69	Top Surface	10mm	656000	3840	21.66	22.20	1.132	-0.07	0.718	0.813	
	1st	FR1 n77_Ant 2	100M	BPSK	135	69	Top Surface	10mm	633332	3499.98	21.18	22.20	1.265	-0.14	0.991	1.253	-5.43%
	2nd	FR1 n77_Ant 2	100M	BPSK	135	69	Top Surface	10mm	633332	3499.98	21.59	22.20	1.151	-0.16	1.030	1.185	
	1st	FR1 n77_Ant 5	-	CW	-	-	Top Surface	10mm	656000	3840	20.33	21.50	1.309	-0.13	0.723	0.947	-3.38%
	2nd	FR1 n77_Ant 5	-	CW	-	-	Top Surface	10mm	656000	3840	20.40	21.50	1.288	-0.1	0.710	0.915	
	1st	FR1 n77_Ant 5	-	CW	-	-	Top Surface	10mm	633332	3499.98	21.12	21.50	1.091	-0.11	0.569	0.621	-0.48%
	2nd	FR1 n77_Ant 5	-	CW	-	-	Top Surface	10mm	633332	3499.98	20.76	21.50	1.186	-0.09	0.521	0.618	
	1st	FR1 n77_Ant 6	-	CW	-	-	Back Side	10mm	656000	3840	19.08	20.50	1.387	-0.15	0.932	1.292	-6.97%
	2nd	FR1 n77_Ant 6	-	CW	-	-	Back Side	10mm	656000	3840	19.35	20.50	1.303	-0.04	0.922	1.202	
	2nd	FR1 n77_Ant 6	-	CW	-	-	Top Surface	10mm	656000	3840	19.35	20.50	1.303	0	0.614	0.800	
	1st	FR1 n77_Ant 6	-	CW	-	-	Top Surface	10mm	633332	3499.98	20.06	20.50	1.107	-0.03	1.160	1.284	-1.64%
	2nd	FR1 n77_Ant 6	-	CW	-	-	Top Surface	10mm	633332	3499.98	19.20	20.50	1.349	-0.17	0.936	1.263	
15	2nd	FR1 n77_Ant 6	-	CW	-	-	Back Side	10mm	633332	3499.98	19.20	20.50	1.349	0.04	1.100	1.484	
	2nd	FR1 n77_Ant 6	-	CW	-	-	Bottom Surface	10mm	633332	3499.98	19.20	20.50	1.349	-0.01	0.422	0.569	



<WLAN SAR>

Plot No.	No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation %
	1st	WLAN2.4GHz_Ant 3	802.11b 1Mbps	Left Side	10mm	6	2437	9.90	10.00	1.023	98.2	1.018	-0.19	0.087	0.091	
16	2nd	WLAN2.4GHz_Ant 3	802.11b 1Mbps	Left Side	10mm	6	2437	9.90	10.00	1.023	98.2	1.018	-0.1	0.085	0.089	-2.20%
	1st	WLAN2.4GHz_Ant 4	802.11b 1Mbps	Top Surface	10mm	6	2437	9.50	10.00	1.122	98.2	1.018	-0.06	0.056	0.064	
	2nd	WLAN2.4GHz_Ant 4	802.11b 1Mbps	Top Surface	10mm	6	2437	9.50	10.00	1.122	98.2	1.018	-0.05	0.048	0.055	-14.06%
	1st	WLAN5GHz_Ant 3	802.11ac-VHT160 MCS0	Left Side	10mm	50	5250	9.70	10.00	1.072	99.5	1.005	-0.13	0.075	0.081	
17	2nd	WLAN5GHz_Ant 3	802.11ac-VHT160 MCS0	Left Side	10mm	50	5250	9.70	10.00	1.072	99.5	1.005	-0.15	0.069	0.074	-8.64%
	1st	WLAN5GHz_Ant 4	802.11ac-VHT160 MCS0	Right Side	10mm	50	5250	9.60	10.00	1.096	99.3	1.007	-0.02	0.039	0.043	
	2nd	WLAN5GHz_Ant 4	802.11ac-VHT160 MCS0	Right Side	10mm	50	5250	9.60	10.00	1.096	99.3	1.007	-0.12	0.019	0.021	-51.16%
	1st	WLAN5GHz_Ant 3	802.11ac-VHT160 MCS0	Left Side	10mm	114	5570	9.70	10.00	1.072	99.3	1.007	-0.03	0.063	0.068	
	2nd	WLAN5GHz_Ant 3	802.11ac-VHT160 MCS0	Left Side	10mm	114	5570	9.70	10.00	1.072	99.3	1.007	0.1	0.062	0.067	-1.47%
	1st	WLAN5GHz_Ant 4	802.11ac-VHT160 MCS0	Back Side	10mm	114	5570	9.50	10.00	1.122	99.3	1.007	-0.17	0.073	0.082	
18	2nd	WLAN5GHz_Ant 4	802.11ac-VHT160 MCS0	Back Side	10mm	114	5570	9.50	10.00	1.122	99.3	1.007	-0.17	0.071	0.080	-2.44%
	1st	WLAN5GHz_Ant 3	802.11ac-VHT80 MCS0	Left Side	10mm	155	5775	9.70	10.00	1.072	99.5	1.005	0.13	0.070	0.075	
	2nd	WLAN5GHz_Ant 3	802.11ac-VHT80 MCS0	Left Side	10mm	155	5775	9.70	10.00	1.072	99.5	1.005	0.07	0.057	0.061	-18.67%
	1st	WLAN5GHz_Ant 4	802.11ac-VHT80 MCS0	Back Side	10mm	155	5775	9.30	10.00	1.175	99.5	1.005	-0.11	0.072	0.085	
19	2nd	WLAN5GHz_Ant 4	802.11ac-VHT80 MCS0	Back Side	10mm	155	5775	9.30	10.00	1.175	99.5	1.005	0.05	0.068	0.080	-5.88%

<WIFI 6E SAR>

Plot No.	No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	APD (W/m^2)	Deviation %
	1st	WLAN6GHz_Ant 3	802.11ax-HE160 MCS0	Bottom Surface	10mm	15	6025	9.40	9.50	1.023	99	1.010	0.14	0.058	0.060		
	2nd	WLAN6GHz_Ant 3	802.11ax-HE160 MCS0	Bottom Surface	10mm	15	6025	9.40	9.50	1.023	99	1.010	-0.12	0.019	0.020	0.112	-66.67%
	1st	WLAN6GHz_Ant 4	802.11ax-HE160 MCS0	Top Surface	10mm	15	6025	8.70	9.50	1.202	99	1.010	0.05	0.049	0.060	0.46	
20	2nd	WLAN6GHz_Ant 4	802.11ax-HE160 MCS0	Top Surface	10mm	15	6025	8.70	9.50	1.202	99	1.010	-0.17	0.043	0.052	0.46	-13.33%

18. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - c. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.

5G NR Note:

1. Referencing the procedure in KDB 941225, the test procedures are outlined as below:
 - a. To start SAR test for the largest channel bandwidth for PI/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. Also do SAR test for 50% RB allocation for PI/2 BPSK SAR testing using 1RB PI/2 BPSK allocation procedure
 - b. For PI/2 BPSK with 100% RB allocation, SAR test is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - c. For higher modulation QPSK/16QAM/64QAM/256QAM, according to tune-up document the power level is not $\frac{1}{2}$ dB higher than the same configuration in PI/2 BPSK, also reported SAR for the PI/2 BPSK configuration is less than 1.45 W/kg, QPSK/16QAM/64QAM/256QAM SAR testing are not required.
 - d. Smaller bandwidth output power for each RB allocation configuration for this device is not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
 - e. For 5G FR1 n41/n71, the maximum channel bandwidth does not support three non-overlapping channels in the frequency band, the middle channel of the group of overlapping channels were selected for testing.
 - f. Due to test setup limitations, SAR testing for NR was performed using Factory Test Mode software to establish the connection and perform SAR with 100% transmission.



18.1 Hotspot SAR

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	
21	LTE Band 13_Ant 1	10M	QPSK	1	0	Top Surface	10mm	DSI 0	23230	782	23.04	24.00	1.247	0.03	0.572	0.714	
	LTE Band 13_Ant 1	10M	QPSK	25	12	Top Surface	10mm	DSI 0	23230	782	21.62	23.00	1.374	-0.12	0.469	0.644	
	LTE Band 13_Ant 1	10M	QPSK	1	0	Bottom Surface	10mm	DSI 0	23230	782	23.04	24.00	1.247	0.08	0.523	0.652	
	LTE Band 13_Ant 1	10M	QPSK	25	12	Bottom Surface	10mm	DSI 0	23230	782	21.62	23.00	1.374	0.03	0.418	0.574	
	LTE Band 13_Ant 1	10M	QPSK	1	0	Left Side	10mm	DSI 0	23230	782	23.04	24.00	1.247	0.11	0.206	0.257	
	LTE Band 13_Ant 1	10M	QPSK	25	12	Left Side	10mm	DSI 0	23230	782	21.62	23.00	1.374	0	0.139	0.191	
	LTE Band 13_Ant 1	10M	QPSK	1	0	Front Side	10mm	DSI 0	23230	782	23.04	24.00	1.247	-0.06	0.242	0.302	
	LTE Band 13_Ant 1	10M	QPSK	25	12	Front Side	10mm	DSI 0	23230	782	21.62	23.00	1.374	0.03	0.211	0.290	
	LTE Band 25_Ant 2	20M	QPSK	1	0	Top Surface	10mm	DSI 0	26140	1860	23.02	24.00	1.253	-0.13	0.670	0.840	
	LTE Band 25_Ant 2	20M	QPSK	1	0	Top Surface	10mm	DSI 0	26340	1880	22.81	24.00	1.315	0.03	0.774	1.018	
	22	LTE Band 25_Ant 2	20M	QPSK	1	0	Top Surface	10mm	DSI 0	26590	1905	22.79	24.00	1.321	0.09	0.842	1.113
		LTE Band 25_Ant 2	20M	QPSK	50	0	Top Surface	10mm	DSI 0	26140	1860	21.87	23.00	1.297	-0.13	0.631	0.819
		LTE Band 25_Ant 2	20M	QPSK	50	0	Top Surface	10mm	DSI 0	26340	1880	21.64	23.00	1.368	0.03	0.542	0.741
		LTE Band 25_Ant 2	20M	QPSK	50	24	Top Surface	10mm	DSI 0	26590	1905	21.78	23.00	1.324	0.14	0.569	0.754
		LTE Band 25_Ant 2	20M	QPSK	100	0	Top Surface	10mm	DSI 0	26590	1905	21.69	23.00	1.352	0.04	0.609	0.823
		LTE Band 25_Ant 2	20M	QPSK	1	0	Bottom Surface	10mm	DSI 0	26140	1860	23.02	24.00	1.253	-0.18	0.634	0.794
LTE Band 25_Ant 2		20M	QPSK	50	50	Bottom Surface	10mm	DSI 0	26140	1860	21.75	23.00	1.334	0.04	0.545	0.727	
LTE Band 25_Ant 2		20M	QPSK	1	0	Right Side	10mm	DSI 0	26140	1860	23.02	24.00	1.253	0.02	0.435	0.545	
	LTE Band 25_Ant 2	20M	QPSK	50	50	Right Side	10mm	DSI 0	26140	1860	21.75	23.00	1.334	0.04	0.454	0.605	
	LTE Band 25_Ant 2	20M	QPSK	1	0	Front Side	10mm	DSI 0	26140	1860	23.02	24.00	1.253	-0.11	0.331	0.415	
	LTE Band 25_Ant 2	20M	QPSK	50	50	Front Side	10mm	DSI 0	26140	1860	21.75	23.00	1.334	0	0.295	0.393	
	23	LTE Band 26_Ant 1	15M	QPSK	1	0	Top Surface	10mm	DSI 0	26865	831.5	22.64	24.00	1.368	-0.09	0.598	0.818
		LTE Band 26_Ant 1	15M	QPSK	36	39	Top Surface	10mm	DSI 0	26865	831.5	21.59	23.00	1.384	0.06	0.444	0.614
		LTE Band 26_Ant 1	15M	QPSK	1	0	Bottom Surface	10mm	DSI 0	26865	831.5	22.64	24.00	1.368	0.04	0.532	0.728
		LTE Band 26_Ant 1	15M	QPSK	36	39	Bottom Surface	10mm	DSI 0	26865	831.5	21.59	23.00	1.384	0.01	0.430	0.595
		LTE Band 26_Ant 1	15M	QPSK	1	0	Left Side	10mm	DSI 0	26865	831.5	22.64	24.00	1.368	-0.18	0.228	0.312
LTE Band 26_Ant 1		15M	QPSK	36	39	Left Side	10mm	DSI 0	26865	831.5	21.59	23.00	1.384	-0.02	0.180	0.249	
LTE Band 26_Ant 1		15M	QPSK	1	0	Front Side	10mm	DSI 0	26865	831.5	22.64	24.00	1.368	-0.19	0.154	0.211	
LTE Band 26_Ant 1		15M	QPSK	36	39	Front Side	10mm	DSI 0	26865	831.5	21.59	23.00	1.384	0.07	0.125	0.173	
24	LTE Band 71_Ant 1	20M	QPSK	1	0	Top Surface	10mm	DSI 0	133297	680.5	22.90	24.00	1.288	0.1	0.491	0.633	
	LTE Band 71_Ant 1	20M	QPSK	50	50	Top Surface	10mm	DSI 0	133297	680.5	21.19	23.00	1.517	-0.04	0.387	0.587	
	LTE Band 71_Ant 1	20M	QPSK	1	0	Bottom Surface	10mm	DSI 0	133297	680.5	22.90	24.00	1.288	-0.04	0.408	0.526	
	LTE Band 71_Ant 1	20M	QPSK	50	50	Bottom Surface	10mm	DSI 0	133297	680.5	21.19	23.00	1.517	0.01	0.290	0.440	
	LTE Band 71_Ant 1	20M	QPSK	1	0	Left Side	10mm	DSI 0	133297	680.5	22.90	24.00	1.288	-0.09	0.356	0.459	
	LTE Band 71_Ant 1	20M	QPSK	50	50	Left Side	10mm	DSI 0	133297	680.5	21.19	23.00	1.517	0.06	0.246	0.373	
	LTE Band 71_Ant 1	20M	QPSK	1	0	Front Side	10mm	DSI 0	133297	680.5	22.90	24.00	1.288	0.04	0.129	0.166	
	LTE Band 71_Ant 1	20M	QPSK	50	50	Front Side	10mm	DSI 0	133297	680.5	21.19	23.00	1.517	-0.18	0.120	0.182	



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41_Ant 2	20M	QPSK	1	0	Top Surface	10mm	DSI 0	39750	2506	23.15	24.00	1.216	62.9	1.006	-0.06	0.295	0.361
	LTE Band 41_Ant 2	20M	QPSK	50	50	Top Surface	10mm	DSI 0	39750	2506	21.95	23.00	1.274	62.9	1.006	-0.07	0.222	0.284
	LTE Band 41_Ant 2	20M	QPSK	1	0	Bottom Surface	10mm	DSI 0	39750	2506	23.15	24.00	1.216	62.9	1.006	-0.04	0.344	0.421
	LTE Band 41_Ant 2	20M	QPSK	50	50	Bottom Surface	10mm	DSI 0	39750	2506	21.95	23.00	1.274	62.9	1.006	0.1	0.268	0.343
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Side	10mm	DSI 0	39750	2506	23.15	24.00	1.216	62.9	1.006	-0.18	0.638	0.781
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Side	10mm	DSI 0	40185	2549.5	23.09	24.00	1.233	62.9	1.006	-0.12	0.649	0.805
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Side	10mm	DSI 0	40620	2593	23.06	24.00	1.242	62.9	1.006	-0.08	0.808	1.009
25	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Side	10mm	DSI 0	41055	2636.5	22.85	24.00	1.303	62.9	1.006	0.06	0.900	1.180
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Side	10mm	DSI 0	41490	2680	23.07	24.00	1.239	62.9	1.006	0.05	0.901	1.123
	LTE Band 41_Ant 2	20M	QPSK	50	50	Right Side	10mm	DSI 0	39750	2506	21.95	23.00	1.274	62.9	1.006	-0.03	0.460	0.589
	LTE Band 41_Ant 2	20M	QPSK	100	0	Right Side	10mm	DSI 0	39750	2506	21.98	23.00	1.265	62.9	1.006	0.09	0.442	0.562
	LTE Band 41_Ant 2	20M	QPSK	1	0	Front Side	10mm	DSI 0	39750	2506	23.15	24.00	1.216	62.9	1.006	-0.16	0.141	0.173
	LTE Band 41_Ant 2	20M	QPSK	50	50	Front Side	10mm	DSI 0	39750	2506	21.95	23.00	1.274	62.9	1.006	0.11	0.101	0.129
	LTE Band 41C_Ant 2	20M	QPSK	1	0	Right Side	10mm	DSI 0	41055	2636.5	23.96	24.00	1.009	62.9	1.006	0.05	0.856	0.869

<5G NR SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n25_Ant 1	20M	BPSK	1	1	Top Surface	10mm	DSI 0	381000	1905	23.37	24.00	1.156	-0.09	0.674	0.779
	FR1 n25_Ant 1	20M	BPSK	50	28	Top Surface	10mm	DSI 0	381000	1905	23.22	24.00	1.197	-0.16	0.763	0.913
	FR1 n25_Ant 1	20M	BPSK	50	28	Top Surface	10mm	DSI 0	372000	1860	23.13	24.00	1.222	0.11	0.745	0.910
	FR1 n25_Ant 1	20M	BPSK	50	28	Top Surface	10mm	DSI 0	376500	1882.5	23.21	24.00	1.199	-0.16	0.741	0.889
	FR1 n25_Ant 1	20M	BPSK	100	0	Top Surface	10mm	DSI 0	376500	1882.5	22.79	23.50	1.178	0.06	0.703	0.828
	FR1 n25_Ant 1	20M	BPSK	1	1	Bottom Surface	10mm	DSI 0	381000	1905	23.37	24.00	1.156	-0.11	0.624	0.721
	FR1 n25_Ant 1	20M	BPSK	50	28	Bottom Surface	10mm	DSI 0	381000	1905	23.22	24.00	1.197	0.03	0.722	0.864
	FR1 n25_Ant 1	20M	BPSK	50	28	Bottom Surface	10mm	DSI 0	372000	1860	23.13	24.00	1.222	0.13	0.714	0.872
	FR1 n25_Ant 1	20M	BPSK	50	28	Bottom Surface	10mm	DSI 0	376500	1882.5	23.21	24.00	1.199	-0.03	0.723	0.867
	FR1 n25_Ant 1	20M	BPSK	100	0	Bottom Surface	10mm	DSI 0	381000	1905	22.79	24.00	1.321	0.03	0.681	0.900
	FR1 n25_Ant 1	20M	BPSK	1	1	Left Side	10mm	DSI 0	381000	1905	23.37	24.00	1.156	-0.06	0.512	0.592
	FR1 n25_Ant 1	20M	BPSK	50	28	Left Side	10mm	DSI 0	381000	1905	23.22	24.00	1.197	0.1	0.578	0.692
	FR1 n25_Ant 1	20M	BPSK	1	1	Front Side	10mm	DSI 0	381000	1905	23.37	24.00	1.156	-0.14	0.388	0.449
	FR1 n25_Ant 1	20M	BPSK	50	28	Front Side	10mm	DSI 0	381000	1905	23.22	24.00	1.197	-0.17	0.464	0.555
	FR1 n25_Ant 2	20M	BPSK	1	1	Top Surface	10mm	DSI 0	372000	1860	23.46	24.00	1.132	0.05	0.519	0.588
	FR1 n25_Ant 2	20M	BPSK	50	28	Top Surface	10mm	DSI 0	372000	1860	23.17	24.00	1.211	0.09	0.673	0.815
26	FR1 n25_Ant 2	20M	BPSK	50	28	Top Surface	10mm	DSI 0	376500	1882.5	23.13	24.00	1.222	-0.14	0.750	0.916
	FR1 n25_Ant 2	20M	BPSK	50	28	Top Surface	10mm	DSI 0	381000	1905	22.96	24.00	1.271	0.09	0.660	0.839
	FR1 n25_Ant 2	20M	BPSK	100	0	Top Surface	10mm	DSI 0	372000	1860	22.80	23.50	1.175	0.09	0.603	0.708
	FR1 n25_Ant 2	20M	BPSK	1	1	Bottom Surface	10mm	DSI 0	372000	1860	23.46	24.00	1.132	0	0.486	0.550
	FR1 n25_Ant 2	20M	BPSK	50	28	Bottom Surface	10mm	DSI 0	372000	1860	23.17	24.00	1.211	-0.04	0.631	0.764
	FR1 n25_Ant 2	20M	BPSK	1	1	Right Side	10mm	DSI 0	372000	1860	23.46	24.00	1.132	-0.12	0.364	0.412
	FR1 n25_Ant 2	20M	BPSK	50	28	Right Side	10mm	DSI 0	372000	1860	23.17	24.00	1.211	0.1	0.471	0.570
	FR1 n25_Ant 2	20M	BPSK	1	1	Front Side	10mm	DSI 0	372000	1860	23.46	24.00	1.132	-0.16	0.292	0.331
	FR1 n25_Ant 2	20M	BPSK	50	28	Front Side	10mm	DSI 0	372000	1860	23.17	24.00	1.211	-0.19	0.348	0.421

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n71_Ant 1	20M	BPSK	1	1	Top Surface	10mm	136100	680.5	23.21	24.00	1.199	-0.02	0.421	0.505
27	FR1 n71_Ant 1	20M	BPSK	50	28	Top Surface	10mm	136100	680.5	23.30	24.00	1.175	-0.09	0.432	0.508
	FR1 n71_Ant 1	20M	BPSK	1	1	Bottom Surface	10mm	136100	680.5	23.21	24.00	1.199	-0.12	0.331	0.397
	FR1 n71_Ant 1	20M	BPSK	50	28	Bottom Surface	10mm	136100	680.5	23.30	24.00	1.175	0.03	0.305	0.358
	FR1 n71_Ant 1	20M	BPSK	1	1	Left Side	10mm	136100	680.5	23.21	24.00	1.199	-0.18	0.317	0.380
	FR1 n71_Ant 1	20M	BPSK	50	28	Left Side	10mm	136100	680.5	23.30	24.00	1.175	-0.1	0.272	0.320
	FR1 n71_Ant 1	20M	BPSK	1	1	Front Side	10mm	136100	680.5	23.21	24.00	1.199	0.09	0.122	0.146
	FR1 n71_Ant 1	20M	BPSK	50	28	Front Side	10mm	136100	680.5	23.30	24.00	1.175	-0.03	0.131	0.154
	FR1 n41_Ant 2	100M	BPSK	1	271	Top Surface	10mm	518598	2592.99	23.34	24.00	1.164	0.07	0.300	0.349
	FR1 n41_Ant 2	100M	BPSK	135	69	Top Surface	10mm	518598	2592.99	23.20	24.00	1.202	-0.14	0.387	0.465
	FR1 n41_Ant 2	100M	BPSK	1	271	Bottom Surface	10mm	518598	2592.99	23.34	24.00	1.164	0.03	0.287	0.334
	FR1 n41_Ant 2	100M	BPSK	135	69	Bottom Surface	10mm	518598	2592.99	23.20	24.00	1.202	-0.18	0.211	0.254
	FR1 n41_Ant 2	100M	BPSK	1	271	Right Side	10mm	518598	2592.99	23.34	24.00	1.164	-0.01	0.768	0.894
28	FR1 n41_Ant 2	100M	BPSK	135	69	Right Side	10mm	518598	2592.99	23.20	24.00	1.202	0	1.050	1.262
	FR1 n41_Ant 2	100M	BPSK	270	0	Right Side	10mm	518598	2592.99	22.98	23.50	1.127	0.13	0.613	0.691
	FR1 n41_Ant 2	100M	BPSK	1	271	Front Side	10mm	518598	2592.99	23.34	24.00	1.164	-0.18	0.107	0.125
	FR1 n41_Ant 2	100M	BPSK	135	69	Front Side	10mm	518598	2592.99	23.20	24.00	1.202	0.09	0.199	0.239



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n48_Ant 1	20M	BPSK	1	1	Top Surface	10mm	646000	3690	21.43	21.70	1.064	-0.01	0.691	0.735
	FR1 n48_Ant 1	20M	BPSK	1	1	Top Surface	10mm	637334	3560.01	20.39	21.70	1.352	-0.13	0.855	1.156
	FR1 n48_Ant 1	20M	BPSK	1	1	Top Surface	10mm	641666	3624.99	21.29	21.70	1.099	-0.1	0.735	0.808
	FR1 n48_Ant 1	20M	BPSK	25	13	Top Surface	10mm	646000	3690	21.34	21.70	1.086	-0.1	0.710	0.771
	FR1 n48_Ant 1	20M	BPSK	25	13	Top Surface	10mm	637334	3560.01	20.05	21.70	1.462	-0.14	0.811	1.186
	FR1 n48_Ant 1	20M	BPSK	25	13	Top Surface	10mm	641666	3624.99	21.23	21.70	1.114	-0.15	0.710	0.791
	FR1 n48_Ant 1	20M	BPSK	50	0	Top Surface	10mm	646000	3690	21.11	21.20	1.021	-0.06	0.716	0.731
	FR1 n48_Ant 1	20M	BPSK	1	1	Bottom Surface	10mm	646000	3690	21.43	21.70	1.064	0.02	0.406	0.432
	FR1 n48_Ant 1	20M	BPSK	1	1	Bottom Surface	10mm	637334	3560.01	20.39	21.70	1.352	-0.12	0.502	0.679
	FR1 n48_Ant 1	20M	BPSK	1	1	Bottom Surface	10mm	641666	3624.99	21.29	21.70	1.099	-0.04	0.431	0.474
	FR1 n48_Ant 1	20M	BPSK	25	13	Bottom Surface	10mm	646000	3690	21.34	21.70	1.086	-0.01	0.456	0.495
	FR1 n48_Ant 1	20M	BPSK	25	13	Bottom Surface	10mm	637334	3560.01	20.05	21.70	1.462	0.08	0.477	0.697
	FR1 n48_Ant 1	20M	BPSK	25	13	Bottom Surface	10mm	641666	3624.99	21.23	21.70	1.114	-0.11	0.417	0.465
	FR1 n48_Ant 1	20M	BPSK	1	1	Left Side	10mm	646000	3690	21.43	21.70	1.064	0.11	0.469	0.499
	FR1 n48_Ant 1	20M	BPSK	1	1	Left Side	10mm	637334	3560.01	20.39	21.70	1.352	0.09	0.580	0.784
	FR1 n48_Ant 1	20M	BPSK	1	1	Left Side	10mm	641666	3624.99	21.29	21.70	1.099	-0.05	0.345	0.379
	FR1 n48_Ant 1	20M	BPSK	25	13	Left Side	10mm	646000	3690	21.34	21.70	1.086	-0.1	0.438	0.476
	FR1 n48_Ant 1	20M	BPSK	25	13	Left Side	10mm	637334	3560.01	20.05	21.70	1.462	-0.18	0.280	0.409
	FR1 n48_Ant 1	20M	BPSK	25	13	Left Side	10mm	641666	3624.99	21.23	21.70	1.114	0.07	0.311	0.347
	FR1 n48_Ant 1	20M	BPSK	1	1	Front Side	10mm	646000	3690	21.43	21.70	1.064	-0.04	0.172	0.183
	FR1 n48_Ant 1	20M	BPSK	25	13	Front Side	10mm	646000	3690	21.34	21.70	1.086	-0.03	0.131	0.142
29	FR1 n48_Ant 2	20M	BPSK	1	1	Top Surface	10mm	637334	3560.01	20.91	21.80	1.227	-0.11	1.030	1.264
	FR1 n48_Ant 2	20M	BPSK	1	1	Top Surface	10mm	641666	3624.99	20.84	21.80	1.247	-0.13	0.975	1.216
	FR1 n48_Ant 2	20M	BPSK	1	1	Top Surface	10mm	646000	3690	20.57	21.80	1.327	-0.05	0.932	1.237
	FR1 n48_Ant 2	20M	BPSK	25	13	Top Surface	10mm	637334	3560.01	20.87	21.80	1.239	0.09	0.651	0.806
	FR1 n48_Ant 2	20M	BPSK	25	13	Top Surface	10mm	641666	3624.99	20.86	21.80	1.242	0.1	0.744	0.924
	FR1 n48_Ant 2	20M	BPSK	25	13	Top Surface	10mm	646000	3690	20.30	21.80	1.413	-0.03	0.687	0.971
	FR1 n48_Ant 2	20M	BPSK	50	0	Top Surface	10mm	637334	3560.01	20.37	21.30	1.239	-0.07	0.722	0.895
	FR1 n48_Ant 2	20M	BPSK	1	1	Bottom Surface	10mm	637334	3560.01	20.91	21.80	1.227	-0.13	0.696	0.854
	FR1 n48_Ant 2	20M	BPSK	1	1	Bottom Surface	10mm	641666	3624.99	20.84	21.80	1.247	-0.01	0.651	0.812
	FR1 n48_Ant 2	20M	BPSK	1	1	Bottom Surface	10mm	646000	3690	20.57	21.80	1.327	0.09	0.589	0.782
	FR1 n48_Ant 2	20M	BPSK	25	13	Bottom Surface	10mm	637334	3560.01	20.87	21.80	1.239	0.1	0.682	0.844
	FR1 n48_Ant 2	20M	BPSK	25	13	Bottom Surface	10mm	641666	3624.99	20.86	21.80	1.242	-0.12	0.647	0.803
	FR1 n48_Ant 2	20M	BPSK	25	13	Bottom Surface	10mm	646000	3690	20.30	21.80	1.413	0.11	0.573	0.809
	FR1 n48_Ant 2	20M	BPSK	50	0	Bottom Surface	10mm	637334	3560.01	20.37	21.30	1.239	0.03	0.667	0.826
	FR1 n48_Ant 2	20M	BPSK	1	1	Right Side	10mm	637334	3560.01	20.91	21.80	1.227	-0.12	0.730	0.896
	FR1 n48_Ant 2	20M	BPSK	1	1	Right Side	10mm	641666	3624.99	20.84	21.80	1.247	0.19	0.710	0.886
	FR1 n48_Ant 2	20M	BPSK	1	1	Right Side	10mm	646000	3690	20.57	21.80	1.327	-0.03	0.619	0.822
	FR1 n48_Ant 2	20M	BPSK	25	13	Right Side	10mm	637334	3560.01	20.87	21.80	1.239	-0.01	0.545	0.675
	FR1 n48_Ant 2	20M	BPSK	25	13	Right Side	10mm	641666	3624.99	20.86	21.80	1.242	-0.01	0.568	0.705
	FR1 n48_Ant 2	20M	BPSK	25	13	Right Side	10mm	646000	3690	20.30	21.80	1.413	-0.01	0.519	0.733
	FR1 n48_Ant 2	20M	BPSK	50	0	Right Side	10mm	637334	3560.01	20.37	21.30	1.239	-0.01	0.493	0.611
	FR1 n48_Ant 2	20M	BPSK	1	1	Front Side	10mm	637334	3560.01	20.91	21.80	1.227	0.11	0.157	0.192
	FR1 n48_Ant 2	20M	BPSK	25	13	Front Side	10mm	637334	3560.01	20.87	21.80	1.239	-0.05	0.141	0.175



19. Simultaneous Transmission Analysis

Exposure condition	NO.	Simultaneous Transmission Configurations	Support
Body condition	1	WWAN + 2.4GHz Ant3 + 2.4GHz Ant4	V
	2	WWAN + 5GHz Ant3 + 5GHz Ant4	V
	3	WWAN + 2.4GHz Ant3 + 5GHz Ant4	V
	4	WWAN + 2.4GHz Ant4 + 5GHz Ant3	V
	5	LTE + FR1 + 2.4GHz Ant3 + 2.4GHz Ant4	V
	6	LTE + FR1+ 5GHz Ant3 + 5GHz Ant4	V
	7	LTE + FR1+ 2.4GHz Ant3 + 5GHz Ant4	V
	8	LTE + FR1+ 2.4GHz Ant4 + 5GHz Ant3	V
	9 ⁽¹⁾	WWAN + 6GHz Ant3 + 6GHz Ant4	V
	10 ⁽¹⁾	WWAN + 2.4GHz Ant3 + 6GHz Ant4	V
	11 ⁽¹⁾	WWAN + 2.4GHz Ant4 + 6GHz Ant3	V
	12 ⁽¹⁾	LTE + FR1+ 6GHz Ant3 + 6GHz Ant4	V
	13 ⁽¹⁾	LTE + FR1+ 2.4GHz Ant3 + 6GHz Ant4	V
	14 ⁽¹⁾	LTE + FR1+ 2.4GHz Ant4 + 6GHz Ant3	V
	15	2.4GHz Ant3 (client) + 5GHz Ant4(AP)	V
	16	5GHz Ant3 (Client) + 2.4GHz Ant4 (AP)	V
	17	6GHz Ant3 (Client) + 2.4GHz Ant4 (AP)	V

General Note:

1. WiFi 6E AP mode is enabled only when it's connected to AC mains, the compliance is justified in MPE test report no.: FA160614-03E.
2. When device is connected to the PC, 2.4GHz and 6GHz simultaneous transmission is possible while the device supports AP mode in 2.4GHz and client mode in WiFi 6E
3. When the WWAN operation is offloading which the WiFi 2.4GHz/5GHz/6GHz at ant3 only operate client and WiFi 2.4GHz/5GHz ant4 operate AP mode
4. The data reuse results from FCC ID: PY321100529 are used for Sim-Tx analysis, if the spot check result for FCC ID: PY322100558 is higher than original result, for that exposure configuration will using the worst SAR to be evaluation.
5. The worst case WLAN reported SAR for each antenna combination was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
6. The device support uplink MIMO for 5G FR1 n48, the Smart Transmit will control the device to transmit at higher power instantaneously, as high as Pmax, when needed, but enforces power limiting to maintain time-averaged transmit power to Plimit
7. The 1g SAR summation is calculated based on the same configuration and test position.
8. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) 1g SAR summation SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.



19.1 5G NR + LTE + WLAN Sim-Tx analysis

In 5G NR + LTE + WLAN or LTE inter band uplink CA +WLAN simultaneous transmission, 5G NR and LTE or LTE inter band uplink PCC and SCC transmission are managed and controlled by Qualcomm® Smart Transmit, while the RF exposure from WLAN radios is managed using legacy approach, i.e., through a fixed power back-off if needed. Since WLAN do not employ time-averaging, 1gSAR and 10gSAR measurement for WLAN need to be conducted at their corresponding rated power following current FCC test procedures to determine reported SAR values. Smart Transmit current implementation assumes hotspots from 5G NR and LTE are collocated. Therefore, for a total of 100% exposure margin, if LTE or LTE PCC uses x%, then the exposure margin left for 5G NR or LTE SCC is capped to (100-x)%. Thus, the compliance equation for LTE + 5G NR or LTE PCC + LTE SCC is

x% * A + (100-x)% * B ≤ 1.0,

Where, A is normalized reported time-averaged SAR exposure ratio from LTE or LTE PCC, and A ≤ 1.0; B is normalized reported time-averaged exposure ratio from LTE PCC or 5G NR (i.e., PD exposure for mmW NR or SAR exposure for sub6 NR), and B ≤ 1.0.

Let C = normalized reported SAR exposure ratio from WLAN, then for compliance,
x% * A + (100-x)% * B + C ≤ 1.0 (1)

x% * A + (100-x)% * B ≤ x% * max(A, B) + (100-x)% * max(A, B) ≤ max(A, B)

x% * A + (100-x)% * B + C ≤ max(A, B) + C ≤ 1.0 (2)

if A + C ≤ 1.0 and B + C ≤ 1.0 can be proven, then “x% * A + (100-x)% * B + C ≤ 1.0”. Therefore simultaneous transmission analysis for 5G NR + LTE + WLAN or LTE inter band Uplink CA+ WLAN can be performed in two steps

- Step 1: Prove total exposure ratio (TER) of LTE + WLAN < 1 or LTE PCC+ WLAN<1
Step 2: Prove total exposure ratio (TER) of 5G NR + WLAN < 1 or LTE SCC+WLAN<1

- Else, if A + C > 1.0 and/or B + C > 1.0, then the followings need to hold true for compliance:
i. Since A and C are decoupled based on the SAR distribution, and
ii. (100-x)% * B + C ≤ 1.0, and
iii. x% * A + (100-x)% * B ≤ 1.0

Note iii. is covered in Part 2 report; i. and ii. is addressed in Part 1 report.



19.2 Body Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 3 1g SAR (W/kg)	2.4GHz WLAN Ant 4 1g SAR (W/kg)	5/6GHz WLAN Ant 3 1g SAR (W/kg)	5/6GHz WLAN Ant 4 1g SAR (W/kg)				
LTE Band 2_Ant 1	Top Surface	0.903	0.041	0.064	0.071	0.066	1.008	1.040	1.010	1.038
	Bottom Surface	0.677	0.052	0.035	0.058	0.062	0.764	0.797	0.791	0.770
	Left Side	0.656	0.091		0.081		0.747	0.737	0.747	0.737
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.400					0.400	0.400	0.400	0.400
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
LTE Band 5_Ant 1	Top Surface	0.718	0.041	0.064	0.071	0.066	0.823	0.855	0.825	0.853
	Bottom Surface	0.687	0.052	0.035	0.058	0.062	0.774	0.807	0.801	0.780
	Left Side	0.334	0.091		0.081		0.425	0.415	0.425	0.415
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.182					0.182	0.182	0.182	0.182
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
LTE Band 12_Ant 1	Top Surface	0.712	0.041	0.064	0.071	0.066	0.817	0.849	0.819	0.847
	Bottom Surface	0.508	0.052	0.035	0.058	0.062	0.595	0.628	0.622	0.601
	Left Side	0.344	0.091		0.081		0.435	0.425	0.435	0.425
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.263					0.263	0.263	0.263	0.263
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
LTE Band 13_Ant 1	Top Surface	0.714	0.041	0.064	0.071	0.066	0.819	0.851	0.821	0.849
	Bottom Surface	0.652	0.052	0.035	0.058	0.062	0.739	0.772	0.766	0.745
	Left Side	0.257	0.091		0.081		0.348	0.338	0.348	0.338
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.302					0.302	0.302	0.302	0.302
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
LTE Band 14_Ant 1	Top Surface	0.779	0.041	0.064	0.071	0.066	0.884	0.916	0.886	0.914
	Bottom Surface	0.769	0.052	0.035	0.058	0.062	0.856	0.889	0.883	0.862
	Left Side	0.292	0.091		0.081		0.383	0.373	0.383	0.373
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.291					0.291	0.291	0.291	0.291
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
LTE Band 26_Ant 1	Top Surface	0.818	0.041	0.064	0.071	0.066	0.923	0.955	0.925	0.953
	Bottom Surface	0.728	0.052	0.035	0.058	0.062	0.815	0.848	0.842	0.821
	Left Side	0.312	0.091		0.081		0.403	0.393	0.403	0.393
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.211					0.211	0.211	0.211	0.211
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
LTE Band 48_Ant 1	Top Surface	0.906	0.041	0.064	0.071	0.066	1.011	1.043	1.013	1.041
	Bottom Surface	0.423	0.052	0.035	0.058	0.062	0.510	0.543	0.537	0.516
	Left Side	0.432	0.091		0.081		0.523	0.513	0.523	0.513
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.160					0.160	0.160	0.160	0.160
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
LTE Band 66_Ant 1	Top Surface	0.868	0.041	0.064	0.071	0.066	0.973	1.005	0.975	1.003
	Bottom Surface	0.700	0.052	0.035	0.058	0.062	0.787	0.820	0.814	0.793
	Left Side	0.524	0.091		0.081		0.615	0.605	0.615	0.605
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.403					0.403	0.403	0.403	0.403
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
LTE Band 71_Ant 1	Top Surface	0.633	0.041	0.064	0.071	0.066	0.738	0.770	0.740	0.768
	Bottom Surface	0.526	0.052	0.035	0.058	0.062	0.613	0.646	0.640	0.619
	Left Side	0.459	0.091		0.081		0.550	0.540	0.550	0.540
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.182					0.182	0.182	0.182	0.182
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076



WWAN Band	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3	2.4GHz WLAN Ant 4	5/6GHz WLAN Ant 3	5/6GHz WLAN Ant 4				
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
FR1 n2_Ant 1	Top Surface	0.928	0.041	0.064	0.071	0.066	1.033	1.065	1.035	1.063
	Bottom Surface	0.671	0.052	0.035	0.058	0.062	0.758	0.791	0.785	0.764
	Left Side	0.663	0.091		0.081		0.754	0.744	0.754	0.744
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.405					0.405	0.405	0.405	0.405
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
FR1 n5_Ant 1	Top Surface	0.755	0.041	0.064	0.071	0.066	0.860	0.892	0.862	0.890
	Bottom Surface	0.741	0.052	0.035	0.058	0.062	0.828	0.861	0.855	0.834
	Left Side	0.349	0.091		0.081		0.440	0.430	0.440	0.430
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.184					0.184	0.184	0.184	0.184
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
FR1 n12_Ant 1	Top Surface	0.675	0.041	0.064	0.071	0.066	0.780	0.812	0.782	0.810
	Bottom Surface	0.513	0.052	0.035	0.058	0.062	0.600	0.633	0.627	0.606
	Left Side	0.358	0.091		0.081		0.449	0.439	0.449	0.439
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.255					0.255	0.255	0.255	0.255
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
FR1 n14_Ant 1	Top Surface	0.823	0.041	0.064	0.071	0.066	0.928	0.960	0.930	0.958
	Bottom Surface	0.722	0.052	0.035	0.058	0.062	0.809	0.842	0.836	0.815
	Left Side	0.305	0.091		0.081		0.396	0.386	0.396	0.386
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.301					0.301	0.301	0.301	0.301
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
FR1 n25_Ant 1	Top Surface	0.913	0.041	0.064	0.071	0.066	1.018	1.050	1.020	1.048
	Bottom Surface	0.900	0.052	0.035	0.058	0.062	0.987	1.020	1.014	0.993
	Left Side	0.692	0.091		0.081		0.783	0.773	0.783	0.773
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.555					0.555	0.555	0.555	0.555
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
FR1 n48_Ant 1	Top Surface	1.186	0.041	0.064	0.071	0.066	1.291	1.323	1.293	1.321
	Bottom Surface	0.697	0.052	0.035	0.058	0.062	0.784	0.817	0.811	0.790
	Left Side	0.784	0.091		0.081		0.875	0.865	0.875	0.865
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.183					0.183	0.183	0.183	0.183
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
FR1 n66_Ant 1	Top Surface	0.922	0.041	0.064	0.071	0.066	1.027	1.059	1.029	1.057
	Bottom Surface	0.790	0.052	0.035	0.058	0.062	0.877	0.910	0.904	0.883
	Left Side	0.591	0.091		0.081		0.682	0.672	0.682	0.672
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.472					0.472	0.472	0.472	0.472
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
FR1 n71_Ant 1	Top Surface	0.508	0.041	0.064	0.071	0.066	0.613	0.645	0.615	0.643
	Bottom Surface	0.397	0.052	0.035	0.058	0.062	0.484	0.517	0.511	0.490
	Left Side	0.380	0.091		0.081		0.471	0.461	0.471	0.461
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.154					0.154	0.154	0.154	0.154
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
FR1 n77_Ant 1	Top Surface	1.152	0.041	0.064	0.071	0.066	1.257	1.289	1.259	1.287
	Bottom Surface	0.724	0.052	0.035	0.058	0.062	0.811	0.844	0.838	0.817
	Left Side	0.596	0.091		0.081		0.687	0.677	0.687	0.677
	Right Side			0.042		0.073	0.042	0.073	0.073	0.042
	Front Side	0.284					0.284	0.284	0.284	0.284
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076



WWAN Band	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3	2.4GHz WLAN Ant 4	5/6GHz WLAN Ant 3	5/6GHz WLAN Ant 4				
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
LTE Band 2_Ant 2	Top Surface	1.168	0.041	0.064	0.071	0.066	1.273	1.305	1.275	1.303
	Bottom Surface	1.156	0.052	0.035	0.058	0.062	1.243	1.276	1.270	1.249
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	1.024		0.042		0.073	1.066	1.097	1.097	1.066
	Front Side	0.550					0.550	0.550	0.550	0.550
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
LTE Band 7_Ant 2	Top Surface	0.665	0.041	0.064	0.071	0.066	0.770	0.802	0.772	0.800
	Bottom Surface	0.419	0.052	0.035	0.058	0.062	0.506	0.539	0.533	0.512
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	1.160		0.042		0.073	1.202	1.233	1.233	1.202
	Front Side	0.309					0.309	0.309	0.309	0.309
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
LTE Band 25_Ant 2	Top Surface	1.113	0.041	0.064	0.071	0.066	1.218	1.250	1.220	1.248
	Bottom Surface	0.794	0.052	0.035	0.058	0.062	0.881	0.914	0.908	0.887
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	0.605		0.042		0.073	0.647	0.678	0.678	0.647
	Front Side	0.415					0.415	0.415	0.415	0.415
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
LTE Band 30_Ant 2	Top Surface	0.924	0.041	0.064	0.071	0.066	1.029	1.061	1.031	1.059
	Bottom Surface	1.066	0.052	0.035	0.058	0.062	1.153	1.186	1.180	1.159
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	1.293		0.042		0.073	1.335	1.366	1.366	1.335
	Front Side	0.389					0.389	0.389	0.389	0.389
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
LTE Band 41_Ant 2	Top Surface	0.361	0.041	0.064	0.071	0.066	0.466	0.498	0.468	0.496
	Bottom Surface	0.421	0.052	0.035	0.058	0.062	0.508	0.541	0.535	0.514
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	1.180		0.042		0.073	1.222	1.253	1.253	1.222
	Front Side	0.173					0.173	0.173	0.173	0.173
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
LTE Band 66_Ant 2	Top Surface	0.993	0.041	0.064	0.071	0.066	1.098	1.130	1.100	1.128
	Bottom Surface	0.895	0.052	0.035	0.058	0.062	0.982	1.015	1.009	0.988
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	0.689		0.042		0.073	0.731	0.762	0.762	0.731
	Front Side	0.410					0.410	0.410	0.410	0.410
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076



WWAN Band	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3	2.4GHz WLAN Ant 4	5/6GHz WLAN Ant 3	5/6GHz WLAN Ant 4				
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
FR1 n2_Ant 2	Top Surface	1.127	0.041	0.064	0.071	0.066	1.232	1.264	1.234	1.262
	Bottom Surface	1.105	0.052	0.035	0.058	0.062	1.192	1.225	1.219	1.198
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	0.710		0.042		0.073	0.752	0.783	0.783	0.752
	Front Side	0.419					0.419	0.419	0.419	0.419
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
FR1 n5_Ant 2	Top Surface	0.593	0.041	0.064	0.071	0.066	0.698	0.730	0.700	0.728
	Bottom Surface	0.568	0.052	0.035	0.058	0.062	0.655	0.688	0.682	0.661
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	0.255		0.042		0.073	0.297	0.328	0.328	0.297
	Front Side	0.204					0.204	0.204	0.204	0.204
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
FR1 n25_Ant 2	Top Surface	0.916	0.041	0.064	0.071	0.066	1.021	1.053	1.023	1.051
	Bottom Surface	0.764	0.052	0.035	0.058	0.062	0.851	0.884	0.878	0.857
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	0.570		0.042		0.073	0.612	0.643	0.643	0.612
	Front Side	0.421					0.421	0.421	0.421	0.421
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
FR1 n30_Ant 2	Top Surface	0.848	0.041	0.064	0.071	0.066	0.953	0.985	0.955	0.983
	Bottom Surface	0.991	0.052	0.035	0.058	0.062	1.078	1.111	1.105	1.084
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	1.183		0.042		0.073	1.225	1.256	1.256	1.225
	Front Side	0.363					0.363	0.363	0.363	0.363
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
FR1 n41_Ant 2	Top Surface	0.465	0.041	0.064	0.071	0.066	0.570	0.602	0.572	0.600
	Bottom Surface	0.334	0.052	0.035	0.058	0.062	0.421	0.454	0.448	0.427
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	1.262		0.042		0.073	1.304	1.335	1.335	1.304
	Front Side	0.239					0.239	0.239	0.239	0.239
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
FR1 n48_Ant 2	Top Surface	1.264	0.041	0.064	0.071	0.066	1.369	1.401	1.371	1.399
	Bottom Surface	0.854	0.052	0.035	0.058	0.062	0.941	0.974	0.968	0.947
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	0.896		0.042		0.073	0.938	0.969	0.969	0.938
	Front Side	0.192					0.192	0.192	0.192	0.192
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
FR1 n66_Ant 2	Top Surface	0.681	0.041	0.064	0.071	0.066	0.786	0.818	0.788	0.816
	Bottom Surface	0.616	0.052	0.035	0.058	0.062	0.703	0.736	0.730	0.709
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	0.540		0.042		0.073	0.582	0.613	0.613	0.582
	Front Side	0.373					0.373	0.373	0.373	0.373
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076



WWAN Band	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3	2.4GHz WLAN Ant 4	5/6GHz WLAN Ant 3	5/6GHz WLAN Ant 4				
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
FR1 n77_Ant 2	Top Surface	1.253	0.041	0.064	0.071	0.066	1.358	1.390	1.360	1.388
	Bottom Surface	0.911	0.052	0.035	0.058	0.062	0.998	1.031	1.025	1.004
	Left Side		0.091		0.081		0.091	0.081	0.091	0.081
	Right Side	0.641		0.042		0.073	0.683	0.714	0.714	0.683
	Front Side	0.195					0.195	0.195	0.195	0.195
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
FR1 n77_Ant 5	Top Surface	0.947	0.041	0.064	0.071	0.066	1.052	1.084	1.054	1.082
	Bottom Surface	0.496	0.052	0.035	0.058	0.062	0.583	0.616	0.610	0.589
	Left Side	0.052	0.091		0.081		0.143	0.133	0.143	0.133
	Right Side	0.107		0.042		0.073	0.149	0.180	0.180	0.149
	Front Side	0.628					0.628	0.628	0.628	0.628
	Back Side		0.018	0.024	0.052	0.085	0.042	0.137	0.103	0.076
FR1 n77_Ant 6	Top Surface	1.284	0.041	0.064	0.071	0.066	1.389	1.421	1.391	1.419
	Bottom Surface	0.397	0.052	0.035	0.058	0.062	0.484	0.517	0.511	0.490
	Left Side	0.164	0.091		0.081		0.255	0.245	0.255	0.245
	Right Side	0.033		0.042		0.073	0.075	0.106	0.106	0.075
	Front Side						0.000	0.000	0.000	0.000
	Back Side	1.292	0.018	0.024	0.052	0.085	1.334	1.429	1.395	1.368

Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)
	6GHz WLAN Ant 3	6GHz WLAN Ant 4	
	1g SAR (W/kg)	1g SAR (W/kg)	
Top Surface	0.019	0.060	0.079
Bottom Surface	0.060	0.012	0.072
Left Side	0.028		0.028
Right Side		0.039	0.039
Front Side			0.000
Back Side	0.002	0.015	0.017

<WWAN is offloading>

Exposure Position	2	3	4	5	2+3 Summed 1g SAR (W/kg)	2+5 Summed 1g SAR (W/kg)	3+4 Summed 1g SAR (W/kg)
	2.4GHz WLAN Ant 3	2.4GHz WLAN Ant 4	5/6GHz WLAN Ant 3	5/6GHz WLAN Ant 4			
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
Top Surface	0.041	0.064	0.071	0.066	0.105	0.107	0.135
Bottom Surface	0.052	0.035	0.058	0.062	0.087	0.114	0.093
Left Side	0.091		0.081		0.091	0.091	0.081
Right Side		0.042		0.073	0.042	0.073	0.042
Front Side					0.000	0.000	0.000
Back Side	0.018	0.024	0.052	0.085	0.042	0.103	0.076

Test Engineer : Mood Huang, Tommy Chen, Charles Shen and Jordar Jhuang

20. Uncertainty Assessment

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

- (a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity
- (b) κ is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.



Applicable for SAR Measurements:

Uncertainty Budget (4 MHz - 10 GHz range)							
Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	18.60	N	2	1	1	9.3	9.3
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Linearity	4.70	R	1.732	1	1	2.7	2.7
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Boundary Effects	2.00	R	1.732	1	1	1.2	1.2
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	6.70	R	1.732	1	1	3.9	3.9
Post-processing	4.00	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Holder	3.60	N	1	1	1	3.6	3.6
Test sample Positioning	3.03	N	1	1	1	3.0	3.0
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
Power Drift	5.00	R	1.732	1	1	2.9	2.9
Phantom and Setup							
Phantom Uncertainty	7.60	R	1.732	1	1	4.4	4.4
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.77	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.77	2.3	2.2
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.77	1.1	1.1
Temp. unc. - Conductivity	3.68	R	1.732	0.78	0.77	1.7	1.6
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						14.5%	14.2%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						29.0%	28.4%

21. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.
- [6] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [7] FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 2015
- [8] FCC KDB 941225 D05A v01r02, “Rel. 10 LTE SAR Test Guidance and KDB Inquiries”, Oct 2015
- [9] FCC KDB 941225 D06 v02r01, “SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities”, Oct 2015.
- [10] FCC KDB 865664 D01 v01r04, “SAR Measurement Requirements for 100 MHz to 6 GHz”, Aug 2015.
- [11] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.