

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Report No.: RFBBQZ-WTW-P23020336-5

FCC ID: PY322400578

Product: Mesh WiFi 6E Satellite

Brand: NETGEAR

Model No.: MS90

Received Date: 2023/1/31

Test Date: 2023/3/13 ~ 2023/5/24

Issued Date: 2023/6/1

Applicant: NETGEAR, Inc.

Address: 350 East Plumeria Drive San Jose, CA 95134

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

FCC Registration / 723255 / TW2022

Designation Number:

Approved by:


May Chen / Manager

, Date:

2023/6/1

This test report consists of 210 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Claire Kuan / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Antenna Description of EUT	9
3.3 Channel List.....	10
3.4 Test Mode Applicability and Tested Channel Detail.....	12
3.5 Duty Cycle of Test Signal.....	15
3.6 Test Program Used and Operation Descriptions.....	17
3.7 Connection Diagram of EUT and Peripheral Devices	17
3.8 Configuration of Peripheral Devices and Cable Connections	18
4 Test Instruments	19
4.1 RF Output Power.....	19
4.2 Power Spectral Density	19
4.3 Emission Bandwidth	19
4.4 In-Band Emission Mask.....	19
4.5 Occupied Bandwidth.....	19
4.6 Frequency Stability	20
4.7 Contention-based Protocol	20
4.8 AC Power Conducted Emissions	21
4.9 Unwanted Emissions below 1 GHz	21
4.10 Unwanted Emissions above 1 GHz.....	22
5 Limits of Test Items.....	23
5.1 RF Output Power	23
5.2 Power Spectral Density	23
5.3 Emission Bandwidth	23
5.4 In-Band Emission Mask.....	23
5.5 Occupied Bandwidth.....	23
5.6 Frequency Stability	24
5.7 Contention-based Protocol	24
5.8 AC Power Conducted Emissions	24
5.9 Unwanted Emissions below 1 GHz	24
5.10 Unwanted Emissions above 1 GHz.....	25
6 Test Arrangements.....	26
6.1 RF Output Power.....	26
6.1.1 Test Setup	26
6.1.2 Test Procedure.....	26
6.2 Power Spectral Density	27
6.2.1 Test Setup	27
6.2.2 Test Procedure	27
6.3 Emission Bandwidth	28
6.3.1 Test Setup	28
6.3.2 Test Procedure	28
6.4 In-Band Emission Mask.....	28
6.4.1 Test Setup	28
6.4.2 Test Procedure	28
6.5 Occupied Bandwidth.....	29
6.5.1 Test Setup	29
6.5.2 Test Procedure	29
6.6 Frequency Stability	29
6.6.1 Test Setup	29

6.6.2	Test Procedure	29
6.7	Contention-based Protocol	30
6.7.1	Test Setup	30
6.7.2	Test Procedure	30
6.8	AC Power Conducted Emissions	31
6.8.1	Test Setup	31
6.8.2	Test Procedure	31
6.9	Unwanted Emissions below 1 GHz	32
6.9.1	Test Setup	32
6.9.2	Test Procedure	33
6.10	Unwanted Emissions above 1 GHz	34
6.10.1	Test Setup	34
6.10.2	Test Procedure	34
7	Test Results of Test Item	35
7.1	RF Output Power	35
7.2	Power Spectral Density	47
7.3	Emission Bandwidth	60
7.4	In-Band Emission Mask	63
7.5	Occupied Bandwidth	81
7.6	Frequency Stability	84
7.7	Contention-based Protocol	85
7.8	AC Power Conducted Emissions	94
7.9	Unwanted Emissions below 1 GHz	96
7.10	Unwanted Emissions above 1 GHz	98
8	Operational Restrictions for 6 GHz U-NII Devices	208
9	Pictures of Test Arrangements	209
10	Information of the Testing Laboratories	210



Release Control Record

Issue No.	Description	Date Issued
RFBBQZ-WTW-P23020336-5	Original release.	2023/6/1



1 Certificate

Product: Mesh WiFi 6E Satellite

Brand: NETGEAR

Test Model: MS90

Sample Status: Engineering sample

Applicant: NETGEAR, Inc.

Test Date: 2023/3/13 ~ 2023/5/24

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement procedure: ANSI C63.10-2013

KDB 987594 D02 U-NII 6 GHz EMC Measurement v01v01

KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(6)	RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(6)	Power Spectral Density	Pass	Meet the requirement of limit.
15.407(a)(10)	Occupied Bandwidth	Pass	Reference only.
15.407(b)(9)	AC Power Conducted Emissions	Pass	Minimum passing margin is -6.67 dB at 0.35065 MHz
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -5.7 dB at 63.53 MHz
15.407(b)(6) 15.407(b)(10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -0.3 dB at 7125.00 MHz
15.407(b)(7)	In-Band Emission Mask	Pass	Meet the requirement of limit.
15.407(d)(6)	Contention-based Protocol	Pass	Meet the requirement of limit.
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.407(d)	Operational restrictions for 6 GHz U-NII devices	Pass	Declaration by applicant
15.203	Antenna Requirement	Pass	No antenna connector is used.
---	Emission Bandwidth	-	Meet the requirement of limit.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (\pm)
AC Power Conducted Emissions	150 kHz ~ 30 MHz	1.9 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.1 dB
	30 MHz ~ 1 GHz	5.5 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	5.1 dB
	18 GHz ~ 40 GHz	5.3 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Mesh WiFi 6E Satellite
Brand	NETGEAR
Test Model	MS90
Status of EUT	Engineering sample
Power Supply Rating	Refer to Note
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 1024QAM for OFDMA in 11ax mode
Modulation Technology	OFDM, OFDMA
Transfer Rate	802.11a: up to 54 Mbps 802.11ax: up to 2401.9 Mbps
Operating Frequency	6.115 GHz ~ 6.415 GHz 6.435 GHz ~ 6.525 GHz 6.535 GHz ~ 6.865 GHz 6.875 GHz ~ 7.115 GHz
Number of Channel	802.11a, 802.11ax (HE20): 51 802.11ax (HE40): 25 802.11ax (HE80): 12 802.11ax (HE160): 6
Output Power	<p>CDD Mode:</p> <p>6.115 GHz ~ 6.415 GHz : EIRP: 328.852 mW (25.17 dBm) 6.435 GHz ~ 6.525 GHz : EIRP: 336.512 mW (25.27 dBm) 6.535 GHz ~ 6.865 GHz : EIRP: 321.366 mW (25.07 dBm) 6.875 GHz ~ 7.115 GHz : EIRP: 328.852 mW (25.17 dBm)</p> <p>Beamforming(2T1S) Mode:</p> <p>6.115 GHz ~ 6.415 GHz : EIRP: 497.737 mW (26.97 dBm) 6.435 GHz ~ 6.525 GHz : EIRP: 475.355 mW (26.77 dBm) 6.535 GHz ~ 6.865 GHz : EIRP: 475.355 mW (26.77 dBm) 6.875 GHz ~ 7.115 GHz : EIRP: 486.407 mW (26.87 dBm)</p> <p>SM-MIMO(2T2S) Mode:</p> <p>6.115 GHz ~ 6.415 GHz : EIRP: 486.407 mW (26.87 dBm) 6.435 GHz ~ 6.525 GHz : EIRP: 475.335 mW (26.77 dBm) 6.535 GHz ~ 6.865 GHz : EIRP: 464.515 mW (26.67 dBm) 6.875 GHz ~ 7.115 GHz : EIRP: 395.367 mW (25.97 dBm)</p> <p>Beamforming(2T2S) Mode:</p> <p>6.115 GHz ~ 6.415 GHz : EIRP: 464.515 mW (26.67 dBm) 6.435 GHz ~ 6.525 GHz : EIRP: 464.515 mW (26.67 dBm) 6.535 GHz ~ 6.865 GHz : EIRP: 453.942 mW (26.57 dBm) 6.875 GHz ~ 7.115 GHz : EIRP: 377.572 mW (25.77 dBm)</p>
EUT Category	Indoor subordinate device only

Note:

1. The EUT has below radios as following table:

Radio 1	Radio 2
WLAN 2.4GHz	WLAN 5GHz + 6GHz

2. Simultaneously transmission condition.

Condition	Technology		
1	WLAN (2.4 GHz)	WLAN (5 GHz)	WLAN (6 GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT must be supplied with a power adapter as the following table:

AC Adapter 1

Brand	Model	Specification
NETGEAR	2AED030FC	Part Number: 332-11595-01 AC Input: 100-120V~60Hz Max 1.0A DC Output: 12V, 2.5A DC Output Cable: unshielded, 1.8m without core

AC Adapter 2

Brand	Model	Specification
NETGEAR	ADS-40FPC-12 12030E	Part Number: 332-11585-02 AC Input: 100-120V~50/60Hz 1.0A DC Output: 12V, 2.5A DC Output Cable: unshielded, 1.8m without core

Ethernet Cable

Brand	Model	Specification
NETGEAR	312-10138-01	Signal Line : 2m, Unshielded

4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

Test Item	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
In-Band Emission Mask	802.11a	CDD	33, 61, 93, 97, 105, 113, 117, 149, 181, 185, 209, 233	BPSK	6Mb/s
	802.11ax (HE20)	CDD	33, 61, 93, 97, 105, 113, 117, 149, 181, 185, 209, 229, 233	BPSK	MCS0
	802.11ax (HE40)	CDD	35, 59, 91, 99, 107, 115, 123, 155, 179, 187, 211, 227	BPSK	MCS0
	802.11ax (HE80)	CDD	39, 55, 87, 103, 119, 151, 167, 183, 199, 215	BPSK	MCS0
	802.11ax (HE160)	CDD	47, 79, 111, 143, 175, 207	BPSK	MCS0
Occupied Bandwidth	802.11a	CDD	33, 61, 93, 97, 105, 113, 117, 149, 181, 185, 209, 233	BPSK	6Mb/s
	802.11ax (HE20)	CDD	33, 61, 93, 97, 105, 113, 117, 149, 181, 185, 209, 229, 233	BPSK	MCS0
	802.11ax (HE40)	CDD	35, 59, 91, 99, 107, 115, 123, 155, 179, 187, 211, 227	BPSK	MCS0
	802.11ax (HE80)	CDD	39, 55, 87, 103, 119, 151, 167, 183, 199, 215	BPSK	MCS0
	802.11ax (HE160)	CDD	47, 79, 111, 143, 175, 207	BPSK	MCS0
Frequency Stability	802.11a	CDD	33	un-modulation	-
Contention-based Protocol	802.11ax (HE20)	CDD	33, 97, 129, 193	BPSK	MCS0
	802.11ax (HE160)	CDD	47, 111, 143, 207	BPSK	MCS0
AC Power Conducted Emissions	802.11ax (HE160)	CDD	79	BPSK	MCS0
Unwanted Emissions below 1 GHz	802.11ax (HE160)	CDD	79	BPSK	MCS0

Test Item	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
Unwanted Emissions above 1 GHz	802.11a	CDD	33, 61, 93, 97, 105, 113, 117, 149, 181, 185, 209, 233	BPSK	6Mb/s
	802.11ax (HE20)	CDD	33, 61, 93, 97, 105, 113, 117, 149, 181, 185, 209, 229, 233	BPSK	MCS0
	802.11ax (HE40)	CDD	35, 59, 91, 99, 107, 115, 123, 155, 179, 187, 211, 227	BPSK	MCS0
	802.11ax (HE80)	CDD	39, 55, 87, 103, 119, 151, 167, 183, 199, 215	BPSK	MCS0
	802.11ax (HE160)	CDD	47, 79, 111, 143, 175, 207	BPSK	MCS0

3.5 Duty Cycle of Test Signal

802.11a: Duty cycle = $1.588 \text{ ms} / 1.617 \text{ ms} \times 100\% = 98.2\%$

802.11ax (HE20) CDD: Duty cycle = $2.168 \text{ ms} / 2.2 \text{ ms} \times 100\% = 98.5\%$

802.11ax (HE40) CDD: Duty cycle = $2.154 \text{ ms} / 2.185 \text{ ms} \times 100\% = 98.6\%$

802.11ax (HE80) CDD: Duty cycle = $2.143 \text{ ms} / 2.171 \text{ ms} \times 100\% = 98.7\%$


802.11ax (HE160) CDD: Duty cycle = $2.143 \text{ ms} / 2.171 \text{ ms} \times 100\% = 98.7\%$

802.11ax (HE20) Beamforming: Duty cycle = $3.004 \text{ ms} / 3.034 \text{ ms} \times 100\% = 99\%$


802.11ax (HE40) Beamforming: Duty cycle = $2.006 \text{ ms} / 3.036 \text{ ms} \times 100\% = 99\%$

802.11ax (HE80) Beamforming: Duty cycle = $3.005 \text{ ms} / 3.035 \text{ ms} \times 100\% = 99\%$


802.11ax (HE160) Beamforming: Duty cycle = $3.005 \text{ ms} / 3.035 \text{ ms} \times 100\% = 99\%$

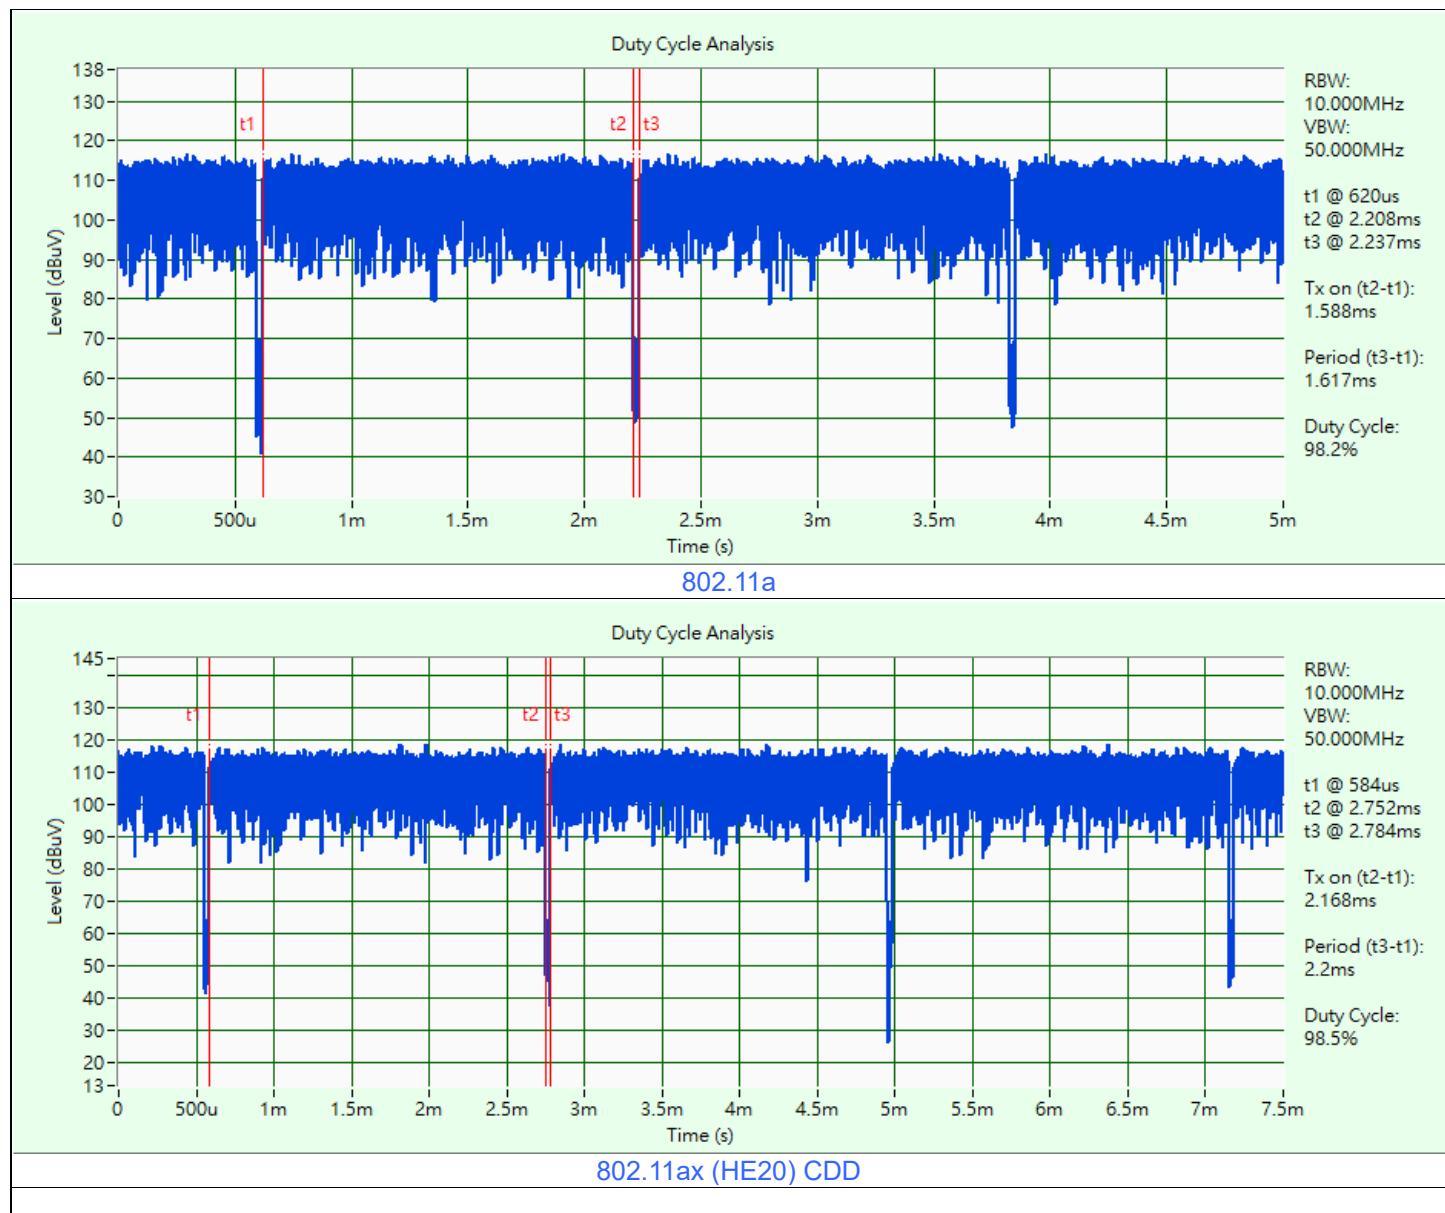


Duty Cycle Analysis

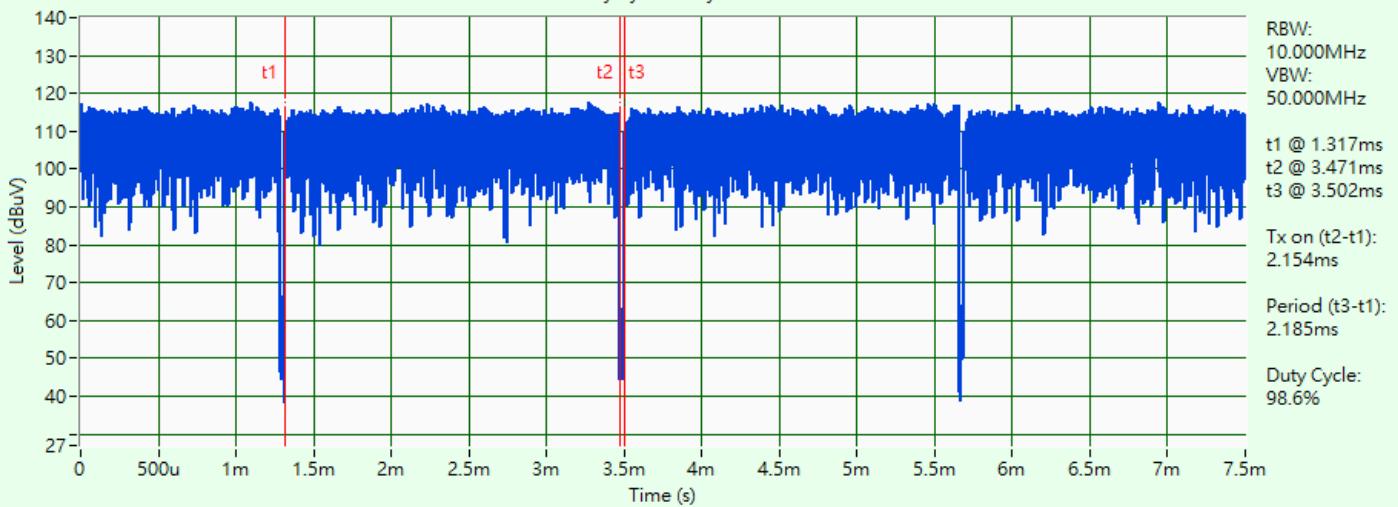

802.11ax (HE40) CDD

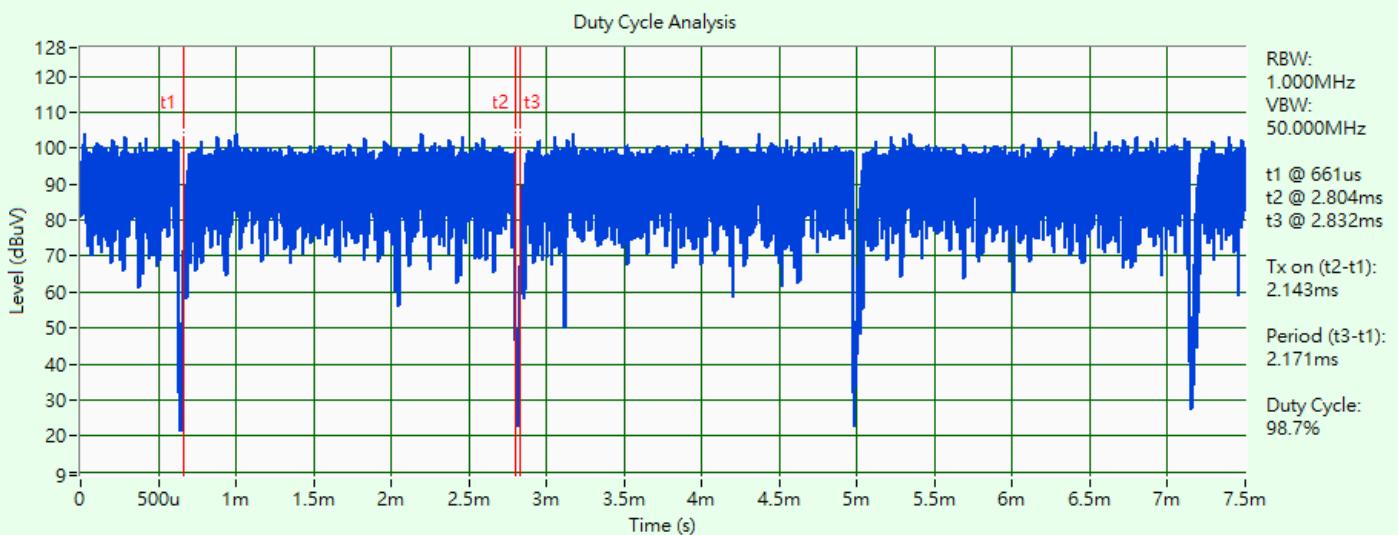

802.11ax (HE80) CDD

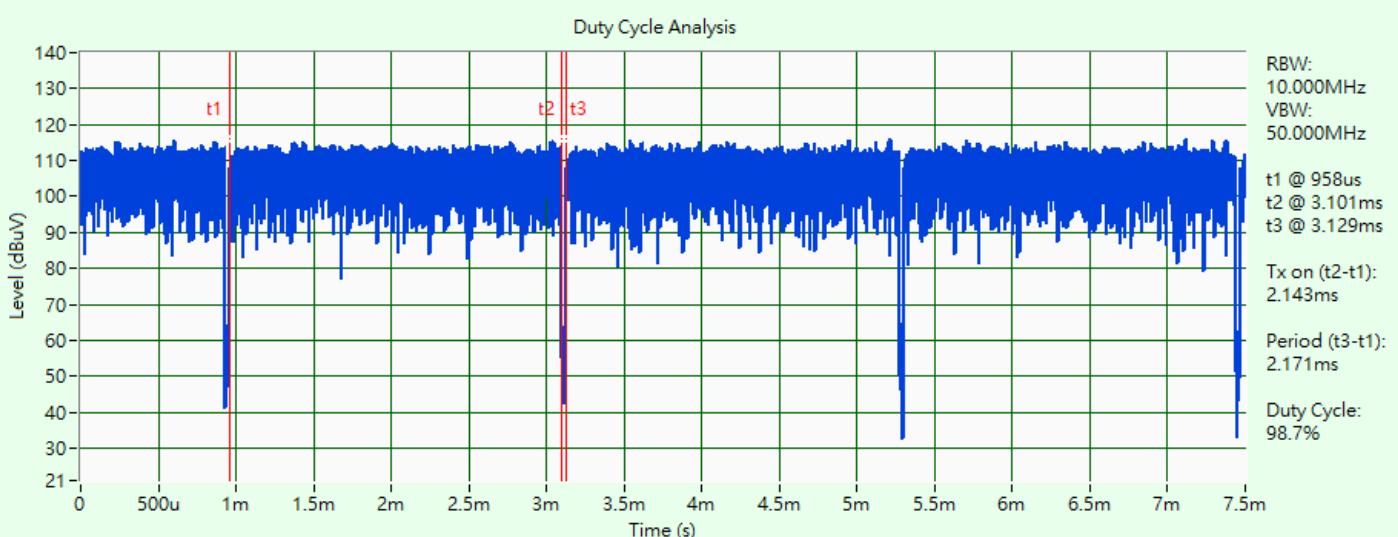


802.11ax (HE160) CDD

3.6 Test Program Used and Operation Descriptions

Controlling software (WIFI: MT7663 QA 0.0.2.8) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

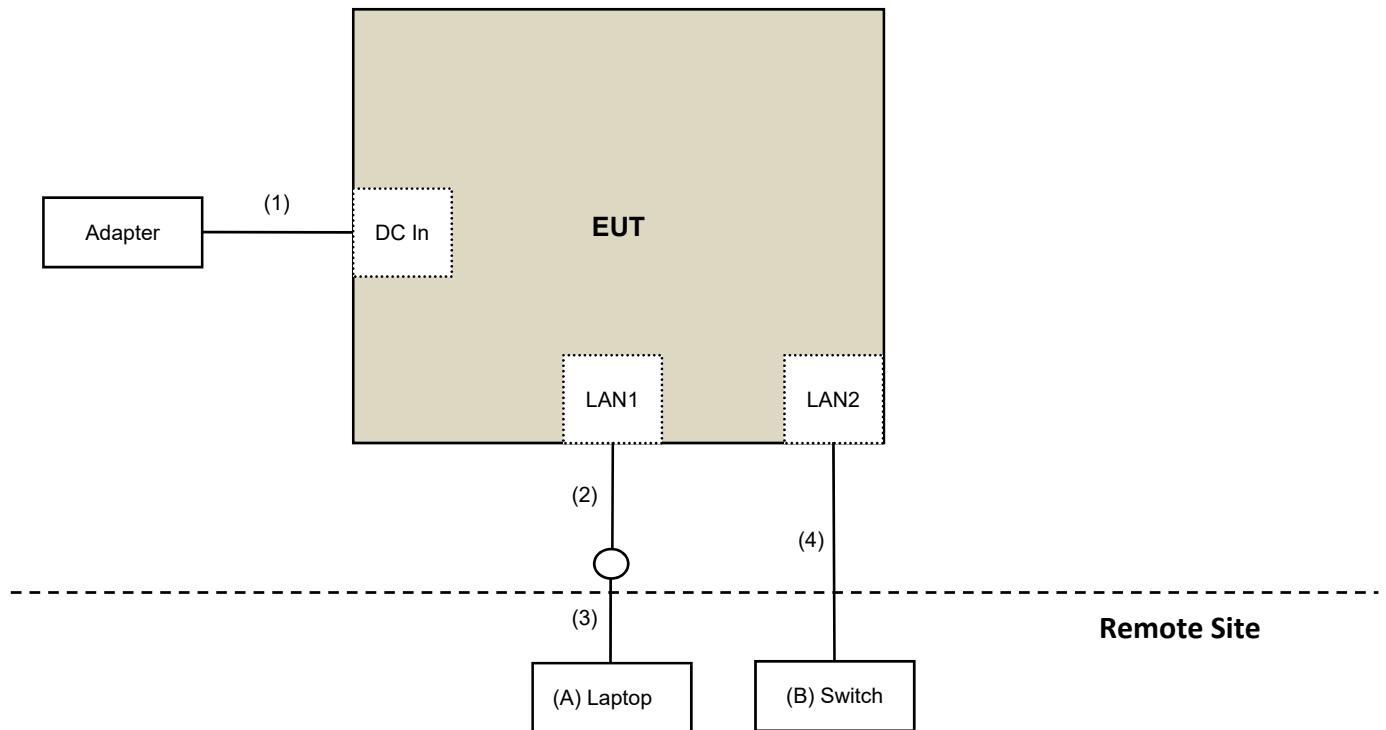

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	Lenovo	20U5S01X00 L14	PF-1ANPYA	N/A	Provided by Lab
B	Switch	D-Link	DGS-1005D	DR8WC92000523	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC Cable	1	1.8	No	0	Supplied by applicant
2	RJ45	1	2	No	0	Supplied by applicant
3	RJ45	1	10	No	0	Provided by Lab
4	RJ45	1	10	No	0	Provided by Lab

4.6 Frequency Stability

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
AC Power Source GOOD WILL	6905S	1991551	N/A	N/A
Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	2022/4/5	2023/4/4
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A
Spectrum Analyzer Keysight	N9020B	MY60112409	2023/2/18	2024/2/17
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	2022/12/26	2023/12/25
True RMS Clamp Meter Fluke	325	31130711WS	2022/6/9	2023/6/8

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2023/4/2

4.7 Contention-based Protocol

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Combiner Mini-Circuits	ZFRSC-123-S+	F698501347_01	2022/12/28	2023/12/27
		F698501347_02	2022/12/15	2023/12/14
Frequency Extender KEYSIGHT	N5182BX07	MY59360198	2022/10/14	2023/10/13
MXG Vector Signal Generator Keysight	N5182B	MY53052647	2022/11/8	2023/11/7
PXA Signal Analyzer Keysight	N9030A	MY55410176	2022/6/21	2023/6/20
Signal Analyzer R&S	FSV40	101516	2023/2/10	2024/2/9

Notes:

1. The test was performed in Adaptivity room.
2. Tested Date: 2023/5/24

4.10 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-783	2022/11/13	2023/11/12
	BBHA 9170	9170-739	2022/11/13	2023/11/12
Pre_Amplifier EMCI	EMC12630SE	980688	2022/10/4	2023/10/3
	EMC184045SE	980387	2022/12/28	2023/12/27
RF Cable-Frequency Range : 1- 26.5GHz EMCI	EMC104-SM-SM-1200	160922	2022/12/15	2023/12/14
RF Cable-Frequency range: 1- 40GHz EMCI	EMC102-KM-KM-1200	160924	2022/12/28	2023/12/27
RF Coaxial Cable EMCI	EMC-KM-KM-4000	200214	2023/2/20	2024/2/19
	EMC104-SM-SM-2000	180502	2022/4/25	2023/4/24
	EMC104-SM-SM-6000	210704	2022/11/4	2023/11/3
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A
Spectrum Analyzer KEYSIGHT	N9030B	MY57142938	2022/4/26	2023/4/25

Notes:

1. The test was performed in 966 Chamber No. 4.
2. Tested Date: 2023/3/15

5 Limits of Test Items

5.1 RF Output Power

Operation Band	EUT Category	Limit
		Max Average Power
U-NII-5 U-NII-6 U-NII-7 U-NII-8	Indoor subordinate device only	EIRP 30 dBm

5.2 Power Spectral Density

Operation Band	EUT Category	Limit
		Peak Power Density
U-NII-5 U-NII-6 U-NII-7 U-NII-8	Indoor subordinate device only	EIRP 5 dBm/MHz

5.3 Emission Bandwidth

The results are for reference only.

5.4 In-Band Emission Mask

Test Item	Frequencies (MHz)	(X) dBc ^{*1}
Emission Mask	At 1 MHz outside of channel edge	20
	At one channel bandwidth from the channel center ^{*2}	28
	At one- and one-half times the channel bandwidth away from channel center ^{*3}	40
	More than one- and one-half times the channel bandwidth	40

^{*1} : The power spectral density must be suppressed by "x" dB

^{*2} : At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression,

^{*3} : At frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression.

5.5 Occupied Bandwidth

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 MHz.

5.6 Frequency Stability

The frequency of the carrier signal shall be maintained within band of operation.

5.7 Contention-based Protocol

Unlicensed indoor low-power devices must detect co-channel radio frequency power that is at least -62 dBm (The threshold is referenced to a 0 dBi antenna gain.) or lower. Additionally, indoor low-power devices must detect co-channel energy with 90% or greater certainty.

5.8 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.9 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.10 Unwanted Emissions above 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Frequencies (MHz)	EIRP Limit	Equivalent Field Strength at 3 m
5925 MHz > F > 7125 MHz	Peak: -7 (dBm/MHz)	88.2 (dBuV/m)
	Average: -27 (dBm/MHz)	68.2 (dBuV/m)

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:


$$E = \frac{1000000 \sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts).}$$

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup

Radiated Measurement Method

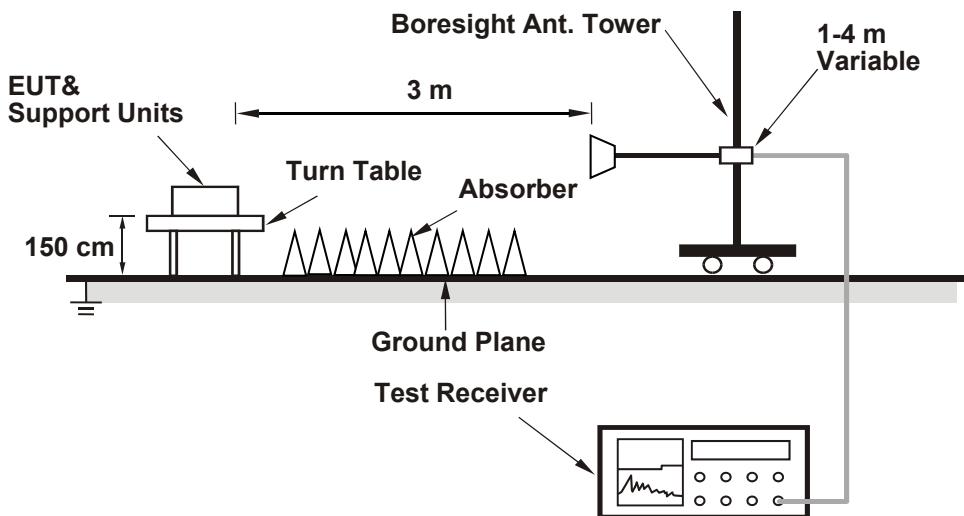

6.1.2 Test Procedure

Radiated Measurement Method

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP level.
- Follow ANSI C63.10 section 12.7.3, EIRP Value (dBm) = Field Strength Value (dBuV / m) + Correction Factor @ 3 m.
- Correction Factor (dB) @ 3 m = $20\log(D) - 104.77 = -95.23 \text{ dB}$; where D is the measurement distance @3 m.

Spectrum analyzer setting as below:

Method SA-1


- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to “free run”.
- Trace average at least 100 traces in power averaging mode.
- Record the max value

Note: When measuring power, use compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument's band power measurement function, with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.

6.2 Power Spectral Density

6.2.1 Test Setup

Radiated Measurement Method

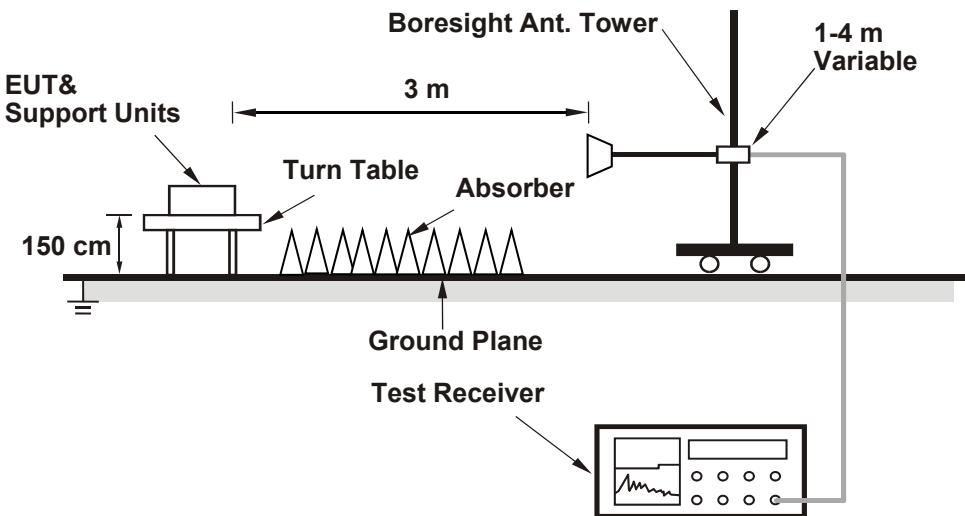

6.2.2 Test Procedure

Radiated Measurement Method

- g. The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- h. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- i. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- j. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP level.
- k. Follow ANSI C63.10 section 12.7.3, EIRP Value (dBm) = Field Strength Value (dBuV/m) + Correction Factor @ 3 m.
- l. Correction Factor (dB) @ 3 m = $20\log(D) - 104.77$; where D is the measurement distance @3 m = -95.23 dB


Spectrum analyzer setting as below:

Method SA-1

- m. Set span to encompass the entire emission bandwidth (EBW) of the signal.
- n. Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
- o. Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- p. Sweep time = auto, trigger set to “free run”.
- q. Trace average at least 100 traces in power averaging mode.
- r. Record the max value

6.3 Emission Bandwidth

6.3.1 Test Setup

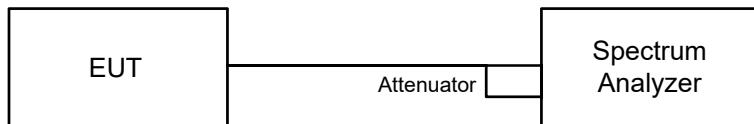


6.3.2 Test Procedure

- a. Set RBW = approximately 1% of the emission bandwidth.
- b. Set the VBW > RBW.
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6.4 In-Band Emission Mask

6.4.1 Test Setup

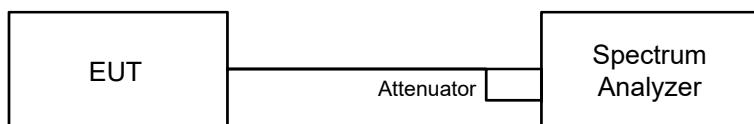


6.4.2 Test Procedure

- a. Connect output of the antenna port to a spectrum analyzer and adjust appropriate attenuation.
- b. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (Determine the channel edge.)
- c. Measure the power spectral density (for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq [3 \times \text{RBW}]$.
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging).
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
- a. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a) Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - b) Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c) Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
- a. Adjust the span to encompass the entire mask as necessary and clear trace.
- b. Trace average at least 100 traces in power averaging (rms) mode.
- c. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask

6.5 Occupied Bandwidth

6.5.1 Test Setup

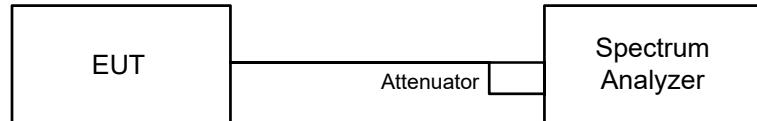


6.5.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to Sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

6.6 Frequency Stability

6.6.1 Test Setup

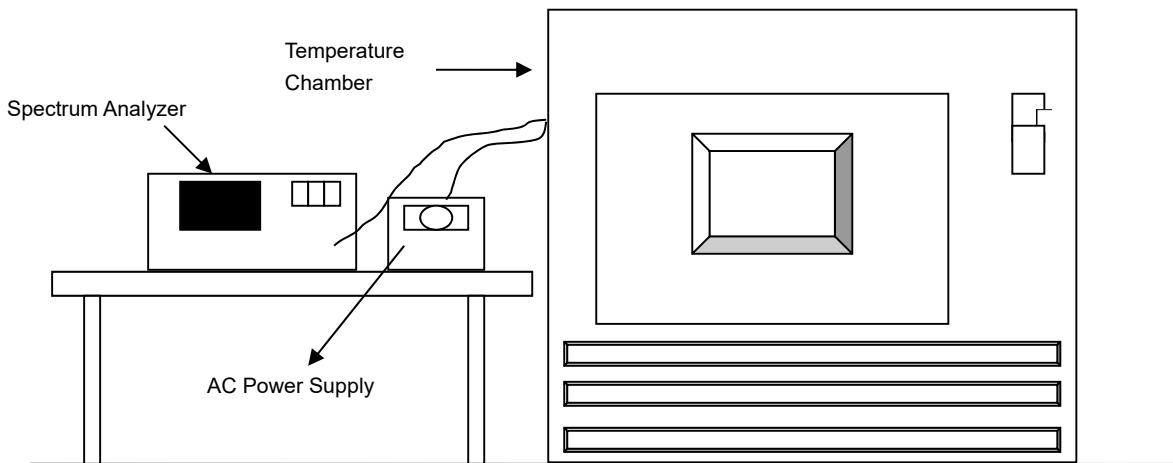


6.6.2 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- Repeat step (d) with the temperature chamber set to the next desired temperature until measurements down to the lowest specified temperature have been completed.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

6.7 Contention-based Protocol

6.7.1 Test Setup

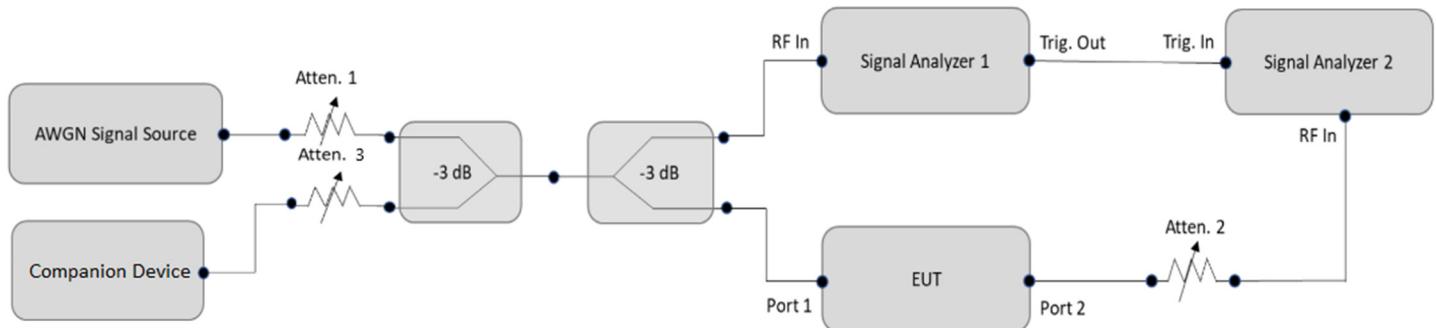

6.7.2 Test Procedure


- Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
- Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters (set as following section 4.7.5 EUT operating condition).
- Determine number of times detection threshold test as following table,

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Same as EUT transmission
$BW_{Inc} < BW_{EUT} \leq 2xBW_{Inc}$	Once	Contained within BW_{EUT}
$2xBW_{Inc} < BW_{EUT} \leq 4xBW_{Inc}$	Twice. (Incumbent transmission is contained within BW_{EUT})	Closely to the lower edge and upper edge of the EUT Channel
$BW_{EUT} > 4xBW_{Inc}$	Three times	Closely to the lower edge ,in the middle and upper edge of the EUT Channel

- Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use step c table to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
- Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT.
- Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
- Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
- (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
- Refer to step c table to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step d, choose a different center frequency for the AWGN signal and repeat the process.

6.8 AC Power Conducted Emissions

6.8.1 Test Setup

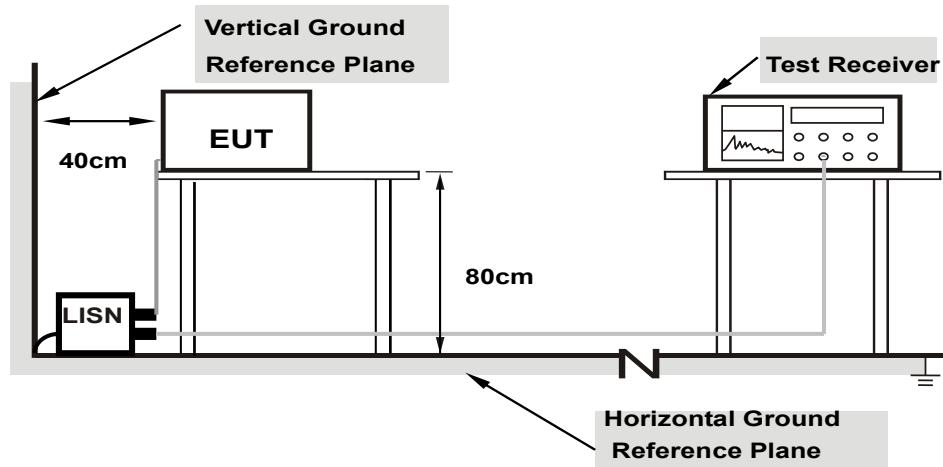

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.8.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.9 Unwanted Emissions below 1 GHz

6.9.1 Test Setup

For Radiated emission below 30 MHz

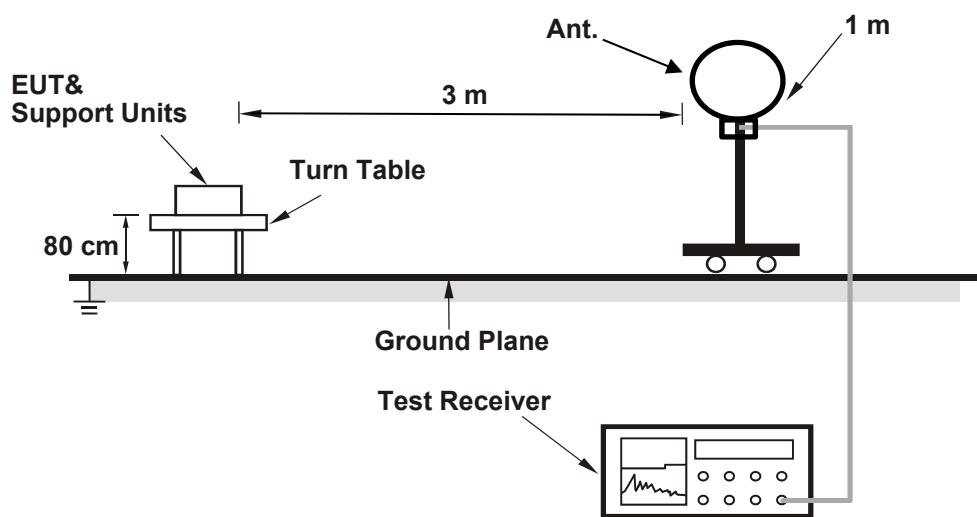

For Radiated emission above 30 MHz

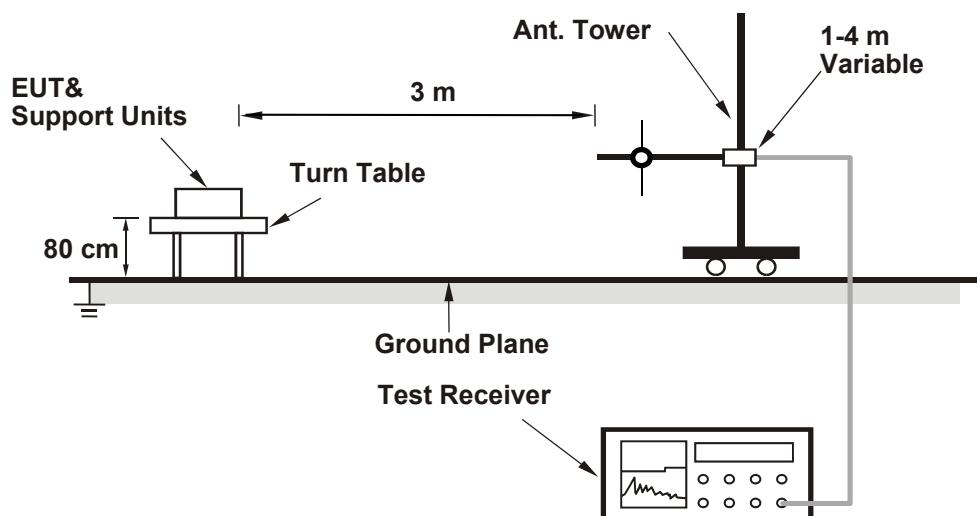

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.9.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.10 Unwanted Emissions above 1 GHz

6.10.1 Test Setup

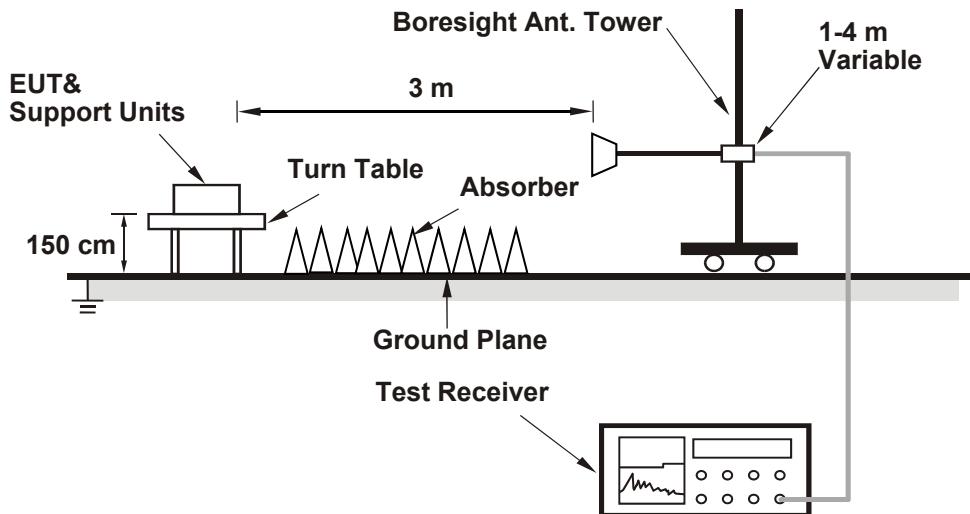

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.10.2 Test Procedure

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

1. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
2. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.



BUREAU
VERITAS

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 65% RH	Tested By:	Katina Lu
--------------	----------------	---------------------------	--------------	------------	-----------

802.11a CDD

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
33	6115	111.50	-95.23	42.364	16.27	30	Pass
61	6255	111.90	-95.23	46.452	16.67	30	Pass
93	6415	111.60	-95.23	43.351	16.37	30	Pass
97	6435	111.70	-95.23	44.361	16.47	30	Pass
105	6475	111.80	-95.23	45.394	16.57	30	Pass
113	6515	111.70	-95.23	44.361	16.47	30	Pass
117	6535	111.90	-95.23	46.452	16.67	30	Pass
149	6695	111.60	-95.23	43.351	16.37	30	Pass
181	6855	112.00	-95.23	47.534	16.77	30	Pass
185	6875	111.70	-95.23	44.361	16.47	30	Pass
209	6995	111.80	-95.23	45.394	16.57	30	Pass
233	7115	111.60	-95.23	43.351	16.37	30	Pass

802.11ax (HE20) CDD

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
33	6115	112.20	-95.23	49.774	16.97	30	Pass
61	6255	112.30	-95.23	50.933	17.07	30	Pass
93	6415	112.40	-95.23	52.119	17.17	30	Pass
97	6435	112.40	-95.23	52.119	17.17	30	Pass
105	6475	112.20	-95.23	49.774	16.97	30	Pass
113	6515	112.30	-95.23	50.933	17.07	30	Pass
117	6535	112.20	-95.23	49.774	16.97	30	Pass
149	6695	112.30	-95.23	50.933	17.07	30	Pass
181	6855	112.60	-95.23	54.576	17.37	30	Pass
185	6875	112.30	-95.23	50.933	17.07	30	Pass
209	6995	112.00	-95.23	47.534	16.77	30	Pass
229	7095	112.50	-95.23	53.333	17.27	30	Pass
233	7115	96.10	-95.23	1.222	0.87	30	Pass

BUREAU
VERITAS**802.11ax (HE40) CDD**


Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
35	6125	114.70	-95.23	88.512	19.47	30	Pass
59	6245	114.70	-95.23	88.512	19.47	30	Pass
91	6405	114.60	-95.23	86.497	19.37	30	Pass
99	6445	114.60	-95.23	86.497	19.37	30	Pass
107	6485	114.60	-95.23	86.497	19.37	30	Pass
115	6525	114.30	-95.23	80.724	19.07	30	Pass
123	6565	114.60	-95.23	86.497	19.37	30	Pass
155	6725	114.60	-95.23	86.497	19.37	30	Pass
179	6845	114.70	-95.23	88.512	19.47	30	Pass
187	6885	114.40	-95.23	82.604	19.17	30	Pass
211	7005	114.70	-95.23	88.512	19.47	30	Pass
227	7085	114.60	-95.23	86.497	19.37	30	Pass

802.11ax (HE80) CDD

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
39	6145	116.90	-95.23	146.893	21.67	30	Pass
55	6225	117.00	-95.23	150.314	21.77	30	Pass
87	6385	117.00	-95.23	150.314	21.77	30	Pass
103	6465	116.90	-95.23	146.893	21.67	30	Pass
119	6545	117.10	-95.23	153.815	21.87	30	Pass
151	6705	117.00	-95.23	150.314	21.77	30	Pass
183	6865	117.10	-95.23	153.815	21.87	30	Pass
199	6945	117.10	-95.23	153.815	21.87	30	Pass
215	7025	117.20	-95.23	157.398	21.97	30	Pass

802.11ax (HE160) CDD

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
47	6185	120.10	-95.23	306.902	24.87	30	Pass
79	6345	120.40	-95.23	328.852	25.17	30	Pass
111	6505	120.50	-95.23	336.512	25.27	30	Pass
143	6665	120.20	-95.23	314.051	24.97	30	Pass
175	6825	120.30	-95.23	321.366	25.07	30	Pass
207	6985	120.40	-95.23	328.852	25.17	30	Pass

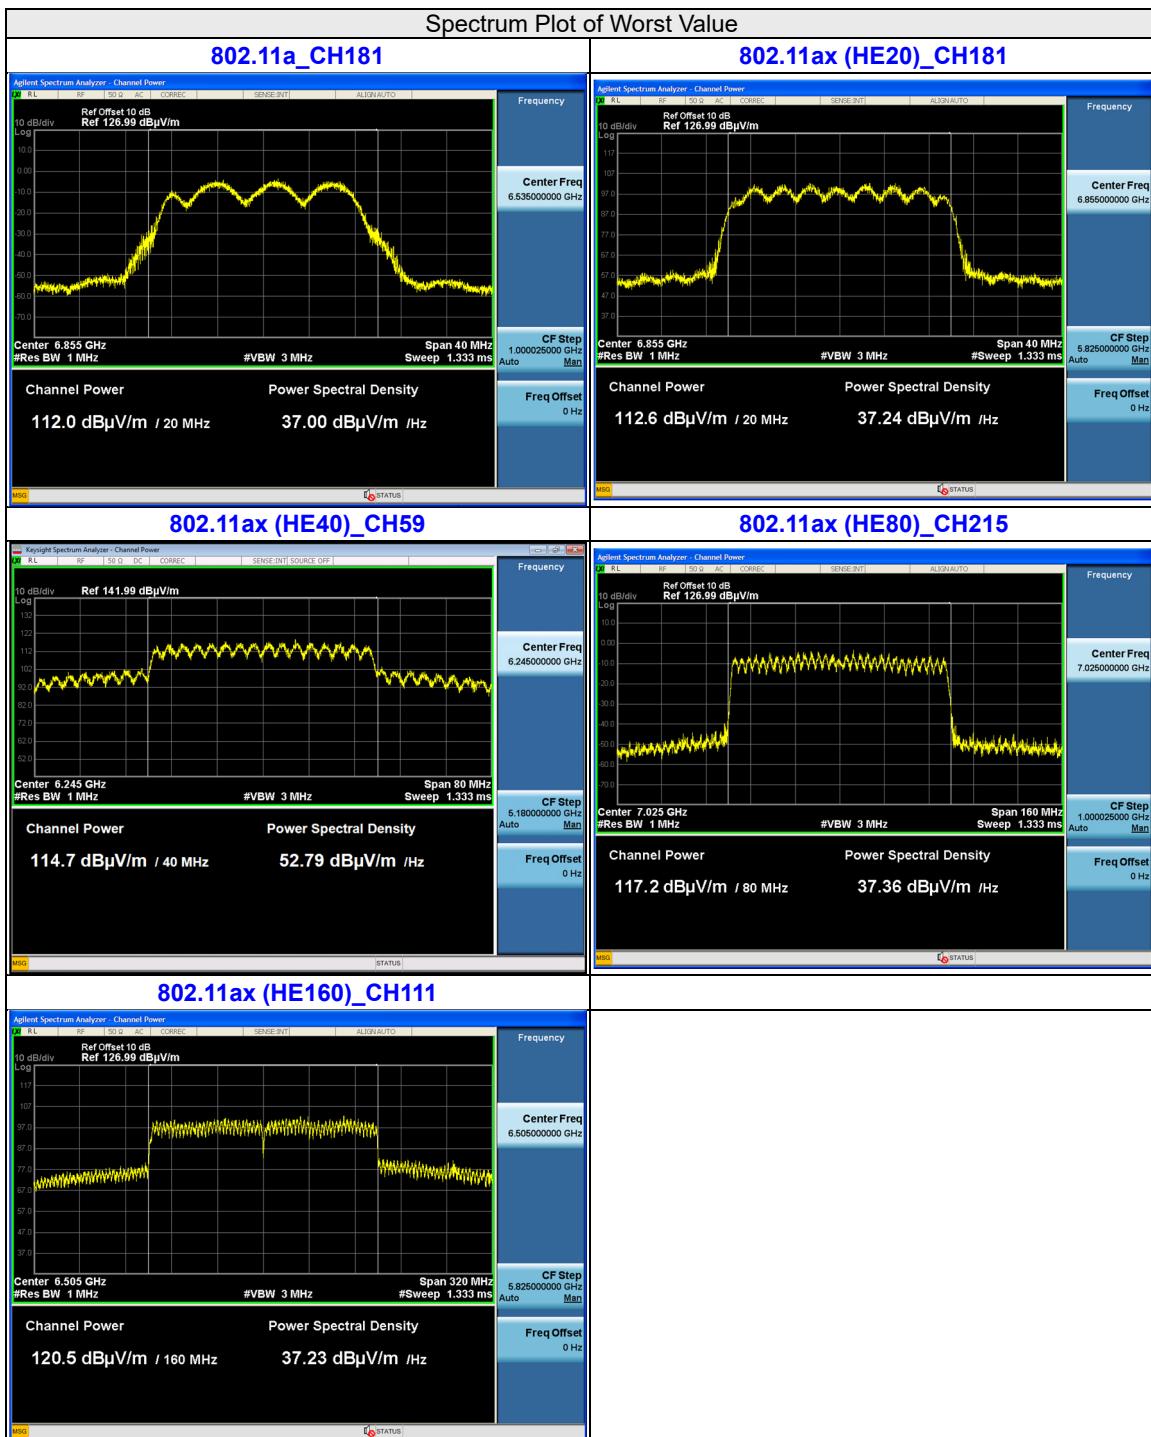


802.11ax (HE80) Beamforming_2T1S

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
39	6145	118.70	-95.23	222.331	23.47	30	Pass
55	6225	118.60	-95.23	217.27	23.37	30	Pass
87	6385	118.90	-95.23	232.809	23.67	30	Pass
103	6465	118.80	-95.23	227.51	23.57	30	Pass
119	6545	118.70	-95.23	222.331	23.47	30	Pass
151	6705	118.70	-95.23	222.331	23.47	30	Pass
183	6865	118.80	-95.23	227.51	23.57	30	Pass
199	6945	118.90	-95.23	232.809	23.67	30	Pass
215	7025	119.10	-95.23	243.781	23.87	30	Pass

802.11ax (HE160) Beamforming_2T1S

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
47	6185	121.60	-95.23	433.511	26.37	30	Pass
79	6345	122.20	-95.23	497.737	26.97	30	Pass
111	6505	122.00	-95.23	475.335	26.77	30	Pass
143	6665	121.80	-95.23	453.942	26.57	30	Pass
175	6825	122.00	-95.23	475.335	26.77	30	Pass
207	6985	122.10	-95.23	486.407	26.87	30	Pass

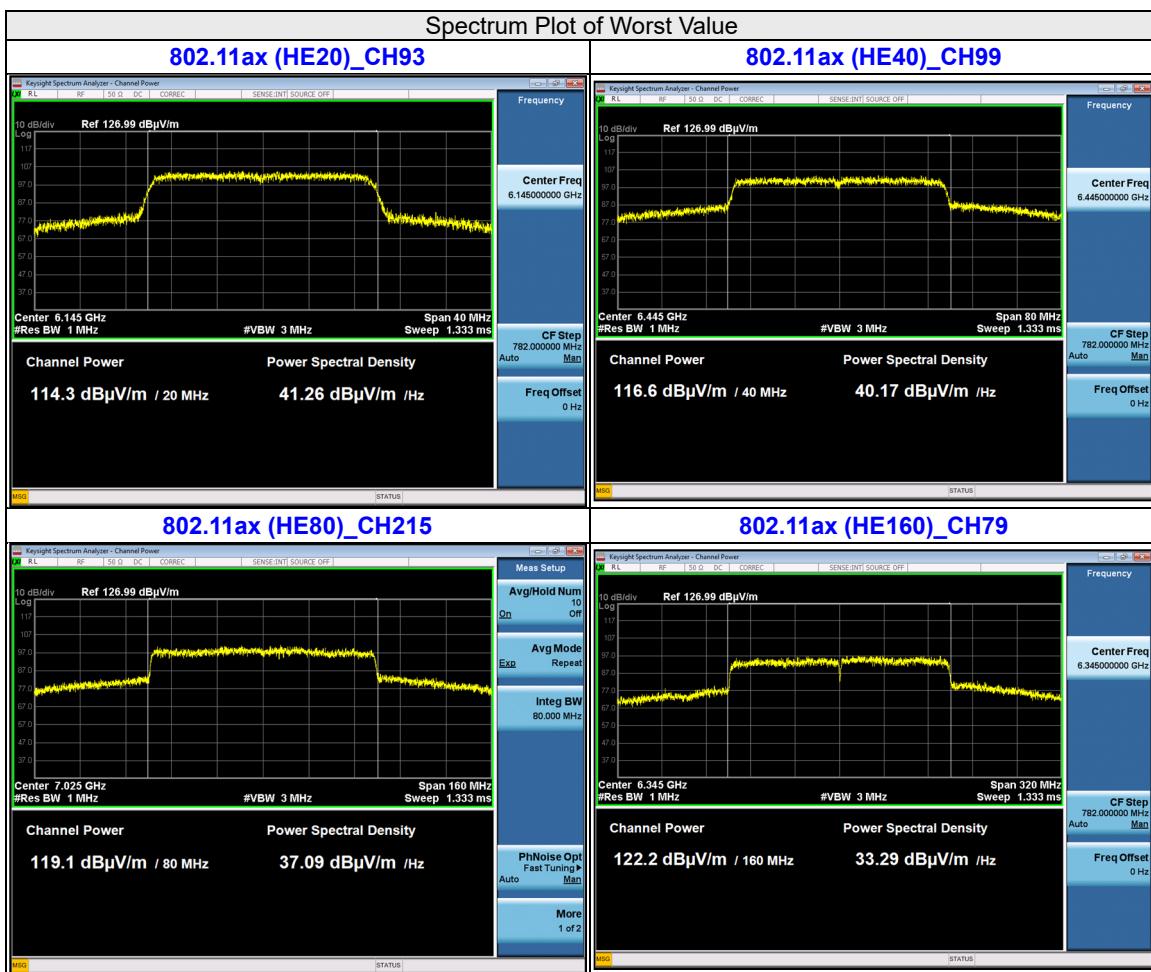




BUREAU
VERITAS

802.11ax (HE80) SM-MIMO_2T2S

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
39	6145	119.30	-95.23	255.27	24.07	30	Pass
55	6225	119.20	-95.23	249.459	23.97	30	Pass
87	6385	119.20	-95.23	249.459	23.97	30	Pass
103	6465	119.40	-95.23	261.216	24.17	30	Pass
119	6545	119.30	-95.23	255.27	24.07	30	Pass
151	6705	119.20	-95.23	249.459	23.97	30	Pass
183	6865	119.20	-95.23	249.459	23.97	30	Pass
199	6945	119.10	-95.23	243.781	23.87	30	Pass
215	7025	119.20	-95.23	249.459	23.97	30	Pass

802.11ax (HE160) SM-MIMO_2T2S

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
47	6185	121.80	-95.23	453.942	26.57	30	Pass
79	6345	122.10	-95.23	486.407	26.87	30	Pass
111	6505	122.00	-95.23	475.335	26.77	30	Pass
143	6665	121.90	-95.23	464.515	26.67	30	Pass
175	6825	121.90	-95.23	464.515	26.67	30	Pass
207	6985	121.20	-95.23	395.367	25.97	30	Pass

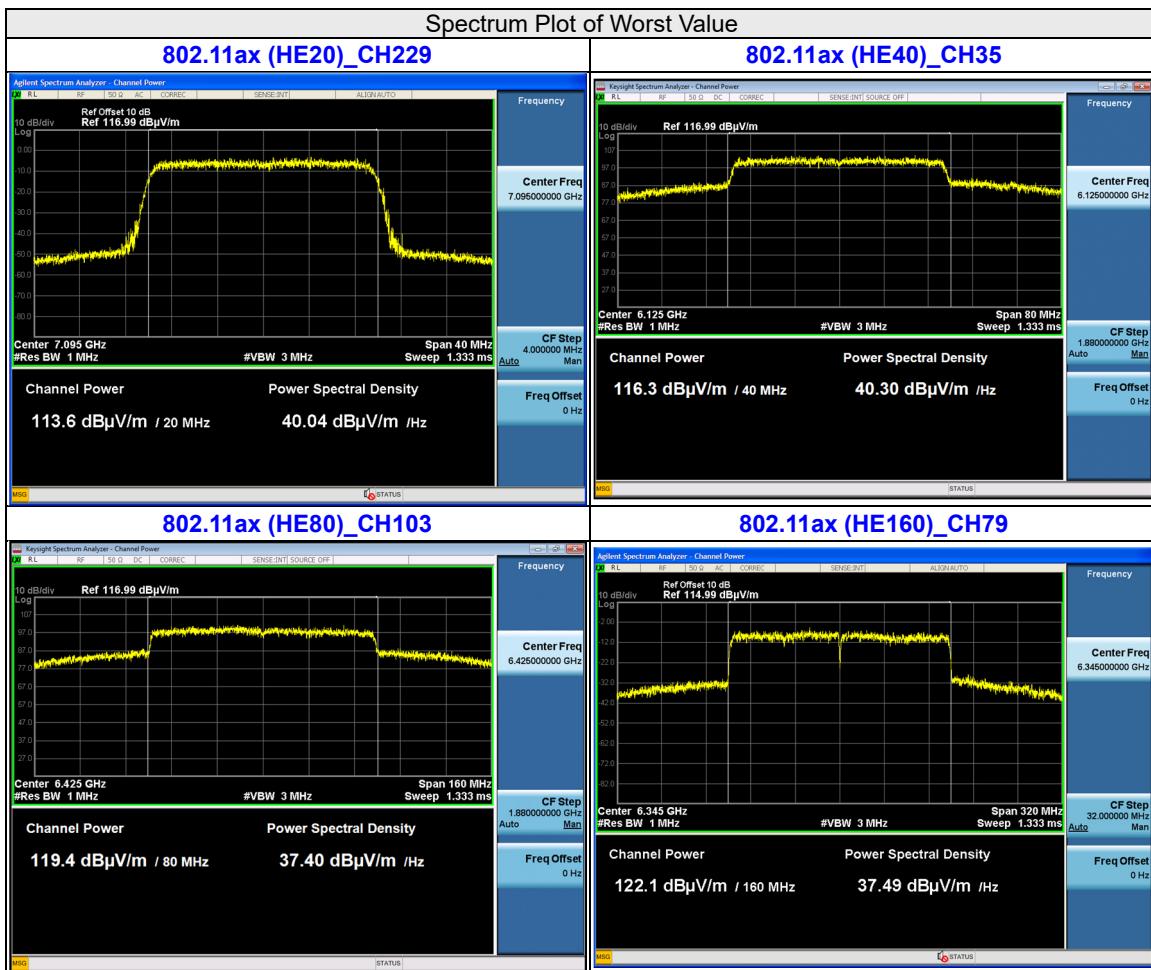


802.11ax (HE80) Beamforming_2T2S

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
39	6145	119.10	-95.23	243.781	23.87	30	Pass
55	6225	119.00	-95.23	238.232	23.77	30	Pass
87	6385	119.20	-95.23	249.459	23.97	30	Pass
103	6465	119.20	-95.23	249.459	23.97	30	Pass
119	6545	119.20	-95.23	249.459	23.97	30	Pass
151	6705	119.10	-95.23	243.781	23.87	30	Pass
183	6865	119.00	-95.23	238.232	23.77	30	Pass
199	6945	119.00	-95.23	238.232	23.77	30	Pass
215	7025	119.10	-95.23	243.781	23.87	30	Pass

802.11ax (HE160) Beamforming_2T2S

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
47	6185	121.80	-95.23	453.942	26.57	30	Pass
79	6345	121.90	-95.23	464.515	26.67	30	Pass
111	6505	121.90	-95.23	464.515	26.67	30	Pass
143	6665	121.80	-95.23	453.942	26.57	30	Pass
175	6825	121.80	-95.23	453.942	26.57	30	Pass
207	6985	121.00	-95.23	377.572	25.77	30	Pass

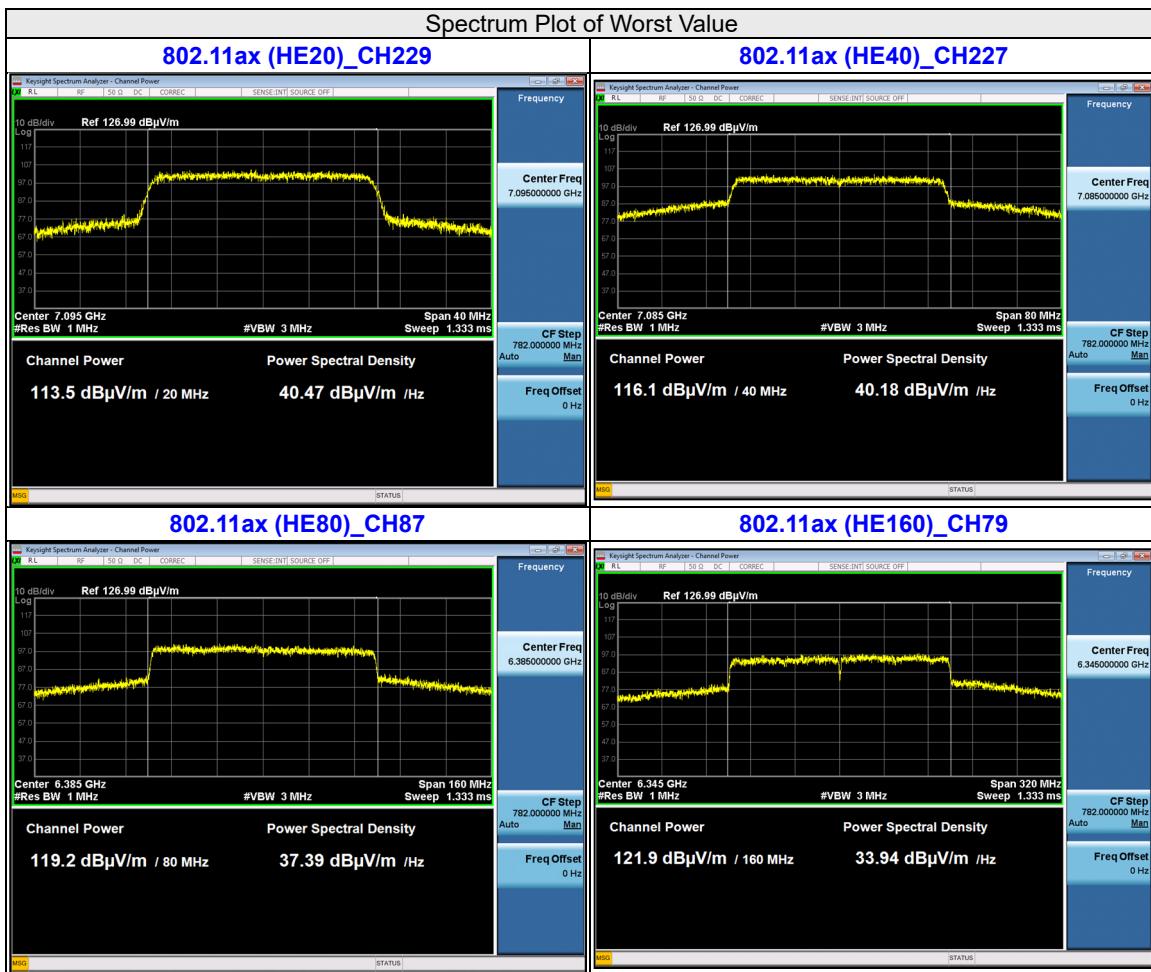

802.11ax (HE40) CDD

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
35	6125	100.04	-95.23	4.81	5	Pass
59	6245	99.95	-95.23	4.72	5	Pass
91	6405	100.10	-95.23	4.87	5	Pass
99	6445	99.95	-95.23	4.72	5	Pass
107	6485	100.04	-95.23	4.81	5	Pass
115	6525	99.88	-95.23	4.65	5	Pass
123	6565	100.06	-95.23	4.83	5	Pass
155	6725	100.03	-95.23	4.80	5	Pass
179	6845	100.03	-95.23	4.80	5	Pass
187	6885	100.04	-95.23	4.81	5	Pass
211	7005	100.03	-95.23	4.80	5	Pass
227	7085	100.07	-95.23	4.84	5	Pass

802.11ax (HE80) CDD


Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
39	6145	100.06	-95.23	4.83	5	Pass
55	6225	100.01	-95.23	4.78	5	Pass
87	6385	100.07	-95.23	4.84	5	Pass
103	6465	100.06	-95.23	4.83	5	Pass
119	6545	100.06	-95.23	4.83	5	Pass
151	6705	99.96	-95.23	4.73	5	Pass
183	6865	100.01	-95.23	4.78	5	Pass
199	6945	99.98	-95.23	4.75	5	Pass
215	7025	100.03	-95.23	4.80	5	Pass



BUREAU
VERITAS

802.11ax (HE160) CDD

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
47	6185	100.09	-95.23	4.86	5	Pass
79	6345	100.04	-95.23	4.81	5	Pass
111	6505	100.10	-95.23	4.87	5	Pass
143	6665	100.06	-95.23	4.83	5	Pass
175	6825	100.13	-95.23	4.90	5	Pass
207	6985	100.10	-95.23	4.87	5	Pass

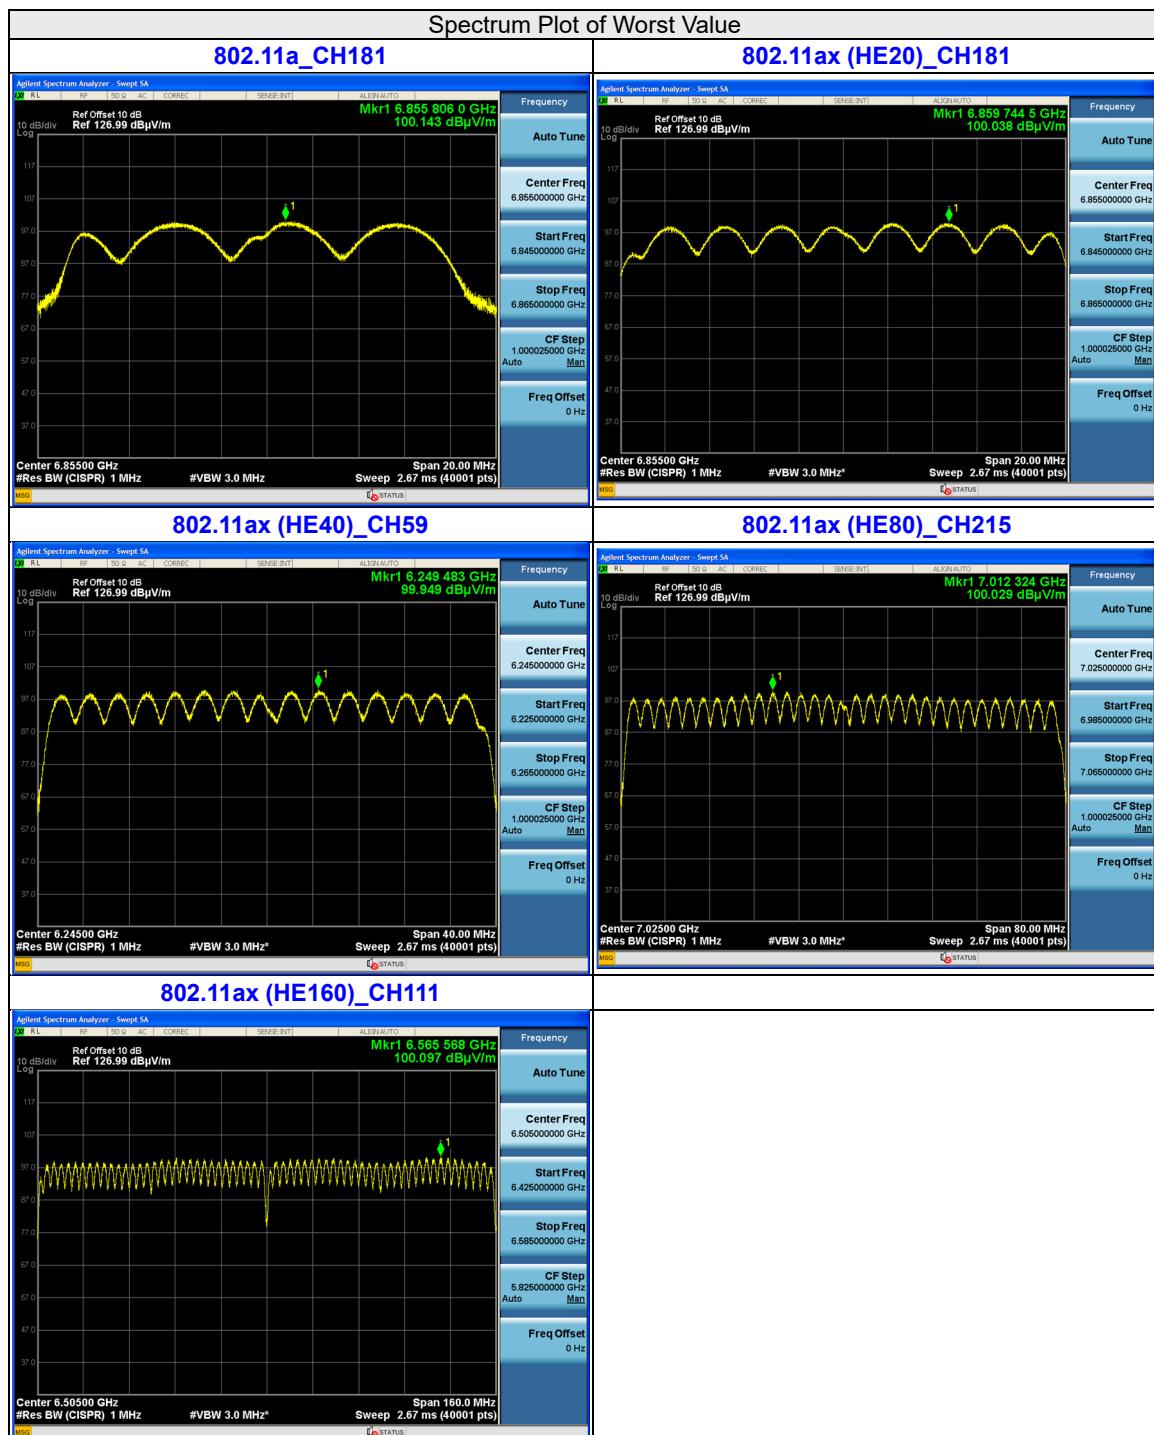



BUREAU
VERITAS

802.11ax (HE20) Beamforming_2T1S

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
33	6115	99.90	-95.23	4.67	5	Pass
61	6255	100.03	-95.23	4.80	5	Pass
93	6415	100.03	-95.23	4.80	5	Pass
97	6435	100.04	-95.23	4.81	5	Pass
105	6475	99.96	-95.23	4.73	5	Pass
113	6515	100.05	-95.23	4.82	5	Pass
117	6535	99.92	-95.23	4.69	5	Pass
149	6695	100.03	-95.23	4.80	5	Pass
181	6855	100.03	-95.23	4.80	5	Pass
185	6875	99.97	-95.23	4.74	5	Pass
209	6995	99.89	-95.23	4.66	5	Pass
229	7095	100.05	-95.23	4.82	5	Pass
233	7115	87.48	-95.23	-7.75	5	Pass

802.11ax (HE40) Beamforming_2T1S


Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
35	6125	99.95	-95.23	4.72	5	Pass
59	6245	99.96	-95.23	4.73	5	Pass
91	6405	100.02	-95.23	4.79	5	Pass
99	6445	99.88	-95.23	4.65	5	Pass
107	6485	99.95	-95.23	4.72	5	Pass
115	6525	99.89	-95.23	4.66	5	Pass
123	6565	99.94	-95.23	4.71	5	Pass
155	6725	99.86	-95.23	4.63	5	Pass
179	6845	100.00	-95.23	4.77	5	Pass
187	6885	100.02	-95.23	4.79	5	Pass
211	7005	99.87	-95.23	4.64	5	Pass
227	7085	99.94	-95.23	4.71	5	Pass

802.11ax (HE80) Beamforming_2T1S

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
39	6145	100.09	-95.23	4.86	5	Pass
55	6225	99.98	-95.23	4.75	5	Pass
87	6385	99.99	-95.23	4.76	5	Pass
103	6465	100.01	-95.23	4.78	5	Pass
119	6545	100.00	-95.23	4.77	5	Pass
151	6705	99.94	-95.23	4.71	5	Pass
183	6865	99.92	-95.23	4.69	5	Pass
199	6945	99.91	-95.23	4.68	5	Pass
215	7025	99.97	-95.23	4.74	5	Pass

802.11ax (HE160) Beamforming_2T1S

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
47	6185	99.95	-95.23	4.72	5	Pass
79	6345	99.97	-95.23	4.74	5	Pass
111	6505	99.98	-95.23	4.75	5	Pass
143	6665	99.88	-95.23	4.65	5	Pass
175	6825	100.02	-95.23	4.79	5	Pass
207	6985	100.04	-95.23	4.81	5	Pass

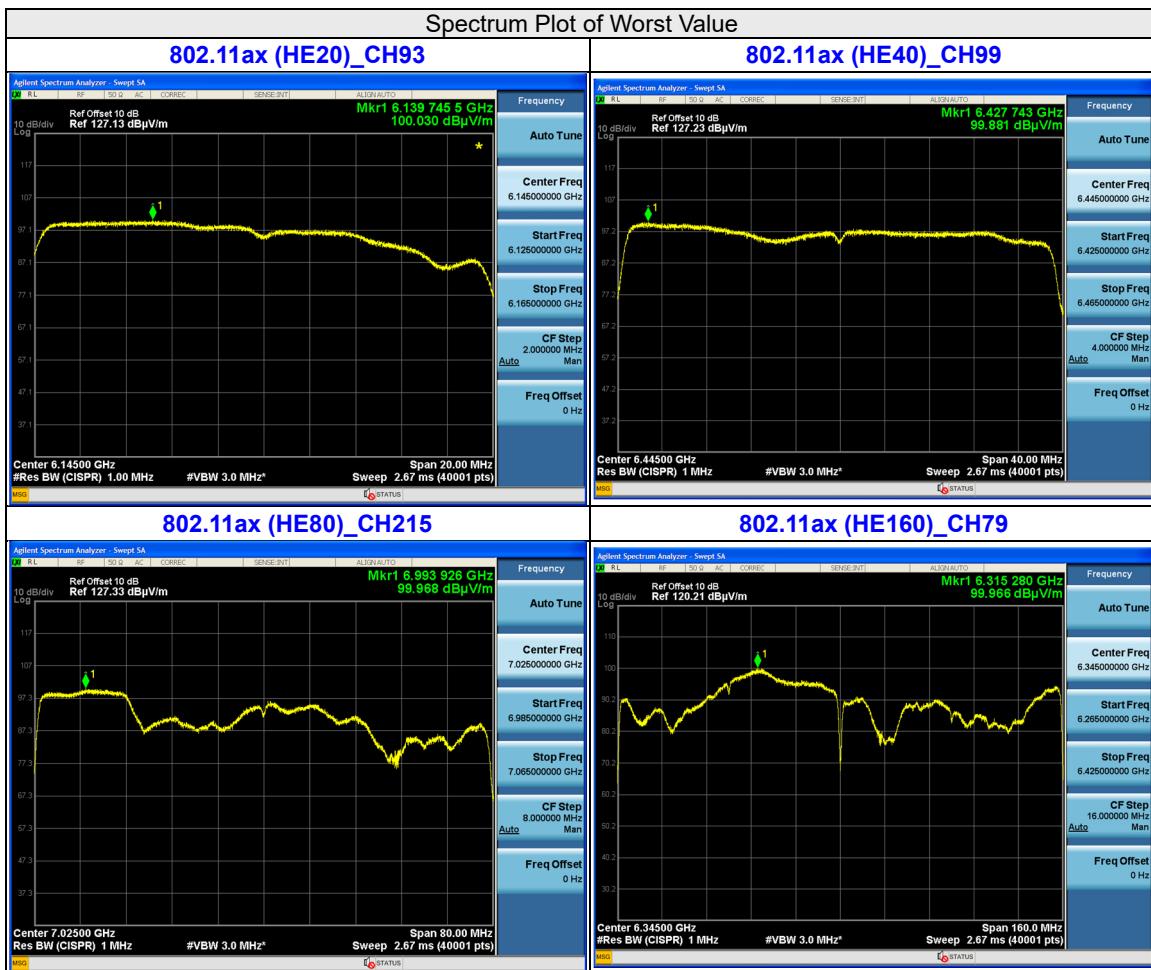

802.11ax (HE20) SM-MIMO_2T2S

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
33	6115	100.05	-95.23	4.82	5	Pass
61	6255	100.01	-95.23	4.78	5	Pass
93	6415	99.90	-95.23	4.67	5	Pass
97	6435	100.03	-95.23	4.80	5	Pass
105	6475	100.15	-95.23	4.92	5	Pass
113	6515	100.09	-95.23	4.86	5	Pass
117	6535	99.89	-95.23	4.66	5	Pass
149	6695	100.02	-95.23	4.79	5	Pass
181	6855	100.09	-95.23	4.86	5	Pass
185	6875	100.11	-95.23	4.88	5	Pass
209	6995	99.94	-95.23	4.71	5	Pass
229	7095	99.96	-95.23	4.72	5	Pass
233	7115	83.65	-95.23	-11.58	5	Pass

802.11ax (HE40) SM-MIMO_2T2S

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
35	6125	100.04	-95.23	4.81	5	Pass
59	6245	99.94	-95.23	4.71	5	Pass
91	6405	100.08	-95.23	4.85	5	Pass
99	6445	100.01	-95.23	4.78	5	Pass
107	6485	99.96	-95.23	4.73	5	Pass
115	6525	100.00	-95.23	4.77	5	Pass
123	6565	99.98	-95.23	4.75	5	Pass
155	6725	100.05	-95.23	4.82	5	Pass
179	6845	100.16	-95.23	4.93	5	Pass
187	6885	99.93	-95.23	4.70	5	Pass
211	7005	100.05	-95.23	4.82	5	Pass
227	7085	100.04	-95.23	4.81	5	Pass



BUREAU
VERITAS

802.11ax (HE80) SM-MIMO_2T2S

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
39	6145	99.98	-95.23	4.75	5	Pass
55	6225	99.96	-95.23	4.73	5	Pass
87	6385	100.00	-95.23	4.77	5	Pass
103	6465	99.86	-95.23	4.63	5	Pass
119	6545	100.12	-95.23	4.89	5	Pass
151	6705	100.05	-95.23	4.82	5	Pass
183	6865	100.13	-95.23	4.90	5	Pass
199	6945	99.99	-95.23	4.76	5	Pass
215	7025	100.09	-95.23	4.86	5	Pass

802.11ax (HE160) SM-MIMO_2T2S

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
47	6185	100.00	-95.23	4.77	5	Pass
79	6345	99.98	-95.23	4.75	5	Pass
111	6505	100.04	-95.23	4.81	5	Pass
143	6665	99.93	-95.23	4.70	5	Pass
175	6825	100.16	-95.23	4.93	5	Pass
207	6985	99.08	-95.23	3.85	5	Pass



802.11ax (HE80) Beamforming_2T2S

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
39	6145	99.84	-95.23	4.61	5	Pass
55	6225	99.97	-95.23	4.74	5	Pass
87	6385	99.96	-95.23	4.73	5	Pass
103	6465	99.92	-95.23	4.69	5	Pass
119	6545	99.97	-95.23	4.74	5	Pass
151	6705	99.94	-95.23	4.71	5	Pass
183	6865	100.06	-95.23	4.83	5	Pass
199	6945	99.94	-95.23	4.71	5	Pass
215	7025	100.12	-95.23	4.89	5	Pass

802.11ax (HE160) Beamforming_2T2S

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
47	6185	99.95	-95.23	4.72	5	Pass
79	6345	100.01	-95.23	4.78	5	Pass
111	6505	100.08	-95.23	4.85	5	Pass
143	6665	99.88	-95.23	4.65	5	Pass
175	6825	100.08	-95.23	4.85	5	Pass
207	6985	98.96	-95.23	3.73	5	Pass



7.3 Emission Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 65% RH	Tested By:	Katina Lu
--------------	----------------	---------------------------	--------------	------------	-----------

802.11a

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	
		Chain 0	Chain 1
33	6115	21.65	21.57
61	6255	21.64	21.59
93	6415	21.71	21.60
97	6435	21.77	21.54
105	6475	21.73	21.55
113	6515	21.62	21.61
117	6535	21.75	21.45
149	6695	21.78	21.54
181	6855	21.70	21.53
185	6875	21.77	21.55
209	6995	21.62	21.51
233	7115	21.65	21.58

802.11ax (HE20)

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	
		Chain 0	Chain 1
33	6115	21.83	21.81
61	6255	21.93	21.74
93	6415	22.00	21.85
97	6435	21.97	21.83
105	6475	21.79	21.82
113	6515	22.00	21.76
117	6535	21.96	21.74
149	6695	21.95	21.65
181	6855	21.94	21.58
185	6875	21.84	21.81
209	6995	21.92	21.80
229	7095	21.96	21.80
233	7115	21.93	21.88

