

Plot 7-100. 26dB Bandwidth Plot SISO ANT2 (160MHz BW(U) 802.11ax – 996 Tones (UNII Band 2C) – Ch. 114)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 71 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 71 of 274



#### 7.3 6dB Bandwidth Measurement – 802.11ax OFDMA

§15.407 (e); RSS-Gen [6.7]

#### **Test Overview and Limit**

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band, the 6dB bandwidth must be  $\geq$  500 kHz.

#### **Test Procedure Used**

ANSI C63.10-2013 – Section 6.9.2 KDB 789033 D02 v02r01 – Section C

#### **Test Settings**

- 1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 100 kHz
- 3.  $VBW \ge 3 \times RBW$
- 4. Detector = Peak
- Trace mode = max hold
- 6. Sweep = auto couple

#### **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

#### **Test Notes**

The 6dB Bandwidth measurement for each channel was measured with the RU index showing the highest conducted power.

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 70 of 074
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset		Page 72 of 274
© 2021 PCTEST				V 9.0 02/01/2019



# SISO Antenna-1 6 dB Bandwidth Measurements (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
	5745	149	ax (20MHz)	26T	MCS0	2.71
•	5785	157	ax (20MHz)	26T	MCS0	2.72
<u>5</u> م	5825	165	ax (20MHz)	26T	MCS0	2.70
Band	5755	151	ax (40MHz)	26T	MCS0	2.22
_	5795	159	ax (40MHz)	26T	MCS0	2.19
	5775	155	ax (80MHz)	26T	MCS0	3.34

Table 7-6. Conducted Bandwidth Measurements SISO ANT1 (26 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 73 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	raye 13 01 214






Plot 7-101. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 149)




Plot 7-102. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 157)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 74 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 74 of 274



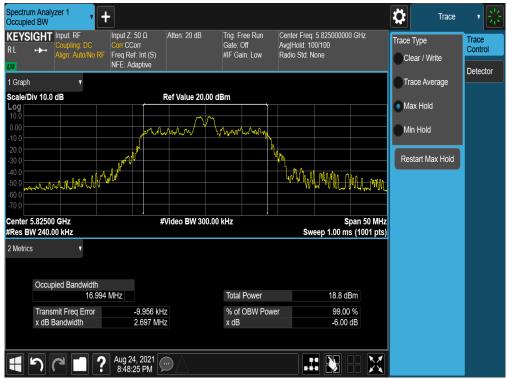

Plot 7-103. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 165)

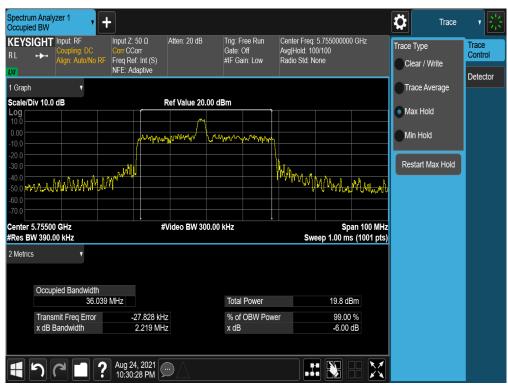

Plot 7-104. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 151)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 75 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 75 of 274





Plot 7-105. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 159)



Plot 7-106. 6dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 155)

FCC ID: PY7-95324M	PCTEST° Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogo 70 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset		Page 76 of 274
© 2021 PCTEST				V 9.0 02/01/2019




# SISO Antenna-1 6 dB Bandwidth Measurements (Full Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
	5745	149	ax (20MHz)	242T	MCS0	19.07
	5785	157	ax (20MHz)	242T	MCS0	19.05
9 pc	5825	165	ax (20MHz)	242T	MCS0	19.09
Band	5755	151	ax (40MHz)	484T	MCS0	38.22
	5795	159	ax (40MHz)	484T	MCS0	38.19
	5775	155	ax (80MHz)	996T	MCS0	78.25


Table 7-7. Conducted Bandwidth Measurements SISO ANT1 (Full Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 77 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 77 of 274



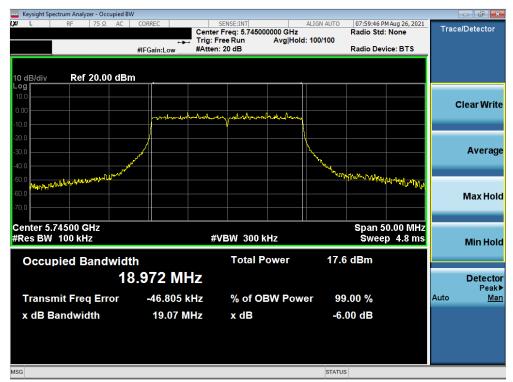


Plot 7-107. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 242 Tones (UNII Band 3) - Ch. 149)

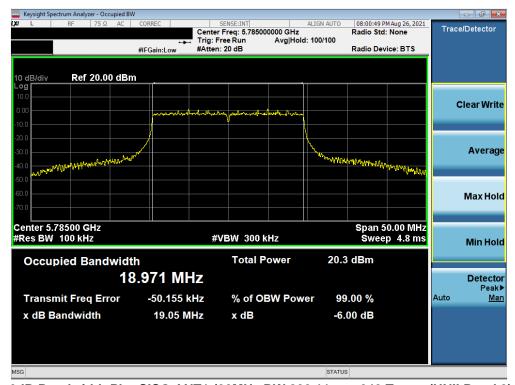


Plot 7-108. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 242 Tones (UNII Band 3) - Ch. 157)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg 70 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 78 of 274



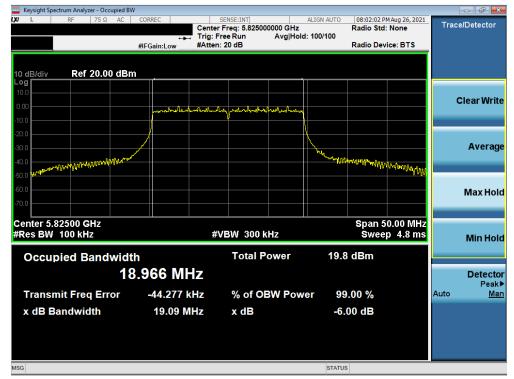


Plot 7-109. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 242 Tones (UNII Band 3) - Ch. 165)

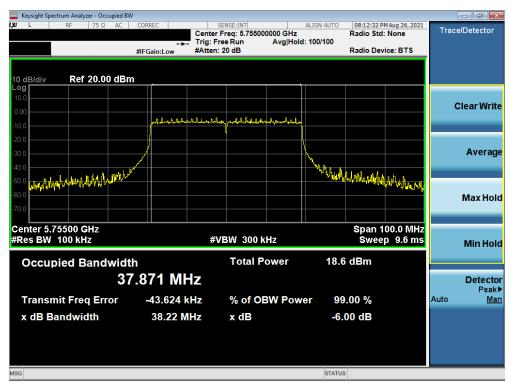


Plot 7-110. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 3) – Ch. 151)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 70 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 79 of 274



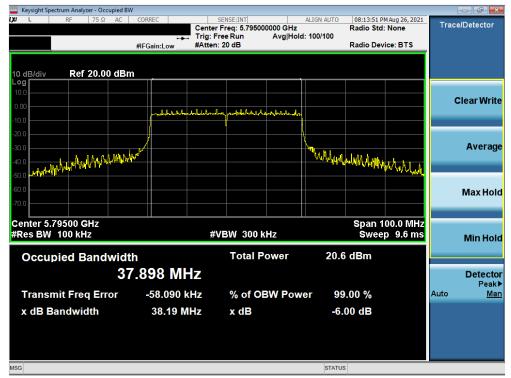

Plot 7-111. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 484 Tones (UNII Band 3) - Ch. 159)

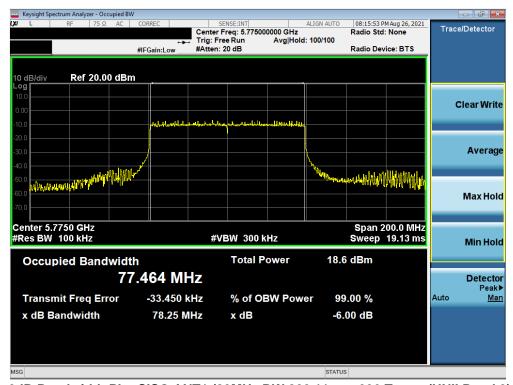

Plot 7-112. 6dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax - 996 Tones (UNII Band 3) - Ch. 155)

FCC ID: PY7-95324M	PCTEST° Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 90 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset		Page 80 of 274
© 2021 PCTEST				V 9.0 02/01/2019




# SISO Antenna-2 6dB Bandwidth Measurements (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
	5745	149	ax (20MHz)	26T	MCS0	2.10
	5785	157	ax (20MHz)	26T	MCS0	2.10
3 pt	5825	165	ax (20MHz)	26T	MCS0	2.08
Band	5755	151	ax (40MHz)	26T	MCS0	2.15
_	5795	159	ax (40MHz)	26T	MCS0	2.12
	5775	155	ax (80MHz)	26T	MCS0	2.28


Table 7-8. Conducted Bandwidth Measurements SISO ANT2 (26 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager	
Test Report S/N: Test Dates:		EUT Type:	Dogo 91 of 274	
1M2108040087-09.PY7 8/2/2021 - 9/10/2021		Portable Handset	Page 81 of 274	



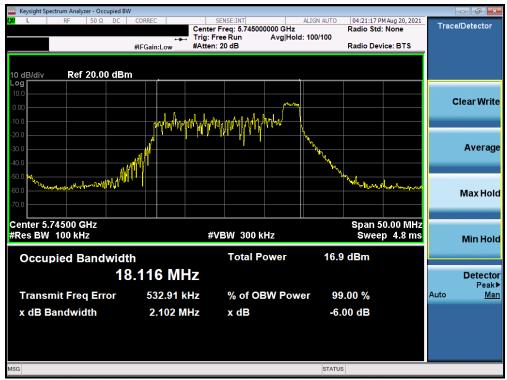


Plot 7-113. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 149)

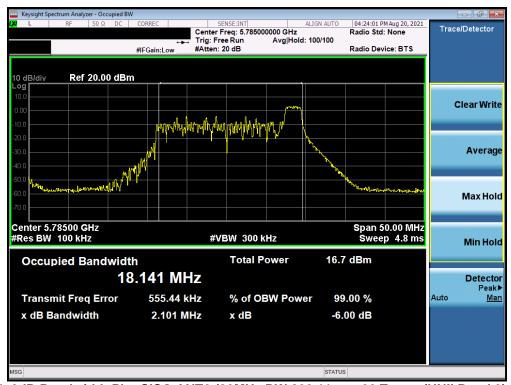

Plot 7-114. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 157)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N: Test Dates:		EUT Type:	Page 82 of 274
1M2108040087-09.PY7 8/2/2021 - 9/10/2021		Portable Handset	Page 02 01 274



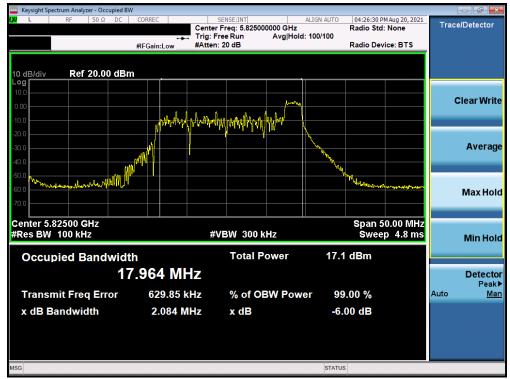

Plot 7-115. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 165)



Plot 7-116. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 151)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N: Test Dates:		EUT Type:	Dogo 92 of 274
1M2108040087-09.PY7 8/2/2021 - 9/10/2021		Portable Handset	Page 83 of 274





Plot 7-117. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 159)



Plot 7-118. 6dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 155)

FCC ID: PY7-95324M	PCTEST* Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogo 94 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset		Page 84 of 274
© 2021 PCTEST				V 9.0 02/01/2019




# SISO Antenna-2 6dB Bandwidth Measurements (Full Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
	5745	149	ax (20MHz)	242T	MCS0	19.10
	5785	157	ax (20MHz)	242T	MCS0	19.06
3 pt	5825	165	ax (20MHz)	242T	MCS0	19.08
Band	5755	151	ax (40MHz)	484T	MCS0	38.22
	5795	159	ax (40MHz)	484T	MCS0	38.26
	5775	155	ax (80MHz)	996T	MCS0	78.27

Table 7-9. Conducted Bandwidth Measurements SISO ANT2 (Full Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 85 of 274
1M2108040087-09.PY7 8/2/2021 - 9/10/2021		Portable Handset	Page 65 01 274



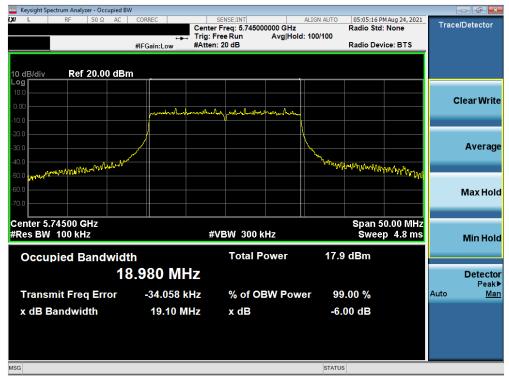


Plot 7-119. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 242 Tones (UNII Band 3) - Ch. 149)




Plot 7-120. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 242 Tones (UNII Band 3) - Ch. 157)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N: Test Dates:		EUT Type:	Page 86 of 274
1M2108040087-09.PY7 8/2/2021 - 9/10/2021		Portable Handset	rage of 01 274



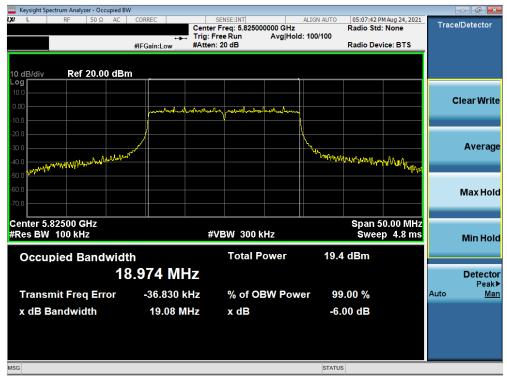

Plot 7-121. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 242 Tones (UNII Band 3) - Ch. 165)

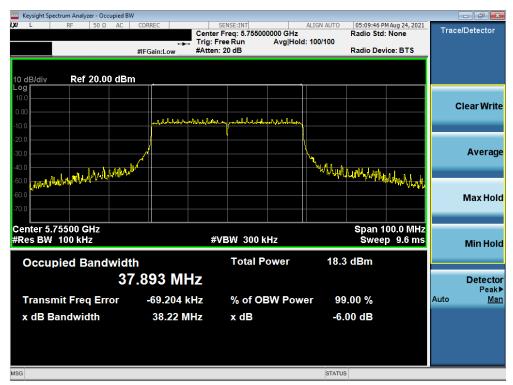


Plot 7-122. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 3) – Ch. 151)

FCC ID: PY7-95324M		MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 97 of 274	
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 87 of 274	
© 2024 DOTECT			1/ 0 0 00/04/0040	





Plot 7-123. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 484 Tones (UNII Band 3) - Ch. 159)

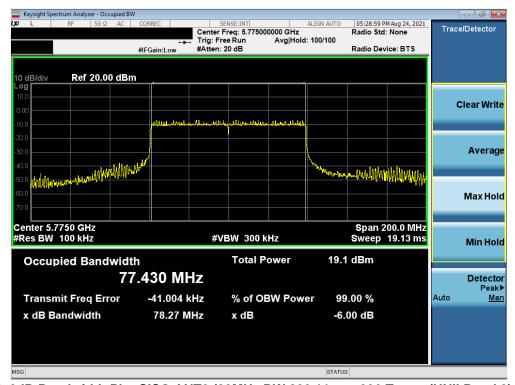

Plot 7-124. 6dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax - 996 Tones (UNII Band 3) - Ch. 155)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N: Test Dates:		EUT Type:	Page 88 of 274
1M2108040087-09.PY7 8/2/2021 - 9/10/2021		Portable Handset	rage oo ul 214



# 7.4 UNII Output Power Measurement – 802.11ax OFDMA §15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

#### **Test Overview and Limits**

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm). The maximum e.i.r.p. shall not exceed the lesser of 200 mW or 10 + 10 log10B, dBm.

In the 5.25-5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or 11 dBm +  $10\log_{10}(26$ dB BW) = 11 dBm +  $10\log_{10}(18.44)$  = 23.66dBm. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or  $17 + 10\log_{10}(18.44)$  =  $10\log_{10}(18.44)$  =  $10\log_{10}(1$ 

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or 11 dBm +  $10\log_{10}(26dB \text{ BW}) = 11 \text{ dBm} + 10\log_{10}(18.44) = 23.66dBm$ . The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or 17 + 10 log10B, dBm.

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm). The maximum e.i.r.p. is 36 dBm.

#### **Test Procedure Used**

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

#### **Test Settings**

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

#### **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N: Test Dates:		EUT Type:	Page 89 of 274
1M2108040087-09.PY7 8/2/2021 - 9/10/2021		Portable Handset	Page 09 01 274



### SISO Antenna-1 Conducted Output Power Measurements (26 Tones)

	Freq [MHz]	Channel	Detector	Tones	RU Index		Conducted Power Limit	Conducted Power	
					0	4	8	[dBm]	Margin [dB]
N	5180	36	AVG	26T	9.14	9.19	9.25	23.98	-14.73
王 全	5200	40	AVG	26T	9.09	9.22	9.26	23.98	-14.72
≥岩	5240	48	AVG	26T	9.49	8.83	8.84	23.98	-14.49
    - 	5260	52	AVG	26T	9.51	8.90	8.88	23.47	-13.96
<u>S</u> <u>S</u>	5280	56	AVG	26T	9.36	9.42	8.89	23.47	-14.05
N S	5320	64	AVG	26T	9.31	9.36	9.38	23.47	-14.09
E E	5500	100	AVG	26T	9.11	9.15	9.11	22.80	-13.65
C m	5600	120	AVG	26T	9.44	9.48	9.48	22.80	-13.32
5	5720	144	AVG	26T	9.33	9.34	9.29	22.80	-13.46
	5745	149	AVG	26T	9.38	9.42	9.38	30.00	-20.58
	5785	157	AVG	26T	9.20	9.24	9.18	30.00	-20.76
	5825	165	AVG	26T	9.41	9.46	9.45	30.00	-20.54

Table 7-10. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

N _	Freq [MHz]	[MHz] Channel Detector		Tones		RU Index	Conducted Power Limit	Conducted Power	
Ϊ́ C					0	8	17	[dBm]	Margin [dB]
三岩	5190	38	AVG	26T	9.32	9.35	9.01	23.98	-14.63
를 등	5230	46	AVG	26T	9.34	9.35	8.97	23.98	-14.63
4 3	5270	54	AVG	26T	9.29	9.16	9.29	23.47	-14.18
7	5310	62	AVG	26T	9.11	9.00	9.11	23.47	-14.36
7 5	5510	102	AVG	26T	9.38	9.28	9.36	22.80	-13.42
3a	5590	118	AVG	26T	9.26	9.02	9.19	22.80	-13.54
5G B	5710	142	AVG	26T	9.26	9.38	9.20	22.80	-13.42
	5755	151	AVG	26T	9.09	9.11	9.10	30.00	-20.89
	5795	159	AVG	26T	8.89	9.38	8.94	30.00	-20.62

Table 7-11. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

z	Freq [MHz]	req [MHz] Channel	Channel Detector	Tones		RU Index	Conducted Power Limit	Conducted Power	
/Hz (h:					0	18	36	[dBm]	Margin [dB]
(80M) width	5210	42	AVG	26T	9.23	9.17	9.37	23.98	-14.61
	5290	58	AVG	26T	9.38	9.16	9.39	23.47	-14.08
Hz	5530	106	AVG	26T	9.10	9.21	8.95	22.80	-13.59
5Gł Ba	5610	122	AVG	26T	9.50	9.17	9.34	22.80	-13.30
5	5690	138	AVG	26T	9.33	9.05	9.26	22.80	-13.47
	5775	155	AVG	26T	9.26	9.43	9.23	30.00	-20.57

Table 7-12. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 90 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 90 01 274



IZ IHz dth L)	Freq [MHz]	Channel	Channel Detector	Tones		RU Index	Conducted Power Limit	Conducted Power	
5GH 60M dwic					0	18	36	[dBm]	Margin [dB]
5 (16 and	5250	50	AVG	26T	9.38	9.21	9.31	23.98	-14.60
ĕ	5570	114	AVG	26T	9.03	9.10	9.46	23.47	-14.01

Table 7-13. SISO ANT1 160MHz(L) BW (UNII) Maximum Conducted Output Power (26 Tones)

GHz OMHz width U)			Tones		RU Index	Conducted Power Limit	Conducted Power		
SOM SOM Iwic					0	18	36	[dBm]	Margin [dB]
5 (16 and	5250	50	AVG	26T	9.28	9.25	9.42	23.98	-14.56
B	5570	114	AVG	26T	9.47	9.32	9.51	23.47	-13.96

Table 7-14. SISO ANT1 160MHz(U) BW (UNII) Maximum Conducted Output Power (26 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 01 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 91 of 274



### SISO Antenna-1 Conducted Output Power Measurements (52 Tones)

	Freq [MHz]	Channel	Detector	Tones		RU Index		Conducted Power Limit	Conducted Power
					37	39	40	[dBm]	Margin [dB]
N	5180	36	AVG	52T	9.98	10.17	10.09	23.98	-13.81
I C	5200	40	AVG	52T	12.18	12.44	12.20	23.98	-11.54
돌	5240	48	AVG	52T	12.38	12.12	12.04	23.98	-11.60
S : \( \times \)	5260	52	AVG	52T	12.47	12.49	12.47	23.47	-10.98
2 ≥	5280	56	AVG	52T	12.33	12.46	12.35	23.47	-11.01
N S	5320	64	AVG	52T	10.35	9.93	10.29	23.47	-13.12
<b>≡</b>	5500	100	AVG	52T	10.15	10.21	10.09	22.80	-12.59
(D)	5600	120	AVG	52T	12.28	12.40	12.32	22.80	-10.40
5	5720	144	AVG	52T	10.84	10.93	10.87	22.80	-11.87
	5745	149	AVG	52T	9.86	9.95	9.88	30.00	-20.05
	5785	157	AVG	52T	12.37	12.46	12.41	30.00	-17.54
	5825	165	AVG	52T	11.50	11.14	11.09	30.00	-18.50

Table 7-15. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

N	Freq [MHz]	req [MHz] Channel Detector		Tones		RU Index	Conducted Power Limit	Conducted Power	
Ϊ̈́ c					37	40	44	[dBm]	Margin [dB]
夏黄	5190	38	AVG	52T	12.16	11.99	12.23	23.98	-11.75
<b>5 5</b>	5230	46	AVG	52T	12.31	12.33	12.38	23.98	-11.60
<b>4</b> ≥	5270	54	AVG	52T	12.44	12.35	12.43	23.47	-11.03
<b>—</b> <del>—</del> —	5310	62	AVG	52T	12.07	12.45	12.11	23.47	-11.02
7 5	5510	102	AVG	52T	12.51	12.28	12.43	22.80	-10.29
3a	5590	118	AVG	52T	12.34	12.14	12.28	22.80	-10.46
5G B	5710	142	AVG	52T	11.77	12.17	11.78	22.80	-10.63
	5755	151	AVG	52T	12.49	12.29	12.48	30.00	-17.51
	5795	159	AVG	52T	12.27	12.06	12.28	30.00	-17.72

Table 7-16. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

Hz (ι	Freq [MHz]	Channel	nnel Detector	Tones		RU Index	Conducted Power Limit	Conducted Power	
<b>₹</b>					37	44	52	[dBm]	Margin [dB]
(80MI width	5210	42	AVG	52T	12.11	12.38	12.33	23.98	-11.60
	5290	58	AVG	52T	12.39	12.12	12.49	23.47	-10.98
Hz	5530	106	AVG	52T	12.09	12.28	12.03	22.80	-10.52
5G1 Ba	5610	122	AVG	52T	12.51	12.14	12.42	22.80	-10.29
50 E	5690	138	AVG	52T	12.02	12.20	11.97	22.80	-10.60
	5775	155	AVG	52T	12.42	12.05	12.38	30.00	-17.58

Table 7-17. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 92 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 92 01 274



tz IHz dth L)	Freq [MHz]	Channel	Detector	Tones		RU Index			Conducted Power
5GHz (160MH andwidtl					37	44	52	[dBm]	Margin [dB]
. 5 (16 and	5250	50	AVG	52T	12.15	12.23	12.50	23.98	-11.48
ä	5570	114	AVG	52T	12.32	12.42	12.49	23.47	-10.98

Table 7-18. SISO ANT1 160MHz(L) BW (UNII) Maximum Conducted Output Power (52 Tones)

GHz OMHz width U)				Tones		RU Index	Conducted Power Limit	Conducted Power	
SOM SOM Iwic					37	44	52	[dBm]	Margin [dB]
5 (16 and	5250	50	AVG	52T	12.44	12.22	12.10	23.98	-11.54
B	5570	114	AVG	52T	12.18	12.26	12.33	23.47	-11.14

Table 7-19. SISO ANT1 160MHz(U) BW (UNII) Maximum Conducted Output Power (52 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 02 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 93 of 274



### SISO Antenna-1 Conducted Output Power Measurements (106 Tones)

	Freq [MHz]	Channel	Detector	Tones	Tones RU Index		Conducted Power Limit	Conducted Power
					53	54	[dBm]	Margin [dB]
N (	5180	36	AVG	106T	10.63	10.72	23.98	-13.26
I C	5200	40	AVG	106T	12.30	12.41	23.98	-11.57
<b>₹</b>	5240	48	AVG	106T	12.17	12.13	23.98	-11.81
20 20 20 20 20 20 20 20 20 20 20 20 20 2	5260	52	AVG	106T	12.09	12.14	23.47	-11.33
<b>≥ 2</b>	5280	56	AVG	106T	12.08	12.07	23.47	-11.39
N S	5320	64	AVG	106T	10.41	10.42	23.47	-13.05
T T	5500	100	AVG	106T	10.26	10.24	22.80	-12.54
(D)	5600	120	AVG	106T	12.43	12.48	22.80	-10.32
5	5720	144	AVG	106T	11.99	11.98	22.80	-10.81
	5745	149	AVG	106T	10.05	10.03	30.00	-19.95
	5785	157	AVG	106T	11.86	11.89	30.00	-18.11
	5825	165	AVG	106T	10.53	10.60	30.00	-19.40

Table 7-20. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

N _	Freq [MHz]	Channel	Detector	Tones	RU Index		Conducted Power Limit	Conducted Power	
Î Ĉ					53	54	56	[dBm]	Margin [dB]
三世	5190	38	AVG	106T	12.20	12.48	12.34	23.98	-11.50
5.5	5230	46	AVG	106T	12.36	12.23	12.48	23.98	-11.50
<b>4</b> ≥	5270	54	AVG	106T	12.42	12.26	12.51	23.47	-10.96
$\overline{}$	5310	62	AVG	106T	12.03	12.43	12.14	23.47	-11.04
4 5	5510	102	AVG	106T	12.41	12.29	12.40	22.80	-10.39
5 3a	5590	118	AVG	106T	12.19	12.15	12.19	22.80	-10.61
5G B	5710	142	AVG	106T	12.21	12.07	12.11	22.80	-10.59
4,	5755	151	AVG	106T	12.46	12.27	12.45	30.00	-17.54
	5795	159	AVG	106T	12.22	12.05	12.25	30.00	-17.75

Table 7-21. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

N .	Freq [MHz]	Channel	Detector	Tones	RU Index		Conducted Power Limit	Conducted Power	
<b>₹</b> €					53	56	60	[dBm]	Margin [dB]
(80MHz width)	5210	42	AVG	106T	12.12	12.36	12.20	23.98	-11.62
	5290	58	AVG	106T	12.32	12.06	12.38	23.47	-11.09
rd nd	5530	106	AVG	106T	12.03	12.23	12.02	22.80	-10.57
5GHz Band	5610	122	AVG	106T	12.36	12.17	12.39	22.80	-10.41
5	5690	138	AVG	106T	12.42	12.19	12.45	22.80	-10.35
	5775	155	AVG	106T	12.34	12.04	12.46	30.00	-17.54

Table 7-22. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 04 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 94 of 274



Z IHz #h L)	Freq [MHz]	Channel	Detector	Tones		RU Index		Conducted Power Limit	Conducted Power
5GHz (160MH Indwidt					53	56	60	[dBm]	Margin [dB]
16 and	5250	50	AVG	106T	12.13	12.19	12.51	23.98	-11.47
Ä	5570	114	AVG	106T	12.25	12.36	11.98	23.47	-11.11

Table 7-23. SISO ANT1 160MHz(L) BW (UNII) Maximum Conducted Output Power (106 Tones)

GHz OMHz width U)	Freq [MHz]	Channel	Detector	Tones		RU Index			Conducted Power
SOM SOM Iwic					53	56	60	[dBm]	Margin [dB]
5 (16 and	5250	50	AVG	106T	12.51	12.16	12.09	23.98	-11.47
B	5570	114	AVG	106T	12.19	12.33	12.51	23.47	-10.96

Table 7-24. SISO ANT1 160MHz(U) BW (UNII) Maximum Conducted Output Power (106 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 05 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 95 of 274



### SISO Antenna-1 Conducted Output Power Measurements (242 Tones)

	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit	Conducted Power
					61	[dBm]	Margin [dB]
N _	5180	36	AVG	242T	12.30	23.98	-11.68
王 子	5200	40	AVG	242T	12.31	23.98	-11.67
OMH idth)	5240	48	AVG	242T	12.10	23.98	-11.88
S - €	5260	52	AVG	242T	12.13	23.47	-11.34
<u>≤</u> (2)	5280	56	AVG	242T	12.08	23.47	-11.39
N 2	5320	64	AVG	242T	12.28	23.47	-11.19
Hz	5500	100	AVG	242T	12.14	22.80	-10.66
OM	5600	120	AVG	242T	11.97	22.80	-10.83
5	5720	144	AVG	242T	12.04	22.80	-10.76
	5745	149	AVG	242T	10.06	30.00	-19.94
	5785	157	AVG	242T	12.51	30.00	-17.49
	5825	165	AVG	242T	11.64	30.00	-18.36

Table 7-25. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

N _	Freq [MHz]	Channel	Detector	Detector Tones	RU I	ndex	Conducted Power Limit	Conducted Power
IÏ O					61	62	[dBm]	Margin [dB]
	5190	38	AVG	242T	10.61	10.23	23.98	-13.37
(40M	5230	46	AVG	242T	12.37	12.51	23.98	-11.47
4 ≥	5270	54	AVG	242T	12.07	12.07	23.47	-11.40
<b>7</b>	5310	62	AVG	242T	10.38	10.35	23.47	-13.09
Hz	5510	102	AVG	242T	10.72	10.70	22.80	-12.08
	5590	118	AVG	242T	12.49	12.45	22.80	-10.31
5G B	5710	142	AVG	242T	11.93	11.91	22.80	-10.87
	5755	151	AVG	242T	10.51	10.51	30.00	-19.49
	5795	159	AVG	242T	12.43	12.43	30.00	-17.57

Table 7-26. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

Z	Freq [MHz]	Channel	Detector	Tones		RU Index	Conducted Power Limit	Conducted Power	
<b>₹</b>					61	62	64	[dBm]	Margin [dB]
(80MHz width)	5210	42	AVG	242T	10.18	10.39	10.33	23.98	-13.59
	5290	58	AVG	242T	10.39	10.05	10.48	23.47	-12.99
5GHz Band	5530	106	AVG	242T	10.09	10.19	10.05	22.80	-12.61
G Ba	5610	122	AVG	242T	12.51	12.09	12.49	22.80	-10.29
5	5690	138	AVG	242T	12.49	12.15	12.50	22.80	-10.30
	5775	155	AVG	242T	10.28	10.41	10.29	30.00	-19.59

Table 7-27. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 06 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 96 of 274



tz AHz dth L)	Freq [MHz]	Channel	Detector	Tones		RU Index			Conducted Power
5GH (160M Indwic					61	62	64	[dBm]	Margin [dB]
5 (16 and	5250	50	AVG	242T	10.44	10.17	10.03	23.98	-13.54
B	5570	114	AVG	242T	10.72	10.99	10.61	23.47	-12.48

Table 7-28. SISO ANT1 160MHz(L) BW (UNII) Maximum Conducted Output Power (242 Tones)

GHz OMHz width U)	Freq [MHz]	Channel	Detector	Tones		RU Index			Conducted Power
SOM SOM Iwic					61	62	64	[dBm]	Margin [dB]
5 (16 and	5250	50	AVG	242T	10.05	10.01	10.46	23.98	-13.52
B	5570	114	AVG	242T	10.75	10.14	10.79	23.47	-12.68

Table 7-29. SISO ANT1 160MHz(U) BW (UNII) Maximum Conducted Output Power (242 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 07 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 97 of 274



### SISO Antenna-1 Conducted Output Power Measurements (484 Tones)

N	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit	Conducted Power
HZ (C					65	[dBm]	Margin [dB]
	5190	38	AVG	484T	10.69	23.98	-13.29
e id	5230	46	AVG	484T	12.48	23.98	-11.50
4 3	5270	54	AVG	484T	12.09	23.47	-11.38
	5310	62	AVG	484T	10.44	23.47	-13.03
Hz	5510	102	AVG	484T	10.79	22.80	-12.01
	5590	118	AVG	484T	12.49	22.80	-10.31
5G B	5710	142	AVG	484T	12.40	22.80	-10.40
	5755	151	AVG	484T	10.51	30.00	-19.49
	5795	159	AVG	484T	12.43	30.00	-17.57

Table 7-30. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

Z	Freq [MHz]	Channel	Detector	Tones	RU II	ndex	Conducted Power Limit	Conducted Power
(80MH; lwidth)					65	66	[dBm]	Margin [dB]
S E	5210	42	AVG	484T	10.22	10.45	23.98	-13.53
	5290	58	AVG	484T	10.45	10.51	23.47	-12.96
5GHz Band	5530	106	AVG	484T	10.18	10.12	22.80	-12.62
GF Ba	5610	122	AVG	484T	12.01	12.09	22.80	-10.71
5	5690	138	AVG	484T	12.10	12.09	22.80	-10.70
	5775	155	AVG	484T	10.29	10.42	30.00	-19.58

Table 7-31. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

z IHz ith L)	Freq [MHz]	Channel	Detector	Tones	RU Index		Conducted Power Limit	Conducted Power
5GHz I60MH Idwidt					65	66	[dBm]	Margin [dB]
	5250	50	AVG	484T	10.29	10.03	23.98	-13.69
Bar	5570	114	AVG	484T	10.51	10.11	23.47	-12.96

Table 7-32. SISO ANT1 160MHz(L) BW (UNII) Maximum Conducted Output Power (484 Tones)

z IHz ith U)	Freq [MHz]	Channel	Detector	etector Tones RU Index		ndex	Conducted Power Limit	Conducted Power
SGH SOM Iwic					65	66	[dBm]	Margin [dB]
(1) no	5250	50	AVG	484T	10.07	10.32	23.98	-13.66
Ba	5570	114	AVG	484T	10.69	10.72	23.47	-12.75

Table 7-33. SISO ANT1 160MHz(U) BW (UNII) Maximum Conducted Output Power (484 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 08 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 98 of 274



### SISO Antenna-1 Conducted Output Power Measurements (996 Tones)

N	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit	Conducted Power
(80MH)					67	[dBm]	Margin [dB]
<b>6 5</b>	5210	42	AVG	996T	10.32	23.98	-13.66
<u>∞</u> ≥	5290	58	AVG	996T	10.43	23.47	-13.04
Hz	5530	106	AVG	996T	10.10	22.80	-12.70
<u>ත</u> ස	5610	122	AVG	996T	12.44	22.80	-10.36
5	5690	138	AVG	996T	12.50	22.80	-10.30
	5775	155	AVG	996T	10.28	30.00	-19.72

Table 7-34. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (996 Tones)

5GHz  60MHz  dwidth L)	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit	Conducted Power
5GF 60N					67	[dBm]	Margin [dB]
ここ	5250	50	AVG	996T	9.92	23.98	-14.06
Ba	5570	114	AVG	996T	10.91	23.47	-12.56

Table 7-35. SISO ANT1 160MHz(L) BW (UNII) Maximum Conducted Output Power (996 Tones)

Hz MHz idth U)	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit	Conducted Power
5GHz I60MH dwidtl					67	[dBm]	Margin [dB]
	5250	50	AVG	996T	10.51	23.98	-13.47
Ba	5570	114	AVG	996T	10.93	23.47	-12.54

Table 7-36. SISO ANT1 160MHz(U) BW (UNII) Maximum Conducted Output Power (996 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 00 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 99 of 274



### SISO Antenna-2 Conducted Output Power Measurements (26 Tones)

	Freq [MHz]	Channel	Detector	Tones		RU Index	Conducted Power Limit	Conducted Power	
					0	4	8	[dBm]	Margin [dB]
N	5180	36	AVG	26T	9.04	9.17	9.18	23.98	-14.80
ב <u>∓</u>	5200	40	AVG	26T	9.07	9.14	9.17	23.98	-14.81
d d	5240	48	AVG	26T	8.97	9.10	9.18	23.98	-14.80
<b>O</b> .=	5260	52	AVG	26T	9.15	9.29	9.22	23.47	-14.18
2 ≥	5280	56	AVG	26T	9.13	9.32	9.25	23.47	-14.15
1 Do	5320	64	AVG	26T	8.66	8.78	8.72	23.47	-14.69
五声	5500	100	AVG	26T	8.95	9.13	9.01	22.80	-13.67
(D) m	5600	120	AVG	26T	8.74	8.91	8.77	22.80	-13.89
5	5720	144	AVG	26T	8.72	8.95	8.82	22.80	-13.85
	5745	149	AVG	26T	9.33	9.49	9.37	30.00	-20.51
	5785	157	AVG	26T	9.25	9.48	9.46	30.00	-20.52
	5825	165	AVG	26T	9.34	9.28	9.34	30.00	-20.66

Table 7-37. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

N _	Freq [MHz]	Freq [MHz] Channel Detector		Tones		RU Index	Conducted Power Limit	Conducted Power	
T C	•				0	8	17	[dBm]	Margin [dB]
巨美	5190	38	AVG	26T	8.77	9.29	8.85	23.98	-14.69
5 5	5230	46	AVG	26T	8.86	9.37	8.98	23.98	-14.61
<b>4</b> ≥	5270	54	AVG	26T	8.81	9.32	8.94	23.47	-14.15
<b>—</b> <del>—</del> —	5310	62	AVG	26T	9.00	9.49	9.02	23.47	-13.98
7	5510	102	AVG	26T	8.72	9.14	8.67	22.80	-13.66
三 3a	5590	118	AVG	26T	9.32	8.95	9.30	22.80	-13.48
5G B	5710	142	AVG	26T	8.78	9.27	8.86	22.80	-13.53
	5755	151	AVG	26T	9.01	9.52	9.12	30.00	-20.48
	5795	159	AVG	26T	9.22	9.38	9.07	30.00	-20.62

Table 7-38. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

Z	Freq [MHz]	Channel	Channel Detector	Tones		RU Index			Conducted Power
(80MHz width)					0	18	36	[dBm]	Margin [dB]
	5210	42	AVG	26T	8.91	9.04	8.72	23.98	-14.94
	5290	58	AVG	26T	9.49	9.46	9.18	23.47	-13.98
5GHz Band	5530	106	AVG	26T	9.11	9.14	8.75	22.80	-13.66
G Ba	5610	122	AVG	26T	9.26	9.22	8.92	22.80	-13.54
5	5690	138	AVG	26T	8.89	8.81	8.60	22.80	-13.91
	5775	155	AVG	26T	9.37	9.31	9.22	30.00	-20.63

Table 7-39. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 100 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 100 of 274



tz AHz dth L)	Freq [MHz]	Freq [MHz] Channel	Detector	Tones	RU Index			Conducted Power Limit	Conducted Power
5GHz 60MH dwidt					0	18	36	[dBm]	Margin [dB]
こここ	5250	50	AVG	26T	8.02	8.01	7.31	23.98	-15.96
Ba	5570	114	AVG	26T	7.94	7.85	7.74	23.47	-15.53

Table 7-40. SISO ANT2 160MHz(L) BW (UNII) Maximum Conducted Output Power (26 Tones)

z IHz #th U)	이 문화를 되었다. 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그		Detector	etector Tones		RU Index	Conducted Power Limit	Conducted Power	
SGH SON Iwic					0	18	36	[dBm]	Margin [dB]
T 7 2	5250	50	AVG	26T	8.01	7.95	8.03	23.98	-15.95
Bai	5570	114	AVG	26T	7.76	7.88	7.94	23.47	-15.53

Table 7-41. SISO ANT2 160MHz(U) BW (UNII) Maximum Conducted Output Power (26 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 101 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 101 of 274



### SISO Antenna-2 Conducted Output Power Measurements (52 Tones)

	Freq [MHz]	Channel	Detector	Tones		RU Index	Conducted Power Limit	Conducted Power	
					37	39	40	[dBm]	Margin [dB]
N	5180	36	AVG	52T	9.99	10.08	10.16	23.98	-13.82
ב <u>∓</u>	5200	40	AVG	52T	10.86	10.89	10.79	23.98	-13.09
ĕ Ħ	5240	48	AVG	52T	10.78	10.84	10.75	23.98	-13.14
	5260	52	AVG	52T	10.87	11.02	10.90	23.47	-12.45
<u>≥</u>	5280	56	AVG	52T	10.92	11.00	10.93	23.47	-12.47
1 Do	5320	64	AVG	52T	9.86	10.03	9.99	23.47	-13.44
五声	5500	100	AVG	52T	10.15	9.56	10.11	22.80	-12.65
(D) m	5600	120	AVG	52T	10.80	10.82	11.15	22.80	-11.65
5	5720	144	AVG	52T	10.71	10.75	10.70	22.80	-12.05
	5745	149	AVG	52T	9.76	9.73	9.81	30.00	-20.19
	5785	157	AVG	52T	11.11	10.84	11.17	30.00	-18.83
	5825	165	AVG	52T	10.09	9.70	10.15	30.00	-19.85

Table 7-42. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

N _	Freq [MHz]	Freq [MHz] Channel Detector		Tones		RU Index	Conducted Power Limit	Conducted Power	
<b>1</b>	•				37	40	44	[dBm]	Margin [dB]
三 美	5190	38	AVG	52T	10.80	11.01	10.79	23.98	-12.97
<b>5 5</b>	5230	46	AVG	52T	10.86	11.16	11.02	23.98	-12.82
<b>4</b> ≥	5270	54	AVG	52T	10.89	10.91	10.71	23.47	-12.56
<b>—</b>	5310	62	AVG	52T	11.02	10.92	10.66	23.47	-12.45
무	5510	102	AVG	52T	10.94	10.79	11.02	22.80	-11.78
<b>完</b>	5590	118	AVG	52T	10.82	11.14	11.17	22.80	-11.63
5G B	5710	142	AVG	52T	10.63	10.59	10.73	22.80	-12.07
	5755	151	AVG	52T	11.15	11.02	10.75	30.00	-18.85
	5795	159	AVG	52T	10.94	10.78	11.07	30.00	-18.93

Table 7-43. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

N	Freq [MHz]	z] Channel Dete	Detector	Tones		RU Index			Conducted Power
(80MHz width)					37	44	52	[dBm]	Margin [dB]
<b>€</b> ₹	5210	42	AVG	52T	10.74	11.17	11.05	23.98	-12.81
	5290	58	AVG	52T	11.01	11.00	10.82	23.47	-12.46
5GHz Band	5530	106	AVG	52T	10.74	10.93	11.09	22.80	-11.71
G Ba	5610	122	AVG	52T	10.97	10.72	10.93	22.80	-11.83
5	5690	138	AVG	52T	10.71	10.99	10.75	22.80	-11.81
	5775	155	AVG	52T	10.76	11.15	11.03	30.00	-18.85

Table 7-44. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 102 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 102 of 274



Z IHz #h L)	Freq [MHz]		Channel	Detector	Tones		RU Index	Conducted Power Limit	Conducted Power
5GHz 60MH dwidt					37	44	52	[dBm]	Margin [dB]
5 (16 and	5250	50	AVG	52T	11.06	10.72	10.67	23.98	-12.92
Ä	5570	114	AVG	52T	10.62	10.22	10.98	23.47	-12.49

Table 7-45. SISO ANT2 160MHz(L) BW (UNII) Maximum Conducted Output Power (52 Tones)

tz AHz dth U)	Freq [MHz]	Channel	Detector	Tones		RU Index	RU Index		Conducted Power
はのでは					37	44	52	[dBm]	Margin [dB]
5(16 and)	5250	50	AVG	52T	10.93	10.99	11.06	23.98	-12.92
Bai	5570	114	AVG	52T	11.04	11.12	10.64	23.47	-12.35

Table 7-46. SISO ANT2 160MHz(U) BW (UNII) Maximum Conducted Output Power (52 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 102 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 103 of 274



### SISO Antenna-2 Conducted Output Power Measurements (106 Tones)

	Freq [MHz] Channe		Channel Detector		RU I	ndex	Conducted Power Limit	Conducted Power
					53	54	[dBm]	Margin [dB]
N (	5180	36	AVG	106T	10.35	10.08	23.98	-13.63
I C	5200	40	AVG	106T	11.93	11.83	23.98	-12.05
<b>₹</b>	5240	48	AVG	106T	11.70	11.98	23.98	-12.00
<b>9</b> :=	5260	52	AVG	106T	12.15	11.84	23.47	-11.32
<u>S</u> <u>≥</u>	5280	56	AVG	106T	11.72	11.94	23.47	-11.53
N   S	5320	64	AVG	106T	10.09	9.80	23.47	-13.38
E E	5500	100	AVG	106T	10.15	9.86	22.80	-12.65
(D)	5600	120	AVG	106T	11.86	12.06	22.80	-10.74
5	5720	144	AVG	106T	11.83	11.95	22.80	-10.85
	5745	149	AVG	106T	9.95	10.06	30.00	-19.94
· · · · · · · · · · · · · · · · · · ·	5785	157	AVG	106T	11.86	12.11	30.00	-17.89
	5825	165	AVG	106T	10.27	9.99	30.00	-19.73

Table 7-47. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

N (	Freq [MHz]	Channel	Detector	Tones		RU Index			Conducted Power
T C					53	54	56	[dBm]	Margin [dB]
国芸	5190	38	AVG	106T	11.86	12.08	12.02	23.98	-11.90
5.2	5230	46	AVG	106T	12.09	11.90	11.74	23.98	-11.89
4 >	5270	54	AVG	106T	12.17	12.02	11.79	23.47	-11.30
<b>—</b> <del>—</del> —	5310	62	AVG	106T	11.79	11.98	11.83	23.47	-11.49
Hz	5510	102	AVG	106T	11.68	11.82	12.17	22.80	-10.63
4	5590	118	AVG	106T	11.90	12.17	11.98	22.80	-10.63
5G B	5710	142	AVG	106T	11.91	12.11	11.92	22.80	-10.69
	5755	151	AVG	106T	11.76	11.96	11.81	30.00	-18.04
	5795	159	AVG	106T	12.14	11.79	11.65	30.00	-17.86

Table 7-48. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

z	Freq [MHz]	Channel	Detector	Tones		RU Index		Conducted Power Limit	Conducted Power
(80MHz width)					53	56	60	[dBm]	Margin [dB]
(80N widt	5210	42	AVG	106T	11.68	12.08	11.87	23.98	-11.90
	5290	58	AVG	106T	11.84	12.14	11.95	23.47	-11.33
5GHz Band	5530	106	AVG	106T	11.86	11.67	11.83	22.80	-10.94
G Ba	5610	122	AVG	106T	11.72	11.92	11.68	22.80	-10.88
5	5690	138	AVG	106T	11.96	11.67	11.53	22.80	-10.84
	5775	155	AVG	106T	11.94	11.88	11.74	30.00	-18.06

Table 7-49. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 104 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 104 of 274



5GHz (160MHz indwidth L)	Freq [MHz]	Channel	Detector	Tones		RU Index			Conducted Power
S S S S S S S S S S S S S S S S S S S					53	56	60	[dBm]	Margin [dB]
5 (16 and	5250	50	AVG	106T	11.92	11.99	12.13	23.98	-11.85
Ä	5570	114	AVG	106T	11.69	11.86	12.04	23.47	-11.43

Table 7-50. SISO ANT2 160MHz(L) BW (UNII) Maximum Conducted Output Power (106 Tones)

z IHz #th U)	Freq [MHz]	Channel	Detector	Tones		RU Index			Conducted Power
SGH 50N Iwic					53	56	60	[dBm]	Margin [dB]
47 = 0	5250	50	AVG	106T	12.00	11.89	11.91	23.98	-11.98
(1 Ban	5570	114	AVG	106T	11.61	11.76	11.70	23.47	-11.71

Table 7-51. SISO ANT2 160MHz(U) BW (UNII) Maximum Conducted Output Power (106 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 105 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 105 of 274



### SISO Antenna-2 Conducted Output Power Measurements (242 Tones)

	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit	Conducted Power
					61	[dBm]	Margin [dB]
N	5180	36	AVG	242T	12.01	23.98	-11.97
E C	5200	40	AVG	242T	11.74	23.98	-12.24
<b>₹</b>	5240	48	AVG	242T	11.87	23.98	-12.11
	5260	52	AVG	242T	11.78	23.47	-11.69
<u>S</u> <u>S</u>	5280	56	AVG	242T	11.90	23.47	-11.57
N 2	5320	64	AVG	242T	11.85	23.47	-11.62
五声	5500	100	AVG	242T	11.64	22.80	-11.16
Om	5600	120	AVG	242T	11.92	22.80	-10.88
5	5720	144	AVG	242T	11.90	22.80	-10.90
	5745	149	AVG	242T	9.93	30.00	-20.07
	5785	157	AVG	242T	12.01	30.00	-17.99
	5825	165	AVG	242T	11.25	30.00	-18.75

Table 7-52. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

N	Freq [MHz]	Freq [MHz] Channel		Tones	RU II	ndex	Conducted Power Limit	Conducted Power
T ?					61	62	[dBm]	Margin [dB]
国芸	5190	38	AVG	242T	9.76	9.90	23.98	-14.08
<b>5 5</b>	5230	46	AVG	242T	12.13	11.71	23.98	-11.85
<b>4</b> ≥	5270	54	AVG	242T	12.17	11.77	23.47	-11.30
$\overline{}$	5310	62	AVG	242T	10.17	9.73	23.47	-13.30
HZ	5510	102	AVG	242T	10.11	10.54	22.80	-12.26
4	5590	118	AVG	242T	12.02	12.00	22.80	-10.78
5G B	5710	142	AVG	242T	11.89	11.92	22.80	-10.88
	5755	151	AVG	242T	9.93	9.93	30.00	-20.07
	5795	159	AVG	242T	12.17	11.67	30.00	-17.83

Table 7-53. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

Z .	Freq [MHz]	Channel	Channel Detector			RU Index	Conducted Power Limit	Conducted Power	
ا <del>آ</del> ٿ					61	62	64	[dBm]	Margin [dB]
(80MHz width)	5210	42	AVG	242T	10.15	9.93	10.02	23.98	-13.83
	5290	58	AVG	242T	10.05	9.79	9.86	23.47	-13.42
5GHz Band	5530	106	AVG	242T	9.75	9.97	9.96	22.80	-12.83
GF Ba	5610	122	AVG	242T	11.68	11.85	11.82	22.80	-10.95
5 E	5690	138	AVG	242T	11.98	12.11	11.57	22.80	-10.69
	5775	155	AVG	242T	10.16	9.85	10.04	30.00	-19.84

Table 7-54. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 106 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Fage 106 01 274



	AHz ath L)	Freq [MHz]	[MHz] Channel	Detector	Tones		RU Index	Conducted Power Limit	Conducted Power	
5 5 T						61	62	64	[dBm]	Margin [dB]
4	7 (16 and	5250	50	AVG	242T	10.16	10.04	9.99	23.98	-13.82
	Ř	5570	114	AVG	242T	10.52	10.34	10.59	23.47	-12.88

Table 7-55. SISO ANT2 160MHz(L) BW (UNII) Maximum Conducted Output Power (242 Tones)

tz AHz dth U)	Freq [MHz]	eq [MHz] Channel	Detector	Tones		RU Index	Conducted Power Limit	Conducted Power	
はってい					61	62	64	[dBm]	Margin [dB]
5(16 and)	5250	50	AVG	242T	9.86	9.96	10.17	23.98	-13.81
Bai	5570	114	AVG	242T	10.61	10.42	10.58	23.47	-12.86

Table 7-56. SISO ANT2 160MHz(U) BW (UNII) Maximum Conducted Output Power (242 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 107 of 274	
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 107 of 274	



## SISO Antenna-2 Conducted Output Power Measurements (484 Tones)

N	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit	Conducted Power
II C					65	[dBm]	Margin [dB]
7	5190	38	AVG	484T	10.35	23.98	-13.63
<b>5 5</b>	5230	46	AVG	484T	11.72	23.98	-12.26
4 >	5270	54	AVG	484T	11.74	23.47	-11.73
	5310	62	AVG	484T	9.69	23.47	-13.78
무드	5510	102	AVG	484T	10.20	22.80	-12.60
GHz Banc	5590	118	AVG	484T	12.10	22.80	-10.70
5G B	5710	142	AVG	484T	11.96	22.80	-10.84
	5755	151	AVG	484T	9.90	30.00	-20.10
	5795	159	AVG	484T	11.68	30.00	-18.32

Table 7-57. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

Z	Freq [MHz]	Channel	Detector	Tones	RU I	ndex	Conducted Power Limit	Conducted Power
(80MH)					65	66	[dBm]	Margin [dB]
<b>€ 5</b>	5210	42	AVG	484T	9.75	9.95	23.98	-14.03
	5290	58	AVG	484T	9.69	9.79	23.47	-13.68
GHz Band	5530	106	AVG	484T	9.85	9.82	22.80	-12.95
GF Ba	5610	122	AVG	484T	11.89	11.93	22.80	-10.87
5	5690	138	AVG	484T	11.62	11.65	22.80	-11.15
	5775	155	AVG	484T	10.14	10.14	30.00	-19.86

Table 7-58. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

Z IHz ith L)	Freq [MHz]	Channel	Detector	Tones	RU I	ndex	Conducted Power Limit	Conducted Power
					65	66	[dBm]	Margin [dB]
5 (16	5250	50	AVG	484T	10.07	9.90	23.98	-13.91
m	5570	114	AVG	484T	10.30	10.53	23.47	-12.94

Table 7-59. SISO ANT2 160MHz(L) BW (UNII) Maximum Conducted Output Power (484 Tones)

iz IHz ath U)	Freq [MHz]	Channel	Detector	Tones	RU I	ndex	Conducted Power Limit	Conducted Power
S S S S S S S S S S S S S S S S S S S					65	66	[dBm]	Margin [dB]
5 (16 and	5250	50	AVG	484T	9.78	10.04	23.98	-13.94
Ba	5570	114	AVG	484T	10.48	10.46	23.47	-12.99

Table 7-60. SISO ANT2 160MHz(U) BW (UNII) Maximum Conducted Output Power (484 Tones)

FCC ID: PY7-95324M  Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 100 of 274	
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 108 of 274	

© 2021 PCTEST V 9.0 02/01/2019



## SISO Antenna-2 Conducted Output Power Measurements (996 Tones)

Z	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit	Conducted Power
(80MH)					67	[dBm]	Margin [dB]
(80MH width)	5210	42	AVG	996T	9.82	23.98	-14.16
	5290	58	AVG	996T	9.72	23.47	-13.75
42	5530	106	AVG	996T	9.73	22.80	-13.07
GH Bar	5610	122	AVG	996T	11.70	22.80	-11.10
5_	5690	138	AVG	996T	11.98	22.80	-10.82
	5775	155	AVG	996T	10.02	30.00	-19.98

Table 7-61. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (996 Tones)

IZ IHz ath L)	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit	Conducted Power
5GHz 160MH Idwidt					67	[dBm]	Margin [dB]
ここ	5250	50	AVG	996T	9.75	23.98	-14.23
Ba	5570	114	AVG	996T	10.41	23.47	-13.06

Table 7-62. SISO ANT2 160MHz(L) BW (UNII) Maximum Conducted Output Power (996 Tones)

iz IHz ath U)	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit	Conducted Power
GH SOM					67	[dBm]	Margin [dB]
5G (160 andw	5250	50	AVG	996T	9.67	23.98	-14.31
Ba	5570	114	AVG	996T	10.19	23.47	-13.28

Table 7-63. SISO ANT2 160MHz(U) BW (UNII) Maximum Conducted Output Power (996 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 100 of 274	
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 109 of 274	

© 2021 PCTEST



### MIMO Maximum Conducted Output Power Measurements (26 Tones)

									RU Index					Conducted	Conducted
	Freq [MHz]	Channel	Detector	Tones		0			4			8		Power Limit	Power
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]
N _	5180	36	AVG	26T	8.88	9.05	11.98	8.90	9.06	11.99	8.81	9.04	11.94	23.98	-11.99
王 三	5200	40	AVG	26T	8.84	9.04	11.95	8.88	9.06	11.98	8.92	9.04	11.99	23.98	-11.99
≥ ∺	5240	48	AVG	26T	8.96	9.04	12.01	8.93	9.07	12.01	9.01	9.05	12.04	23.98	-11.94
<u>Š</u>	5260	52	AVG	26T	9.14	9.17	12.17	9.07	9.28	12.19	9.03	9.21	12.13	23.47	-11.28
<u>U</u> ≥	5280	56	AVG	26T	9.14	9.15	12.16	8.98	9.26	12.13	8.95	9.17	12.07	23.47	-11.31
N S	5320	64	AVG	26T	8.99	8.74	11.88	9.00	8.88	11.95	8.97	9.18	12.09	23.47	-11.38
一声	5500	100	AVG	26T	9.41	9.02	12.23	9.06	8.38	11.74	9.17	8.32	11.78	22.80	-10.57
Om	5600	120	AVG	26T	9.48	8.93	12.22	9.08	8.55	11.83	9.50	8.54	12.06	22.80	-10.58
5	5720	144	AVG	26T	9.18	8.48	11.85	9.05	8.56	11.82	9.39	8.58	12.01	22.80	-10.79
	5745	149	AVG	26T	9.50	8.85	12.20	9.30	8.95	12.14	9.49	8.90	12.22	30.00	-17.78
	5785	157	AVG	26T	9.51	8.96	12.25	9.38	9.08	12.24	9.51	9.03	12.29	30.00	-17.71
	5825	165	AVG	26T	9.49	8.67	12.11	9.38	8.81	12.11	9.49	8.80	12.17	30.00	-17.83

Table 7-64. MIMO 20MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

									RU Index					Conducted	Conducted
N	Freq [MHz]	Channel	Detector	Tones		0			8			17		Power Limit	Power
7 =					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]
₹	5190	38	AVG	26T	9.02	9.22	12.13	9.06	9.24	12.16	8.71	8.83	11.78	23.98	-11.82
⊴ 8	5230	46	AVG	26T	9.46	8.94	12.22	9.51	9.01	12.28	9.09	8.55	11.84	23.98	-11.70
4 ≥	5270	54	AVG	26T	9.24	9.47	12.37	9.22	9.43	12.34	8.87	9.00	11.95	23.47	-11.10
<b>∵</b> €	5310	62	AVG	26T	9.16	9.06	12.12	9.11	9.06	12.10	9.14	9.03	12.10	23.47	-11.35
우호	5510	102	AVG	26T	9.34	8.56	11.98	9.29	8.54	11.94	9.40	8.67	12.06	22.80	-10.74
유 B	5590	118	AVG	26T	9.11	8.11	11.65	9.15	8.08	11.66	9.31	8.31	11.85	22.80	-10.95
20	5710	142	AVG	26T	9.36	8.76	12.08	9.33	8.81	12.09	9.38	8.86	12.14	22.80	-10.66
۵,	5755	151	AVG	26T	9.14	8.57	11.87	9.13	8.64	11.90	9.31	8.68	12.02	30.00	-17.98
	5795	159	AVG	26T	8.79	8.86	11.84	9.17	8.61	11.91	9.14	9.01	12.09	30.00	-17.91

Table 7-65. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

									RU Index					Conducted	Conducted
N	Freq [MHz]	Channel	Detector	Tones		0			18			36		Power Limit	Power
≣ ਦੇ					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]
5.5	5210	42	AVG	26T	9.15	8.60	11.89	9.03	9.07	12.06	9.36	8.74	12.07	23.98	-11.91
∞ ≥	5290	58	AVG	26T	9.00	9.03	12.03	9.35	9.44	12.41	8.89	9.16	12.04	23.47	-11.06
후	5530	106	AVG	26T	9.33	8.74	12.06	9.04	8.39	11.74	9.35	8.62	12.01	22.80	-10.74
효율	5610	122	AVG	26T	9.26	8.61	11.96	9.51	8.92	12.24	9.19	8.54	11.89	22.80	-10.56
5 _	5690	138	AVG	26T	9.51	7.89	11.79	9.46	8.08	11.83	9.41	8.02	11.78	22.80	-10.97
	5775	155	AVG	26T	9.13	8.39	11.79	9.46	8.79	12.15	9.15	8.67	11.93	30.00	-17.85

Table 7-66. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

MHz h L)	F 7001-1	01	Datastas	<b>-</b>					RU Index					Conducted	
8 <del>2</del>	Freq [MHz]	Channel	Detector	Tones	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	Power Limit	Power Margin [dB]
z (1 Idwi						0	•		18	•		36		[ubiii]	war girr [ub]
5GH Bar	5250	50	AVG	26T	9.38	8.02	11.76	9.21	8.01	11.66	9.31	7.31	11.43	23.98	-12.22
<u>د</u> س	5570	114	AVG	26T	9.03	7.94	11.53	9.10	7.85	11.53	9.46	7.74	11.69	23.47	-11.78

Table 7-67. MIMO 160MHz(L) BW (UNII) Maximum Conducted Output Power (26 Tones)

MHz h U)	Erog [MUz]	Channal	Detector	Tones					RU Index					Conducted Power Limit	Conducted Power
(160M width	Freq [MHz]	Channel	Detector	Tones	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO		Margin [dB]
z (						0 18 36									margin [ab]
SGH Ban	5250	50	AVG	26T	9.28	8.01	11.70	9.25	7.95	11.66	9.42	8.03	11.79	23.98	-12.19
۳ - 2	5570	114	AVG	26T	9.47	7.76	11 71	9.32	7.88	11.67	9.51	7 94	11.81	23.47	-11.66

Table 7-68. MIMO 160MHz(U) BW (UNII) Maximum Conducted Output Power (26 Tones)

FCC ID: PY7-95324M	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 440 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset		Page 110 of 274
© 2021 PCTEST				V 9.0 02/01/2019



### MIMO Conducted Output Power Measurements (52 Tones)

									RU Index					Conducted	Conducted
	Freq [MHz]	Channel	Detector	Tones		37			39			40		Power Limit	Power
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]
<u>N</u> _	5180	36	AVG	52T	9.98	9.99	13.00	10.17	10.08	13.14	10.09	10.16	13.14	23.98	-10.84
⊑ ⊆	5200	40	AVG	52T	12.18	10.86	14.58	12.44	10.89	14.74	12.20	10.79	14.56	23.98	-9.24
⋝≒	5240	48	AVG	52T	12.38	10.78	14.66	12.12	10.84	14.54	12.04	10.75	14.45	23.98	-9.32
	5260	52	AVG	52T	12.47	10.87	14.75	12.49	11.02	14.83	12.47	10.90	14.77	23.47	-8.64
⊻ ≤	5280	56	AVG	52T	12.33	10.92	14.69	12.46	11.00	14.80	12.35	10.93	14.71	23.47	-8.67
N S	5320	64	AVG	52T	10.35	9.86	13.12	9.93	10.03	12.99	10.29	9.99	13.15	23.47	-10.32
ᄑᄫ	5500	100	AVG	52T	10.15	10.15	13.16	10.21	9.56	12.91	10.09	10.11	13.11	22.80	-9.64
מה כי	5600	120	AVG	52T	12.28	10.80	14.61	12.40	10.82	14.69	12.32	11.15	14.78	22.80	-8.02
ი —	5720	144	AVG	52T	10.84	10.71	13.79	10.93	10.75	13.85	10.87	10.70	13.80	22.80	-8.95
	5745	149	AVG	52T	9.86	9.87	12.88	9.95	9.73	12.85	9.88	9.81	12.86	30.00	-17.12
	5785	157	AVG	52T	12.37	11.11	14.80	12.46	10.84	14.74	12.41	11.17	14.84	30.00	-15.16
	5825	165	AVG	52T	11.50	10.09	13.86	11.14	9.70	13.49	11.09	10.15	13.66	30.00	-16.14

Table 7-69. MIMO 20MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

									RU Index					Conducted	Conducted
N	Freq [MHz]	Channel	Detector	Tones		37			40			44		Power Limit	Power
÷ ÷					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]
₹	5190	38	AVG	52T	12.16	10.80	14.54	11.99	11.01	14.54	12.23	10.79	14.58	23.98	-9.40
5.5	5230	46	AVG	52T	12.31	10.86	14.66	12.33	11.16	14.79	12.38	11.02	14.76	23.98	-9.18
4 <u>\$</u>	5270	54	AVG	52T	12.44	10.89	14.74	12.35	10.91	14.70	12.43	10.71	14.66	23.47	-8.73
<del>6</del>	5310	62	AVG	52T	12.07	11.02	14.59	12.45	10.92	14.76	12.11	10.66	14.46	23.47	-8.71
무드	5510	102	AVG	52T	12.51	10.94	14.81	12.28	10.79	14.61	12.43	11.02	14.79	22.80	-7.99
ig R	5590	118	AVG	52T	12.34	10.82	14.66	12.14	11.14	14.68	12.28	11.17	14.77	22.80	-8.03
20 E	5710	142	AVG	52T	11.77	10.63	14.25	12.17	10.59	14.46	11.78	10.73	14.30	22.80	-8.34
4,	5755	151	AVG	52T	12.49	11.15	14.88	12.29	11.02	14.71	12.48	10.75	14.71	30.00	-15.12
	5795	159	AVG	52T	12.27	10.94	14.67	12.06	10.78	14.48	12.28	11.07	14.73	30.00	-15.27

Table 7-70. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

									RU Index					Conducted	Conducted
N	Freq [MHz]	Channel	Detector	Tones		37			44			52		Power Limit	Power
≣ ਦੇ					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]
5.5	5210	42	AVG	52T	12.11	10.74	14.49	12.38	11.17	14.83	12.33	11.05	14.75	23.98	-9.15
∞ ≥	5290	58	AVG	52T	12.39	11.01	14.76	12.12	11.00	14.61	12.49	10.82	14.75	23.47	-8.71
후	5530	106	AVG	52T	12.09	10.74	14.48	12.28	10.93	14.67	12.03	11.09	14.60	22.80	-8.13
효율	5610	122	AVG	52T	12.51	10.97	14.82	12.14	10.72	14.50	12.42	10.93	14.75	22.80	-7.98
5 _	5690	138	AVG	52T	12.02	10.71	14.42	12.20	10.99	14.65	11.97	10.75	14.41	22.80	-8.15
	5775	155	AVG	52T	12.42	10.76	14.68	12.05	11.15	14.63	12.38	11.03	14.77	30.00	-15.23

Table 7-71. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

OMHz th L)	Freq [MHz]	Channal	Detector	Tones					RU Index					Conducted Power Limit	Conducted
9 Ħ	rreq [winz]	Charmer	Detector	Tones	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO		Margin [dB]
7 Z (7						37			44			52		[ubiii]	wargin [ub]
5GH Bar	5250	50	AVG	52T	12.15	11.06	14.65	12.23	10.72	14.55	12.50	10.67	14.69	23.98	-9.29
- C	5570	114	AVG	52T	12.32	10.62	14.56	12.42	10.22	14.47	12.49	10.98	14.81	23.47	-8.66

Table 7-72. MIMO 160MHz(L) BW (UNII) Maximum Conducted Output Power (52 Tones)

MHz h U)	Freq [MHz]	Channal	Detector	Tones					RU Index					Conducted Power Limit	Conducted Power
(160 vidtl	rreq [winz]	Chamilei	Detector	Tones	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO		Margin [dB]
o y						37			44			52		[ubiii]	margin [ab]
퓛	5250	50	AVG	52T	12.44	10.93	14.76	12.22	10.99	14.66	12.10	11.06	14.62	23.98	-9.22
С п	5570	114	AVG	52T	12.18	11.04	14.66	12.26	11.12	14.74	12.33	10.64	14.58	23.47	-8.73

Table 7-73. MIMO 160MHz(U) BW (UNII) Maximum Conducted Output Power (52 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 111 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 111 of 274



### **MIMO Conducted Output Power Measurements (106 Tones)**

								RU I	ndex			Conducted	Conducted
		Freq [MHz]	Channel	Detector	Tones		53			54		Power Limit	Power
						ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]
N		5180	36	AVG	106T	10.63	10.35	13.50	10.72	10.08	13.42	23.98	-10.48
王	h	5200	40	AVG	106T	12.30	11.93	15.13	12.41	11.83	15.14	23.98	-8.84
Σ	Ħ	5240	48	AVG	106T	12.17	11.70	14.95	12.13	11.98	15.07	23.98	-8.91
20	Ξ	5260	52	AVG	106T	12.09	12.15	15.13	12.14	11.84	15.00	23.47	-8.34
2	<u>≥</u>	5280	56	AVG	106T	12.08	11.72	14.91	12.07	11.94	15.02	23.47	-8.45
N	20	5320	64	AVG	106T	10.41	10.09	13.26	10.42	9.80	13.13	23.47	-10.21
I	ar	5500	100	AVG	106T	10.26	10.15	13.22	10.24	9.86	13.06	22.80	-9.58
G	m	5600	120	AVG	106T	12.43	11.86	15.16	12.48	12.06	15.29	22.80	-7.51
5		5720	144	AVG	106T	11.99	11.83	14.92	11.98	11.95	14.98	22.80	-7.82
		5745	149	AVG	106T	10.05	9.95	13.01	10.03	10.06	13.06	30.00	-16.94
		5785	157	AVG	106T	11.86	11.86	14.87	11.89	12.11	15.01	30.00	-14.99
		5825	165	AVG	106T	10.53	10.27	13.41	10.60	9.99	13.32	30.00	-16.59

Table 7-74. MIMO 20MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

									RU Index					Conducted	Conducted
N	Freq [MHz]	Channel	Detector	Tones		53			54			56		Power Limit	Power
Ť 🗢					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]
\\	5190	38	AVG	106T	12.20	11.86	15.04	12.48	12.08	15.29	12.34	12.02	15.19	23.98	-8.68
<b>5 5</b>	5230	46	AVG	106T	12.36	12.09	15.24	12.23	11.90	15.08	12.48	11.74	15.14	23.98	-8.74
4 \$	5270	54	AVG	106T	12.42	12.17	15.31	12.26	12.02	15.15	12.51	11.79	15.18	23.47	-8.16
<del>6</del>	5310	62	AVG	106T	12.03	11.79	14.92	12.43	11.98	15.22	12.14	11.83	15.00	23.47	-8.25
우호	5510	102	AVG	106T	12.41	11.68	15.07	12.29	11.82	15.07	12.40	12.17	15.30	22.80	-7.50
法 g	5590	118	AVG	106T	12.19	11.90	15.06	12.15	12.17	15.17	12.19	11.98	15.10	22.80	-7.63
5G B	5710	142	AVG	106T	12.21	11.91	15.07	12.07	12.11	15.10	12.11	11.92	15.03	22.80	-7.70
~ /	5755	151	AVG	106T	12.46	11.76	15.13	12.27	11.96	15.13	12.45	11.81	15.15	30.00	-14.85
	5795	159	AVG	106T	12.22	12.14	15.19	12.05	11.79	14.93	12.25	11.65	14.97	30.00	-14.81

Table 7-75. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

									RU Index					Conducted	Conducted
N	Freq [MHz]	Channel	Detector	Tones		53			56			60		Power Limit	Power
<b>₹</b>					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]
등 등	5210	42	AVG	106T	12.12	11.68	14.92	12.36	12.08	15.23	12.20	11.87	15.05	23.98	-8.75
∞ ≥	5290	58	AVG	106T	12.32	11.84	15.10	12.06	12.14	15.11	12.38	11.95	15.18	23.47	-8.29
우	5530	106	AVG	106T	12.03	11.86	14.96	12.23	11.67	14.97	12.02	11.83	14.94	22.80	-7.83
효율	5610	122	AVG	106T	12.36	11.72	15.06	12.17	11.92	15.06	12.39	11.68	15.06	22.80	-7.74
5	5690	138	AVG	106T	12.42	11.96	15.21	12.19	11.67	14.95	12.45	11.53	15.02	22.80	-7.59
	5775	155	AVG	106T	12.34	11.94	15.15	12.04	11.88	14.97	12.46	11.74	15.13	30.00	-14.85

Table 7-76. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

MHz h L)	Freq [MHz]	Channel	Detector	Tones					RU Index					Conducted Power Limit	Conducted Power
160M idth	i req [ivii iz]	Chamie	Detector	Tones	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO		Margin [dB]
z (1 idwi						53			56			60		[ubiii]	wargiii [GD]
5GH Ban	5250	50	AVG	106T	12.13	11.92	15.04	12.19	11.99	15.10	12.51	12.13	15.33	23.98	-8.64
- C	5570	114	AVG	106T	12.25	11.69	14.99	12.36	11.86	15.13	11.98	12.04	15.02	23.47	-8.34

Table 7-77. MIMO 160MHz(L) BW (UNII) Maximum Conducted Output Power (106 Tones)

MHz h U)	Freq [MHz]	Channel	Detector	Tones					RU Index					Conducted Power Limit	Conducted Power
(160 <u> </u> vidtl	i req [wii iz]	Citatillei	Detector	Tones	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO		Margin [dB]
o v						53			56			60		[GDIII]	Mar giri [ab]
퓛	5250	50	AVG	106T	12.51	12.00	15.27	12.16	11.89	15.04	12.09	11.91	15.01	23.98	-8.71
. S	5570	114	AVG	106T	12.19	11.61	14.92	12.33	11.76	15.06	12.51	11.70	15.13	23.47	-8.34

Table 7-78. MIMO 160MHz(U) BW (UNII) Maximum Conducted Output Power (106 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 112 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 112 of 274



### MIMO Conducted Output Power Measurements (242 Tones)

						RU Index		Conducted	Conducted
	Freq [MHz]	Channel	Detector	Tones		61		Power Limit	Power
					ANT1	ANT2	MIMO	[dBm]	Margin [dB]
N	5180	36	AVG	242T	12.30	12.01	15.17	23.98	-8.81
I C	5200	40	AVG	242T	12.31	11.74	15.04	23.98	-8.93
₹ F	5240	48	AVG	242T	12.10	11.87	15.00	23.98	-8.98
	5260	52	AVG	242T	12.13	11.78	14.97	23.47	-8.50
<u>S</u> ≥	5280	56	AVG	242T	12.08	11.90	15.00	23.47	-8.47
N S	5320	64	AVG	242T	12.28	11.85	15.08	23.47	-8.39
西 工	5500	100	AVG	242T	12.14	11.64	14.91	22.80	-7.89
(D) M	5600	120	AVG	242T	11.97	11.92	14.96	22.80	-7.84
5	5720	144	AVG	242T	12.04	11.90	14.98	22.80	-7.82
	5745	149	AVG	242T	10.06	9.93	13.01	30.00	-16.99
	5785	157	AVG	242T	12.51	12.01	15.28	30.00	-14.72
	5825	165	AVG	242T	11.64	11.25	14.46	30.00	-15.54

Table 7-79. MIMO 20MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

								RU I	ndex			Conducted	Conducted
		Freq [MHz]	Channel	Detector	Tones		61			62		Power Limit	Power
¥.						ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]
₹	무	5190	38	AVG	242T	10.61	9.76	13.22	10.23	9.90	13.08	23.98	-10.76
6	힏	5230	46	AVG	242T	12.37	12.13	15.26	12.51	11.71	15.14	23.98	-8.72
4	ĭ₹I	5270	54	AVG	242T	12.07	12.17	15.13	12.07	11.77	14.93	23.47	-8.34
<u> </u>	ਰ।	5310	62	AVG	242T	10.38	10.17	13.29	10.35	9.73	13.06	23.47	-10.18
4		5510	102	AVG	242T	10.72	10.11	13.44	10.70	10.54	13.63	22.80	-9.17
杰	g	5590	118	AVG	242T	12.49	12.02	15.27	12.45	12.00	15.24	22.80	-7.53
	ш	5710	142	AVG	242T	11.93	11.89	14.92	11.91	11.92	14.93	22.80	-7.87
		5755	151	AVG	242T	10.51	9.93	13.24	10.51	9.93	13.24	30.00	-16.76
		5795	159	AVG	242T	12.43	12.17	15.31	12.43	11.67	15.08	30.00	-14.69

Table 7-80. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

									RU Index					Conducted	Conducted
N	Freq [MHz]	Channel	Detector	Tones		61			62			64		Power Limit	Power
₹ €					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]
를 등	5210	42	AVG	242T	10.18	10.15	13.18	10.39	9.93	13.18	10.33	10.02	13.19	23.98	-10.79
∞ ≥	5290	58	AVG	242T	10.39	10.05	13.23	10.05	9.79	12.93	10.48	9.86	13.19	23.47	-10.24
2 4	5530	106	AVG	242T	10.09	9.75	12.93	10.19	9.97	13.09	10.05	9.96	13.02	22.80	-9.71
o B	5610	122	AVG	242T	12.51	11.68	15.13	12.09	11.85	14.98	12.49	11.82	15.18	22.80	-7.62
5	5690	138	AVG	242T	12.49	11.98	15.25	12.15	12.11	15.14	12.50	11.57	15.07	22.80	-7.55
	5775	155	AVG	242T	10.28	10.16	13.23	10.41	9.85	13.15	10.29	10.04	13.18	30.00	-16.77

Table 7-81. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

MHz h L)	Freq [MHz]	Channal	Detector	Tones					RU Index					Conducted Power Limit	Conducted Power
160M idth	rreq [winz]	Chamilei	Detector	Tones	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO		Margin [dB]
z ×						61			62			64		[ubiii]	wargin [GD]
B GH	5250	50	AVG	242T	10.44	10.16	13.31	10.17	10.04	13.12	10.03	9.99	13.02	23.98	-10.67
	5570	114	AVG	242T	10.72	10.52	13.63	10.99	10.34	13.69	10.61	10.59	13.61	23.47	-9.78

Table 7-82. MIMO 160MHz(L) BW (UNII) Maximum Conducted Output Power (242 Tones)

MHz h U)	Eron (MHz)	Channal	Datastar	Tones					RU Index					Conducted Power Limit	Conducted Power
<u>8</u>	Freq [MHz]   Channel   Detector   Tor				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO		Margin [dB]
z (						61			62			64		[GDII]	margin [ab]
퓛	5250	50	AVG	242T	10.05	9.86	12.97	10.01	9.96	13.00	10.46	10.17	13.33	23.98	-10.65
C III	5570	114	AVG	242T	10.75	10.61	13.69	10 14	10.42	13.29	10.79	10.58	13.70	23.47	-9.77

Table 7-83. MIMO 160MHz(U) BW (UNII) Maximum Conducted Output Power (242 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 112 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 113 of 274



## **MIMO Conducted Output Power Measurements (484 Tones)**

						RU Index		Conducted	Conducted
N _	Freq [MHz]	Channel	Detector	Tones		65		Power Limit	Power
<b>17</b>					ANT1	ANT2	MIMO	[dBm]	Margin [dB]
<b>三</b>	5190	38	AVG	484T	10.69	10.35	13.53	23.98	-10.45
<b>5 5</b>	5230	46	AVG	484T	12.48	11.72	15.13	23.98	-8.85
4 ≥	5270	54	AVG	484T	12.09	11.74	14.93	23.47	-8.54
<b>—</b>	5310	62	AVG	484T	10.44	9.69	13.09	23.47	-10.38
7 2	5510	102	AVG	484T	10.79	10.20	13.52	22.80	-9.28
다 Sa	5590	118	AVG	484T	12.49	12.10	15.31	22.80	-7.49
5G B	5710	142	AVG	484T	12.40	11.96	15.20	22.80	-7.60
	5755	151	AVG	484T	10.51	9.90	13.23	30.00	-16.77
	5795	159	AVG	484T	12.43	11.68	15.08	30.00	-14.92

Table 7-84. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

							RU I	ndex			Conducted	Conducted
N	Freq [MHz]	Channel	Detector	Tones	es 65				66		Power Limit	Power
<b>₹</b>					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]
5 5	5210	42	AVG	484T	10.22	9.75	13.00	10.45	9.95	13.22	23.98	-10.76
® <u>\( \bar{\bar{\bar{\bar{\bar{\bar{\bar{</u>	5290	58	AVG	484T	10.45	9.69	13.10	10.51	9.79	13.18	23.47	-10.29
후	5530	106	AVG	484T	10.18	9.85	13.03	10.12	9.82	12.98	22.80	-9.77
Ba G	5610	122	AVG	484T	12.01	11.89	14.96	12.09	11.93	15.02	22.80	-7.78
5	5690	138	AVG	484T	12.10	11.62	14.88	12.09	11.65	14.89	22.80	-7.91
	5775	155	AVG	484T	10.29	10.14	13.23	10.42	10.14	13.29	30.00	-16.71

Table 7-85. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

MHz h L)	Freg [MHz]	Channel	Detector	Tones	RU Index							Conducted Power		
(160MI width I	Treq [Will2]	Onarine Di	Detector	Detector	Detector	Tones	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	Power Limit   M	Margin [dB]
z (					65				66	[ubiii]	war girr [ab]			
5GH Bar	5250	50	AVG	484T	10.29	10.07	13.19	10.03	9.90	12.98	23.98	-10.79		
5 1	5570	114	AVG	484T	10.51	10.30	13.42	10.11	10.53	13.34	23.47	-10.05		

Table 7-86. MIMO 160MHz(L) BW (UNII) Maximum Conducted Output Power (484 Tones)

160MHz idth U)	Freq [MHz] Channel Detec	Detector	Tones	RU Index						Conducted Power Limit	Conducted Power	
16 16		Onamici	Detector	101100	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO		Margin [dB]
z (1 idwi					65			66		[dDilij	war girr [ab]	
5GH Ban	5250	50	AVG	484T	10.07	9.78	12.94	10.32	10.04	13.19	23.98	-10.79
. S	5570	114	AVG	484T	10.69	10.48	13.60	10.72	10.46	13.60	23.47	-9.87

Table 7-87. MIMO 160MHz(U) BW (UNII) Maximum Conducted Output Power (484 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 114 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 114 of 274



## **MIMO Conducted Output Power Measurements (996 Tones)**

						RU Index		Conducted	Conducted
N	Freq [MHz]	Channel	Detector	Tones		67	Power Limit	Power	
/Hz (h:					ANT1	ANT2	MIMO	[dBm]	Margin [dB]
(80MI width	5210	42	AVG	996T	10.32	9.82	13.09	23.98	-10.89
	5290	58	AVG	996T	10.43	9.72	13.10	23.47	-10.37
5GHz Band	5530	106	AVG	996T	10.10	9.73	12.93	22.80	-9.87
G Ba	5610	122	AVG	996T	12.44	11.70	15.10	22.80	-7.70
5	5690	138	AVG	996T	12.50	11.98	15.26	22.80	-7.54
	5775	155	AVG	996T	10.28	10.02	13.16	30.00	-16.84

Table 7-88. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (996 Tones)

(160MHz width L)	Freq [MHz] Channel	l Detector	Tones		RU Index	Conducted Power Limit	Conducted Power		
(160 widtl		Charmer	Detector	101163	ANT1	ANT2	MIMO		Margin [dB]
) b						67			. J 1. 1
5GHz Band	5250	50	AVG	996T	9.92	9.75	12.85	23.98	-11.13
2	5570	114	AVG	996T	10.91	10.41	13.68	23.47	-9.79

Table 7-89. MIMO 160MHz(L) BW (UNII) Maximum Conducted Output Power (996 Tones)

5GHz (160MHz Bandwidth U)	Freq [MHz] Cha	Channel	Detector	Tones	RU Index			Conducted Power Limit	Conducted Power
			Detector	TOTICS	ANT1	ANT2	MIMO		Margin [dB]
) z						67		[aziii]	mar giii [a.2]
5GHz Band	5250	50	AVG	996T	10.51	9.67	13.12	23.98	-10.86
5	5570	114	AVG	996T	10.93	10.19	13.59	23.47	-9.88

Table 7-90. MIMO 160MHz(U) BW (UNII) Maximum Conducted Output Power (996 Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 115 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 115 of 274



#### Note:

Per ANSI C63.10-2013 and KDB 662911 v02r01 Section E)1), the conducted powers at Antenna-1 and Antenna-2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where  $G_N$  is the gain of the nth antenna and  $N_{ANT}$ , the total number of antennas used.

Directional gain = 
$$10 \log[(10^{G_1/20} + 10^{G_2/20} + ... + 10^{G_N/20})^2 / N_{ANT}] dBi$$

#### **Sample MIMO Calculation:**

assembly of contents thereof, please contact INFO@PCTEST.COM.

At 5180MHz in 802.11n (20MHz BW) mode, the average conducted output power was measured to be 11.36 dBm for Antenna-1 and 11.74 dBm for Antenna-2.

$$(11.36 \text{ dBm} + 11.74 \text{ dBm}) = (13.68 \text{ mW} + 14.93 \text{ mW}) = 28.61 \text{ mW} = 14.56 \text{ dBm}$$

FCC ID: PY7-95324M		MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 116 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 110 01 274



## 7.5 Maximum Power Spectral Density – 802.11ax OFDMA

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

#### **Test Overview and Limit**

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

#### **Test Procedure Used**

ANSI C63.10-2013 – Section 12.3.2.2 KDB 789033 D02 v02r01 – Section F ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

#### **Test Settings**

- 1. Analyzer was set to the center frequency of the UNII channel under investigation
- 2. Span was set to encompass the entire emission bandwidth of the signal
- 3. RBW = 1MHz
- 4. VBW = 3MHz
- 5. Number of sweep points  $\geq 2 \times (\text{span/RBW})$
- 6. Sweep time = auto
- 7. Detector = power averaging (RMS)
- 8. Trigger was set to free run for all modes
- 9. Trace was averaged over 100 sweeps
- 10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

#### **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

#### **Test Notes**

The power spectral density for each channel was measured with the RU index showing the highest conducted power

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 117 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 117 of 274



# SISO Antenna-1 Power Spectral Density Measurements (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
	5180	36	ax (20MHz)	26T	MCS0	7.27	11.0	-3.74
	5200	40	ax (20MHz)	26T	MCS0	7.60	11.0	-3.40
Band 1	5240	48	ax (20MHz)	26T	MCS0	7.52	11.0	-3.48
Bar	5190	38	ax (40MHz)	26T	MCS0	7.05	11.0	-3.95
	5230	46	ax (40MHz)	26T	MCS0	7.23	11.0	-3.78
	5210	42	ax (80MHz)	26T	MCS0	7.60	11.0	-3.40
Band 1/2A	5250	50	ax (160 MHz L)	26T	MCS0	4.83	11.0	-6.17
Ba 1//	5250	50	ax (160 MHz U)	26T	MCS0	5.71	11.0	-5.29
	5260	52	ax (20MHz)	26T	MCS0	7.49	11.0	-3.51
	5280	56	ax (20MHz)	26T	MCS0	5.83	11.0	-5.17
Band 2A	5320	64	ax (20MHz)	26T	MCS0	6.57	11.0	-4.43
Ban	5270	54	ax (40MHz)	26T	MCS0	7.28	11.0	-3.72
	5310	62	ax (40MHz)	26T	MCS0	6.75	11.0	-4.25
	5290	58	ax (80MHz)	26T	MCS0	7.35	11.0	-3.65
	5500	100	ax (20MHz)	26T	MCS0	5.99	11.0	-5.01
	5600	120	ax (20MHz)	26T	MCS0	5.54	11.0	-5.46
	5720	144	ax (20MHz)	26T	MCS0	6.49	11.0	-4.51
	5510	102	ax (40MHz)	26T	MCS0	7.24	11.0	-3.76
ပ္လ	5590	118	ax (40MHz)	26T	MCS0	6.30	11.0	-4.70
Band 2C	5710	142	ax (40MHz)	26T	MCS0	7.68	11.0	-3.32
B	5530	106	ax (80MHz)	26T	MCS0	6.12	11.0	-4.88
	5610	122	ax (80MHz)	26T	MCS0	6.74	11.0	-4.27
	5690	138	ax (80MHz)	26T	MCS0	6.83	11.0	-4.17
	5570	114	ax (160 MHz L)	26T	MCS0	4.80	11.0	-6.20
	5570	114	ax (160 MHz U)	26T	MCS0	4.68	11.0	-6.32


Table 7-91. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements SISO ANT1 (26 Tones)

FCC ID: PY7-95324M	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 118 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset		Page 118 01 274
© 2021 PCTEST				V 9.0 02/01/2019






Plot 7-125. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 36)

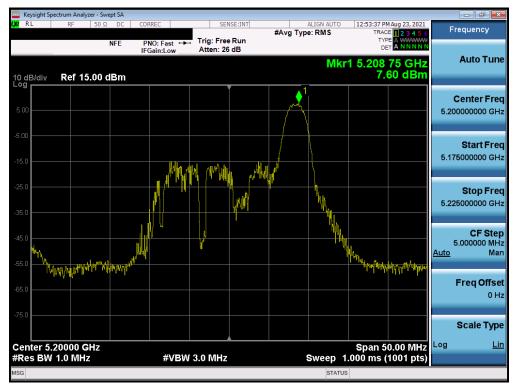

Plot 7-126. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 40)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 110 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 119 of 274



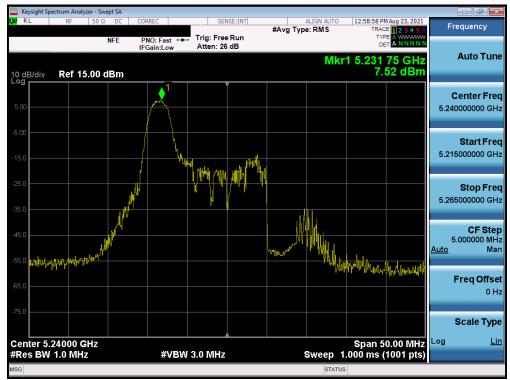

Plot 7-127. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 48)




Plot 7-128. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 38)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 120 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Fage 120 01 274





Plot 7-129. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 46)

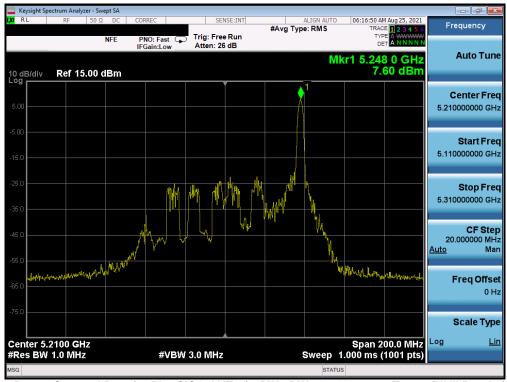

Plot 7-130. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 42)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 121 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 121 of 274





Plot 7-131. Power Spectral Density Plot SISO ANT1 (160MHz BW (L) 802.11ax - 26 Tones (UNII Band 1/2A) - Ch. 50)



Plot 7-132. Power Spectral Density Plot SISO ANT1 (160MHz BW (U) 802.11ax - 26 Tones (UNII Band 1/2A) - Ch. 50)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 122 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Fage 122 01 274

© 2021 PCTEST






Plot 7-133. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 52)



Plot 7-134. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 56)

FCC ID: PY7-95324M	PCTEST° Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 100 of 074
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset		Page 123 of 274
© 2021 PCTEST	•	•		V 9.0 02/01/2019



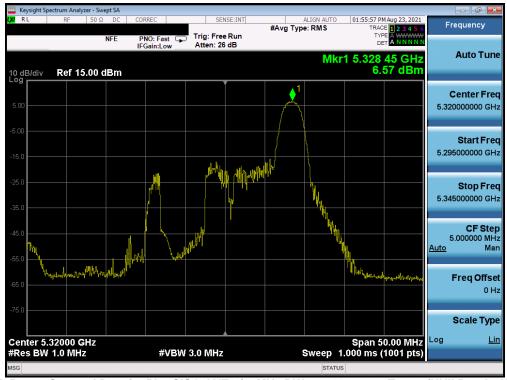

Plot 7-135. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 64)



Plot 7-136. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 54)

FCC ID: PY7-95324M	PCTEST*  Proud to be part of selement	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 124 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 124 01 274
© 2024 DOTECT			V 0 0 00/04/2040





Plot 7-137. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 62)



Plot 7-138. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 58)

FCC ID: PY7-95324M	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 405 of 074
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset		Page 125 of 274
© 2021 PCTEST				V 9.0 02/01/2019





Plot 7-139. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 100)



Plot 7-140. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 120)

FCC ID: PY7-95324M	PCTEST° Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 100 of 074
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset		Page 126 of 274
© 2021 PCTEST	•	•		V 9.0 02/01/2019





Plot 7-141. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 144)



Plot 7-142. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 102)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 127 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 127 01 274





Plot 7-143. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 118)



Plot 7-144. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 142)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 129 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 128 of 274





Plot 7-145. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 106)



Plot 7-146. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 122)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 120 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 129 of 274





Plot 7-147. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 138)



Plot 7-148. Power Spectral Density Plot SISO ANT1 (160MHz BW (L) 802.11ax - 26 Tones (UNII Band 2C) - Ch. 114)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 130 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Fage 130 01 274





Plot 7-149. Power Spectral Density Plot SISO ANT1 (160MHz BW (U) 802.11ax - 26 Tones (UNII Band 2C) - Ch. 114)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 121 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 131 of 274



	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density	Margin [dB]
	5745	149	ax (20MHz)	26T	MCS0	4.80	30.00	-25.20
•	5785	157	ax (20MHz)	26T	MCS0	3.95	30.00	-26.05
Jd 3	5825	165	ax (20MHz)	26T	MCS0	4.22	30.00	-25.79
Band	5755	151	ax (40MHz)	26T	MCS0	4.68	30.00	-25.33
	5795	159	ax (40MHz)	26T	MCS0	4.40	30.00	-25.60
	5775	155	ax (80MHz)	26T	MCS0	3.11	30.00	-26.89

Table 7-92. Band 3 Conducted Power Spectral Density Measurements SISO ANT1 (26 Tones)



Plot 7-150. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 149)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 122 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 132 of 274





Plot 7-151. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 157)



Plot 7-152. Power Spectral Density Plot SISO ANT1 (20 MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 165)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 133 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Fage 133 01 274






Plot 7-153. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 151)



Plot 7-154. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 159)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 124 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 134 of 274



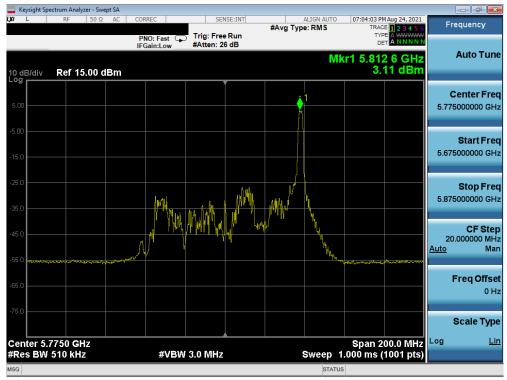

Plot 7-155. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 155)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 135 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 133 01 274




# SISO Antenna-1 Power Spectral Density Measurements (Full Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
	5180	36	ax (20MHz)	242T	MCS0	0.72	11.0	-10.28
	5200	40	ax (20MHz)	242T	MCS0	1.00	11.0	-10.00
Band 1	5240	48	ax (20MHz)	242T	MCS0	0.43	11.0	-10.57
Bar	5190	38	ax (40MHz)	484T	MCS0	-3.76	11.0	-14.76
	5230	46	ax (40MHz)	484T	MCS0	-1.94	11.0	-12.94
	5210	42	ax (80MHz)	996T	MCS0	-6.71	11.0	-17.71
Band 1/2A	5250	50	ax (160 MHz L)	996T	MCS0	-9.30	11.0	-20.30
Bai 1/2	5250	50	ax (160 MHz U)	996T	MCS0	-9.16	11.0	-20.16
	5260	52	ax (20MHz)	242T	MCS0	0.42	11.0	-10.58
	5280	56	ax (20MHz)	242T	MCS0	0.56	11.0	-10.44
Band 2A	5320	64	ax (20MHz)	242T	MCS0	0.64	11.0	-10.36
Bane	5270	54	ax (40MHz)	484T	MCS0	-2.02	11.0	-13.02
	5310	62	ax (40MHz)	484T	MCS0	-4.05	11.0	-15.05
	5290	58	ax (80MHz)	996T	MCS0	-6.60	11.0	-17.60
	5500	100	ax (20MHz)	242T	MCS0	0.54	11.0	-10.46
	5600	120	ax (20MHz)	242T	MCS0	0.29	11.0	-10.71
	5720	144	ax (20MHz)	242T	MCS0	0.50	11.0	-10.50
	5510	102	ax (40MHz)	484T	MCS0	-3.90	11.0	-14.90
ပ္သ	5590	118	ax (40MHz)	484T	MCS0	-1.89	11.0	-12.89
Band 2C	5710	142	ax (40MHz)	484T	MCS0	-2.08	11.0	-13.08
B	5530	106	ax (80MHz)	996T	MCS0	-7.07	11.0	-18.07
	5610	122	ax (80MHz)	996T	MCS0	-4.80	11.0	-15.80
	5690	138	ax (80MHz)	996T	MCS0	-4.65	11.0	-15.65
	5570	114	ax (160 MHz L)	996T	MCS0	-8.36	11.0	-19.36
	5570	114	ax (160 MHz U)	996T	MCS0	-8.52	11.0	-19.52


Table 7-93. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements SISO ANT1 (Full Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 136 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Fage 130 01 274



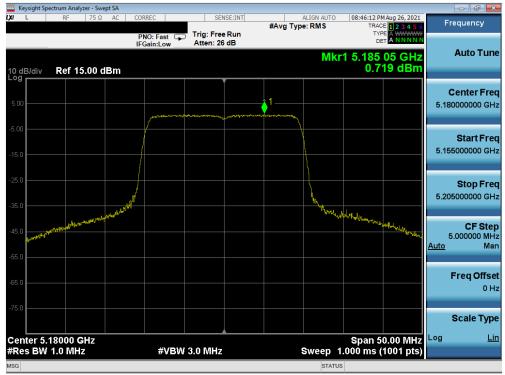


Plot 7-156. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 1) - Ch. 36)

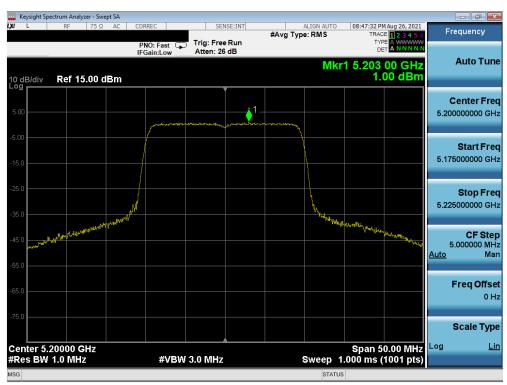


Plot 7-157. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 1) - Ch. 40)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 127 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 137 of 274



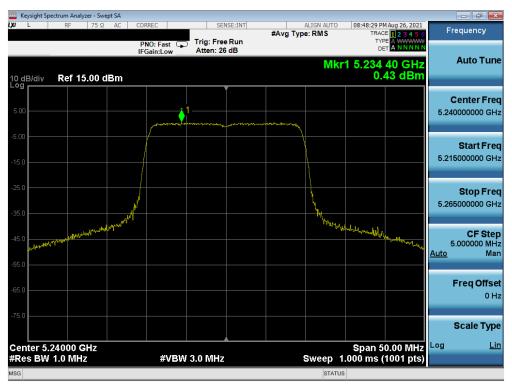


Plot 7-158. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 1) - Ch. 48)

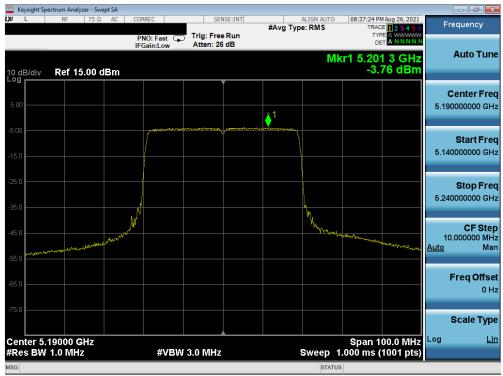


Plot 7-159. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - Full Tones (UNII Band 1) - Ch. 38)

FCC ID: PY7-95324M	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 120 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset		Page 138 of 274
© 2021 PCTEST				V 9.0 02/01/2019



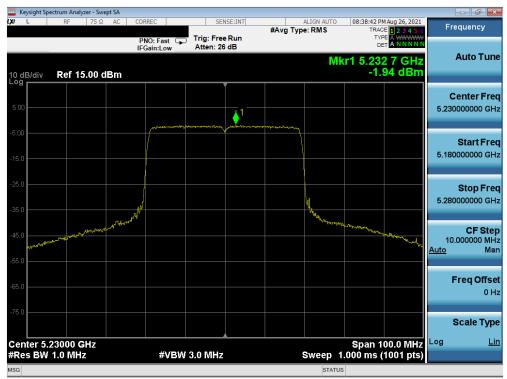

Plot 7-160. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - Full Tones (UNII Band 1) - Ch. 46)

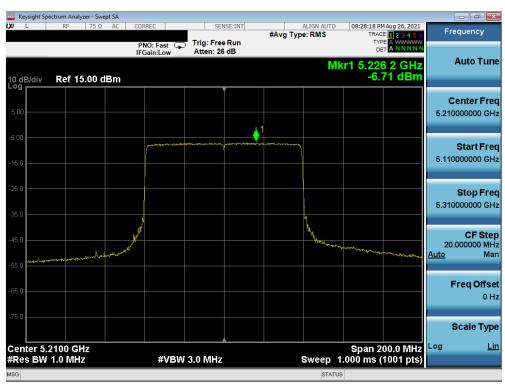

Plot 7-161. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - Full Tones (UNII Band 1) - Ch. 42)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 120 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 139 of 274






Plot 7-162. Power Spectral Density Plot SISO ANT1 (160MHz BW (L) 802.11ax - Full Tones (UNII Band 1/2A) - Ch. 50)




Plot 7-163. Power Spectral Density Plot SISO ANT1 (160MHz BW (U) 802.11ax - Full Tones (UNII Band 1/2A) - Ch. 50)

FCC ID: PY7-95324M	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 140 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset		Page 140 of 274
© 2021 PCTEST				V 9.0 02/01/2019



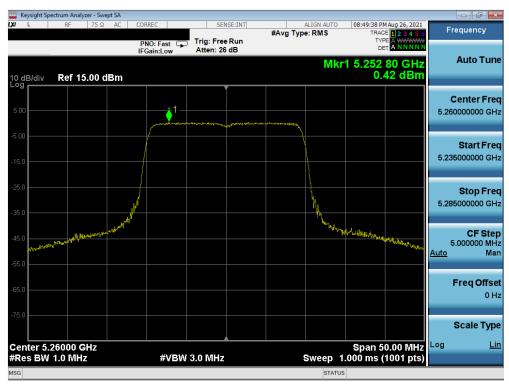


Plot 7-164. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 2A) - Ch. 52)

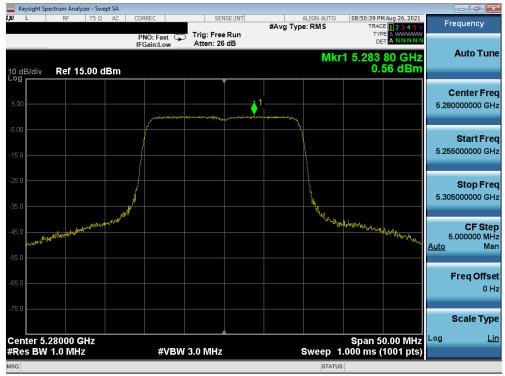

Plot 7-165. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 2A) - Ch. 56)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 141 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 141 01 274



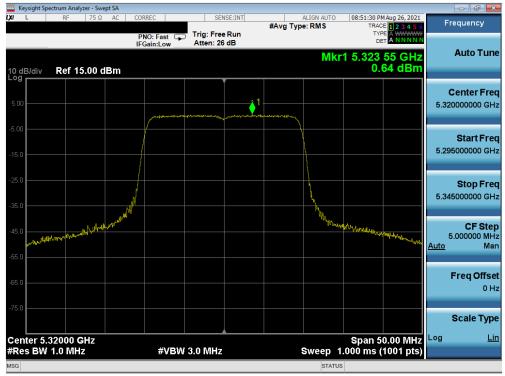


Plot 7-166. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 2A) - Ch. 64)




Plot 7-167. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - Full Tones (UNII Band 2A) - Ch. 54)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 142 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 142 01 274



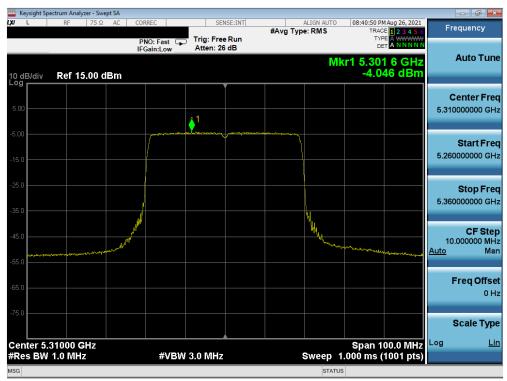


Plot 7-168. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - Full Tones (UNII Band 2A) - Ch. 62)

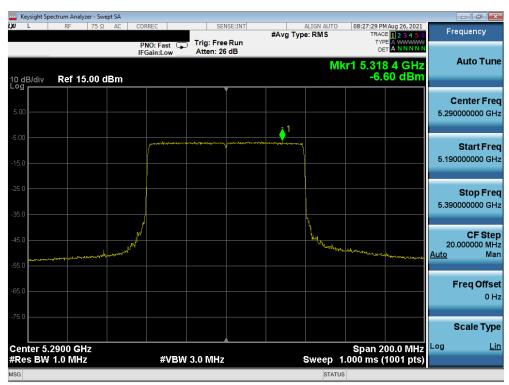


Plot 7-169. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - Full Tones (UNII Band 2A) - Ch. 58)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 142 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 143 of 274



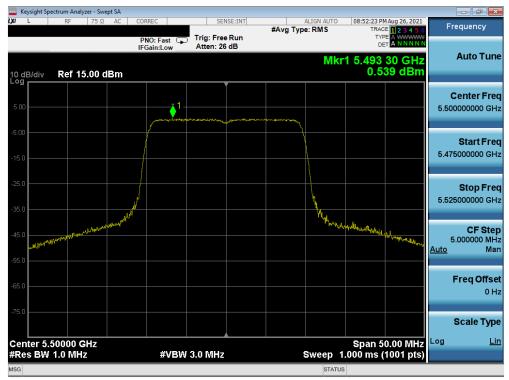


Plot 7-170. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 2C) - Ch. 100)

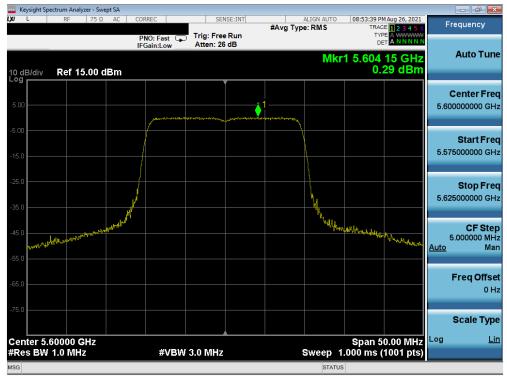


Plot 7-171. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 2C) - Ch. 120)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 144 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 144 of 274



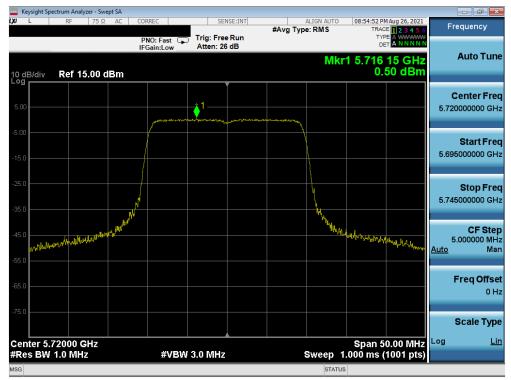


Plot 7-172. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 2C) - Ch. 144)

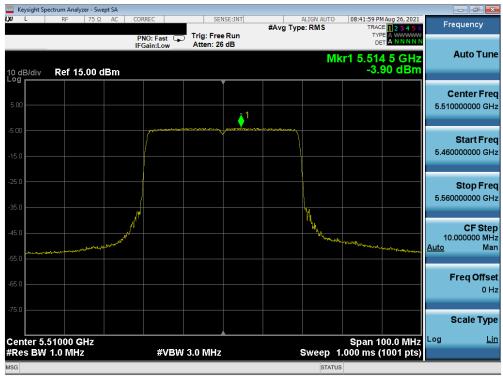


Plot 7-173. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - Full Tones (UNII Band 2C) - Ch. 102)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 145 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 145 of 274



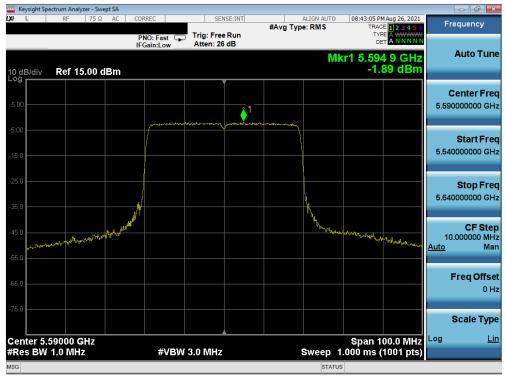


Plot 7-174. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - Full Tones (UNII Band 2C) - Ch. 118)

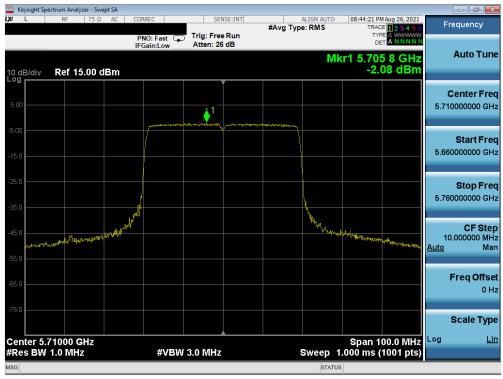


Plot 7-175. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - Full Tones (UNII Band 2C) - Ch. 142)

FCC ID: PY7-95324M	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	NY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 146 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset		Page 146 of 274
© 2021 PCTEST	•			V 9.0 02/01/2019



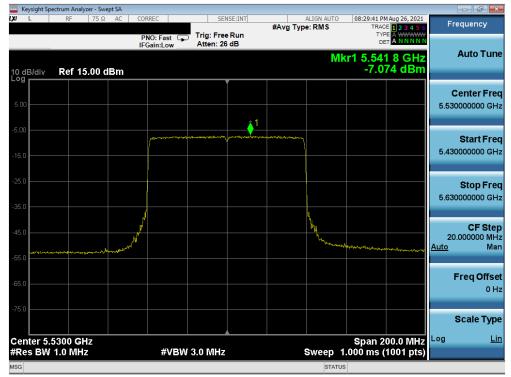


Plot 7-176. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - Full Tones (UNII Band 2C) - Ch. 106)

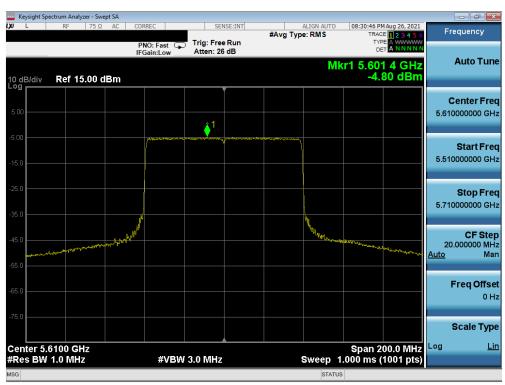

Plot 7-177. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - Full Tones (UNII Band 2C) - Ch. 122)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 147 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 147 of 274



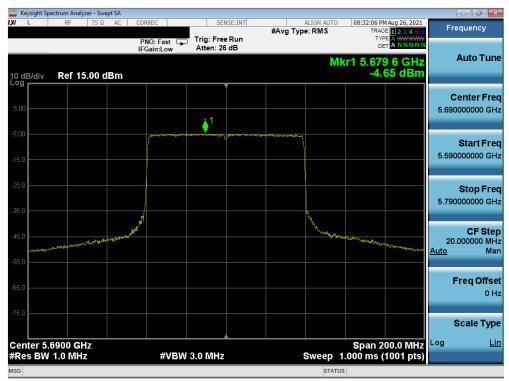

Plot 7-178. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - Full Tones (UNII Band 2C) - Ch. 138)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 149 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 148 of 274





Plot 7-179. Power Spectral Density Plot SISO ANT1 (160MHz BW (L) 802.11ax - Full Tones (UNII Band 2C) - Ch. 114)



Plot 7-180. Power Spectral Density Plot SISO ANT1 (160MHz BW (U) 802.11ax - Full Tones (UNII Band 2C) - Ch. 114)

FCC ID: PY7-95324M	PCTEST° Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 140 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset		Page 149 of 274
© 2021 PCTEST	•	•		V 9.0 02/01/2019




	Frequency [MHz]	Channel No.	802.11 <b>M</b> ode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density	Margin [dB]
	5745	149	ax (20MHz)	242T	MCS0	-4.32	30.00	-34.32
	5785	157	ax (20MHz)	242T	MCS0	-1.87	30.00	-31.87
pq 3	5825	165	ax (20MHz)	242T	MCS0	-2.56	30.00	-32.56
Band	5755	151	ax (40MHz)	484T	MCS0	-6.77	30.00	-36.77
	5795	159	ax (40MHz)	484T	MCS0	-4.97	30.00	-34.97
	5775	155	ax (80MHz)	996T	MCS0	-9.94	30.00	-39.94


Table 7-94. Band 3 Conducted Power Spectral Density Measurements SISO ANT1 (Full Tones)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 150 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 150 of 274



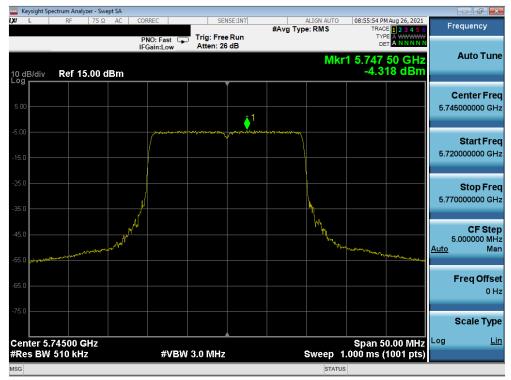


Plot 7-181. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 3) - Ch. 149)

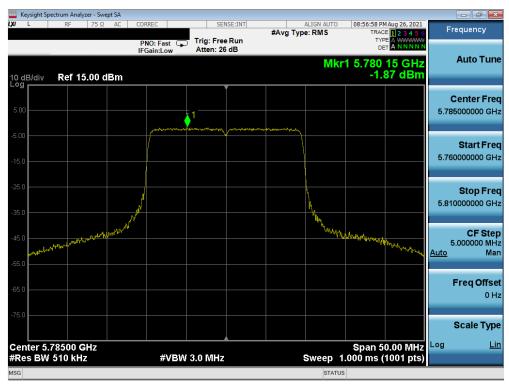


Plot 7-182. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 3) - Ch. 157)

FCC ID: PY7-95324M	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 454 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset		Page 151 of 274
© 2021 PCTEST				V 9.0 02/01/2019



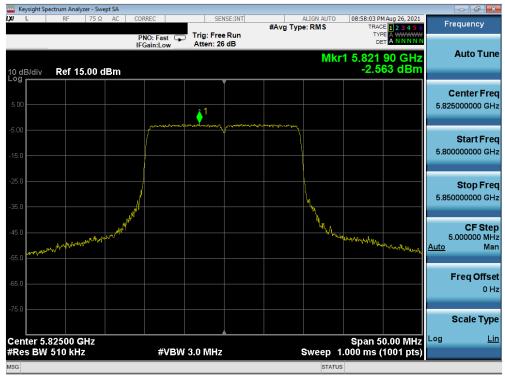


Plot 7-183. Power Spectral Density Plot SISO ANT1 (20 MHz BW 802.11ax - Full Tones (UNII Band 3) - Ch. 165)

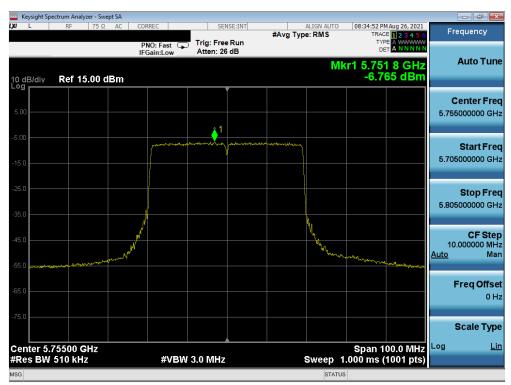


Plot 7-184. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - Full Tones (UNII Band 3) - Ch. 151)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 152 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 152 of 274



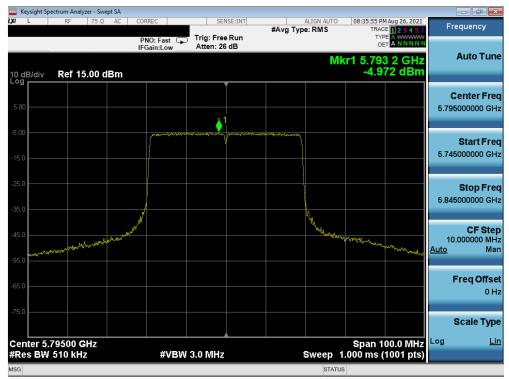

Plot 7-185. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - Full Tones (UNII Band 3) - Ch. 159)

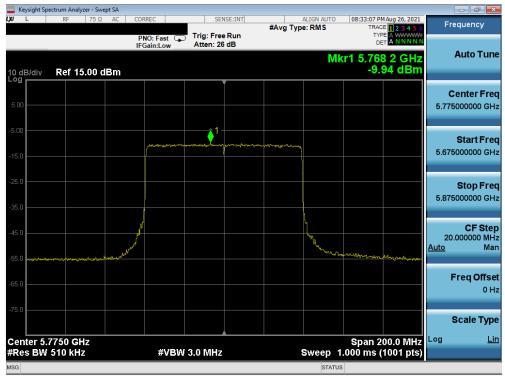

Plot 7-186. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - Full Tones (UNII Band 3) - Ch. 155)

FCC ID: PY7-95324M	Proud to be part of @ element	MEASUREMENT REPORT (CERTIFICATION) SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 152 of 274
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset	Page 153 of 274



## SISO Antenna-2 Power Spectral Density Measurements (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	26T	MCS0	3.99	11.0	-7.01
	5200	40	ax (20MHz)	26T	MCS0	4.10	11.0	-6.90
	5240	48	ax (20MHz)	26T	MCS0	3.92	11.0	-7.08
	5190	38	ax (40MHz)	26T	MCS0	6.13	11.0	-4.87
	5230	46	ax (40MHz)	26T	MCS0	6.23	11.0	-4.77
	5210	42	ax (80MHz)	26T	MCS0	5.14	11.0	-5.86
Band 1/2A	5250	50	ax (160 MHz L)	26T	MCS0	3.91	11.0	-7.09
	5250	50	ax (160 MHz U)	26T	MCS0	4.53	11.0	-6.47
Band 2A	5260	52	ax (20MHz)	26T	MCS0	5.36	11.0	-5.64
	5280	56	ax (20MHz)	26T	MCS0	4.36	11.0	-6.64
	5320	64	ax (20MHz)	26T	MCS0	5.36	11.0	-5.64
	5270	54	ax (40MHz)	26T	MCS0	5.58	11.0	-5.42
_	5310	62	ax (40MHz)	26T	MCS0	5.37	11.0	-5.63
	5290	58	ax (80MHz)	26T	MCS0	5.27	11.0	-5.73
	5500	100	ax (20MHz)	26T	MCS0	5.43	11.0	-5.57
Band 2C	5600	120	ax (20MHz)	26T	MCS0	5.18	11.0	-5.82
	5720	144	ax (20MHz)	26T	MCS0	5.29	11.0	-5.71
	5510	102	ax (40MHz)	26T	MCS0	5.64	11.0	-5.36
	5590	118	ax (40MHz)	26T	MCS0	5.29	11.0	-5.71
	5710	142	ax (40MHz)	26T	MCS0	5.49	11.0	-5.51
	5530	106	ax (80MHz)	26T	MCS0	5.96	11.0	-5.04
	5610	122	ax (80MHz)	26T	MCS0	4.38	11.0	-6.62
	5690	138	ax (80MHz)	26T	MCS0	3.80	11.0	-7.20
	5570	114	ax (160 MHz L)	26T	MCS0	3.90	11.0	-7.11
	5570	114	ax (160 MHz U)	26T	MCS0	3.73	11.0	-7.27

Table 7-95. Conducted Power Spectral Density Measurements SISO ANT2 (26 Tones)

FCC ID: PY7-95324M	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 154 of 274	
1M2108040087-09.PY7	8/2/2021 - 9/10/2021	Portable Handset		
© 2021 PCTEST				V 9.0 02/01/2019