



FCC CFR47 PART 22 SUBPART H  
FCC CFR47 PART 24 SUBPART E

CERTIFICATION TEST REPORT

FOR

**GSM/WCDMA + BLUETOOTH, DTS/UNII a/b/g/n/ac, ANT+ and NFC**

**FCC ID: PY7-PM0794**

**REPORT NUMBER: R10707861-RF1**

**ISSUE DATE: 2015-04-22**

*Prepared for*

**SONY MOBILE COMMUNICATIONS, INC.  
1-8-15 KONAN, MINATO-KU, TOKYO, 108-0075 JAPAN**

*Prepared by*

**UL LLC  
12 LABORATORY DR.  
RESEARCH TRIANGLE PARK, NC 27709 USA  
TEL: (919) 549-1400**

**NVLAP®**

**NVLAP LAB CODE 200246-0**

**Revision History**

Issue			
Rev.	Date	Revisions	Revised By
-	2015-04-16	Initial Release	Jeff Moser
1	2015-04-22	Removed model designators.	Jeff Moser

## TABLE OF CONTENTS

<b>1.</b>	<b>ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2.</b>	<b>TEST METHODOLOGY .....</b>	<b>6</b>
<b>3.</b>	<b>FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4.</b>	<b>CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
<b>4.1.</b>	<i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>6</i>
<b>4.2.</b>	<i>SAMPLE CALCULATION .....</i>	<i>6</i>
<b>4.3.</b>	<i>MEASUREMENT UNCERTAINTY .....</i>	<i>7</i>
<b>5.</b>	<b>EQUIPMENT UNDER TEST .....</b>	<b>8</b>
<b>5.1.</b>	<i>DESCRIPTION OF EUT .....</i>	<i>8</i>
<b>5.2.</b>	<i>MAXIMUM OUTPUT POWER .....</i>	<i>8</i>
<b>5.3.</b>	<i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>9</i>
<b>5.4.</b>	<i>DESCRIPTION OF TEST SETUP .....</i>	<i>9</i>
<b>6.</b>	<b>TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>13</b>
<b>7.</b>	<b>Summary Table .....</b>	<b>16</b>
<b>8.</b>	<b>RF POWER OUTPUT VERIFICATION .....</b>	<b>17</b>
<b>8.1.</b>	<i>GSM/GPRS/EDGE .....</i>	<i>17</i>
<b>8.1.1.</b>	<i>GSM OUTPUT POWER RESULT .....</i>	<i>18</i>
<b>8.2.</b>	<i>UMTS REL 99 .....</i>	<i>20</i>
<b>8.2.1.</b>	<i>UMTS REL 99 OUTPUT POWER RESULT .....</i>	<i>20</i>
<b>8.3.</b>	<i>UMTS HSDPA .....</i>	<i>21</i>
<b>8.3.1.</b>	<i>UMTS HSDPA OUTPUT POWER RESULT .....</i>	<i>21</i>
<b>8.4.</b>	<i>UMTS HSUPA .....</i>	<i>22</i>
<b>8.4.1.</b>	<i>UMTS HSUPA OUTPUT POWER RESULT .....</i>	<i>23</i>
<b>9.</b>	<b>PEAK TO AVERAGE RATIO .....</b>	<b>24</b>
<b>9.1.</b>	<i>CONDUCTED PEAK TO AVERAGE RESULT .....</i>	<i>25</i>
<b>10.</b>	<b>LIMITS AND CONDUCTED RESULTS .....</b>	<b>28</b>
<b>10.1.</b>	<i>OCCUPIED BANDWIDTH .....</i>	<i>28</i>
<b>10.1.1.</b>	<i>OCCUPIED BANDWIDTH RESULTS .....</i>	<i>29</i>
<b>10.1.2.</b>	<i>OCCUPIED BANDWIDTH PLOTS .....</i>	<i>30</i>
<b>10.2.</b>	<i>BAND EDGE EMISSIONS .....</i>	<i>37</i>
<b>10.2.1.</b>	<i>BAND EDGE PLOTS .....</i>	<i>38</i>

10.3.	<i>OUT OF BAND EMISSIONS</i> .....	42
10.3.1.	OUT OF BAND EMISSIONS RESULT .....	43
10.3.2.	OUT OF BAND EMISSIONS PLOTS.....	44
10.4.	<i>FREQUENCY STABILITY</i> .....	50
10.4.1.	FREQUENCY STABILITY RESULTS.....	51
<b>11.</b>	<b>RADIATED TEST RESULTS</b> .....	<b>53</b>
11.1.	<i>RADIATED POWER (ERP &amp; EIRP)</i> .....	53
11.1.1.	ERP/EIRP Results.....	54
11.1.2.	ERP/EIRP PLOTS.....	55
11.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i> .....	61
11.2.1.	SPURIOUS RADIATION PLOTS.....	63
<b>12.</b>	<b>SETUP PHOTOS</b> .....	<b>69</b>

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SONY MOBILE COMMUNICATION, INC.

**EUT DESCRIPTION:** GSM/WCDMA + BLUETOOTH, DTS/UNII a/b/g/n/ac, ANT+ and NFC

**SERIAL NUMBER:** SN 00440245-427882-3 and SN 00440245-396119-9

**DATE TESTED:** 2015-03-13 THROUGH 2015-04-13

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H and 24E	PASS

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL LLC based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released  
For UL LLC By:

Choon Sian Ooi  
EMC Project Lead  
UL – Consumer Technology Division

Prepared By:

Jeff Moser  
EMC Program Manager  
UL – Consumer Technology Division

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22 and FCC CFR Part 24.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 12 Laboratory Dr., Research Triangle Park, NC 27709, USA.

12 Laboratory Dr., RTP, NC 27709
<input type="checkbox"/> Chamber A
<input checked="" type="checkbox"/> Chamber C

The onsite chambers (A & C) are covered under Industry Canada company address code 2180C with site numbers 2180C -1 through 2180C-2, respectively.

UL LLC (RTP) is accredited by NVLAP, Laboratory Code 200246-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2002460.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

EIRP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss( between the SG and substitution antenna) + Substitution Antenna Factor (dBi)

ERP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss( between the SG and substitution antenna)

(Path loss = Signal generator output – PSA reading with substitution antenna)

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test	Uncertainty
Conducted Emissions (0.150-30MHz)	+/- 2.37 dB
Radiated Emissions (30-1000 MHz)	+/- 6.04 dB (3m)
Radiated Emissions (1-40 GHz)	+/- 6.81 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA Device with WLAN/Bluetooth/NFC/ANT+ capability that is manufactured by Sony.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum average conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation	Conducted		Radiated	
			Peak	AVG(dBm)	AVG(mW)	AVG(dBm)
GSM850	824~849	GMSK	32.2	1659.59		
	824~849	GPRS	32.2	1659.59	26.77	475.34
	824~849	EGPRS	26.7	467.74	21.51	141.58
GSM1900	1850~1910	GMSK	29.9	977.24		
	1850~1910	GPRS	29.9	977.24	28.39	690.24
	1850~1910	EGPRS	25.9	389.05	25.08	322.11
Band 5	824~849	REL99	24.6	288.40	19.08	80.91
	824~849	HSDPA	22.8	190.55	17.23	52.84
	824~849	HSUPA	22.8	190.55		

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the GSM 850, GSM 1900 and WCDMA Band 5 with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
GSM850, 824~849MHz	-5.6
GSM1900, 1850~1910MHz	-1.5
Band 5, 824~849MHz	-5.6

### 5.4. DESCRIPTION OF TEST SETUP

#### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Sony	EP-880	3514W 01 S08499	

#### I/O CABLES (CONDUCTED SETUP)


I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA

**I/O CABLES (RADIATED SETUP)**

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes


**TEST SETUP**

The EUT is continuously communicated to the call box during the tests.

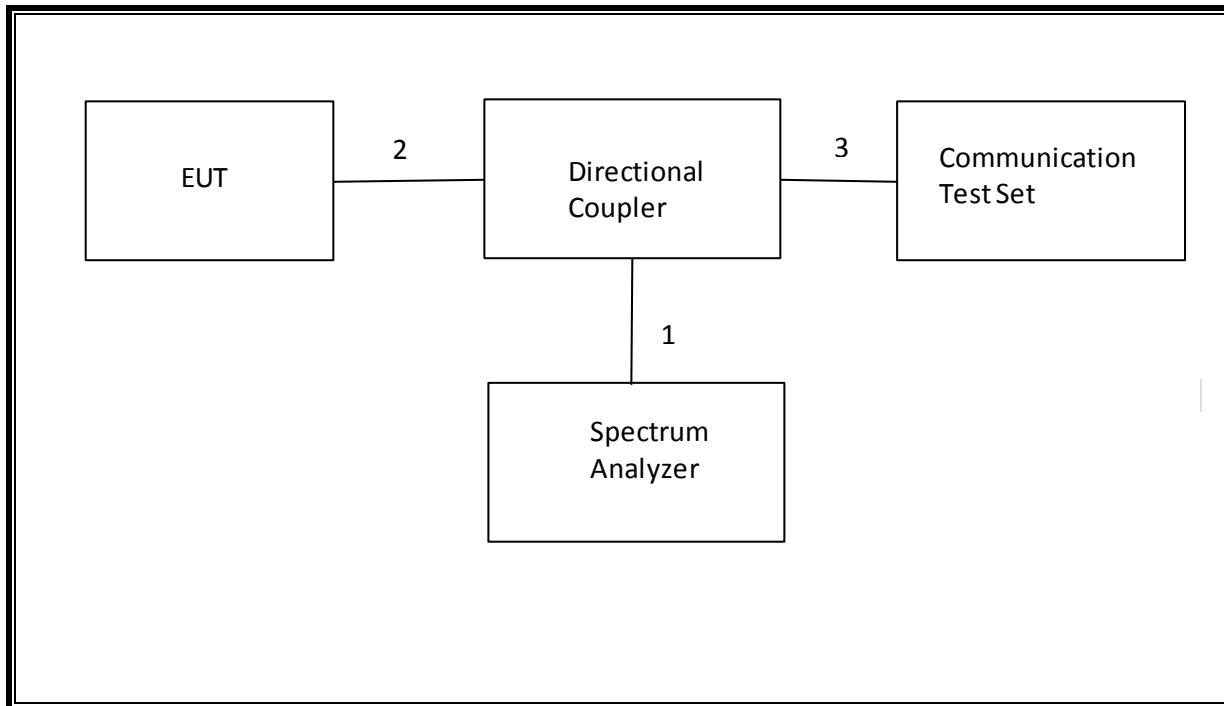
**SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)**

**SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)**

SPURIOUS

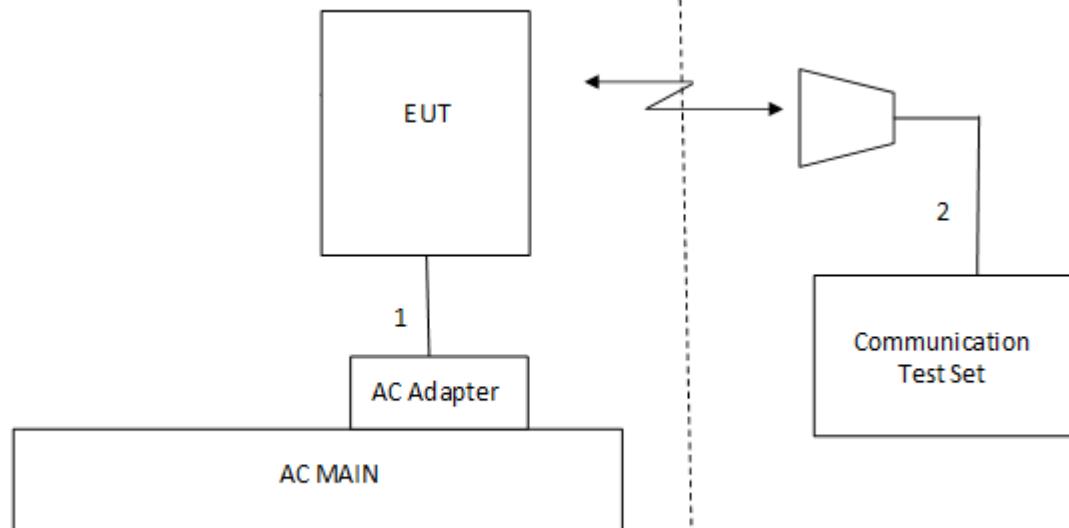

FUNDAMENTAL

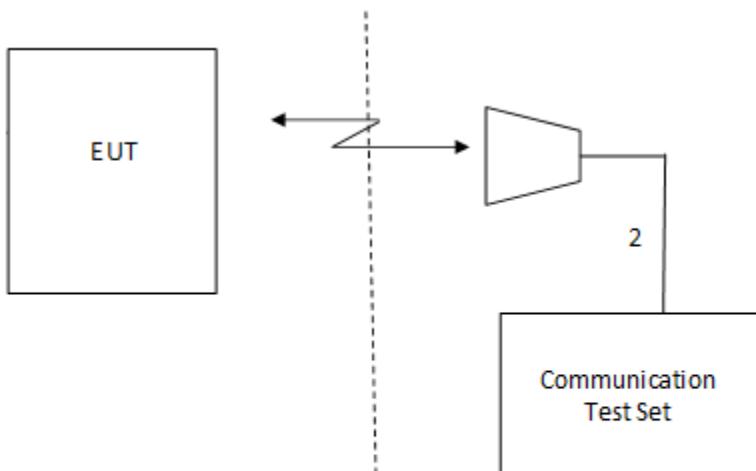

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

### Wireless Conducted Measurement Equipment

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
	<b>Common Equipment</b>				
SA0020	Spectrum Analyzer	Agilent Technologies	E4446	2014-06-12	2015-06-30
SA0022	Network Analyzer	Agilent Technologies	8722ES	2015-03-19	2016-03-31
T374	Wideband Radio Communications Tester	Rohde and Schwartz	CMW500	2014-10-13	2015-10-31
MM0150	Digital Multimeter, 4½ Digit (True RMS AC, AC+DC measurement)	Agilent	U1252A	2014-09-04	2016-09-30
MM0151	Digital Multimeter, 4½ Digit (True RMS AC, AC+DC measurement)	Agilent	U1252A	2014-09-04	2016-09-30
HI0069	Temp/Humid/Pressure Meter	Cole-Parmer	99760-00	2014-06-27	2015-06-30
-	Directional Coupler	Mini Circuits	ZUDC10-183+	Cal on Demand	Cal on Demand

## Radiated Disturbance Emissions (E-field) – Chamber C

<b>Equip. ID</b>	<b>Description</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Last Cal.</b>	<b>Next Cal.</b>
	<b>30-1000 MHz Range</b>				
AT0066	Hybrid Broadband Antenna	Sunol Sciences Corp.	JB1	2014-07-10	2015-07-31
	<b>1-18 GHz</b>				
AT0062	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2014-07-22	2015-07-31
	<b>Substitution Antenna</b>				
AT0069 (Substitution Antenna)	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2015-02-17	2016-02-29
AT0016 (Substitution Antenna)	Dipole Antenna, 400-1000MHz	EMCO	3121C-DB4	2014-04-17	2015-04-30
	<b>Tuned Dipole Set</b>				
AT0013- AT0016	Four Dipole Antenna Set, 30 to 1000 MHz	EMCO	3121C-DB-1, -2, -3, -4	2014-04-17	2015-04-30
	<b>Gain-Loss Chains</b>				
SAC_G (Hybrid) 30-1000MHz	Gain-Loss string for Hyrbid antenna at 3m	Various	Various	2015-01-26	2016-01-31
SAC_G (BOM) 1-18GHz	Gain-Loss string for Hyrbid antenna at 3m	Various	Various	2015-01-26	2016-01-31
	<b>Receiver &amp; Software</b>				
SA0018	Spectrum Analyzer	Agilent	N9030A	2014-06-24	2015-06-30
SOFTEMI	EMI Software	UL	Version 9.5	NA	NA
T918	Wideband Radio Communications Tester	Rohde and Schwartz	CMW500	2014-12-30	2015-12-31
	<b>Additional Equipment used</b>				
HI0069	Temp/Humid/Pressure Meter	Cole-Parmer	99760-00	2014-06-27	2015-06-30

Equip. ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
SIG001 (Substitution Signal Generator)	Signal Generator, 100kHz-6GHz	Agilent	N5181A	2015-02-04	2016-02-04
HPF009	1GHz High-pass Filter	Micro-Tronics	HPM17672	2015-01-28	2016-01-31

## 7. Summary Table

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Note
2.1049	N/A	Occupied Band width (99%)	N/A		Pass	4.14 MHz
22.917(a) 24.238(a) 27.53(g) 90.691	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm	Conducted	Pass	-23.33 dBm/ -15.84 dBm
2.1046	N/A	Conducted output power	N/A		Pass	32.2 dBm
22.355 24.235 27.54 90.213	RSS-132(4.3) RSS-133(6.3) RSS-139(6.3) RSS-199(4.3)	Frequency Stability	2.5PPM		Pass	0.019 ppm
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38.5dBm		Pass	26.77 dBm
24.232(c ) 27.50(h)(2)	RSS-133(6.4) RSS-199(4.4)	Equivalent Isotropic Radiated Power	33dBm	Radiated	Pass	28.39 dBm
22.917(a) 24.238(a) 27.53(g)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Radiated Spurious Emission	-13dBm		Pass	-40.5 dBm

## 8. RF POWER OUTPUT VERIFICATION

### 8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press Connection control to choose the different menus

Press RESET > choose all to reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM+GPRS or GSM+EGPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850/900

> 30 dBm for GPRS1800/1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0> 4 dB

Slot Config > Unchanged (if already set under MS Signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3 (Default)

Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)

Bit Stream > 2E9-1PSR Bit Pattern

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal On to turn on the signal and change settings

### 8.1.1. GSM OUTPUT POWER RESULT

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)
GSM (Voice)	CS1	1	128	824.2	32.0
			190	836.6	32.2
			251	848.8	32.1
GPRS (GMSK)	CS1	1	128	824.2	32.0
			190	836.6	32.2
			251	848.8	32.1
		2	128	824.2	31.7
			190	836.6	31.8
			251	848.8	31.3
		3	128	824.2	29.3
			190	836.6	29.4
			251	848.8	29.4
		4	128	824.2	27.9
			190	836.6	28.1
			251	848.8	28.1
EGPRS (8PSK)	MCS5	1	128	824.2	26.6
			190	836.6	26.7
			251	848.8	26.6
		2	128	824.2	25.4
			190	836.6	25.6
			251	848.8	25.4
		3	128	824.2	23.2
			190	836.6	23.3
			251	848.8	23.2
		4	128	824.2	22.6
			190	836.6	22.8
			251	848.8	22.7

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)
GSM (Voice)	CS1	1	512	1850.2	29.6
			661	1880.0	29.8
			810	1909.8	29.9
GPRS (GMSK)	CS1	1	512	1850.2	29.6
			661	1880.0	29.8
			810	1909.8	29.9
		2	512	1850.2	27.8
			661	1880.0	28.1
			810	1909.8	28.1
		3	512	1850.2	26.7
			661	1880.0	26.8
			810	1909.8	26.9
		4	512	1850.2	25.3
			661	1880.0	25.6
			810	1909.8	25.6
EGPRS (8PSK)	MCS5	1	512	1850.2	25.8
			661	1880.0	25.7
			810	1909.8	25.9
		2	512	1850.2	24.5
			661	1880.0	24.4
			810	1909.8	24.5
		3	512	1850.2	22.2
			661	1880.0	22.0
			810	1909.8	22.1
		4	512	1850.2	21.3
			661	1880.0	21.2
			810	1909.8	21.4

## 8.2. UMTS REL 99

### TEST PROCEDURE

The following summary of these settings are illustrated below:

	Mode	Rel99
	Subtest	-
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	$\beta_c$	Not Applicable
	$\beta_d$	Not Applicable
	$\beta_{ec}$	Not Applicable
	$\beta_c/\beta_d$	8/15
	$\beta_{hs}$	Not Applicable
	$\beta_{ed}$	Not Applicable

### 8.2.1. UMTS REL 99 OUTPUT POWER RESULT

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Rel 99 (RMC, 12.2 kbps)	4132	826.4	0	24.5
		4183	836.6	0	24.5
		4233	846.6	0	24.6

### 8.3. UMTS HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	Rel5 HSDPA			
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	$\beta_c$	2/15	12/15	15/15	15/15
	$\beta_d$	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	$\beta_c/\beta_d$	2/15	12/15	15/8	15/4
	$\beta_{hs}$	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D <sub>ACK</sub>	8			
	D <sub>NAK</sub>	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
$A_{hs} = \beta_{hs}/\beta_c$		30/15			

#### 8.3.1. UMTS HSDPA OUTPUT POWER RESULT

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V (HSDPA)	Subtest 1	4132	826.4	0	22.8
		4183	836.6	0	22.8
		4233	846.6	0	22.8
	Subtest 2	4132	826.4	0	22.8
		4183	836.6	0	22.8
		4233	846.6	0	22.8
	Subtest 3	4132	826.4	0.5	22.3
		4183	836.6	0.5	22.3
		4233	846.6	0.5	22.4
	Subtest 4	4132	826.4	0.5	22.3
		4183	836.6	0.5	22.3
		4233	846.6	0.5	22.4

## 8.4. UMTS HSUPA

### TEST PROCEDURE

The following summary of these settings are illustrated below: (ETSI TS 134.121-1 Table C.11.1)

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	P-CPICH (dB)	-10				
	P-CCPCH (dB)	-12				
	SCH (dB)	-12				
	PICH(dB)	-15				
	DPCCH (dB)	-9				
	HS-SCCH_1 (dB)	-8				
	HS-PDSCH (dB)	-3				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	Bc	11/15	6/15	15/15	2/15	15/15
	Bd	15/15	15/15	9/15	15/15	15/15
HSDPA Specific Settings	Bec	209/225	12/15	30/15	2/15	5/15
	$\beta_c/\beta_d$	11/15	6/15	15/9	2/15	15/15
	Bhs	22/15	12/15	30/15	4/15	30/15
	$\beta_{ed}$ (note1)	1309/225	94/75	47/15	56/75	134/15
	MPR	0	2	1	2	0
	DACK	8				
	DNAK	8				
HSUPA Specific Settings	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
HSUPA Specific Settings	AG Index	20	12	15	17	21
	Reference E-TFCIs	5	5	2	5	5
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs			E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		
				E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		

Note1:  $\beta_{ed}$  cannot be set directly, it is set by Absolute Grant Value.

#### 8.4.1. UMTS HSUPA OUTPUT POWER RESULT

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V (HSUPA)	Subtest 1	4132	826.4	0	22.8
		4183	836.6	0	22.7
		4233	846.6	0	22.8
	Subtest 2	4132	826.4	2	21.2
		4183	836.6	2	21.2
		4233	846.6	2	21.2
	Subtest 3	4132	826.4	1	21.1
		4183	836.6	1	21.1
		4233	846.6	1	21.2
	Subtest 4	4132	826.4	2	21.2
		4183	836.6	2	21.2
		4233	846.6	2	21.2
	Subtest 5	4132	826.4	0	22.8
		4183	836.6	0	22.7
		4233	846.6	0	22.8

## 9. PEAK TO AVERAGE RATIO

### Test Procedure


Per KDB 971168 D01 Power Meas License Digital Systems v02r01


### Test Spec


In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

## 9.1. CONDUCTED PEAK TO AVERAGE RESULT

### GSM

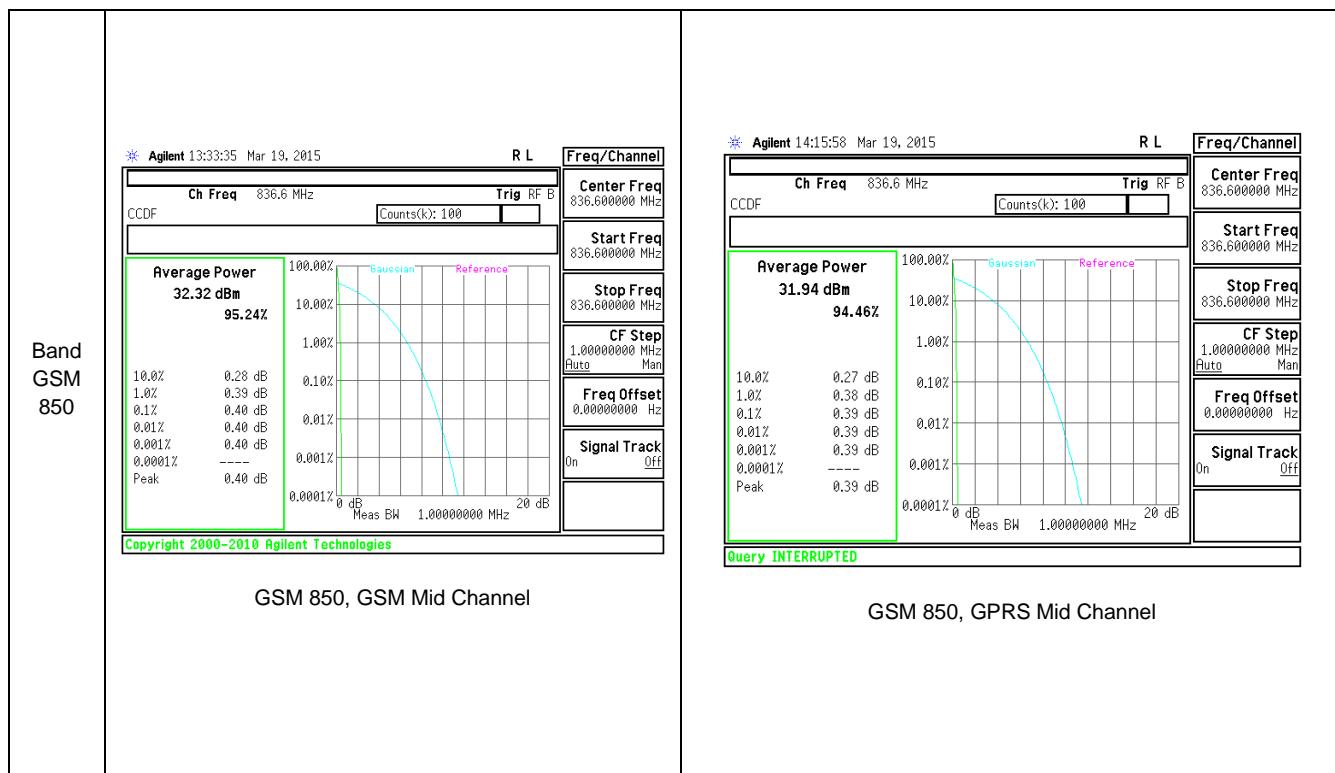

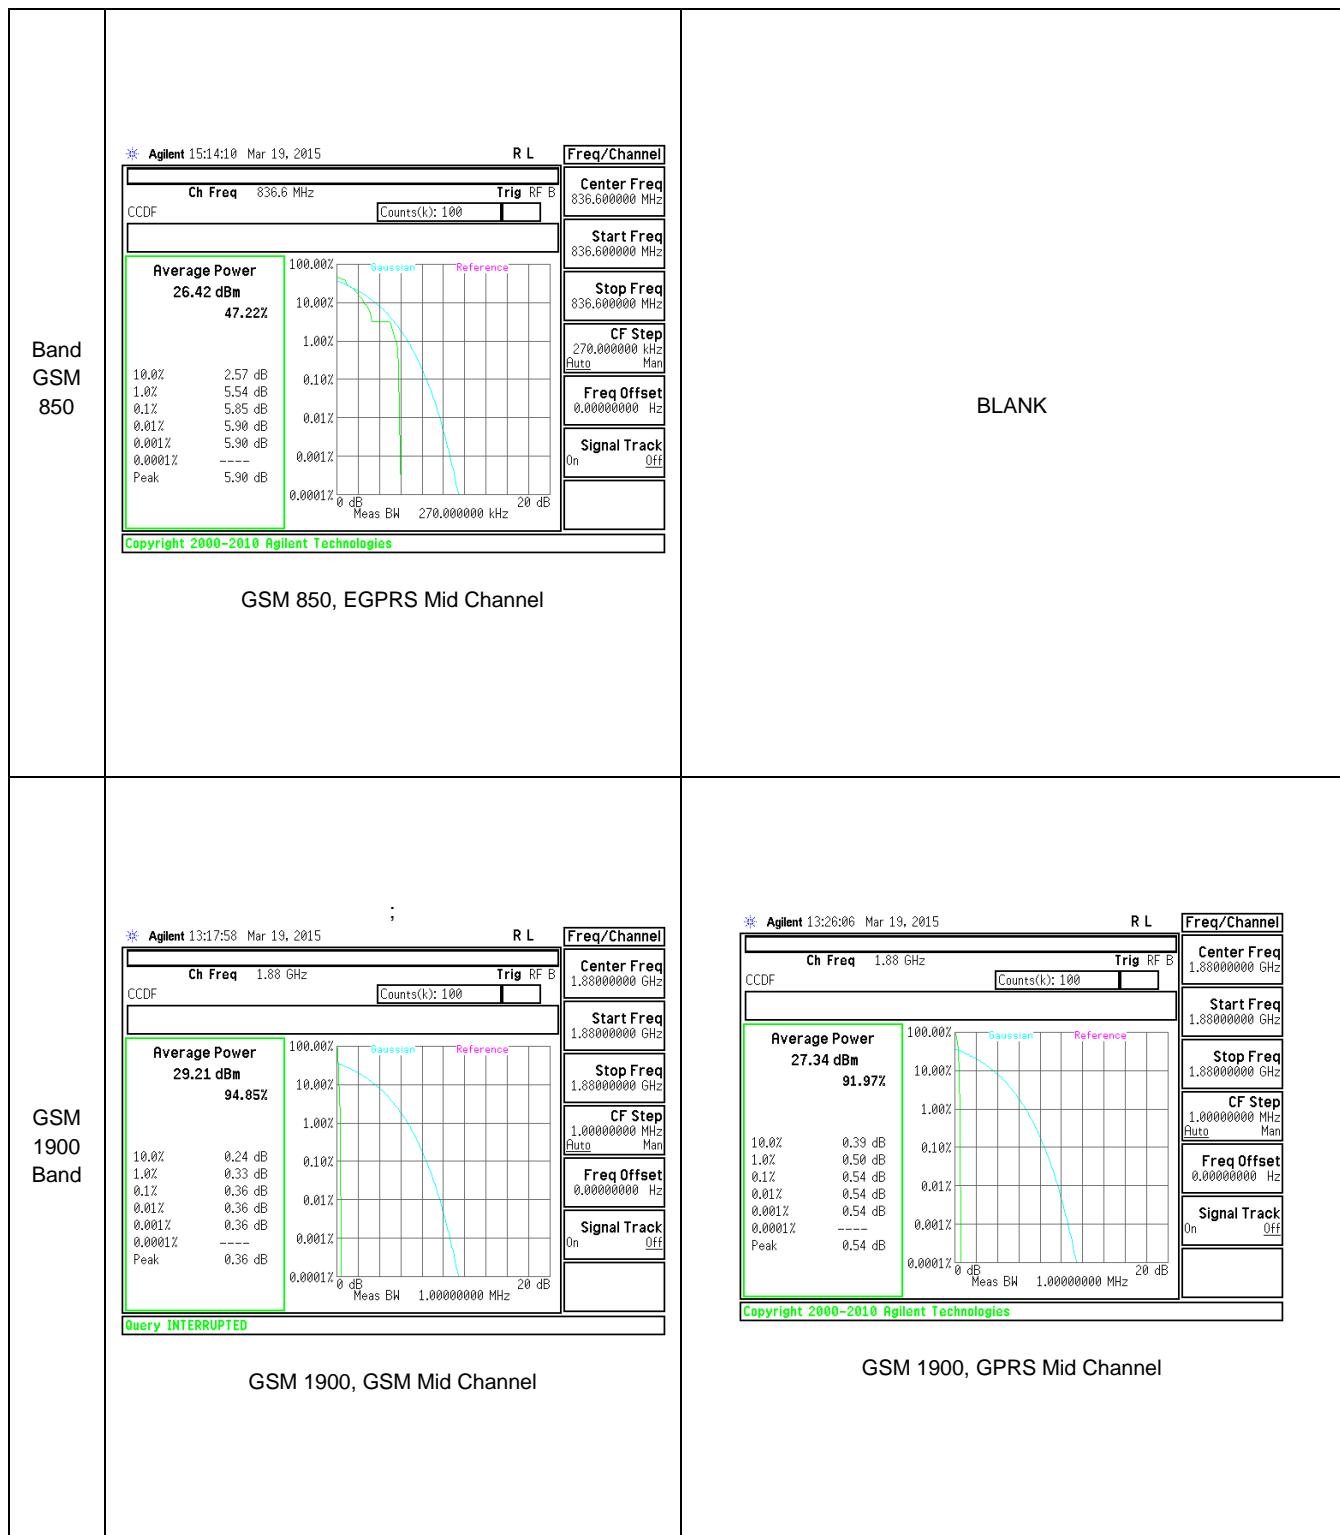

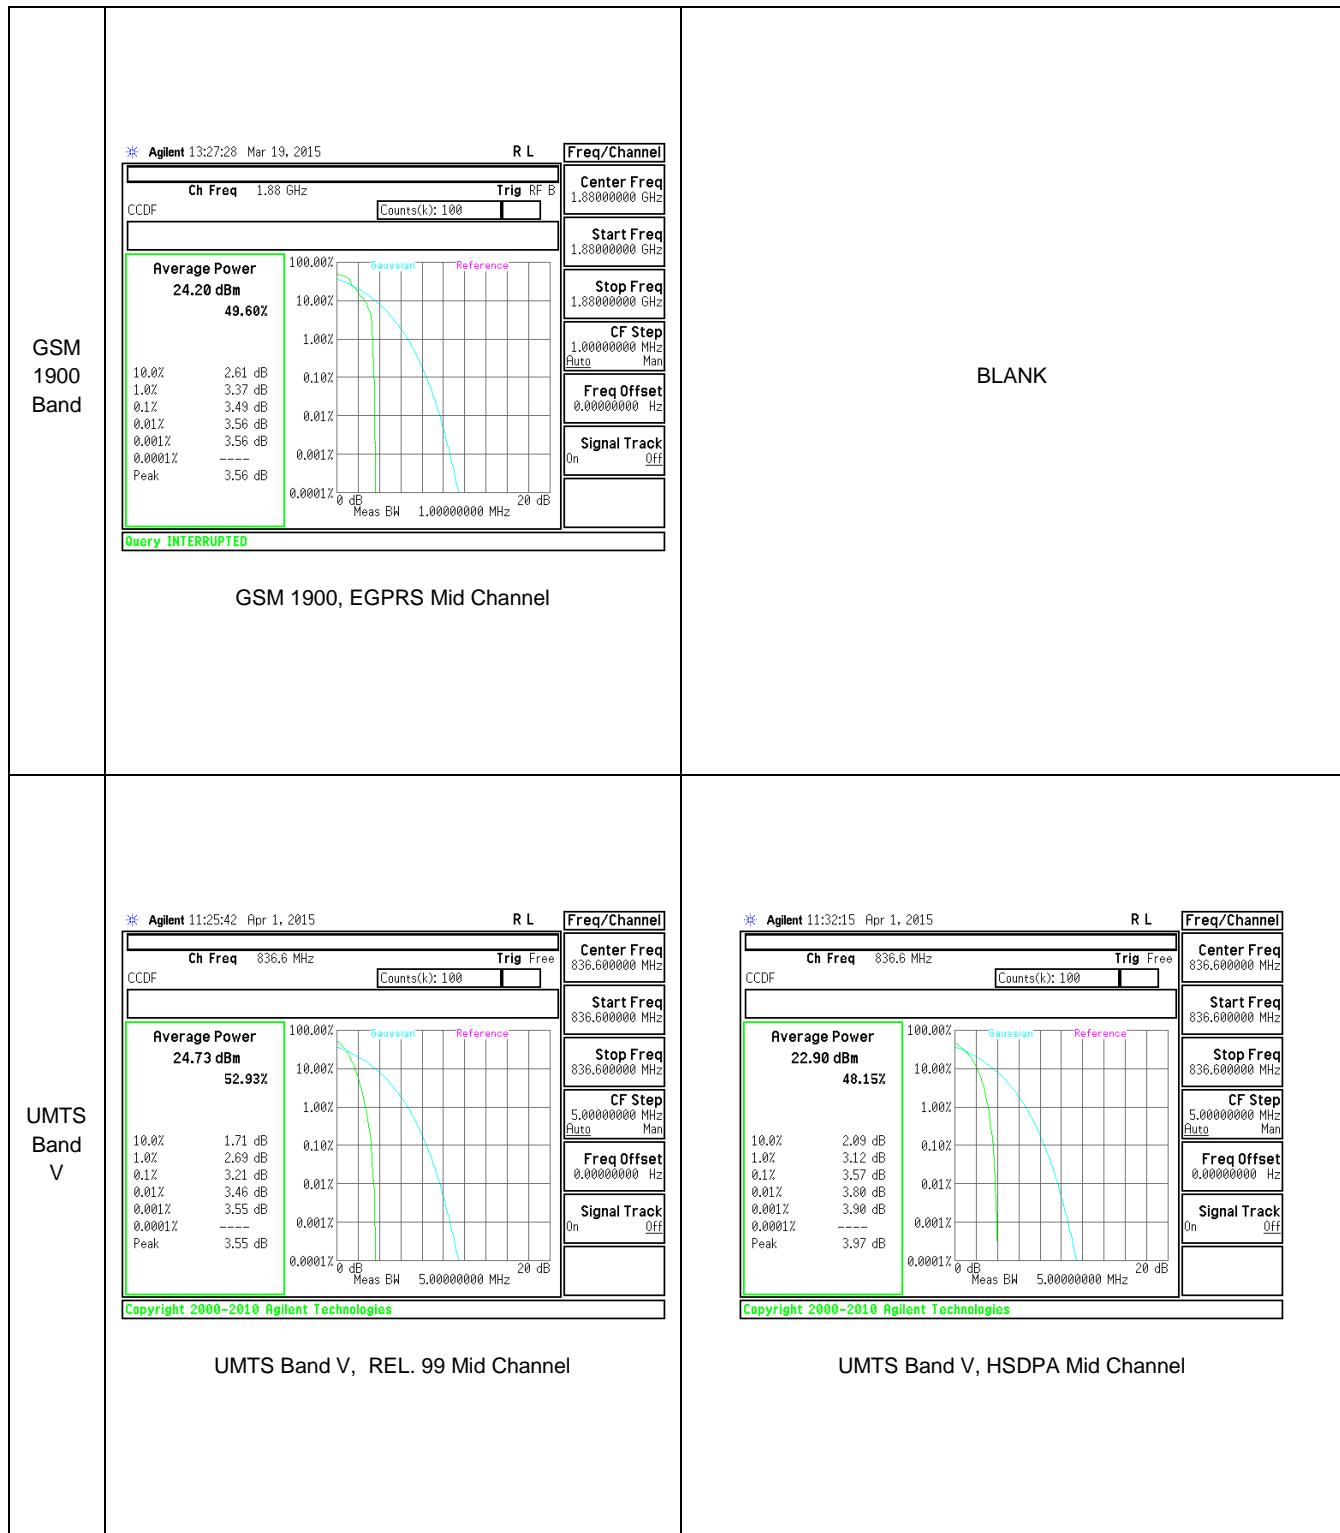

## 10. LIMITS AND CONDUCTED RESULTS

### 10.1. OCCUPIED BANDWIDTH

#### RULE PART(S)

FCC: §2.1049  
IC: RSS-132, 4.5; RSS-133, 6.5

#### LIMITS

For reporting purposes only

#### TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r02)

#### MODES TESTED


GSM 850, GSM 1900 and WCDMA Band V


### 10.1.1. OCCUPIED BANDWIDTH RESULTS


Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
GSM850	GPRS	128	824.2	241.9	317.8
		190	836.6	240.7	322.3
		251	848.8	242.9	315.9
	EGPRS	128	824.2	238.9	301.4
		190	836.6	233.7	285.7
		251	848.8	244.0	308.0
GSM 1900	GPRS	512	1850.2	243.0	311.2
		661	1880	243.1	313.1
		810	1909.8	242.1	315.4
	EGPRS	512	1850.2	239.9	315.0
		661	1880	239.3	306.2
		810	1909.8	237.1	303.4
WCDMA Band 5	REL99	4132	826.4	4137.1	4701.0
		4183	836.6	4141.6	4703.0
		4233	846.6	4126.8	4678.0
	HSDPA	4132	826.4	4144.0	4688.0
		4183	836.6	4121.6	4680.0
		4233	846.6	4129.6	4701.0

### 10.1.2. OCCUPIED BANDWIDTH PLOTS


GSM 850

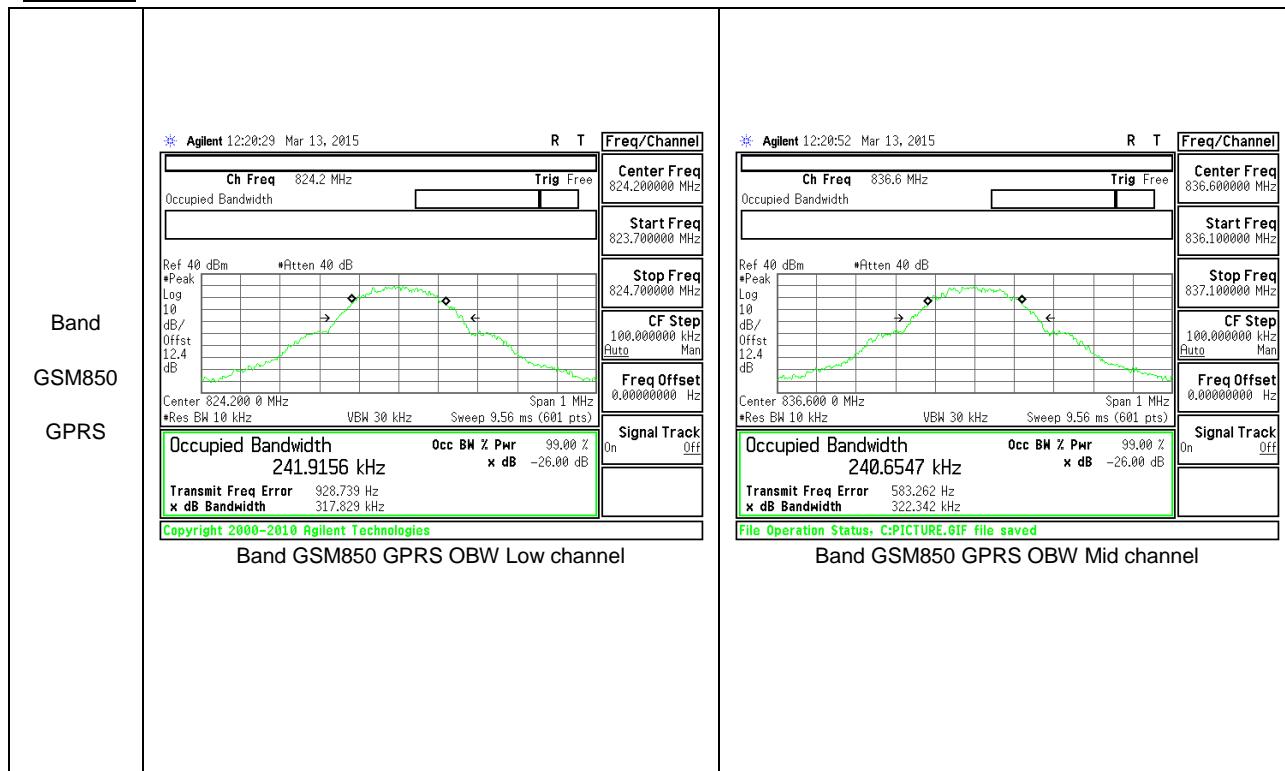


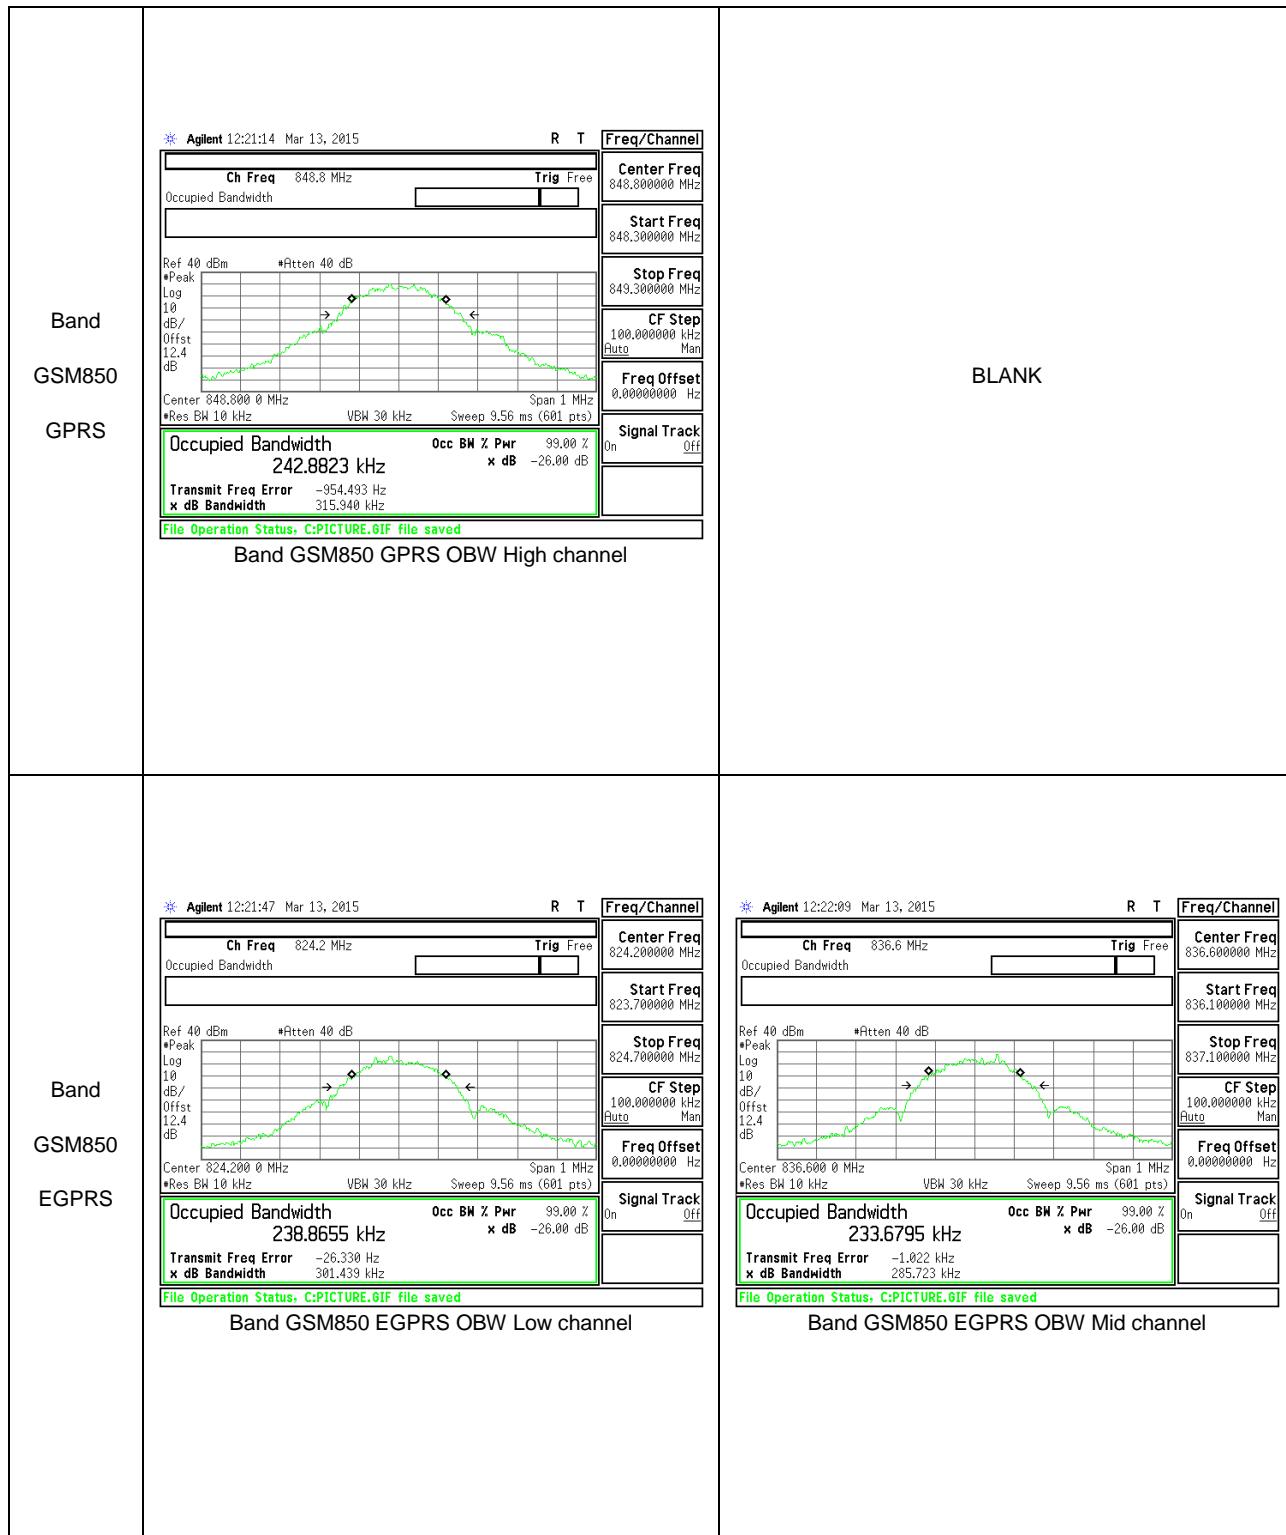


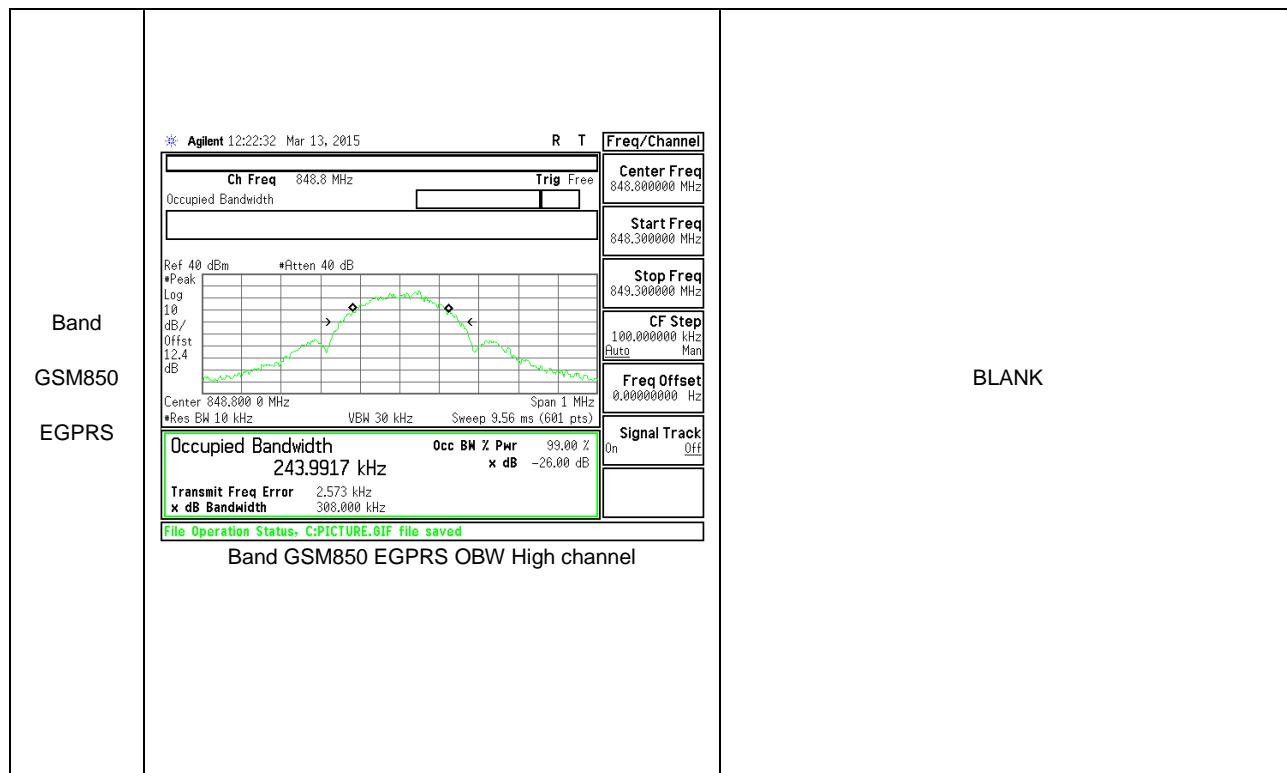


## GSM 1900

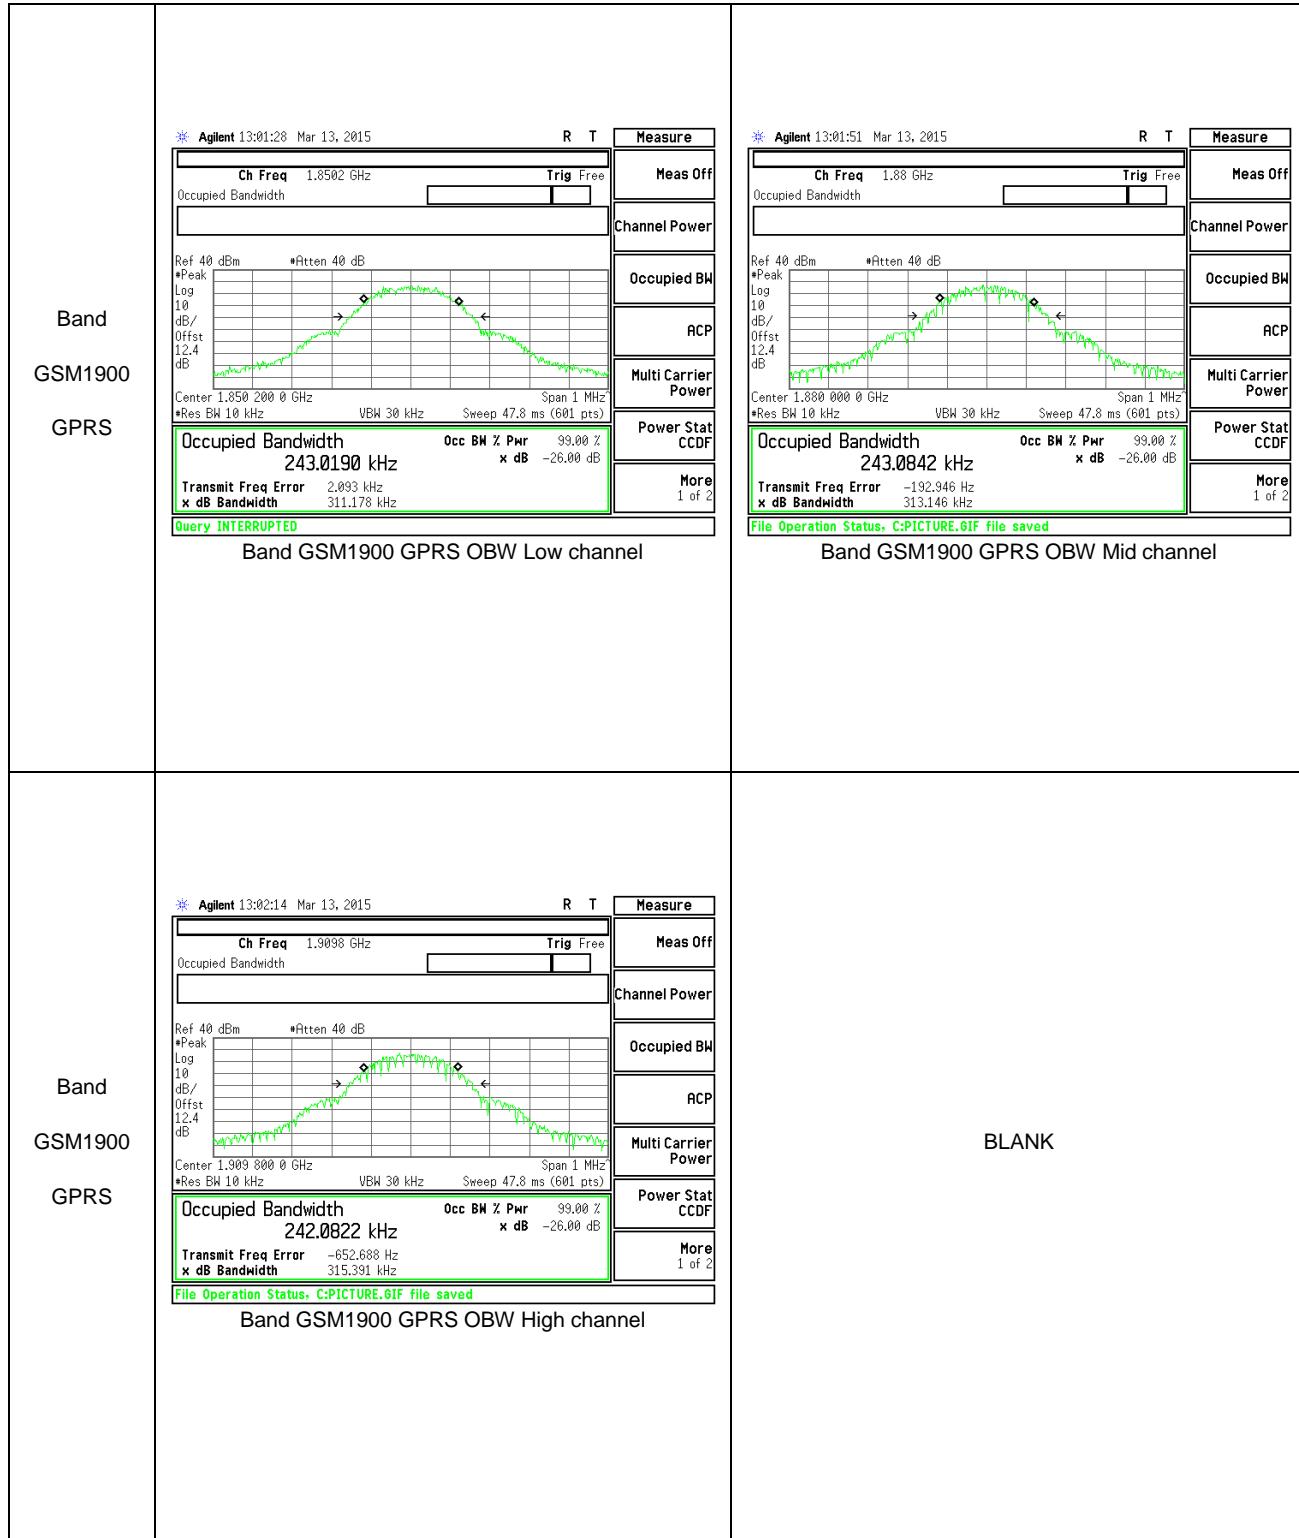

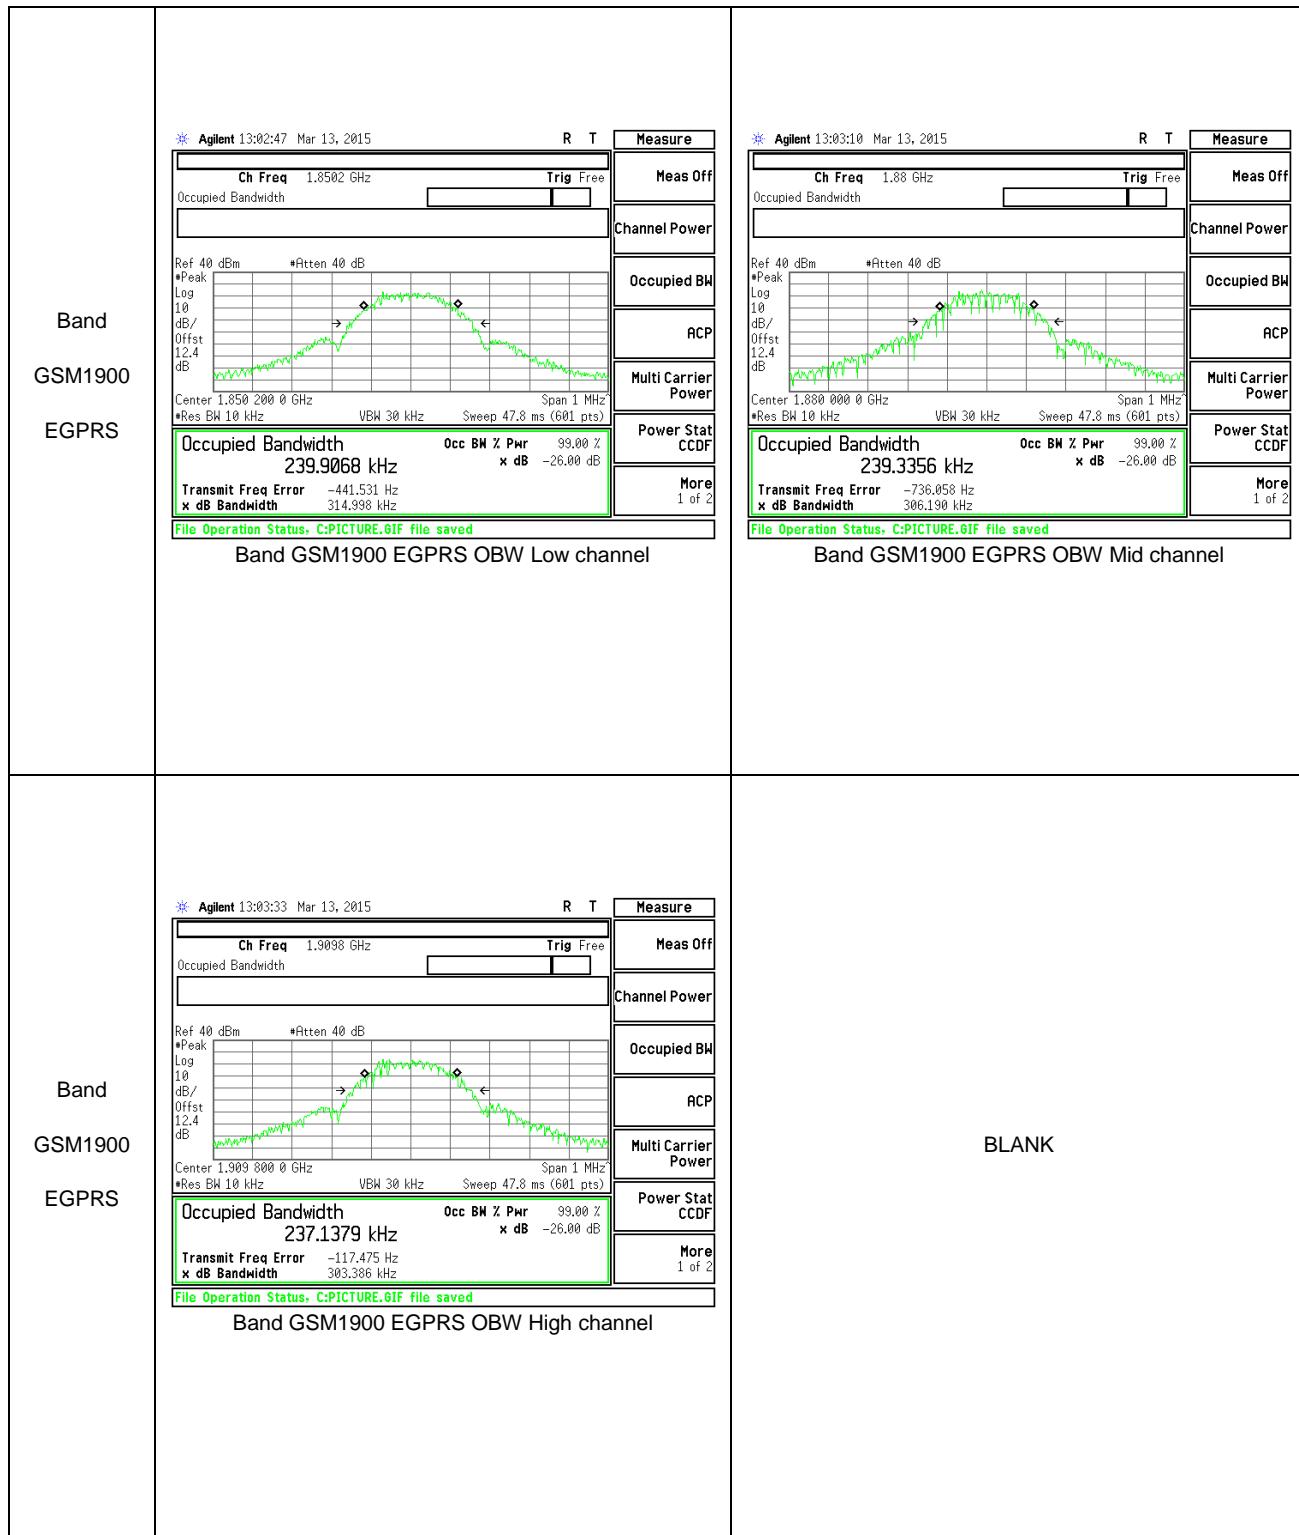

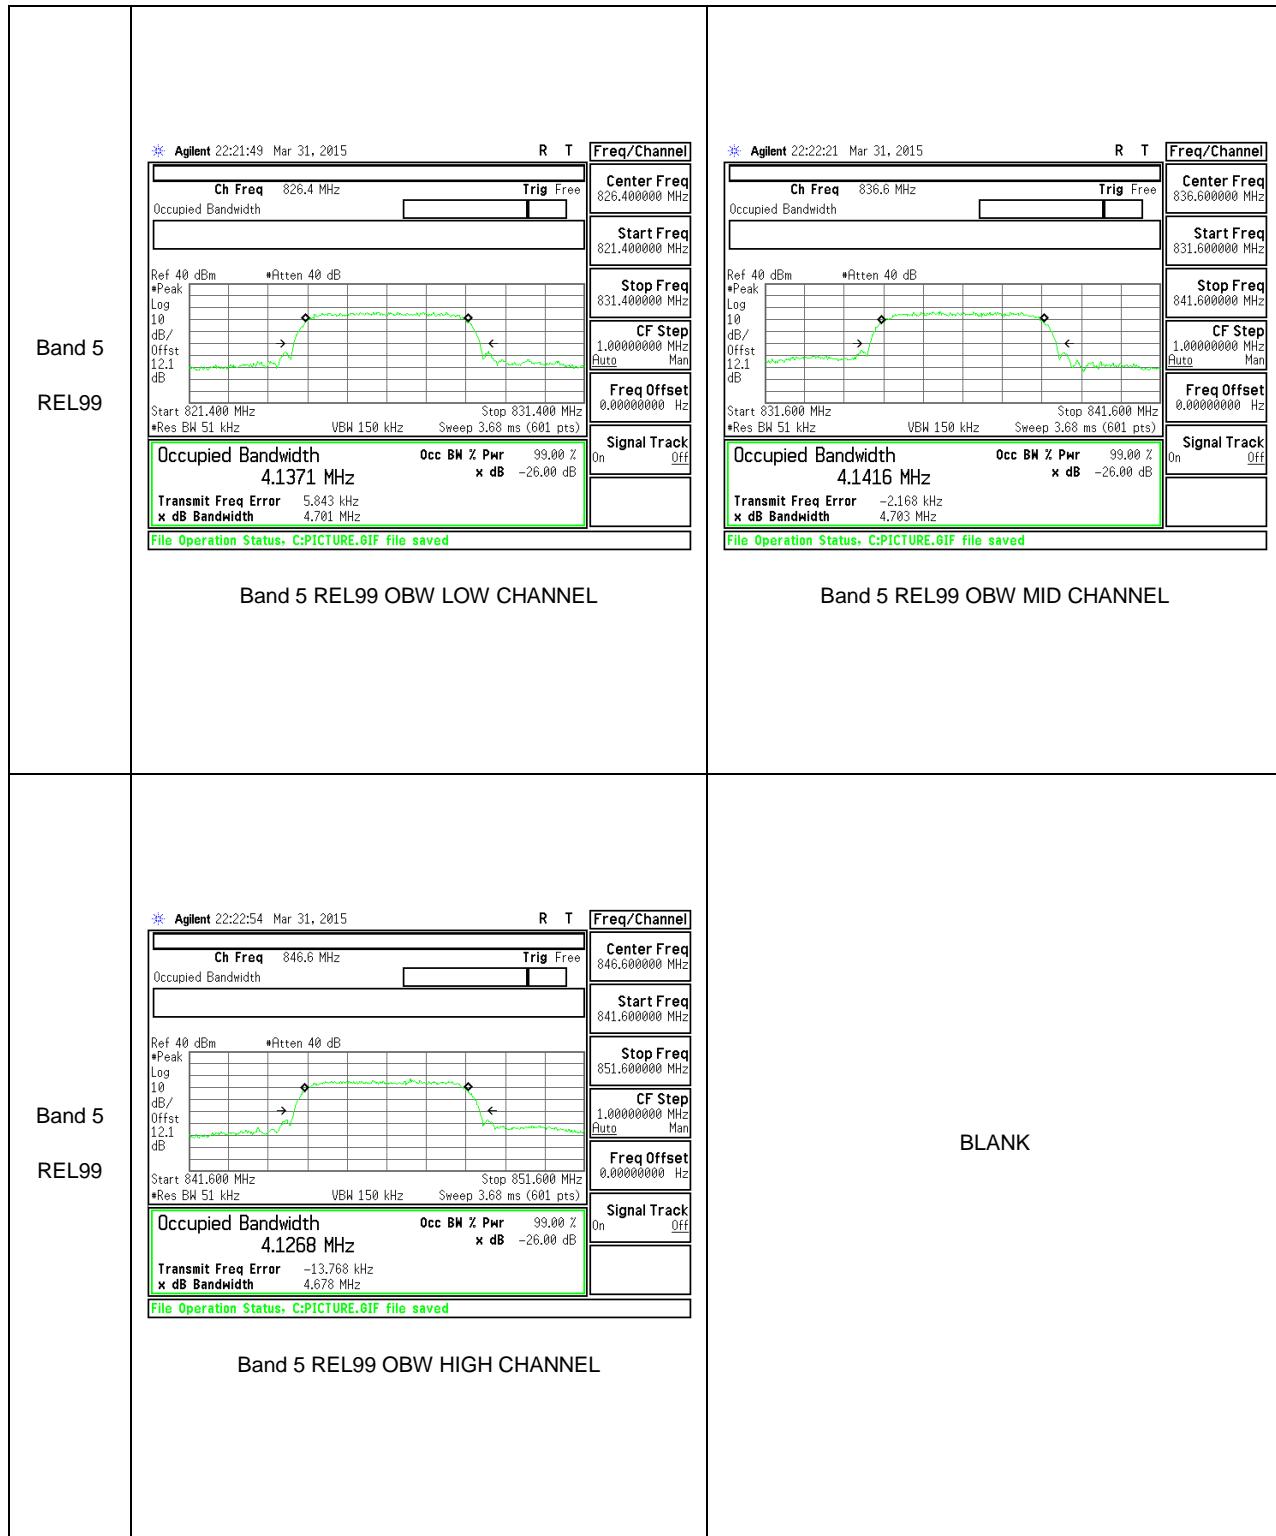WCDMA

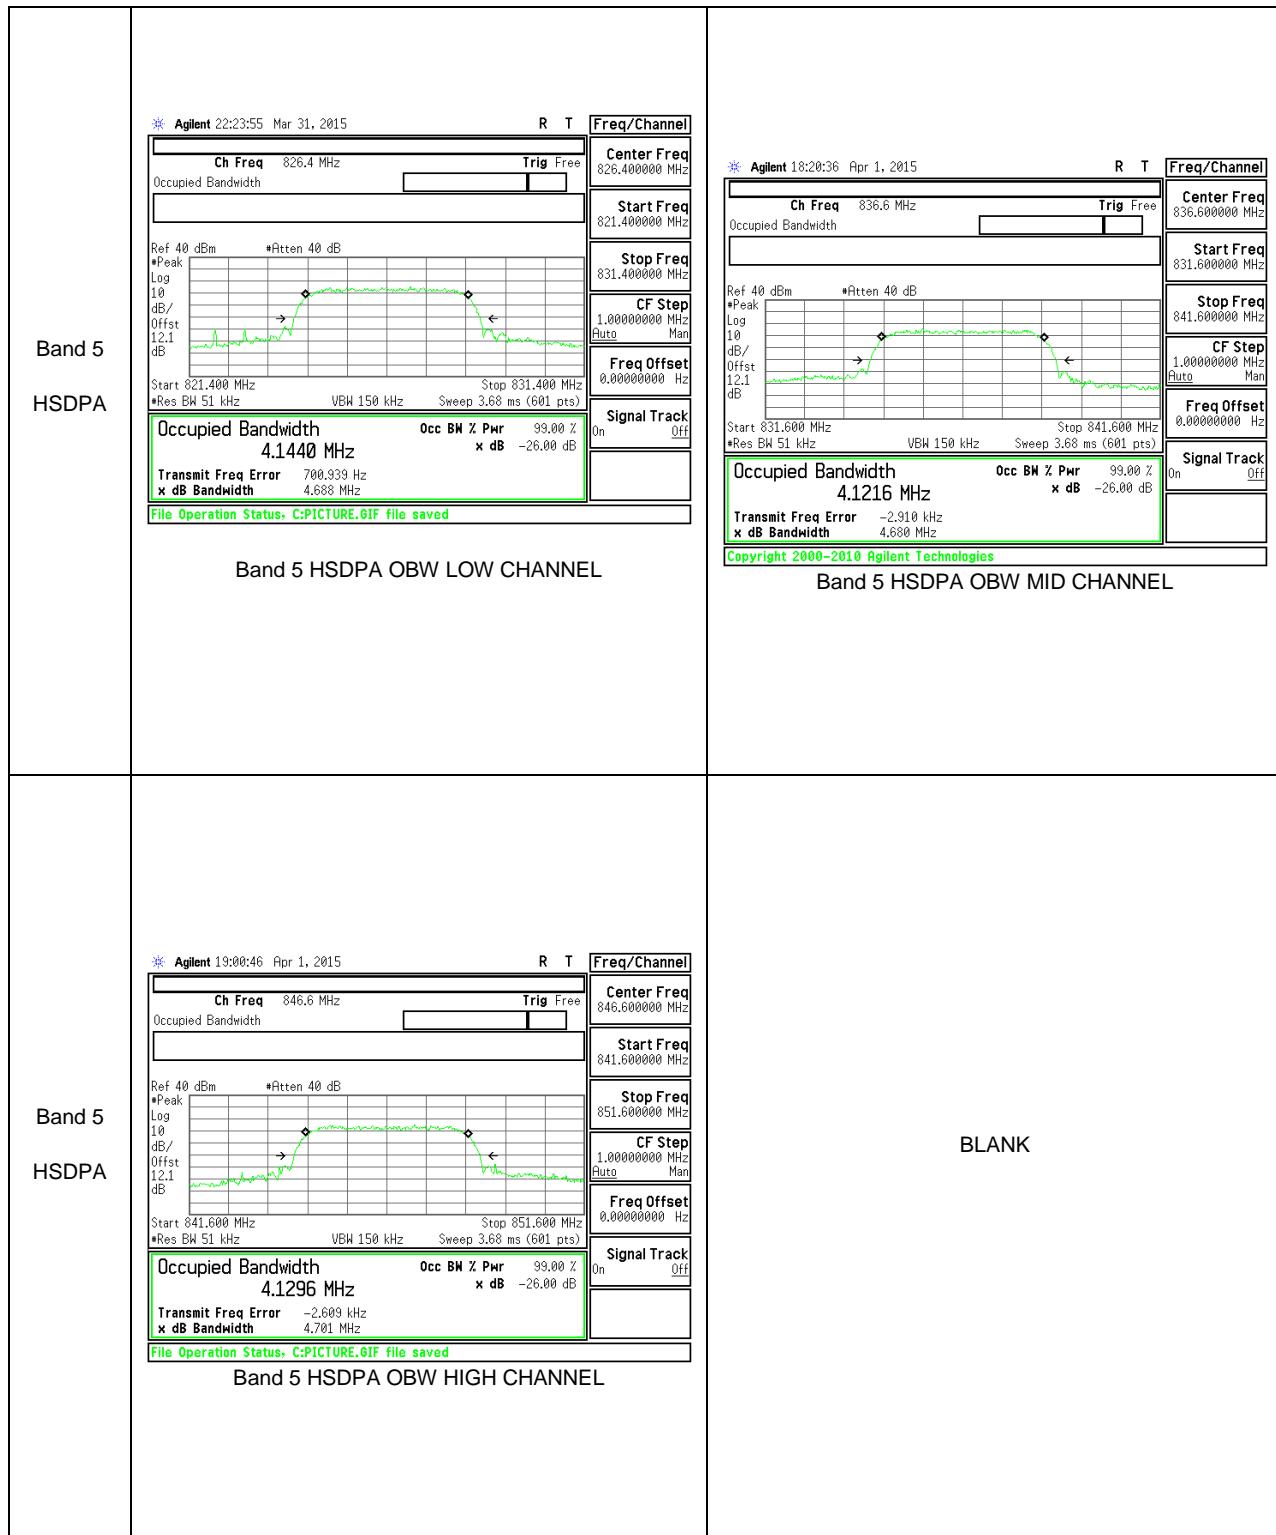

## 10.2. BAND EDGE EMISSIONS

### RULE PART(S)

FCC: §22.359, §24.238 and § 90.691

### LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.


### MODES TESTED


GSM 850, GSM 1900 and WCDMA Band V


### RESULTS

### 10.2.1. BAND EDGE PLOTS


GSM

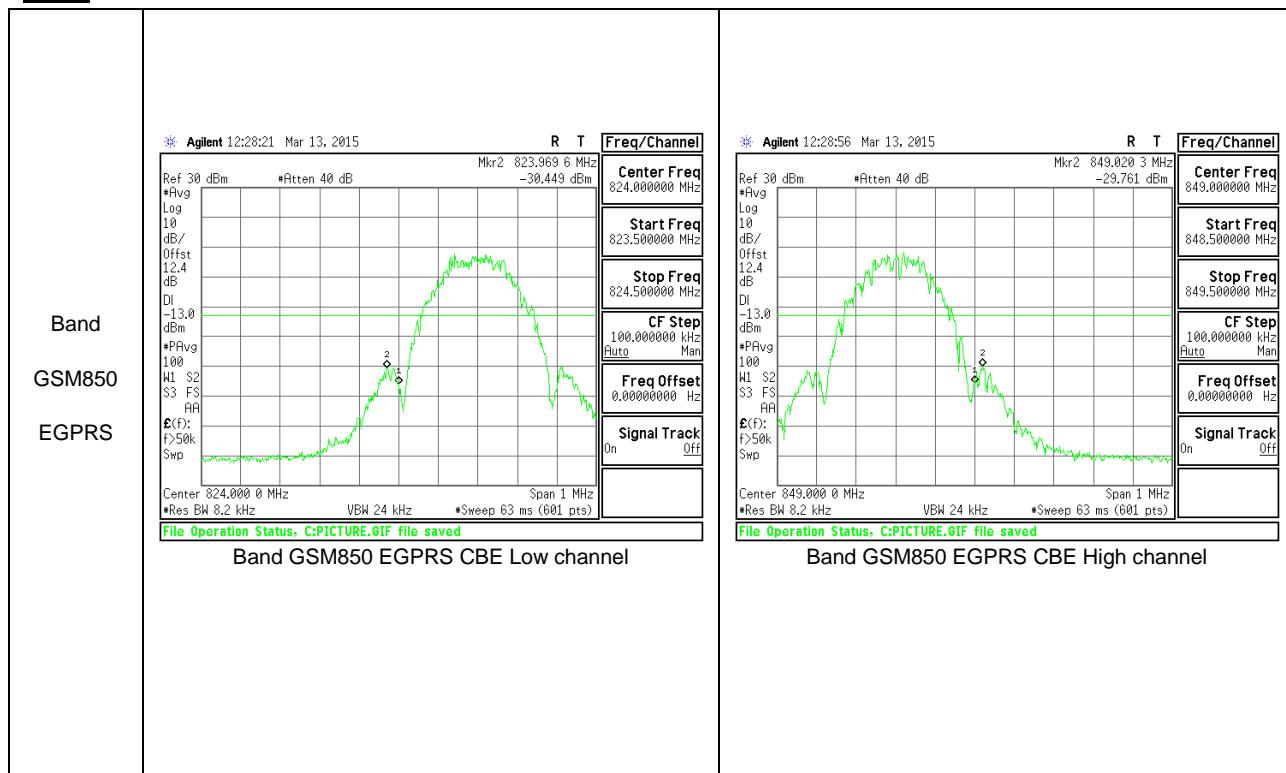

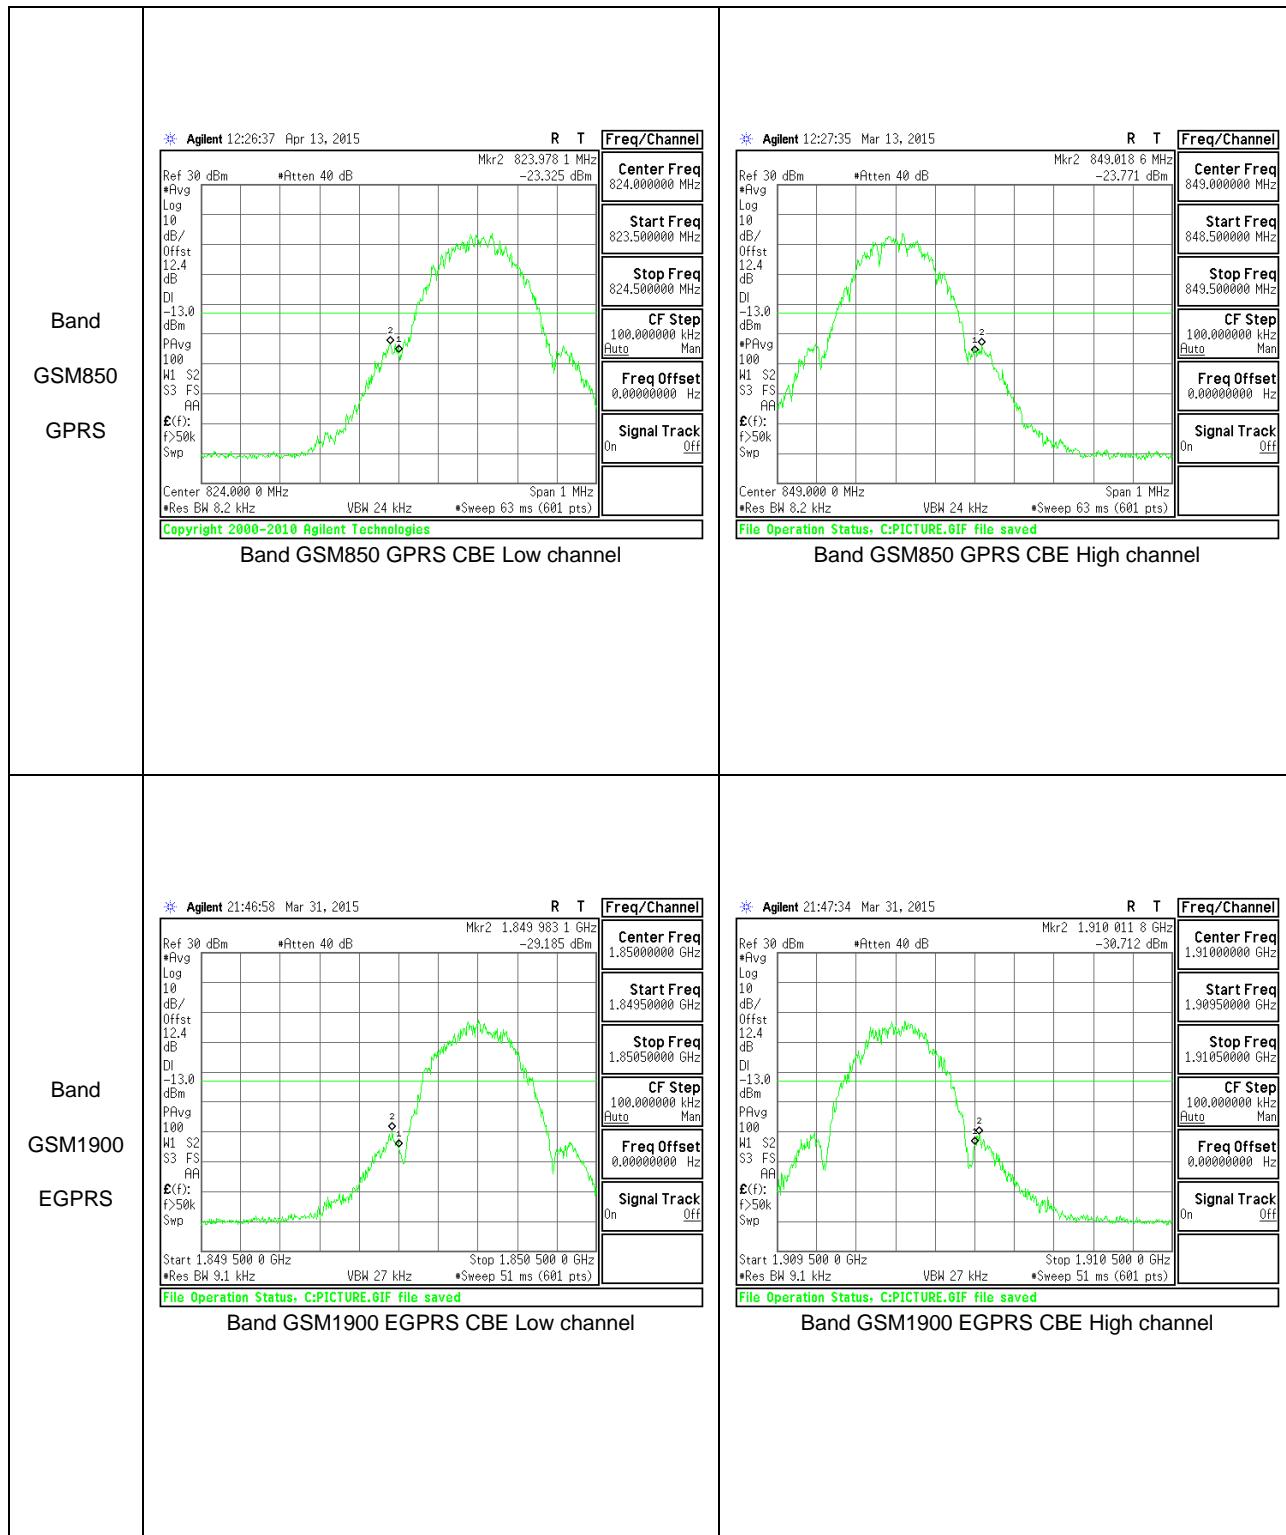

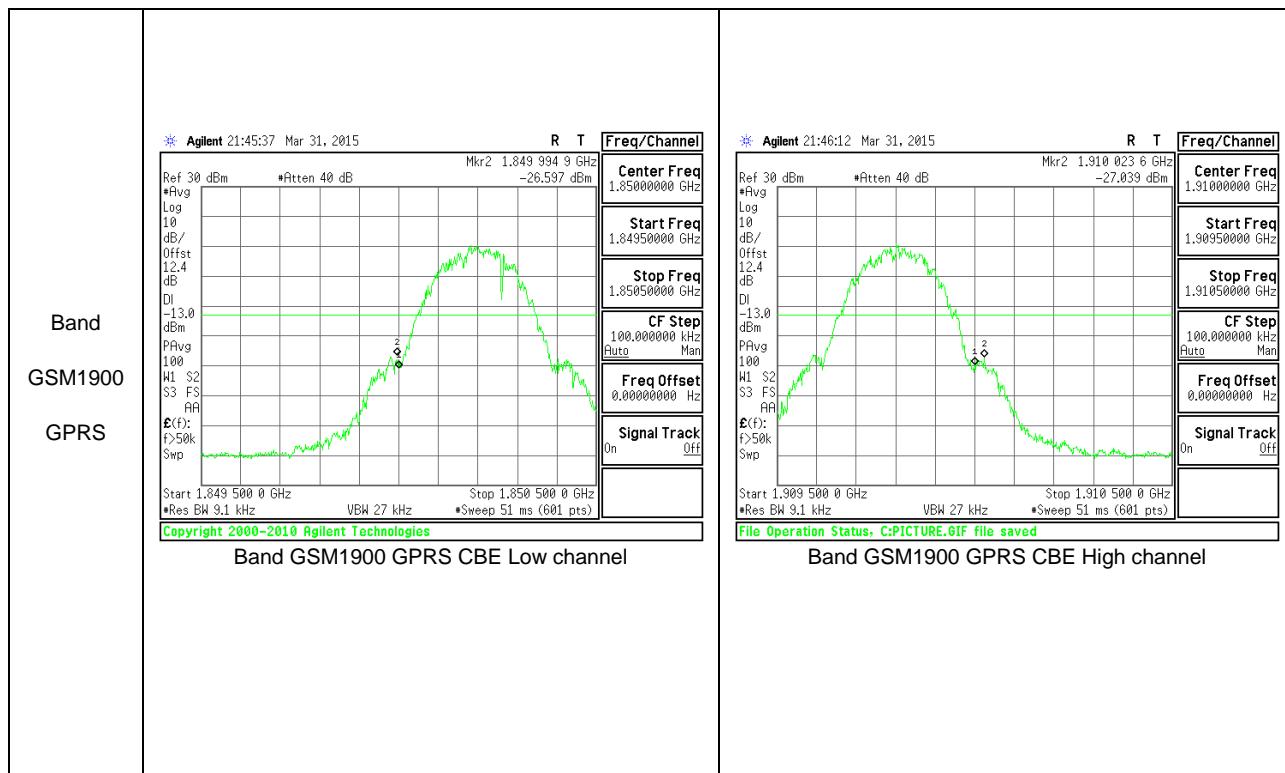

## WCDMA

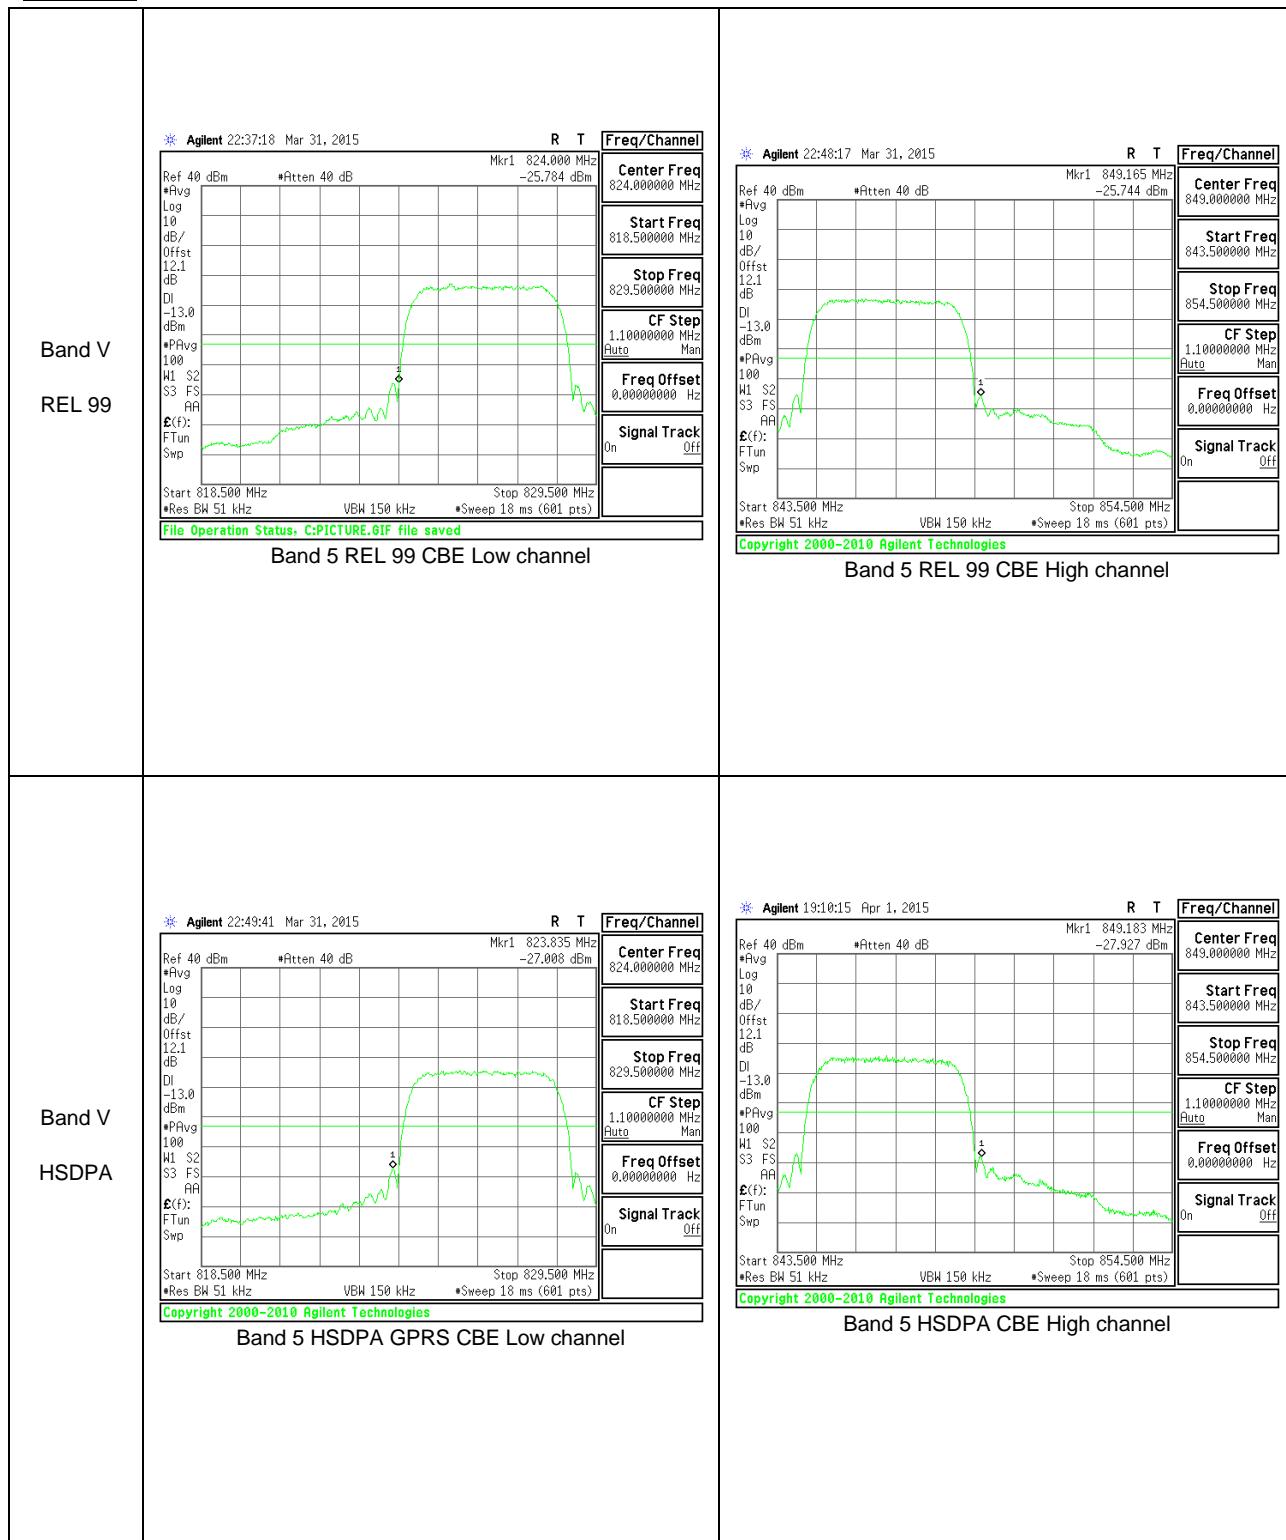

### 10.3. OUT OF BAND EMISSIONS

#### RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238 and §90.691

#### LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

#### TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

#### MODES TESTED

GSM 850, GSM 1900 and WCDMA V


#### RESULTS


### 10.3.1. OUT OF BAND EMISSIONS RESULT


Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
GSM850	GPRS	824.2	-18.71	-13	-5.71
		836.6	-18.94	-13	-5.94
		848.8	-18.55	-13	-5.55
	EGPRS	824.2	-19.60	-13	-6.60
		836.6	-19.84	-13	-6.84
		848.8	-18.75	-13	-5.75
GSM1900	GPRS	1850.2	-17.10	-13	-4.10
		1880	-16.84	-13	-3.84
		1909.8	-16.85	-13	-3.85
	EGPRS	1850.2	-15.84	-13	-2.84
		1880	-17.03	-13	-4.03
		1909.8	-16.47	-13	-3.47
Band 5	REL99	826.4	-16.96	-13	-3.96
		836.6	-17.52	-13	-4.52
		846.6	-17.29	-13	-4.29
	HSDPA	826.4	-17.33	-13	-4.33
		836.6	-19.71	-13	-6.71
		846.6	-19.21	-13	-6.21


### 10.3.2. OUT OF BAND EMISSIONS PLOTS


GSM

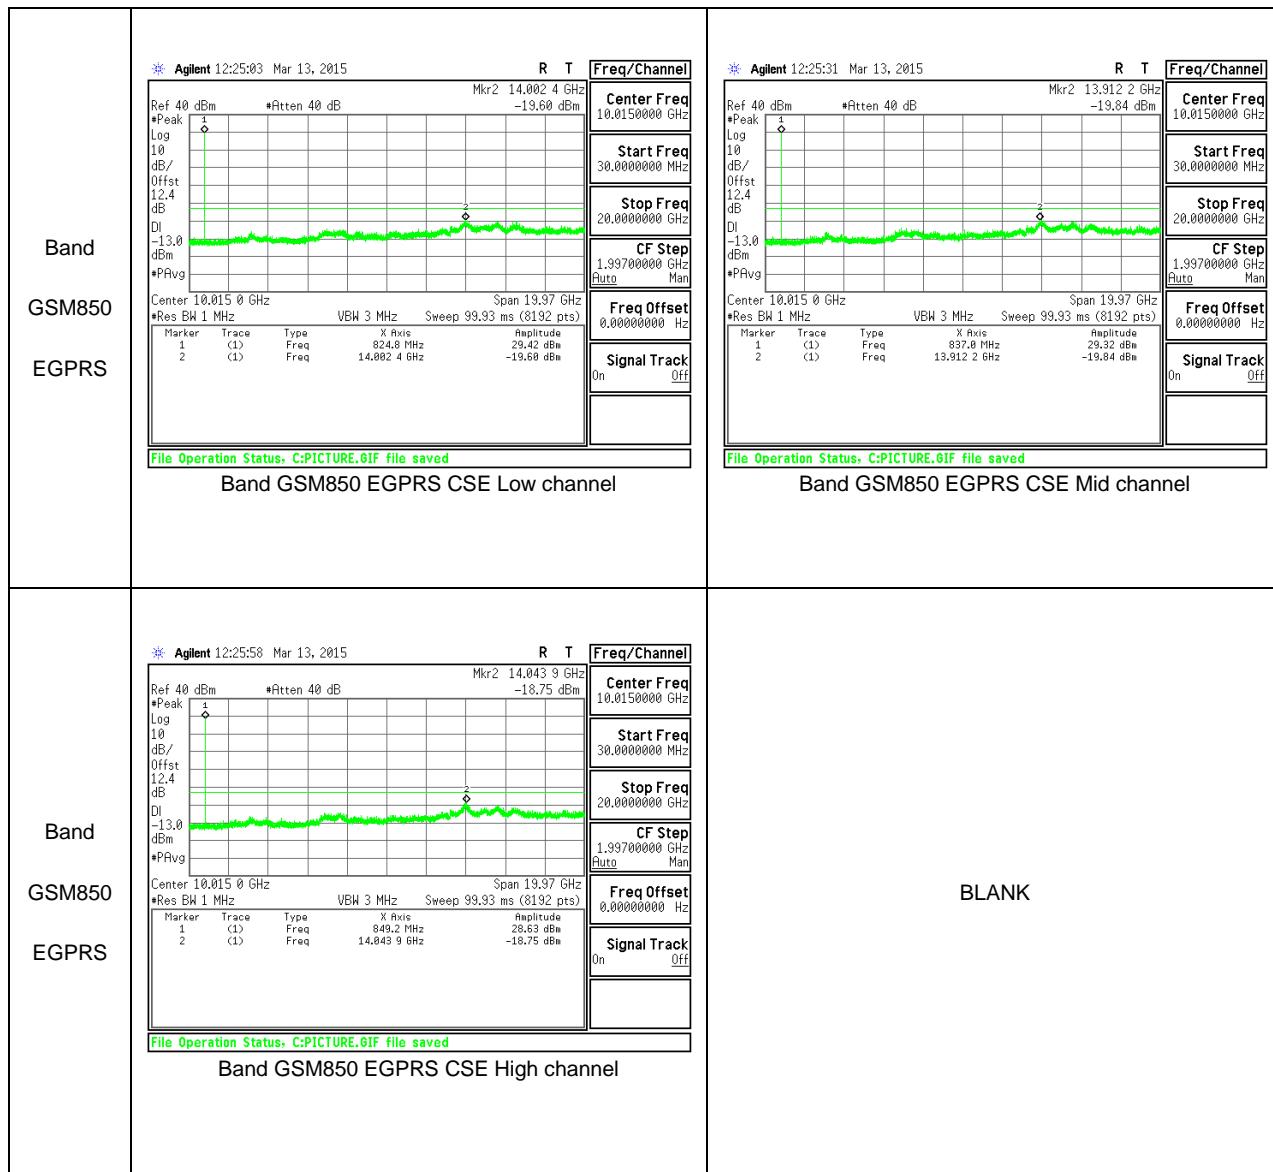


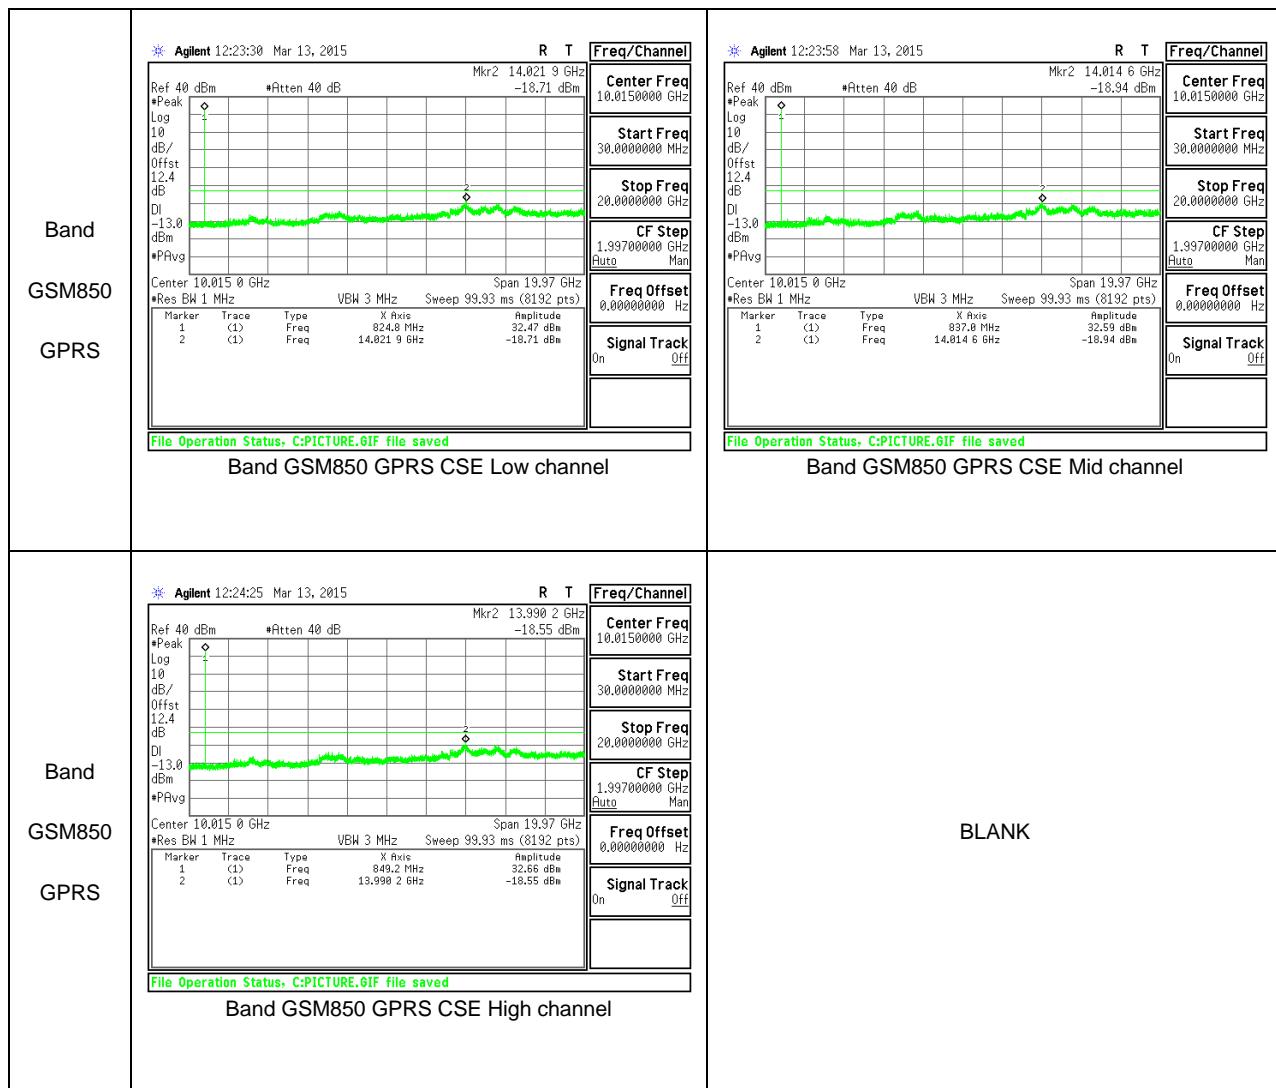

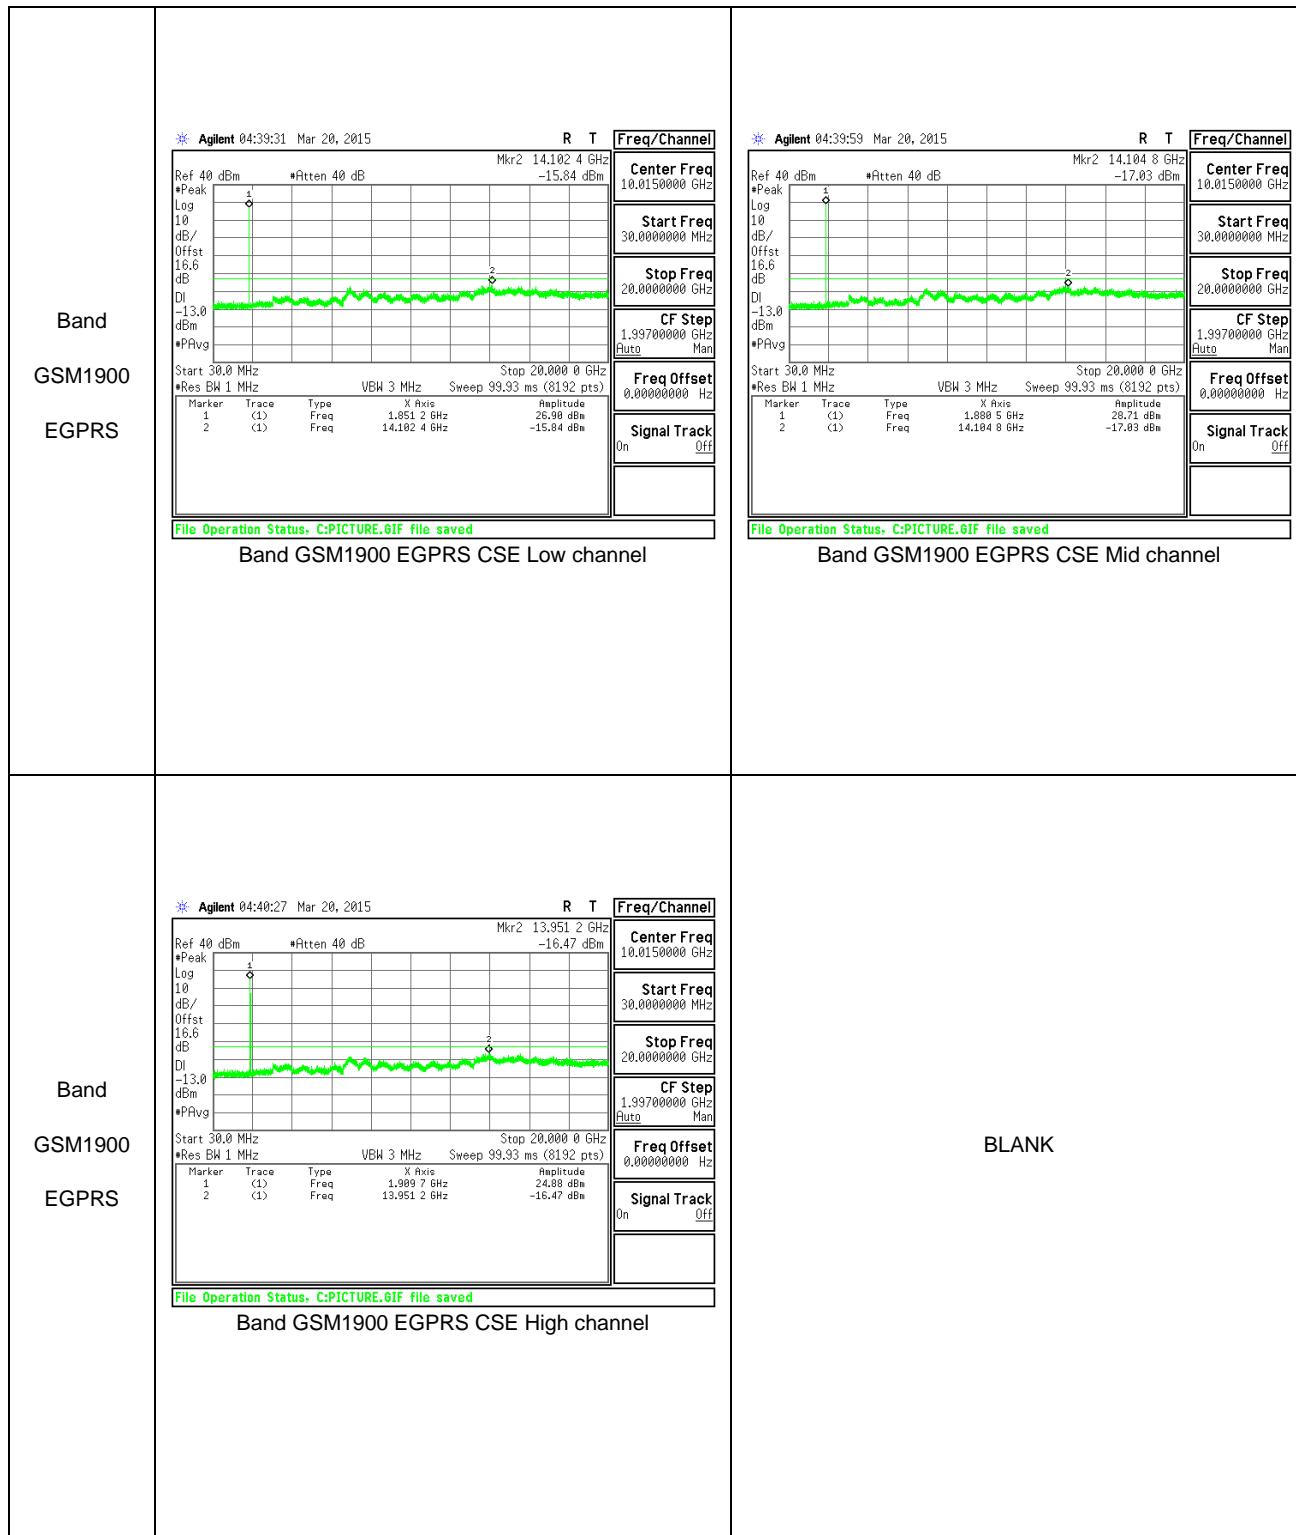

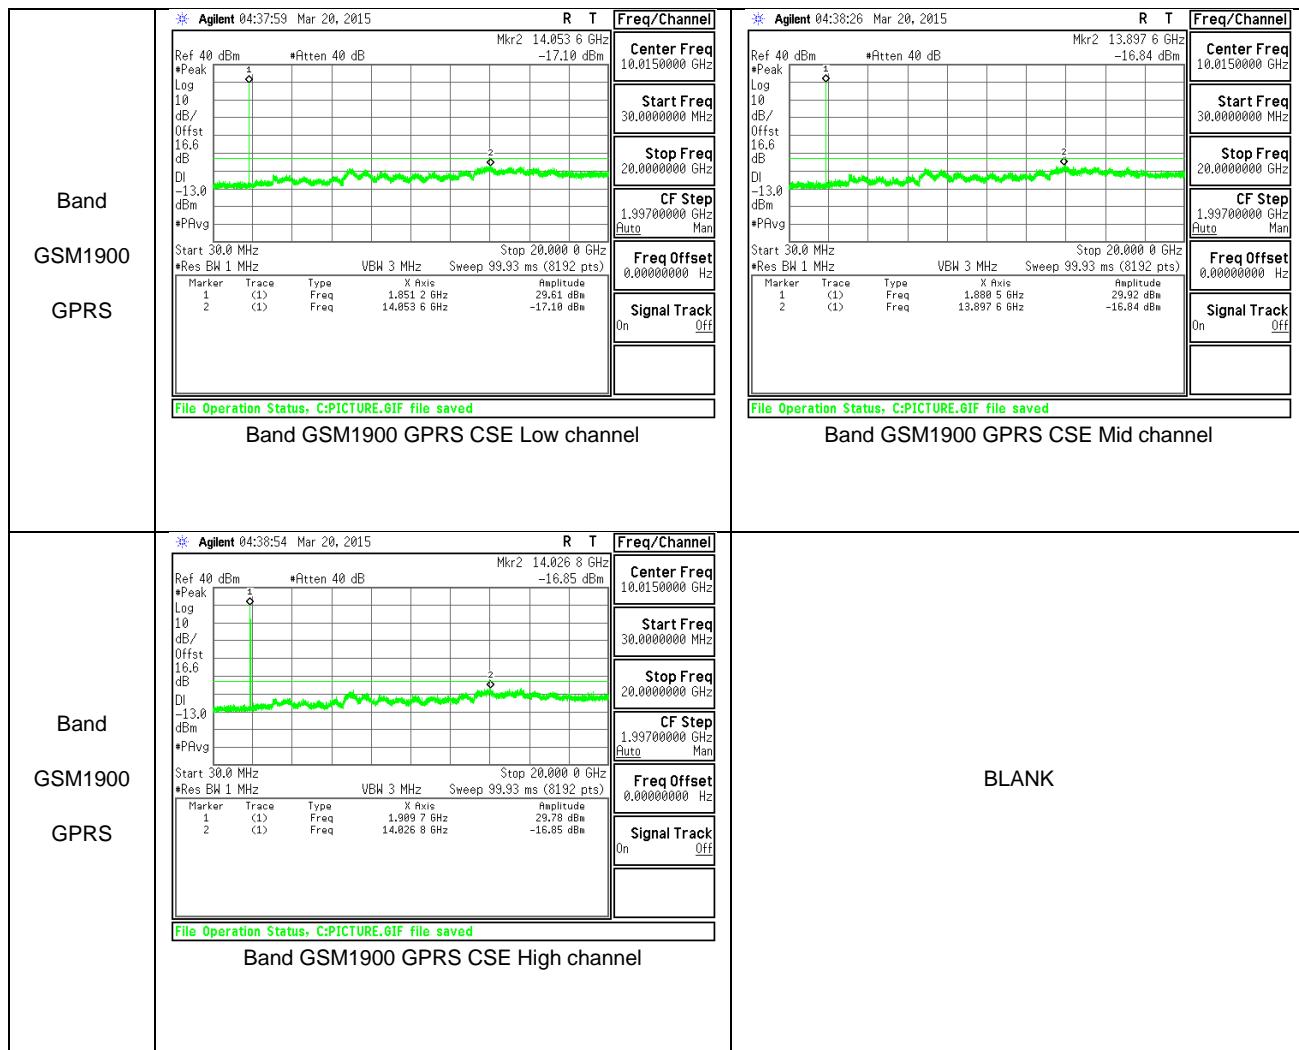

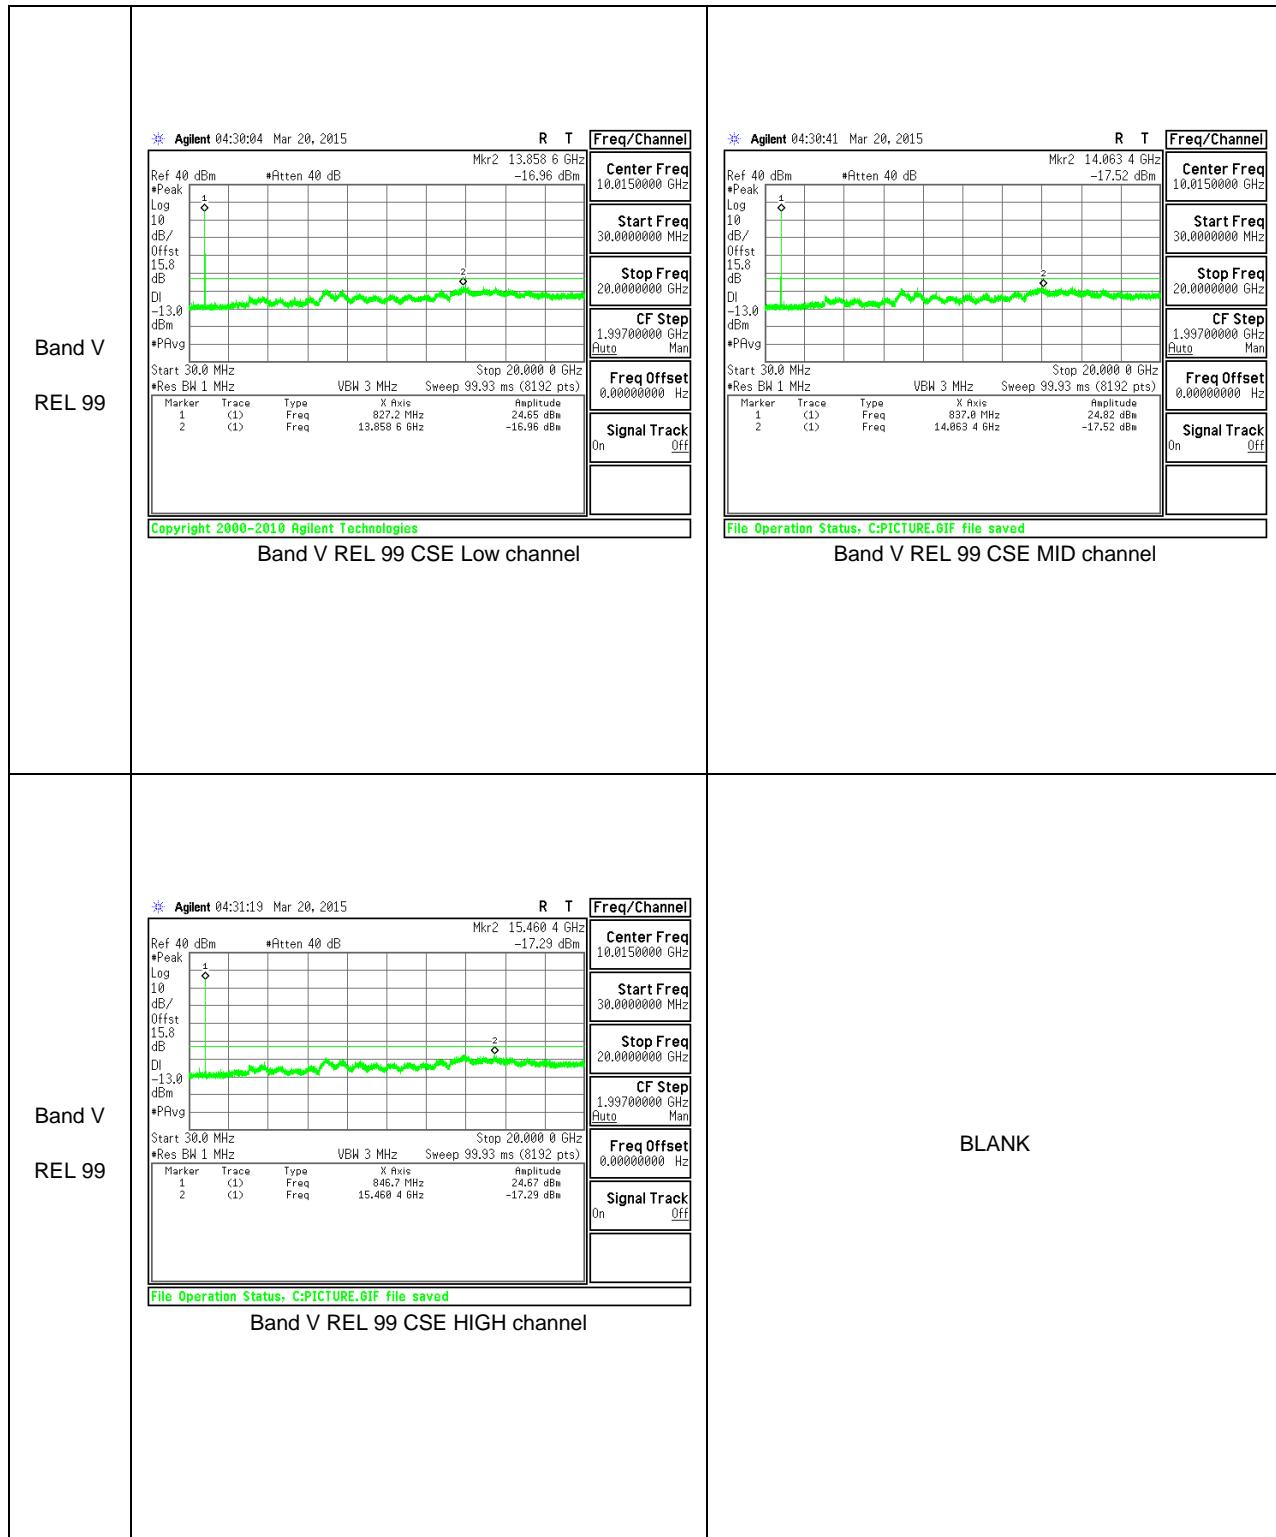WCDMA

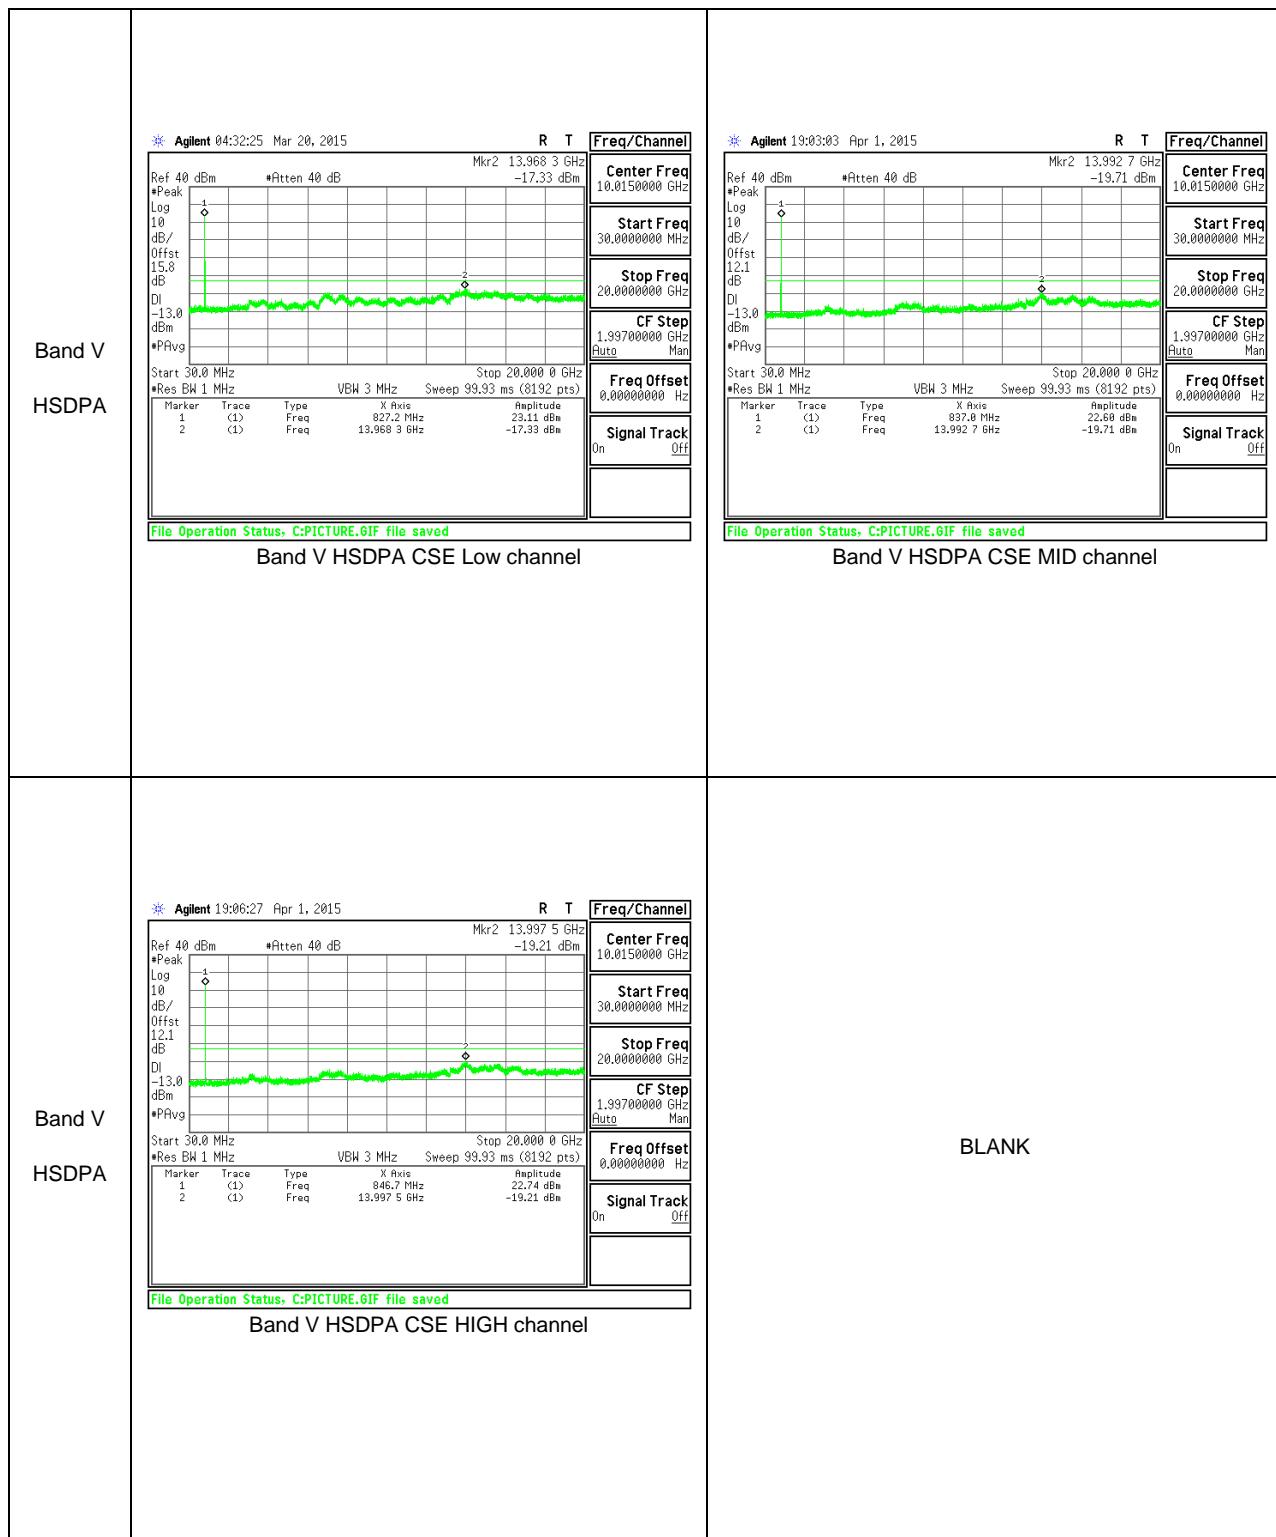

## 10.4. FREQUENCY STABILITY

### RULE PART(S)

FCC: §2.1055, §22.355, §24.235, and §27.54

### LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of  $\pm 2.5$  ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§27.54 - The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

### MODES TESTED

GSM 850, GSM 1900 and WCDMA V

### RESULTS

See the following pages.

### 10.4.1. FREQUENCY STABILITY RESULTS

**GSM850, Freq: 836.6 MHz– MID CHANNEL**

Reference Frequency: PCS Mid Channel Limit: to stay +- 2.5 ppm =		836.6 2091.500	MHz @ 20°C Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.600013	-0.003	2.5
3.80	40	836.600010	0.001	2.5
3.80	30	836.600007	0.005	2.5
<b>3.80</b>	<b>20</b>	<b>836.600010</b>	<b>0</b>	<b>2.5</b>
3.80	10	836.600010	0.000	2.5
3.80	0	836.600011	-0.001	2.5
3.80	-10	836.600014	-0.004	2.5
3.80	-20	836.600017	-0.008	2.5
3.80	-30	836.600014	-0.005	2.5

Reference Frequency: PCS Mid Channel Limit: to stay +- 2.5 ppm =		836.6 2091.500	MHz @ 20°C Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
<b>3.80</b>	<b>20</b>	<b>836.600010</b>	<b>0</b>	<b>2.5</b>
4.37	20	836.6000264	-0.019	2.5
3.23	20	836.6000265	-0.019	2.5

**GSM1900, Freq: 1880 MHz– MID CHANNEL**

Reference Frequency: PCS Mid Channel Limit: to stay +- 2.5 ppm =		1880 4700.000	MHz @ 20°C Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1880.000027	0.000	2.5
3.80	40	1880.000026	0.001	2.5
3.80	30	1880.000027	0.000	2.5
<b>3.80</b>	<b>20</b>	<b>1880.000027</b>	<b>0</b>	<b>2.5</b>
3.80	10	1880.000026	0.000	2.5
3.80	0	1880.000030	-0.002	2.5
3.80	-10	1880.000023	0.002	2.5
3.80	-20	1880.000021	0.003	2.5
3.80	-30	1880.000039	-0.006	2.5

Reference Frequency: PCS Mid Channel Limit: to stay +- 2.5 ppm =		1880 4700.000	MHz @ 20°C Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
<b>3.80</b>	<b>20</b>	<b>1880.000027</b>	<b>0</b>	<b>2.5</b>
4.37	20	1880.000031	-0.002	2.5
3.23	20	1880.000036	-0.005	2.5

## 11. RADIATED TEST RESULTS

### 11.1. RADIATED POWER (ERP & EIRP)

#### RULE PART(S)

FCC: §2.1046, §22.913, §24.232, and § 90.635.

#### LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

#### TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17, PXA setting reference to 971168 D01 v02r02

#### MODES TESTED

GSM 850, GSM 1900 and WCDMA V

**TEST RESULTS****11.1.1. ERP/EIRP Results**

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM850	GPRS	128	824.2	26.58	454.99
		190	836.6	26.67	464.52
		251	848.8	26.77	475.34
	EGPRS	128	824.2	21.51	141.58
		190	836.6	21.21	132.13
		251	848.8	21.43	139.00

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM1900	GPRS	512	1850.2	28.39	690.24
		661	1880	28.12	648.63
		810	1909.8	26.98	498.88
	EGPRS	512	1850.2	24.92	310.46
		661	1880	23.61	229.61
		810	1909.8	25.09	322.85

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
Band 5	REL99	4132	826.4	17.38	54.70
		4183	836.6	18.79	75.68
		4233	846.6	19.08	80.91
	HSDPA	4132	826.4	14.83	30.41
		4183	836.6	16.43	43.95
		4233	846.6	17.23	52.84

### 11.1.2. ERP/EIRP PLOTS

#### GSM 850 – GPRS

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
<b>Company:</b> Sony <b>Project #:</b> 10701108 <b>Date:</b> 4/4/2015 <b>Test Engineer:</b> M. Nolting <b>Configuration:</b> FCC ID: PY7-PM0794; Stand-alone ( X (Flat) orientation); s/n 00440245-427892-3 <b>Mode:</b> GPRS 850								
<b>Test Equipment:</b>								
<b>Receiving:</b> Hybrid AT0066 & SMA cables <b>Substitution:</b> Dipole AT0016, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.20	20.42	V	0.6	-1.0	18.90	38.5	-19.6	
824.20	28.10	H	0.6	-1.0	26.58	38.5	-11.9	
Mid Ch								
836.60	21.96	V	0.6	-0.9	20.48	38.5	-18.0	
836.60	28.15	H	0.6	-0.9	26.67	38.5	-11.8	
High Ch								
848.80	22.04	V	0.6	-0.9	20.61	38.5	-17.9	
848.80	28.21	H	0.6	-0.9	26.77	38.5	-11.7	

Rev. 3.17.11  
Note: For Band 4 EIRP limit is 30dBm

GSM 850 EGPRS

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
<b>Company:</b> Sony <b>Project #:</b> 10701108 <b>Date:</b> 4/4/2015 <b>Test Engineer:</b> M. Nolting <b>Configuration:</b> FCC ID: PY7-PM0794 ; Stand-alone ( X (Flat) orientation); s/n 00440245-427892-3 <b>Mode:</b> EGPRS 850								
<b>Test Equipment:</b>								
<b>Receiving:</b> Hybrid AT0066 & SMA cables <b>Substitution:</b> Dipole AT0016, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.20	15.17	V	0.6	-1.0	13.65	38.5	-24.9	
824.20	23.04	H	0.6	-1.0	21.51	38.5	-17.0	
Mid Ch								
836.60	16.61	V	0.6	-0.9	15.13	38.5	-23.4	
836.60	22.69	H	0.6	-0.9	21.21	38.5	-17.3	
High Ch								
848.80	16.03	V	0.6	-0.9	14.59	38.5	-23.9	
848.80	22.87	H	0.6	-0.9	21.43	38.5	-17.1	

Rev. 3.17.11  
Note: For Band 4 EIRP limit is 30dBm

GSM 1900 GPRS

**High Frequency Substitution Measurement**  
**UL Verification Services, Inc. Chamber C**

**Company:** Sony**Project #:** 10707861**Date:** 4/3/2015**Test Engineer:** B. Kiewra**Configuration:** FCC ID: PY7-PM0794; Stand-alone (Y (landscape) orientation); s/n 00440245-427882-3**Mode:** GPRS 1900**Test Equipment:****Receiving:** Horn AT0062 & SMA cables**Substitution:** Horn AT069, sig-gen SIG001, & cable CBL010

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
<b>Low Ch</b>								
1850.20	15.44	V	0.9	5.4	19.95	33.0	-13.0	
1850.20	23.88	H	0.9	5.4	28.39	33.0	-4.6	
<b>Mid Ch</b>								
1880.00	17.64	V	0.9	5.3	22.05	33.0	-11.0	
1880.00	23.72	H	0.9	5.3	28.12	33.0	-4.9	
<b>High Ch</b>								
1909.80	18.45	V	0.9	5.2	22.75	33.0	-10.2	
1909.80	22.69	H	0.9	5.2	26.98	33.0	-6.0	

Rev. 3.17.11

Note: For Band 4 EIRP limit is 30dBm

GSM 1900 EGPRS

**High Frequency Substitution Measurement  
UL Verification Services, Inc. Chamber C**

**Company:** Sony**Project #:** 10707861**Date:** 4/3/2015**Test Engineer:** B. Kiewra**Configuration:** FCC ID: PY7-PM0794; Stand-alone (Y (landscape) orientation); s/n 00440245-427882-3**Mode:** EGPRS 1900**Test Equipment:****Receiving:** Horn AT0062 & SMA cables**Substitution:** Horn AT069, sig-gen SIG001, & cable CBL010

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
<b>Low Ch</b>								
1850.20	15.46	V	0.9	5.4	19.97	33.0	-13.0	
1850.20	20.41	H	0.9	5.4	24.92	33.0	-8.1	
<b>Mid Ch</b>								
1880.00	18.06	V	0.9	5.3	22.47	33.0	-10.5	
1880.00	19.21	H	0.9	5.3	23.61	33.0	-9.4	
<b>High Ch</b>								
1909.80	16.51	V	0.9	5.2	20.81	33.0	-12.2	
1909.80	20.79	H	0.9	5.2	25.08	33.0	-7.9	

Rev. 3.17.11

Note: For Band 4 EIRP limit is 30dBm

WCDMA BAND 5 REL 99

**High Frequency Substitution Measurement**  
**UL Verification Services, Inc. Chamber C**

**Company:** Sony**Project #:** 10707861**Date:** 3/18/2015**Test Engineer:** B. Kiewra/M. Nolting**Configuration:** FCC ID: PY7-PM0794; Stand-alone (Y (landscape) orientation); s/n 00440245-427882-3**Mode:** WCDMA BD5**Test Equipment:****Receiving:** Hybrid AT0066 & SMA cables**Substitution:** Dipole AT0016, sig-gen SIG001, & cable CBL010

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
<b>Low Ch</b>								
826.40	13.15	V	0.6	-0.9	11.64	38.5	-26.9	
826.40	18.89	H	0.6	-0.9	17.38	38.5	-21.1	
<b>Mid Ch</b>								
836.60	13.00	V	0.6	-0.9	11.52	38.5	-27.0	
836.60	20.26	H	0.6	-0.9	18.79	38.5	-19.7	
<b>High Ch</b>								
846.60	13.23	V	0.6	-0.9	11.79	38.5	-26.7	
846.60	20.53	H	0.6	-0.9	19.08	38.5	-19.4	

Rev. 3.17.11

Note: For Band 4 EIRP limit is 30dBm

WCDMA BAND 5 HSDPA

**High Frequency Substitution Measurement  
UL Verification Services, Inc. Chamber C**

**Company:** Sony**Project #:** 10707861**Date:** 3/18/2015**Test Engineer:** B. Kiewra/M. Nolting**Configuration:** FCC ID: PY7-PM0794; Stand-alone (Y (landscape) orientation); s/n 00440245-427882-3**Mode:** HSDPA BD5**Test Equipment:****Receiving:** Hybrid AT0066 & SMA cables**Substitution:** Dipole AT0016, sig-gen SIG001, & cable CBL010

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
<b>Low Ch</b>								
826.40	11.21	V	0.6	-0.9	9.70	38.5	-28.8	
826.40	16.34	H	0.6	-0.9	14.83	38.5	-23.7	
<b>Mid Ch</b>								
836.60	11.57	V	0.6	-0.9	10.09	38.5	-28.4	
836.60	17.91	H	0.6	-0.9	16.43	38.5	-22.1	
<b>High Ch</b>								
846.60	11.44	V	0.6	-0.9	9.99	38.5	-28.5	
846.60	18.67	H	0.6	-0.9	17.23	38.5	-21.3	

Rev. 3.17.11

Note: For Band 4 EIRP limit is 30dBm

**11.2. FIELD STRENGTH OF SPURIOUS RADIATION**

**RULE PART(S)**

FCC: §2.1053, §22.917, §24.238, and §27.53

**LIMIT**

§22.917 (e) and §24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB

**TEST PROCEDURE**

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

**MODES TESTED**

GSM 850, GSM 1900 and WCDMA Band 5

**RESULTS**

### 11.2.1. SPURIOUS RADIATION PLOTS

#### GSM 850 GRPS

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement								
Chamber		Pre-amplifier		Filter		Limit		
3m Chamber				Filter 1		Part 22		
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.2MHz								
1.648	-52.0	V	3.0	1.0	-50.9	-13.0	-37.9	
2.473	-48.7	V	3.0	1.0	-47.6	-13.0	-34.6	
3.297	-53.1	V	3.0	1.0	-52.0	-13.0	-39.0	
1.648	-50.1	H	3.0	1.0	-49.0	-13.0	-36.0	
2.473	-47.5	H	3.0	1.0	-46.4	-13.0	-33.4	
3.297	-53.2	H	3.0	1.0	-52.2	-13.0	-39.2	
Mid Ch, 836.6MHz								
1.673	-54.5	V	3.0	1.0	-53.5	-13.0	-40.5	
2.510	-46.4	V	3.0	1.0	-45.3	-13.0	-32.3	
3.346	-51.6	V	3.0	1.0	-50.6	-13.0	-37.6	
1.673	-52.1	H	3.0	1.0	-51.0	-13.0	-38.0	
2.510	-47.7	H	3.0	1.0	-46.7	-13.0	-33.7	
3.346	-52.8	H	3.0	1.0	-51.7	-13.0	-38.7	
High Ch, 848.8MHz								
1.698	-57.1	V	3.0	1.0	-56.0	-13.0	-43.0	
2.546	-49.8	V	3.0	1.0	-48.8	-13.0	-35.8	
3.395	-52.9	V	3.0	1.0	-51.9	-13.0	-38.9	
1.698	-55.0	H	3.0	1.0	-54.0	-13.0	-41.0	
2.546	-50.5	H	3.0	1.0	-49.4	-13.0	-36.4	
3.395	-53.3	H	3.0	1.0	-52.2	-13.0	-39.2	

Rev. 03.03.09  
Note: No other emissions were detected above the system noise floor.

Note – Pre-amp is part of substitution measurement.

GSM 850 EGPRS

**UL Verification Services, Inc.**  
**Above 1GHz High Frequency Substitution Measurement**

**Company:** Sony**Project #:** 10707861**Date:** 3/20/2015**Test Engineer:** B. Kiewra**Configuration:** FCC ID: PY7-PM0794 with charger (Y (landscape) orientation); s/n 00440245-427882-3**Mode:** EGPRS 850 CS

Chamber		Pre-amplifier	Filter		Limit			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 824.2MHz</b>								
1.648	-52.5	V	3.0	1.0	-51.5	-13.0	-38.5	
2.473	-46.6	V	3.0	1.0	-45.6	-13.0	-32.6	
3.297	-50.6	V	3.0	1.0	-49.6	-13.0	-36.6	
1.648	-55.5	H	3.0	1.0	-54.5	-13.0	-41.5	
2.473	-52.0	H	3.0	1.0	-50.9	-13.0	-37.9	
3.297	-51.2	H	3.0	1.0	-50.2	-13.0	-37.2	
<b>Mid Ch, 836.6MHz</b>								
1.673	-51.6	V	3.0	1.0	-50.6	-13.0	-37.6	
2.510	-41.6	V	3.0	1.0	-40.5	-13.0	-27.5	
3.346	-52.5	V	3.0	1.0	-51.5	-13.0	-38.5	
1.673	-49.5	H	3.0	1.0	-48.4	-13.0	-35.4	
2.510	-42.2	H	3.0	1.0	-41.1	-13.0	-28.1	
3.346	-52.1	H	3.0	1.0	-51.1	-13.0	-38.1	
<b>High Ch, 848.8MHz</b>								
1.698	-52.7	V	3.0	1.0	-51.7	-13.0	-38.7	
2.546	-46.3	V	3.0	1.0	-45.2	-13.0	-32.2	
3.395	-52.7	V	3.0	1.0	-51.7	-13.0	-38.7	
1.698	-52.0	H	3.0	1.0	-51.0	-13.0	-38.0	
2.546	-44.5	H	3.0	1.0	-43.4	-13.0	-30.4	
3.395	-51.6	H	3.0	1.0	-50.6	-13.0	-37.6	

Rev. 03.03.09

Note: No other emissions were detected above the system noise floor.

Note – Pre-amp is part of substitution measurement.

GSM1900 GPRS

**UL Verification Services, Inc.**  
**Above 1GHz High Frequency Substitution Measurement**

**Company:** Sony**Project #:** 10707861**Date:** 3/24/2015**Test Engineer:** B. Kiewra**Configuration:** FCC ID: PY7-PM0794 with charger (Y (landscape) orientation); s/n 00440245-427882-3**Mode:** GPRS 1900

Chamber		Pre-amplifier	Filter		Limit	
3m Chamber			Filter 1		Part 22	
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)
Low Ch, 1850.2MHz						
3.700	-52.0	V	3.0	1.2	-50.8	-13.0
5.551	-49.0	V	3.0	1.2	-47.8	-13.0
7.401	-45.6	V	3.0	1.2	-44.4	-13.0
3.700	-52.6	H	3.0	1.2	-51.4	-13.0
5.551	-48.5	H	3.0	1.2	-47.3	-13.0
7.401	-45.7	H	3.0	1.2	-44.5	-13.0
Mid Ch, 1880MHz						
3.760	-52.3	V	3.0	1.2	-51.1	-13.0
5.640	-48.8	V	3.0	1.2	-47.6	-13.0
7.520	-44.8	V	3.0	1.2	-43.6	-13.0
3.760	-52.6	H	3.0	1.2	-51.4	-13.0
5.640	-49.1	H	3.0	1.2	-47.9	-13.0
7.520	-45.4	H	3.0	1.2	-44.2	-13.0
High Ch, 1909.8MHz						
3.820	-52.9	V	3.0	1.2	-51.7	-13.0
5.729	-48.1	V	3.0	1.2	-46.9	-13.0
7.639	-46.0	V	3.0	1.2	-44.8	-13.0
3.820	-53.2	H	3.0	1.2	-52.0	-13.0
5.729	-48.0	H	3.0	1.2	-46.8	-13.0
7.639	-45.9	H	3.0	1.2	-44.7	-13.0

Rev. 03.03.09

Note: No other emissions were detected above the system noise floor.

Note – Pre-amp is part of substitution measurement.

GSM 1900 EGPRS

**UL Verification Services, Inc.**  
**Above 1GHz High Frequency Substitution Measurement**

**Company:** Sony**Project #:** 10707861**Date:** 3/23/2015**Test Engineer:** B. Kiewra**Configuration:** FCC ID: PY7-PM0794 with charger (Y (landscape) orientation); s/n 00440245-427882-3**Mode:** EGPRS 1900

Chamber		Pre-amplifier	Filter		Limit			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1850.2MHz</b>								
3.700	-51.9	V	3.0	1.2	-50.7	-13.0	-37.7	
5.551	-48.9	V	3.0	1.2	-47.7	-13.0	-34.7	
7.401	-45.5	V	3.0	1.2	-44.3	-13.0	-31.3	
3.700	-52.9	H	3.0	1.2	-51.7	-13.0	-38.7	
5.551	-51.3	H	3.0	1.2	-50.1	-13.0	-37.1	
7.401	-45.6	H	3.0	1.2	-44.4	-13.0	-31.4	
<b>Mid Ch, 1880MHz</b>								
3.760	-51.7	V	3.0	1.2	-50.5	-13.0	-37.5	
5.640	-49.8	V	3.0	1.2	-48.6	-13.0	-35.6	
7.520	-46.4	V	3.0	1.2	-45.2	-13.0	-32.2	
3.760	-51.9	H	3.0	1.2	-50.7	-13.0	-37.7	
5.640	-49.4	H	3.0	1.2	-48.1	-13.0	-35.1	
7.520	-45.7	H	3.0	1.2	-44.5	-13.0	-31.5	
<b>High Ch, 1909.8MHz</b>								
3.820	-51.7	V	3.0	1.2	-50.5	-13.0	-37.5	
5.729	-47.4	V	3.0	1.2	-46.2	-13.0	-33.2	
7.639	-46.2	V	3.0	1.2	-45.0	-13.0	-32.0	
3.820	-51.3	H	3.0	1.2	-50.1	-13.0	-37.1	
5.729	-48.2	H	3.0	1.2	-47.0	-13.0	-34.0	
7.639	-45.7	H	3.0	1.2	-44.5	-13.0	-31.5	

Rev. 03.03.09

Note: No other emissions were detected above the system noise floor.

Note – Pre-amp is part of substitution measurement.

WCDMA Band 5 REL 99

**UL Verification Services, Inc.**  
**Above 1GHz High Frequency Substitution Measurement**

**Company:** Sony**Project #:** 10707861**Date:** 3/24/2015**Test Engineer:** B. Kiewra**Configuration:** FCC ID: PY7-PM0794 with charger (Y (landscape) orientation); s/n 00440245-427882-3**Mode:** WCDMA REL99

Chamber		Pre-amplifier	Filter		Limit			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 826.4MHz</b>								
1.653	-51.4	V	3.0	1.0	-50.4	-13.0	-37.4	
2.479	-51.5	V	3.0	1.0	-50.5	-13.0	-37.5	
3.306	-50.7	V	3.0	1.0	-49.7	-13.0	-36.7	
1.653	-48.9	H	3.0	1.0	-47.9	-13.0	-34.9	
2.479	-52.0	H	3.0	1.0	-51.0	-13.0	-38.0	
3.306	-51.2	H	3.0	1.0	-50.2	-13.0	-37.2	
<b>Mid Ch, 836.6MHz</b>								
1.673	-51.0	V	3.0	1.0	-50.0	-13.0	-37.0	
2.510	-51.4	V	3.0	1.0	-50.4	-13.0	-37.4	
3.346	-50.5	V	3.0	1.0	-49.5	-13.0	-36.5	
1.673	-48.8	H	3.0	1.0	-47.8	-13.0	-34.8	
2.510	-51.7	H	3.0	1.0	-50.7	-13.0	-37.7	
3.346	-50.6	H	3.0	1.0	-49.6	-13.0	-36.6	
<b>High Ch, 846.6MHz</b>								
1.693	-49.6	V	3.0	1.0	-48.6	-13.0	-35.6	
2.540	-47.7	V	3.0	1.0	-46.7	-13.0	-33.7	
3.386	-50.3	V	3.0	1.0	-49.3	-13.0	-36.3	
1.693	-48.1	H	3.0	1.0	-47.1	-13.0	-34.1	
2.540	-51.2	H	3.0	1.0	-50.2	-13.0	-37.2	
3.386	-50.8	H	3.0	1.0	-49.8	-13.0	-36.8	

Rev. 03.03.09

Note: No other emissions were detected above the system noise floor.

Note – Pre-amp is part of substitution measurement.

WCDMA BAND 5 HSDPA

**UL Verification Services, Inc.**  
**Above 1GHz High Frequency Substitution Measurement**

**Company:** Sony**Project #:** 10707861**Date:** 3/24/2015**Test Engineer:** B. Kiewra**Configuration:** FCC ID: PY7-PM0794 with charger (Y (landscape) orientation); s/n 00440245-427882-3**Mode:** WCDMA HSDPA

Chamber		Pre-amplifier	Filter		Limit			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 826.4MHz</b>								
1.653	-53.2	V	3.0	1.0	-52.2	-13.0	-39.2	
2.479	-53.8	V	3.0	1.0	-52.8	-13.0	-39.8	
3.306	-52.8	V	3.0	1.0	-51.8	-13.0	-38.8	
1.653	-53.4	H	3.0	1.0	-52.4	-13.0	-39.4	
2.479	-53.9	H	3.0	1.0	-52.9	-13.0	-39.9	
3.306	-52.4	H	3.0	1.0	-51.4	-13.0	-38.4	
<b>Mid Ch, 836.6MHz</b>								
1.673	-55.8	V	3.0	1.0	-54.8	-13.0	-41.8	
2.510	-53.7	V	3.0	1.0	-52.7	-13.0	-39.7	
3.346	-51.0	V	3.0	1.0	-50.0	-13.0	-37.0	
1.673	-52.9	H	3.0	1.0	-51.9	-13.0	-38.9	
2.510	-53.7	H	3.0	1.0	-52.7	-13.0	-39.7	
3.346	-52.6	H	3.0	1.0	-51.6	-13.0	-38.6	
<b>High Ch, 846.6MHz</b>								
1.693	-55.3	V	3.0	1.0	-54.3	-13.0	-41.3	
2.540	-52.2	V	3.0	1.0	-51.2	-13.0	-38.2	
3.386	-52.7	V	3.0	1.0	-51.7	-13.0	-38.7	
1.693	-54.5	H	3.0	1.0	-53.5	-13.0	-40.5	
2.540	-54.3	H	3.0	1.0	-53.3	-13.0	-40.3	
3.386	-52.0	H	3.0	1.0	-51.0	-13.0	-38.0	

Rev. 03.03.09

Note: No other emissions were detected above the system noise floor.

Note – Pre-amp is part of substitution measurement.