



**FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 27 SUBPART F**

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac, ANT+ and NFC

FCC ID: PY7-TM0062

REPORT NUMBER: R10721207-RF Revision 1

ISSUE DATE: MAY 13, 2015

**Prepared for
SONY MOBILE COMMUNICATIONS, INC.
1-8-15 KONAN, MINATO-KU, TOKYO, 108-0075 JAPAN**

**Prepared by
UL LLC
12 LABORATORY DR.
RESEARCH TRIANGLE PARK, NC 27709 USA
TEL: (919) 549-1400**



NVLAP LAB CODE 200246-0

Revision History

Rev.	Date	Revisions	Revised By
-	2015-05-10	Initial Release.	Jeff Moser
1	2015-05-13	Revised limit designations for Section 11.2	Jeff Moser

TABLE OF CONTENTS

1.	ATTESTATION OF TEST RESULTS	5
2.	TEST METHODOLOGY	6
3.	FACILITIES AND ACCREDITATION	6
4.	CALIBRATION AND UNCERTAINTY	6
4.1.	MEASURING INSTRUMENT CALIBRATION	6
4.2.	SAMPLE CALCULATION	6
4.3.	MEASUREMENT UNCERTAINTY	7
5.	EQUIPMENT UNDER TEST	8
5.1.	DESCRIPTION OF EUT	8
5.2.	MAXIMUM OUTPUT POWER.....	8
5.3.	MAXIMUM OUTPUT POWER (LTE).....	9
5.4.	DESCRIPTION OF AVAILABLE ANTENNAS	11
5.5.	DESCRIPTION OF TEST SETUP.....	12
6.	TEST AND MEASUREMENT EQUIPMENT	15
7.	Summary Table.....	17
8.	RF POWER OUTPUT VERIFICATION.....	18
8.1.	GSM/GPRS/EDGE	18
8.1.1.	GSM OUTPUT POWER RESULT	19
8.2.	UMTS REL 99.....	21
8.2.1.	UMTS REL 99 OUTPUT POWER RESULT	21
8.3.	UMTS HSDPA	22
8.3.1.	UMTS HSDPA OUTPUT POWER RESULT.....	22
8.3.2.	UMTS HSUPA	24
8.3.3.	UMTS HSUPA OUTPUT POWER RESULT.....	25
8.4.	LTE OUTPUT VERIFICATION.....	26
8.4.1.	LTE OUTPUT RESULT	26
9.	PEAK TO AVERAGE RATIO	29
9.1.	CONDUCTED PEAK TO AVERAGE RESULT.....	29
10.	LIMITS AND CONDUCTED RESULTS	35
10.1.	OCCUPIED BANDWIDTH.....	35
10.1.1.	OCCUPIED BANDWIDTH RESULTS.....	36
10.1.2.	LTE OCCUPIED BANDWIDTH RESULTS	37

10.1.1.	OCCUPIED BANDWIDTH PLOTS	39
10.2.	<i>BAND EDGE EMISSIONS</i>	60
10.2.1.	BAND EDGE PLOTS	61
10.3.	<i>OUT OF BAND EMISSIONS</i>	77
10.3.1.	OUT OF BAND EMISSIONS RESULT	78
10.3.2.	OUT OF BAND EMISSIONS PLOTS.....	81
10.4.	<i>FREQUENCY STABILITY</i>	102
10.4.1.	FREQUENCY STABILITY RESULTS.....	103
11.	RADIATED TEST RESULTS	106
11.1.	<i>RADIATED POWER (ERP & EIRP)</i>	106
11.1.1.	ERP/EIRP Results.....	107
11.1.2.	LTE ERP/EIRP Results	109
11.1.3.	ERP/EIRP PLOTS.....	111
11.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	131
11.2.1.	SPURIOUS RADIATION PLOTS.....	133
12.	SETUP PHOTOS	153

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SONY MOBILE COMMUNICATION, INC.

EUT DESCRIPTION: GSM/WCDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac, ANT+ and NFC

SERIAL NUMBER: Serial Numbers: CB5A23WPZZ, CB5A23WPYJ, CB5A23WQ0J

DATE TESTED: 2015-04-27 through 2015-05-08

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E and 27F	PASS

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL LLC based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released
For UL LLC By:



Choon Sian Ooi
EMC Project Lead
UL – Consumer Technology Division

Prepared By:



Jeff Moser
EMC Program Manager
UL – Consumer Technology Division

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22, FCC CFR Part 24 and FCC CFR 47 Part 27.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 12 Laboratory Dr., Research Triangle Park, NC 27709, USA.

12 Laboratory Dr., RTP, NC 27709	
<input type="checkbox"/>	Chamber A
<input checked="" type="checkbox"/>	Chamber C

The onsite chambers (A & C) are covered under Industry Canada company address code 2180C with site numbers 2180C -1 through 2180C-2, respectively.

UL LLC (RTP) is accredited by NVLAP, Laboratory Code 200246-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2002460.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test	Uncertainty
Conducted Emissions (0.150-30MHz)	+/- 2.37 dB
Radiated Emissions (30-1000 MHz)	+/- 6.04 dB (3m)
Radiated Emissions (1-40 GHz)	+/- 6.81 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac, ANT+ and NFC capability that is manufactured by Sony.

5.2. MAXIMUM OUTPUT POWER

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation Peak	Conducted		Radiated	
			AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
GSM850	824~849	GPRS	32.7	1862.09	28.91	778.04
	824~849	EGPRS	26.7	467.74	23.18	207.97
GSM1900	1850~1910	GPRS	29.8	954.99	32.51	1782.38
	1850~1910	EGPRS	25.8	380.19	28.17	656.15
Band 5	824~849	REL99	24.7	295.12	20.16	103.75
	824~849	HSDPA	23.8	239.88	19.41	87.30
	824~849	HSUPA	22.9	194.98		
Band 2	1850~1910	REL99	23.4	218.78	24.55	285.10
	1850~1910	HSDPA	22.4	173.78	23.64	231.21
	1850~1910	HSUPA	22.2	165.96		

5.3. MAXIMUM OUTPUT POWER (LTE)

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE17	704~716	10MHz	QPSK	23.21	209.41	17.44	55.46
	704~716	10MHz	16QAM	22.74	187.93	16.80	47.86

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE17	704~716	5MHz	QPSK	23.60	229.09	17.74	59.43
	704~716	5MHz	16QAM	22.36	172.19	16.87	48.64

FCC Part 22							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE5	824~849	10MHz	QPSK	23.66	232.27	19.96	99.08
	824~849	10MHz	16QAM	22.81	190.99	19.24	83.95

FCC Part 22							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE5	824~849	5MHz	QPSK	23.69	233.88	20.51	112.46
	824~849	5MHz	16QAM	23.05	201.84	19.64	92.04

FCC Part 22 (3MHz Bandwidth)							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE5	824~849	3MHz	QPSK	23.73	236.05	20.43	110.41
	824~849	3MHz	16QAM	22.92	195.88	19.50	89.13

FCC Part 22							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE5	824~849	1.4MHz	QPSK	23.46	221.82	19.16	82.41
	824~849	1.4MHz	16QAM	22.85	192.75	18.01	63.24

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the GSM 850, GSM 1900, WCDMA Bands 2 and 5 and LTE Bands 5 and 17 with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBd/dBi)
GSM850, 824~849MHz	-4.2
GSM1900, 1850~1910MHz	0.1
Band 5, 824~849MHz	-4.2
Band 2, 1850~1910MHz	0.1
LTE5, 824~849MHz	-4.2
LTE17, 704~716MHz	-4.5

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Sony	EP-880	3514W 01 S08499	

I/O CABLES (CONDUCTED SETUP)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA

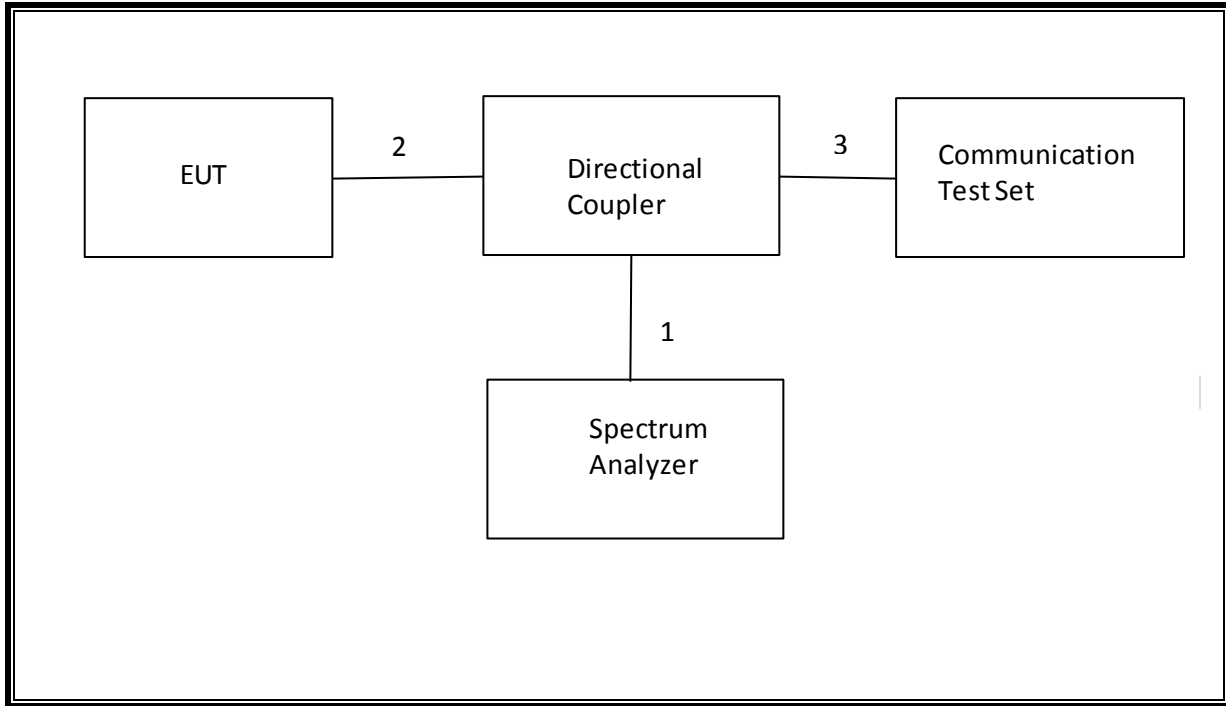
I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes

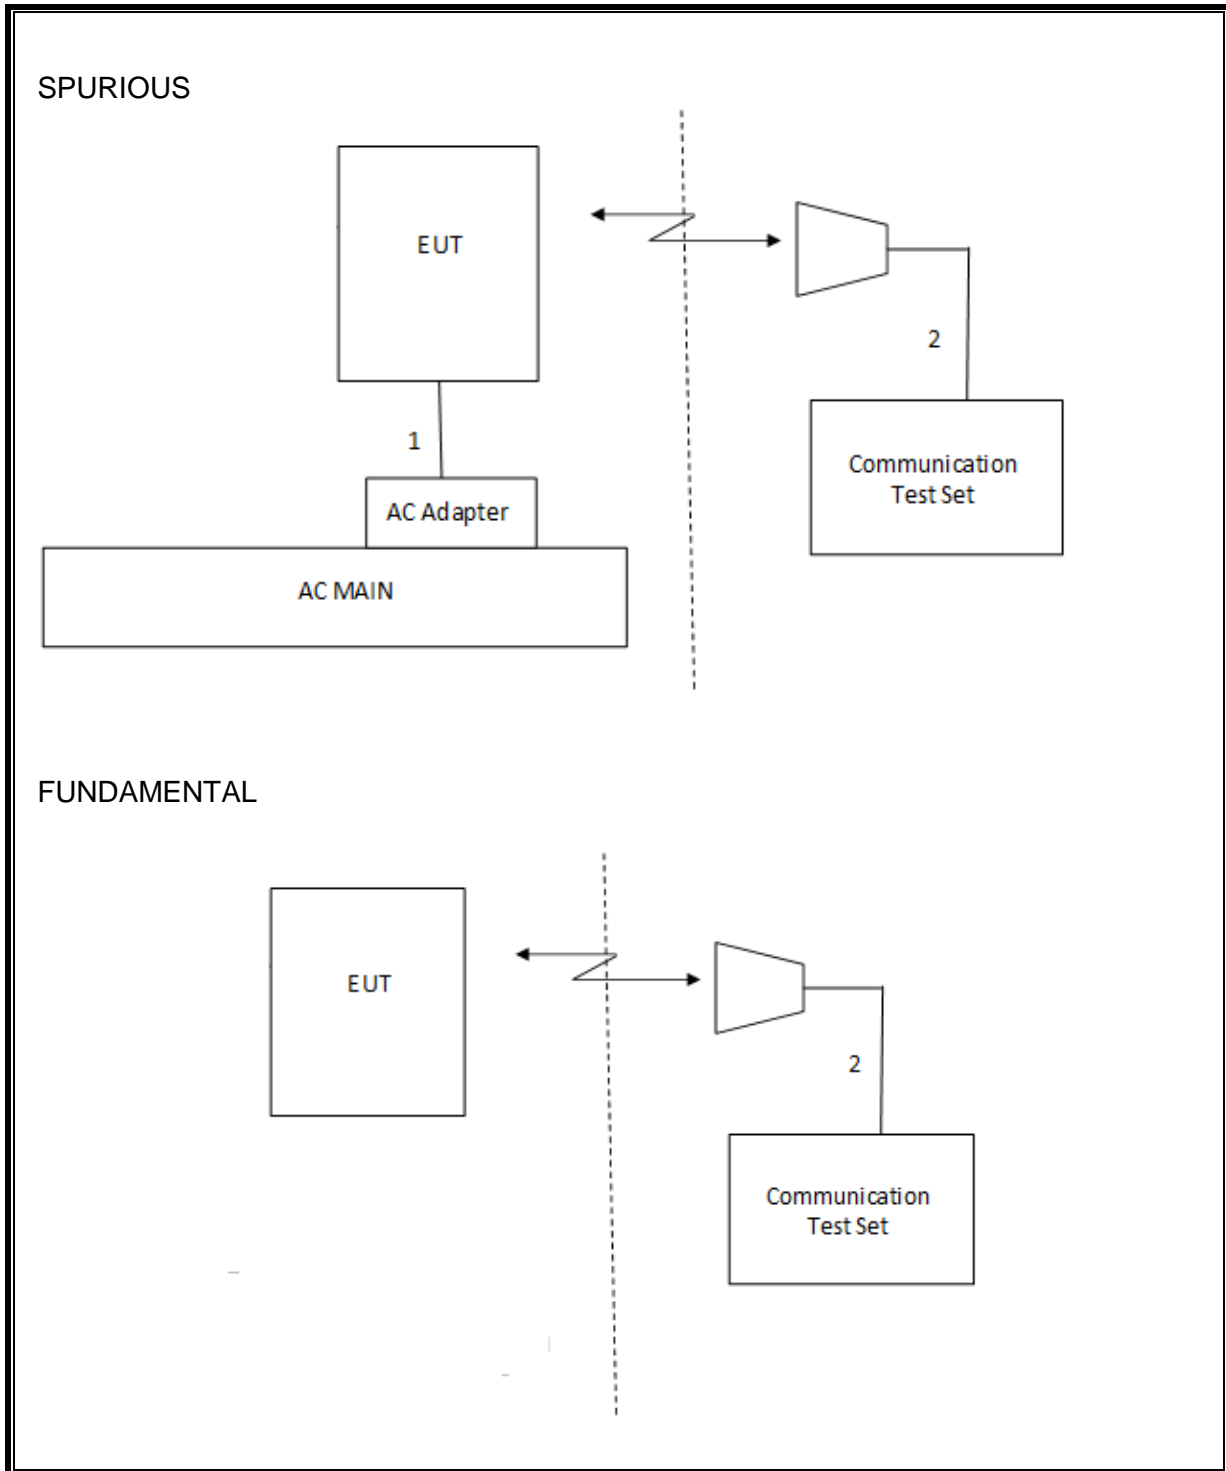
TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)



SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)



6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Wireless Conducted Measurement Equipment

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
	Common Equipment				
SA0020	Spectrum Analyzer	Agilent Technologies	E4446	2014-06-12	2015-06-30
SA0022	Network Analyzer	Agilent Technologies	8722ES	2015-03-19	2016-03-31
PAR038	RF Power Meter Sensor	HP	8481A	2015-01-07	2016-01-31
PAR037	Power Meter, 100kHz to 110 GHz	HP	437B	2015-01-07	2016-01-31
T374	Wideband Radio Communications Tester	Rohde and Schwartz	CMW500	2014-10-13	2015-10-31
MM0143	Digital Multimeter,	Fluke	175	2014-09-04	2016-09-30
HI0069	Temp/Humid/Pressure Meter	Cole-Parmer	99760-00	2014-06-27	2015-06-30
-	Directional Coupler	Mini Circuits	ZUDC10-183+	Cal on Demand	Cal on Demand

Radiated Disturbance Emissions (E-field) – Chamber C

Equip. ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
	30-1000 MHz Range				
AT0066	Hybrid Broadband Antenna	Sunol Sciences Corp.	JB1	2014-07-10	2015-07-31
	1-18 GHz				
AT0062	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2014-07-22	2015-07-31
	Substitution Antenna				
AT0069 (Substitution Antenna)	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2015-02-17	2016-02-29
AT0030 (Substitution Antenna)	Log Periodic	Schaffner	UPA6109	2014-07-01	2015-07-31
	Gain-Loss Chains				
SAC_G (Hybrid) 30-1000MHz	Gain-Loss string for Hybrid antenna at 3m	Various	Various	2015-01-26	2016-01-31
SAC_G (BOM) 1-18GHz	Gain-Loss string for Hybrid antenna at 3m	Various	Various	2015-01-26	2016-01-31
	Receiver & Software				
SA0018	Spectrum Analyzer	Agilent	N9030A	2014-06-24	2015-06-30
SOFTEMI	EMI Software	UL	Version 9.5	NA	NA
T918	Wideband Radio Communications Tester	Rohde and Schwartz	CMW500	2014-12-30	2015-12-31
	Additional Equipment used				
HI0069	Temp/Humid/Pressure Meter	Cole-Parmer	99760-00	2014-06-27	2015-06-30
SIG001 (Substitution Signal Generator)	Signal Generator, 100kHz-6GHz	Agilent	N5181A	2015-02-04	2016-02-04
HPF009	1GHz High-pass Filter	Micro-Tronics	HPM17672	2015-01-28	2016-01-31

7. Summary Table

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Note
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	8.996 MHz
22.917(a) 24.238(a) 27.53(g)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-13.89 dBm/ -16.42 dBm
2.1046	N/A	Conducted output power	N/A		Pass	32.7 dBm
22.355 24.235 27.54	RSS-132(4.3) RSS-133(6.3) RSS-139(6.3)	Frequency Stability	2.5PPM		Pass	-0.005 ppm
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm	Radiated	Pass	28.91 dBm
27.50(b)(10)	N/A		34.77 dBm		Pass	17.74 dBm
24.232(c) 27.50(h)(2)	RSS-133(6.4) RSS-199(4.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	32.51 dBm
22.917(a) 24.238(a) 27.53(g)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Radiated Spurious Emission	-13dBm		Pass	-44.3 dBm

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900
Press Connection control to choose the different menus
Press RESET > choose all to reset all settings
Connection Press Signal Off to turn off the signal and change settings
Network Support > GSM+GPRS or GSM+EGPRS
Main Service > Packet Data
Service selection > Test Mode A – Auto Slot Config. off
MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting
 > Slot configuration > Uplink/Gamma
 > 33 dBm for GPRS 850/900
 > 30 dBm for GPRS1800/1900
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel
Frequency Offset > + 0 Hz
Mode > BCCH and TCH
BCCH Level > -85 dBm (May need to adjust if link is not stable)
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]
Channel Type > Off
P0> 4 dB
Slot Config > Unchanged (if already set under MS Signal)
TCH > choose desired test channel
Hopping > Off
Main Timeslot > 3 (Default)
Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)
 Bit Stream > 2E9-1PSR Bit Pattern
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection Press Signal On to turn on the signal and change settings

8.1.1. GSM OUTPUT POWER RESULT

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)
GSM (Voice)	CS1	1	128	824.2	N/A
			190	836.6	N/A
			251	848.8	N/A
GPRS (GMSK)	CS1	1	128	824.2	32.7
			190	836.6	32.7
			251	848.8	32.7
		2	128	824.2	31.5
			190	836.6	31.4
			251	848.8	31.5
		3	128	824.2	29.4
			190	836.6	29.5
			251	848.8	29.3
		4	128	824.2	28.4
			190	836.6	28.2
			251	848.8	28.4
EGPRS (8PSK)	MCS5	1	128	824.2	26.5
			190	836.6	26.5
			251	848.8	26.7
		2	128	824.2	24.8
			190	836.6	24.8
			251	848.8	24.9
		3	128	824.2	23.1
			190	836.6	23.1
			251	848.8	23.3
		4	128	824.2	21.0
			190	836.6	21.3
			251	848.8	21.2

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)
GSM (Voice)	CS1	1	512	1850.2	N/A
			661	1880.0	N/A
			810	1909.8	N/A
GPRS (GMSK)	CS1	1	512	1850.2	29.8
			661	1880.0	28.7
			810	1909.8	28.9
		2	512	1850.2	28.4
			661	1880.0	28.5
			810	1909.8	28.4
		3	512	1850.2	26.4
			661	1880.0	26.4
			810	1909.8	26.6
		4	512	1850.2	25.4
			661	1880.0	25.1
			810	1909.8	25.0
EGPRS (8PSK)	MCS5	1	512	1850.2	25.6
			661	1880.0	25.8
			810	1909.8	25.8
		2	512	1850.2	24.0
			661	1880.0	24.1
			810	1909.8	24.2
		3	512	1850.2	22.1
			661	1880.0	22.2
			810	1909.8	22.2
		4	512	1850.2	19.9
			661	1880.0	21.0
			810	1909.8	21.1

8.2. UMTS REL 99

TEST PROCEDURE

The following summary of these settings are illustrated below:

	Mode	Rel99
	Subtest	-
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	β_c	Not Applicable
	β_d	Not Applicable
	β_{ec}	Not Applicable
	β_c/β_d	8/15
	β_{hs}	Not Applicable
	β_{ed}	Not Applicable

8.2.1. UMTS REL 99 OUTPUT POWER RESULT

Release 99

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Rel 99 (RMC, 12.2 kbps)	4132	826.4	0	24.7
		4183	836.6	0	24.6
		4233	846.6	0	24.3

Release 99

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band II	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	0	23.3
		9400	1880.0	0	23.4
		9538	1907.6	0	23.3

8.3. UMTS HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	Rel5 HSDPA			
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

8.3.1. UMTS HSDPA OUTPUT POWER RESULT

HSDPA

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	23.8
		4183	836.6	0	23.6
		4233	846.6	0	23.3
	Subtest 2	4132	826.4	0	23.7
		4183	836.6	0	23.6
		4233	846.6	0	23.3
	Subtest 3	4132	826.4	0.5	23.7
		4183	836.6	0.5	23.6
		4233	846.6	0.5	23.3
	Subtest 4	4132	826.4	0.5	23.5
		4183	836.6	0.5	23.6
		4233	846.6	0.5	23.3

HSDPA

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	0	22.2
		9400	1880.0	0	22.4
		9538	1907.6	0	22.3
	Subtest 2	9262	1852.4	0	22.0
		9400	1880.0	0	22.2
		9538	1907.6	0	22.2
	Subtest 3	9262	1852.4	0.5	22.1
		9400	1880.0	0.5	22.2
		9538	1907.6	0.5	22.2
	Subtest 4	9262	1852.4	0.5	22.1
		9400	1880.0	0.5	22.2
		9538	1907.6	0.5	22.2

8.3.2. UMTS HSUPA

TEST PROCEDURE

The following summary of these settings are illustrated below: (ETSI TS 134.121-1 Table C.11.1)

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	P-CPICH (dB)	-10				
	P-CCPCH (dB)	-12				
	SCH (dB)	-12				
	PICH(dB)	-15				
	DPCH (dB)	-9				
	HS-SCCH_1 (dB)	-8				
	HS-PDSCH (dB)	-3				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	Bc	11/15	6/15	15/15	2/15	15/15
	Bd	15/15	15/15	9/15	15/15	15/15
	Bec	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/15
	Bhs	22/15	12/15	30/15	4/15	30/15
β_{ed} (note1)	1309/225	94/75	47/15	56/75	134/15	
MPR	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = β_{hs}/β_c	30/15				
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	Reference E-TFCIs	5	5	2	5	5
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27
	Note1: β_{ed} cannot be set directly, it is set by Absolute Grant Value.					

8.3.3. UMTS HSUPA OUTPUT POWER RESULT

HSUPA

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	22.9
		4183	836.6	0	22.8
		4233	846.6	0	22.8
	Subtest 2	4132	826.4	2	22.0
		4183	836.6	2	22.0
		4233	846.6	2	21.8
	Subtest 3	4132	826.4	1	22.0
		4183	836.6	1	22.5
		4233	846.6	1	22.3
	Subtest 4	4132	826.4	2	22.8
		4183	836.6	2	22.8
		4233	846.6	2	22.3
	Subtest 5	4132	826.4	0	23.7
		4183	836.6	0	23.6
		4233	846.6	0	23.3

HSUPA

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	0	21.5
		9400	1880.0	0	21.8
		9538	1907.6	0	22.2
	Subtest 2	9262	1852.4	2	20.6
		9400	1880.0	2	20.5
		9538	1907.6	2	20.9
	Subtest 3	9262	1852.4	1	21.2
		9400	1880.0	1	21.0
		9538	1907.6	1	21.0
	Subtest 4	9262	1852.4	2	21.3
		9400	1880.0	2	21.4
		9538	1907.6	2	21.0
	Subtest 5	9262	1852.4	0	22.2
		9400	1880.0	0	22.1
		9538	1907.6	0	22.3

8.4. LTE OUTPUT VERIFICATION

8.4.1. LTE OUTPUT RESULT

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)
						23790
						710 MHz
LTE Band 17	10	QPSK	1	0	0	23.07
			1	24	0	23.21
			1	49	0	23.21
			25	0	1	22.19
			25	12	1	22.24
			25	24	1	22.19
		16QAM	50	0	1	22.19
			1	0	1	22.26
			1	24	1	22.74
			1	49	1	22.35
			25	0	2	21.25
			25	12	2	21.29
			25	24	2	21.24
			50	0	2	21.16
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)
						23790
						710 MHz
LTE Band 17	5	QPSK	1	0	0	23.16
			1	12	0	23.60
			1	24	0	23.32
			12	0	1	22.19
			12	6	1	22.22
			12	11	1	22.22
		16QAM	25	0	1	22.23
			1	0	1	22.17
			1	12	1	22.25
			1	24	1	22.36
			12	0	2	21.23
			12	6	2	21.24
			12	11	2	21.21
			25	0	2	21.29

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20450	20525	20600
						829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	23.32	23.36	23.48
			1	24	0	23.37	23.66	23.43
			1	49	0	23.27	23.20	23.04
			25	0	1	22.25	22.32	22.25
			25	12	1	22.36	22.42	22.33
			25	24	1	22.24	22.24	22.12
		16QAM	50	0	1	22.27	22.31	22.24
			1	0	1	22.37	22.79	22.58
			1	24	1	22.80	22.81	22.68
			1	49	1	22.32	22.60	22.11
			25	0	2	21.30	21.34	21.37
			25	12	2	21.38	21.42	21.41
			25	24	2	21.29	21.26	21.19
			50	0	2	21.24	21.35	21.32
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20425	20525	20625
						826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	23.36	23.47	23.43
			1	12	0	23.69	23.46	23.11
			1	24	0	23.50	23.40	23.18
			12	0	1	22.29	22.31	22.21
			12	6	1	22.32	22.43	22.17
			12	11	1	22.31	22.33	22.14
		16QAM	25	0	1	22.26	22.35	22.19
			1	0	1	22.37	22.75	22.72
			1	12	1	22.62	22.83	23.05
			1	24	1	22.44	22.61	22.90
			12	0	2	21.19	21.40	21.20
			12	6	2	21.29	21.50	21.16
			12	11	2	21.32	21.42	21.13
			25	0	2	21.37	21.32	21.11

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20415	20525	20635
						825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	23.32	23.33	23.30
			1	7	0	23.73	23.44	23.37
			1	14	0	23.38	23.30	23.04
			6	0	1	22.20	22.32	22.10
			6	3	1	22.18	22.35	21.98
			6	5	1	22.27	22.39	22.06
		16QAM	15	0	1	22.29	22.35	22.08
			1	0	1	22.32	22.90	22.38
			1	7	1	22.16	22.91	22.26
			1	14	1	22.42	22.92	22.09
			6	0	2	21.33	21.18	21.31
			6	3	2	21.32	21.30	21.22
			6	5	2	21.38	21.30	21.29
			15	0	2	21.30	21.39	21.09
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20407	20525	20643
						824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	23.46	23.40	23.11
			1	2	0	23.43	23.40	23.10
			1	5	0	23.39	23.36	22.97
			3	0	0	23.22	23.29	23.07
			3	1	0	23.19	23.32	23.07
			3	2	0	23.21	23.35	23.05
		16QAM	6	0	1	22.11	22.26	21.95
			1	0	1	22.50	22.75	22.18
			1	2	1	22.37	22.85	22.15
			1	5	1	22.45	22.71	22.03
			3	0	1	22.22	22.51	22.20
			3	1	1	22.27	22.55	22.26
			3	2	1	22.27	22.56	22.26
			6	0	2	21.28	21.23	21.14

9. PEAK TO AVERAGE RATIO

Test Procedure

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

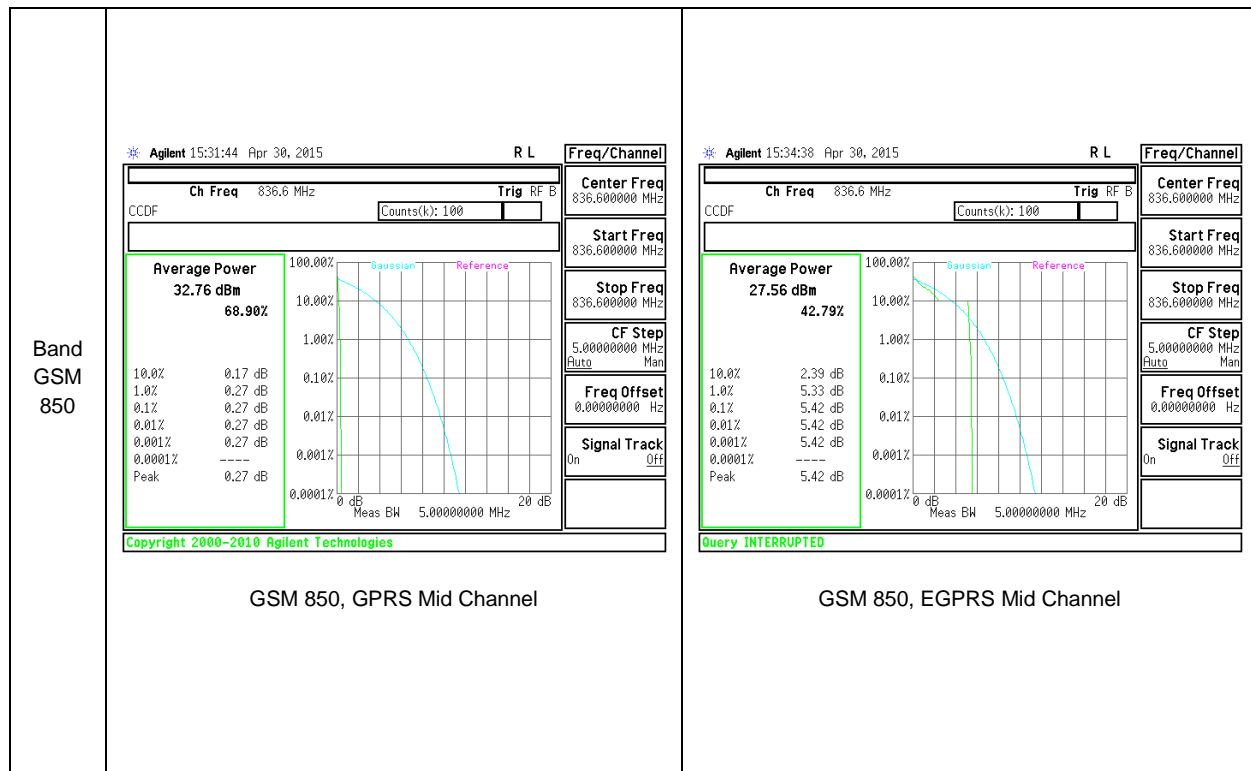
Test Spec

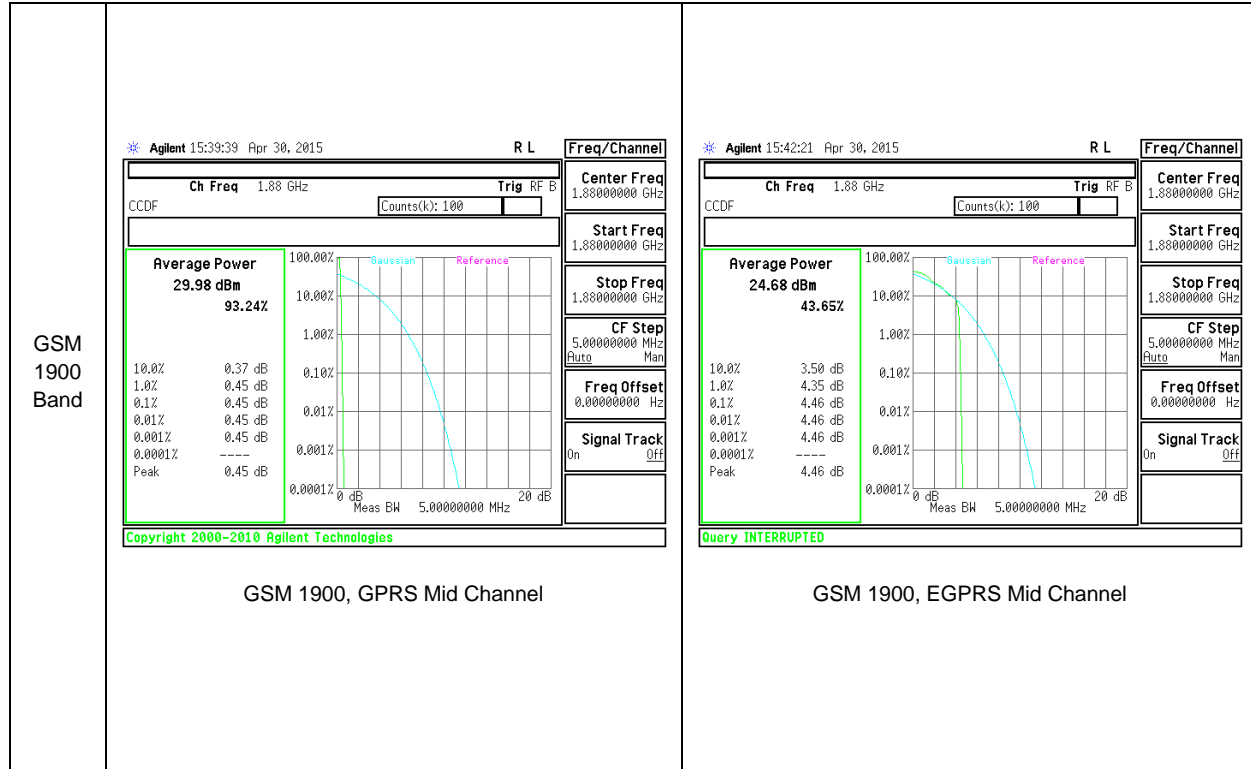
In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

9.1. CONDUCTED PEAK TO AVERAGE RESULT

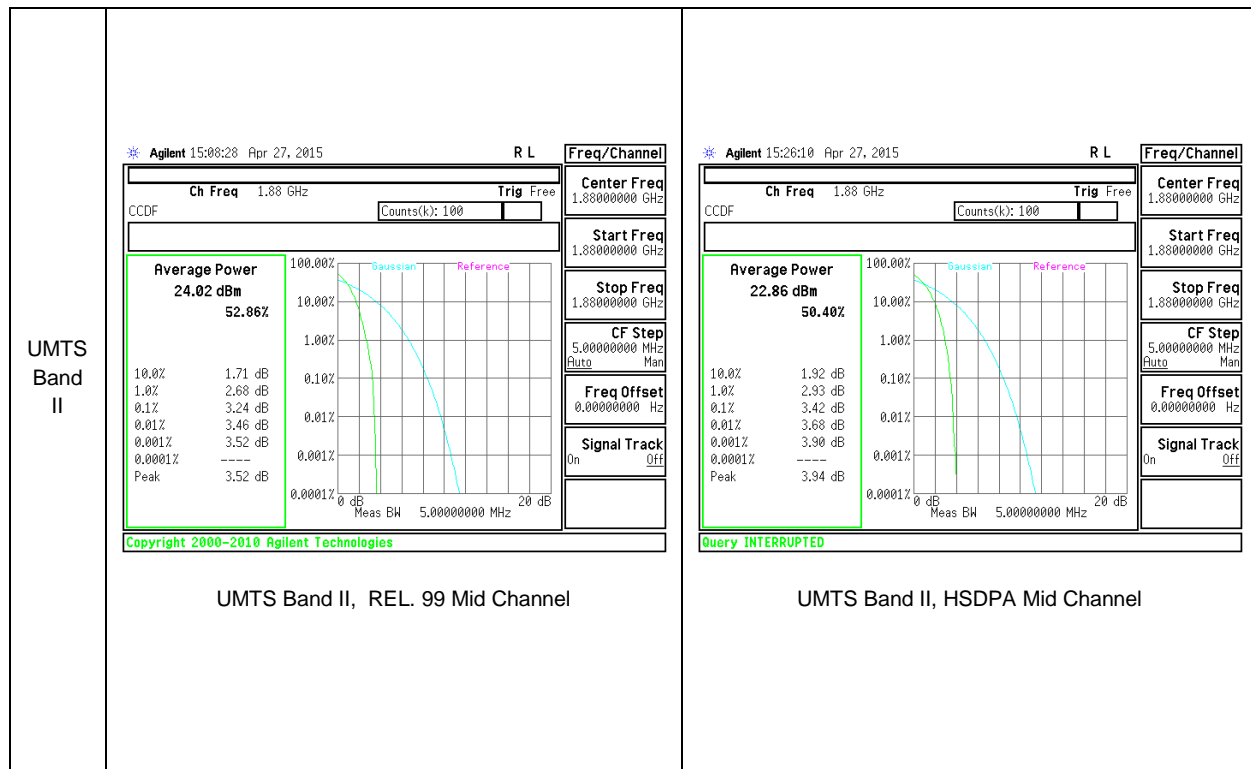
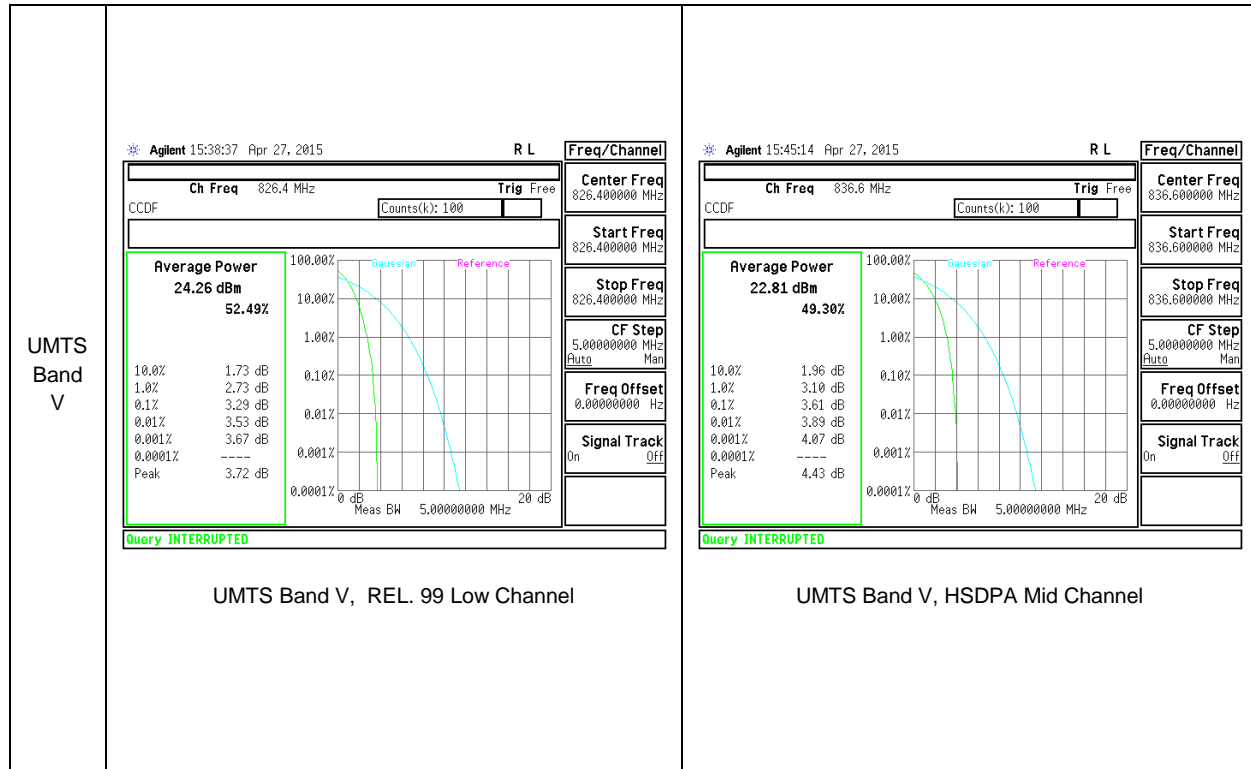
Modes Tested: GSM (850 and 1900), WCDMA (Bands 2 and 5), LTE (Bands 5 and 17).

GSM

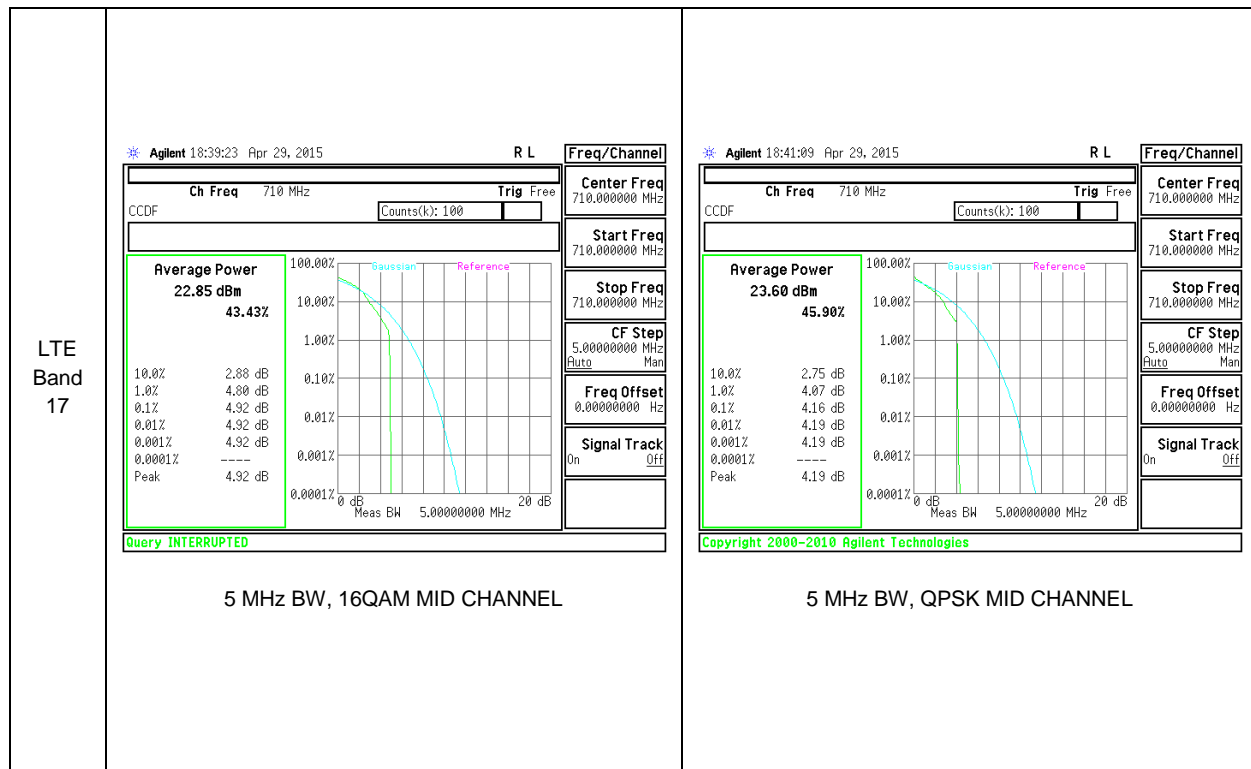
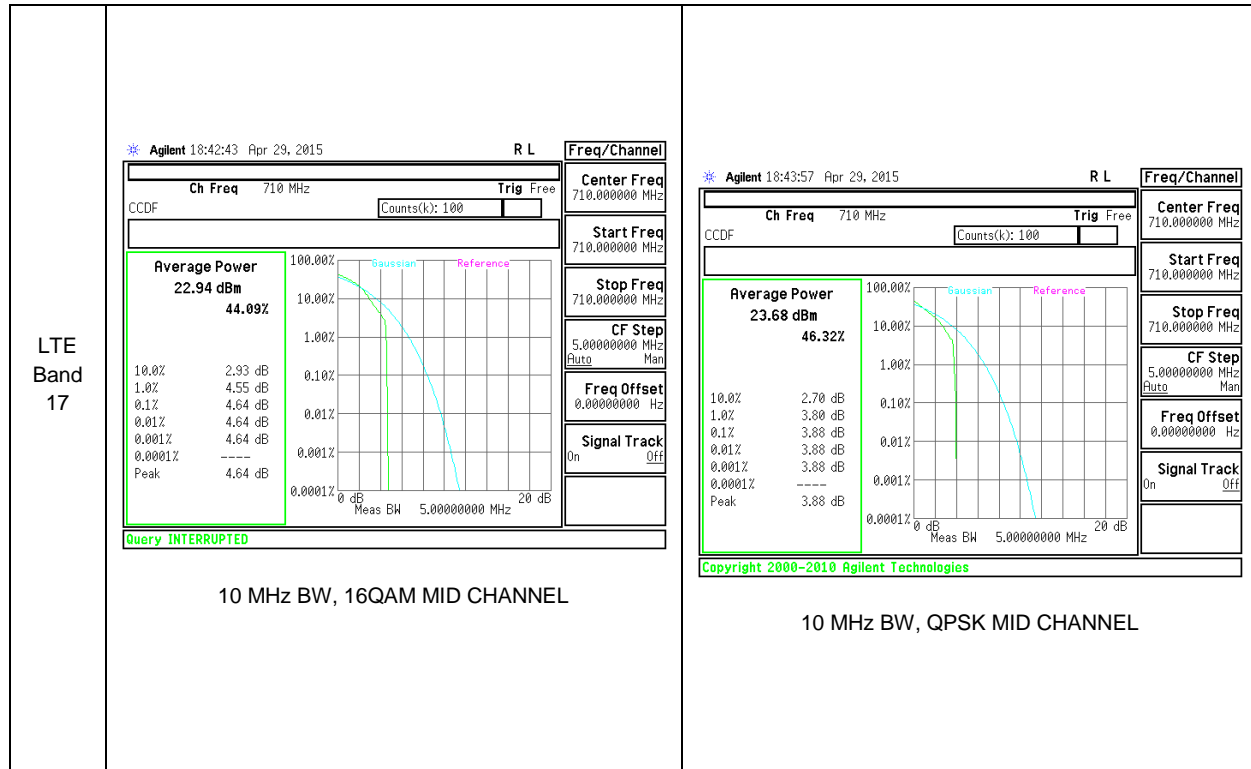


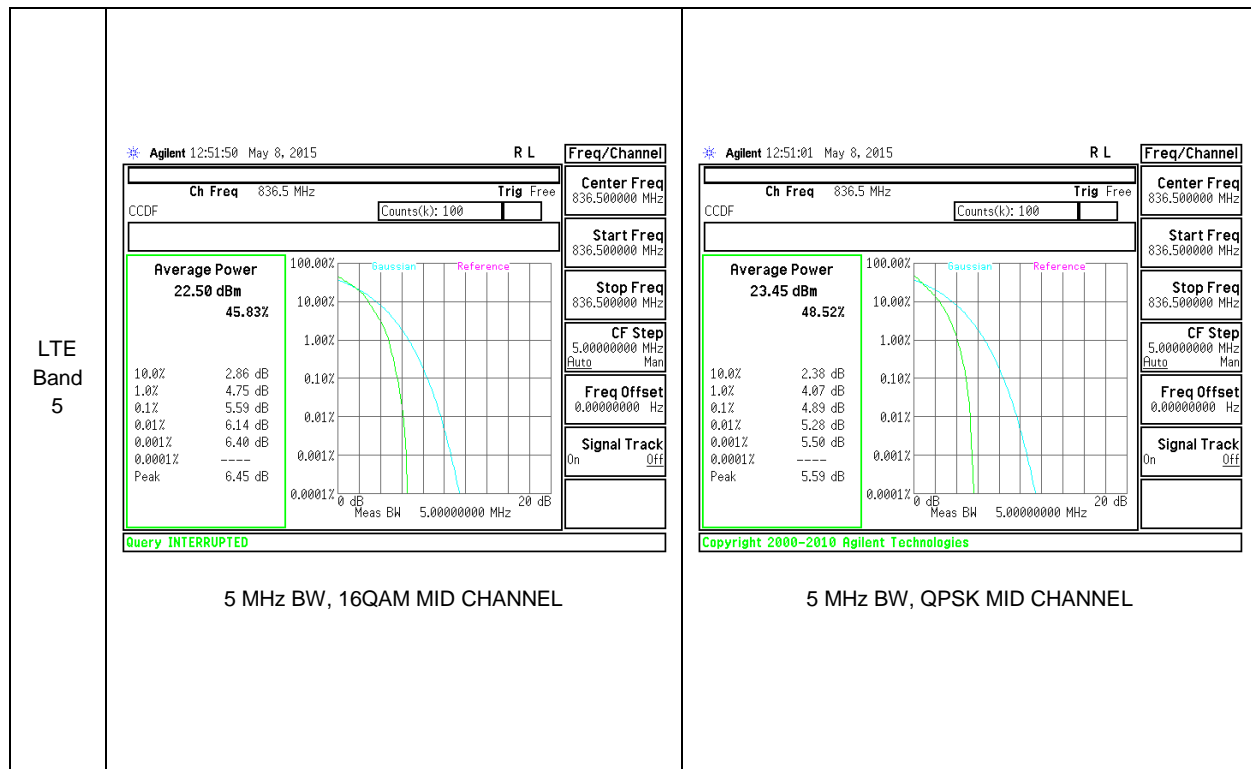
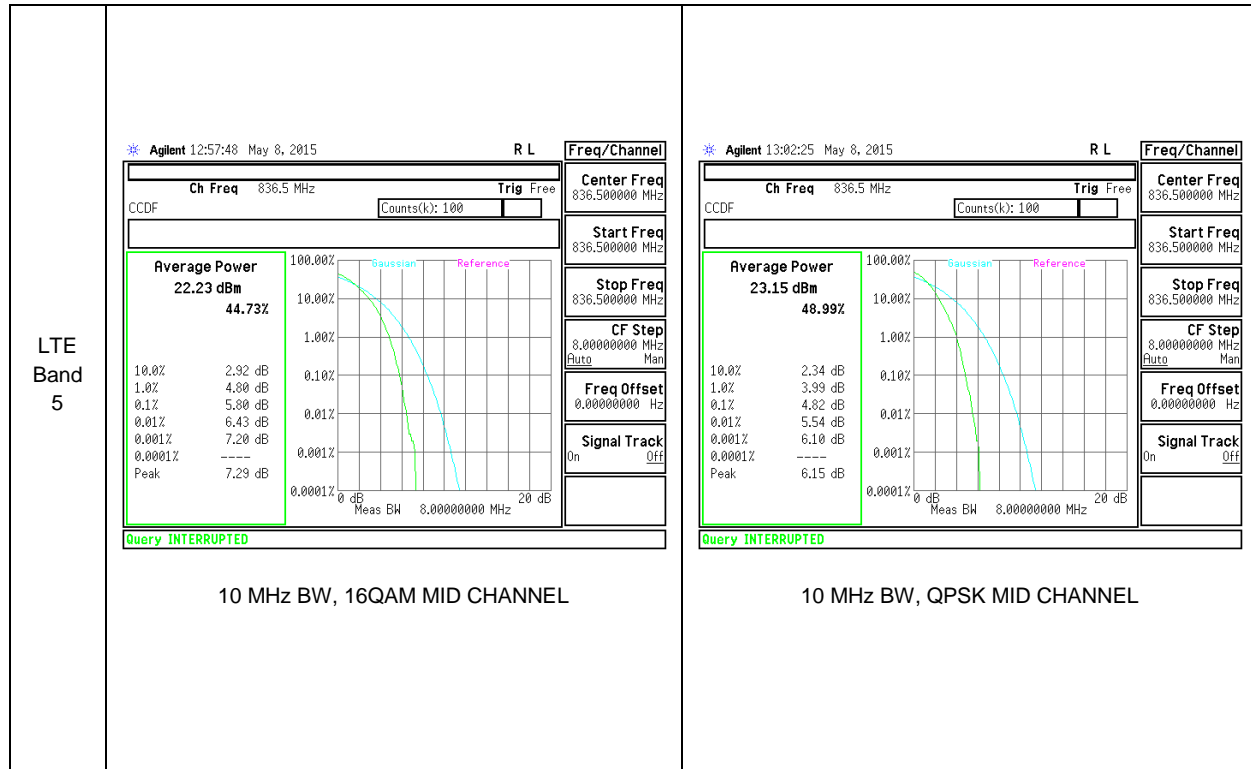


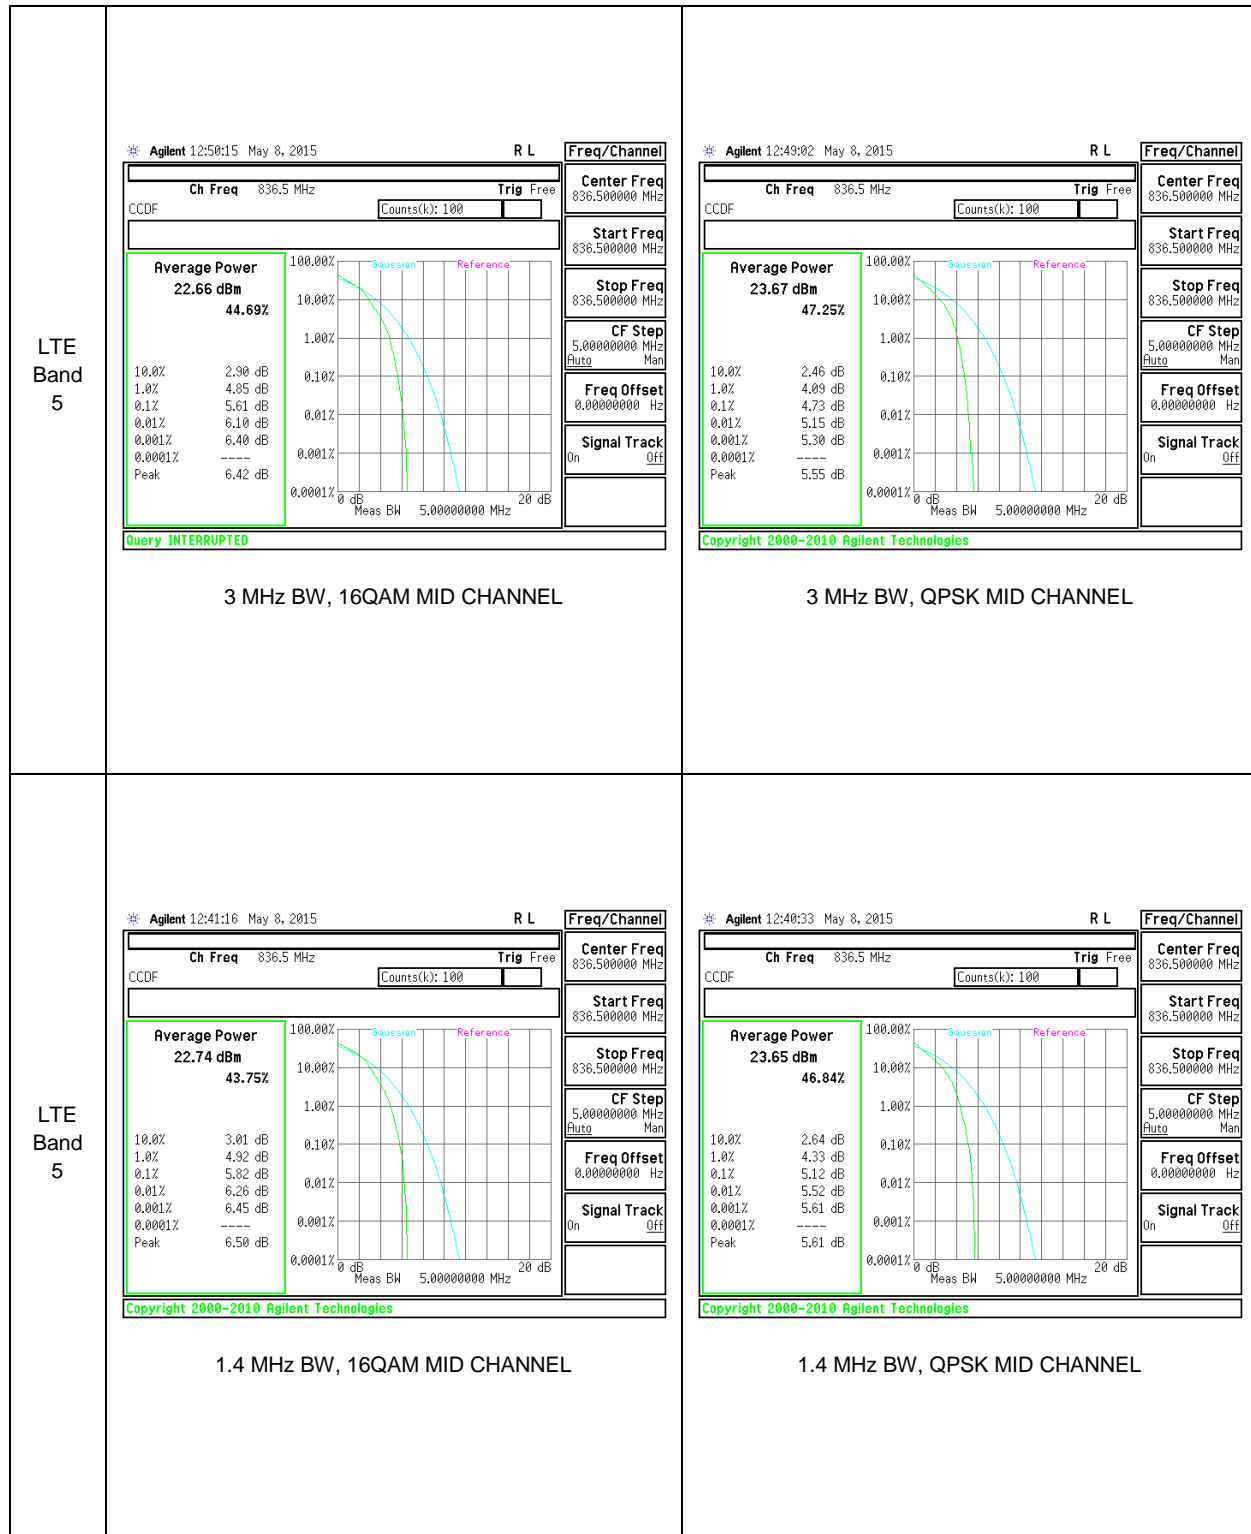
WCDMA



LTE







10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

IC: RSS-132, 4.5; RSS-133, 6.5

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r02)

MODES TESTED

GSM (850, 1900), WCDMA (Bands V and II), LTE (Bands 5 and 17).

10.1.1. OCCUPIED BANDWIDTH RESULTS

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
GSM850	GPRS	128	824.2	241	316.7
		190	836.6	245.1	318.2
		251	848.8	248.3	318.8
	EGPRS	128	824.2	248.6	315.3
		190	836.6	253.7	317
		251	848.8	248.8	308.1
GSM1900	GPRS	512	1850.2	244.1	309.8
		661	1880	239.6	315.1
		810	1909.8	245.7	317.7
	EGPRS	512	1850.2	238.9	313.5
		661	1880	242.1	309.8
		810	1909.8	244.6	308.1

Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
Band 5	REL99	4132	826.4	4.132	4.701
		4183	836.6	4.149	4.698
		4233	846.6	4.132	4.708
	HSDPA	4132	826.4	4.140	4.673
		4183	836.6	4.130	4.667
		4233	846.6	4.130	4.679
Band 2	REL99	9262	1852.4	4.156	4.686
		9400	1880	4.131	4.678
		9538	1907.6	4.137	4.715
	HSDPA	9262	1852.4	4.151	4.690
		9400	1880	4.154	4.719
		9538	1907.6	4.149	4.694

10.1.2. LTE OCCUPIED BANDWIDTH RESULTS

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE17	10	QPSK	50/0	709	8.948	9.651
			50/0	710	8.961	9.742
			50/0	711	8.945	9.772
		16QAM	50/0	709	8.941	9.734
			50/0	710	8.933	9.621
			50/0	711	8.996	9.68

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE17	5	QPSK	25/0	706.5	4.51	4.943
			25/0	710	4.508	4.925
			25/0	713.5	4.503	4.933
		16QAM	25/0	706.5	4.5	4.913
			25/0	710	4.494	4.945
			25/0	713.5	4.485	4.898

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	10	QPSK	50/0	829	8.943	9.619
			50/0	836.5	8.963	9.764
			50/0	844	8.954	9.713
		16QAM	50/0	829	8.939	9.742
			50/0	836.5	8.956	9.707
			50/0	844	8.94	9.719

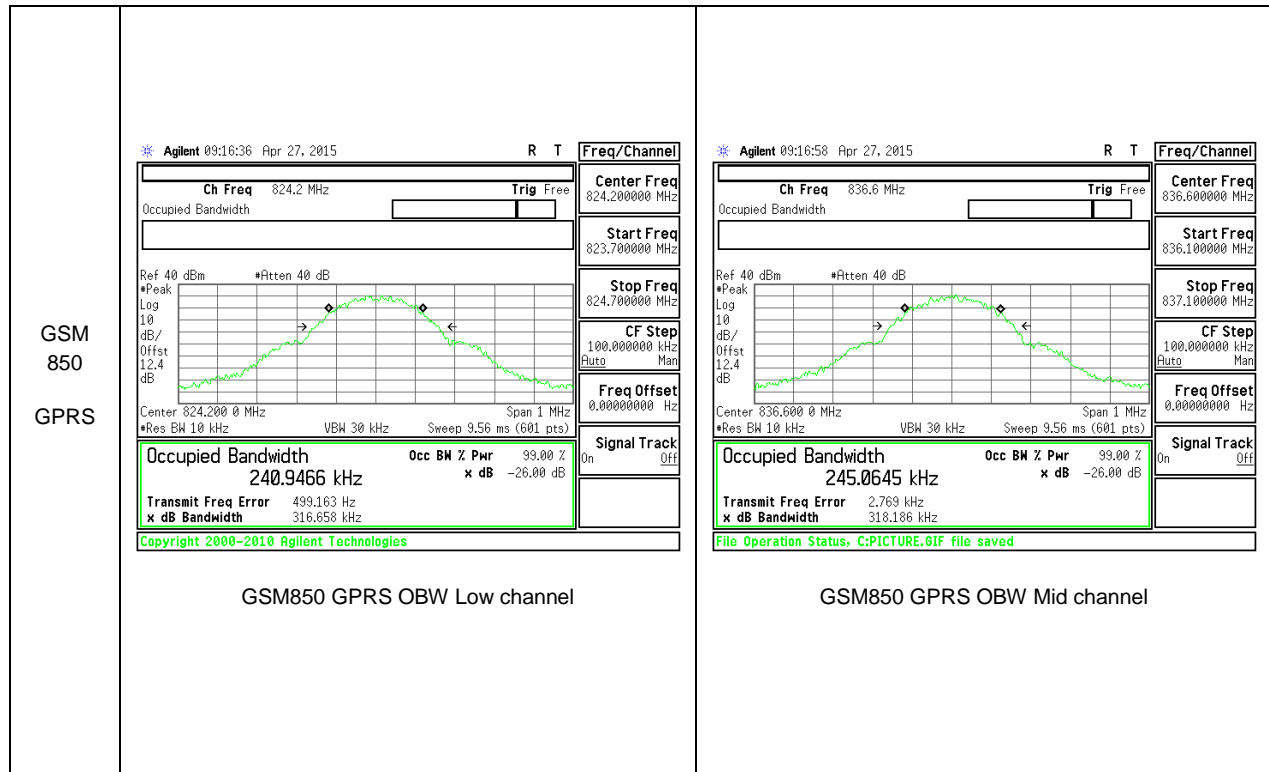
Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	5	QPSK	25/0	826.5	4.511	4.909
			25/0	836.5	4.496	4.957
			25/0	846.5	4.5	4.949
		16QAM	25/0	826.5	4.498	4.902
			25/0	836.5	4.49	4.896
			25/0	846.5	4.49	4.894

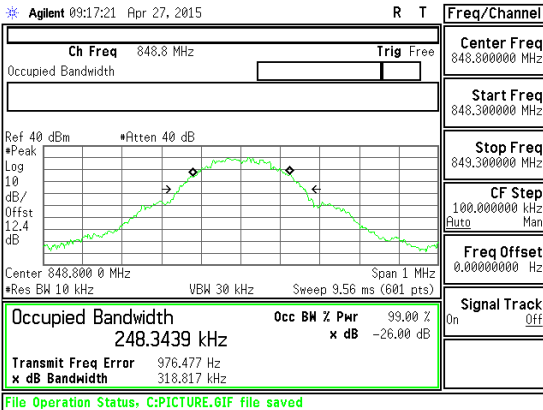
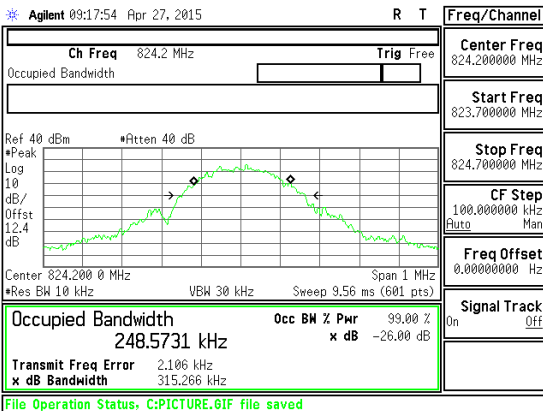
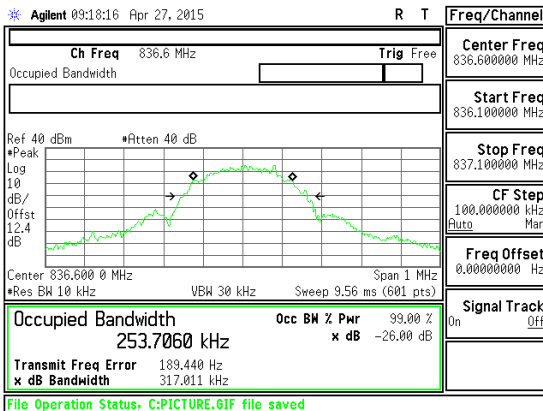
Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	3	QPSK	15/0	825.5	2.686	2.967
			15/0	836.5	2.692	2.966
			15/0	847.5	2.691	2.966
		16QAM	15/0	825.5	2.687	2.966
			15/0	836.5	2.69	2.978
			15/0	847.5	2.679	2.963

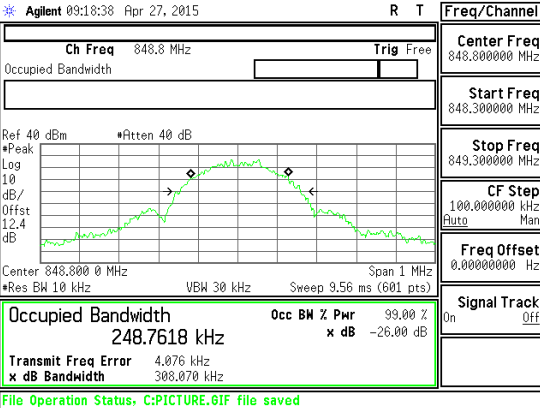
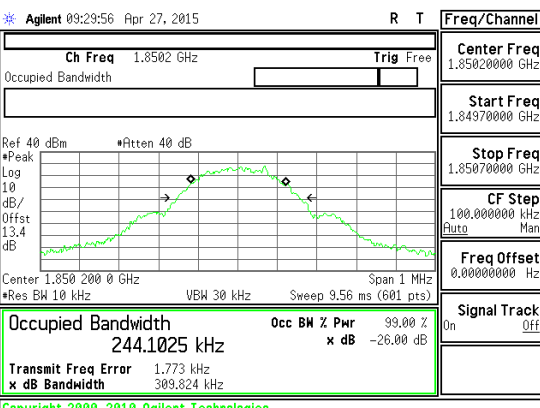
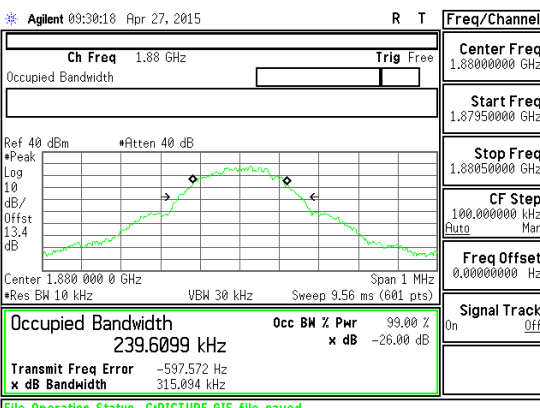
Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	1.4	QPSK	6/0	824.7	1.085	1.22
			6/0	836.5	1.085	1.226
			6/0	848.3	1.079	1.236
		16QAM	6/0	824.7	1.088	1.233
			6/0	836.5	1.083	1.215
			6/0	848.3	1.085	1.227

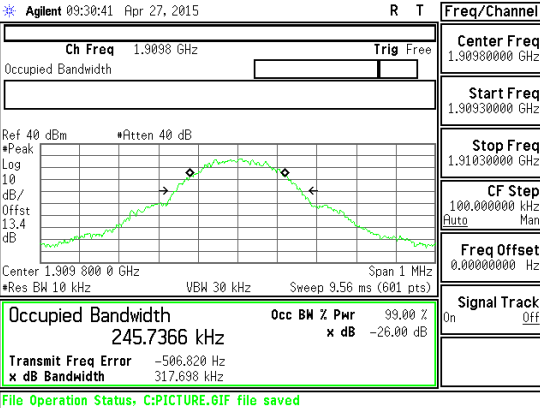
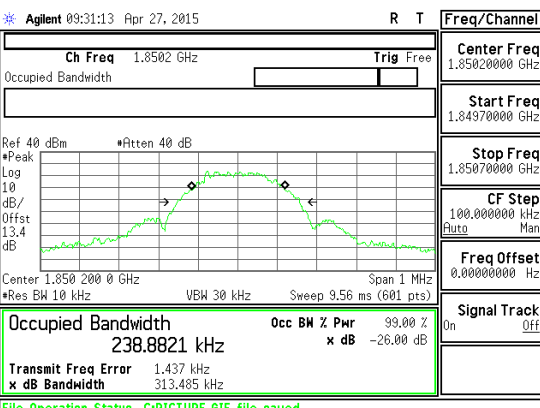
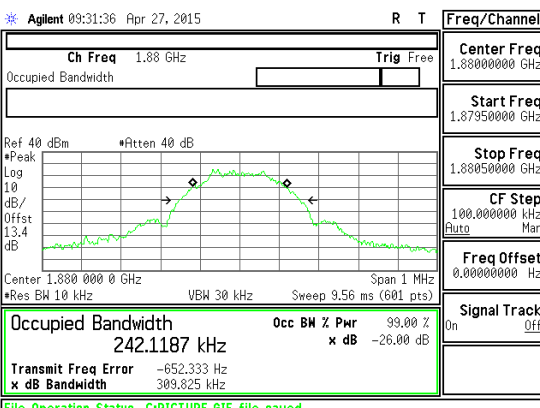
10.1.1. OCCUPIED BANDWIDTH PLOTS

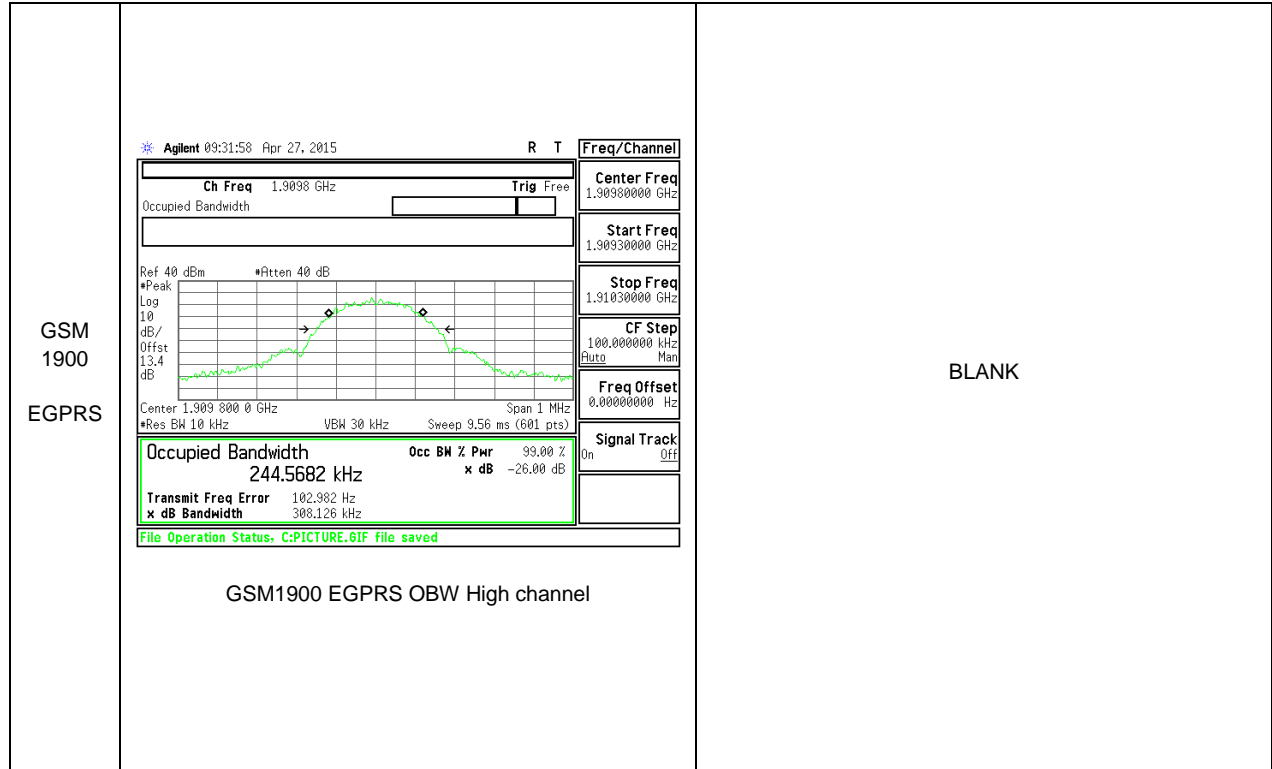
GSM



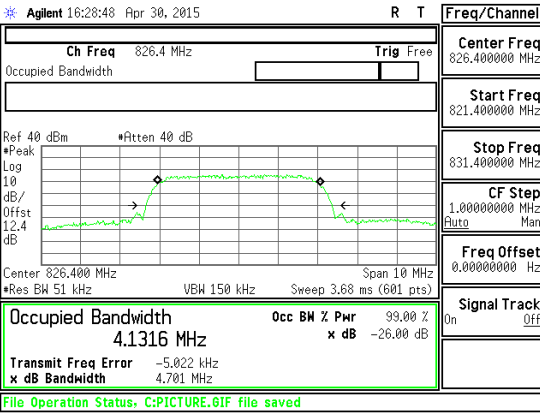
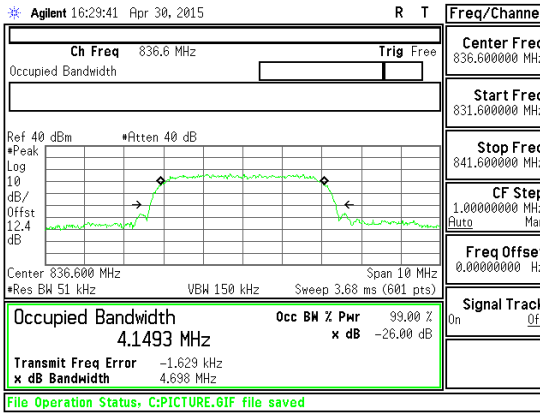
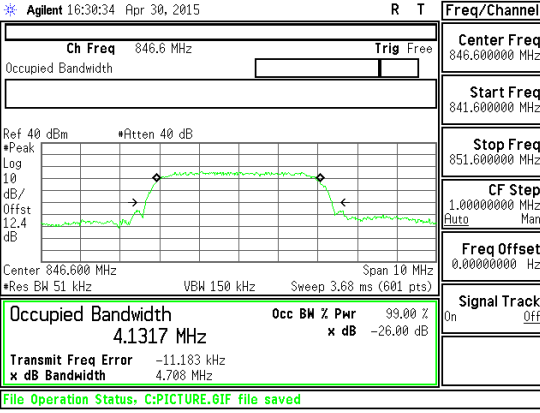
<p>GSM 850 GPRS</p>	 <p style="text-align: center;">GSM850 GPRS OBW High channel</p>	<p style="text-align: center;">BLANK</p>
<p>GSM 850 EGPRS</p>	 <p style="text-align: center;">GSM850 EGPRS OBW Low channel</p>	 <p style="text-align: center;">GSM850 EGPRS OBW Mid channel</p>

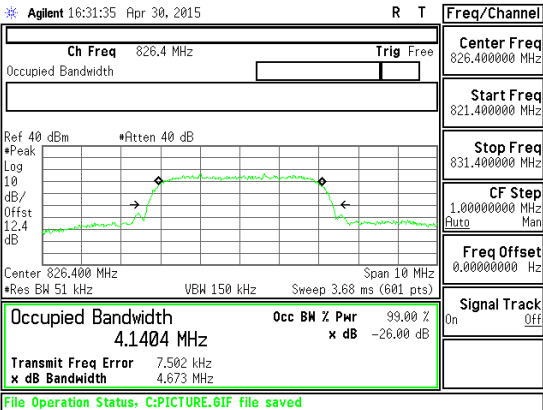
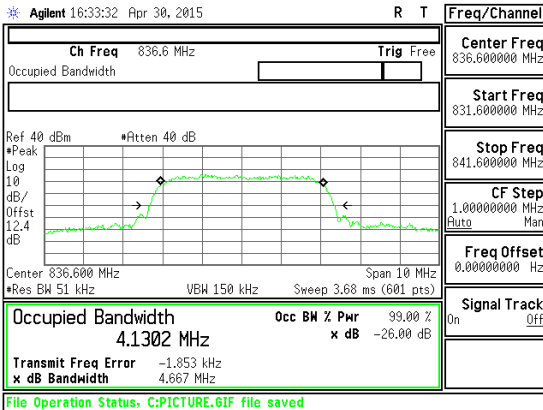
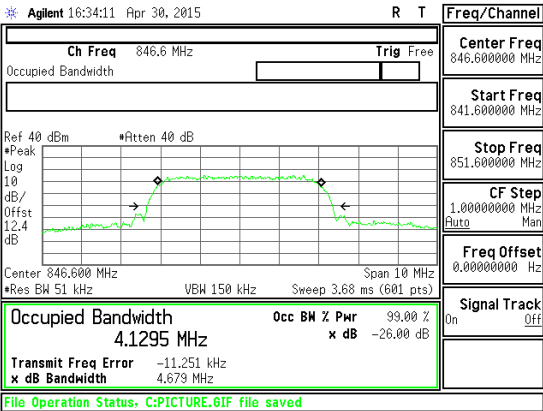
<p>GSM 850 EGPRS</p>	 <p>Agilent 09:18:38 Apr 27, 2015 R T Freq/Channel</p> <p>Ch Freq 848.8 MHz Trig Free</p> <p>Center Freq 848.800000 MHz</p> <p>Start Freq 848.300000 MHz</p> <p>Stop Freq 849.300000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm *Atten 40 dB</p> <p>*Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst</p> <p>13.4</p> <p>dB</p> <p>Center 848.800 0 MHz Span 1 MHz</p> <p>*Res BW 10 kHz VBW 30 kHz Sweep 9.56 ms (601 pts)</p> <p>Occupied Bandwidth 248.7618 kHz Occ BW % PWR 93.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 4.076 kHz x dB Bandwidth 300.070 kHz</p> <p>File Operation Status: C:PICTURE.61F file saved</p> <p>GSM850 EGPRS OBW High channel</p>	<p>BLANK</p>
<p>GSM 1900 GPRS</p>	 <p>Agilent 09:29:56 Apr 27, 2015 R T Freq/Channel</p> <p>Ch Freq 1.8502 GHz Trig Free</p> <p>Center Freq 1.85020000 GHz</p> <p>Start Freq 1.84970000 GHz</p> <p>Stop Freq 1.85070000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm *Atten 40 dB</p> <p>*Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst</p> <p>13.4</p> <p>dB</p> <p>Center 1.850 200 0 GHz Span 1 MHz</p> <p>*Res BW 10 kHz VBW 30 kHz Sweep 9.56 ms (601 pts)</p> <p>Occupied Bandwidth 244.1025 kHz Occ BW % PWR 93.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 1.773 kHz x dB Bandwidth 309.824 kHz</p> <p>Copyright 2000-2010 Agilent Technologies</p> <p>GSM1900 GPRS OBW Low channel</p>	 <p>Agilent 09:30:18 Apr 27, 2015 R T Freq/Channel</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87950000 GHz</p> <p>Stop Freq 1.88050000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm *Atten 40 dB</p> <p>*Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst</p> <p>13.4</p> <p>dB</p> <p>Center 1.880 000 0 GHz Span 1 MHz</p> <p>*Res BW 10 kHz VBW 30 kHz Sweep 9.56 ms (601 pts)</p> <p>Occupied Bandwidth 239.6099 kHz Occ BW % PWR 93.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -597.572 Hz x dB Bandwidth 315.094 kHz</p> <p>File Operation Status: C:PICTURE.61F file saved</p> <p>GSM1900 GPRS OBW Mid channel</p>

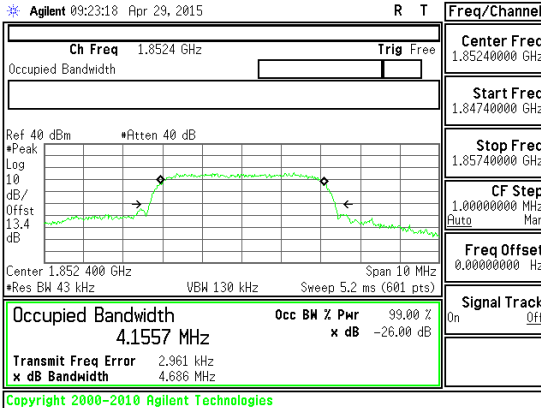
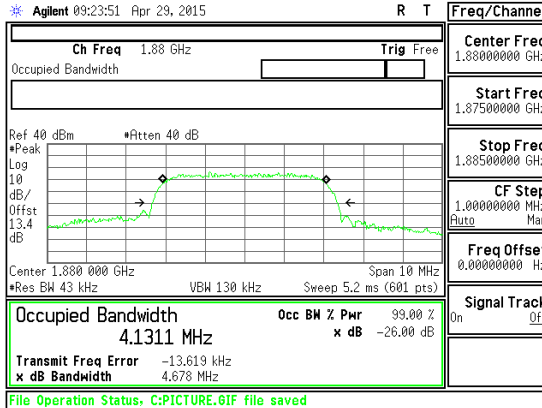
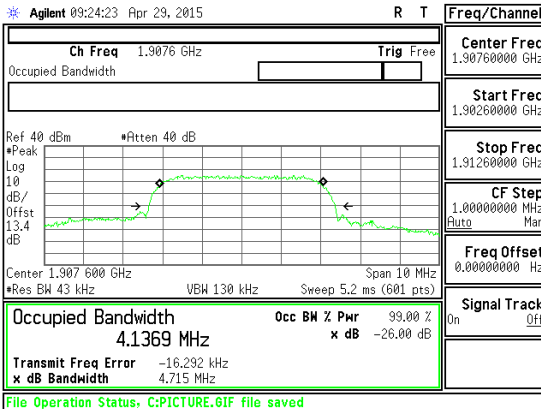
<p>GSM 1900 GPRS</p>	 <p>Agilent 09:30:41 Apr 27, 2015 R T Freq/Channel</p> <p>Ch Freq 1.9098 GHz Trig Free</p> <p>Center Freq 1.90980000 GHz</p> <p>Start Freq 1.90930000 GHz</p> <p>Stop Freq 1.91030000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm *Atten 40 dB</p> <p>*Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst</p> <p>13.4</p> <p>dB</p> <p>Center 1.909 800 0 GHz Span 1 MHz</p> <p>*Res BW 10 kHz VBW 30 kHz Sweep 9.56 ms (601 pts)</p> <p>Occupied Bandwidth 245.7366 kHz Occ BW % PWR 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -506.820 Hz</p> <p>x dB Bandwidth 317.698 kHz</p> <p>File Operation Status: C:PICTURE.61F file saved</p> <p>GSM1900 GPRS OBW High channel</p>	<p>BLANK</p>
<p>GSM 1900 EGPRS</p>	 <p>Agilent 09:31:13 Apr 27, 2015 R T Freq/Channel</p> <p>Ch Freq 1.8502 GHz Trig Free</p> <p>Center Freq 1.85020000 GHz</p> <p>Start Freq 1.84970000 GHz</p> <p>Stop Freq 1.85070000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm *Atten 40 dB</p> <p>*Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst</p> <p>13.4</p> <p>dB</p> <p>Center 1.850 200 0 GHz Span 1 MHz</p> <p>*Res BW 10 kHz VBW 30 kHz Sweep 9.56 ms (601 pts)</p> <p>Occupied Bandwidth 238.8821 kHz Occ BW % PWR 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 1.437 kHz</p> <p>x dB Bandwidth 313.485 kHz</p> <p>File Operation Status: C:PICTURE.61F file saved</p> <p>GSM1900 EGPRS OBW Low channel</p>	 <p>Agilent 09:31:36 Apr 27, 2015 R T Freq/Channel</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87950000 GHz</p> <p>Stop Freq 1.88050000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm *Atten 40 dB</p> <p>*Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst</p> <p>13.4</p> <p>dB</p> <p>Center 1.880 000 0 GHz Span 1 MHz</p> <p>*Res BW 10 kHz VBW 30 kHz Sweep 9.56 ms (601 pts)</p> <p>Occupied Bandwidth 242.1187 kHz Occ BW % PWR 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -652.333 Hz</p> <p>x dB Bandwidth 309.825 kHz</p> <p>File Operation Status: C:PICTURE.61F file saved</p> <p>GSM1900 EGPRS OBW Mid channel</p>

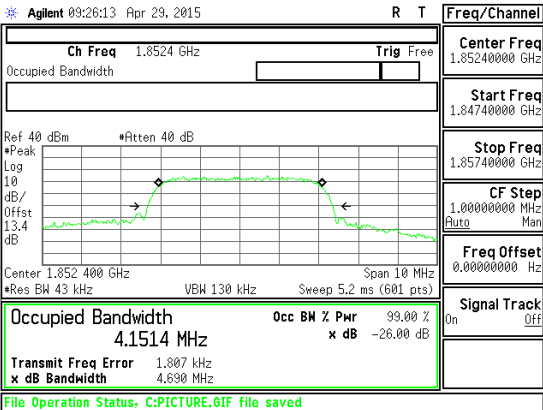
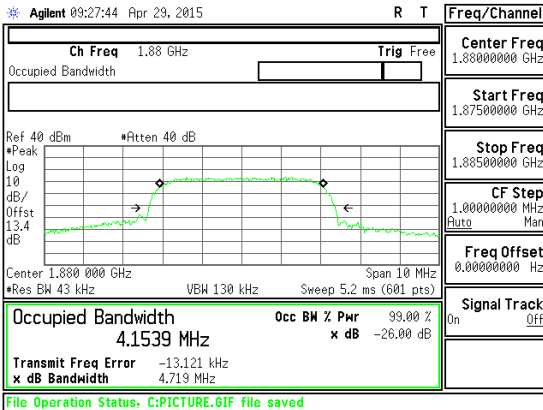
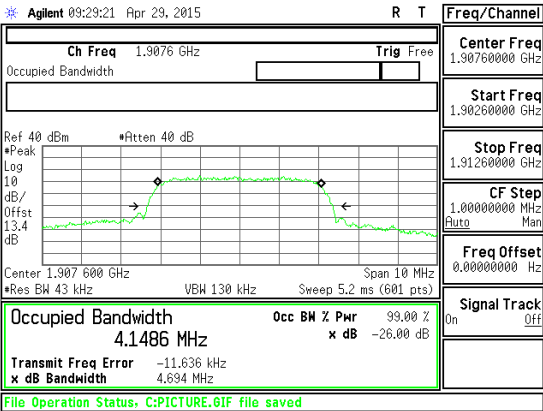


WCDMA

<p>WCDMA Band 5 REL 99</p>	 <p style="text-align: center;">Band 5 REL 99 OBW Low channel</p>	 <p style="text-align: center;">Band 5 REL 99 OBW Mid channel</p>
<p>WCDMA Band 5 REL 99</p>	 <p style="text-align: center;">Band 5 REL 99 OBW High channel</p>	<p style="text-align: center;">BLANK</p>

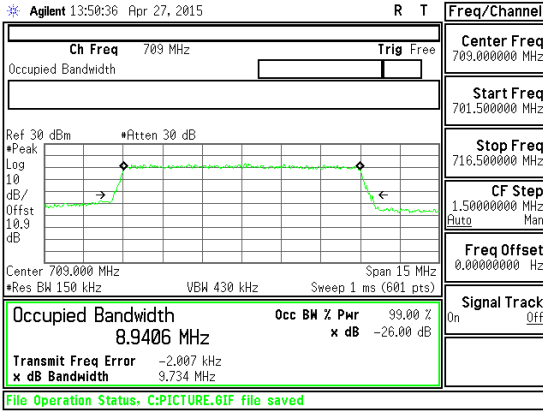
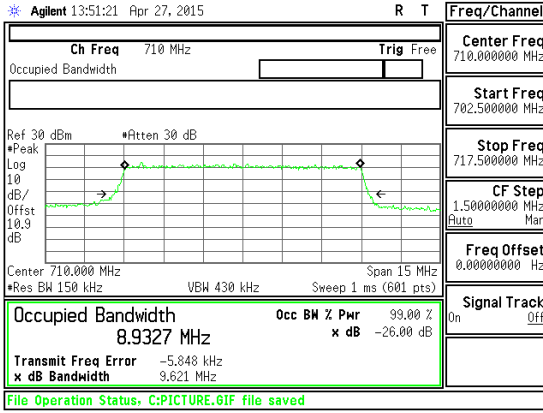
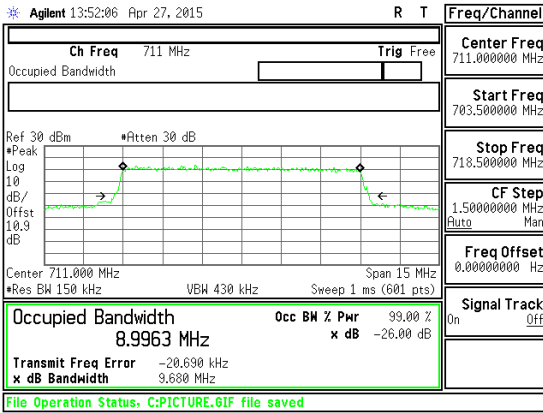
<p>WCDMA Band 5 HSDPA</p>	 <p style="text-align: center;">Band 5 HSDPA OBW Low channel</p>	 <p style="text-align: center;">Band 5 HSDPA OBW Mid channel</p>
<p>WCDMA Band 5 HSDPA</p>	 <p style="text-align: center;">Band 5 HSDPA OBW High channel</p>	<p style="text-align: center;">BLANK</p>

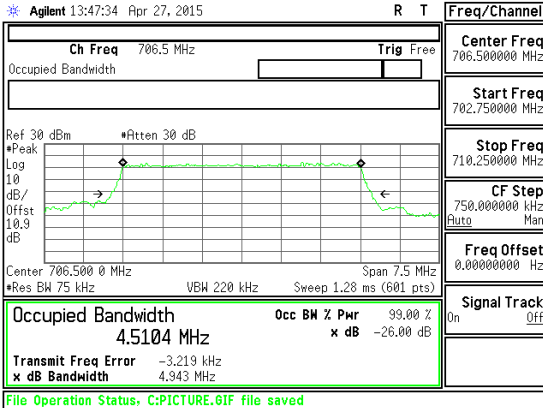
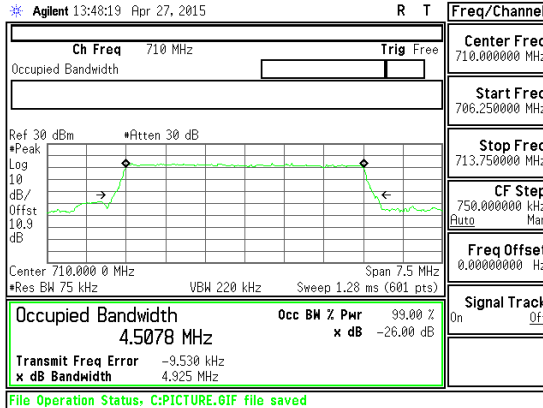
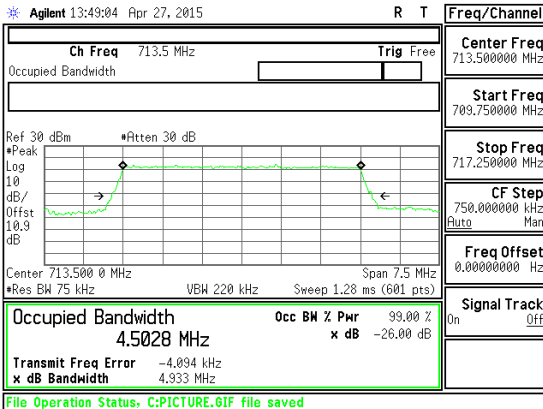
<p>WCDMA Band 2 REL 99</p>	 <p style="text-align: center;">Band 2 REL 99 OBW Low channel</p>	 <p style="text-align: center;">Band 2 REL 99 OBW Mid channel</p>
<p>WCDMA Band 2 REL 99</p>	 <p style="text-align: center;">Band 2 REL 99 OBW High channel</p>	<p style="text-align: center;">BLANK</p>

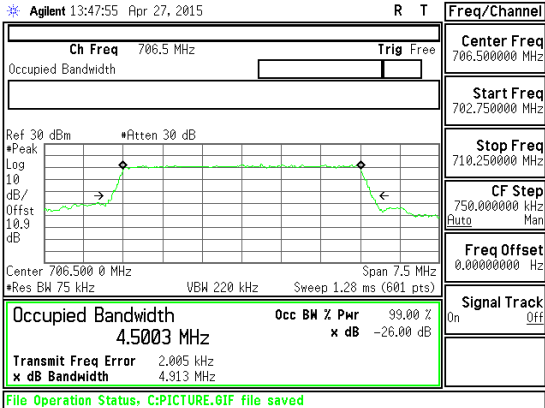
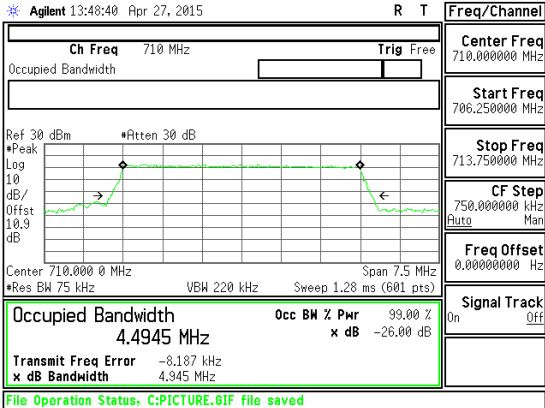
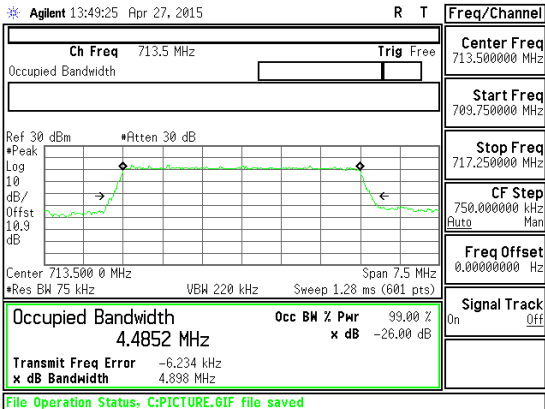
<p>WCDMA Band 2 HSDPA</p>	 <p style="text-align: center;">Band 2 HSDPA OBW Low channel</p>	 <p style="text-align: center;">Band 2 HSDPA OBW Mid channel</p>
<p>WCDMA Band 2 HSDPA</p>	 <p style="text-align: center;">Band 2 HSDPA OBW High channel</p>	<p style="text-align: center;">BLANK</p>

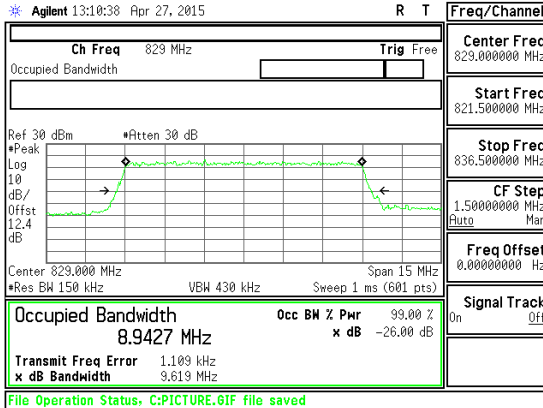
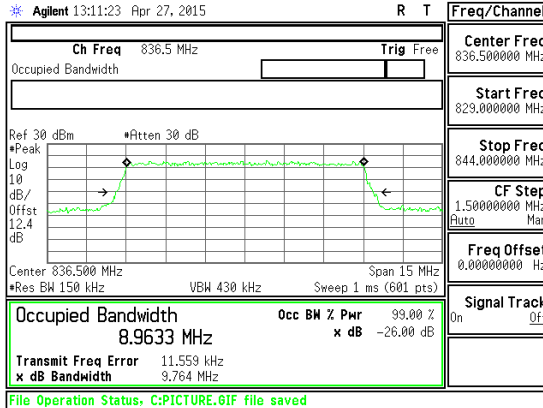
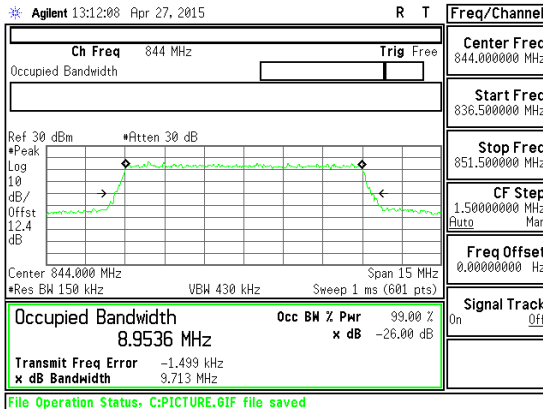
LTE

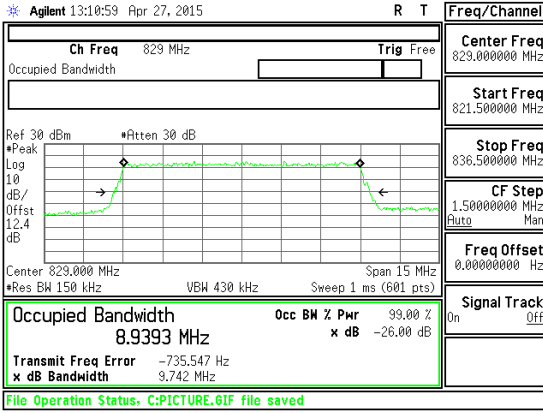
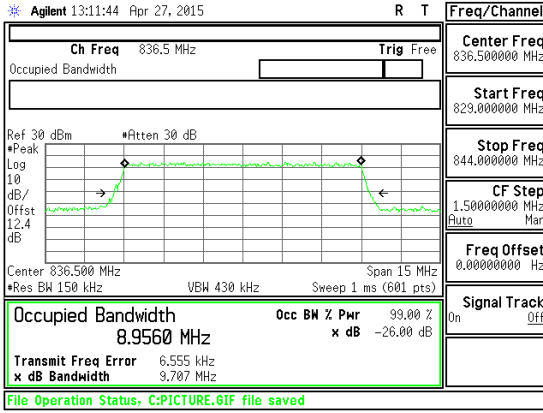
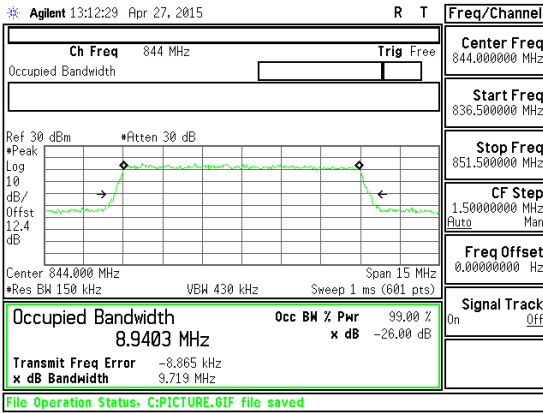
<p>Band LTE17 10 MHz QPSK</p>	<p>Agilent 13:50:15 Apr 27, 2015</p> <p>Ch Freq 709 MHz Trig Free</p> <p>Center Freq 709.000000 MHz</p> <p>Start Freq 701.500000 MHz</p> <p>Stop Freq 716.500000 MHz</p> <p>CF Step 1.50000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 8.9476 MHz</p> <p>Occ BW % PMR 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error -8.884 kHz</p> <p>x dB Bandwidth 9.651 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE17 - 10 MHz QPSK OBW Low channel</p>	<p>Agilent 13:51:00 Apr 27, 2015</p> <p>Ch Freq 710 MHz Trig Free</p> <p>Center Freq 710.000000 MHz</p> <p>Start Freq 702.500000 MHz</p> <p>Stop Freq 717.500000 MHz</p> <p>CF Step 1.50000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 8.9612 MHz</p> <p>Occ BW % PMR 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 7.071 kHz</p> <p>x dB Bandwidth 9.742 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE17 - 10 MHz QPSK OBW Mid channel</p>
<p>Band LTE17 10 MHz QPSK</p>	<p>Agilent 13:51:45 Apr 27, 2015</p> <p>Ch Freq 711 MHz Trig Free</p> <p>Center Freq 711.000000 MHz</p> <p>Start Freq 703.500000 MHz</p> <p>Stop Freq 718.500000 MHz</p> <p>CF Step 1.50000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 8.9447 MHz</p> <p>Occ BW % PMR 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error -7.176 kHz</p> <p>x dB Bandwidth 9.772 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE17 - 10 MHz QPSK OBW High channel</p>	<p>BLANK</p>

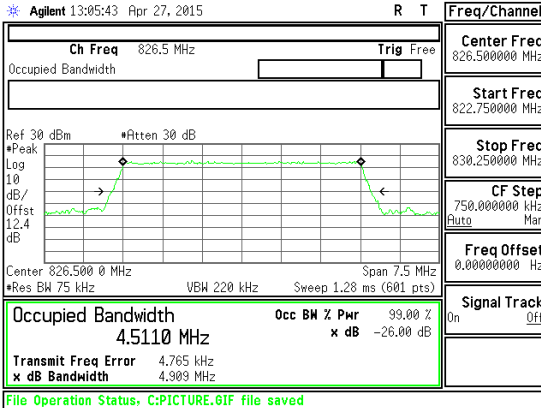
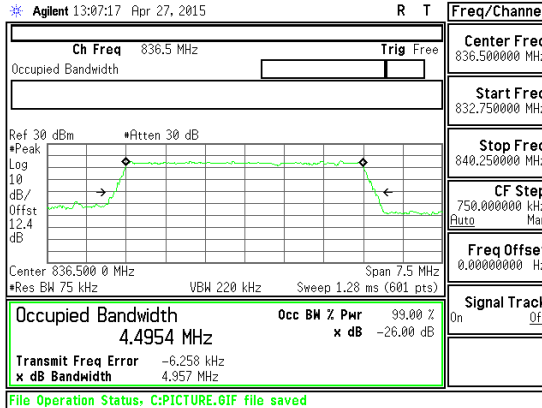
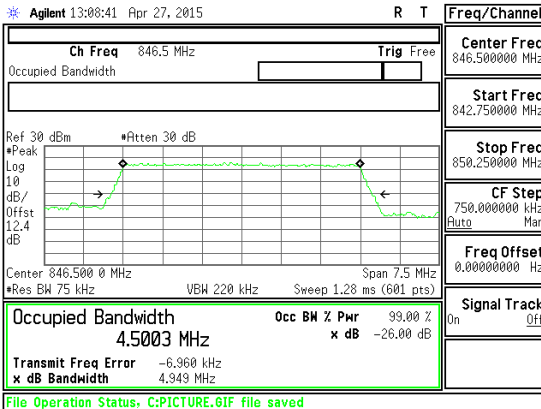
<p>Band LTE17 10 MHz 16QAM</p>	 <p>Band LTE17 - 10 MHz 16QAM OBW Low channel</p>	 <p>Band LTE17 - 10 MHz 16QAM OBW Mid channel</p>
<p>Band LTE17 10 MHz 16QAM</p>	 <p>Band LTE17 - 10 MHz 16QAM OBW High channel</p>	<p>BLANK</p>

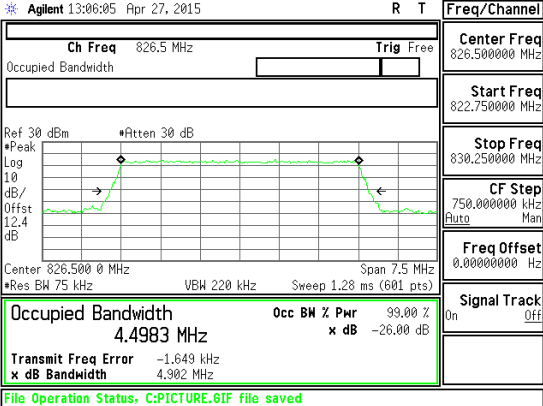
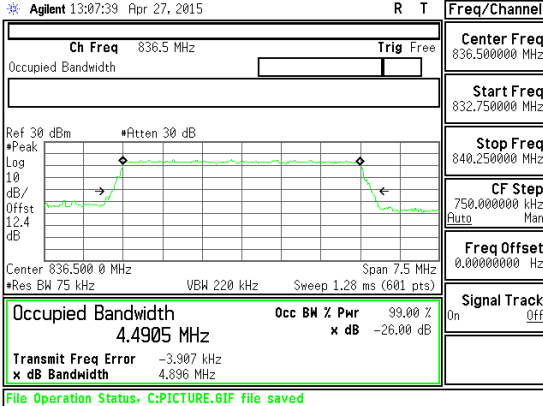
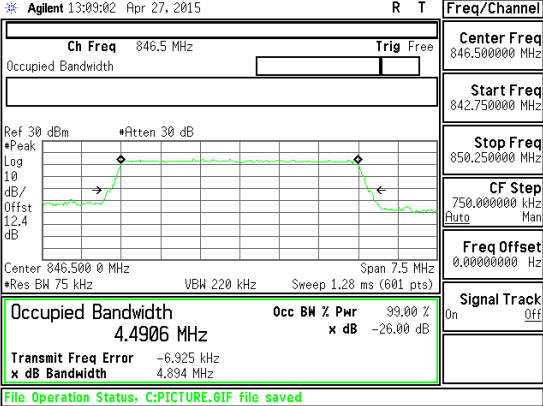
<p>Band LTE17 5 MHz QPSK</p>	 <p>Band LTE17 - 5 MHz QPSK OBW Low channel</p>	 <p>Band LTE17 - 5 MHz QPSK OBW Mid channel</p>
<p>Band LTE17 5 MHz QPSK</p>	 <p>Band LTE17 - 5 MHz QPSK OBW High channel</p>	<p>BLANK</p>

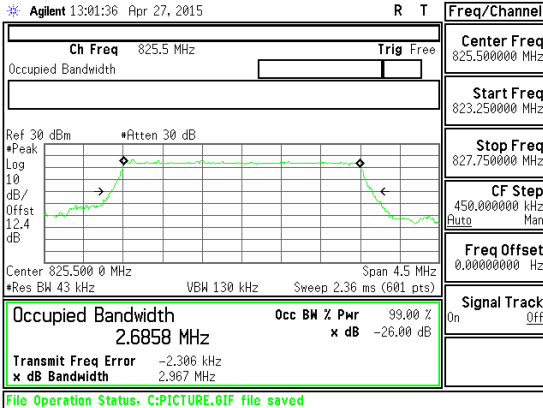
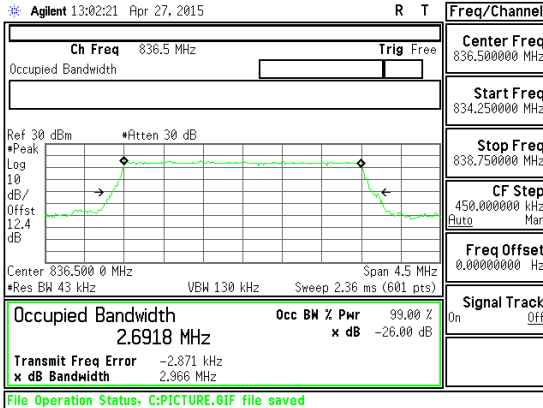
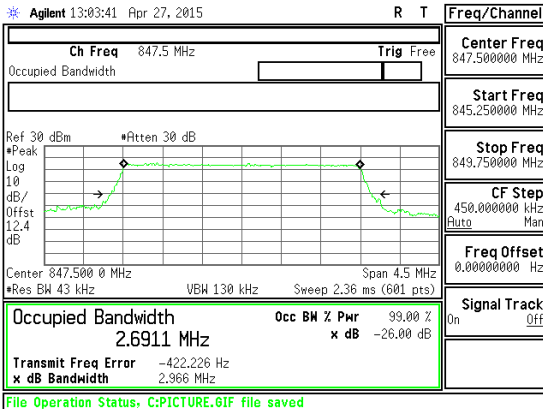
<p>Band LTE17 5 MHz 16 QAM</p>	 <p>Band LTE17 - 5 MHz 16 QAM OBW Low channel</p>	 <p>Band LTE17 - 5 MHz 16 QAM OBW Mid channel</p>
<p>Band LTE17 5 MHz 16 QAM</p>	 <p>Band LTE17 - 5 MHz 16 QAM OBW High channel</p>	<p>BLANK</p>

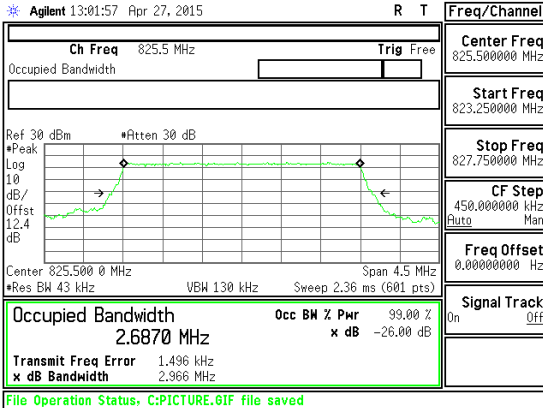
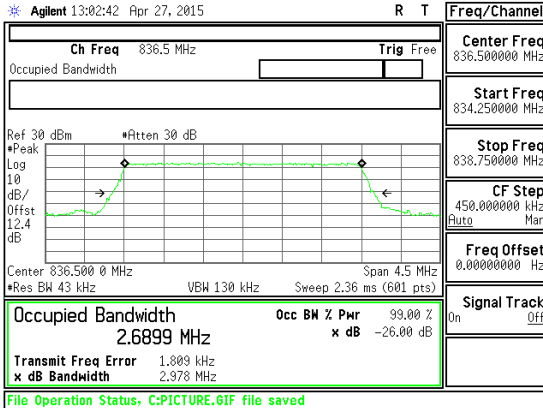
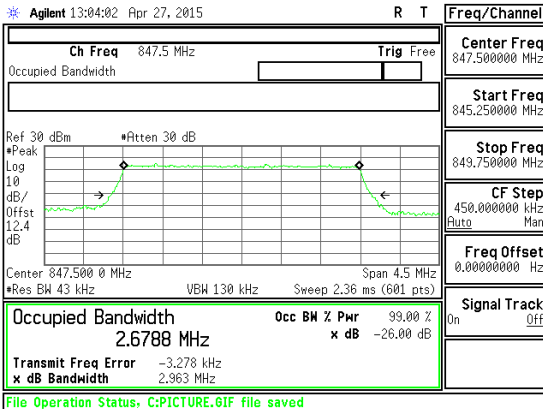
<p>Band LTE5 10 MHz QPSK</p>	 <p>Band LTE5 - 10 MHz QPSK OBW Low channel</p>	 <p>Band LTE5 - 10 MHz QPSK OBW Mid channel</p>
<p>Band LTE5 10 MHz QPSK</p>	 <p>Band LTE5 - 10 MHz QPSK OBW High channel</p>	<p>BLANK</p>

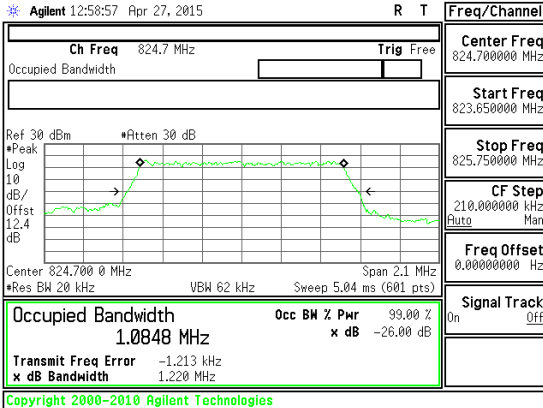
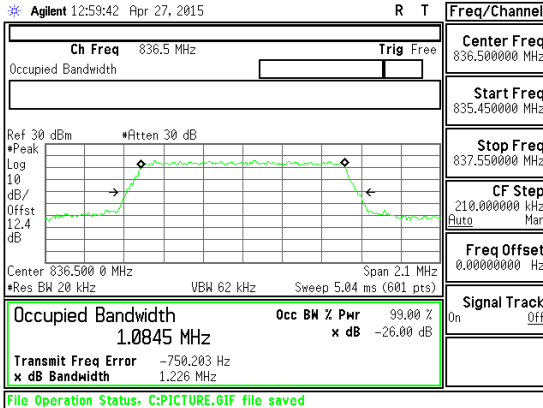
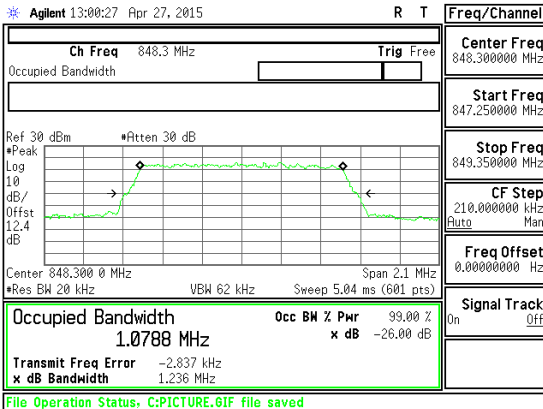
<p>Band LTE5 10 MHz 16QAM</p>	 <p>Agilent 13:10:59 Apr 27, 2015</p> <p>Ch Freq 829 MHz Trig Free</p> <p>Center Freq 829.000000 MHz</p> <p>Start Freq 821.500000 MHz</p> <p>Stop Freq 836.500000 MHz</p> <p>CF Step 1.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 8.9393 MHz</p> <p>Transmit Freq Error -735.547 Hz</p> <p>x dB Bandwidth 9.742 MHz</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 10 MHz 16QAM OBW Low channel</p>	 <p>Agilent 13:11:44 Apr 27, 2015</p> <p>Ch Freq 836.5 MHz Trig Free</p> <p>Center Freq 836.500000 MHz</p> <p>Start Freq 829.000000 MHz</p> <p>Stop Freq 844.000000 MHz</p> <p>CF Step 1.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 8.9560 MHz</p> <p>Transmit Freq Error 6.555 kHz</p> <p>x dB Bandwidth 9.707 MHz</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 10 MHz 16QAM OBW Mid channel</p>
<p>Band LTE5 10 MHz 16QAM</p>	 <p>Agilent 13:12:29 Apr 27, 2015</p> <p>Ch Freq 844 MHz Trig Free</p> <p>Center Freq 844.000000 MHz</p> <p>Start Freq 836.500000 MHz</p> <p>Stop Freq 851.500000 MHz</p> <p>CF Step 1.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 8.9403 MHz</p> <p>Transmit Freq Error -8.865 kHz</p> <p>x dB Bandwidth 9.719 MHz</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 10 MHz 16QAM OBW High channel</p>	<p>BLANK</p>

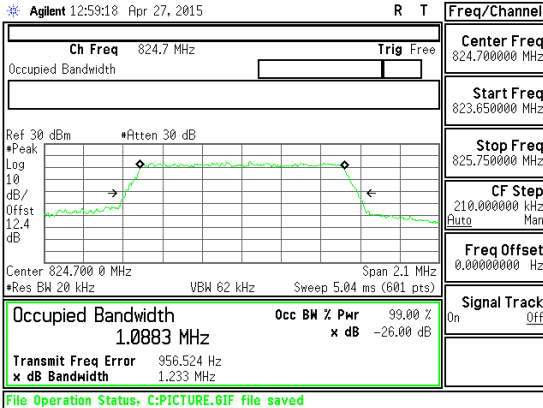
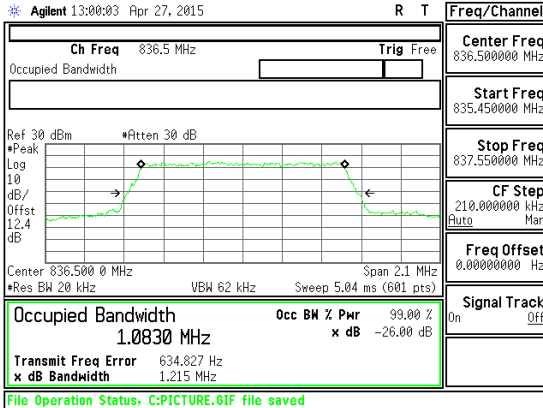
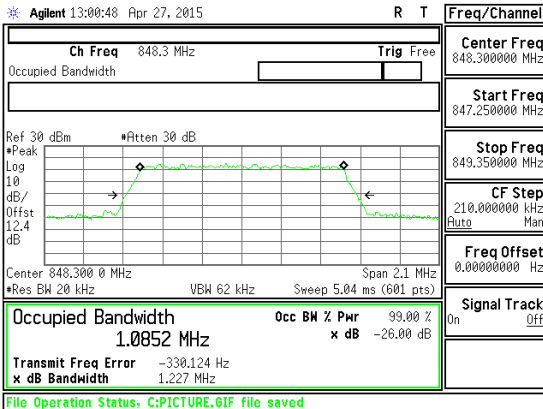
<p>Band LTE5 5 MHz QPSK</p>	 <p>Agilent 13:05:43 Apr 27, 2015</p> <p>Ch Freq 826.5 MHz</p> <p>Center Freq 826.500000 MHz</p> <p>Start Freq 822.750000 MHz</p> <p>Stop Freq 830.250000 MHz</p> <p>CF Step 750.000000 kHz</p> <p>Freq Offset 0.0000000 Hz</p> <p>Occupied Bandwidth 4.5110 MHz</p> <p>Transmit Freq Error 4.765 kHz</p> <p>x dB Bandwidth 4.909 MHz</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 5 MHz QPSK OBW Low channel</p>	 <p>Agilent 13:07:17 Apr 27, 2015</p> <p>Ch Freq 836.5 MHz</p> <p>Center Freq 836.500000 MHz</p> <p>Start Freq 832.750000 MHz</p> <p>Stop Freq 840.250000 MHz</p> <p>CF Step 750.000000 kHz</p> <p>Freq Offset 0.0000000 Hz</p> <p>Occupied Bandwidth 4.4954 MHz</p> <p>Transmit Freq Error -6.258 kHz</p> <p>x dB Bandwidth 4.957 MHz</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 5 MHz QPSK OBW Mid channel</p>
<p>Band LTE5 5 MHz QPSK</p>	 <p>Agilent 13:08:41 Apr 27, 2015</p> <p>Ch Freq 846.5 MHz</p> <p>Center Freq 846.500000 MHz</p> <p>Start Freq 842.750000 MHz</p> <p>Stop Freq 850.250000 MHz</p> <p>CF Step 750.000000 kHz</p> <p>Freq Offset 0.0000000 Hz</p> <p>Occupied Bandwidth 4.5003 MHz</p> <p>Transmit Freq Error -6.968 kHz</p> <p>x dB Bandwidth 4.949 MHz</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 5 MHz QPSK OBW High channel</p>	<p>BLANK</p>

<p>Band LTE5 5 MHz 16 QAM</p>	 <p>Band LTE5 - 5 MHz 16 QAM OBW Low channel</p>	 <p>Band LTE5 - 5 MHz 16 QAM OBW Mid channel</p>
<p>Band LTE5 5 MHz 16 QAM</p>	 <p>Band LTE5 - 5 MHz 16 QAM OBW High channel</p>	<p>BLANK</p>

<p>Band LTE5 3 MHz QPSK</p>	 <p>Agilent 13:01:36 Apr 27, 2015</p> <p>Ch Freq 825.5 MHz Trig Free</p> <p>Center Freq 825.500000 MHz</p> <p>Start Freq 823.250000 MHz</p> <p>Stop Freq 827.750000 MHz</p> <p>CF Step 450.000000 kHz</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 2.6858 MHz</p> <p>Transmit Freq Error -2.306 kHz</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 3 MHz QPSK OBW Low channel</p>	 <p>Agilent 13:02:21 Apr 27, 2015</p> <p>Ch Freq 836.5 MHz Trig Free</p> <p>Center Freq 836.500000 MHz</p> <p>Start Freq 834.250000 MHz</p> <p>Stop Freq 838.750000 MHz</p> <p>CF Step 450.000000 kHz</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 2.6918 MHz</p> <p>Transmit Freq Error -2.871 kHz</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 3 MHz QPSK OBW Mid channel</p>
<p>Band LTE5 3 MHz QPSK</p>	 <p>Agilent 13:03:41 Apr 27, 2015</p> <p>Ch Freq 847.5 MHz Trig Free</p> <p>Center Freq 847.500000 MHz</p> <p>Start Freq 845.250000 MHz</p> <p>Stop Freq 849.750000 MHz</p> <p>CF Step 450.000000 kHz</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 2.6911 MHz</p> <p>Transmit Freq Error -422.226 Hz</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 3 MHz QPSK OBW High channel</p>	<p>BLANK</p>

<p>Band LTE5 3 MHz 16QAM</p>	 <p>Band LTE5 - 3 MHz 16QAM OBW Low channel</p>	 <p>Band LTE5 - 3 MHz 16QAM OBW Mid channel</p>
<p>Band LTE5 3 MHz 16QAM</p>	 <p>Band LTE5 - 3 MHz 16QAM OBW High channel</p>	<p>BLANK</p>

<p>Band LTE5 1.4 MHz QPSK</p>	 <p>Agilent 12:58:57 Apr 27, 2015</p> <p>Center Freq 824.700000 MHz</p> <p>Start Freq 823.650000 MHz</p> <p>Stop Freq 825.750000 MHz</p> <p>CF Step 210.000000 kHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On</p> <p>Occupied Bandwidth 1.0848 MHz</p> <p>Transmit Freq Error -1.213 kHz</p> <p>x dB Bandwidth 1.220 MHz</p> <p>Copyright 2000-2010 Agilent Technologies</p> <p>Band LTE5 - 1.4 MHz QPSK OBW Low channel</p>	 <p>Agilent 12:59:42 Apr 27, 2015</p> <p>Center Freq 836.500000 MHz</p> <p>Start Freq 835.450000 MHz</p> <p>Stop Freq 837.550000 MHz</p> <p>CF Step 210.000000 kHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On</p> <p>Occupied Bandwidth 1.0845 MHz</p> <p>Transmit Freq Error -750.203 Hz</p> <p>x dB Bandwidth 1.226 MHz</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 1.4 MHz QPSK OBW Mid channel</p>
<p>Band LTE5 1.4 MHz QPSK</p>	 <p>Agilent 13:00:27 Apr 27, 2015</p> <p>Center Freq 848.300000 MHz</p> <p>Start Freq 847.250000 MHz</p> <p>Stop Freq 849.350000 MHz</p> <p>CF Step 210.000000 kHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On</p> <p>Occupied Bandwidth 1.0788 MHz</p> <p>Transmit Freq Error -2.837 kHz</p> <p>x dB Bandwidth 1.236 MHz</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 1.4 MHz QPSK OBW High channel</p>	<p>BLANK</p>

<p>Band LTE5 1.4 MHz 16 QAM</p>	 <p>Band LTE5 - 1.4 MHz 16 QAM OBW Low channel</p>	 <p>Band LTE5 - 1.4 MHz 16 QAM OBW Mid channel</p>
<p>Band LTE5 1.4 MHz 16 QAM</p>	 <p>Band LTE5 - 1.4 MHz 16 QAM OBW High channel</p>	<p>BLANK</p>

10.2. BAND EDGE EMISSIONS

RULE PART(S)

§22.917(a), §24.238 (a), §27.53 (g)

LIMITS

Part 22.917(a) & Part 24.238(a) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Part 27.53(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

MODES TESTED

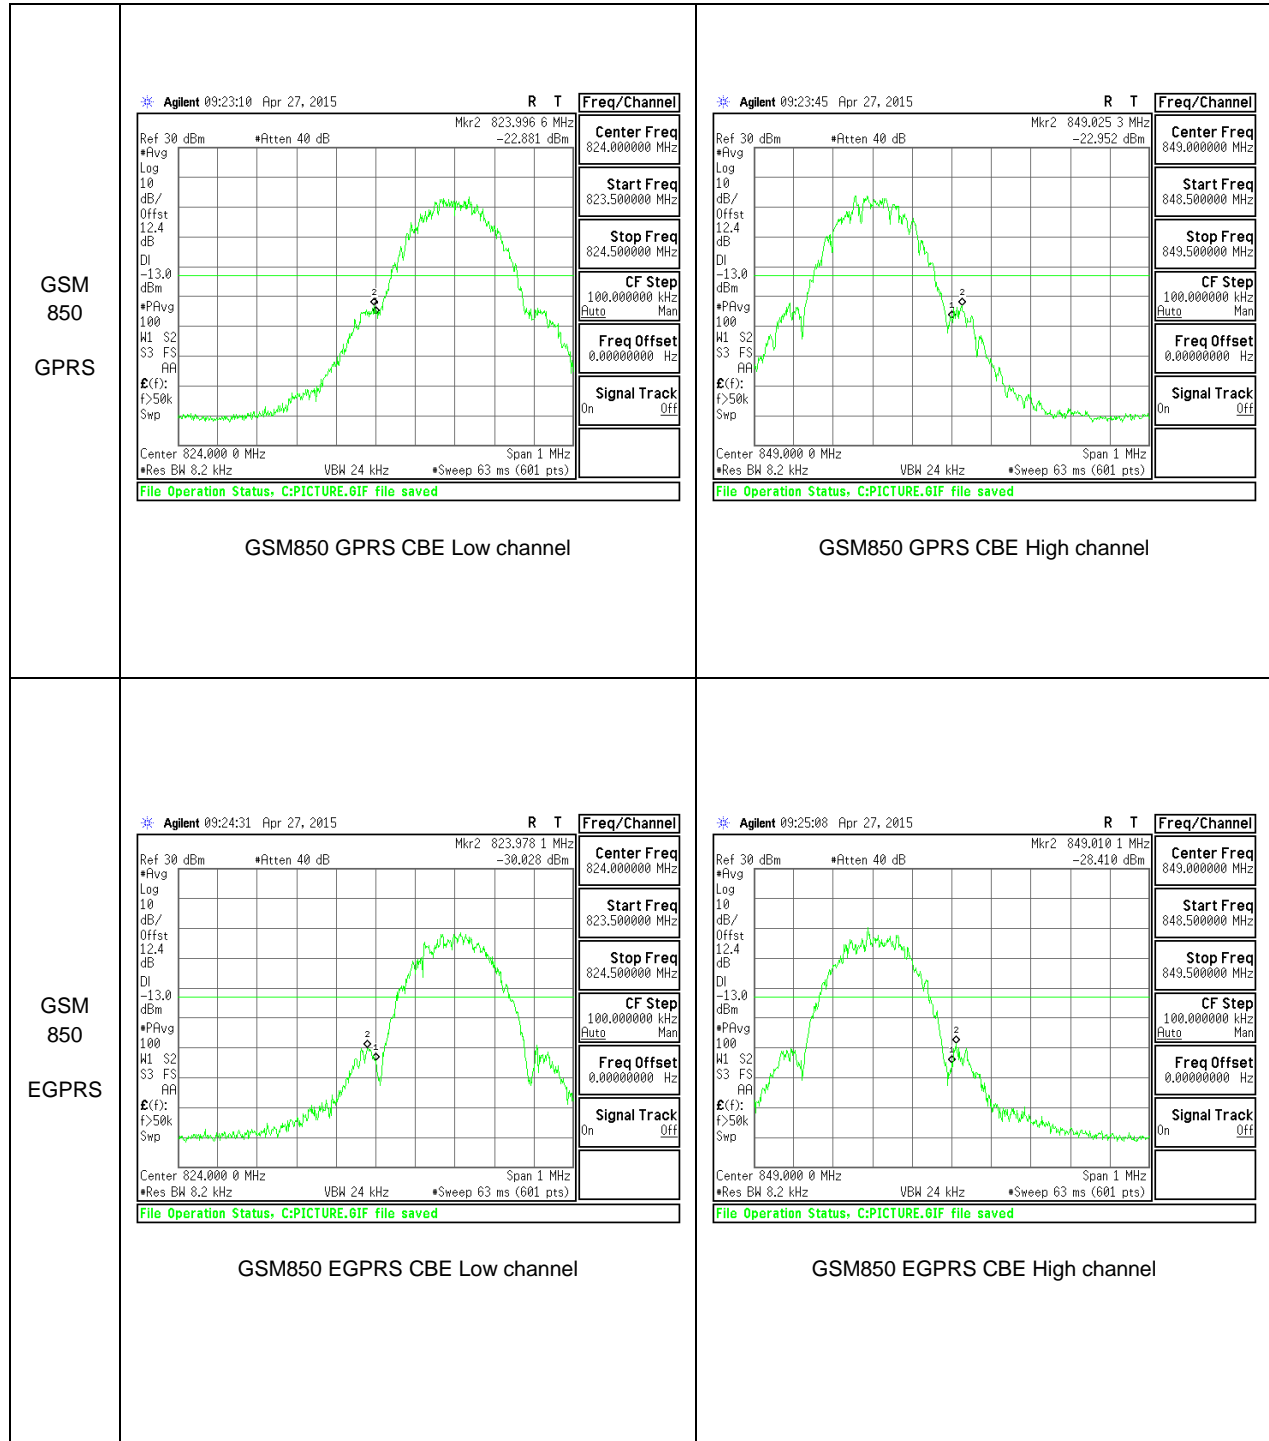
GSM (850, 1900), WCDMA (Bands V and II), LTE (Bands 5 and 17).

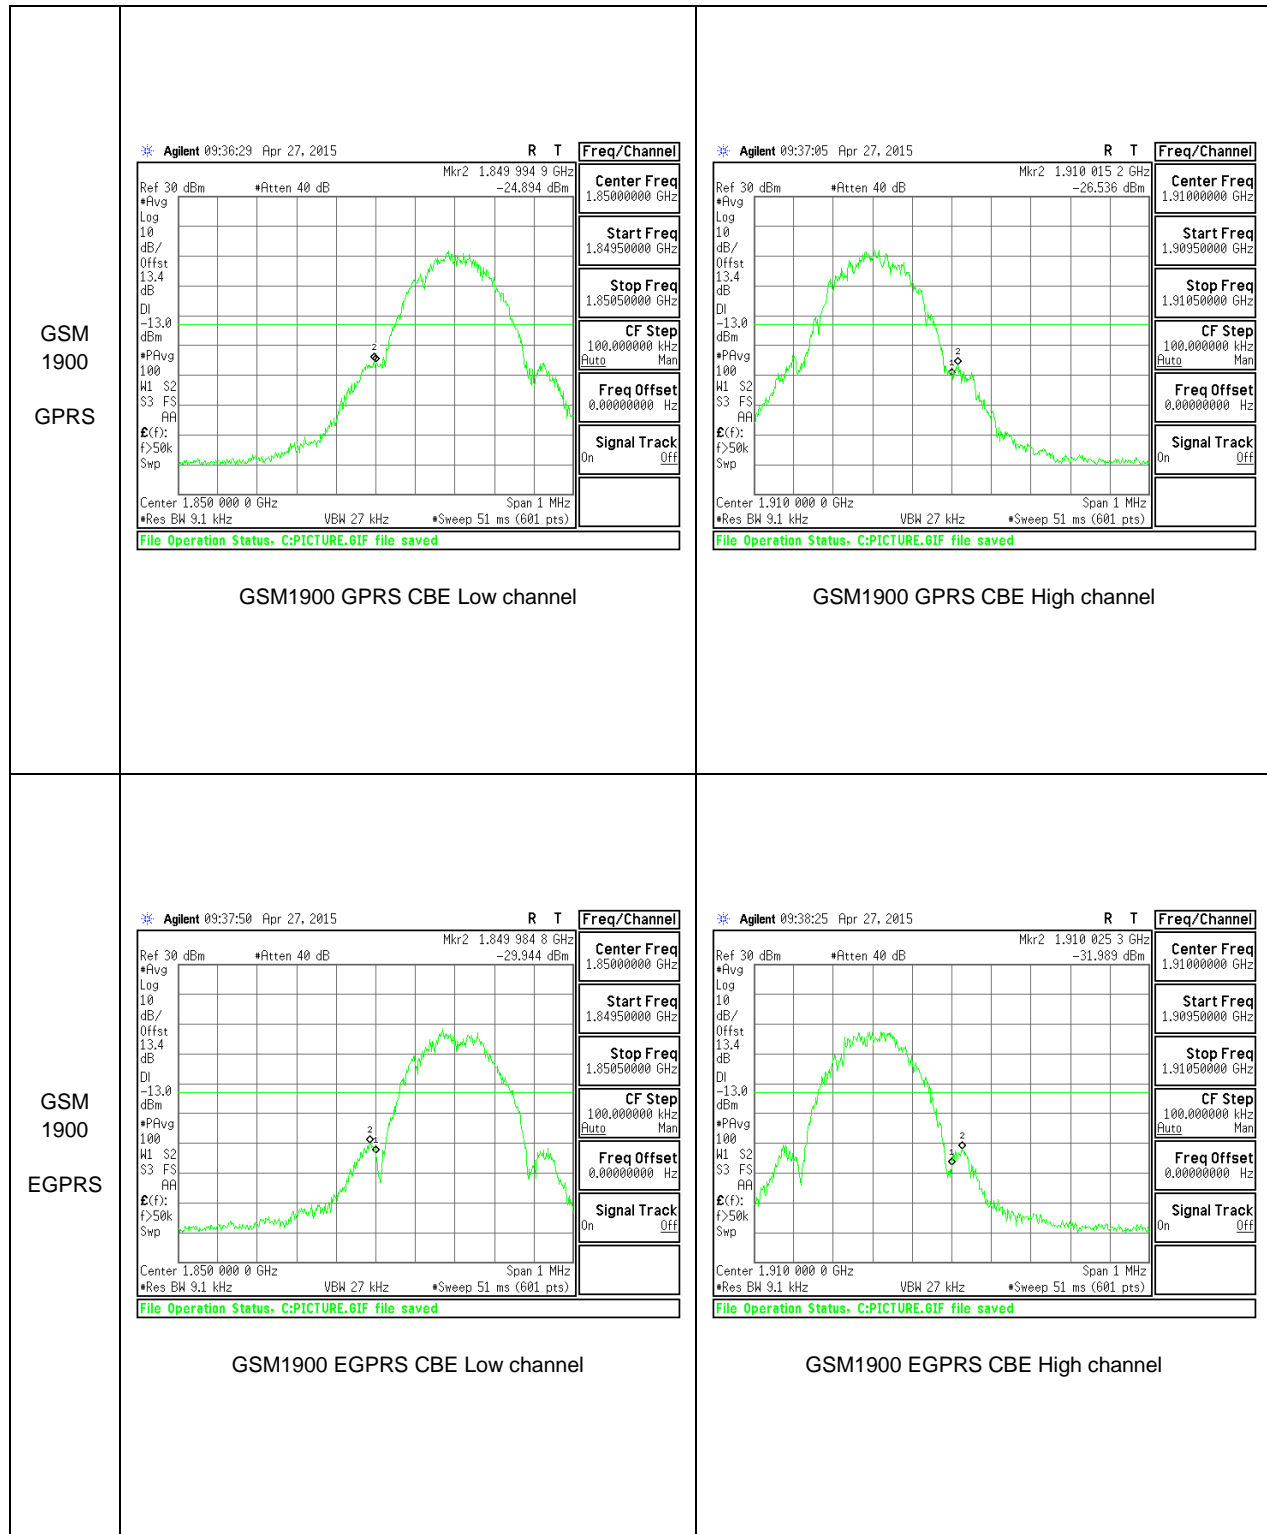
RESULTS

10.2.1. BAND EDGE PLOTS

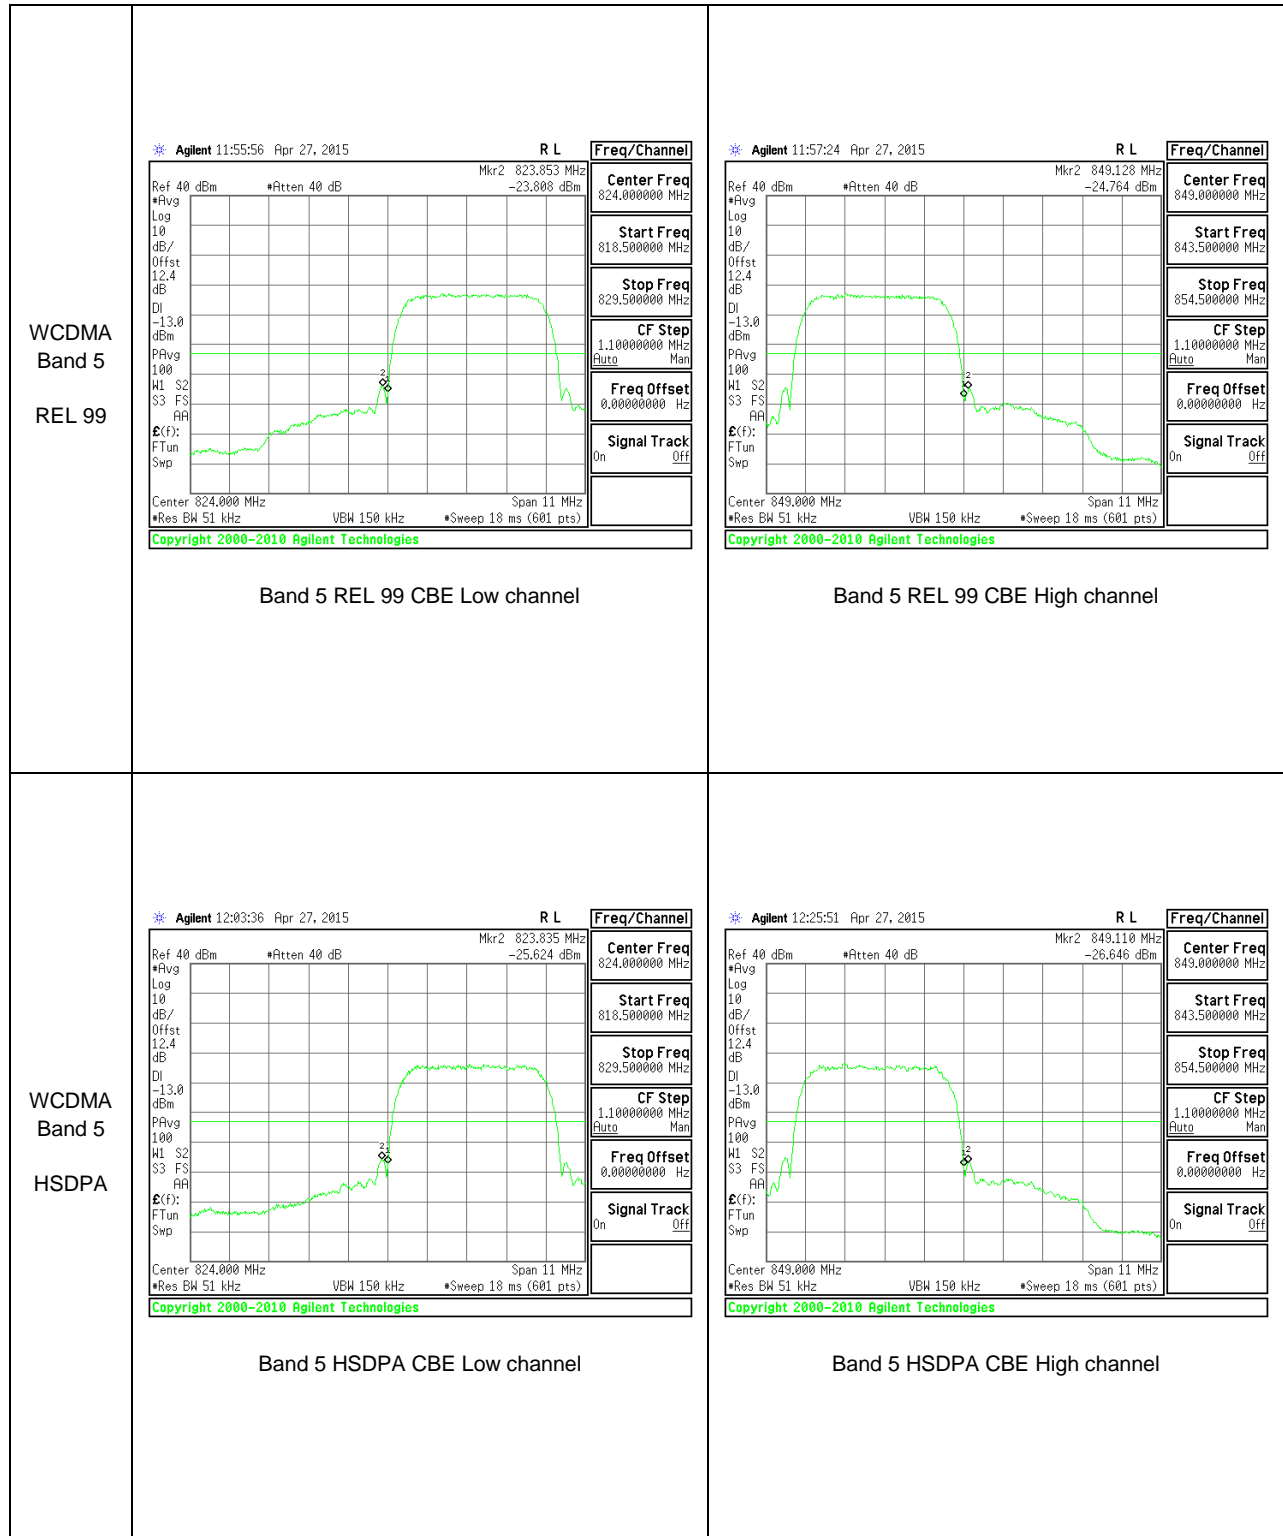
GSM

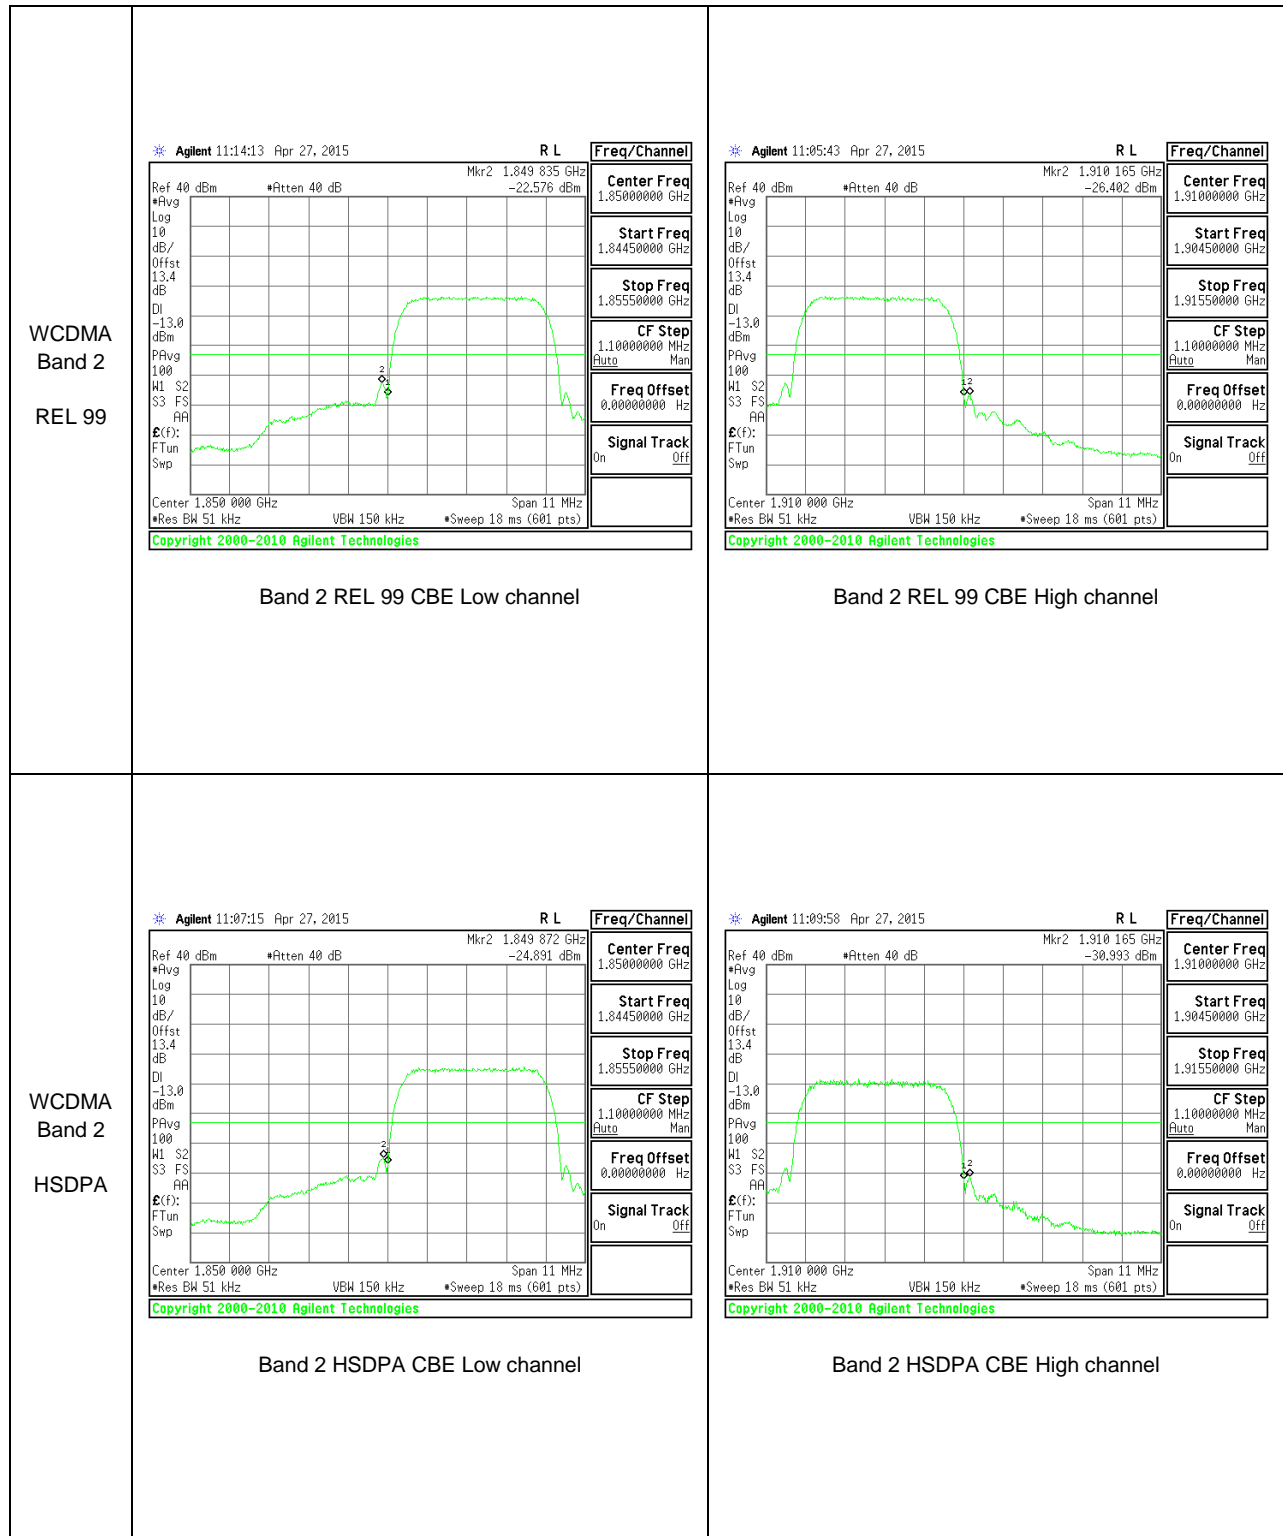
Note: GSM reading need add 9dB DCCF factor due to duty cycle is 12.5% during test.



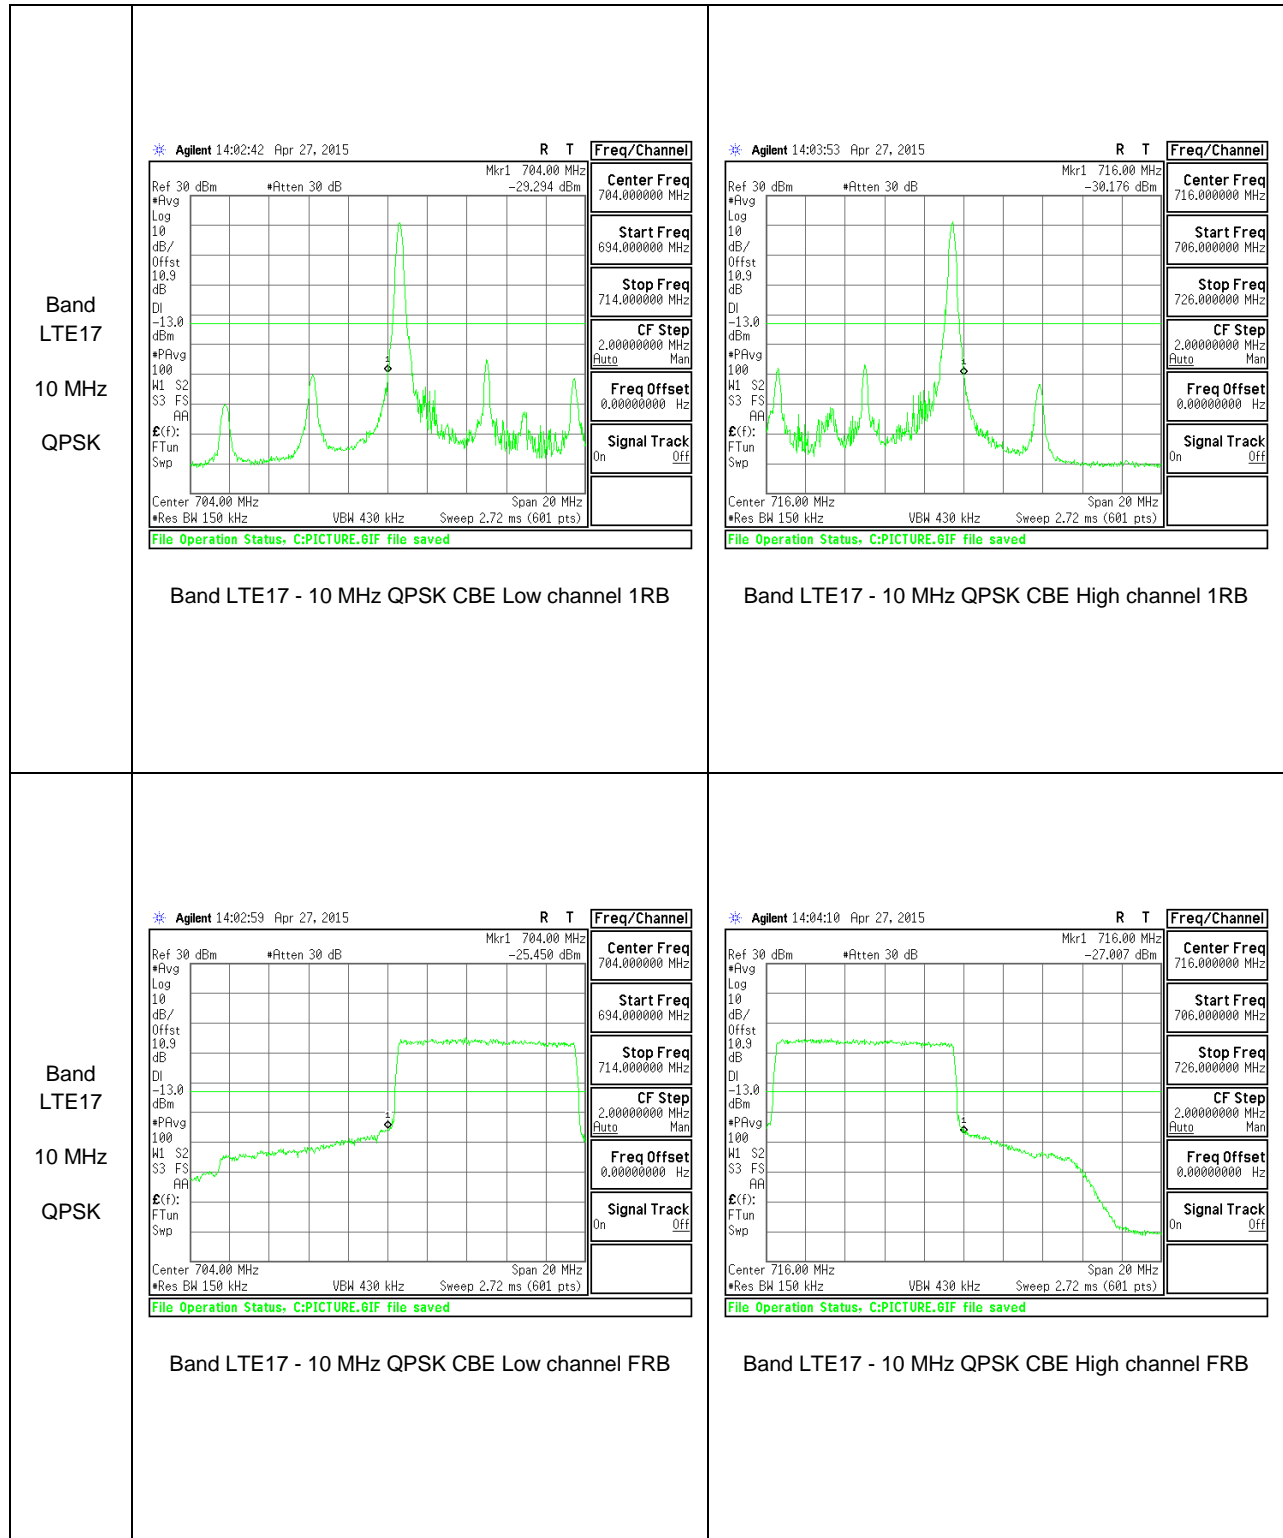


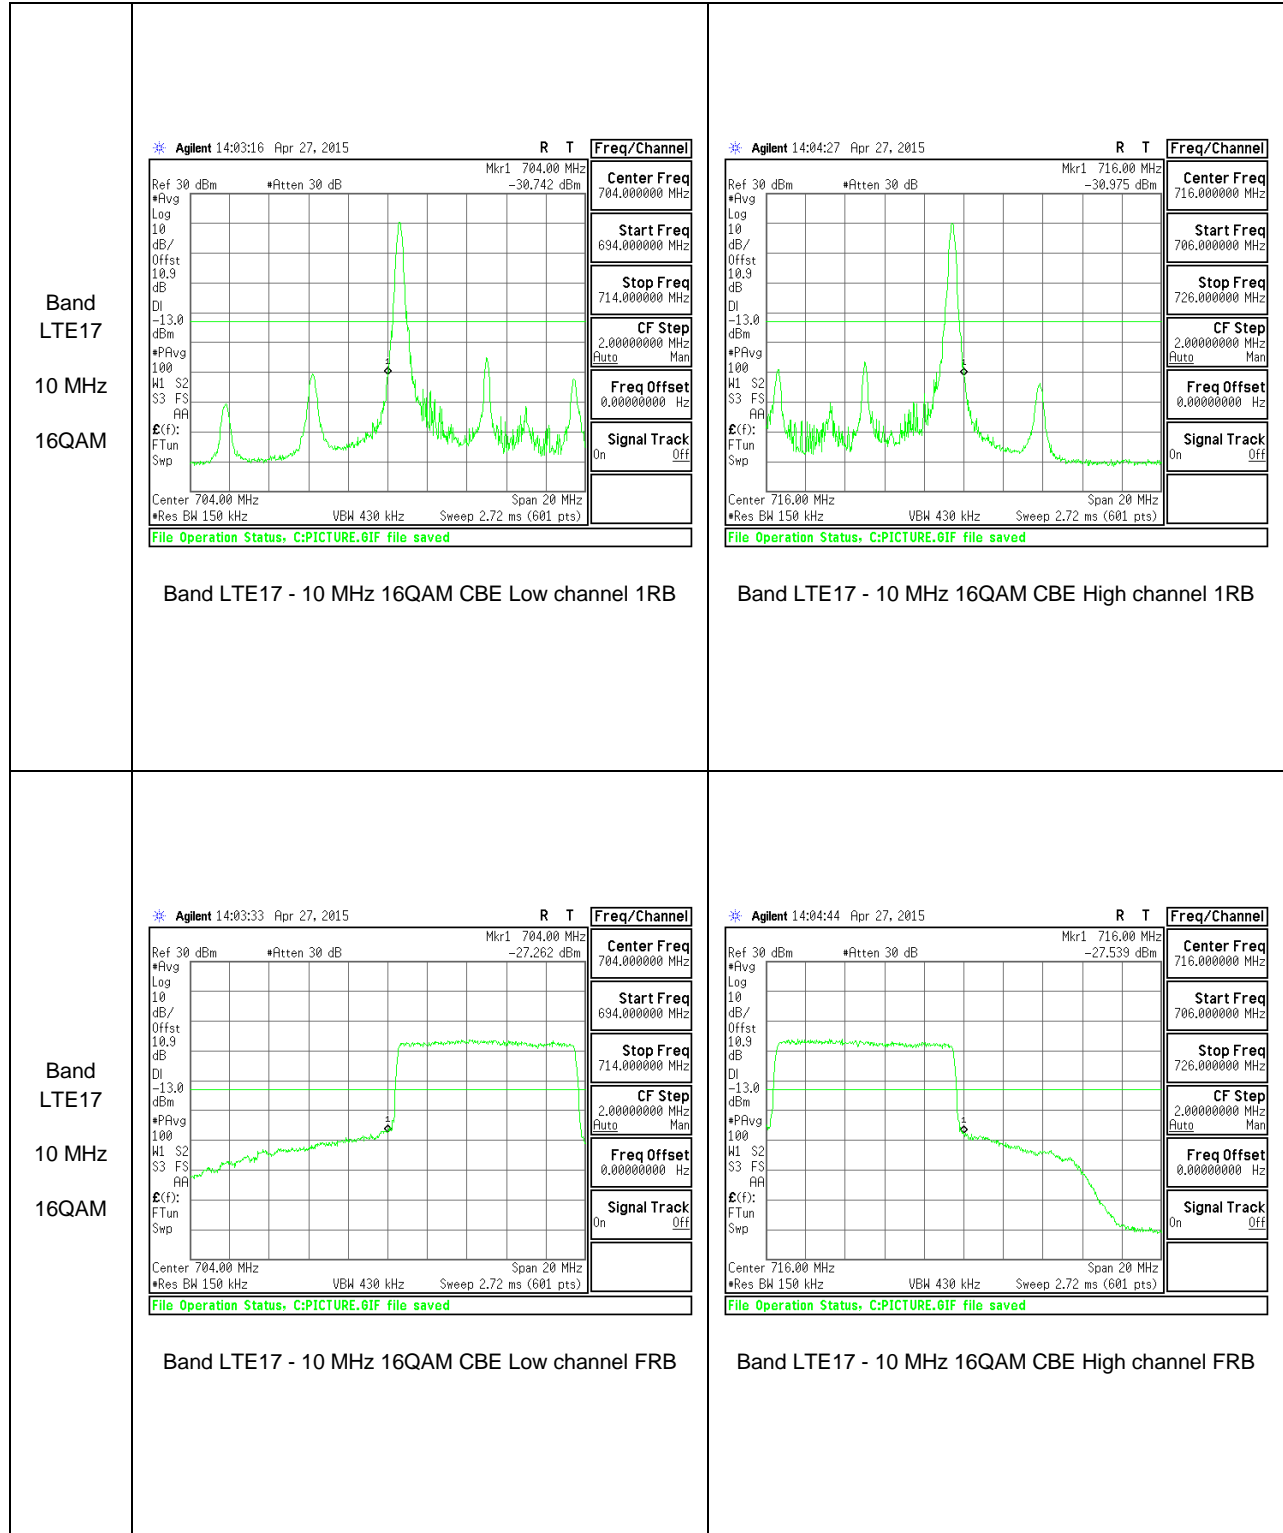
WCDMA

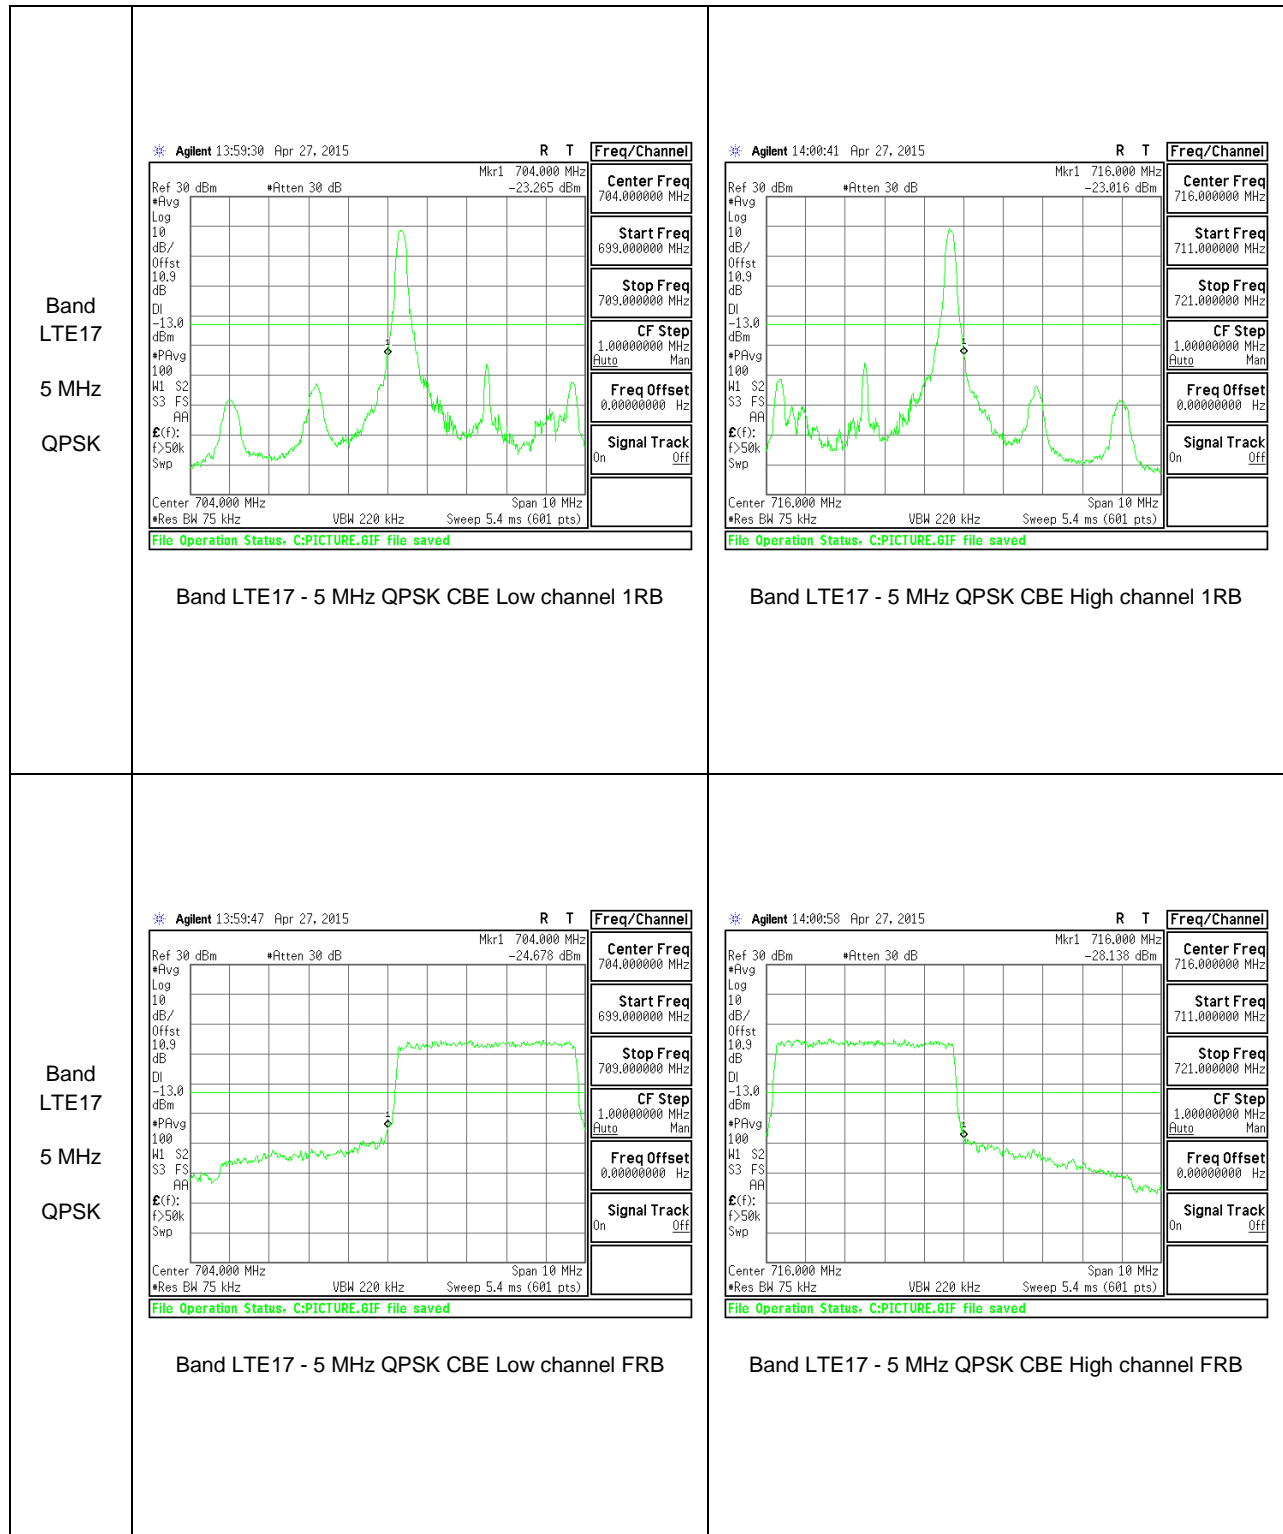


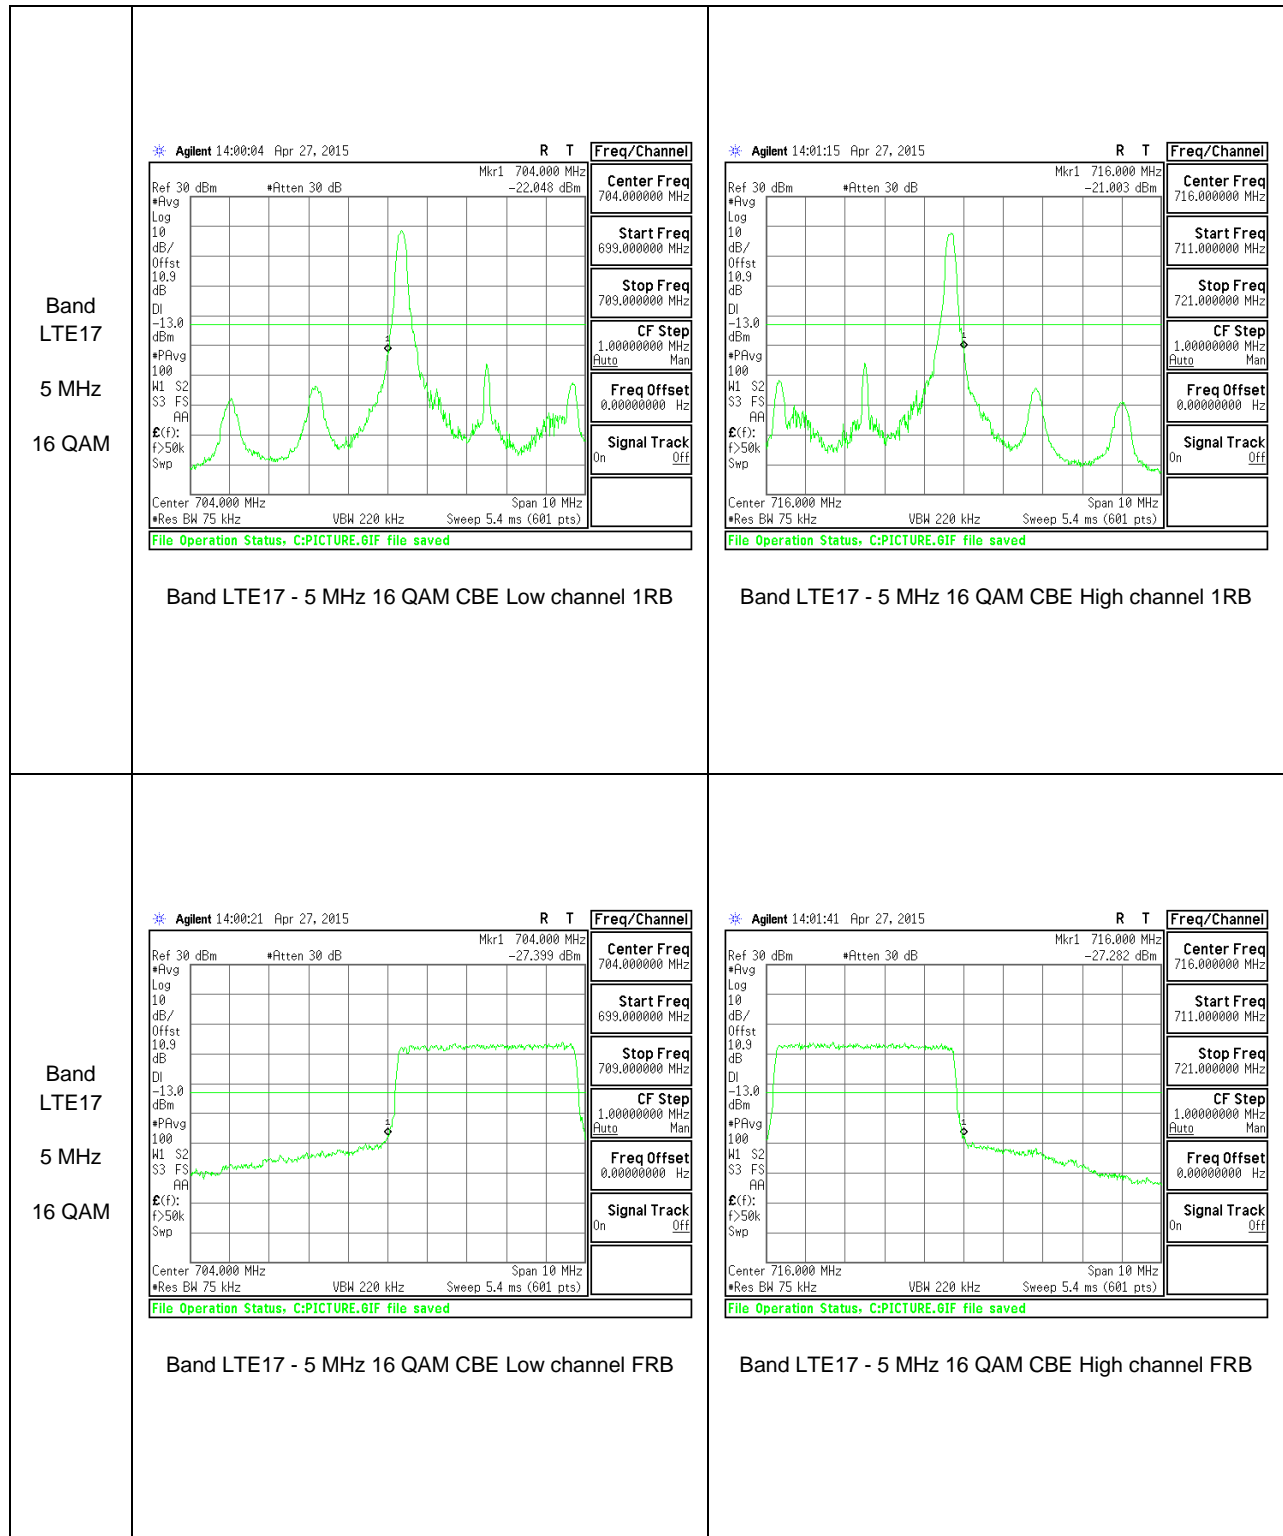


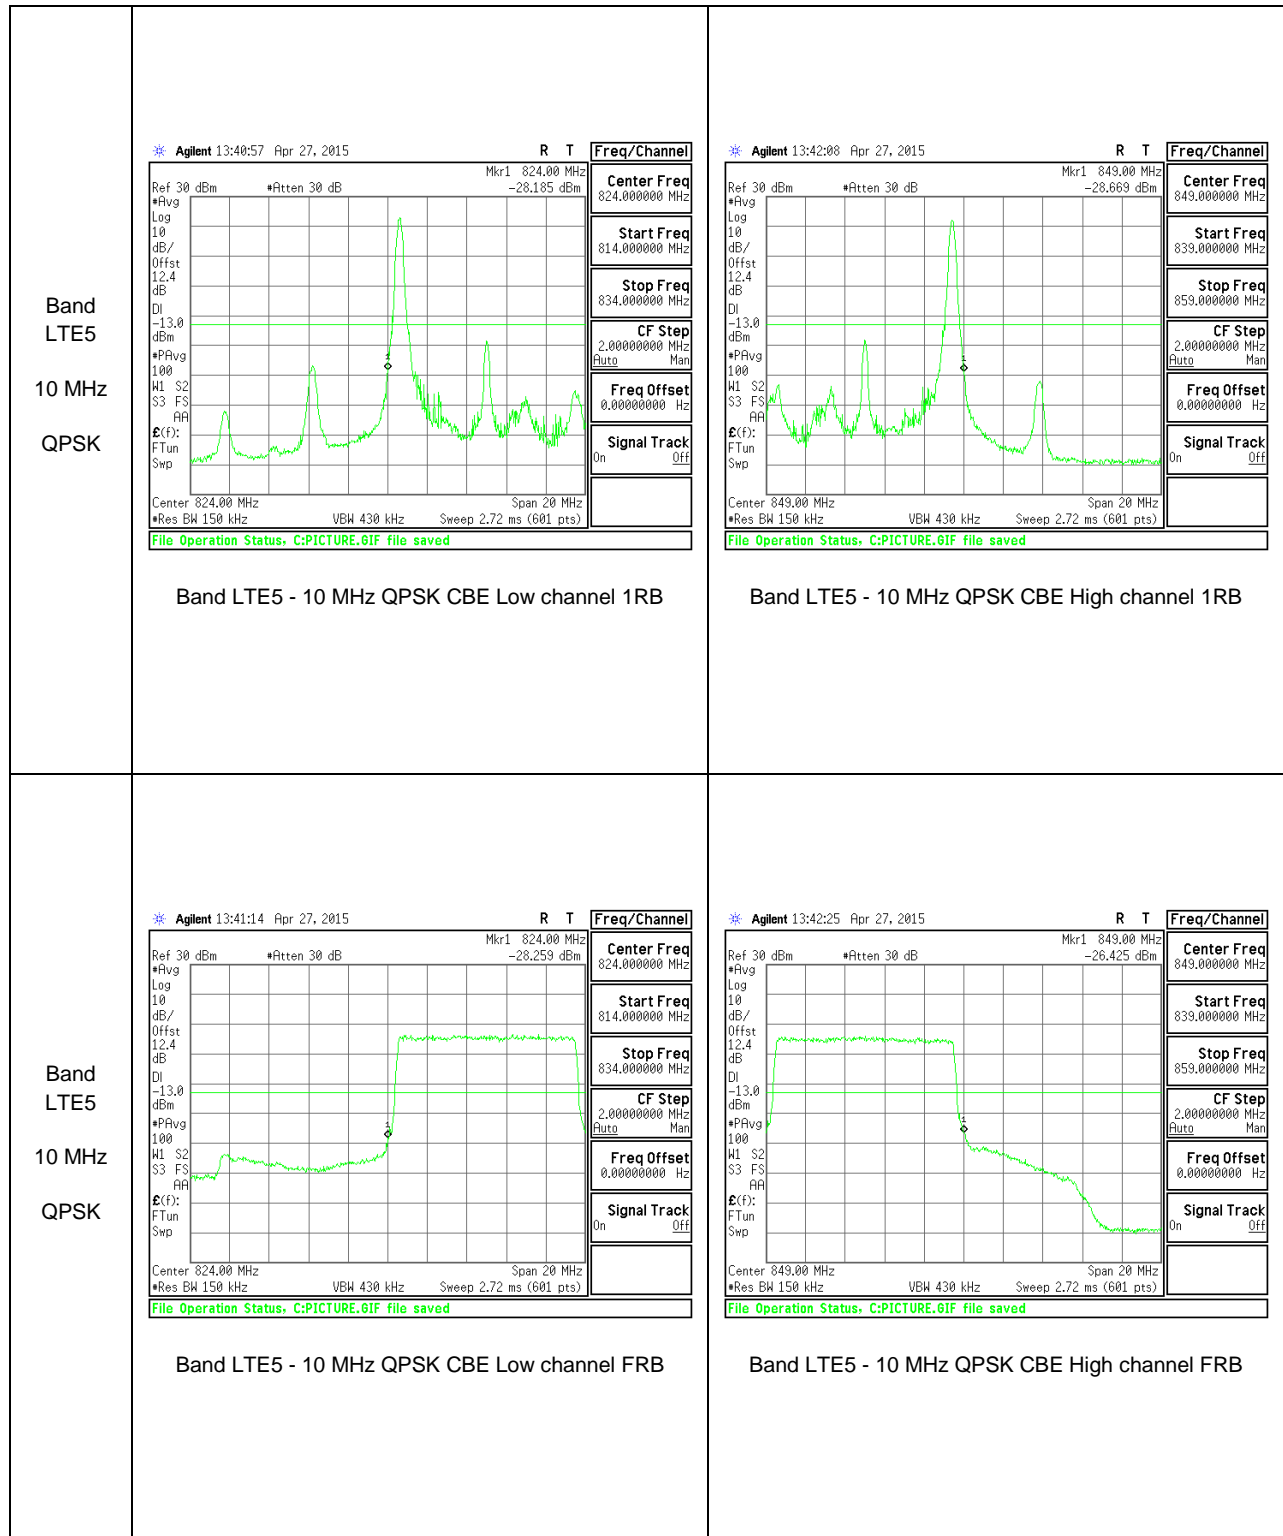
LTE

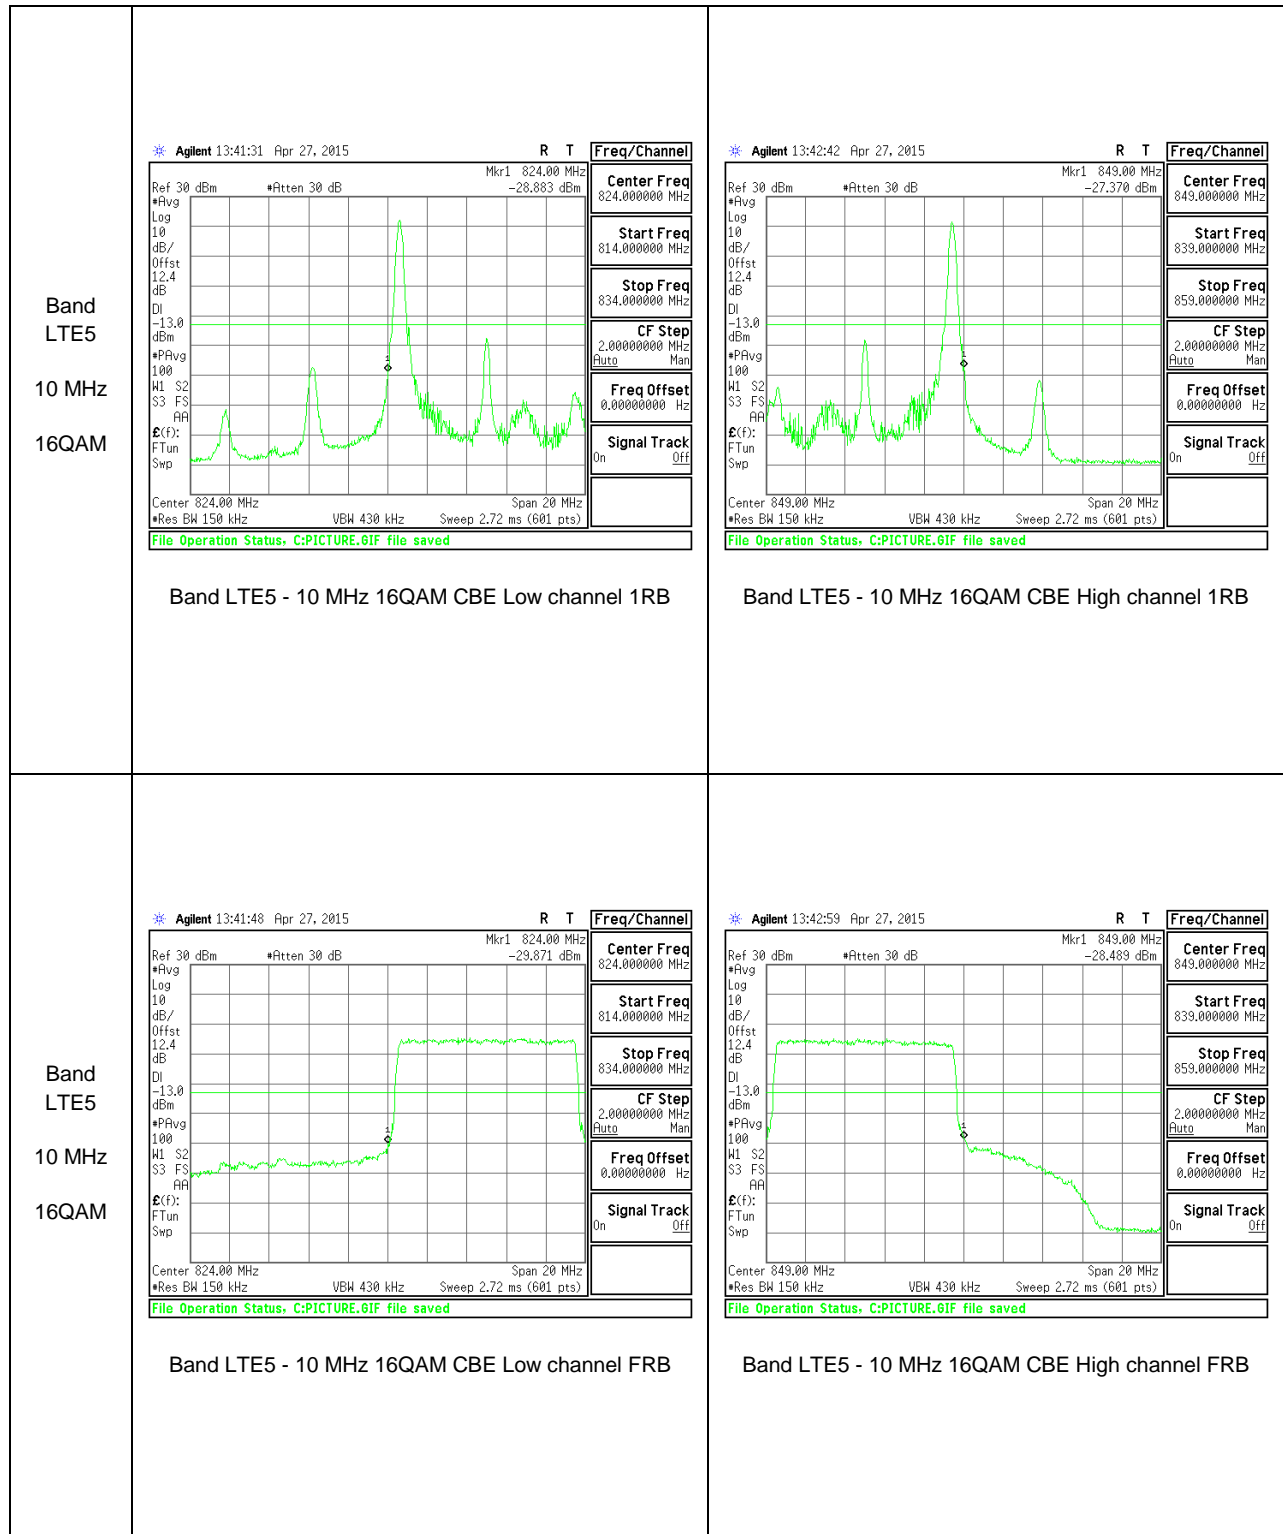


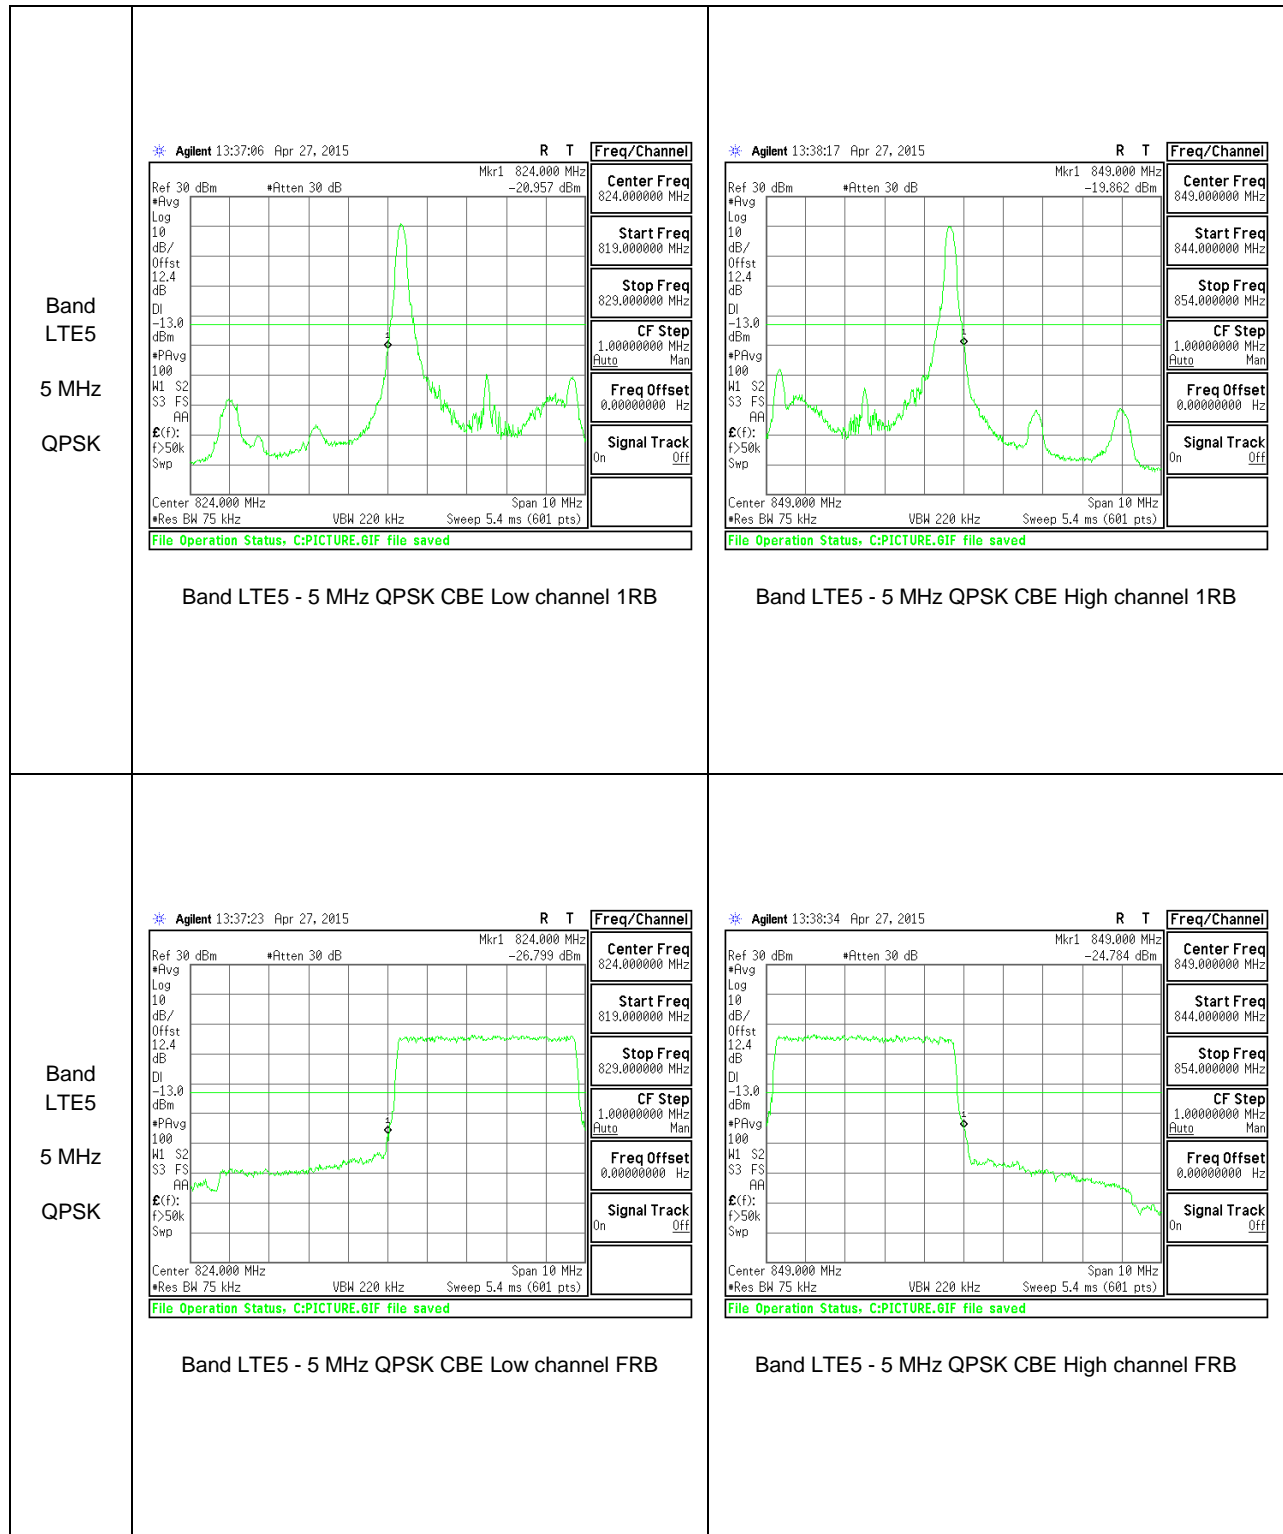


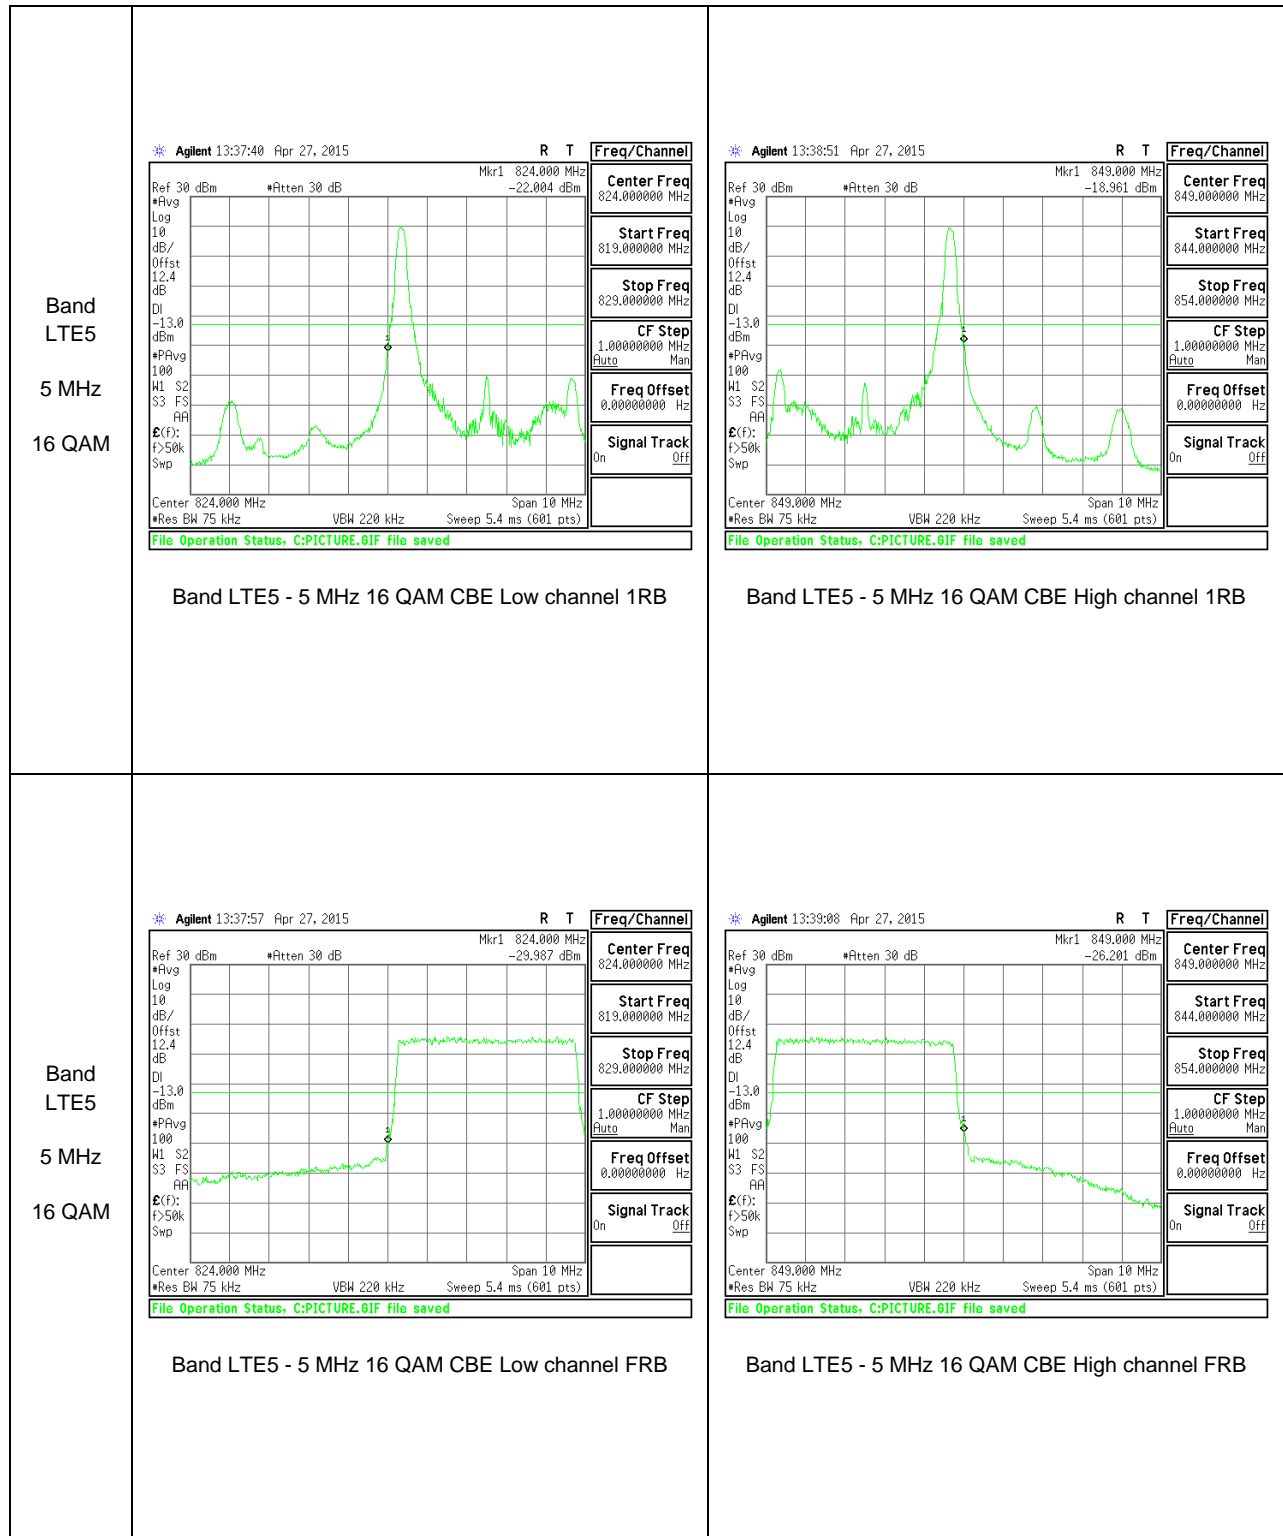


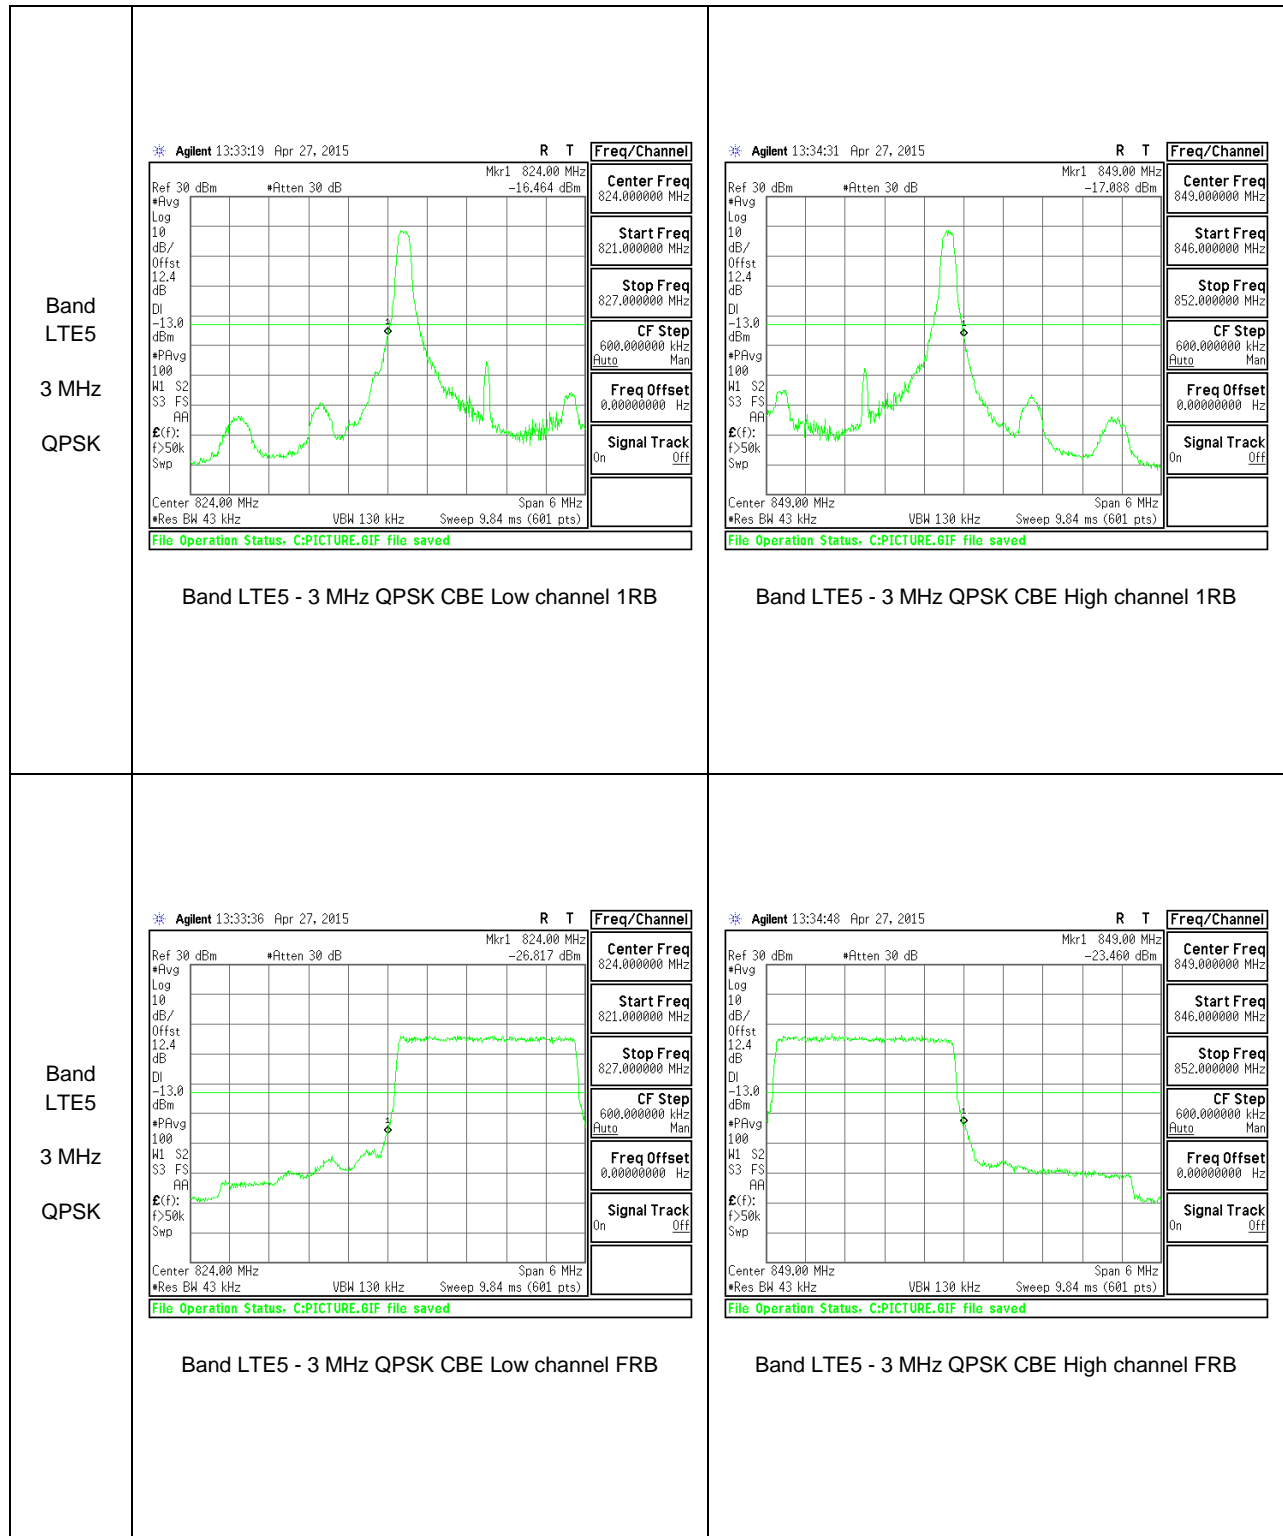


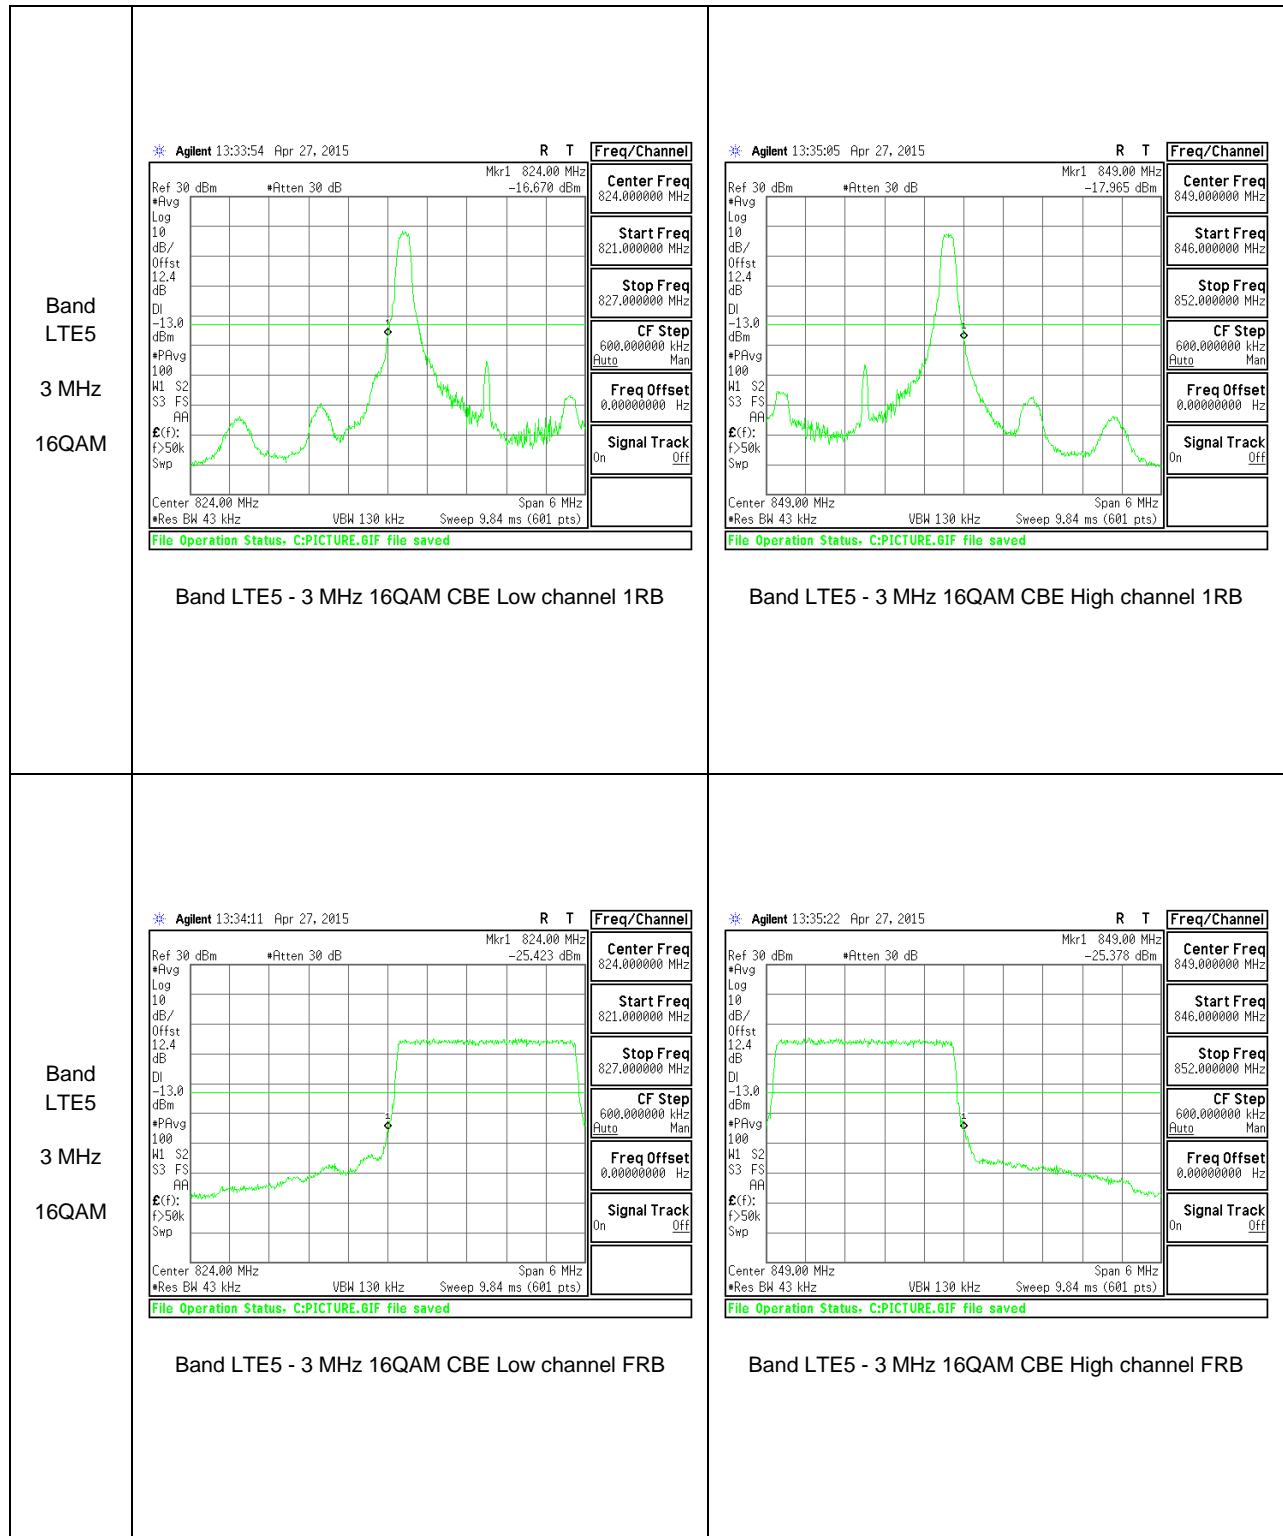


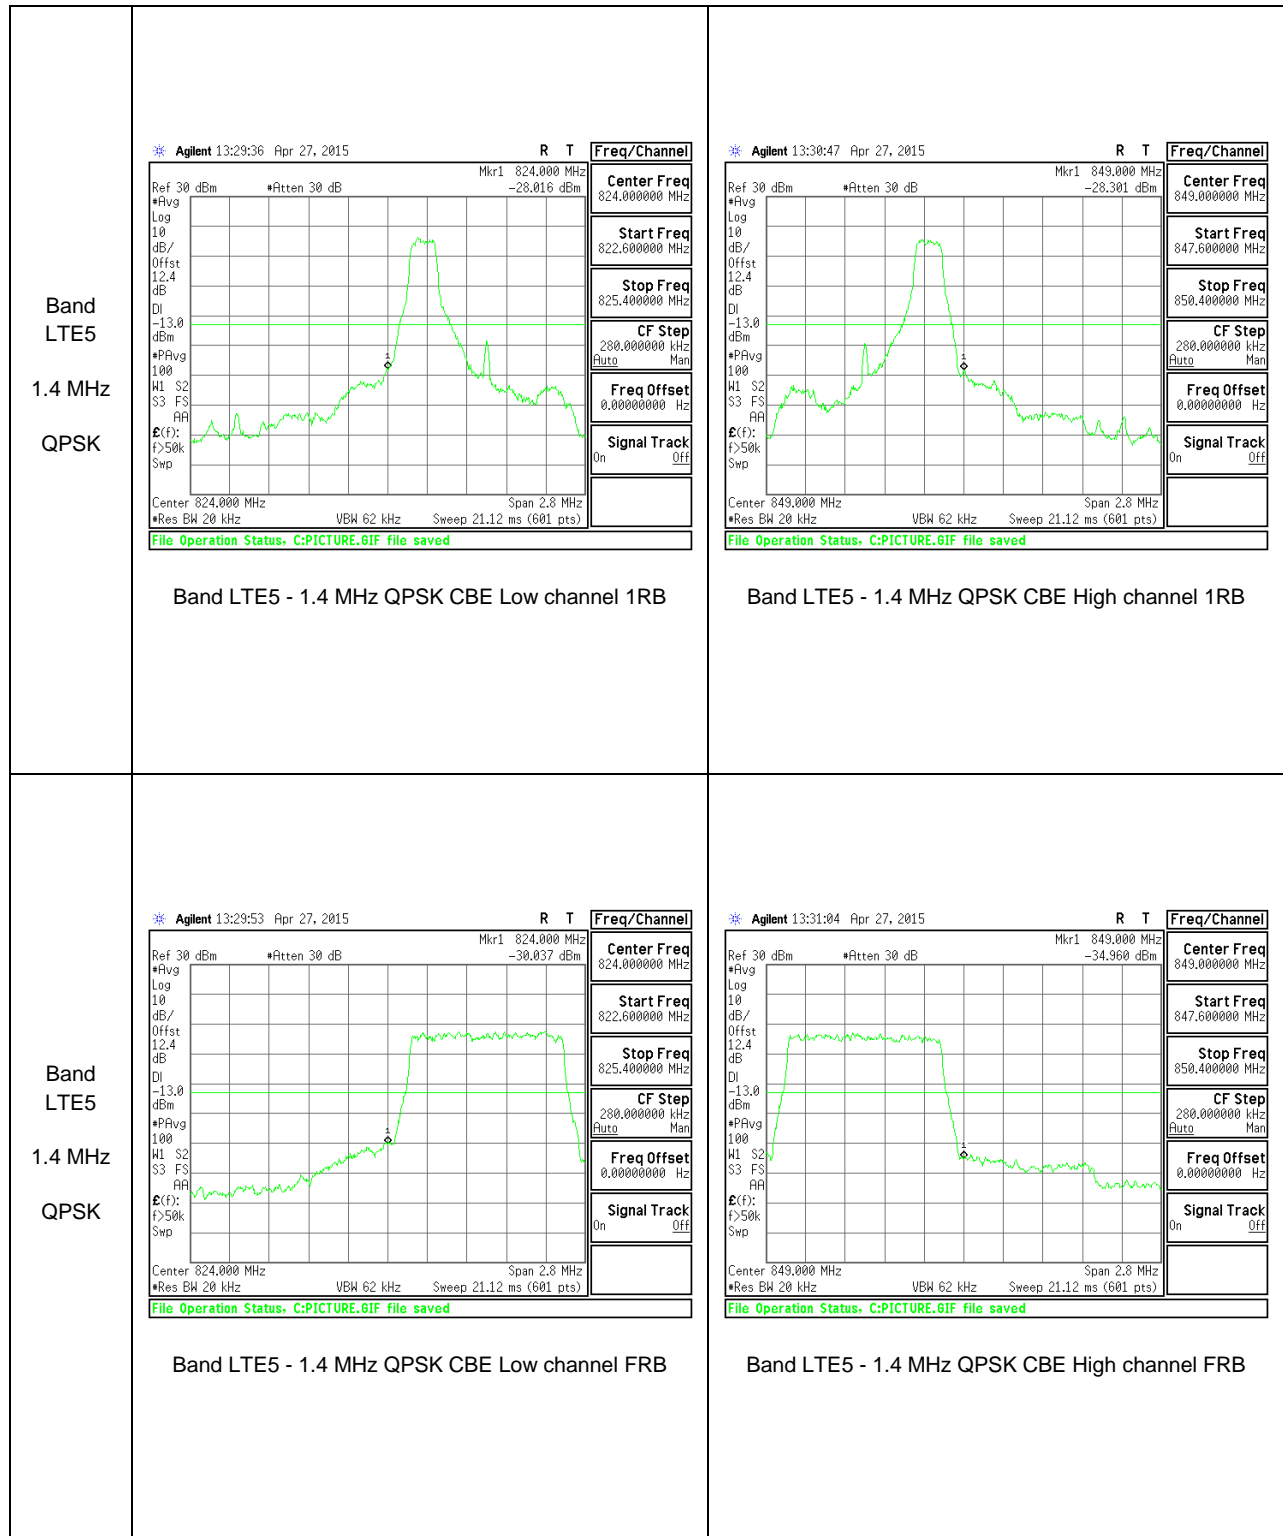


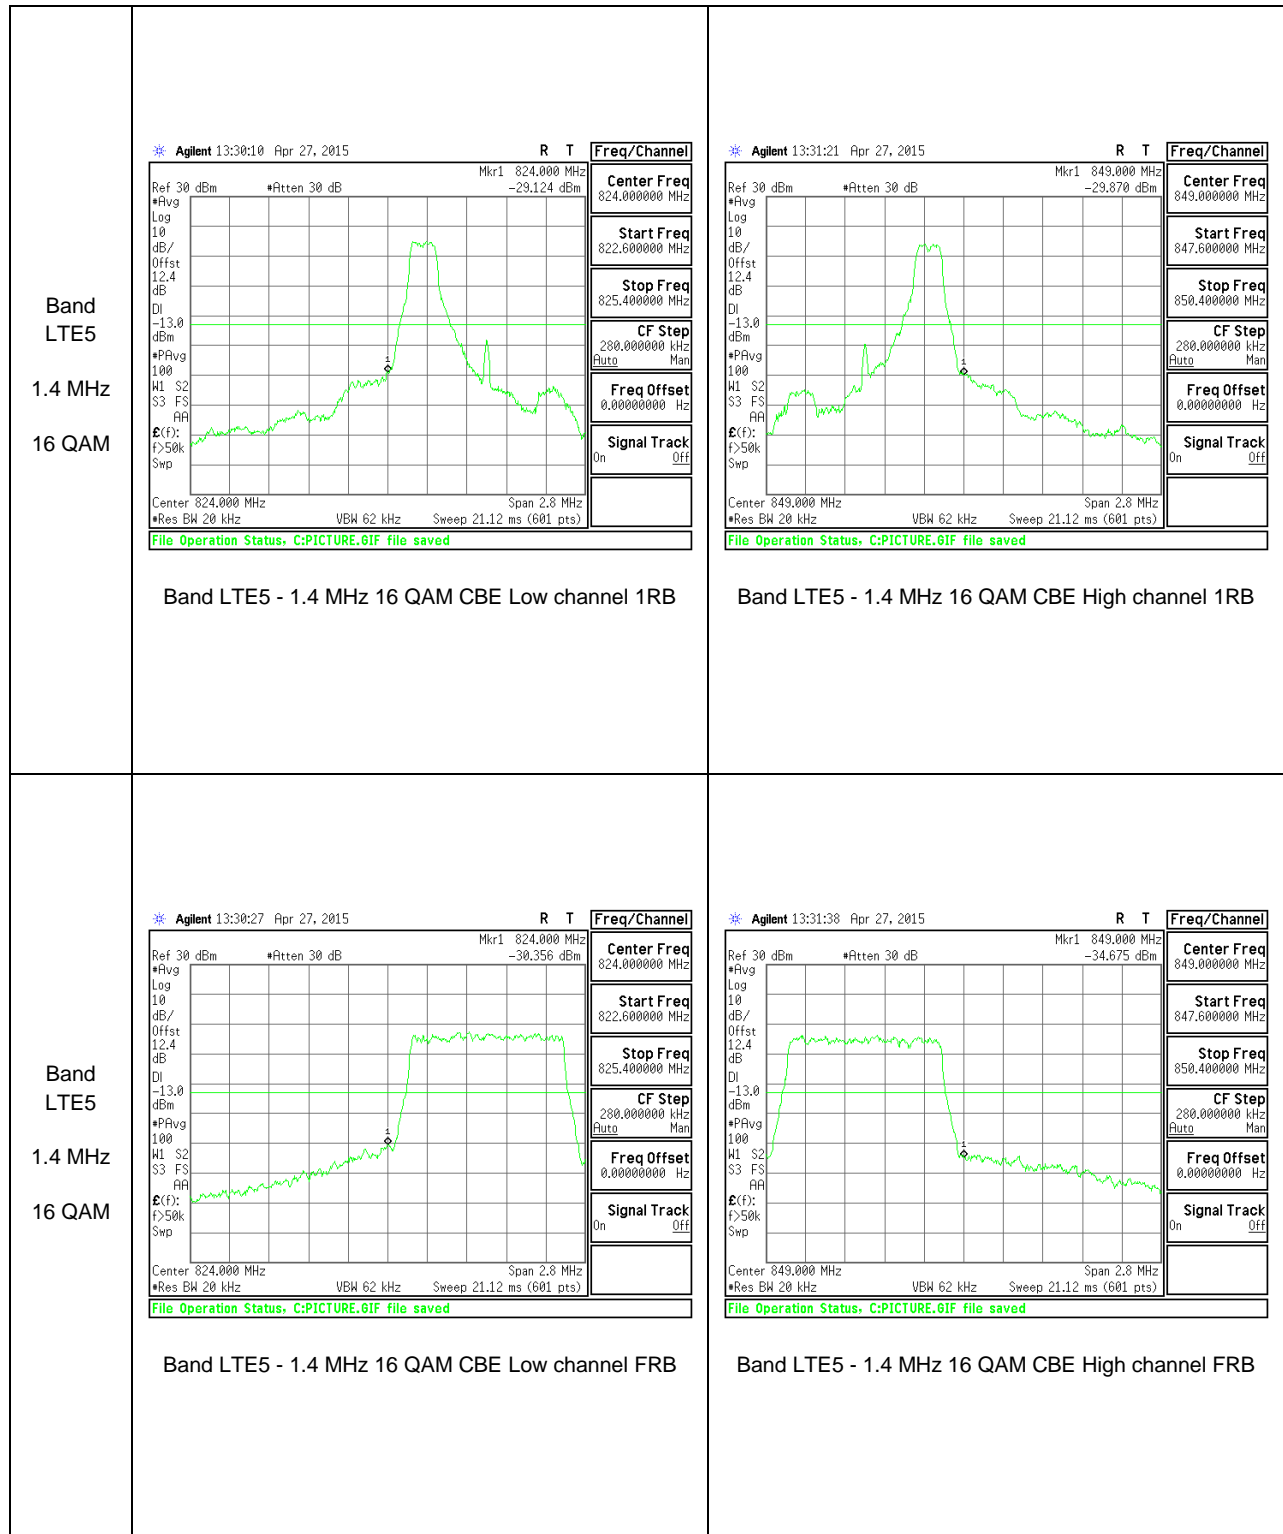












10.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238 (a), §27.53 (g)

LIMITS

Part 22.917(a) & Part 24.238(a) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Part 27.53(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

MODES TESTED

GSM (850, 1900), WCDMA (Bands V and II), LTE (Bands 5 and 17).

RESULTS

10.3.1. OUT OF BAND EMISSIONS RESULT

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
GSM850	GPRS	824.2	-19.702	-13	-6.702
		836.6	-18.831	-13	-5.831
		848.8	-18.65	-13	-5.65
	EGPRS	824.2	-19.95	-13	-6.95
		836.6	-20.003	-13	-7.003
		848.8	-18.819	-13	-5.819
GSM1900	GPRS	1850.2	-18.413	-13	-5.413
		1880	-18.338	-13	-5.338
		1909.8	-18.703	-13	-5.703
	EGPRS	1850.2	-18.181	-13	-5.181
		1880	-17.917	-13	-4.917
		1909.8	-17.633	-13	-4.633
Band 5	REL99	826.4	-19.40	-13	-6.40
		836.6	-19.22	-13	-6.22
		846.6	-19.47	-13	-6.47
	HSDPA	826.4	-19.59	-13	-6.59
		836.6	-18.50	-13	-5.50
		846.6	-18.86	-13	-5.86
Band 2	REL99	1852.4	-16.42	-13	-3.42
		1880	-17.49	-13	-4.49
		1907.6	-18.95	-13	-5.95
	HSDPA	1852.4	-18.19	-13	-5.19
		1880	-18.05	-13	-5.05
		1907.6	-17.52	-13	-4.52

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE17	10	QPSK	709	-29.154	-13	-16.154
			710	-29.684	-13	-16.684
			711	-30.031	-13	-17.031
		16QAM	709	-29.934	-13	-16.934
			710	-29.009	-13	-16.009
			711	-29.485	-13	-16.485

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE17	5	QPSK	706.5	-30.046	-13	-17.046
			710	-29.653	-13	-16.653
			713.5	-28.897	-13	-15.897
		16QAM	706.5	-29.064	-13	-16.064
			710	-29.875	-13	-16.875
			713.5	-29.756	-13	-16.756

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	10	QPSK	829	-28.716	-13	-15.716
			836.5	-28.397	-13	-15.397
			844	-27.772	-13	-14.772
		16QAM	829	-28.404	-13	-15.404
			836.5	-28.315	-13	-15.315
			844	-28.065	-13	-15.065

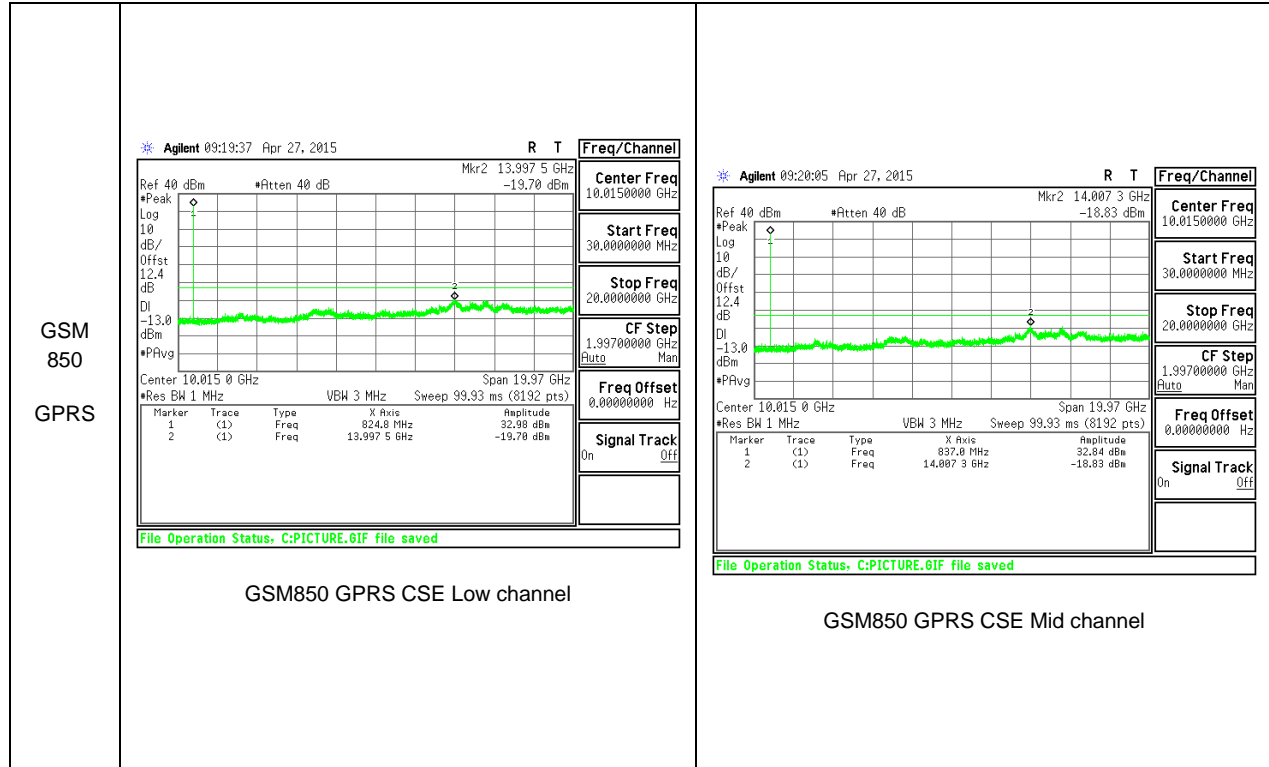
Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	5	QPSK	826.5	-27.611	-13	-14.611
			836.5	-28.574	-13	-15.574
			846.5	-27.657	-13	-14.657
		16QAM	826.5	-28.209	-13	-15.209
			836.5	-27.982	-13	-14.982
			846.5	-28.209	-13	-15.209

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	3	QPSK	825.5	-27.916	-13	-14.916
			836.5	-28.528	-13	-15.528
			847.5	-27.622	-13	-14.622
		16QAM	825.5	-28.336	-13	-15.336
			836.5	-28.512	-13	-15.512
			847.5	-28.256	-13	-15.256

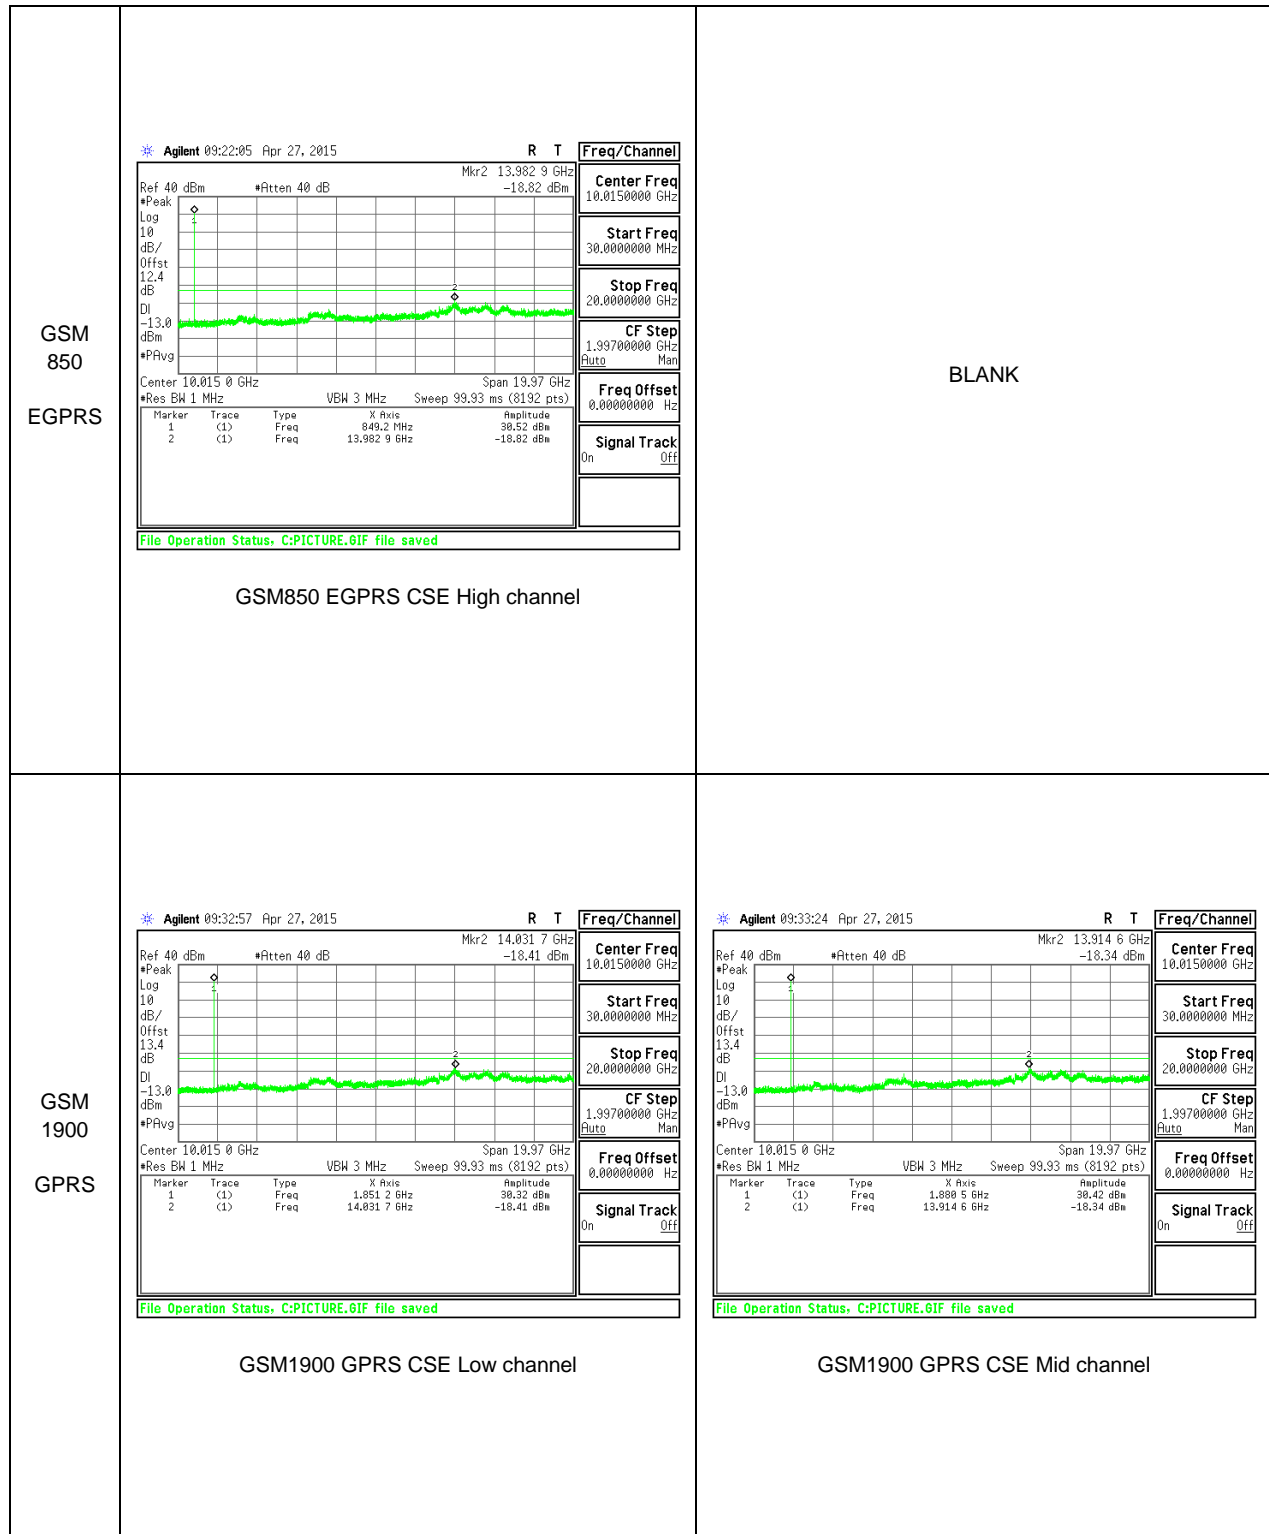
Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	1.4	QPSK	824.7	-28.089	-13	-15.089
			836.5	-28.661	-13	-15.661
			848.3	-27.539	-13	-14.539
		16QAM	824.7	-28.471	-13	-15.471
			836.5	-28.165	-13	-15.165
			848.3	-27.102	-13	-14.102

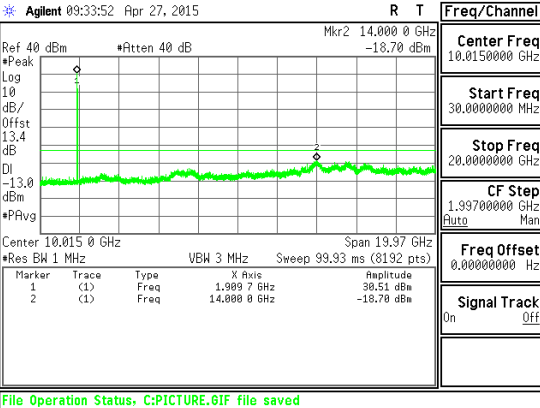
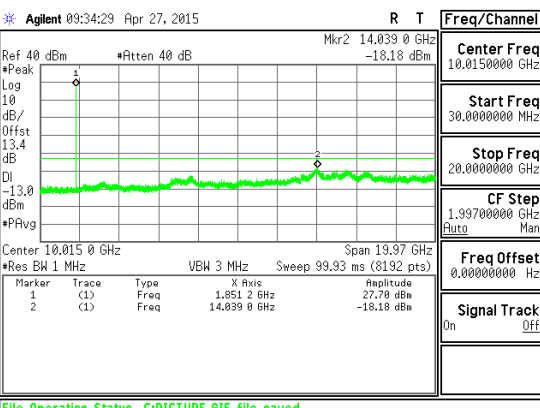
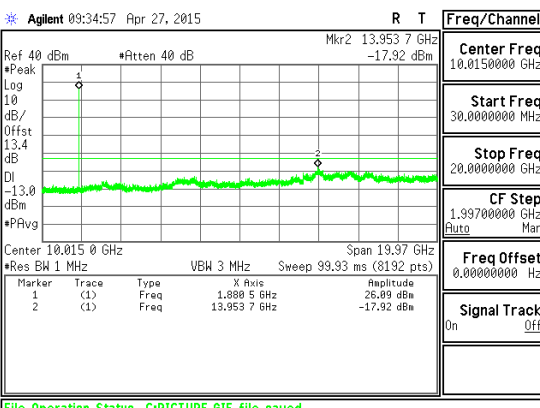
10.3.2. OUT OF BAND EMISSIONS PLOTS

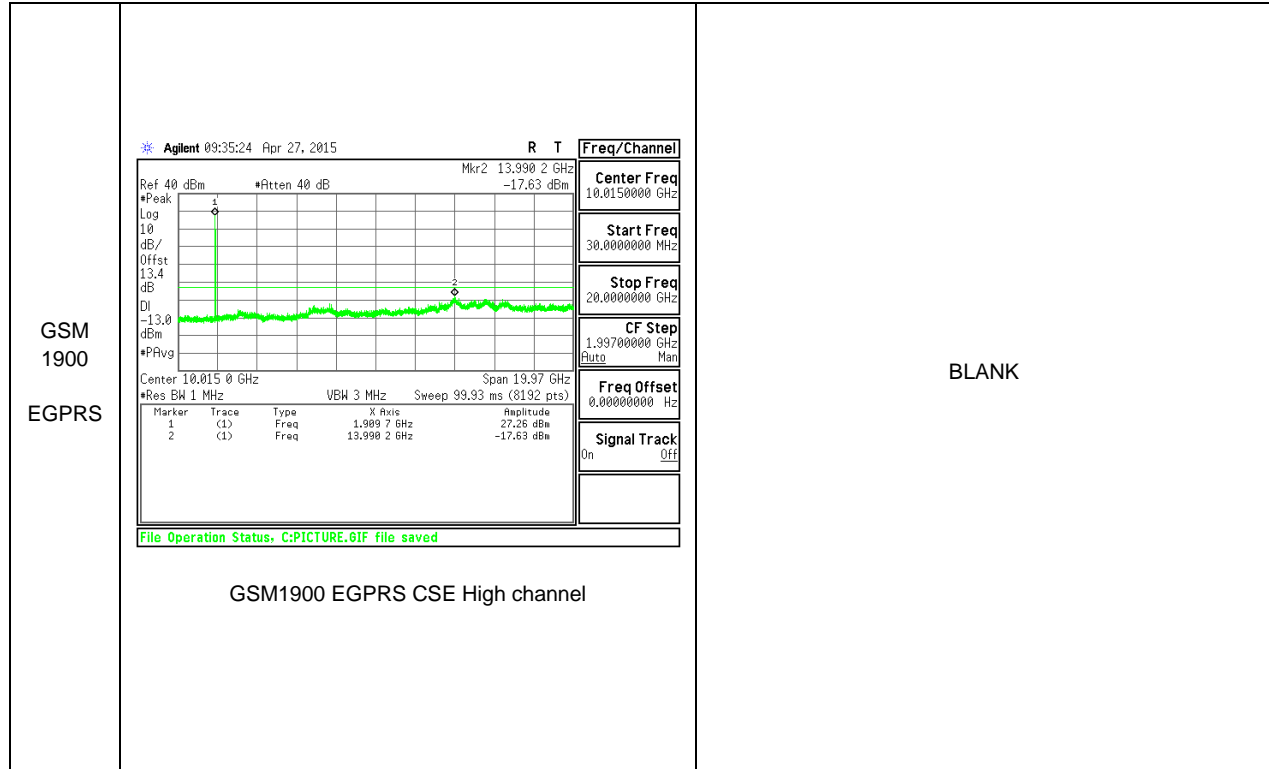
GSM



<p>GSM 850 GPRS</p>	<p>Agilent 09:20:32 Apr 27, 2015 R T Freq/Channel</p> <p>Ref 40 dBm #Atten 40 dB Mkr2 14.012 2 GHz -18.65 dBm</p> <p>Center Freq 10.0150000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 20.0000000 GHz</p> <p>CF Step 1.99700000 GHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>File Operation Status: C:PICTURE.6IF file saved</p> <p>GSM850 GPRS CSE High channel</p>	<p>BLANK</p>
<p>GSM 850 EGPRS</p>	<p>Agilent 09:21:10 Apr 27, 2015 R T Freq/Channel</p> <p>Ref 40 dBm #Atten 40 dB Mkr2 13.970 7 GHz -19.95 dBm</p> <p>Center Freq 10.0150000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 20.0000000 GHz</p> <p>CF Step 1.99700000 GHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>File Operation Status: C:PICTURE.6IF file saved</p> <p>GSM850 EGPRS CSE Low channel</p>	<p>Agilent 09:21:37 Apr 27, 2015 R T Freq/Channel</p> <p>Ref 40 dBm #Atten 40 dB Mkr2 13.990 2 GHz -20.00 dBm</p> <p>Center Freq 10.0150000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 20.0000000 GHz</p> <p>CF Step 1.99700000 GHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>File Operation Status: C:PICTURE.6IF file saved</p> <p>GSM850 EGPRS CSE Mid channel</p>

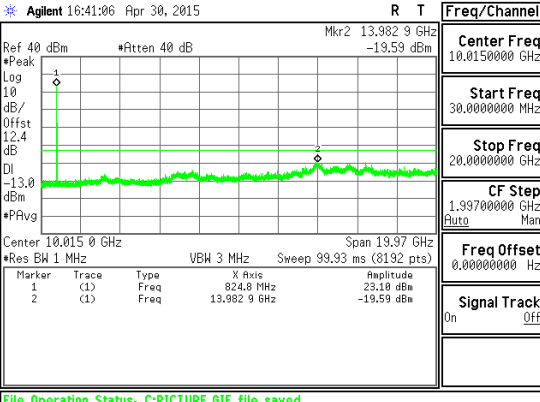
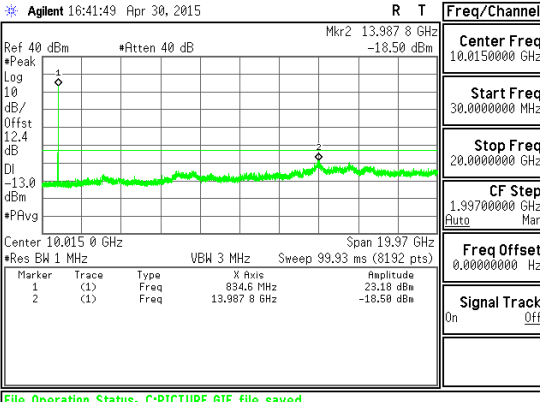
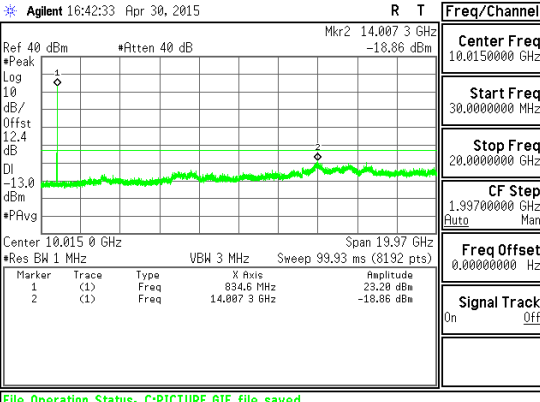


<p>GSM 1900 GPRS</p>	 <p>Agilent 09:33:52 Apr 27, 2015 R T Freq/Channel</p> <p>Center Freq 10.0150000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 20.0000000 GHz</p> <p>CF Step 1.99700000 GHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>File Operation Status: C:PICTURE.6IF file saved</p> <p>GSM1900 GPRS CSE High channel</p>	<p>BLANK</p>
<p>GSM 1900 EGPRS</p>	 <p>Agilent 09:34:29 Apr 27, 2015 R T Freq/Channel</p> <p>Center Freq 10.0150000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 20.0000000 GHz</p> <p>CF Step 1.99700000 GHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>File Operation Status: C:PICTURE.6IF file saved</p> <p>GSM1900 EGPRS CSE Low channel</p>	 <p>Agilent 09:34:57 Apr 27, 2015 R T Freq/Channel</p> <p>Center Freq 10.0150000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 20.0000000 GHz</p> <p>CF Step 1.99700000 GHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>File Operation Status: C:PICTURE.6IF file saved</p> <p>GSM1900 EGPRS CSE Mid channel</p>



WCDMA

<p>WCDMA Band 5 REL 99</p>	<p>Agilent 16:35:41 Apr 30, 2015</p> <p>Center Freq: 10.0150000 GHz Start Freq: 30.0000000 MHz Stop Freq: 20.0000000 GHz CF Step: 1.99700000 GHz Freq Offset: 0.0000000 Hz Signal Track: On</p> <p>Marker 1: 827.2 MHz, 24.32 dBm Marker 2: 13.9878 GHz, -19.40 dBm</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band 5 REL 99 CSE Low channel</p>	<p>Agilent 16:37:47 Apr 30, 2015</p> <p>Center Freq: 10.0150000 GHz Start Freq: 30.0000000 MHz Stop Freq: 20.0000000 GHz CF Step: 1.99700000 GHz Freq Offset: 0.0000000 Hz Signal Track: On</p> <p>Marker 1: 837.0 MHz, 24.24 dBm Marker 2: 14.0219 GHz, -19.22 dBm</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band 5 REL 99 CSE Mid channel</p>
<p>WCDMA Band 5 REL 99</p>	<p>Agilent 16:39:55 Apr 30, 2015</p> <p>Center Freq: 10.0150000 GHz Start Freq: 30.0000000 MHz Stop Freq: 20.0000000 GHz CF Step: 1.99700000 GHz Freq Offset: 0.0000000 Hz Signal Track: On</p> <p>Marker 1: 846.7 MHz, 24.21 dBm Marker 2: 14.0024 GHz, -19.47 dBm</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band 5 REL 99 CSE High channel</p>	<p>BLANK</p>

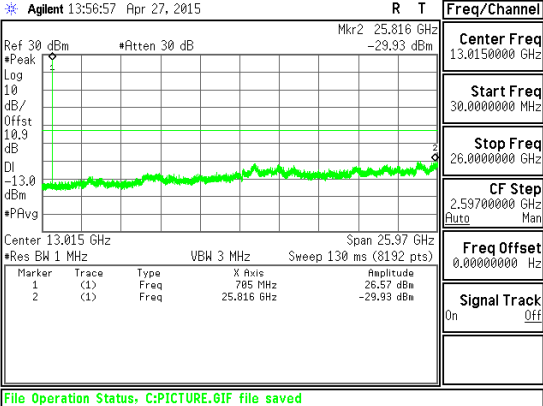
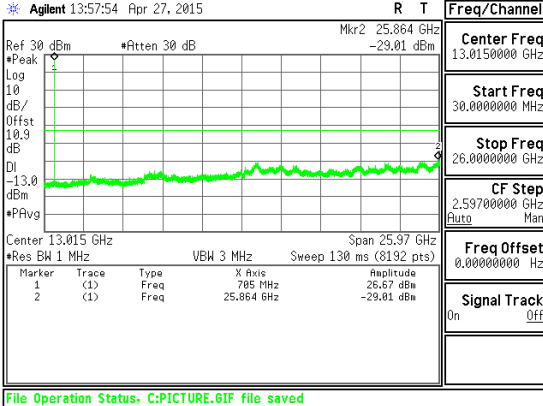
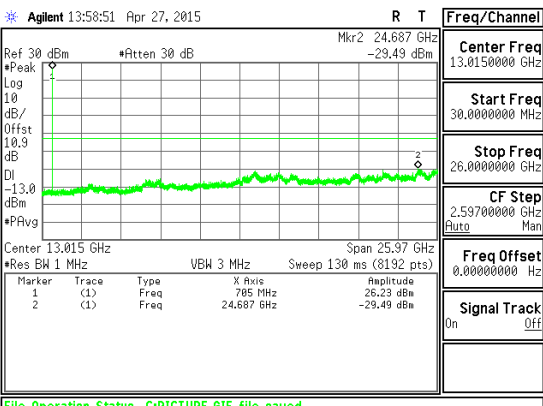
<p>WCDMA Band 5 HSDPA</p>	 <p>Agilent 16:41:06 Apr 30, 2015</p> <p>Center Freq 10.0150000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 20.0000000 GHz</p> <p>CF Step 1.99700000 GHz</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band 5 HSDPA CSE Low channel</p>	 <p>Agilent 16:41:49 Apr 30, 2015</p> <p>Center Freq 10.0150000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 20.0000000 GHz</p> <p>CF Step 1.99700000 GHz</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band 5 HSDPA CSE Mid channel</p>
<p>WCDMA Band 5 HSDPA</p>	 <p>Agilent 16:42:33 Apr 30, 2015</p> <p>Center Freq 10.0150000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 20.0000000 GHz</p> <p>CF Step 1.99700000 GHz</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band 5 HSDPA CSE High channel</p>	<p>BLANK</p>

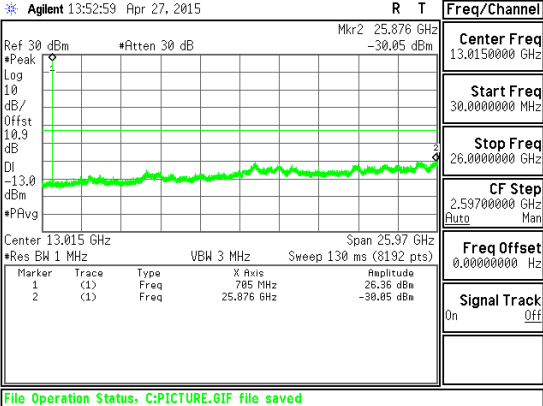
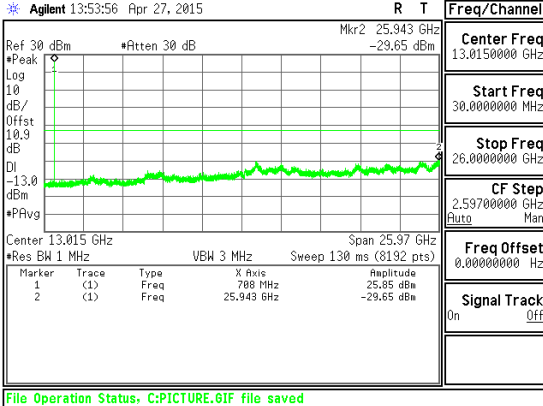
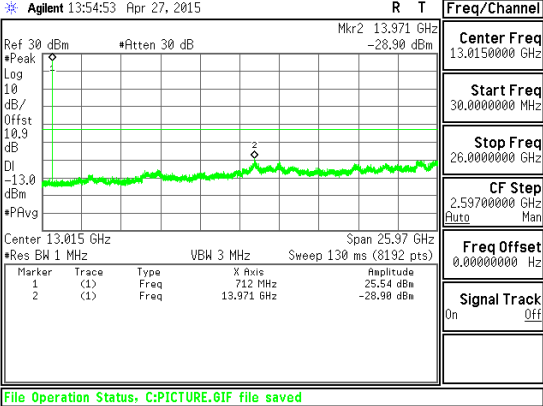
<p>WCDMA Band 2 REL 99</p>	<p>Agilent 18:13:43 Apr 30, 2015</p> <p>Center Freq: 10.0150000 GHz Start Freq: 30.0000000 MHz Stop Freq: 20.0000000 GHz CF Step: 1.99700000 GHz Freq Offset: 0.0000000 Hz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>1.853 7 GHz</td> <td>23.65 dBm</td> </tr> <tr> <td>2</td> <td>(1)</td> <td>Freq</td> <td>13.931 7 GHz</td> <td>-16.42 dBm</td> </tr> </tbody> </table> <p>Signal Track: On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	1.853 7 GHz	23.65 dBm	2	(1)	Freq	13.931 7 GHz	-16.42 dBm	<p>Band 2 REL 99 CSE Low channel</p>
Marker	Trace	Type	X Axis	Amplitude													
1	(1)	Freq	1.853 7 GHz	23.65 dBm													
2	(1)	Freq	13.931 7 GHz	-16.42 dBm													
	<p>Agilent 18:14:22 Apr 30, 2015</p> <p>Center Freq: 10.0150000 GHz Start Freq: 30.0000000 MHz Stop Freq: 20.0000000 GHz CF Step: 1.99700000 GHz Freq Offset: 0.0000000 Hz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>1.878 0 GHz</td> <td>24.20 dBm</td> </tr> <tr> <td>2</td> <td>(1)</td> <td>Freq</td> <td>13.951 2 GHz</td> <td>-17.49 dBm</td> </tr> </tbody> </table> <p>Signal Track: On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	1.878 0 GHz	24.20 dBm	2	(1)	Freq	13.951 2 GHz	-17.49 dBm	<p>Band 2 REL 99 CSE Mid channel</p>
Marker	Trace	Type	X Axis	Amplitude													
1	(1)	Freq	1.878 0 GHz	24.20 dBm													
2	(1)	Freq	13.951 2 GHz	-17.49 dBm													
<p>WCDMA Band 2 REL 99</p>	<p>Agilent 18:15:06 Apr 30, 2015</p> <p>Center Freq: 10.0150000 GHz Start Freq: 30.0000000 MHz Stop Freq: 20.0000000 GHz CF Step: 1.99700000 GHz Freq Offset: 0.0000000 Hz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>1.907 3 GHz</td> <td>23.81 dBm</td> </tr> <tr> <td>2</td> <td>(1)</td> <td>Freq</td> <td>15.538 4 GHz</td> <td>-18.95 dBm</td> </tr> </tbody> </table> <p>Signal Track: On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	1.907 3 GHz	23.81 dBm	2	(1)	Freq	15.538 4 GHz	-18.95 dBm	<p>Band 2 REL 99 CSE High channel</p>
Marker	Trace	Type	X Axis	Amplitude													
1	(1)	Freq	1.907 3 GHz	23.81 dBm													
2	(1)	Freq	15.538 4 GHz	-18.95 dBm													
	<p>BLANK</p>																

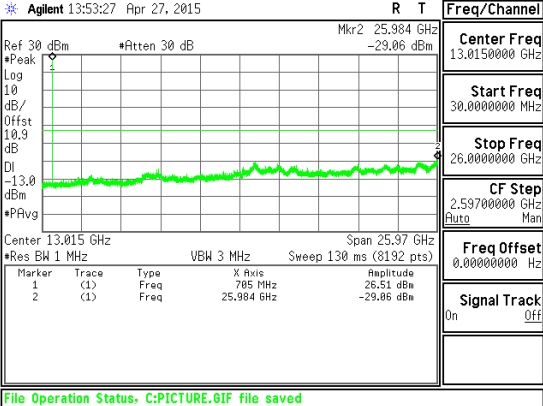
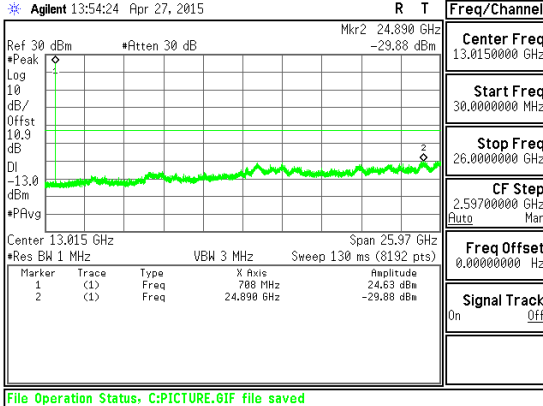
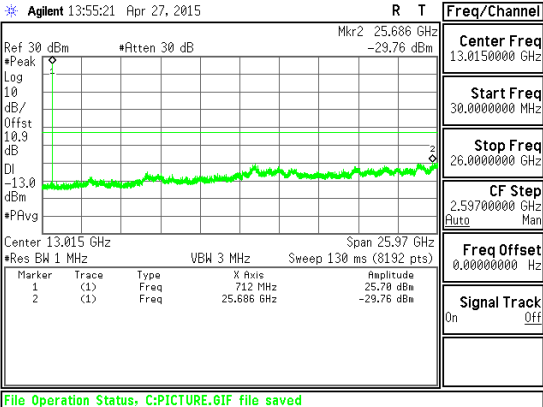
<p>WCDMA Band 2 HSDPA</p>	<p>Agilent 18:42:45 Apr 30, 2015</p> <p>Center Freq: 10.0150000 GHz Start Freq: 30.0000000 MHz Stop Freq: 20.0000000 GHz CF Step: 1.99700000 GHz Freq Offset: 0.0000000 Hz Signal Track: On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p>	<p>Band 2 HSDPA CSE Low channel</p>
	<p>Agilent 18:43:40 Apr 30, 2015</p> <p>Center Freq: 10.0150000 GHz Start Freq: 30.0000000 MHz Stop Freq: 20.0000000 GHz CF Step: 1.99700000 GHz Freq Offset: 0.0000000 Hz Signal Track: On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p>	<p>Band 2 HSDPA CSE Mid channel</p>
<p>WCDMA Band 2 HSDPA</p>	<p>Agilent 18:44:31 Apr 30, 2015</p> <p>Center Freq: 10.0150000 GHz Start Freq: 30.0000000 MHz Stop Freq: 20.0000000 GHz CF Step: 1.99700000 GHz Freq Offset: 0.0000000 Hz Signal Track: On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p>	<p>Band 2 HSDPA CSE High channel</p>
	<p>BLANK</p>	

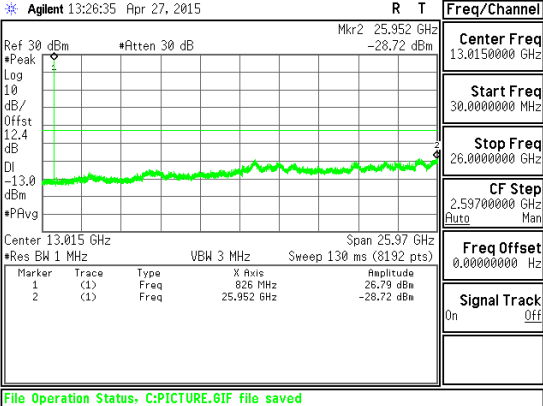
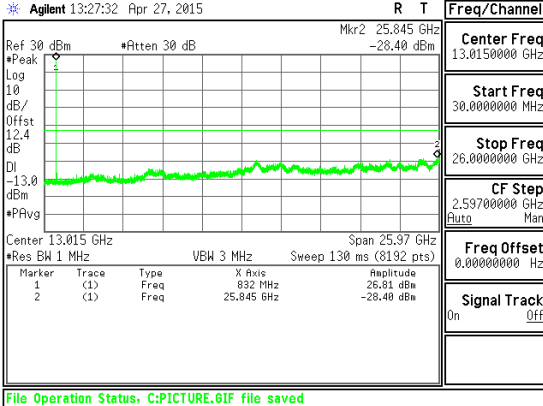
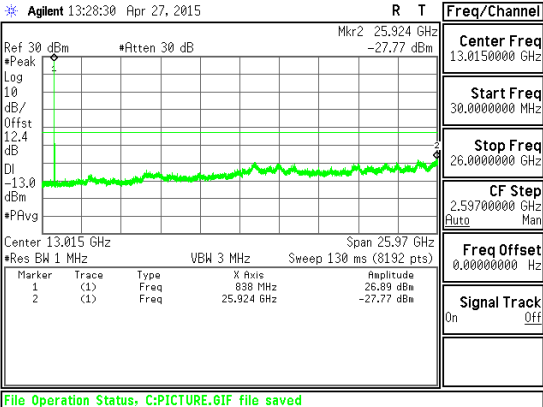
LTE

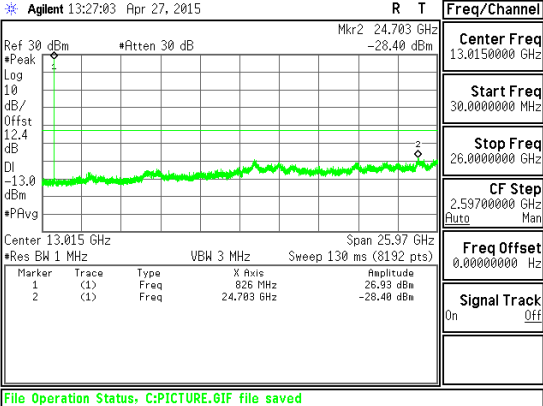
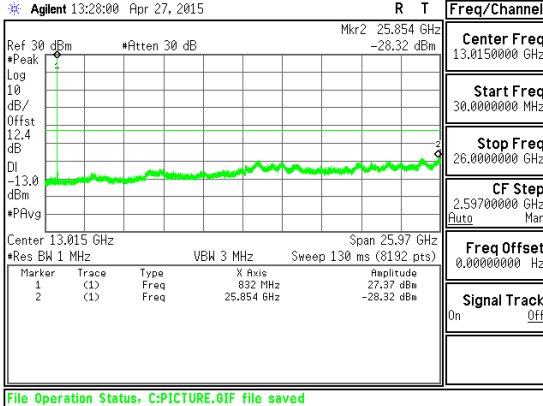
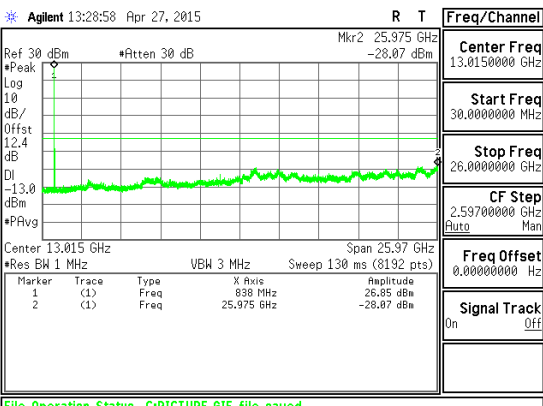
<p>Band LTE17 10 MHz QPSK</p>	<p>Agilent 13:56:29 Apr 27, 2015</p> <p>Center Freq: 13.0150000 GHz Start Freq: 30.0000000 MHz Stop Freq: 26.0000000 GHz CF Step: 2.59700000 GHz Freq Offset: 0.0000000 Hz Signal Track: On</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE17 - 10 MHz QPSK CSE Low channel</p>	<p>Agilent 13:57:26 Apr 27, 2015</p> <p>Center Freq: 13.0150000 GHz Start Freq: 30.0000000 MHz Stop Freq: 26.0000000 GHz CF Step: 2.59700000 GHz Freq Offset: 0.0000000 Hz Signal Track: On</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE17 - 10 MHz QPSK CSE Mid channel</p>
<p>Band LTE17 10 MHz QPSK</p>	<p>Agilent 13:58:23 Apr 27, 2015</p> <p>Center Freq: 13.0150000 GHz Start Freq: 30.0000000 MHz Stop Freq: 26.0000000 GHz CF Step: 2.59700000 GHz Freq Offset: 0.0000000 Hz Signal Track: On</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE17 - 10 MHz QPSK CSE High channel</p>	<p>BLANK</p>

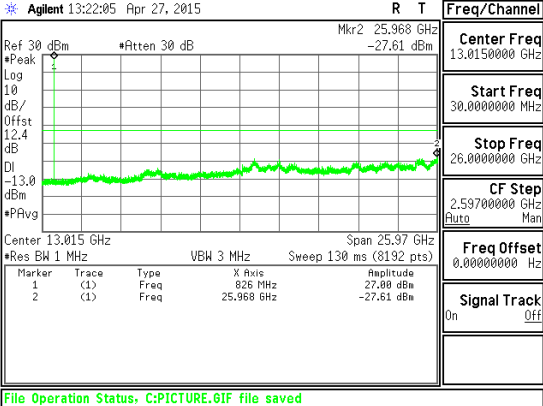
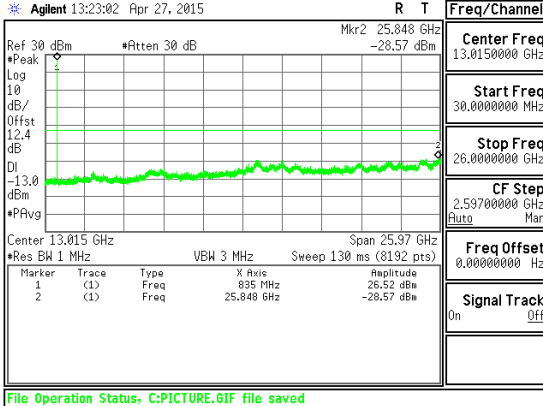
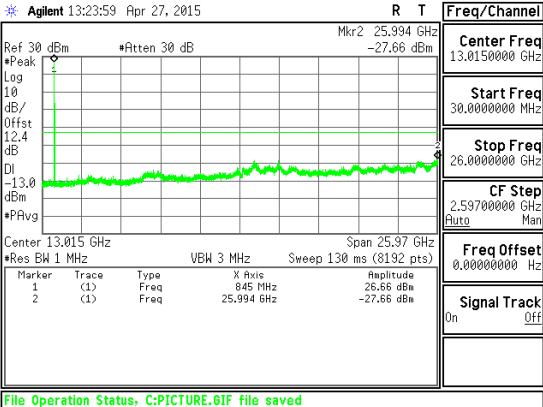
<p>Band LTE17 10 MHz 16QAM</p>	 <p>Agilent 13:56:57 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.00000000 Hz Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE17 - 10 MHz 16QAM CSE Low channel</p>	 <p>Agilent 13:57:54 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.00000000 Hz Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE17 - 10 MHz 16QAM CSE Mid channel</p>
<p>Band LTE17 10 MHz 16QAM</p>	 <p>Agilent 13:58:51 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.00000000 Hz Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE17 - 10 MHz 16QAM CSE High channel</p>	<p>BLANK</p>

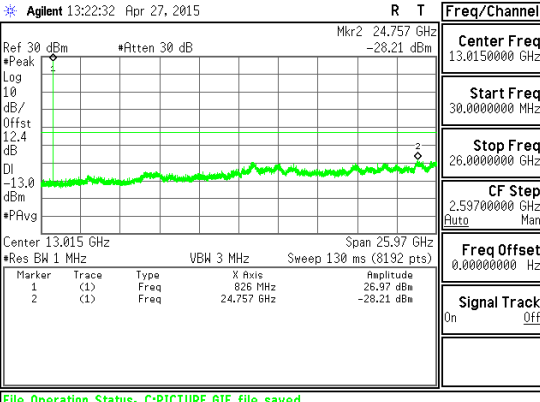
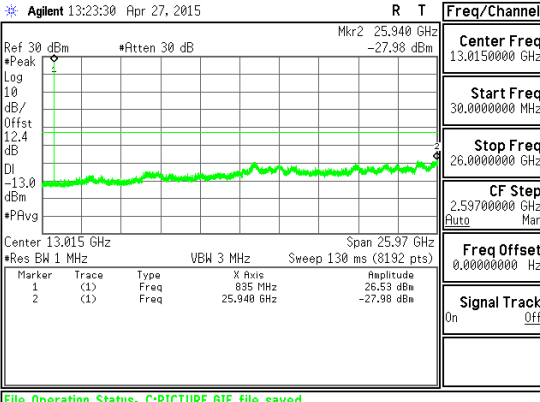
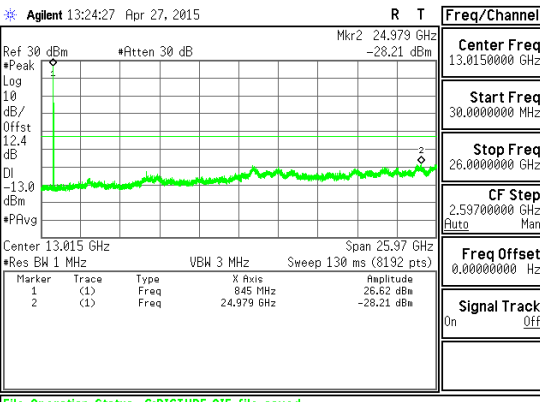
<p>Band LTE17</p> <p>5 MHz</p> <p>QPSK</p>	 <p>Agilent 13:52:59 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.0000000 GHz</p> <p>CF Step 2.59700000 GHz</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE17 - 5 MHz QPSK CSE Low channel</p>	 <p>Agilent 13:53:56 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.0000000 GHz</p> <p>CF Step 2.59700000 GHz</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE17 - 5 MHz QPSK CSE Mid channel</p>
<p>Band LTE17</p> <p>5 MHz</p> <p>QPSK</p>	 <p>Agilent 13:54:53 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.0000000 GHz</p> <p>CF Step 2.59700000 GHz</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE17 - 5 MHz QPSK CSE High channel</p>	<p>BLANK</p>

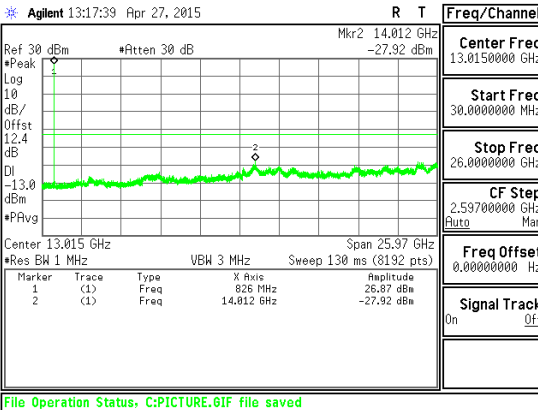
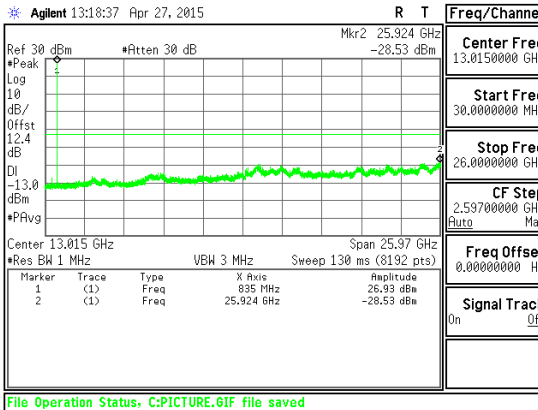
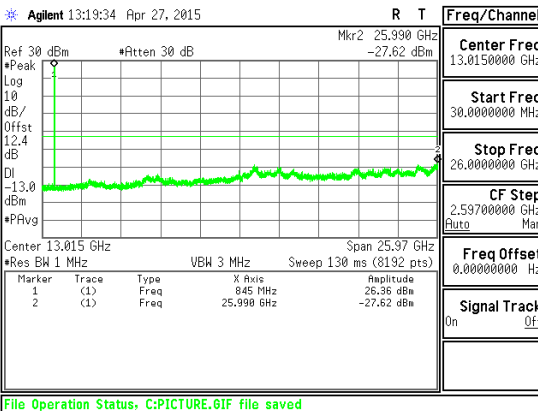
<p>Band LTE17 5 MHz 16 QAM</p>	 <p>Agilent 13:53:27 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.0000000 Hz Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE17 - 5 MHz 16 QAM CSE Low channel</p>	 <p>Agilent 13:54:24 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.0000000 Hz Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE17 - 5 MHz 16 QAM CSE Mid channel</p>
<p>Band LTE17 5 MHz 16 QAM</p>	 <p>Agilent 13:55:21 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.0000000 Hz Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE17 - 5 MHz 16 QAM CSE High channel</p>	<p>BLANK</p>

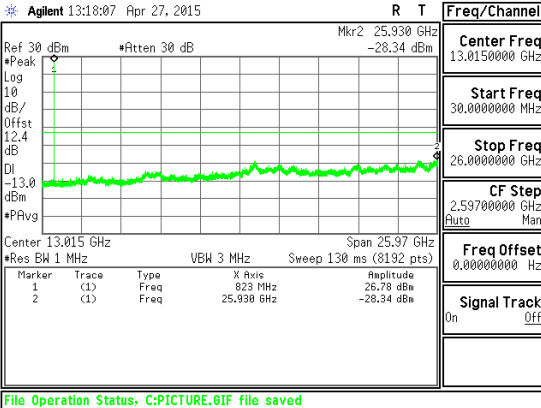
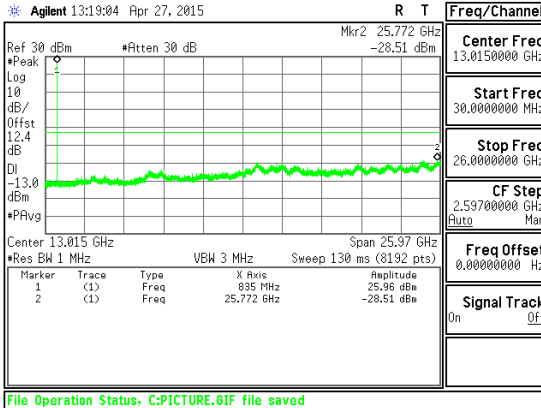
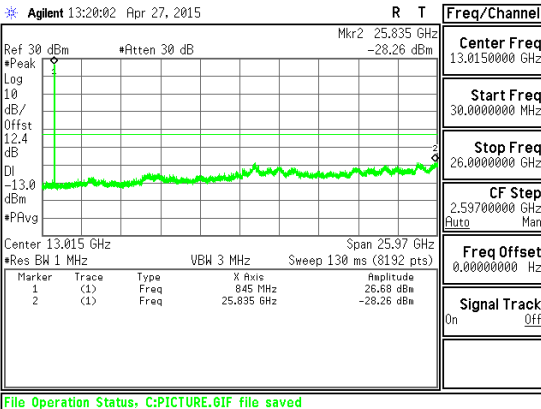
<p>Band LTE5 10 MHz QPSK</p>	 <p>Agilent 13:26:35 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.0000000 Hz Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 10 MHz QPSK CSE Low channel</p>	 <p>Agilent 13:27:32 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.0000000 Hz Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 10 MHz QPSK CSE Mid channel</p>
<p>Band LTE5 10 MHz QPSK</p>	 <p>Agilent 13:28:30 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.0000000 Hz Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 10 MHz QPSK CSE High channel</p>	<p>BLANK</p>

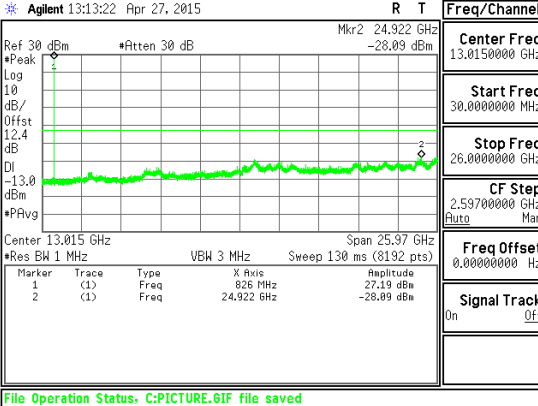
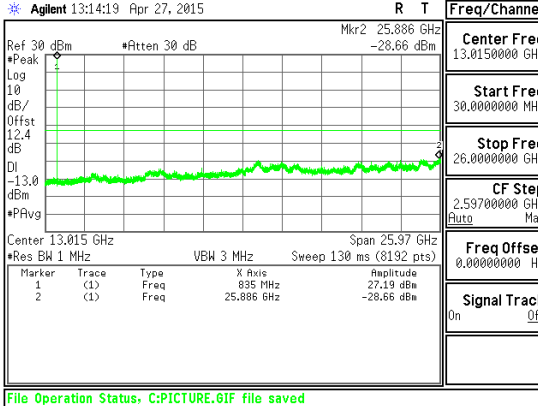
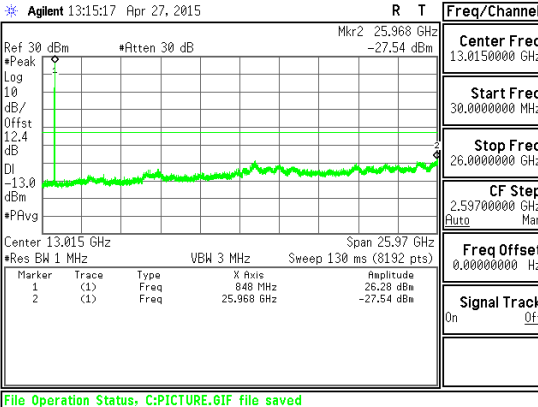
<p>Band LTE5 10 MHz 16QAM</p>	 <p>Agilent 13:27:03 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.00000000 Hz Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 10 MHz 16QAM CSE Low channel</p>	 <p>Agilent 13:28:00 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.00000000 Hz Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 10 MHz 16QAM CSE Mid channel</p>
<p>Band LTE5 10 MHz 16QAM</p>	 <p>Agilent 13:28:50 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.00000000 Hz Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 10 MHz 16QAM CSE High channel</p>	<p>BLANK</p>

<p>Band LTE5 5 MHz QPSK</p>	 <p>Agilent 13:22:05 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.00000000 Hz</p> <p>Center 13.015 GHz Res BW 1 MHz Span 25.97 GHz Sweep 130 ms (8192 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>826 MHz</td> <td>27.00 dBm</td> </tr> <tr> <td>2</td> <td>(1)</td> <td>Freq</td> <td>25.968 GHz</td> <td>-27.61 dBm</td> </tr> </tbody> </table> <p>Signal Track On Off</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 5 MHz QPSK CSE Low channel</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	826 MHz	27.00 dBm	2	(1)	Freq	25.968 GHz	-27.61 dBm	 <p>Agilent 13:23:02 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.00000000 Hz</p> <p>Center 13.015 GHz Res BW 1 MHz Span 25.97 GHz Sweep 130 ms (8192 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>835 MHz</td> <td>26.52 dBm</td> </tr> <tr> <td>2</td> <td>(1)</td> <td>Freq</td> <td>25.848 GHz</td> <td>-28.57 dBm</td> </tr> </tbody> </table> <p>Signal Track On Off</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 5 MHz QPSK CSE Mid channel</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	835 MHz	26.52 dBm	2	(1)	Freq	25.848 GHz	-28.57 dBm
Marker	Trace	Type	X Axis	Amplitude																												
1	(1)	Freq	826 MHz	27.00 dBm																												
2	(1)	Freq	25.968 GHz	-27.61 dBm																												
Marker	Trace	Type	X Axis	Amplitude																												
1	(1)	Freq	835 MHz	26.52 dBm																												
2	(1)	Freq	25.848 GHz	-28.57 dBm																												
<p>Band LTE5 5 MHz QPSK</p>	 <p>Agilent 13:23:59 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.00000000 Hz</p> <p>Center 13.015 GHz Res BW 1 MHz Span 25.97 GHz Sweep 130 ms (8192 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>845 MHz</td> <td>26.66 dBm</td> </tr> <tr> <td>2</td> <td>(1)</td> <td>Freq</td> <td>25.994 GHz</td> <td>-27.66 dBm</td> </tr> </tbody> </table> <p>Signal Track On Off</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 5 MHz QPSK CSE High channel</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	845 MHz	26.66 dBm	2	(1)	Freq	25.994 GHz	-27.66 dBm	<p>BLANK</p>															
Marker	Trace	Type	X Axis	Amplitude																												
1	(1)	Freq	845 MHz	26.66 dBm																												
2	(1)	Freq	25.994 GHz	-27.66 dBm																												

<p>Band LTE5 5 MHz 16 QAM</p>	 <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 5 MHz 16 QAM CSE Low channel</p>	 <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 5 MHz 16 QAM CSE Mid channel</p>
<p>Band LTE5 5 MHz 16 QAM</p>	 <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 5 MHz 16 QAM CSE High channel</p>	<p>BLANK</p>

<p>Band LTE5 3 MHz QPSK</p>	 <p>Agilent 13:17:39 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.00000000 Hz Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 3 MHz QPSK CSE Low channel</p>	 <p>Agilent 13:18:37 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.00000000 Hz Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 3 MHz QPSK CSE Mid channel</p>
<p>Band LTE5 3 MHz QPSK</p>	 <p>Agilent 13:19:34 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.00000000 Hz Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 3 MHz QPSK CSE High channel</p>	<p>BLANK</p>

<p>Band LTE5 3 MHz 16QAM</p>	 <p>Agilent 13:18:07 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.00000000 Hz</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 3 MHz 16QAM CSE Low channel</p>	 <p>Agilent 13:19:04 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.00000000 Hz</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 3 MHz 16QAM CSE Mid channel</p>
<p>Band LTE5 3 MHz 16QAM</p>	 <p>Agilent 13:20:02 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.00000000 Hz</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 3 MHz 16QAM CSE High channel</p>	<p>BLANK</p>

<p>Band LTE5 1.4 MHz QPSK</p>	 <p>Agilent 13:13:22 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.0000000 Hz Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 1.4 MHz QPSK CSE Low channel</p>	 <p>Agilent 13:14:19 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.0000000 Hz Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 1.4 MHz QPSK CSE Mid channel</p>
<p>Band LTE5 1.4 MHz QPSK</p>	 <p>Agilent 13:15:17 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 26.0000000 GHz CF Step 2.59700000 GHz Freq Offset 0.0000000 Hz Signal Track On</p> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 1.4 MHz QPSK CSE High channel</p>	<p>BLANK</p>

<p>Band LTE5 1.4 MHz 16 QAM</p>	<p>Agilent 13:13:50 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.0000000 GHz</p> <p>CF Step 2.59700000 GHz</p> <p>Freq Offset 0.00000000 Hz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>826 MHz</td> <td>27.21 dBm</td> </tr> <tr> <td>2</td> <td>(1)</td> <td>Freq</td> <td>24.748 GHz</td> <td>-28.47 dBm</td> </tr> </tbody> </table> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 1.4 MHz 16 QAM CSE Low channel</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	826 MHz	27.21 dBm	2	(1)	Freq	24.748 GHz	-28.47 dBm	<p>Agilent 13:14:47 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.0000000 GHz</p> <p>CF Step 2.59700000 GHz</p> <p>Freq Offset 0.00000000 Hz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>835 MHz</td> <td>27.48 dBm</td> </tr> <tr> <td>2</td> <td>(1)</td> <td>Freq</td> <td>14.003 GHz</td> <td>-28.17 dBm</td> </tr> </tbody> </table> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 1.4 MHz 16 QAM CSE Mid channel</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	835 MHz	27.48 dBm	2	(1)	Freq	14.003 GHz	-28.17 dBm
Marker	Trace	Type	X Axis	Amplitude																												
1	(1)	Freq	826 MHz	27.21 dBm																												
2	(1)	Freq	24.748 GHz	-28.47 dBm																												
Marker	Trace	Type	X Axis	Amplitude																												
1	(1)	Freq	835 MHz	27.48 dBm																												
2	(1)	Freq	14.003 GHz	-28.17 dBm																												
<p>Band LTE5 1.4 MHz 16 QAM</p>	<p>Agilent 13:15:44 Apr 27, 2015</p> <p>Center Freq 13.0150000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.0000000 GHz</p> <p>CF Step 2.59700000 GHz</p> <p>Freq Offset 0.00000000 Hz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>848 MHz</td> <td>25.83 dBm</td> </tr> <tr> <td>2</td> <td>(1)</td> <td>Freq</td> <td>25.943 GHz</td> <td>-27.10 dBm</td> </tr> </tbody> </table> <p>File Operation Status: C:PICTURE.GIF file saved</p> <p>Band LTE5 - 1.4 MHz 16 QAM CSE High channel</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	848 MHz	25.83 dBm	2	(1)	Freq	25.943 GHz	-27.10 dBm	<p>BLANK</p>															
Marker	Trace	Type	X Axis	Amplitude																												
1	(1)	Freq	848 MHz	25.83 dBm																												
2	(1)	Freq	25.943 GHz	-27.10 dBm																												

10.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, and §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§27.54 - The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

MODES TESTED

GSM 850 (covers WCDMA Band 5 and LTE Band 5), GSM 1900 (covers WCDMA Band 2) and LTE Band 17.

RESULTS

See the following pages.

10.4.1. FREQUENCY STABILITY RESULTS

GSM850, Freq: 836.6 MHz– MID CHANNEL

Reference Frequency: PCS Mid Channel		836.6	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		2091.500	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.600014	-0.003	2.5
3.80	40	836.600012	-0.001	2.5
3.80	30	836.600012	-0.001	2.5
3.80	20	836.600011	0	2.5
3.80	10	836.600013	-0.002	2.5
3.80	0	836.600014	-0.003	2.5
3.80	-10	836.600011	0.001	2.5
3.80	-20	836.600011	0.000	2.5
3.80	-30	836.600011	0.001	2.5

Reference Frequency: PCS Mid Channel		836.6	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		2091.500	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	836.600011	0	2.5
4.18	20	836.6000122	-0.001	2.5
3.42	20	836.6000122	-0.001	2.5

GSM1900, Freq: 1880 MHz– MID CHANNEL

Reference Frequency: PCS Mid Channel Limit: to stay +/- 2.5 ppm =				
		1880	MHz @ 20°C	
		4700.000	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1880.000024	-0.002	2.5
3.80	40	1880.000024	-0.002	2.5
3.80	30	1880.000016	0.003	2.5
3.80	20	1880.000021	0	2.5
3.80	10	1880.000020	0.000	2.5
3.80	0	1880.000021	0.000	2.5
3.80	-10	1880.000017	0.002	2.5
3.80	-20	1880.000016	0.002	2.5
3.80	-30	1880.000015	0.003	2.5

Reference Frequency: PCS Mid Channel Limit: to stay +/- 2.5 ppm =				
		1880	MHz @ 20°C	
		4700.000	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	1880.000021	0	2.5
4.18	20	1880.00002	0.000	2.5
3.42	20	1880.00002	0.000	2.5

LTE17, Freq: 710.0 MHz– MID CHANNEL

Reference Frequency: PCS Mid Channel 710 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 1775.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	710.000004	-0.003	2.5
3.80	40	710.000005	-0.005	2.5
3.80	30	710.000004	-0.003	2.5
3.80	20	710.000002	0	2.5
3.80	10	710.000002	-0.001	2.5
3.80	0	710.000003	-0.002	2.5
3.80	-10	710.000001	0.001	2.5
3.80	-20	710.000002	-0.001	2.5
3.80	-30	710.000001	0.001	2.5

Reference Frequency: PCS Mid Channel 710 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 1775.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	710.000002	0	2.5
4.37	20	710.0000016	0.000	2.5
3.23	20	710.0000017	0.000	2.5

11. RADIATED TEST RESULTS

11.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232, and 27.50(c)

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

27.50(c) - (10) Portable stations (hand-held devices) are limited to 3 watts ERP; (LTE B17).

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17, PXA setting reference to 971168 D01 v02r02

MODES TESTED

GSM (850, 1900), WCDMA (Bands V and II), LTE (Bands 5 and 17).

TEST RESULTS

11.1.1. ERP/EIRP Results

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM850	GPRS	128	824.2	28.73	746.45
		190	836.6	28.91	778.04
		251	848.8	27.14	517.61
	EGPRS	128	824.2	22.78	189.67
		190	836.6	23.18	207.97
		251	848.8	21.64	145.88

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM1900	GPRS	512	1850.2	31.24	1330.45
		661	1880	32.51	1782.38
		810	1909.8	31.78	1506.61
	EGPRS	512	1850.2	26.74	472.06
		661	1880	28.17	656.15
		810	1909.8	26.15	412.10

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
Band 5	REL99	4132	826.4	20.16	103.75
		4183	836.6	19.81	95.72
		4233	846.6	18.33	68.08
	HSDPA	4132	826.4	19.41	87.30
		4183	836.6	18.50	70.79
		4233	846.6	16.60	45.71

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
Band 2	REL99	9262	1852.4	23.42	219.79
		9400	1880	24.55	285.10
		9538	1907.6	23.95	248.31
	HSDPA	9262	1852.4	22.48	177.01
		9400	1880	23.64	231.21
		9538	1907.6	22.82	191.43

11.1.2. LTE ERP/EIRP Results

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE17	10	QPSK	1/0	709	17.44	55.46
			1/0	710	16.88	48.75
			1/0	711	16.77	47.53
		16QAM	1/0	709	16.80	47.86
			1/0	710	16.13	41.02
			1/0	711	15.91	38.99

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE17	5	QPSK	1/0	706.5	17.74	59.43
			1/0	710	16.62	45.92
			1/0	713.5	16.97	49.77
		16QAM	1/0	706.5	16.87	48.64
			1/0	710	16.03	40.09
			1/0	713.5	16.42	43.85

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	10	QPSK	1/0	829	19.65	92.26
			1/0	836.5	19.96	99.08
			1/0	844	19.07	80.72
		16QAM	1/0	829	18.67	73.62
			1/0	836.5	19.24	83.95
			1/0	844	18.31	67.76

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	5	QPSK	1/0	826.5	20.51	112.46
			1/0	836.5	19.86	96.83
			1/0	846.5	17.87	61.24
		16QAM	1/0	826.5	19.64	92.04
			1/0	836.5	18.87	77.09
			1/0	846.5	17.13	51.64

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	3	QPSK	1/0	825.5	20.43	110.41
			1/0	836.5	19.51	89.33
			1/0	847.5	18.80	75.86
		16QAM	1/0	825.5	19.50	89.13
			1/0	836.5	18.56	71.78
			1/0	847.5	18.01	63.24

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	1.4	QPSK	1/0	824.7	19.16	82.41
			1/0	836.5	17.29	53.58
			1/0	848.3	15.96	39.45
		16QAM	1/0	824.7	18.01	63.24
			1/0	836.5	16.27	42.36
			1/0	848.3	15.06	32.06

11.1.3. ERP/EIRP PLOTS

GSM 850 GPRS

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
Company: Sony								
Project #: 10721207								
Date: 4/27/2015								
Test Engineer: B. Kiewra/M. Nolting								
Configuration: FCC ID: PY7-TM0062; Stand-alone (Y (Portrait) orientation); s/n CB5A23WPYJ								
Mode: GPRS 850								
Test Equipment:								
Receiving: Hybrid AT0066 & SMA cables								
Substitution: Tx antenna AT0030, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.20	25.66	V	0.6	3.6	28.73	38.5	-9.8	
824.20	21.60	H	0.6	3.6	24.67	38.5	-13.8	
Mid Ch								
836.60	25.70	V	0.6	3.8	28.91	38.5	-9.6	
836.60	21.03	H	0.6	3.8	24.24	38.5	-14.3	
High Ch								
848.80	24.22	V	0.6	3.5	27.14	38.5	-11.4	
848.80	21.12	H	0.6	3.5	24.04	38.5	-14.5	
Rev. 3.17.11								
Note: For Band 4 EIRP limit is 30dBm								

GSM 850 EGPRS

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
Company: Sony Project #: 10721207 Date: 4/27/2015 Test Engineer: B. Kiewra/M. Nolting Configuration: FCC ID: PY7-TM0062; Stand-alone (Y (Portrait) orientation); s/n CB5A23WPYJ Mode: EGPRS 850								
Test Equipment: Receiving: Hybrid AT0066 & SMA cables Substitution: Tx antenna AT0030, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.20	19.72	V	0.6	3.6	22.78	38.5	-15.7	
824.20	15.77	H	0.6	3.6	18.83	38.5	-19.7	
Mid Ch								
836.60	19.97	V	0.6	3.8	23.18	38.5	-15.3	
836.60	15.15	H	0.6	3.8	18.36	38.5	-20.1	
High Ch								
848.80	18.72	V	0.6	3.5	21.64	38.5	-16.9	
848.80	15.55	H	0.6	3.5	18.47	38.5	-20.0	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

GSM 1900 GPRS

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
Company: Sony Project #: 10721207 Date: 4/29/2015 Test Engineer: B. Kiewra Configuration: FCC ID: PY7-TM0062; Stand-alone (X (Flat) orientation); s/n CB5A23WPYJ Mode: GPRS 1900								
Test Equipment: Receiving: Horn AT0067& SMA cables Substitution: Horn AT0069, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1850.20	20.90	V	0.9	5.4	25.41	33.0	-7.6	
1850.20	26.73	H	0.9	5.4	31.24	33.0	-1.8	
Mid Ch								
1880.00	22.03	V	0.9	5.3	26.43	33.0	-6.6	
1880.00	28.10	H	0.9	5.3	32.51	33.0	-0.5	
High Ch								
1909.80	21.39	V	0.9	5.2	25.68	33.0	-7.3	
1909.80	27.48	H	0.9	5.2	31.78	33.0	-1.2	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

GSM 1900 EGPRS

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
Company: Sony Project #: 10721207 Date: 4/29/2015 Test Engineer: B. Kiewra Configuration: FCC ID: PY7-TM0062; Stand-alone (X (Flat) orientation); s/n CB5A23WPYJ Mode: EGPRS 1900								
Test Equipment: Receiving: Horn AT0067& SMA cables Substitution: Horn AT0069, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1850.20	7.46	V	0.9	5.4	11.97	33.0	-21.0	
1850.20	22.23	H	0.9	5.4	26.74	33.0	-6.3	
Mid Ch								
1880.00	17.70	V	0.9	5.3	22.11	33.0	-10.9	
1880.00	23.77	H	0.9	5.3	28.17	33.0	-4.8	
High Ch								
1909.80	15.36	V	0.9	5.2	19.66	33.0	-13.3	
1909.80	21.85	H	0.9	5.2	26.15	33.0	-6.9	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

WCDMA BAND 5 REL 99

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
Company: Sony Project #: 10721207 Date: 4/27/2015 Test Engineer: B. Kiewra/M. Nolting Configuration: FCC ID: PY7-TM0062; Stand-alone (Y (Portrait) orientation); s/n CB5A23WPYJ Mode: WCDMA5: Rel99								
Test Equipment: Receiving: Hybrid AT0066 & SMA cables Substitution: Tx antenna AT0030, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
826.40	17.10	V	0.6	3.6	20.16	38.5	-18.3	
826.40	12.66	H	0.6	3.6	15.72	38.5	-22.8	
Mid Ch								
836.60	16.60	V	0.6	3.8	19.81	38.5	-18.7	
836.60	11.66	H	0.6	3.8	14.87	38.5	-23.6	
High Ch								
846.60	15.33	V	0.6	3.6	18.33	38.5	-20.2	
846.60	11.22	H	0.6	3.6	14.23	38.5	-24.3	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

WCDMA BAND 5 HSDPA

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
Company: Sony Project #: 10721207 Date: 4/27/2015 Test Engineer: B. Kiewra/M. Nolting Configuration: FCC ID: PY7-TM0062; Stand-alone (Y (Portrait) orientation); s/n CB5A23WPYJ Mode: WCDMA5: HSDPA								
Test Equipment: Receiving: Hybrid AT0066 & SMA cables Substitution: Tx antenna AT0030, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
826.40	16.34	V	0.6	3.6	19.41	38.5	-19.1	
826.40	10.82	H	0.6	3.6	13.89	38.5	-24.6	
Mid Ch								
836.60	15.29	V	0.6	3.8	18.50	38.5	-20.0	
836.60	10.05	H	0.6	3.8	13.26	38.5	-25.2	
High Ch								
846.60	13.60	V	0.6	3.6	16.60	38.5	-21.9	
846.60	10.19	H	0.6	3.6	13.19	38.5	-25.3	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

WCDMA BAND 2 REL 99

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
Company: Sony Project #: 10721207 Date: 4/28/2015 Test Engineer: B. Kiewra Configuration: FCC ID: PY7-TM0062; Stand-alone (X (Flat) orientation); s/n CB5A23WPYJ Mode: WCDMA 2 Rel99								
Test Equipment: Receiving: Horn AT0067& SMA cables Substitution: Horn AT0069, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1852.40	12.68	V	0.9	5.4	17.18	33.0	-15.8	
1852.40	18.92	H	0.9	5.4	23.42	33.0	-9.6	
Mid Ch								
1880.00	13.53	V	0.9	5.3	17.93	33.0	-15.1	
1880.00	20.14	H	0.9	5.3	24.55	33.0	-8.5	
High Ch								
1907.60	14.70	V	0.9	5.2	19.00	33.0	-14.0	
1907.60	19.65	H	0.9	5.2	23.95	33.0	-9.0	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

WCDMA BAND 2 HSDPA

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
Company: Sony Project #: 10721207 Date: 4/28/2015 Test Engineer: B. Kiewra Configuration: FCC ID: PY7-TM0062; Stand-alone (X (Flat) orientation); s/n CB5A23WPYJ Mode: WCDMA 2 HSPDA								
Test Equipment: Receiving: Horn AT0067& SMA cables Substitution: Horn AT0069, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1852.40	11.89	V	0.9	5.4	16.39	33.0	-16.6	
1852.40	17.98	H	0.9	5.4	22.48	33.0	-10.5	
Mid Ch								
1880.00	12.95	V	0.9	5.3	17.35	33.0	-15.7	
1880.00	19.24	H	0.9	5.3	23.64	33.0	-9.4	
High Ch								
1907.60	8.93	V	0.9	5.2	13.23	33.0	-19.8	
1907.60	18.52	H	0.9	5.2	22.82	33.0	-10.2	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE17, 10 MHz QPSK

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
Company: Sony Project #: 10721207 Date: 5/1/2015 Test Engineer: B. Kiewra Configuration: FCC ID: PY7-TM0062; Stand-alone (X (Flat) orientation); s/n CB5A23WPYJ Mode: LTE 17 10MHz BW QPSK								
Test Equipment: Receiving: Hybrid AT0066 & SMA cables Substitution: Tx antenna AT0030, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
709.00	5.99	V	0.5	3.6	9.08	34.77	-25.7	
709.00	14.35	H	0.5	3.6	17.44	34.77	-17.3	
Mid Ch								
710.00	5.99	V	0.5	3.7	9.12	34.77	-25.7	
710.00	13.75	H	0.5	3.7	16.88	34.77	-17.9	
High Ch								
711.00	5.77	V	0.5	3.7	8.94	34.77	-25.8	
711.00	13.60	H	0.5	3.7	16.77	34.77	-18.0	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE17, 10 MHz 16QAM

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
Company: Sony Project #: 10721207 Date: 5/1/2015 Test Engineer: B. Kiewra Configuration: FCC ID: PY7-TM0062; Stand-alone (X (Flat) orientation); s/n CB5A23WPYJ Mode: LTE 17 10MHz BW 16-QAM								
Test Equipment: Receiving: Hybrid AT0066 & SMA cables Substitution: Tx antenna AT0030, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
709.00	5.29	V	0.5	3.6	8.38	34.77	-26.4	
709.00	13.71	H	0.5	3.6	16.80	34.77	-18.0	
Mid Ch								
710.00	5.13	V	0.5	3.7	8.26	34.77	-26.5	
710.00	13.00	H	0.5	3.7	16.13	34.77	-18.6	
High Ch								
711.00	4.87	V	0.5	3.7	8.04	34.77	-26.7	
711.00	12.74	H	0.5	3.7	15.91	34.77	-18.9	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE17, 5MHz QPSK

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
Company: Sony Project #: 10721207 Date: 4/27/2015 Test Engineer: B. Kiewra/M. Nolting Configuration: FCC ID: PY7-TM0062; Stand-alone (X (Flat) orientation); s/n CB5A23WPYJ Mode: LTE 17 5MHz BW QPSK								
Test Equipment: Receiving: Hybrid AT0066 & SMA cables Substitution: Tx antenna AT0030, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
706.50	7.19	V	0.5	3.5	10.18	34.77	-24.6	
706.50	14.75	H	0.5	3.5	17.74	34.77	-17.0	
Mid Ch								
710.00	6.63	V	0.5	3.7	9.76	34.77	-25.0	
710.00	13.49	H	0.5	3.7	16.62	34.77	-18.1	
High Ch								
713.50	7.50	V	0.5	3.8	10.76	34.77	-24.0	
713.50	13.71	H	0.5	3.8	16.97	34.77	-17.8	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE17, 5 MHz 16QAM

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
Company: Sony Project #: 10721207 Date: 4/27/2015 Test Engineer: B. Kiewra/M. Nolting Configuration: FCC ID: PY7-TM0062; Stand-alone (X (Flat) orientation); s/n CB5A23WPYJ Mode: LTE 17 5MHz BW 16-QAM								
Test Equipment: Receiving: Hybrid AT0066 & SMA cables Substitution: Tx antenna AT0030, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
706.50	6.25	V	0.5	3.5	9.24	34.77	-25.5	
706.50	13.88	H	0.5	3.5	16.87	34.77	-17.9	
Mid Ch								
710.00	5.83	V	0.5	3.7	8.96	34.77	-25.8	
710.00	12.90	H	0.5	3.7	16.03	34.77	-18.7	
High Ch								
713.50	6.87	V	0.5	3.8	10.14	34.77	-24.6	
713.50	13.15	H	0.5	3.8	16.42	34.77	-18.4	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE5, 10 MHz QPSK

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
Company: Sony Project #: 10721207 Date: 4/28/2015 Test Engineer: B. Kiewra Configuration: FCC ID: PY7-TM0062; Stand-alone (Y(Landscape) orientation); s/n CB5A23WPYJ Mode: LTE 5 10MHz BW QPSK								
Test Equipment: Receiving: Hybrid AT0066 & SMA cables Substitution: Tx antenna AT0030, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
829.00	16.57	V	0.6	3.7	19.65	38.50	-18.9	
829.00	6.46	H	0.6	3.7	9.54	38.50	-29.0	
Mid Ch								
836.50	16.76	V	0.6	3.8	19.96	38.50	-18.5	
836.50	6.48	H	0.6	3.8	9.69	38.50	-28.8	
High Ch								
844.00	15.96	V	0.6	3.7	19.07	38.50	-19.4	
844.00	6.92	H	0.6	3.7	10.03	38.50	-28.5	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE 5, 10 MHz 16QAM

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
Company: Sony Project #: 10721207 Date: 4/28/2015 Test Engineer: B. Kiewra Configuration: FCC ID: PY7-TM0062; Stand-alone (Y(Landscape) orientation); s/n CB5A23WPYJ Mode: LTE 5 10MHz BW 16-QAM								
Test Equipment: Receiving: Hybrid AT0066 & SMA cables Substitution: Tx antenna AT0030, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
829.00	15.59	V	0.6	3.7	18.67	38.50	-19.8	
829.00	6.08	H	0.6	3.7	9.16	38.50	-29.3	
Mid Ch								
836.50	16.03	V	0.6	3.8	19.24	38.50	-19.3	
836.50	6.25	H	0.6	3.8	9.45	38.50	-29.0	
High Ch								
844.00	15.20	V	0.6	3.7	18.31	38.50	-20.2	
844.00	5.72	H	0.6	3.7	8.83	38.50	-29.7	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE5, 5 MHz QPSK

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
Company: Sony Project #: 10721207 Date: 4/28/2015 Test Engineer: B. Kiewra Configuration: FCC ID: PY7-TM0062; Stand-alone (Y(Landscape) orientation); s/n CB5A23WPYJ Mode: LTE 5 5MHz BW QPSK								
Test Equipment: Receiving: Hybrid AT0066 & SMA cables Substitution: Tx antenna AT0030, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
826.50	17.43	V	0.6	3.7	20.51	38.50	-18.0	
826.50	6.52	H	0.6	3.7	9.60	38.50	-28.9	
Mid Ch								
836.50	16.65	V	0.6	3.8	19.86	38.50	-18.6	
836.50	4.36	H	0.6	3.8	7.57	38.50	-30.9	
High Ch								
846.50	14.86	V	0.6	3.6	17.87	38.50	-20.6	
846.50	9.39	H	0.6	3.6	12.40	38.50	-26.1	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE5, 5 MHz 16QAM

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
Company: Sony Project #: 10721207 Date: 4/28/2015 Test Engineer: B. Kiewra Configuration: FCC ID: PY7-TM0062; Stand-alone (Y(Landscape) orientation); s/n CB5A23WPYJ Mode: LTE 5 5MHz BW 16-QAM								
Test Equipment: Receiving: Hybrid AT0066 & SMA cables Substitution: Tx antenna AT0030, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
826.50	16.56	V	0.6	3.7	19.64	38.50	-18.9	
826.50	5.58	H	0.6	3.7	8.66	38.50	-29.8	
Mid Ch								
836.50	15.66	V	0.6	3.8	18.87	38.50	-19.6	
836.50	3.64	H	0.6	3.8	6.85	38.50	-31.7	
High Ch								
846.50	14.12	V	0.6	3.6	17.13	38.50	-21.4	
846.50	8.50	H	0.6	3.6	11.51	38.50	-27.0	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE5, 3 MHz QPSK

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
Company: Sony Project #: 10721207 Date: 4/28/2015 Test Engineer: B. Kiewra Configuration: FCC ID: PY7-TM0062; Stand-alone (Y(Landscape) orientation); s/n CB5A23WPYJ Mode: LTE 5 3MHz BW QPSK								
Test Equipment: Receiving: Hybrid AT0066 & SMA cables Substitution: Tx antenna AT0030, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
825.50	17.35	V	0.6	3.7	20.43	38.50	-18.1	
825.50	6.07	H	0.6	3.7	9.15	38.50	-29.3	
Mid Ch								
836.50	16.30	V	0.6	3.8	19.51	38.50	-19.0	
836.50	6.90	H	0.6	3.8	10.11	38.50	-28.4	
High Ch								
847.50	15.83	V	0.6	3.6	18.80	38.50	-19.7	
847.50	5.38	H	0.6	3.6	8.35	38.50	-30.2	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE5, 3 MHz 16QAM

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
Company: Sony Project #: 10721207 Date: 4/28/2015 Test Engineer: B. Kiewra Configuration: FCC ID: PY7-TM0062; Stand-alone (Y(Landscape) orientation); s/n CB5A23WPYJ Mode: LTE 5 3MHz BW 16-QAM								
Test Equipment: Receiving: Hybrid AT0066 & SMA cables Substitution: Tx antenna AT0030, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
825.50	16.42	V	0.6	3.7	19.50	38.50	-19.0	
825.50	5.22	H	0.6	3.7	8.30	38.50	-30.2	
Mid Ch								
836.50	15.36	V	0.6	3.8	18.56	38.50	-19.9	
836.50	5.96	H	0.6	3.8	9.16	38.50	-29.3	
High Ch								
847.50	15.04	V	0.6	3.6	18.01	38.50	-20.5	
847.50	4.68	H	0.6	3.6	7.65	38.50	-30.8	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE5, 1.4 MHz QPSK

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
Company: Sony Project #: 10721207 Date: 5/1/2015 Test Engineer: B. Kiewra Configuration: FCC ID: PY7-TM0062; Stand-alone (Y (Landscape) orientation); s/n CB5A23WPYJ Mode: LTE 5 1.4MHz BW QPSK								
Test Equipment: Receiving: Hybrid AT0066 & SMA cables Substitution: Tx antenna AT0030, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.70	16.09	V	0.6	3.6	19.16	38.50	-19.3	
824.70	8.55	H	0.6	3.6	11.62	38.50	-26.9	
Mid Ch								
836.50	14.08	V	0.6	3.8	17.29	38.50	-21.2	
836.50	9.78	H	0.6	3.8	12.98	38.50	-25.5	
High Ch								
848.30	13.02	V	0.6	3.5	15.96	38.50	-22.5	
848.30	11.18	H	0.6	3.5	14.12	38.50	-24.4	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE5, 1.4 MHz 16QAM

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
Company: Sony Project #: 10721207 Date: 5/1/2015 Test Engineer: B. Kiewra Configuration: FCC ID: PY7-TM0062; Stand-alone (Y(Landscape) orientation); s/n CB5A23WPYJ Mode: LTE 5 1.4MHz BW 16-QAM								
Test Equipment: Receiving: Hybrid AT0066 & SMA cables Substitution: Tx antenna AT0030, sig-gen SIG001, & cable CBL010								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.70	14.93	V	0.6	3.6	18.01	38.50	-20.5	
824.70	7.38	H	0.6	3.6	10.46	38.50	-28.0	
Mid Ch								
836.50	13.07	V	0.6	3.8	16.27	38.50	-22.2	
836.50	8.70	H	0.6	3.8	11.91	38.50	-26.6	
High Ch								
848.30	12.13	V	0.6	3.5	15.06	38.50	-23.4	
848.30	10.35	H	0.6	3.5	13.28	38.50	-25.2	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

11.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917(a), §24.238 (a), §27.53 (g)

LIMITS

Part 22.917(a) & Part 24.238(a) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Part 27.53(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

MODES TESTED

GSM (850, 1900), WCDMA (Bands V and II), LTE (Bands 5 and 17).

RESULTS

11.2.1. SPURIOUS RADIATION PLOTS

GSM 850 GPRS

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Sony
Project #: 10721207
Date: 4/28/2015
Test Engineer: M. Nolting
Configuration: EUT with charger (Y (landscape) orientation); FCC ID: PY7-TM0062; s/n CB5A23WPYJ
Mode: GPRS 850

Chamber

3m Chamber

Pre-amplifier

Filter

Filter 1

Limit

Part 22

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.2MHz								
1.648	-53.0	V	3.0	1.2	-51.7	-13.0	-38.7	
2.473	-54.4	V	3.0	1.2	-53.2	-13.0	-40.2	
3.297	-53.2	V	3.0	1.2	-52.0	-13.0	-39.0	
1.648	-49.0	H	3.0	1.2	-47.8	-13.0	-34.8	
2.473	-55.2	H	3.0	1.2	-54.0	-13.0	-41.0	
3.297	-53.2	H	3.0	1.2	-52.0	-13.0	-39.0	
Mid Ch, 836.6MHz								
1.673	-52.2	V	3.0	1.2	-51.0	-13.0	-38.0	
2.510	-54.1	V	3.0	1.2	-52.9	-13.0	-39.9	
3.346	-52.8	V	3.0	1.2	-51.6	-13.0	-38.6	
1.673	-50.6	H	3.0	1.2	-49.4	-13.0	-36.4	
2.510	-54.0	H	3.0	1.2	-52.8	-13.0	-39.8	
3.346	-53.3	H	3.0	1.2	-52.1	-13.0	-39.1	
High Ch, 848.8MHz								
1.698	-53.3	V	3.0	1.2	-52.1	-13.0	-39.1	
2.546	-52.8	V	3.0	1.2	-51.6	-13.0	-38.6	
3.395	-53.1	V	3.0	1.2	-51.8	-13.0	-38.8	
1.698	-52.1	H	3.0	1.2	-50.9	-13.0	-37.9	
2.546	-53.9	H	3.0	1.2	-52.7	-13.0	-39.7	
3.395	-53.2	H	3.0	1.2	-52.0	-13.0	-39.0	

Rev. 03.03.09
 Note: No other emissions were detected above the system noise floor.

Note – Pre-amp is part of substitution measurement.

GSM 850 EGPRS

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Sony
Project #: 10721207
Date: 4/28/2015
Test Engineer: M. Nolting
Configuration: EUT with charger (Y (landscape) orientation); FCC ID: PY7-TM0062; s/n CB5A23WPYJ
Mode: EGPRS 850

Chamber

3m Chamber

Pre-amplifier

Filter

Filter 1

Limit

Part 22

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.2MHz								
1.648	-54.1	V	3.0	1.2	-52.9	-13.0	-39.9	
2.473	-55.1	V	3.0	1.2	-53.9	-13.0	-40.9	
3.297	-53.4	V	3.0	1.2	-52.2	-13.0	-39.2	
1.648	-49.5	H	3.0	1.2	-48.3	-13.0	-35.3	
2.473	-54.9	H	3.0	1.2	-53.7	-13.0	-40.7	
3.297	-53.4	H	3.0	1.2	-52.2	-13.0	-39.2	
Mid Ch, 836.6MHz								
1.673	-56.0	V	3.0	1.2	-54.7	-13.0	-41.7	
2.510	-53.8	V	3.0	1.2	-52.6	-13.0	-39.6	
3.346	-52.7	V	3.0	1.2	-51.5	-13.0	-38.5	
1.673	-51.1	H	3.0	1.2	-49.9	-13.0	-36.9	
2.510	-54.8	H	3.0	1.2	-53.6	-13.0	-40.6	
3.346	-53.0	H	3.0	1.2	-51.8	-13.0	-38.8	
High Ch, 848.8MHz								
1.698	-55.4	V	3.0	1.2	-54.2	-13.0	-41.2	
2.546	-54.0	V	3.0	1.2	-52.8	-13.0	-39.8	
3.395	-53.4	V	3.0	1.2	-52.1	-13.0	-39.1	
1.698	-52.8	H	3.0	1.2	-51.6	-13.0	-38.6	
2.546	-54.6	H	3.0	1.2	-53.4	-13.0	-40.4	
3.395	-53.1	H	3.0	1.2	-51.9	-13.0	-38.9	

Rev. 03.03.09
 Note: No other emissions were detected above the system noise floor.

Note – Pre-amp is part of substitution measurement.

GSM 1900 GPRS

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Sony
Project #: 10721207
Date: 4/28/2015
Test Engineer: B. Kiewra
Configuration: EUT with charger (X (flat) orientation); FCC ID: PY7-TM0062; s/n CB5A23WPYJ
Mode: GPRS 1900

Chamber

3m Chamber

Pre-amplifier

Filter

Filter 1

Limit

Part 24

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.2MHz								
3.700	-56.6	V	3.0	1.2	-55.4	-13.0	-42.4	
5.551	-51.7	V	3.0	1.2	-50.5	-13.0	-37.5	
7.401	-51.4	V	3.0	1.2	-50.2	-13.0	-37.2	
3.700	-56.4	H	3.0	1.2	-55.2	-13.0	-42.2	
5.551	-50.8	H	3.0	1.2	-49.6	-13.0	-36.6	
7.401	-51.2	H	3.0	1.2	-50.0	-13.0	-37.0	
Mid Ch, 1880MHz								
3.760	-55.5	V	3.0	1.2	-54.3	-13.0	-41.3	
5.640	-51.2	V	3.0	1.2	-50.0	-13.0	-37.0	
7.520	-50.8	V	3.0	1.2	-49.6	-13.0	-36.6	
3.760	-55.7	H	3.0	1.2	-54.5	-13.0	-41.5	
5.640	-50.2	H	3.0	1.2	-49.0	-13.0	-36.0	
7.520	-51.5	H	3.0	1.2	-50.3	-13.0	-37.3	
High Ch, 1909.8MHz								
3.820	-54.9	V	3.0	1.2	-53.7	-13.0	-40.7	
5.729	-52.1	V	3.0	1.2	-50.9	-13.0	-37.9	
7.639	-51.6	V	3.0	1.2	-50.4	-13.0	-37.4	
3.820	-55.0	H	3.0	1.2	-53.8	-13.0	-40.8	
5.729	-50.4	H	3.0	1.2	-49.2	-13.0	-36.2	
7.639	-51.5	H	3.0	1.2	-50.3	-13.0	-37.3	

Rev. 03.03.09
 Note: No other emissions were detected above the system noise floor.

Note – Pre-amp is part of substitution measurement.

GSM 1900 EGPRS

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement								
Company: Sony Project #: 10721207 Date: 4/28/2015 Test Engineer: B. Kiewra Configuration: EUT with charger (X (flat) orientation); FCC ID: PY7-TM0062; s/n CB5A23WPYJ Mode: EGPRS 1900								
<div style="border: 1px solid black; padding: 2px; display: inline-block; background-color: #e0f0ff;"> Chamber </div>			<div style="border: 1px solid black; padding: 2px; display: inline-block; background-color: #e0f0ff;"> Pre-amplifier </div>		<div style="border: 1px solid black; padding: 2px; display: inline-block; background-color: #e0f0ff;"> Filter </div>		<div style="border: 1px solid black; padding: 2px; display: inline-block; background-color: #e0f0ff;"> Limit </div>	
<div style="border: 1px solid black; padding: 2px; display: inline-block; background-color: #e0f0ff;"> 3m Chamber </div>			<div style="border: 1px solid black; padding: 2px; display: inline-block; background-color: #e0f0ff;"> [] </div>		<div style="border: 1px solid black; padding: 2px; display: inline-block; background-color: #e0f0ff;"> Filter 1 </div>		<div style="border: 1px solid black; padding: 2px; display: inline-block; background-color: #e0f0ff;"> Part 24 </div>	
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.2MHz								
3.700	-57.3	V	3.0	1.2	-56.1	-13.0	-43.1	
5.551	-51.0	V	3.0	1.2	-49.8	-13.0	-36.8	
7.401	-50.5	V	3.0	1.2	-49.3	-13.0	-36.3	
3.700	-61.2	H	3.0	1.2	-60.0	-13.0	-47.0	
5.551	-50.6	H	3.0	1.2	-49.4	-13.0	-36.4	
7.401	-50.4	H	3.0	1.2	-49.2	-13.0	-36.2	
Mid Ch, 1880MHz								
3.760	-54.6	V	3.0	1.2	-53.4	-13.0	-40.4	
5.640	-53.7	V	3.0	1.2	-52.5	-13.0	-39.5	
7.520	-51.2	V	3.0	1.2	-50.0	-13.0	-37.0	
3.760	-56.5	H	3.0	1.2	-55.3	-13.0	-42.3	
5.640	-50.7	H	3.0	1.2	-49.5	-13.0	-36.5	
7.520	-50.0	H	3.0	1.2	-48.8	-13.0	-35.8	
High Ch, 1909.8MHz								
3.820	-56.3	V	3.0	1.2	-55.1	-13.0	-42.1	
5.729	-51.0	V	3.0	1.2	-49.8	-13.0	-36.8	
7.639	-51.9	V	3.0	1.2	-50.7	-13.0	-37.7	
3.820	-56.1	H	3.0	1.2	-54.8	-13.0	-41.8	
5.729	-50.9	H	3.0	1.2	-49.6	-13.0	-36.6	
7.639	-52.2	H	3.0	1.2	-51.0	-13.0	-38.0	
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.								

Note – Pre-amp is part of substitution measurement.

WCDMA BAND 5 REL 99

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Sony
Project #: 10721207
Date: 4/28/2015
Test Engineer: M. Nolting
Configuration: EUT with charger (Y (landscape) orientation); FCC ID: PY7-TM0062; s/n CB5A23WPYJ
Mode: WCDMA Band 5 Rel99

Chamber

3m Chamber

Pre-amplifier

Filter

Filter 1

Limit

Part 22

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 826.4MHz								
1.653	-59.0	V	3.0	1.2	-57.7	-13.0	-44.7	
2.479	-54.9	V	3.0	1.2	-53.7	-13.0	-40.7	
3.306	-53.4	V	3.0	1.2	-52.2	-13.0	-39.2	
1.653	-58.7	H	3.0	1.2	-57.5	-13.0	-44.5	
2.479	-54.7	H	3.0	1.2	-53.5	-13.0	-40.5	
3.306	-53.7	H	3.0	1.2	-52.5	-13.0	-39.5	
Mid Ch, 836.6MHz								
1.673	-58.6	V	3.0	1.2	-57.4	-13.0	-44.4	
2.510	-54.5	V	3.0	1.2	-53.3	-13.0	-40.3	
3.346	-53.3	V	3.0	1.2	-52.1	-13.0	-39.1	
1.673	-57.5	H	3.0	1.2	-56.3	-13.0	-43.3	
2.510	-54.8	H	3.0	1.2	-53.6	-13.0	-40.6	
3.346	-53.1	H	3.0	1.2	-51.9	-13.0	-38.9	
High Ch, 846.6MHz								
1.693	-59.2	V	3.0	1.2	-58.0	-13.0	-45.0	
2.540	-54.2	V	3.0	1.2	-53.0	-13.0	-40.0	
3.386	-53.4	V	3.0	1.2	-52.1	-13.0	-39.1	
1.693	-58.6	H	3.0	1.2	-57.4	-13.0	-44.4	
2.540	-54.6	H	3.0	1.2	-53.4	-13.0	-40.4	
3.386	-53.4	H	3.0	1.2	-52.2	-13.0	-39.2	

Rev. 03.03.09
 Note: No other emissions were detected above the system noise floor.

Note – Pre-amp is part of substitution measurement.

WCDMA BAND 5 HSDPA

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Sony
Project #: 10721207
Date: 4/28/2015
Test Engineer: M. Nolting
Configuration: EUT with charger (Y (landscape) orientation); FCC ID: PY7-TM0062; s/n CB5A23WPYJ
Mode: WCDMA Band 5 HSDPA

Chamber

3m Chamber

Pre-amplifier

Filter

Filter 1

Limit

Part 22

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 826.4MHz								
1.653	-58.5	V	3.0	1.2	-57.3	-13.0	-44.3	
2.479	-54.8	V	3.0	1.2	-53.5	-13.0	-40.5	
3.306	-53.5	V	3.0	1.2	-52.3	-13.0	-39.3	
1.653	-58.5	H	3.0	1.2	-57.3	-13.0	-44.3	
2.479	-55.0	H	3.0	1.2	-53.8	-13.0	-40.8	
3.306	-53.6	H	3.0	1.2	-52.4	-13.0	-39.4	
Mid Ch, 836.6MHz								
1.673	-59.1	V	3.0	1.2	-57.9	-13.0	-44.9	
2.510	-53.7	V	3.0	1.2	-52.5	-13.0	-39.5	
3.346	-53.1	V	3.0	1.2	-51.9	-13.0	-38.9	
1.673	-58.4	H	3.0	1.2	-57.2	-13.0	-44.2	
2.510	-54.7	H	3.0	1.2	-53.5	-13.0	-40.5	
3.346	-53.3	H	3.0	1.2	-52.1	-13.0	-39.1	
High Ch, 846.6MHz								
1.693	-58.9	V	3.0	1.2	-57.7	-13.0	-44.7	
2.540	-54.4	V	3.0	1.2	-53.2	-13.0	-40.2	
3.386	-53.5	V	3.0	1.2	-52.3	-13.0	-39.3	
1.693	-59.0	H	3.0	1.2	-57.8	-13.0	-44.8	
2.540	-54.6	H	3.0	1.2	-53.4	-13.0	-40.4	
3.386	-53.8	H	3.0	1.2	-52.6	-13.0	-39.6	

Rev. 03.03.09
 Note: No other emissions were detected above the system noise floor.

Note – Pre-amp is part of substitution measurement.

WCDMA BAND 2 REL 99

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Sony
Project #: 10721207
Date: 4/28/2015
Test Engineer: M. Nolting
Configuration: EUT with charger (X (flat) orientation); FCC ID: PY7-TM0062; s/n CB5A23WPYJ
Mode: WCDMA Band 2 Rel99

Chamber

3m Chamber

Pre-amplifier

Filter

Filter 1

Limit

Part 24

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1852.4MHz								
3.705	-50.1	V	3.0	1.2	-48.9	-13.0	-35.9	
5.557	-49.3	V	3.0	1.2	-48.1	-13.0	-35.1	
7.410	-45.3	V	3.0	1.2	-44.1	-13.0	-31.1	
3.705	-49.4	H	3.0	1.2	-48.2	-13.0	-35.2	
5.557	-49.4	H	3.0	1.2	-48.2	-13.0	-35.2	
7.410	-45.5	H	3.0	1.2	-44.3	-13.0	-31.3	
Mid Ch, 1880MHz								
3.760	-49.7	V	3.0	1.2	-48.4	-13.0	-35.4	
5.640	-48.5	V	3.0	1.2	-47.2	-13.0	-34.2	
7.520	-45.8	V	3.0	1.2	-44.6	-13.0	-31.6	
3.760	-50.0	H	3.0	1.2	-48.8	-13.0	-35.8	
5.640	-49.3	H	3.0	1.2	-48.1	-13.0	-35.1	
7.520	-45.6	H	3.0	1.2	-44.4	-13.0	-31.4	
High Ch, 1907.6MHz								
3.815	-50.0	V	3.0	1.2	-48.8	-13.0	-35.8	
5.723	-48.7	V	3.0	1.2	-47.5	-13.0	-34.5	
7.630	-46.2	V	3.0	1.2	-45.0	-13.0	-32.0	
3.815	-50.1	H	3.0	1.2	-48.9	-13.0	-35.9	
5.723	-48.4	H	3.0	1.2	-47.2	-13.0	-34.2	
7.630	-46.5	H	3.0	1.2	-45.3	-13.0	-32.3	

Rev. 03.03.09
 Note: No other emissions were detected above the system noise floor.

Note – Pre-amp is part of substitution measurement.

WCDMA BAND 2 HSDPA

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Sony
Project #: 10721207
Date: 4/28/2015
Test Engineer: M. Nolting
Configuration: EUT with charger (X (flat) orientation); FCC ID: PY7-TM0062; s/n CB5A23WPYJ
Mode: WCDMA Band 2 HSDPA

Chamber

3m Chamber

Pre-amplifier

Filter

Filter 1

Limit

Part 24

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1852.4MHz								
3.705	-50.4	V	3.0	1.2	-49.2	-13.0	-36.2	
5.557	-49.5	V	3.0	1.2	-48.3	-13.0	-35.3	
7.410	-46.4	V	3.0	1.2	-45.1	-13.0	-32.1	
3.705	-50.4	H	3.0	1.2	-49.2	-13.0	-36.2	
5.557	-49.6	H	3.0	1.2	-48.4	-13.0	-35.4	
7.410	-46.3	H	3.0	1.2	-45.1	-13.0	-32.1	
Mid Ch, 1880MHz								
3.760	-50.5	V	3.0	1.2	-49.3	-13.0	-36.3	
5.640	-49.5	V	3.0	1.2	-48.3	-13.0	-35.3	
7.520	-46.0	V	3.0	1.2	-44.8	-13.0	-31.8	
3.760	-50.5	H	3.0	1.2	-49.3	-13.0	-36.3	
5.640	-49.2	H	3.0	1.2	-48.0	-13.0	-35.0	
7.520	-46.3	H	3.0	1.2	-45.1	-13.0	-32.1	
High Ch, 1907.6MHz								
3.815	-50.8	V	3.0	1.2	-49.6	-13.0	-36.6	
5.723	-48.2	V	3.0	1.2	-47.0	-13.0	-34.0	
7.630	-46.1	V	3.0	1.2	-44.9	-13.0	-31.9	
3.815	-50.9	H	3.0	1.2	-49.7	-13.0	-36.7	
5.723	-49.1	H	3.0	1.2	-47.9	-13.0	-34.9	
7.630	-46.3	H	3.0	1.2	-45.1	-13.0	-32.1	

Rev. 03.03.09
 Note: No other emissions were detected above the system noise floor.

Note – Pre-amp is part of substitution measurement.

LTE17, 10 MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: Sony Project #: 10721207 Date: 4/29/2015 Test Engineer: B. Kiewra Configuration: EUT w/ Charger (X (Flat) Orientation) FCC ID: PY7-TM0062; s/n CB5A23WPYJ Mode: LTE17 10BW QPSK									
<div style="border: 1px solid black; padding: 2px; display: inline-block;"> Chamber 3m Chamber </div>			<div style="border: 1px solid black; padding: 2px; display: inline-block;"> Pre-amplifier [] </div>		<div style="border: 1px solid black; padding: 2px; display: inline-block;"> Filter Filter 1 </div>		<div style="border: 1px solid black; padding: 2px; display: inline-block;"> Limit Part 27 </div>		
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 709.0MHz									
1.418	-60.0	V	3.0	1.2	-58.8	-13.0	-45.8		
2.127	-55.1	V	3.0	1.2	-53.9	-13.0	-40.9		
2.836	-52.9	V	3.0	1.2	-51.7	-13.0	-38.7		
1.418	-59.7	H	3.0	1.2	-58.5	-13.0	-45.5		
2.127	-54.8	H	3.0	1.2	-53.6	-13.0	-40.6		
2.836	-53.8	H	3.0	1.2	-52.6	-13.0	-39.6		
Mid Ch, 710 MHz									
1.420	-60.4	V	3.0	1.2	-59.2	-13.0	-46.2		
2.130	-55.5	V	3.0	1.2	-54.3	-13.0	-41.3		
2.840	-53.4	V	3.0	1.2	-52.2	-13.0	-39.2		
1.420	-60.0	H	3.0	1.2	-58.8	-13.0	-45.8		
2.130	-55.4	H	3.0	1.2	-54.2	-13.0	-41.2		
2.840	-53.9	H	3.0	1.2	-52.7	-13.0	-39.7		
High Ch, 711.0MHz									
1.422	-60.3	V	3.0	1.2	-59.1	-13.0	-46.1		
2.133	-55.7	V	3.0	1.2	-54.5	-13.0	-41.5		
2.844	-53.7	V	3.0	1.2	-52.5	-13.0	-39.5		
1.422	-60.2	H	3.0	1.2	-59.0	-13.0	-46.0		
2.133	-55.2	H	3.0	1.2	-54.0	-13.0	-41.0		
2.844	-53.1	H	3.0	1.2	-51.9	-13.0	-38.9		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.									

Note – Pre-amp is part of substitution measurement.

LTE17, 10 MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement								
Company: Sony Project #: 10721207 Date: 4/29/2015 Test Engineer: B. Kiewra Configuration: EUT w/ Charger (X (Flat) Orientation) FCC ID: PY7-TM0062; s/n CB5A23WPYJ Mode: LTE17 10BW 16-QAM								
<div style="border: 1px solid black; padding: 2px; display: inline-block;"> Chamber 3m Chamber </div>			<div style="border: 1px solid black; padding: 2px; display: inline-block;"> Pre-amplifier </div>		<div style="border: 1px solid black; padding: 2px; display: inline-block;"> Filter Filter 1 </div>		<div style="border: 1px solid black; padding: 2px; display: inline-block;"> Limit Part 27 </div>	
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 709.0MHz								
1.418	-60.0	V	3.0	1.2	-58.8	-13.0	-45.8	
2.127	-55.4	V	3.0	1.2	-54.2	-13.0	-41.2	
2.836	-53.5	V	3.0	1.2	-52.3	-13.0	-39.3	
1.418	-60.2	H	3.0	1.2	-59.0	-13.0	-46.0	
2.127	-55.3	H	3.0	1.2	-54.1	-13.0	-41.1	
2.836	-53.7	H	3.0	1.2	-52.5	-13.0	-39.5	
Mid Ch, 710 MHz								
1.420	-59.5	V	3.0	1.2	-58.3	-13.0	-45.3	
2.130	-55.2	V	3.0	1.2	-54.0	-13.0	-41.0	
2.840	-53.8	V	3.0	1.2	-52.6	-13.0	-39.6	
1.420	-60.2	H	3.0	1.2	-59.0	-13.0	-46.0	
2.130	-55.2	H	3.0	1.2	-54.0	-13.0	-41.0	
2.840	-53.7	H	3.0	1.2	-52.5	-13.0	-39.5	
High Ch, 711.0MHz								
1.422	-59.8	V	3.0	1.2	-58.6	-13.0	-45.6	
2.133	-55.5	V	3.0	1.2	-54.3	-13.0	-41.3	
2.844	-53.4	V	3.0	1.2	-52.2	-13.0	-39.2	
1.422	-59.9	H	3.0	1.2	-58.7	-13.0	-45.7	
2.133	-55.6	H	3.0	1.2	-54.4	-13.0	-41.4	
2.844	-53.9	H	3.0	1.2	-52.7	-13.0	-39.7	
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.								

Note – Pre-amp is part of substitution measurement.

LTE17, 5MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement								
Company: Sony Project #: 10721207 Date: 4/29/2015 Test Engineer: B. Kiewra Configuration: EUT w/ Charger (X (Flat) Orientation) FCC ID: PY7-TM0062; s/n CB5A23WPYJ Mode: LTE17 5BW QPSK								
Chamber			Pre-amplifier		Filter		Limit	
3m Chamber					Filter 1		Part 27	
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 706.5MHz								
1.413	-60.1	V	3.0	1.2	-58.9	-13.0	-45.9	
2.120	-55.5	V	3.0	1.2	-54.3	-13.0	-41.3	
2.826	-53.3	V	3.0	1.2	-52.1	-13.0	-39.1	
1.413	-59.9	H	3.0	1.2	-58.7	-13.0	-45.7	
2.120	-55.4	H	3.0	1.2	-54.2	-13.0	-41.2	
2.826		H	3.0	1.2	1.2	-13.0	14.2	
Mid Ch, 710 MHz								
1.420	-60.2	V	3.0	1.2	-59.0	-13.0	-46.0	
2.130	-55.9	V	3.0	1.2	-54.7	-13.0	-41.7	
2.840	-53.0	V	3.0	1.2	-51.8	-13.0	-38.8	
1.420	-59.6	H	3.0	1.2	-58.4	-13.0	-45.4	
2.130	-55.0	H	3.0	1.2	-53.8	-13.0	-40.8	
2.840	-53.7	H	3.0	1.2	-52.5	-13.0	-39.5	
High Ch, 713.5MHz								
1.427	-59.9	V	3.0	1.2	-58.7	-13.0	-45.7	
2.141	-55.6	V	3.0	1.2	-54.4	-13.0	-41.4	
2.854	-53.9	V	3.0	1.2	-52.7	-13.0	-39.7	
1.427	-59.6	H	3.0	1.2	-58.4	-13.0	-45.4	
2.141	-55.5	H	3.0	1.2	-54.3	-13.0	-41.3	
2.854	-54.3	H	3.0	1.2	-53.1	-13.0	-40.1	
Rev. 03.03.09								
Note: No other emissions were detected above the system noise floor.								

Note – Pre-amp is part of substitution measurement.

LTE17, 5 MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Sony
Project #: 10721207
Date: 4/29/2015
Test Engineer: B. Kiewra
Configuration: EUT w/ Charger (X (Flat) Orientation) FCC ID: PY7-TM0062; s/n CB5A23WPYJ
Mode: LTE17 5BW 16-QAM

Chamber

3m Chamber

Pre-amplifier

Filter

Filter 1

Limit

Part 27

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 706.5MHz								
1.413	-59.8	V	3.0	1.2	-58.6	-13.0	-45.6	
2.120	-56.3	V	3.0	1.2	-55.1	-13.0	-42.1	
2.826	-52.9	V	3.0	1.2	-51.7	-13.0	-38.7	
1.413	-60.1	H	3.0	1.2	-58.9	-13.0	-45.9	
2.120	-55.7	H	3.0	1.2	-54.5	-13.0	-41.5	
2.826	-53.4	H	3.0	1.2	-52.2	-13.0	-39.2	
Mid Ch, 710 MHz								
1.420	-60.2	V	3.0	1.2	-59.0	-13.0	-46.0	
2.130	-55.6	V	3.0	1.2	-54.4	-13.0	-41.4	
2.840	-53.1	V	3.0	1.2	-51.9	-13.0	-38.9	
1.420	-59.2	H	3.0	1.2	-58.0	-13.0	-45.0	
2.130	-56.0	H	3.0	1.2	-54.8	-13.0	-41.8	
2.840	-53.9	H	3.0	1.2	-52.7	-13.0	-39.7	
High Ch, 713.5MHz								
1.427	-59.5	V	3.0	1.2	-58.3	-13.0	-45.3	
2.141	-55.8	V	3.0	1.2	-54.6	-13.0	-41.6	
2.854	-53.9	V	3.0	1.2	-52.7	-13.0	-39.7	
1.427	-58.9	H	3.0	1.2	-57.7	-13.0	-44.7	
2.141	-55.4	H	3.0	1.2	-54.2	-13.0	-41.2	
2.854	-54.6	H	3.0	1.2	-53.4	-13.0	-40.4	

Rev. 03.03.09
 Note: No other emissions were detected above the system noise floor.

Note – Pre-amp is part of substitution measurement.

LTE5, 10 MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: Sony Project #: 10721207 Date: 4/29/2015 Test Engineer: B. Kiewra Configuration: FCC ID: PY7-TM0062; Stand-alone (Y(Landscape) orientation); s/n CB5A23WPYJ Mode: LTE5 10BW QPSK									
<div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;"> Chamber </div> <div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;"> 3m Chamber </div>			<div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;"> Pre-amplifier </div> <div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;"> </div>		<div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;"> Filter </div> <div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;"> Filter 1 </div>		<div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;"> Limit </div> <div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;"> Part 22 </div>		
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 829.0MHz									
1.658	-58.5	V	3.0	1.2	-57.3	-13.0	-44.3		
2.487	-54.1	V	3.0	1.2	-52.9	-13.0	-39.9		
3.316	-51.9	V	3.0	1.2	-50.7	-13.0	-37.7		
1.658	-58.5	H	3.0	1.2	-57.3	-13.0	-44.3		
2.487	-54.4	H	3.0	1.2	-53.2	-13.0	-40.2		
3.316	-52.8	H	3.0	1.2	-51.6	-13.0	-38.6		
Mid Ch, 836.5MHz									
1.673	-60.5	V	3.0	1.2	-59.3	-13.0	-46.3		
2.510	-53.8	V	3.0	1.2	-52.6	-13.0	-39.6		
3.346	-52.6	V	3.0	1.2	-51.4	-13.0	-38.4		
1.673	-60.5	H	3.0	1.2	-59.3	-13.0	-46.3		
2.510	-53.4	H	3.0	1.2	-52.2	-13.0	-39.2		
3.346	-52.2	H	3.0	1.2	-51.0	-13.0	-38.0		
High Ch, 844.0MHz									
1.688	-58.3	V	3.0	1.2	-57.1	-13.0	-44.1		
2.532	-53.3	V	3.0	1.2	-52.1	-13.0	-39.1		
3.376	-52.1	V	3.0	1.2	-50.9	-13.0	-37.9		
1.688	-58.6	H	3.0	1.2	-57.4	-13.0	-44.4		
2.532	-53.6	H	3.0	1.2	-52.4	-13.0	-39.4		
3.376	-52.4	H	3.0	1.2	-51.2	-13.0	-38.2		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.									

Note – Pre-amp is part of substitution measurement.

LTE 5, 10 MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: Sony Project #: 10721207 Date: 4/29/2015 Test Engineer: B. Kiewra Configuration: FCC ID: PY7-TM0062; Stand-alone (Y(Landscape) orientation); s/n CB5A23WPYJ Mode: LTE5 10BW 16-QAM									
Chamber	Pre-amplifier	Filter							Limit
3m Chamber		Filter 1							Part 22
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 829.0MHz									
1.658	-58.8	V	3.0	1.2	-57.6	-13.0	-44.6		
2.487	-53.7	V	3.0	1.2	-52.5	-13.0	-39.5		
3.316	-52.0	V	3.0	1.2	-50.8	-13.0	-37.8		
1.658	-58.8	H	3.0	1.2	-57.6	-13.0	-44.6		
2.487	-54.3	H	3.0	1.2	-53.1	-13.0	-40.1		
3.316	-53.1	H	3.0	1.2	-51.9	-13.0	-38.9		
Mid Ch, 836.5MHz									
1.673	-59.9	V	3.0	1.2	-58.7	-13.0	-45.7		
2.510	-53.9	V	3.0	1.2	-52.7	-13.0	-39.7		
3.346	-52.0	V	3.0	1.2	-50.8	-13.0	-37.8		
1.673	-60.1	H	3.0	1.2	-58.9	-13.0	-45.9		
2.510	-54.0	H	3.0	1.2	-52.8	-13.0	-39.8		
3.346	-52.3	H	3.0	1.2	-51.1	-13.0	-38.1		
High Ch, 844.0MHz									
1.688	-58.5	V	3.0	1.2	-57.3	-13.0	-44.3		
2.532	-53.3	V	3.0	1.2	-52.1	-13.0	-39.1		
3.376	-52.2	V	3.0	1.2	-51.0	-13.0	-38.0		
1.688	-58.2	H	3.0	1.2	-57.0	-13.0	-44.0		
2.532	-54.0	H	3.0	1.2	-52.8	-13.0	-39.8		
3.376	-52.5	H	3.0	1.2	-51.3	-13.0	-38.3		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.									

Note – Pre-amp is part of substitution measurement.

LTE5, 5 MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Sony
Project #: 10721207
Date: 4/29/2015
Test Engineer: B. Kiewra
Configuration: FCC ID: PY7-TM0062; Stand-alone (Y(Landscape) orientation); s/n CB5A23WPYJ
Mode: LTE5 5BW QPSK

Chamber

3m Chamber

Pre-amplifier

Filter

Filter 1

Limit

Part 22

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 826.5MHz								
1.653	-58.2	V	3.0	1.2	-57.0	-13.0	-44.0	
2.480	-53.6	V	3.0	1.2	-52.4	-13.0	-39.4	
3.306	-52.4	V	3.0	1.2	-51.2	-13.0	-38.2	
1.653	-58.8	H	3.0	1.2	-57.6	-13.0	-44.6	
2.480	-54.2	H	3.0	1.2	-53.0	-13.0	-40.0	
3.306	-52.6	H	3.0	1.2	-51.4	-13.0	-38.4	
Mid Ch, 836.5MHz								
1.673	-57.8	V	3.0	1.2	-56.6	-13.0	-43.6	
2.510	-53.2	V	3.0	1.2	-52.0	-13.0	-39.0	
3.346	-52.4	V	3.0	1.2	-51.2	-13.0	-38.2	
1.673	-58.0	H	3.0	1.2	-56.8	-13.0	-43.8	
2.510	-54.1	H	3.0	1.2	-52.9	-13.0	-39.9	
3.346	-52.5	H	3.0	1.2	-51.3	-13.0	-38.3	
High Ch, 846.5MHz								
1.693	-58.1	V	3.0	1.2	-56.9	-13.0	-43.9	
2.540	-53.4	V	3.0	1.2	-52.2	-13.0	-39.2	
3.386	-52.3	V	3.0	1.2	-51.1	-13.0	-38.1	
1.693	-58.5	H	3.0	1.2	-57.3	-13.0	-44.3	
2.540	-54.1	H	3.0	1.2	-52.9	-13.0	-39.9	
3.386	-52.1	H	3.0	1.2	-50.9	-13.0	-37.9	

Rev. 03.03.09
 Note: No other emissions were detected above the system noise floor.

Note – Pre-amp is part of substitution measurement.

LTE5, 5 MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Sony
Project #: 10721207
Date: 5/1/2015
Test Engineer: B. Kiewra
Configuration: FCC ID: PY7-TM0062; Stand-alone (Y(Landscape) orientation); s/n CB5A23WPYJ
Mode: LTE5 5BW 16-QAM

Chamber

3m Chamber

Pre-amplifier

Filter

Filter 1

Limit

Part 22

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 826.5MHz								
1.653	-58.8	V	3.0	1.2	-57.6	-13.0	-44.6	
2.480	-54.4	V	3.0	1.2	-53.2	-13.0	-40.2	
3.306	-52.5	V	3.0	1.2	-51.3	-13.0	-38.3	
1.653	-58.6	H	3.0	1.2	-57.4	-13.0	-44.4	
2.480	-54.9	H	3.0	1.2	-53.7	-13.0	-40.7	
3.306	-52.6	H	3.0	1.2	-51.4	-13.0	-38.4	
Mid Ch, 836.5MHz								
1.673	-58.0	V	3.0	1.2	-56.8	-13.0	-43.8	
2.510	-52.9	V	3.0	1.2	-51.7	-13.0	-38.7	
3.346	-52.1	V	3.0	1.2	-50.9	-13.0	-37.9	
1.673	-58.1	H	3.0	1.2	-56.9	-13.0	-43.9	
2.510	-54.2	H	3.0	1.2	-53.0	-13.0	-40.0	
3.346	-52.1	H	3.0	1.2	-50.9	-13.0	-37.9	
High Ch, 846.5MHz								
1.693	-58.3	V	3.0	1.2	-57.1	-13.0	-44.1	
2.540	-47.0	V	3.0	1.2	-45.8	-13.0	-32.8	
3.386		V	3.0	1.2	1.2	-13.0	14.2	
1.693	-58.6	H	3.0	1.2	-57.4	-13.0	-44.4	
2.540	-53.5	H	3.0	1.2	-52.3	-13.0	-39.3	
3.386	-52.1	H	3.0	1.2	-50.9	-13.0	-37.9	

Rev. 03.03.09
 Note: No other emissions were detected above the system noise floor.

Note – Pre-amp is part of substitution measurement.

LTE5, 3 MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: Sony Project #: 10721207 Date: 4/29/2015 Test Engineer: B. Kiewra Configuration: FCC ID: PY7-TM0062; Stand-alone (Y(Landscape) orientation); s/n CB5A23WPYJ Mode: LTE5 3BW QPSK									
<div style="border: 1px solid black; padding: 2px; background-color: #e0f0ff;"> Chamber </div> <div style="border: 1px solid black; padding: 2px; background-color: #e0f0ff;"> 3m Chamber </div>			<div style="border: 1px solid black; padding: 2px; background-color: #e0f0ff;"> Pre-amplifier </div> <div style="border: 1px solid black; padding: 2px; background-color: #e0f0ff;"> </div>		<div style="border: 1px solid black; padding: 2px; background-color: #e0f0ff;"> Filter </div> <div style="border: 1px solid black; padding: 2px; background-color: #e0f0ff;"> Filter 1 </div>		<div style="border: 1px solid black; padding: 2px; background-color: #e0f0ff;"> Limit </div> <div style="border: 1px solid black; padding: 2px; background-color: #e0f0ff;"> Part 22 </div>		
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 825.5MHz									
1.651	-58.6	V	3.0	1.2	-57.4	-13.0	-44.4		
2.477	-54.0	V	3.0	1.2	-52.8	-13.0	-39.8		
3.302	-52.1	V	3.0	1.2	-50.9	-13.0	-37.9		
1.651	-58.6	H	3.0	1.2	-57.4	-13.0	-44.4		
2.477	-54.8	H	3.0	1.2	-53.6	-13.0	-40.6		
3.302	-52.7	H	3.0	1.2	-51.5	-13.0	-38.5		
Mid Ch, 836.5MHz									
1.673	-58.1	V	3.0	1.2	-56.9	-13.0	-43.9		
2.510	-53.4	V	3.0	1.2	-52.2	-13.0	-39.2		
3.346	-52.1	V	3.0	1.2	-50.9	-13.0	-37.9		
1.673	-57.6	H	3.0	1.2	-56.4	-13.0	-43.4		
2.510	-54.1	H	3.0	1.2	-52.9	-13.0	-39.9		
3.346	-52.1	H	3.0	1.2	-50.9	-13.0	-37.9		
High Ch, 847.5MHz									
1.695	-58.0	V	3.0	1.2	-56.8	-13.0	-43.8		
2.543	-53.5	V	3.0	1.2	-52.3	-13.0	-39.3		
3.390	-52.4	V	3.0	1.2	-51.2	-13.0	-38.2		
1.695	-58.3	H	3.0	1.2	-57.1	-13.0	-44.1		
2.543	-54.0	H	3.0	1.2	-52.8	-13.0	-39.8		
3.390	-52.2	H	3.0	1.2	-51.0	-13.0	-38.0		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.									

Note – Pre-amp is part of substitution measurement.

LTE5, 3 MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Sony
Project #: 10721207
Date: 4/29/2015
Test Engineer: B. Kiewra
Configuration: FCC ID: PY7-TM0062; Stand-alone (Y(Landscape) orientation); s/n CB5A23WPYJ
Mode: LTE5 3BW 16-QAM

Chamber

3m Chamber

Pre-amplifier

Filter

Filter 1

Limit

Part 22

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 825.5MHz								
1.651	-58.5	V	3.0	1.2	-57.3	-13.0	-44.3	
2.477	-54.2	V	3.0	1.2	-53.0	-13.0	-40.0	
3.302	-53.1	V	3.0	1.2	-51.9	-13.0	-38.9	
1.651	-58.7	H	3.0	1.2	-57.5	-13.0	-44.5	
2.477	-54.3	H	3.0	1.2	-53.1	-13.0	-40.1	
3.302	-53.0	H	3.0	1.2	-51.8	-13.0	-38.8	
Mid Ch, 836.5MHz								
1.673	-58.7	V	3.0	1.2	-57.5	-13.0	-44.5	
2.510	-53.7	V	3.0	1.2	-52.5	-13.0	-39.5	
3.346	-52.7	V	3.0	1.2	-51.5	-13.0	-38.5	
1.673	-58.6	H	3.0	1.2	-57.4	-13.0	-44.4	
2.510	-53.9	H	3.0	1.2	-52.7	-13.0	-39.7	
3.346	-52.0	H	3.0	1.2	-50.8	-13.0	-37.8	
High Ch, 847.5MHz								
1.695	-58.4	V	3.0	1.2	-57.2	-13.0	-44.2	
2.543	-53.4	V	3.0	1.2	-52.2	-13.0	-39.2	
3.390	-52.6	V	3.0	1.2	-51.4	-13.0	-38.4	
1.695	-58.6	H	3.0	1.2	-57.4	-13.0	-44.4	
2.543	-54.1	H	3.0	1.2	-52.9	-13.0	-39.9	
3.390	-52.6	H	3.0	1.2	-51.4	-13.0	-38.4	

Rev. 03.03.09
 Note: No other emissions were detected above the system noise floor.

Note – Pre-amp is part of substitution measurement.

LTE5, 1.4 MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement								
Company: Sony Project #: 10721207 Date: 4/29/2015 Test Engineer: B. Kiewra Configuration: FCC ID: PY7-TM0062; Stand-alone (Y(Landscape) orientation); s/n CB5A23WPYJ Mode: LTE5 1.4BW QPSK								
Chamber			Pre-amplifier		Filter		Limit	
3m Chamber					Filter 1		Part 22	
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.7MHz								
1.649	-58.5	V	3.0	1.2	-57.3	-13.0	-44.3	
2.474	-54.3	V	3.0	1.2	-53.1	-13.0	-40.1	
3.299	-52.9	V	3.0	1.2	-51.7	-13.0	-38.7	
1.649	-58.8	H	3.0	1.2	-57.6	-13.0	-44.6	
2.474	-54.7	H	3.0	1.2	-53.5	-13.0	-40.5	
3.299	-52.8	H	3.0	1.2	-51.6	-13.0	-38.6	
Mid Ch, 836.5MHz								
1.673	-58.0	V	3.0	1.2	-56.8	-13.0	-43.8	
2.510	-53.9	V	3.0	1.2	-52.7	-13.0	-39.7	
3.346	-52.2	V	3.0	1.2	-51.0	-13.0	-38.0	
1.673	-59.0	H	3.0	1.2	-57.8	-13.0	-44.8	
2.510	-53.7	H	3.0	1.2	-52.5	-13.0	-39.5	
3.346	-52.6	H	3.0	1.2	-51.4	-13.0	-38.4	
High Ch, 848.3MHz								
1.697	-58.3	V	3.0	1.2	-57.1	-13.0	-44.1	
2.545	-52.7	V	3.0	1.2	-51.5	-13.0	-38.5	
3.393	-52.8	V	3.0	1.2	-51.6	-13.0	-38.6	
1.697	-58.1	H	3.0	1.2	-56.9	-13.0	-43.9	
2.545	-53.5	H	3.0	1.2	-52.3	-13.0	-39.3	
3.393	-52.9	H	3.0	1.2	-51.7	-13.0	-38.7	
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.								

Note – Pre-amp is part of substitution measurement.

LTE5, 1.4 MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: Sony Project #: 10721207 Date: 4/29/2015 Test Engineer: B. Kiewra Configuration: FCC ID: PY7-TM0062; Stand-alone (Y(Landscape) orientation); s/n CB5A23WPYJ Mode: LTE5 1.4BW 16-QAM									
<div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;"> Chamber </div> <div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;"> 3m Chamber </div>			<div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;"> Pre-amplifier </div> <div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;"> </div>		<div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;"> Filter </div> <div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;"> Filter 1 </div>		<div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;"> Limit </div> <div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;"> Part 22 </div>		
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 824.7MHz									
1.649	-58.4	V	3.0	1.2	-57.2	-13.0	-44.2		
2.474	-54.5	V	3.0	1.2	-53.3	-13.0	-40.3		
3.299	-52.8	V	3.0	1.2	-51.6	-13.0	-38.6		
1.649	-58.8	H	3.0	1.2	-57.6	-13.0	-44.6		
2.474	-54.9	H	3.0	1.2	-53.7	-13.0	-40.7		
3.299	-53.0	H	3.0	1.2	-51.8	-13.0	-38.8		
Mid Ch, 836.5MHz									
1.673	-58.6	V	3.0	1.2	-57.4	-13.0	-44.4		
2.510	-54.0	V	3.0	1.2	-52.8	-13.0	-39.8		
3.346	-52.0	V	3.0	1.2	-50.8	-13.0	-37.8		
1.673	-58.5	H	3.0	1.2	-57.3	-13.0	-44.3		
2.510	-54.6	H	3.0	1.2	-53.4	-13.0	-40.4		
3.346	-52.2	H	3.0	1.2	-51.0	-13.0	-38.0		
High Ch, 848.3MHz									
1.697	-58.4	V	3.0	1.2	-57.2	-13.0	-44.2		
2.545	-51.9	V	3.0	1.2	-50.7	-13.0	-37.7		
3.393	-52.1	V	3.0	1.2	-50.9	-13.0	-37.9		
1.697	-58.6	H	3.0	1.2	-57.4	-13.0	-44.4		
2.545	-53.5	H	3.0	1.2	-52.3	-13.0	-39.3		
3.393	-52.6	H	3.0	1.2	-51.4	-13.0	-38.4		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.									

Note – Pre-amp is part of substitution measurement.