

Radio Satellite Communication

Untertürkheimer Straße 6-10 . D-66117 Saarbrücken Telefon: +49 (0)681 598-9100 Telefax: -9075

RSC11

issue test report consist of 61 Pages

Page 1 (61)



# **Accredited Bluetooth Test Facility (BQTF)**

Test report no.: 4\_0658-01-02/02 FCC Part 24 1130402-BV FCC ID: PY71130402

CETECOM – ICT Services GmbH Untertürkheimerstr. 6-10 66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0 Fax: + 49 (0) 681 / 9075



Test report nr.:4 0658-01-02/02 Issue date: 2002-06-18 Page 2 (61)

### **Table of Contents**

- 1 General information
- 1.1 **Notes**
- Testing laboratory Details of applicant 1.2
- 1.3
- Application details 1.4
- Test item
- Test standards
- 2 Technical test
- 2.1 2.2 **Summary of test results**
- Test report
- **General information** 1

#### 1.1 **Notes**

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

#### 1.2 **Testing laboratory**

**CETECOM ICT Services GmbH** Untertürkheimer Straße 6 - 10 66117 Saarbrücken

Germany

Telefone : +49 681 598 - 9100 : +49 681 598 - 9075 Telefax

E-mail : Michael.Berg@ict.cetecom.de

: www.cetecom-ict.de Internet

Accredited testing laboratory

DAR-registration number: TTI-P-G-166/98-30

The Test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025.

Accredited Bluetooth<sup>™</sup> Test Facility (BQTF)

BLUETOOTH<sup>™</sup> is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM



### 1.3 Details of applicant

Name : Sony Ericsson Mobile Communications AB

Street : Nya Vattentornet City : SE-22188 Lund

**Country**: Sweden

Telephone: +46 46 193242
Telefax: +46 46 193295
Contact: Mr. Bo Johansson
Telephone: +46 46 193242

1.4 Application details

Date of receipt of application : 2002-06-03 Date of receipt of test item : 2002-06-08 Date of test : 2002-06-18

1.5 Test item

Type of equipment : **GSM 900/1800/1900 phone** 

Type designation : 1130402-BV Manufacturer : applicant

Street

City

Country

Serial number : PSN: KRY0338428 IMEI: 004601.01.278238.0.01

**Additional informations::** 

Frequency : 1850 – 1910 MHz

Type of modulation : 300KGXW

Number of channels : 300

Antenna : Integral antenna and socket

Power supply : AC/DC Adapter 100-240V AC/5.1V DC

Type CST-13 BML 162 157/ 1R1B Type 4020069-BV

Output power : 1.016W Peak, ERP: 0.616 W (Burst); EIRP:1.00 W (Burst)

Type of equipment : Temperature range :  $-30^{\circ}\text{C} - +60^{\circ}\text{C}$ 

FCC – ID : PY71130402

Hardware : 3302 Software : 8DOH

1.6 Test standards: FCC Part 24



### 2 Technical test

The radiated measurements were performed vertical and horizontal over the whole frequency range. We start at 1 m high with vertical receiving antenna and rotate the dish continuously. During rotation we use the antenna lift system to vary the high from 1 to 4 m. So we find maximum radiation output. At this points we do manual re-measurements. After this we do the same measurements in horizontal position of the receiving antenna. This (horizontal and vertical) is made for all the three planes of the test sample. We use the maximum received results.

All measurements was done based on ANSI C63.4.

### 2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

FINAL VERDICT: PASS

**Technical responsibility for area of testing:** 

2002-04-29 RSC 8411 Berg M.

Date Section Name Signature

**Technical responsibility for area of testing:** 

2002-04-29 RSC8412 Hausknecht D. U. Koun Ke chil

Date Section Name Signature



2.2 Testreport

**TEST REPORT** 

Test report no.: 4\_0658-01-02/02



### TEST REPORT REFERENCE

### LIST OF MEASUREMENTS

| PARAMETER TO BE MEASURED Paragraph     | PAGE |
|--|------|
| POWER OUTPUT SUBCLAUSE § 24.232        | 7    |
| FREQUENCY STABILITY SUBCLAUSE § 24.235 | 9    |
| AFC FREQ ERROR vs. VOLTAGE             | 10   |
| AFC FREQ ERROR vs. TEMPERATURE         | 10   |
| EMISSIONS LIMITS §24.238               | 12   |
| OCCUPIED BANDWIDTH §2.989              | 37   |
| CONDUCTED EMISSIONS § 15.107/207       | 44   |
| TEST SITE                              | 48   |
| PHOTOCD APHS OF THE FOUIDMENT          | 51   |



Test report nr.:4 0658-01-02/02 Issue date: 2002-06-18 Page 7 (61)

#### **POWER OUTPUT**

SUBCLAUSE § 24.232

#### **Summery:**

This paragraph contains both average , peak output powers and EIRP measurements for the mobile station.

In all cases, the peak output power is wthin the required mask (this mask is specified in the JTC standarts, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

#### **Method of Measurements:**

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Spectrum Analyzer FSIQ 26 (peak and average)

This measurements were done at 3 frequencies, 1850,2 MHz, 1880,0 MHz and 1909,8 MHz (bottom, middle and top of operational frequency range)

Peak power and Average power was measured with a calibrated Signal Analyzer (FSIQ from R&S). Peak power: max Power of the Signal measured with 3 MHz ResBW and 3 MHz VBW. Average power is the integrated Power over Time from the modulated GSM Signal in the burst.

#### Limits:

| Power Step | Nominal Peak Output Power | Tolerance (dB) |
|------------|---------------------------|----------------|
|            | (dBm)                     |                |
| 0          | +30                       | ±2             |

#### **Power Measurements:**

#### **Conducted:**

| Frequency<br>(MHz) | Power Step    | Peak<br>Output Power<br>(dBm) | Burst Average<br>Output Power<br>(dBm) |
|--------------------|---------------|-------------------------------|--|
| 1850.2             | 0             | 30.07                         | 29.97                                  |
| 1880.0             | 0             | 29.05                         | 28.95                                  |
| 1909.8             | 0             | 29.55                         | 29.35                                  |
| Measuremen         | t uncertainty | ±0.:                          | 5 dB                                   |



#### **EIRP Measurements**

Description: This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

#### Method of Measurement:

- 1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference center of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
- 2. A "reference path loss" is established as Pin + 2.1 Pr.
- 3. The EUT is substituted for the dipole at the reference centre of the chamber. The EUT is put into CW test mode and a scan is performed to obtain the radiation pattern.
- 4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs is identified.
- 5. The EUT is then put into pulse mode at its maximum power level (Power Step 0).
- 6. "Gated mode" power measurements are performed with the receiving antenna placed at the co-ordinates determined in Step 3 to determine the output power as defined in FCC Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
- 7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.1 dBi) and known input power (Pin).
- 8. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.1dBi.

#### Limits:

| Power Step | Burst Average EIRP (dBm) |  |
|------------|--------------------------|--|
| 0          | <33                      |  |

#### **Power Measurements:**

#### Radiated:

|                  |            | BURST AVERAGE<br>(dBm) |       | MODULATION AVERAGE |       |  |
|------------------|------------|------------------------|-------|--------------------|-------|--|
| Frequency        | Power Step |                        |       | (dBm)              |       |  |
| (MHz)            |            | EIRP                   | ERP   | EIRP               | ERP   |  |
| 1850.2           | 0          | 30.00                  | 27.90 | 21.00              | 18.90 |  |
| 1880.0           | 0          | 29.40                  | 27.30 | 20.40              | 18.30 |  |
| 1909.8           | 0          | 28.30                  | 26.20 | 19.30              | 17.20 |  |
| Measurement unce | rtainty    | ±3 dB                  |       | ±3                 |       |  |



#### FREQUENCY STABILITY

**SUBCLAUSE § 24.235** 

#### **Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a "call mode". This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER..

- 1. Measure the carrier frequency at room temperature.
- 2. Subject the mobile station to overnight soak at -30 C.
- 3. With the mobile station, powered with 3.6 Volts, connected to the CMU 200 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
- 4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
- 5. Re-measure carrier frequency at room temperature with nominal 3.6 Volts. Vary supply voltage from minimum
- 3.4 Volts to maximum 4.0 Volts, in 13 steps remeasuring carrier frequency at each voltage. Pause at 3.6 V ac Volts for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
- 6. Subject the mobile station to overnight soak at +60 C.
- 7. With the mobile station, powered with 3.6 Volts, connected to the CMU 200 and in a simulated call on channel 661(centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
- 8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
- 9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

#### **Measurement Limit:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. This transceiver is specified to operate with an input voltage of between 3.4 V dc and 4.0 V dc, with a nominal voltage of 3.6V dc...



Test report nr.:4 0658-01-02/02 Issue date: 2002-06-18 Page 10 (61)


### AFC FREQ ERROR vs. VOLTAGE


| Voltage<br>(V) | Frequency Error<br>(Hz) | Frequency Error (%) | Frequency Error<br>(ppm) |
|----------------|-------------------------|---------------------|--------------------------|
| 3.40           | -86                     | -0,00000457         | -0,0457                  |
| 3.45           | -85                     | -0,00000452         | -0,0452                  |
| 3.50           | -95                     | -0,00000505         | -0,0505                  |
| 3.55           | -84                     | -0,00000447         | -0,0447                  |
| 3.60           | -85                     | -0,00000452         | -0,0452                  |
| 3.65           | -93                     | -0,00000495         | -0,0495                  |
| 3.70           | -78                     | -0,00000415         | -0,0415                  |
| 3.75           | -97                     | -0,00000516         | -0,0516                  |
| 3.80           | -103                    | -0,00000548         | -0,0548                  |
| 3.85           | -92                     | -0,00000489         | -0,0489                  |
| 3.90           | -82                     | -0,00000436         | -0,0436                  |
| 3.95           | -89                     | -0,00000473         | -0,0473                  |
| 4.00           | -84                     | -0,00000447         | -0,0447                  |

## AFC FREQ ERROR vs. TEMPERATURE

| TEMPERATURE | Frequency Error | Frequency Error | Frequency Error |
|-------------|-----------------|-----------------|-----------------|
| (°C)        | (Hz)            | (%)             | (ppm)           |
| -30         | -189            | -0,00001005     | -0,1005         |
| -20         | -114            | -0,00000606     | -0,0606         |
| -10         | -104            | -0,00000553     | -0,0553         |
| ±0.0        | -98             | -0,00000521     | -0,0521         |
| +10         | -88             | -0,00000468     | -0,0468         |
| +20         | -79             | -0,00000420     | -0,0420         |
| +30         | -88             | -0,00000468     | -0,0468         |
| +40         | -97             | -0,00000516     | -0,0516         |
| +50         | -112            | -0,00000596     | -0,0596         |
| +60         | -120            | -0,00000638     | -0,0638         |



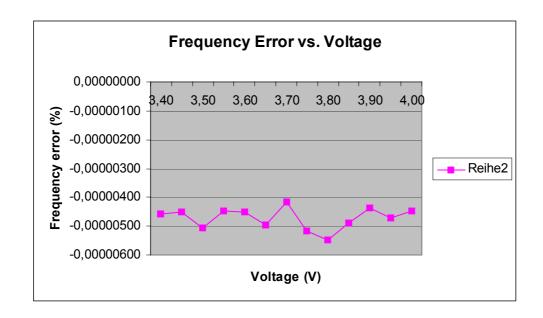

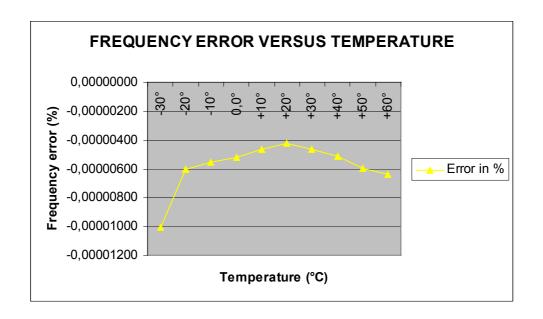



Test report nr.:4 0658-01-02/02 Issue date: 2002-06-18 Page 12 (61)

#### **EMISSIONS LIMITS**

**§24.238** 

#### **Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognised by the FCC to be in compliance for a 3 and a10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

### The final open field emission test procedure is as follows:

- a) The test item was placed on a 0. 8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and I MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters using the equation shown below:

 $Pg = E^2 4\pi d^2 / 120\pi = E^2 d^2 / 30$ where: P = power in watts

where. F – power in watts

g = arithmetic gain of transmitting antenna over isotropic radiator.

E = maximum field strength in volts/meter

d = measurement distance in meter

Using a dipole gain of 1.67 or 2.2 dB and a test distance of 3 meters, this equation reduces to:

P(dBm) = E(dBuV/m) - 97.2dB

#### **Measurement Limit:**

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.



#### **Measurement Results:**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1879.8 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:


No Radiated Emissions less than 20 dB below the limit was found!






### Channel 512 (up to 4 GHz horizontal and vertical)

Peaks at 1850.2 MHz shows the carrier frequency suppressed by narrow band rejection filter

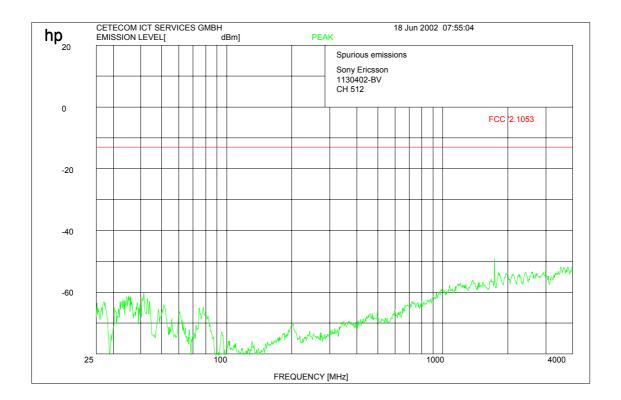




### Channel 512 (up to 12 GHz worst case)

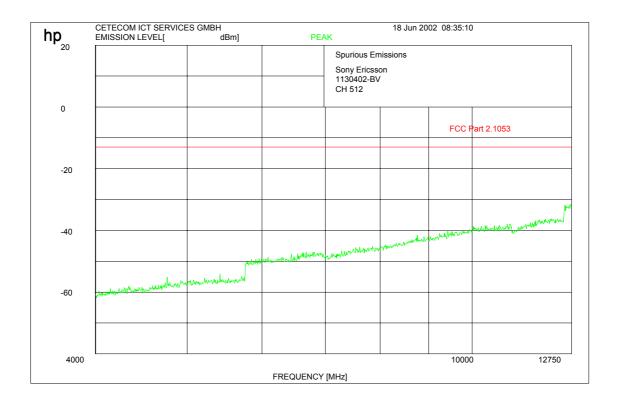



### Channel 512: up to 20 GHz

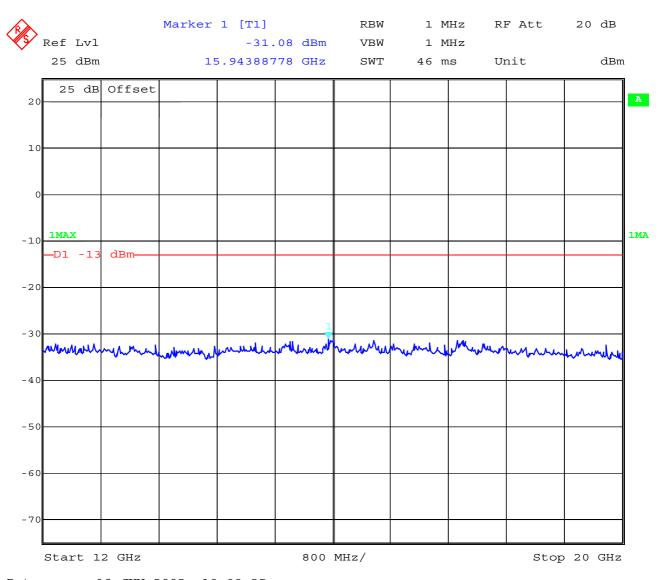


Date: 18.JUN.2002 10:00:25




## Channel 661 (up to 4 GHz)

Peaks at 1880 MHz shows the carrier frequency suppressed by narrow band rejection filter

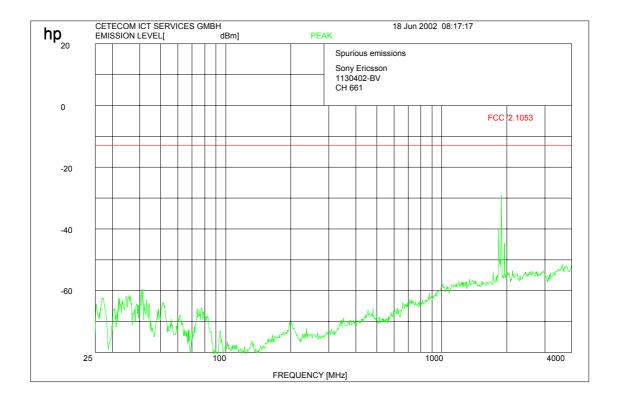




Channel 661 (up to 12 GHz)

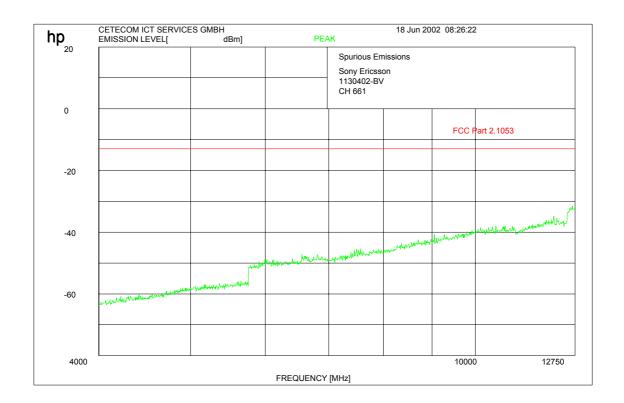



Channel 661: up to 20 GHz

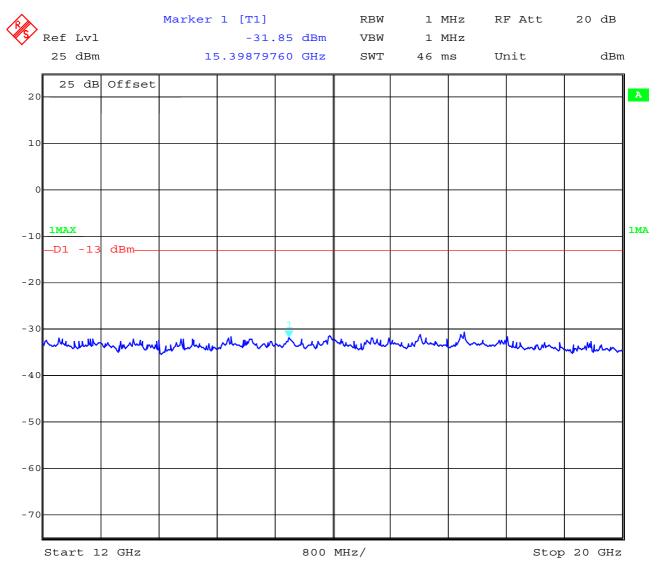


Date: 18.JUN.2002 10:00:59




### Channel 810 up to 4 GHz

Peak at 1909.8 MHz shows the carrier frequency suppressed by narrow band rejection filter

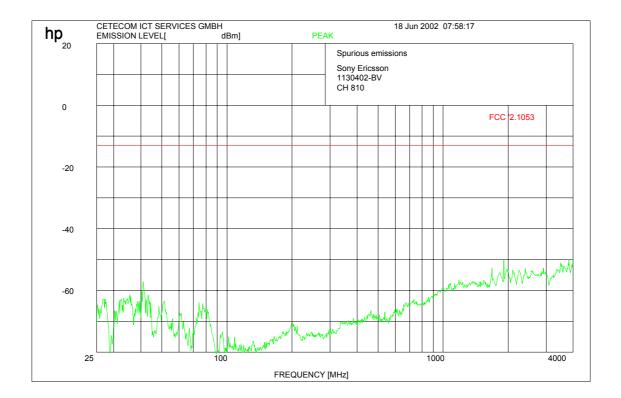




Channel 810 up to 12 GHz

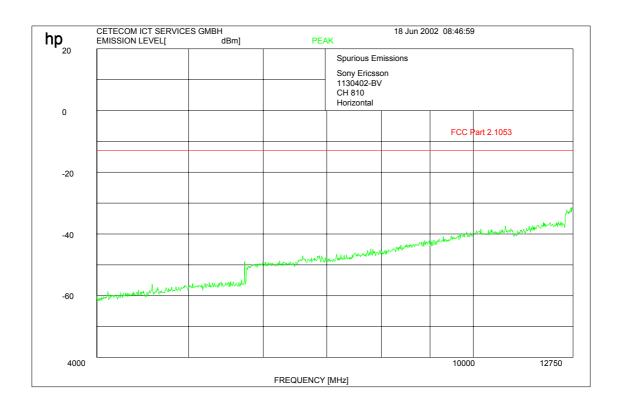



Channel 810: up to 20 GHz

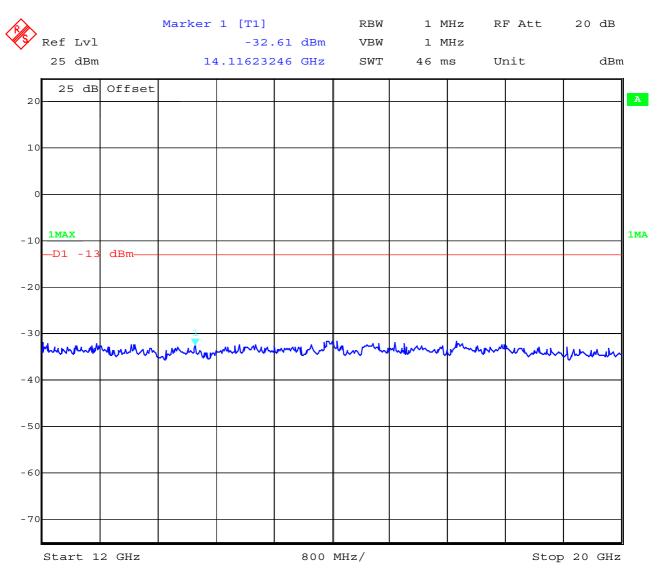

Date: 18.JUN.2002 10:01:21




Channel 661 (this is valid for all 3 channels and up to 1 GHz) Idle-Mode

No Radiated Emissions less than 20 dB below the limit was found!






Channel 661 (this is valid for all 3 channels and up to 4 GHz, Idle-Mode

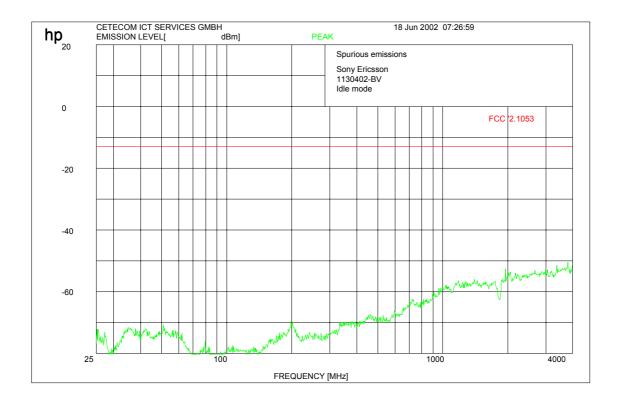




Channel 661 (this is valid for all 3 channels and up to 12 GHz, Idle-Mode

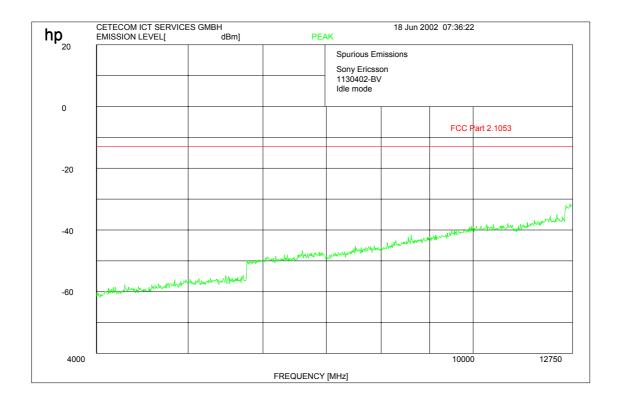



### Channel 661 (this is valid for all 3 channels and up to 20 GHz, Idle-Mode

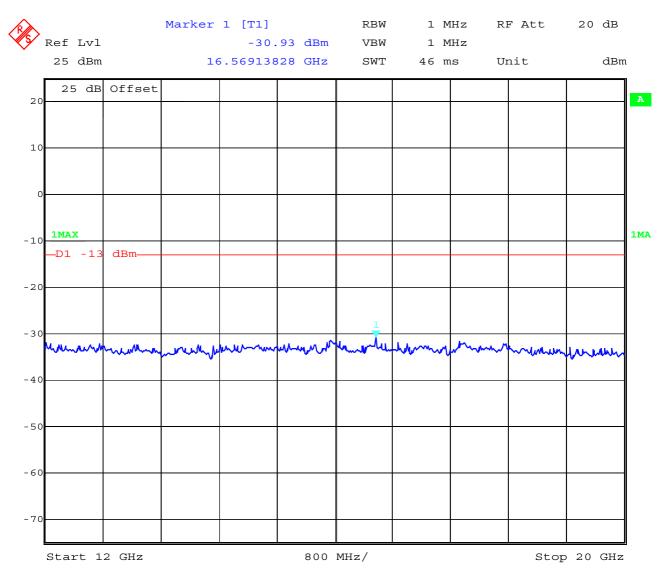



### **Conducted Spurious Emissions**

#### **Measurement Procedure:**

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

- 1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.
- 2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

### **USPCS Transmitter**

#### **Channel Frequency**

512 1850.2 MHz

661 1880.0 MHz

810 1909.8 MHz

#### **Measurement Limit:**

Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0

dBm, this becomes a constant specification limit of -13 dBm.





|               | EMIS            | SION LIMITAT          | TIONS                 |          |
|---------------|-----------------|-----------------------|-----------------------|----------|
|               | amplitude<br>of | limit<br>max. allowed | actual<br>attenuation |          |
| f             | emission        | emmision              | below                 | results  |
| (MHz)         | (dBm)           | power                 | frequency of          |          |
|               |                 | (dBm)                 | operation (dBc)       |          |
|               |                 | CH 512                |                       |          |
| 1850.2        | 30.00           | -13.0                 |                       | carrier  |
| 1618.75       | -34.42          | (43.00 dBc)           | 64.42                 | complies |
| 1850.00       | -17.80          |                       | 47.80                 | complies |
| 1932.71       | -30.99          |                       | 60.99                 | complies |
| 2078.12       | -33.39          |                       | 33.39                 | complies |
| •             |                 | CH 661                |                       |          |
| 1880.0        | 29.40           | -13.0                 |                       | carrier  |
| 1641.77       | -33.64          | (42.40dBc)            | 63.82                 | complies |
| 1879.00       | -26.49          |                       | 55.89                 | complies |
| 1926.29       | -30.15          |                       | 59.55                 | complies |
| 2107.75       | -36.44          |                       | 65.88                 | complies |
| •             | '               | CH 810                |                       | •        |
| 1909.8        | 28.30           | -13.0                 |                       | carrier  |
| 1675.35       | -33.80          | (41.30 dBc)           | 62.10                 | complies |
| 1910.01       | -15.73          | •                     | 44.03                 | complies |
| 2636.01       | -36.94          |                       | 65.24                 | •        |
|               |                 |                       |                       | _        |
| Measurement u | ıncertainty     |                       | $\pm 0.5 dB$          |          |




**Measurements:** 

Channel: 512




Date: 18.JUN.2002 09:33:27




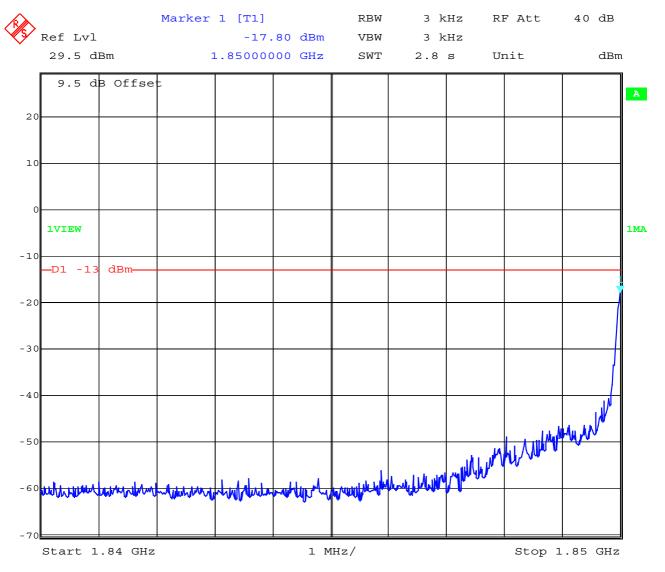




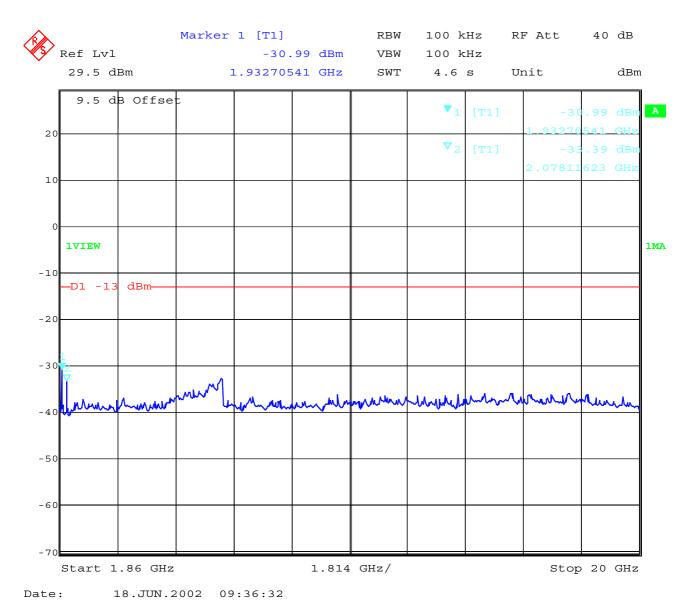




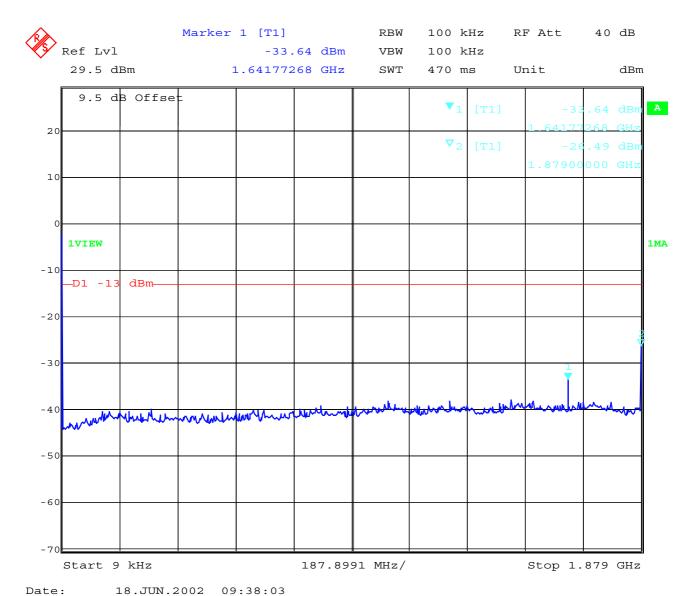



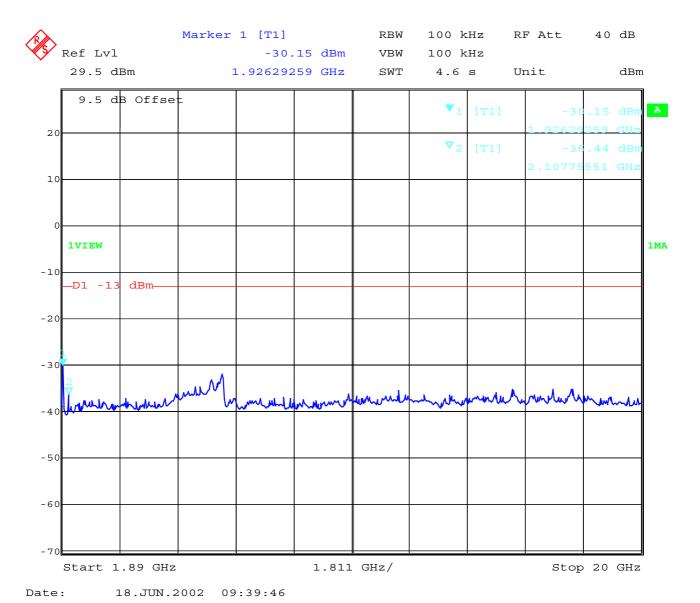




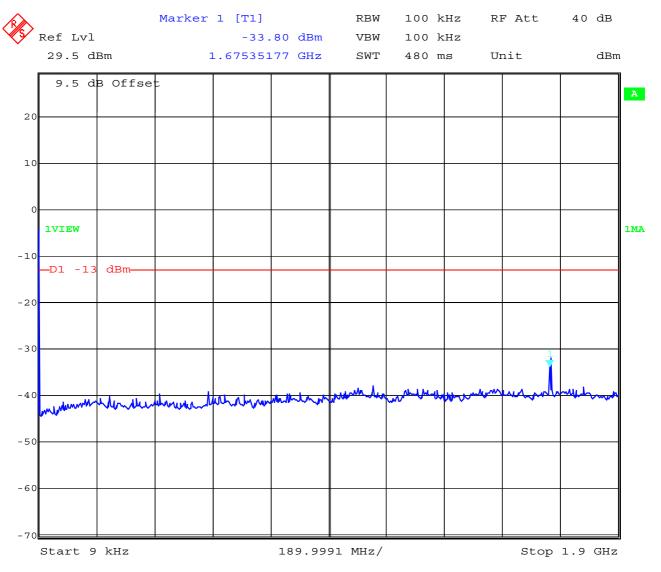




#### **Channel 810**

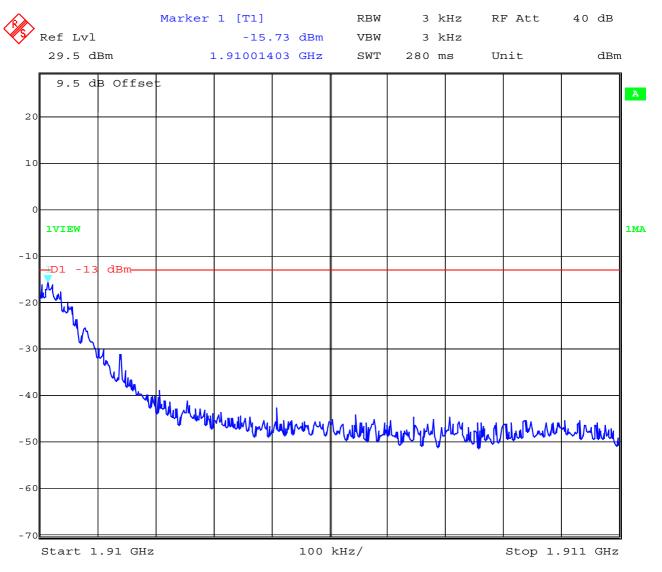

Date: 18.JUN.2002 09:43:54



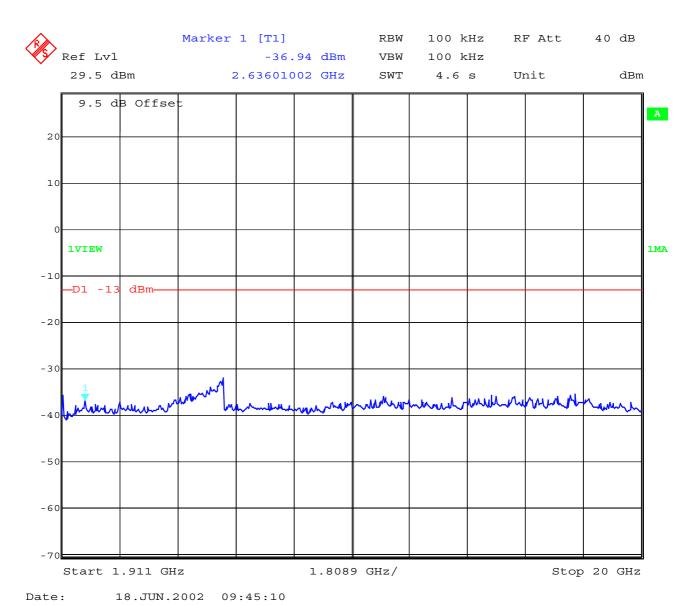



#### OCCUPIED BANDWIDTH

**§2.989** 

#### **Occupied Bandwidth Results**


Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.

| Frequency  | 99% Occupied Bandwidth | -26 dBc Bandwidth |
|------------|------------------------|-------------------|
| 1850.2 MHz | 286.573                | 310.621           |
| 1880.0 MHz | 284.569                | 314.629           |
| 1909.8 MHz | 280.561                | 314.629           |

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 287 kHz, this equates to a resolution bandwidth of at least 2.9 kHz. For this testing, a resolution bandwidth 3.0 kHz was used




Channel 512 99% Occupied Bandwidth

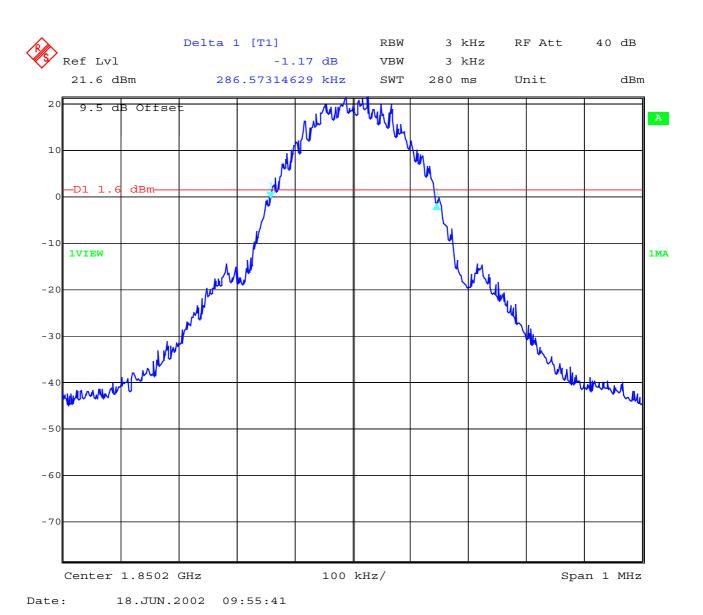




# Channel 512 -26 dBc Bandwidth

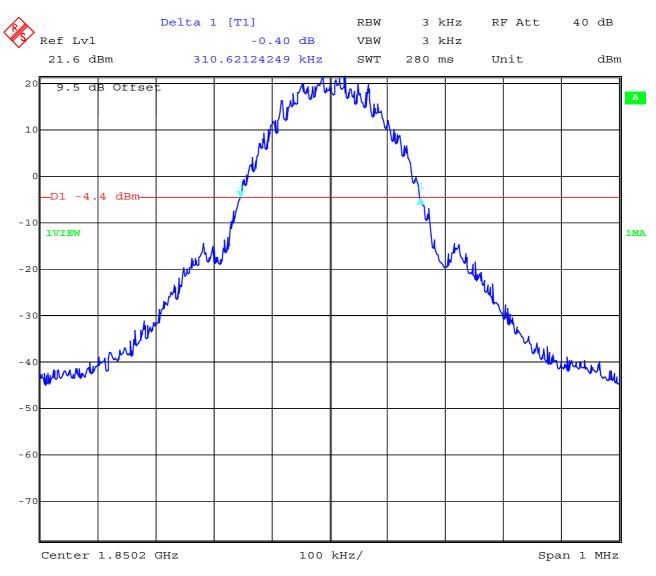

Date: 18.JUN.2002 09:56:45




#### Channel 661 99% Occupied Bandwidth

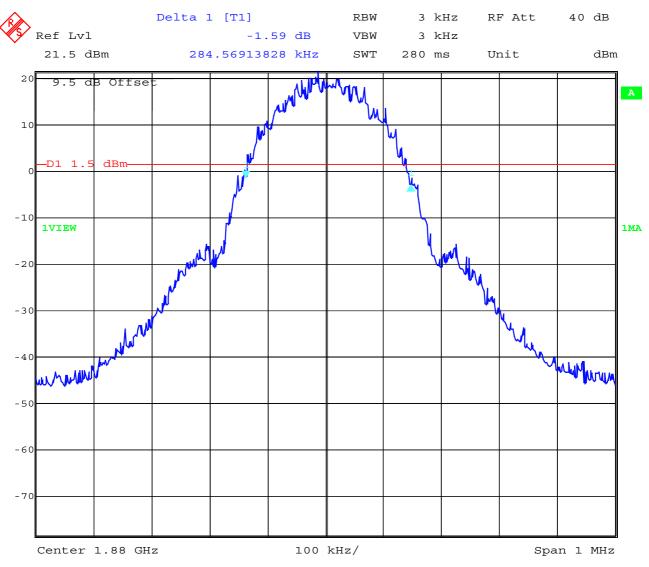




# Channel 661 -26 dBc Bandwidth

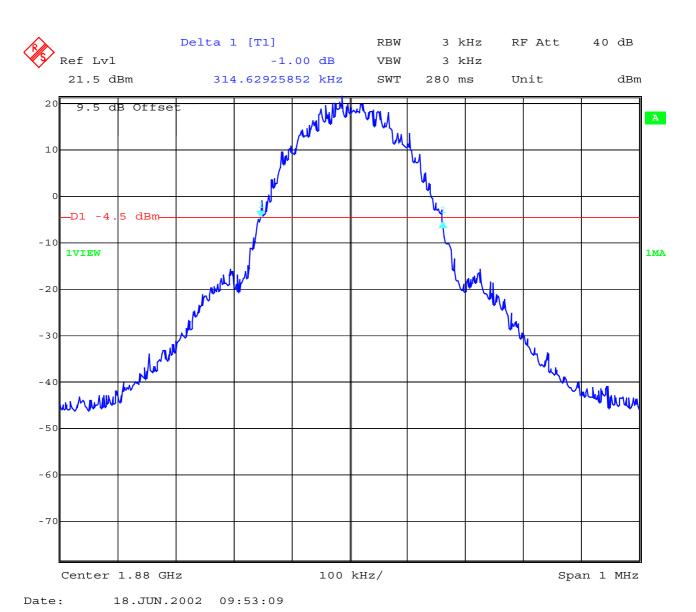




### Channel 810 99% Occupied Bandwidth

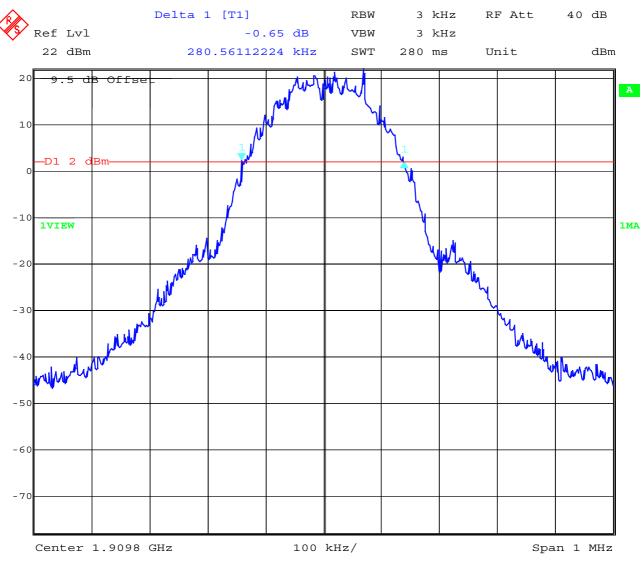

Date: 18.JUN.2002 09:49:31



# Channel 810 -26 dBc Bandwidth

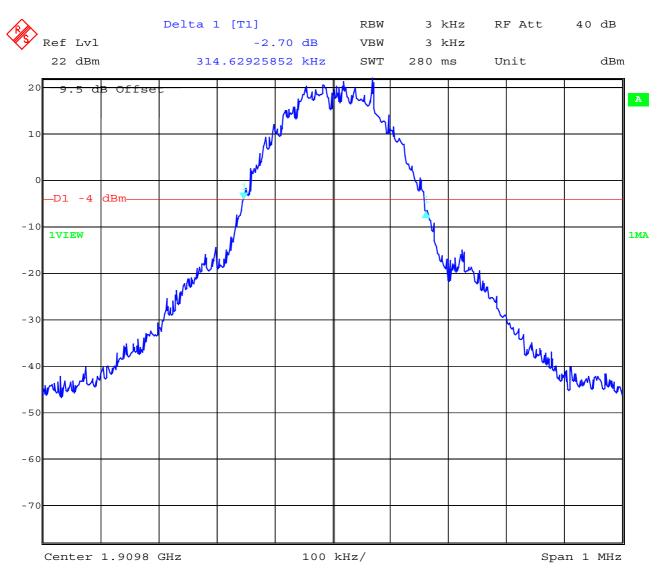

Date: 18.JUN.2002 09:50:11



#### **Conducted emissions**

§ 15.107/207

EUT: 1130402-BV Applicant: Sony Ericsson Operating condition: Tx/Rx-mode

Test Site: CETECOM ICT Services GmbH Saarbrücken, Room 006

**Operator:** Berg M.

Power Supply: 115V/60Hz Start of Test: 18.06.02 / 13:35:45


**SCANTABELLE: "FCC Part 15 AC"** 

**Kurzbeschreibung:** Voltage Mains 1.60

Start- Stop- Schritt- Detektor Meß- ZF- Transducer

Frequenz Frequenz weite zeit Bandbr.

450.0 kHz 30.0 MHz 6.0 kHz MaxPeak 100.0 ms 10 kHz ESH3-Z5 L1 2209

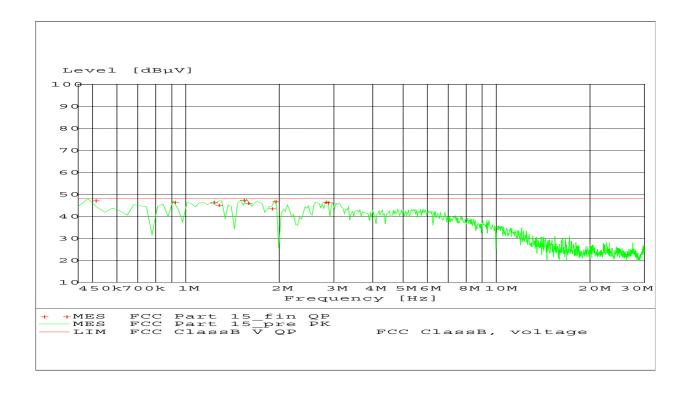



#### **CONDUCTED EMISSIONS**

§ 15.207

### MEßERGEBNIS: "FCC Part 15\_fin QP"

18.06.02 13:39

| 8.06.02 13: |       |        |       |        |         |
|-------------|-------|--------|-------|--------|---------|
| Frequenz    | Pegel | Transd | Limit | Margin | Line PE |
| MHz         | dBμV  | dB     | dΒμV  | dB     |         |
| 0.510000    | 47.40 | 10.0   | 48    | 0.5 N  | GND     |
| 0.918000    | 46.60 | 10.4   | 48    | 1.3 N  | GND     |
| 1.224000    | 46.70 | 10.4   | 48    | 1.3 N  | FLO     |
| 1.272000    | 45.30 | 10.3   | 48    | 2.6 N  | FLO     |
| 1.530000    | 47.60 | 10.4   | 48    | 0.4 N  | GND     |
| 1.578000    | 46.20 | 10.3   | 48    | 1.7 N  | GND     |
| 1.884000    | 43.70 | 10.4   | 48    | 4.3 N  | FLO     |
| 1.938000    | 46.80 | 10.4   | 48    | 1.1 N  | FLO     |
| 2.802000    | 46.60 | 10.4   | 48    | 1.4 N  | FLO     |
| 2.856000    | 46.30 | 10.4   | 48    | 1.7 N  | FLO     |
|             |       |        |       |        |         |

#### Limits

### **SUBCLAUSE § 15.107 / 207**

| Frequency (MHz) | Conducted Limits (µV)      |
|-----------------|----------------------------|
| 0.45 - 1.705    | 1000 / 60 dBμV (Class A)   |
| 1.705 - 30.0    | 3000 / 69.5 dBμV (Class A) |
| 0.45 - 30.0     | 250 / 48 dBμV (Class B)    |



#### TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

|    | T                      | 75        | 3.5                    | G . 1. 1. 1. 1. |
|----|------------------------|-----------|------------------------|-----------------|
| No | Instrument/Ancillary   | Type      | Manufacturer           | Serial No.      |
| 01 | Spectrum Analyzer      | 8566 A    | Hewlett-Packard        | 1925A00257      |
| 02 | Analyzer Display       | 8566 A    | Hewlett-Packard        | 1925A00860      |
| 03 | Oscilloscope           | 7633      | Tektronix              | 230054          |
| 04 | Radio Communication    | CMTA 54   | Rohde & Schwarz        | 894 043/010     |
|    | Analyzer               |           |                        |                 |
| 05 | System Power Supply    | 6038 A    | Hewlett-Packard        | 2848A07027      |
| 06 | Signal Generator       | 8111 A    | Hewlett-Packard        | 2215G00867      |
| 07 | Signal Generator       | 8662 A    | Hewlett-Packard        | 2224A01012      |
| 08 | Function Generator     | AFGU      | Rohde & Schwarz        | 862 480/032     |
| 09 | Regulating Transformer | MPL       | Erfi                   | 91350           |
| 10 | LISN                   | NNLA 8120 | Schwarzbeck            | 8120331         |
| 11 | Relay-Matrix           | PSU       | Rohde & Schwarz        | 893 285/020     |
| 12 | Power-Meter            | 436 A     | Hewlett-Packard        | 2101A12378      |
| 13 | Power-Sensor           | 8484 A    | Hewlett-Packard        | 2237A10156      |
| 14 | Power-Sensor           | 8482 A    | Hewlett-Packard        | 2237A00616      |
| 15 | Modulation Meter       | 9008      | Racal-Dana             | 2647            |
| 16 | Frequency Counter      | 5340 A    | <b>Hewlett-Packard</b> | 1532A03899      |
| 17 | Anechoic Chamber       | 1         | MWB                    | 87400/002       |
| 18 | Spectrum Analyzer      | 85660 B   | Hewlett-Packard        | 2747A05306      |
| 19 | Analyzer Display       | 85662 A   | Hewlett-Packard        | 2816A16541      |
| 20 | Quasi Peak Adapter     | 85650 A   | Hewlett-Packard        | 2811A01131      |
| 21 | RF-Preselector         | 85685 A   | Hewlett-Packard        | 2833A00768      |
| 22 | Biconical Antenna      | 3104      | Emco                   | 3758            |
| 23 | Log. Per. Antenna      | 3146      | Emco                   | 2130            |
| 24 | Double Ridged Horn     | 3115      | Emco                   | 3088            |
| 25 | EMI-Testreceiver       | ESAI      | Rohde & Schwarz        | 863 180/013     |
| 26 | EMI-Analyzer-Display   | ESAI-D    | Rohde & Schwarz        | 862 771/008     |
| 27 | Biconical Antenna      | HK 116    | Rohde & Schwarz        | 888 945/013     |
| 28 | Log. Per. Antenna      | HL 223    | Rohde & Schwarz        | 825 584/002     |
| 29 | Relay-Switch-Unit      | RSU       | Rohde & Schwarz        | 375 339/002     |
| 30 | Highpass               | HM985955  | FSY Microwave          | 001             |
| 31 | Amplifier              | P42-GA29  | Tron-Tech              | B 23602         |
| 32 | Anechoic Chamber       |           | Frankonia              |                 |
| 33 | Control Computer       | PSM 7     | Rohde & Schwarz        | 834 621/004     |
| 34 | EMI Test Receiver      | ESMI      | Rohde & Schwarz        | 827 063/010     |
| 35 | EMI Test Receiver      | Display   | Rohde & Schwarz        | 829 808/010     |
|    |                        | I J       |                        |                 |




#### TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

| No   | Instrument/Ancillary   | Type   | Manufacturer  | Serial No.  |
|--|--|--|---|---|
| 36   | Control Computer   | HD 100   | Deisel  | 100/322/93  |
| 37   | Relay Matrix   | PSN  | Rohde & Schwarz   | 829 065/003   |
| 38   | Control Unit   | GB 016 A2  | Rohde & Schwarz   | 344 122/008   |
| 39   | Relay Switch Unit  | RSU  | Rohde & Schwarz   | 316 790/001   |
| 40   | Power Supply   | 6032A  | Hewlett Packard   | 2846A04063  |
| 41   | Spectrum Monitor   | EZM  | Rohde & Schwarz   | 883 720/006   |
| 42   | Measuring Receiver   | ESH 3  | Rohde & Schwarz   | 890 174/002   |
| 43   | Measuring Receiver   | ESVP   | Rohde & Schwarz   | 891 752/005   |
| 44   | Bicon Ant. 20-300MHz   | HK 116   | Rohde & Schwarz   | 833 162/011   |
| 45   | Logper Ant. 0.3-1 GHz  | HL 223   | Rohde & Schwarz   | 832 914/010   |
| 46   | Amplifier 0.1-4 GHz  | AFS4   | Miteq Inc.  | 206461  |
| 47   | Logper Ant. 1-18 GHz   | HL 024 A2  | Rohde & Schwarz   | 342 662/002   |
| 48   | Polarisation Network   | HL 024 Z1  | Rohde & Schwarz   | 341 570/002   |
| 49   | Double Ridged Horn   | 3115   | EMCO  | 9107-3696   |
|  | Antenna 1-26.5 GHz   |  |   |   |
| 50   | Microw. Sys. Amplifier   | 8317A  | Hewlett Packard   | 3123A00105  |
|  | 0.5- 26.5 GHz  |  |   |   |
| 51   | Audio Analyzer   | UPD  | Rohde & Schwarz   | 1030.7500.04  |
| 52   | Controler  | PSM 7  | Rohde & Schwarz   | 883 086/026   |
| 53   | DC V-Network   | ESH3-Z6  | Rohde & Schwarz   | 861 406/005   |
| 54   |  |  |   |   |
|  | DC V-Network   | ESH3-Z6  | Rohde & Schwarz   | 893 689/012   |
| 55   | DC V-Network AC 2 Phase V-Network  | ESH3-Z6<br>ESH3-Z5   | Rohde & Schwarz Rohde & Schwarz   | 893 689/012<br>861 189/014  |
| 55<br>56   |  |  |   |   |
| 55   | AC 2 Phase V-Network   | ESH3-Z5  | Rohde & Schwarz   | 861 189/014   |
| 55<br>56<br>57<br>58   | AC 2 Phase V-Network AC 2 Phase V-Network  | ESH3-Z5<br>ESH3-Z5   | Rohde & Schwarz Rohde & Schwarz   | 861 189/014<br>894 981/019  |
| 55<br>56<br>57   | AC 2 Phase V-Network AC 2 Phase V-Network AC-3 Phase V-Network   | ESH3-Z5<br>ESH3-Z5<br>ESH2-Z5                                      | Rohde & Schwarz<br>Rohde & Schwarz<br>Rohde & Schwarz   | 861 189/014<br>894 981/019<br>882 394/007<br>2933A05441<br>881 487/021  |
| 55<br>56<br>57<br>58<br>59<br>60                               | AC 2 Phase V-Network AC 2 Phase V-Network AC-3 Phase V-Network Power Supply RF-Test Receiver Spectrum Monitor  | ESH3-Z5<br>ESH3-Z5<br>ESH2-Z5<br>6032A<br>ESVP.52<br>EZM           | Rohde & Schwarz   | 861 189/014<br>894 981/019<br>882 394/007<br>2933A05441<br>881 487/021<br>883 086/026   |
| 55<br>56<br>57<br>58<br>59<br>60<br>61                         | AC 2 Phase V-Network AC 2 Phase V-Network AC-3 Phase V-Network Power Supply RF-Test Receiver   | ESH3-Z5<br>ESH3-Z5<br>ESH2-Z5<br>6032A<br>ESVP.52                  | Rohde & Schwarz   | 861 189/014<br>894 981/019<br>882 394/007<br>2933A05441<br>881 487/021  |
| 55<br>56<br>57<br>58<br>59<br>60                               | AC 2 Phase V-Network AC 2 Phase V-Network AC-3 Phase V-Network Power Supply RF-Test Receiver Spectrum Monitor  | ESH3-Z5<br>ESH3-Z5<br>ESH2-Z5<br>6032A<br>ESVP.52<br>EZM           | Rohde & Schwarz                                 | 861 189/014<br>894 981/019<br>882 394/007<br>2933A05441<br>881 487/021<br>883 086/026<br>881 515/002<br>882 943/029                               |
| 55<br>56<br>57<br>58<br>59<br>60<br>61<br>62<br>63             | AC 2 Phase V-Network AC 2 Phase V-Network AC-3 Phase V-Network Power Supply RF-Test Receiver Spectrum Monitor RF-Test Receiver Relay Matrix Relay Matrix                   | ESH3-Z5 ESH3-Z5 ESH2-Z5 6032A ESVP.52 EZM ESH3 PSU PSU             | Rohde & Schwarz                 | 861 189/014<br>894 981/019<br>882 394/007<br>2933A05441<br>881 487/021<br>883 086/026<br>881 515/002  |
| 55<br>56<br>57<br>58<br>59<br>60<br>61<br>62<br>63<br>64       | AC 2 Phase V-Network AC 2 Phase V-Network AC-3 Phase V-Network Power Supply RF-Test Receiver Spectrum Monitor RF-Test Receiver Relay Matrix Relay Matrix Spectrum Analyzer | ESH3-Z5 ESH3-Z5 ESH2-Z5 6032A ESVP.52 EZM ESH3 PSU PSU PSU FSIQ 26 | Rohde & Schwarz                                 | 861 189/014<br>894 981/019<br>882 394/007<br>2933A05441<br>881 487/021<br>883 086/026<br>881 515/002<br>882 943/029<br>828 628/007<br>119.6001.27 |
| 55<br>56<br>57<br>58<br>59<br>60<br>61<br>62<br>63             | AC 2 Phase V-Network AC 2 Phase V-Network AC-3 Phase V-Network Power Supply RF-Test Receiver Spectrum Monitor RF-Test Receiver Relay Matrix Relay Matrix                   | ESH3-Z5 ESH3-Z5 ESH2-Z5 6032A ESVP.52 EZM ESH3 PSU PSU             | Rohde & Schwarz                 | 861 189/014<br>894 981/019<br>882 394/007<br>2933A05441<br>881 487/021<br>883 086/026<br>881 515/002<br>882 943/029<br>828 628/007                |
| 55<br>56<br>57<br>58<br>59<br>60<br>61<br>62<br>63<br>64       | AC 2 Phase V-Network AC 2 Phase V-Network AC-3 Phase V-Network Power Supply RF-Test Receiver Spectrum Monitor RF-Test Receiver Relay Matrix Relay Matrix Spectrum Analyzer | ESH3-Z5 ESH3-Z5 ESH2-Z5 6032A ESVP.52 EZM ESH3 PSU PSU PSU FSIQ 26 | Rohde & Schwarz | 861 189/014<br>894 981/019<br>882 394/007<br>2933A05441<br>881 487/021<br>883 086/026<br>881 515/002<br>882 943/029<br>828 628/007<br>119.6001.27 |
| 55<br>56<br>57<br>58<br>59<br>60<br>61<br>62<br>63<br>64<br>65 | AC 2 Phase V-Network AC 2 Phase V-Network AC-3 Phase V-Network Power Supply RF-Test Receiver Spectrum Monitor RF-Test Receiver Relay Matrix Relay Matrix Spectrum Analyzer | ESH3-Z5 ESH3-Z5 ESH2-Z5 6032A ESVP.52 EZM ESH3 PSU PSU PSU FSIQ 26 | Rohde & Schwarz | 861 189/014<br>894 981/019<br>882 394/007<br>2933A05441<br>881 487/021<br>883 086/026<br>881 515/002<br>882 943/029<br>828 628/007<br>119.6001.27 |



### <u>Test site</u> RADIATED EMISSIONS

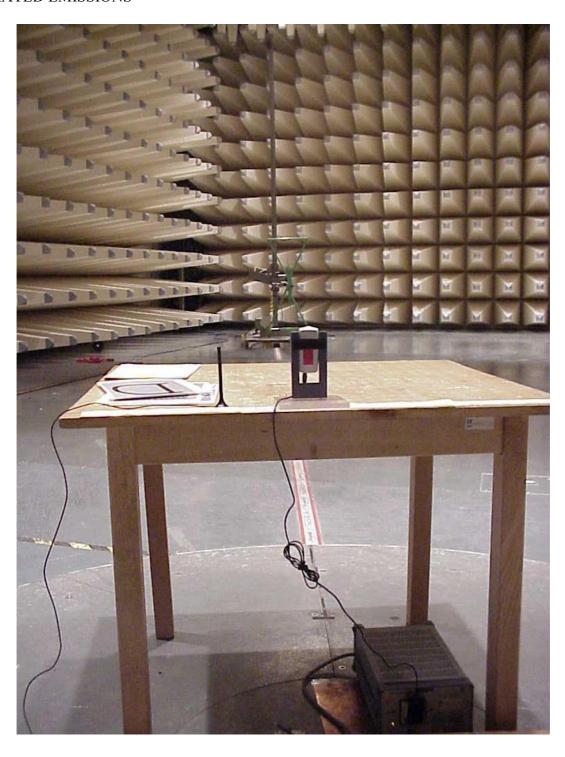




#### **Test site**





## **Test site**

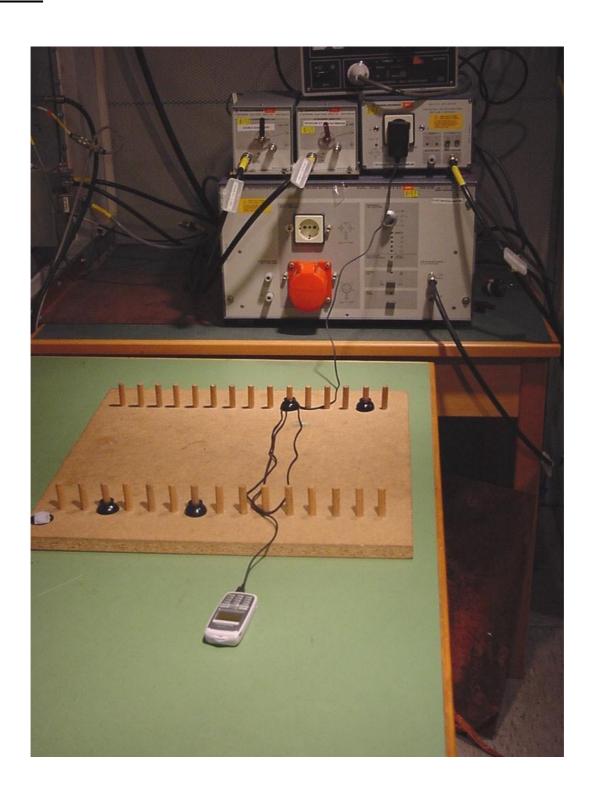



### **Photographs of the equipment**





### Photographs of the equipment





### Photographs of the equipment





### Photographs of the equipment





### Photographs of the equipment





### Photographs of the equipment





### Photographs of the equipment






### Photographs of the equipment





### Photographs of the equipment

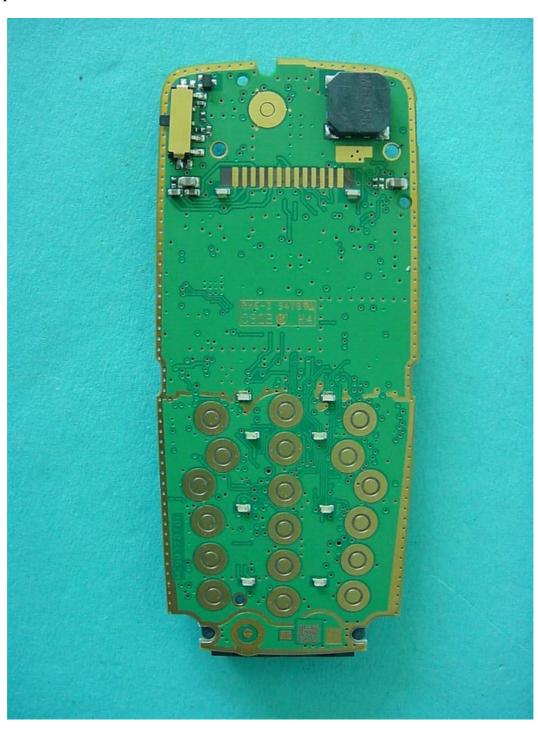



### Photographs of the equipment





#### Photographs of the equipment

