



CERTIFICATION TEST REPORT

Report Number. : 12132879-E5V3

Applicant : SONY MOBILE COMMUNICATIONS, INC.
4-12-3 HIGASHI-SHINAGAWA,
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN

FCC ID : PY7-70663E

EUT Description : GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac &
NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E (EXCEPT DFS)

Date Of Issue:

April 2, 2018

Prepared by:

UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	3/20/2018	Initial Issue	Dan Corona
V2	3/23/2018	Updated Section 8.5.8	Kiya Kedida
V3	4/2/2018	Updated Section 5.5, 8.5.3, 8.5.4 & 8.5.9 – 8.5.16	Kiya Kedida

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY.....	8
5. EQUIPMENT UNDER TEST	9
5.1. EUT DESCRIPTION	9
5.1. MAXIMUM OUTPUT POWER.....	9
5.2. DESCRIPTION OF AVAILABLE ANTENNAS	10
5.3. SOFTWARE AND FIRMWARE.....	10
5.4. LIST OF TEST REDUCTION AND MODES.....	10
5.5. WORST-CASE CONFIGURATION AND MODE.....	11
5.6. DESCRIPTION OF TEST SETUP.....	12
6. MEASUREMENT METHOD.....	15
7. TEST AND MEASUREMENT EQUIPMENT	16
8. ANTENNA PORT TEST RESULTS	17
8.1. ON TIME AND DUTY CYCLE.....	17
8.2. 26 dB BANDWIDTH.....	19
8.2.1. 802.11a 2TX CDD MODE IN THE 5.2 GHz BAND.....	20
8.2.2. 802.11n HT20 2TX CDD MODE IN THE 5.2 GHz BAND	22
8.2.3. 802.11n HT40 2TX CDD MODE IN THE 5.2 GHz BAND	24
8.2.4. 802.11ac VHT80 2TX CDD MODE IN THE 5.2 GHz BAND	25
8.2.5. 802.11a 2TX CDD MODE IN THE 5.3 GHz BAND.....	26
8.2.6. 802.11n HT20 2TX CDD MODE IN THE 5.3 GHz BAND	28
8.2.7. 802.11n HT40 2TX CDD MODE IN THE 5.3 GHz BAND	30
8.2.8. 802.11ac VHT80 2TX CDD MODE IN THE 5.3 GHz BAND	31
8.2.9. 802.11a 2TX CDD MODE IN THE 5.6 GHz BAND.....	32
8.2.10. 802.11n HT20 2TX CDD MODE IN THE 5.6 GHz BAND	34
8.2.11. 802.11n HT40 2TX CDD MODE IN THE 5.6 GHz BAND	36
8.2.12. 802.11ac VHT80 2TX CDD MODE IN THE 5.6 GHz BAND	38
8.2.13. 802.11a 2TX CDD MODE IN THE 5.8 GHz BAND.....	40
8.2.14. 802.11n HT20 2TX CDD MODE IN THE 5.8 GHz BAND	42

8.2.15.	802.11n HT40 2TX CDD MODE IN THE 5.8 GHz BAND	44
8.2.16.	802.11ac VHT80 2TX CDD MODE IN THE 5.8 GHz BAND	45
8.3.	99% BANDWIDTH.....	46
8.3.1.	802.11a 2TX CDD MODE IN THE 5.2 GHz BAND.....	47
8.3.2.	802.11n HT20 2TX CDD MODE IN THE 5.2 GHz BAND	49
8.3.3.	802.11n HT40 2TX CDD MODE IN THE 5.2 GHz BAND	51
8.3.4.	802.11ac VHT80 2TX CDD MODE IN THE 5.2 GHz BAND	52
8.3.5.	802.11a 2TX CDD MODE IN THE 5.3 GHz BAND.....	53
8.3.6.	802.11n HT20 2TX CDD MODE IN THE 5.3 GHz BAND	55
8.3.7.	802.11n HT40 2TX CDD MODE IN THE 5.3 GHz BAND	57
8.3.8.	802.11ac VHT80 2TX CDD MODE IN THE 5.3 GHz BAND	58
8.3.9.	802.11a 2TX CDD MODE IN THE 5.6 GHz BAND.....	59
8.3.10.	802.11n HT20 2TX CDD MODE IN THE 5.6 GHz BAND	61
8.3.11.	802.11n HT40 2TX CDD MODE IN THE 5.6 GHz BAND	63
8.3.12.	802.11ac VHT80 2TX CDD MODE IN THE 5.6 GHz BAND	65
8.3.13.	802.11a 2TX CDD MODE IN THE 5.8 GHz BAND.....	67
8.3.14.	802.11n HT20 2TX CDD MODE IN THE 5.8 GHz BAND	69
8.3.15.	802.11n HT40 2TX CDD MODE IN THE 5.8 GHz BAND	71
8.3.16.	802.11ac VHT80 2TX CDD MODE IN THE 5.8 GHz BAND	72
8.4.	6 dB BANDWIDTH.....	73
8.4.1.	802.11a 2TX CDD MODE IN THE 5.8 GHz BAND.....	74
8.4.2.	802.11n HT20 2TX CDD MODE IN THE 5.8 GHz BAND	76
8.4.3.	802.11n HT40 2TX CDD MODE IN THE 5.8 GHz BAND	78
8.4.4.	802.11ac VHT80 2TX CDD MODE IN THE 5.8 GHz BAND	80
8.5.	OUTPUT POWER AND PSD.....	81
8.5.1.	802.11a 2TX CDD MODE IN THE 5.2 GHz BAND.....	84
8.5.2.	802.11n HT20 2TX CDD MODE IN THE 5.2 GHz BAND	87
8.5.3.	802.11n HT40 2TX CDD MODE IN THE 5.2 GHz BAND	90
8.5.4.	802.11ac VHT80 2TX CDD MODE IN THE 5.2 GHz BAND	92
8.5.5.	802.11a 2TX CDD MODE IN THE 5.3 GHz BAND.....	94
8.5.6.	802.11n HT20 2TX CDD MODE IN THE 5.3 GHz BAND	97
8.5.7.	802.11n HT40 2TX CDD MODE IN THE 5.3 GHz BAND	100
8.5.8.	802.11ac VHT80 2TX CDD MODE IN THE 5.3 GHz BAND	102
8.5.9.	802.11a 2TX CDD MODE IN THE 5.6 GHz BAND.....	104
8.5.10.	802.11n HT20 2TX CDD MODE IN THE 5.6 GHz BAND	107
8.5.11.	802.11n HT40 2TX CDD MODE IN THE 5.6 GHz BAND	110
8.5.12.	802.11ac VHT80 2TX CDD MODE IN THE 5.6 GHz BAND	113
8.5.13.	802.11a 2TX CDD MODE IN THE 5.8 GHz BAND.....	116
8.5.14.	802.11n HT20 2TX CDD MODE IN THE 5.8 GHz BAND	119
8.5.15.	802.11n HT40 2TX CDD MODE IN THE 5.8 GHz BAND	122
8.5.16.	802.11ac VHT80 2TX CDD MODE IN THE 5.8 GHz BAND	124
9.	RADIATED TEST RESULTS.....	126
9.1.	TRANSMITTER ABOVE 1 GHz.....	127
9.1.1.	TX ABOVE 1 GHz 802.11a 2TX CDD MODE IN THE 5.2 GHz BAND	127
9.1.2.	TX ABOVE 1 GHz 802.11n HT20 2TX CDD MODE IN THE 5.2 GHz BAND	135
9.1.3.	TX ABOVE 1 GHz 802.11n HT40 2TX CDD MODE IN THE 5.2 GHz BAND	143
9.1.4.	TX ABOVE 1 GHz 802.11ac VHT80 2TX CDD MODE IN THE 5.2 GHz BAND	149
9.1.5.	TX ABOVE 1 GHz 802.11a 2TX CDD MODE IN THE 5.3 GHz BAND	153
9.1.6.	TX ABOVE 1 GHz 802.11n HT20 2TX CDD MODE IN THE 5.3 GHz BAND	161
9.1.7.	TX ABOVE 1 GHz 802.11n HT40 2TX CDD MODE IN THE 5.3 GHz BAND	169

9.1.8.	TX ABOVE 1 GHz 802.11ac VHT80 2TX CDD MODE IN THE 5.3 GHz BAND	.175
9.1.9.	TX ABOVE 1 GHz 802.11a 2TX CDD MODE IN THE 5.6 GHz BAND	179
9.1.10.	TX ABOVE 1 GHz 802.11n HT20 2TX CDD MODE IN THE 5.6 GHz BAND	191
9.1.11.	TX ABOVE 1 GHz 802.11n HT40 2TX CDD MODE IN THE 5.6 GHz BAND	203
9.1.12.	TX ABOVE 1 GHz 802.11ac VHT80 2TX CDD MODE IN THE 5.6 GHz BAND	.215
9.1.13.	TX ABOVE 1 GHz 802.11a 2TX CDD MODE IN THE 5.8 GHz BAND	225
9.1.14.	TX ABOVE 1 GHz 802.11n HT20 2TX CDD MODE IN THE 5.8 GHz BAND	235
9.1.15.	TX ABOVE 1 GHz 802.11n HT40 2TX CDD MODE IN THE 5.8 GHz BAND	245
9.1.16.	TX ABOVE 1 GHz 802.11ac VHT80 2TX CDD MODE IN THE 5.8 GHz BAND	.253
9.1.	<i>WORST-CASE BELOW 30 MHz</i>	259
9.2.	<i>WORST CASE BELOW 1 GHz</i>	260
9.3.	<i>WORST-CASE 18-26 GHz</i>	262
9.4.	<i>WORST-CASE 26-40 GHz</i>	264
10.	AC POWER LINE CONDUCTED EMISSIONS	266
10.1.1.	AC Power Line Norm	267
11.	SETUP PHOTOS	269

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SONY MOBILE COMMUNICATIONS, INC.
4-12-3 HIGASHI-SHINAGAWA,
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN

EUT DESCRIPTION: GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC

SERIAL NUMBER: BH9000B9BC& BH9000G2BC (CONDUCTED)
BH9000BYBG& BH9000NHBG (RADIATED)

DATE TESTED: FEBRUARY 23 – MARCH 08, 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E (EXCEPT DFS)	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:

Reviewed By:



Dan Corona
CONSUMER TECHNOLOGY DIVISION
Operations Leader
UL Verification Services Inc.



Kiya Kedida
CONSUMER TECHNOLOGY DIVISION
Project Engineer
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC KDB 662911 D01 v02r01, FCC KDB 789033 D02 v02r01, ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☒ Chamber A (ISED:2324B-1)	☐ Chamber D (ISED:22541-1)
☒ Chamber B (ISED:2324B-2)	☐ Chamber E (ISED:22541-2)
☐ Chamber C (ISED:2324B-3)	☐ Chamber F (ISED:22541-3)
	☐ Chamber G (ISED:22541-4)
	☒ Chamber H (ISED:22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through C are covered under ISED company address code 2324B with site numbers 2324B -1 through 2324B-3, respectively. Chambers D through H are covered under ISED Canada company address code 22541 with site numbers 22541 -1 through 22541-5, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned}\text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m}\end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. EUT DESCRIPTION

The EUT is a GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC.

5.1. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

5.2GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a CDD 2TX	14.83	30.41
	802.11n HT20 CDD 2TX	14.82	30.34
5190 - 5230	802.11n HT40 CDD 2TX	14.66	29.24
5210	802.11ac VHT80 CDD 2TX	12.27	16.87

5.3GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5260 - 5320	802.11a CDD 2TX	14.55	28.51
	802.11n HT20 CDD 2TX	14.93	31.12
5270 - 5310	802.11n HT40 CDD 2TX	14.59	28.77
5290	802.11ac VHT80 CDD 2TX	12.58	18.11

5.6GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5500 - 5720	802.11a CDD 2TX	14.84	30.48
5500 - 5720	802.11n HT20 CDD 2TX	15.08	32.21
5510 - 5710	802.11n HT40 CDD 2TX	14.88	30.76
5530-5690	802.11ac VHT80 CDD 2TX	14.87	30.69

5.8GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5745 - 5825	802.11a CDD 2TX	14.45	27.86
5745 - 5825	802.11n HT20 CDD 2TX	14.74	29.79
5755 - 5795	802.11n HT40 CDD 2TX	14.39	27.48
5775	802.11ac VHT80 CDD 2TX	13.57	22.75

5.2. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes Loop Type antennas, with the following maximum gains:

Frequency (GHz)	Peak Antenna Gain (dBi)	
	Main (Chain 0)	Sub (Chain 1)
5180-5320	-4.11	-5.64
5500-5700	-0.10	-2.93
5725-5850	0.19	-5.16

5.3. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was s_atp_XXX_0_00375_A_19.
The test utility software used during testing was Tera Term Ver 4.79.

5.4. LIST OF TEST REDUCTION AND MODES

Antenna port & Radiated Testing	
Mode	Covered by
802.11a Legacy	802.11a 2TX CDD
802.11HT20 2TX STBC	802.11n HT20 2TX CDD
802.11ac VHT20 2TX STBC	802.11n HT20 2TX CDD
802.11n HT40 2TX STBC	802.11n HT40 2TX CDD
802.11ac VHT40 2TX STBC	802.11n HT40 2TX CDD
802.11ac VHT80 2TX STBC	802.11n HT20 2TX CDD

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emissions below 30MHz, 1GHz, above 18GHz, and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, & Z, and it was determined that Y-Axis with AC/DC Adapter was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y-Axis with AC/DC Adapter orientation.

Worst-case data rates as provided by the client were:

802.11a mode: 6 Mbps
802.11n HT20 mode: 13 Mbps (MCS0)
802.11n HT40 mode: 27 Mbps (MCS0)
802.11ac VHT80 mode: 58.5 Mbps (MCS0)

802.11ac VHT20 and VHT40 mode are different from 802.11nHT20 and HT40 only in control messages and have the same power settings.

The simultaneous mode (SISO 2.4GHz Chain 0 and 5GHz chain 1) was checked and stand-alone (MIMO) 2.4 GHz / 5GHz remain worst case.

NOTE: SISO mode is covered by MIMO mode due to same maximum tune-up limit (power).

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Lenovo	20B7S0A200	PC015REW	NA
AC Adapter	SONY	UCH12	4016W40310044	NA
DC Power Supply	Ametek	XT 15-4	T463	N/A

I/O CABLES (CONDUCTED TEST)


I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	RF	Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	DC	1	DC	Shielded	0.3	N/A

I/O CABLES (RADIATED AND CONDUCTED EMISSIONS)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	USB	1	USB	Shielded	3	N/A


TEST SETUP

CONDCUTED TEST SETUP DIAGRAM

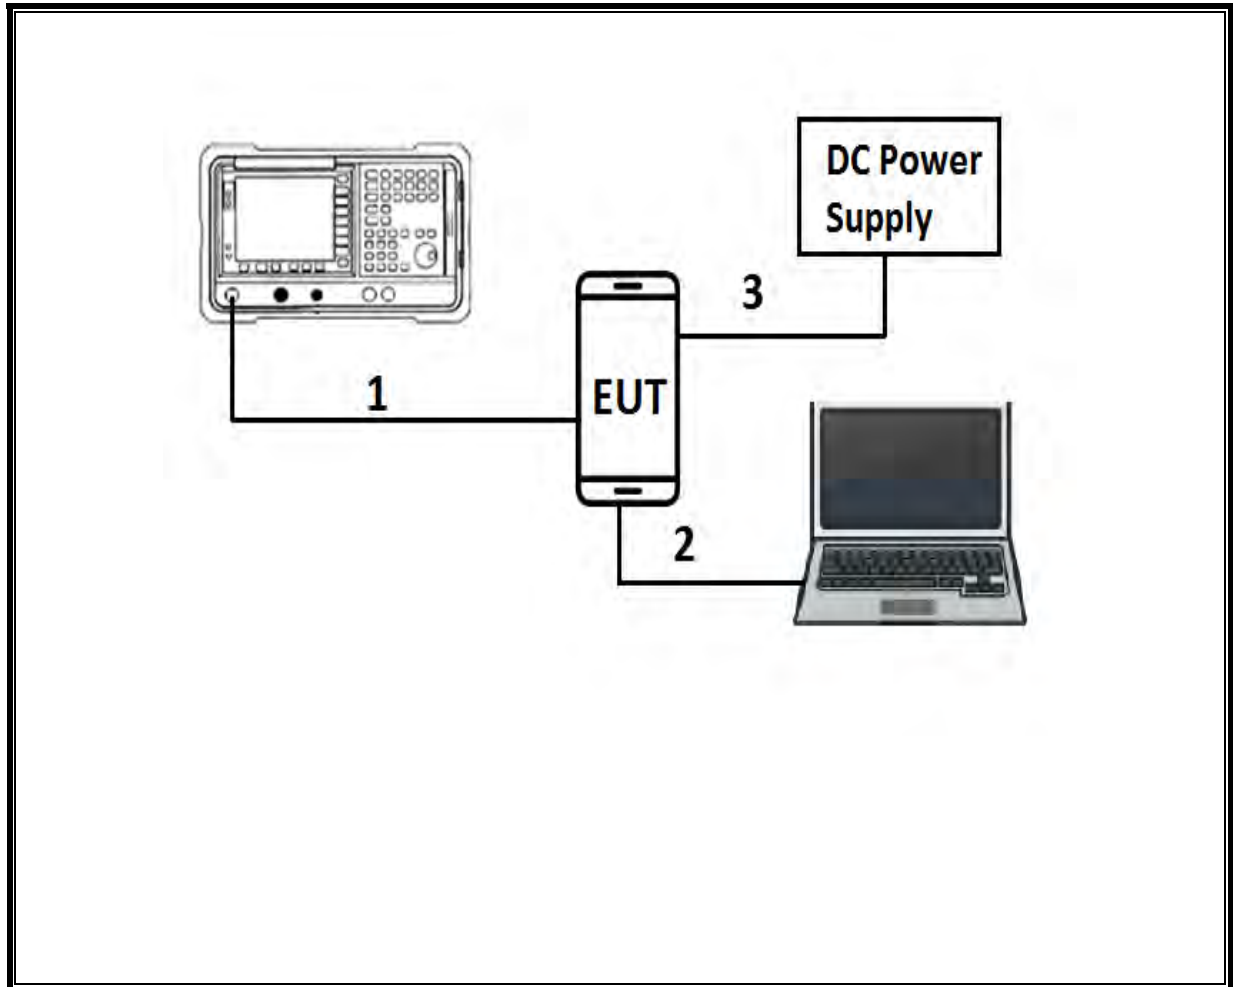

TEST SETUP

RADIATED AND AC LINE CONDUCTED EMISSIONS SETUP DIAGRAM

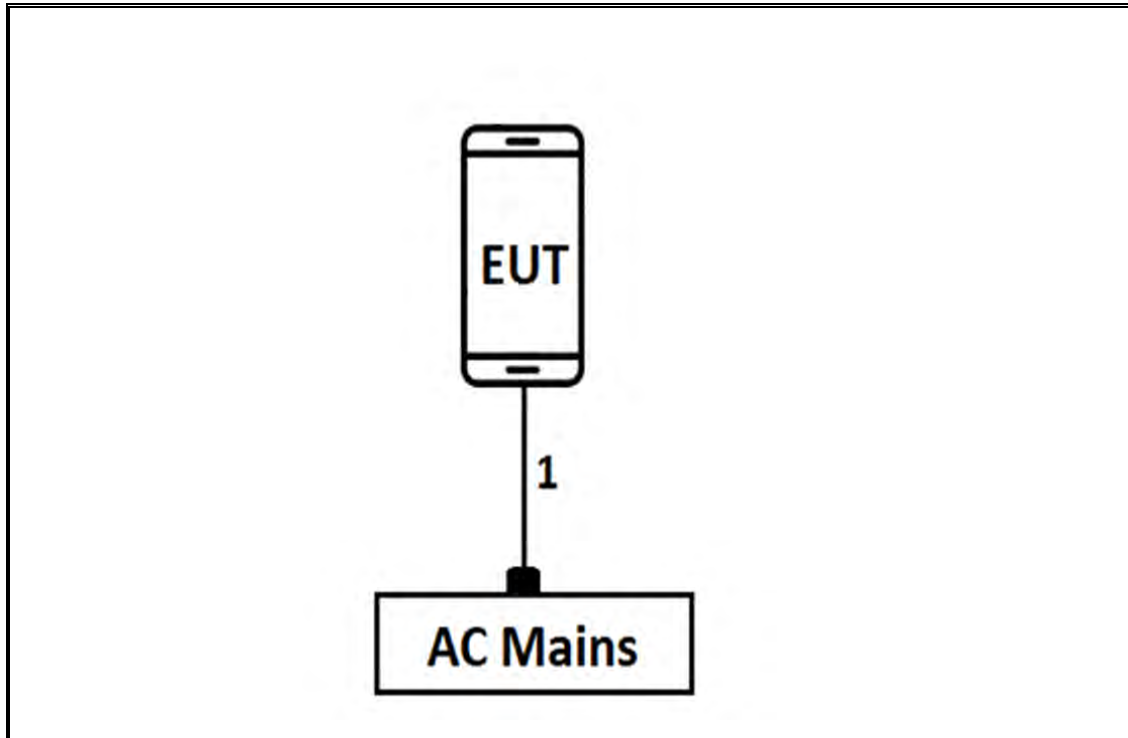

6. MEASUREMENT METHOD

On Time and Duty Cycle: KDB 789033 D02 v02r01, Section B.

6 dB Emission BW: KDB 789033 D02 v02r01, Section C.2.

26 dB Emission BW: KDB 789033 D02 v02r01, Section C.1.

99% Occupied BW: KDB 789033 D02 v02r01, Section D.

Conducted Output Power: KDB 789033 D02 v02r01, Section E.3.b (Method PM-G)

Power Spectral Density: KDB 789033 D02 v02r01, Section F

Unwanted emissions in restricted bands: KDB 789033 D02 v02r01, Sections G.3, G.4, G.5, and G.6

Unwanted emissions in non-restricted bands: KDB 789033 D02 v02r01, Sections G.3, G.4, and G.5

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	T493	06/23/2018	06/23/2017
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	T1165	11/25/2018	11/25/2017
RF Preamplifier, 1 - 26GHz	Agilent	8449B	T404	07/23/2018	07/23/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma Instrument	310N	T835	06/24/2018	06/24/2017
Antenna, Broadband Hybrid 30MHz to 2000MHz	Sunol Science	JB1	T185	03/30//2018	03/30/2017
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T863	06/09/2018	06/09/2017
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T862	06/09/2018	06/09/2017
Antenna, Horn 18-26.5GHz	ARA	MWH-1826	T449	01/04/2019	01/04/2018
Power Meter, P-series single channel	Agilent (Keysight) Technologies	N1911A	T1269	03/29/2018	03/29/2017
Power Sensor, P - series, 50MHz to 18GHz, Wideband	All	N1921A	T1224	03/29/2018	03/29/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1113	12/21/2018	12/21/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1466	04/11/2018	04/11/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1454	01/08/2019	01/08/2018
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T917	06/29/2018	06/29/2017
Antenna, Active Loop 9kHz-30MHz	Com-Power Corp.	AL-130R	T1866	10/10/2018	10/10/2017
Test Receiver, EMI, 10Hz-7GHz	Rhode&Schwarz	ESR	T1436	01/06/2019	01/06/2018
LISN	FISCHER	FCC-LISN-50/250-25-2-01	T1310	01/17/2019	01/17/2018

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Ver 9.5, Dec 1, 2016
Antenna Port Software	UL	UL RF	Ver 8.0, Feb 14, 2018

NOTE: *testing is completed before equipment calibration expiration date.

8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 789033 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11a CDD	2.028	2.064	0.983	98.26%	0.00	0.010
802.11n HT20 CDD	2.508	2.559	0.980	98.01%	0.00	0.010
802.11n HT40 CDD	1.229	1.305	0.942	94.18%	0.26	0.814
802.11ac VHT80 CDD	0.592	0.668	0.886	88.62%	0.52	1.689

DUTY CYCLE PLOTS



8.2. 26 dB BANDWIDTH

LIMITS



None; for reporting purposes only.

RESULTS



8.2.1. 802.11a 2TX CDD MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5180	21.65	21.85
Mid	5200	21.95	22.40
High	5240	21.40	21.75



LOW CHANNEL

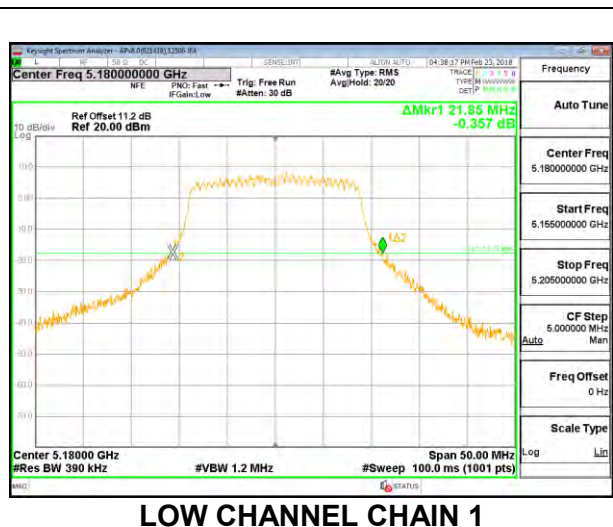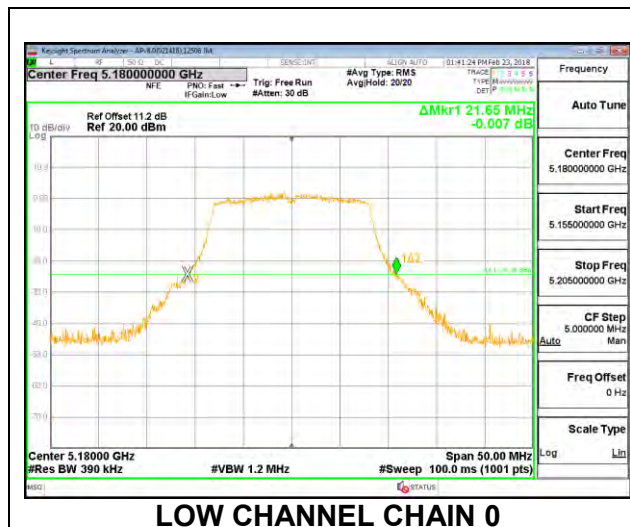

MID CHANNEL

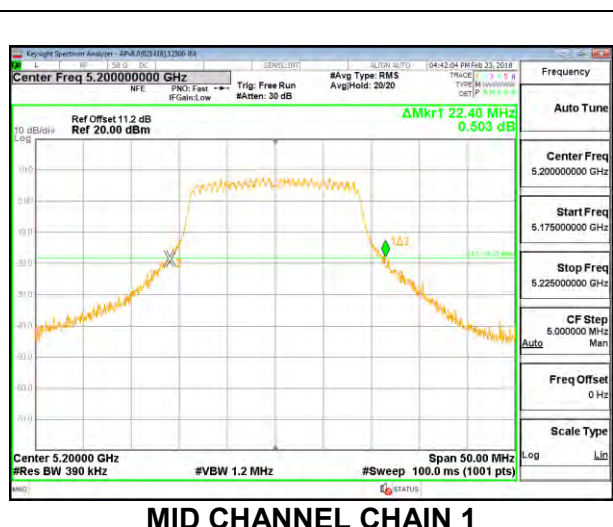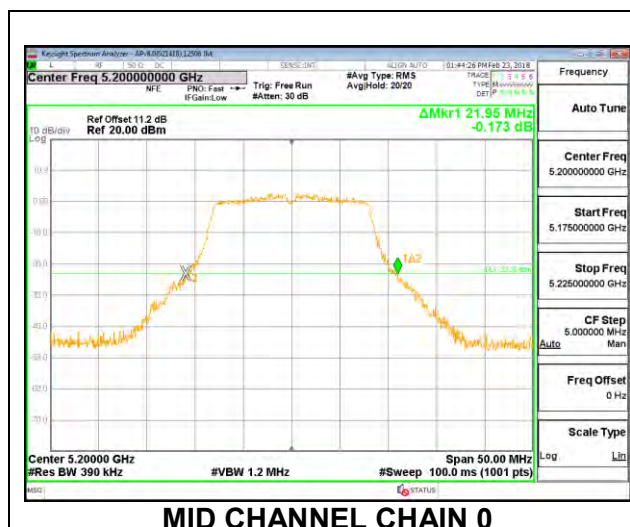



HIGH CHANNEL

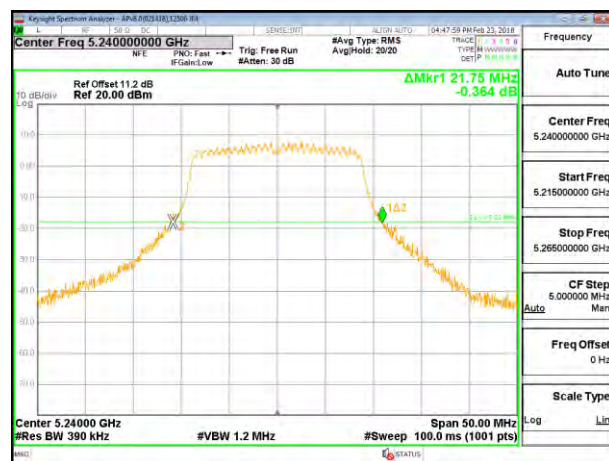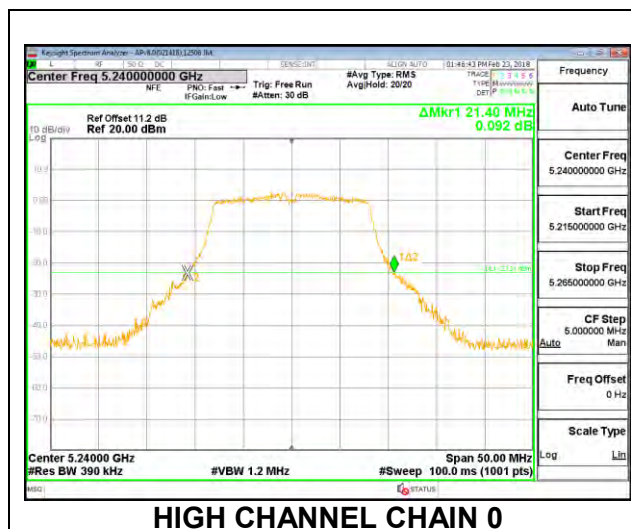



8.2.2. 802.11n HT20 2TX CDD MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5180	22.55	21.75
Mid	5200	22.80	22.10
High	5240	22.75	22.20


LOW CHANNEL

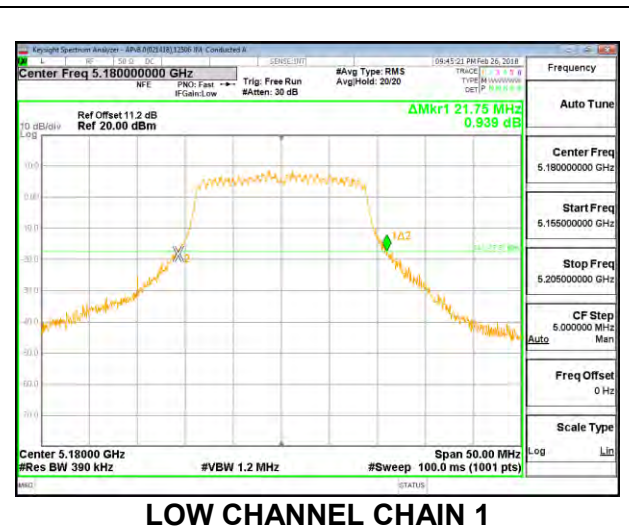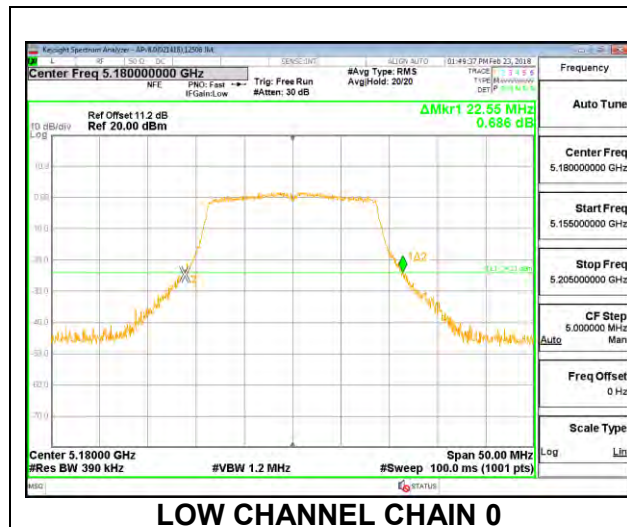

MID CHANNEL

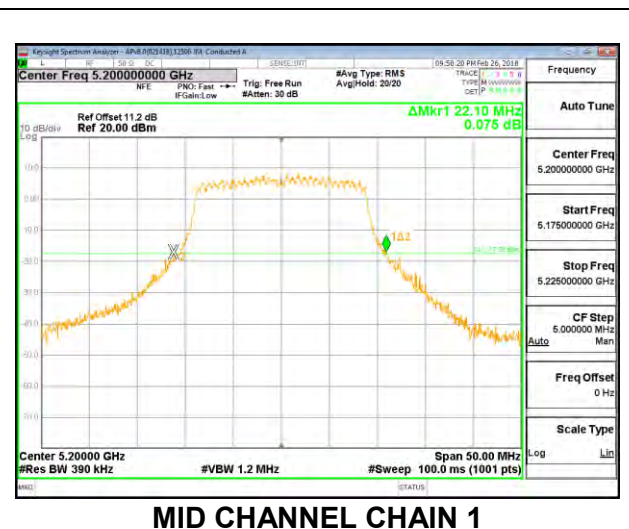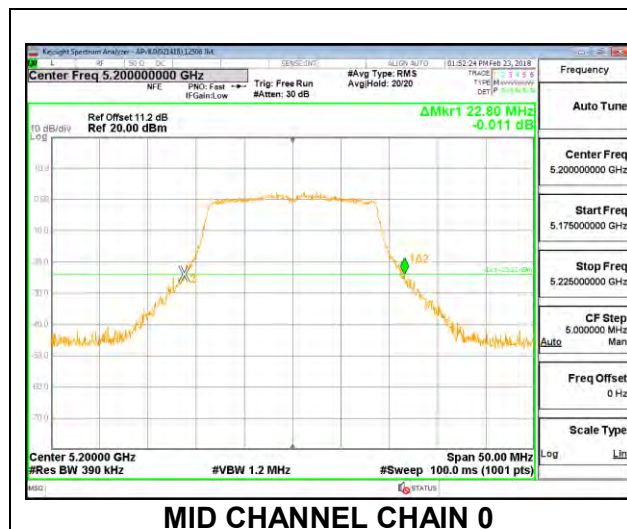



HIGH CHANNEL

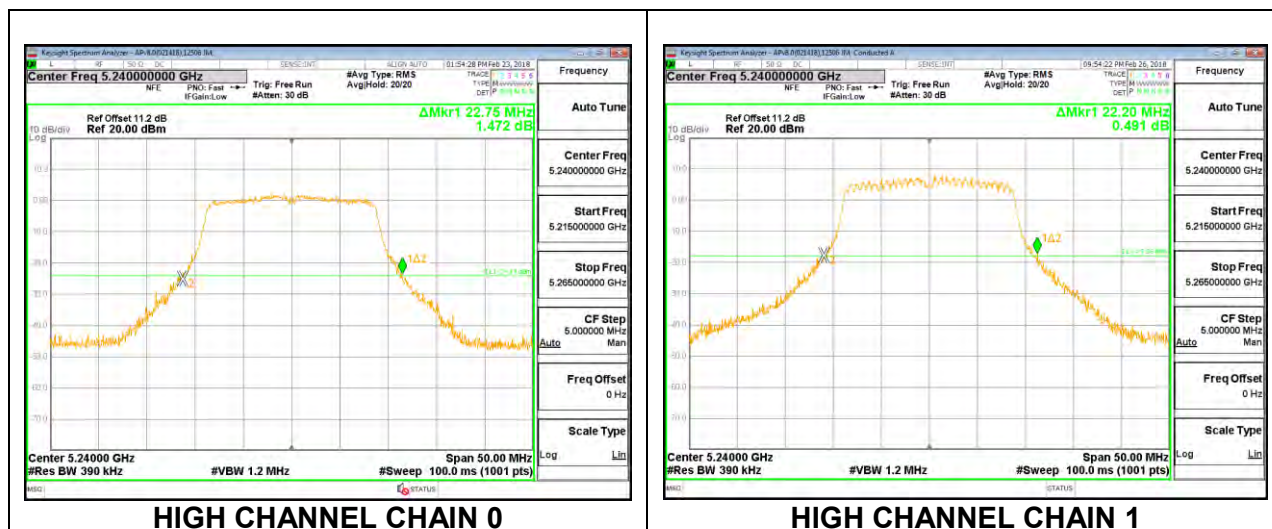



8.2.3. 802.11n HT40 2TX CDD MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth	26 dB Bandwidth
		Chain 0 (MHz)	Chain 1 (MHz)
Low	5190	41.70	41.00
High	5230	41.50	41.10

LOW CHANNEL

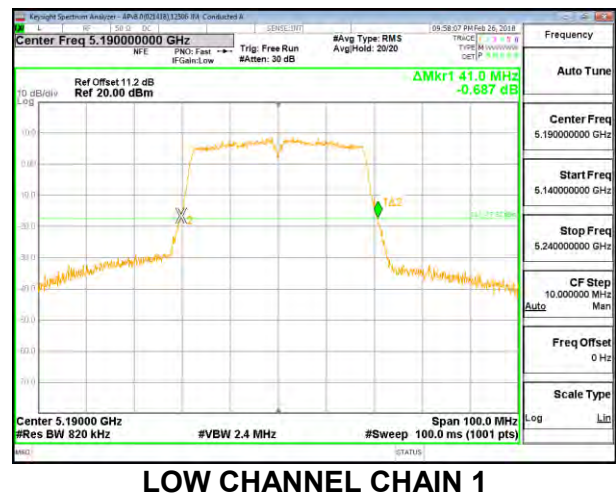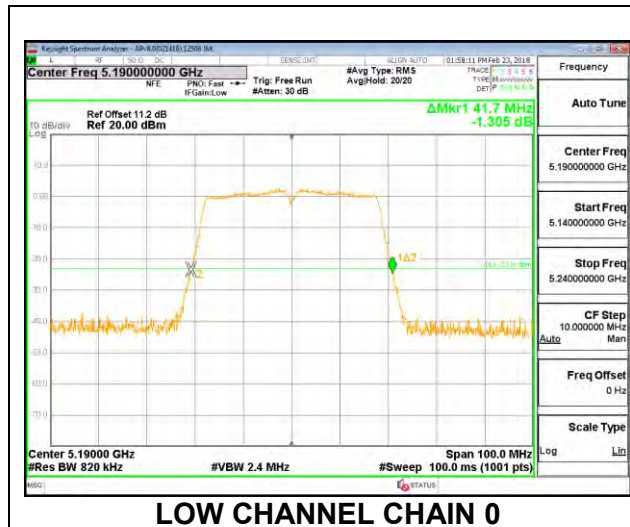



HIGH CHANNEL

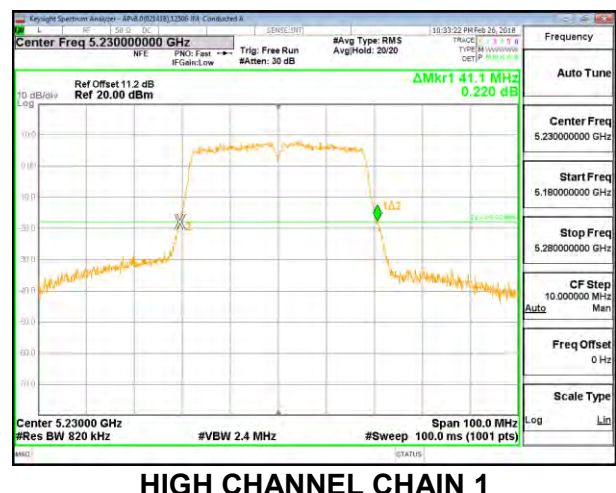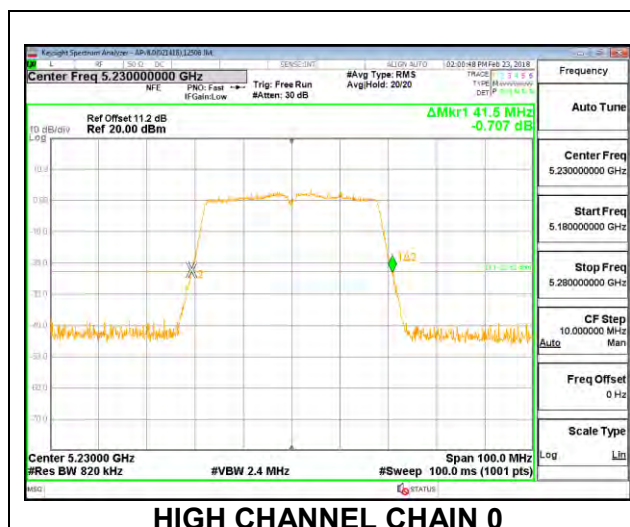

8.2.4. 802.11ac VHT80 2TX CDD MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth	26 dB Bandwidth
		Chain 0 (MHz)	Chain 1 (MHz)
Mid	5210	90.80	83.20


MID CHANNEL

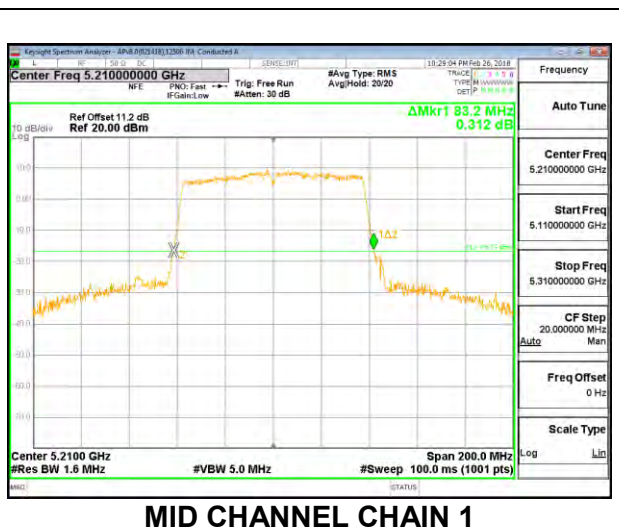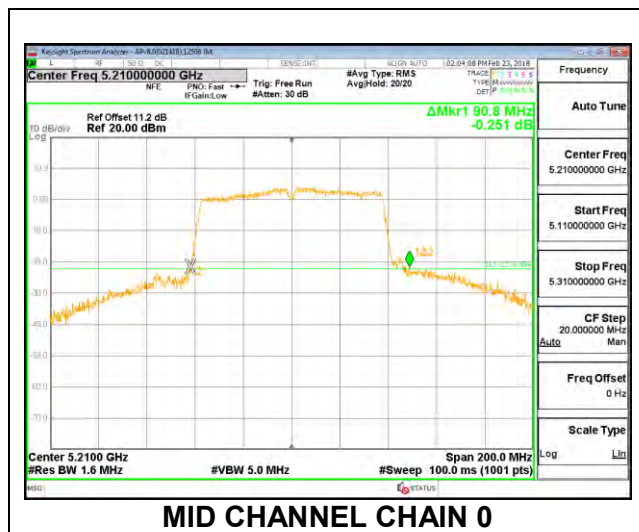


8.2.5. 802.11a 2TX CDD MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5260	22.00	21.50
Mid	5300	21.70	21.35
High	5320	21.90	21.25

LOW CHANNEL

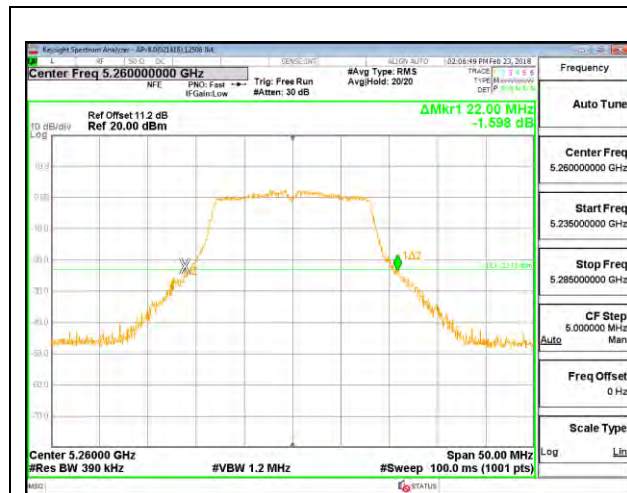


LOW CHANNEL CHAIN 0

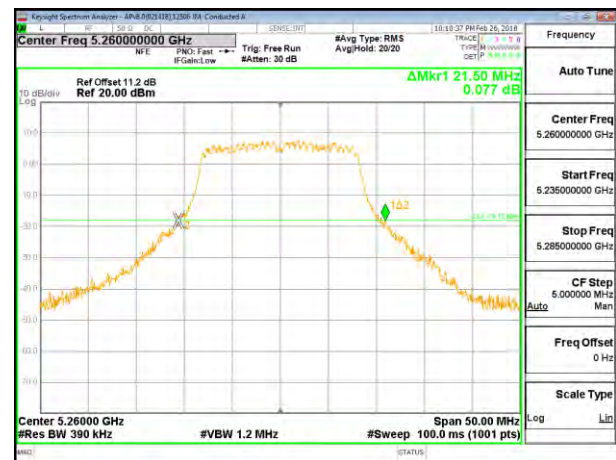


LOW CHANNEL CHAIN 1

MID CHANNEL

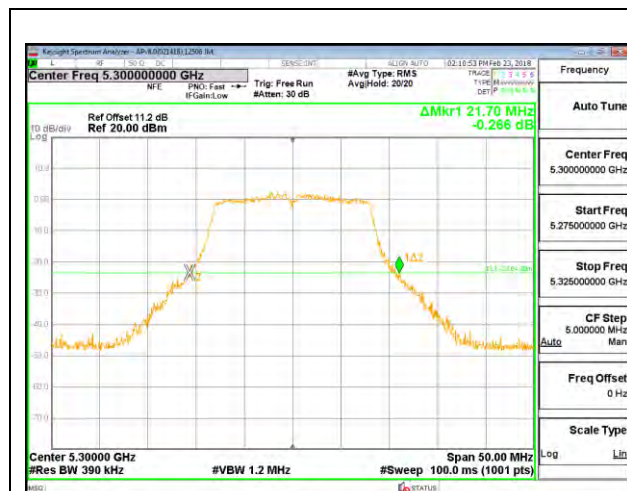


MID CHANNEL CHAIN 0

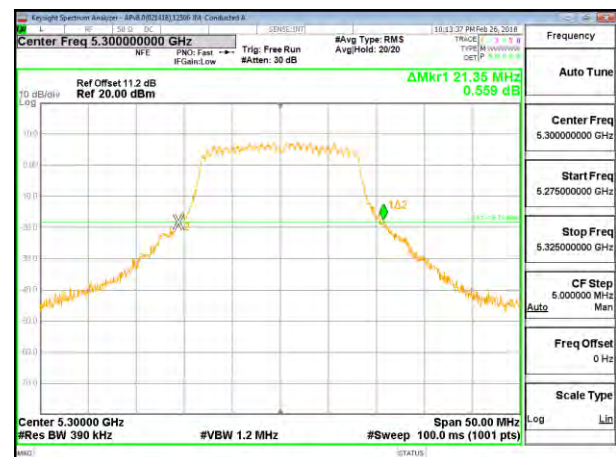

MID CHANNEL CHAIN 1


HIGH CHANNEL

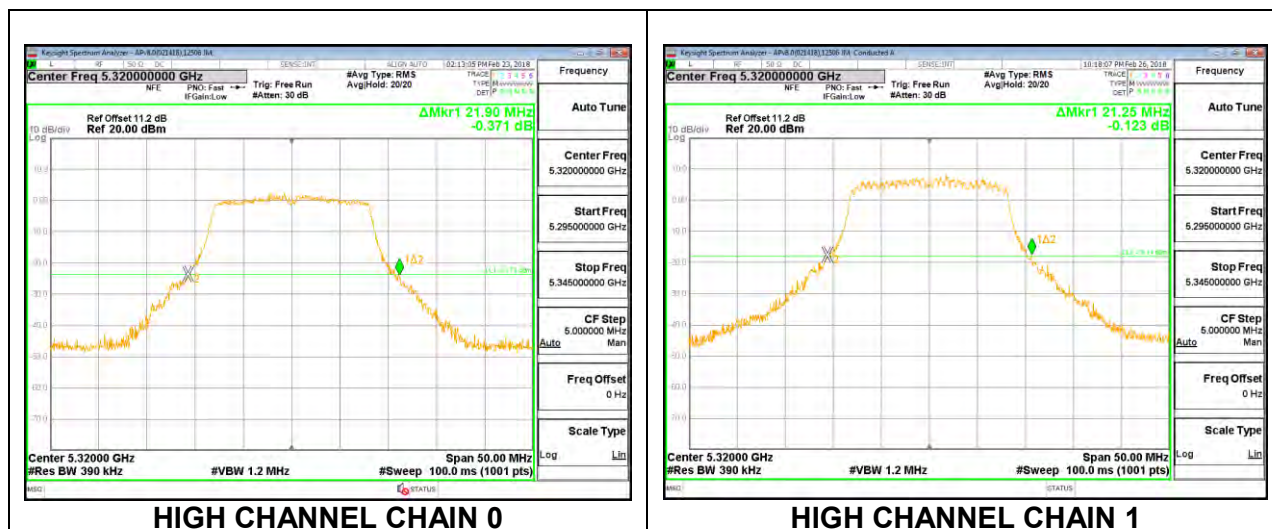


8.2.6. 802.11n HT20 2TX CDD MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth	
		Chain 0 (MHz)	Chain 1 (MHz)
Low	5260	22.80	22.25
Mid	5300	22.70	22.80
High	5320	22.50	22.20



LOW CHANNEL

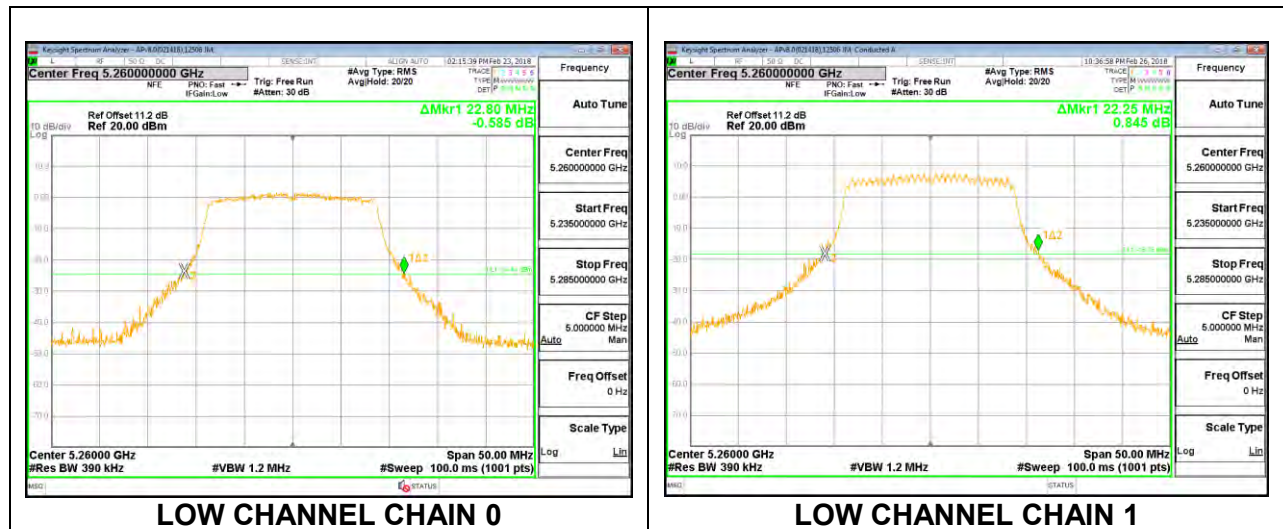

MID CHANNEL

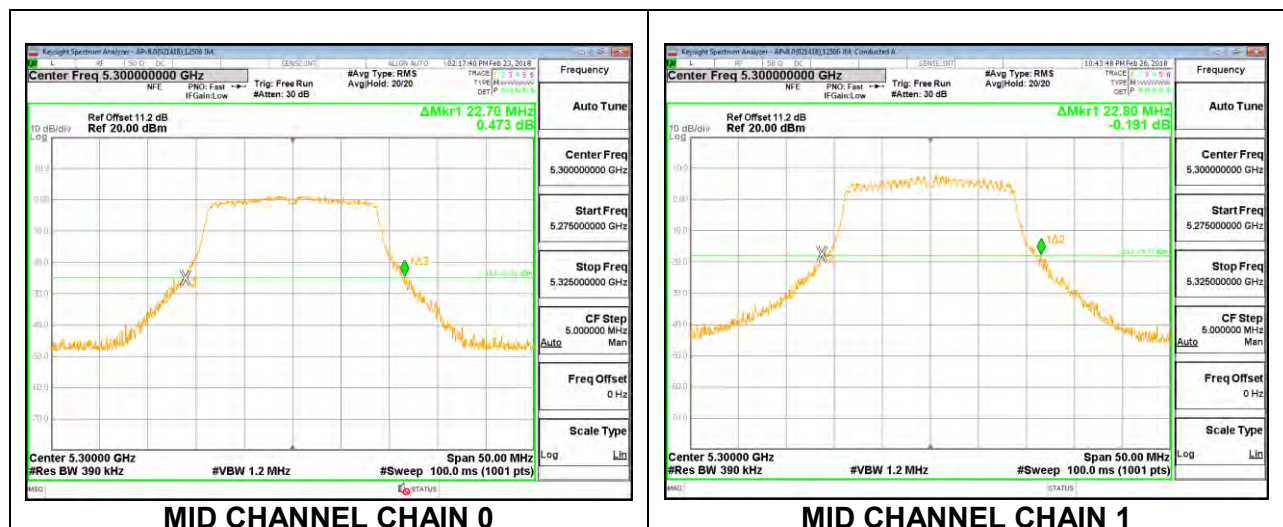


HIGH CHANNEL

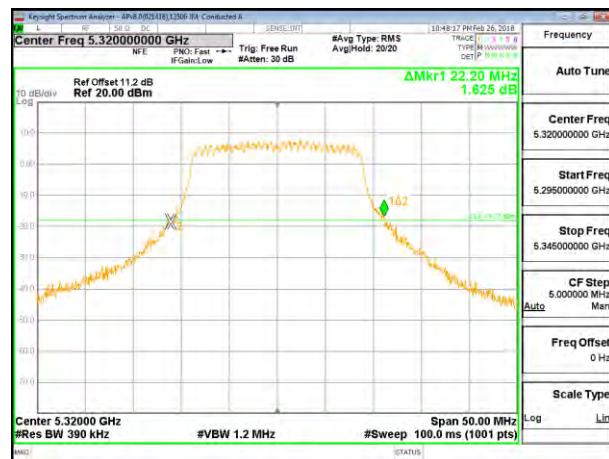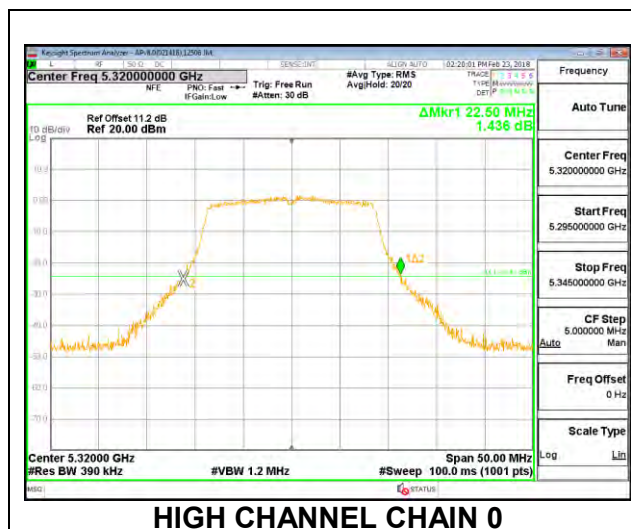


8.2.7. 802.11n HT40 2TX CDD MODE IN THE 5.3 GHz BAND

Channel	Frequency	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5270	41.70	41.10
High	5310	41.60	41.20

LOW CHANNEL

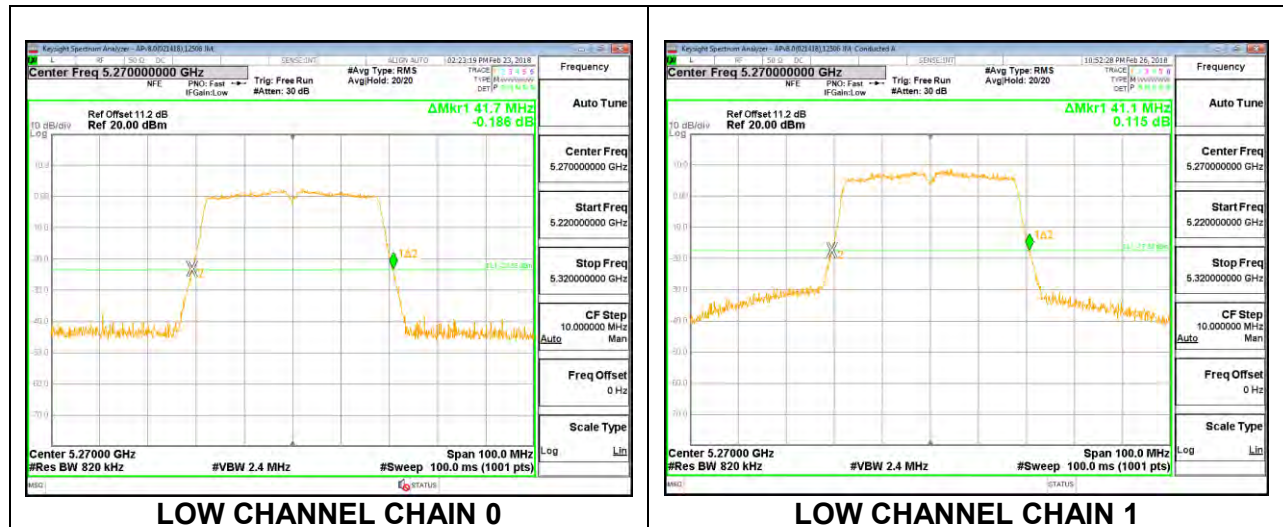


HIGH CHANNEL

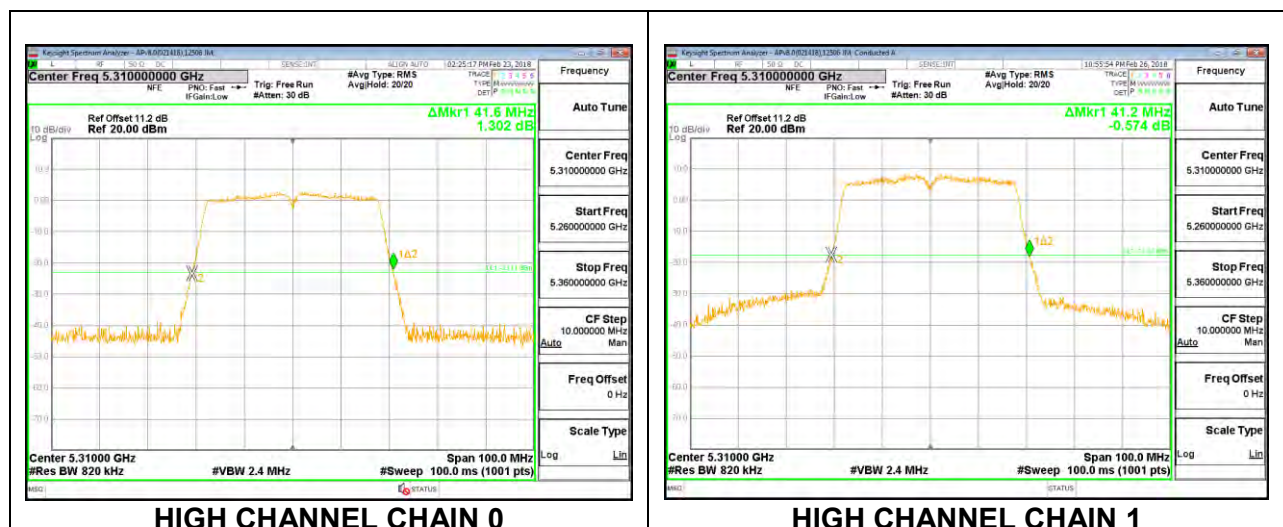

8.2.8. 802.11ac VHT80 2TX CDD MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth	26 dB Bandwidth
		Chain 0 (MHz)	Chain 1 (MHz)
Mid	5290	84.00	83.60


MID CHANNEL

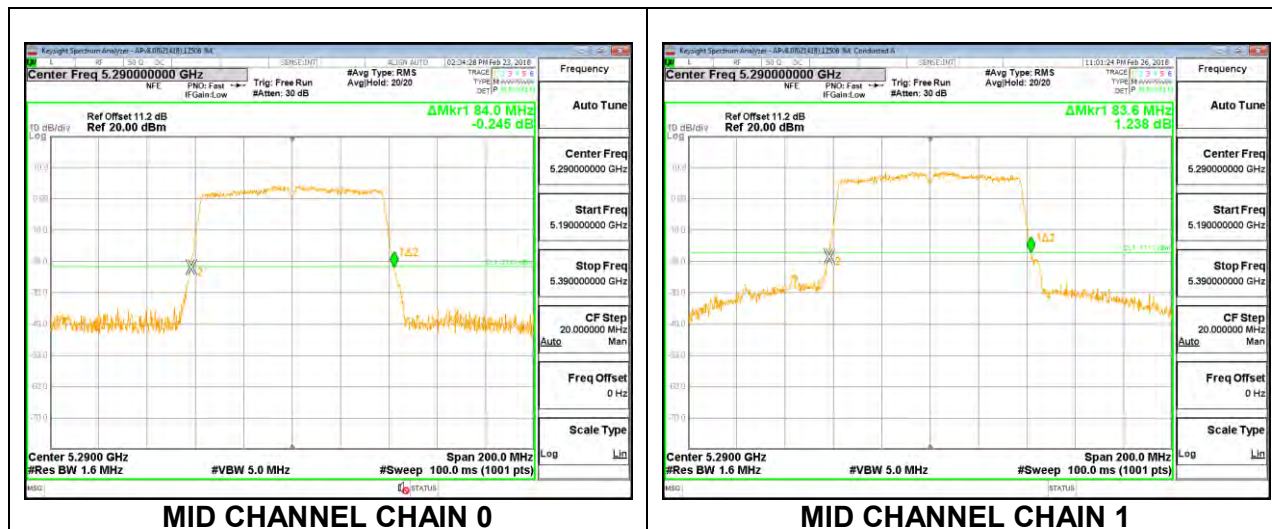


8.2.9. 802.11a 2TX CDD MODE IN THE 5.6 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5500	21.55	20.90
Mid	5580	21.45	21.75
High	5700	21.40	21.45
144	5720	21.60	22.10


LOW CHANNEL

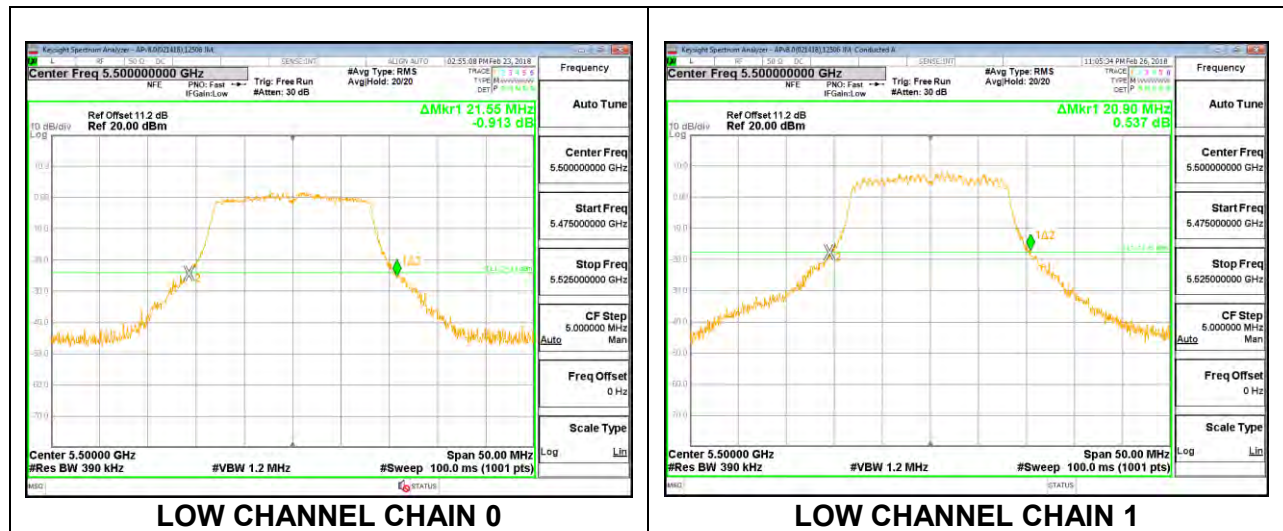


MID CHANNEL

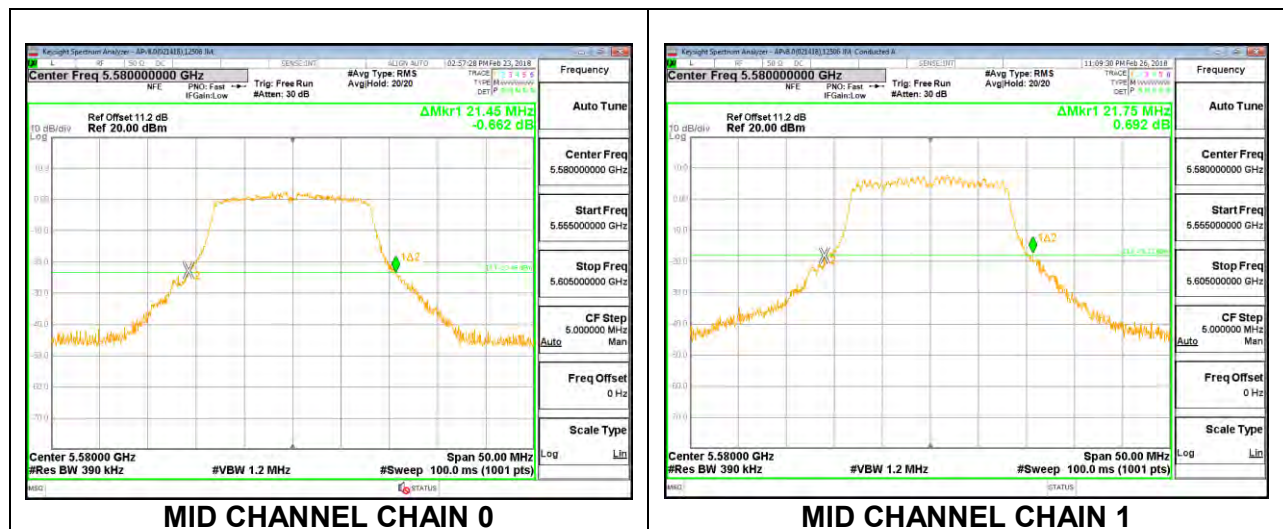

HIGH CHANNEL

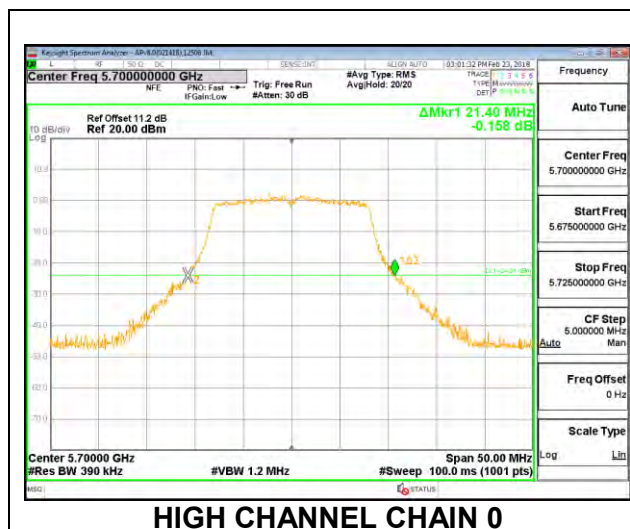


HIGH CHANNEL CHAIN 0

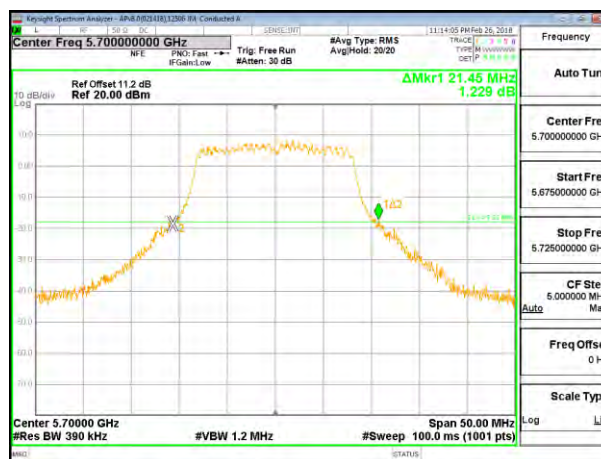

HIGH CHANNEL CHAIN 1

CHANNEL 144

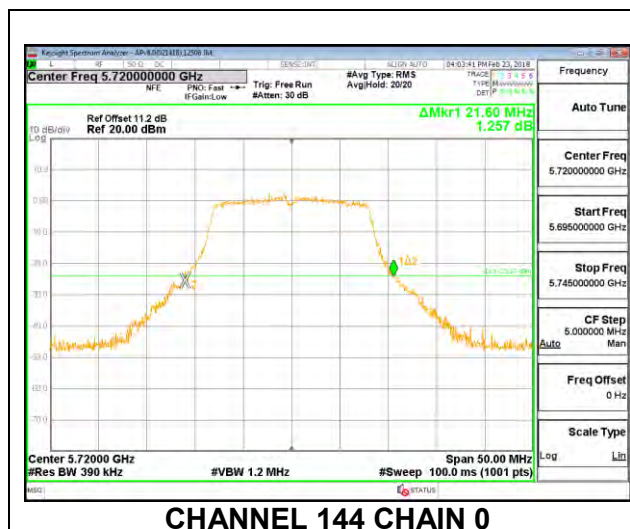

CHANNEL 144 CHAIN 0




CHANNEL 144 CHAIN 1


8.2.10. 802.11n HT20 2TX CDD MODE IN THE 5.6 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5500	22.90	21.80
Mid	5580	23.20	21.95
High	5700	22.60	22.40
144	5720	22.95	22.20


LOW CHANNEL

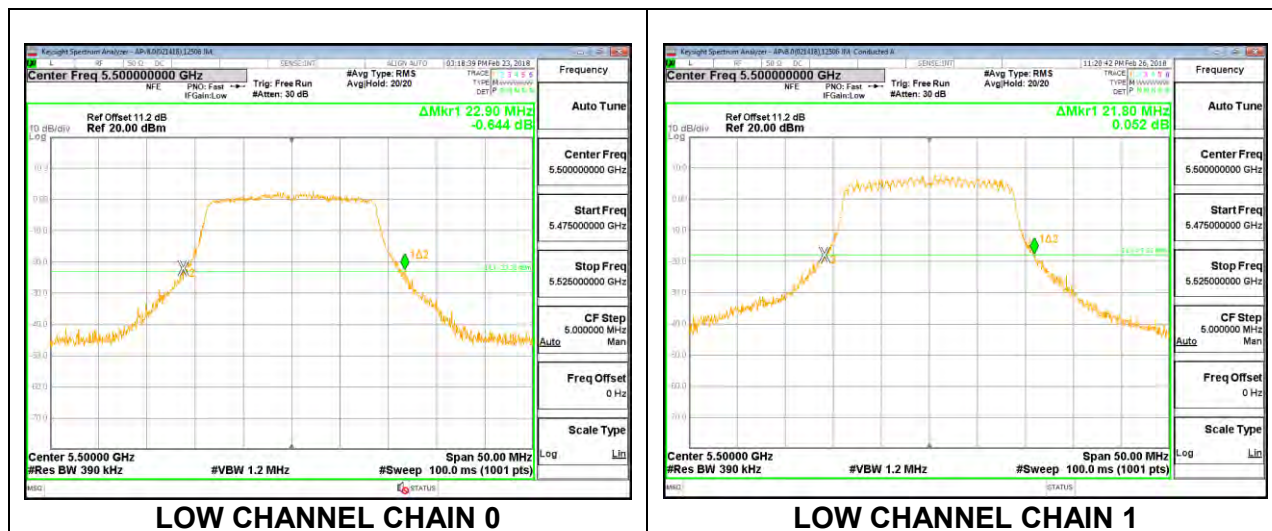


MID CHANNEL

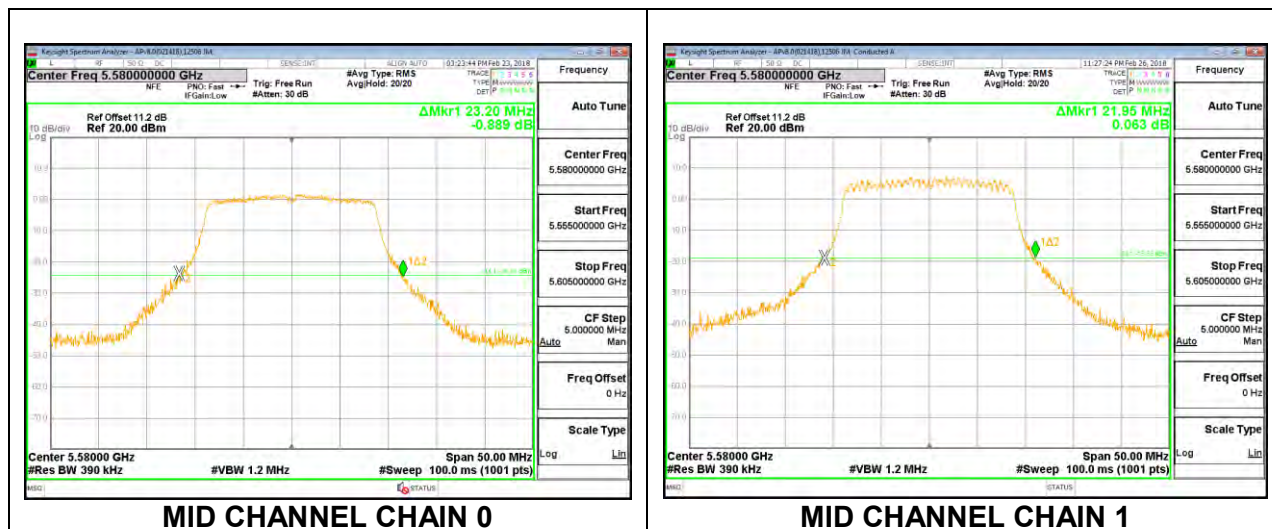

HIGH CHANNEL

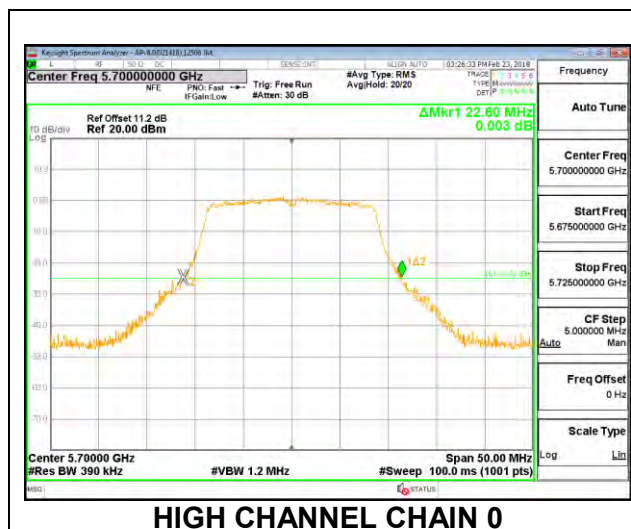


HIGH CHANNEL CHAIN 0

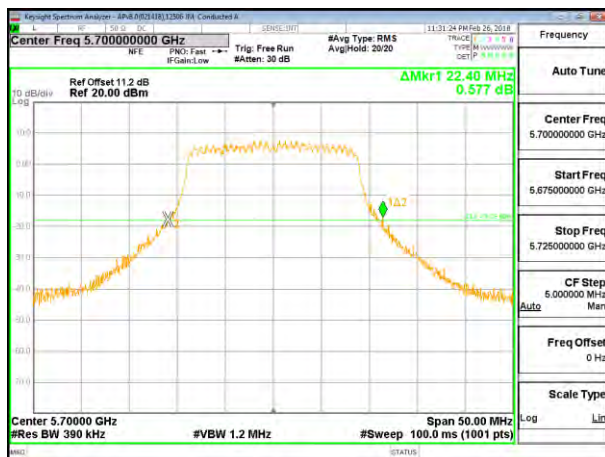


HIGH CHANNEL CHAIN 1

CHANNEL 144

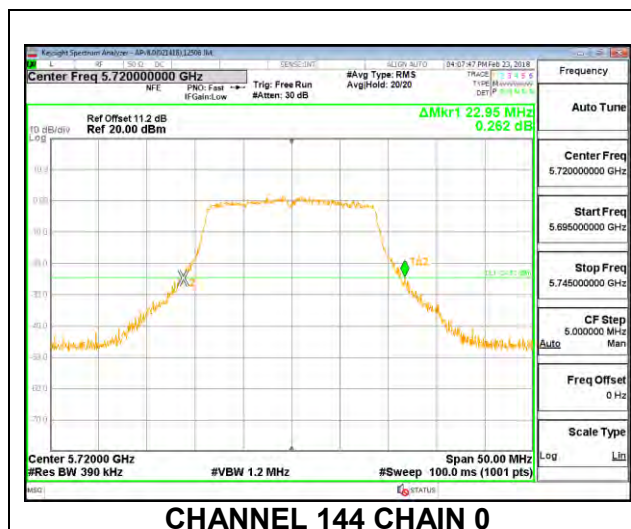

CHANNEL 144 CHAIN 0

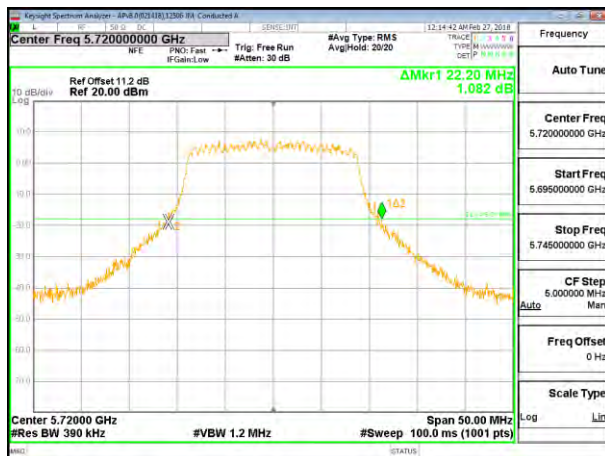


CHANNEL 144 CHAIN 1


8.2.11. 802.11n HT40 2TX CDD MODE IN THE 5.6 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5510	41.70	41.20
Mid	5550	41.60	41.00
High	5670	41.50	41.10
142	5710	41.70	40.90



LOW CHANNEL

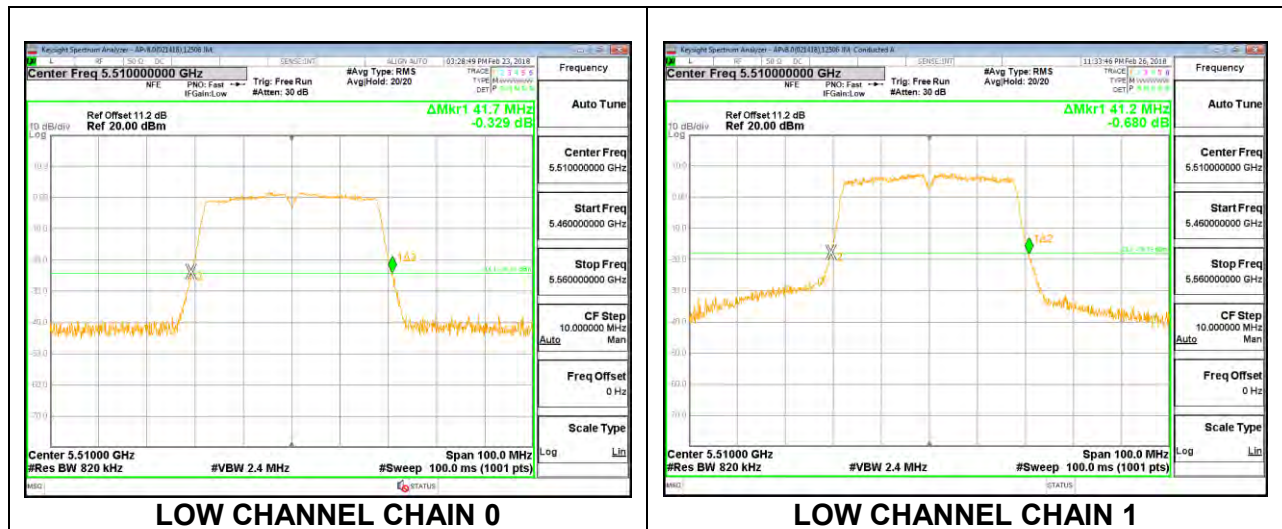



MID CHANNEL

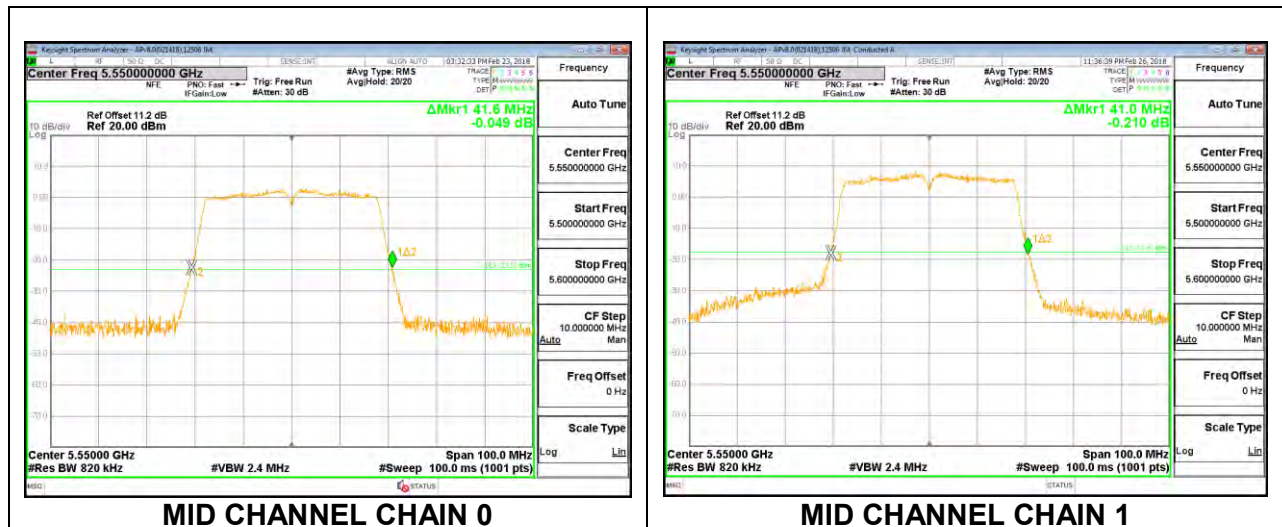

HIGH CHANNEL

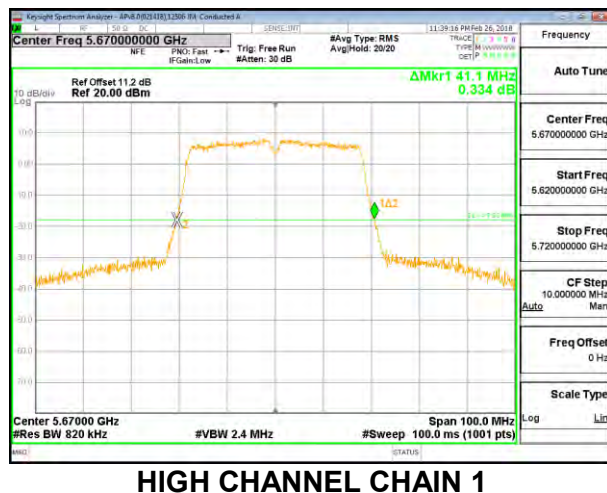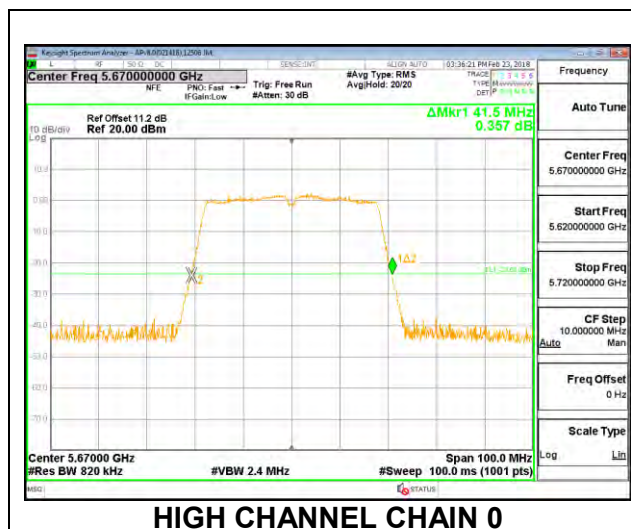


CHANNEL 142

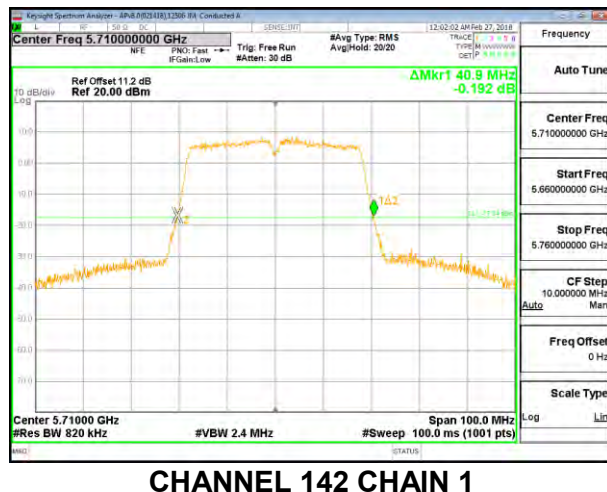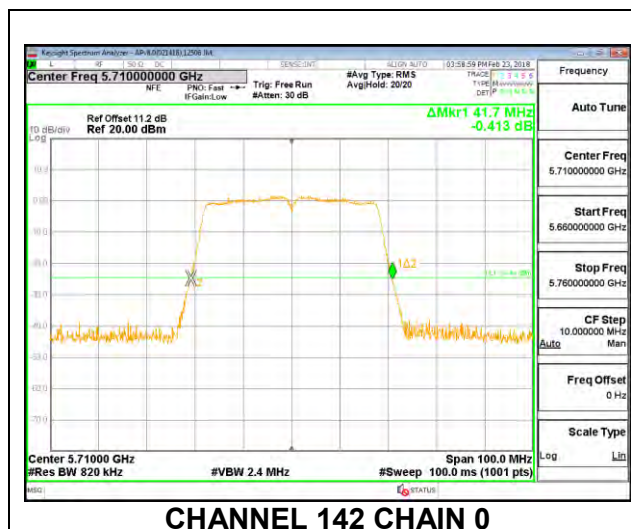


8.2.12. 802.11ac VHT80 2TX CDD MODE IN THE 5.6 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5530	84.00	83.80
High	5610	84.00	83.60
138	5690	83.80	83.20


LOW CHANNEL

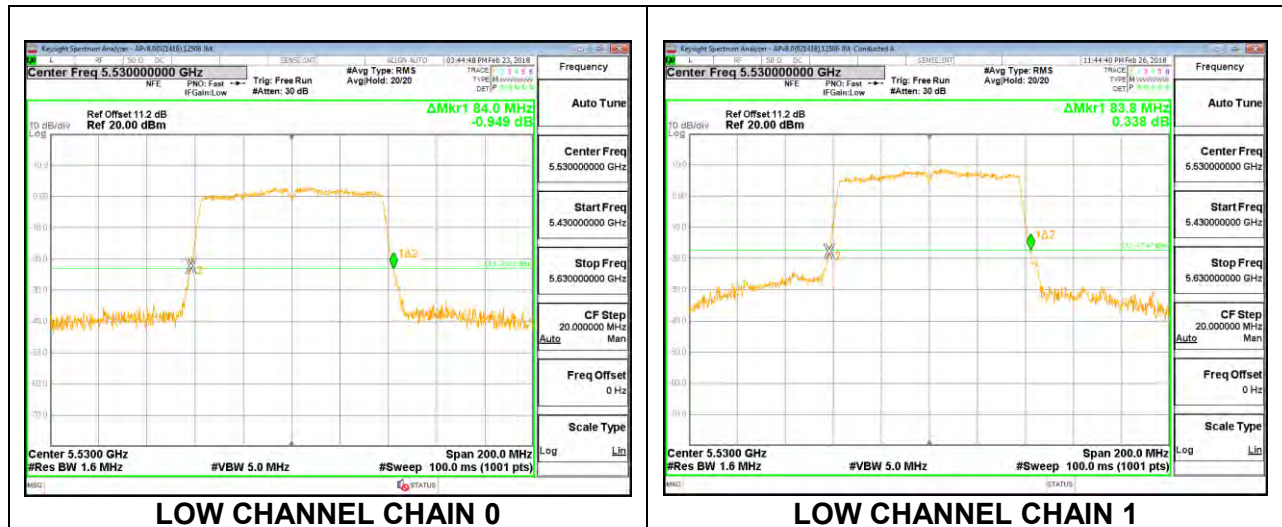

HIGH CHANNEL

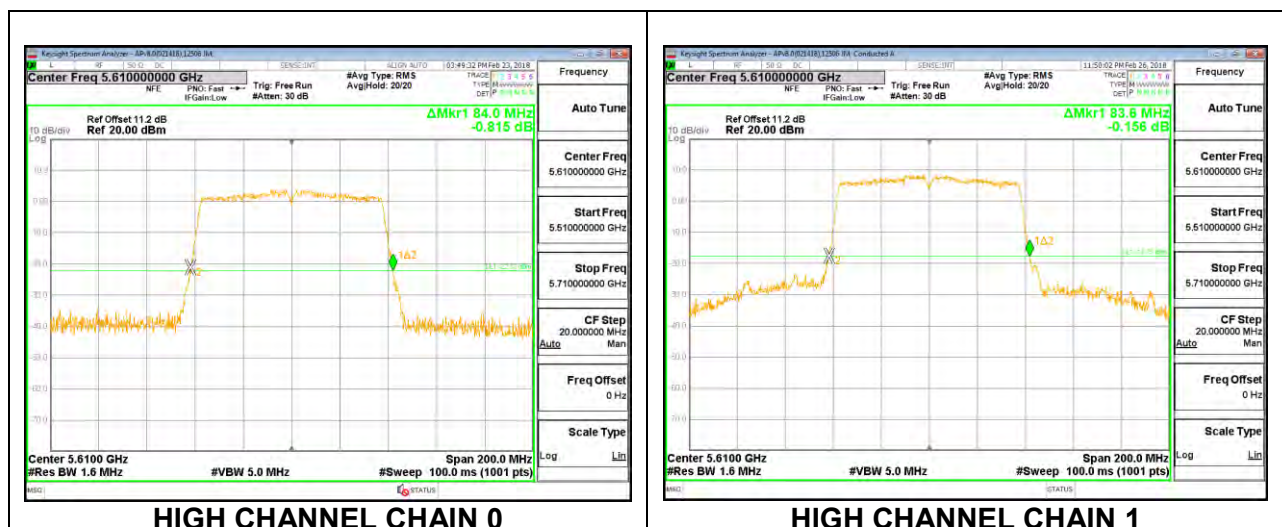


CHANNEL 138

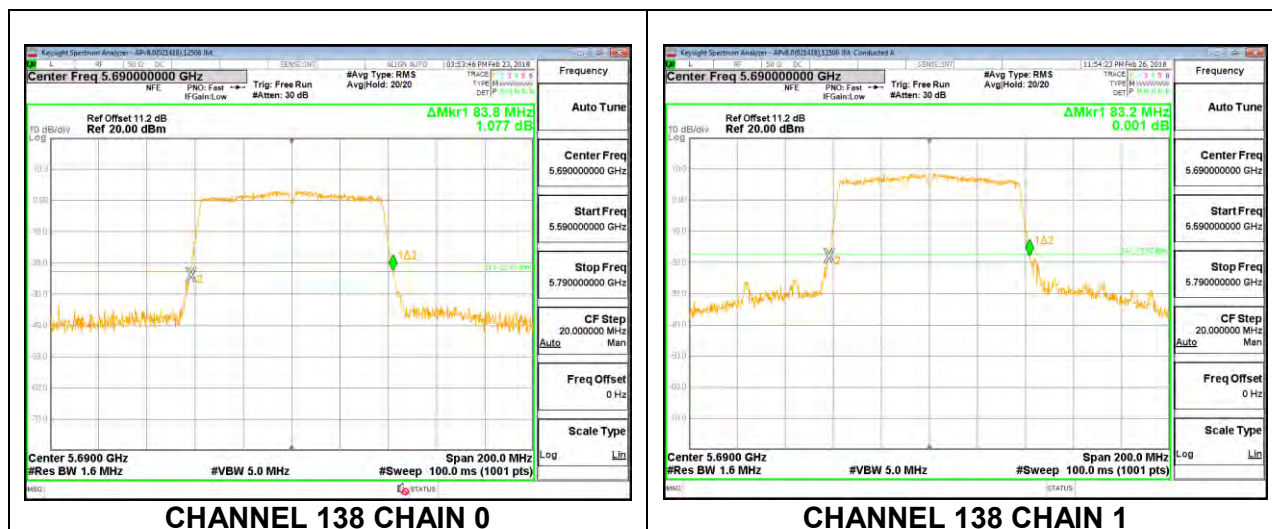


8.2.13. 802.11a 2TX CDD MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5745	21.45	21.05
Mid	5785	21.90	21.40
High	5825	22.00	21.00


LOW CHANNEL

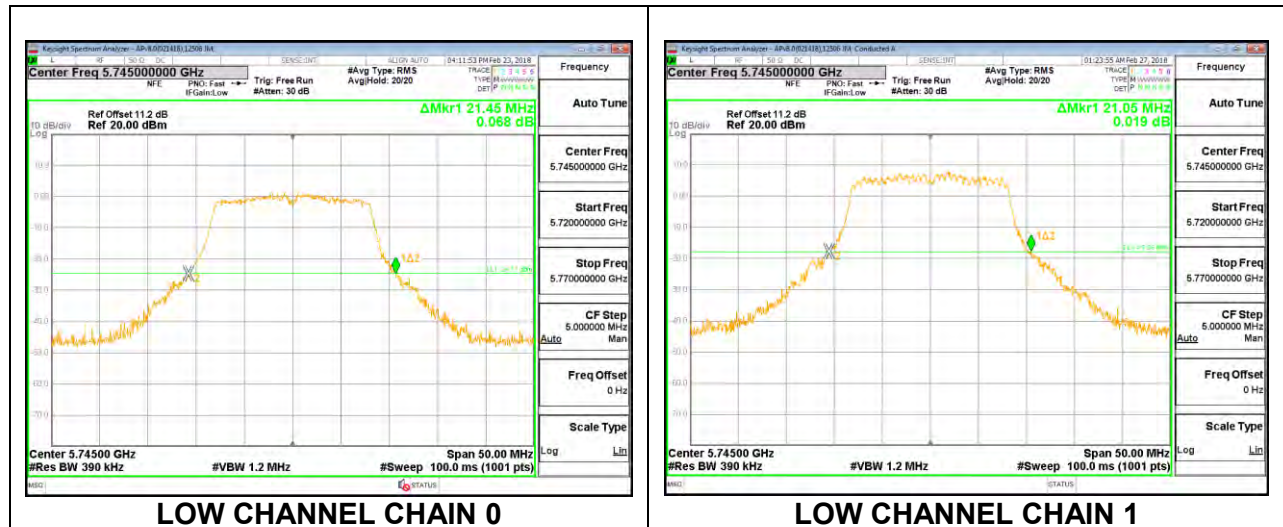


MID CHANNEL

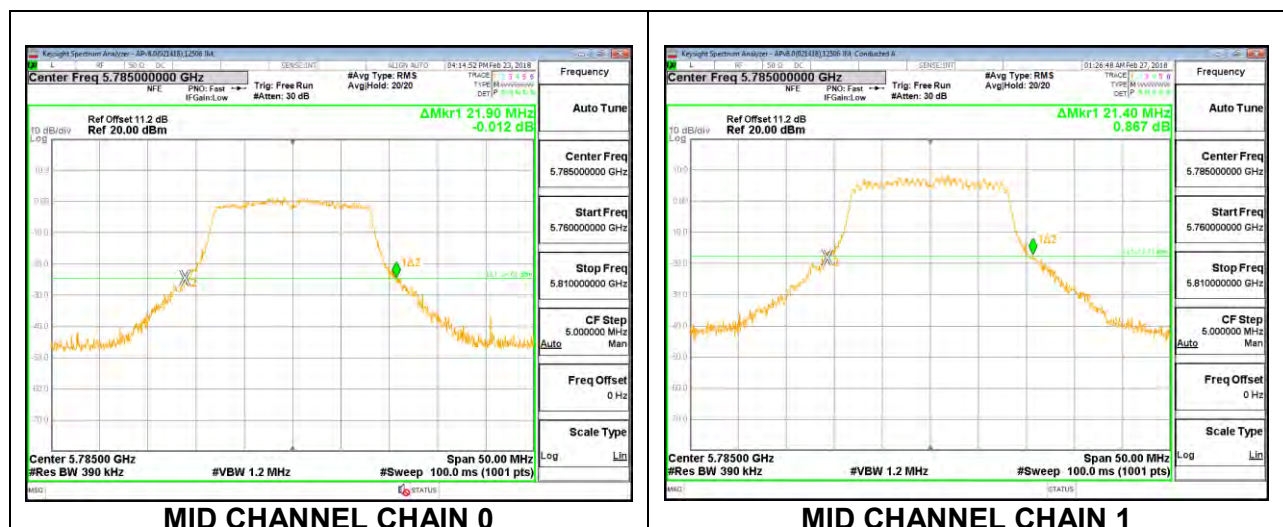

HIGH CHANNEL

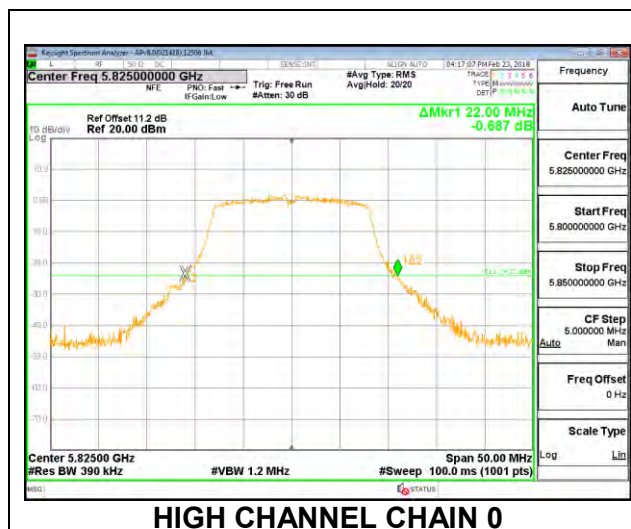

HIGH CHANNEL CHAIN 0

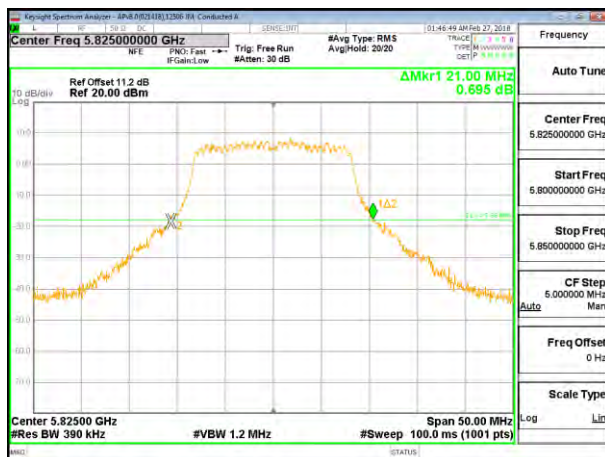


HIGH CHANNEL CHAIN 1


8.2.14. 802.11n HT20 2TX CDD MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)
Low	5745	22.45	21.85
Mid	5785	22.10	22.10
High	5825	22.45	22.35


LOW CHANNEL

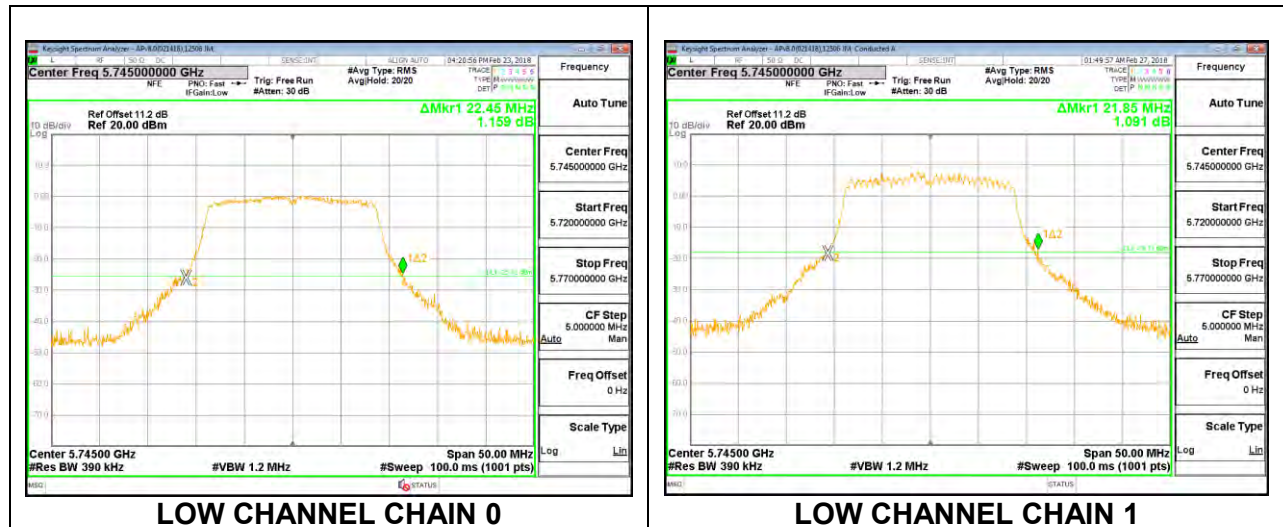

MID CHANNEL

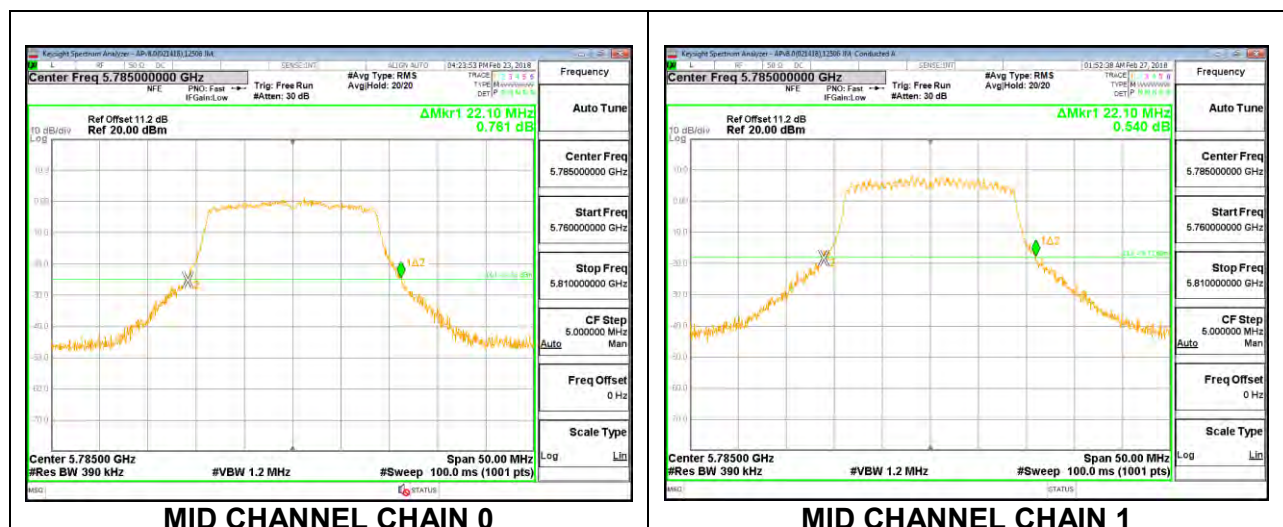


HIGH CHANNEL

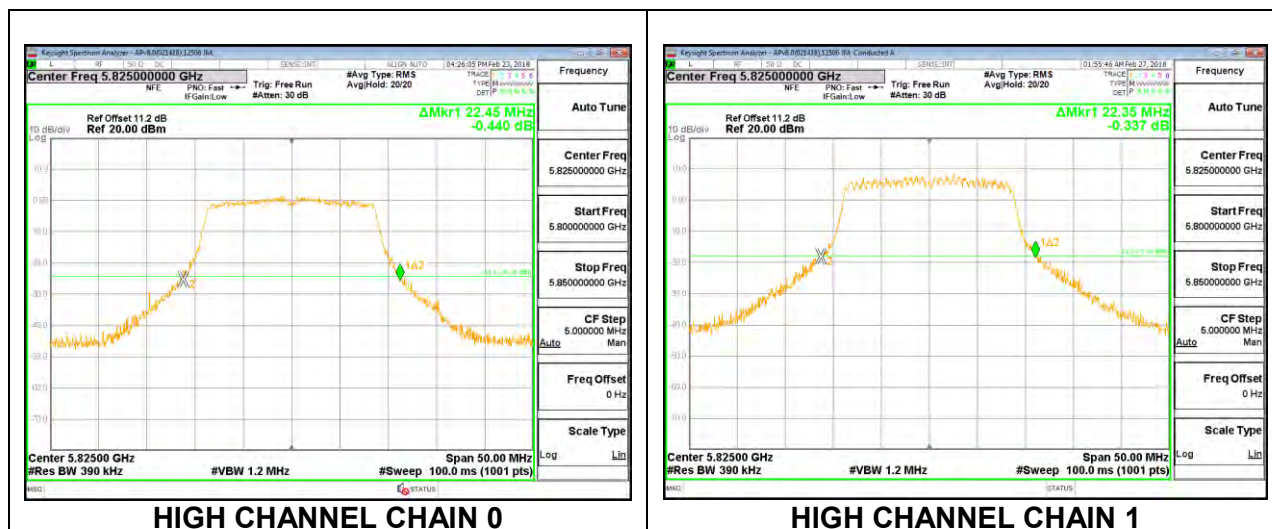


8.2.15. 802.11n HT40 2TX CDD MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth	26 dB Bandwidth
		Chain 0 (MHz)	Chain 1 (MHz)
Low	5755	41.70	41.20
High	5795	41.50	41.00

LOW CHANNEL

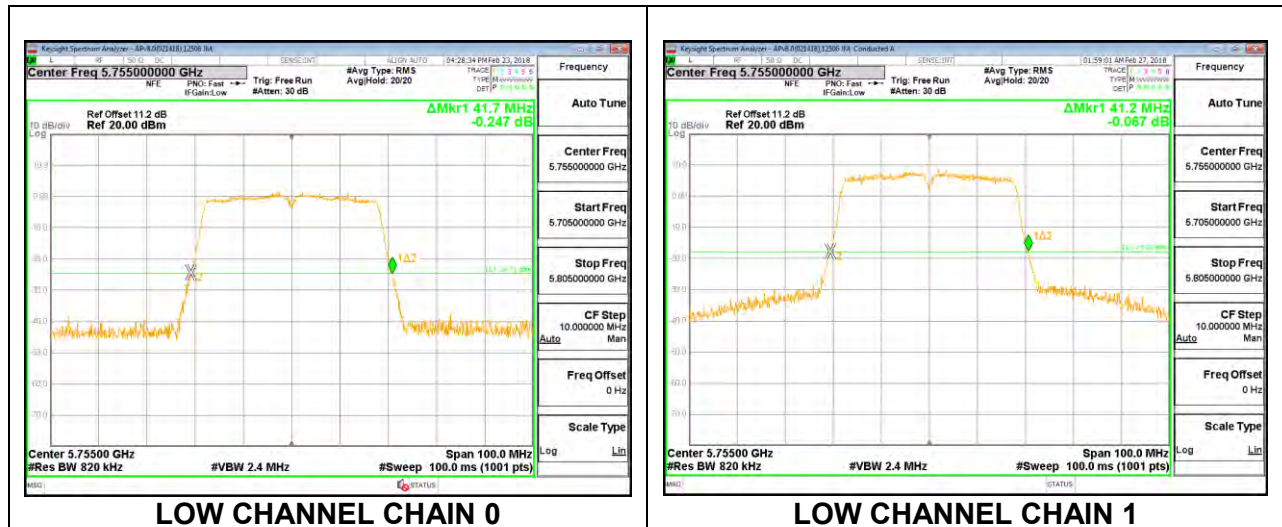


HIGH CHANNEL

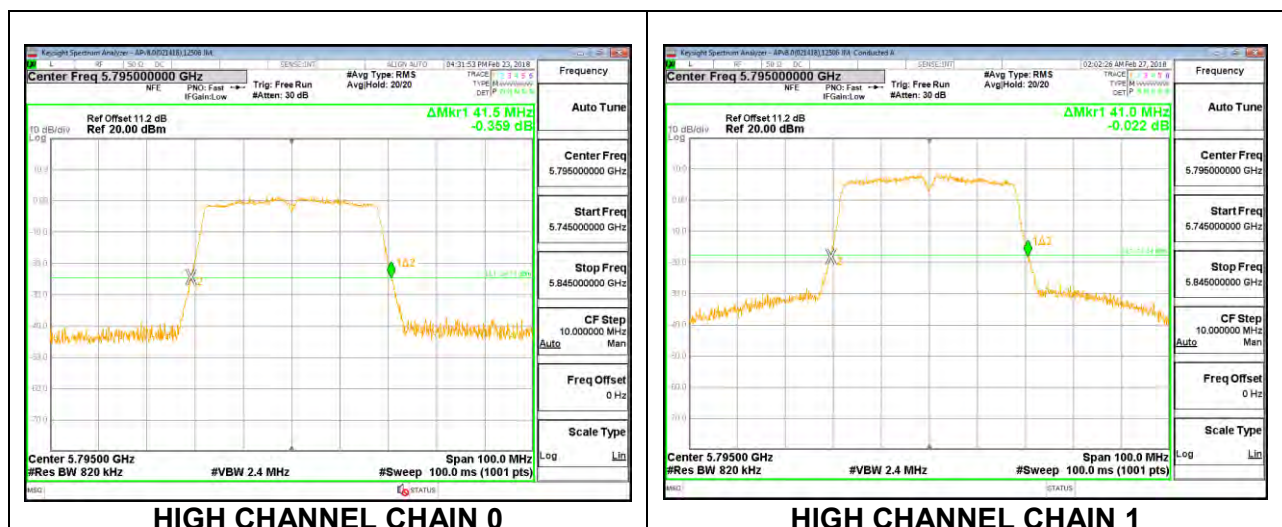

8.2.16. 802.11ac VHT80 2TX CDD MODE IN THE 5.8 GHz BAND

Channel	Frequency	26 dB Bandwidth	26 dB Bandwidth
	(MHz)	Chain 0	Chain 1
		(MHz)	(MHz)
Mid	5775	84.60	83.40

MID CHANNEL

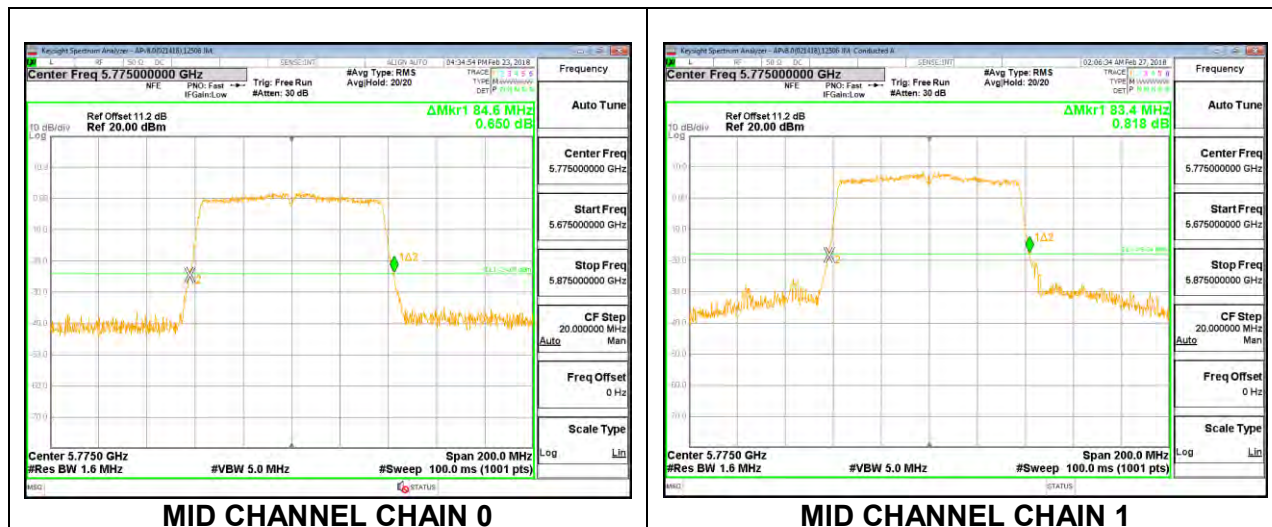

8.3. 99% BANDWIDTH

LIMITS


None; for reporting purposes only.

RESULTS


8.3.1. 802.11a 2TX CDD MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5180	16.482	16.451
Mid	5200	16.488	16.391
High	5240	16.538	16.490


LOW CHANNEL

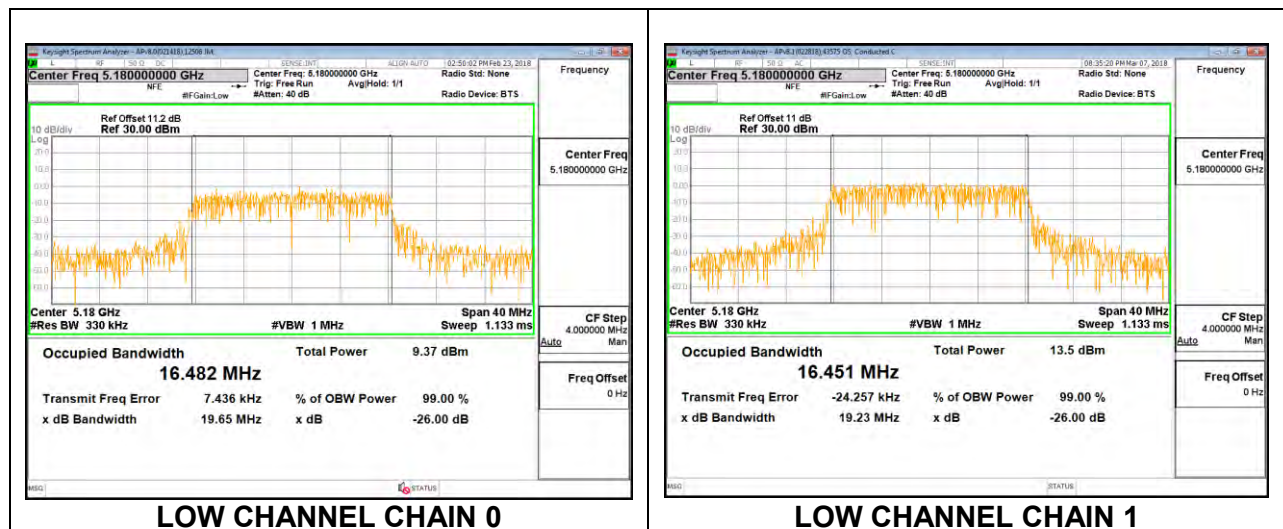

MID CHANNEL

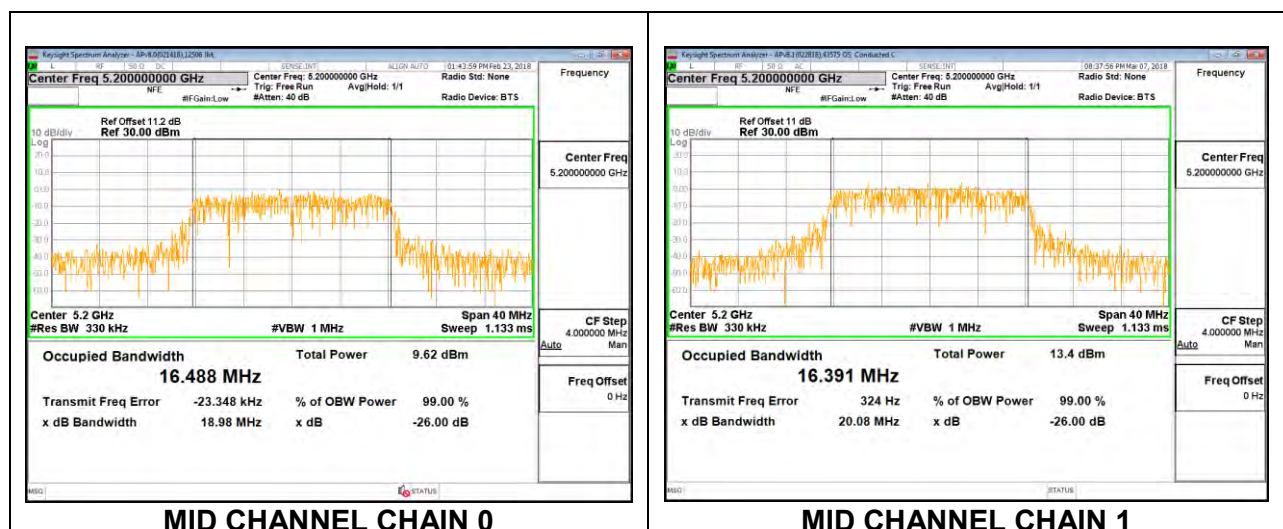



HIGH CHANNEL

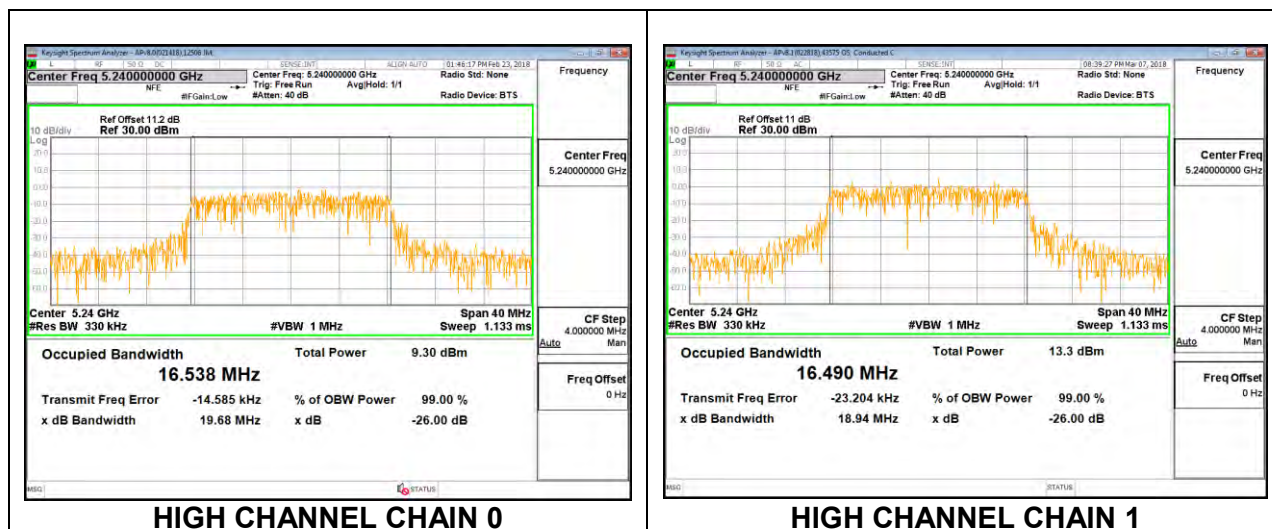



8.3.2. 802.11n HT20 2TX CDD MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5180	17.695	17.795
Mid	5200	17.705	17.763
High	5240	17.737	17.687


LOW CHANNEL

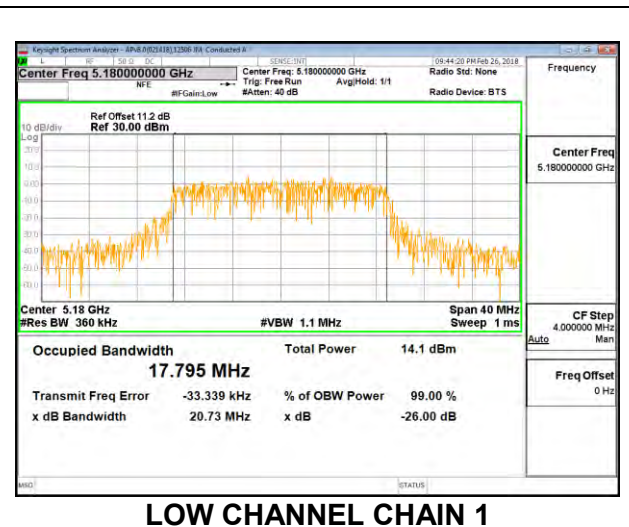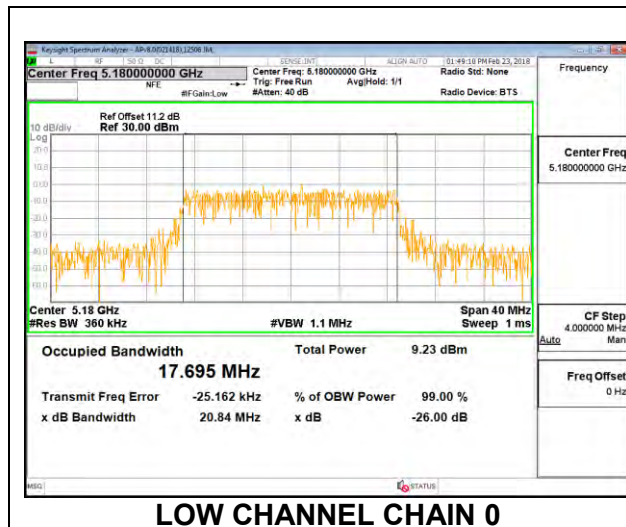

MID CHANNEL

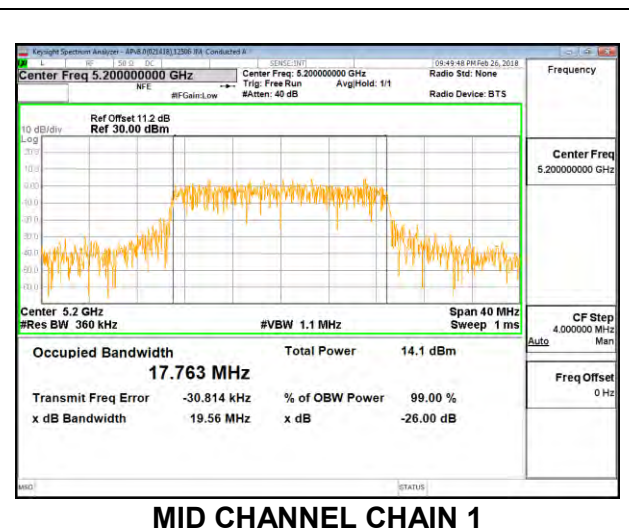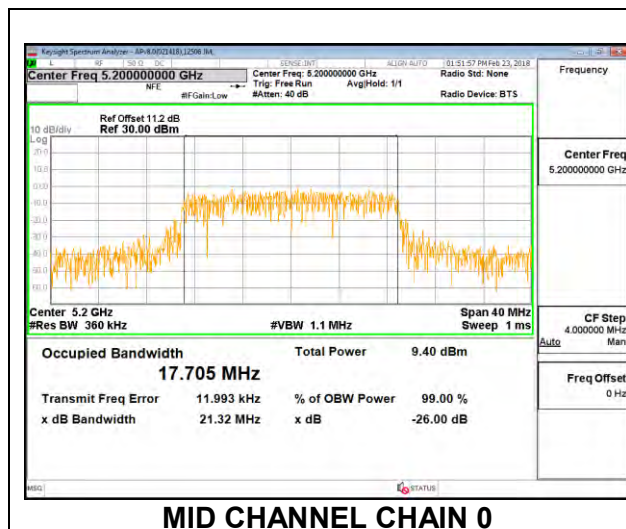



HIGH CHANNEL

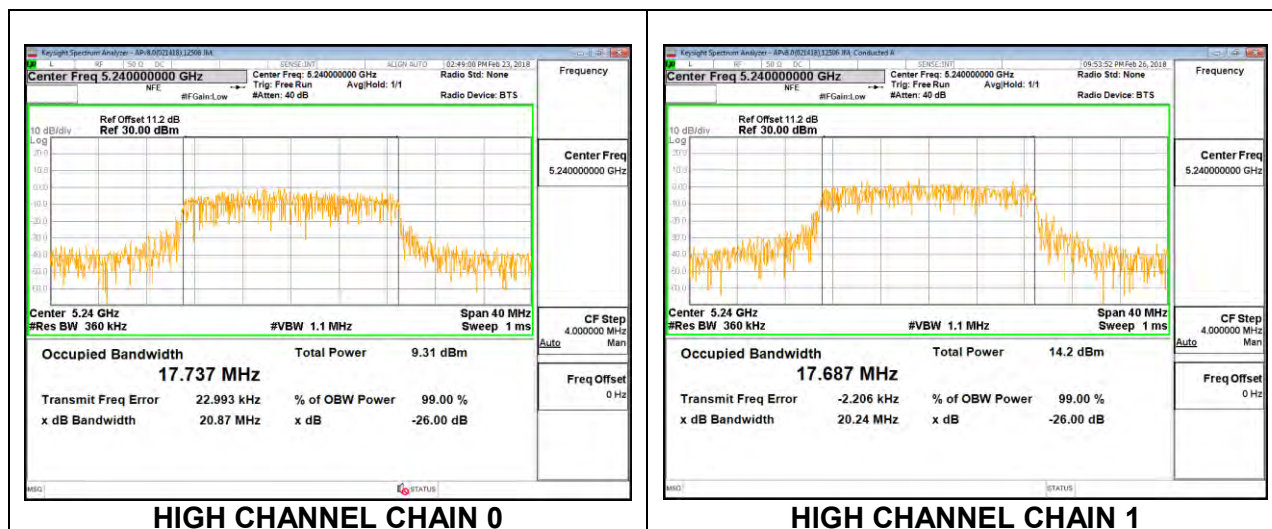



8.3.3. 802.11n HT40 2TX CDD MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5190	36.373	36.457
High	5230	36.295	36.222

LOW CHANNEL

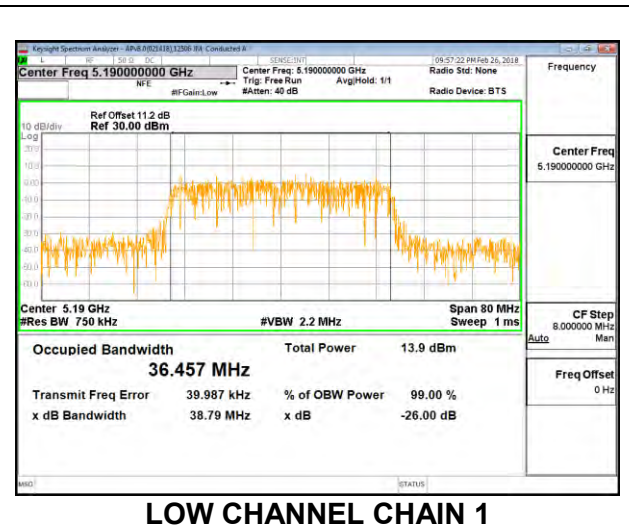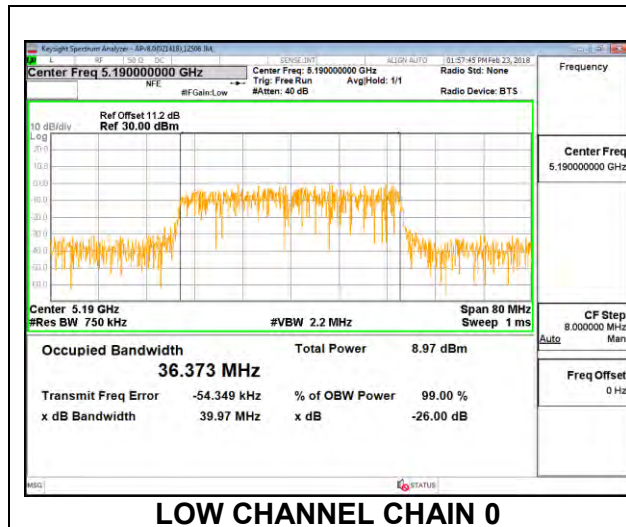

HIGH CHANNEL

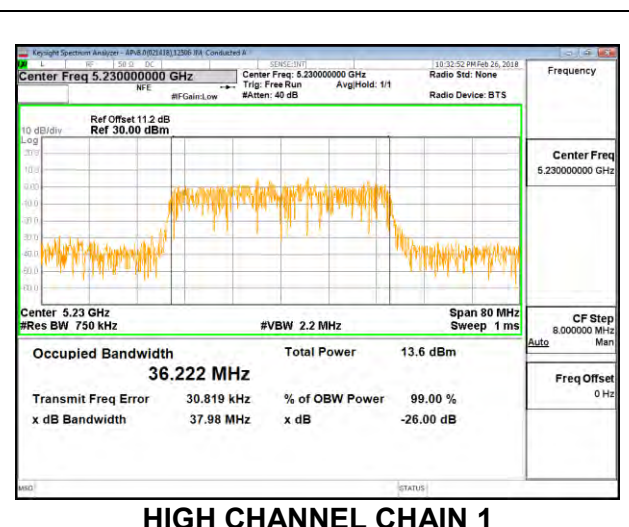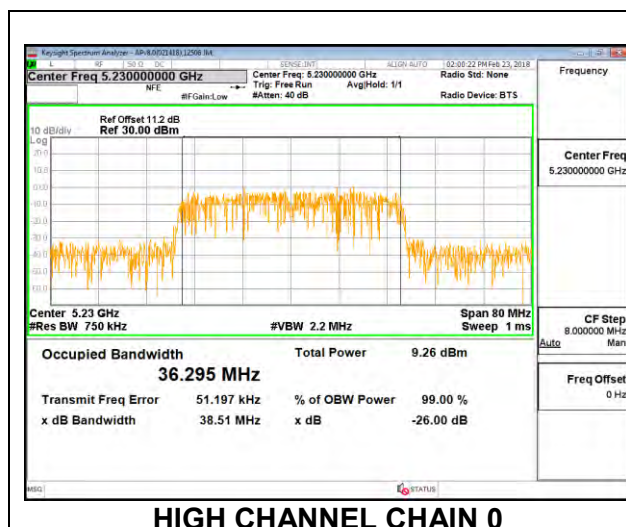

8.3.4. 802.11ac VHT80 2TX CDD MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Mid	5210	76.012	75.816



MID CHANNEL





8.3.5. 802.11a 2TX CDD MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5260	16.467	16.513
Mid	5300	16.497	16.441
High	5320	16.453	16.471


LOW CHANNEL

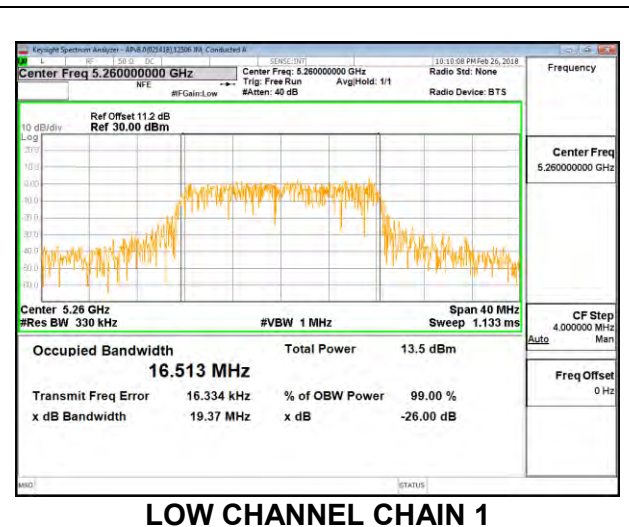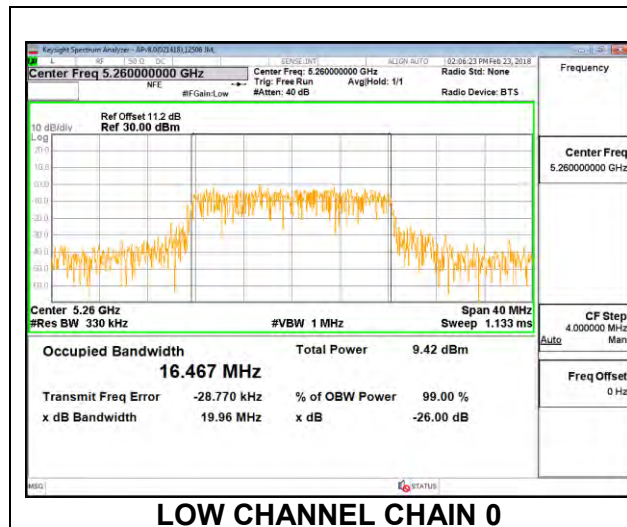

MID CHANNEL

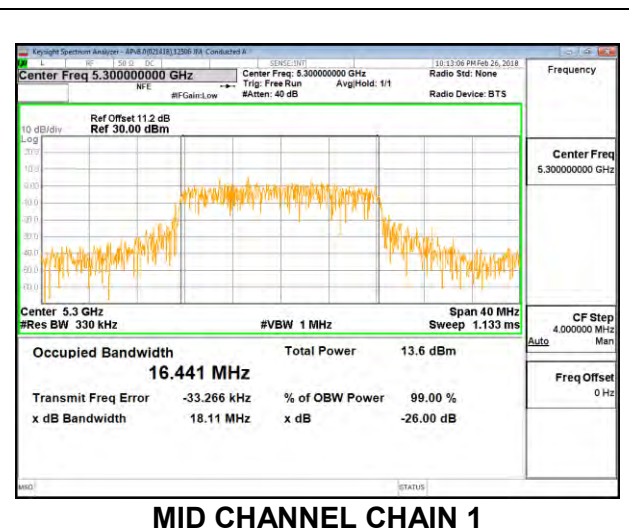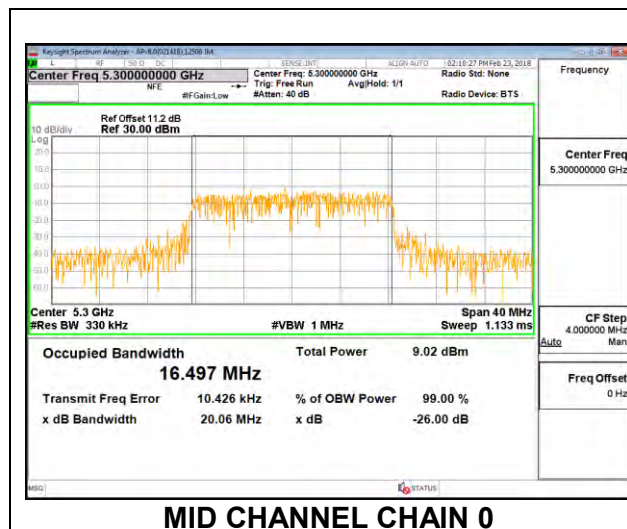


HIGH CHANNEL

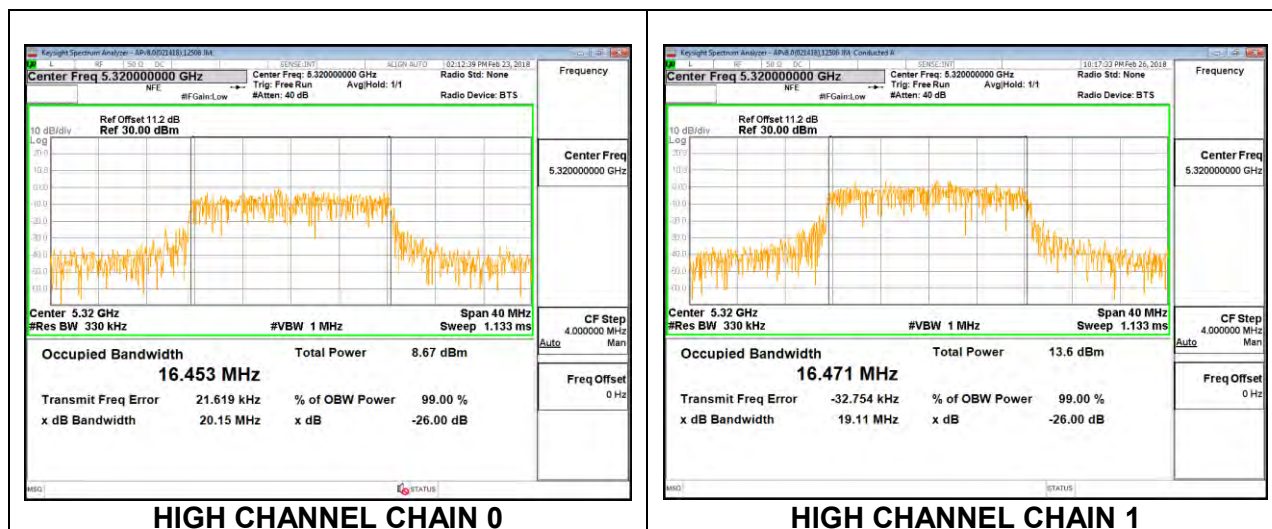

8.3.6. 802.11n HT20 2TX CDD MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5260	17.722	17.761
Mid	5300	17.648	17.665
High	5320	17.750	17.647

LOW CHANNEL

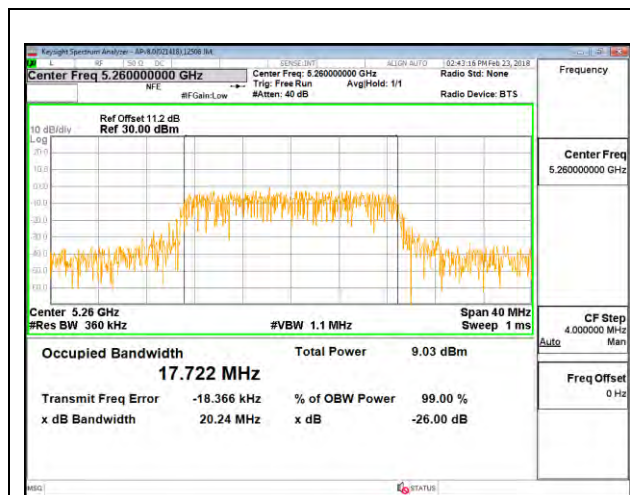


LOW CHANNEL CHAIN 0



LOW CHANNEL CHAIN 1

MID CHANNEL

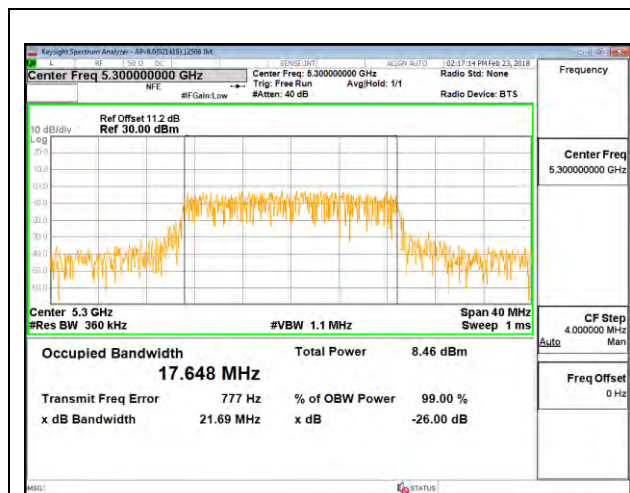


MID CHANNEL CHAIN 0



MID CHANNEL CHAIN 1



HIGH CHANNEL

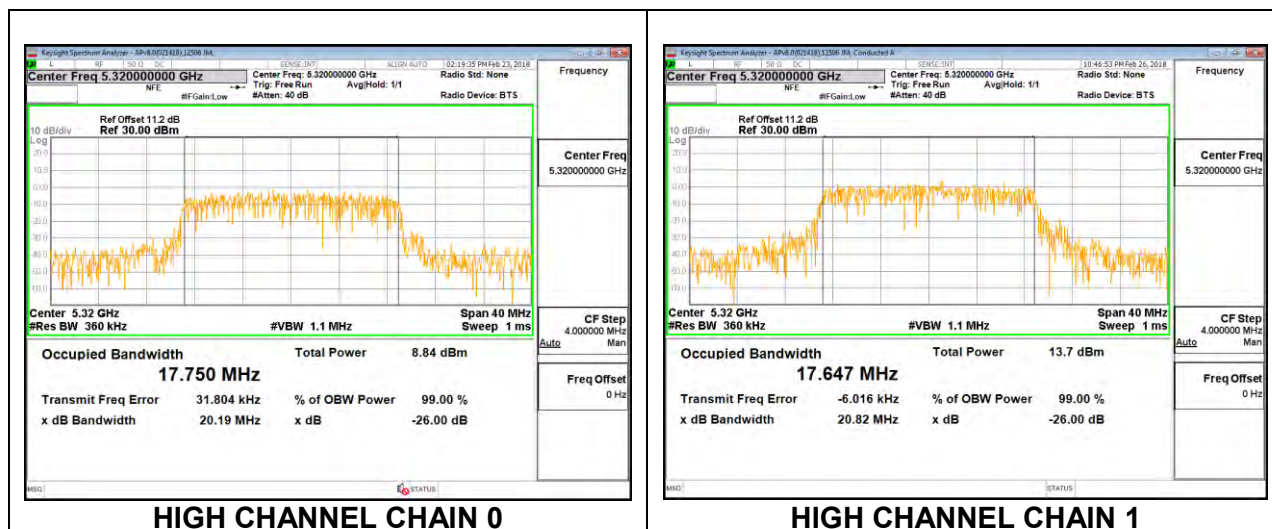



8.3.7. 802.11n HT40 2TX CDD MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5270	36.280	36.388
High	5310	36.435	36.216

LOW CHANNEL

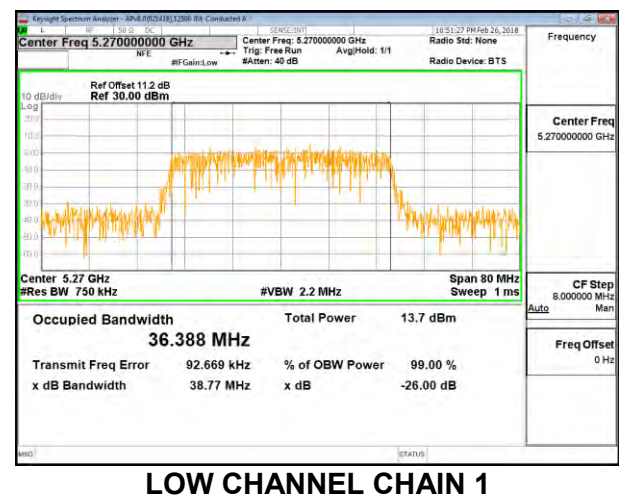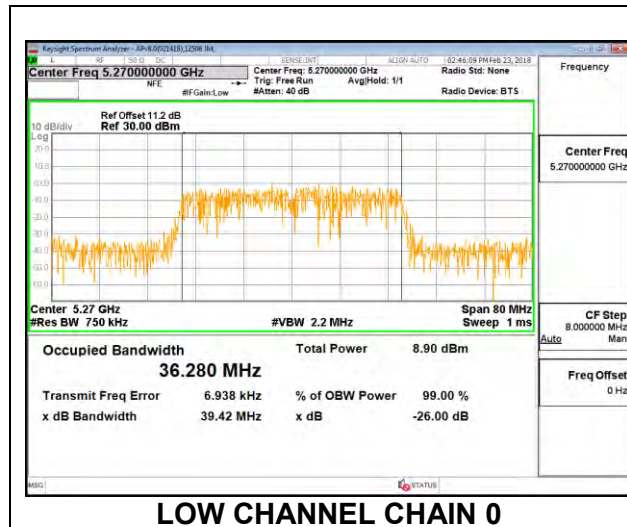


HIGH CHANNEL

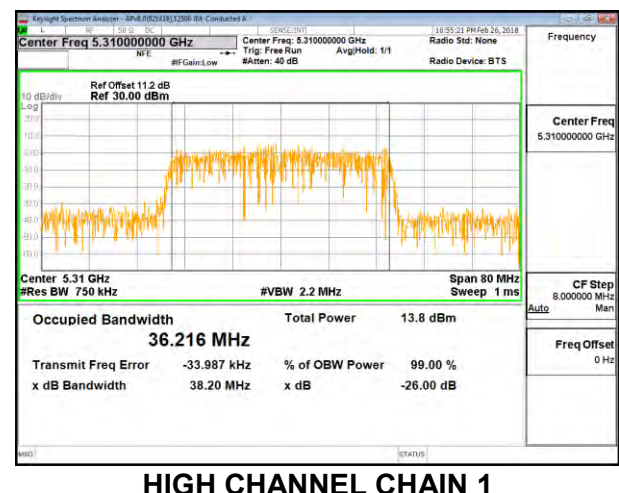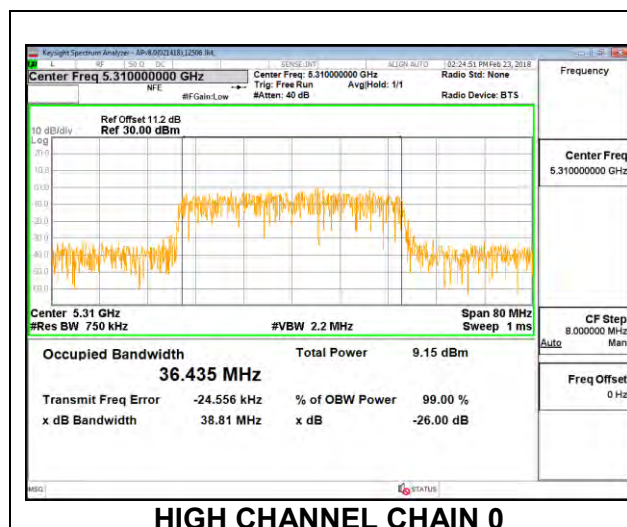

8.3.8. 802.11ac VHT80 2TX CDD MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Mid	5290	75.963	76.029


MID CHANNEL

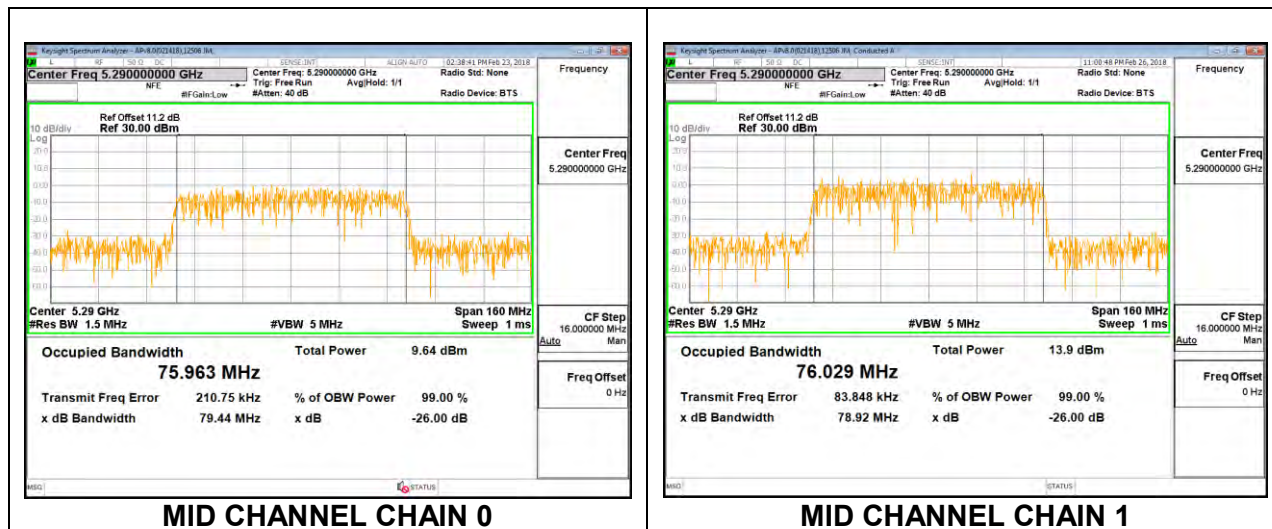


8.3.9. 802.11a 2TX CDD MODE IN THE 5.6 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5500	16.509	16.413
Mid	5580	16.520	16.572
High	5700	16.584	16.446
144	5720	16.411	16.630


LOW CHANNEL

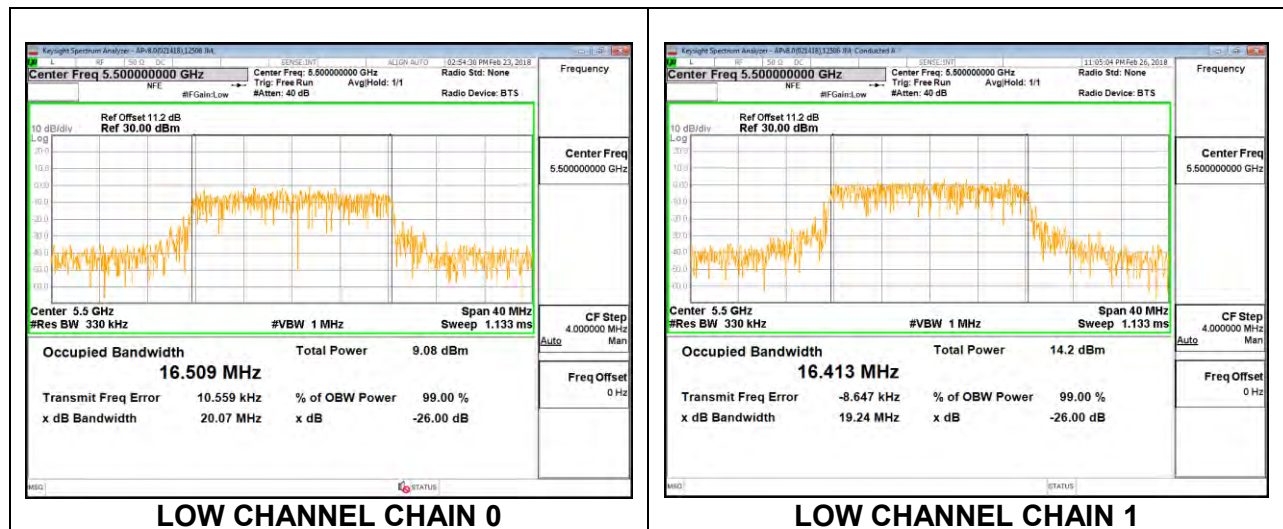


MID CHANNEL

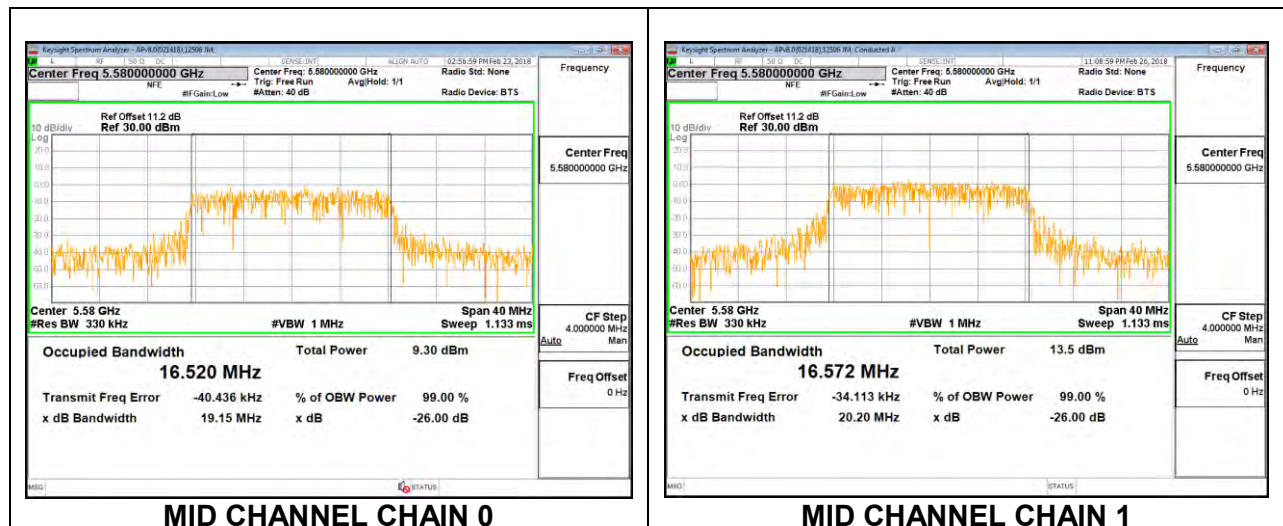

HIGH CHANNEL

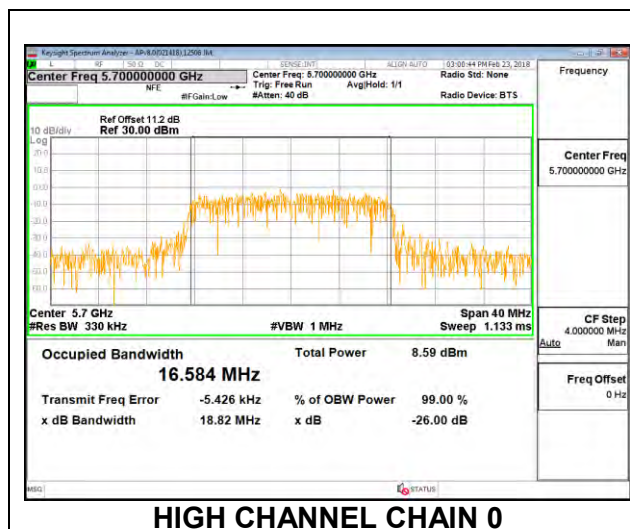


HIGH CHANNEL CHAIN 0

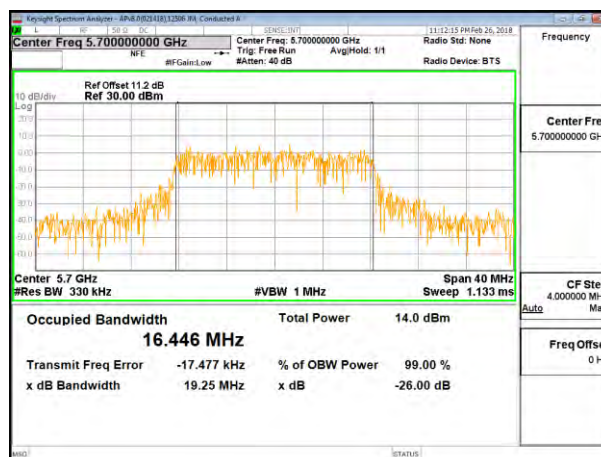

HIGH CHANNEL CHAIN 1

CHANNEL 144

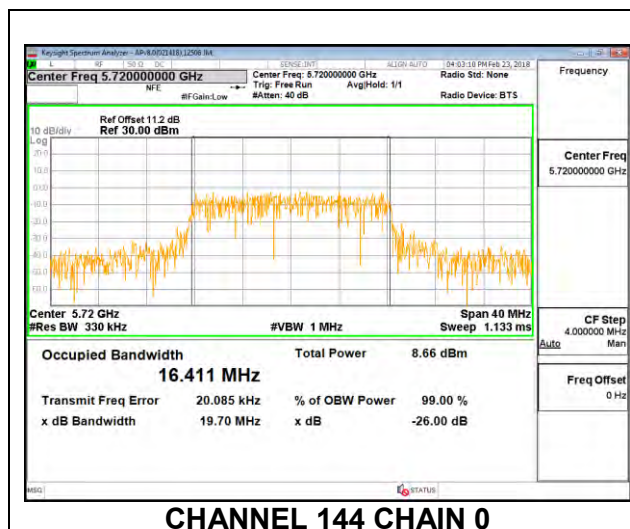

CHANNEL 144 CHAIN 0




CHANNEL 144 CHAIN 1


8.3.10. 802.11n HT20 2TX CDD MODE IN THE 5.6 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5500	17.711	17.677
Mid	5580	17.716	17.696
High	5700	17.688	17.809
144	5720	17.753	17.606



LOW CHANNEL

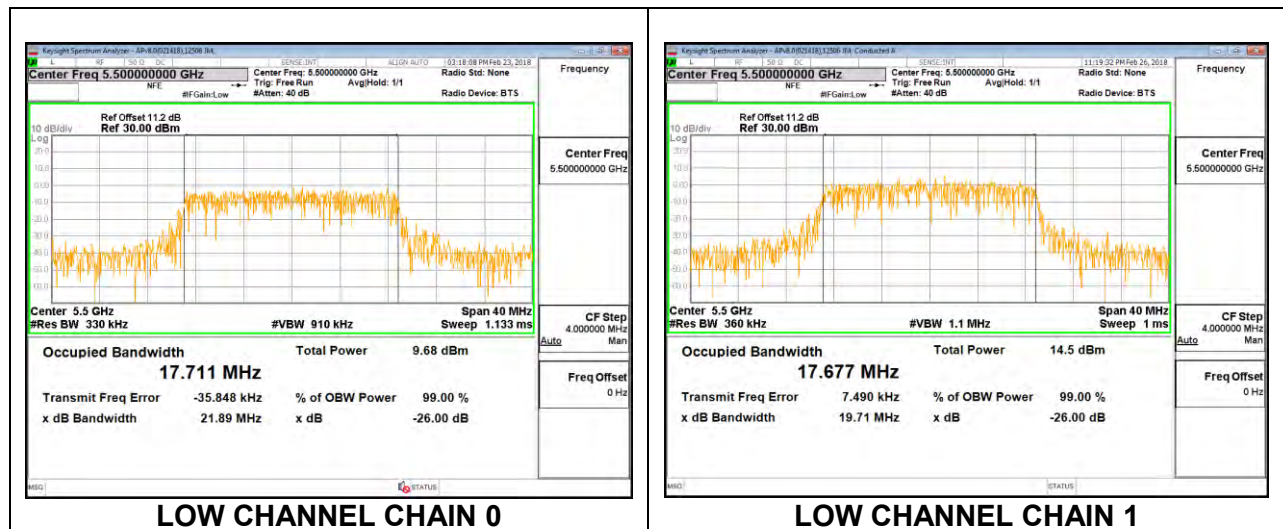


MID CHANNEL

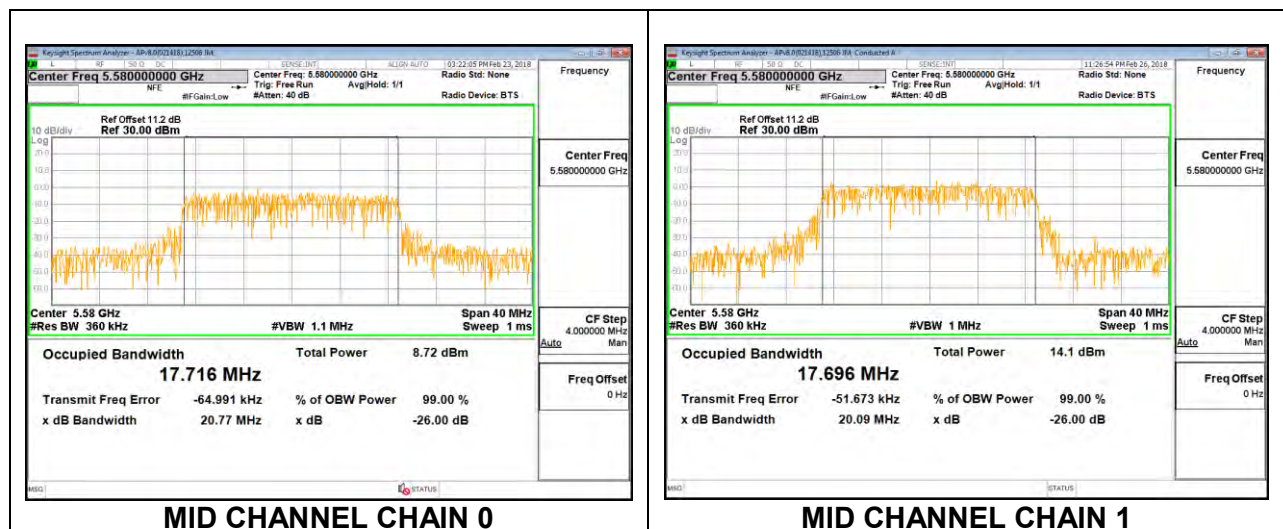

HIGH CHANNEL

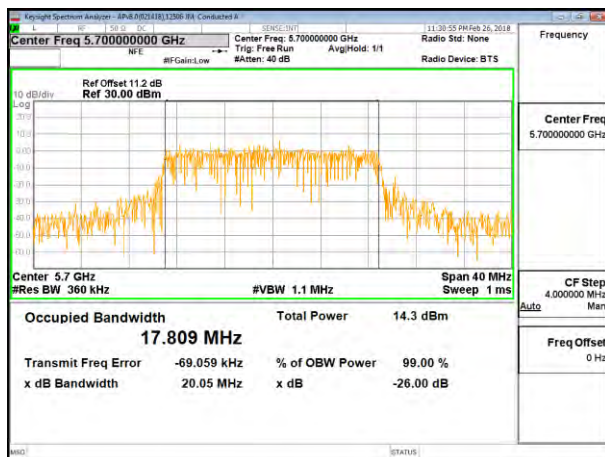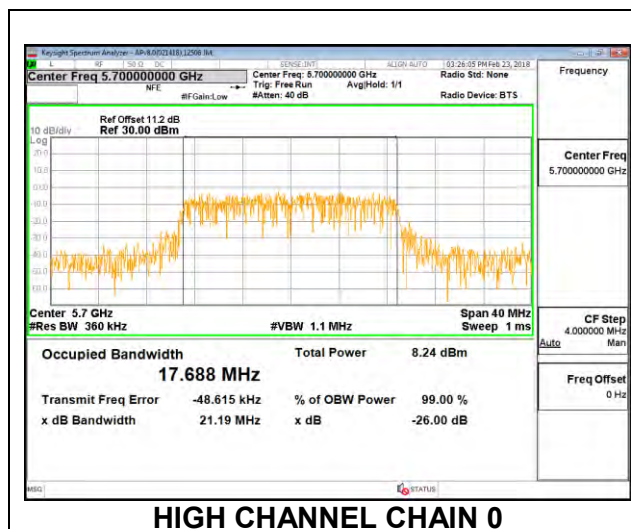


CHANNEL 144

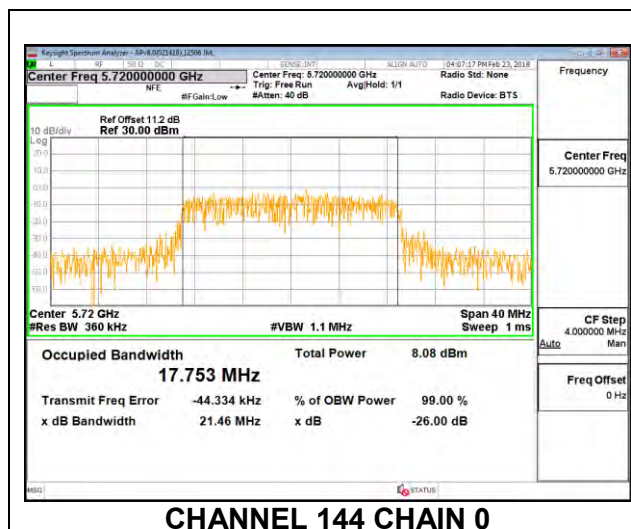


8.3.11. 802.11n HT40 2TX CDD MODE IN THE 5.6 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5510	36.265	36.421
Mid	5550	36.456	36.310
High	5670	36.281	36.269
142	5710	36.367	36.377


LOW CHANNEL

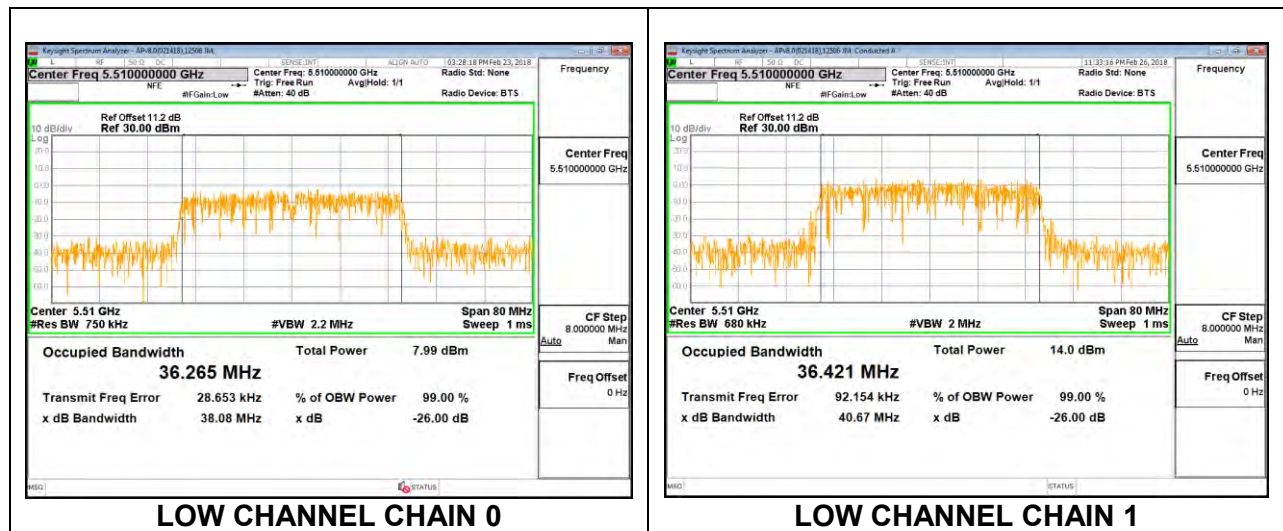


MID CHANNEL

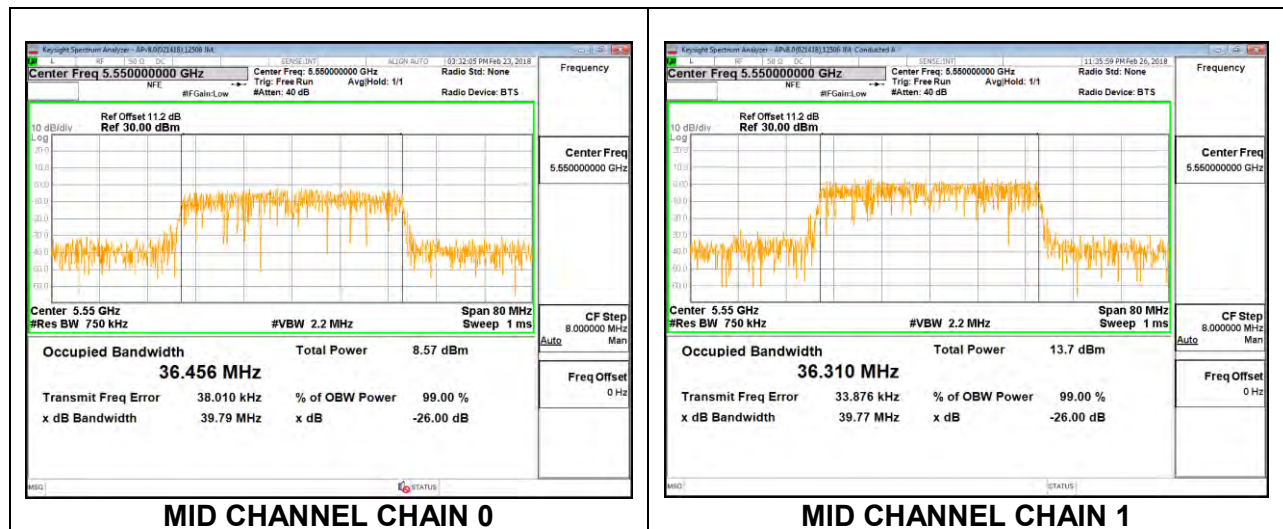

HIGH CHANNEL

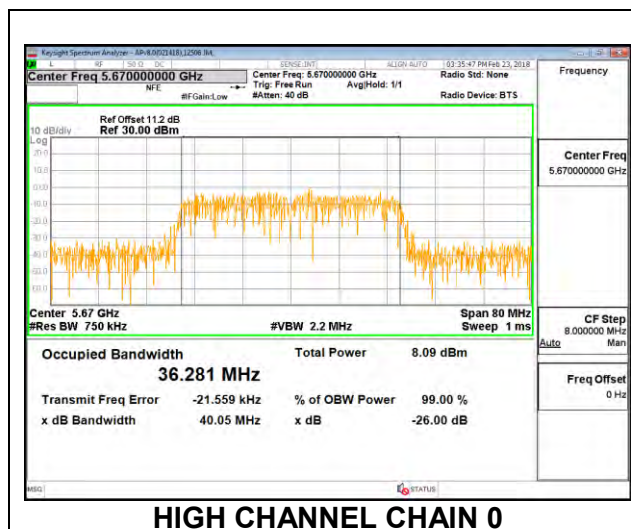


HIGH CHANNEL CHAIN 0

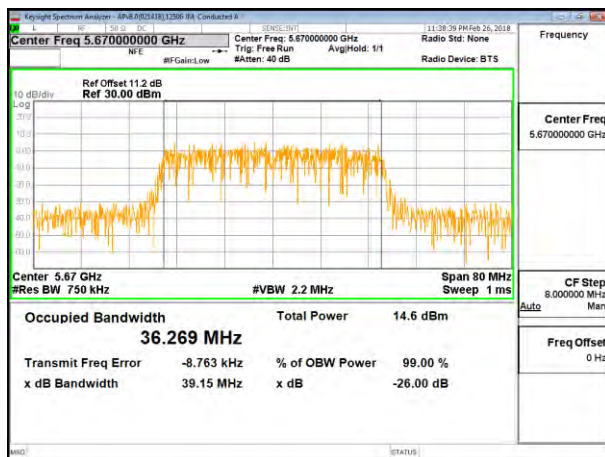

HIGH CHANNEL CHAIN 1

CHANNEL 142

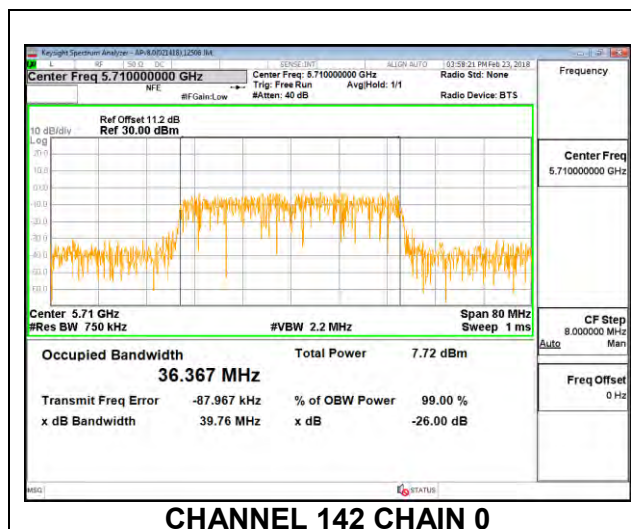

CHANNEL 142 CHAIN 0




CHANNEL 142 CHAIN 1


8.3.12. 802.11ac VHT80 2TX CDD MODE IN THE 5.6 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5530	76.077	75.846
High	5610	76.116	75.713
138	5690	76.144	75.799


LOW CHANNEL

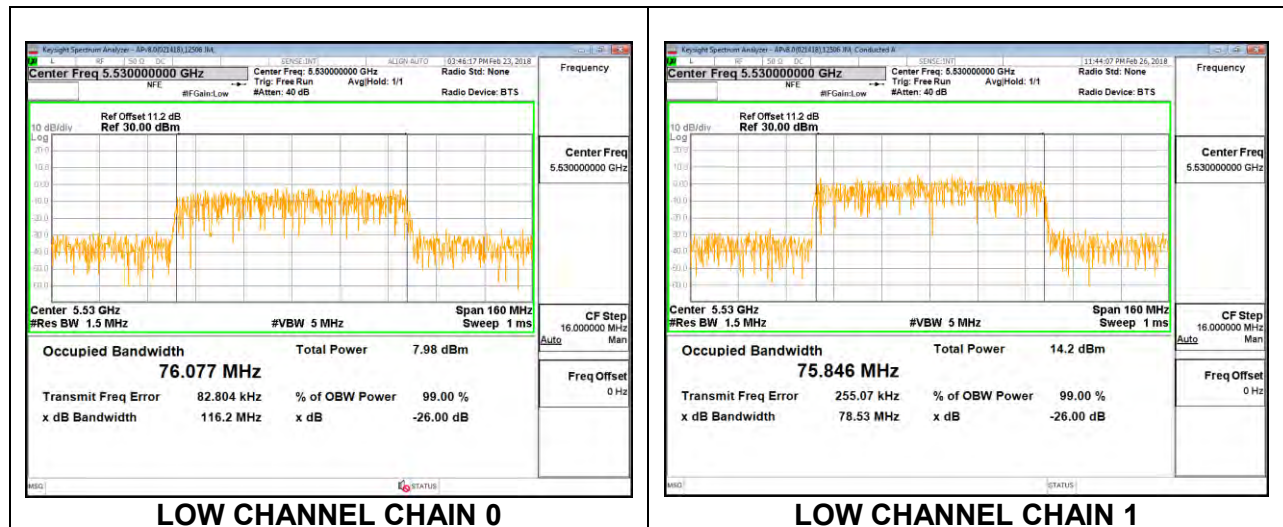

HIGH CHANNEL

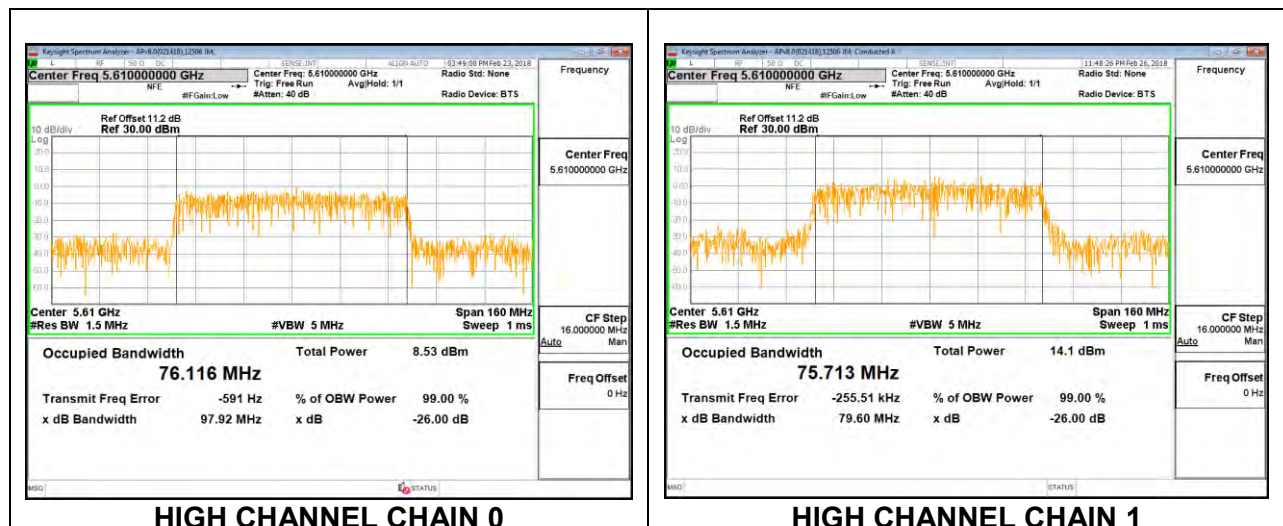



CHANNEL 138

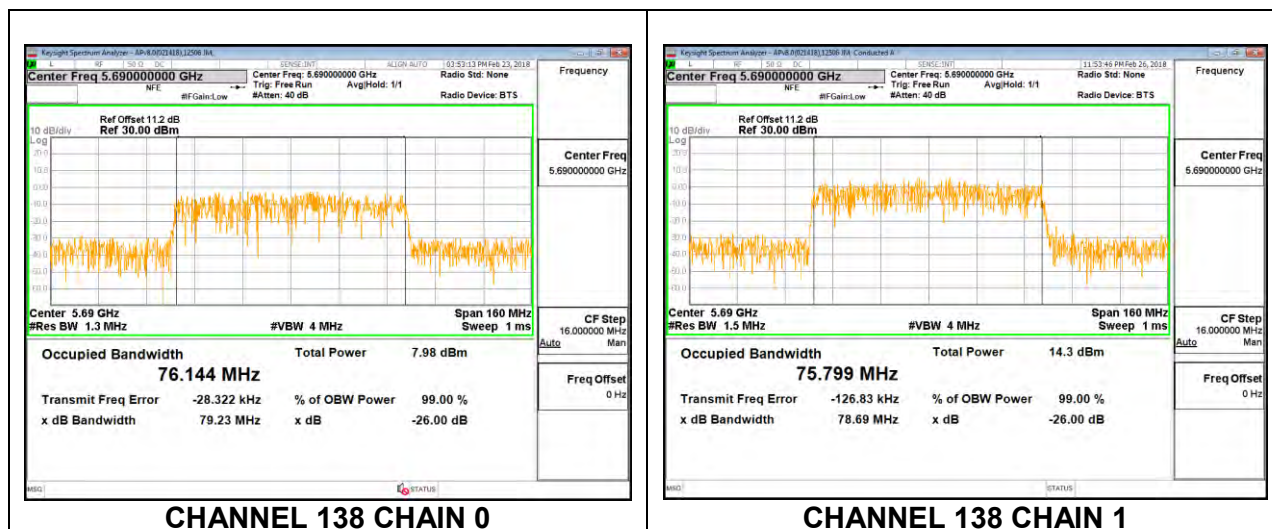



8.3.13. 802.11a 2TX CDD MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5745	16.466	16.516
Mid	5785	16.555	16.509
High	5825	16.573	16.502


LOW CHANNEL

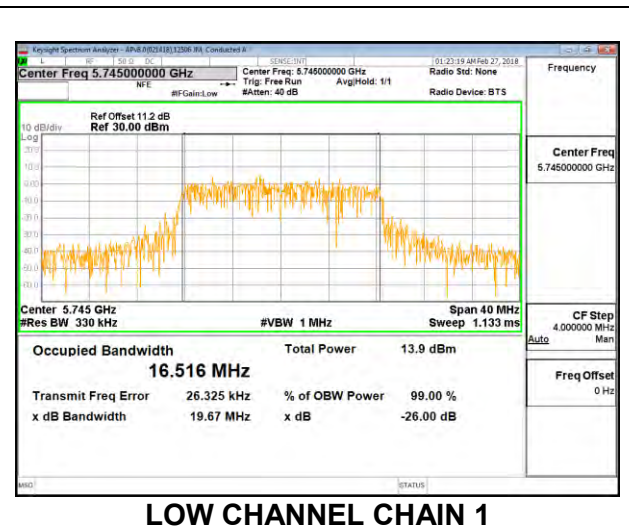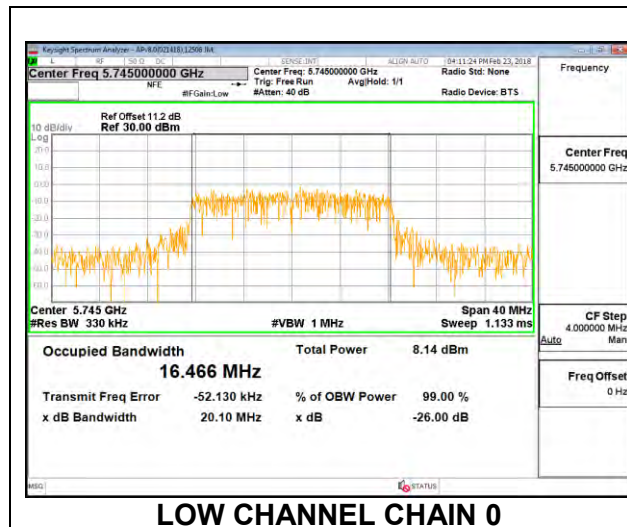

MID CHANNEL

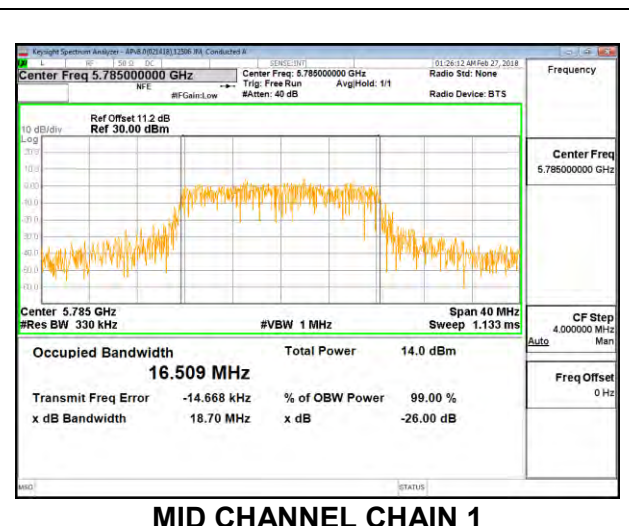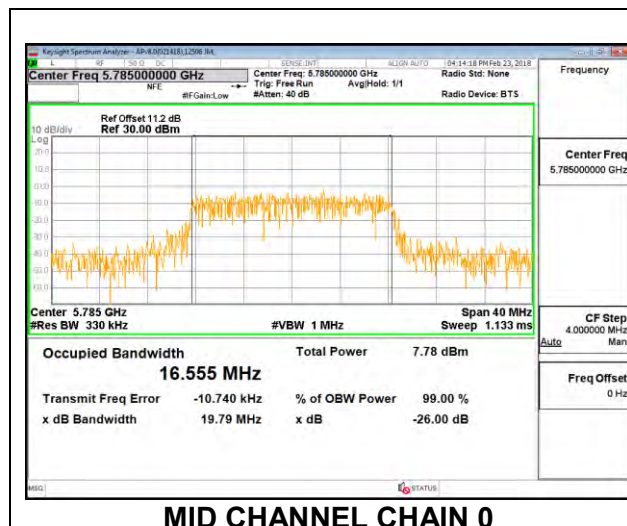



HIGH CHANNEL

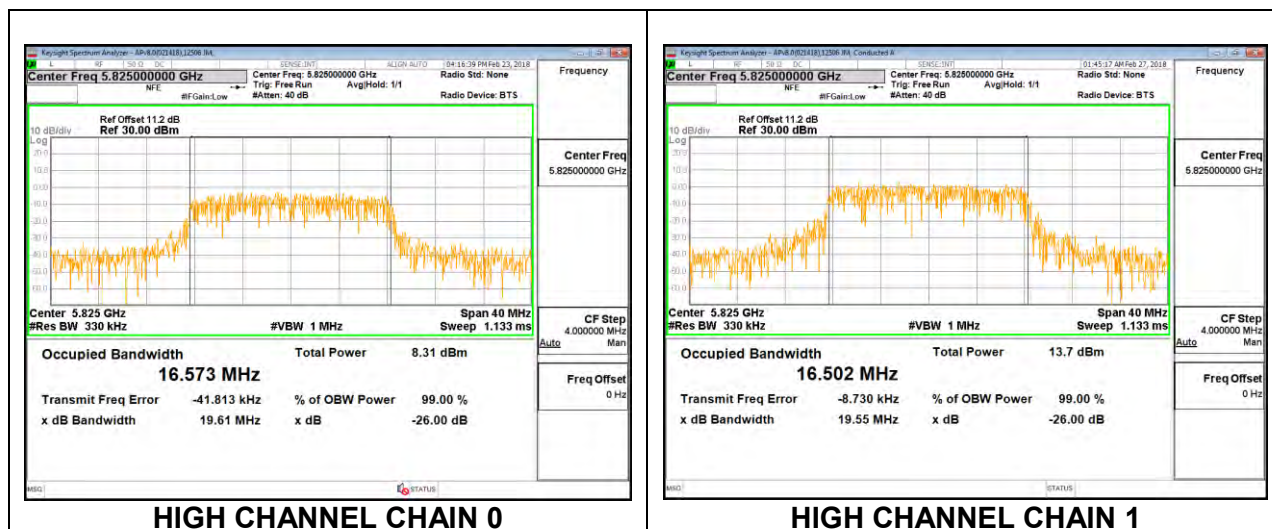



8.3.14. 802.11n HT20 2TX CDD MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5745	17.663	17.649
Mid	5785	17.770	17.754
High	5825	17.669	17.627


LOW CHANNEL

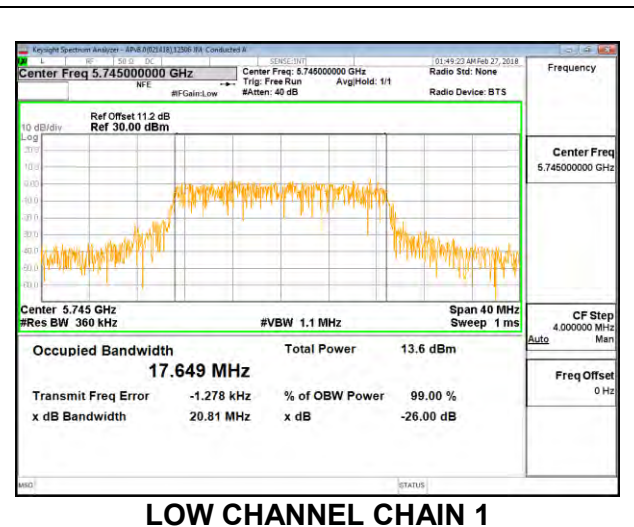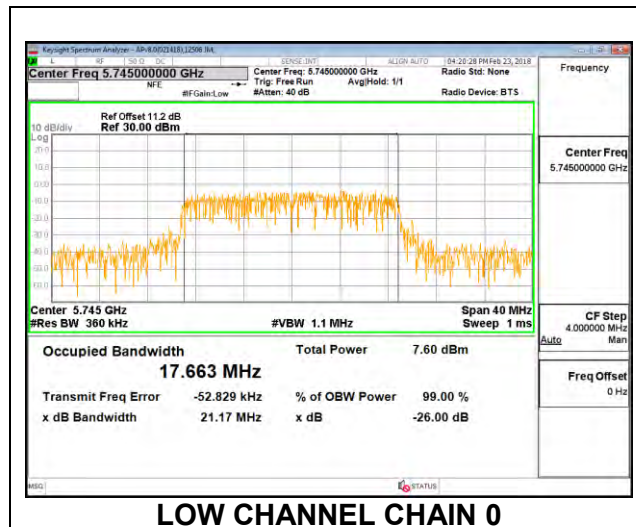

MID CHANNEL

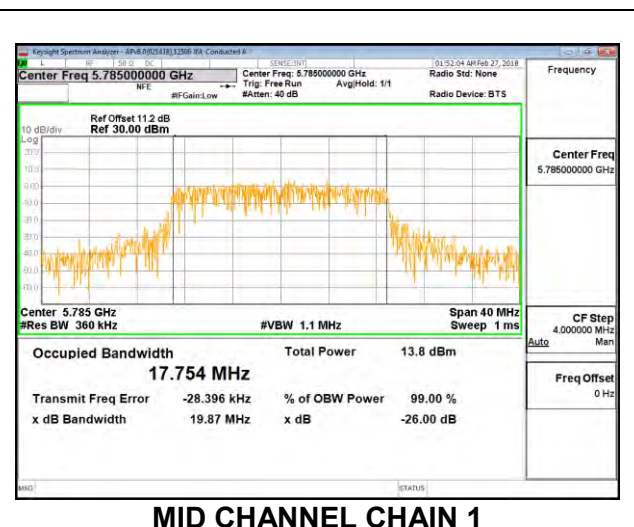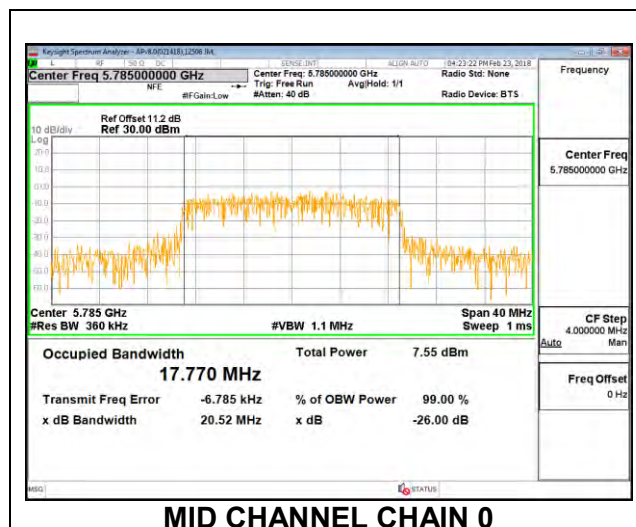



HIGH CHANNEL

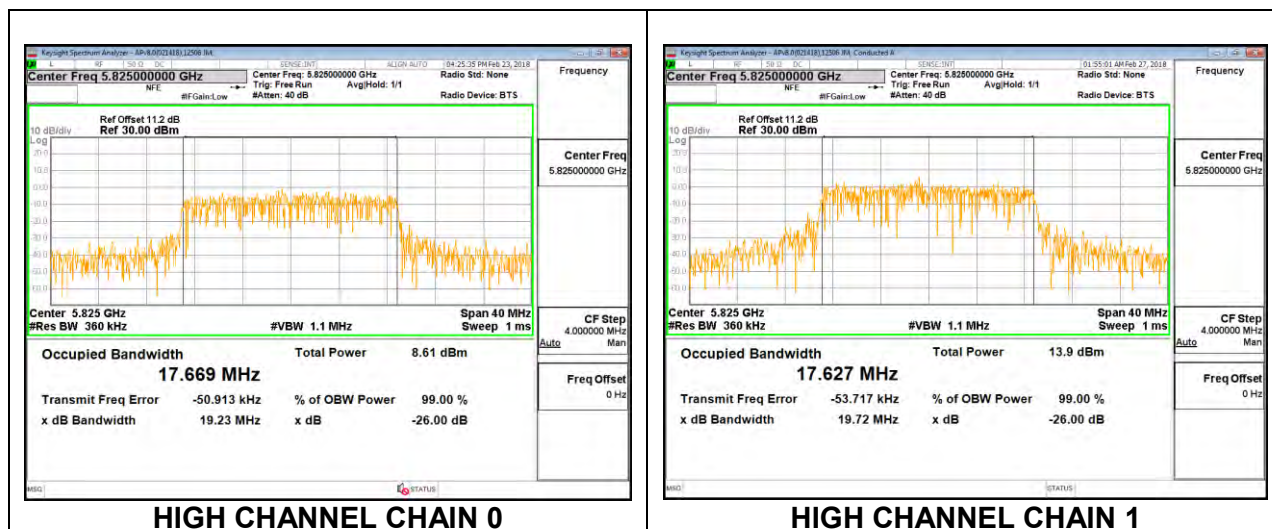



8.3.15. 802.11n HT40 2TX CDD MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low	5755	36.232	36.309
High	5795	36.326	36.431

LOW CHANNEL

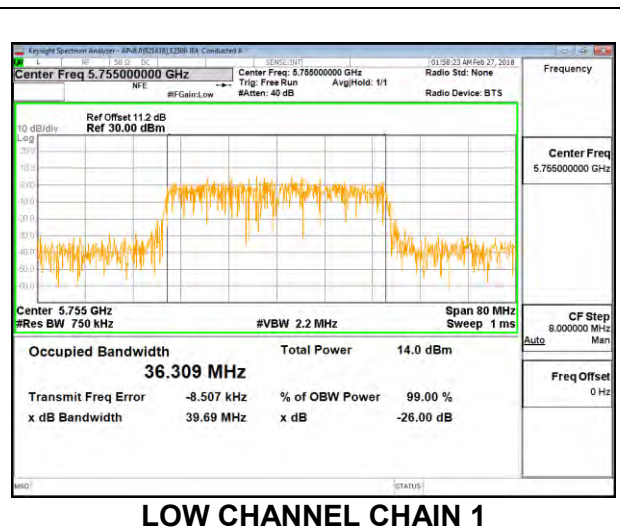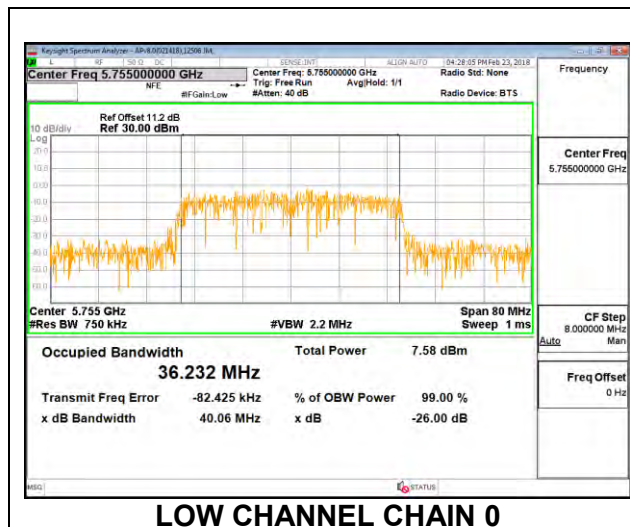


HIGH CHANNEL

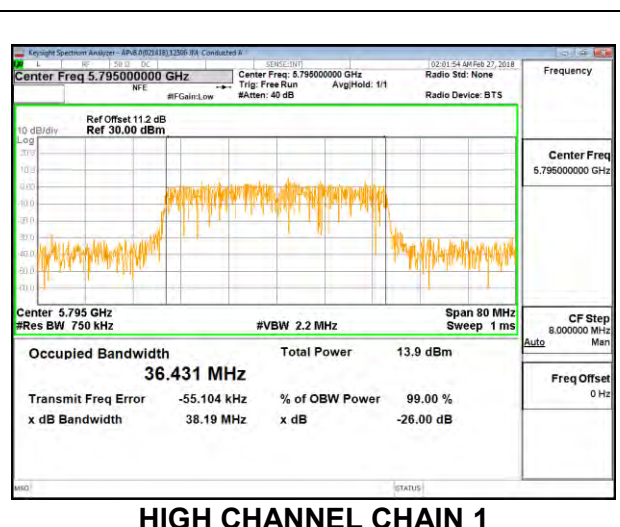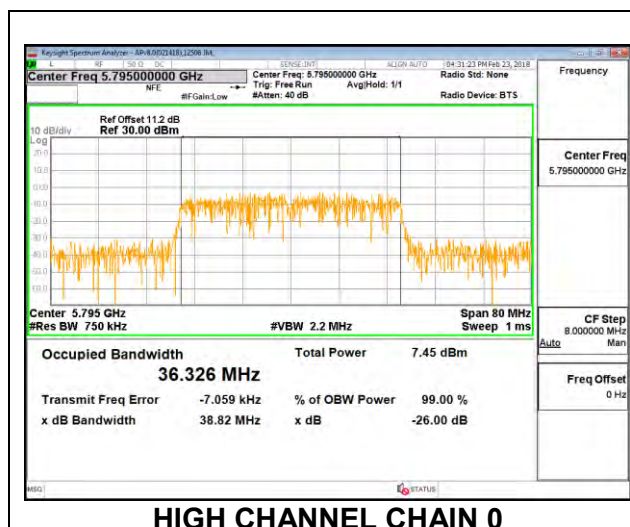

8.3.16. 802.11ac VHT80 2TX CDD MODE IN THE 5.8 GHz BAND

Channel	Frequency	99% Bandwidth Chain 0	99% Bandwidth Chain 1
	(MHz)	(MHz)	(MHz)
Mid	5775	76.178	75.936

MID CHANNEL

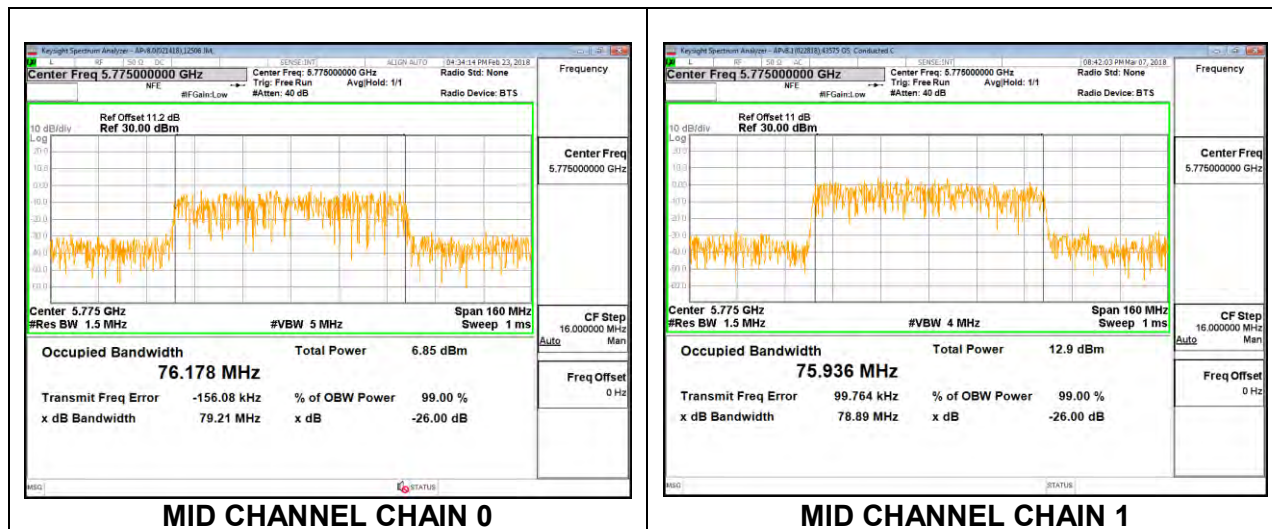

8.4. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS


8.4.1. 802.11a 2TX CDD MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	6 dB BW Chain 0 (MHz)	6 dB BW Chain 1 (MHz)	Minimum Limit (MHz)
Low	5745	16.400	16.330	0.5
Mid	5785	16.315	16.295	0.5
High	5825	16.105	16.325	0.5
144	5720	3.145	3.200	0.5



LOW CHANNEL

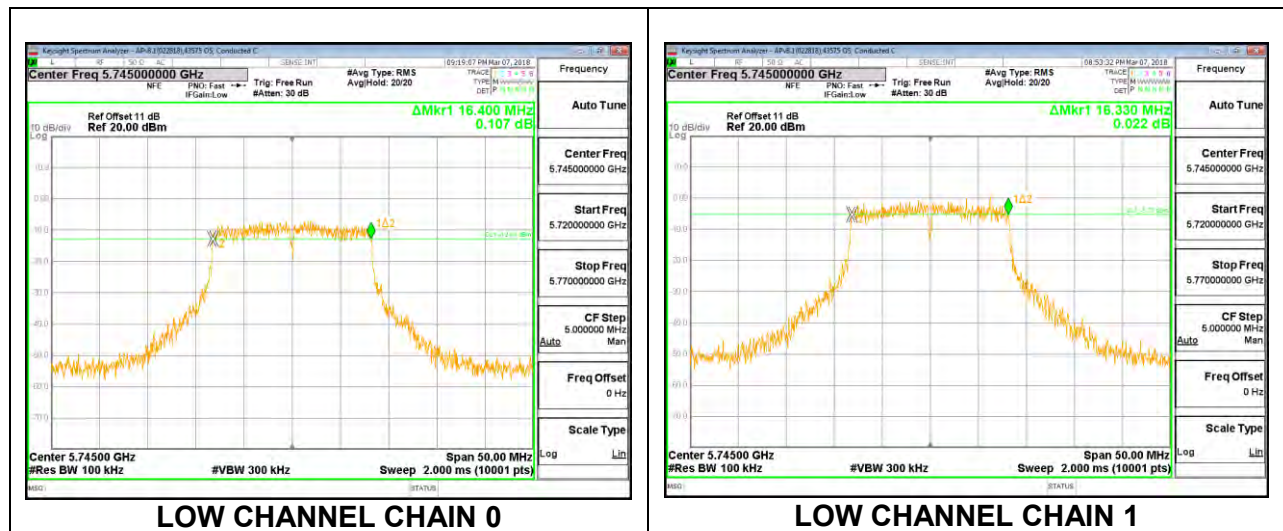

MID CHANNEL

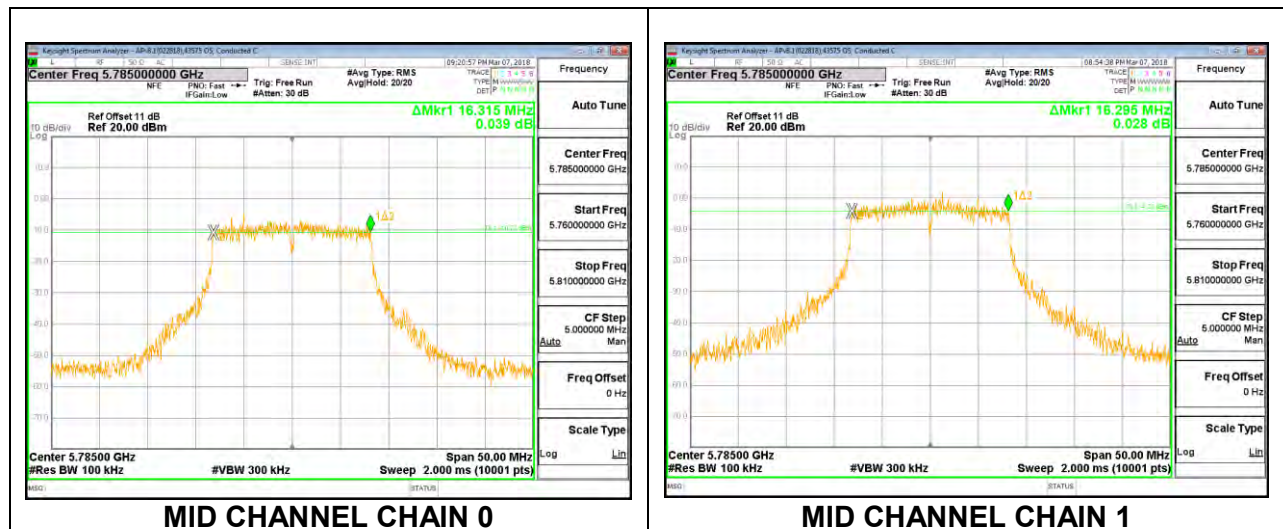

HIGH CHANNEL

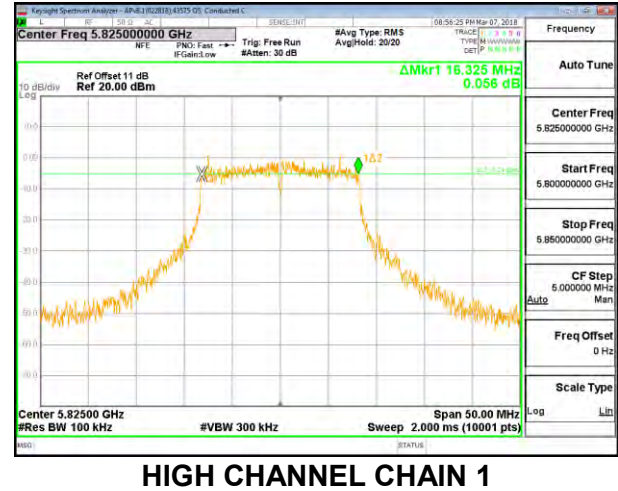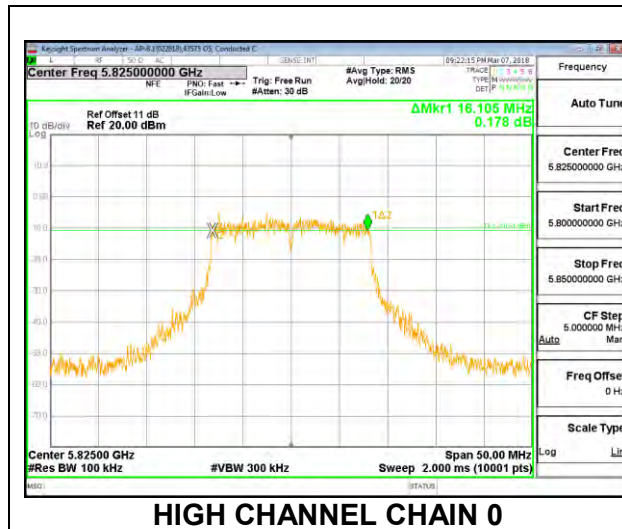

CHANNEL 144

