



## Accredited testing-laboratory

**DAR registration number: DGA-PL-176/94-D1**

**Federal Motor Transport Authority (KBA)  
DAR registration number: KBA-P 00070-97**

**Recognized by the Federal Communications Commission**

**Anechoic chamber registration no.: 90462 (FCC)**

**Anechoic chamber registration no.: 3462C-1 (IC)**

**Certification ID: DE 0001**

**Accreditation ID: DE 0002**

**Accredited Bluetooth® Test Facility (BQTF)**

*The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Cetecom ICT is under license*

**Test report no. : 1-1954-18-02/10**  
**Type identification : AAD-3880061-BV**  
**Applicant : Sony Ericsson Mobile Communications AB**  
**FCC ID : PY7A3880061**  
**IC Certification No : 4170B-A3880061**  
**Test standards : 47 CFR Part 22**  
**47 CFR Part 24**  
**RSS - 132 Issue 2**  
**RSS - 133 Issue 5**

## Table of contents

<b>1</b>	<b>General information</b>	<b>3</b>
1.1	Notes	3
1.2	Testing laboratory	4
1.3	Details of applicant	4
1.4	Application details	4
<b>2</b>	<b>Test standard/s</b>	<b>5</b>
<b>3</b>	<b>Technical tests</b>	<b>6</b>
3.1	Details of manufacturer	6
3.1.1	Test item	6
3.2	Test Setup	7
<b>4</b>	<b>Statement of Compliance</b>	<b>8</b>
4.1	Summary of Measurement Results	8
4.1.1	PCS 1900	8
4.1.2	GSM 850	8
4.1.3	Receiver	8
<b>5</b>	<b>Measurements and results</b>	<b>9</b>
5.1	PART PCS 1900	9
5.1.1	RF Power Output	9
5.1.2	Frequency Stability	14
5.1.3	Radiated Emissions	17
5.1.4	Conducted Spurious Emissions	22
5.1.5	Block Edge Compliance	25
5.1.6	Occupied Bandwidth	28
5.2	PART GSM 850	35
5.2.1	RF Power Output	35
5.2.2	Frequency Stability	39
5.2.3	Radiated Emissions	42
5.2.4	Conducted Spurious Emissions	47
5.2.5	Block Edge Compliance	50
5.2.6	Occupied Bandwidth	53
5.3	Receiver	60
5.3.1	Receiver Radiated Emissions	60
<b>6</b>	<b>Test equipment and ancillaries used for tests</b>	<b>66</b>

## 1 General information

### 1.1 Notes

The test results of this test report relate exclusively to the test item specified in 3.1.1. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.


**Test laboratory manager:**

2010-04-07      Marco Bertolino  
Date                      Name

  
Signature

**Technical responsibility for area of testing:**

2010-04-07      Stefan Bös  
Date                      Name

  
Signature

## 1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

e-mail: info@ICT.cetecom.de

Internet: http://www.cetecom-ict.de

State of accreditation:

The test laboratory (area of testing) is accredited according to

DIN EN ISO/IEC 17025

DAR registration number: DGA-PL-176/94-D1

Accredited by:

Federal Motor Transport Authority (KBA)

DAR registration number: KBA-P 00070-97

Testing location, if different from CETECOM ICT Services GmbH:

Name :  
Street :  
Town :  
Country :  
Phone :  
Fax :

## 1.3 Details of applicant

<b>Name:</b>	<b>Sony Ericsson Mobile Communications AB</b>
<b>Street:</b>	<b>Nya Vattentornet</b>
<b>Town:</b>	<b>22188 Lund</b>
<b>Country:</b>	<b>Sweden</b>
<b>Telephone:</b>	<b>+46-46-19-3000</b>
<b>Fax:</b>	<b>+46 (0) 46 19 32 95</b>
<b>Contact:</b>	<b>Mr. Johan Wedin</b>
<b>E-mail:</b>	<b>johan.wedin@sonyericsson.com</b>
<b>Telephone:</b>	<b>+46 (0) 707 19 57 36</b>

## 1.4 Application details

<b>Date of receipt of order:</b>	<b>2010-03-29</b>
<b>Date of receipt of test item:</b>	<b>2010-03-30</b>
<b>Date of start test:</b>	<b>2010-03-30</b>
<b>Date of end test:</b>	<b>2010-04-07</b>
<b>Persons(s) who have been present during the test:</b>	<b>-/-</b>

## 2 Test standard/s

<b>47 CFR Part 22</b>	<b>2006-10</b>	<b>Title 47 of the Code of Federal Regulations; Chapter I- Federal Communications Commission subchapter B - common carrier services, Part 22-Public mobile services</b>
<b>47 CFR Part 24</b>	<b>2006-10</b>	<b>Title 47 of the Code of Federal Regulations; Chapter I- Federal Communications Commission subchapter B - common carrier services, Part 24-Personal communications services</b>
<b>RSS - 132 Issue 2</b>	<b>2005-09</b>	<b>Spectrum Management and Telecommunications Policy - Radio Standards Specifications Cellular Telephones Employing New Technologies Operating in the Bands 824-849 MHz and 869-894 MHz</b>
<b>RSS - 133 Issue 5</b>	<b>2009-02</b>	<b>Spectrum Management and Telecommunications Policy - Radio Standards Specifications 2 GHz Personal Communication Services</b>

### 3 Technical tests

#### 3.1 Details of manufacturer

Name:	Sony Ericsson Mobile Communications AB
Street:	Nya Vattentornet
Town:	22188 Lund
Country:	Sweden

##### 3.1.1 Test item

Kind of test item	:	Mobile Phone GSM 850/900/1800/1900, UMTS FDD1/FDD8, HSDPA/HSUPA/ BT2.0+EDR, A-GPS, FM Rx, WLAN
Type identification	:	AAD-3880061-BV
Serial Number	:	Rad. BX901CFW6 BX901CFXK Cond. BX9018U7TL BX9018WTQQ
Frequency	:	1850.2 – 1909.8 MHz and 824.2 – 848.8 MHz
Type of modulation	:	GMSK; 8-PSK
Emission Designator for GSM 1900	:	GMSK: 293KGXW 8-PSK: 319KG7W
Emission Designator for GSM 850	:	GMSK: 279KGXW 8-PSK: 315KG7W
Number of channels	:	300 (PCS1900) and 125 (PCS850)
Antenna Type	:	Integrated PCB antenna
Power supply (normal)	:	DC by power supply / battery + charger
Output power GSM 850 / GMSK	:	cond.: 31.90 dBm ERP: 35.13 dBm
Output power GSM 1900 / GMSK	:	cond : 29.44 dBm EIRP: 32.55 dBm
Output power GSM 850 / 8-PSK	:	cond.: 26.60 dBm ERP: 30.13 dBm
Output power GSM 1900 / 8-PSK	:	cond : 25.36 dBm EIRP: 28.69 dBm
Transmitter Spurious (worst case)	:	0.13 µW / -38.79 dBm
Receiver Spurious (worst case)	:	48.92 dBµV/m @ 3 m
FCC ID	:	PY7A3880061
Certification No. IC	:	4170B-A3880061
Open Area Test Site IC No.	:	IC 3462C-1
IC Standards	:	RSS132, Issue 2, RSS133, Issue 5

**ATTESTATION:**

**DECLARATION OF COMPLIANCE:**

I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

**Laboratory Manager:**

2010-04-07 Marco Bertolino  
Date Name

Signature 

### 3.2 Test Setup

Hardware	:	AP1.2
Software	:	R1AB014

Mobile; (cond. measurements)	:	BX9018U7TL & BX9018WTQQ
Mobile; (rad. measurements)	:	BX901CFW6 & BX901CFXK

The radiated measurements were performed with USB travel charger EP800.

## 4 Statement of Compliance

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

### 4.1 Summary of Measurement Results

- No deviations from the technical specifications were ascertained  
 There were deviations from the technical specifications ascertained

#### 4.1.1 PCS 1900

Section in this Report	Test Name	Verdict
5.1.1	RF Power Output	Passed
5.1.2	Frequency Stability	Passed
5.1.3	Radiated Emissions	Passed
5.1.4	Conducted Spurious Emissions	Passed
5.1.5	Block Edge Compliance	Passed
5.1.6	Occupied Bandwidth	Passed

#### 4.1.2 GSM 850

Section in this Report	Test Name	Verdict
5.2.1	RF Power Output	Passed
5.2.2	Frequency Stability	Passed
5.2.3	Radiated Emissions	Passed
5.2.4	Conducted Spurious Emissions	Passed
5.2.5	Block Edge Compliance	Passed
5.2.6	Occupied Bandwidth	Passed

#### 4.1.3 Receiver

Section in this Report	Test Name	Verdict
5.3.1	Receiver Radiated emissions	Passed



## 5 Measurements and results

### 5.1 PART PCS 1900

For Part 24/22 we use the substitution method (TIA/EIA 603).

All measurements in this report are done in GSM mode. The device is able to transmit data in GPRS mode also.

But because the current measurements are performed in PEAK mode no other results from GPRS mode are possible.

The only difference is the modulation average power, which is 3 dB higher (by using 2 timeslots in the Up-link).

All relevant tests have been repeated in 8-PSK Modulation if EDGE Mode is supported.

#### 5.1.1 RF Power Output

##### Reference

FCC:	CFR Part 24.232, 2.1046
IC:	RSS 133, Issue 5, Section 6.4

##### Summary:

This paragraph contains both average/peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

##### Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average)

These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0 MHz and 1909.8 MHz (bottom, middle and top of operational frequency range).

**Limits:**

Nominal Peak Output Power (dBm)
+33

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

**Test Results: Output Power (conducted) GMSK Mode**

Frequency (MHz)	Average Output Power (dBm)	Peak-to-Average Ratio (dB)
1850.2	28.92	0.1
1880.0	28.93	0.2
1909.8	29.44	0.1
Measurement uncertainty	$\pm 0.5$ dB	

**Test Results: Output Power (conducted) 8-PSK Mode**

Frequency (MHz)	Average Output Power (dBm)	Peak-to-Average Ratio (dB)
1850.2	25.23	3.3
1880.0	25.48	3.2
1909.8	25.36	3.3
Measurement uncertainty	$\pm 0.5$ dB	

## EIRP Measurements

### Description:

This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

(a) The measurements were performed with full rf output power and modulation.

(b) Test was performed at listed 3m test site (listed with FCC, IC).

(c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)

(d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.

(e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

$E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

(f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency

Resolution BW: 100 kHz

Video BW: same

Detector Mode: positive

Average: off

Span: 3 x the signal bandwidth

(g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.

(h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.

(i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.

(j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.

(k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.

(l) Repeat for all different test signal frequencies

**Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method**

(a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency : equal to the signal source  
 Resolution BW : 10 kHz  
 Video BW : same  
 Detector Mode : positive  
 Average : off  
 Span : 3 x the signal bandwidth

(b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

E (dBuV/m) = Reading (dBuV) + Total Correction Factor (dB/m)

(c) Select the frequency and E-field levels for ERP/EIRP measurements.

(d) Substitute the EUT by a signal generator and one of the following transmitting antennas (substitution antenna):

DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz}.

(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.

(f) Use one of the following antenna as a receiving antenna: .DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.

(g) If the DIPOLE antenna is used, tune its elements to the frequency as specified in the calibration manual.

(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.

(i) Tune the EMI Receivers to the test frequency.

(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(k) The transmitter was rotated through 360 o about a vertical axis until a higher maximum signal was received.

(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.

(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$EIRP = P + G1 = P3 + L2 - L1 + A + G1$$

$$ERP = EIRP - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.

P1: Power output from the signal generator

P2: Power measured at attenuator A input

P3: Power reading on the Average Power Meter

EIRP: EIRP after correction

ERP: ERP after correction

(o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)

(p) Repeat step (d) to (o) for different test frequency

(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.

(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

**Limits:**

Nominal Peak Output Power (dBm)
+33

**Test Results: Output Power (radiated) GMSK Mode**

Frequency (MHz)	Average EIRP (dBm)
1850.2	31.84
1880.0	32.14
1909.8	32.55
Measurement uncertainty	±0.5 dB

**Test Results: Output Power (radiated) 8-PSK Mode**

Frequency (MHz)	Average EIRP (dBm)
1850.2	28.15
1880.0	28.69
1909.8	28.47
Measurement uncertainty	±0.5 dB

**Sample Calculation:**

Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	EIRP Result			
MHz	dBμV	dBm	dB <i>i</i>	dB <i>d</i>	dB	dBm			
1909.8	132.3	24.6	8.4	0.0	3.3	29.7			

EIRP = SG (dBm) - Cable Loss (dB) + Ant. gain (dB*i*)

## 5.1.2 Frequency Stability

### Reference

FCC:	CFR Part 24.235, 2.1055
IC:	RSS 133, Issue 5, Section 6.3

### Method of Measurement:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a “call mode”. This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with  $V_{nom}$ , connected to the CMU 200 and in a simulated call on channel 661 (center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with  $V_{nom}$ . Vary supply voltage from  $V_{min}$  to  $V_{max}$ , in 12 steps re-measuring carrier frequency at each voltage. Pause at  $V_{nom}$  for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with  $V_{nom}$ , connected to the CMU 200 and in a simulated call on channel 661(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

### Measurement Limit:



According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

**Test Results: AFC FREQ ERROR vs. VOLTAGE**

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
3.3	-78	-0,00000415	-0,0415
3.4	-77	-0,00000410	-0,0410
3.5	-82	-0,00000436	-0,0436
3.6	-81	-0,00000431	-0,0431
3.7	-77	-0,00000410	-0,0410
3.8	-86	-0,00000457	-0,0457
3.9	-74	-0,00000394	-0,0394
4.0	-54	-0,00000287	-0,0287
4.1	-65	-0,00000346	-0,0346
4.2	-64	-0,00000340	-0,0340
4.3	-67	-0,00000356	-0,0356
4.4	-71	-0,00000378	-0,0378

**Test Results: AFC FREQ ERROR vs. TEMPERATURE**

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-30	-80	-0,00000426	-0,0426
-20	-74	-0,00000394	-0,0394
-10	-82	-0,00000436	-0,0436
±0.0	-80	-0,00000426	-0,0426
+10	-73	-0,00000388	-0,0388
+20	-87	-0,00000463	-0,0463
+30	-82	-0,00000436	-0,0436
+40	-64	-0,00000340	-0,0340
+50	-71	-0,00000378	-0,0378
+60	-74	-0,00000394	-0,0394

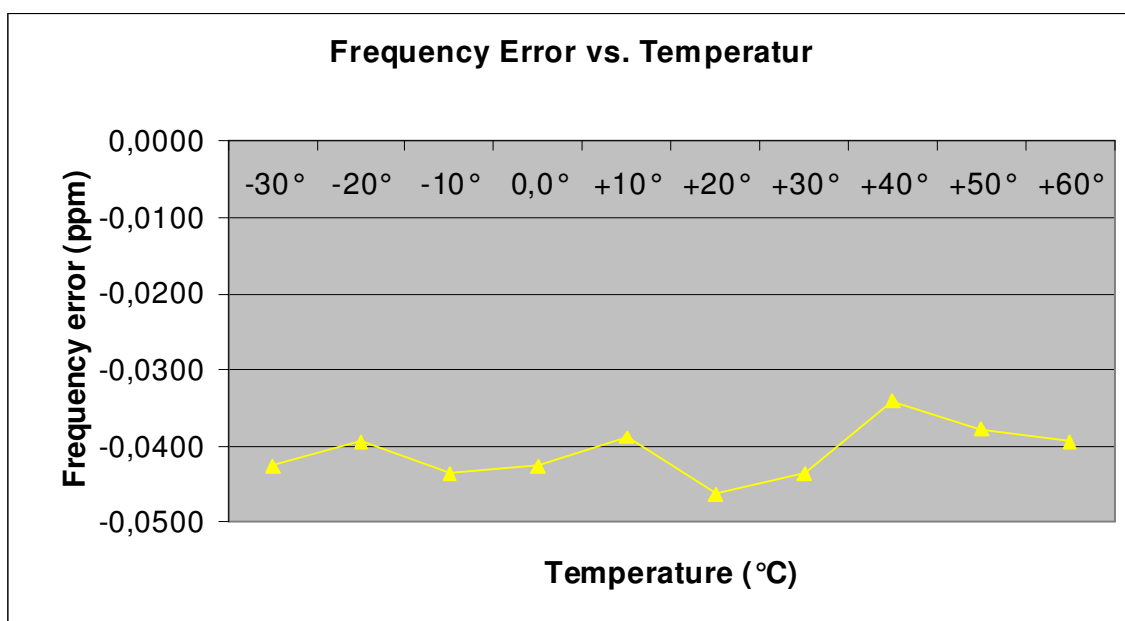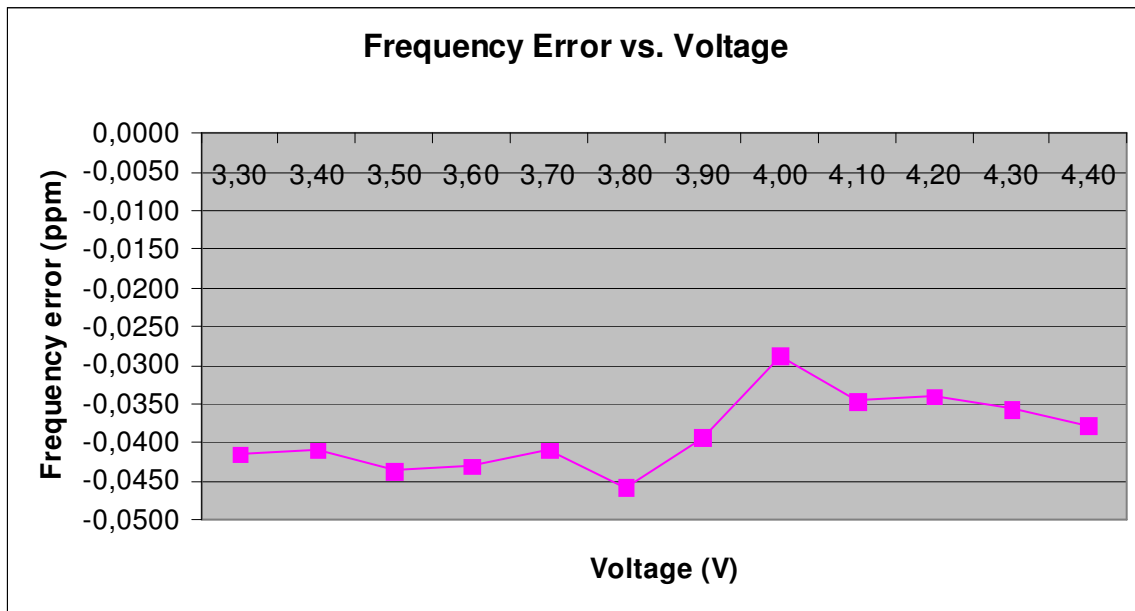



### 5.1.3 Radiated Emissions

#### Reference

FCC:	CFR Part 24.238, 2.1053
IC:	RSS 133, Issue 5, Section 6.5

#### Measurement Procedure:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2003 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded.
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603.

#### Measurement Limit:

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee' s frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**Measurement Results: Radiated Emissions**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1880.0 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next table.

All measurements were done in horizontal and vertical polarization; the plots show the worst case. The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked, too. The found values are stated in the table below.

As can be seen from this data, the emissions from the test item were within the specification limit.

Harmonic	Tx ch.-512 Freq. (MHz)	Level (dBm)	Tx ch.-661 Freq. (MHz)	Level (dBm)	Tx ch.-810 Freq. (MHz)	Level (dBm)
2	3700.4	-	3760	-	3819.6	-
3	5550.6	-	5640	-	5729.4	-
4	7400.8	-	7520	-	7639.2	-
5	9251.0	-	9400	-	9549.0	-
6	11101.2	-	11280	-	11458.8	-
7	12951.4	-	13160	-	13368.6	-
8	14801.6	-	15040	-	15278.4	-
9	16651.8	-	16920	-	17188.2	-
10	18502.0	-	18800	-	19098.0	-


**No peaks found > 20 dB below limit.**

**Sample calculation:**


Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	EIRP Result			
MHz	dBμV	dBm	dB	dBd	dB	dBm			
1909.8	132.3	24.6	8.4	0.0	3.3	29.7			

EIRP = SG (dBm) - Cable Loss (dB) + Ant. gain (dBi)

**Channel 661 (Traffic mode up to 30 MHz)**

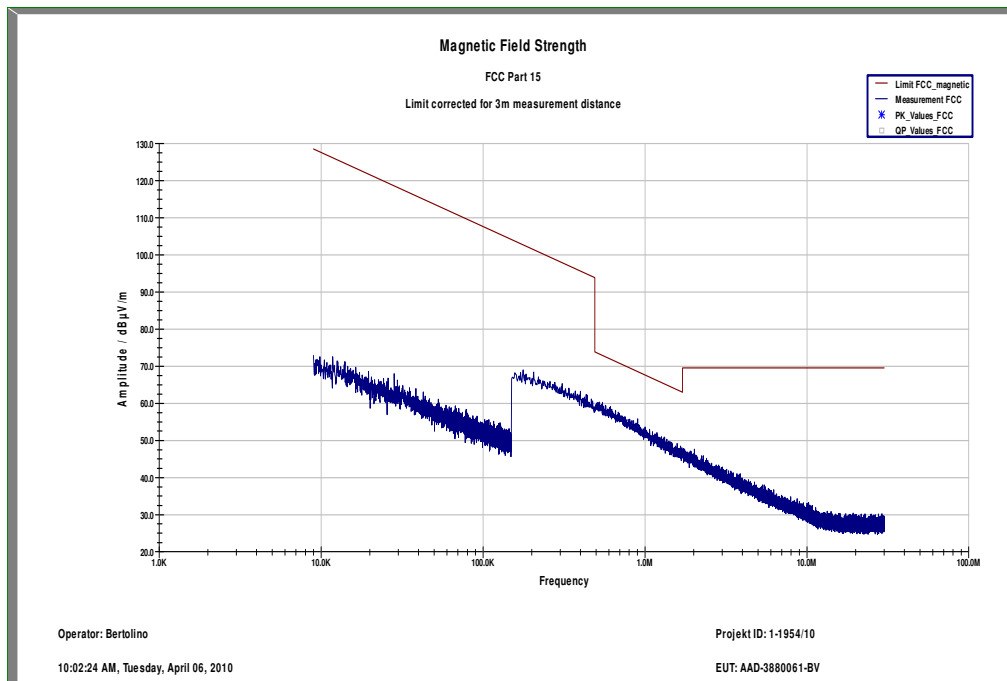


**Channel 661 (30 MHz - 1 GHz), vertical polarization**

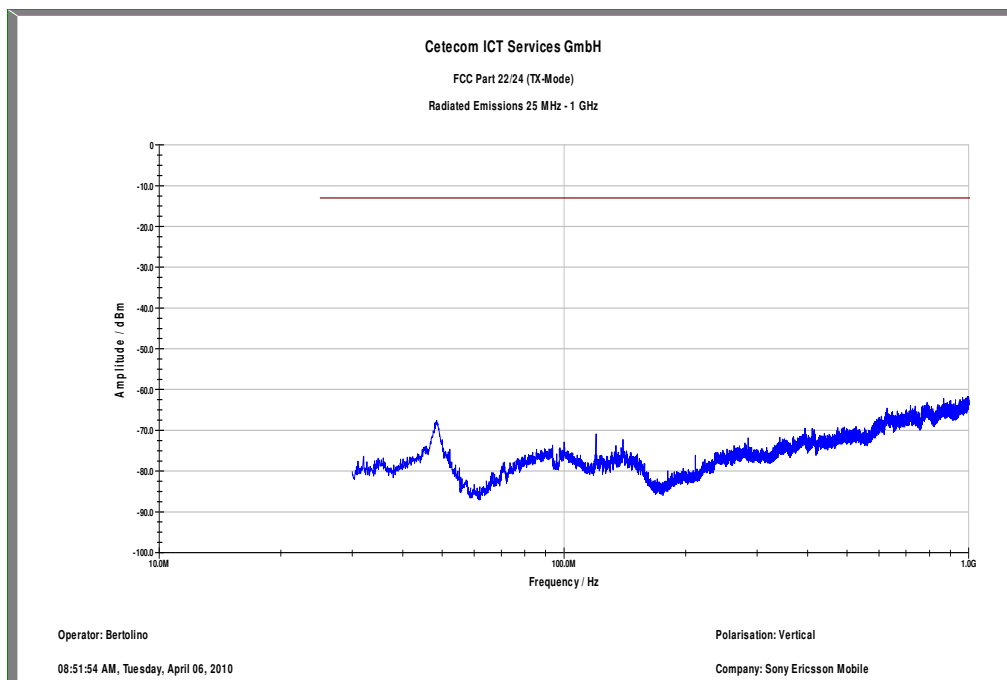

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz

**Channel 661 (1 GHz – 12.75 GHz), vertical polarization**

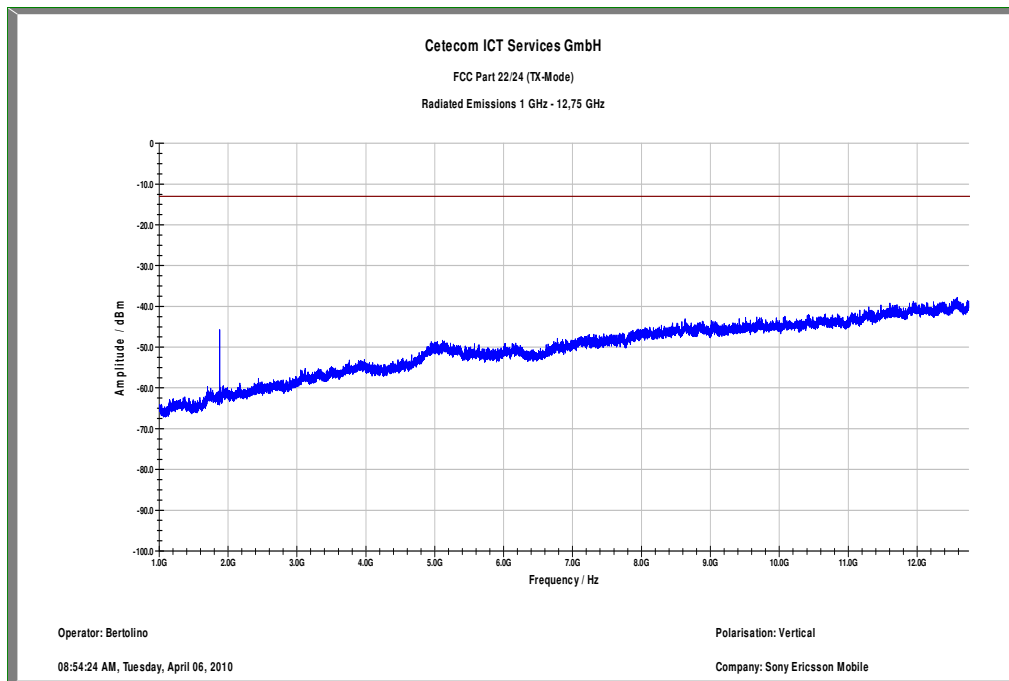


Carrier suppressed with a rejection filter

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz


**Channel 661 (30 MHz - 1 GHz), horizontal polarization**

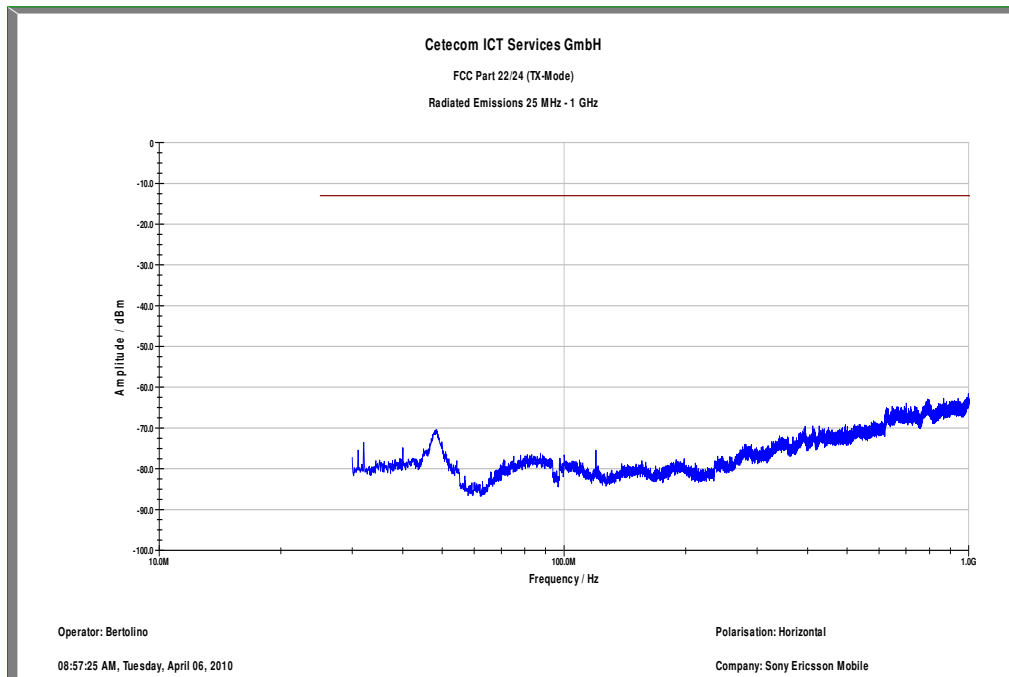

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz

**Channel 661 (1 GHz – 12.75 GHz), horizontal polarization**

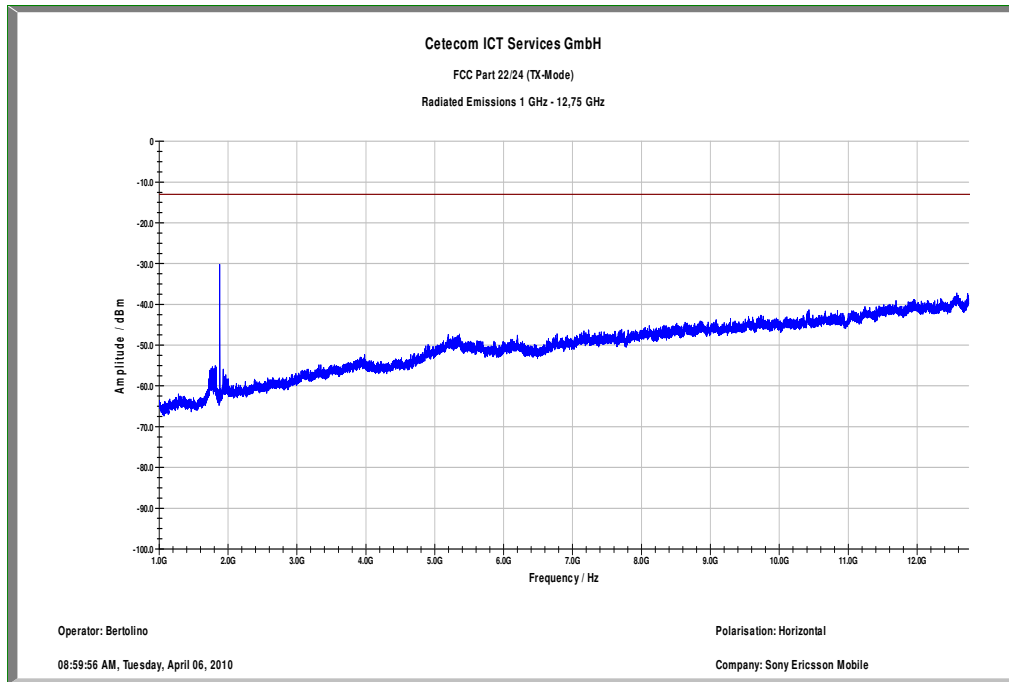


Carrier suppressed with a rejection filter

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$

**Channel 661 (12 GHz - 25 GHz) valid for all 3 channels**

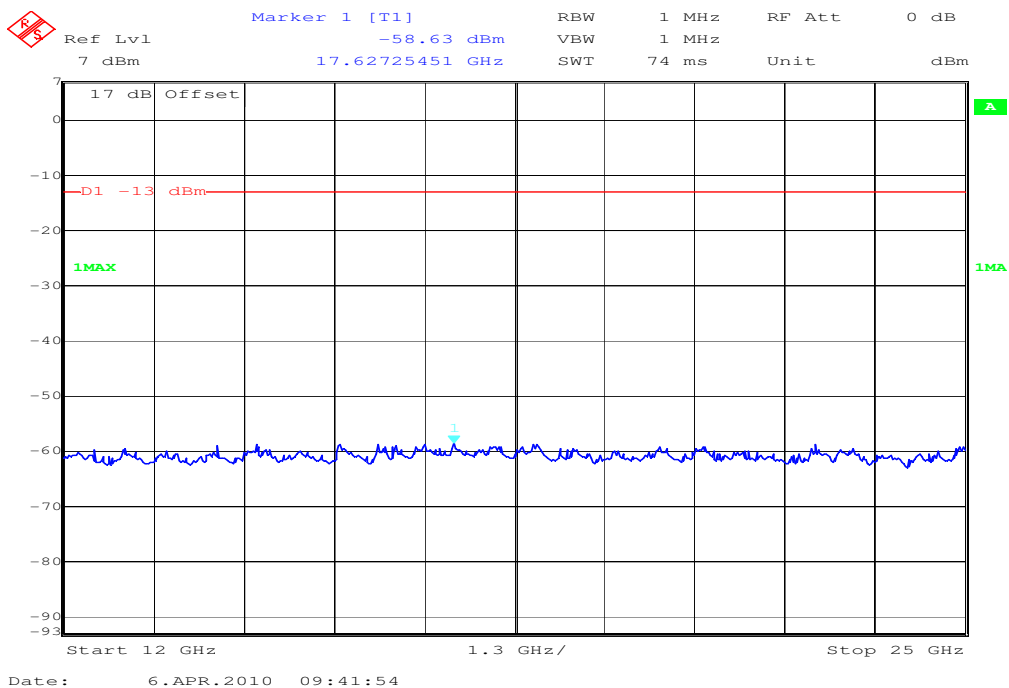

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$

### 5.1.4 Conducted Spurious Emissions

#### Reference

FCC:	CFR Part 24.238, 2.10.51
IC:	RSS 133, Issue 5, Section 6.5

#### Measurement Procedure:

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.

2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

USPCS Transmitter Channel Frequency:

512 1850.2 MHz

661 1880.0 MHz

810 1909.8 MHz

#### Measurement Limit:


(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

#### Measurement Results:


Harmonic	Tx ch.-512 Freq. (MHz)	Level (dBm)	Tx ch.-661 Freq. (MHz)	Level (dBm)	Tx ch.-810 Freq. (MHz)	Level (dBm)
2	3700.4	-	3760	-	3819.6	-
3	5550.6	-	5640	-	5729.4	-
4	7400.8	-	7520	-	7639.2	-
5	9251.0	-	9400	-	9549.0	-
6	11101.2	-	11280	-	11458.8	-
7	12951.4	-	13160	-	13368.6	-
8	14801.6	-	15040	-	15278.4	-
9	16651.8	-	16920	-	17188.2	-
10	18502.0	-	18800	-	19098.0	-

**No peaks found > 20 dB below limit.**


**Plot 1:** TX mode, 30 MHz – 25 GHz, channel 512

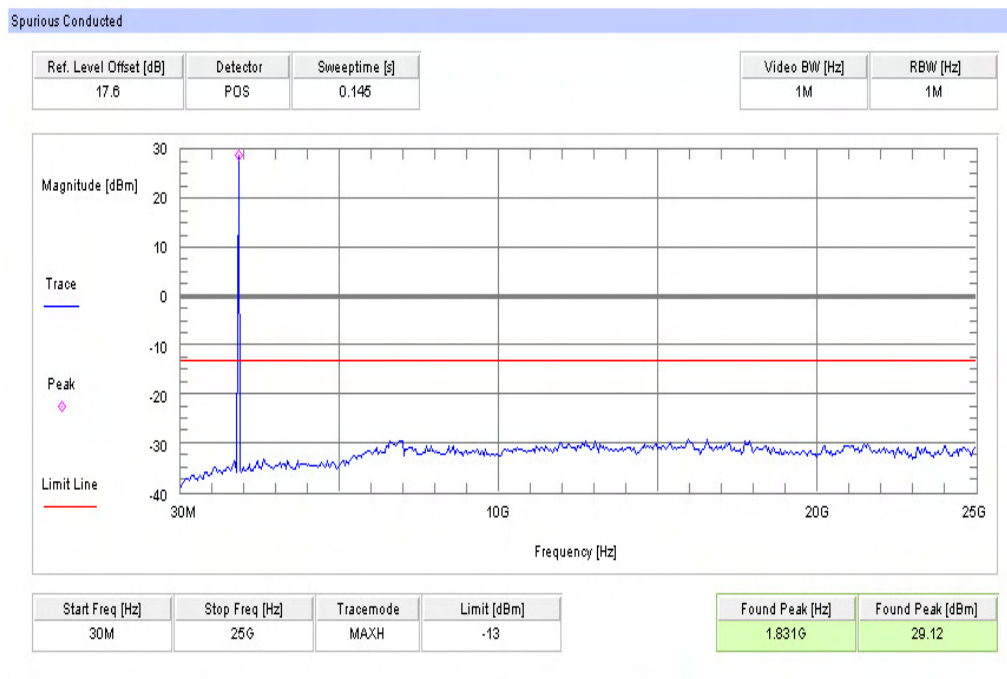

**Plot 2:** TX mode, 30 MHz – 25 GHz, channel 661

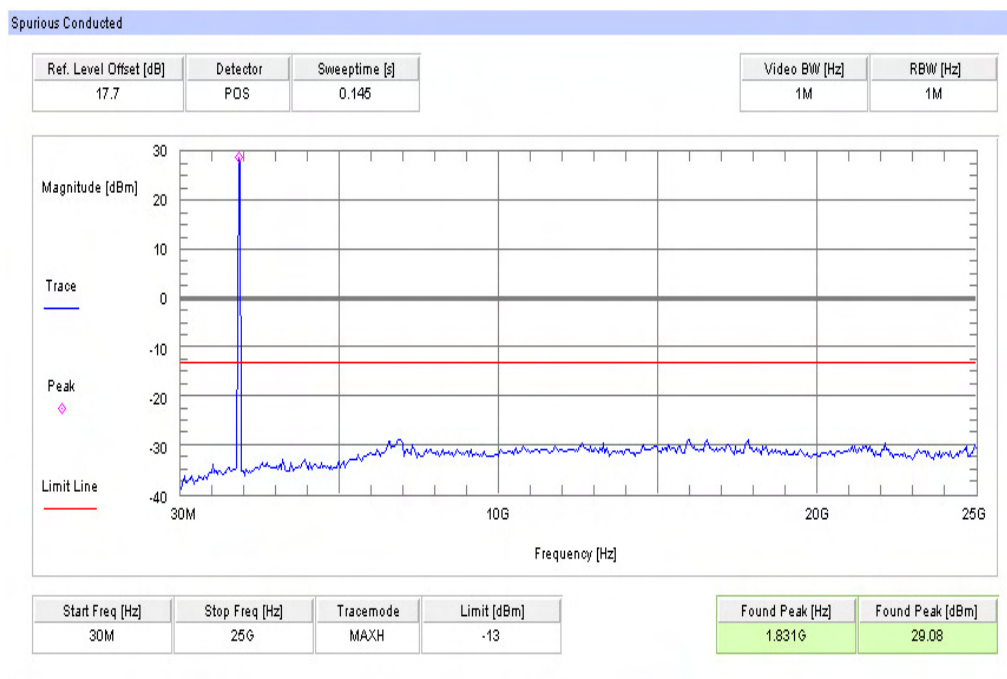

**Plot 3:** TX mode, 30 MHz – 25 GHz, channel 810

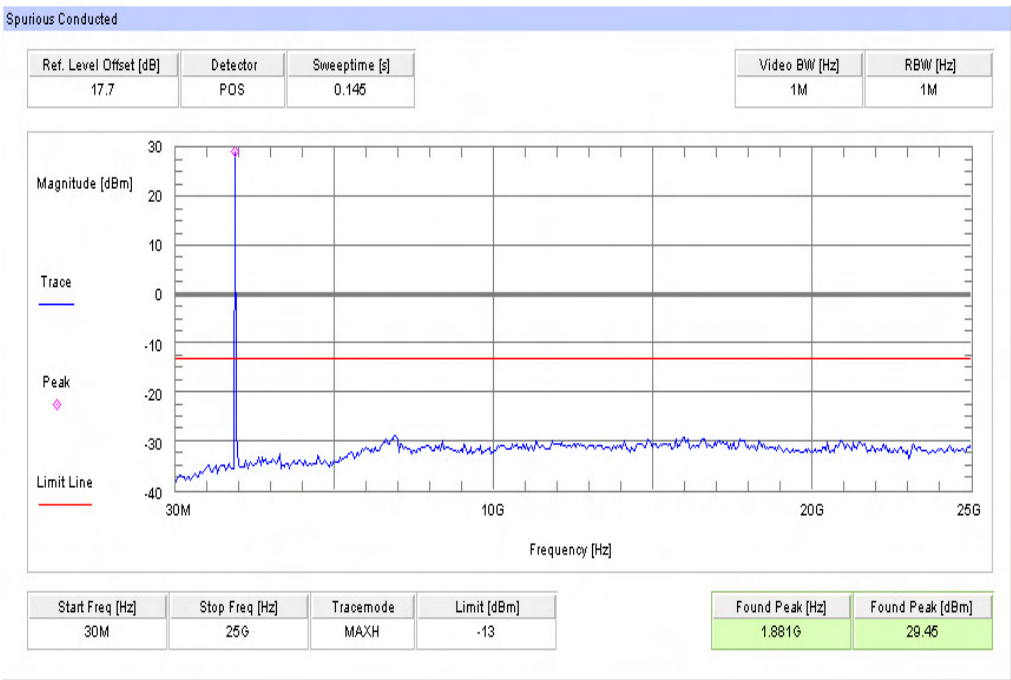



### 5.1.5 Block Edge Compliance


#### Reference

FCC:	CFR Part 24.238
IC:	RSS 133, Issue 5, Section 6.5


#### Measurement Limit:

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10 \text{ Log (P)}$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.


**Plot 1:** TX mode, Block 1, channel 512, GSM mode

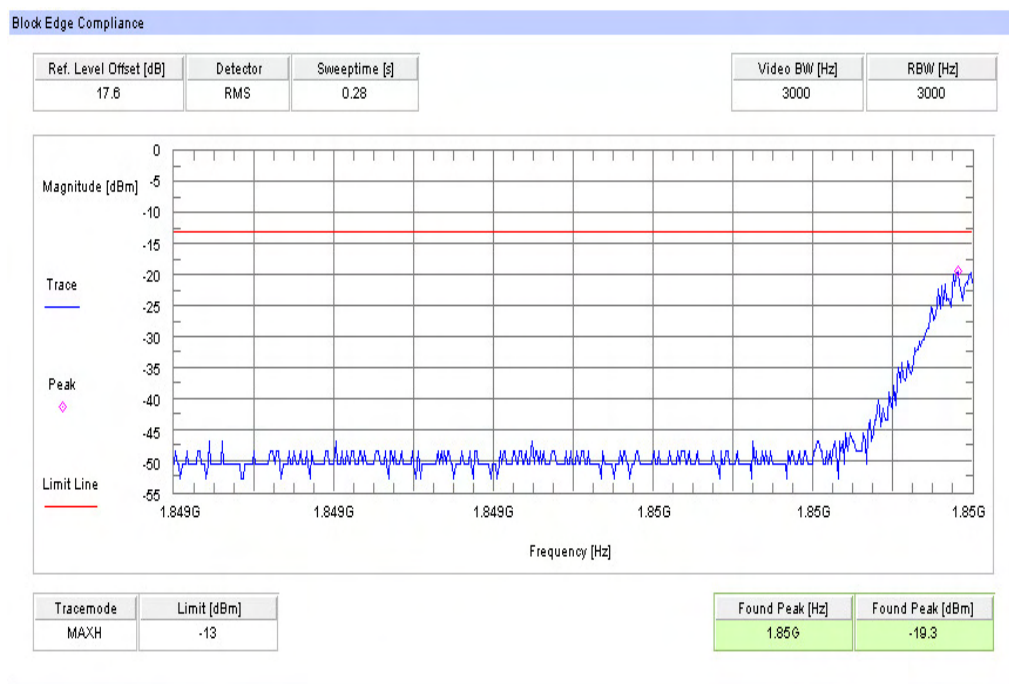


**Plot 2:** TX mode, Block 6, channel 810, GSM mode

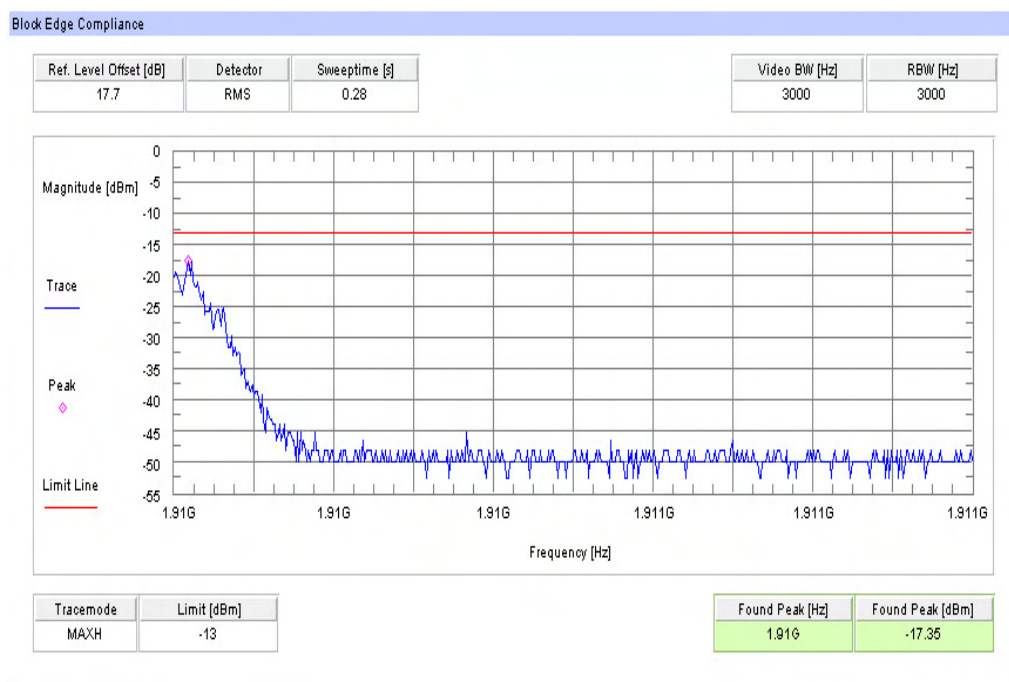

**Plot 3:** TX mode, Block 1, channel 512, EGPRS / EDGE mode

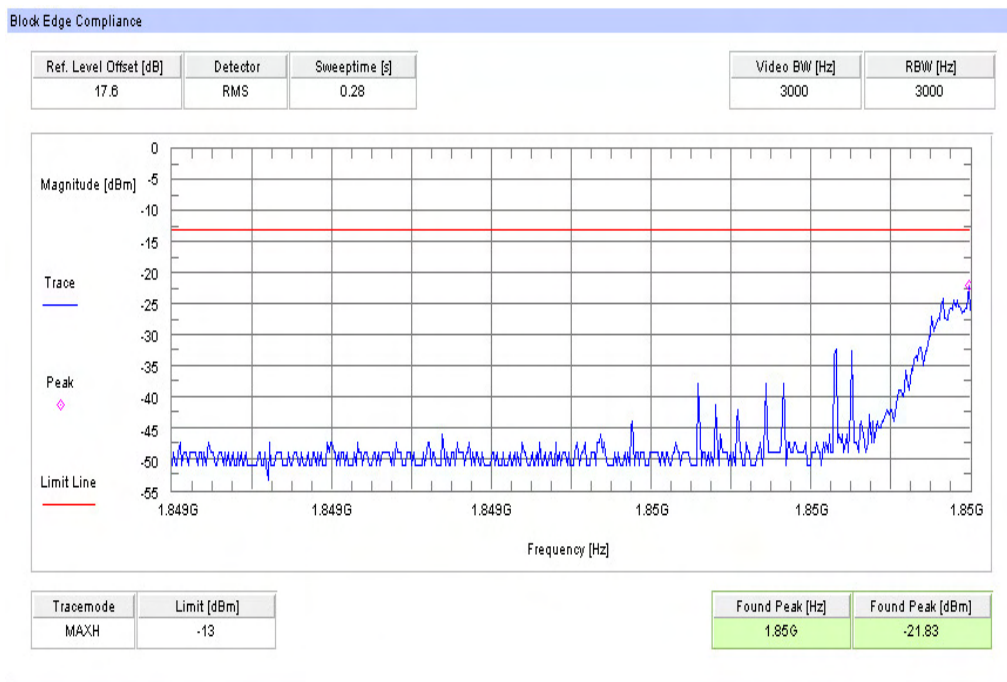

**Plot 4:** TX mode, Block 6, channel 810, EGPRS / EDGE mode

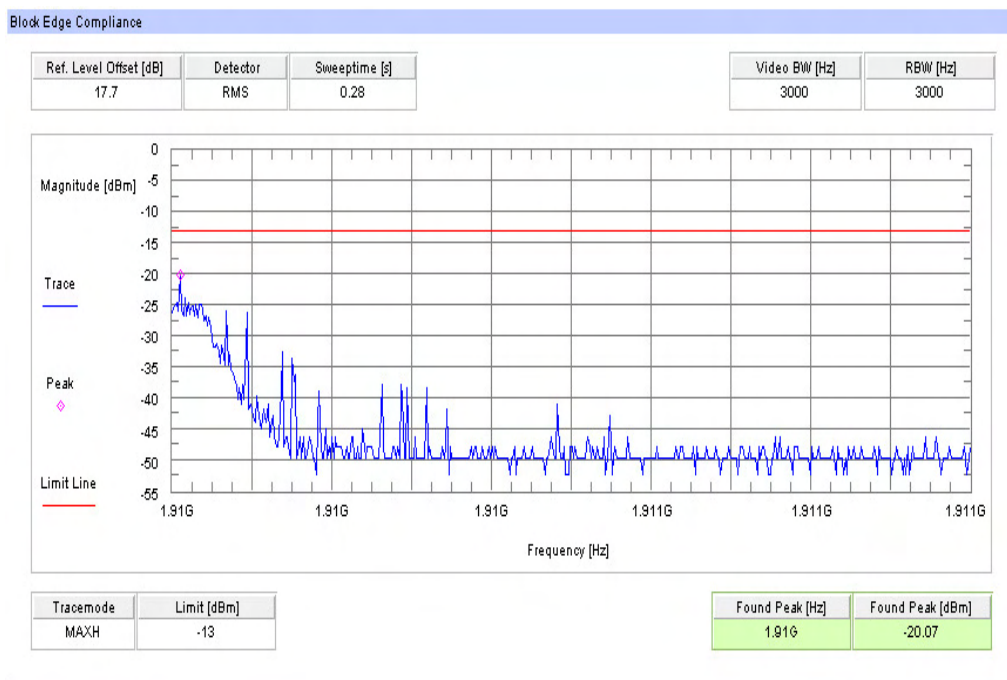

### 5.1.6 Occupied Bandwidth

#### Reference

FCC:	CFR Part 24.238, 2.1049
IC:	RSS 133, Issue 5, Section 6.5

#### Occupied Bandwidth Results

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.

#### Normal mode


Frequency	99% Occupied Bandwidth kHz	-26 dBc Bandwidth kHz
1850.2 MHz	273	311
1880.0 MHz	277	313
1909.8 MHz	293	319

#### EDGE mode


Frequency	99% Occupied Bandwidth kHz	-26 dBc Bandwidth kHz
1850.2 MHz	279	315
1880.0 MHz	259	315
1909.8 MHz	257	315

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 300.0 kHz, this equates to a resolution bandwidth of at least 3.0 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.


**Plot 1:** TX mode, 99% (-20 dB) occupied bandwidth, channel 512, GSM mode

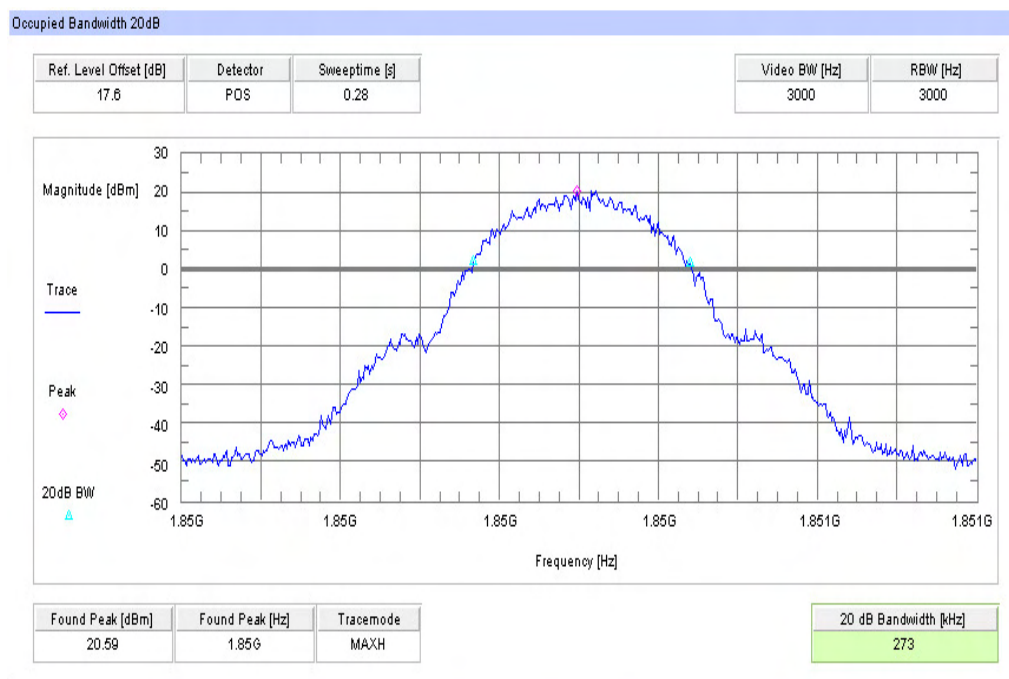


**Plot 2:** TX mode, -26 dBc bandwidth, channel 512, GSM mode

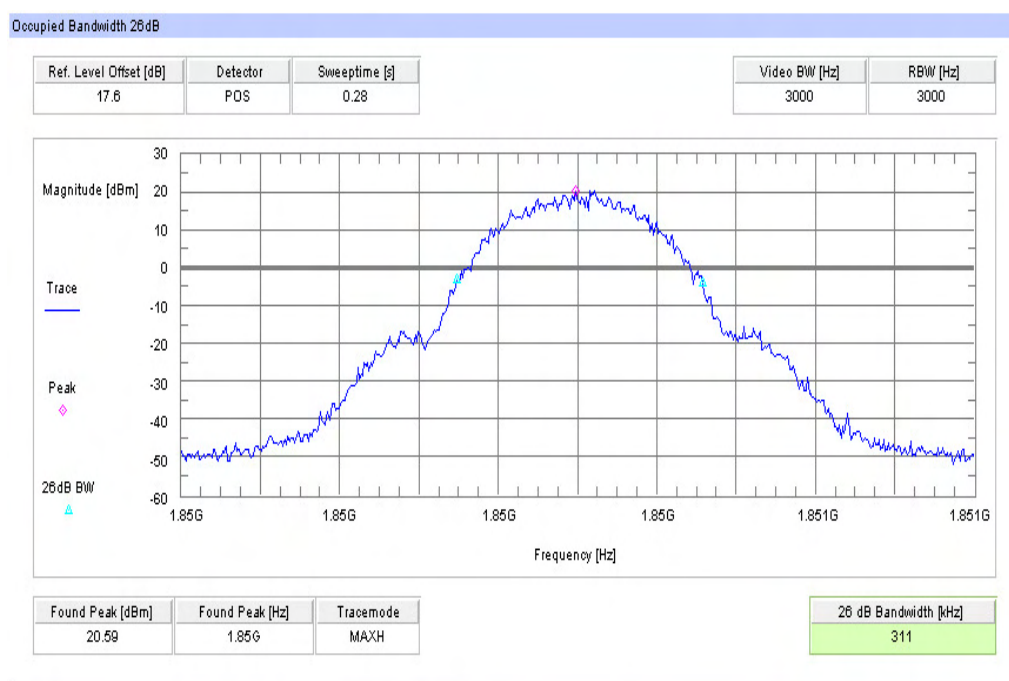


**Plot 3: TX mode, 99% (-20 dB) occupied bandwidth, channel 661, GSM mode**

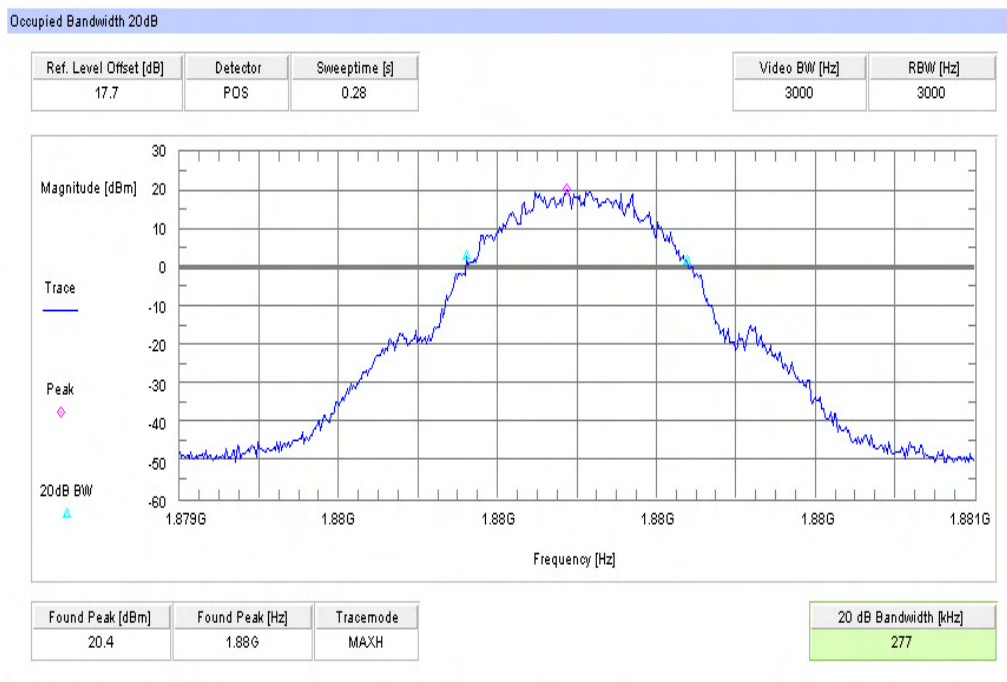


**Plot 4: TX mode, -26 dBc bandwidth, channel 661, GSM mode**

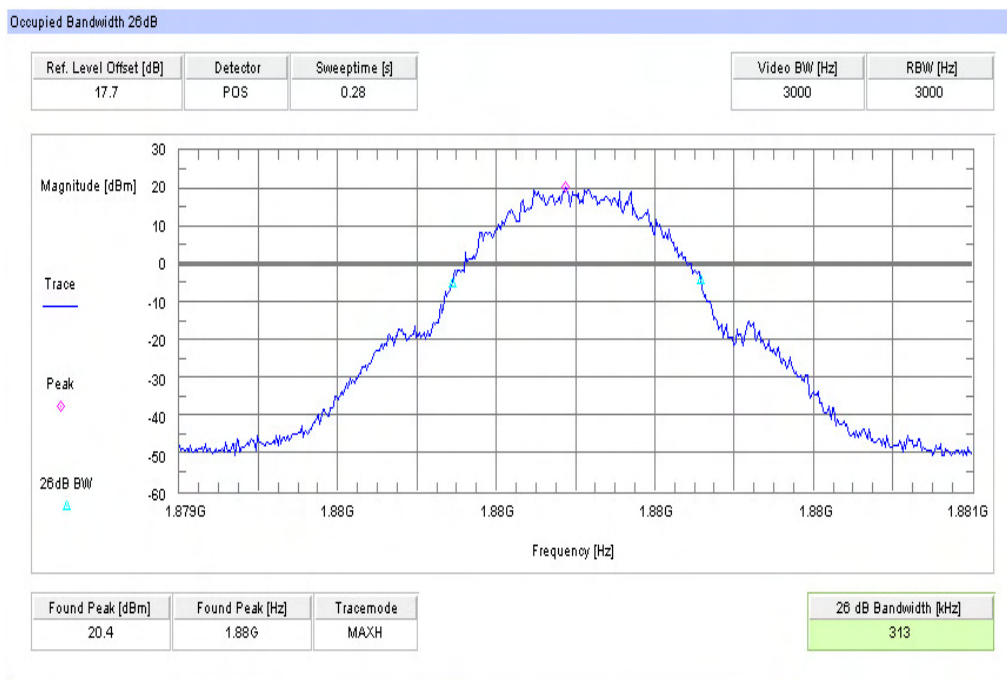


**Plot 5:** TX mode, 99% (-20 dB) occupied bandwidth, channel 810, GSM mode

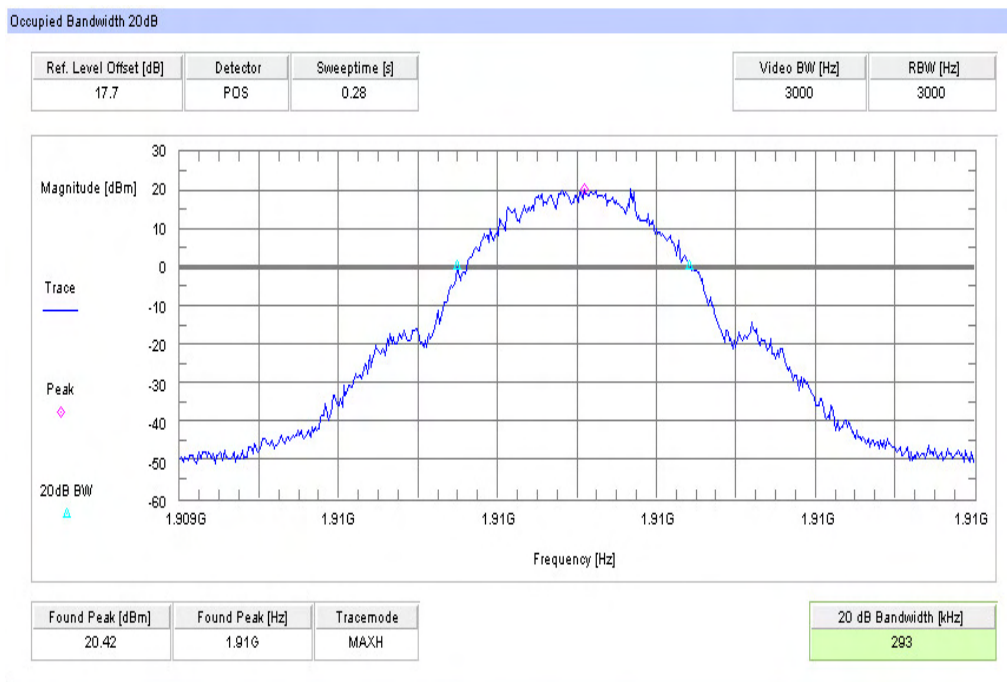


**Plot 6:** TX mode, -26 dBc bandwidth, channel 810, GSM mode

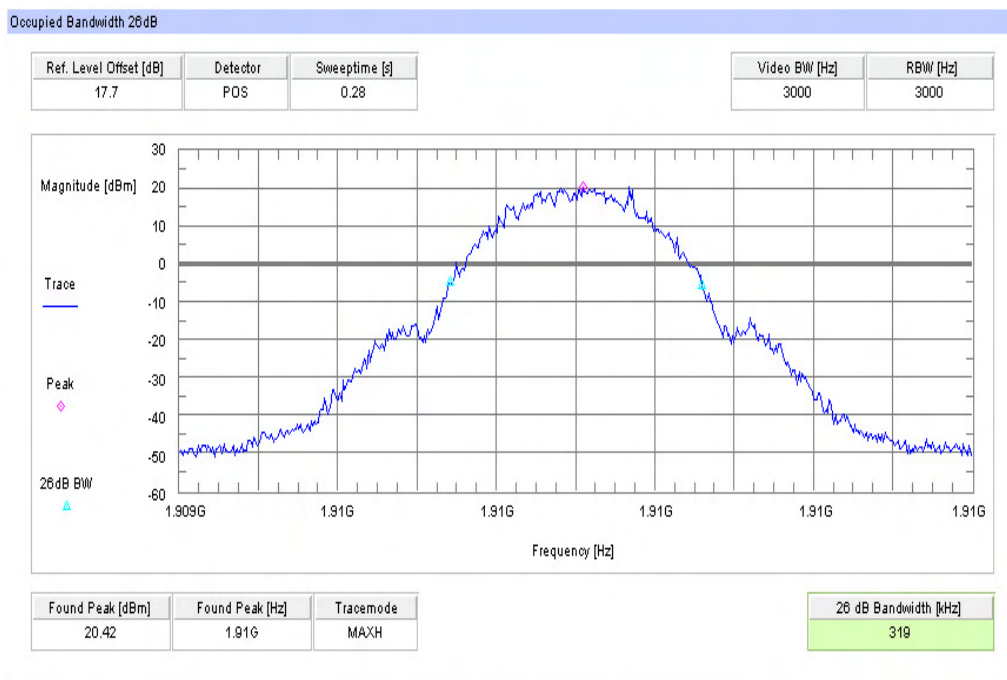

**Plot 7:** TX mode, 99% (-20 dB) occupied bandwidth, channel 512, EGPRS / EDGE mode

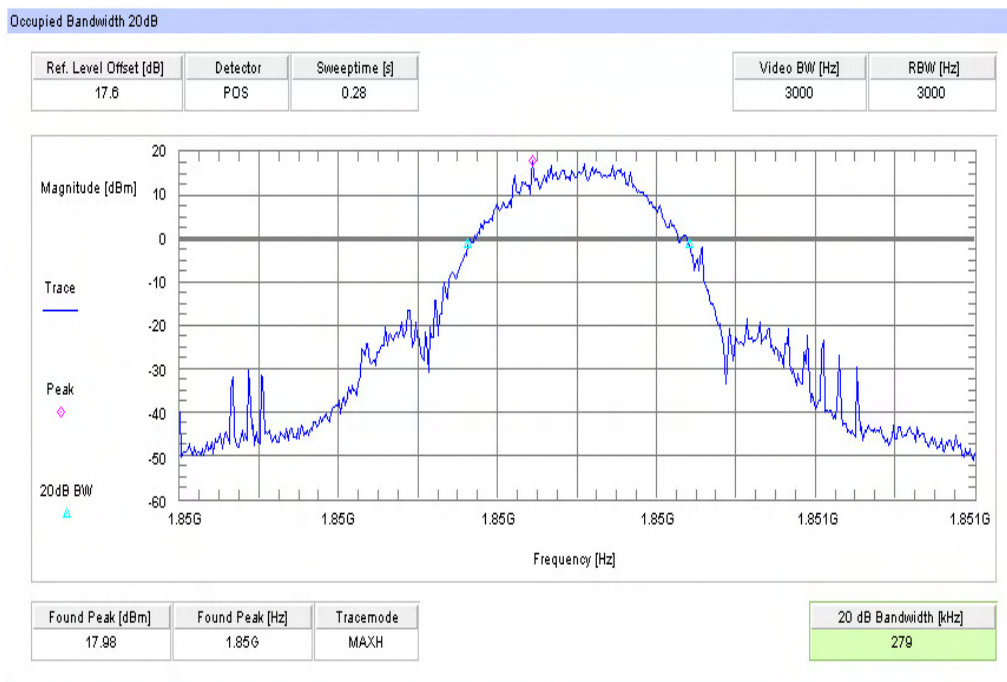


**Plot 8:** TX mode, -26 dBc bandwidth, channel 512, EGPRS / EDGE mode

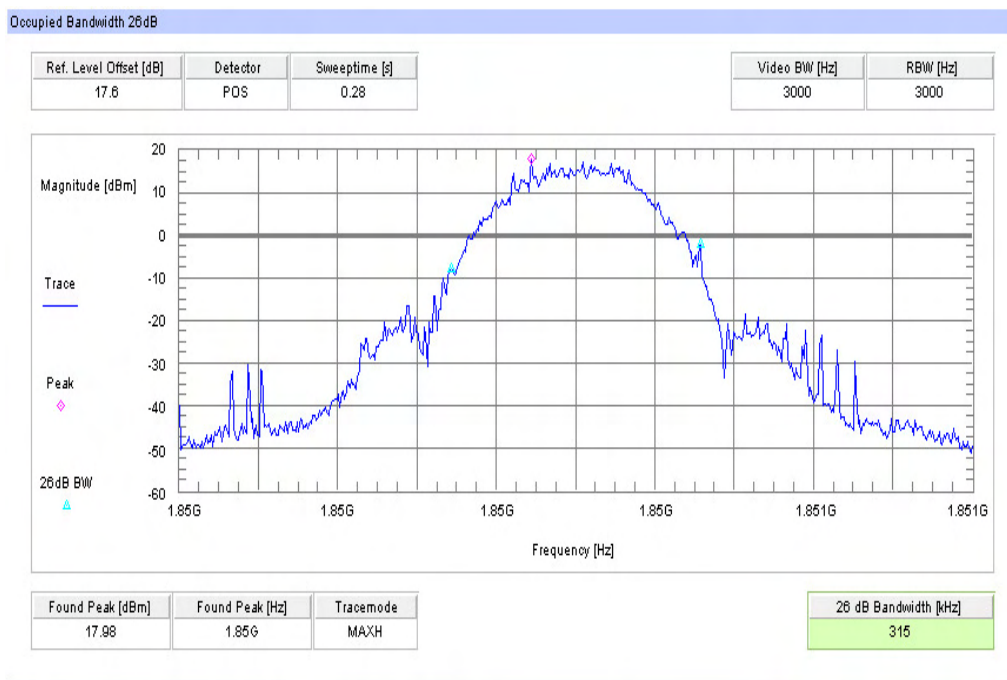





**Plot 9:** TX mode, 99% (-20 dB) occupied bandwidth, channel 661, EGPRS / EDGE mode

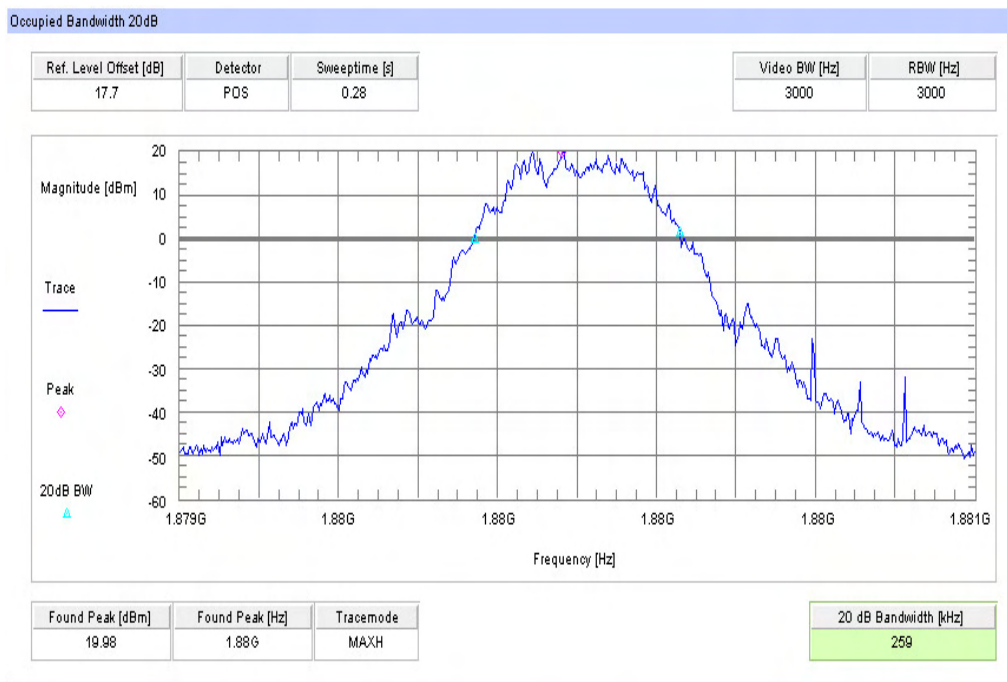

**Plot 10:** TX mode, -26 dBc bandwidth, channel 661, EGPRS / EDGE mode

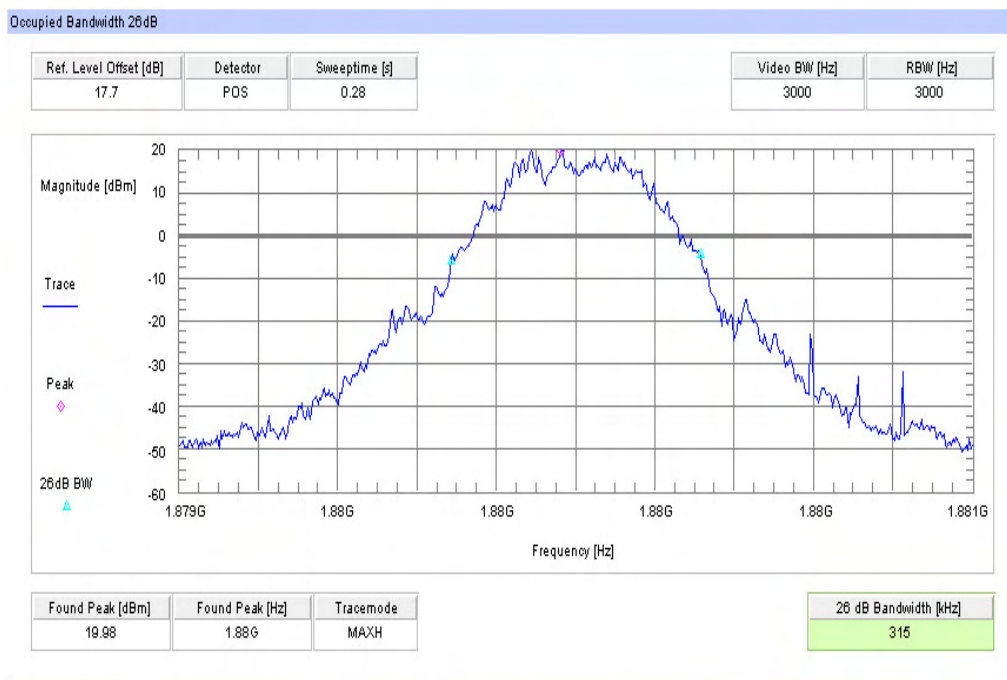

**Plot 11:** TX mode, 99% (-20 dB) occupied bandwidth, channel 810, EGPRS / EDGE mode

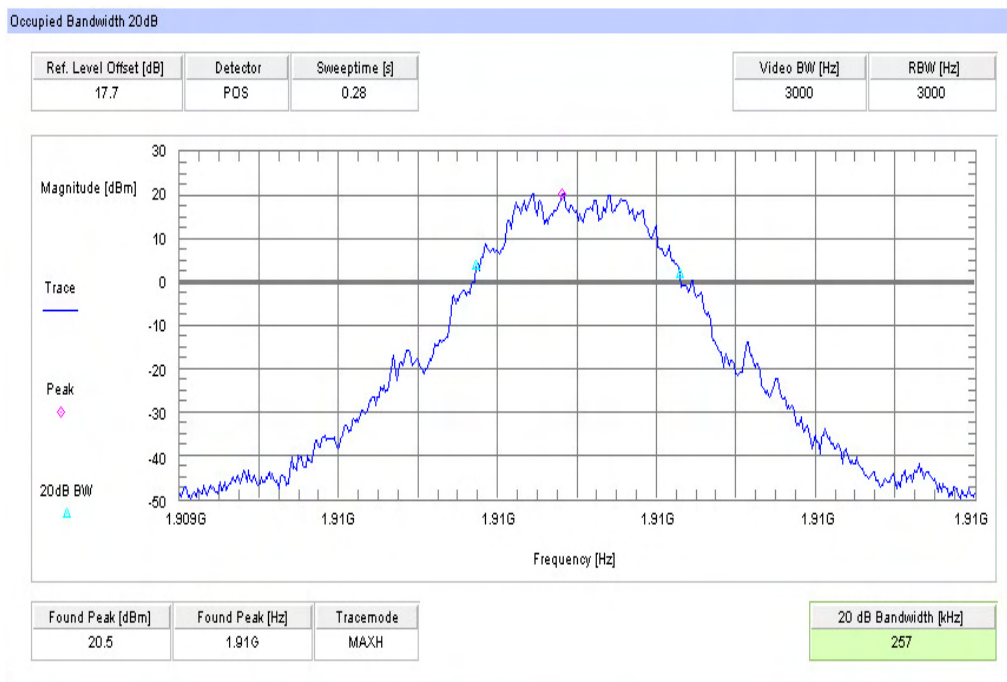

**Plot 12:** TX mode, -26 dBc bandwidth, channel 810, EGPRS / EDGE mode



## 5.2 PART GSM 850

### 5.2.1 RF Power Output

#### Reference

FCC:	CFR Part 22.9.1.3, 2.1046
IC:	RSS 132, Issue 2, Section 4.4 and 6.4

#### Summary:

This paragraph contains both average, peak output powers and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

#### Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation. The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average) These measurements were done at 3 frequencies, 824.2 MHz, 836.4 MHz and 848.8 MHz (bottom, middle and top of operational frequency range).

#### Limits:

Nominal Peak Output Power (dBm)
+38.45

#### Test Results: Output Power (conducted) GMSK Mode

Frequency (MHz)	Average Output Power (dBm)	Peak-to-Average Ratio (dB)
824.2	31.9	0.2
836.4	31.7	0.1
848.8	31.6	0.1
Measurement uncertainty	± 3 dB	

#### Test Results: Output Power (conducted) 8-PSK Mode

Frequency (MHz)	Average Output Power (dBm)	Peak-to-Average Ratio (dB)
824.2	26.5	3.1
836.4	26.5	3.2
848.8	26.6	3.1
Measurement uncertainty	± 3 dB	

## ERP Measurements

Description: This is the test for the maximum radiated power from the phone.  
Rule Part 22.913 specifies that "Mobile/portable stations are limited to 7 watts ERP.

Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

- (a) The measurements were performed with full rf output power and modulation.
- (b) Test was performed at listed 3m test site (listed with FCC, IC).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level  
Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor  
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$
- (f) Set the EMI Receiver and #2 as follows:  
Center Frequency: test frequency  
Resolution BW: 100 kHz  
Video BW: same  
Detector Mode: positive  
Average: off  
Span: 3 x the signal bandwidth
- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- (l) Repeat for all different test signal frequencies

**Measuring the ERP of Spurious/Harmonic Emissions using Substitution Method**

(a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring ERP) as follows:

Center Frequency : equal to the signal source  
 Resolution BW : 10 kHz  
 Video BW : same  
 Detector Mode : positive  
 Average : off  
 Span : 3 x the signal bandwidth

(b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

$E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

(c) Select the frequency and E-field levels for ERP/EIRP measurements.

(d) Substitute the EUT by a signal generator and one of the following transmitting antennas (substitution antenna): DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz}.

(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.

(f) Use one of the following antenna as a receiving antenna: .DIPOLE antenna for frequency from 30-1000 MHz or HORN antenna for frequency above 1 GHz }.

(g) If the DIPOLE antenna is used, tune its elements to the frequency as specified in the calibration manual.

(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.

(i) Tune the EMI Receivers to the test frequency.

(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(k) The transmitter was rotated through 360 o about a vertical axis until a higher maximum signal was received.

(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.

(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$\text{EIRP} = P + G1 = P3 + L2 - L1 + A + G1$$

$$\text{ERP} = \text{EIRP} - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.

P1: Power output from the signal generator

P2: Power measured at attenuator A input

P3: Power reading on the Average Power Meter

EIRP: EIRP after correction

ERP: ERP after correction

(o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)

(p) Repeat step (d) to (o) for different test frequency

(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.

(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

**Limits:**

Nominal Peak Output Power (dBm)
+38.45

**Test Results: Output Power (radiated) GMSK Mode**

Frequency (MHz)	Average (dBm)
824.2	34.39
836.4	34.77
848.8	35.13
Measurement uncertainty	±0.5 dB

**Test Results: Output Power (radiated) 8-PSK Mode**

Frequency (MHz)	Average (dBm)
824.2	29.80
836.4	29.57
848.8	30.13
Measurement uncertainty	±0.5 dB

**Sample calculation:**

Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	ERP	Substitution Antenna
MHz	dB $\mu$ V	dBm	dB $i$	dB $d$	dB	dBm	
848.8	137.8	26.6	8.4	0.0	3.3	31.7	UHAP Schwarzbeck S/N 460

ERP = SG (dBm) - Cable Loss (dB) + Ant. gain (dB)

\*ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.1dB $i$

## 5.2.2 Frequency Stability

### Reference

FCC:	CFR Part 22.355, 2.1055
IC:	RSS 132, Issue 2, Section 4.3 and 6.3

### Method of Measurement:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a "call mode". This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal 3.7 Volts. Vary supply voltage from minimum 3.3 Volts to maximum 4.4 Volts, in 13 steps re-measuring carrier frequency at each voltage. Pause at 3.7 V ac Volts for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

### Measurement Limit:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 22.355, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.. This transceiver is specified to operate with an input voltage of between 3.3 V dc and 4.4 V dc, with a nominal voltage of 3.7 V dc.



**Measurement Results: AFC FREQ ERROR vs. VOLTAGE**

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
3.3	-46	-0,00000550	-0,0550
3.4	-47	-0,00000562	-0,0562
3.5	-43	-0,00000514	-0,0514
3.6	-41	-0,00000490	-0,0490
3.7	-40	-0,00000478	-0,0478
3.8	-34	-0,00000407	-0,0407
3.9	-39	-0,00000466	-0,0466
4.0	-35	-0,00000418	-0,0418
4.1	-31	-0,00000371	-0,0371
4.2	-29	-0,00000347	-0,0347
4.3	-31	-0,00000371	-0,0371
4.4	-37	-0,00000442	-0,0442

**Measurement Results: AFC FREQ ERROR vs. TEMPERATURE**

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-30	-39	-0,00000466	-0,0466
-20	-44	-0,00000526	-0,0526
-10	-48	-0,00000574	-0,0574
±0.0	-53	-0,00000634	-0,0634
+10	-51	-0,00000610	-0,0610
+20	-41	-0,00000490	-0,0490
+30	-44	-0,00000526	-0,0526
+40	-39	-0,00000466	-0,0466
+50	-37	-0,00000442	-0,0442
+60	-29	-0,00000347	-0,0347



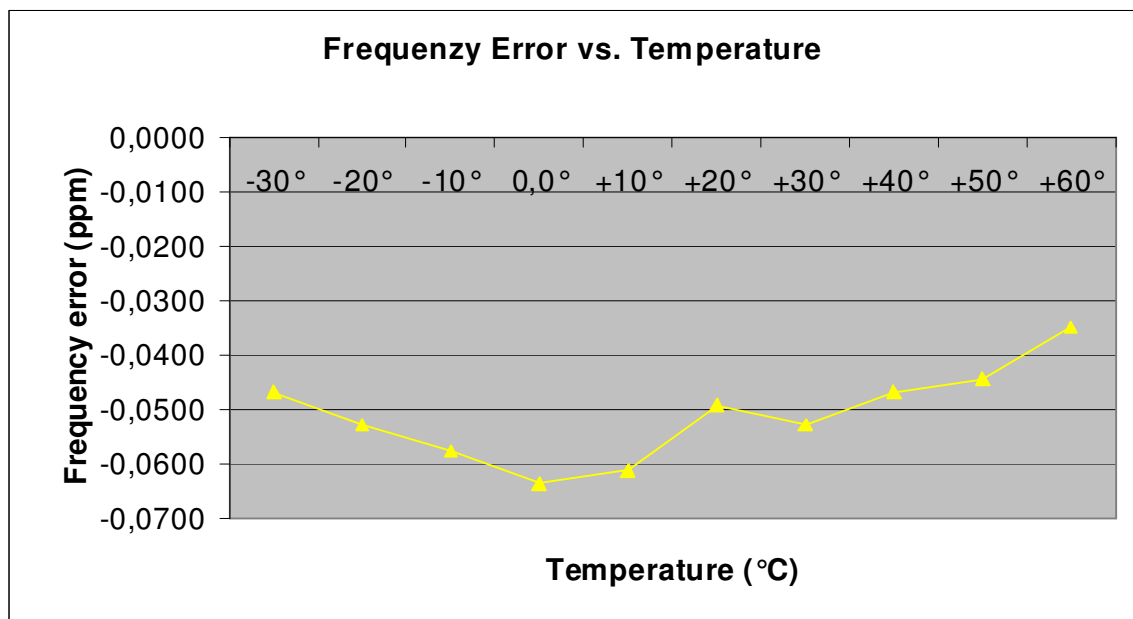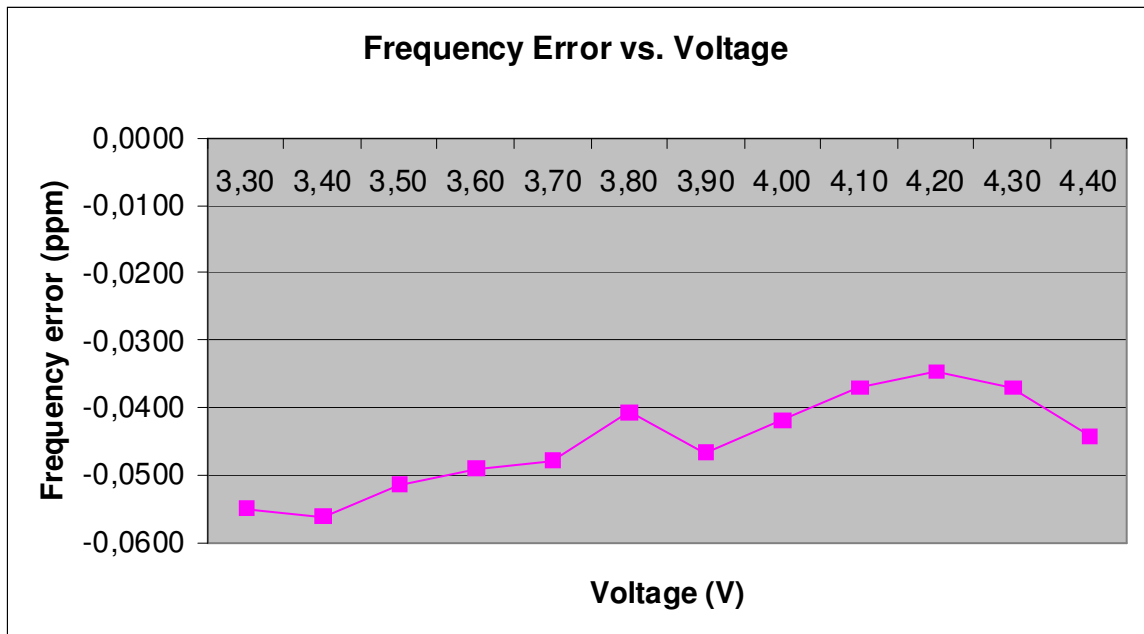

### 5.2.3 Radiated Emissions

#### Reference

FCC:	CFR Part 22.917, 2.1053
IC:	RSS 132, Issue 2, Section 4.5 and 6.5

#### Measurement Procedure:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2003 requirements and is recognized by the FCC to be in compliance for a 3 and a10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 848.8 MHz. This was rounded up to 12 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final open field emission ( here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters using the equation shown below:
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603.

#### Measurement Limit:

Sec. 22.917 Emission Limits.

(a) On any frequency outside a licensee' s frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\text{Log}(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**Measurement Results:**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (824.2 MHz, 836.4 MHz and 848.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization; the plots shows the worst case.

The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked, too.

The found values are stated in the table below.

As can be seen from this data, the emissions from the test item were within the specification limit.

Harmonic	Tx ch.-128 Freq. (MHz)	Level (dBm)	Tx ch.-189 Freq. (MHz)	Level (dBm)	Tx ch.-251 Freq. (MHz)	Level (dBm)
2	1648.4	-	1672.8	-	1697.6	-
3	2472.6	-	2509.2	-	2546.4	-
4	3296.8	-	3345.6	-	3395.2	-
5	4121.0	-	4182.0	-	4244.0	-
6	4945.2	-	5018.4	-	5092.8	-
7	5769.4	-	5854.8	-	5941.6	-
8	6593.6	-	6691.2	-	6790.4	-
9	7417.8	-	7527.6	-	7639.2	-
10	8242.0	-	8364.0	-	8488.0	-

**No peaks found > 20 dB below limit.**


**Sample calculation:**

Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	ERP	Substitution Antenna
MHz	dBμV	dBm	dB <i>i</i>	dB <i>d</i>	dB	dBm	
848.8	137.8	26.6	8.4	0.0	3.3	31.7	UHAP Schwarzbeck S/N 460


ERP = SG (dBm) - Cable Loss (dB) + Ant. gain (dB)

\*ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.1dB*i*

**Channel 189 (Traffic mode up to 30 MHz)**

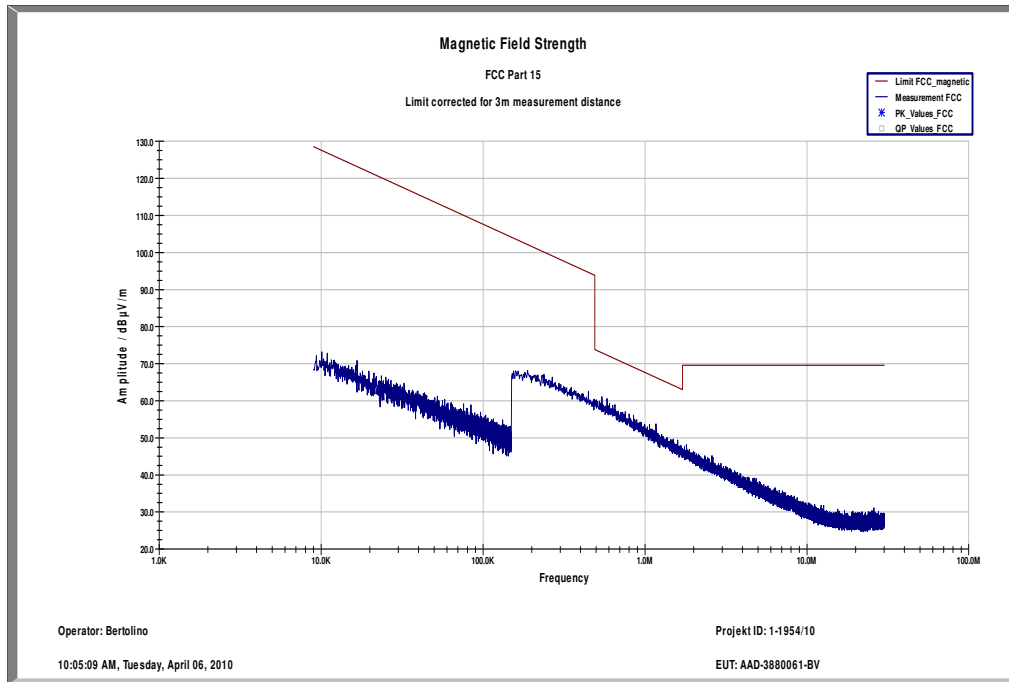


**Channel 189 (30 MHz - 1 GHz), vertical polarization**

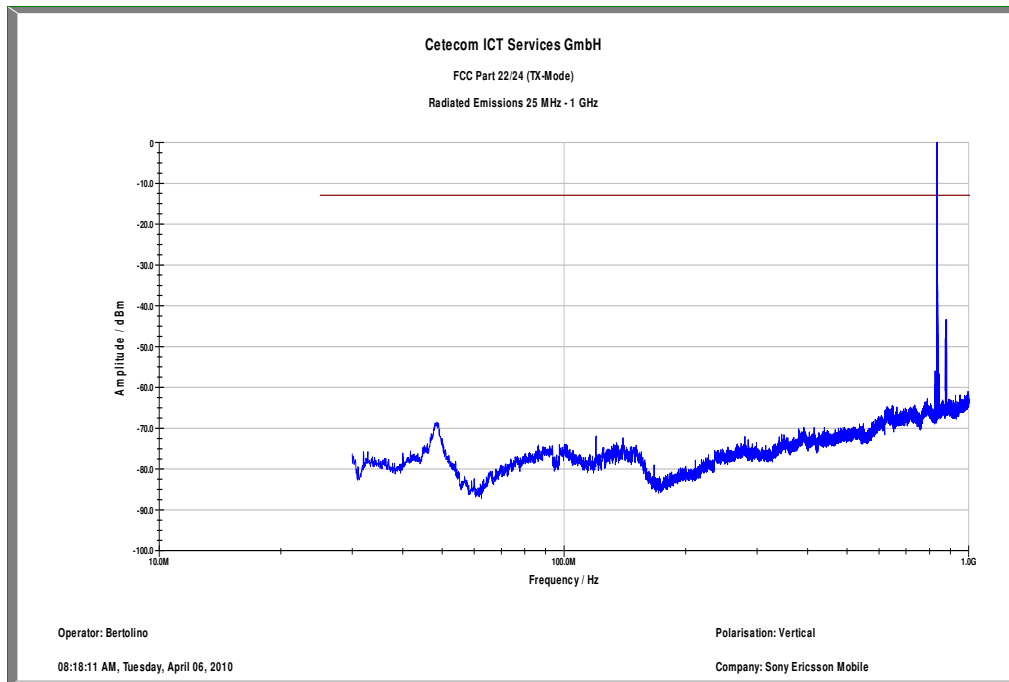

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$


**Channel 189 (1 GHz – 12.75 GHz), vertical polarization**

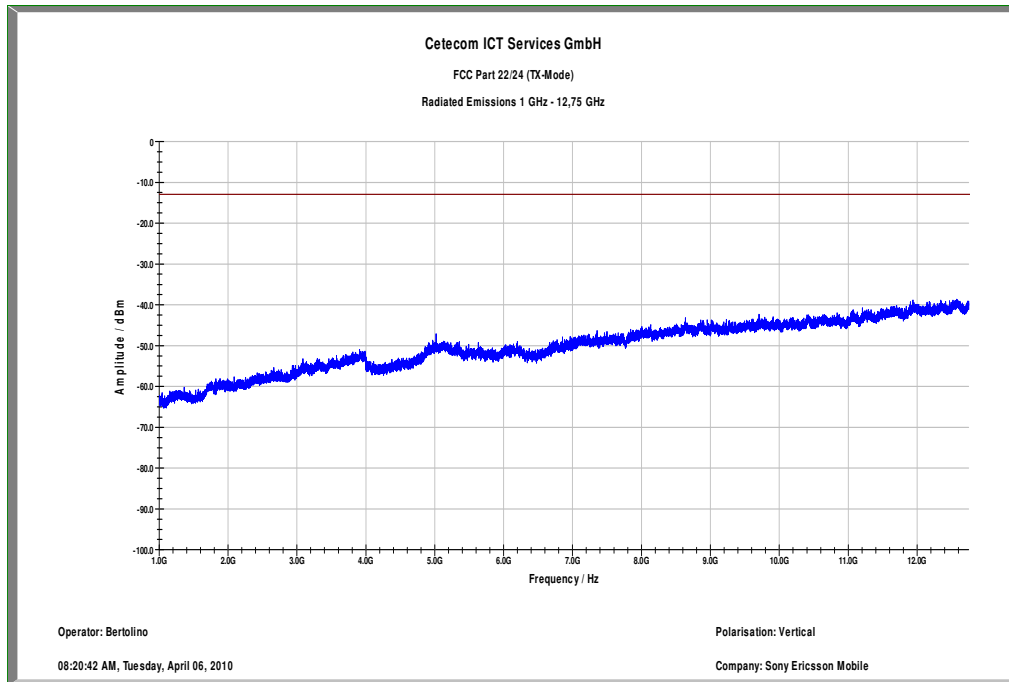

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz


**Channel 189 (30 MHz - 1 GHz), horizontal polarization**

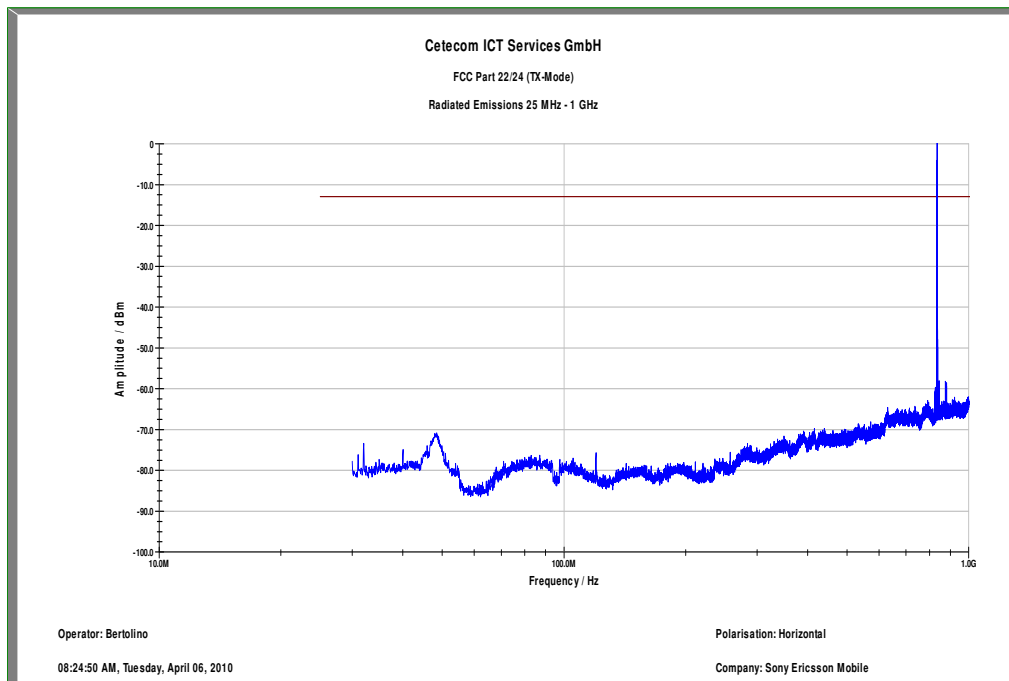

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz


**Channel 189 (1 GHz – 12.75 GHz), horizontal polarization**

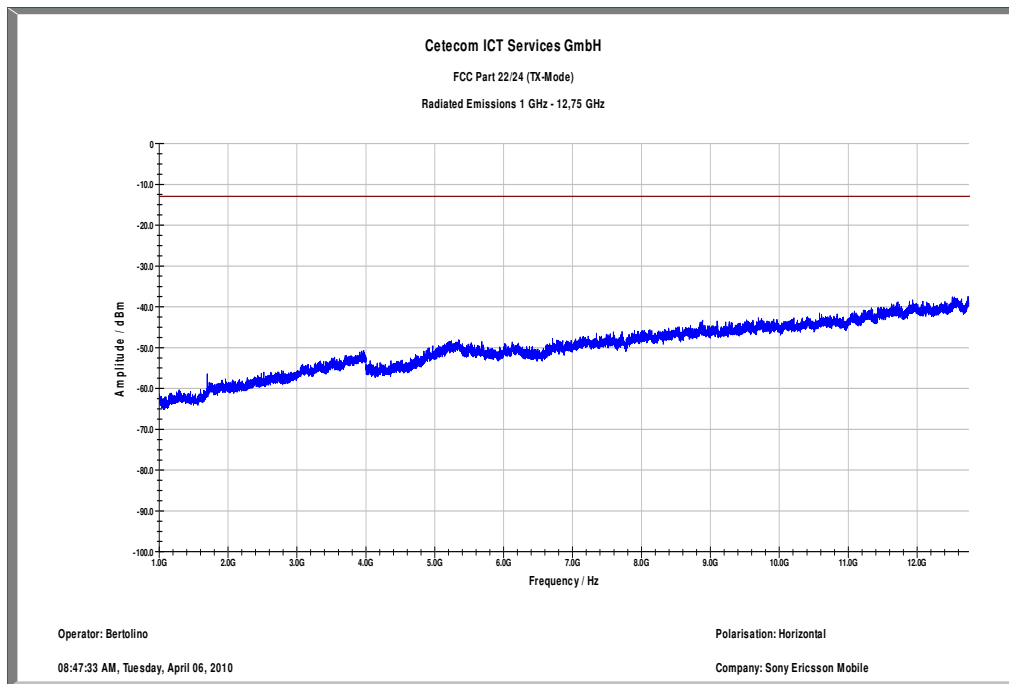

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz

**Channel 128 (12 GHz - 25 GHz)**

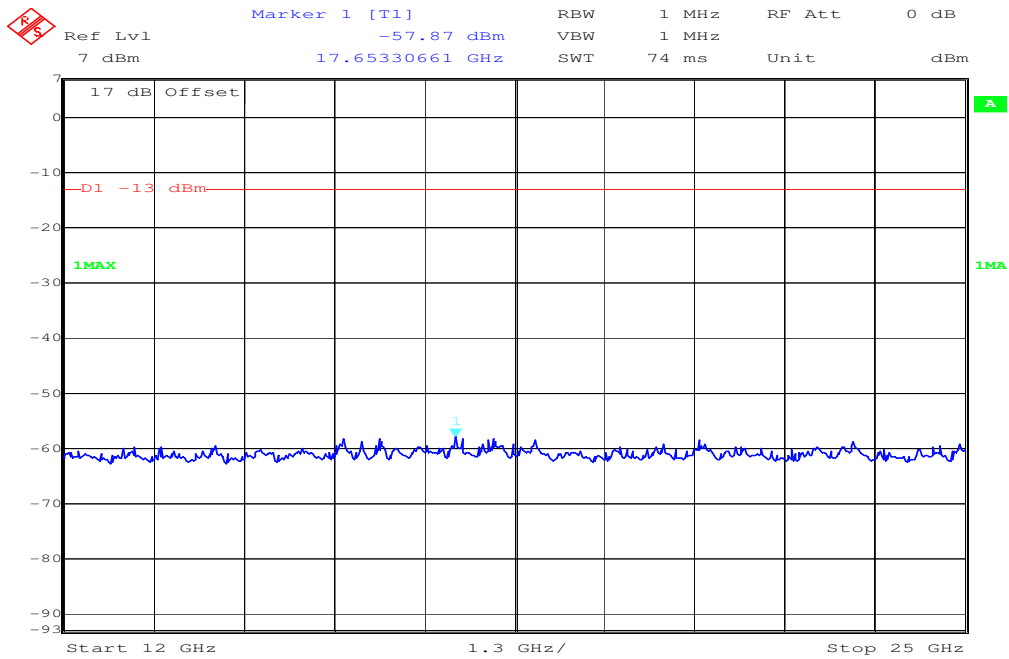

Date: 6.APR.2010 09:42:30

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz

### 5.2.4 Conducted Spurious Emissions

#### Reference

FCC:	CFR Part 22.917, 1.1051
IC:	RSS 132, Issue 2, Section 4.5 and 6.5

#### Measurement Procedure

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.

2. Determine mobile station transmits frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

USPCS Transmitter Channel Frequency

128 824.2 MHz

189 836.4 MHz

251 848.8 MHz

#### Measurement Limit


(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\text{Log}(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

#### Measurement Results


Harmonic	Tx ch.-128 Freq. (MHz)	Level (dBm)	Tx ch.-189 Freq. (MHz)	Level (dBm)	Tx ch.-251 Freq. (MHz)	Level (dBm)
2	1648.4	-	1672.8	-	1697.6	-
3	2472.6	-	2509.2	-	2546.4	-
4	3296.8	-	3345.6	-	3395.2	-
5	4121.0	-	4182.0	-	4244.0	-
6	4945.2	-	5018.4	-	5092.8	-
7	5769.4	-	5854.8	-	5941.6	-
8	6593.6	-	6691.2	-	6790.4	-
9	7417.8	-	7527.6	-	7639.2	-
10	8242.0	-	8364.0	-	8488.0	-

**No peaks found > 20 dB below limit.**

**Plot 1:** TX mode, 30 MHz – 25 GHz, channel 128

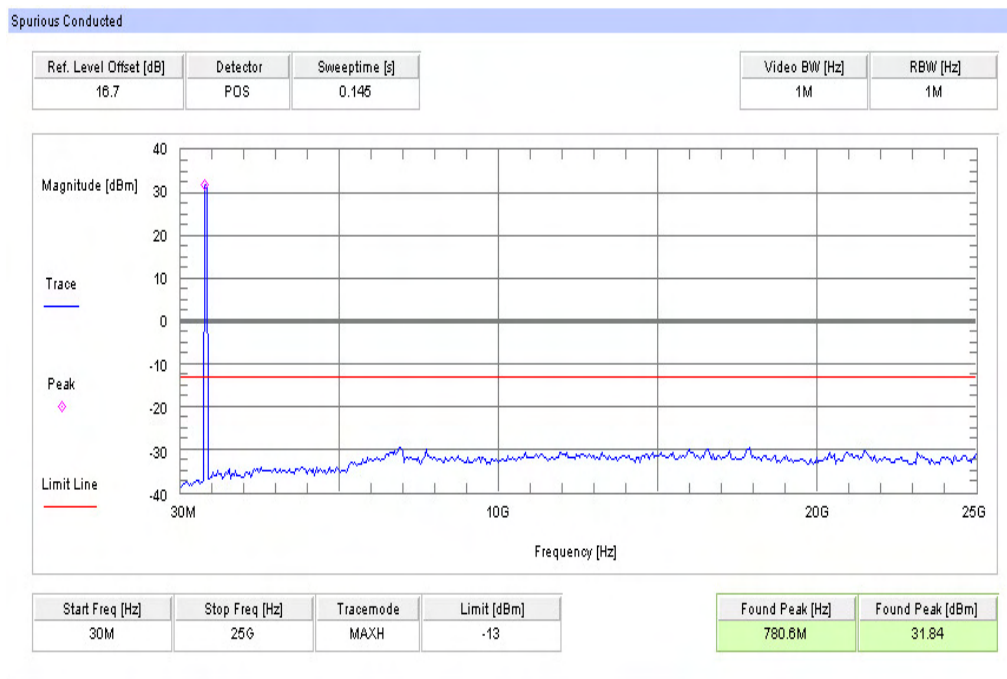


**Plot 2:** TX mode, 30 MHz – 25 GHz, channel 189

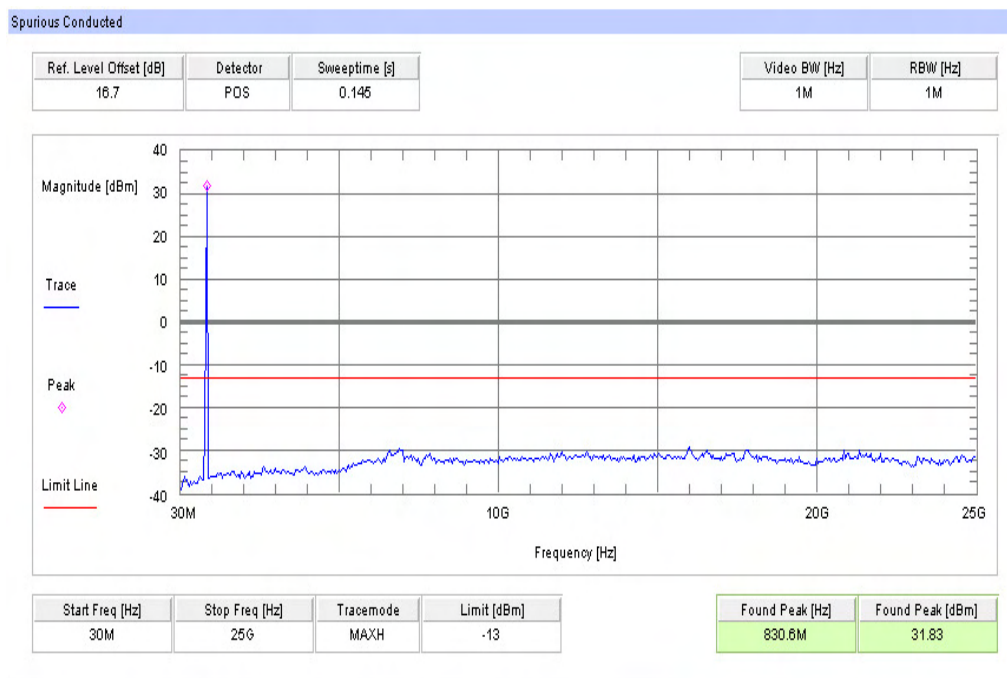



**Plot 3:** TX mode, 30 MHz – 25 GHz, channel 251

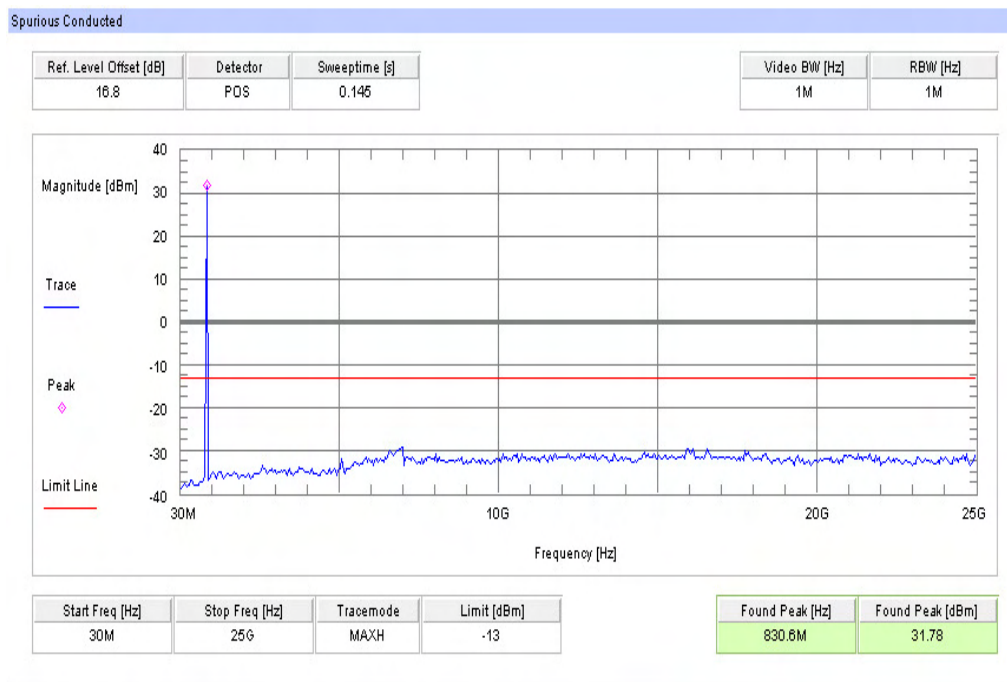

---

### 5.2.5 Block Edge Compliance

#### Reference

FCC:	CFR Part 22.917
IC:	RSS 132, Issue 2, Section 6.5

#### Measurement Limit:


Sec. 22.917 (b) Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10 \text{ Log (P)}$  dB. For all power levels +33 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.


**Plot 1:** TX mode, Block 1, channel 128, GSM mode




**Plot 2:** TX mode, Block 6, channel 251, GSM mode

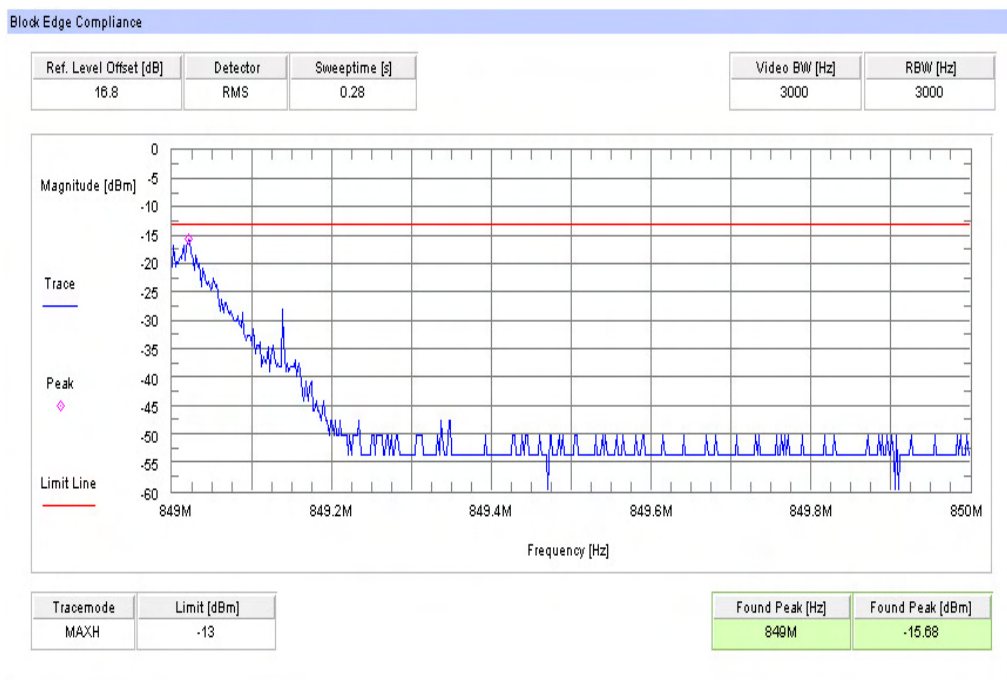

**Plot 3:** TX mode, Block 1, channel 128, EGPRS / EDGE mode

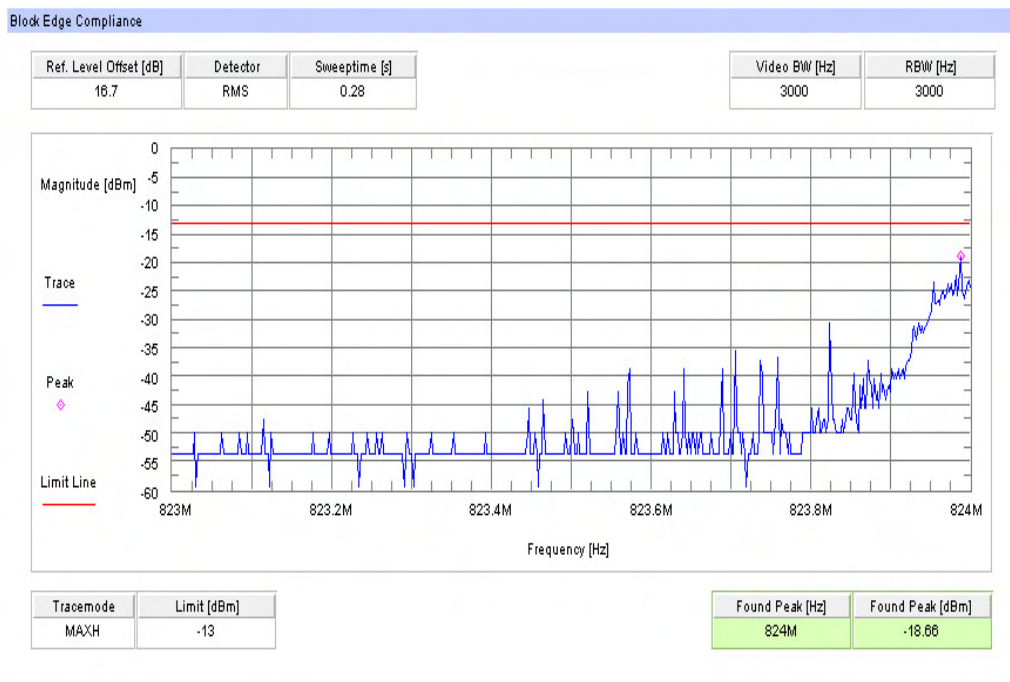

**Plot 4:** TX mode, Block 6, channel 251, EGPRS / EDGE mode

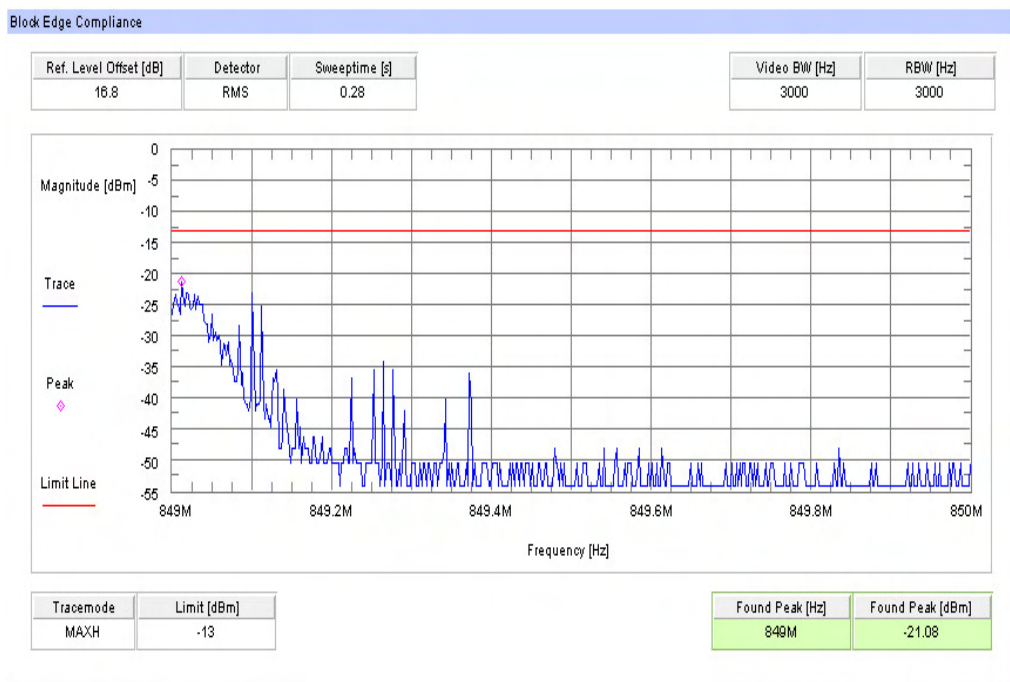

### 5.2.6 Occupied Bandwidth

#### Reference

FCC:	CFR Part 22.917, 2.1049
IC:	RSS 132, Issue 2, Section 4.2

#### Occupied Bandwidth Results

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.

#### Normal mode


Frequency	99% Occupied Bandwidth (kHz)	-26 dBc Bandwidth (kHz)
824.2 MHz	269	311
836.4 MHz	261	311
848.8 MHz	279	315

#### EDGE mode


Frequency	99% Occupied Bandwidth (kHz)	-26 dBc Bandwidth (kHz)
824.2 MHz	267	307
836.4 MHz	263	313
848.8 MHz	263	315

Part 22 requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 300 kHz, this equates to a resolution bandwidth of at least 3 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.


**Plot 1:** TX mode, 99% (-20 dB) occupied bandwidth, channel 128, GSM mode

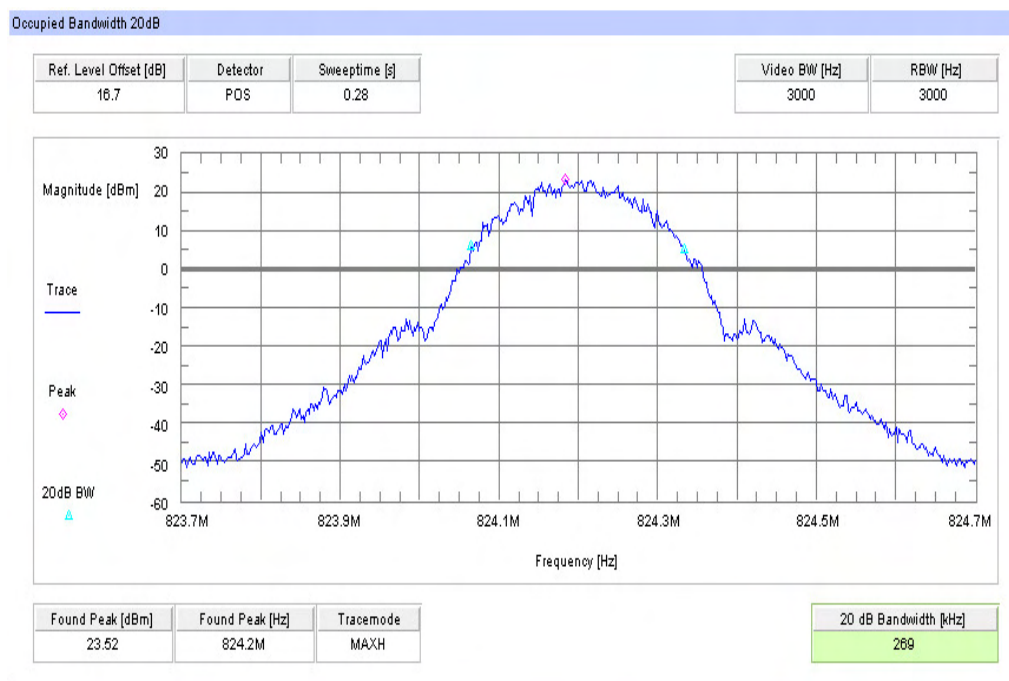


**Plot 2:** TX mode, -26 dBc bandwidth, channel 128, GSM mode

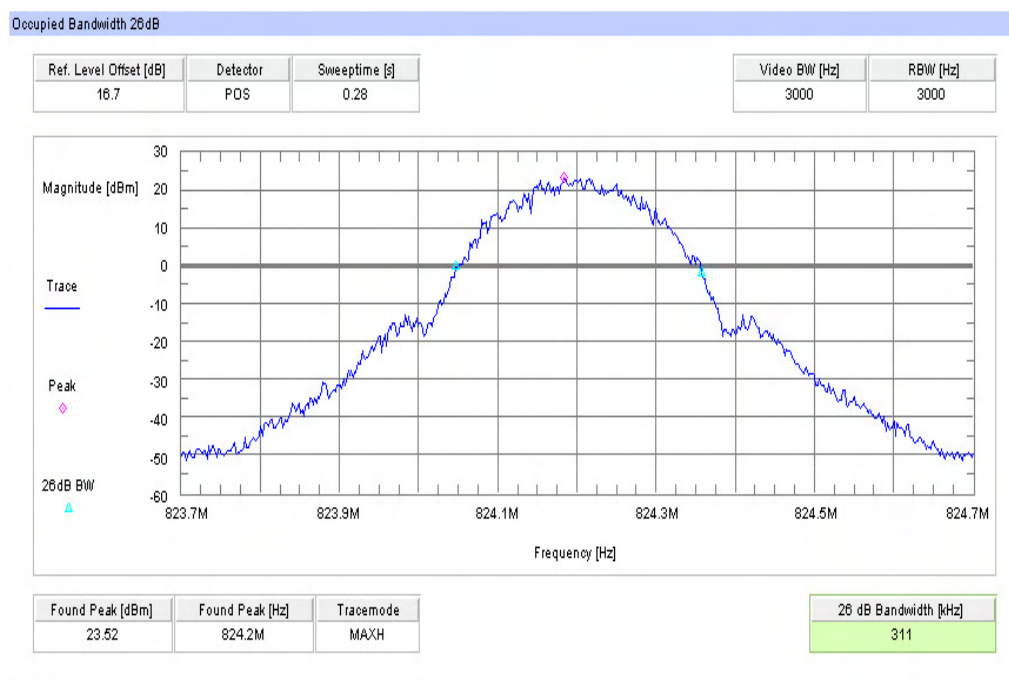


**Plot 3: TX mode, 99% (-20 dB) occupied bandwidth, channel 189, GSM mode**

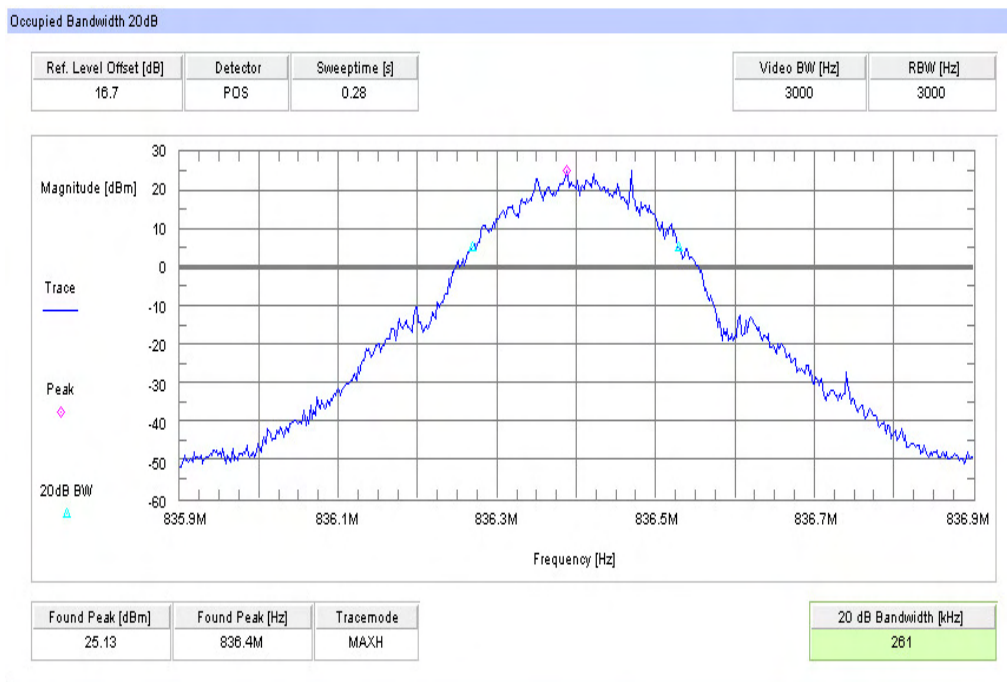


**Plot 4: TX mode, -26 dBc bandwidth, channel 189, GSM mode**

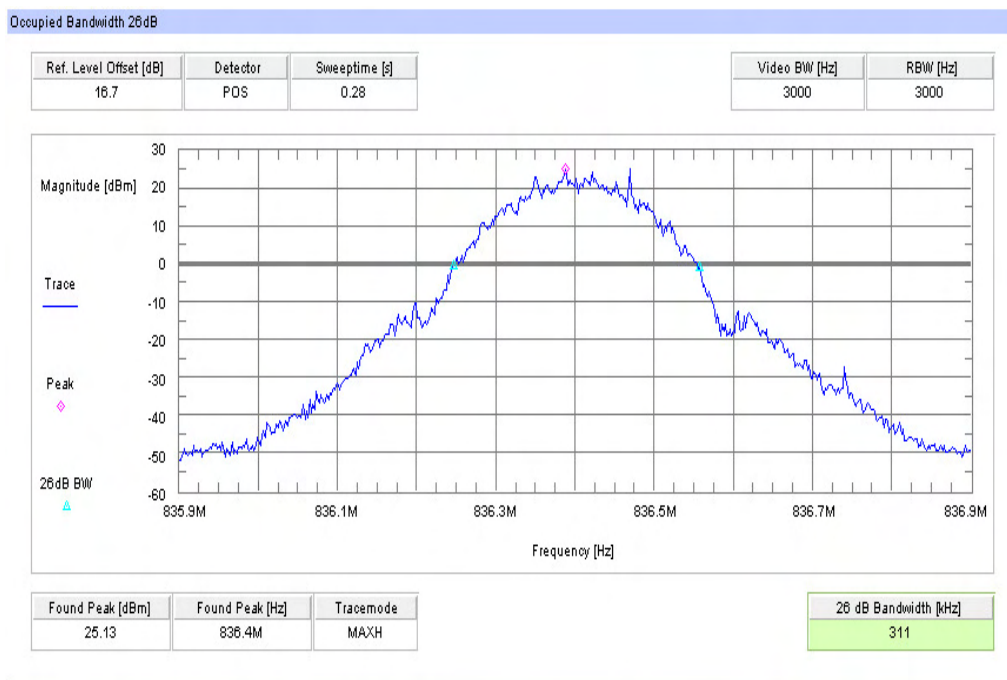

**Plot 5:** TX mode, 99% (-20 dB) occupied bandwidth, channel 251, GSM mode

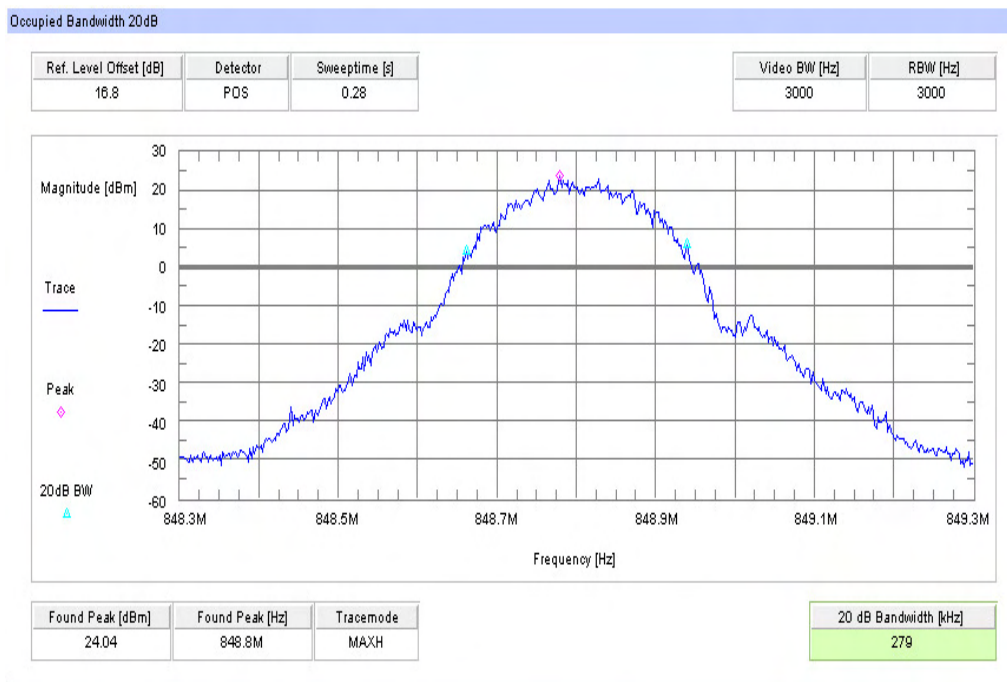


**Plot 6:** TX mode, -26 dBc bandwidth, channel 251, GSM mode

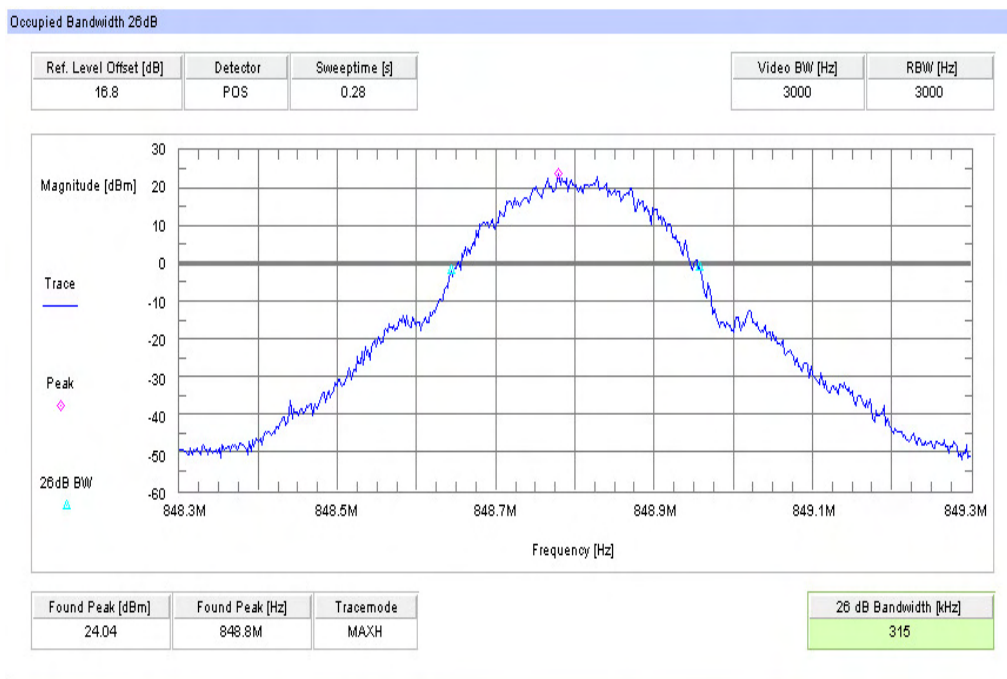





**Plot 7:** TX mode, 99% (-20 dB) occupied bandwidth, channel 128, EGPRS / EDGE mode

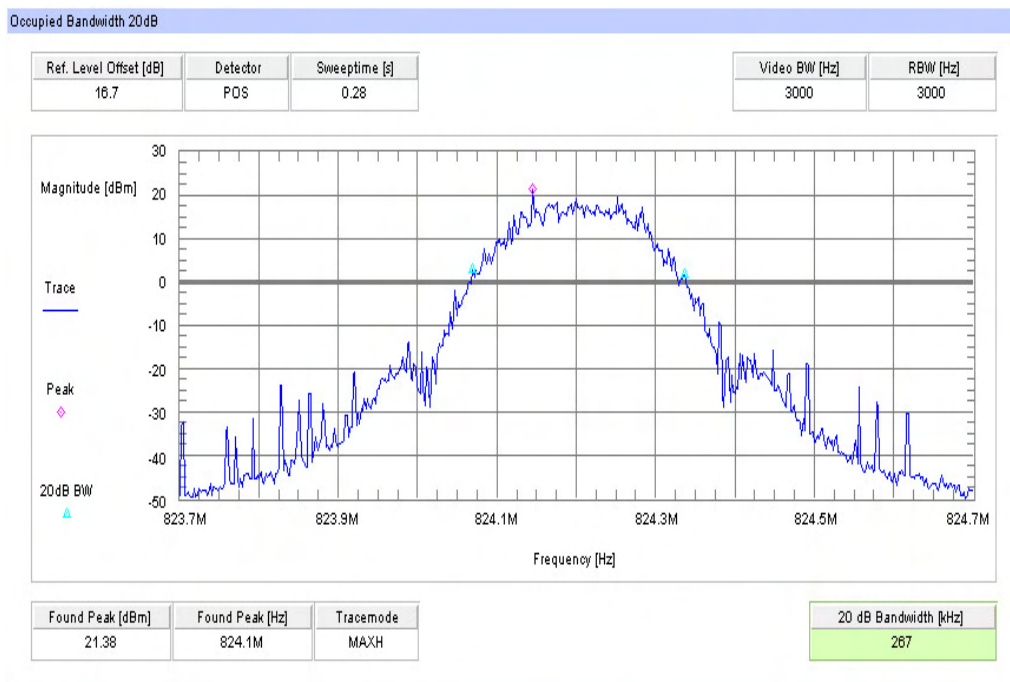


**Plot 8:** TX mode, -26 dBc bandwidth, channel 128, EGPRS / EDGE mode

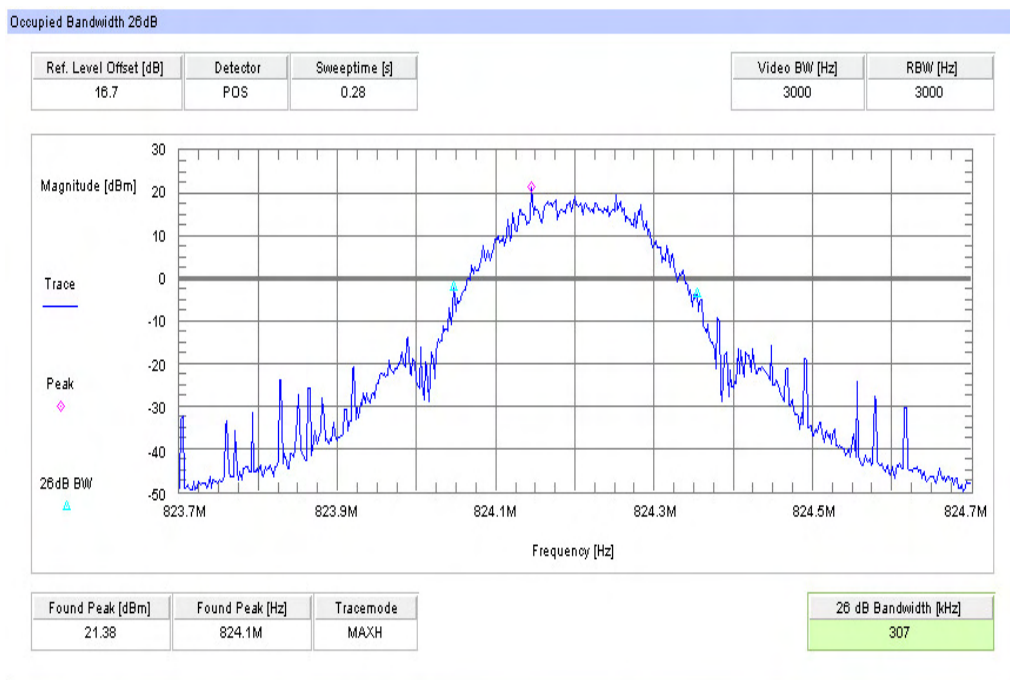


**Plot 9:** TX mode, 99% (-20 dB) occupied bandwidth, channel 189, EGPRS / EDGE mode

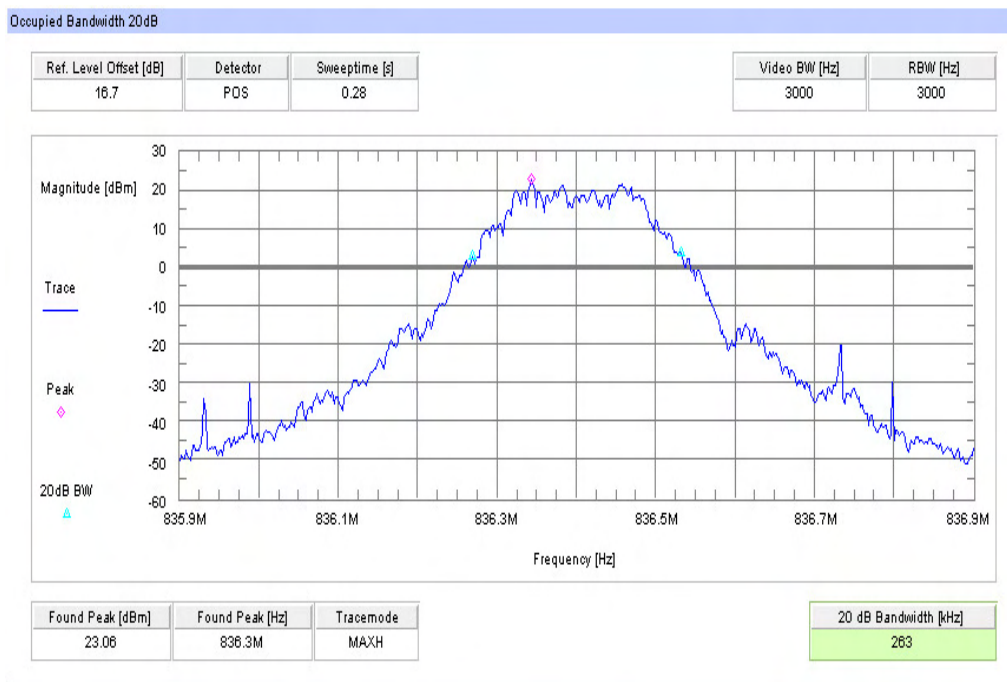


**Plot 10:** TX mode, -26 dBc bandwidth, channel 189, EGPRS / EDGE mode

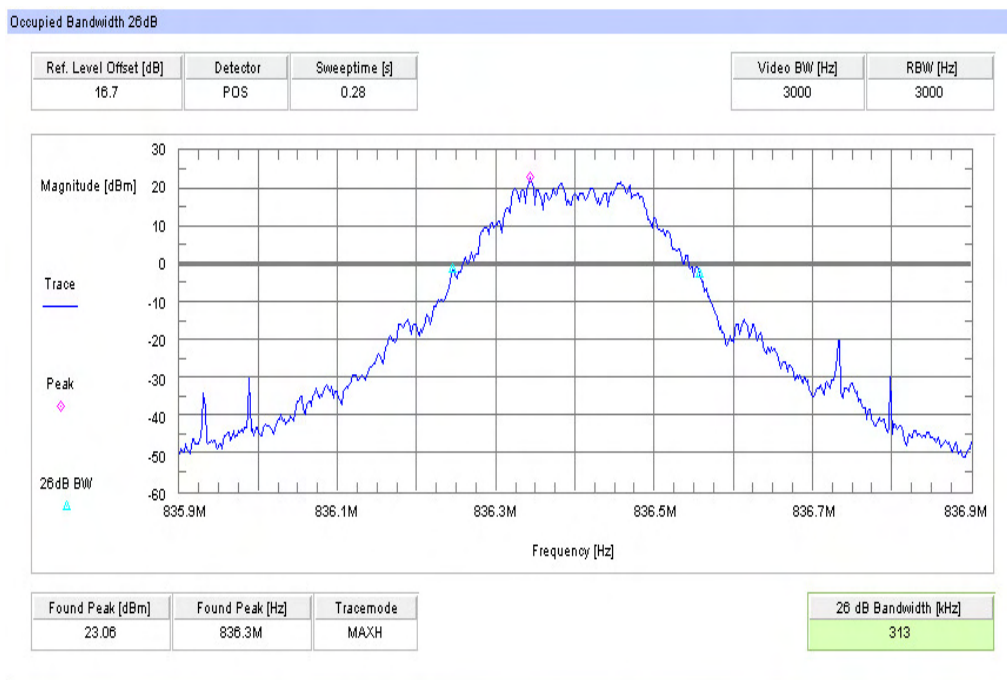

**Plot 11:** TX mode, 99% (-20 dB) occupied bandwidth, channel 251, EGPRS / EDGE mode

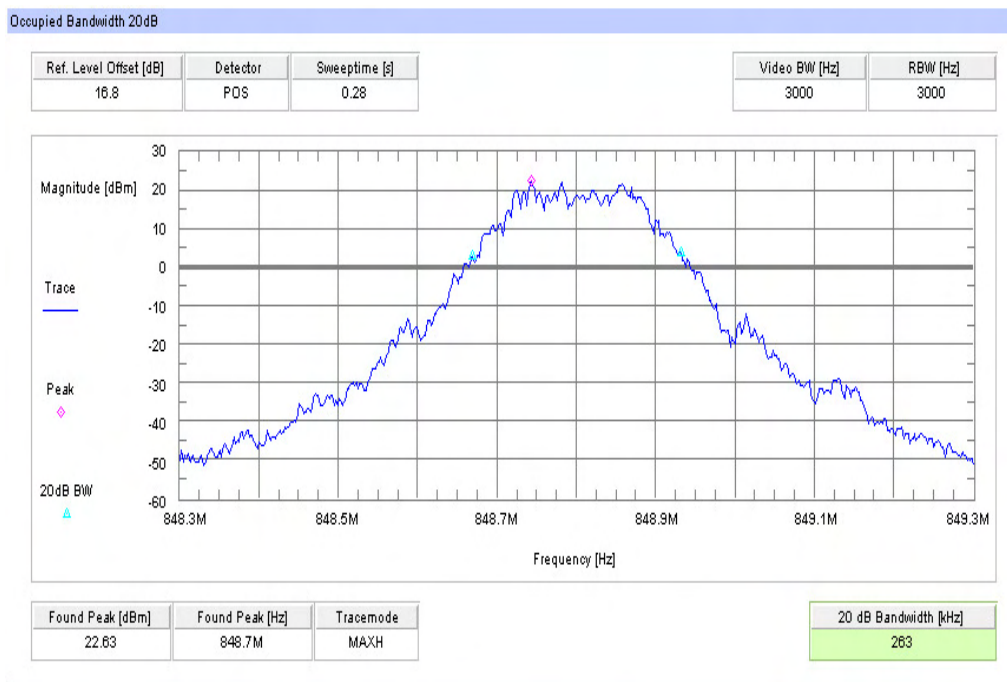

**Plot 12:** TX mode, -26 dBc bandwidth, channel 251, EGPRS / EDGE mode

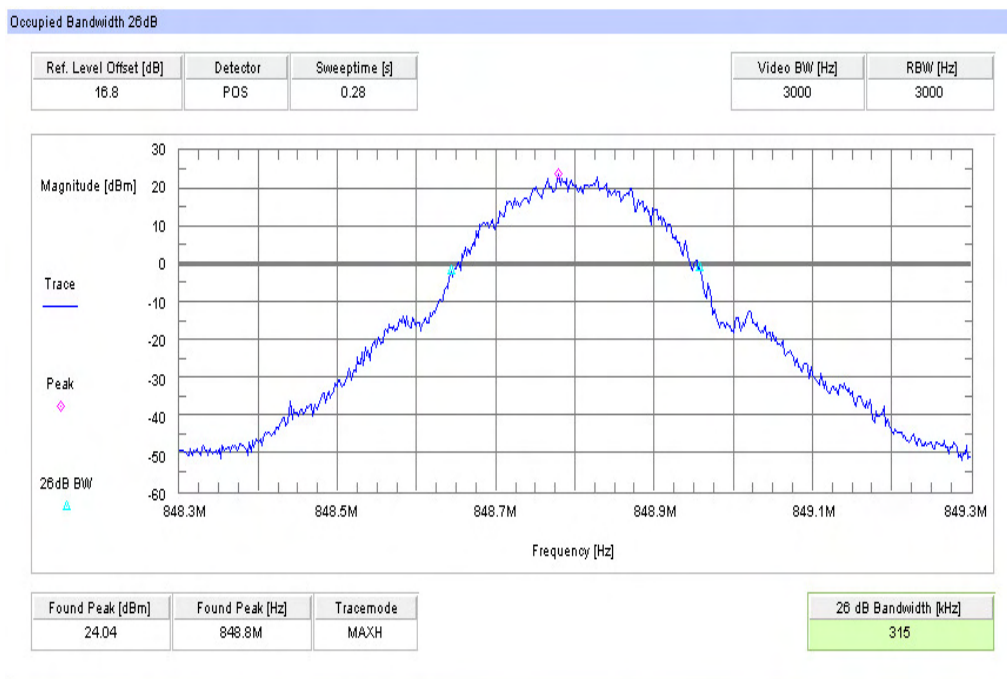

### 5.3 Receiver

#### 5.3.1 Receiver Radiated Emissions

##### Reference

FCC:	CFR Part 15.109, 2.1053
IC:	RSS 132, Issue 2, Section 4.6 and 6.6

##### Method of measurement

The measurement was performed in worst case. The EUT was not connected to the CMU 200. So the EUT perform a network search. In this case all oscillators are active.

##### Measurement Results

SPURIOUS EMISSIONS LEVEL (dB $\mu$ V/m)								
Idle mode			-/-			-/-		
f (MHz)	Detector	Level (dB $\mu$ V/m)	f (MHz)	Detector	Level (dB $\mu$ V/m)	f (MHz)	Detector	Level (dB $\mu$ V/m)
No critical peaks detected								
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz


H = Horizontal; V= Vertical

Measurement distance see table

##### Limits: § 15.109

Frequency (MHz)	Field strength (dB $\mu$ V/m)	Measurement distance (m)
30 - 88	30.0	10
88 - 216	33.5	10
216 - 960	36.0	10
above 960	54.0	3

Idle-Mode (0 MHz - 30 MHz)

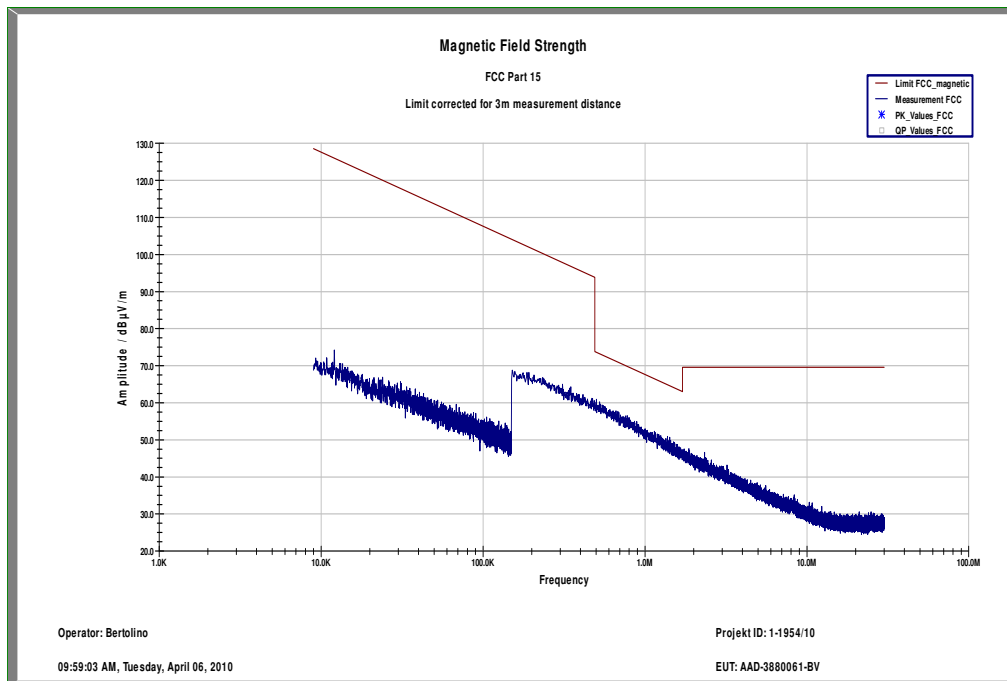

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$


## Idle-Mode (30 MHz - 1 GHz)

EUT: AAD-3880061-BV + CAA-0002016-BV  
 Serial Number: IMEI:00440107-849532-8 + 1109W504000514  
 Test Description: FCC part 15 B class B  
 Operating Conditions: GSM idle/A-GPS activ  
 Operator Name: Lang  
 Comment: AC: 115 V / 60 Hz

### Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)  
 Level Unit: dB $\mu$ V/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 1,05 GHz	QuasiPeak	120 kHz	15 s	Receiver

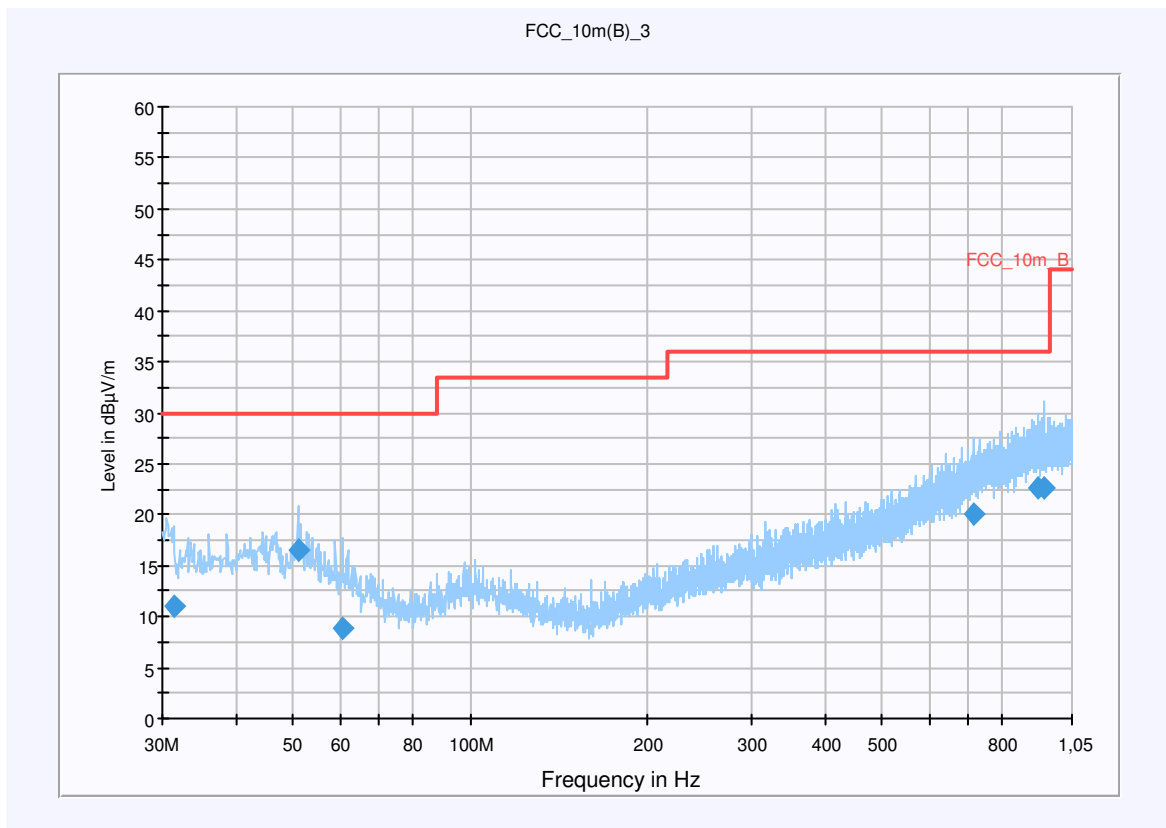

### Final Result 1

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V/m)	Comment
31.515600	10.9	15000.000	120.000	151.0	V	53.0	12.7	19.1	30.0	
50.970300	16.5	15000.000	120.000	98.0	V	180.0	13.3	13.5	30.0	
60.622500	8.8	15000.000	120.000	108.0	V	135.0	11.5	21.2	30.0	
717.216000	20.1	15000.000	120.000	201.0	H	223.0	22.8	15.9	36.0	
916.051350	22.6	15000.000	120.000	199.0	H	53.0	25.2	13.4	36.0	
943.532400	22.5	15000.000	120.000	220.0	H	236.0	25.3	13.5	36.0	

---


## Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

### Subrange 1

Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/003, FW 4.32
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table: Cable_EN_1GHz (0909)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.10.00


**Idle-Mode (1 GHz – 12.75 GHz), vertical polarization**

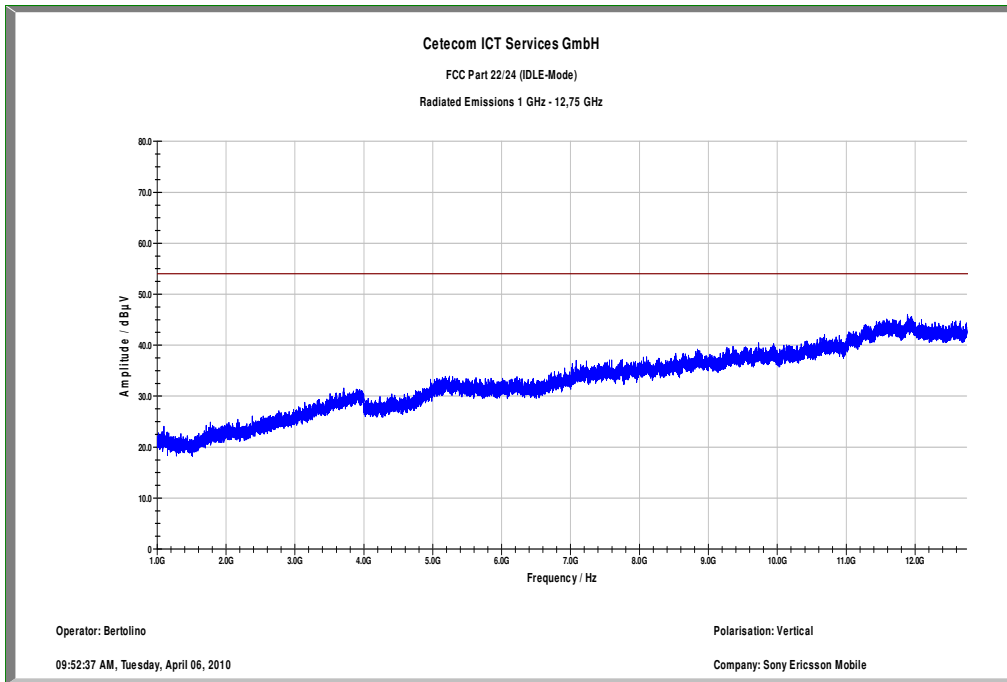

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz

**Idle-Mode (1 GHz – 12.75 GHz), horizontal polarization**

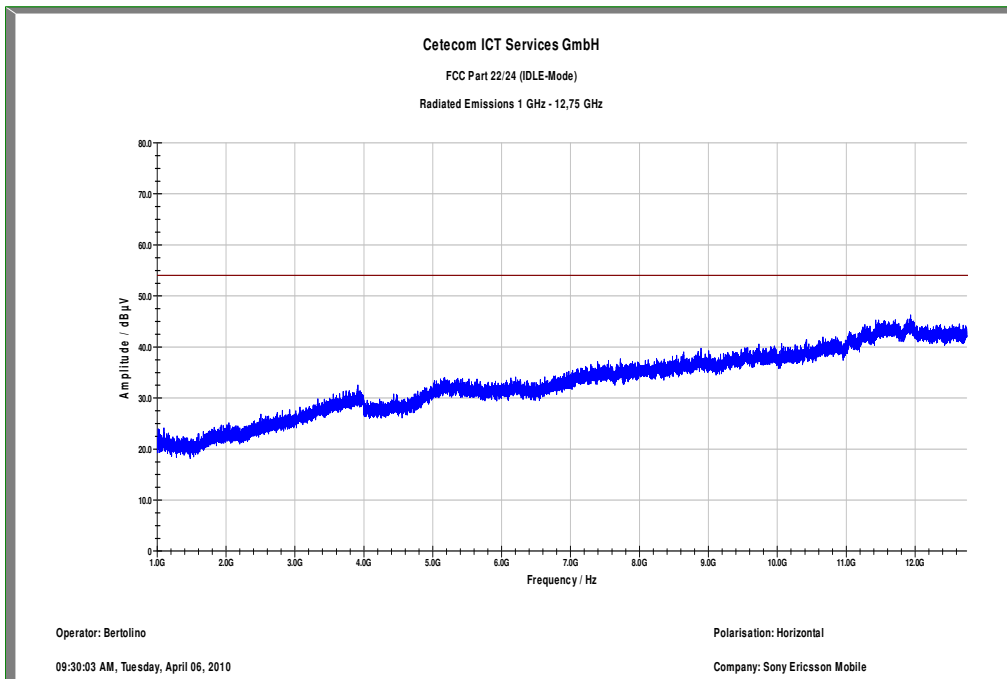


$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz



Idle-Mode (12 GHz - 25 GHz)

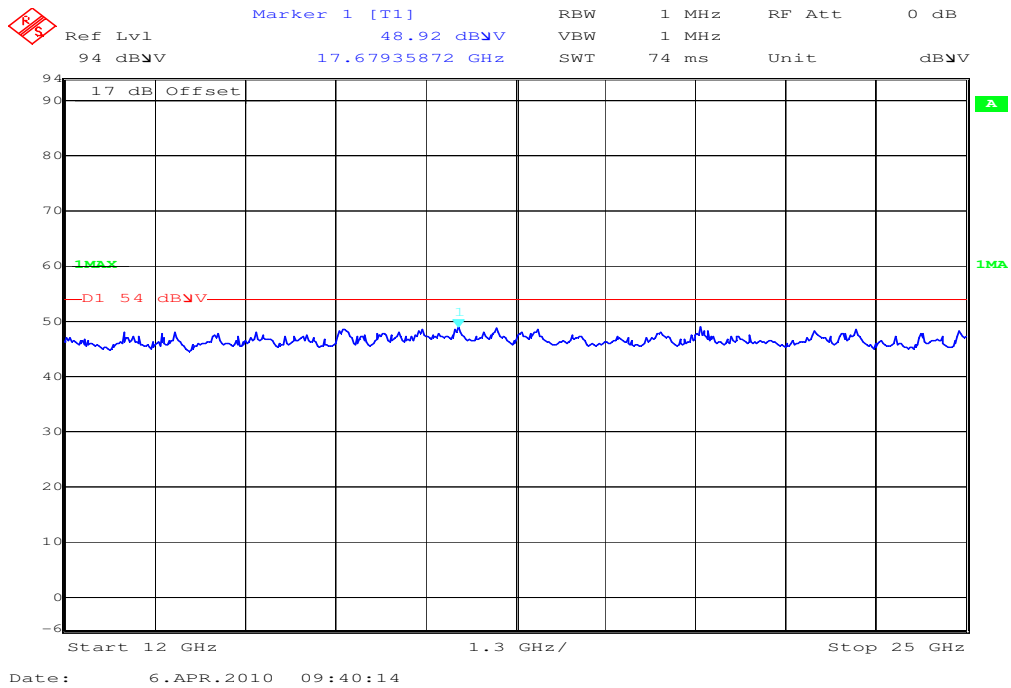

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz

## 6 Test equipment and ancillaries used for tests

In order to simplify the identification of the equipment used at each specific test, each item of test equipment and ancillaries are provided with an identifier or number in the equipment list below.

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

No.	Labor / Item	Equipment	Type	Manufac t.	Serial No.	INV. No Cetecom	Kal. Art	Last Calibra tion	Next Calibra tion
1	n. a.	Universal Communication Tester	CMU 200	R&S	832221 /055	30000286 2	k	20.03. 2008	20.03. 2011
2	n. a.	DC Power Supply 0 – 32V System	1108-32	Heiden	1802	30000138 3	Ve	13.05. 2007	13.05. 2010
3	n. a.	Autoranging DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A 04590	30000104 1	Ve	08.01. 2009	08.01. 2012
4	n. a.	Temperature Test Chamber	VT 4002	Heraeus Voetsch	521/83 761	30000232 6	Ve	28.05. 2009	28.05. 2011
5	n. a.	Switch / Control Unit	3488A	HP	2605e0 8770	30000144 3	ne		
6	n. a.	Signal Analyzer 20Hz- 26,5GHz-150 to + 30 DBM System	FSiQ26	R&S	835111 /0004	30000267 8	Ve	06.01. 2009	06.01. 2011
7	n. a.	Autoranging DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2818A 03450	30000104 0	Ve	08.01. 2009	08.01. 2012
8	n. a.	PowerAttenuator	8325	Byrd	1530	30000159 5			
9	n. a.	Double-Ridged Waveguide Horn Antenna 1-26.5GHz	3115	EMCO	8812- 3088	30000103 2	vIKI!	05.03. 2009	05.03. 2011
10	n. a.	Active Loop Antenna	6502	EMCO	2210	30000101 5	ne		
11	n. a.	Anechoic chamber		MWB	87400/ 02	30000099 6			
12	Spec.A. 2_2e	System-Rack	85900	HP I.V.	*	30000022 2	ne		
13	9	Artificial Mains 9 kHz to 30 MHz, 4 x 25 Ampere	ESH3-Z5	R&S	828576 /020	30000121 0	Ve	06.01. 2010	06.01. 2012
14	n. a.	Relais Matrix	3488A	HP	2719A	30000115	ne		

				Meßtech nik	15013	6			
15	n. a.	Relais Matrix	PSU	R&S	890167 /024	30000116 8	ne		
16	n. a.	Isolating Transformer	RT5A	Grundig	9242	30000126 3	ne		
17	n. a.	Power Splitter, 50 Ohm	11850C	HP Meßtech nik		30000099 7	ne		
18	n. a.	Band Reject filter	WRCG1855/1 910- 1835/1925- 40/8SS	Wainwri ght	7	30000335 0	ev		
19	n. a.	Band Reject filter	WRCG2400/2 483- 2375/2505- 50/10SS	Wainwri ght	11	30000335 1	ev		
20	n. a.	TILE-Software Emission	Quantum Change, Modell TILE- ICS/FULL	EMCO	none	30000345 1	ne		
21	n. a.	Highpass Filter	WHKX2.9/18 G-12SS	Wainwri ght	1	30000349 2	ev		
22	n. a.	Highpass Filter	WHK1.1/15G- 10SS	Wainwri ght	3	30000325 5	ev		
23	n. a.	Highpass Filter	WHKX7.0/18 G-8SS	Wainwri ght	18	30000378 9	ne		
24	n. a.	PSA Spectrum Analyzer 3 Hz - 26.5 GHz MXG	E4440A	Agilent Vertr. Bad Hom	MY482 50080	30000381 2	k	05.08. 2008	05.08. 2010
25	n. a.	Microwave Analog Signal Generator	N5183A	Agilent Vertr. Bad Hom	MY474 20220	30000381 3	k	06.08. 2008	06.08. 2010
26	n. a.	RF Filter Section 9kHz - 1GHz	N9039A	Agilent Vertr. Bad Hom	MY482 60003	30000382 5	vIKI!	19.08. 2008	19.08. 2010
27	n. a.	TRILOG Super Breitband Antenne	VULB9163	Schwarz beck	371	30000385 4	vIKI!	17.12. 2008	17.12. 2010