



## Accredited testing-laboratory

**DAR registration number: DAT-P-176/94-D1**

**Federal Motor Transport Authority (KBA)  
DAR registration number: KBA-P 00070-97**

**Recognized by the Federal Communications Commission**

**Anechoic chamber registration no.: 90462 (FCC)**

**Anechoic chamber registration no.: 3463A-1 (IC)**

**Certification ID: DE 0001**

**Accreditation ID: DE 0002**

**Accredited Bluetooth® Test Facility (BQTF)**

*The Bluetooth word mark and logos are owned by the Bluetooth SIG,  
Inc. and any use of such marks by Cetecom ICT is under license*

**Test report no. : 1-0726-01-04/08**  
**Type identification : FAD-3232022-BV (MD400) / FAD-3232023-BV (MD400g)**  
**Applicant : Sony Ericsson Mobile Computing**  
**FCC ID : PY7F3232022 / PY7F3232023**  
**IC Certification No : 4170B-F3232022 / 4170B-3232023**  
**Test standards : 47 CFR Part 22**  
**47 CFR Part 24**  
**47 CFR Part 2**  
**RSS - 132 Issue 2**  
**RSS - 133 Issue 4**

**Table of contents**

**1 General information.....3**

1.1 Notes .....3

1.2 Testing laboratory .....4

1.3 Details of applicant .....4

1.4 Application details .....4

**2 Test standard/s:.....5**

**3 Technical tests .....6**

3.1 Details of manufacturer.....6

3.1.1 Test item.....7

3.2 Test Setup.....8

**4 Statement of Compliance.....9**

4.1 Summary of Measurement Results.....9

4.1.1 Labeling requirements.....9

4.1.2 PCS 1900.....9

4.1.3 GSM 850.....9

4.1.4 UMTS Band II.....10

4.1.5 UMTS Band V .....10

4.1.6 Receiver .....10

**5 Measurements and results ..... 11**

5.1 Labeling ..... 11

5.2 PART PCS 1900 .....12

5.2.1 RF Power Output.....12

5.2.2 Frequency Stability .....16

5.2.3 Radiated Emissions .....19

5.2.4 Conducted Spurious Emissions .....23

5.2.5 Block Edge Compliance.....27

5.2.6 Occupied Bandwidth.....30

5.3 PART GSM 850.....37

5.3.1 RF Power Output.....37

5.3.2 Frequency Stability .....40

5.3.3 Radiated Emissions .....43

5.3.4 Conducted Spurious Emissions .....47

5.3.5 Block Edge Compliance.....51

5.3.6 Occupied Bandwidth .....54

5.4 PART UMTS Band II .....61

5.4.1 RF Power Output.....61

5.4.2 Frequency Stability .....65

5.4.3 Radiated Emissions .....68

5.4.4 Conducted Spurious Emissions .....72

5.4.5 Block Edge Compliance.....76

5.4.6 Occupied Bandwidth .....78

5.5 PART UMTS Band V .....82

5.5.1 RF Power Output.....82

5.5.2 Frequency Stability .....86

5.5.3 Radiated Emissions .....89

5.5.4 Conducted Spurious Emissions .....93

5.5.5 Block Edge Compliance.....97

5.5.6 Occupied Bandwidth.....99

5.6 Receiver .....103

5.6.1 Receiver Radiated Emissions .....103

**6 Test equipment and ancillaries used for tests..... 107**

## 1 General information

### 1.1 Notes

The test results of this test report relate exclusively to the test item specified in 3.1.1. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

#### Test laboratory manager:


2008-09-08

Stefan Bös

Date

Name

Signature



#### Technical responsibility for area of testing:


2008-09-08

Michael Berg

Date

Name

Signature

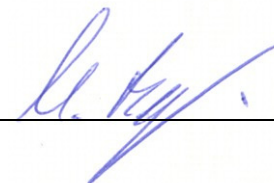

## 1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10  
66117 Saarbrücken  
Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

e-mail: info@ICT.cetecom.de

Internet: <http://www.cetecom-ict.de>

State of accreditation: The test laboratory (area of testing) is accredited according to  
DIN EN ISO/IEC 17025  
DAR registration number: DAT-P-176/94-D1

Accredited by: Federal Motor Transport Authority (KBA)  
DAR registration number: KBA-P 00070-97

Testing location, if different from CETECOM ICT Services GmbH:

Name :  
Street :  
Town :  
Country :  
Phone :  
Fax :

## 1.3 Details of applicant

<b>Name:</b>	<b>Sony Ericsson Mobile Computing</b>
<b>Street:</b>	<b>7001 Development Drive</b>
<b>Town:</b>	<b>Research Triangle Park, NC 27709</b>
<b>Country:</b>	<b>USA</b>
<b>Telephone:</b>	<b>+1-919-472-1431</b>
<b>Fax:</b>	<b>+1-919-472-6030</b>
<b>Contact:</b>	<b>Louis Le</b>
<b>E-mail:</b>	<b>Louis.Le@Sonyericsson.com</b>
<b>Telephone:</b>	<b>+1-919-472-1431</b>

## 1.4 Application details

<b>Date of receipt of order:</b>	<b>2008-08-04</b>
<b>Date of receipt of test item:</b>	<b>2008-09-01</b>
<b>Date of start test:</b>	<b>2008-09-01</b>
<b>Date of end test</b>	<b>2008-09-08</b>
<b>Persons(s) who have been present during the test:</b>	<b>-/-</b>

---

## 2 Test standard/s:

47 CFR Part 22	2006-10	Title 47 of the Code of Federal Regulations; Chapter I- Federal Communications Commission subchapter B - common carrier services, Part 22-Public mobile services
47 CFR Part 24	2006-10	Title 47 of the Code of Federal Regulations; Chapter I- Federal Communications Commission subchapter B - common carrier services, Part 24-Personal communications services
47 CFR Part 2	2006-10	Title 47 of the Code of Federal Regulations; Chapter I- Federal Communications Commission Frequency allocations and radio treaty matters; general rules and regulations
RSS - 132 Issue 2	2005-09	Spectrum Management and Telecommunications Policy - Radio Standards Specifications Cellular Telephones Employing New Technologies Operating in the Bands 824-849 MHz and 869-894 MHz
RSS - 133 Issue 4	2008-02	Spectrum Management and Telecommunications Policy - Radio Standards Specifications 2 GHz Personal Communication Services

---

### 3 Technical tests

#### 3.1 Details of manufacturer

Name:	<b>Sony Ericsson Mobile Communications AB</b>
Street:	<b>Nya Vattentorget</b>
Town:	<b>22188 Lund</b>
Country:	<b>Sweden</b>

**3.1.1 Test item**

Kind of test item	:	USB Dongle GSM850/900/1800/1900;FDDI,II,V
Type identification	:	FAD-3232022-BV (MD400) / FAD-3232023-BV (MD400g)
Serial Number	:	BDX0002T5Q, BDX0002T61, BDX0002T5X, BDX0002SPP (Radiated and Conducted Sample)
Frequency	:	1850.2 – 1909.8 MHz and 824.2 – 848.8 MHz
Type of modulation	:	GMSK; 8-PSK; QPSK; 16QAM
Emission Designator for GSM 1900	:	GMSK: 319KGXW 8-PSK: 319KG7W
Emission Designator for GSM 850	:	GMSK: 319KGXW 8-PSK: 303KG7W
Emission Designator for WCDMA 1900	:	4M80F9W
Emission Designator for WCDMA 850	:	4M83F9W
Number of channels	:	300 (PCS1900) and 125 (PCS850) 103 (FDD V) / 278 (FDD II)
Antenna Type	:	Integrated Antenna
Power supply (normal)	:	DC-supplied by USB-connection
Output power GSM 850 / GMSK	:	cond.: 32.2 dBm ERP: 31.5 dBm
Output power GSM 1900 / GMSK	:	cond : 29.7 dBm EIRP: 28.9 dBm
Output power GSM 850 / 8-PSK	:	cond.: 27.3 dBm ERP: 26.6 dBm
Output power GSM 1900 / 8-PSK	:	cond : 26.5 dBm EIRP: 25.6 dBm
Output power UMTS 850 / WCDMA	:	cond.: 23.5 dBm ERP: 22.8 dBm
Output power UMTS 1900 / WCDMA	:	cond : 22.7 dBm EIRP: 21.7 dBm
Output power UMTS 850 / HSDPA	:	cond.: 23.2 dBm
Output power UMTS 1900 / HSDPA	:	cond : 22.4 dBm
Output power UMTS 850 / HSUPA	:	cond.: 22.0 dBm
Output power UMTS 1900 / HSUPA	:	cond : 21.8 dBm
Transmitter Spurious (worst case)	:	0.001 mW / -40 dBm
Receiver Spurious (worst case)	:	140 µV/m @ 3 m
FCC ID	:	PY7F3232022 / PY7F3232023
Certification No. IC	:	4170B-F3232022 / 4170B-3232023
Open Area Test Site IC No.	:	IC 3463A-1
IC Standards	:	RSS132, Issue 2, RSS133, Issue 4

**ATTESTATION:**

**DECLARATION OF COMPLIANCE:**

I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

**Laboratory Manager:**

2008-09-08

Stefan Bös



Date

Name

Signature

---

### 3.2 Test Setup

Hardware	:	A
Software	:	R4Axxx / SVN:05
Mobile; (cond. measurements)	:	BDX0002T5Q, BDX0002T5X
Mobile; (rad. measurements)	:	BDX0002SPP, BDX0002T61

**The results of this test report are valid for both types (with and without GPS-receiver). The Idle measurements were performed also with GPS active. The plots show the worst case.**



## 4 Statement of Compliance

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

### 4.1 Summary of Measurement Results

- No deviations from the technical specifications were ascertained
- There were deviations from the technical specifications ascertained

#### 4.1.1 Labeling requirements

Section in this Report	Test Name	Verdict
5.1	Labeling	pass

#### 4.1.2 PCS 1900

Section in this Report	Test Name	Verdict
5.2.1	RF Power Output	pass
5.2.2	Frequency Stability	pass
5.2.3	Radiated Emissions	pass
5.2.4	Conducted Spurious Emissions	pass
5.2.5	Block Edge Compliance	pass
5.2.6	Occupied Bandwidth	pass

#### 4.1.3 GSM 850

Section in this Report	Test Name	Verdict
5.3.1	RF Power Output	pass
5.3.2	Frequency Stability	pass
5.3.3	Radiated Emissions	pass
5.3.4	Conducted Spurious Emissions	pass
5.3.5	Block Edge Compliance	pass
5.3.6	Occupied Bandwidth	pass

**4.1.4 UMTS Band II**

Section in this Report	Test Name	Verdict
5.4.1	RF Power Output	pass
5.4.2	Frequency Stability	pass
5.4.3	Radiated Emissions	pass
5.4.4	Conducted Spurious Emissions	pass
5.4.5	Block Edge Compliance	pass
5.4.6	Occupied Bandwidth	pass

**4.1.5 UMTS Band V**

Section in This Report	Test Name	Verdict
5.5.1	RF Power Output	pass
5.5.2	Frequency Stability	pass
5.5.3	Radiated Emissions	pass
5.5.4	Conducted Spurious Emissions	pass
5.5.5	Block Edge Compliance	pass
5.5.6	Occupied Bandwidth	pass

**4.1.6 Receiver**

Section in this Report	Test Name	Verdict
5.6.1	Receiver Radiated emissions	pass

## 5 Measurements and results

### 5.1 Labeling

Each equipment covered in an application for equipment authorization shall bear a nameplate or label listing the following:

(1) FCC Identifier consisting of the two elements in the exact order specified in § 2.926. The FCC Identifier shall be preceded by the term *FCC ID* in capital letters on a single line, and shall be of a type size large enough to be legible without the aid of magnification.

*Example:* FCC ID XXX123. XXX—Grantee  
Code 123—Equipment Product Code

**Verification:**



**Result:**

Labeling as described in Part 2.925:	PASS
--------------------------------------	------

## 5.2 PART PCS 1900

For Part 24/22 we use the substitution method ( TIA/EIA 603).

All measurements in this report are done in GSM mode. The device is able to transmit data in GPRS mode also. But because the current measurements are performed in PEAK mode no other results from GPRS mode are possible. The only different is the modulation average power, which is 3 dB higher (by using 2 timeslots in the Up-link ). All relevant tests have been repeated in 8-PSK Modulation if EDGE Mode is supported.

### 5.2.1 RF Power Output

#### Reference

FCC:	CFR Part 24.232, 2.1046
IC:	RSS 133, Issue 4, Section 4.3

#### Summary:

This paragraph contains both average/peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

#### Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average)

These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0 MHz and 1909.8 MHz (bottom, middle and top of operational frequency range).

#### Limits:

Nominal Peak Output Power (dBm)
+33

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
---

#### Test Results: Output Power (conducted) GMSK Mode

Frequency (MHz)	Average Output Power (dBm)	Peak-to-Average Ratio (dB)
1850.2	29.6	0.2
1880.0	29.7	0.2
1909.8	29.6	0.2
Measurement uncertainty	±0.5 dB	

#### Test Results: Output Power (conducted) 8-PSK Mode

Frequency (MHz)	Average Output Power (dBm)	Peak-to-Average Ratio (dB)
1850.2	26.4	3.3
1880.0	26.4	3.3
1909.8	26.5	3.3
Measurement uncertainty	±0.5 dB	

## EIRP Measurements

### Description:

This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

(a) The measurements were performed with full rf output power and modulation.

(b) Test was performed at listed 3m test site (listed with FCC, IC).

(c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)

(d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.

(e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

$E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

(f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency

Resolution BW: 100 kHz

Video BW: same

Detector Mode: positive

Average: off

Span: 3 x the signal bandwidth

(g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.

(h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.

(i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.

(j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.

(k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.

(l) Repeat for all different test signal frequencies

**Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method**

(a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

- Center Frequency : equal to the signal source
- Resolution BW : 10 kHz
- Video BW : same
- Detector Mode : positive
- Average : off
- Span : 3 x the signal bandwidth

(b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

$E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

(c) Select the frequency and E-field levels for ERP/EIRP measurements.

(d) Substitute the EUT by a signal generator and one of the following transmitting antennas (substitution antenna): DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz}.

(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.

(f) Use one of the following antenna as a receiving antenna: .DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.

(g) If the DIPOLE antenna is used, tune its elements to the frequency as specified in the calibration manual.

(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.

(i) Tune the EMI Receivers to the test frequency.

(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(k) The transmitter was rotated through 360 o about a vertical axis until a higher maximum signal was received.

(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.

(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$\text{EIRP} = P + G1 = P3 + L2 - L1 + A + G1$$

$$\text{ERP} = \text{EIRP} - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.

P1: Power output from the signal generator

P2: Power measured at attenuator A input

P3: Power reading on the Average Power Meter

EIRP: EIRP after correction

ERP: ERP after correction

(o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)

(p) Repeat step (d) to (o) for different test frequency

(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.

(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

**Limits:**

Nominal Peak Output Power (dBm)
+33

**Test Results: Output Power (radiated) GMSK Mode**

Frequency (MHz)	Average EIRP (dBm)
1850.2	28.8
1880.0	28.9
1909.8	28.9
Measurement uncertainty	±0.5 dB

**Test Results: Output Power (radiated) 8-PSK Mode**

Frequency (MHz)	Average EIRP (dBm)
1850.2	25.5
1880.0	25.6
1909.8	25.5
Measurement uncertainty	±0.5 dB

**Sample Calculation:**

Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	EIRP Result			
MHz	dBμV	dBm	dBi	dBd	dB	dBm			
1909.8	132.3	24.6	8.4	0.0	3.3	29.7			

$EIRP = SG \text{ (dBm)} - \text{Cable Loss (dB)} + \text{Ant. gain (dBi)}$

## 5.2.2 Frequency Stability

### Reference

FCC:	CFR Part 24.235, 2.1055
IC:	RSS 133, Issue 4, Section 4.2

### Method of Measurement:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a “call mode”. This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER..

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with Vnom, connected to the CMU 200 and in a simulated call on channel 661 (center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with Vnom. Vary supply voltage from Vmin to Vmax, in 12 steps re-measuring carrier frequency at each voltage. Pause at Vnom for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with Vnom, connected to the CMU 200 and in a simulated call on channel 661(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

### Measurement Limit:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block..





**Test Results: AFC FREQ ERROR vs. VOLTAGE**

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
4.50	-13	-0.00000069	-0.0069
4.60	-10	-0.00000053	-0.0053
4.70	-6	-0.00000032	-0.0032
4.80	-5	-0.00000027	-0.0027
4.90	-8	-0.00000043	-0.0043
5.00	-2	-0.00000011	-0.0011
5.10	4	0.00000021	0.0021
5.20	12	0.00000064	0.0064
5.25	16	0.00000085	0.0085

**Test Results: AFC FREQ ERROR vs. TEMPERATURE**

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-10	-7	-0.00000037	-0.0037
±0.0	5	0.00000027	0.0027
+10	3	0.00000016	0.0016
+20	-2	-0.00000011	-0.0011
+30	6	0.00000032	0.0032
+40	12	0.00000064	0.0064
+50	18	0.00000096	0.0096
+55	22	0.00000117	0.0117

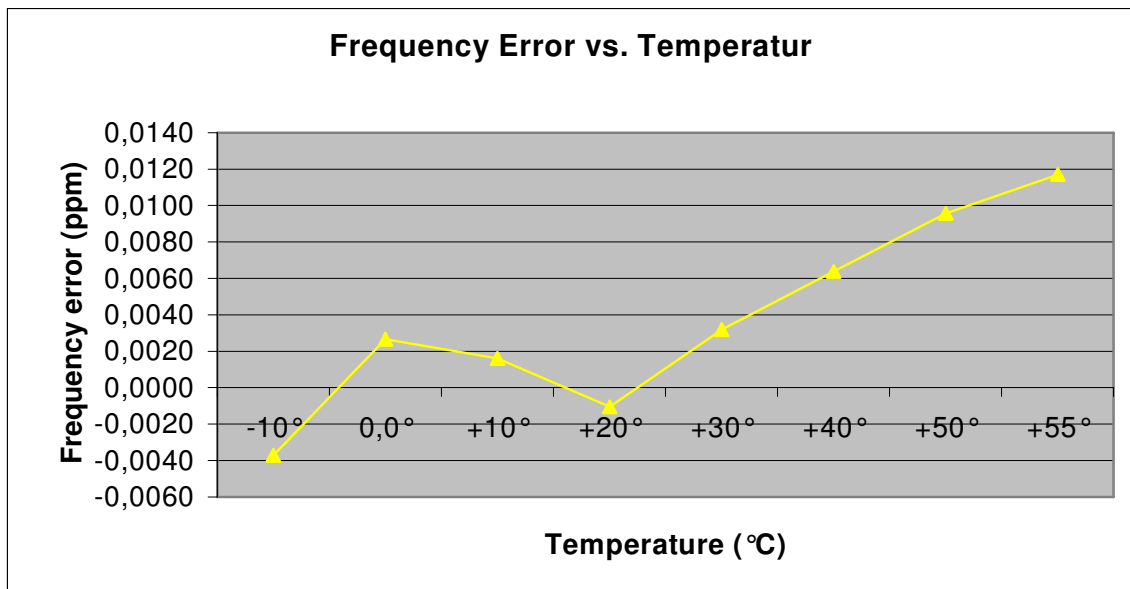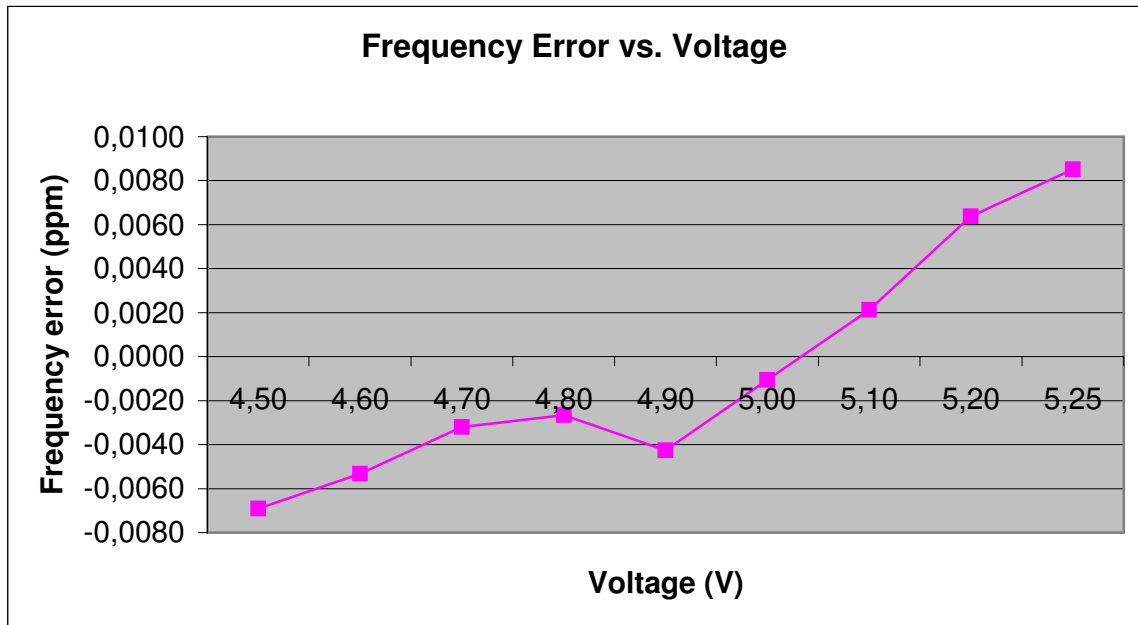

### 5.2.3 Radiated Emissions

#### Reference

FCC:	CFR Part 24.238, 2.1053
IC:	RSS 133, Issue 4, Section 4.4

#### Measurement Procedure:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2003 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded.
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603.

#### Measurement Limit:

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee' s frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**Measurement Results: Radiated Emissions**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1880.0 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next table.

All measurements were done in horizontal and vertical polarization; the plots show the worst case. The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked, too. The found values are stated in the table below.

As can be seen from this data, the emissions from the test item were within the specification limit.

Harmonic	Tx ch.-512 Freq. (MHz)	Level (dBm)	Tx ch.-661 Freq. (MHz)	Level (dBm)	Tx ch.-810 Freq. (MHz)	Level (dBm)
2	3700.4	-	3760	-	3819.6	-
3	5550.6	-	5640	-	5729.4	-
4	7400.8	-	7520	-	7639.2	-
5	9251.0	-	9400	-	9549.0	-
6	11101.2	-	11280	-	11458.8	-
7	12951.4	-	13160	-	13368.6	-
8	14801.6	-	15040	-	15278.4	-
9	16651.8	-	16920	-	17188.2	-
10	18502.0	-	18800	-	19098.0	-


**No peaks found < 20 dB below limit.**

**Sample calculation:**


Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	EIRP Result			
MHz	dBμV	dBm	dBi	dBd	dB	dBm			
1909.8	132.3	24.6	8.4	0.0	3.3	29.7			

$EIRP = SG \text{ (dBm)} - \text{Cable Loss (dB)} + \text{Ant. gain (dBi)}$

## Channel 661 (Traffic mode up to 30 MHz)

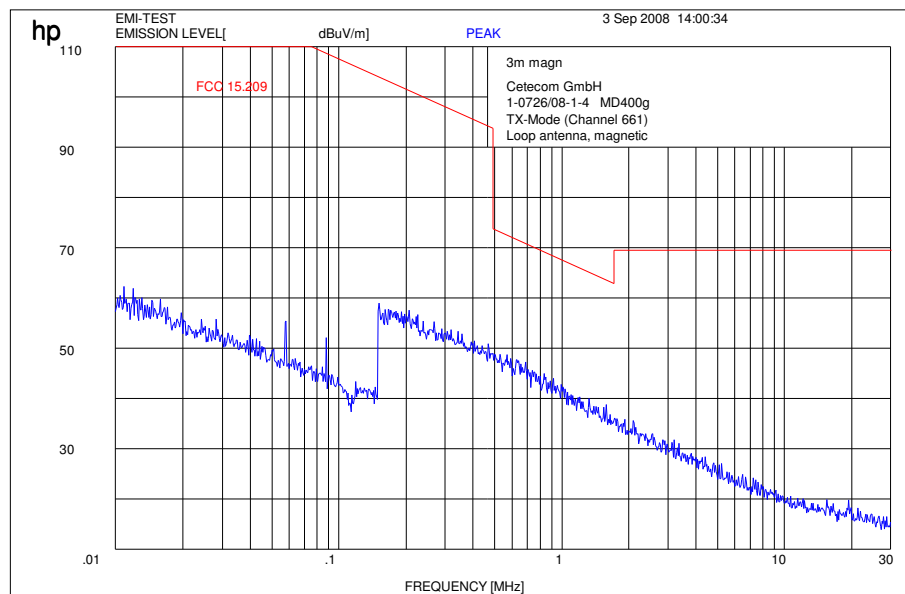

## Channel 661 (30 MHz - 4 GHz)

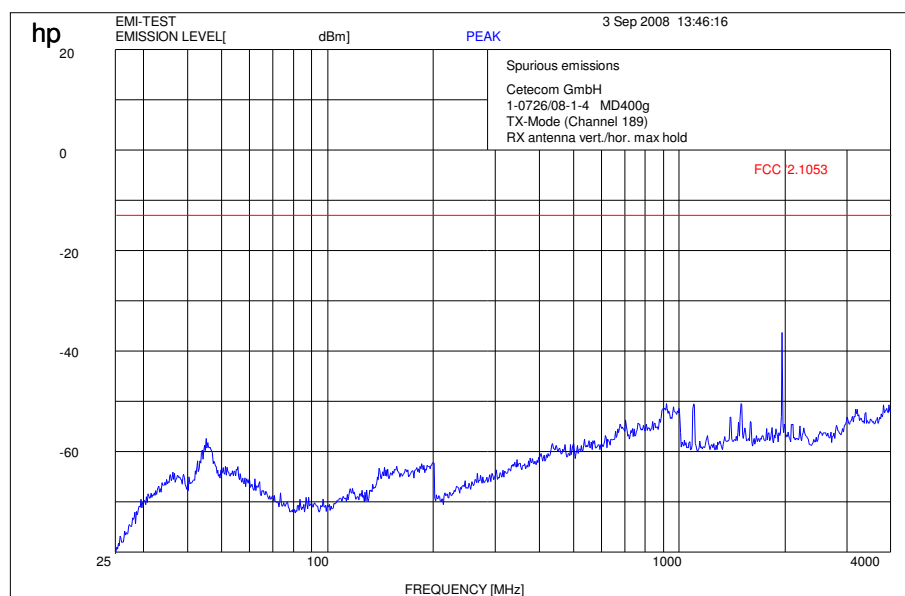


$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz

Carrier suppressed with a rejection filter


Channel 661 (4 GHz – 12.5 GHz)

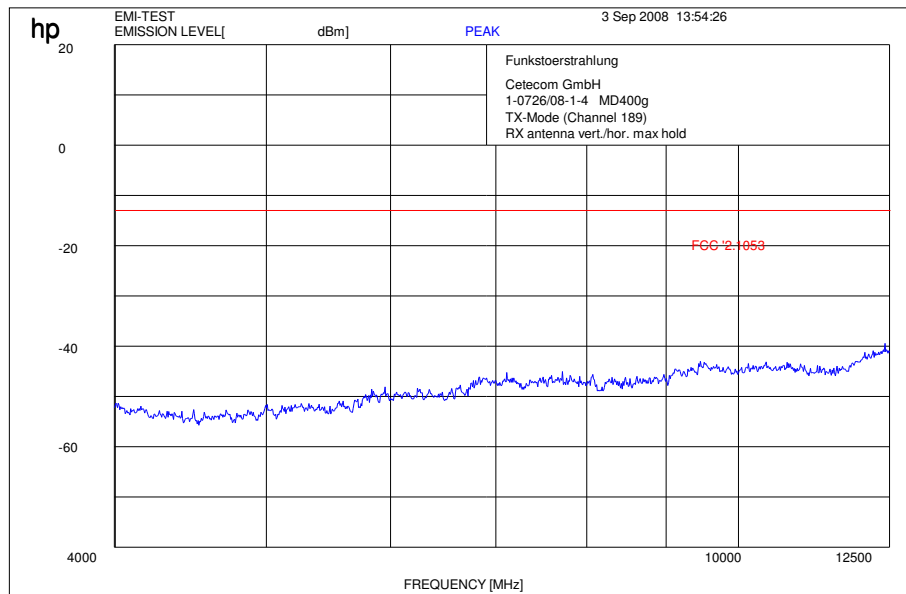

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz

Channel 661 (12 GHz - 20 GHz) valid for all 3 channels

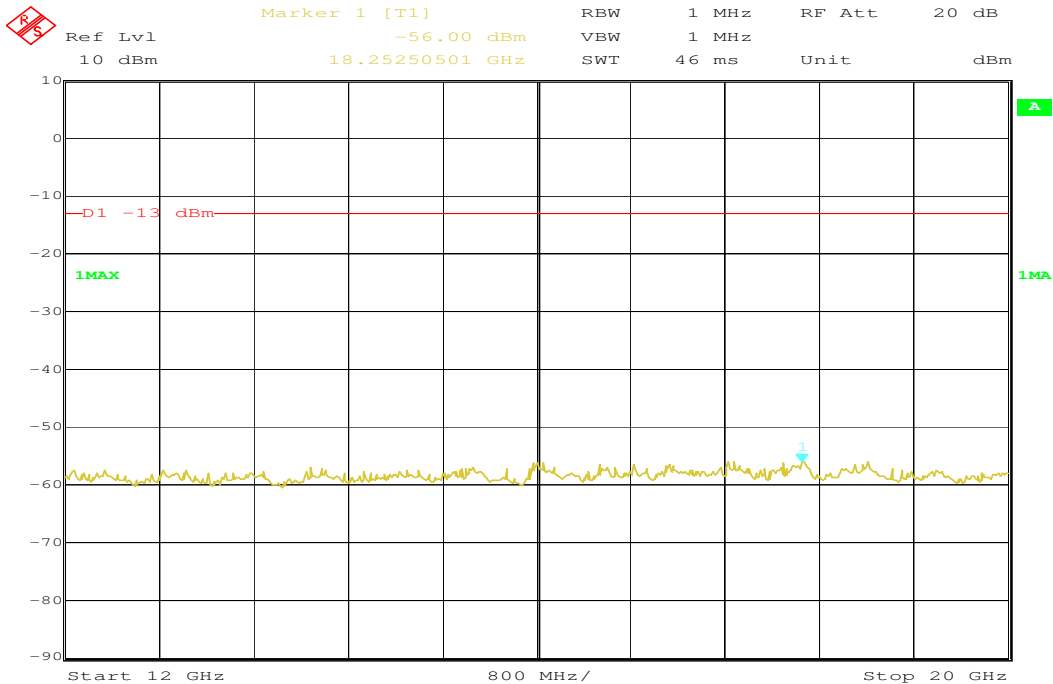

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz

### 5.2.4 Conducted Spurious Emissions

#### Reference

FCC:	CFR Part 24.238, 2.10.51
IC:	RSS 133, Issue 4, Section 4.4

#### Measurement Procedure:

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.

For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.

2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

USPCS Transmitter Channel Frequency:

512 1850.2 MHz

661 1880.0 MHz

810 1909.8 MHz

#### Measurement Limit:


(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

#### Measurement Results:

Harmonic	Tx ch.-512 Freq. (MHz)	Level (dBm)	Tx ch.-661 Freq. (MHz)	Level (dBm)	Tx ch.-810 Freq. (MHz)	Level (dBm)
2	3700.4	-	3760	-	3819.6	-
3	5550.6	-	5640	-	5729.4	-
4	7400.8	-	7520	-	7639.2	-
5	9251.0	-	9400	-	9549.0	-
6	11101.2	-	11280	-	11458.8	-
7	12951.4	-	13160	-	13368.6	-
8	14801.6	-	15040	-	15278.4	-
9	16651.8	-	16920	-	17188.2	-
10	18502.0	-	18800	-	19098.0	-

### Channel 512


#### 9 kHz – 1 GHz:

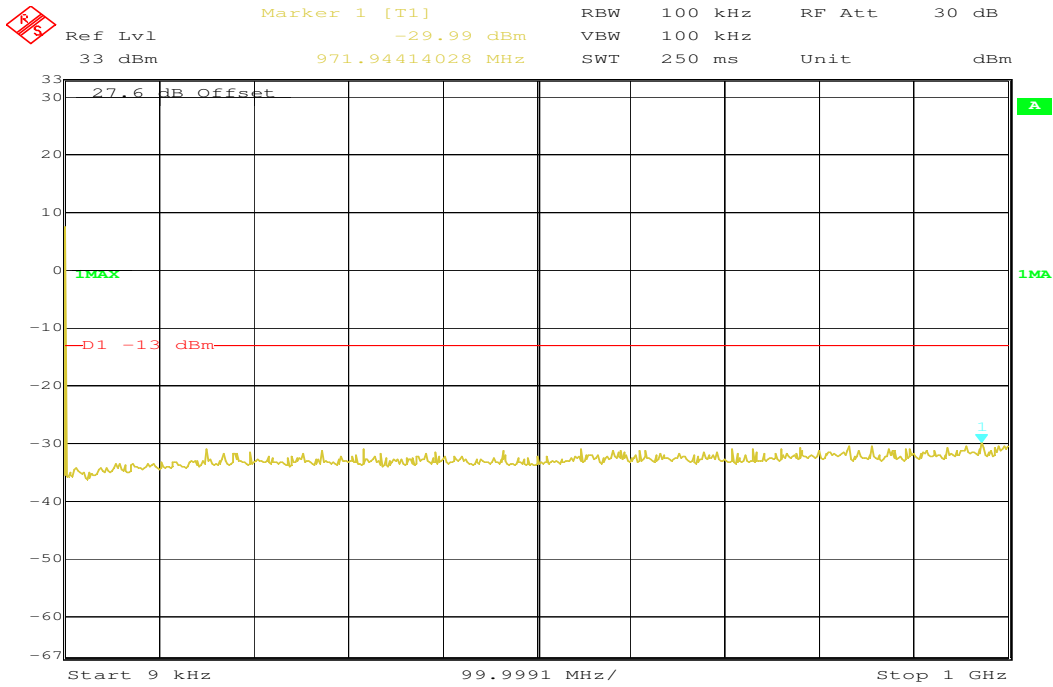

Date: 5.SEP.2008 08:30:01

The peak at the beginning of the Plot is the LO from the measuring spectrum Analyzer and not from the EUT.

#### 1 GHz – 20 GHz:

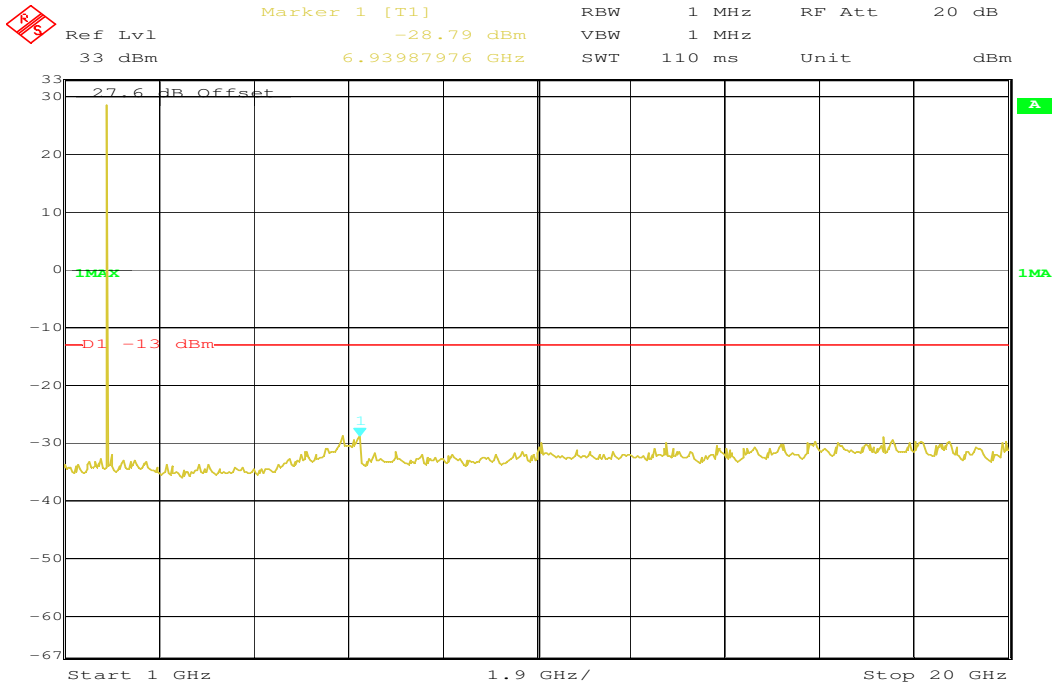


Date: 5.SEP.2008 08:32:01



Channel 661


9 kHz – 1 GHz:

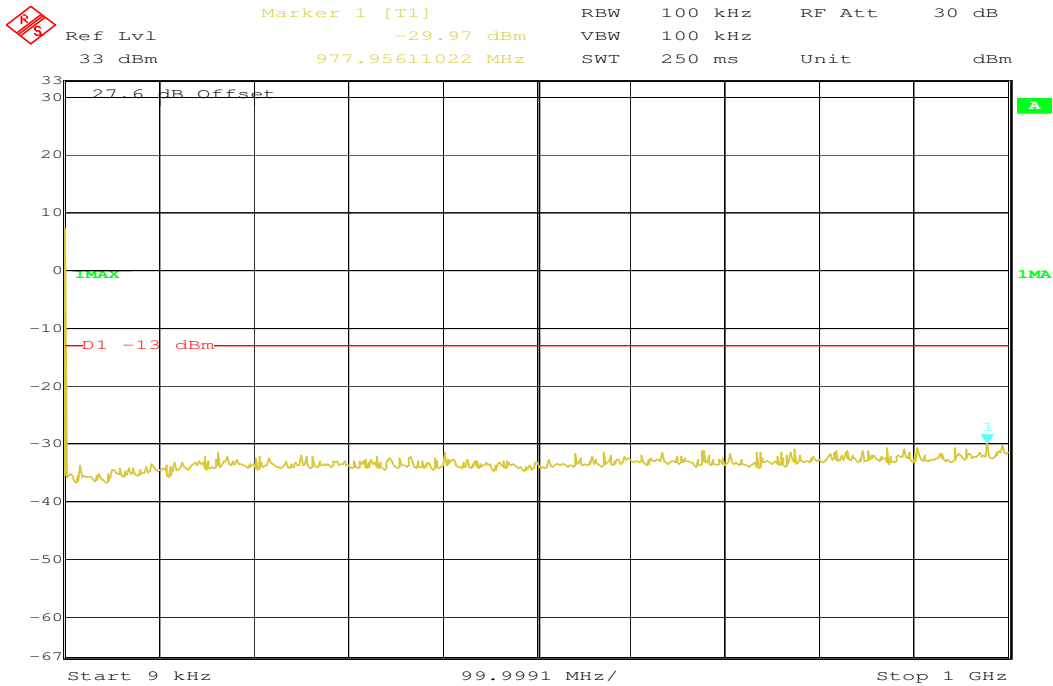

Date: 5.SEP.2008 08:29:20

The peak at the beginning of the Plot is the LO from the measuring spectrum Analyzer and not from the EUT.


1 GHz – 20 GHz:

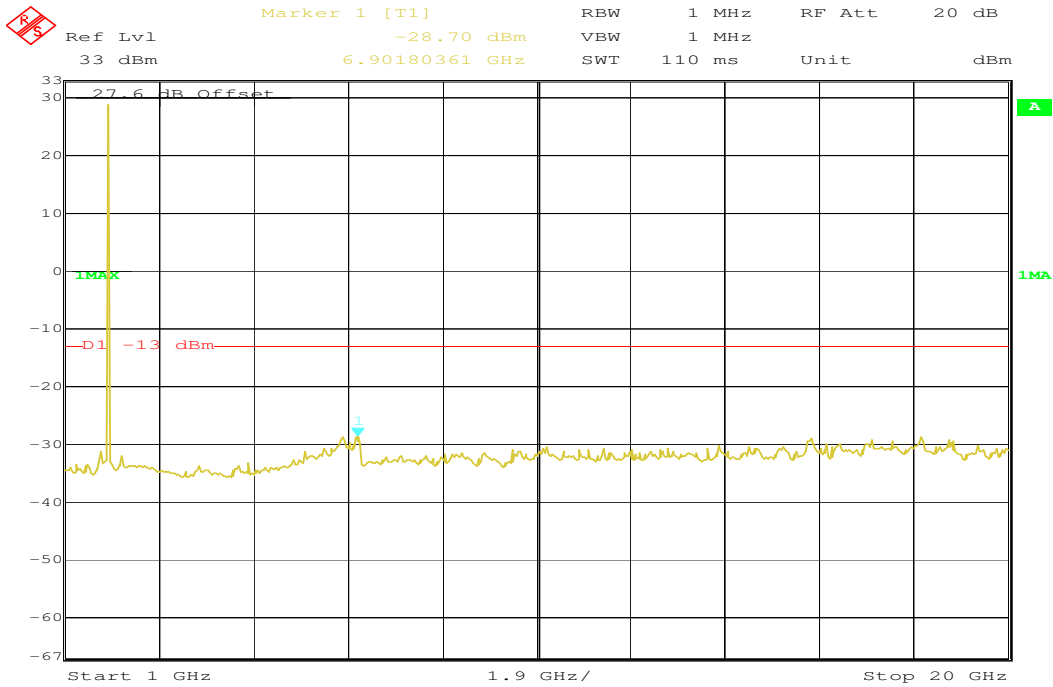

Date: 5.SEP.2008 08:32:32

Channel 810


9 kHz – 1 GHz:

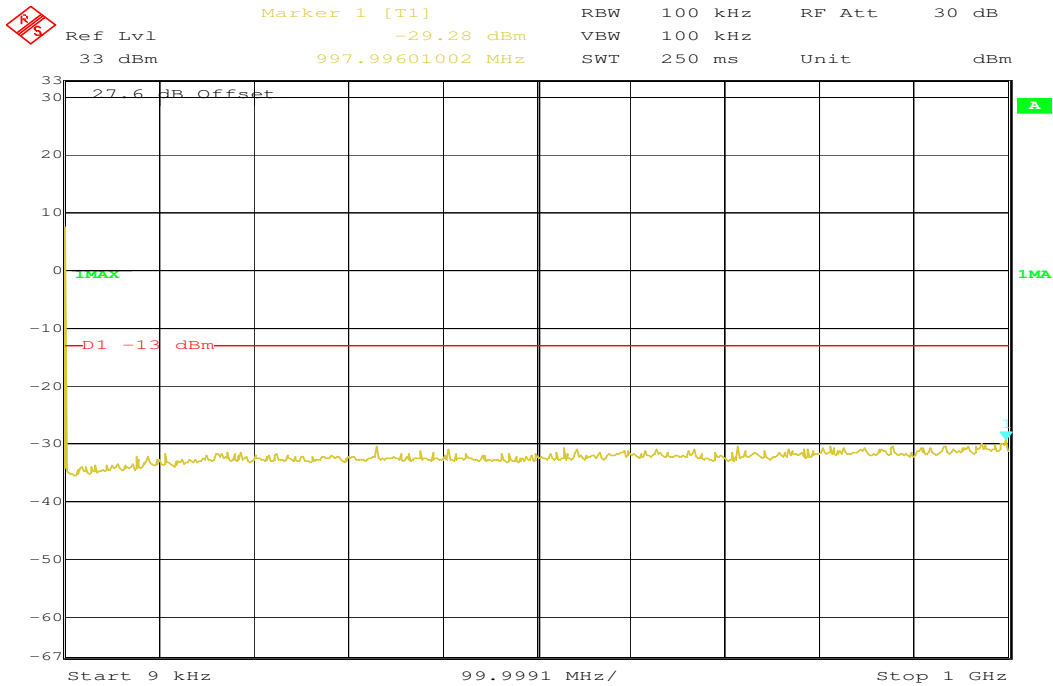

Date: 5.SEP.2008 08:28:52

The peak at the beginning of the Plot is the LO from the measuring spectrum Analyzer and not from the EUT.

1 GHz – 20 GHz:

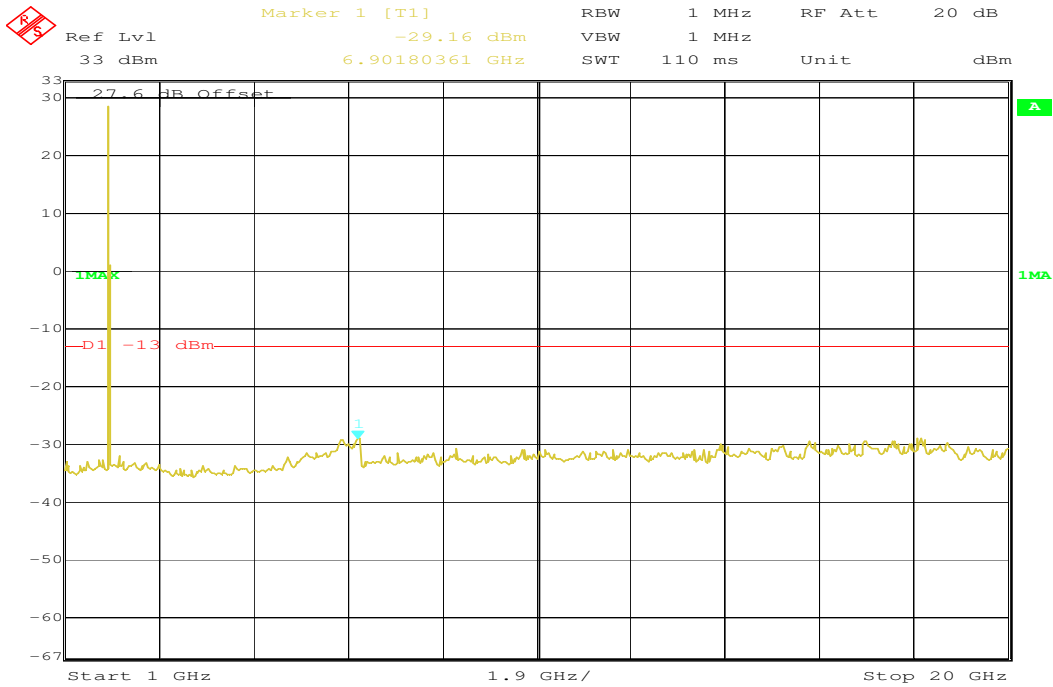

Date: 5.SEP.2008 08:33:01

### 5.2.5 Block Edge Compliance


#### Reference

FCC:	CFR Part 24.238
IC:	RSS 133, Issue 4, Section 6.5


#### Measurement Limit:

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power ( $P$ , in Watts) by at least  $43+10\text{Log}(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.


Channel 512

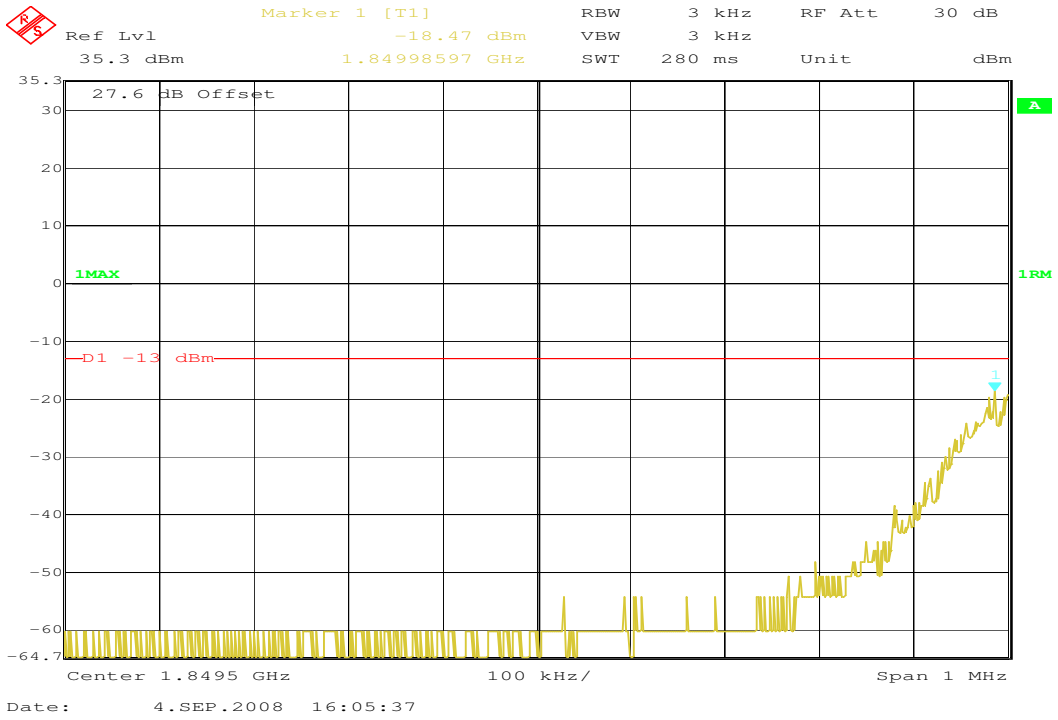


Channel 810

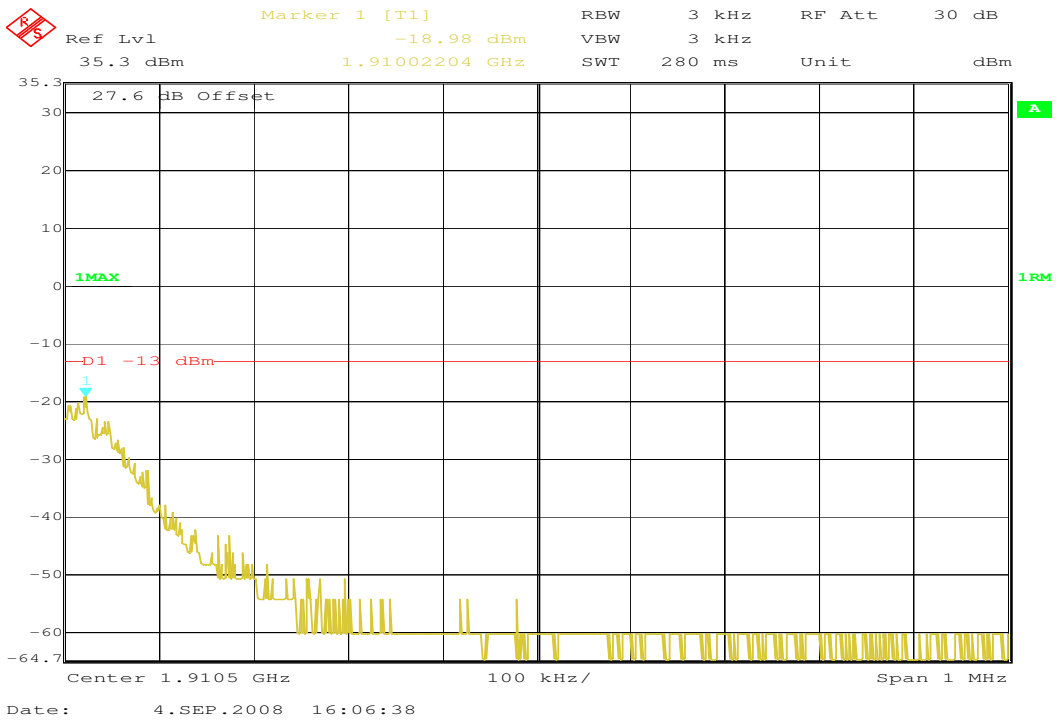

## Channel 512 (EDGE)

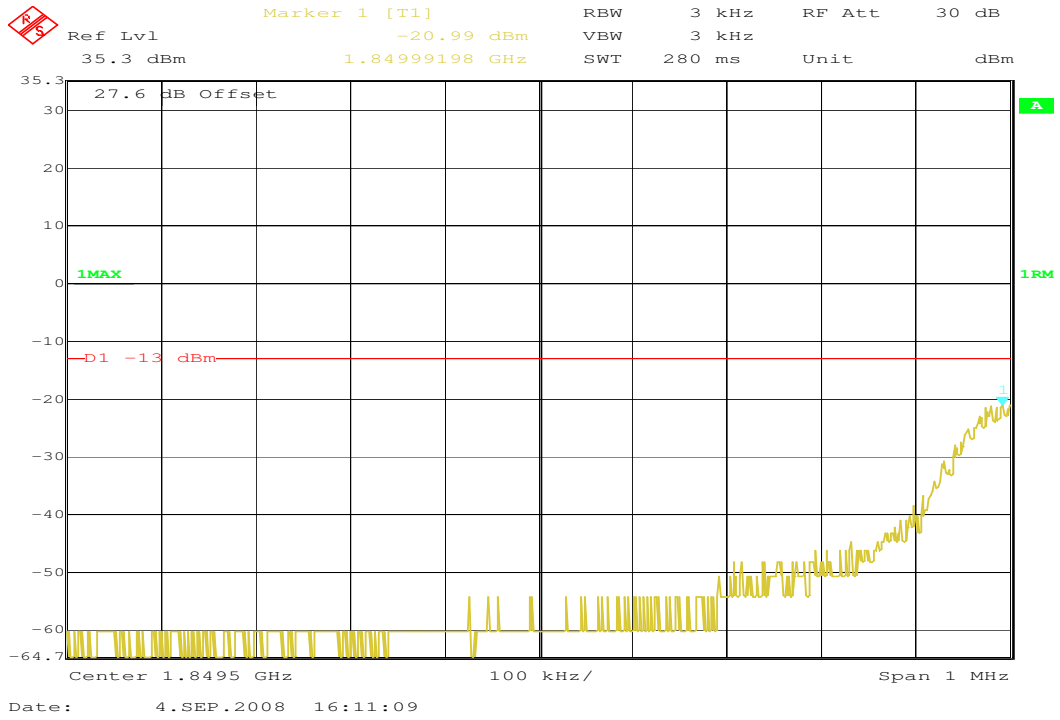

## Channel 810 (EDGE)

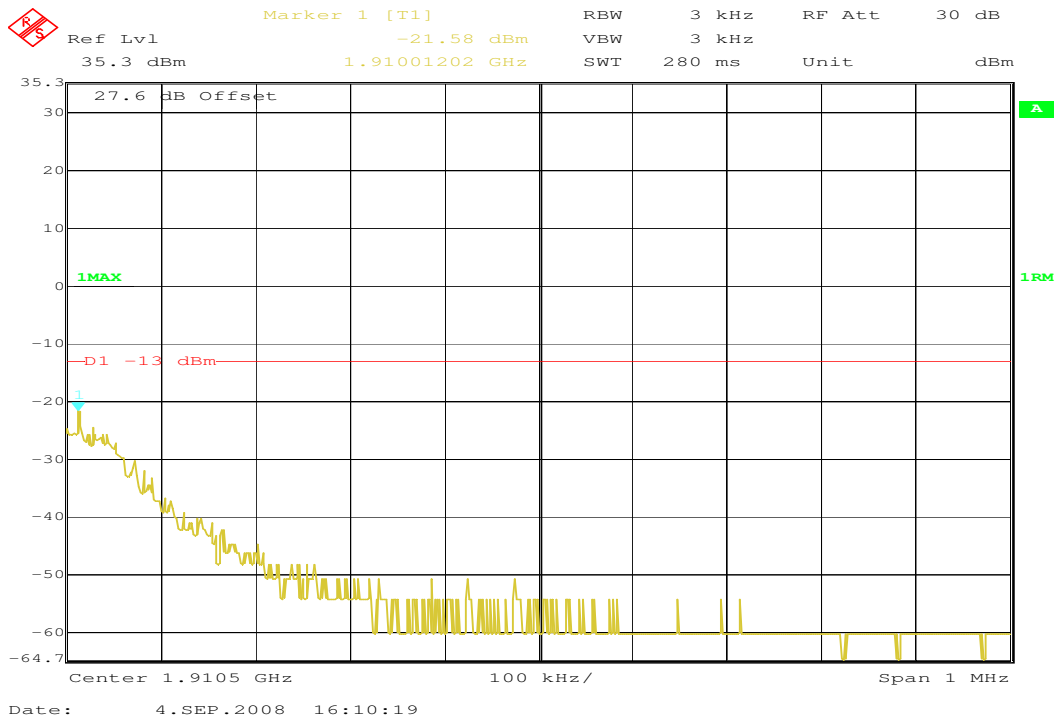

### 5.2.6 Occupied Bandwidth

#### Reference

FCC:	CFR Part 24.238, 2.1049
IC:	RSS 133, Issue 4, Section 6.5

#### Occupied Bandwidth Results

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.

#### Normal mode

Frequency	99% Occupied Bandwidth kHz	-26 dBc Bandwidth kHz
1850.2 MHz	283	317
1880.0 MHz	283	319
1909.8 MHz	279	317

#### EDGE mode


Frequency	99% Occupied Bandwidth kHz	-26 dBc Bandwidth kHz
1850.2 MHz	279	307
1880.0 MHz	279	303
1909.8 MHz	285	319

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 300.0 kHz, this equates to a resolution bandwidth of at least 3.0 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.

**Channel 512**

**99% (-20 dB) Occupied Bandwidth**

	Ref Lvl	33 dBm	Marker 1 [T1 ndB]	20.00 dB	RBW	3 kHz	RF Att	20 dB
			BW	282.56513026 kHz	VBW	3 kHz	Unit	dBm
			SWT	280 ms				

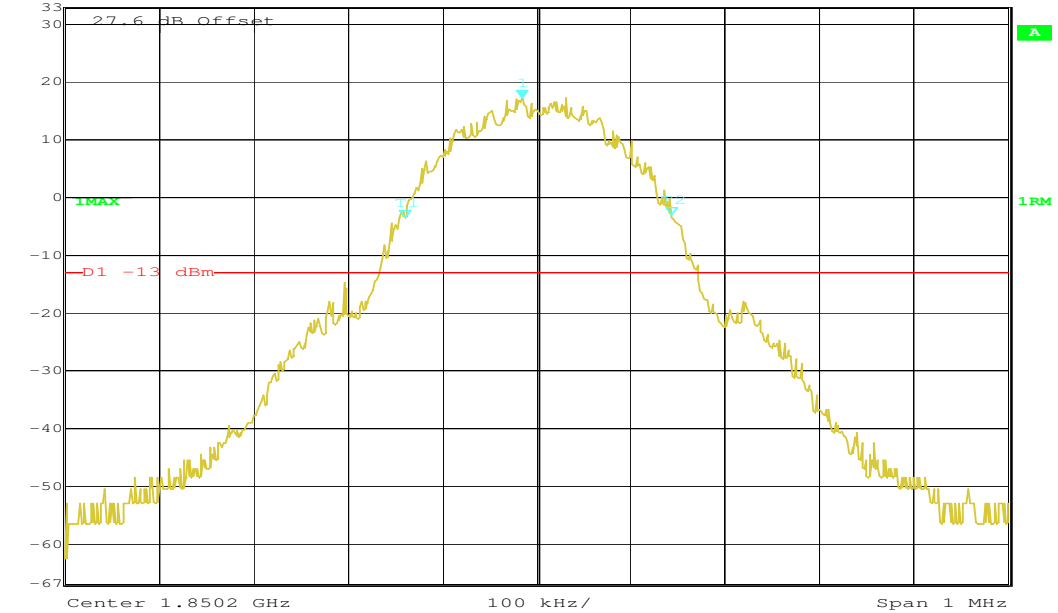


Date: 5.SEP.2008 08:36:26

**Channel 512**

**-26 dBc Bandwidth**


	Ref Lvl	33 dBm	Marker 1 [T1 ndB]	26.00 dB	RBW	3 kHz	RF Att	20 dB
			BW	316.63326653 kHz	VBW	3 kHz	Unit	dBm
			SWT	280 ms				

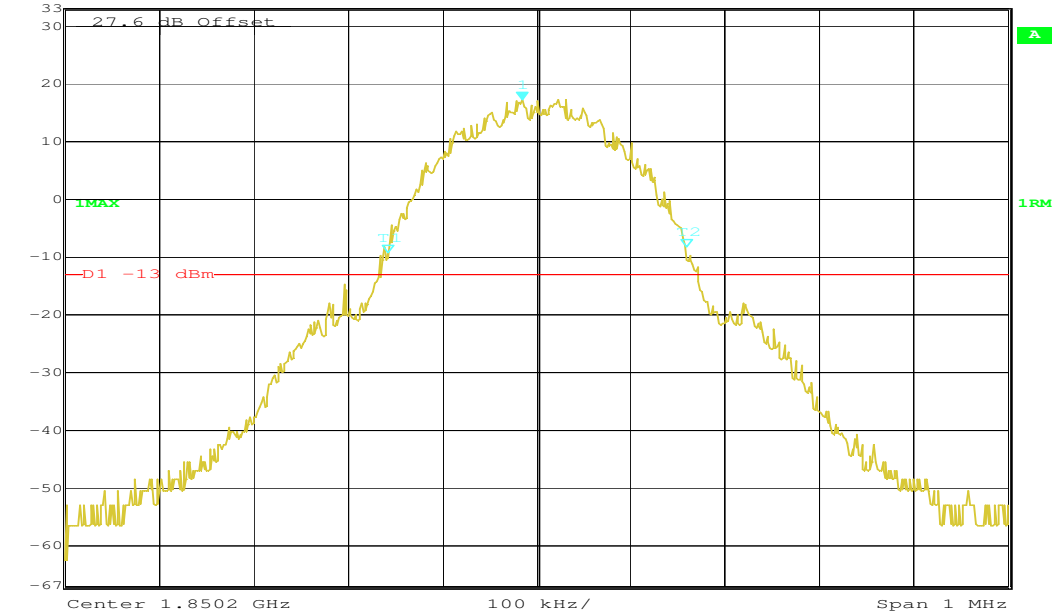

Date: 5.SEP.2008 08:36:46

**Channel 661**  
**99% (-20 dB) Occupied Bandwidth**


	Ref Lvl	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	20 dB
	33 dBm	ndB 20.00 dB	VBW	3 kHz		
		BW 282.56513026 kHz	SWT	280 ms	Unit	dBm

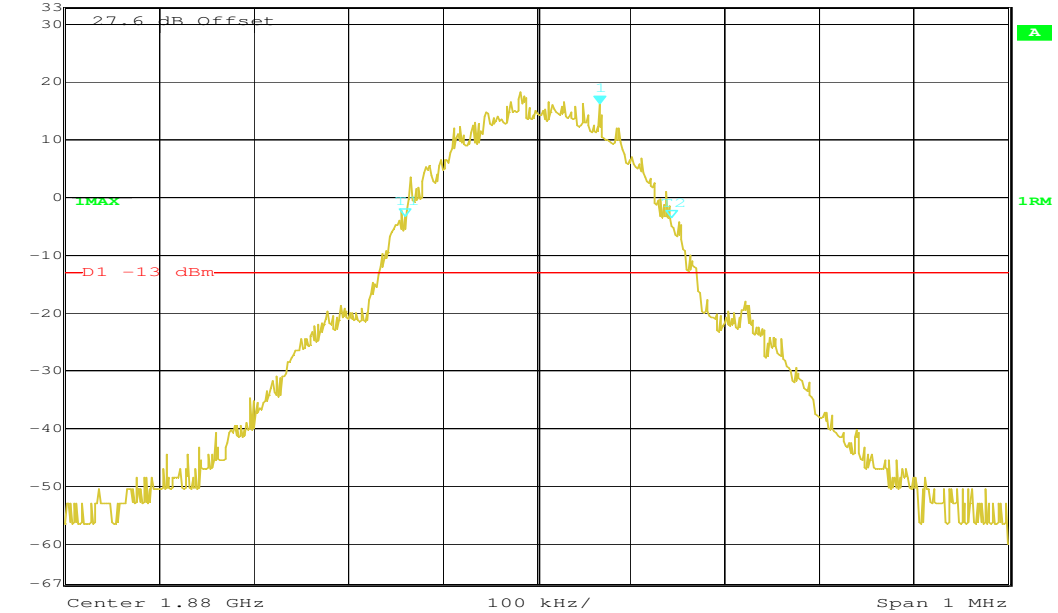

Date: 5.SEP.2008 08:38:29

**Channel 661**  
**-26 dBc Bandwidth**

	Ref Lvl	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	20 dB
	33 dBm	ndB 26.00 dB	VBW	3 kHz		
		BW 318.63727455 kHz	SWT	280 ms	Unit	dBm

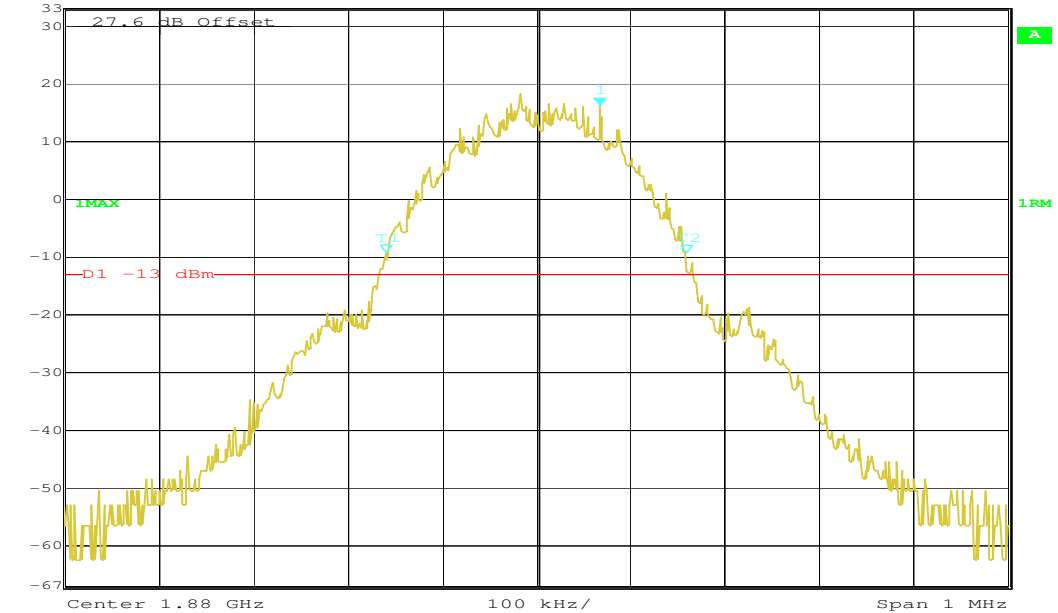


Date: 5.SEP.2008 08:37:44



**Channel 810**

**99% (-20 dB) Occupied Bandwidth**

	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	20 dB
Ref Lvl	ndB 20.00 dB	VBW	3 kHz		
33 dBm	BW 278.55711423 kHz	SWT	280 ms	Unit	dBm

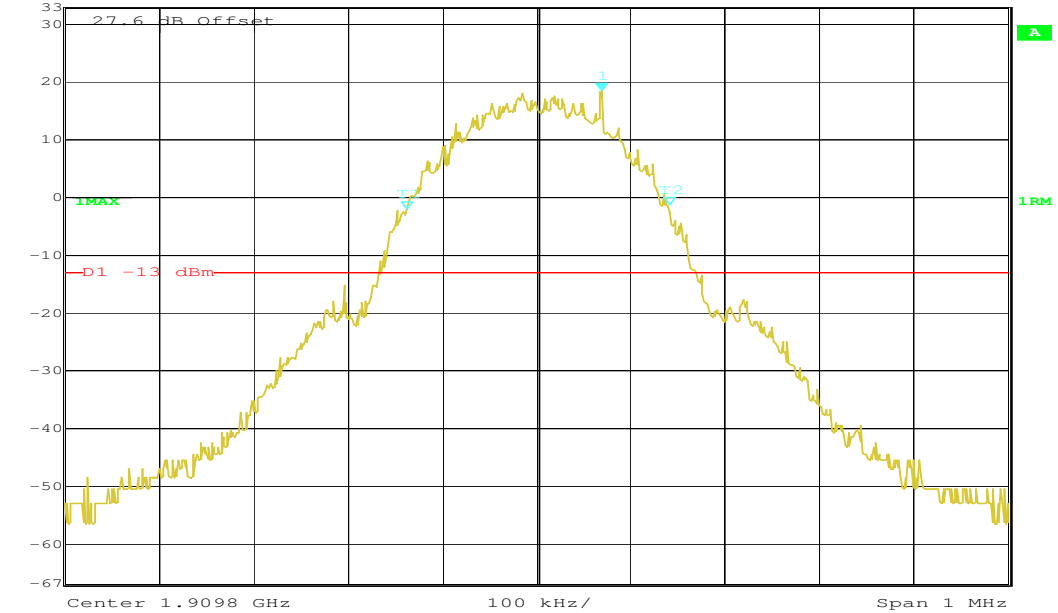


Date: 5.SEP.2008 08:43:39

**Channel 810**

**-26 dBc Bandwidth**

	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	20 dB
Ref Lvl	ndB 26.00 dB	VBW	3 kHz		
33 dBm	BW 316.63326653 kHz	SWT	280 ms	Unit	dBm

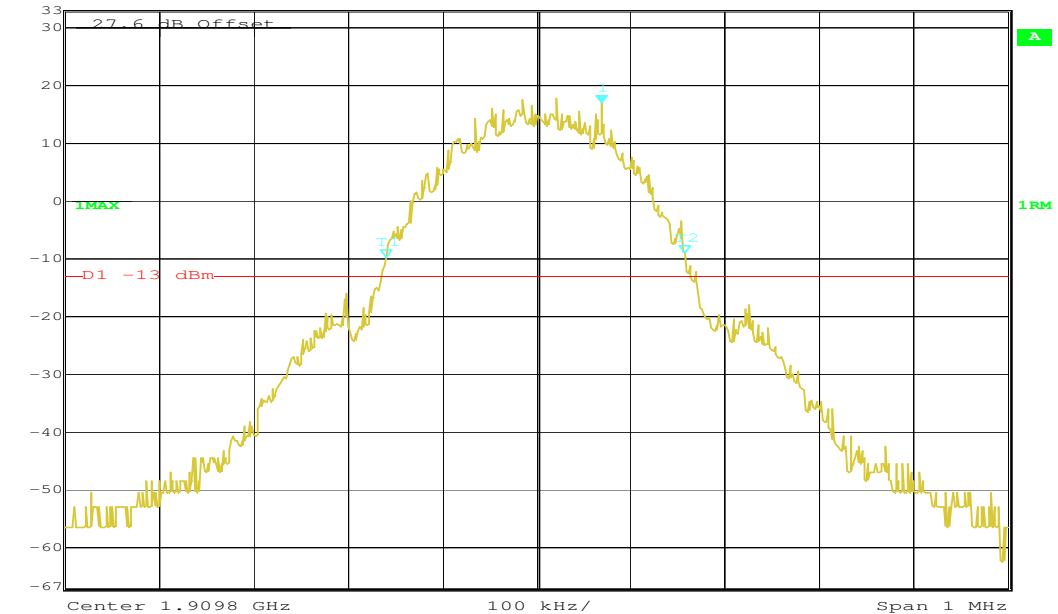


Date: 5.SEP.2008 08:39:39

Channel 512 (EDGE)

99% (-20 dB) Occupied Bandwidth

	Ref Lvl	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	30 dB
	35.3 dBm	ndB 20.00 dB	VBW	3 kHz		
		BW 278.55711423 kHz	SWT	280 ms	Unit	dBm

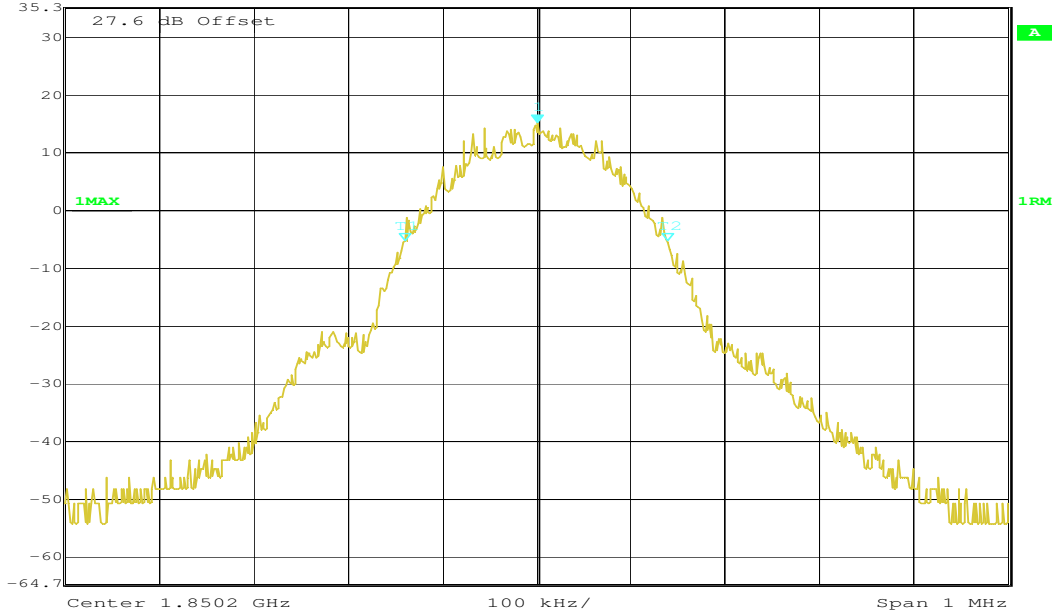


Date: 4.SEP.2008 16:14:08

Channel 512 (EDGE)

-26 dBc Bandwidth

	Ref Lvl	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	30 dB
	35.3 dBm	ndB 26.00 dB	VBW	3 kHz		
		BW 306.61322645 kHz	SWT	280 ms	Unit	dBm

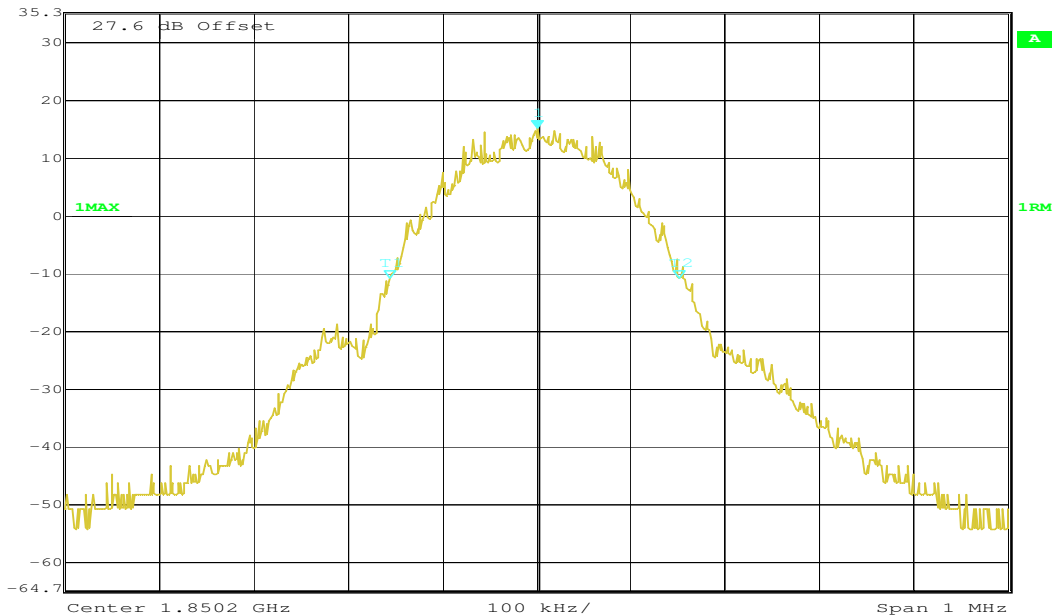


Date: 4.SEP.2008 16:14:44

**Channel 661 (EDGE)**

**99% (-20 dB) Occupied Bandwidth**

	Ref Lvl	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	30 dB
	35.3 dBm	ndB 20.00 dB	VBW	3 kHz		
		BW 278.55711423 kHz	SWT	280 ms	Unit	dBm

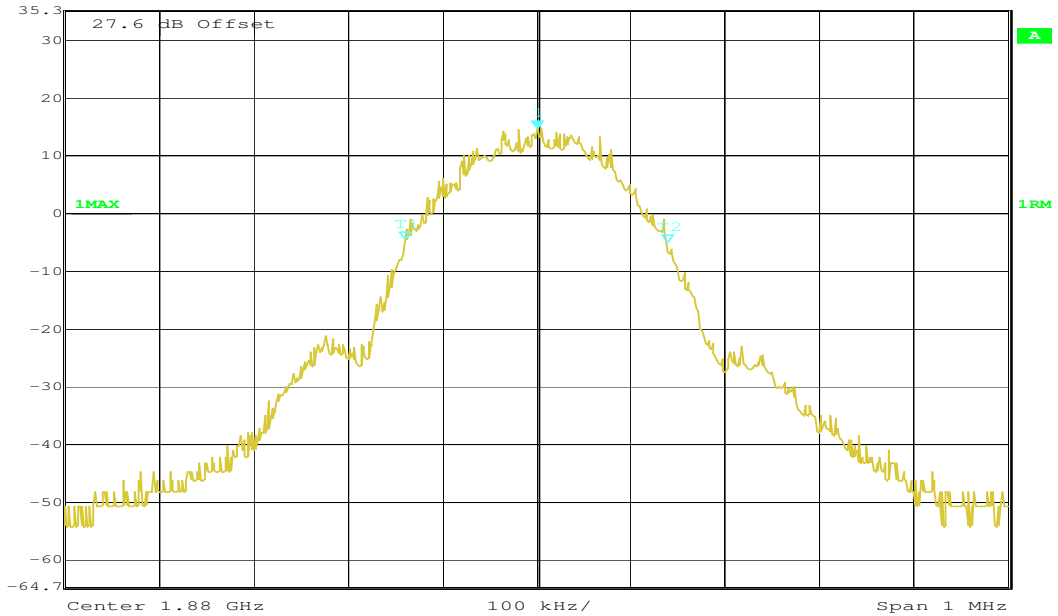


Date: 4.SEP.2008 16:16:12

**Channel 661 (EDGE)**

**-26 dBc Bandwidth**

	Ref Lvl	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	30 dB
	35.3 dBm	ndB 26.00 dB	VBW	3 kHz		
		BW 302.60521042 kHz	SWT	280 ms	Unit	dBm

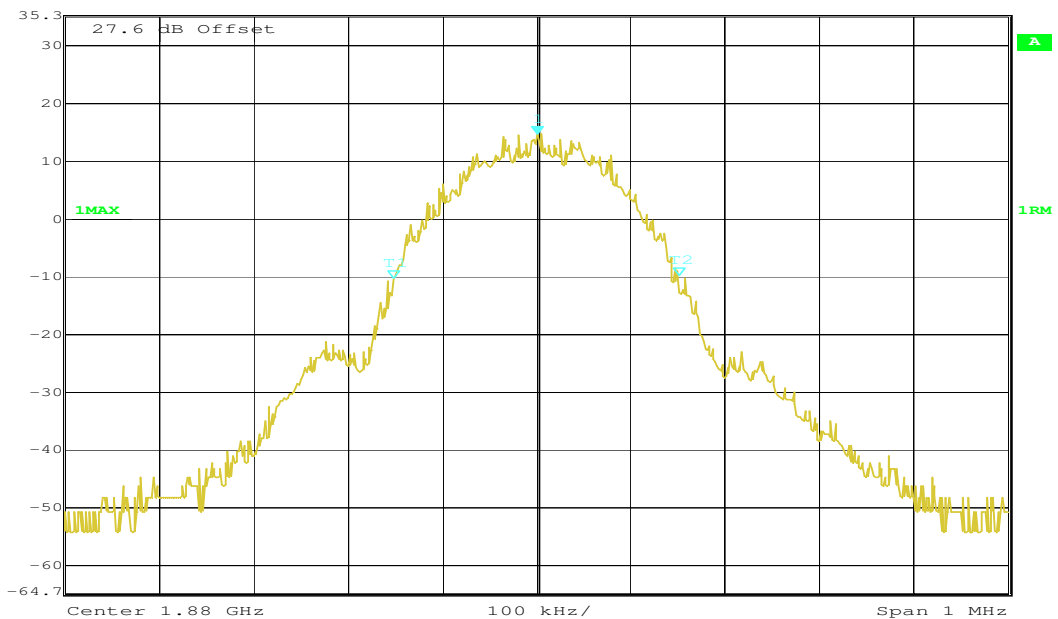


Date: 4.SEP.2008 16:15:48

**Channel 810 (EDGE)**

**99% (-20 dB) Occupied Bandwidth**

	Ref Lvl	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	30 dB
	35.3 dBm	ndB 20.00 dB	VBW	3 kHz		
		BW 284.56913828 kHz	SWT	280 ms	Unit	dBm

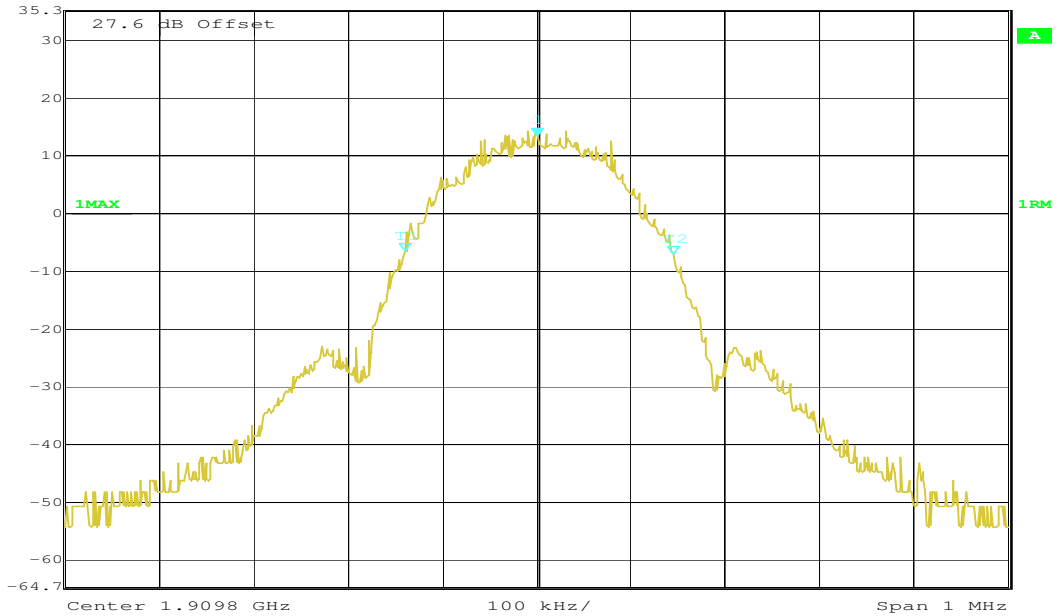


Date: 4.SEP.2008 16:17:47

**Channel 810 (EDGE)**

**-26 dBc Bandwidth**

	Ref Lvl	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	30 dB
	35.3 dBm	ndB 26.00 dB	VBW	3 kHz		
		BW 318.63727455 kHz	SWT	280 ms	Unit	dBm

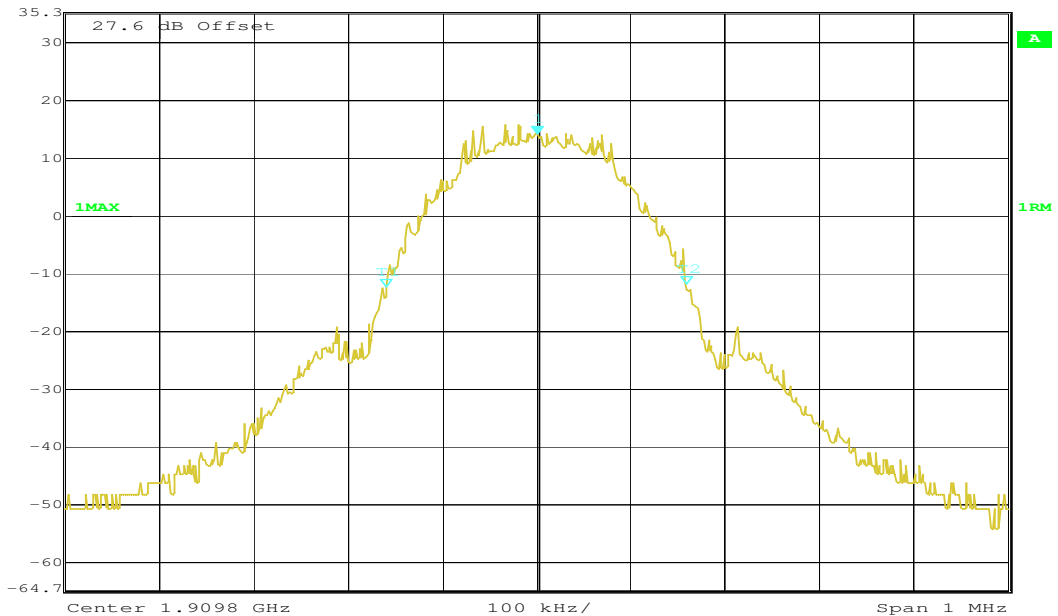

Date: 4.SEP.2008 16:20:19

### 5.3 PART GSM 850

#### 5.3.1 RF Power Output

##### Reference

FCC:	CFR Part 22.9.1.3, 2.1046
IC:	RSS 132, Issue 2, Section 4.4 and 6.4

##### Summary:

This paragraph contains both average, peak output powers and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

##### Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation. The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average) These measurements were done at 3 frequencies, 824.2 MHz, 836.4 MHz and 848.8 MHz (bottom, middle and top of operational frequency range).

##### Limits:

Nominal Peak Output Power (dBm)
+38.45

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
---

##### Test Results: Output Power (conducted) GMSK Mode

Frequency (MHz)	Average Output Power (dBm)	Peak-to-Average Ratio (dB)
824.2	32.2	0.1
836.4	32.0	0.1
848.8	32.0	0.1
Measurement uncertainty	±0.5 dB	

##### Test Results: Output Power (conducted) 8-PSK Mode

Frequency (MHz)	Average Output Power (dBm)	Peak-to-Average Ratio (dB)
824.2	27.3	3.2
836.4	27.2	3.3
848.8	27.2	3.2
Measurement uncertainty	±0.5 dB	

**ERP Measurements**

Description: This is the test for the maximum radiated power from the phone.  
 Rule Part 22.913 specifies that "Mobile/portable stations are limited to 7 watts ERP.

Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

- (a) The measurements were performed with full rf output power and modulation.
- (b) Test was performed at listed 3m test site (listed with FCC, IC).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level  
 Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor  
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$
- (f) Set the EMI Receiver and #2 as follows:  
 Center Frequency: test frequency  
 Resolution BW: 100 kHz  
 Video BW: same  
 Detector Mode: positive  
 Average: off  
 Span: 3 x the signal bandwidth
- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through 360 o about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- (l) Repeat for all different test signal frequencies

**Measuring the ERP of Spurious/Harmonic Emissions using Substitution Method**

- (a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring ERP) as follows:  
 Center Frequency : equal to the signal source  
 Resolution BW : 10 kHz  
 Video BW : same  
 Detector Mode : positive  
 Average : off  
 Span : 3 x the signal bandwidth
- (b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level  
 Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor  
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$
- (c) Select the frequency and E-field levels for ERP/EIRP measurements.
- (d) Substitute the EUT by a signal generator and one of the following transmitting antennas (substitution antenna):  
 .DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.
- (e) Mount the transmitting antenna at 1.5 meter high from the ground plane.
- (f) Use one of the following antenna as a receiving antenna: .DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.
- (g) If the DIPOLE antenna is used, tune its elements to the frequency as specified in the calibration manual.
- (h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.
- (i) Tune the EMI Receivers to the test frequency.
- (j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- (k) The transmitter was rotated through 360 o about a vertical axis until a higher maximum signal was received.
- (l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- (m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.
- (n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:  
 $P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$   
 $EIRP = P + G1 = P3 + L2 - L1 + A + G1$   
 $ERP = EIRP - 2.15 \text{ dB}$

Total Correction factor in EMI Receiver # 2 = L2 – L1 + G1

Where: P: Actual RF Power fed into the substitution antenna port after corrected.

P1: Power output from the signal generator

P2: Power measured at attenuator A input

P3: Power reading on the Average Power Meter

EIRP: EIRP after correction

ERP: ERP after correction

(o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)

(p) Repeat step (d) to (o) for different test frequency

(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.

(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

**Limits:**

Nominal Peak Output Power (dBm)
+38.45

**Test Results: Output Power (radiated) GMSK Mode**

Frequency (MHz)	Average (dBm)
824.2	31.5
836.4	31.4
848.8	31.3
Measurement uncertainty	±0.5 dB

**Test Results: Output Power (radiated) 8-PSK Mode**

Frequency (MHz)	Average (dBm)
824.2	26.5
836.4	26.6
848.8	26.5
Measurement uncertainty	±0.5 dB

**Sample calculation:**

Freg	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	ERP	Substitution Antenna
MHz	dBμV	dBm	dB <i>i</i>	dB <i>d</i>	dB	dBm	
848.8	137.8	26.6	8.4	0.0	3.3	31.7	UHAP Schwarzbeck S/N 460

ERP = SG (dBm) - Cable Loss (dB) + Ant. gain (dB)

\*ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.1dB*i*

### 5.3.2 Frequency Stability

#### Reference

FCC:	CFR Part 22.355, 2.1055
IC:	RSS 132, Issue 2, Section 4.3 and 6.3

#### Method of Measurement:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a "call mode". This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER..

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal 3.7 Volts. Vary supply voltage from minimum 3.3 Volts to maximum 4.4 Volts, in 13 steps re-measuring carrier frequency at each voltage. Pause at 3.7 V ac Volts for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

#### Measurement Limit:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 22.355, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.. This transceiver is specified to operate with an input voltage of between 3.3 V dc and 4.4 V dc, with a nominal voltage of 3.7 V dc.





**Measurement Results: AFC FREQ ERROR vs. VOLTAGE**

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
4.50	16	0.00000191	0.0191
4.60	19	0.00000227	0.0227
4.70	22	0.00000263	0.0263
4.80	17	0.00000203	0.0203
4.90	16	0.00000191	0.0191
5.00	23	0.00000275	0.0275
5.10	28	0.00000335	0.0335
5.20	31	0.00000371	0.0371
5.25	35	0.00000418	0.0418

**Measurement Results: AFC FREQ ERROR vs. TEMPERATURE**

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-10	-7	-0.00000084	-0.0084
±0.0	2	0.00000024	0.0024
+10	17	0.00000203	0.0203
+20	23	0.00000275	0.0275
+30	18	0.00000215	0.0215
+40	20	0.00000239	0.0239
+50	27	0.00000323	0.0323
+55	32	0.00000383	0.0383

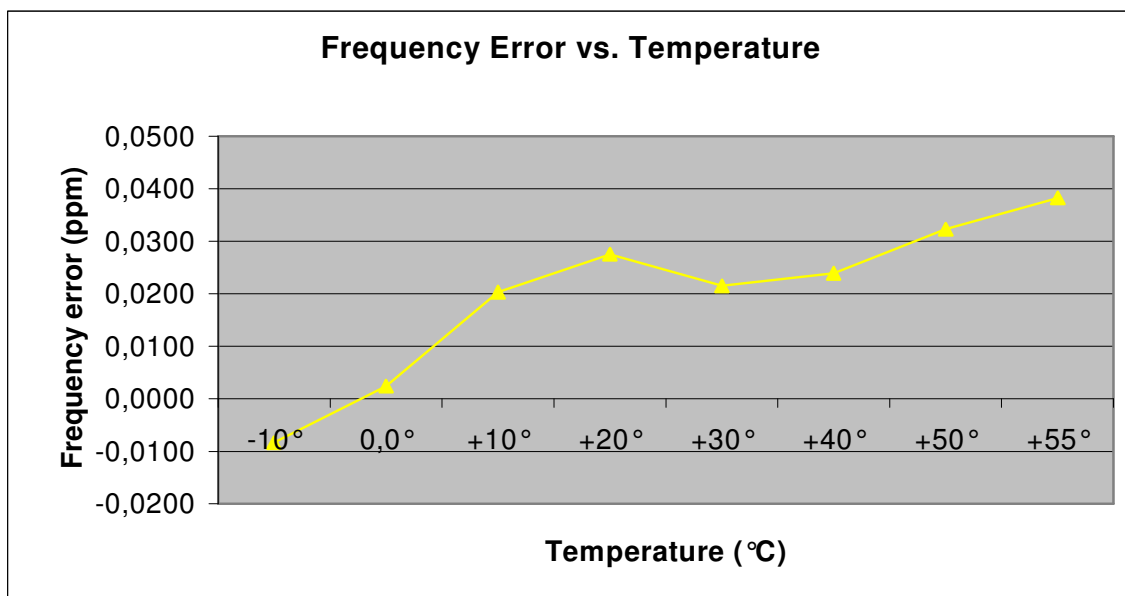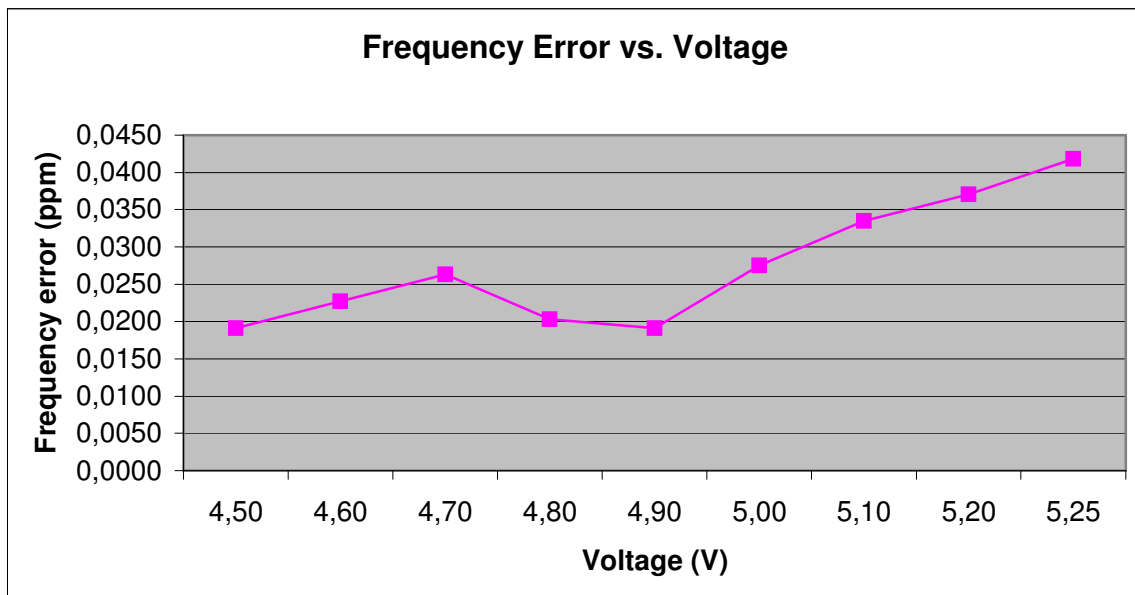

### 5.3.3 Radiated Emissions

#### Reference

FCC:	CFR Part 22.917, 2.1053
IC:	RSS 132, Issue 2, Section 4.5 and 6.5

#### Measurement Procedure:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2003 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 848.8 MHz. This was rounded up to 12 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final open field emission ( here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters using the equation shown below:
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603 .

#### Measurement Limit:

Sec. 22.917 Emission Limits.

- (a) On any frequency outside a licensee' s frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\text{Log}(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**Measurement Results:**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (824.2 MHz, 836.4 MHz and 848.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization; the plots shows the worst case.

The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked, too.

The found values are stated in the table below.

As can be seen from this data, the emissions from the test item were within the specification limit.

Harmonic	Tx ch.-128 Freq. (MHz)	Level (dBm)	Tx ch.-189 Freq. (MHz)	Level (dBm)	Tx ch.-251 Freq. (MHz)	Level (dBm)
2	1648.4	-	1672.8	-	1697.6	-
3	2472.6	-	2509.2	-	2546.4	-
4	3296.8	-	3345.6	-	3395.2	-
5	4121.0	-	4182.0	-	4244.0	-
6	4945.2	-	5018.4	-	5092.8	-
7	5769.4	-	5854.8	-	5941.6	-
8	6593.6	-	6691.2	-	6790.4	-
9	7417.8	-	7527.6	-	7639.2	-
10	8242.0	-	8364.0	-	8488.0	-


**Sample calculation:**

Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	ERP	Substitution Antenna
MHz	dB $\mu$ V	dBm	dBi	dBd	dB	dBm	
848.8	137.8	26.6	8.4	0.0	3.3	31.7	UHAP Schwarzbeck S/N 460


$ERP = SG \text{ (dBm)} - \text{Cable Loss (dB)} + \text{Ant. gain (dB)}$

\*ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.1\text{dBi}$

**Channel 189 (Traffic mode up to 30 MHz)**

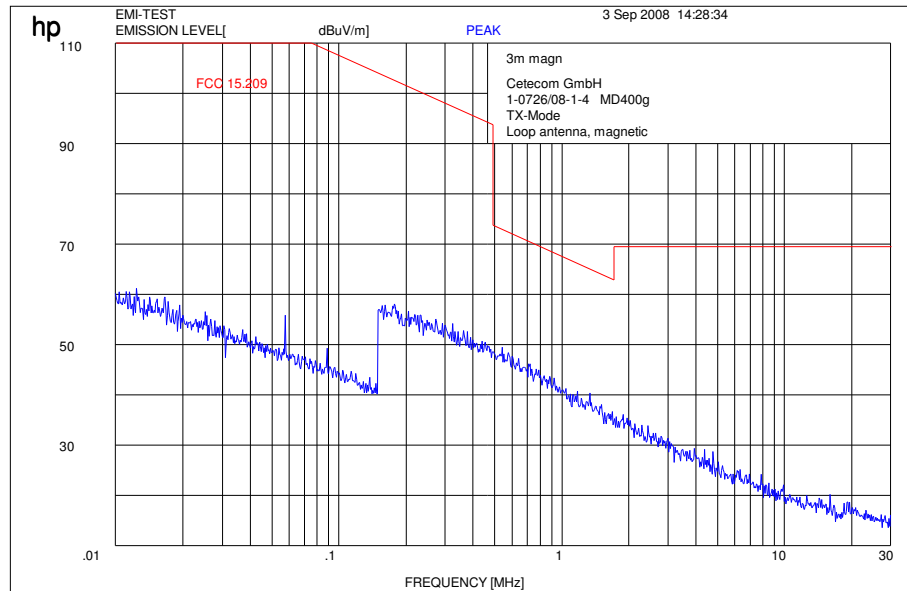


**Channel 189 (30 MHz - 4 GHz)**

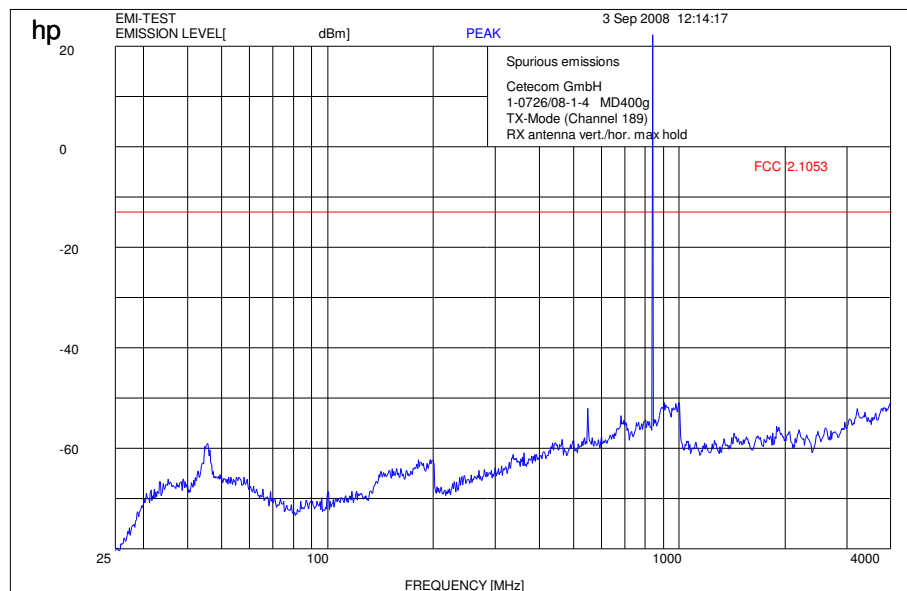

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$


Channel 189 (4 GHz – 12.5 GHz)

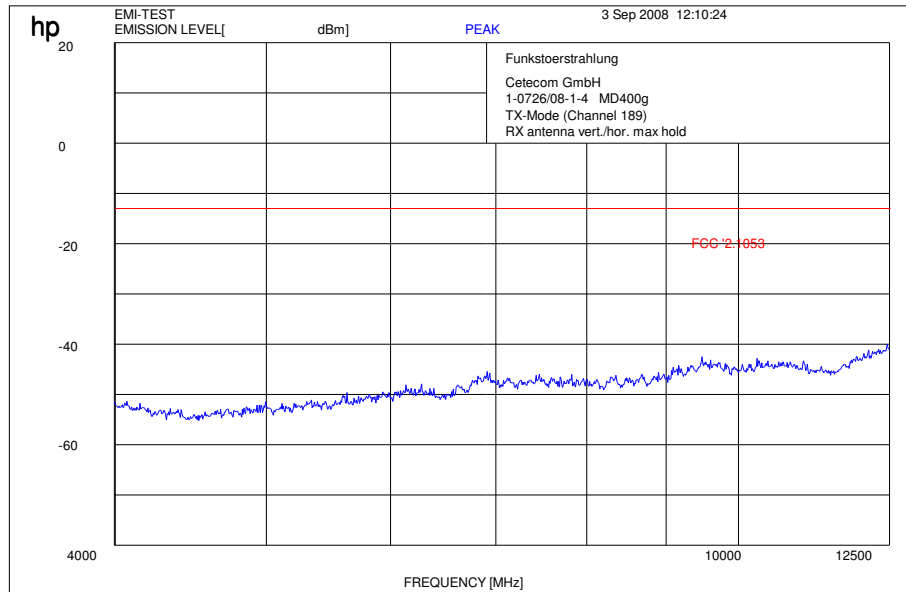

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz

Channel 189 (12 GHz - 20 GHz)

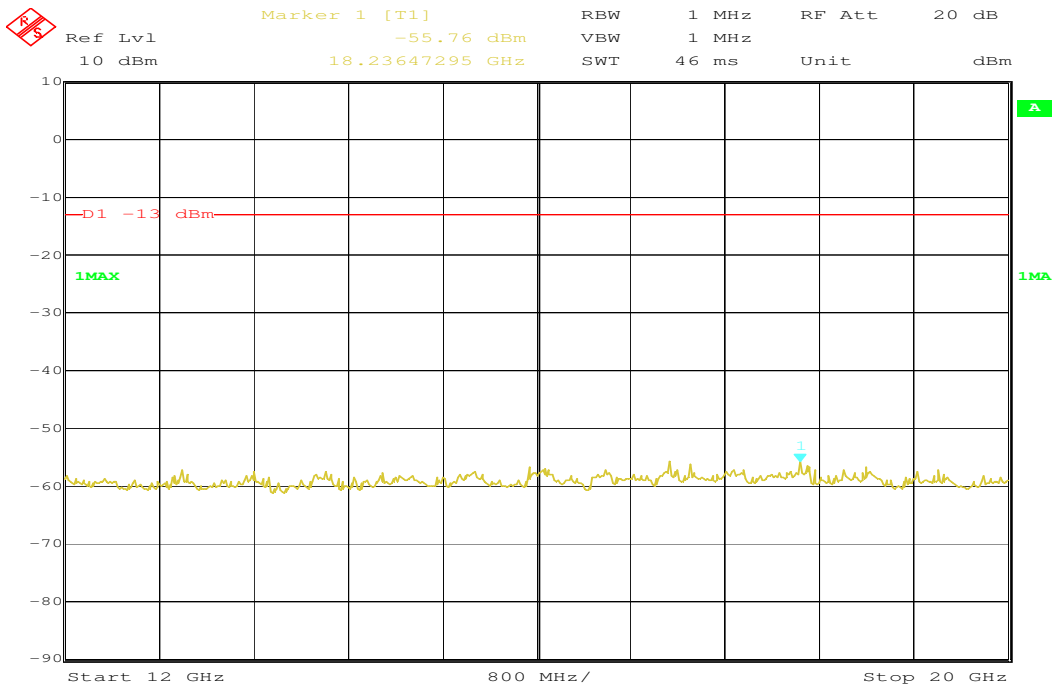

Date: 8.SEP.2008 16:10:11

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz

### 5.3.4 Conducted Spurious Emissions

#### Reference

FCC:	CFR Part 22.917, 1.1051
IC:	RSS 132, Issue 2, Section 4.5 and 6.5

#### Measurement Procedure

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.
2. Determine mobile station transmits frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

USPCS Transmitter Channel Frequency

128 824.2 MHz

189 836.4 MHz

251 848.8 MHz


#### Measurement Limit

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

#### Measurement Results

Harmonic	Tx ch.-128 Freq. (MHz)	Level (dBm)	Tx ch.-189 Freq. (MHz)	Level (dBm)	Tx ch.-251 Freq. (MHz)	Level (dBm)
2	1648.4	-	1672.8	-	1697.6	-
3	2472.6	-	2509.2	-	2546.4	-
4	3296.8	-	3345.6	-	3395.2	-
5	4121.0	-	4182.0	-	4244.0	-
6	4945.2	-	5018.4	-	5092.8	-
7	5769.4	-	5854.8	-	5941.6	-
8	6593.6	-	6691.2	-	6790.4	-
9	7417.8	-	7527.6	-	7639.2	-
10	8242.0	-	8364.0	-	8488.0	-

Channel: 128

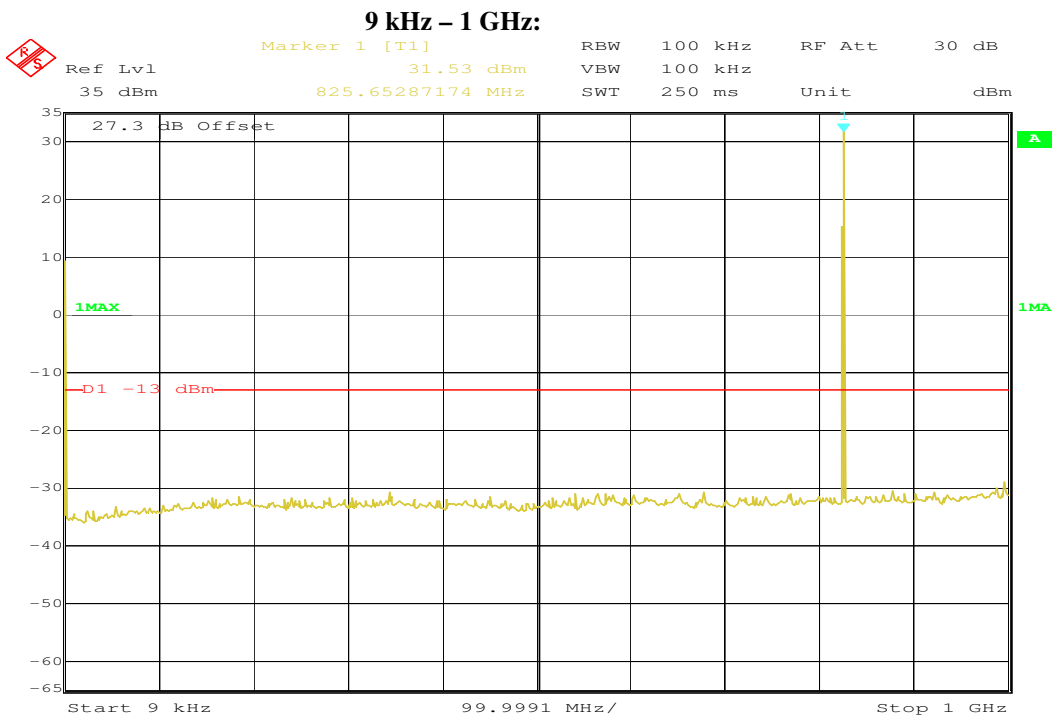

Date: 4.SEP.2008 14:57:42

The peak at the beginning of the Plot is the LO from the measuring spectrum Analyzer and not from the EUT.



Date: 4.SEP.2008 15:00:32







---

### 5.3.5 Block Edge Compliance

#### Reference


FCC:	CFR Part 22.917
IC:	RSS 132, Issue 2, Section 6.5

#### Measurement Limit:


Sec. 22.917 (b) Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\text{Log}(P)$  dB. For all power levels +33 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.


Channel 128

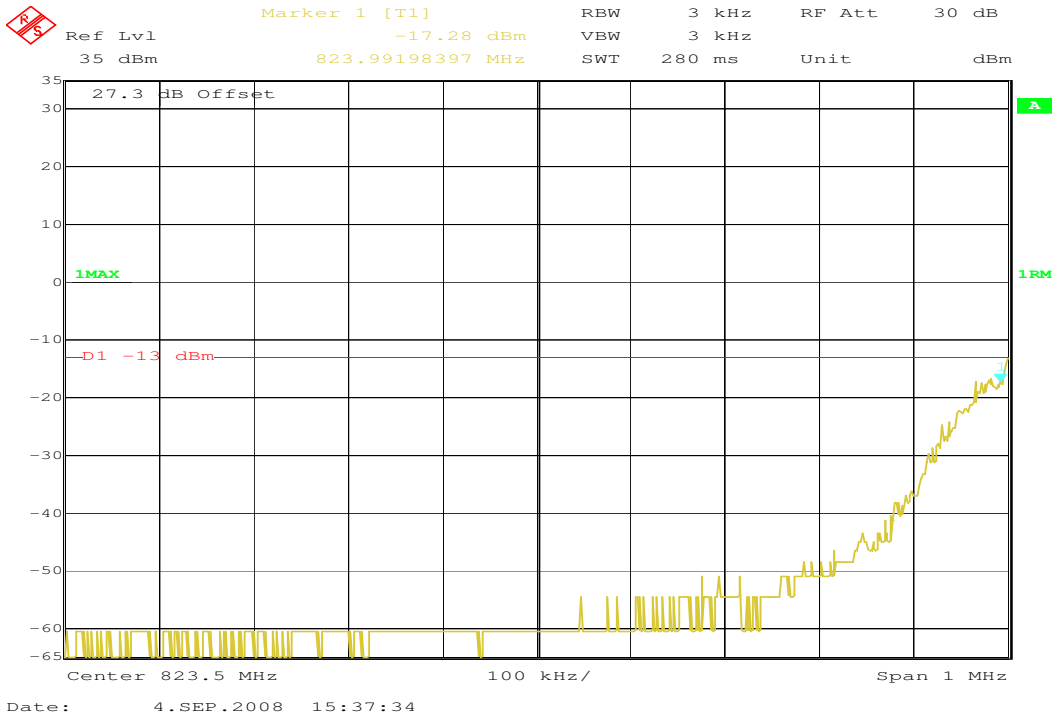


Channel 251

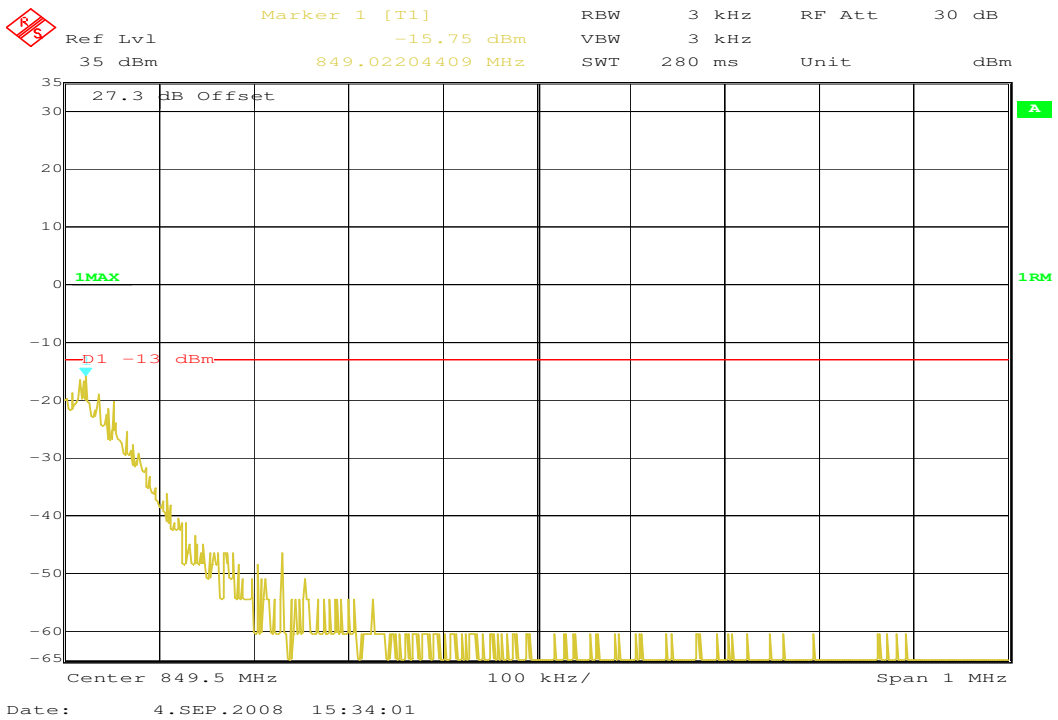

**Channel 128 (EDGE)**

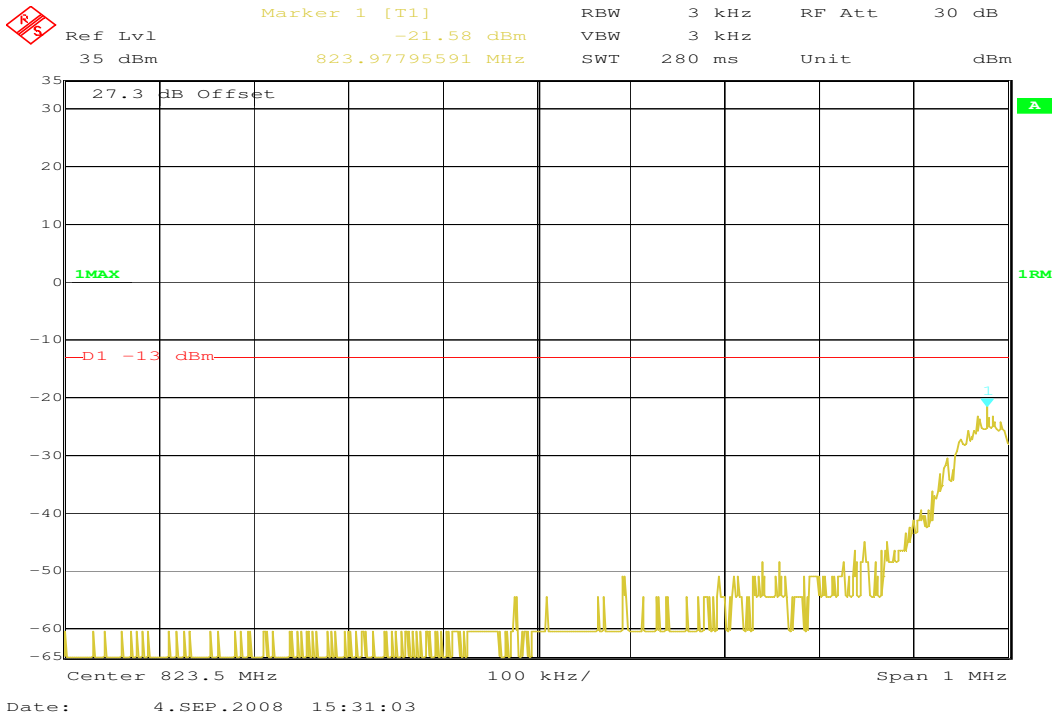

**Channel 251 (EDGE)**

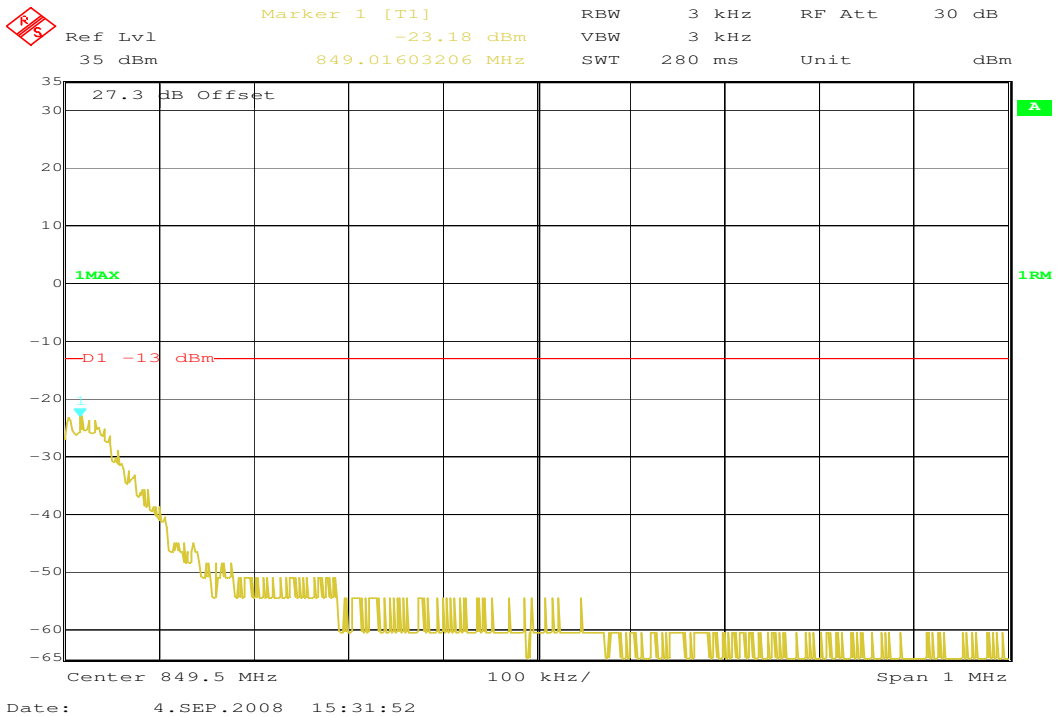

### 5.3.6 Occupied Bandwidth

#### Reference

FCC:	CFR Part 22.917, 2.1049
IC:	RSS 132, Issue 2, Section 4.2

#### Occupied Bandwidth Results

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.

##### Normal mode

Frequency	99% Occupied Bandwidth (kHz)	-26 dBc Bandwidth (kHz)
824.2 MHz	273	315
836.4 MHz	283	315
848.8 MHz	285	319

##### EDGE mode


Frequency	99% Occupied Bandwidth (kHz)	-26 dBc Bandwidth (kHz)
824.2 MHz	281	303
836.4 MHz	279	303
848.8 MHz	269	303

Part 22 requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 300 kHz, this equates to a resolution bandwidth of at least 3 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.

**Channel 128**

**99% (-20 dB) Occupied Bandwidth**

	Ref Lvl	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	30 dB
	35 dBm	ndB 20.00 dB	VBW	3 kHz		
		BW 272.54509018 kHz	SWT	280 ms	Unit	dBm

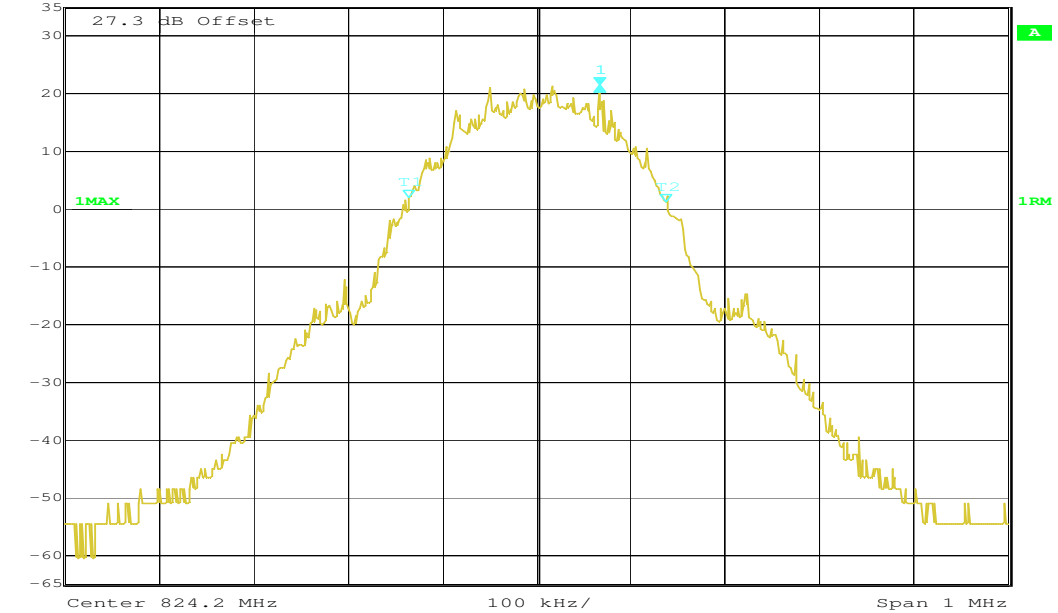


Date: 4.SEP.2008 15:03:50

**Channel 128**

**-26 dBc Bandwidth**

	Ref Lvl	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	30 dB
	35 dBm	ndB 26.00 dB	VBW	3 kHz		
		BW 314.62925852 kHz	SWT	280 ms	Unit	dBm

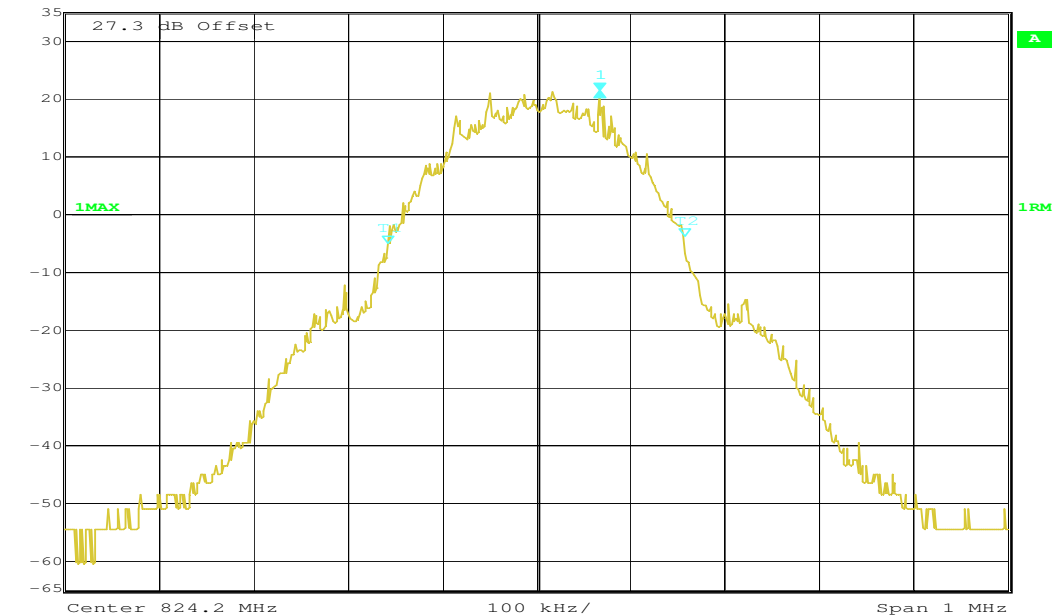


Date: 4.SEP.2008 15:04:16

Channel 189

99% (-20 dB) Occupied Bandwidth

	Ref Lvl	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	30 dB
	35 dBm	ndB 20.00 dB	VBW	3 kHz		
		BW 282.56513026 kHz	SWT	280 ms	Unit	dBm

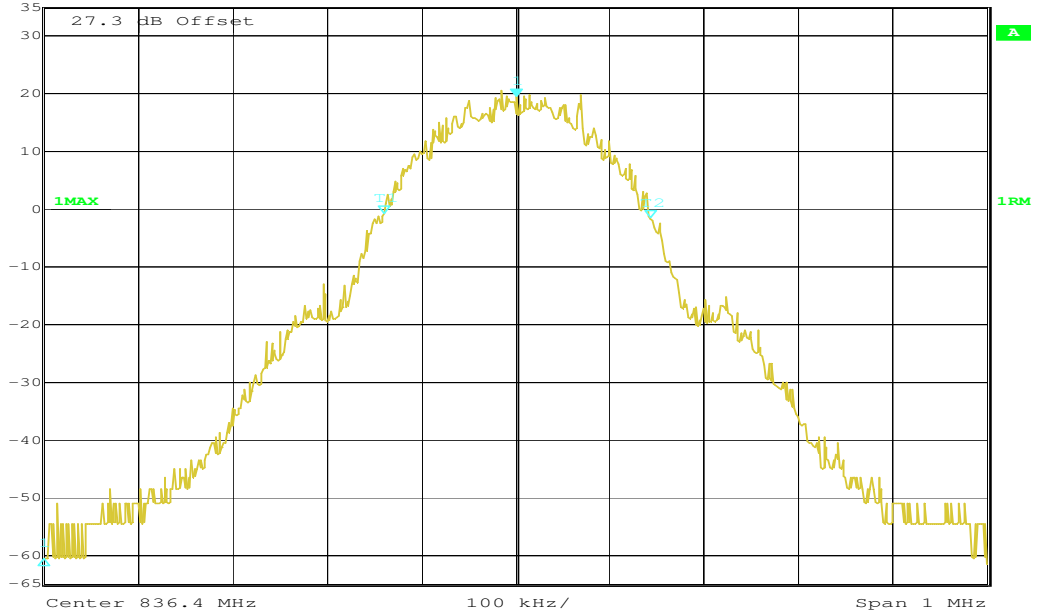


Date: 4.SEP.2008 15:06:19

Channel 189

-26 dBc Bandwidth

	Ref Lvl	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	30 dB
	35 dBm	ndB 26.00 dB	VBW	3 kHz		
		BW 314.62925852 kHz	SWT	280 ms	Unit	dBm

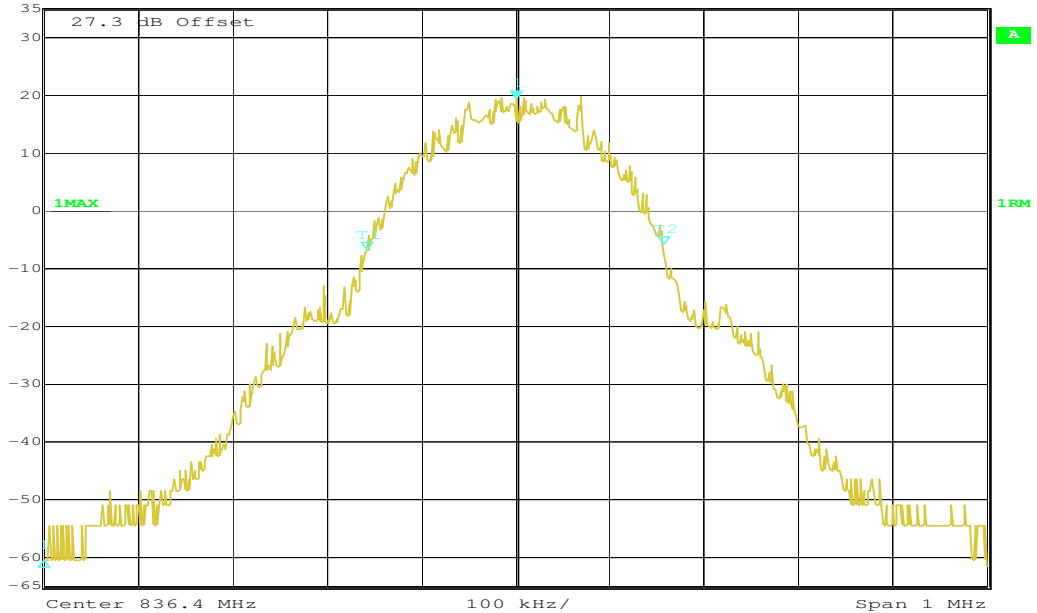


Date: 4.SEP.2008 15:05:37



**Channel 251**

**99% (-20 dB) Occupied Bandwidth**

	Ref Lvl	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	30 dB
	35 dBm	ndB 20.00 dB	VBW	3 kHz		
		BW 284.56913828 kHz	SWT	280 ms	Unit	dBm

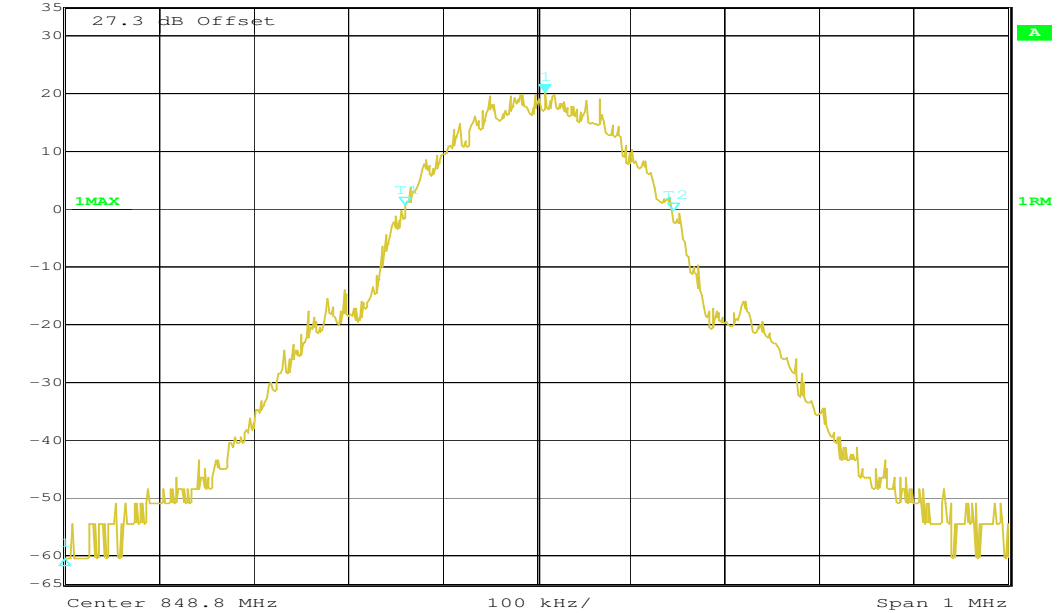


Date: 4.SEP.2008 15:08:06

**Channel 251**

**-26 dBc Bandwidth**

	Ref Lvl	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	30 dB
	35 dBm	ndB 26.00 dB	VBW	3 kHz		
		BW 318.63727455 kHz	SWT	280 ms	Unit	dBm

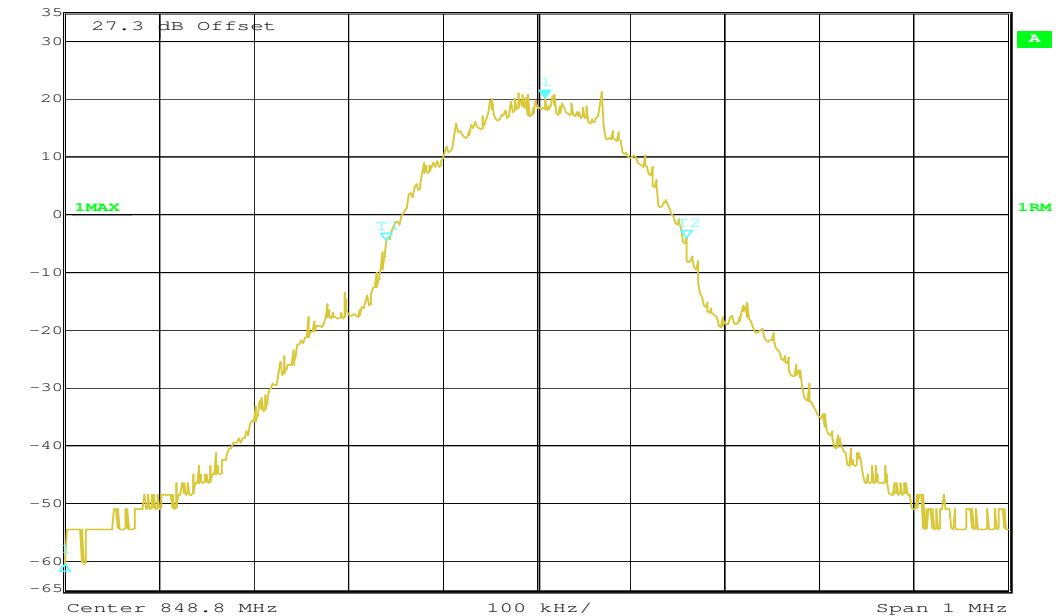


Date: 4.SEP.2008 15:11:07

**Channel 128 (EDGE)**

**99% (-20 dB) Occupied Bandwidth**

	Ref Lvl	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	30 dB
	35 dBm	ndB 20.00 dB	VBW	3 kHz		
		BW 280.56112224 kHz	SWT	280 ms	Unit	dBm

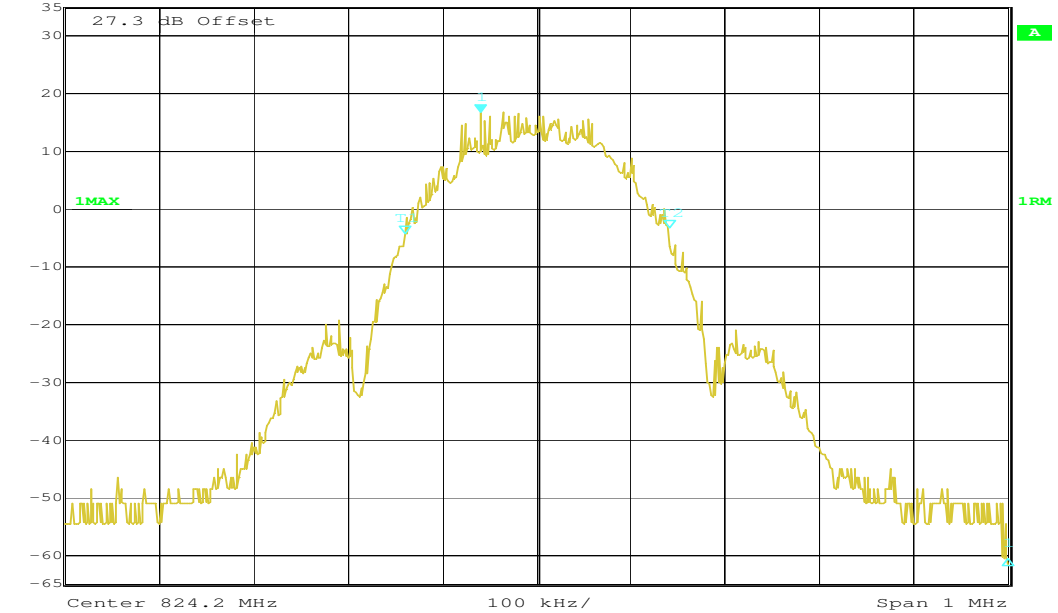


Date: 4.SEP.2008 15:28:25

**Channel 128 (EDGE)**

**-26 dBc Bandwidth**


	Ref Lvl	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	30 dB
	35 dBm	ndB 26.00 dB	VBW	3 kHz		
		BW 302.60521042 kHz	SWT	280 ms	Unit	dBm

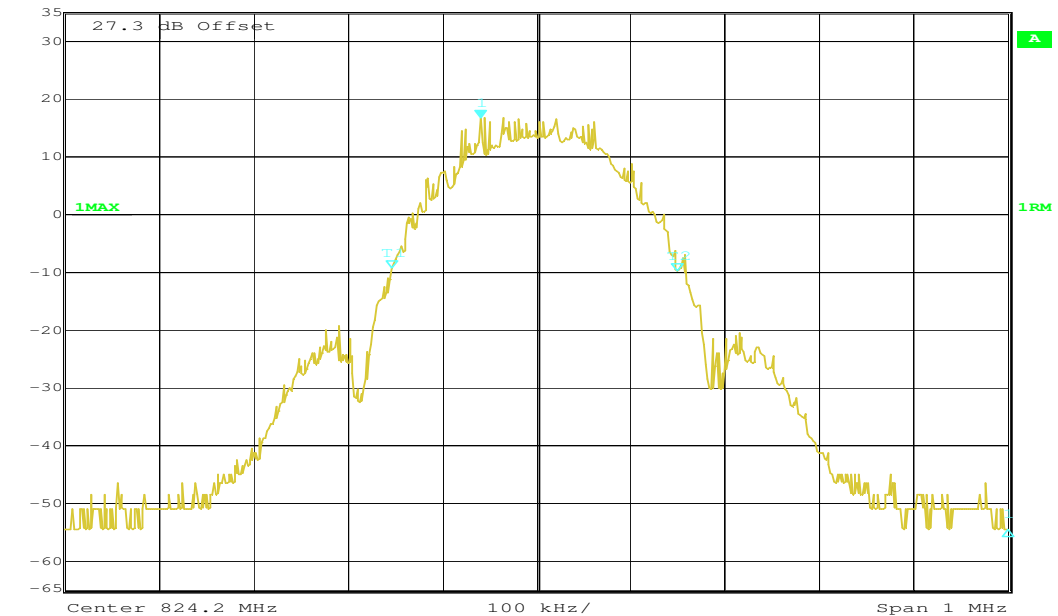

Date: 4.SEP.2008 15:29:02

**Channel 189 (EDGE)**  
**99% (-20 dB) Occupied Bandwidth**


	Ref Lvl	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	30 dB
	35 dBm	ndB 20.00 dB	VBW	3 kHz		
		BW 278.55711423 kHz	SWT	280 ms	Unit	dBm

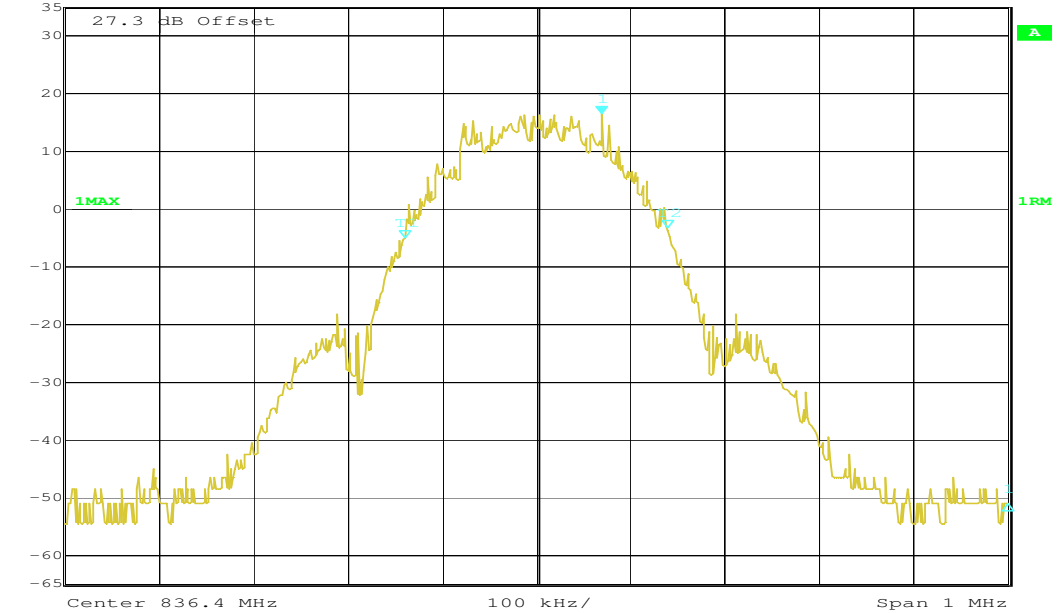

Date: 4.SEP.2008 15:27:07

**Channel 189 (EDGE)**  
**-26 dBc Bandwidth**


	Ref Lvl	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	30 dB
	35 dBm	ndB 26.00 dB	VBW	3 kHz		
		BW 302.60521042 kHz	SWT	280 ms	Unit	dBm

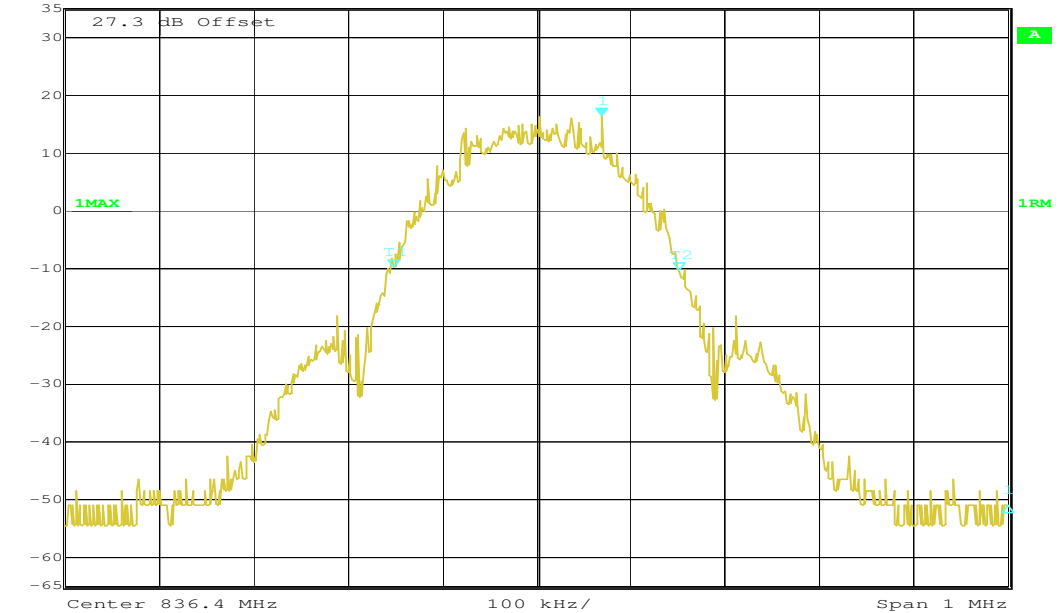

Date: 4.SEP.2008 15:26:40

**Channel 251 (EDGE)**  
**99% (-20 dB) Occupied Bandwidth**


	Ref Lvl	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	30 dB
	35 dBm	ndB 20.00 dB	VBW	3 kHz	Unit	dBm
		BW 268.53707415 kHz	SWT	280 ms		

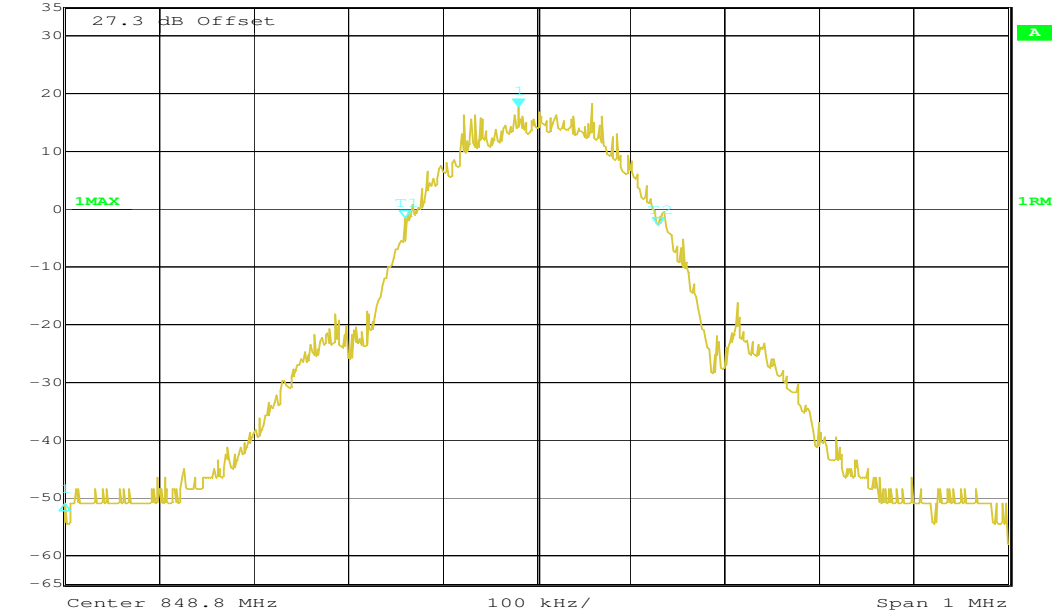

Date: 4.SEP.2008 15:24:19

**Channel 251 (EDGE)**  
**-26 dBc Bandwidth**

	Ref Lvl	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	30 dB
	35 dBm	ndB 26.00 dB	VBW	3 kHz	Unit	dBm
		BW 302.60521042 kHz	SWT	280 ms		

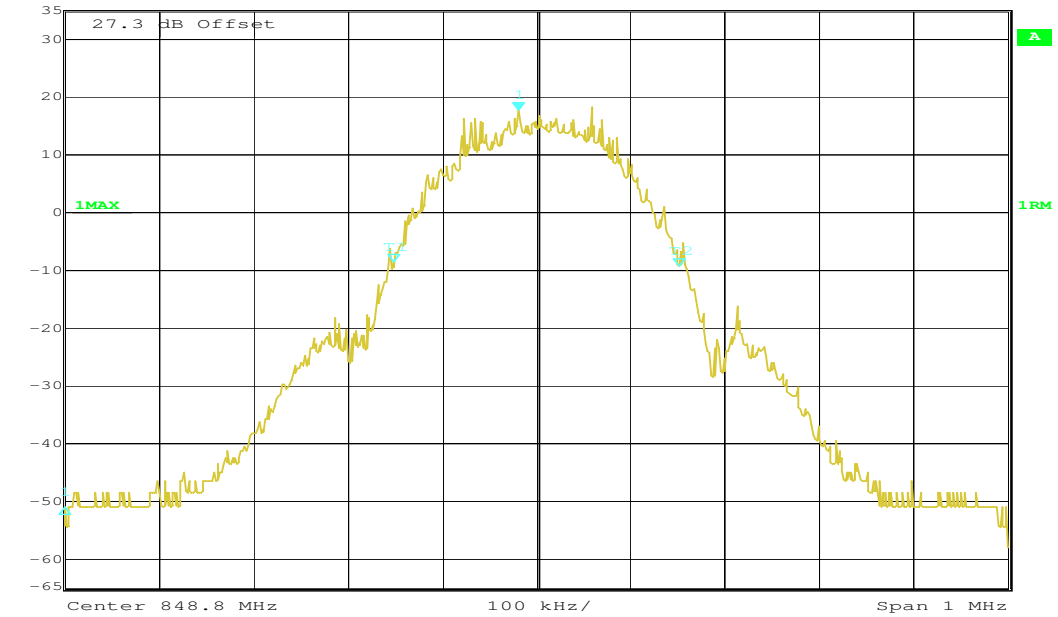

Date: 4.SEP.2008 15:24:51

## 5.4 PART UMTS Band II

### 5.4.1 RF Power Output

#### Reference

FCC:	CFR Part 24.232, 2.1046
IC:	RSS 133, Issue 3, Section 4.3

#### Summary:

This paragraph contains both average/peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

#### Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation. The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average) These measurements were done at 3 frequencies, 1852.4 MHz, 1880.0 MHz and 1907.6 MHz (bottom, middle and top of operational frequency range).

Settings for maximum output power were used. For HSPA the subtest with the maximum average power (defined by 3GPP 34.121) was selected.

#### Limits:

Nominal Peak Output Power (dBm)
+33

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
---

#### Test Results: Output Power (conducted) UMTS Mode

Frequency (MHz)	Average Output Power (dBm)	Peak-to-Average Ratio (dB)
1852.4	22.3	3.1
1880.0	22.6	3.1
1907.6	22.7	3.0
Measurement uncertainty	±0.5 dB	

#### Test Results: Output Power (conducted) HSDPA Mode (Subtest 1)

Frequency (MHz)	Average Output Power (dBm)	Peak-to-Average Ratio (dB)
1852.4	22.1	2.9
1880.0	22.3	3.0
1907.6	22.4	3.0
Measurement uncertainty	±0.5 dB	

#### Test Results: Output Power (conducted) HSUPA Mode (Subtest 5)

Frequency (MHz)	Average Output Power (dBm)	Peak-to-Average Ratio (dB)
1852.4	21.8	3.8
1880.0	21.7	3.9
1907.6	21.8	3.8
Measurement uncertainty	±0.5 dB	

## EIRP Measurements

### Description:

This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

(a) The measurements were performed with full rf output power and modulation.

(b) Test was performed at listed 3m test site (listed with FCC, IC).

(c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)

(d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.

(e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

$E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

(f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency

Resolution BW: 100 kHz

Video BW: same

Detector Mode: positive

Average: off

Span: 3 x the signal bandwidth

(g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.

(h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.

(i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.

(j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.

(k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.

(l) Repeat for all different test signal frequencies

**Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method**

(a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

- Center Frequency : equal to the signal source
- Resolution BW : 10 kHz
- Video BW : same
- Detector Mode : positive
- Average : off
- Span : 3 x the signal bandwidth

(b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

$E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

(c) Select the frequency and E-field levels for ERP/EIRP measurements.

(d) Substitute the EUT by a signal generator and one of the following transmitting antennas (substitution antenna):

DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz}.

(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.

(f) Use one of the following antenna as a receiving antenna: .DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.

(g) If the DIPOLE antenna is used, tune its elements to the frequency as specified in the calibration manual.

(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.

(i) Tune the EMI Receivers to the test frequency.

(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(k) The transmitter was rotated through 360 o about a vertical axis until a higher maximum signal was received.

(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.

(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$\text{EIRP} = P + G1 = P3 + L2 - L1 + A + G1$$

$$\text{ERP} = \text{EIRP} - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.

P1: Power output from the signal generator

P2: Power measured at attenuator A input

P3: Power reading on the Average Power Meter

EIRP: EIRP after correction

ERP: ERP after correction

(o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)

(p) Repeat step (d) to (o) for different test frequency

(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.

(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

**Limits:**

Nominal Peak Output Power (dBm)
+33

**Test Results: Output Power (radiated) UMTS Mode**

Frequency (MHz)	Average EIRP (dBm)
1852.4	21.5
1880.0	21.7
1907.6	21.7
Measurement uncertainty	±0.5 dB

**Sample Calculation:**

Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	EIRP Result			
MHz	dBµV	dBm	dBi	dBd	dB	dBm			
1852.4	125.8	22.6	8.4	0.0	3.3	27.7			

$EIRP = SG \text{ (dBm)} - \text{Cable Loss (dB)} + \text{Ant. gain (dBi)}$



## 5.4.2 Frequency Stability

### Reference

FCC:	CFR Part 24.235, 2.1055
IC:	RSS 133, Issue 3, Section 4.2

### Method of Measurement:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a “call mode”. This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with Vnom, connected to the CMU 200 and in a simulated call on channel 661 (center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with Vnom. Vary supply voltage from Vmin to Vmax, in 12 steps re-measuring carrier frequency at each voltage. Pause at Vnom for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with Vnom, connected to the CMU 200 and in a simulated call on channel 661 (center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

### Measurement Limit:



According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block..

**Test Results: AFC FREQ ERROR vs. VOLTAGE**

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
4.50	-28	-0.00000149	-0.0149
4.60	-23	-0.00000122	-0.0122
4.70	-20	-0.00000106	-0.0106
4.80	-15	-0.00000080	-0.0080
4.90	-18	-0.00000096	-0.0096
5.00	-16	-0.00000085	-0.0085
5.10	-13	-0.00000069	-0.0069
5.20	-12	-0.00000064	-0.0064
5.25	-15	-0.00000080	-0.0080

**Test Results: AFC FREQ ERROR vs. TEMPERATURE**

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-10	-23	-0.00000122	-0.0122
±0.0	-20	-0.00000106	-0.0106
+10	-14	-0.00000074	-0.0074
+20	-16	-0.00000085	-0.0085
+30	-12	-0.00000064	-0.0064
+40	-8	-0.00000043	-0.0043
+50	-2	-0.00000011	-0.0011
+55	-4	-0.00000021	-0.0021

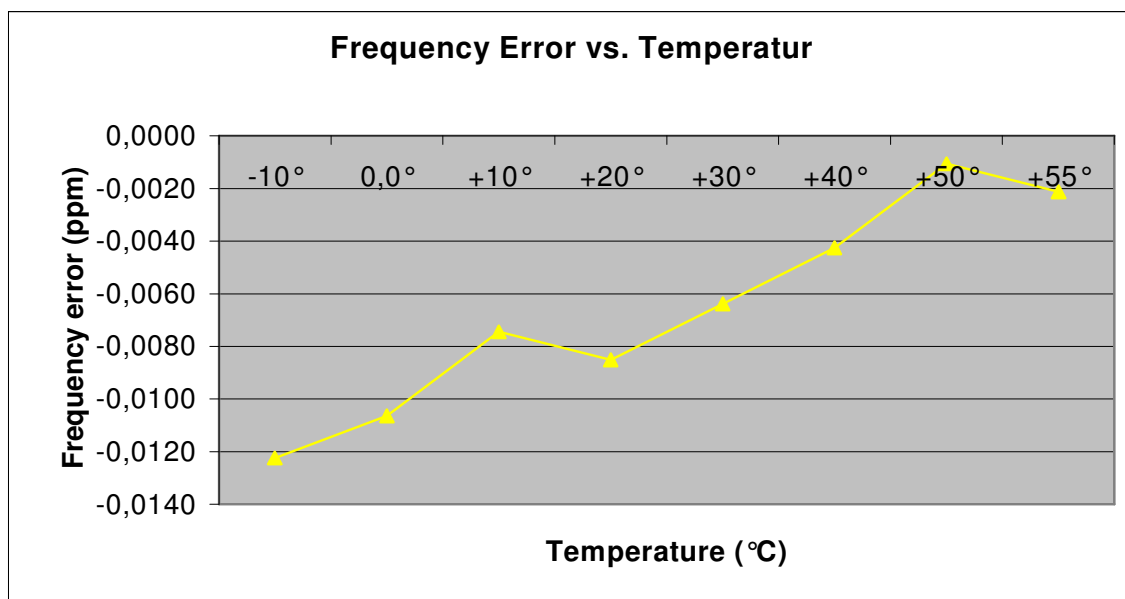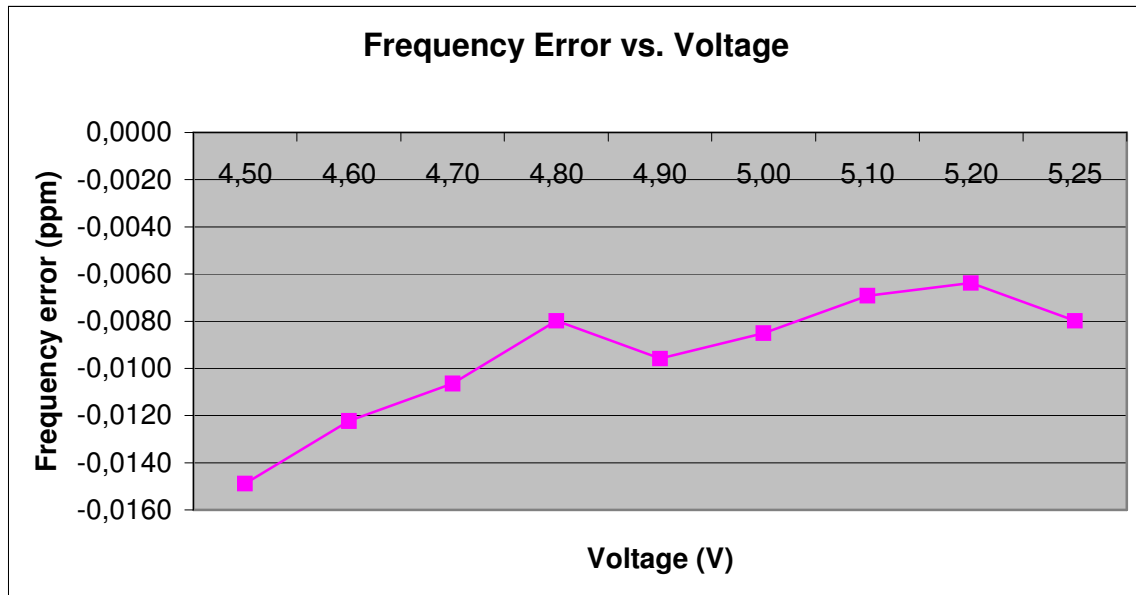

### 5.4.3 Radiated Emissions

#### Reference

FCC:	CFR Part 24.238, 2.1053
IC:	RSS 133, Issue 3, Section 4.4

#### Measurement Procedure:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2003 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded.
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603.

#### Measurement Limit:

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43 + 10 \log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**Measurement Results: Radiated Emissions**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the UMTS band (1852.4 MHz, 1880.0 MHz and 1907.6 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the UMTS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next table.

All measurements were done in horizontal and vertical polarization; the plots show the worst case. The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked, too. The found values are stated in the table below.

As can be seen from this data, the emissions from the test item were within the specification limit.

Harmonic	Tx ch.-9262 Freq. (MHz)	Level (dBm)	Tx ch.-9400 Freq. (MHz)	Level (dBm)	Tx ch.-9538 Freq. (MHz)	Level (dBm)
2	3704.8	-	3760	-	3815.2	-
3	5557.2	-	5640	-	5722.8	-
4	7409.6	-	7520	-	7630.4	-
5	9262.0	-	9400	-	9538.0	-
6	11114.4	-	11280	-	11445.6	-
7	12966.8	-	13160	-	13353.2	-
8	14819.2	-	15040	-	15260.8	-
9	16671.6	-	16920	-	17168.4	-
10	18524.0	-	18800	-	19076.0	-


**No peaks found < 20 dB below limit.**

**Sample calculation:**


Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	EIRP Result			
MHz	dBμV	dBm	dBi	dBd	dB	dBm			
1852.4	125.8	22.6	8.4	0.0	3.3	27.7			

EIRP = SG (dBm) - Cable Loss (dB) + Ant. gain (dBi)

**Channel 9400 (Traffic mode up to 30 MHz)**

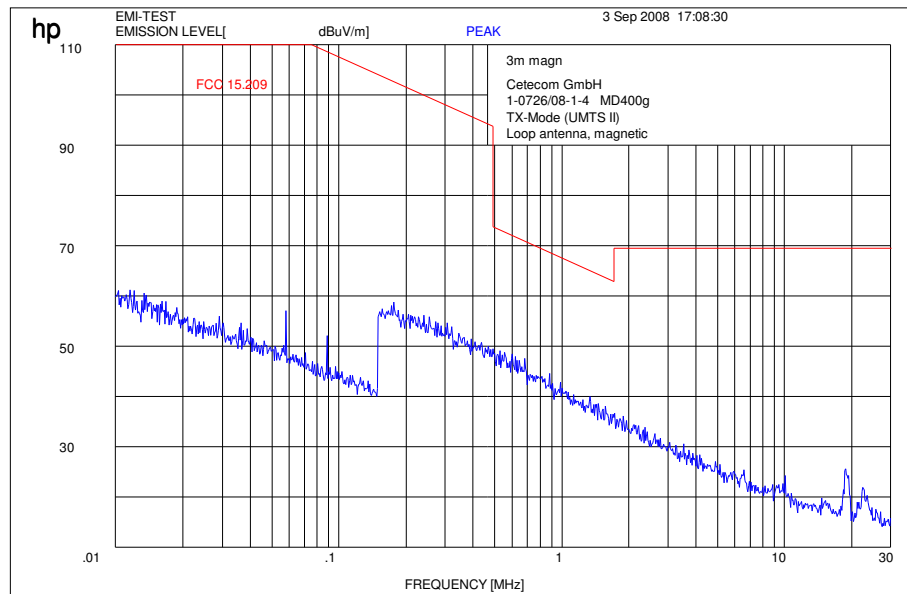

**Channel 9400 (30 MHz - 4 GHz)**

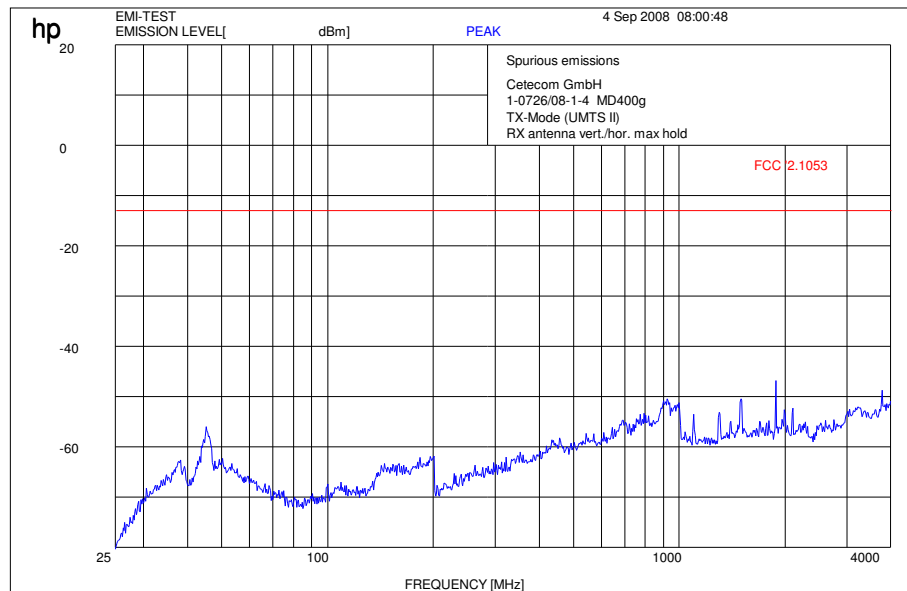


$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz

Carrier suppressed with a rejection filter


**Channel 9400 (4 GHz – 12.5 GHz)**

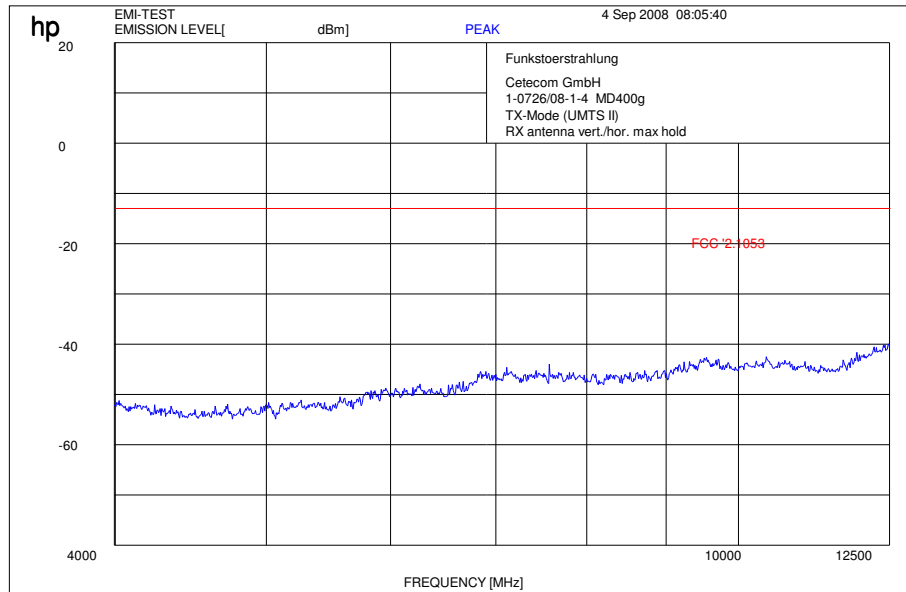

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz

**Channel 9400 (12 GHz - 20 GHz)**

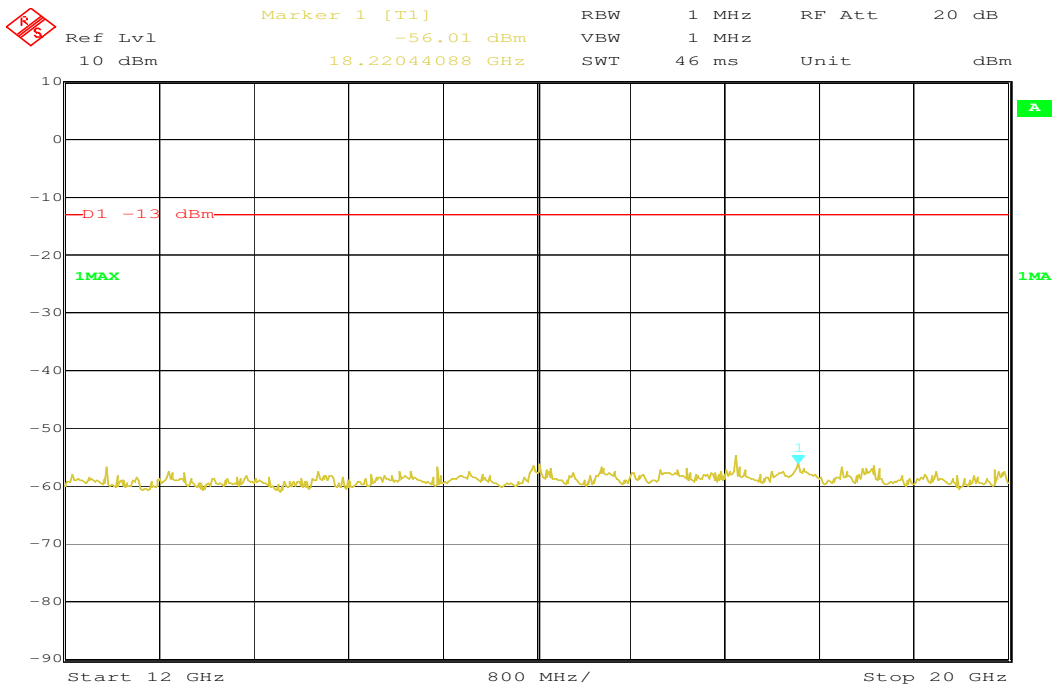

Date: 8.SEP.2008 16:10:51

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz

### 5.4.4 Conducted Spurious Emissions

#### Reference

FCC:	CFR Part 24.238, 2.10.51
IC:	RSS 133, Issue 3, Section 4.4

#### Measurement Procedure:

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.
2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

UMTS Transmitter Channel Frequency:  
 9262 1852.4 MHz  
 9400 1880.0 MHz  
 9538 1907.6 MHz

#### Measurement Limit:


(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\text{Log}(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

#### Measurement Results:

Harmonic	Tx ch.- 9262 Freq. (MHz)	Level (dBm)	Tx ch.-9400 Freq. (MHz)	Level (dBm)	Tx ch.-9538 Freq. (MHz)	Level (dBm)
2	3704.8	-	3760	-	3815.2	-
3	5557.2	-	5640	-	5722.8	-
4	7409.6	-	7520	-	7630.4	-
5	9262.0	-	9400	-	9538.0	-
6	11114.4	-	11280	-	11445.6	-
7	12966.8	-	13160	-	13353.2	-
8	14819.2	-	15040	-	15260.8	-
9	16671.6	-	16920	-	17168.4	-
10	18524.0	-	18800	-	19076.0	-




## Channel 9262 (30 MHz – 1 GHz)

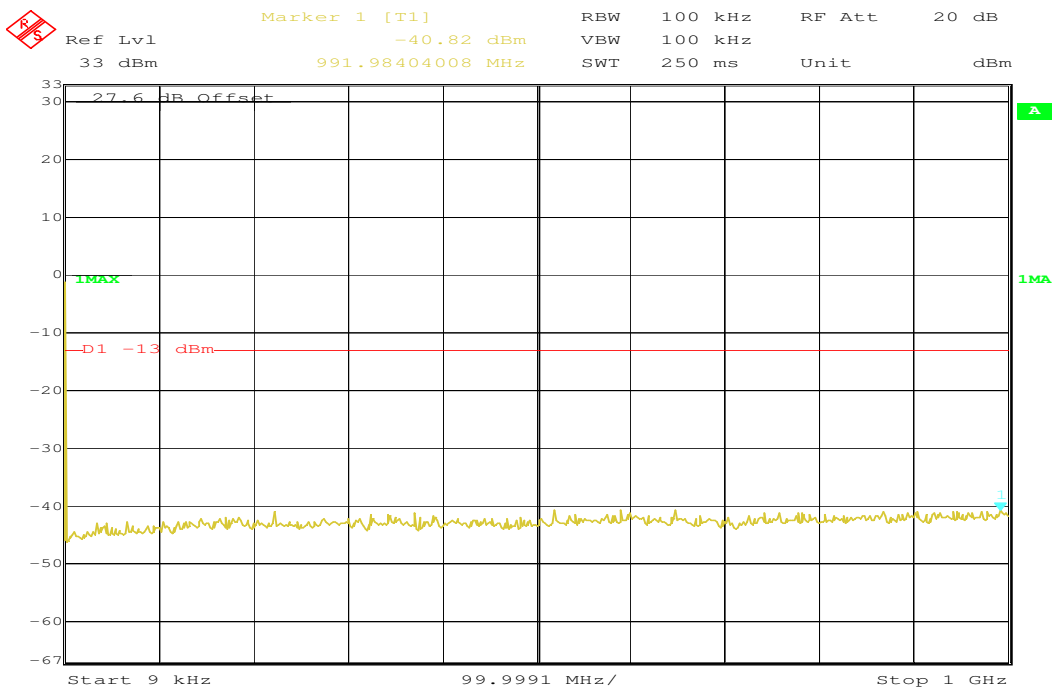

Date: 5.SEP.2008 09:06:19


The peak at the beginning of the Plot is the LO from the measuring spectrum Analyzer and not from the EUT.

## Channel 9262 (1 GHz – 20 GHz)

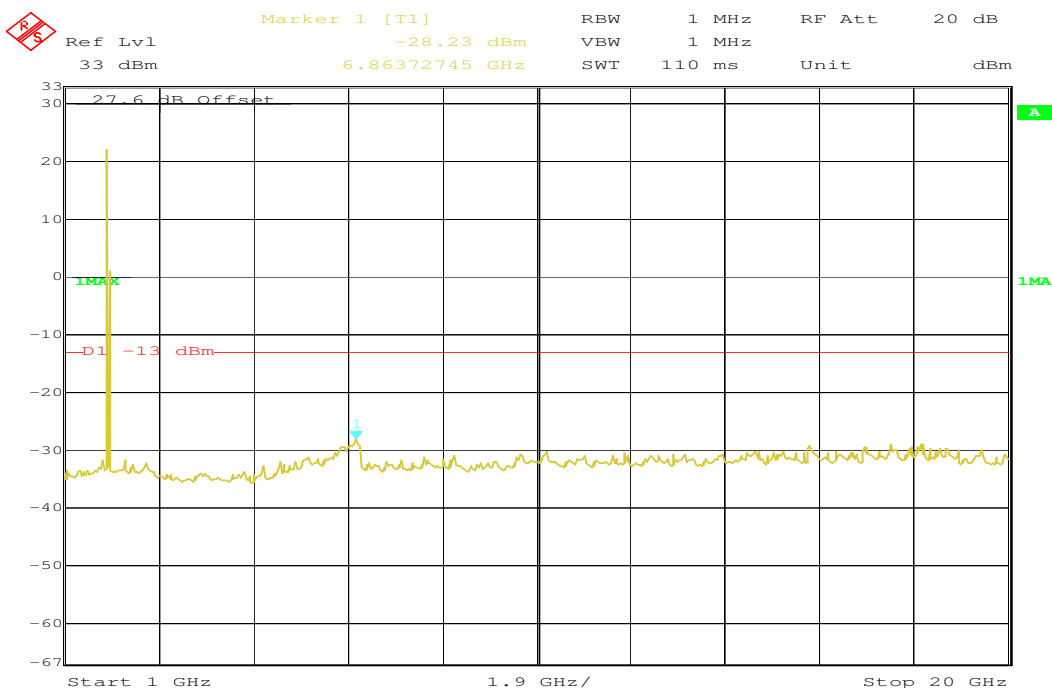


Date: 5.SEP.2008 09:06:57

Channel 9400 (30 MHz – 1 GHz)

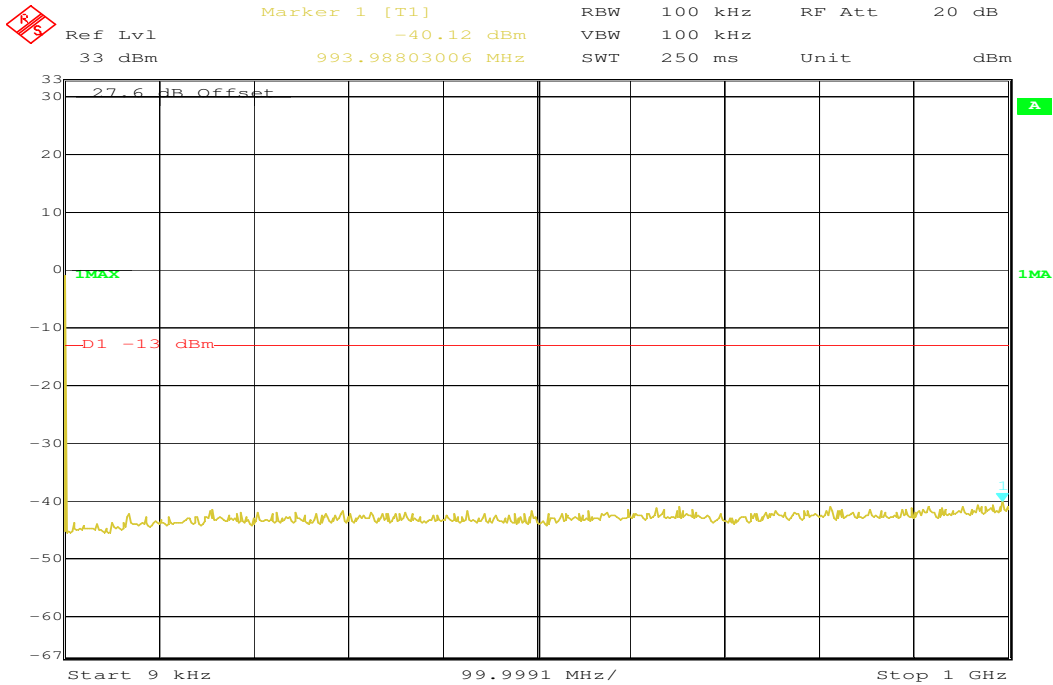

The peak at the beginning of the Plot is the LO from the measuring spectrum Analyzer and not from the EUT.

Channel 9400 (1 GHz – 20 GHz)

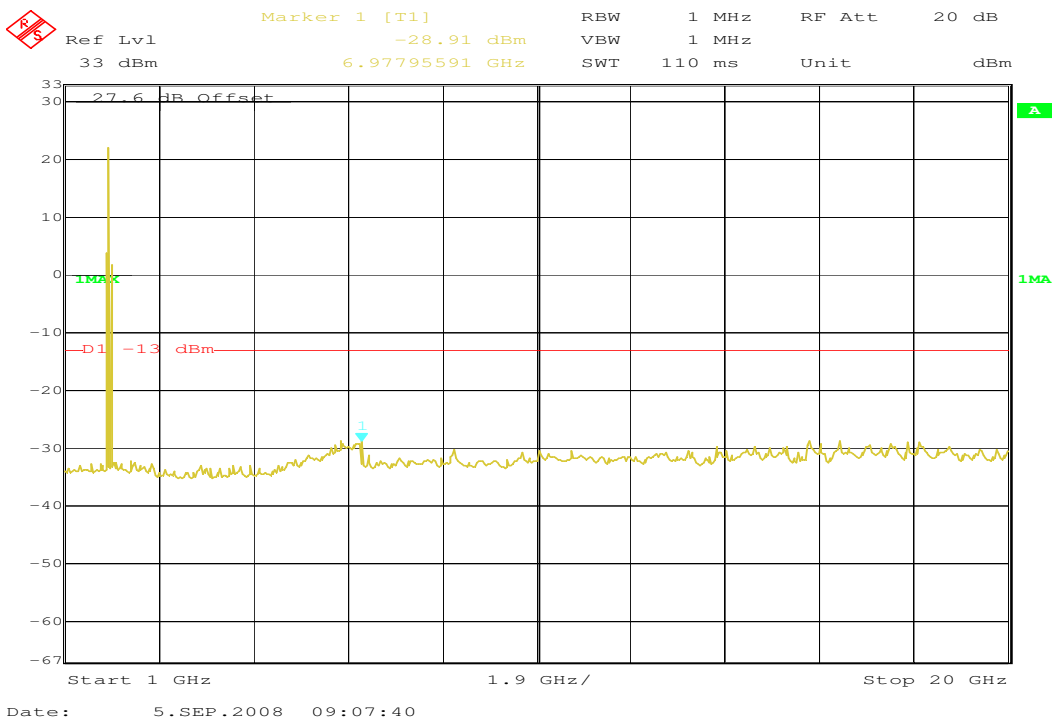



---

### 5.4.5 Block Edge Compliance


#### Reference

FCC:	CFR Part 24.238
IC:	RSS 133, Issue 3, Section 6.5


#### Measurement Limit:

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\text{Log}(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

**Channel 9262**

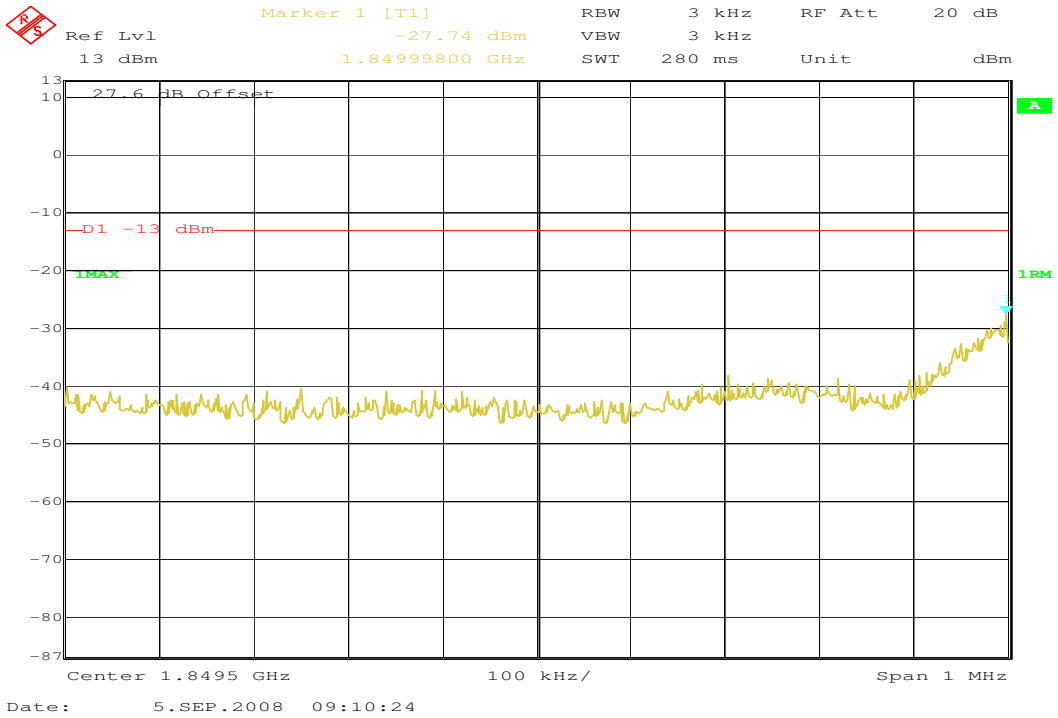

**Channel 9538**

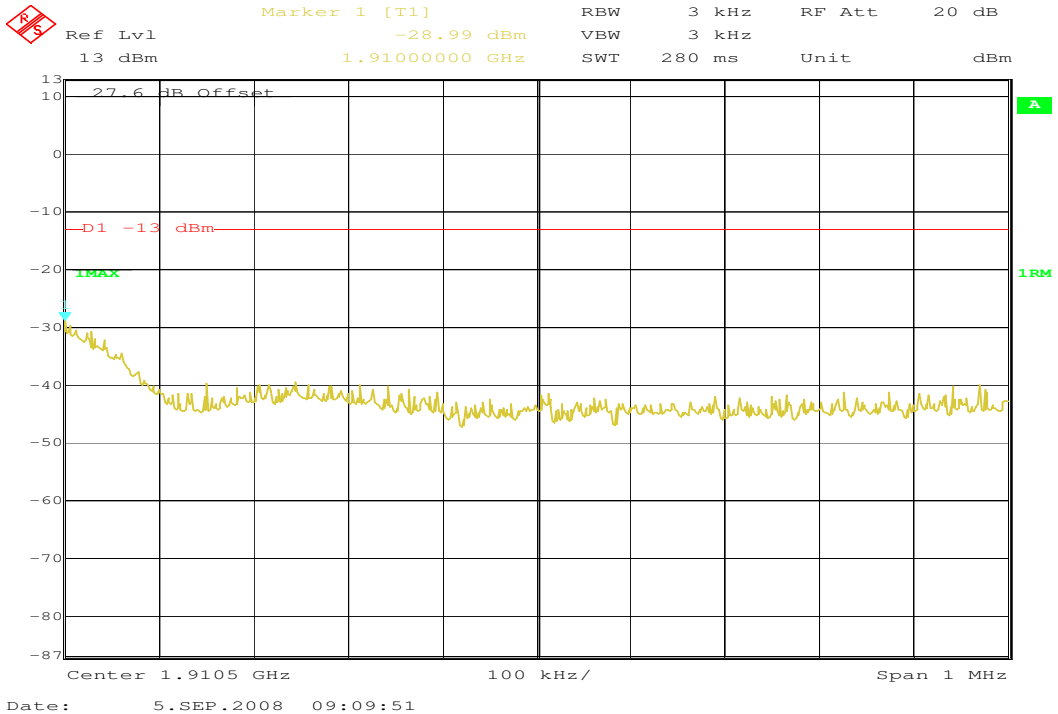

### 5.4.6 Occupied Bandwidth

#### Reference

FCC:	CFR Part 24.238, 2.1049
IC:	RSS 133, Issue 3, Section 6.5

#### Occupied Bandwidth Results

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBc occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Normal mode


Frequency	99% Occupied Bandwidth kHz	-26 dBc Bandwidth kHz
1852.4 MHz	4.653	4.797
1880.0 MHz	4.629	4.773
1907.6 MHz	4.617	4.797

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 4.7 MHz, this equates to a resolution bandwidth of at least 47 kHz. For this testing, a resolution bandwidth 50 kHz was used.

Channel 9262

99% (-20 dB) Occupied Bandwidth

Marker 1 [T1 ndB] RBW 50 kHz RF Att 20 dB  
Ref Lvl ndB 20.00 dB VBW 50 kHz  
23 dBm BW 4.65330661 MHz SWT 6 ms Unit dBm

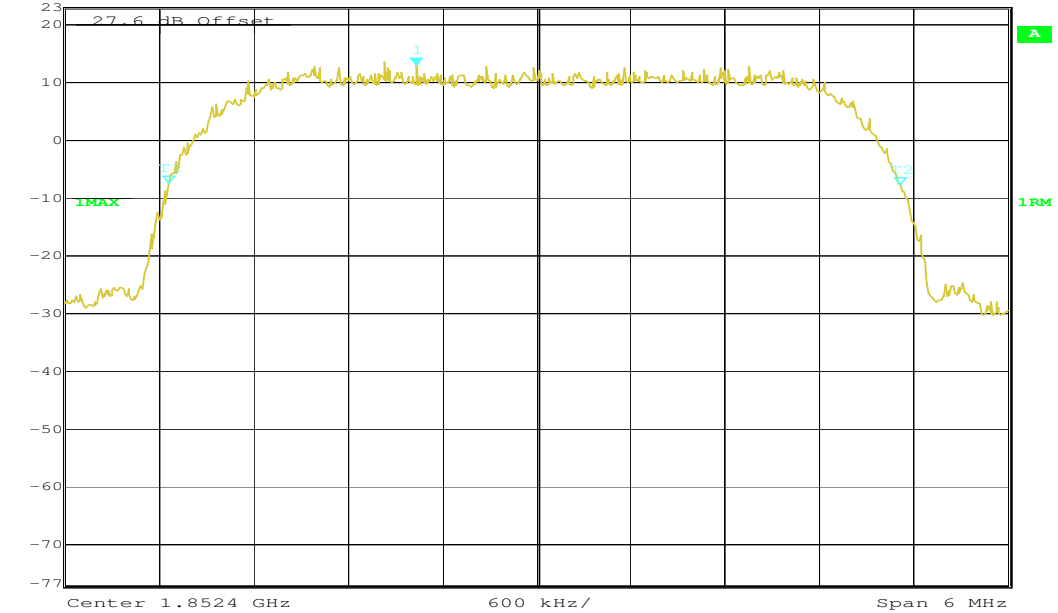


Date: 5.SEP.2008 09:26:06

Channel 9262

-26 dBc Bandwidth

Marker 1 [T1 ndB] RBW 50 kHz RF Att 20 dB  
Ref Lvl ndB 26.00 dB VBW 50 kHz  
23 dBm BW 4.79759519 MHz SWT 6 ms Unit dBm

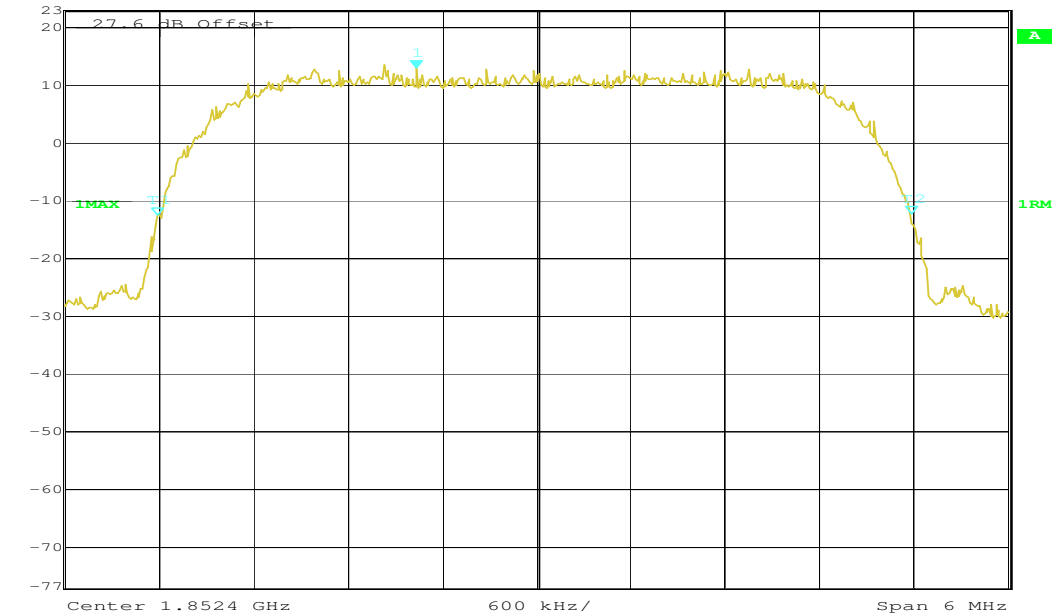


Date: 5.SEP.2008 09:26:26

**Channel 9400**

**99% (-20 dB) Occupied Bandwidth**

	Marker 1 [T1 ndB]	RBW	50 kHz	RF Att	20 dB
Ref Lvl	ndB	20.00 dB	VBW	50 kHz	
23 dBm	BW	4.62925852 MHz	SWT	6 ms	Unit dBm

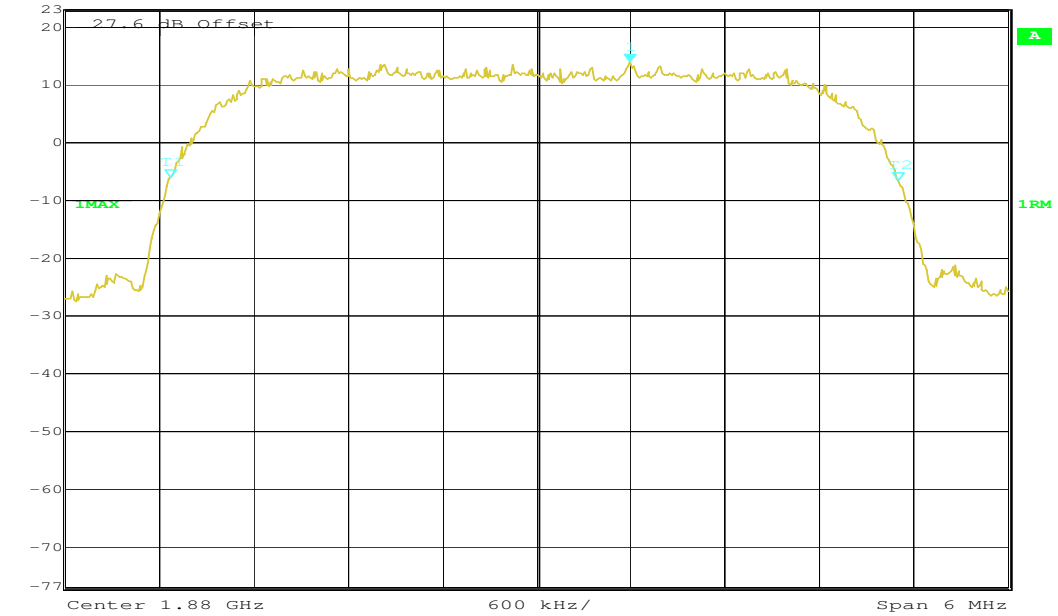


Date: 5.SEP.2008 09:24:57

**Channel 9400**

**-26 dBc Bandwidth**

	Marker 1 [T1 ndB]	RBW	50 kHz	RF Att	20 dB
Ref Lvl	ndB	26.00 dB	VBW	50 kHz	
23 dBm	BW	4.77354709 MHz	SWT	6 ms	Unit dBm

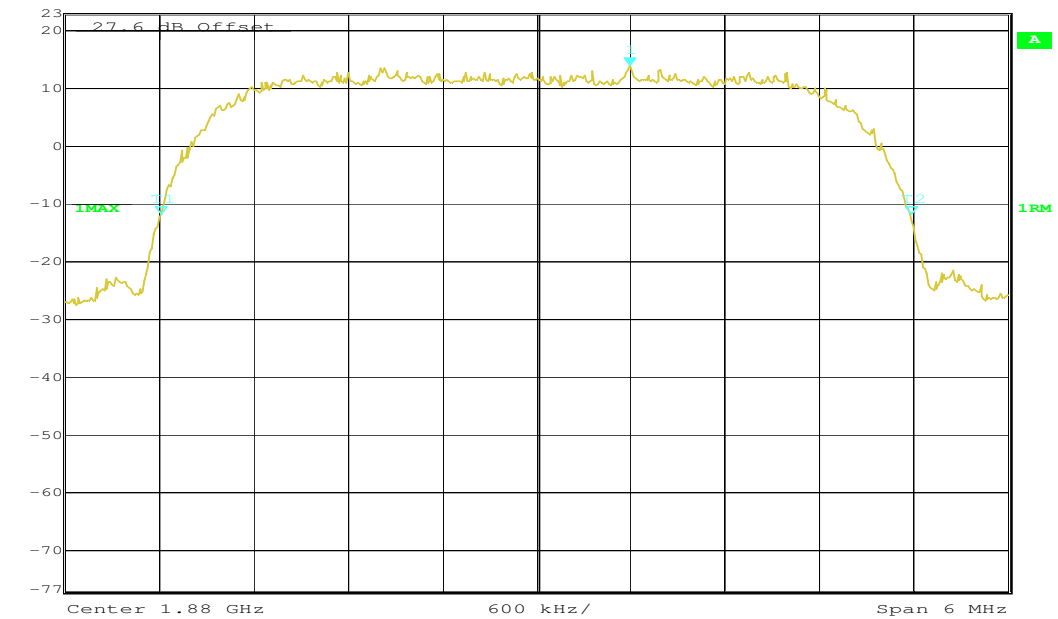


Date: 5.SEP.2008 09:23:49



**Channel 9538**

**99% (-20 dB) Occupied Bandwidth**

	Ref Lvl	Marker 1 [T1 ndB]	RBW	50 kHz	RF Att	20 dB
	23 dBm	ndB 20.00 dB	VBW	50 kHz		
		BW 4.61723447 MHz	SWT	6 ms	Unit	dBm

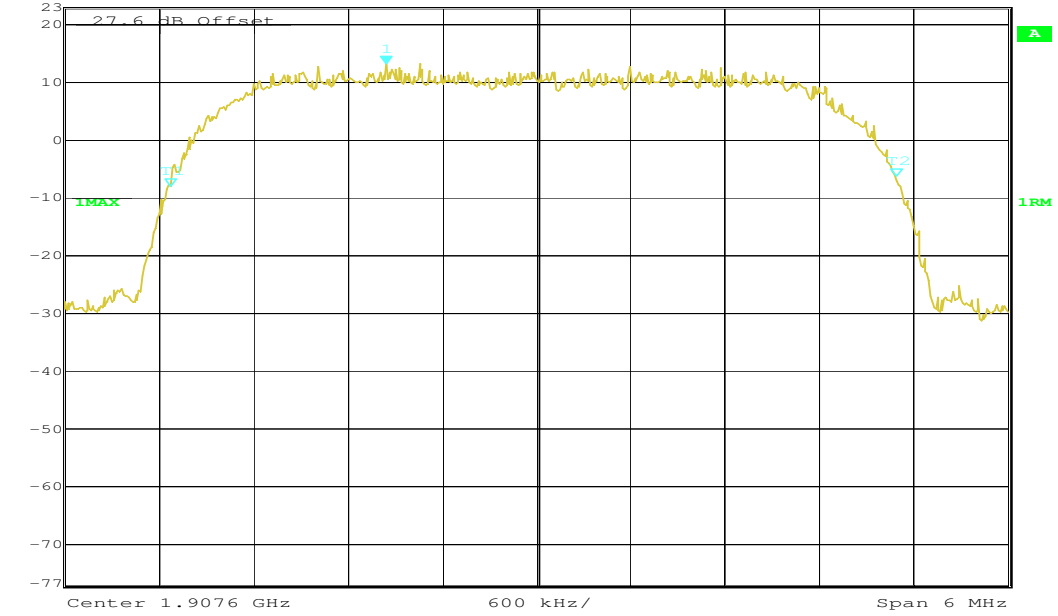


Date: 5.SEP.2008 09:27:20

**Channel 9538**

**-26 dBc Bandwidth**

	Ref Lvl	Marker 1 [T1 ndB]	RBW	50 kHz	RF Att	20 dB
	23 dBm	ndB 26.00 dB	VBW	50 kHz		
		BW 4.79759519 MHz	SWT	6 ms	Unit	dBm

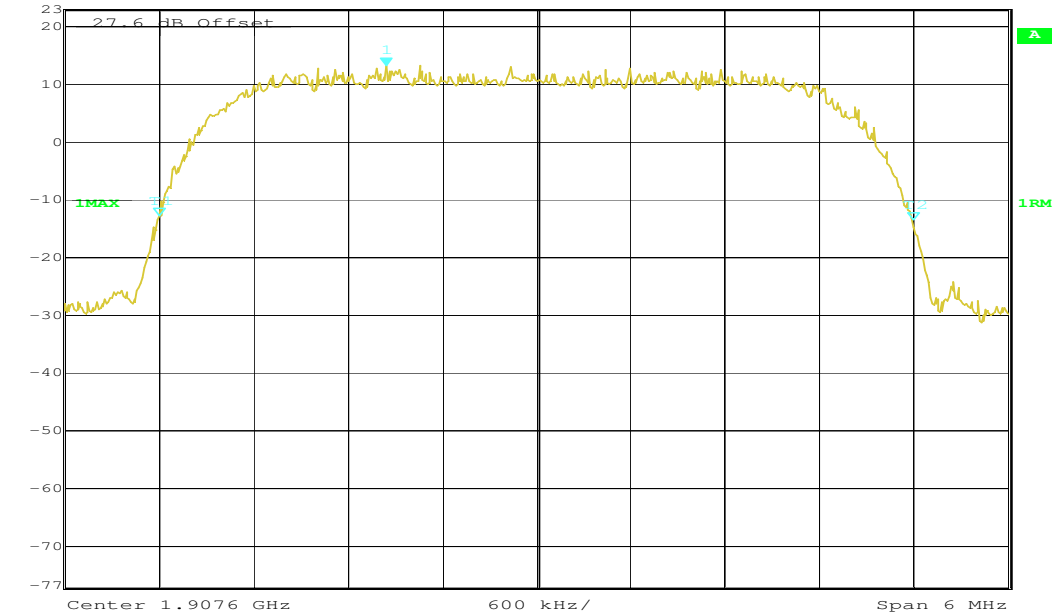

Date: 5.SEP.2008 09:27:39

## 5.5 PART UMTS Band V

### 5.5.1 RF Power Output

#### Reference

FCC:	CFR Part 22.9.1.3, 2.1046
IC:	RSS 132, Issue 2, Section 4.4 and 6.4

#### Summary:

This paragraph contains both average, peak output powers and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

#### Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average)

These measurements were done at 3 frequencies, 826.4 MHz, 836.0 MHz and 846.6 MHz (bottom, middle and top of operational frequency range).

Settings for maximum output power were used. For HSPA the subtest with the maximum average power (defined by 3GPP 34.121) was selected.

#### Limits:

Nominal Peak Output Power (dBm)
+38.45

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### Test Results: Output Power (conducted) UMTS Mode

Frequency (MHz)	Average Output Power (dBm)	Peak-to-Average Ratio (dB)
826.4	23.4	3.1
836.0	23.3	3.0
846.6	23.5	3.1
Measurement uncertainty	±0.5 dB	

#### Test Results: Output Power (conducted) HSDPA Mode (Subtest 1)

Frequency (MHz)	Average Output Power (dBm)	Peak-to-Average Ratio (dB)
826.4	23.2	3.0
836.0	23.2	3.0
846.6	23.1	3.0
Measurement uncertainty	±0.5 dB	

#### Test Results: Output Power (conducted) HSUPA Mode (Subtest 5)

Frequency (MHz)	Average Output Power (dBm)	Peak-to-Average Ratio (dB)
826.4	21.8	3.9
836.0	21.9	3.9
846.6	22.0	4.0
Measurement uncertainty	±0.5 dB	

---

## ERP Measurements

Description: This is the test for the maximum radiated power from the phone.

Rule Part 22.913 specifies that "Mobile/portable stations are limited to 7 watts ERP.

Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

(a) The measurements were performed with full rf output power and modulation.

(b) Test was performed at listed 3m test site (listed with FCC, IC).

(c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)

(d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.

(e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

$E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

(f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency

Resolution BW: 100 kHz

Video BW: same

Detector Mode: positive

Average: off

Span: 3 x the signal bandwidth

(g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.

(h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.

(i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.

(j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.

(k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.

(l) Repeat for all different test signal frequencies

**Measuring the ERP of Spurious/Harmonic Emissions using Substitution Method**

(a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring ERP) as follows:

- Center Frequency : equal to the signal source
- Resolution BW : 10 kHz
- Video BW : same
- Detector Mode : positive
- Average : off
- Span : 3 x the signal bandwidth

(b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

$E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

(c) Select the frequency and E-field levels for ERP/EIRP measurements.

(d) Substitute the EUT by a signal generator and one of the following transmitting antennas (substitution antenna):

.DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz}.

(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.

(f) Use one of the following antenna as a receiving antenna: .DIPOLE antenna for frequency from 30-1000 MHz or

.HORN antenna for frequency above 1 GHz }.

(g) If the DIPOLE antenna is used, tune its elements to the frequency as specified in the calibration manual.

(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.

(i) Tune the EMI Receivers to the test frequency.

(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(k) The transmitter was rotated through 360 o about a vertical axis until a higher maximum signal was received.

(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.

(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$\text{EIRP} = P + G1 = P3 + L2 - L1 + A + G1$$

$$\text{ERP} = \text{EIRP} - 2.15 \text{ dB}$$

Total Correction factor in EMI Receiver # 2 =  $L2 - L1 + G1$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.

P1: Power output from the signal generator

P2: Power measured at attenuator A input

P3: Power reading on the Average Power Meter

EIRP: EIRP after correction

ERP: ERP after correction

(o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)

(p) Repeat step (d) to (o) for different test frequency

(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.

(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

**Limits:**

Nominal Peak Output Power (dBm)
+38.45

**Test Results: Output Power (radiated) UMTS Mode**

Frequency (MHz)	Average (dBm)
826.4	22.8
836.0	22.7
846.6	22.8
Measurement uncertainty	±0.5 dB

**Sample calculation:**

Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	ERP	Substitution Antenna
MHz	dBμV	dBm	dBi	dBd	dB	dBm	
846.6	124.9	21.5	8.4	0.0	3.3	26.3	UHAP Schwarzbeck S/N 460

ERP = SG (dBm) - Cable Loss (dB) + Ant. gain (dB)

## 5.5.2 Frequency Stability

### Reference

FCC:	CFR Part 22.355, 2.1055
IC:	RSS 132, Issue 2, Section 4.3 and 6.3

### Method of Measurement:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a “call mode”. This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER..

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal 3.7 Volts. Vary supply voltage from minimum 3.3 Volts to maximum 4.4 Volts, in 13 steps re-measuring carrier frequency at each voltage. Pause at 3.7 V ac Volts for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

### Measurement Limit:



According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 22.355, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.. This transceiver is specified to operate with an input voltage of between 3.3 V dc and 4.4 V dc, with a nominal voltage of 3.7 V dc.

**Test Results: AFC FREQ ERROR vs. VOLTAGE**

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
4.50	12	0.00000064	0.0064
4.60	15	0.00000080	0.0080
4.70	18	0.00000096	0.0096
4.80	16	0.00000085	0.0085
4.90	22	0.00000117	0.0117
5.00	27	0.00000144	0.0144
5.10	28	0.00000149	0.0149
5.20	24	0.00000128	0.0128
5.25	31	0.00000165	0.0165

**Test Results: AFC FREQ ERROR vs. TEMPERATURE**

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-10	21	0.00000112	0.0112
±0.0	28	0.00000149	0.0149
+10	25	0.00000133	0.0133
+20	27	0.00000144	0.0144
+30	31	0.00000165	0.0165
+40	30	0.00000160	0.0160
+50	36	0.00000191	0.0191
+60	38	0.00000202	0.0202

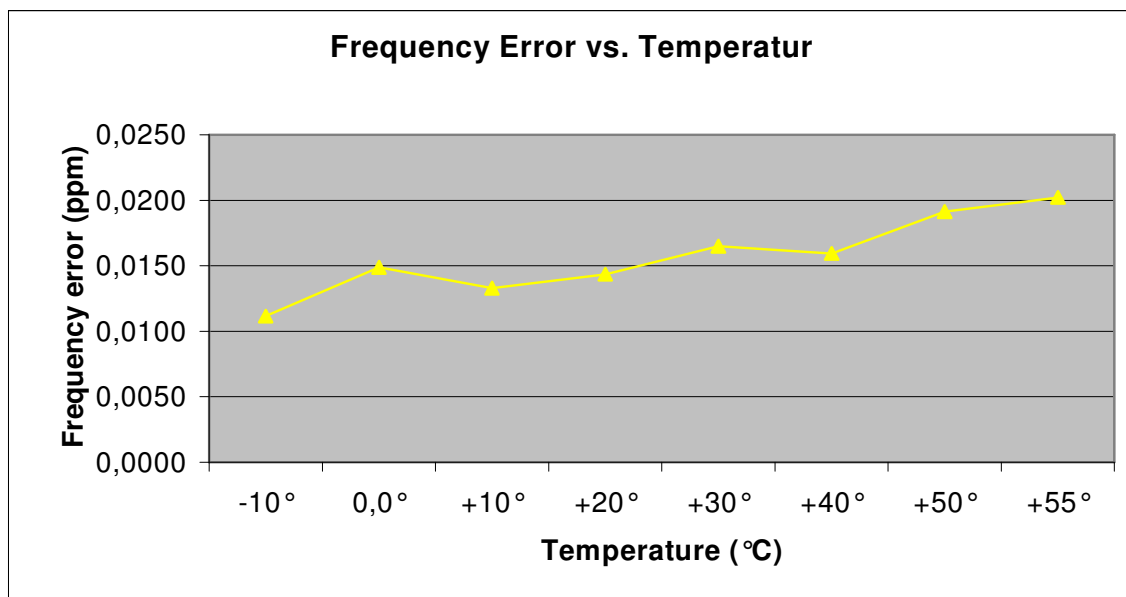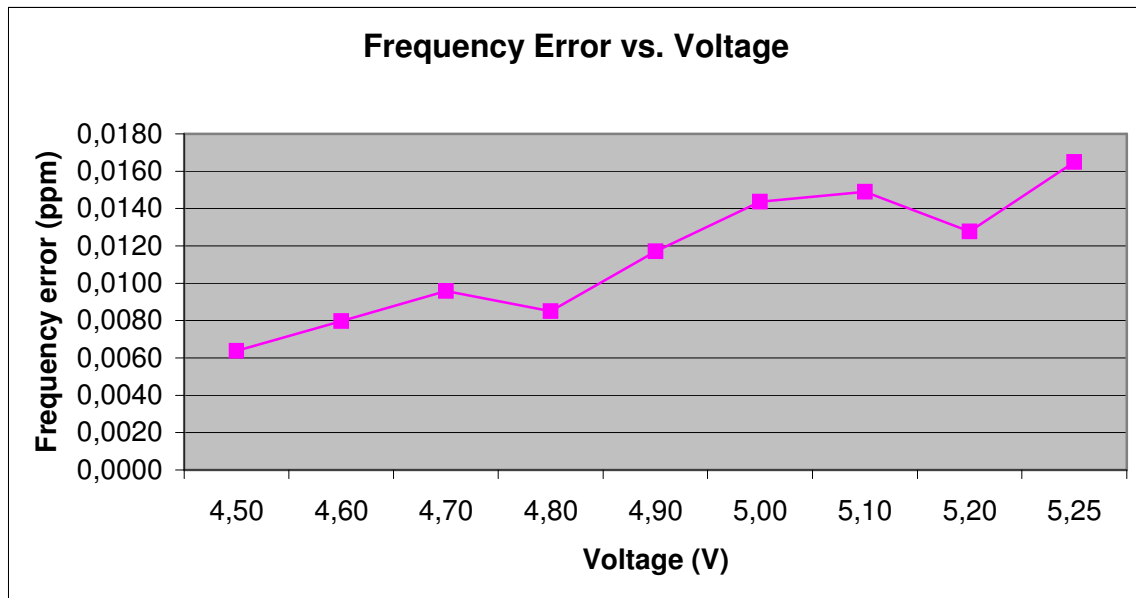



### 5.5.3 Radiated Emissions

#### Reference

FCC:	CFR Part 22.917, 2.1053
IC:	RSS 132, Issue 2, Section 4.5 and 6.5

#### Measurement Procedure:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2003 requirements and is recognized by the FCC to be in compliance for a 3 and a10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 848.8 MHz. This was rounded up to 12 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the UMTS band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters using the equation shown below:
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603 .

#### Measurement Limit:

Sec. 22.917 Emission Limits.

(a) On any frequency outside a licensee' s frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\text{Log}(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**Measurement Results:**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the UMTS band (826.4 MHz, 836.0 MHz and 846.6 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the UMTS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization, the plots shows the worst case.

All measurements were done in horizontal and vertical polarization; the plots shows the worst case.

The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked,

As can be seen from this data, the emissions from the test item were within the specification limit.

Harmonic	Tx ch.-4132 Freq. (MHz)	Level (dBm)	Tx ch.-4180 Freq. (MHz)	Level (dBm)	Tx ch.-4233 Freq. (MHz)	Level (dBm)
2	1652.8	-	1672.0	-	1693.2	-
3	2479.2	-	2508.0	-	2539.8	-
4	3305.6	-	3344.0	-	3386.4	-
5	4132.0	-	4180.0	-	4233.0	-
6	4958.4	-	5016.0	-	5079.6	-
7	5784.8	-	5852.0	-	5926.2	-
8	6611.2	-	6688.0	-	6772.8	-
9	7437.6	-	7524.0	-	7619.4	-
10	8264.0	-	8360.0	-	8466.0	-


**Sample calculation:**

Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	ERP	Substitution Antenna
MHz	dBμV	dBm	dBi	dBd	dB	dBm	
846.6	124.9	21.5	8.4	0.0	3.3	26.3	UHAP Schwarzbeck S/N 460


ERP = SG (dBm) - Cable Loss (dB) + Ant. gain (dB)

\*ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.1dBi

**Channel 4180 (Traffic mode up to 30 MHz)**

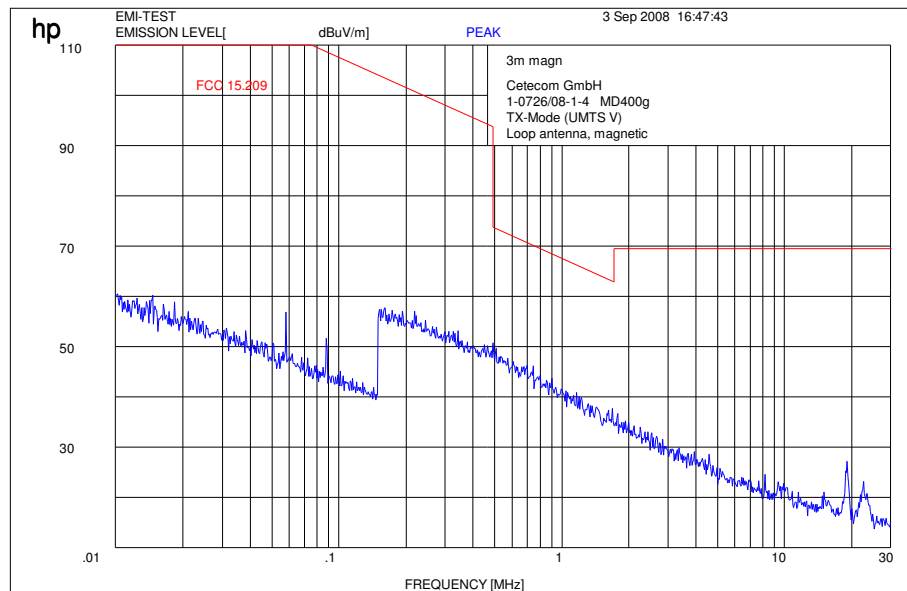


**Channel 4180 (30 MHz - 4 GHz)**

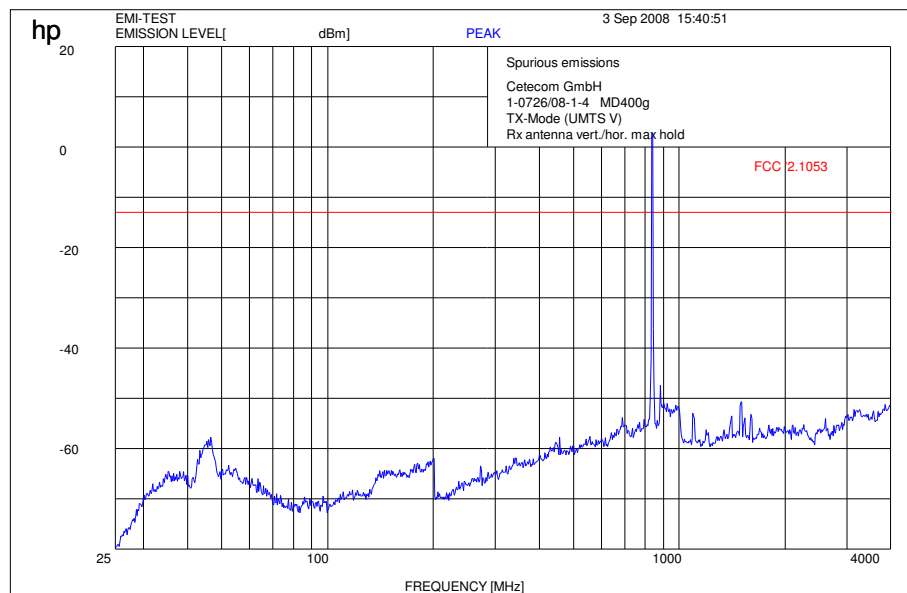

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$

## Channel 4180 (4 GHz – 12.5 GHz)

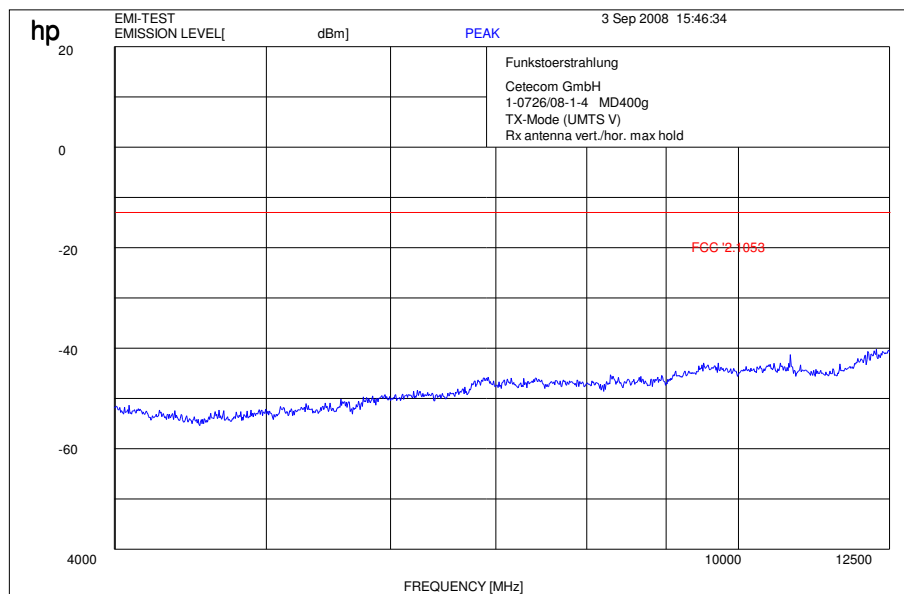

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz

### 5.5.4 Conducted Spurious Emissions

#### Reference

FCC:	CFR Part 22.917, 1.1051
IC:	RSS 132, Issue 2, Section 4.5 and 6.5

#### Measurement Procedure

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.
2. Determine mobile station transmits frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

UMTS Transmitter Channel Frequency

4132 826.4 MHz

4180 836.0 MHz

4233 846.6 MHz

#### Measurement Limit


(a) On any frequency outside frequency band of the UMTS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

#### Measurement Results

Harmonic	Tx ch.-4132 Freq. (MHz)	Level (dBm)	Tx ch.-4180 Freq. (MHz)	Level (dBm)	Tx ch.- 4233 Freq. (MHz)	Level (dBm)
2	1652.8	-	1672.0	-	1693.2	-
3	2479.2	-	2508.0	-	2539.8	-
4	3305.6	-	3344.0	-	3386.4	-
5	4132.0	-	4180.0	-	4233.0	-
6	4958.4	-	5016.0	-	5079.6	-
7	5784.8	-	5852.0	-	5926.2	-
8	6611.2	-	6688.0	-	6772.8	-
9	7437.6	-	7524.0	-	7619.4	-
10	8264.0	-	8360.0	-	8466.0	-




**Channel 4180 (30 MHz – 1 GHz)**

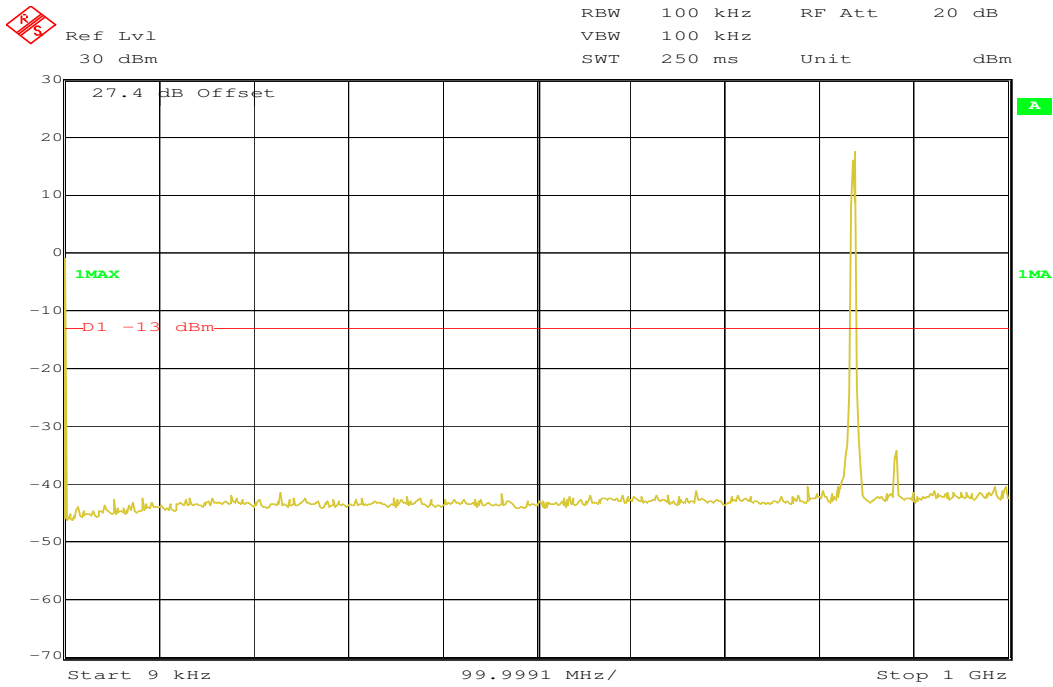


*The peak at the beginning of the Plot is the LO from the measuring spectrum Analyzer and not from the EUT.*

**Channel 4180 (1 GHz – 20 GHz)**

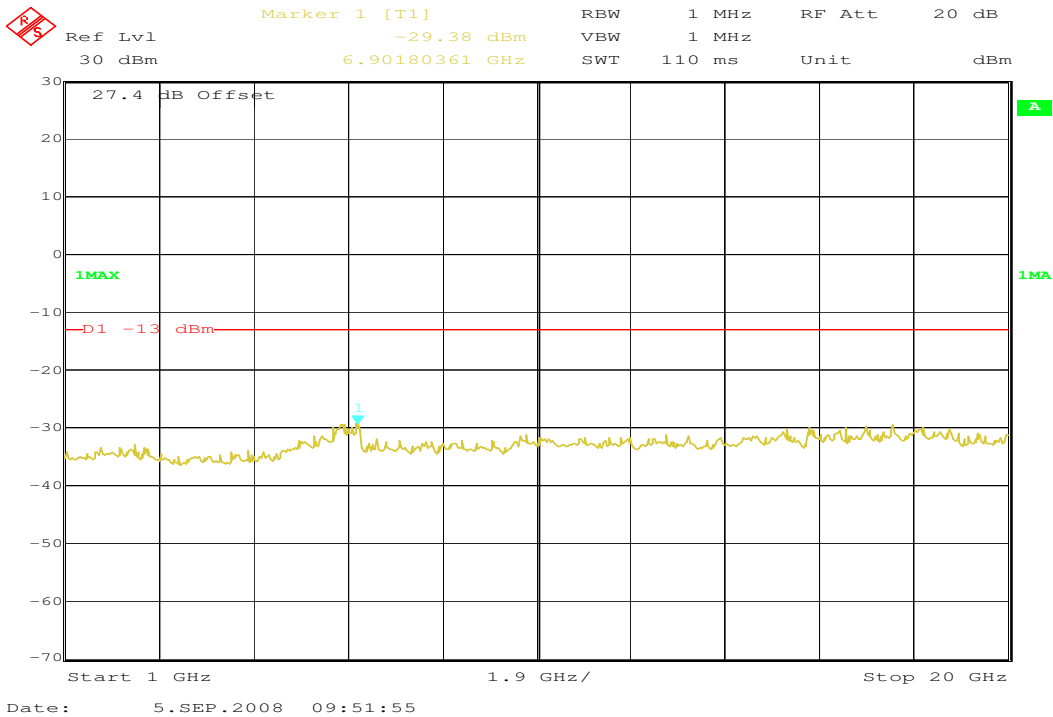


Channel 4233 (30 MHz – 1 GHz)

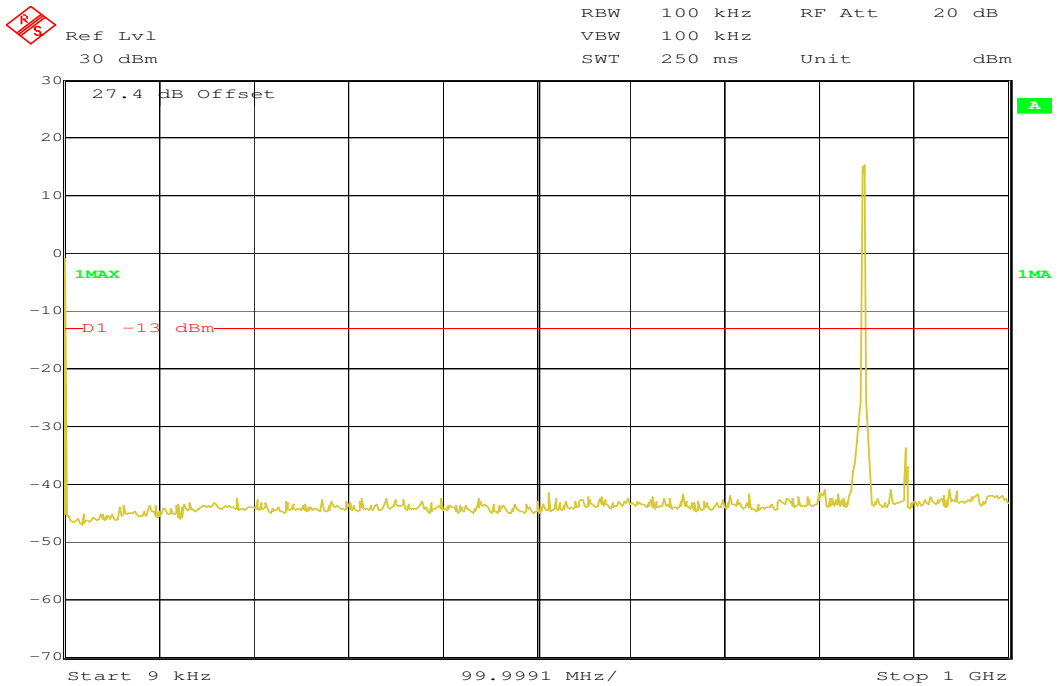

The peak at the beginning of the Plot is the LO from the measuring spectrum Analyzer and not from the EUT.

Channel 4233 (1 GHz – 20 GHz)

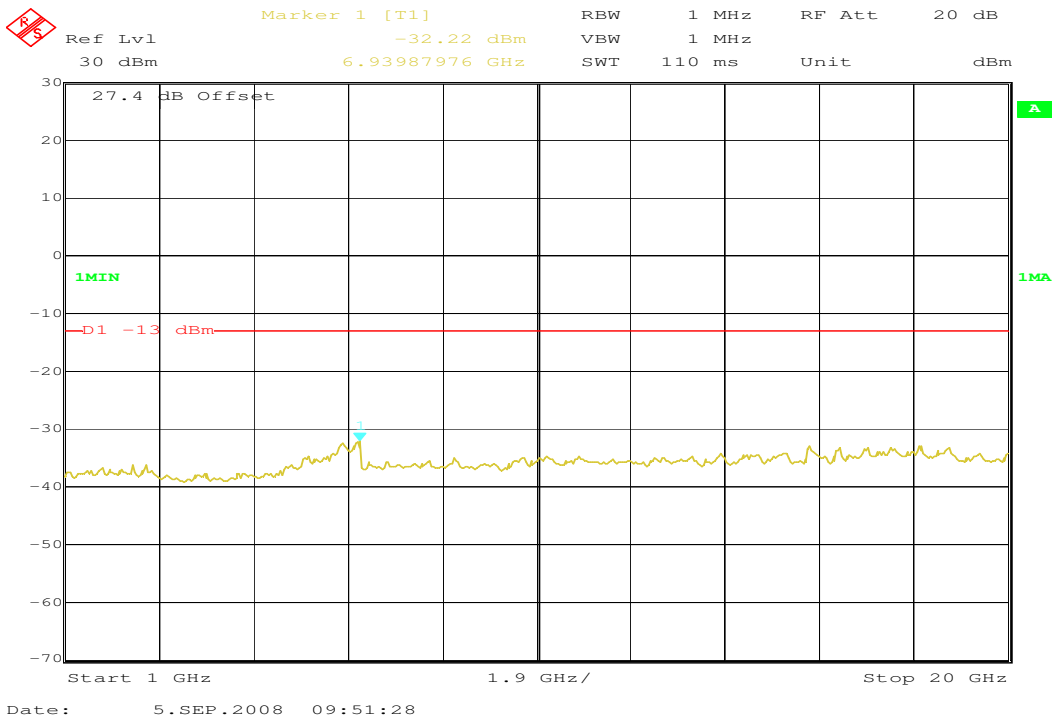



---

### 5.5.5 Block Edge Compliance

#### Reference


FCC:	CFR Part 22.917
IC:	RSS 132, Issue 2, Section 6.5

#### Measurement Limit:


Sec. 22.917 (b) Emission Limits.

(a) On any frequency outside frequency band of the UMTS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\text{Log}(P)$  dB. For all power levels +33 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

Channel 4132

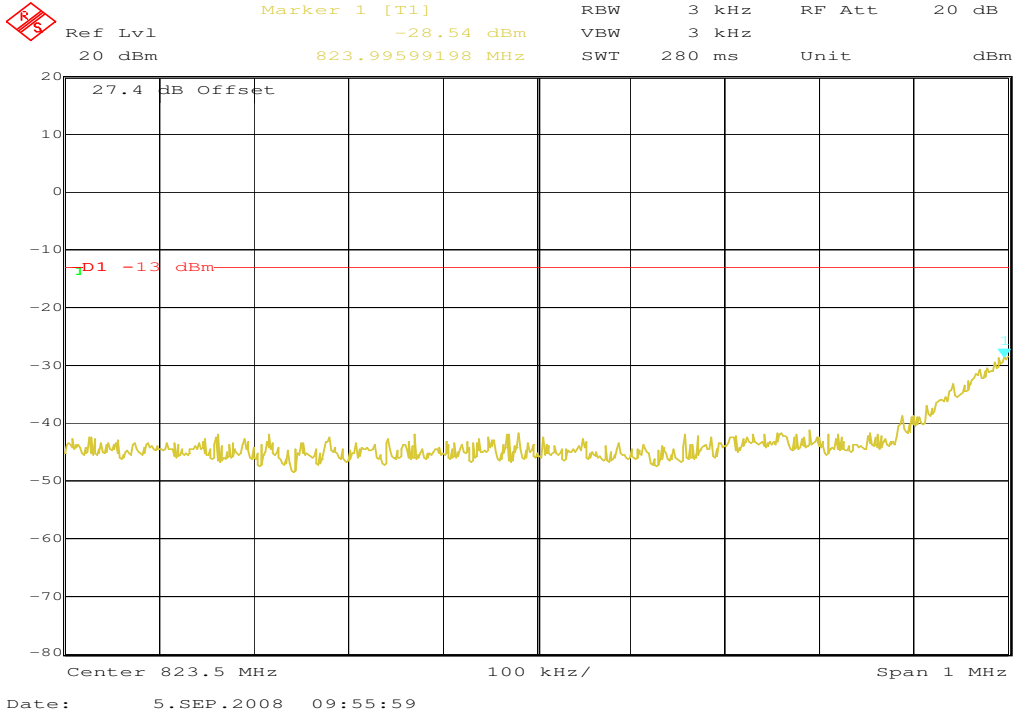

Channel 4233

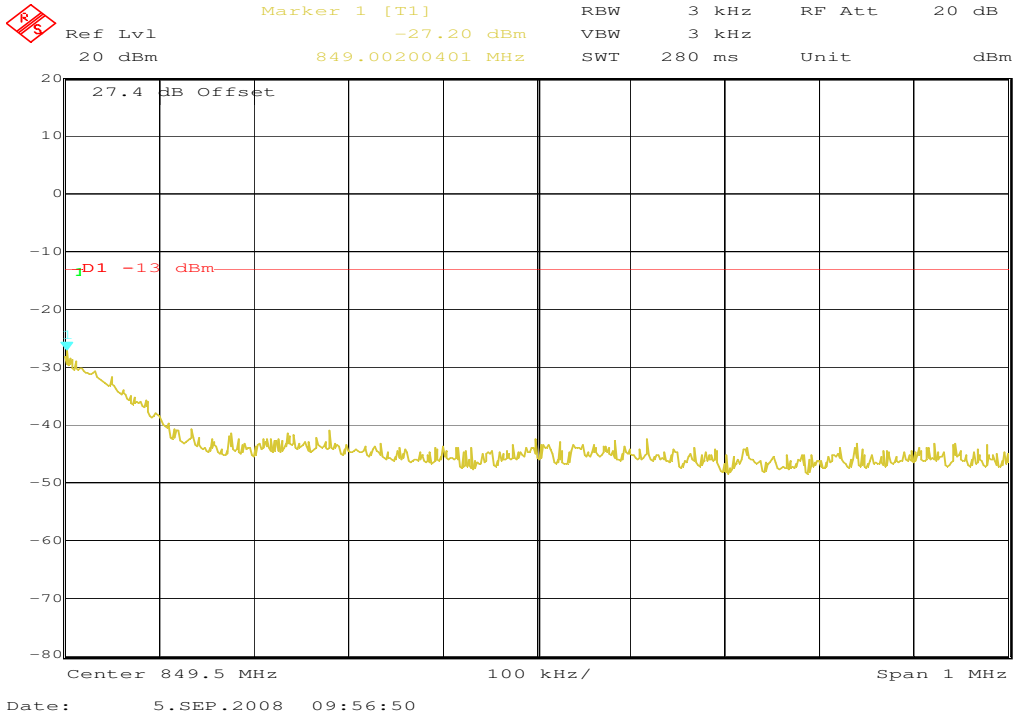

### 5.5.6 Occupied Bandwidth

#### Reference

FCC:	CFR Part 22.917, 2.1049
IC:	RSS 132, Issue 2, Section 4.2

#### Occupied Bandwidth Results

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the UMTS frequency band. Table below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Normal mode


Frequency	99% Occupied Bandwidth (kHz)	-26 dBc Bandwidth (kHz)
826.4 MHz	4.653	4.810
836.0 MHz	4.665	4.822
846.6 MHz	4.677	4.834

Part 22 requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 4.7 MHz, this equates to a resolution bandwidth of at least 47 kHz. For this testing, a resolution bandwidth 50 kHz was used.

**Channel 4132**

**99% (-20 dB) Occupied Bandwidth**

	Marker 1 [T1 ndB]	RBW	50 kHz	RF Att	20 dB
Ref Lvl	ndB	20.00 dB	VBW	50 kHz	
20 dBm	BW	4.65330661 MHz	SWT	6 ms	Unit
					dBm

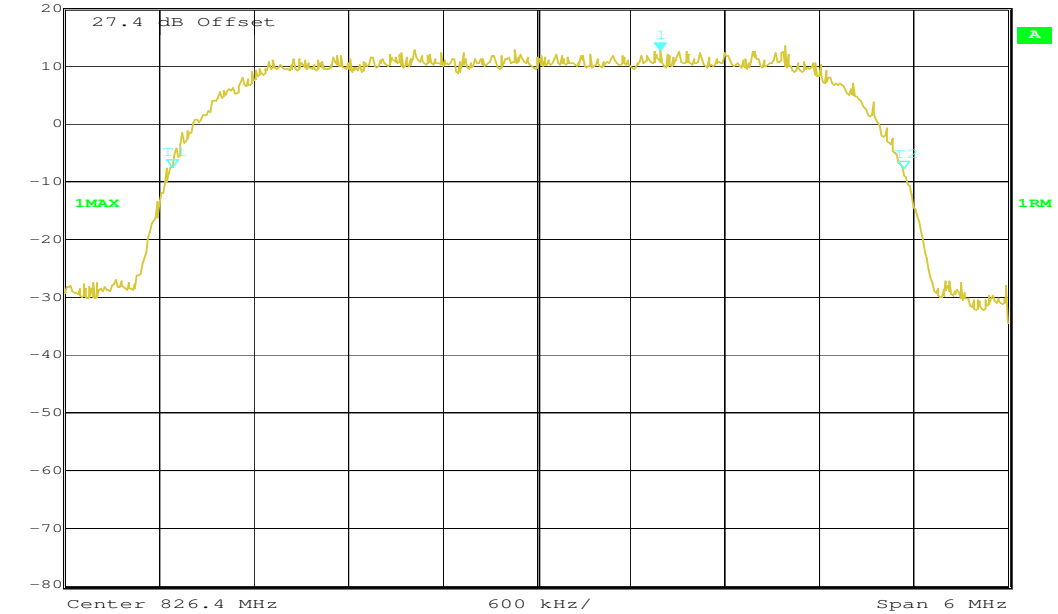


Date: 5.SEP.2008 09:59:34

**Channel 4132**


**-26 dBc Bandwidth**

	Marker 1 [T1 ndB]	RBW	50 kHz	RF Att	20 dB
Ref Lvl	ndB	26.00 dB	VBW	50 kHz	
20 dBm	BW	4.80961924 MHz	SWT	6 ms	Unit
					dBm

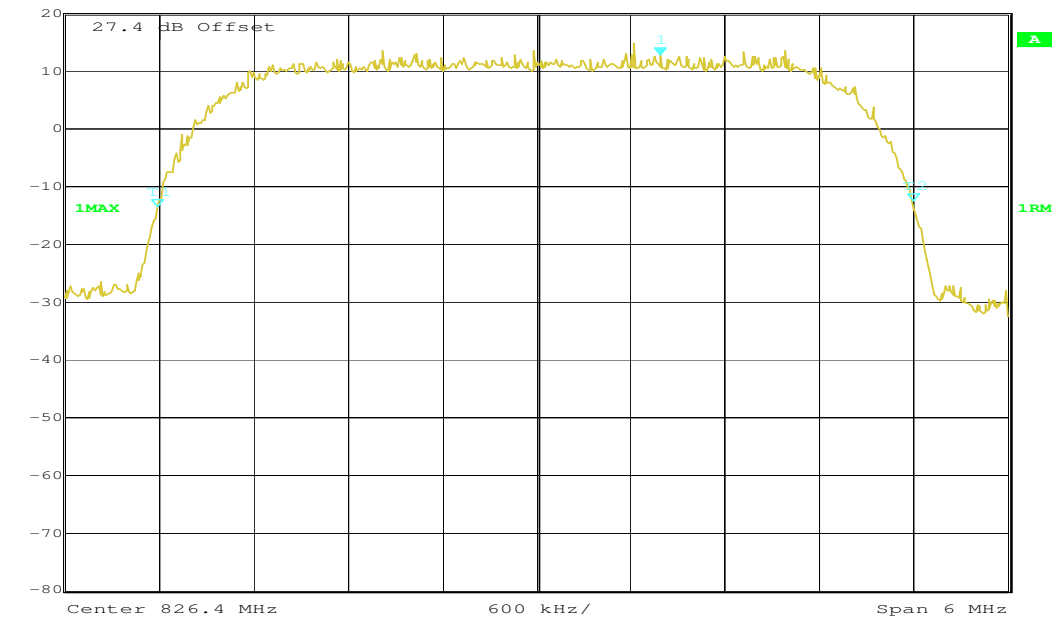


Date: 5.SEP.2008 10:00:02

**Channel 4180**  
**99% (-20 dB) Occupied Bandwidth**

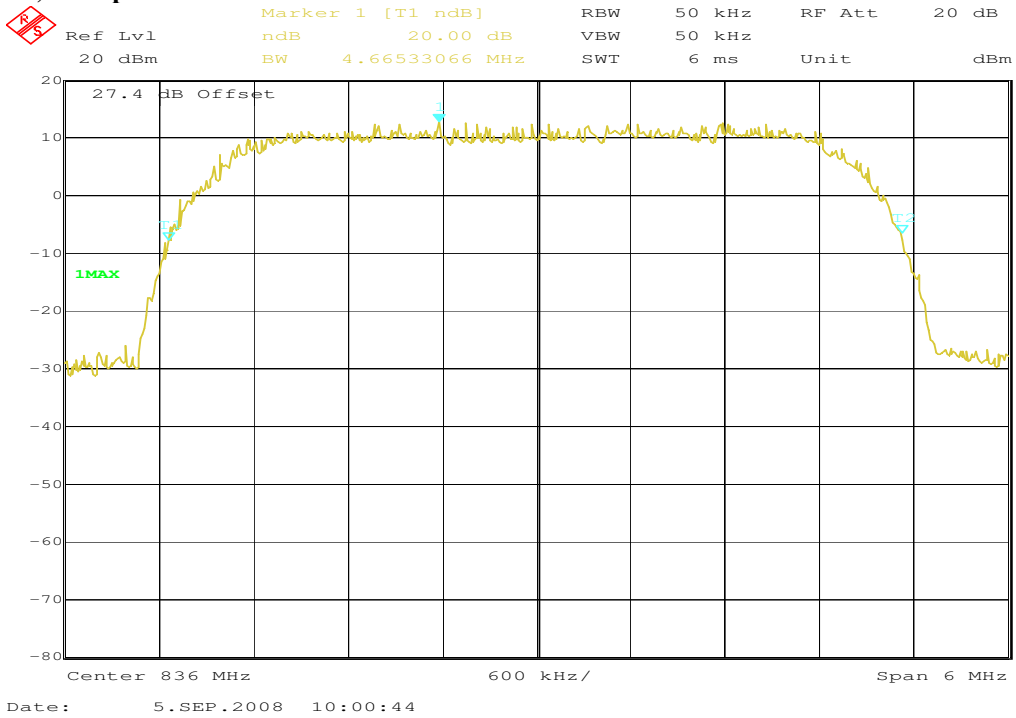


**Channel 4180**  
**-26 dBc Bandwidth**

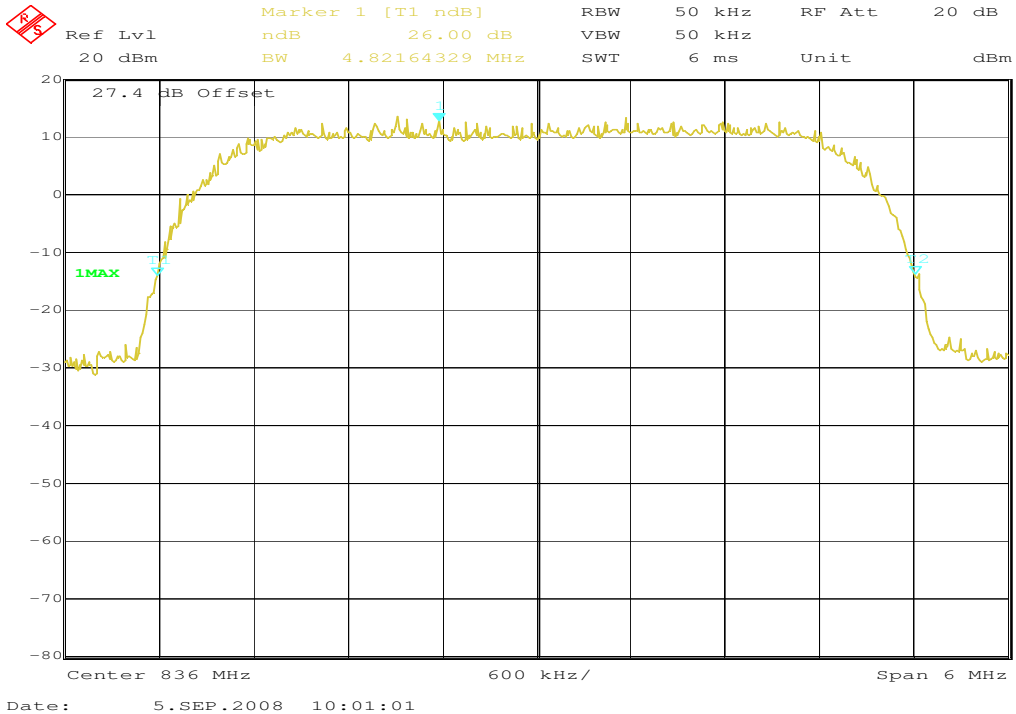

**Channel 4233**

**99% (-20 dB) Occupied Bandwidth**

	Ref Lvl	Marker 1 [T1 ndB]	RBW	50 kHz	RF Att	20 dB
	20 dBm	ndB 20.00 dB	VBW	50 kHz		
		BW 4.67735471 MHz	SWT	6 ms	Unit	dBm

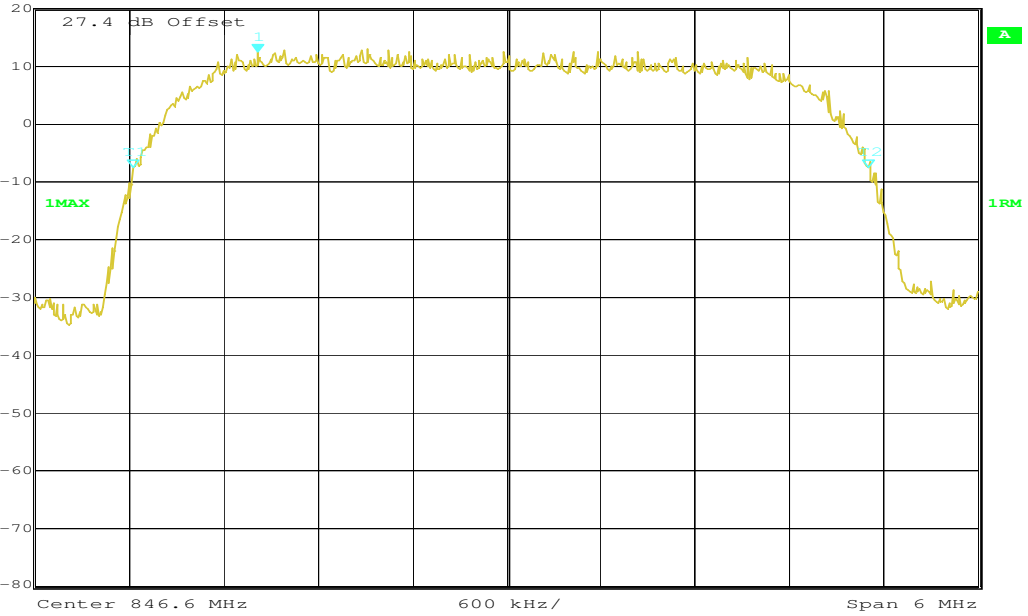


Date: 5.SEP.2008 10:01:48

**Channel 4233**

**-26 dBc Bandwidth**

	Ref Lvl	Marker 1 [T1 ndB]	RBW	50 kHz	RF Att	20 dB
	20 dBm	ndB 26.00 dB	VBW	50 kHz		
		BW 4.83366733 MHz	SWT	6 ms	Unit	dBm

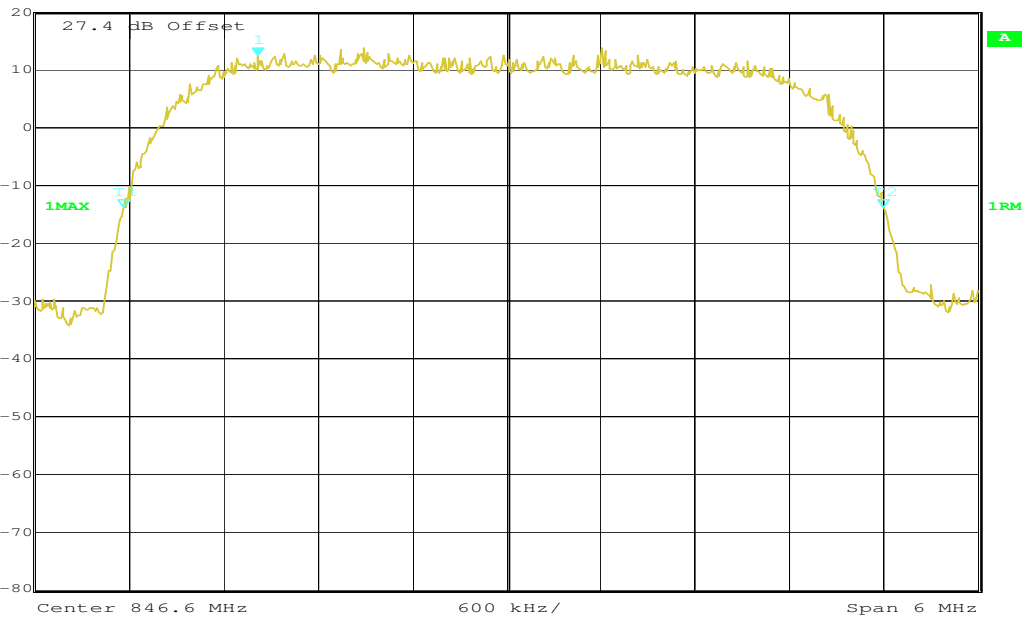

Date: 5.SEP.2008 10:02:06

## 5.6 Receiver

### 5.6.1 Receiver Radiated Emissions

#### Reference

FCC:	CFR Part 15.109, 2.1053
IC:	RSS 132, Issue 2, Section 4.6 and 6.6

#### Method of measurement

The measurement was performed in worst case. The EUT was not connected to the CMU 200. So the EUT perform a network search. In this case all oscillators are active.

#### Measurement Results

SPURIOUS EMISSIONS LEVEL (dB $\mu$ V/m)								
Idle mode			-/-			-/-		
Frequency (MHz)	Detector	Level (dB $\mu$ V/m)	Frequency (MHz)	Detector	Level (dB $\mu$ V/m)	Frequency (MHz)	Detector	Level (dB $\mu$ V/m)
No critical peaks detected !								
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

H = Horizontal; V= Vertical

Measurement distance see table

#### Limits:

§ 15.109

Frequency (MHz)	Field strength (dB $\mu$ V/m)	Measurement distance (m)
30 - 88	30.0	10
88 - 216	33.5	10
216 - 960	36.0	10
above 960	54.0	3

**Idle-Mode (30 MHz - 1 GHz)**

**Information**


EUT:	FAD-3232023-BV (MD400g)
Serial Number:	BDX0002T61
Test Description:	FCC @ 10 m
Operating Conditions:	Idle 850
Operator Name:	Folz
Comment:	

**Scan Setup: FCC\_Fin [EMI radiated]**

Hardware Setup:	EMI radiated\Electric Field (NOS)
Level Unit:	dBµV/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30MHz - 1GHz	QuasiPeak	120kHz	15s	Receiver

**FCC\_1GHz**

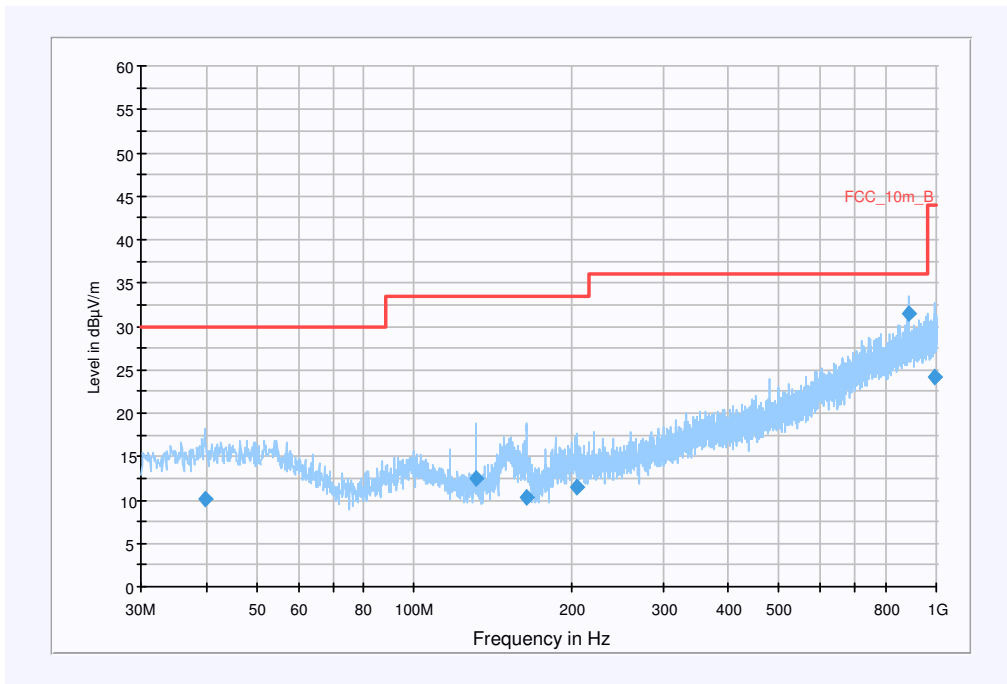

**Final Measurement Detector 1**


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
39.899950	10.1	15000.000	120.000	151.0	H	137.0	13.6	19.9	30.0	
131.472850	12.6	15000.000	120.000	146.0	V	1.0	9.6	20.9	33.5	
164.168500	10.4	15000.000	120.000	115.0	V	222.0	9.7	23.1	33.5	
204.375600	11.4	15000.000	120.000	135.0	V	105.0	12.1	22.1	33.5	
881.525050	31.5	15000.000	120.000	115.0	H	245.0	25.8	4.5	36.0	
992.069000	24.1	15000.000	120.000	100.0	V	105.0	26.9	19.9	44.0	



Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

<b>Subrange 1</b>	
Frequency Range:	30MHz - 2GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/003, FW 3.32, CAL 07.01.2009
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW ---, CAL 08.04.2010 Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table: Cabel with switch (0408)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12


### Idle-Mode (1 GHz - 4 GHz)

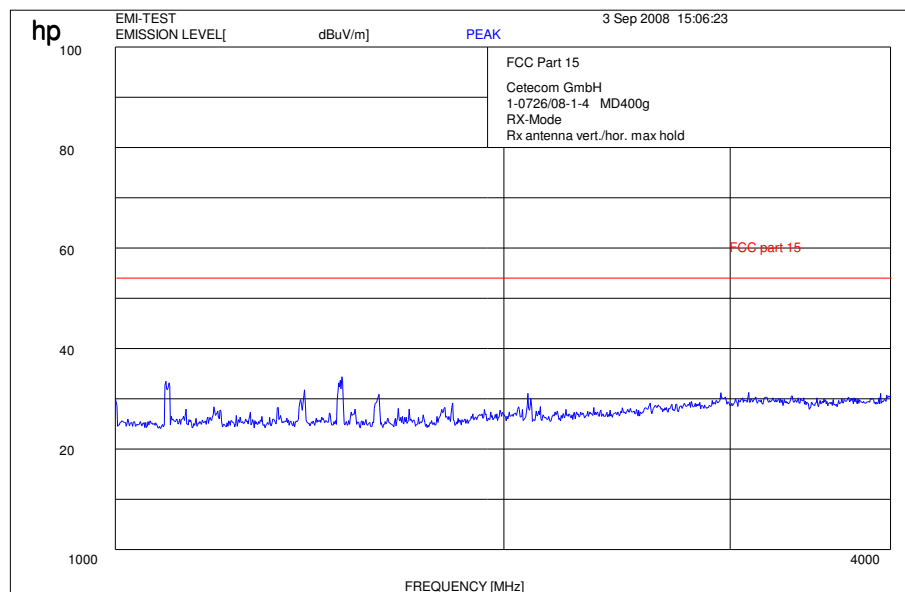

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz

## Idle-Mode (4 GHz – 12.0 GHz)

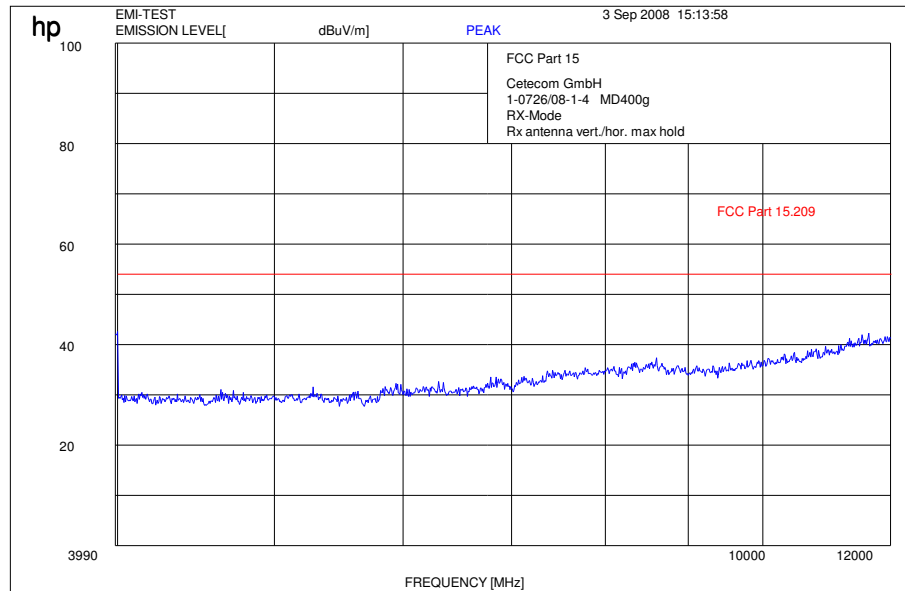

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz

## 6 Test equipment and ancillaries used for tests

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

### *Anechoic chamber C:*

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Anechoic chamber	MWB	87400/02	300000996	Monthly verification		
2	System-Rack 85900	HP I.V.	*	300000222	n.a.		
3	Measurement System 1						
4	Spektrum Analyzer 8566B	HP	3138A07614	300001207	13.12.2007	24	13.12.2009
5	Spektrum Analyzer Display 85662A	HP	3144A28627	300001208	13.12.2007	24	13.12.2009
6	Quasi-Peak-Adapter 85650A	HP	2811A01204	300002308	13.12.2007	24	13.12.2009
7	RF-Preselector 85685A	HP	2837A00778	300002448	13.12.2007	24	13.12.2009
8	PC Vectra VL	HP		300001688	n.a.		
9	Software EMI	HP		300000983	n.a.		
10	Measurement System 2						
11	FSP 30	R&S	100886	300003575	25.08.2008	24	25.08.2010
12	PC	F+W			n.a.		
13	TILE	TILE			n.a.		
14	Biconical antenna	EMCO	S/N: 860 942/003		Monthly verification (System cal.)		
15	Log. Period. Antenna 3146	EMCO	2130	300001603	Monthly verification (System cal.)		
16	Double Ridged Antenna HP 3115P	EMCO	3088	300001032	Monthly verification (System cal.)		
17	Active Loop Antenna 6502	EMCO	2210	300001015	Monthly verification (System cal.)		
18	Power Supply 6032A	HP	2818A03450	300001040	12.05.2007	36	12.05.2010
19	Busisolator	Kontron		300001056	n.a.		
20	Leitungsteiler 11850C	HP		300000997	Monthly verification (System cal.)		
21	Power attenuator 8325	Byrd	1530	300001595	Monthly verification (System cal.)		
22	Band reject filter WRCG1855/1910	Wainwright	7	300003350	Monthly verification (System cal.)		
23	Band reject filter WRCG2400/2483	Wainwright	11	300003351	Monthly verification (System cal.)		

### *Signalling Units:*

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	CBT	R&S	100313	300003516	24.10.2006	24	24.10.2008
2	CBT	R&S	100185	300003416	21.02.2006	24	21.02.2008
3	CMU-200	R&S	103992	300003231	27.04.2007	12	27.04.2008
4	CMU-200	R&S	106240	300003321	02.05.2006	24	02.05.2008
5	CMU-200	R&S	832221/0055	300002862	20.03.2008	24	20.03.2010

### *Climatic Box:*

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Climatic box VT 4002	Heraeus Vötsch	58566046820010	300003019	11.05.2007	24	11.05.2009
2	Climatic box CTS T-40/50	CTS	064023	300003540	03.01.2007	24	03.01.2009

**SRD Laboratory Room 005:**

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Spektrum Analyzer 8566B	HP	2747A05275	300000219	08.11.2006	24	08.11.2008
2	Spektrum Analyzer Display 85662A	HP	2816A16497	300001690	08.11.2006	24	08.11.2008
3	Quasi-Peak-Adapter 85650A	HP	2811A01135	300000216	08.11.2006	24	08.11.2008
4	Power Supply	Heiden	003202	300001187	12.05.2007	36	12.05.2010
5	Power Supply	Heiden	1701	300001392	12.05.2007	36	12.05.2010

**SRD Laboratory Room 011:**

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	NRP Power Meter	R&S	100212	300003780	27.02.2008	24	27.02.2010

**Anechoic chamber F:**

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Control Computer	F+W	FW0502032	300003303	-/-	-/-	-/-
2	Trilog Antenna	9163-295	-/-	-/-	30.04.2008	24	30.04.2010
3	Amplifier - 0518C-138	Veritech Micro-wave Inc.	-/-	-/-	-/-	-/-	-/-
4	Switch - 3488A	HP		300000368	-/-	-/-	-/-
5	EMI Test receiver - ESCI	R&S	100083	300003312	31.01.2009	24	31.01.2009
6	Turntable Controller - 1061 3M	EMCO	1218	300000661	-/-	-/-	-/-
7	Tower Controller 1051 Controller	EMCO	1262	300000625	-/-	-/-	-/-
8	Tower - 1051	EMCO	1262	300000625	-/-	-/-	-/-
10	Ultra Notch-Filter Rejected band Ch. 62	WRCD	9	-/-	-/-	-/-	-/-