

FCC Test Report

FCC EVALUATION REPORT FOR VERIFICATION

| | |
|-----------------------|---|
| Project Reference No. | 161388 |
| Product | Baby monitor |
| Brand Name | / |
| Model | 02090ARX |
| Alternate Model | N/A |
| Tested according to | FCC Rules and Regulations Part 15 Subpart B Class B 2008, ANSI C63.4-2009 |

| | |
|---------------------------------------|---|
| Tested in period | 2010-12-19 to 2010-12-24 |
| Issued date | 2010-12-24 |
| Name and address of the Test House | Nemko Nemko Shanghai Ltd. 7F, No.1 Building, No. 2007 Hong Mei Road, Xuhui district, Shanghai, P.R. China Phone : +86 21 5072 0988 Fax : +86 21 5072 0950 |
| Tested by | <i>Zone Peng</i> 2010-12-27 |
| | <i>Zone Peng</i> <i>date</i> |
| Verified by | <i>Daria Liu</i> 2010-12-27 |
| | <i>Daria Liu</i> <i>date</i> |

This form is only for use by Nemko, or by others according to special agreement with Nemko. The report may be reproduced in full. Partial reproduction may only be made with the written consent of Nemko Shanghai. This report applies only to the sample(s) tested. It is the manufacturer's responsibility to assure the additional production units of this product are manufactured with identical electrical and mechanical components.

Contents of This Report

| | |
|---|----|
| 1. Client Information | 3 |
| 1.1 Applicant | 3 |
| 1.2 Manufacturer..... | 3 |
| 1.3 Scope | 3 |
| 2. Equipment under Test (EUT)..... | 4 |
| 2.1 Identification of EUT | 4 |
| 2.2 Setup drawing | 4 |
| 2.3 Additional Information Related to Testing | 4 |
| 3. General Test Conditions | 4 |
| 3.1 Location | 4 |
| 3.2 Operating Environment..... | 5 |
| 3.3 Operating During Test..... | 5 |
| 3.4 Test Equipment | 5 |
| 4. Measurement Uncertainty | 5 |
| 5. Conducted Emission (150 KHz to 30 MHz) | 6 |
| 5.1 Test Procedure..... | 6 |
| 5.2 Measurement Equipment..... | 6 |
| 5.3 Test Result | 6 |
| 5.3.1 Diagram 001 | 7 |
| 5.3.2 Diagram 002 | 8 |
| 6. Radiated Electromagnetic Disturbances..... | 9 |
| 6.1 Test Procedure..... | 9 |
| 6.2 Measurement Equipment..... | 9 |
| 6.3 Test Result | 9 |
| 6.3.1 Diagram 003 | 10 |
| 6.3.2 Diagram 004 | 11 |
| 6.3.3 Diagram 005 | 12 |
| 6.3.4 Diagram 006 | 13 |
| 6.3.5 Diagram 007 | 14 |
| 6.3.6 Diagram 008 | 15 |
| 6.3.7 Diagram 009 | 16 |
| 6.3.8 Diagram 010 | 17 |
| 6.3.1 Diagram 011..... | 18 |
| 6.3.2 Diagram 012 | 19 |
| 6.3.3 Diagram 013 | 20 |
| 6.3.4 Diagram 014 | 21 |
| 6.3.5 Diagram 015 | 22 |
| 6.3.6 Diagram 016 | 23 |
| 6.3.7 Diagram 017 | 24 |
| 6.3.8 Diagram 018 | 25 |
| Appendix A Sample Label | 26 |



FCC ID :PZK02090ARX

Reference No.: 161388

1. Client Information

1.1 Applicant

Company Name: **Summer Infant, Inc.**

582 Great Road

Company Address: **North Smithfield, RI, 02896
USA**

1.2 Manufacturer

Company Name: **Foshan Shunde Alford Electronics Co. Ltd.**

Company Address: **Xinjiao Industrial Park, Daliang, Shunde, Foshan City,
Guangdong Province, China**

1.3 Scope


- Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 15.

2. Equipment under Test (EUT)

2.1 Identification of EUT

| | |
|--------------------------------|--|
| Category: | Baby Monitor |
| Model Name: | 02090ARX |
| Alternate model: | N/A |
| Brand name: | N/A |
| Technical data (Rating, etc.): | Input: 120V/60Hz Only RX, no TX Receiver :910MHz - 921MHz HON-KWANG Model: D75750CEC Input : 120VAC 60Hz Output: 7.5VDC 750mA |
| AC to DC adapter | |

2.2 Setup drawing

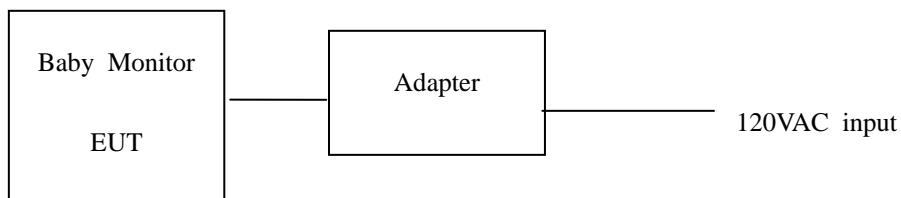

2.3 Additional Information Related to Testing

Test mode

- TM1 120V~ 60Hz, Rx mode & Channel A, AV out**
- TM2 120V~ 60Hz, Rx mode & Channel B, AV out**
- TM3 120V~ 60Hz, Rx mode & Channel A, Earphone out**
- TM4 120V~ 60Hz, Rx mode & Channel B, Earphone out**

Remark: AV out and Earphone out cannot work together

Remark: 3 axes of EUT are pretest and Only list worse result in the report

3. General Test Conditions

3.1 Location

These measurement tests were conducted at Shenzhen Timeway Technology Consulting Co., Ltd. East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. Chegongmiao, Futian District, Shenzhen, China—ELA 611

FCC-Registration No.: 899988

IC- Registration No.: IC5205A-01

Note: all test are witnessed by NEMKO engineer

3.2 Operating Environment

All tests and measurements were performed in a shielded enclosure or a controlled environment suitable for the tests conducted. The climatic conditions in the test area are automatically controlled and recorded continuously.

| Parameters | Recording during test | Accepted deviation |
|----------------------|-----------------------|--------------------|
| Ambient temperature | 20-25°C | 15 – 35 °C |
| Relative humidity | 45-55% | 30 - 60% |
| Atmospheric pressure | 101.2 kPa -101.3kPa | 86-106kPa |

3.3 Operating During Test

- The EUT is operated at 120V a.c. 60Hz during all tests.

3.4 Test Equipment

The test equipments used in testing are calibrated on a regular basis. For most of the testing equipments accredited calibration is conducted once a year. For certain equipment the calibration interval is longer. Between the calibrations all test equipment are controlled and verified on a regular basis. The test equipments used are defined in each test section of this report.

AE equipment:

Earphone : FCCVOC

4. Measurement Uncertainty

The Measurement Uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 with the confidence level of 95 %.

| No. | Item | Uncertainty | Remark |
|-----|-------------------------|-------------|------------|
| 1 | Conducted Emission Test | 3.6dB | |
| 2 | Radiated Emission Test | 4.7dB | 3m chamber |

5. Conducted Emission (150 KHz to 30 MHz)

5.1 Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network. This provided a 50-ohm coupling impedance for the EUT (Please refer to the test setup photographs). The other peripheral devices power cord connected to the power mains through another line impedance stabilization network.

Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4-2009 on conducted Emission test.

The bandwidth of test receiver is set at 9kHz. The frequency range from 150kHz to 30MHz is checked. The test result are reported as below.

5.2 Measurement Equipment


| | Equipment | Last Calibration | Type | Serial No. | Manufacturer |
|-------------------------------------|-------------------|------------------|------------|------------|--------------|
| <input checked="" type="checkbox"/> | EMI Receiver | 2010.5.14 | ESH3 | 860905/006 | R & S |
| <input checked="" type="checkbox"/> | Spectrum Analyzer | 2010.5.14 | ESA-L1500A | US37451154 | R & S |
| <input checked="" type="checkbox"/> | PULSE LIMITER | 2010.5.14 | ESH3-Z2 | 100281 | R & S |
| <input checked="" type="checkbox"/> | LISN | 2010.5.14 | ESH3-Z5 | 100294 | R & S |

5.3 Test Result

| Model | Test mode | Power Line | Test Data | Test Result |
|----------|-----------|------------|-------------|-------------|
| 02090ARX | TM3 | Line | Diagram 001 | Pass |
| | | Neutral | Diagram 002 | Pass |

NOTES:


1. Measurements using CISPR quasi-peak mode & average mode.
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. Correct factor = LISN Factor + Cable Loss
4. The limit for Class B device is on the FCC Part section 15.107(a).
6. If PK value is lower than AV limit then no reading value listed in report .If QP value is Lower than AV limit ,then AV value don't listed in report.
7. By pre-scan, TM3(Rx Mode & Channal A, earphone out) is the worse mode, only list the worse mode in this report.

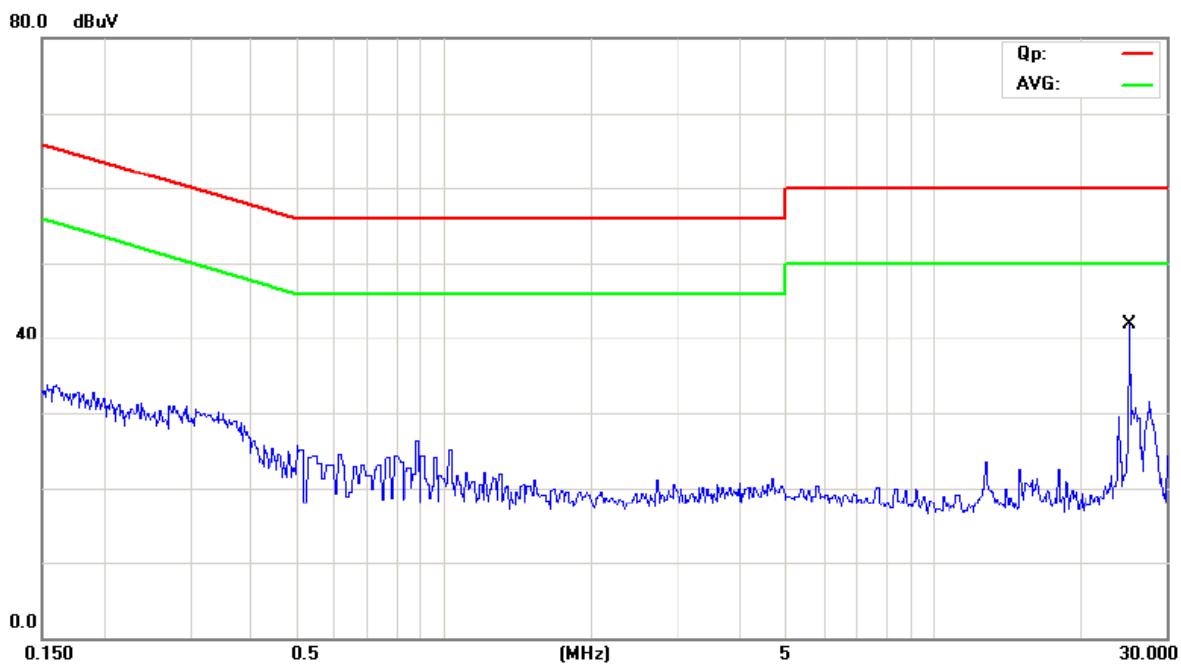5.3.1 Diagram 001*Model: 02090ARX, Test Mode: TM3, Line: L*

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dB | Over Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|-------------|------------------|
| 1 | | 25.1743 | 33.30 | 11.40 | 44.70 | 60.00 | -15.30 QP |
| 2 | * | 25.1743 | 32.50 | 11.40 | 43.90 | 50.00 | -6.10 AVG |

5.3.2 Diagram 002

Model: 02090ARX, Test Mode: TM3, Line: N

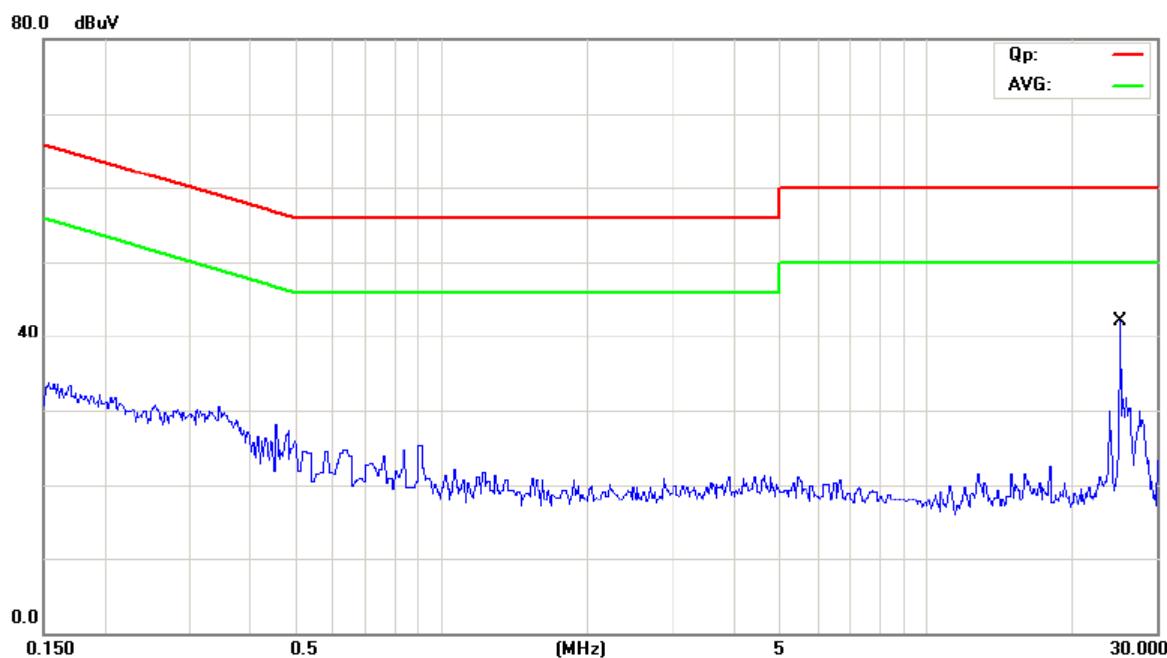

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dB | Over Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|-------------|------------------|
| 1 | | 25.1747 | 29.80 | 11.40 | 41.20 | 60.00 | -18.80 QP |
| 2 * | | 25.1747 | 31.40 | 11.40 | 42.80 | 50.00 | -7.20 AVG |

6. Radiated Electromagnetic Disturbances

6.1 Test Procedure

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. An antenna was located 3m or 10m from the EUT on an adjustable mast.

The EUT were rotated 0 to 360 degree and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. The test result are reported as below.

For below 1GHz

RBW=120 kHz; VBW=300KHz. The frequency range from 30MHz to 1000MHz is checked.

For above 1GHz

RBW=1MHz ; VBW=1MHz,PK detector for peak emissions measurement above 1GHz

RBW=1MHz ; VBW=10Hz, PK detector for average emissions measure above 1GHz

6.2 Measurement Equipment

| | Equipment | Last Calibration | Type | Serial No. | Manufacturer |
|-------------------------------------|---------------------|------------------|-----------|------------|--------------|
| <input checked="" type="checkbox"/> | Spectrum Analyzer | 2010-5-14 | FSEM | 848597、001 | RS |
| <input checked="" type="checkbox"/> | Ultra Broadband ANT | 2010-5-14 | VULB9163 | 9163/340 | Schwarebeck |
| <input checked="" type="checkbox"/> | Pre-amplifier | 2010-5-14 | 8447D | 2727A05017 | HP |
| <input checked="" type="checkbox"/> | Pre-amplifier | 2010-5-14 | EM30265 | 2727A05017 | EM |
| <input checked="" type="checkbox"/> | Signal Generator | 2010-5-14 | 8657B | 3208U02589 | HP |
| <input checked="" type="checkbox"/> | Horn Antenna | 2010-5-14 | BBHA9120D | 1201 | Schwarebeck |

6.3 Test Result


| Model | Test mode | Frequency range | Antenna Polarity | Test Data | Test Result |
|----------|-----------|--------------------------------|------------------|-------------|-------------|
| 02090ARX | TM1 | 30MHz~1GHz 3m test distance | Horizontal | Diagram 003 | Pass |
| | | | Vertical | Diagram 004 | Pass |
| | TM2 | 30MHz~1GHz 3m test distance | Horizontal | Diagram 005 | Pass |
| | | | Vertical | Diagram 006 | Pass |
| | TM3 | 30MHz~1GHz 3m test distance | Horizontal | Diagram 007 | Pass |
| | | | Vertical | Diagram 008 | Pass |
| | TM4 | 30MHz~1GHz 3m test distance | Horizontal | Diagram 009 | Pass |
| | | | Vertical | Diagram 010 | Pass |
| | TM1 | 1GHz~5GHz 3m test distance | Horizontal | Diagram 011 | Pass |
| | | | Vertical | Diagram 012 | Pass |
| | TM2 | 1GHz~5GHz 3m test distance | Horizontal | Diagram 013 | Pass |
| | | | Vertical | Diagram 014 | Pass |
| | TM3 | 1GHz~5GHz 3m test distance | Horizontal | Diagram 015 | Pass |
| | | | Vertical | Diagram 016 | Pass |
| | TM4 | 1GHz~5GHz 3m test distance | Horizontal | Diagram 017 | Pass |
| | | | Vertical | Diagram 018 | Pass |

NOTES:

1. All modes were measured and the worst case emission was reported.
2. Measurements using CISPR quasi-peak mode.
3. The limit for Class B device is on the FCC Part section 15.109(a).
- 4: If the PK value is lower than AV limit ,then AV value is deemed to comply with AV limit too .

6.3.1 Diagram 003


Model: 02090ARX, Test Mode: TM1, Frequency Range: 30MHz-1GHz Horizontal

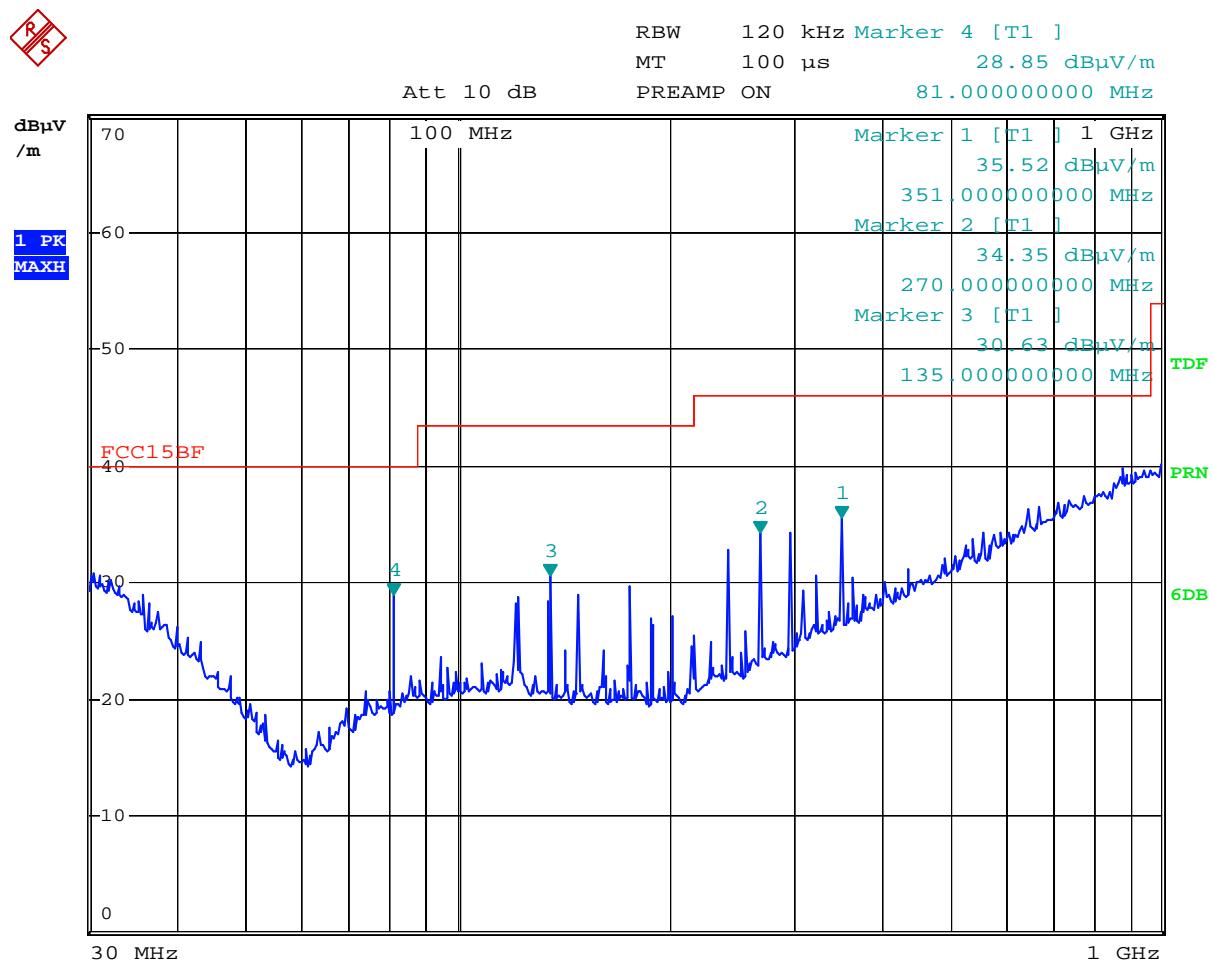

Date: 24.DEC.2010 08:13:17

6.3.2 Diagram 004


Model: 02090ARX, Test Mode: TMI, Frequency Range: 30MHz-1GHz Vertical

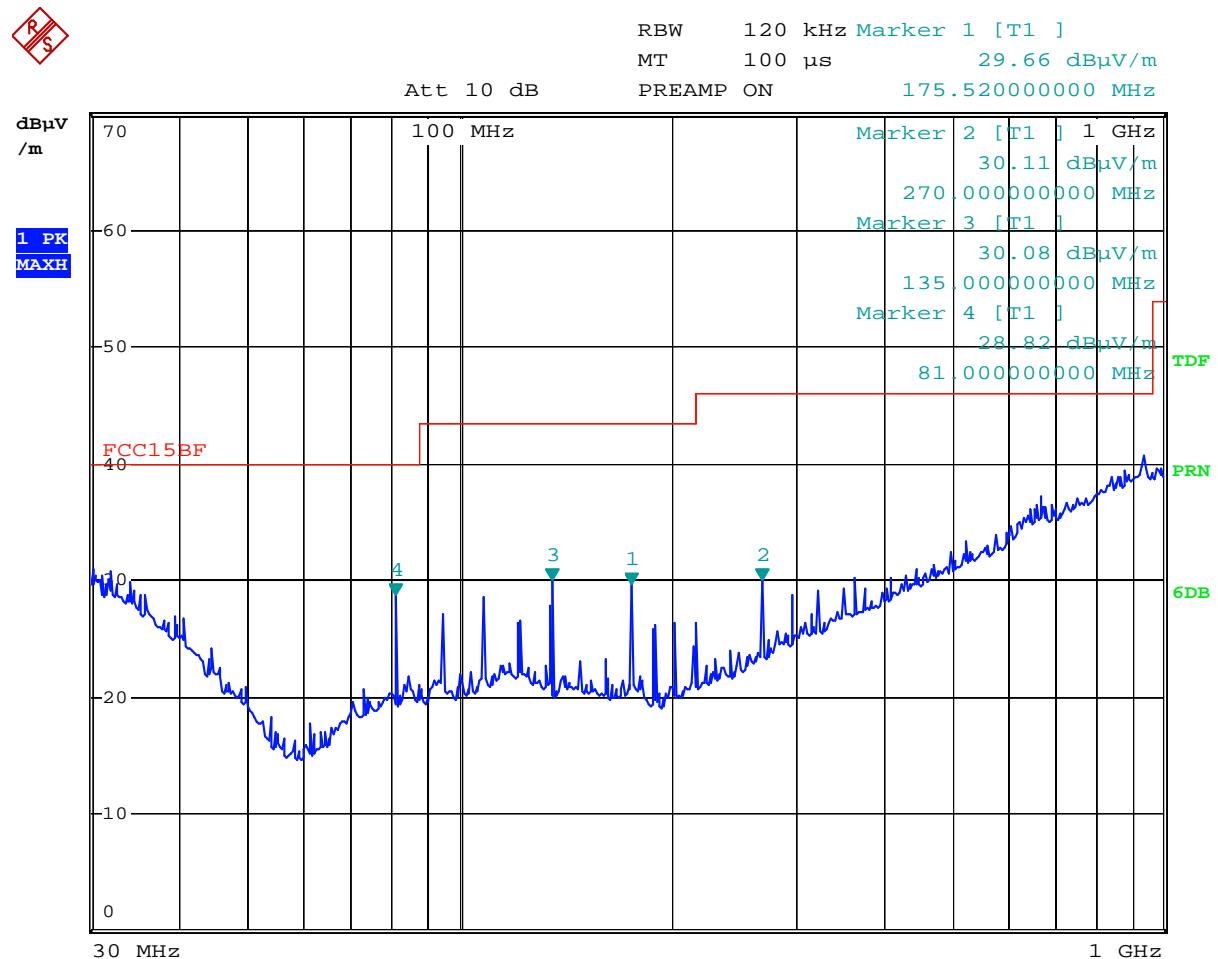

Date: 24.DEC.2010 08:06:02

6.3.3 Diagram 005


Model: 02090ARX, Test Mode: TM2, Frequency Range: 30MHz-1GHz Horizontal

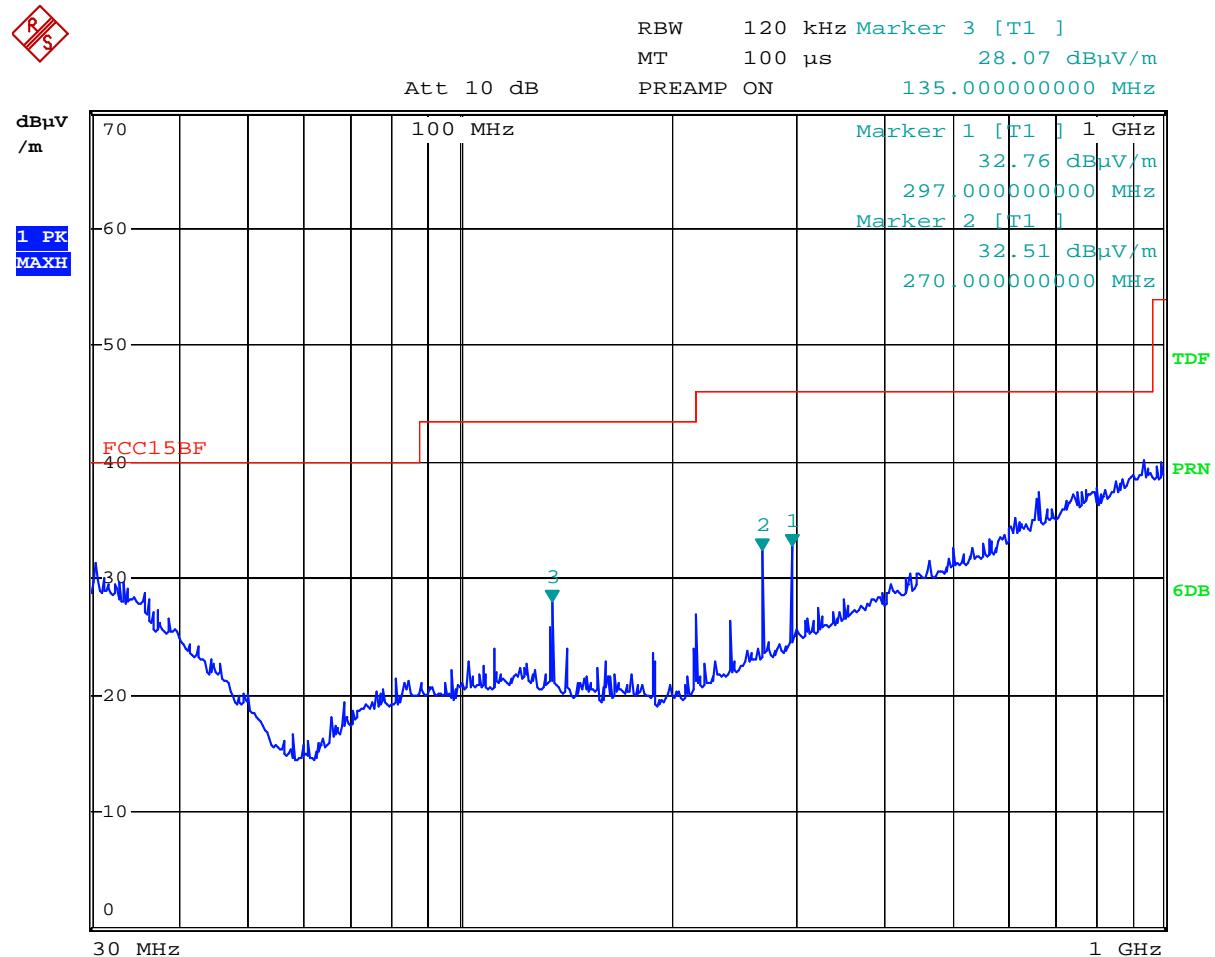

Date: 24.DEC.2010 12:10:50

6.3.4 Diagram 006


Model: 02090ARX, Test Mode: TM2, Frequency Range: 30MHz-1GHz Vertical

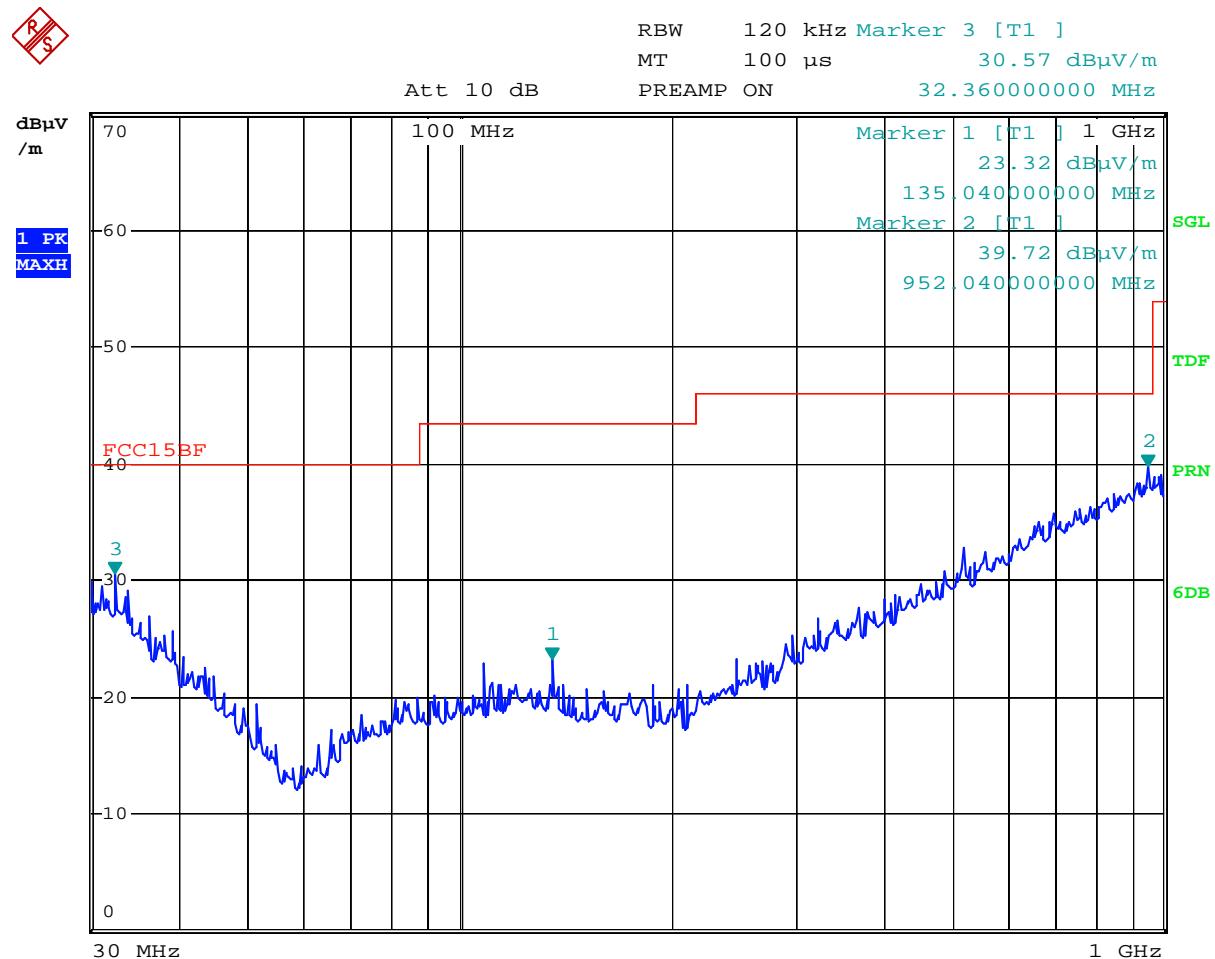

Date: 24.DEC.2010 12:16:29

6.3.5 Diagram 007


Model: 02090ARX, Test Mode: TM3, Frequency Range: 30MHz-1GHz Horizontal

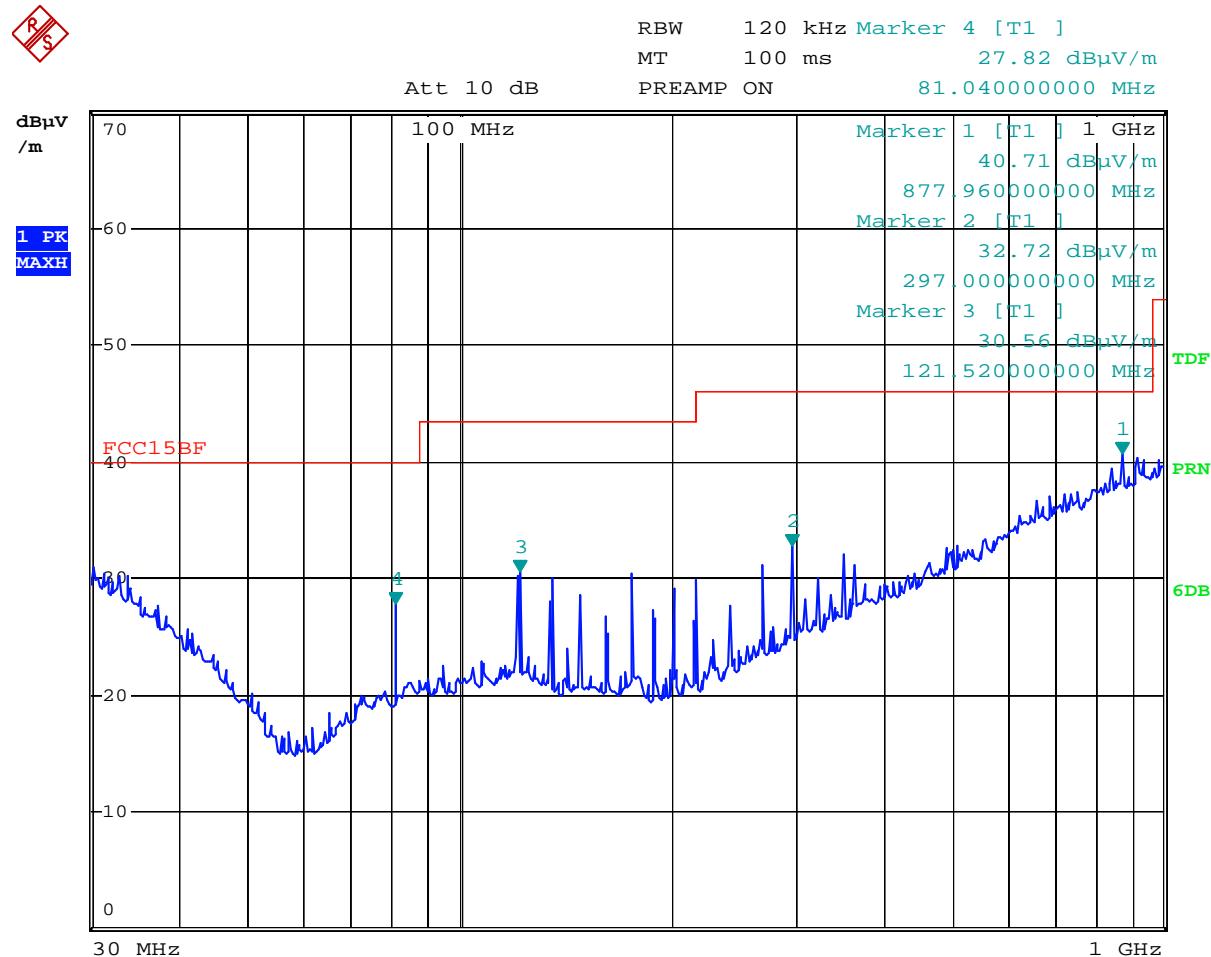

Date: 24.DEC.2010 07:53:00

6.3.6 Diagram 008


Model: 02090ARX, Test Mode: TM3, Frequency Range: 30MHz-1GHz Vertical

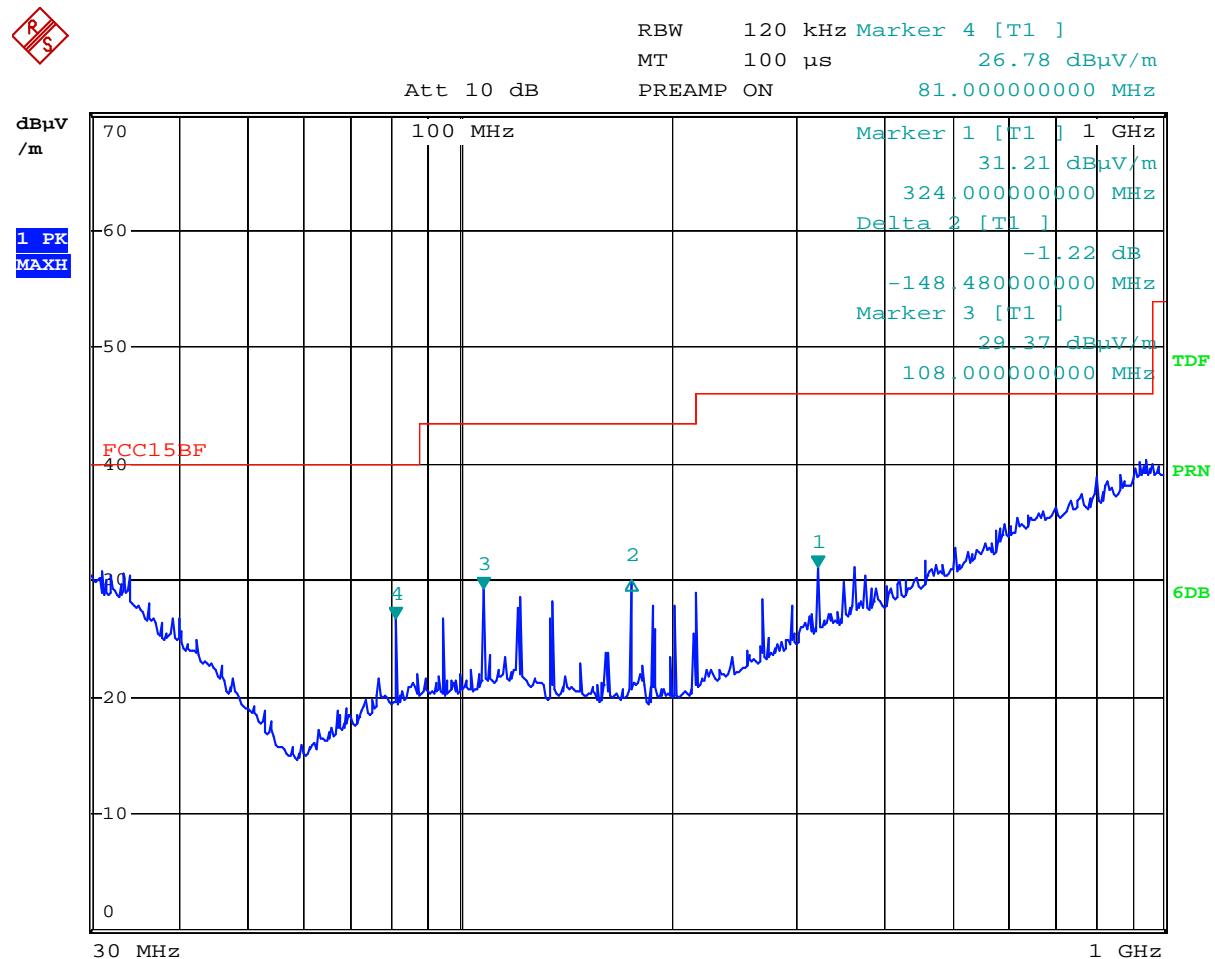

Date: 24.DEC.2010 07:56:05

6.3.7 Diagram 009


Model: 02090ARX, Test Mode: TM4, Frequency Range: 30MHz-1GHz Horizontal

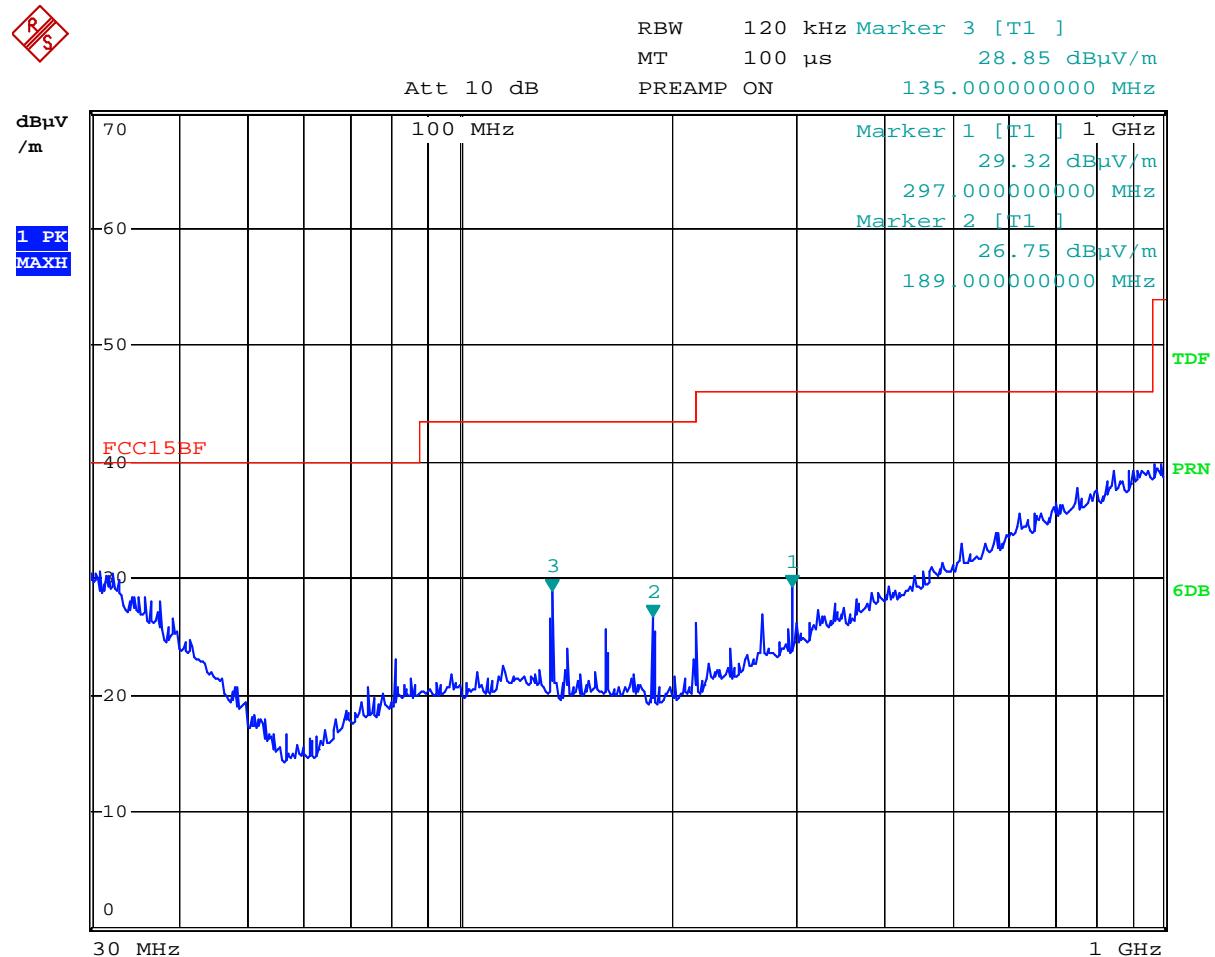

Date: 24.DEC.2010 12:32:27

6.3.8 Diagram 010

Model: 02090ARX, Test Mode: TM4, Frequency Range: 30MHz-1GHz Vertical

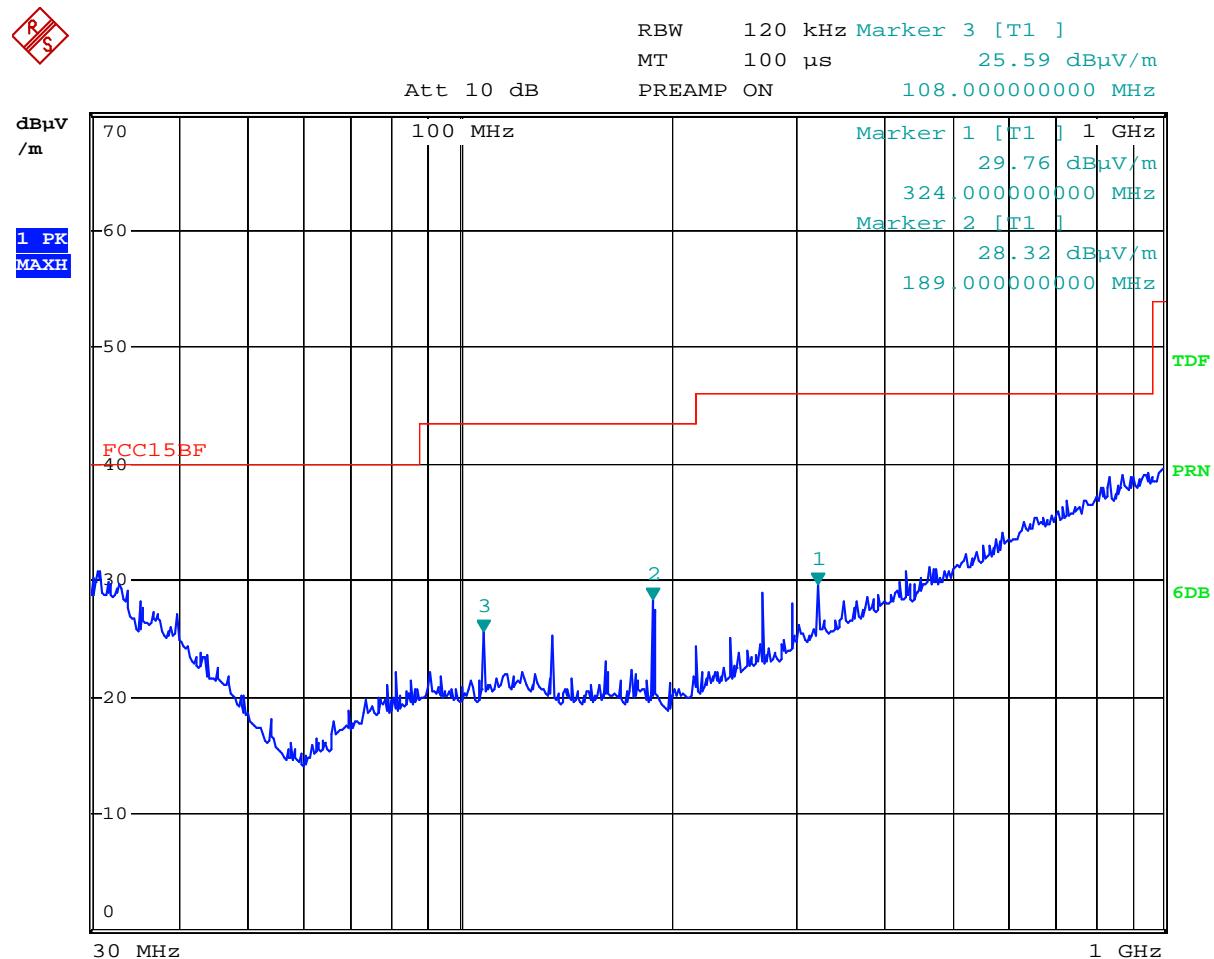


Date: 24.DEC.2010 12:23:29

6.3.1 Diagram 011*Model: 02090ARX, Test Mode: TMI, Frequency Range: 1GHz-5GHz Horizontal***Measurement Result:**

| Marker | Frequency MHz | Peak Measurement dBuV/m | Limit dBuV/m | Polarization |
|--------|------------------|----------------------------|-----------------|--------------|
| 1 | 1950.170 | 30.35 | 74 | Horizontal |
| 2 | 2500.000 | 31.62 | 74 | Horizontal |

6.3.2 Diagram 012

Model: 02090ARX, Test Mode: TMI, Frequency Range: 30MHz-1GHz Vertical

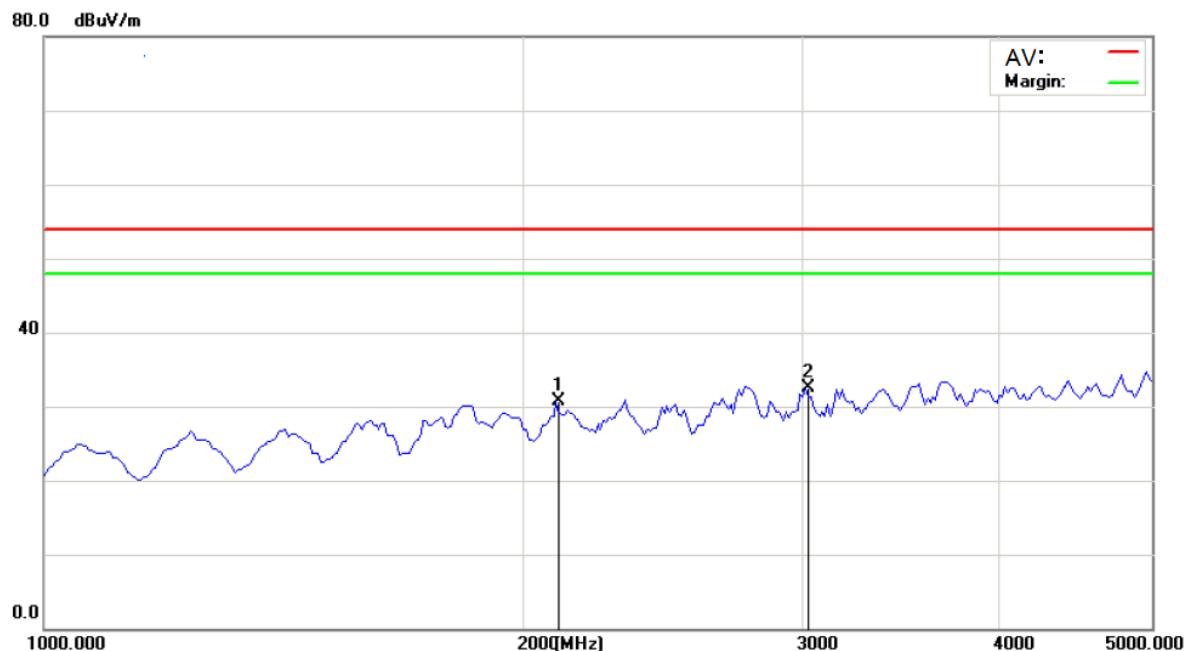


Measurement Result:

| Marker | Frequency MHz | Peak Measurement dBuV/m | Limit dBuV/m | Polarization |
|--------|------------------|----------------------------|-----------------|--------------|
| 1 | 2110.000 | 30.72 | 74 | Vertical |
| 2 | 3030.000 | 32.41 | 74 | Vertical |


6.3.3 Diagram 013

Model: 02090ARX, Test Mode: TM2, Frequency Range: 1GHz-5GHz Horizontal

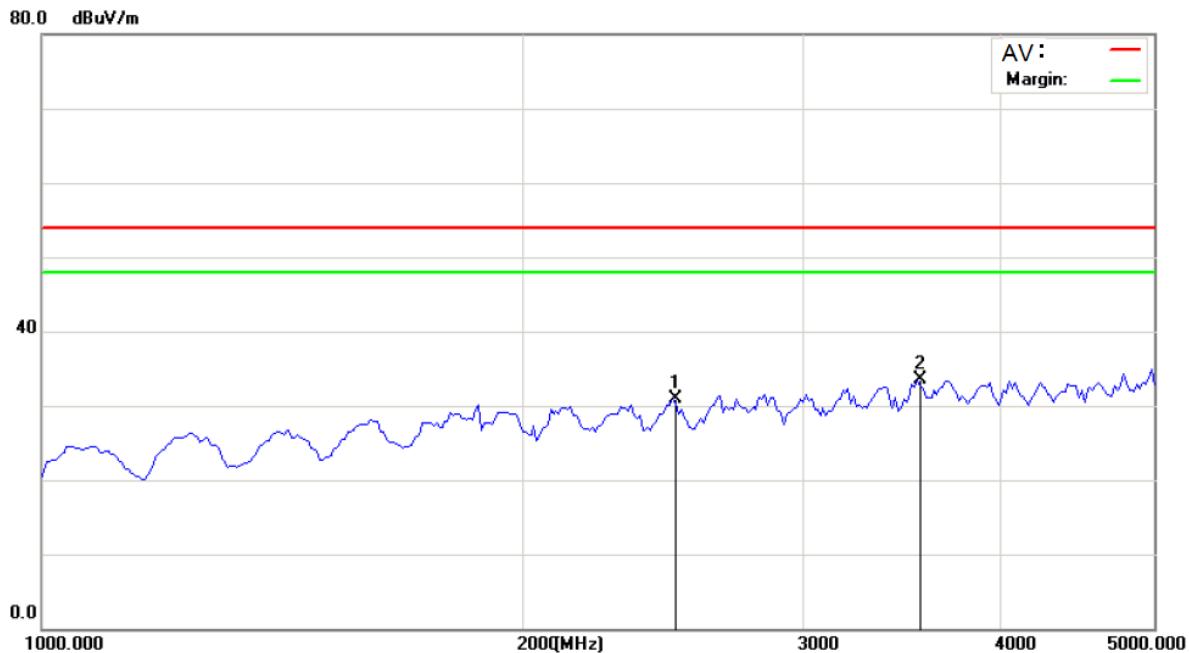

Measurement Result:


| Marker | Frequency MHz | Peak Measurement dBuV/m | Limit dBuV/m | Polarization |
|--------|------------------|----------------------------|-----------------|--------------|
| 1 | 2500.000 | 30.97 | 74 | Horizontal |
| 2 | 3560.000 | 33.45 | 74 | Horizontal |

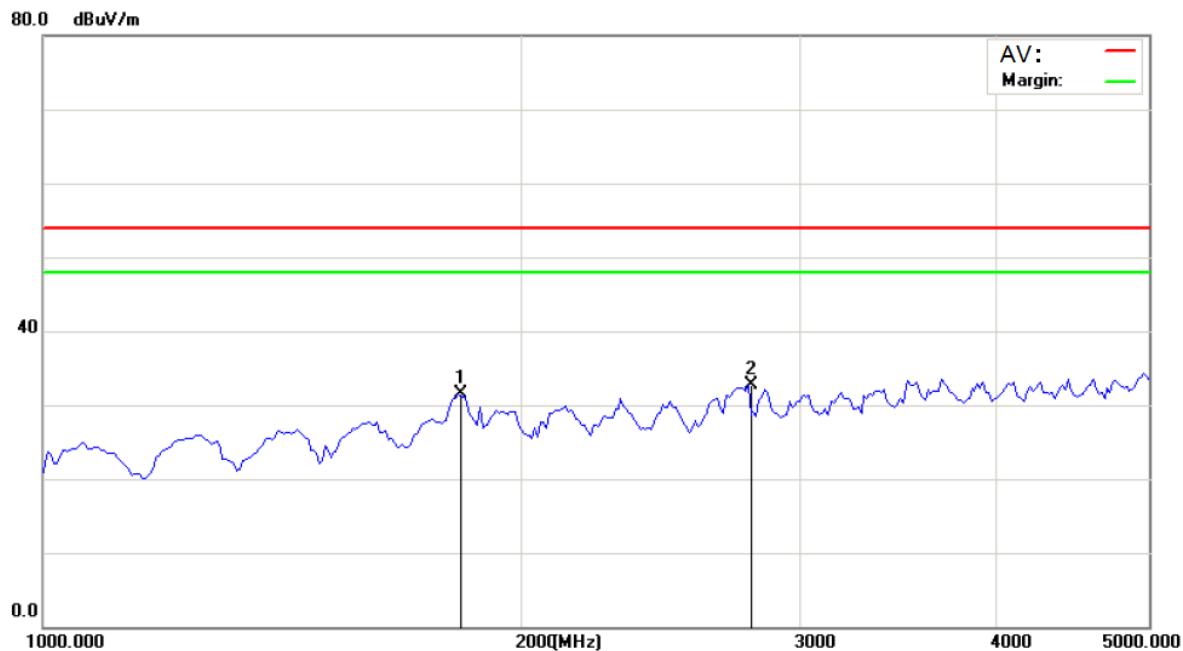6.3.4 Diagram 014*Model: 02090ARX, Test Mode: TM2, Frequency Range: 1GHz-5GHz Vertical***Measurement Result:**

| Marker | Frequency MHz | Peak Measurement dBuV/m | Limit dBuV/m | Polarization |
|--------|------------------|----------------------------|-----------------|--------------|
| 1 | 1830.000 | 31.50 | 74 | Vertical |
| 2 | 2790.000 | 32.75 | 74 | Vertical |


6.3.5 Diagram 015

Model: 02090ARX, Test Mode: TM3, Frequency Range: 1GHz-5GHz Horizontal

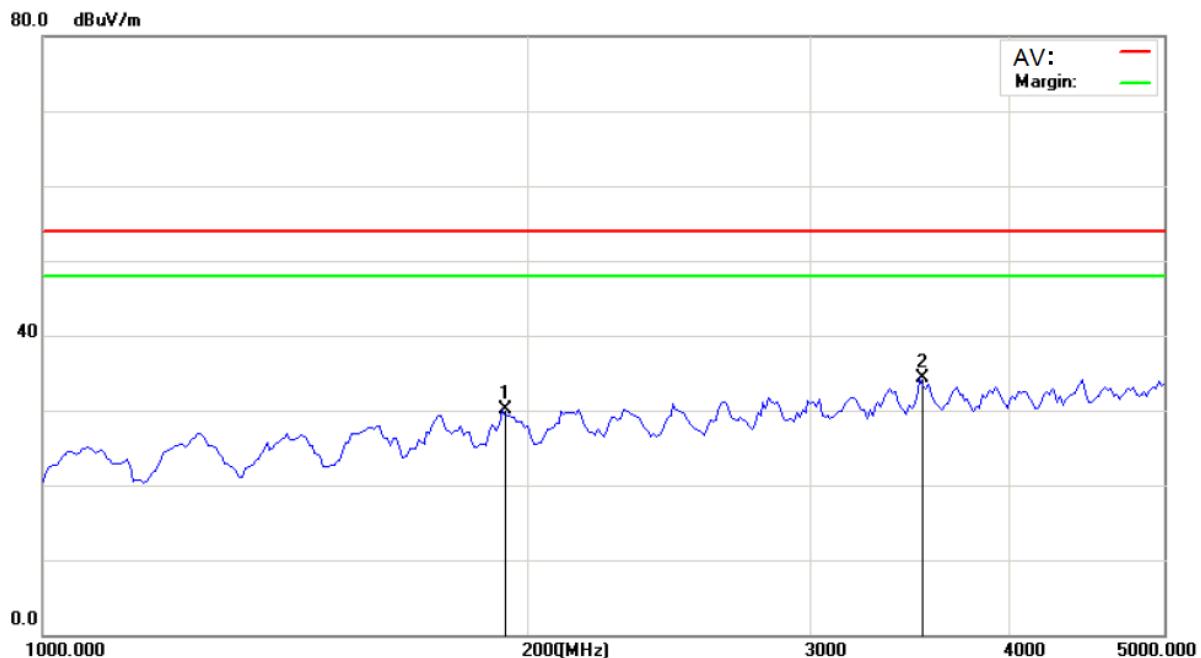


Measurement Result:


| Marker | Frequency MHz | Peak Measurement dBuV/m | Limit dBuV/m | Polarization |
|--------|------------------|----------------------------|-----------------|--------------|
| 1 | 1940.000 | 30.19 | 74 | Horizontal |
| 2 | 3530.000 | 34.23 | 74 | Horizontal |

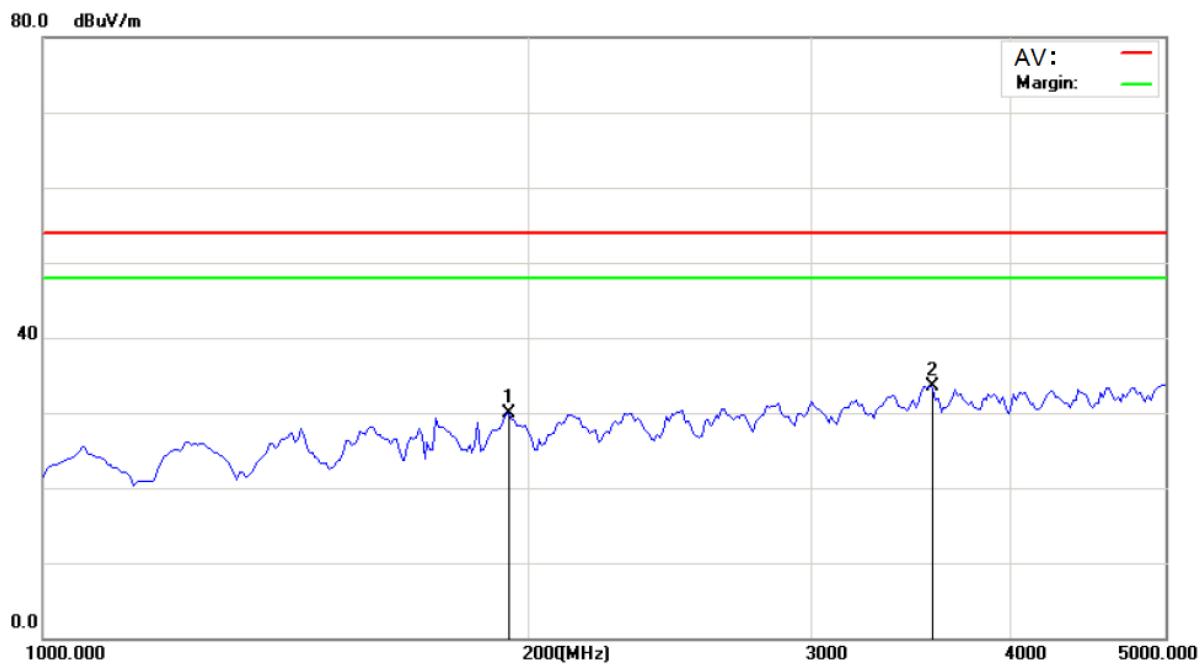6.3.6 Diagram 016*Model: 02090ARX, Test Mode: TM3, Frequency Range: 1GHz-5GHz Vertical***Measurement Result:**

| Marker | Frequency MHz | Peak Measurement dBuV/m | Limit dBuV/m | Polarization |
|--------|------------------|----------------------------|-----------------|--------------|
| 1 | 1950.170 | 29.88 | 74 | Vertical |
| 2 | 3570.000 | 33.57 | 74 | Vertical |

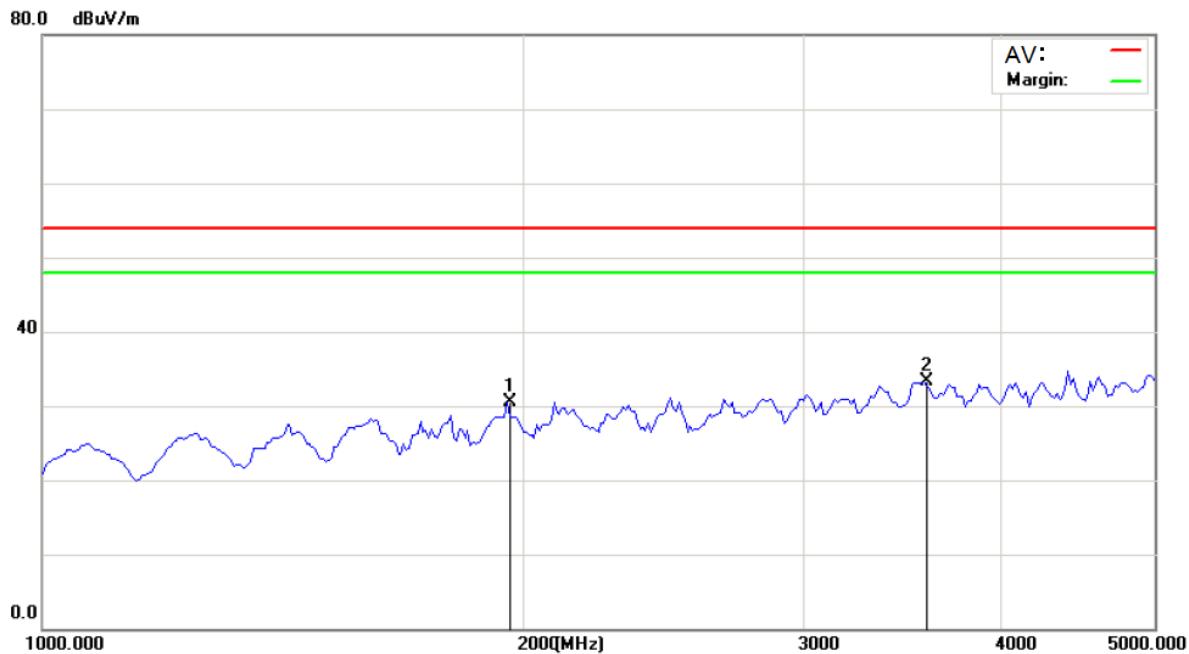6.3.7 Diagram 017*Model: 02090ARX, Test Mode: TM4, Frequency Range: 1GHz-5GHz Horizontal***Measurement Result:**

| Marker | Frequency MHz | Peak Measurement dBuV/m | Limit dBuV/m | Polarization |
|--------|------------------|----------------------------|-----------------|--------------|
| 1 | 1960.000 | 30.52 | 74 | Horizontal |
| 2 | 3590.000 | 33.37 | 74 | Horizontal |

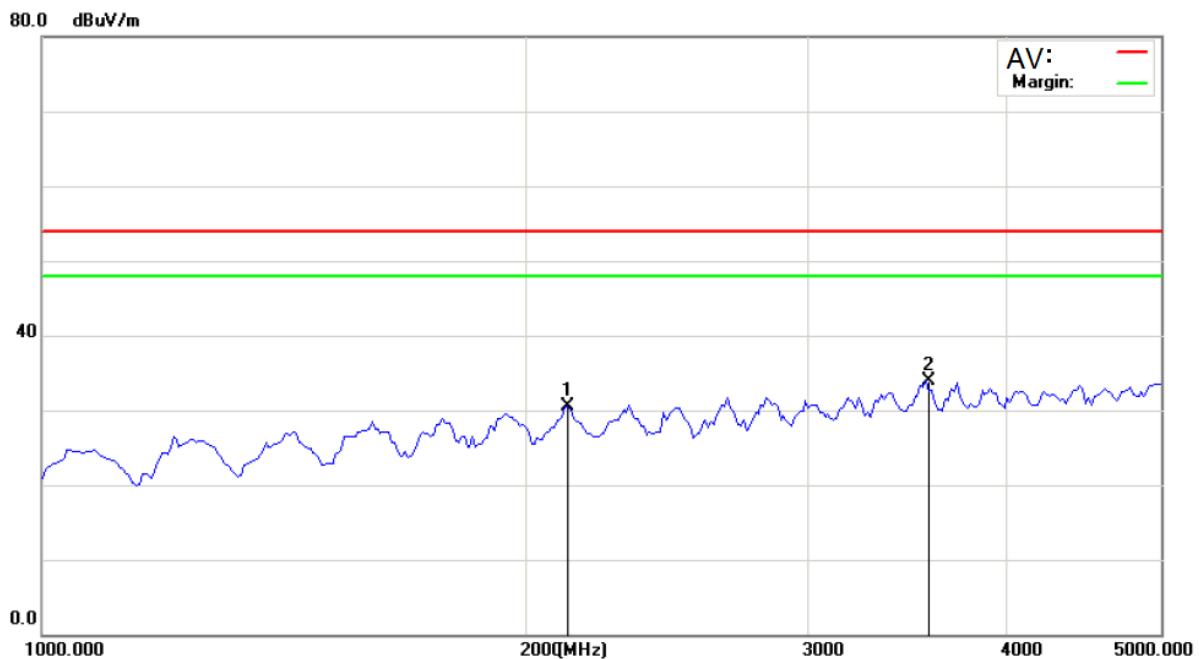6.3.8 Diagram 018*Model: 02090ARX, Test Mode: TM4, Frequency Range: 1GHz-5GHz Vertical***Measurement Result:**

| Marker | Frequency MHz | Peak Measurement dBuV/m | Limit dBuV/m | Polarization |
|--------|------------------|----------------------------|-----------------|--------------|
| 1 | 2130.000 | 30.51 | 74 | Horizontal |
| 2 | 3580.000 | 33.86 | 74 | Horizontal |



FCC ID :PZK02090ARX

Reference No.: 161388

Appendix A Sample Label

Labelling Requirements

The sample label shown shall be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.

*** The following paragraph specified in the user manual.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.