


REV.	DESCRIPTION	REFERENCE	DATE	APPROVED
A	FIRST RELEASE		21/06/2020	Gilad E

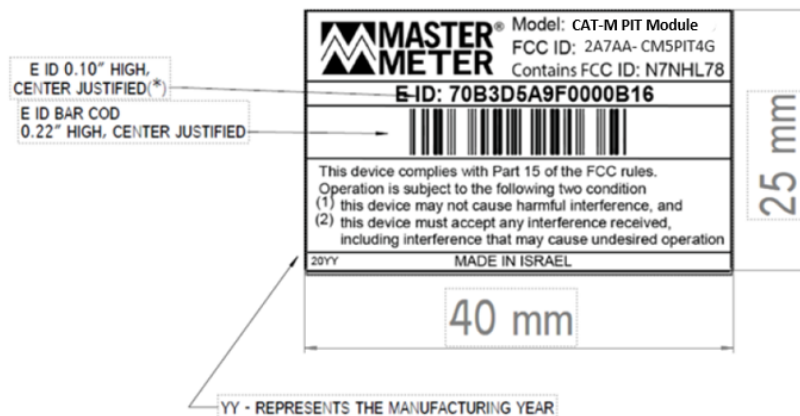

NOTES:

1. MATERIAL:
 - a. WHITE POLYESTER.
 - b. TOTAL LABEL THICKNESS: 0.06mm
 - c. ADHESIVE: PERMANENT ACRYLIC.
 - d. LAMINATION REQUIRED.
 - e. TEMPERATURE RANGE: -40° TO 150°C.
 - f. CHEMICAL RESISTANCE TO ALCOHOL (ISOPROPYL) 70% AND 99%.
 - g. - UL APPROVED LABEL MATERIAL.
 - UL APPROVED PRINTING.
2. PRINTING:
 - a. THE FONT AND HEIGHT OF THE TEXT ARE SPECIFIED ON THE DRAWING.
 - b. COLOR - BLACK

WEIGHT [g] :

MATERIAL [generic name] :

Arad Measuring Technologies
ENGINEERING DEPARTMENT

STATUS:

	NAME	DATE	NAME
DRAWN	Yanina Milavsky	21/06/2020	Water-UV resistant CAT-M-Booster FCCID 25x40
DESIGNED	Yanina Milavsky	21/06/2020	
CHECKED			
APPROVED			
			ISO 2768
			TOLERANCE
			±0.1 ±0.2 ±0.3 ±0.5 ±0.8 ±30'
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS			
CAT.NO./ REV: 9 50 035 18 /A			



A4

CONTENTS PROPERTY OF
ARAD MEASURING TECHNOLOGIES LTD.
UNAUTHORIZED USE IS NOT PERMITTED

SCALE
1:1
()



Dwg: C:\Arad_Tech_Vault\products\inle booster flute\mechanical\95003518_Water-UV resistant CAT-M-Booster FCCID 25x40 Model: Model Rev: