

FCC Radio Test Report

FCC ID: Q3N-M0010A

This report concerns (check one) : ☒ Original Grant ☐ Class II Change

Issued Date : Jan. 31, 2008

Project No. : R0801008

Equipment : Terminal

Model Name : M0010

Applicant : CIPHERLAB CO., LTD

Address : 12F., 333, Sec. 2, Dunhua S. Rd., Taipei, Taiwan
106

Tested by:

Neutron Engineering Inc. EMC Laboratory


Date of Test:

Jan. 14, 2008 ~ Jan. 30, 2008

Testing Engineer :


(Jeff Yang)

Technical Manager :


(Steven Lu)

Authorized Signatory :


(Vic Chiu)

NEUTRON ENGINEERING INC.

No. 132-1, Lane 329, Sec. 2, Palain Rd.,
Shijr City, Taipei, Taiwan

TEL : (02) 2646-5426 FAX : (02) 2646-6815



Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (NML) of R.O.C., or National Institute of Standards and Technology (NIST) of U.S.A.

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	11
3.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . TEST RESULT	14
4.1 MODULATION CHARACTERISTICS	14
4.1.1 LIMIT	14
4.1.2 DESCRIPTION OF MODULATION TECHNIQUE	14
4.1.3 DESIGNATION OF EMISSIONS	14
4.1.4 MODULATION PLOT OF ACTIVE TIME SLOT 8 MODULATED FRAME	15
4.2 RADIATED RF OUTPUT POWER MEASUREMENT	16
4.2.1 LIMIT	16
4.2.2 MEASURING INSTRUMENTS AND SETTING	16
4.2.3 TEST PROCEDURE	16
4.2.4 TEST SETUP LAYOUT	17
4.2.5 TEST DEVIATION	17
4.2.6 EUT OPERATION DURING TEST	17
4.2.7 TEST RESULT OF RADIATED RF OUTPUT POWER	18
4.3 99% OCCUPIED BANDWIDTH MEASUREMENT	19
4.3.1 LIMIT	19
4.3.2 MEASURING INSTRUMENTS AND SETTING	19
4.3.3 TEST PROCEDURE	19
4.3.4 TEST SETUP LAYOUT	19
4.3.5 TEST DEVIATION	19
4.3.6 EUT OPERATION DURING TEST	19
4.3.7 TEST RESULT OF 99% OCCUPIED BANDWIDTH	20
4.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS WEASUREMENT	22
4.4.1 LIMIT	22
4.4.2 MEASURING INSTRUMENTS AND SETTING	22
4.4.3 TEST PROCEDURES	22

Table of Contents	Page
4.4.4 TEST SETUP LAYOUT	22
4.4.5 TEST DEVIATION	22
4.4.6 EUT OPERATION DURING TEST	22
4.4.7 TEST RESULT OF SPURIOUS EMISSIONS AT ANTENNA TERMINALS	23
4.5 SPURIOUS RADIATED EMISSIONS MEASUREMENT	35
4.5.1 LIMIT	35
4.5.2 MEASURING INSTRUMENTS AND SETTING	35
4.5.3 TEST PROCEDURES	35
4.5.4 TEST SETUP LAYOUT	36
4.5.5 TEST DEVIATION	36
4.5.6 EUT OPERATION DURING TEST	36
4.5.7 RESULTS OF TRANSMITTER SPURIOUS EMISSIONS BELOW 1GHZ	37
4.5.8 RESULTS OF TRANSMITTER SPURIOUS EMISSIONS ABOVE 1GHZ	39
4.6 BAND EDGE EMISSIONS MEASUREMENT	45
4.6.1 LIMIT	45
4.6.2 MEASURING INSTRUMENTS AND SETTING	45
4.6.3 TEST PROCEDURES	45
4.6.4 TEST SETUP LAYOUT	45
4.6.5 TEST DEVIATION	45
4.6.6 EUT OPERATION DURING TEST	45
4.6.7 TEST RESULTS OF BAND EDGE EMISSIONS	46
4.7 FREQUENCY STABILITY MEASUREMENT	47
4.7.1 LIMIT	47
4.7.2 MEASURING INSTRUMENTS AND SETTING	47
4.7.3 TEST PROCEDURES	47
4.7.4 TEST SETUP LAYOUT	47
4.7.5 TEST DEVIATION	47
4.7.6 EUT OPERATION DURING TEST	47
4.7.7 RESULTS OF FREQUENCY STABILITY	48
4.8 CONDUCTED EMISSION MEASUREMENT	49
4.8.1 POWER LINE CONDUCTED EMISSION LIMITS	49
4.8.2 MEASUREMENT INSTRUMENTS LIST AND SETTING	49
4.8.3 TEST PROCEDURE	50
4.8.4 DEVIATION FROM TEST STANDARD	50
4.8.5 TEST SETUP	50
4.8.6 EUT OPERATING CONDITIONS	51
4.8.7 TEST RESULTS	52
5. LIST OF MEASUREMENT EQUIPMENTS	56
6. EUT TEST PHOTO	57

1. CERTIFICATION

Equipment: Terminal
Trade Name : CIPHERLAB
Model Name: M0010
Applicant: CIPHERLAB CO., LTD
Date of Test: Jan. 14, 2008 ~ Jan. 30, 2008
Test Item: ENGINEERING SAMPLE
Standards: 47 CFR FCC Part 24 Subpart E & ANSI C63.4 : 2003
47 CFR FCC Part 2 & ANSI/TIA/EIA-603-A

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-4-R0801008) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the PCS1900 part of the product.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Applied Standard: FCC Part 24 & Part 2 / IC RSS-133				
Part	Standard Section	Test Item	Judgment	Remark
4.1	2.1047(d)	Modulation Characteristics	PASS	
4.2	2.1046/24.232	Radiated RF Output	PASS	
4.3	2.1049/24.238(b)	99% Occupied Bandwidth	PASS	
4.4	2.1051/24.238(a)	Spurious Emissions at Antenna Terminals	PASS	
4.5	2.1053/24.238(a)	Spurious Radiated Emissions	PASS	
4.6	24.238(b)	Band Edge Emissions	PASS	
4.7	2.1055/24.235	Frequency Stability	PASS	
4.8	15.207	Conducted Emission	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **C01/OS02** at the location of No.132-1, Lane 329, Sec. 2, Palain Road, Shijr City, Taipei, Taiwan.

Neutron's test firm number is 95335

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
C01	ANSI	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
OS-01	ANSI	30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
OS-02	ANSI	30MHz ~ 200MHz	V	2.48	
		30MHz ~ 200MHz	H	2.16	
		200MHz ~ 1,000MHz	V	2.50	
		200MHz ~ 1,000MHz	H	2.66	

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Terminal	
Trade Name	CIPHERLAB	
Model Name	M0010	
Product Description	The EUT is a Terminal	
	Modulation Type:	GMSK /8PSK
	Channel Band Width (99%)	315.4 KHz
	Number Of Channel	299 CH
	TX Frequency	1850.2MHz~1908.8MHz
	RX Frequency	1930.2MHz~1989.8MHz
	Antenna Type	Please see Note 3.
	Conducted Output Power	GPRS: 28.00 dBm(0.631W) EDGE: 23.00 dBm(0.199W)
	Extreme voltage range	3.6Vdc to 4.2Vdc
Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.		
Channel List	Please refer to the Note 2.	
Power Source	DC Voltage supplied from AC/DC adapter & Li-ion battery	
	#AC DC Adapter Brand name:LEADER ;Model name:NU40-2060330-I3 #Li-ion battery Brand name:CIPHER ;Model name:BA-0011A8	
Power Rating	#AC/DC Adapter I/P 100-240VAC~ 50/60Hz, 1.2A O/P 6.0V, 3.3A	
	# Li-ion battery 3.7Vdc 1800mAh	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Frequency Band	Channel No.	Frequency
1850~1910MHz	512	1850.2 MHz
	513	1850.4 MHz
	:	:
	660	1879.8 MHz
	661	1880.0 MHz
	662	1880.2 MHz
	:	:
	809	1909.6 MHz
	810	1909.8 MHz

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	ACX	AT7020-E3R0HBAT	CHIP Antenna	U.FL	1.3
2	ACX	AT7020-E3R0HBAT	CHIP Antenna	U.FL	1.3
3	CIPHERLAB	9400RFIDA	Loop Antenna	N/A	N/A
4	BJTEK	IA-100	Dipole Antenna	N/A	850 : 2.54dBi 900 : -5.97dBi 1800 : 1.47dBi 1900 : 3.72dBi

Ant.1 for WLAN function

Ant.2 for Bluetooth function

Ant.3 for RFID function

Ant.4 for GSM function

4. The hardware version: 1.1

5. The software version: 1.1

6. The EUT IMEI Code: 355634008134337.

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Items	Worst TX Mode	Channel	Antenna
Radiated RF Output	GPRS/EDGE	512/661/810	4
Spurious Radiated Emissions	GPRS;Note(2)/(3)	512/661/810	4
Band Edge Emissions	GPRS;Note(2)	512/810	4
Frequency Stability	GPRS	661	NA
99% Occupied Bandwidth	GPRS	512/661/810	NA
Spurious Emissions at Antenna Terminals	GPRS/EDGE	512/661/810	NA

For Conducted Emission	
Final Test Mode	Description
Mode 1	Normal Link with cradle use (full system)

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The EUT is considered a portable unit; it was pre-tested on the positioning of each 3 axis. The worst case was found positioned on Z-plane. Therefore only the test data of this Z-plane was used for radiated emission measurement test.
- (3) Below 1GHz, the channel 512, 661 and 810 were pre-tested in chamber. The channel 512, the worst case, was chosen for final test. Above 1GHz, the channel 512, 661 and 810 were tested individually.

3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of PCS1900. During the test, Power Control level was set to 0, it is chosen as the worst case.


3.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conduction: Normal Link with cradle use (full system)

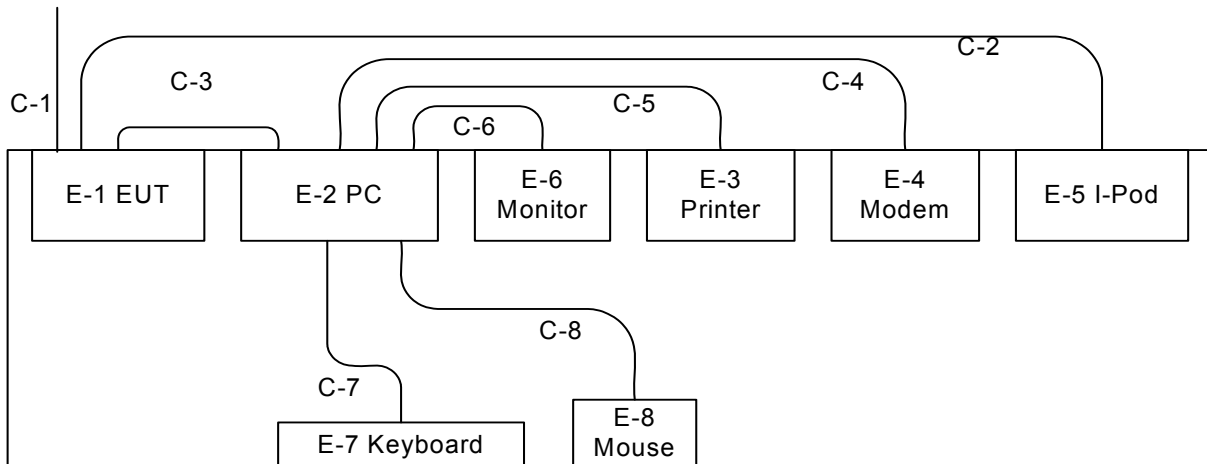

C-1 Power Line
C-2 USB Cable
C-3 USB Cable
C-4 RS-232 Cable
C-5 LPT Cable
C-6 D-sub Cable
C-7 PS/2 Cable
C-8 PS/2 Cable

Radiated:CTX Mode

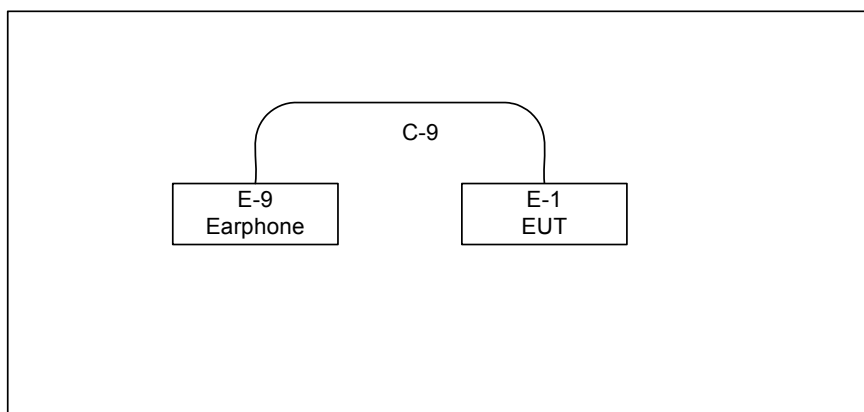

C-9 Audio Line

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	Terminal	CIPHERLAB	M0010	Q3N-M0010A	N/A	EUT
E-2	PC	HP	HP Compaq dx7300 MT	DOC	SGH71505LH	
E-3	Modem	ACEEX	DM-1414V	DOC	8041708	
E-4	Printer	SII	DPU-414	DOC	1045105A	
E-5	iPod	Apple	A1059	DOC	JQ509DCJPS9	
E-6	19" LCD Monitor	Samsung	SyncMaster 193P	GH19PH	DI19H4JXC05517A	
E-7	PS/2 K/B	DELL	M-SAW34	DOC	N/A	
E-8	PS/2 Mouse	Logitech	M-SBF69	DOC	HCA44601156	
E-9	Earphone	KOKA	DM-510	DOC	N/A	
E-10	Cradle	CIPHERLAB	A1010	DOC	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	YES	1.8M	DC POWER LINE
C-2	YES	NO	1.8M	
C-3	YES	NO	1.8M	
C-4	YES	NO	1.8M	
C-5	YES	NO	1.8M	
C-6	YES	YES	1.8M	
C-7	NO	NO	1.8M	
C-8	NO	NO	1.8M	
C-9	NO	NO	1.8M	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

4. TEST RESULT

4.1 MODULATION CHARACTERISTICS

4.1.1 Limit

A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

4.1.2 DESCRIPTION OF MODULATION TECHNIQUE

	GPRS	EGRPS (EDGE)
Modulation	GMSK	8PSK
Symbol rate	270 ksym/s	270 ksym/s
Modulation bit rate	270 kb/s	810 kb/s
Radio data rate per time slot	22.8 kbs/s	69.2 kbs/s
User data rate per time slot	20 kb/s(CS4)	59.2 kb/s(MCS9)
User data rate (8 time slots)	160 kb/s	473.6 kb/s

4.1.3 DESIGNATION OF EMISSIONS



Emissions bandwidth is about 300kHz for GSMK (GSM/GPRS mode) and 8PSK (EDGE mode).
For GSMK = 300KGXW
For 8PSK = 300KG7W

According to FCC 2.1047(d), the system is using digital modulation and accomplished with the PCS requirement as defined in the 3GPP TS 05:01, TS 05:02, TS 05:04. It uses narrowband TDMA. Eight simultaneous calls can occupy the same radio frequency.

There are 299 channels and channel spacing is 200kHz. The frequency band 1850~1910MHz is allocated to the up-link and 1930~1990MHz to the down-link. The up-link and down-link channel space is 80MHz and is duplex at the same time.

The modulation scheme used GMSK (Gaussian Minimum Shift Keying), that is a special case of FSK (Frequency Shift Keying). Each time slot is to last about 580μs and data length is 156.25bits. A frame contains the eight time slots.

4.1.4 MODULATION PLOT OF ACTIVE TIME SLOT 8 MODULATED FRAME

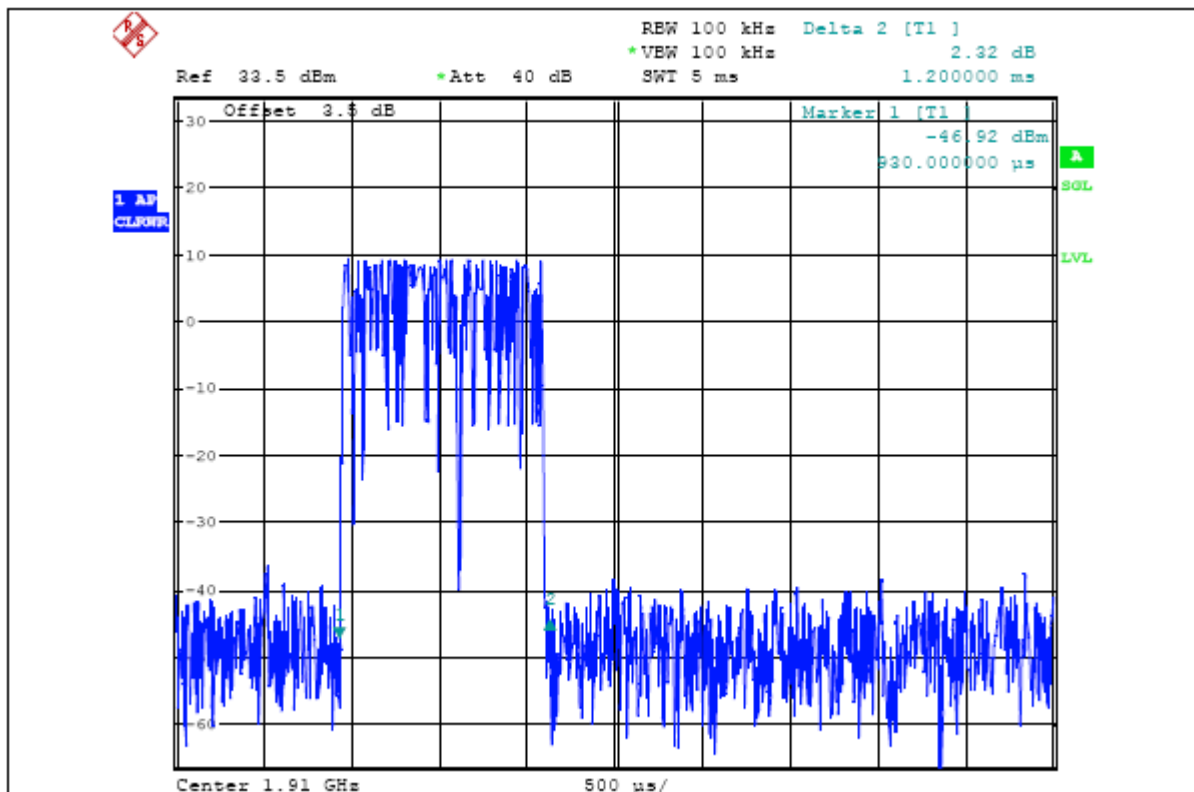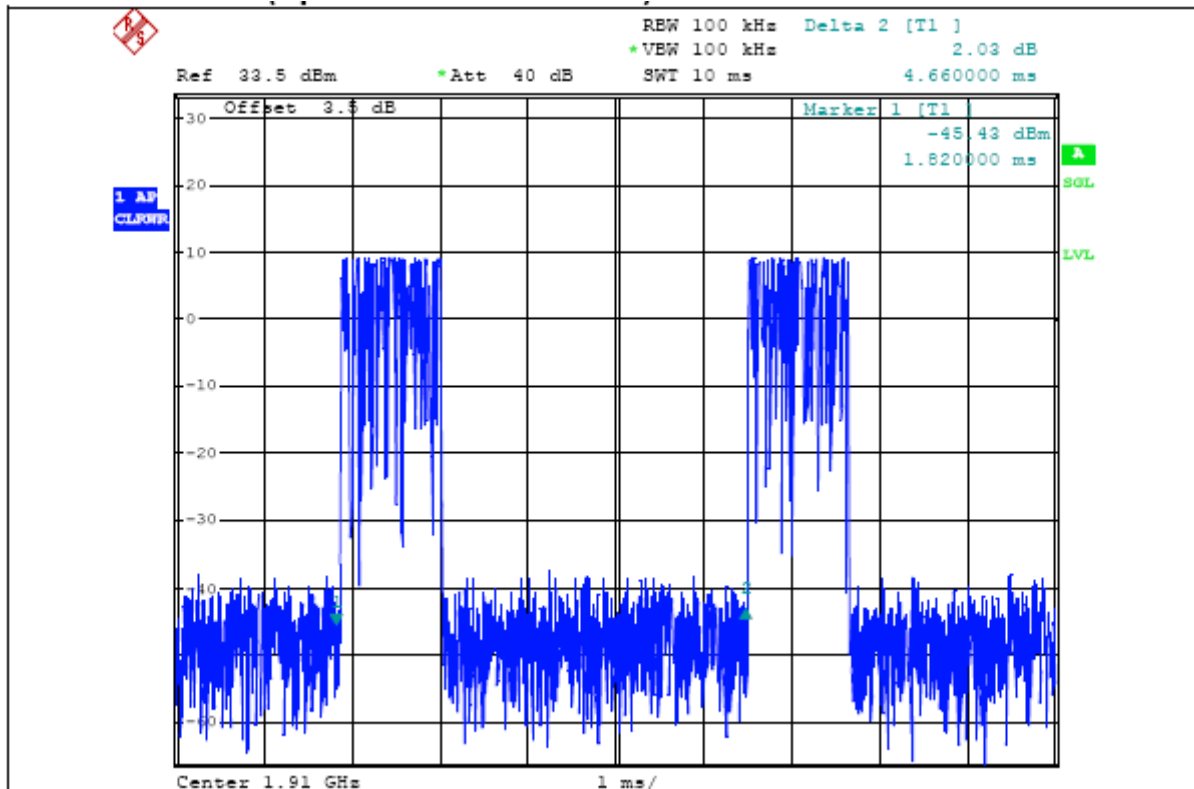

4.2 RADIATED RF OUTPUT POWER MEASUREMENT

4.2.1 LIMIT

The Radiated Peak Output Power shall be according to the specific rule Part 24.232(b) that "Mobile/Portable station are limited to 2 watts e.i.r.p." and 24.232(c) specified that "Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.

4.2.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.


Spectrum Parameters	Setting
Attenuation	Auto
Center Frequency	Low / middle / high channels
Span Frequency	10MHz
RB / VB	3MHz / 3MHz for Peak

4.2.3 TEST PROCEDURE


1. The EUT was set up for the maximum peak power with GPRS link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810 (low, middle and high operational frequency range).
2. The conducted peak output power used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The path loss included the splitter loss, cable loss and 20dB pad loss. The spectrum set RB/VB 3MHz, then read peak power value and record to the test. (All transmitted path loss shall be considered in the test report data)
3. E.I.R.P peak power measurement. In the fully anechoic chamber, EUT placed on the 1.5m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
4. The substitution horn antenna is substituted for EUT at the same position, and signal generator export the CW signal to the calibration antenna. Rotated the Turn Table to find the maximum radiation power. "Raw" is the spectrum reading value, "SG" is signal generator export power, "TX Gain" is calibration antenna isotropic gain value, "TX cable" is the transmitted cable loss between the calibration antenna and signal generator. The "Factor" means that the transmission path loss is equal to "SG" - "TX cable" + "TX Gain" - "Raw".
5. Actually the real E.I.R.P peak power is equal to "Read Value" + "Factor"
6. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power=E.I.P.R power-2.15dBi.

4.2.4 TEST SETUP LAYOUT

EIRP Power Measurement

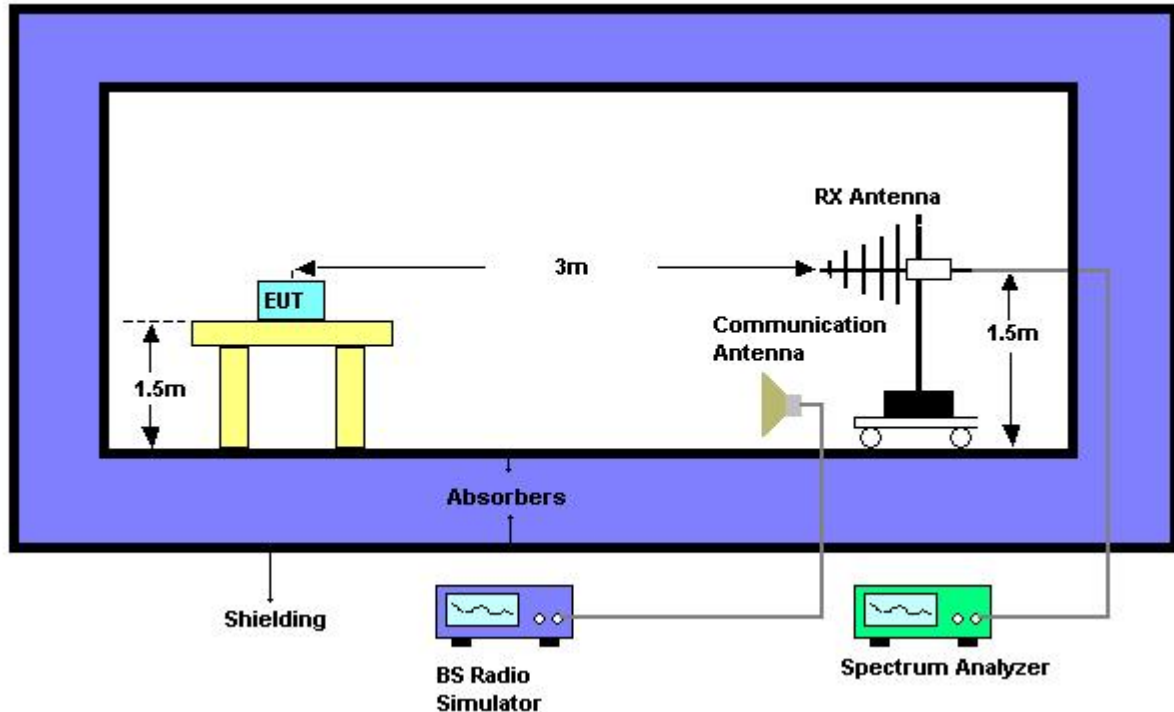

Conducted Power Measurement

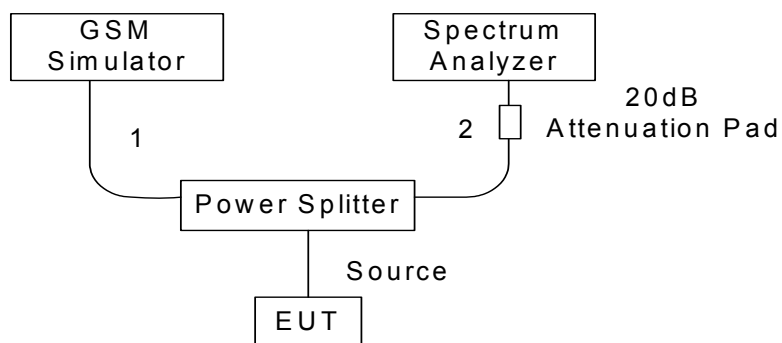

4.2.5 TEST DEVIATION

There is no deviation with the original standard.

4.2.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.2.7 TEST RESULT OF RADIATED RF OUTPUT POWER

EUT :	Terminal	Model Name. :	M0010
Temperature :	19 °C	Relative Humidity :	66%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX CH 512/661/810		
Power Control Level :	0		

Configuration GPRS

Channel	Frequency	Peak Output Power (dBm)	Max. Limit (dBm)	Result
512	1850.2 MHz	27.80	33	Complies
661	1880.0 MHz	28.00	33	Complies
810	1909.8 MHz	27.90	33	Complies

Configuration EDGE

Channel	Frequency	Peak Output Power (dBm)	Max. Limit (dBm)	Result
512	1850.2 MHz	23.00	33	Complies
661	1880.0 MHz	21.00	33	Complies
810	1909.8 MHz	19.00	33	Complies

REMARKS:

1. Peak Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB)
2. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)
3. The EUT does employ a power control function by which the output power is controlled from +28dBm to +19dBm (nominal) by 2dB steps. Consequently the EUT meets the requirement of Part24.232(c).

4.3 99% OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 LIMIT

According to FCC 24.238(b) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

4.3.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	3 kHz
VB	3 kHz
Trace	Max Hold

4.3.3 TEST PROCEDURE

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Used measurement function of spectrum to measure the 99% occupied bandwidth..

4.3.4 TEST SETUP LAYOUT

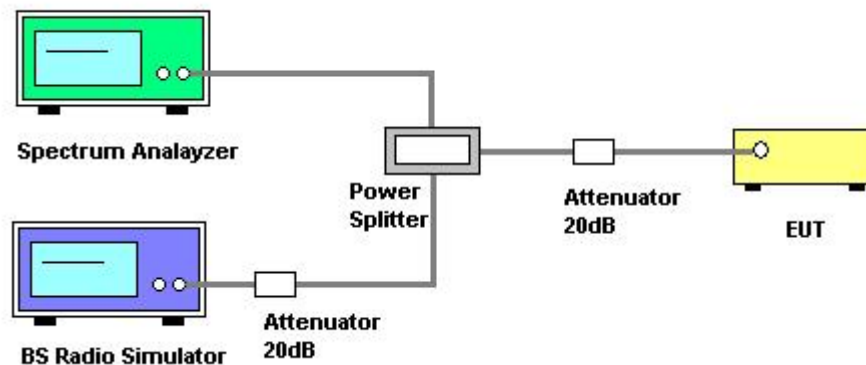

4.3.5 TEST DEVIATION

There is no deviation with the original standard.

4.3.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.


4.3.7 TEST RESULT OF 99% OCCUPIED BANDWIDTH

EUT :	Terminal	Model Name. :	M0010
Temperature :	19 °C	Relative Humidity :	66%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX CH 512/661/810		

Configuration GPRS


Channel	Frequency	99% OBW (kHz)	-26dBc Bandwidth	Result
512	1850.2 MHz	303.4	251.49	Complies
661	1880.0 MHz	311.4	235.52	Complies
810	1909.8 MHz	315.4	251.49	Complies

99% Occupied Bandwidth Configuration GPRS channel 512

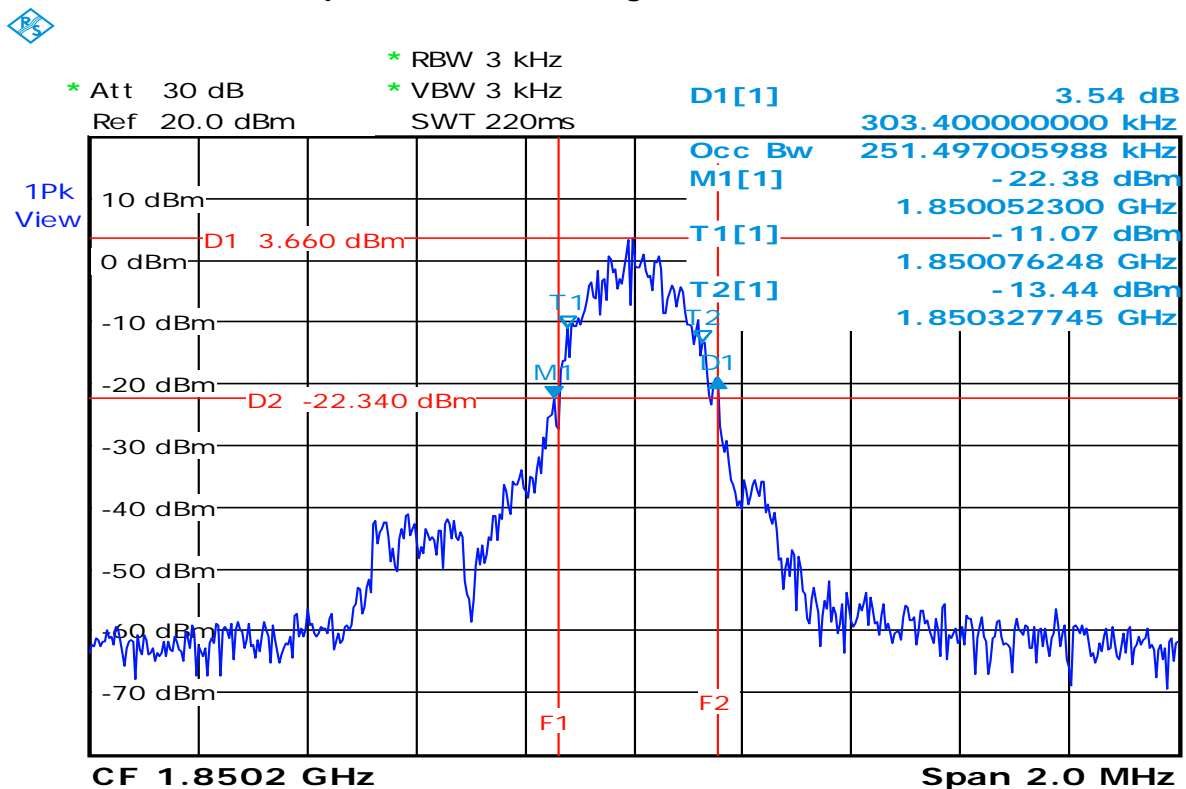


Date: 23.JAN.2008 03:31:08

99% Occupied Bandwidth Configuration GPRS channel 661

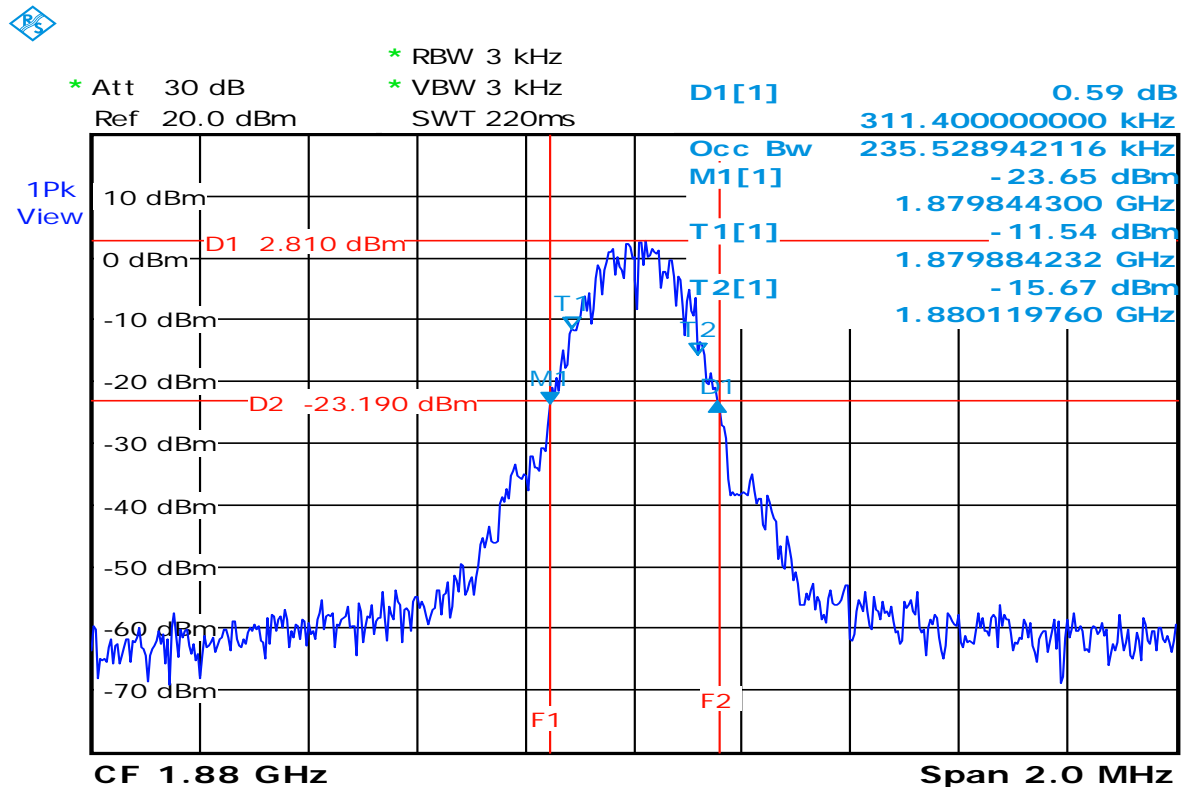

Date: 23.JAN.2008 03:33:23

99% Occupied Bandwidth Configuration GPRS channel 810

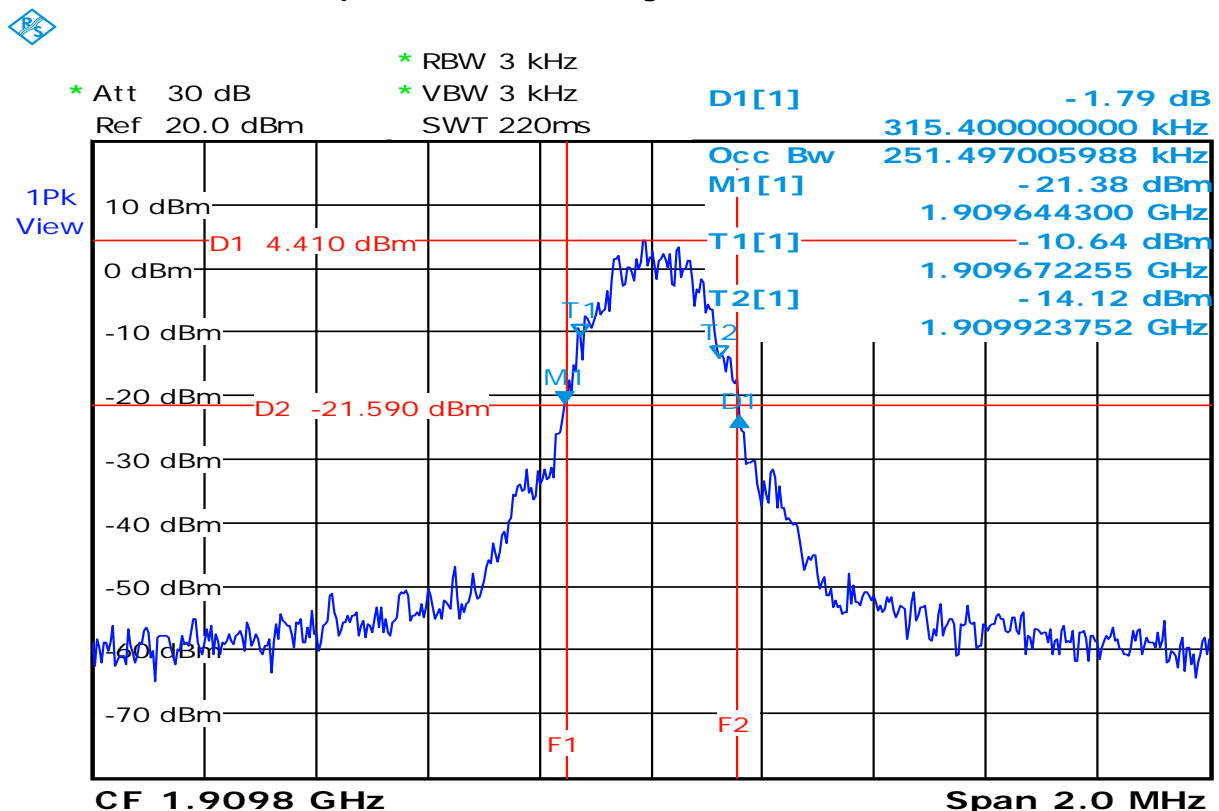

Date: 23.JAN.2008 03:35:58

4.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS WEASUREMENT

4.4.1 LIMIT

In the FCC 24.238(a), on any frequency outside a licensee's frequency block within USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit translates in the relevant power range (1 to 0.001W). At 1W(Power Control Level 0) the specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm.

4.4.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Start Frequency	9kHz
Stop Frequency	10th carrier harmonic
RB / VB	1 MHz / 1MHz for Peak

4.4.3 TEST PROCEDURES

1. The EUT was set up for the maximum peak power with GPRS link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810(low, middle and high operational frequency range.)
2. The conducted spurious emission used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss 4dB in the transmitted path track.
3. When the spectrum scanned from 9kHz to 3GHz, it shall be connected to the band reject filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.
4. When the spectrum scanned from 3kHz to 20GHz, it shall be connected to the high pass filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.

4.4.4 TEST SETUP LAYOUT

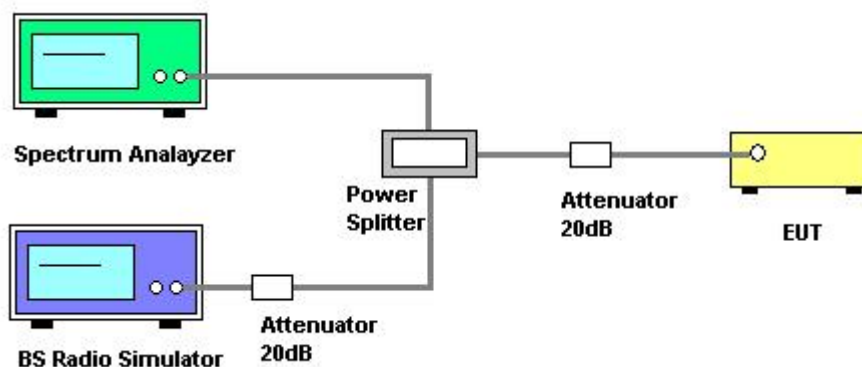

4.4.5 TEST DEVIATION

There is no deviation with the original standard.

4.4.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.4.7 TEST RESULT OF SPURIOUS EMISSIONS AT ANTENNA TERMINALS


EUT :	Terminal	Model Name. :	M0010
Temperature :	19 °C	Relative Humidity :	66%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX CH 512(9KHz~10 th Harmonic) for GPRS		

CONDUCTED SPURIOUS EMISSION					
Frequency (MHz)	Raw (dBm)	Correction Factor(dB)	Conducted Level(dBm)	Limit (dBm)	Margin
1422	-41.45	3.78	-37.67	-13.00	-24.67
2280	-48.89	3.92	-44.97	-13.00	-31.97
3700	-37.28	4.21	-33.07	-13.00	-20.07
5548	-49.15	4.32	-44.83	-13.00	-31.83
7410	-42.29	4.46	-37.83	-13.00	-24.83
9258	-50.62	4.52	-46.10	-13.00	-33.10
11100	-57.53	4.65	-52.88	-13.00	-39.88


REMARKS:

1. Peak Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB)
2. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)


Conducted Spurious of Configuration GPRS channel 512 (9kHz~3GHz)

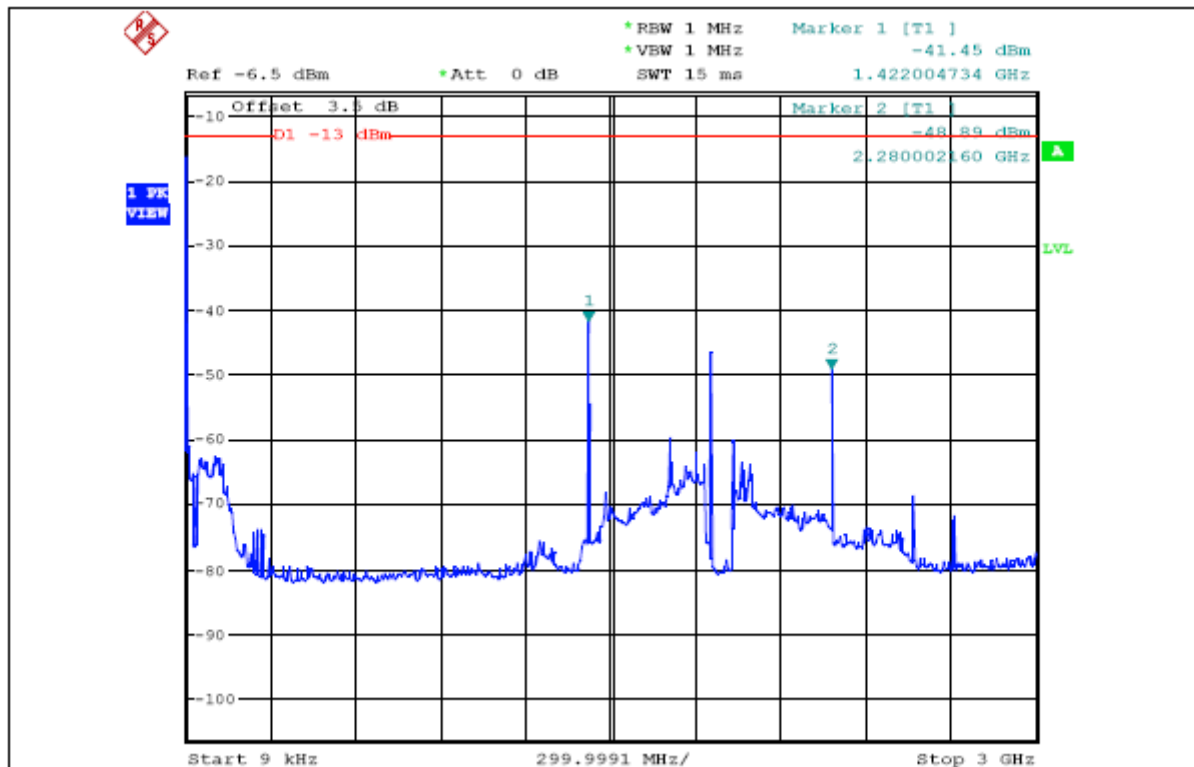

Conducted Spurious of Configuration GPRS channel 512 (3GHz~10GHz)

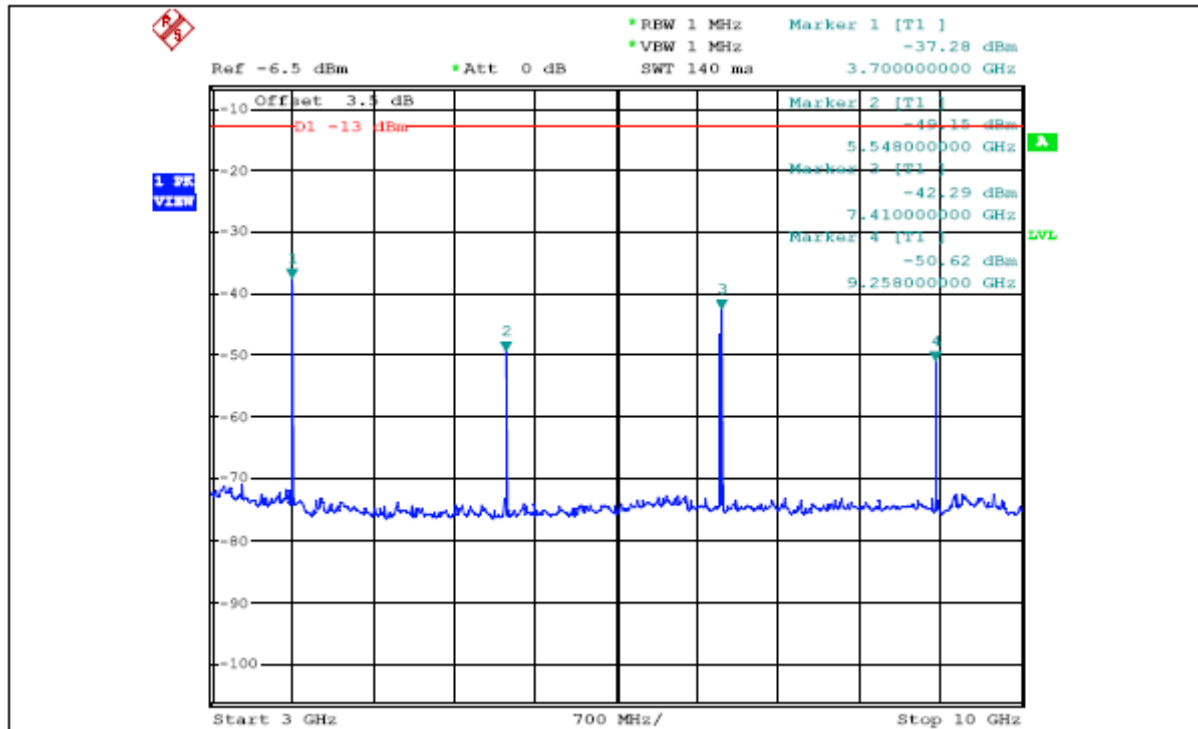

Conducted Spurious of Configuration GPRS channel 512 (10GHz~10th Harmonic)

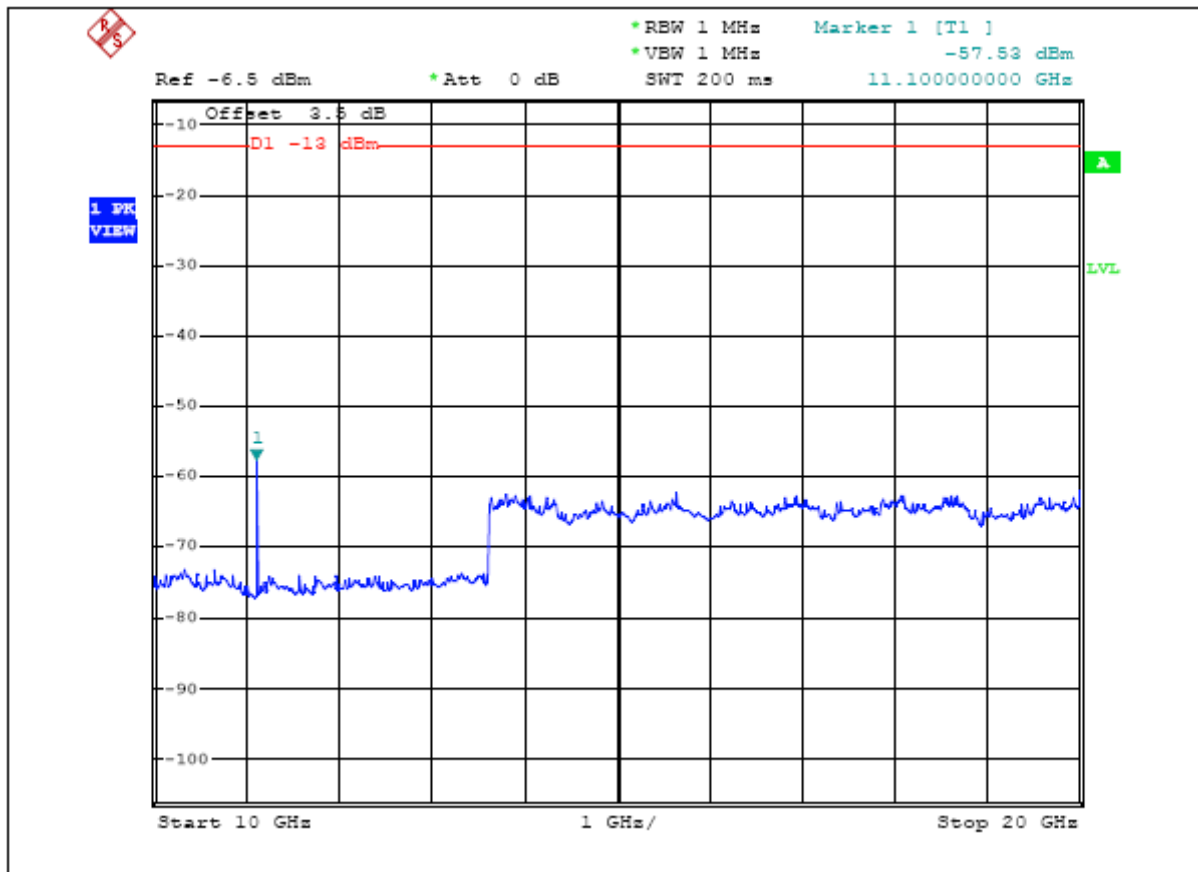

EUT :	Terminal	Model Name. :	M0010
Temperature :	19 °C	Relative Humidity :	66%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX CH 661(9KHz~10 th Harmonic) for GPRS		


CONDUCTED SPURIOUS EMISSION

Frequency (MHz)	Raw (dBm)	Correction Factor(dB)	Conducted Level(dBm)	Limit (dBm)	Margin
1452	-44.42	3.78	-40.64	-13.00	-27.64
2310	-45.07	3.92	-41.15	-13.00	-28.15
3756	-45.42	4.21	-41.21	-13.00	-28.21
5646	-47.68	4.34	-43.34	-13.00	-30.34
7522	-42.75	4.48	-38.27	-13.00	-25.27
9412	-51.74	4.55	-47.19	-13.00	-34.19
11280	-68.28	4.68	-63.60	-13.00	-50.60


REMARKS:

1. Peak Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB)
2. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)


Conducted Spurious of Configuration GPRS channel 661 (9KHz~3GHz)

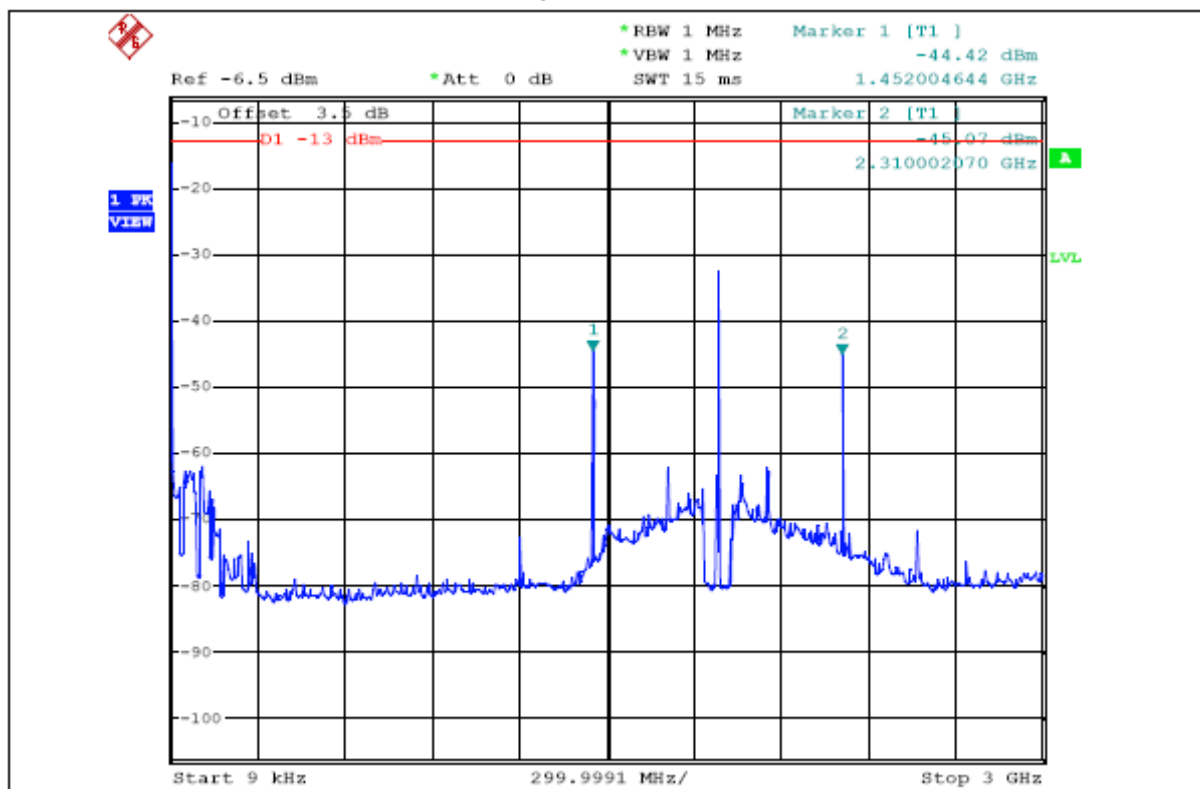

Conducted Spurious of Configuration GPRS channel 661 (3GHz~10GHz)

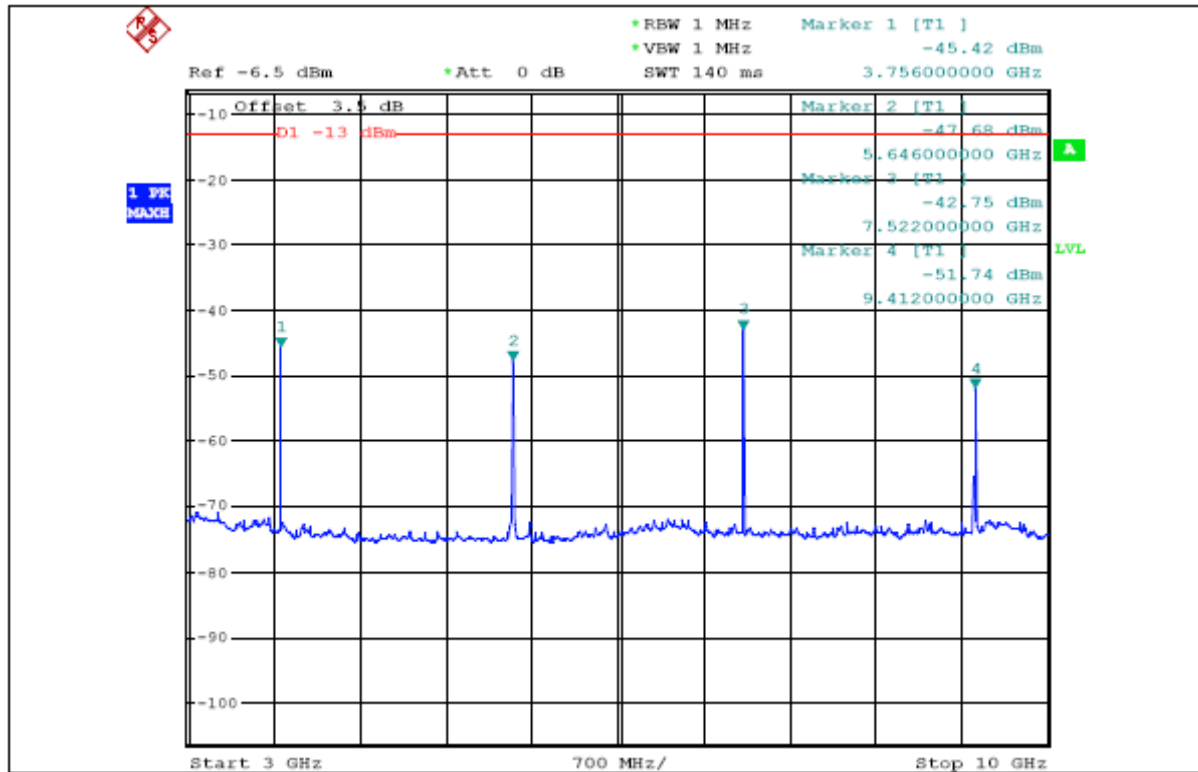

Conducted Spurious of Configuration GPRS channel 661 (10GHz~10th Harmonic)

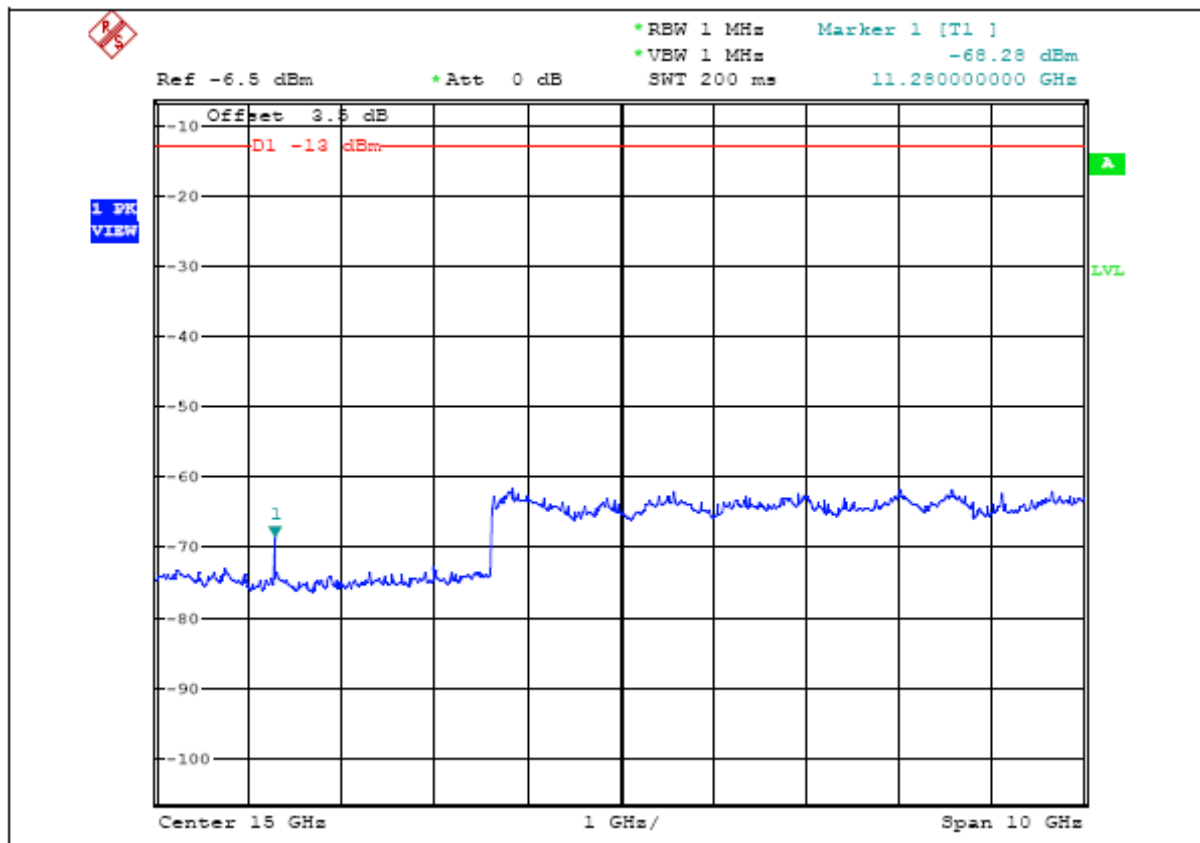

EUT :	Terminal	Model Name. :	M0010
Temperature :	19 °C	Relative Humidity :	66%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX CH 810(9KHz~10 th Harmonic) for GPRS		


CONDUCTED SPURIOUS EMISSION

Frequency (MHz)	Raw (dBm)	Correction Factor(dB)	Conducted Level(dBm)	Limit (dBm)	Margin
1482	-33.98	3.78	-30.20	-13.00	-17.20
2340	-53.22	3.92	-49.30	-13.00	-36.30
3812	-39.84	4.23	-35.61	-13.00	-22.61
5730	-43.38	4.35	-39.03	-13.00	-26.03
7648	-55.06	4.51	-50.55	-13.00	-37.55
9552	-50.55	4.57	-45.98	-13.00	-32.98
11460	-70.57	4.71	-65.86	-13.00	-52.86


REMARKS:

1. Peak Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB)
2. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)


Conducted Spurious of Configuration GPRS channel 810 (9KHz~3GHz)

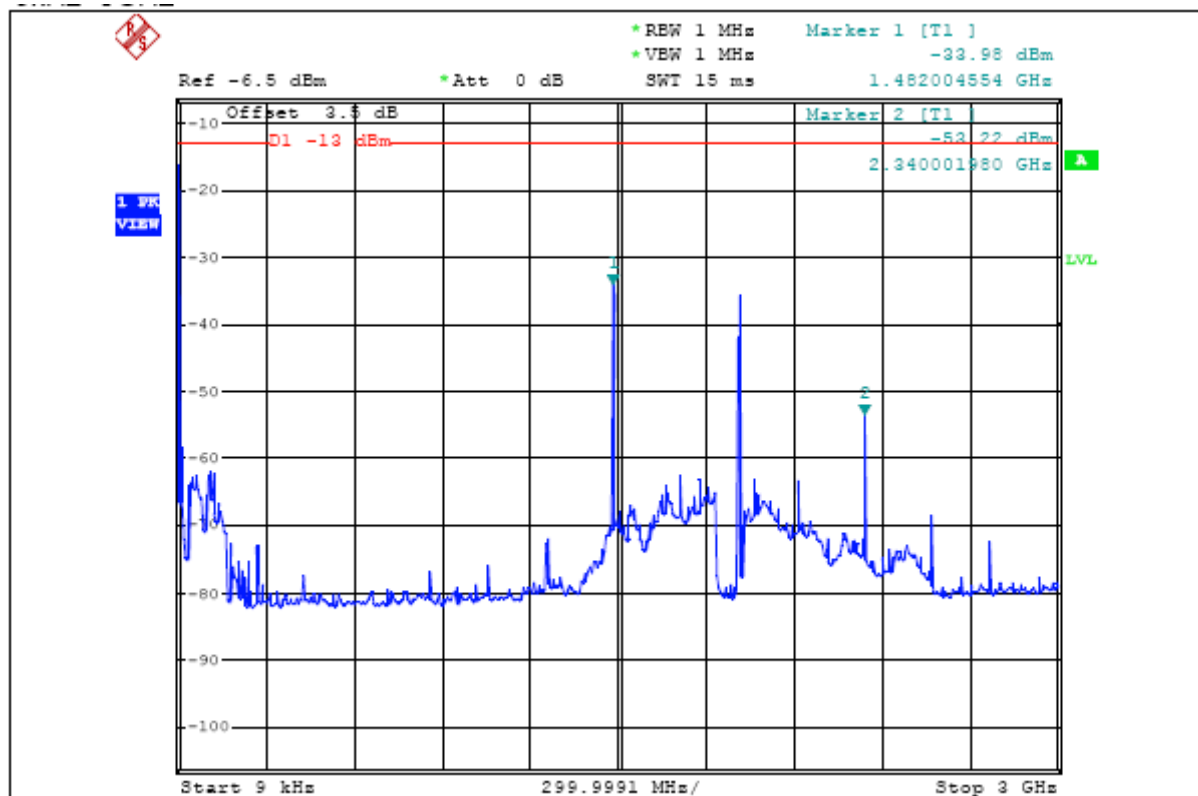

Conducted Spurious of Configuration GPRS channel 810 (3GHz~10GHz)

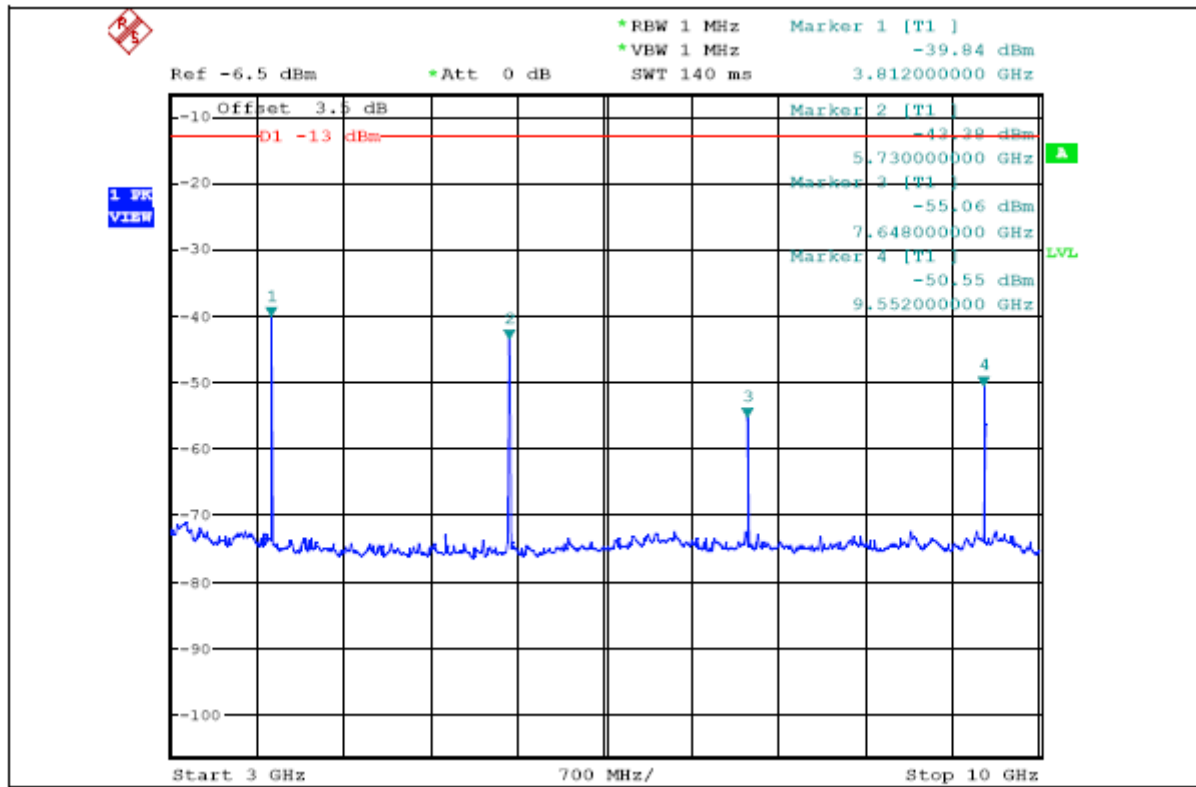

Conducted Spurious of Configuration GPRS channel 810 (10GHz~10th Harmonic)

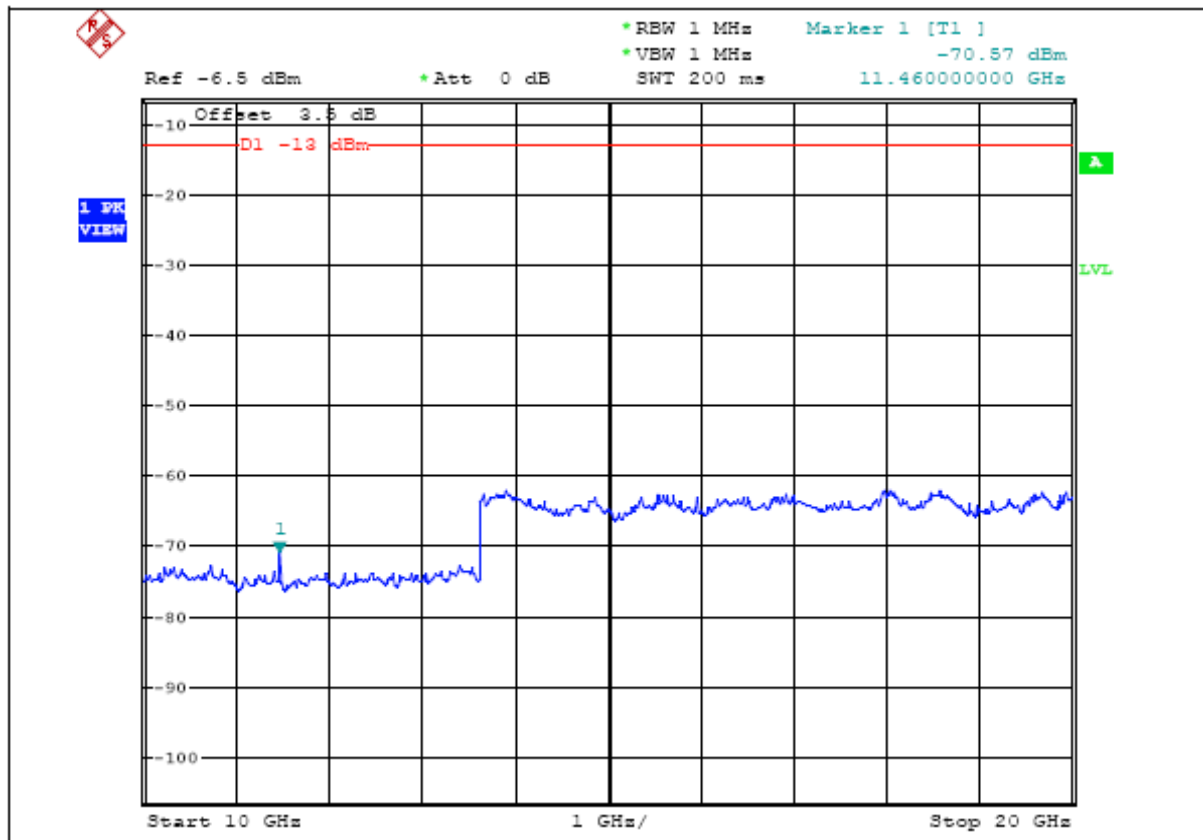

EUT :	Terminal	Model Name. :	M0010
Temperature :	19 °C	Relative Humidity :	66%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX CH 512(9KHz~10 th Harmonic) for EDGE		

CONDUCTED SPURIOUS EMISSION


Frequency (MHz)	Raw (dBm)	Correction Factor(dB)	Conducted Level(dBm)	Limit (dBm)	Margin
1422	-42.44	3.78	-38.66	-13.00	-25.66
2280	-48.06	3.92	-44.14	-13.00	-31.14
3700	-38.29	4.21	-34.08	-13.00	-21.08
5548	-49.85	4.32	-45.53	-13.00	-32.53
7410	-42.18	4.46	-37.72	-13.00	-24.72
9258	-51.27	4.52	-46.75	-13.00	-33.75
11100	-58.50	4.65	-53.85	-13.00	-40.85

REMARKS:


1. Peak Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB)
2. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)

Conducted Spurious of Configuration EDGE channel 512 (9KHz~3GHz)


9kHz~3GHz

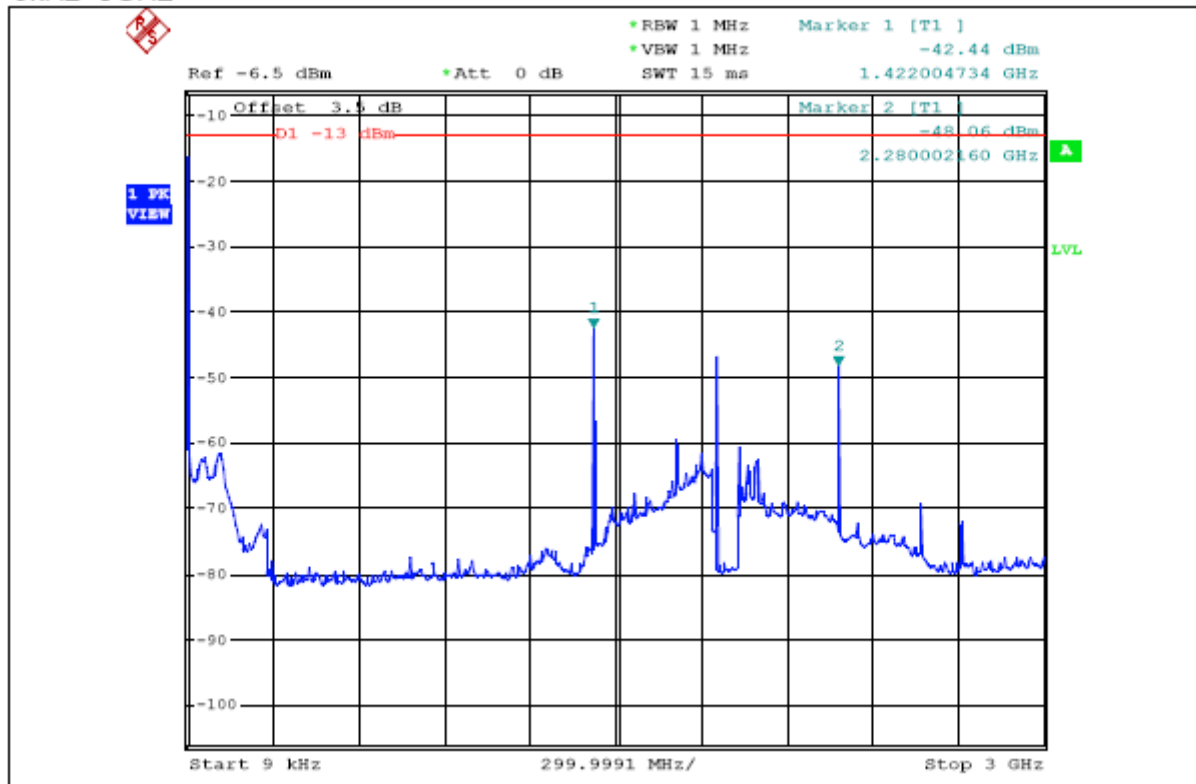

Conducted Spurious of Configuration EDGE channel 512 (3GHz~10GHz)

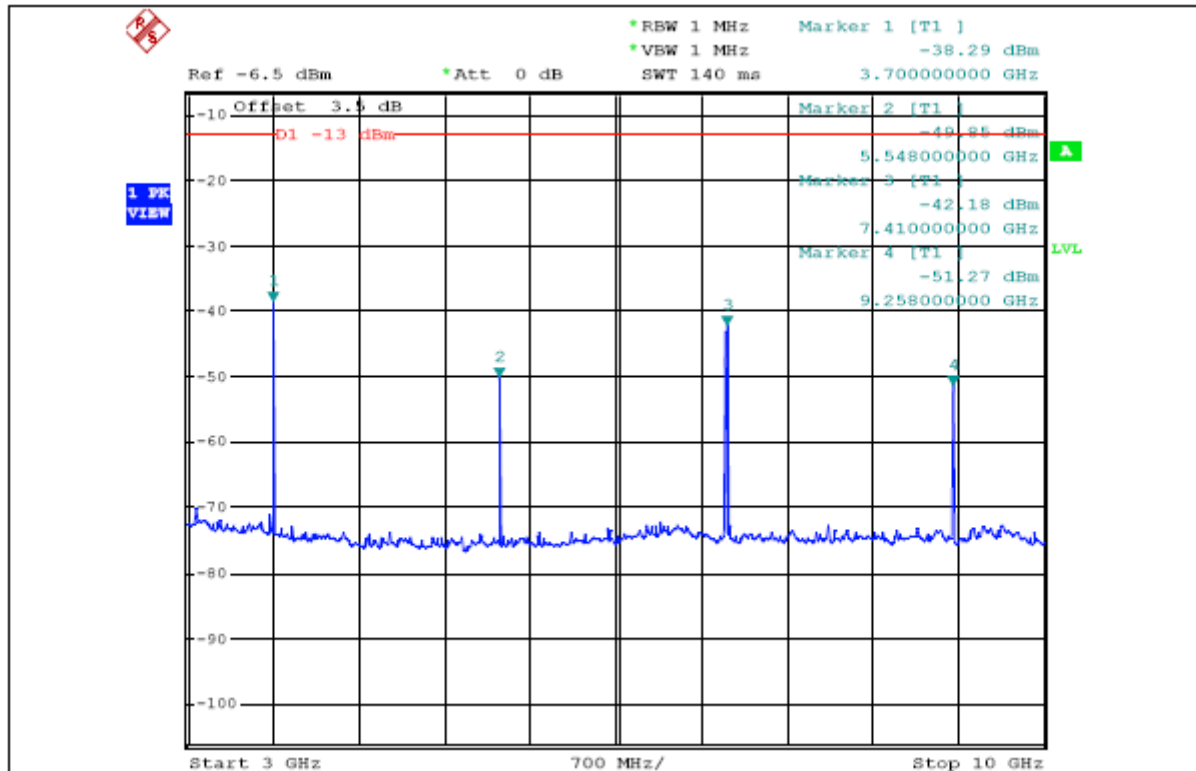

Conducted Spurious of Configuration EDGE channel 512 (10GHz~10th Harmonic)

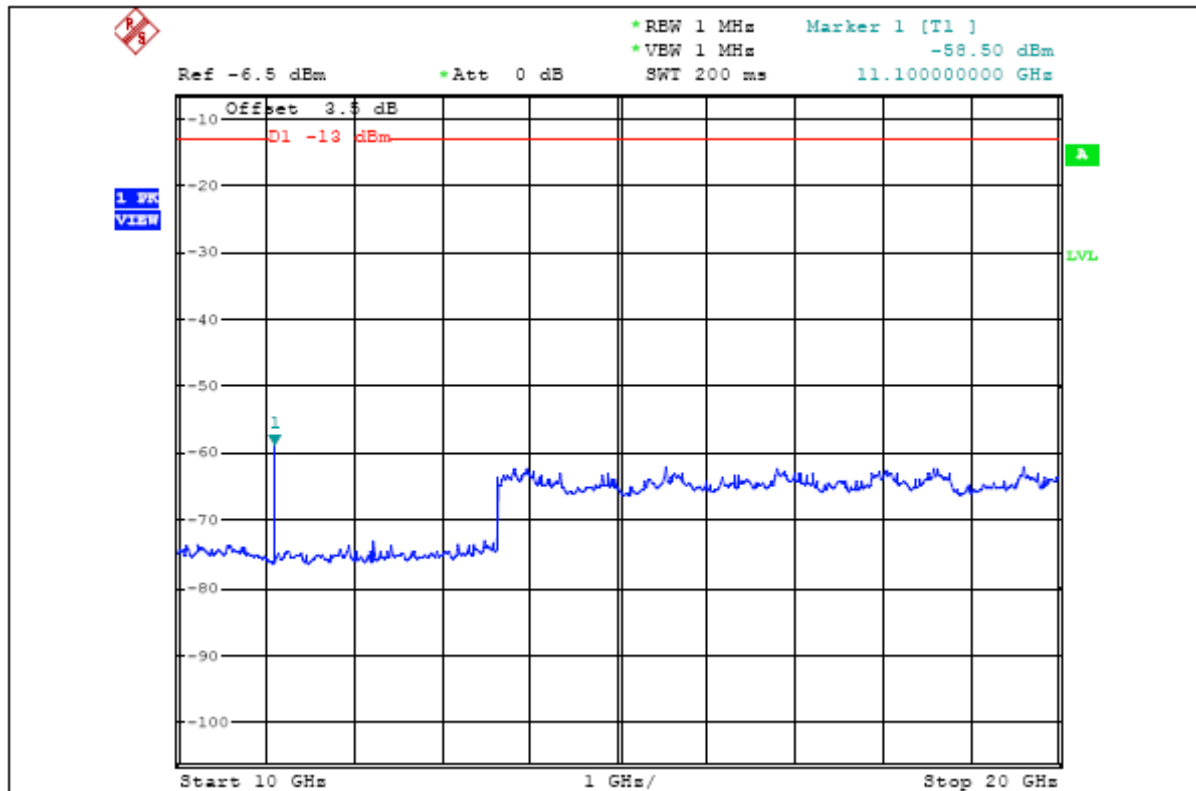

EUT :	Terminal	Model Name. :	M0010
Temperature :	19 °C	Relative Humidity :	66%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX CH 661(9KHz~10 th Harmonic) for EDGE		


CONDUCTED SPURIOUS EMISSION

Frequency (MHz)	Raw (dBm)	Correction Factor(dB)	Conducted Level(dBm)	Limit (dBm)	Margin
1452	-44.74	3.78	-40.96	-13.00	-27.96
2310	-45.35	3.92	-41.43	-13.00	-28.43
3756	-45.04	4.21	-40.83	-13.00	-27.83
5646	-49.93	4.34	-45.59	-13.00	-32.59
7522	-42.27	4.48	-37.79	-13.00	-24.79
9412	-57.16	4.55	-52.61	-13.00	-39.61
11280	-69.30	4.68	-64.62	-13.00	-51.62


REMARKS:

1. Peak Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB)
2. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)


Conducted Spurious of Configuration EDGE channel 661 (9KHz~3GHz)

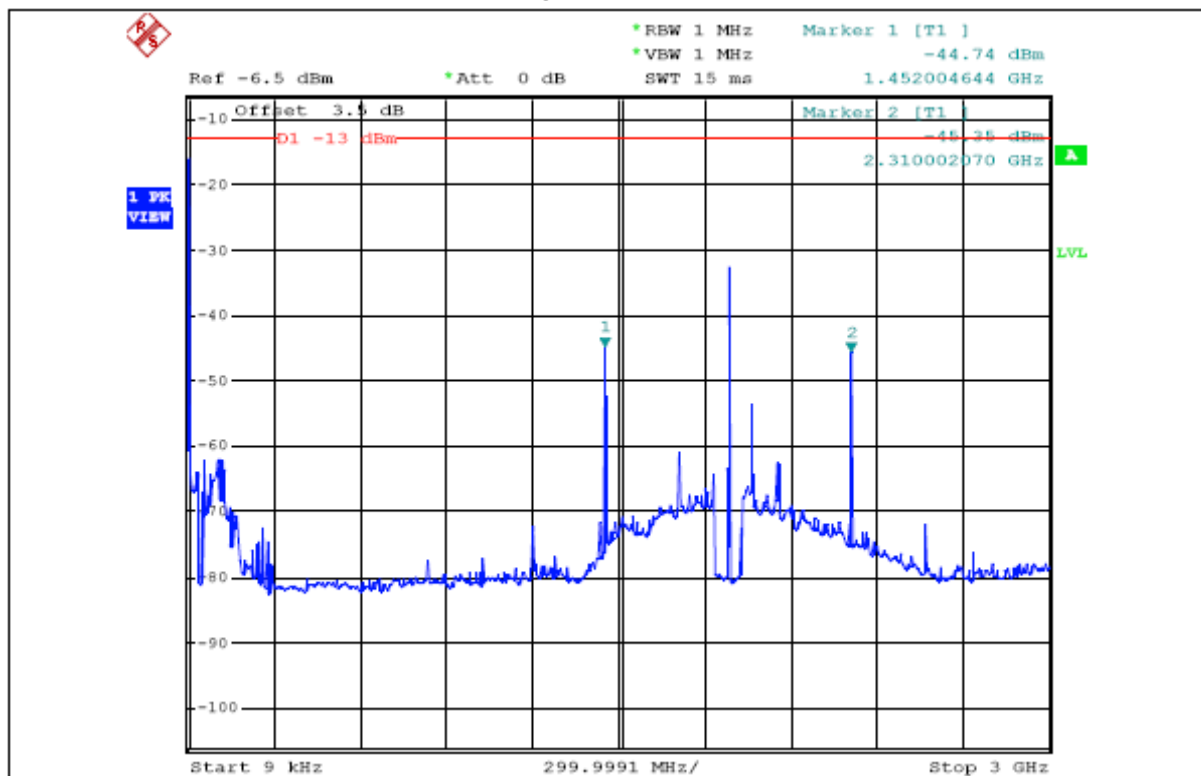

Conducted Spurious of Configuration EDGE channel 661 (3GHz~10GHz)

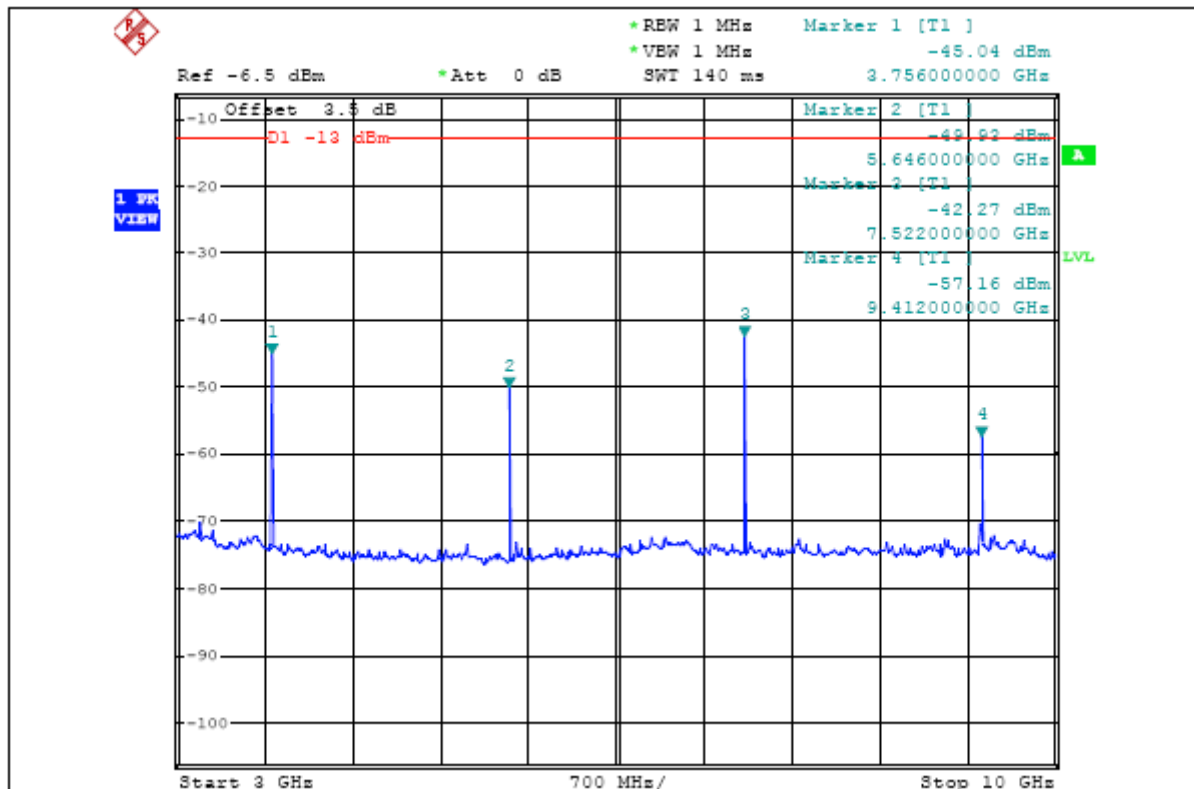

Conducted Spurious of Configuration EDGE channel 661 (10GHz~10th Harmonic)

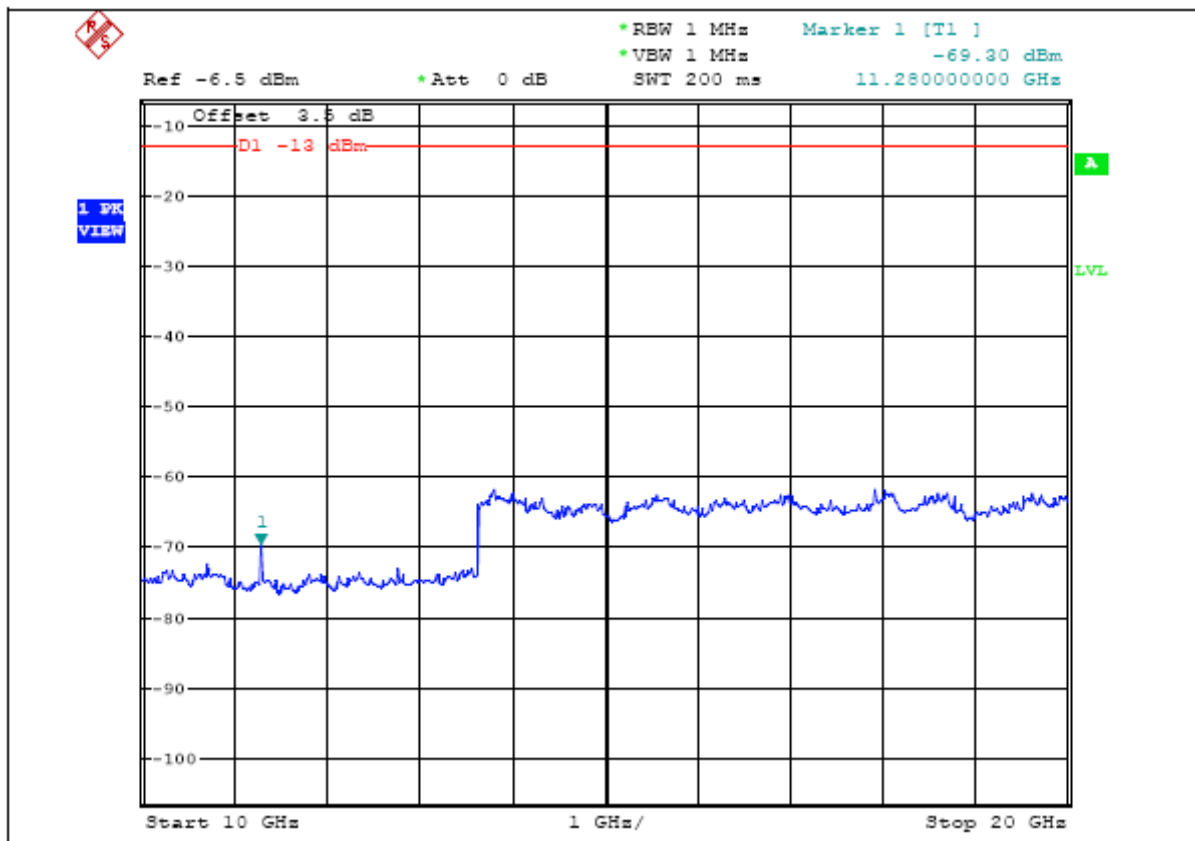

EUT :	Terminal	Model Name. :	M0010
Temperature :	19 °C	Relative Humidity :	66%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX CH 810(9KHz~10 th Harmonic) for EDGE		


CONDUCTED SPURIOUS EMISSION

Frequency (MHz)	Raw (dBm)	Correction Factor(dB)	Conducted Level(dBm)	Limit (dBm)	Margin
1482	-34.33	3.78	-30.55	-13.00	-17.55
2340	-51.93	3.92	-48.01	-13.00	-35.01
3812	-39.93	4.23	-35.70	-13.00	-22.70
5730	-43.66	4.35	-39.31	-13.00	-26.31
7648	-55.02	4.51	-50.51	-13.00	-37.51
9552	-50.46	4.57	-45.89	-13.00	-32.89
11460	-70.87	4.71	-66.16	-13.00	-53.16


REMARKS:

1. Peak Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB)
2. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)


Conducted Spurious of Configuration EDGE channel 810 (9KHz~3GHz)

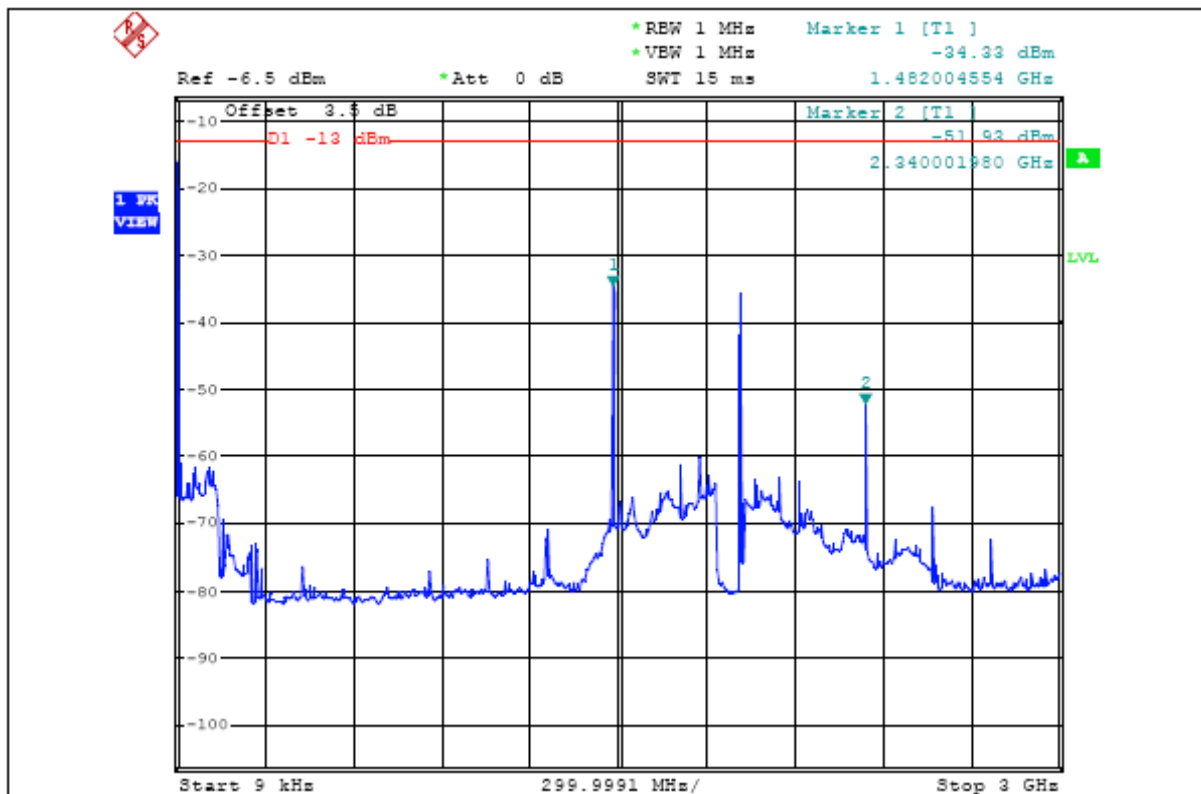

Conducted Spurious of Configuration EDGE channel 810 (3GHz~10GHz)

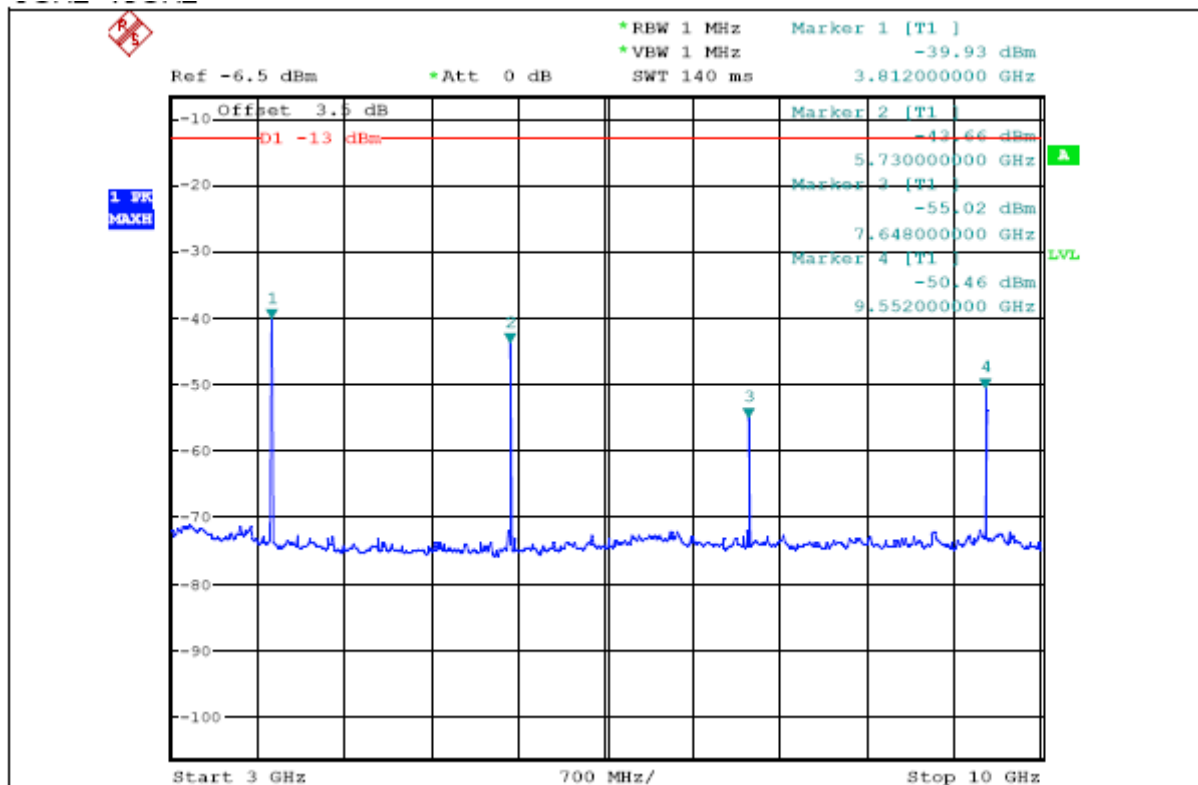

Conducted Spurious of Configuration EDGE channel 810 (10GHz~10th Harmonic)

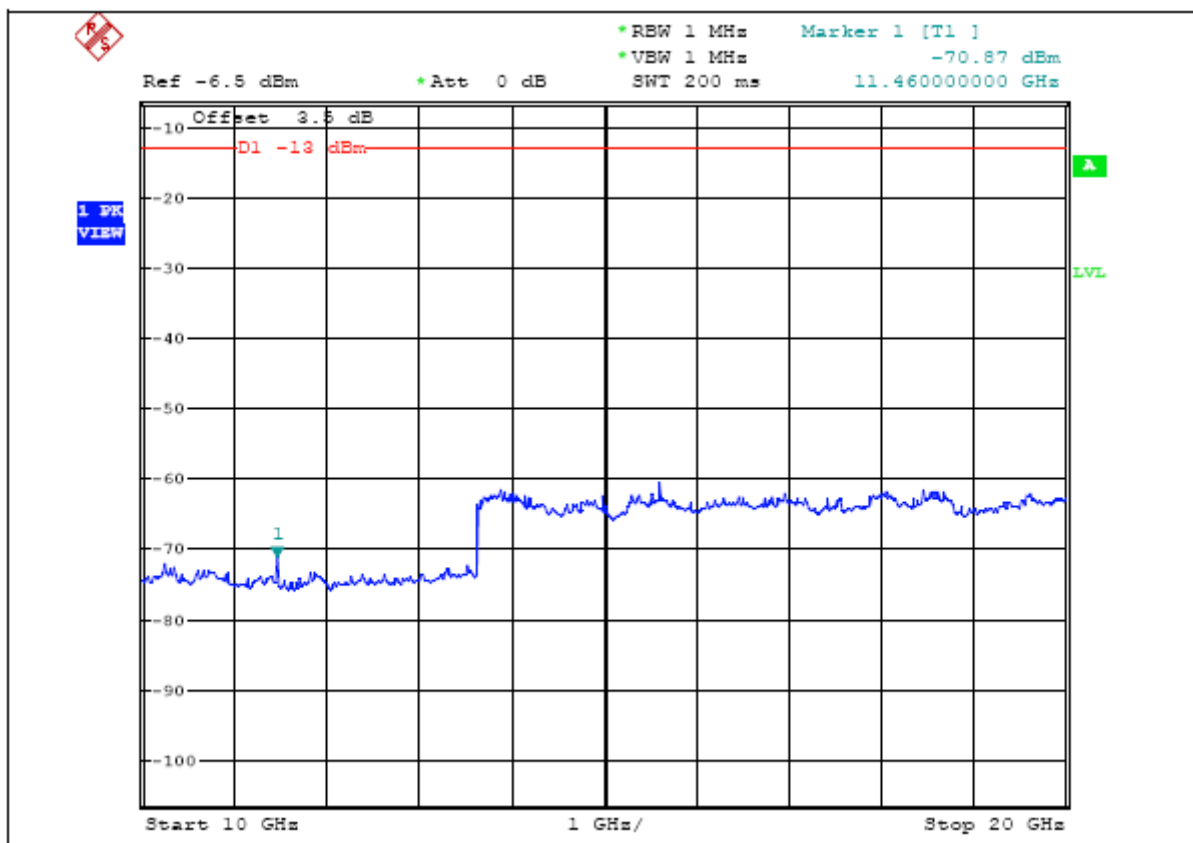

4.5 SPURIOUS RADIATED EMISSIONS MEASUREMENT

4.5.1 LIMIT

In the FCC 24.238(a), On any frequency outside a licensee's frequency block within USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit translates in the relevant power range (1 to 0.001W). At 1W(Power Control Level 0) the specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm. At 0.001W(Power Control Level 15) the specified minimum attenuation becomes 13dB and the emission of limit equal to -13dBm. So the limit of emission is the same absolute specified line.

4.5.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Start Frequency	30 MHz
Stop Frequency	10th carrier harmonic
Detector	Positive Peak
Span	100 MHz
Sweep Time	1s
RB / VB	1 MHz / 1MHz
Attenuation	Positive Peak

4.5.3 TEST PROCEDURES

1. The EUT was placed on the top of the turntable in fully anechoic chamber.
2. The test shall be made in the transmitting mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. This measurement shall be repeated with the transmitter in standby mode where applicable.
4. For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable. For 1~10th carrier harmonic measurement, the receiving Horn antenna was placed 1.5 meters far away from the turntable.
5. The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
6. Replace the EUT by standard antenna and feed the RF port by signal generator.
7. Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
8. Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
9. The level of the spurious emission is the power level of (8) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.

4.5.4 TEST SETUP LAYOUT

This test setup layout is the same as that shown in section 4.2.4.

4.5.5 TEST DEVIATION

There is no deviation with the original standard.

4.5.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.


4.5.7 RESULTS OF TRANSMITTER SPURIOUS EMISSIONS BELOW 1GHZ

EUT :	Terminal	Model Name. :	M0010
Temperature :	19 °C	Relative Humidity :	66%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX CH512 for GPRS		

Frequency (MHz)	Ant H / V	EUT Axis (X/Y/Z)	TX/RX	Measure d(FS) (dBm)	Limits (dBm)	Margins	Note
94.0199	V	Z	TX	-56.11	-13.0	-43.11	
247.2800	V	Z	TX	-54.04	-13.0	-41.04	
286.0799	V	Z	TX	-53.49	-13.0	-40.49	
324.8800	V	Z	TX	-51.63	-13.0	-38.63	
392.7800	V	Z	TX	-52.53	-13.0	-39.53	
416.0600	V	Z	TX	-55.07	-13.0	-42.07	

Remark :

- (1) Reading in which marked as Peak means measurements by using is Peak Mode with Detector SPA setting in RBW=1MHz, VBW=1MHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

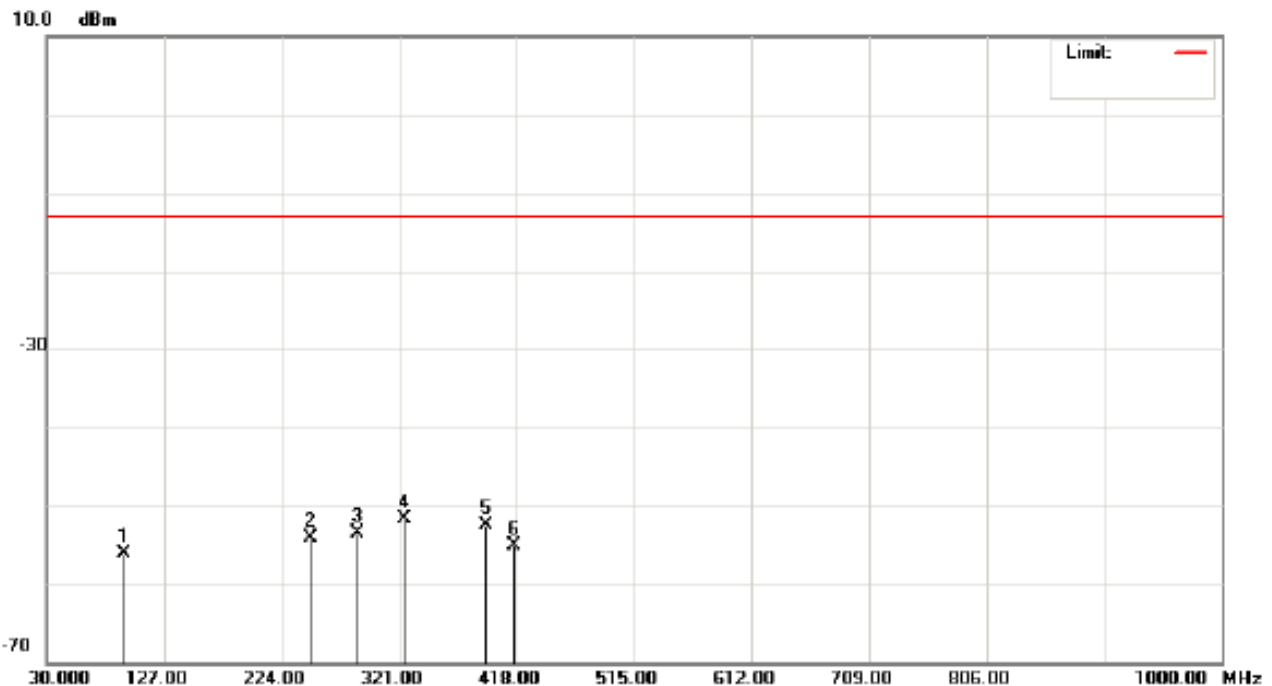


EUT :	Terminal	Model Name. :	M0010
Temperature :	19 °C	Relative Humidity :	66%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX CH512 for GPRS		

Frequency (MHz)	Ant H / V	EUT Axis (X/Y/Z)	TX/RX	Measure d(FS)	Limits	Margins	Note
99.8399	H	Z	TX	-57.62	-13.0	-44.62	
183.2600	H	Z	TX	-53.45	-13.0	-40.45	
307.4200	H	Z	TX	-57.03	-13.0	-44.03	
363.3800	H	Z	TX	-49.93	-13.0	-36.93	
373.3800	H	Z	TX	-49.93	-13.0	-36.93	
433.5200	H	Z	TX	-52.43	-13.0	-39.43	

Remark :

- (1) Reading in which marked as Peak means measurements by using is Peak Mode with Detector SPA setting in RBW=1MHz, VBW=1MHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

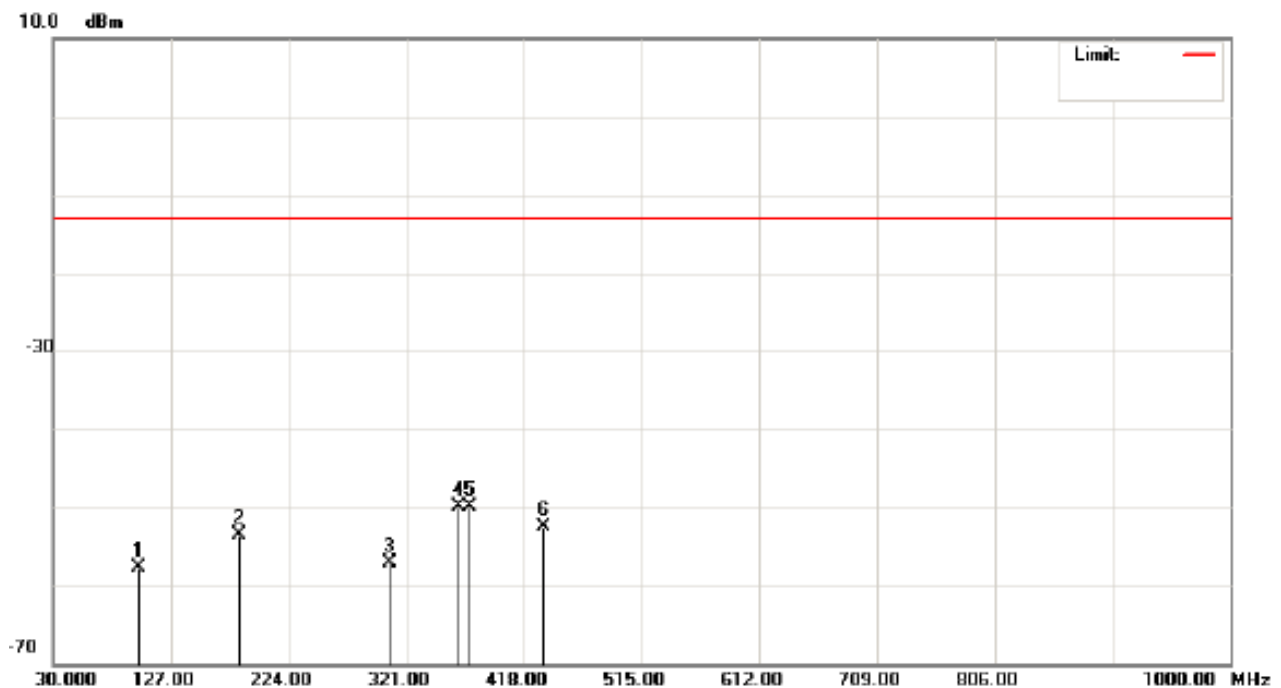


4.5.8 RESULTS OF TRANSMITTER SPURIOUS EMISSIONS ABOVE 1GHZ

EUT :	Terminal	Model Name. :	M0010
Temperature :	19 °C	Relative Humidity :	66%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX CH512 for GPRS		

Frequency (MHz)	Ant H / V	EUT Axis (X/Y/Z)	TX/RX	Measure d(FS) (dBm)	Limits (dBm)	Margins	Note
3700.560	V	Z	TX	-33.17	-13.0	-20.17	
5550.820	V	Z	TX	-49.49	-13.0	-36.49	

Remark :

- (1) Reading in which marked as Peak means measurements by using is Peak Mode with Detector SPA setting in RBW=1MHz, VBW =1MHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

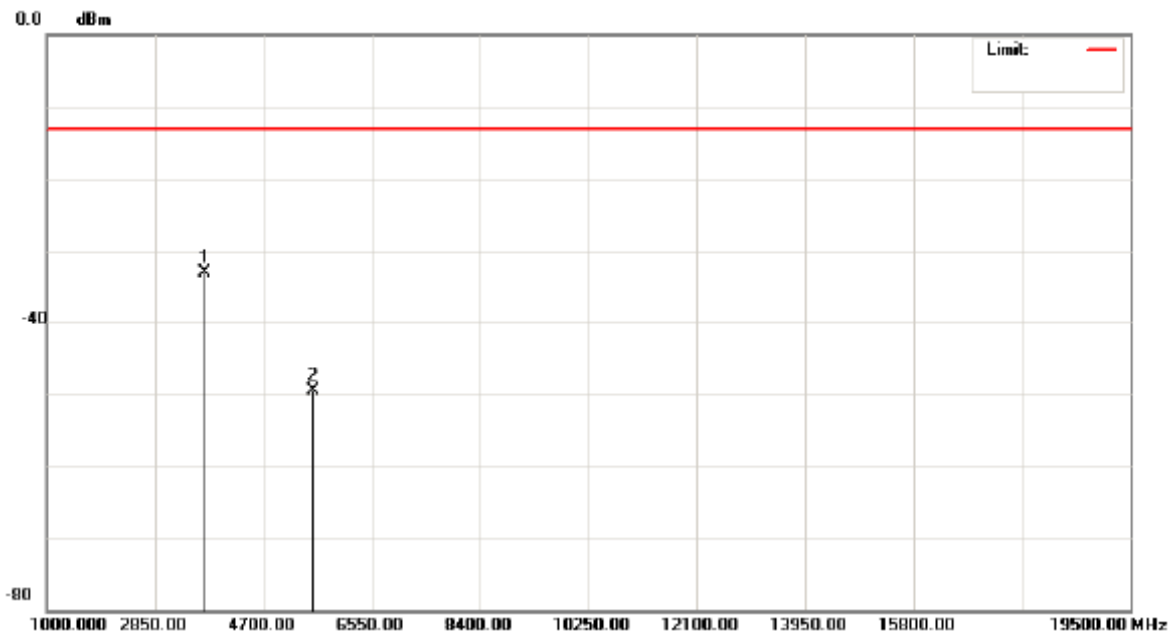


EUT :	Terminal	Model Name. :	M0010
Temperature :	19 °C	Relative Humidity :	66%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX CH512 for GPRS		

Frequency (MHz)	Ant H / V	EUT Axis (X/Y/Z)	TX/RX	Measure d(FS)	Limits	Margins	Note
3700.320	H	Z	TX	-31.34	-13.0	-18.34	
5550.820	H	Z	TX	-48.90	-13.0	-35.90	

Remark :

- (1) Reading in which marked as Peak means measurements by using is Peak Mode with Detector SPA setting in RBW=1MHz, VBW =1MHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

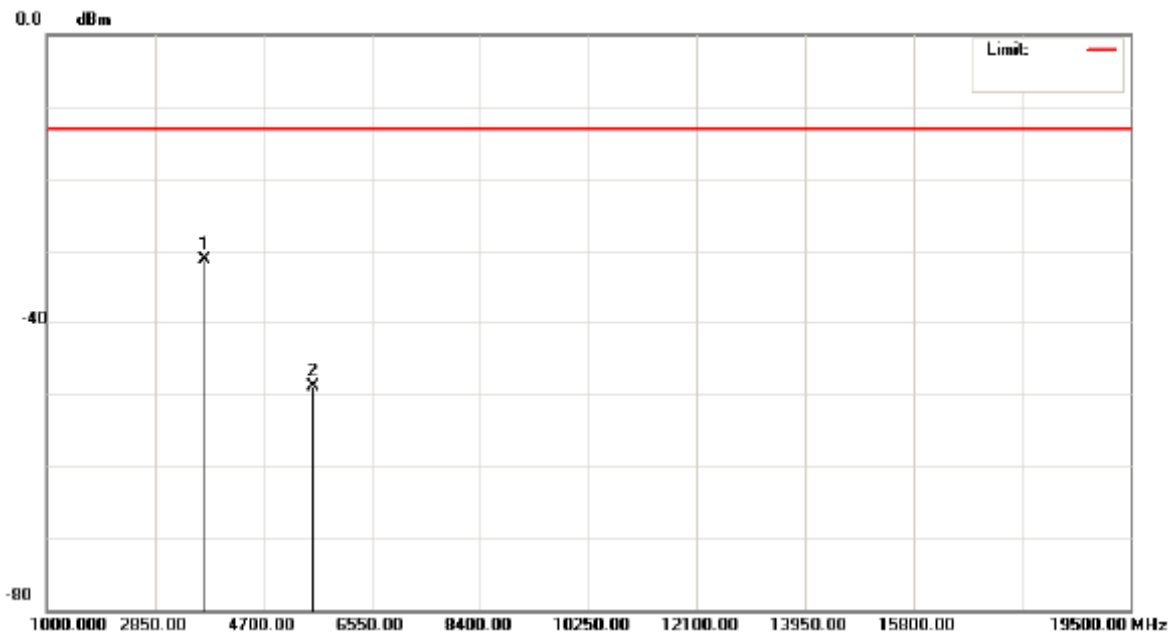


EUT :	Terminal	Model Name. :	M0010
Temperature :	19 °C	Relative Humidity :	66%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX CH661 for GPRS		

Frequency (MHz)	Ant H / V	EUT Axis (X/Y/Z)	TX/RX	Measure d(FS) (dBm)	Limits (dBm)	Margins	Note
3760.120	V	Z	TX	-46.22	-13.0	-33.22	
5639.860	V	Z	TX	-52.90	-13.0	-39.90	

Remark :

- (1) Reading in which marked as Peak means measurements by using is Peak Mode with Detector SPA setting in RBW=1MHz, VBW =1MHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

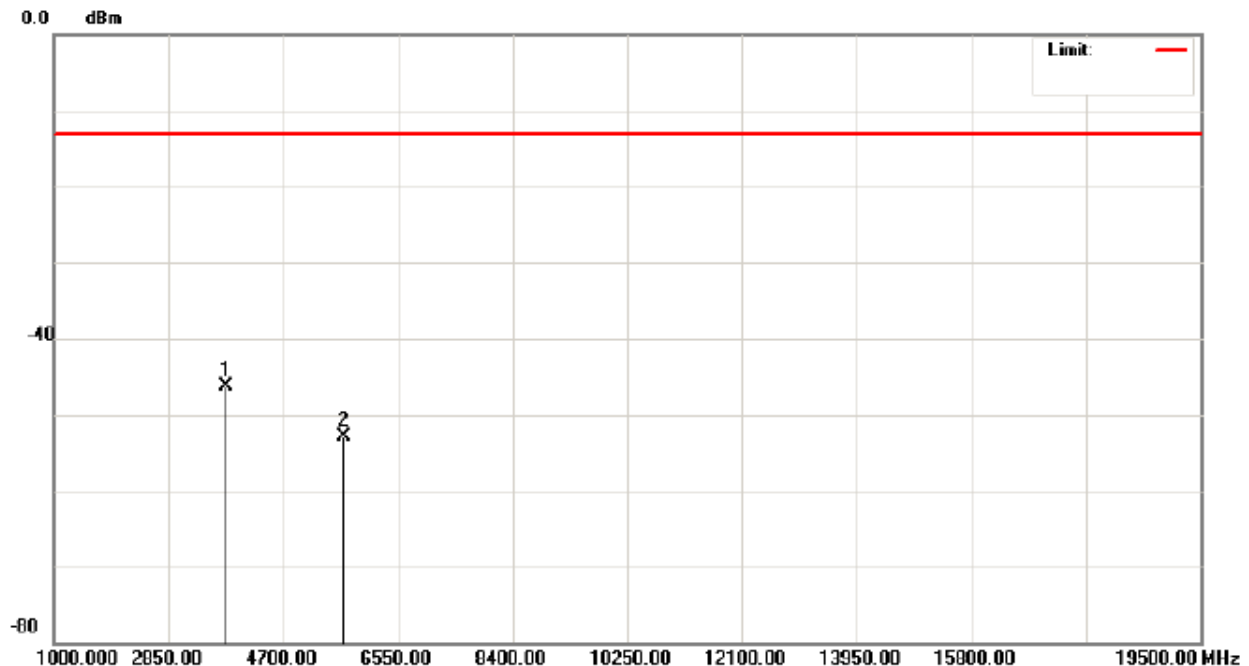


EUT :	Terminal	Model Name. :	M0010
Temperature :	19 °C	Relative Humidity :	66%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX CH661 for GPRS		

Frequency (MHz)	Ant H / V	EUT Axis (X/Y/Z)	TX/RX	Measure d(FS)	Limits	Margins	Note
3760.000	H	Z	TX	-42.68	-13.0	-29.68	
5639.720	H	Z	TX	-53.54	-13.0	-40.54	

Remark :

- (1) Reading in which marked as Peak means measurements by using is Peak Mode with Detector SPA setting in RBW=1MHz, VBW =1MHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

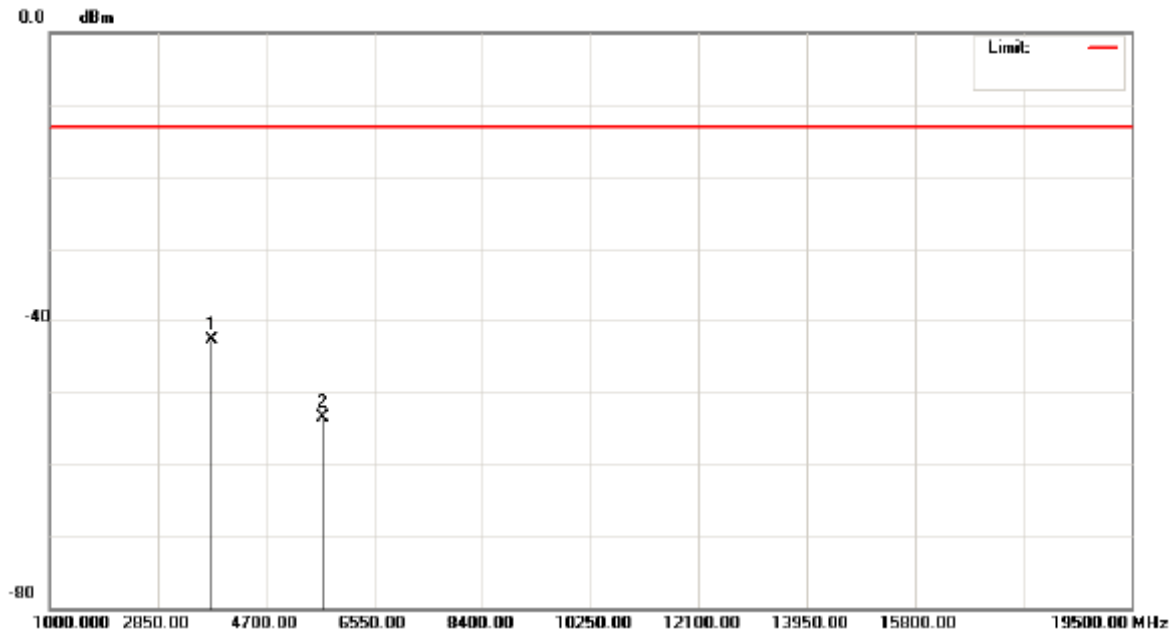


EUT :	Terminal	Model Name. :	M0010
Temperature :	19 °C	Relative Humidity :	66%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX CH810 for GPRS		

Frequency (MHz)	Ant H / V	EUT Axis (X/Y/Z)	TX/RX	Measure d(FS) (dBm)	Limits (dBm)	Margins	Note
3819.660	V	Z	TX	-48.96	-13.0	-35.96	
5731.380	V	Z	TX	-53.27	-13.0	-40.27	

Remark :

- (1) Reading in which marked as Peak means measurements by using is Peak Mode with Detector SPA setting in RBW=1MHz, VBW =1MHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

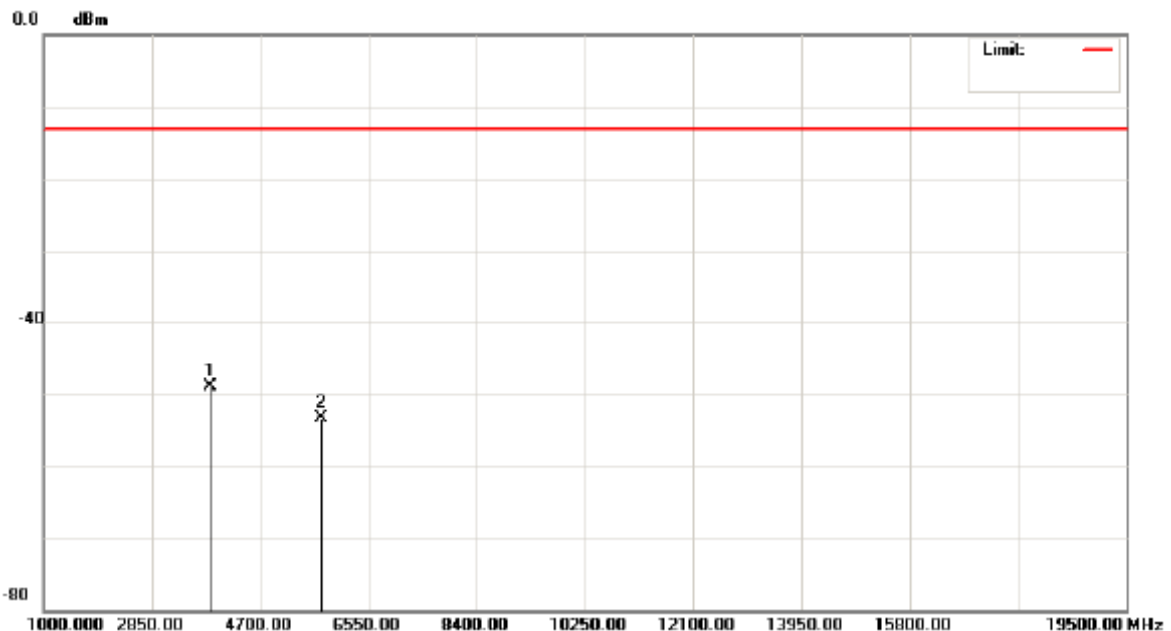


EUT :	Terminal	Model Name. :	M0010
Temperature :	19 °C	Relative Humidity :	66%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX CH810 for GPRS		

Frequency (MHz)	Ant H / V	EUT Axis (X/Y/Z)	TX/RX	Measure d(FS)	Limits	Margins	Note
3819.850	H	Z	TX	-46.66	-13.0	-33.66	
5730.430	H	Z	TX	-53.62	-13.0	-40.62	

Remark :

- (1) Reading in which marked as Peak means measurements by using is Peak Mode with Detector SPA setting in RBW=1MHz, VBW =1MHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

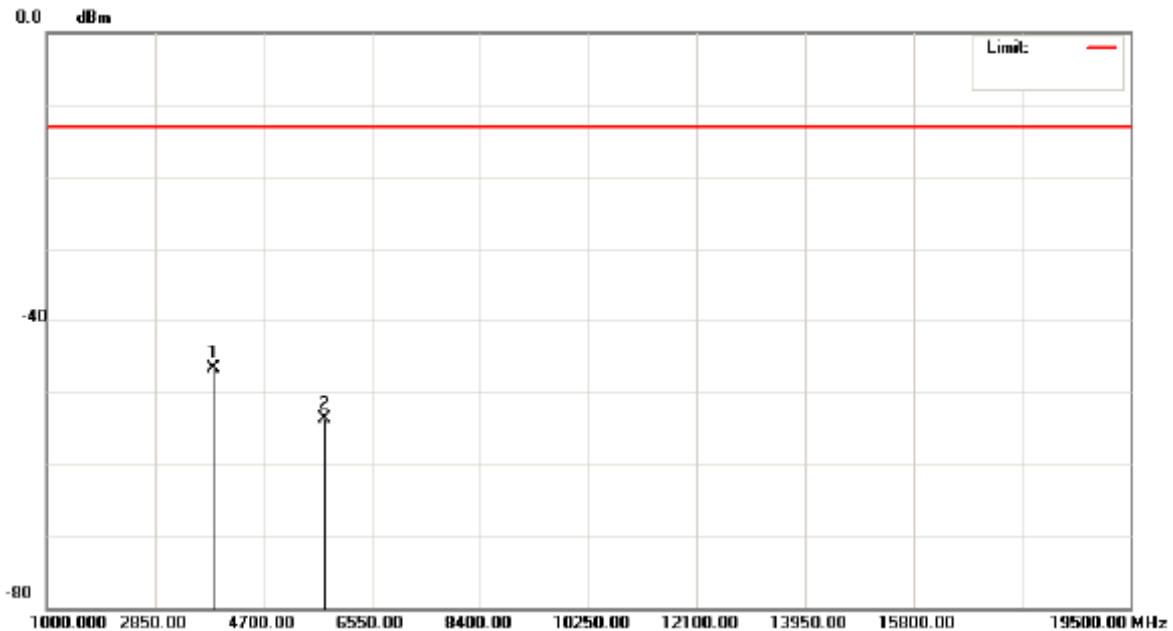

4.6 BAND EDGE EMISSIONS MEASUREMENT

4.6.1 LIMIT

The PCS frequency bands refer to the FCC 24.229 rule. According to FCC 24.238(b) specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. Then we measure that the bandwidth is about 300kHz and the resolution bandwidth is 3kHz.

4.6.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	2 MHz
RB / VB	3 kHz /30 kHz
Trace	Max Hold
Sweep Time	Auto

4.6.3 TEST PROCEDURES

1. The EUT was set up for the maximum peak power with GPRS link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels, 512 and 810(low and high operational frequency range.)
2. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The splitter loss and cable loss are the worst loss 4dB in the transmitted path track.
3. The center frequency of spectrum is the band edge frequency and span is 2 MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10KHz.
4. Record the max. trace plot into the test report.

4.6.4 TEST SETUP LAYOUT

This test setup layout is the same as that shown in section 4.2.4.

4.6.5 TEST DEVIATION


There is no deviation with the original standard.

4.6.6 EUT OPERATION DURING TEST


The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.6.7 TEST RESULTS OF BAND EDGE EMISSIONS

Band Edge on Configuration GPRS / Channel 512-CONDUCTED MODE

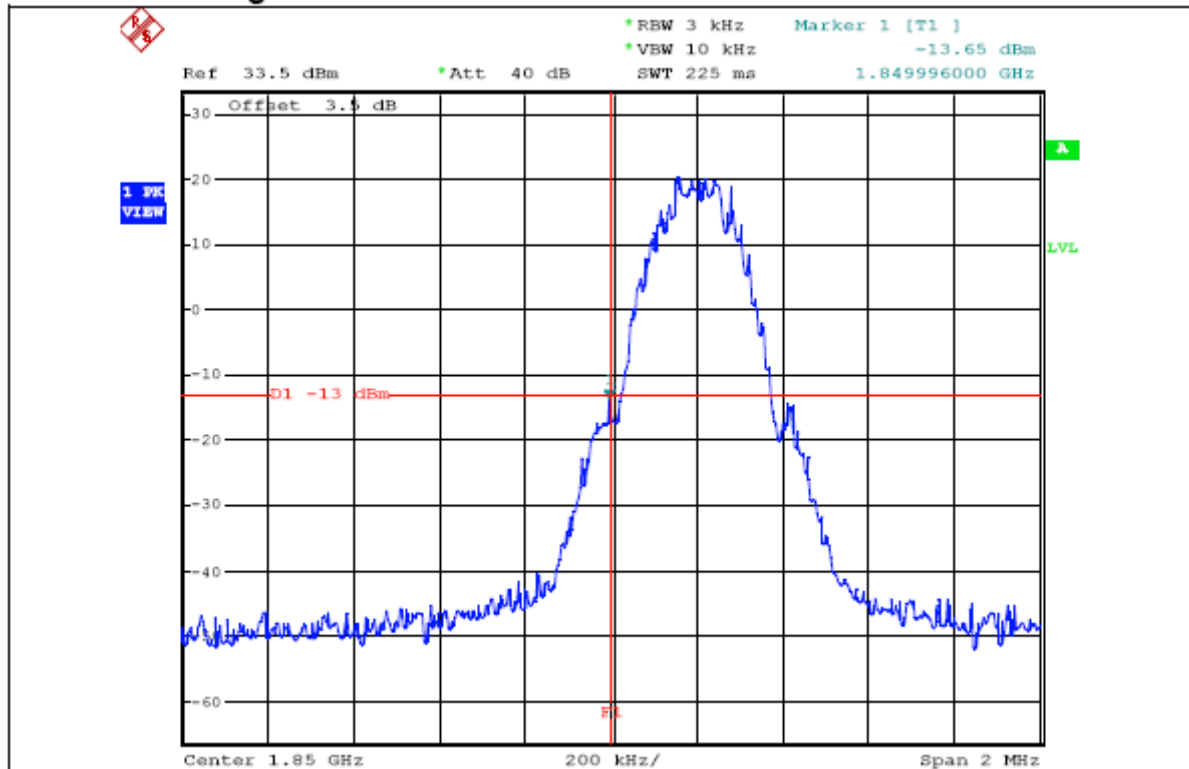

Band Edge on Configuration GPRS / Channel 810-CONDUCTED MODE

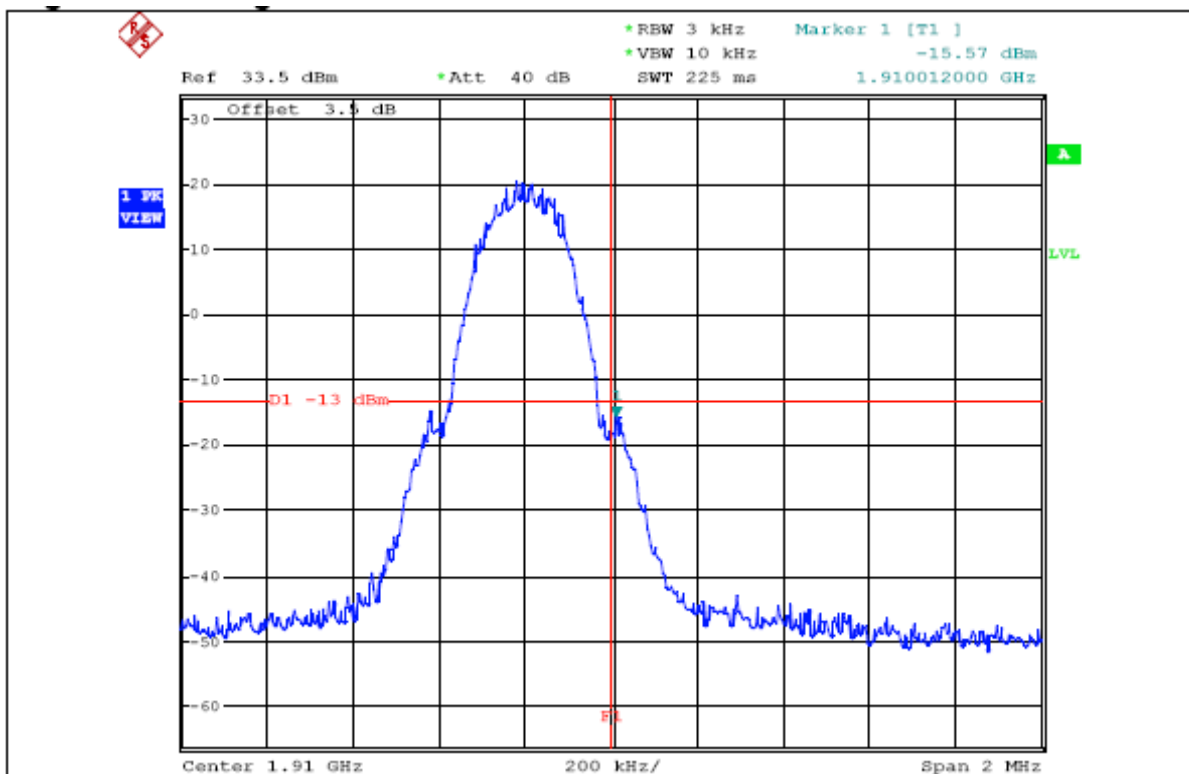

4.7 FREQUENCY STABILITY MEASUREMENT

4.7.1 LIMIT

According to the FCC part 2.4235 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The frequency error rate is according to the JTC standard that the frequency error rate shall be accurate to within 0.1 ppm of the received frequency from the base station. The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with the 2.1055(a)(1) $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.7.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the BS Simulator.

Spectrum Parameters	Setting
Frequency Error	The maximum of transmit frequency error

4.7.3 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the BS Simulator.
2. The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.
3. BS simulator used the frequency error function and measured the peak frequency error.
Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.
The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.
4. EUT is connected the external power supply to control the DC input power. The various Volts from the minimum 3.6 Volts to 4.2 Volts. Each step shall be record the frequency error rate.
5. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
6. Extreme temperature rule is $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.7.4 TEST SETUP LAYOUT

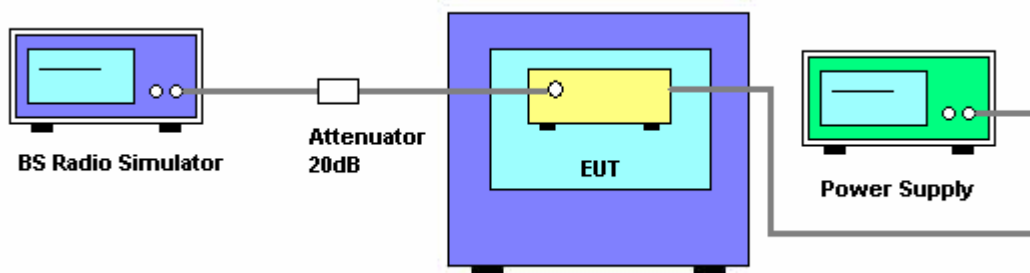

4.7.5 TEST DEVIATION

There is no deviation with the original standard.

4.7.6 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.7.7 RESULTS OF FREQUENCY STABILITY

EUT :	Terminal	Model Name. :	M0010
Temperature :	19 °C	Relative Humidity :	66%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX CH 661(un-modulation)		

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.6	28	0.0149	0.1
3.7	26	0.0138	0.1
3.8	28	0.0149	0.1
3.9	29	0.0154	0.1
4.0	28	0.0149	0.1
4.1	31	0.0165	0.1
4.2	29	0.0154	0.1
Max. Deviation (ppm)	31	0.0165	0.1

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
50	42	0.022	0.1
40	32	0.017	0.1
30	23	0.012	0.1
20	10	0.005	0.1
10	32	0.017	0.1
0	29	0.015	0.1
-10	6	0.003	0.1
-20	18	0.010	0.1
-30	21	0.011	0.1
Max. Deviation (ppm)	42	0.022	0.1

4.8 CONDUCTED EMISSION MEASUREMENT

4.8.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.8.2 MEASUREMENT INSTRUMENTS LIST AND SETTING

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00042991	Jan. 24, 2009
2	LISN	EMCO	3816/2	00042990	Jan. 24, 2009
3	Pulse Limiter	Electro-Metrics	EM-7600	112644	Nov. 27, 2008
4	50Ω Terminator	N/A	N/A	N/A	May.13, 2009
5	Test Cable	N/A	C01	N/A	Nov. 27, 2008
6	EMI Test Receiver	R&S	ESCI	100082	Mar. 08, 2008

Remark: " N/A" denotes No Model Name. , Serial No. or No Calibration specified.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.8.3 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation

4.8.5 TEST SETUP

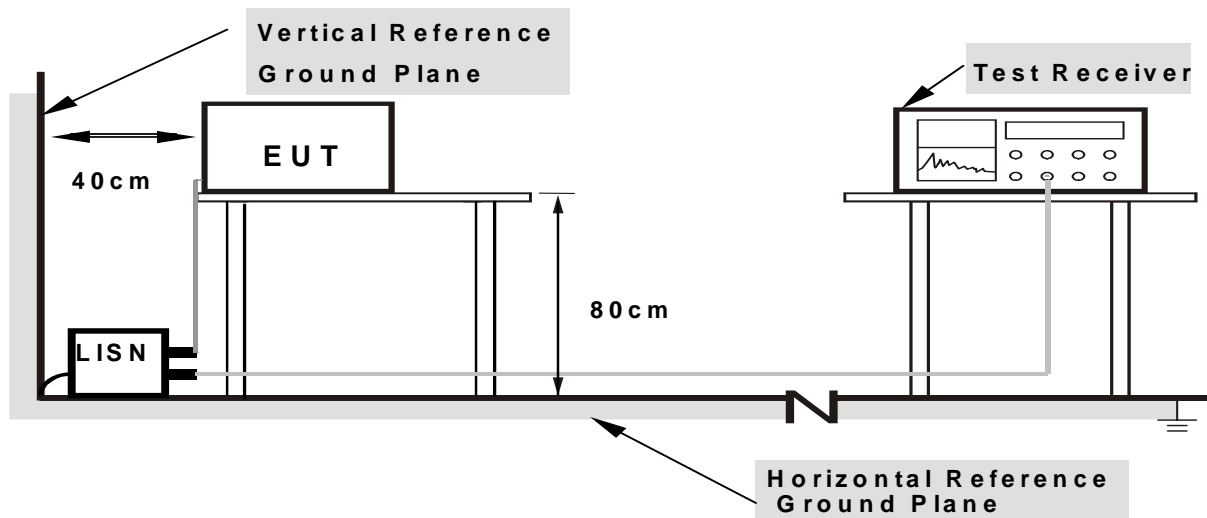

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.8.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


4.8.7 TEST RESULTS

EUT :	Terminal	Model Name. :	M0010
Temperature :	18 °C	Relative Humidity :	60%
Pressure :	1008hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 4 - Normal Link with cradle use (full system)		

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Margin (dB)	Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.17	Line	57.10	40.82	64.78	54.78	-13.96	(QP)
0.23	Line	49.59	*	62.51	52.51	-12.92	(QP)
0.41	Line	40.42	*	57.61	47.61	-17.19	(QP)
0.48	Line	41.21	*	56.41	46.41	-15.20	(QP)
0.51	Line	39.66	*	56.00	46.00	-16.34	(QP)
13.55	Line	59.15	58.95	60.00	50.00	8.95	Note (3)

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of Note. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.
- (3) Tx Fundamental, For reference only. Please refer to the next page.

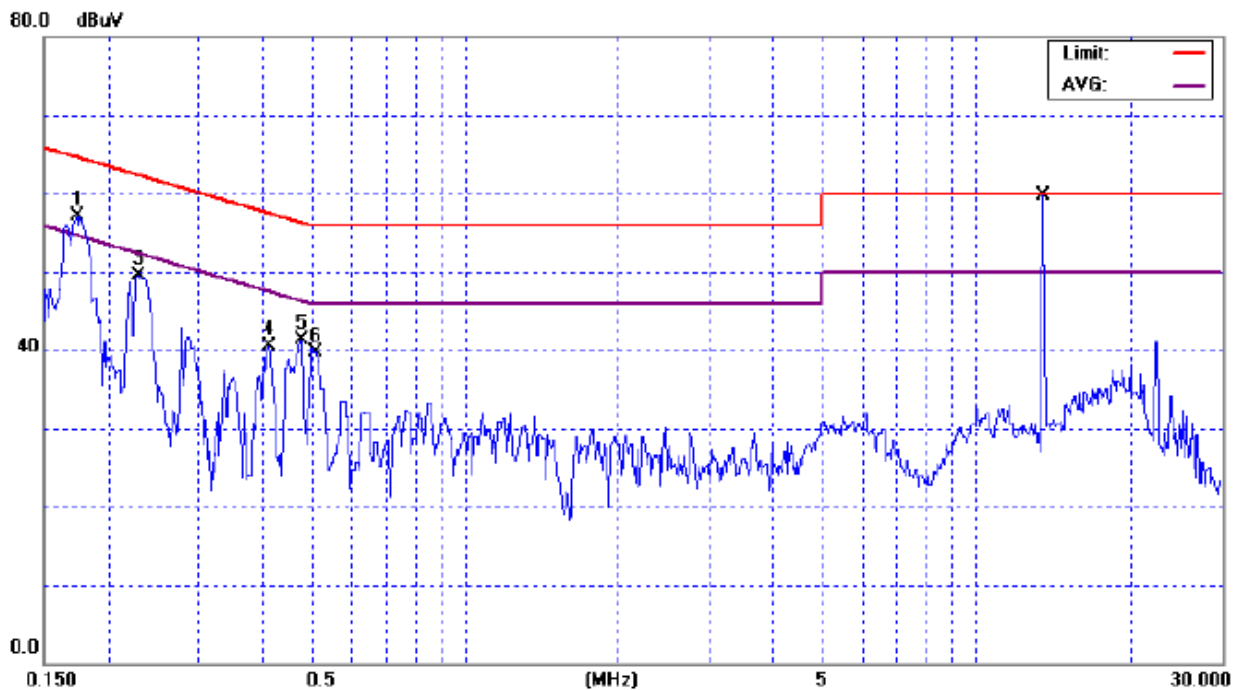


EUT :	Terminal	Model Name. :	M0010
Temperature :	18 °C	Relative Humidity :	60%
Pressure :	1008hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 4 - Normal Link with cradle use (full system)		

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Margin (dB)	Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
13.55	Line	43.16	36.63	60.00	50.00	-13.37	(AV)

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of Note. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.
- (3) a) First, perform the AC line conducted tests with the antenna attached to make sure the device complies with the conducted limits outside the transmitter's fundamental emission band.
b) Second, retest with a dummy load to make sure the device complies with the conducted limits inside the transmitter's fundamental emission band. Only the fundamental TX emission band needs to be retested.

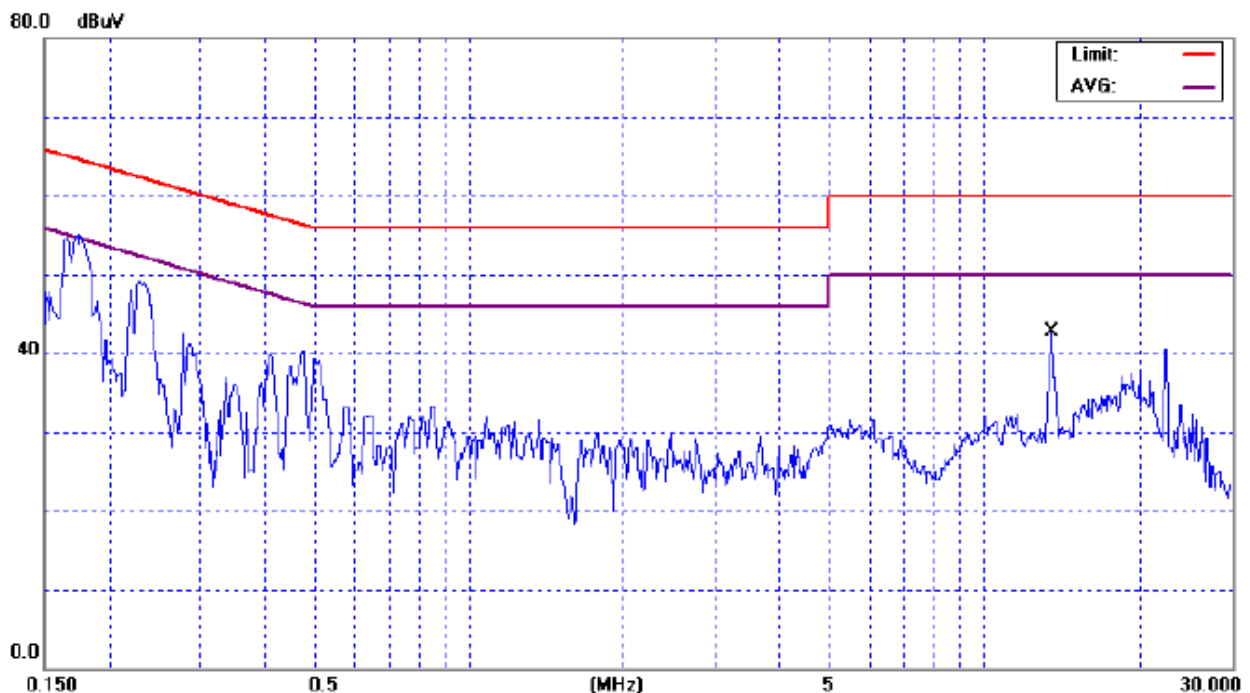


EUT :	Terminal	Model Name. :	M0010
Temperature :	18 °C	Relative Humidity :	60%
Pressure :	1008hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 4 - Normal Link with cradle use (full system)		

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Margin (dB)	Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.18	Neutral	53.49	37.34	64.68	54.68	-17.39	(AV)
0.23	Neutral	46.82	*	62.58	52.58	-15.76	(QP)
0.45	Neutral	40.61	*	56.88	46.88	-16.27	(QP)
1.37	Neutral	35.25	*	56.00	46.00	-20.75	(QP)
13.55	Neutral	59.39	59.39	60.00	50.00	9.39	Note (3)
22.55	Neutral	40.28	*	60.00	50.00	-19.72	(QP)

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of "Note". If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.
- (3) Tx Fundamental, For reference only. Please refer to the next page.

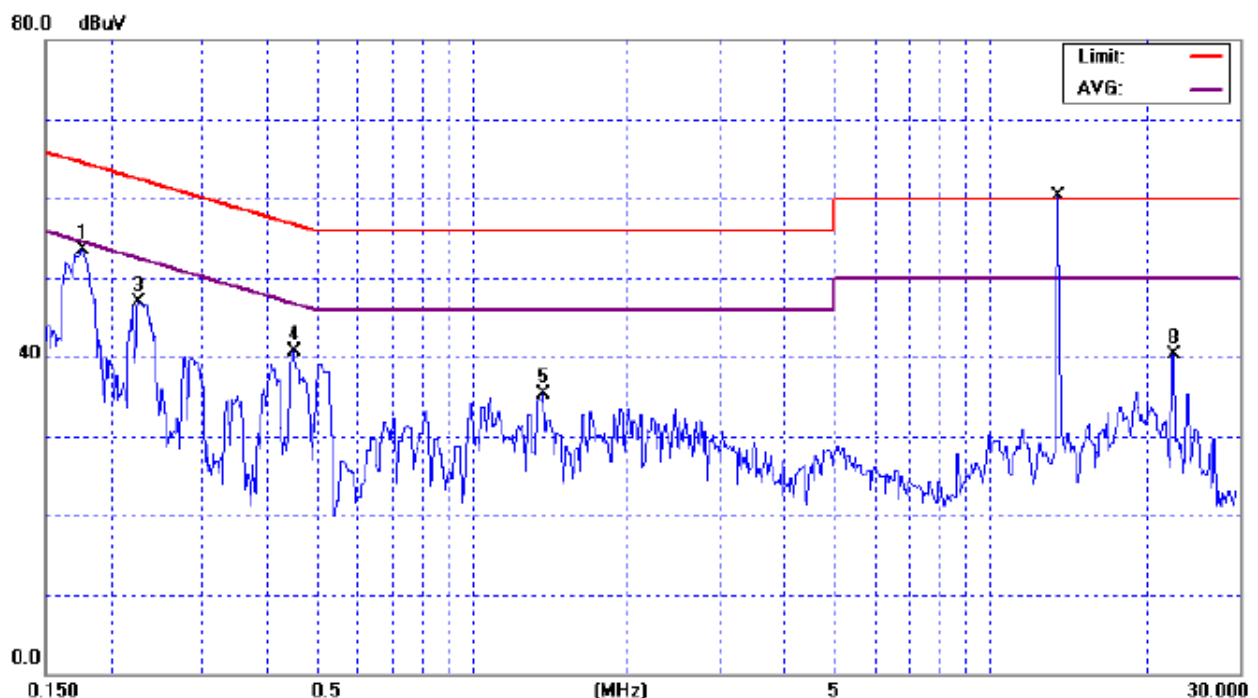


EUT :	Terminal	Model Name. :	M0010
Temperature :	18 °C	Relative Humidity :	60%
Pressure :	1008hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 4 - Normal Link with cradle use (full system)		

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Margin (dB)	Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
13.55	Neutral	33.67	28.14	60.00	50.00	-11.27	(AV)

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of Note. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.
- (3) a) First, perform the AC line conducted tests with the antenna attached to make sure the device complies with the conducted limits outside the transmitter's fundamental emission band.
b) Second, retest with a dummy load to make sure the device complies with the conducted limits inside the transmitter's fundamental emission band. Only the fundamental TX emission band needs to be retested.

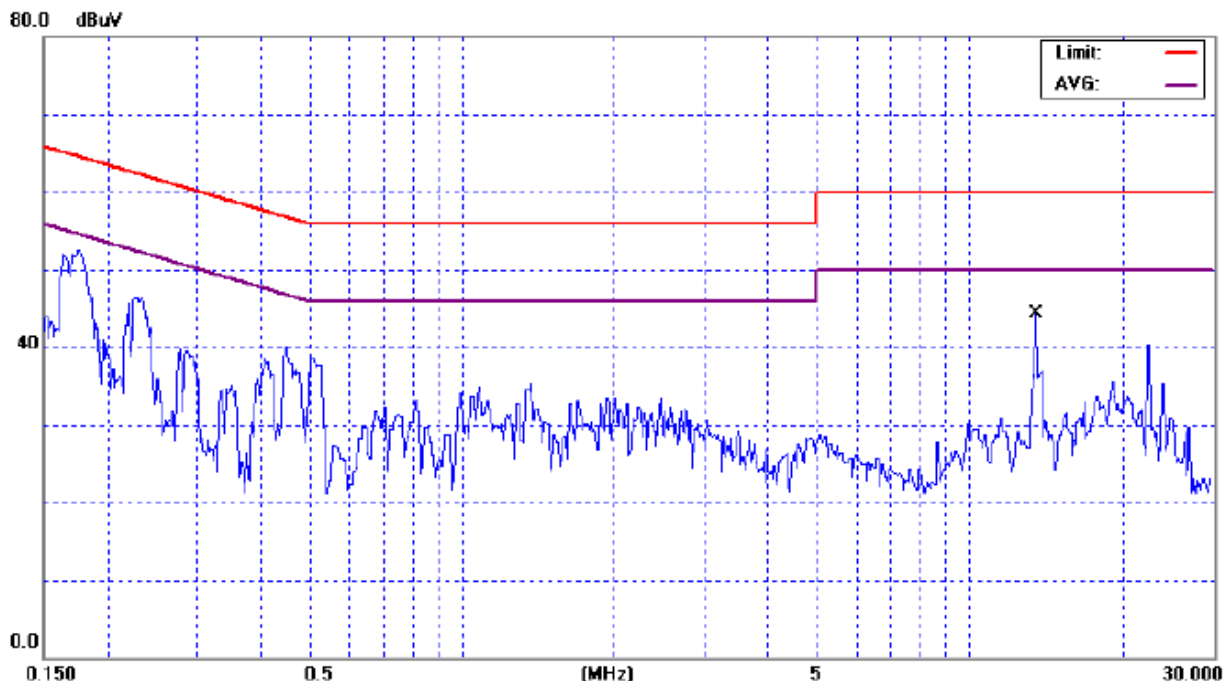

5. LIST OF MEASUREMENT EQUIPMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9160	3058	Nov. 27, 2008
2	Test Cable	N/A	10M_OS02	N/A	Nov. 27, 2008
3	Test Cable	N/A	OS02-1/-2/-3	N/A	Nov. 27, 2008
4	Pre-Amplifier	Anritsu	MH648A	M09961	Nov. 27, 2008
5	EMI Test Receiver	R&S	ESCI	100082	Jan. 31, 2008
6	Antenna Mast	Chance Most	CMTB-1.5	N/A	N/A
7	Turn Table	Chance Most	CMTB-1.5	N/A	N/A
8	Spectrum Analyzer	R&S	FSP_40	100129	Jan. 07, 2009
9	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-325	Oct. 24, 2008
10	Horn Antenna	Schwarzbeck	BBHA9170	9170187	Oct. 24, 2008
11	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Mar. 10, 2008
12	Microflex Cable	United Microwave	57793	1m	Mar. 10, 2008
13	Microflex Cable	United Microwave	A30A30-5006	10M	Jul. 07, 2008
14	Universal Radio Communication Tester	R&S	CMU200	109369	Jan. 18, 2009
15	High Pass Filter	MICRO-TRONICS	HPM50108	020	Oct. 03, 2008
16	High Pass Filter	MICRO-TRONICS	HPM50111	021	Oct. 03, 2008
17	High Pass Filter	MICRO-TRONICS	HPM50702	029	Oct. 03, 2008
18	Attenuator	RADIALL	R41572000	0603033073	NCR
19	Power Divider	Agilent	87302C (0.5-26.5GHz)	3239A00760	NCR
20	Signal Generator	R&S	SMT 06	832080/007	Aug. 01, 2008
21	Temperature & Humidity Chamber	GIANT FORCE	GTH-056P	GF-94454-1	Jul. 23, 2008

6. EUT TEST PHOTO

Conducted Measurement Photos Normal Link with cradle use (full system)



**Radiated Measurement Photos
EUT Orthogonal Axis : Z**

