


Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

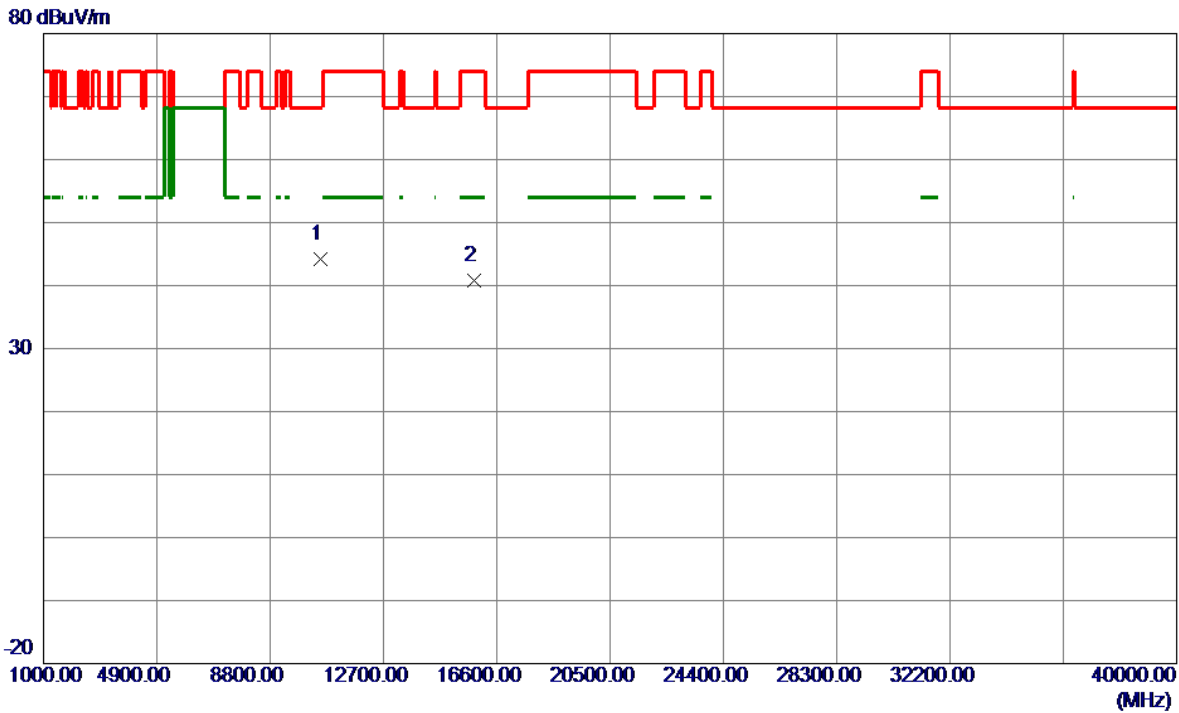


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10540.0000	53.59	-9.43	44.16	68.20	-24.04	Peak	
2	15810.0000	47.66	-6.90	40.76	74.00	-33.24	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

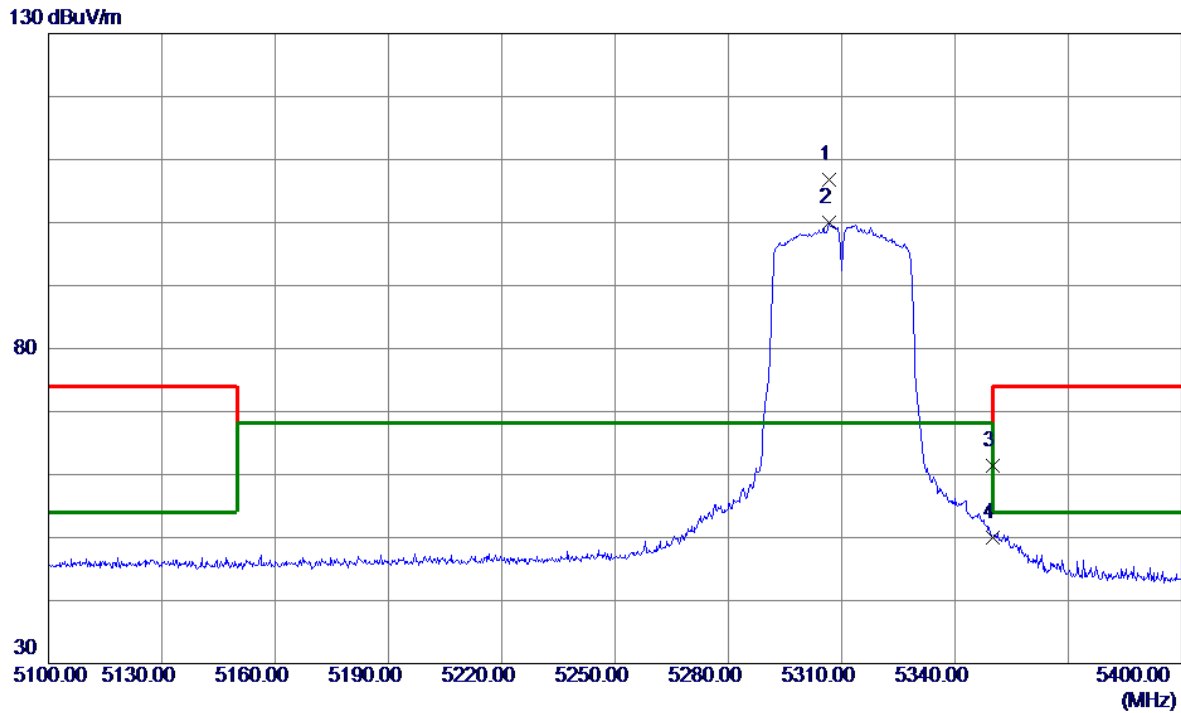


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5306.5500	69.31	37.56	106.87	68.20	38.67	Peak	No limit
2	5306.5500	62.43	37.56	99.99	68.20	31.79	AVG	No limit
3	5350.0000	23.62	37.74	61.36	74.00	-12.64	Peak	
4	5350.0000	12.24	37.74	49.98	54.00	-4.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

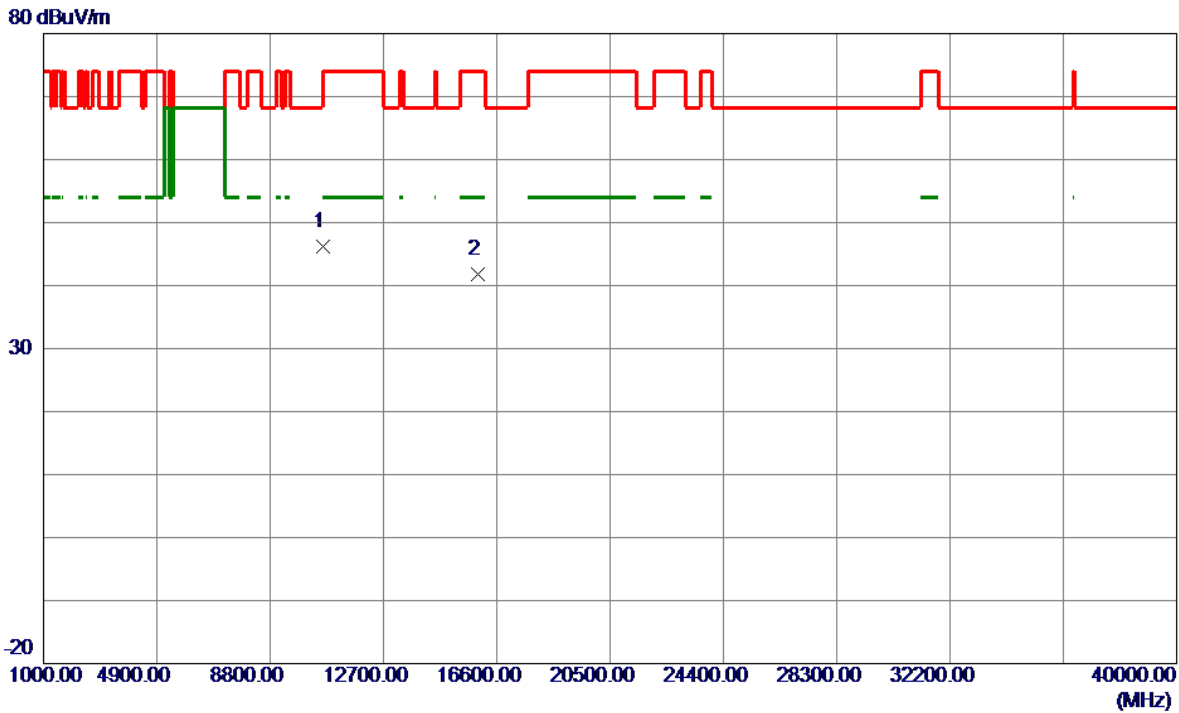


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10627.1500	55.56	-9.34	46.22	74.00	-27.78	Peak	
2	15930.0000	48.68	-6.96	41.72	74.00	-32.28	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

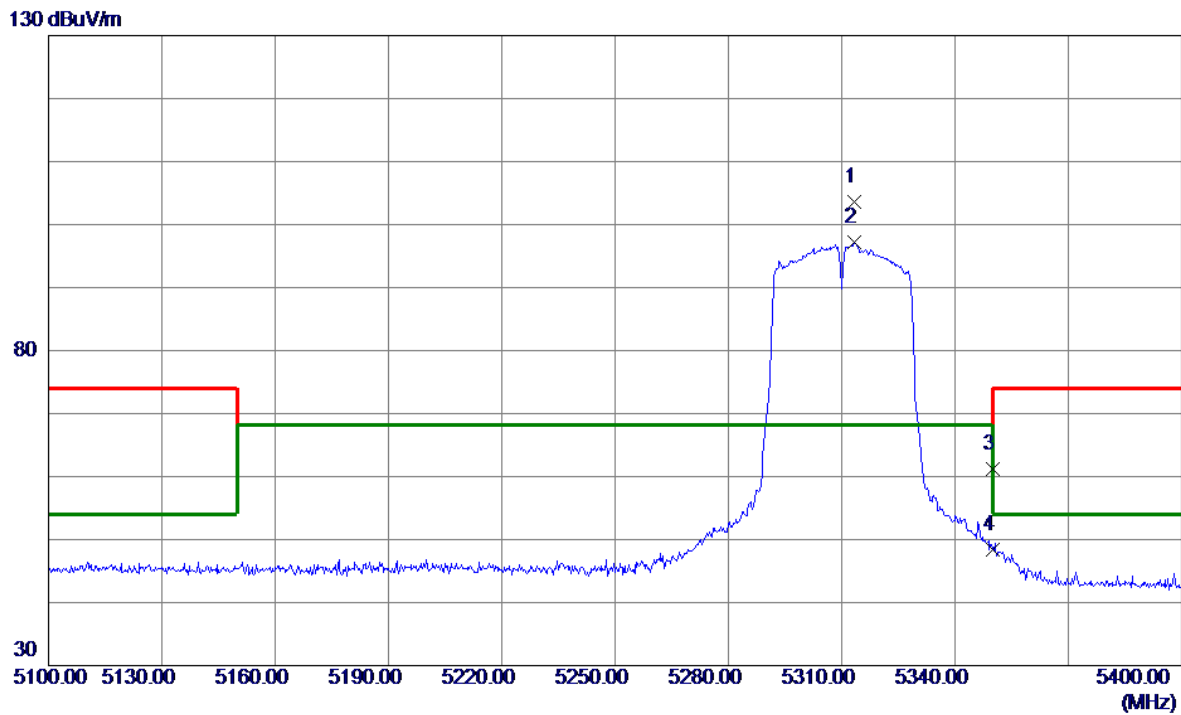


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5313.4500	65.95	37.59	103.54	68.20	35.34	Peak	No limit
2	5313.4500	59.56	37.59	97.15	68.20	28.95	AVG	No limit
3	5350.0000	23.40	37.74	61.14	74.00	-12.86	Peak	
4	5350.0000	10.75	37.74	48.49	54.00	-5.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

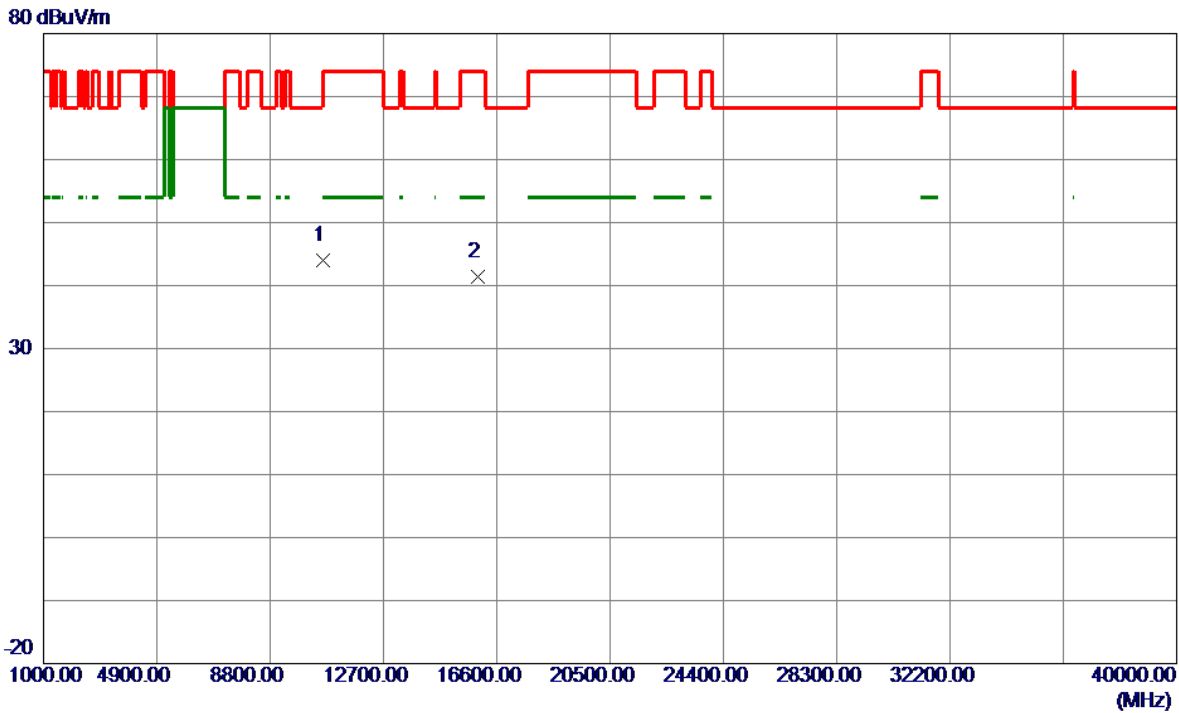


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10620.0000	53.32	-9.35	43.97	74.00	-30.03	Peak	
2	15930.0000	48.43	-6.96	41.47	74.00	-32.53	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

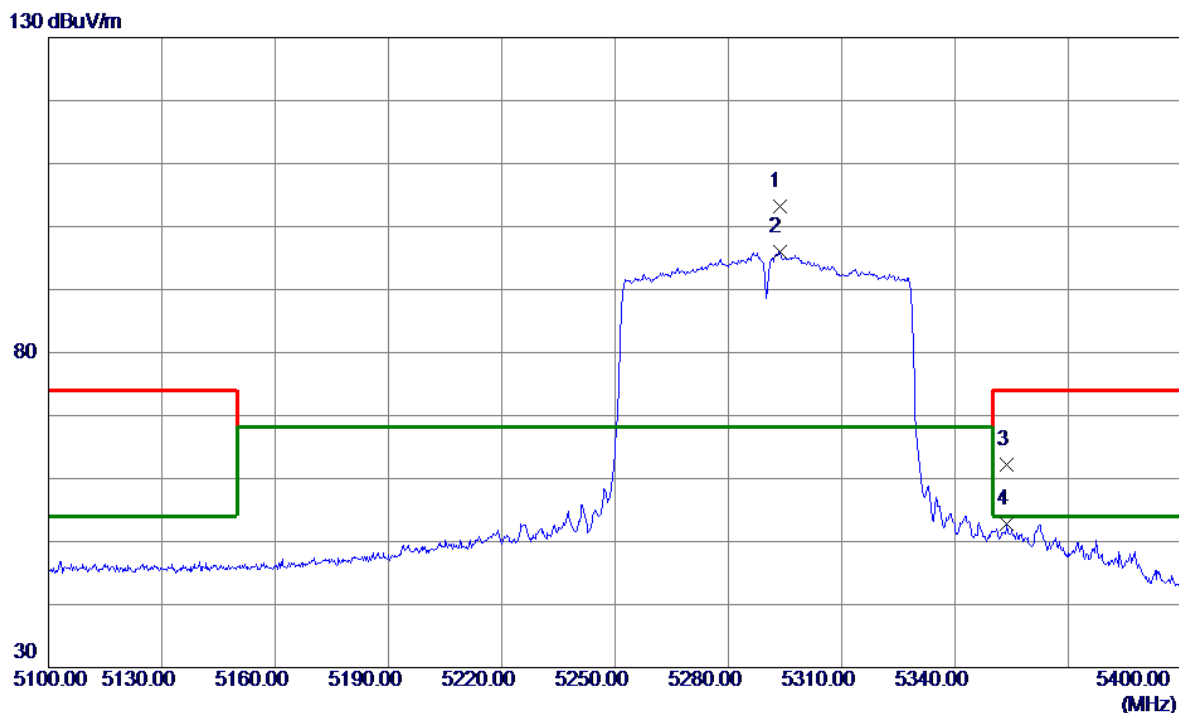


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5293.5000	65.73	37.54	103.27	68.20	35.07	Peak	No limit
2	5293.5000	58.44	37.54	95.98	68.20	27.78	AVG	No limit
3	5353.8000	24.46	37.75	62.21	74.00	-11.79	Peak	
4	5353.8000	15.07	37.75	52.82	54.00	-1.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

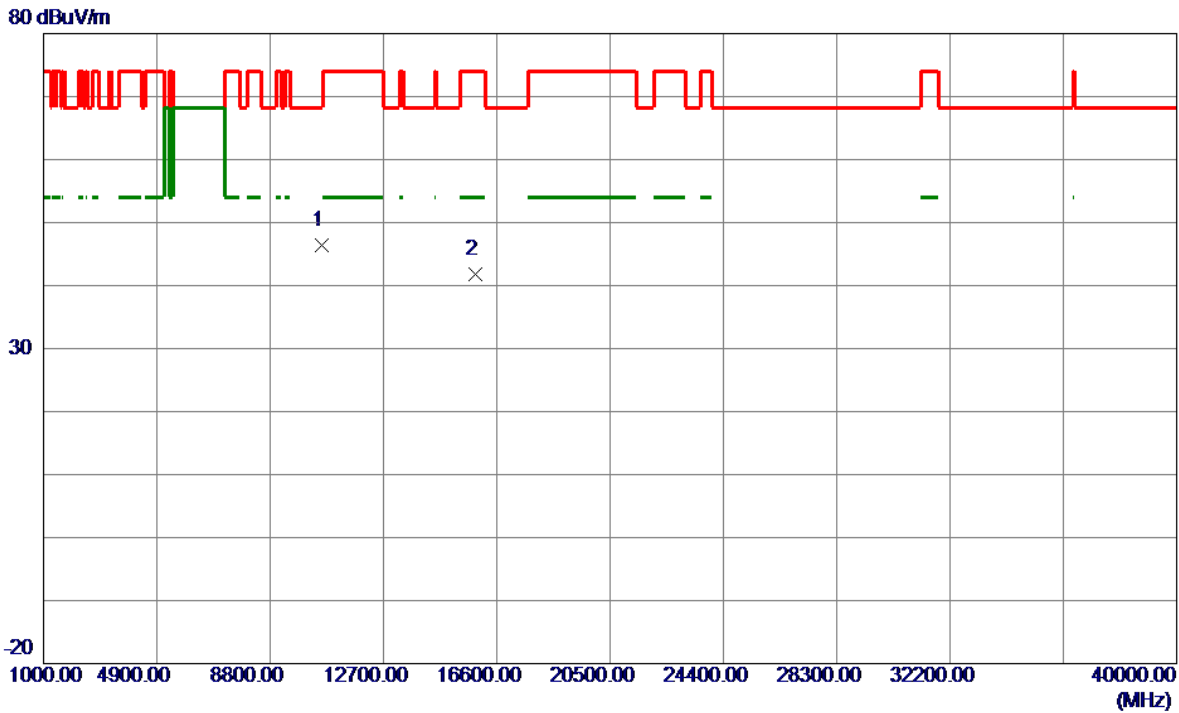


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10580.0000	55.71	-9.38	46.33	68.20	-21.87	Peak	
2	15870.0000	48.76	-6.93	41.83	74.00	-32.17	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

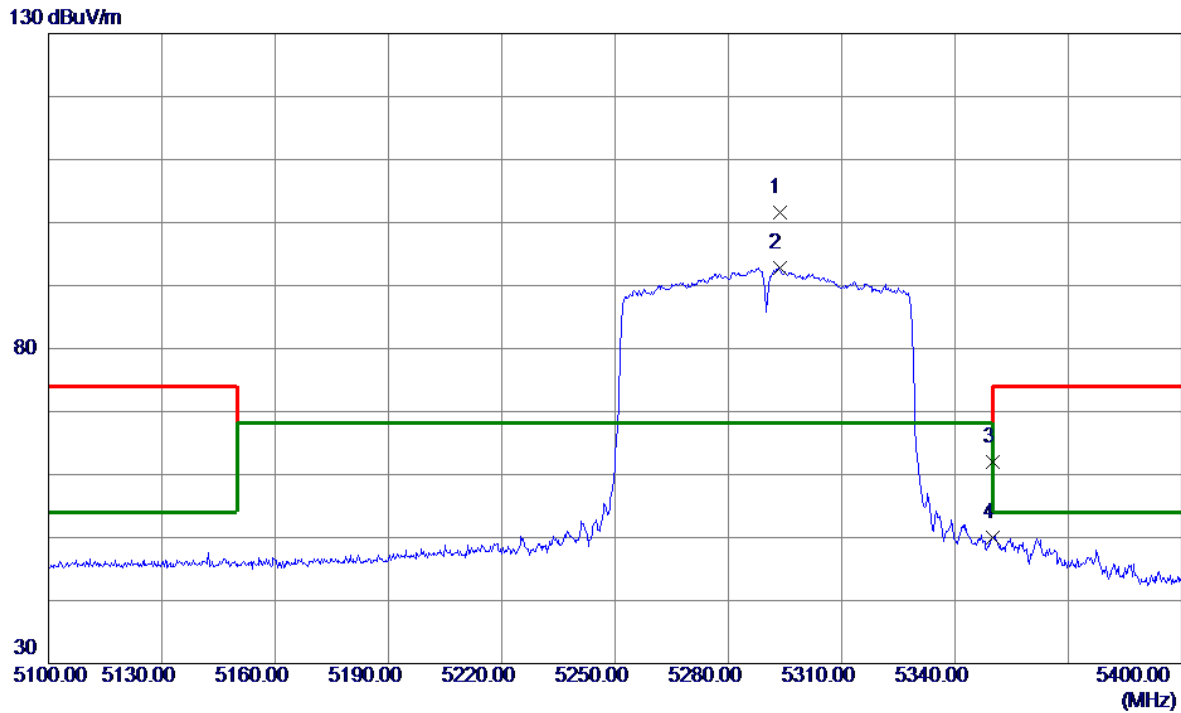


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5293.5000	64.13	37.54	101.67	68.20	33.47	Peak	No limit
2	5293.5000	55.19	37.54	92.73	68.20	24.53	AVG	No limit
3	5350.0000	24.28	37.74	62.02	74.00	-11.98	Peak	
4	5350.0000	12.33	37.74	50.07	54.00	-3.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

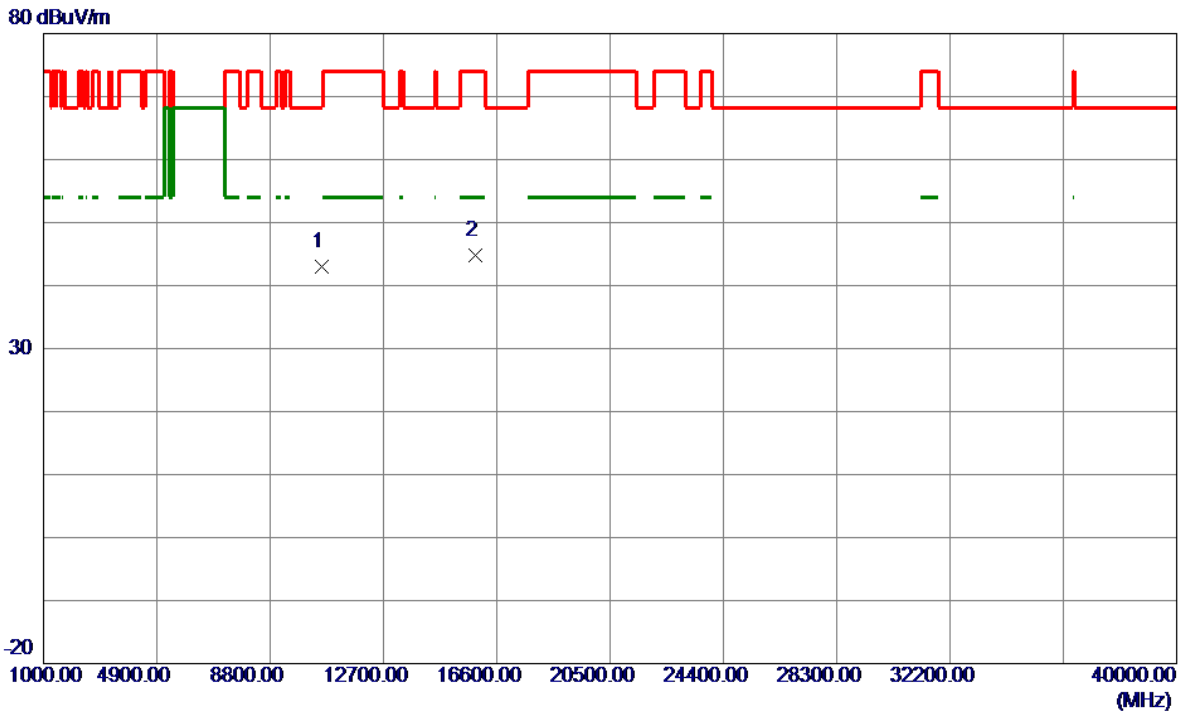


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10580.0000	52.46	-9.38	43.08	68.20	-25.12	Peak	
2	15870.0000	51.69	-6.93	44.76	74.00	-29.24	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

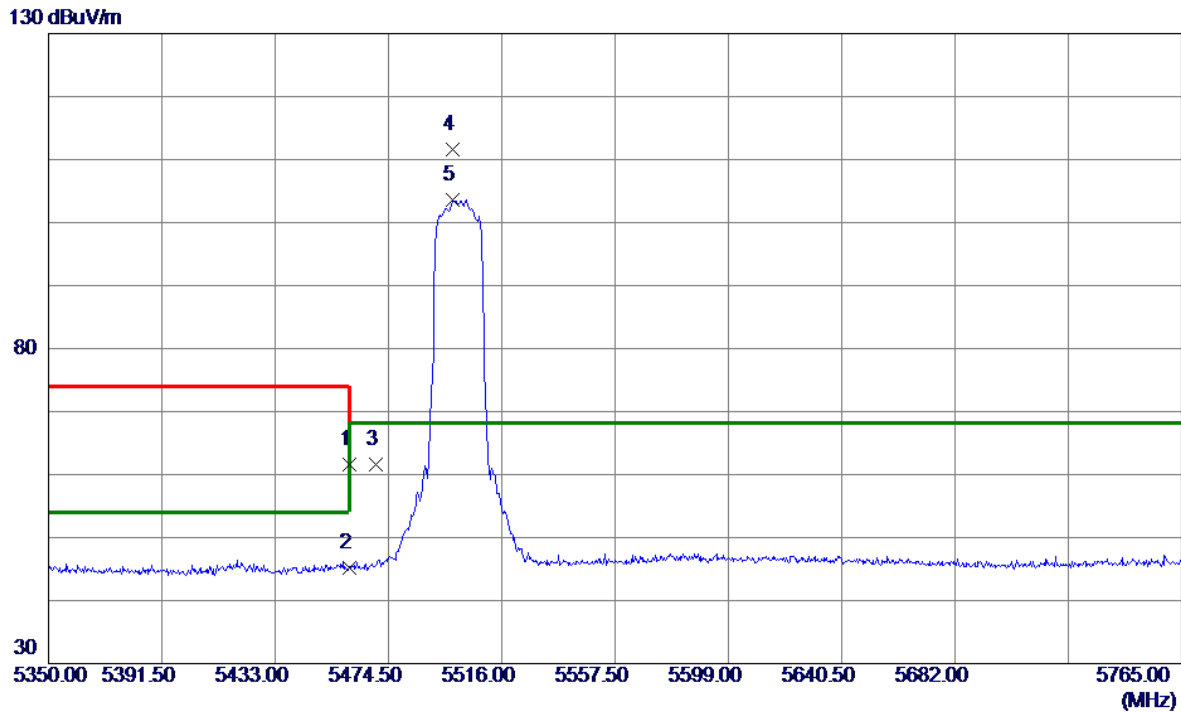


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	23.55	38.12	61.67	74.00	-12.33	Peak	
2	5460.0000	7.02	38.12	45.14	54.00	-8.86	AVG	
3	5470.0000	23.48	38.15	61.63	68.20	-6.57	Peak	
4 *	5498.1549	73.28	38.23	111.51	68.20	43.31	Peak	No limit
5	5498.1549	65.37	38.23	103.60	68.20	35.40	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

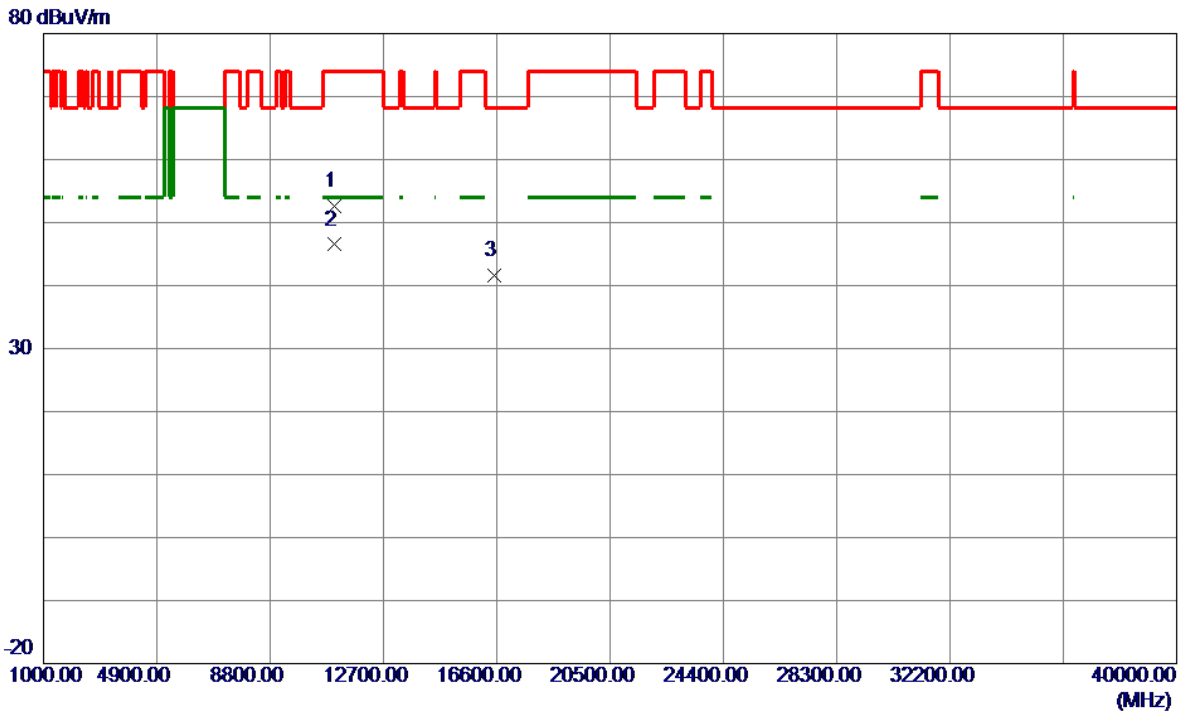


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10999.6000	61.40	-8.86	52.54	74.00	-21.46	Peak	
2 *	10999.6000	55.36	-8.86	46.50	54.00	-7.50	AVG	
3	16500.0000	47.42	-5.90	41.52	68.20	-26.68	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

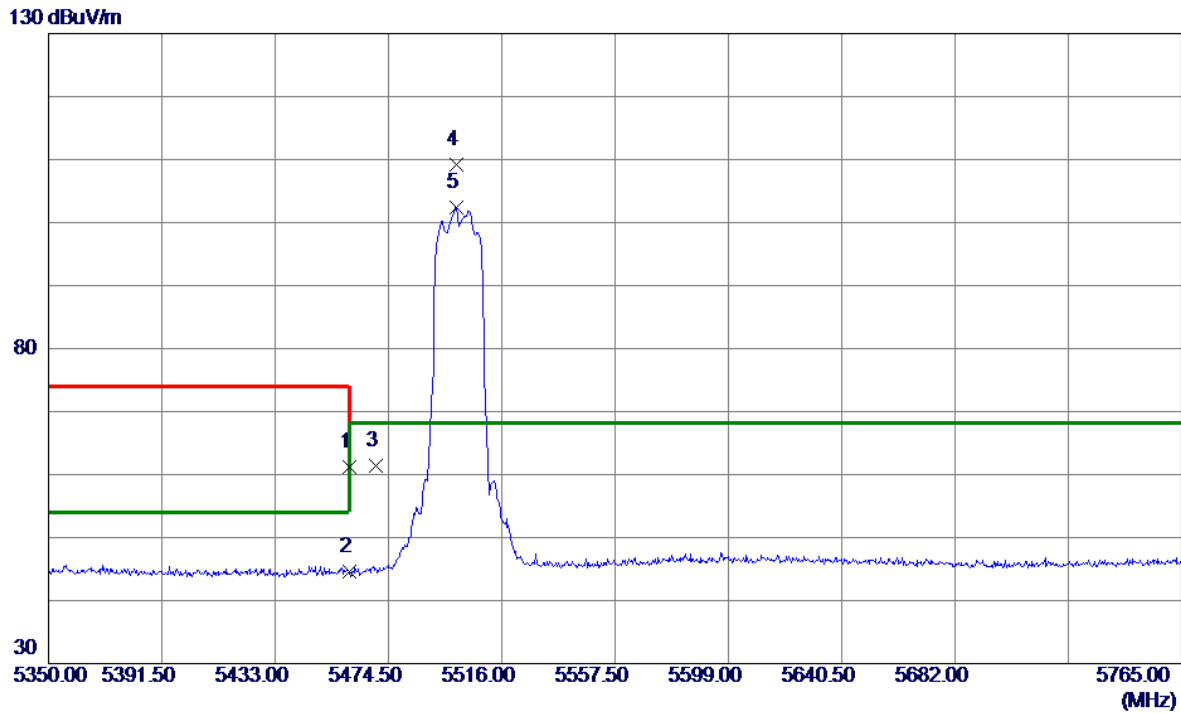


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	23.16	38.12	61.28	74.00	-12.72	Peak	
2	5460.0000	6.48	38.12	44.60	54.00	-9.40	AVG	
3	5470.0000	23.16	38.15	61.31	68.20	-6.89	Peak	
4 *	5499.4000	71.01	38.24	109.25	68.20	41.05	Peak	No limit
5	5499.4000	64.19	38.24	102.43	68.20	34.23	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

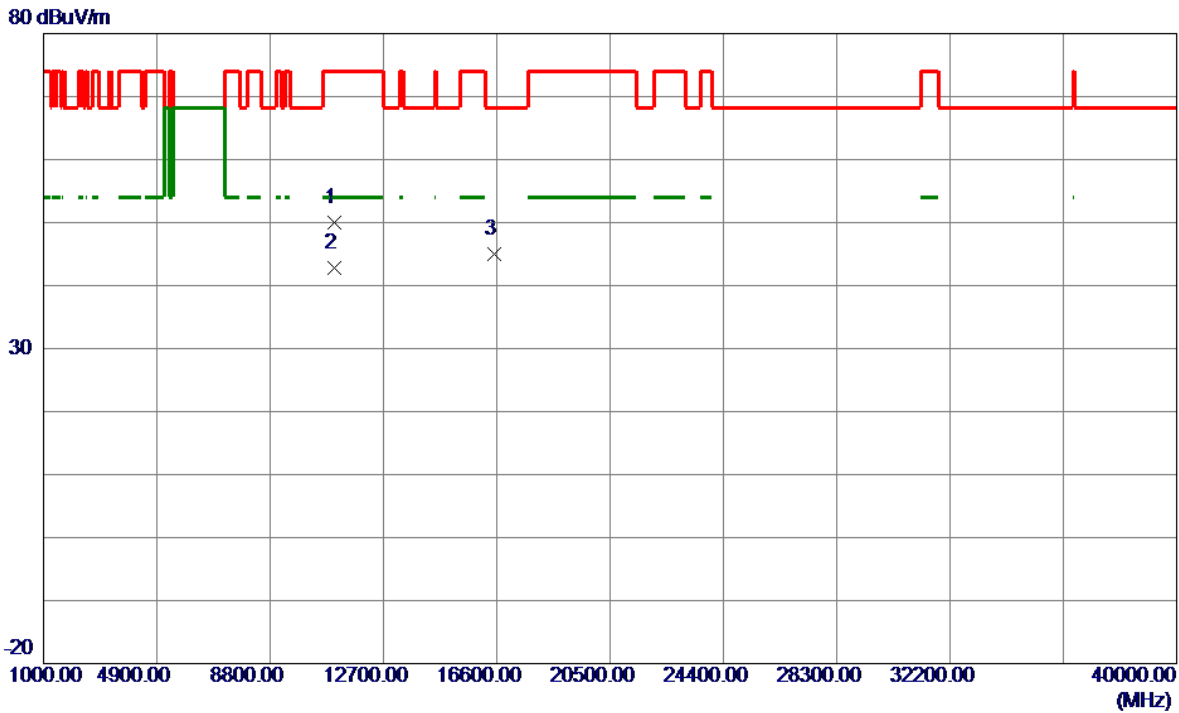


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11005.4500	58.80	-8.86	49.94	74.00	-24.06	Peak	
2 *	11005.4500	51.58	-8.86	42.72	54.00	-11.28	AVG	
3	16500.0000	50.89	-5.90	44.99	68.20	-23.21	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

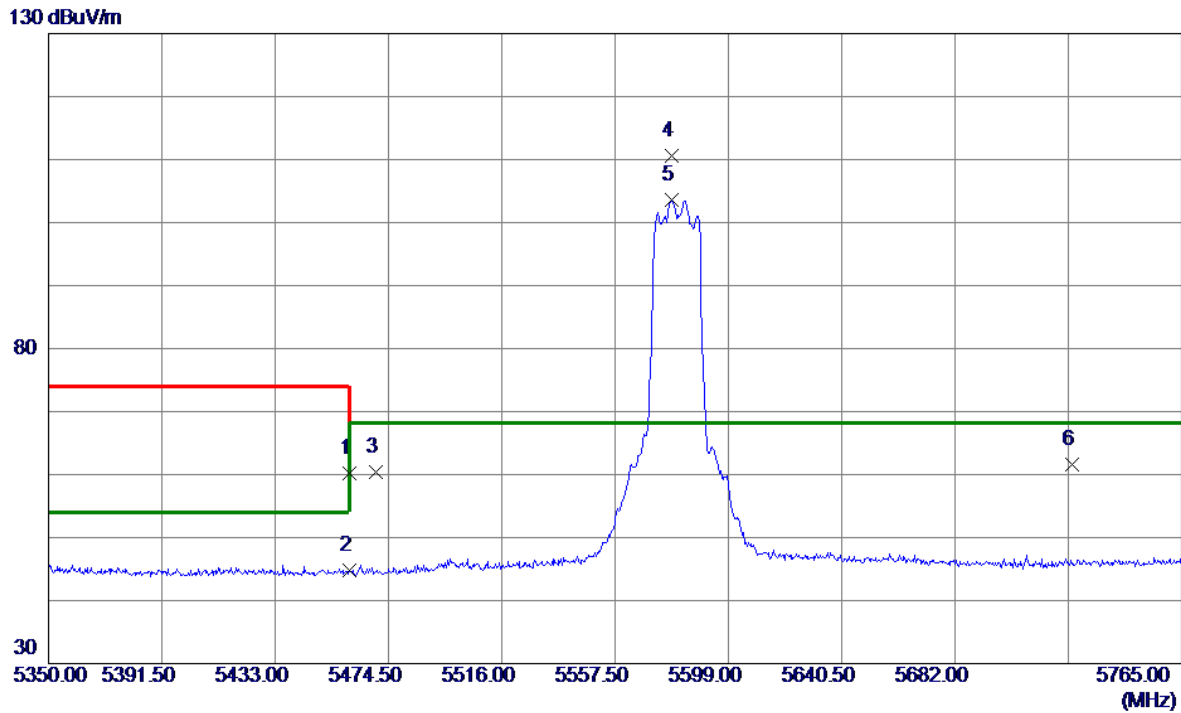


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	22.05	38.12	60.17	74.00	-13.83	Peak	
2	5460.0000	6.61	38.12	44.73	54.00	-9.27	AVG	
3	5470.0000	22.32	38.15	60.47	68.20	-7.73	Peak	
4 *	5578.0419	72.26	38.32	110.58	68.20	42.38	Peak	No limit
5	5578.0419	65.37	38.32	103.69	68.20	35.49	AVG	No limit
6	5725.0000	23.07	38.50	61.57	68.20	-6.63	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

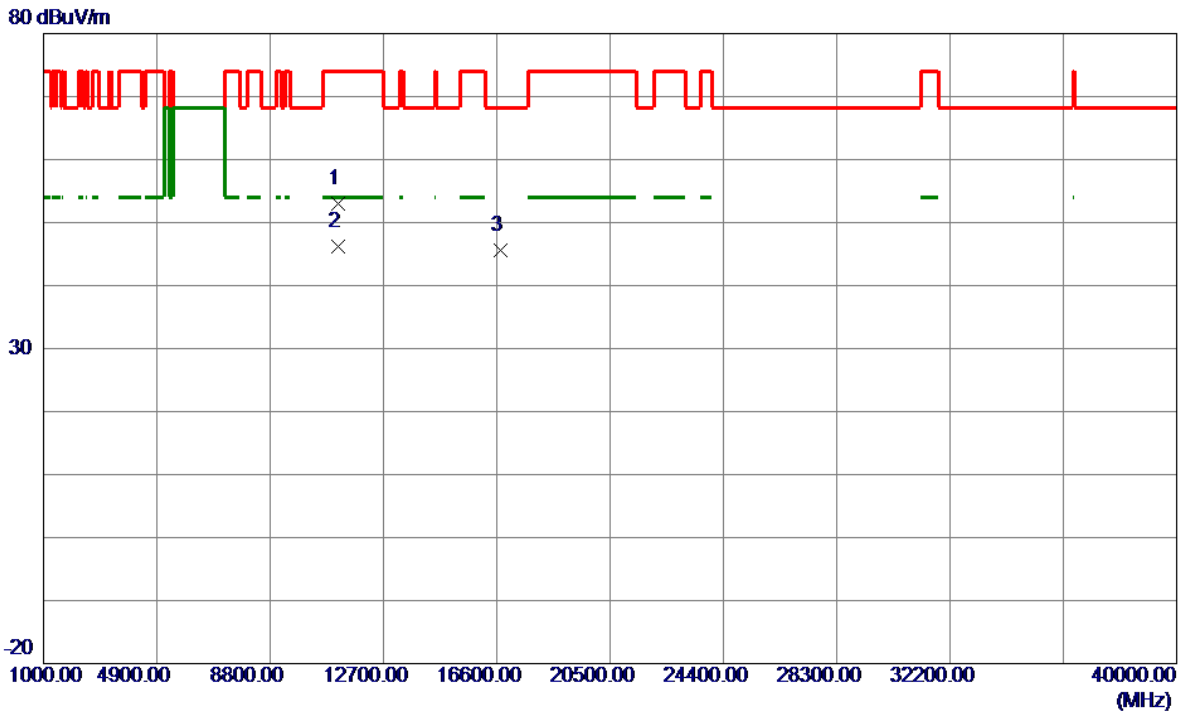


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11159.5000	62.00	-8.96	53.04	74.00	-20.96	Peak	
2 *	11159.5000	55.08	-8.96	46.12	54.00	-7.88	AVG	
3	16748.2000	50.92	-5.29	45.63	68.20	-22.57	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

130 dBuV/m

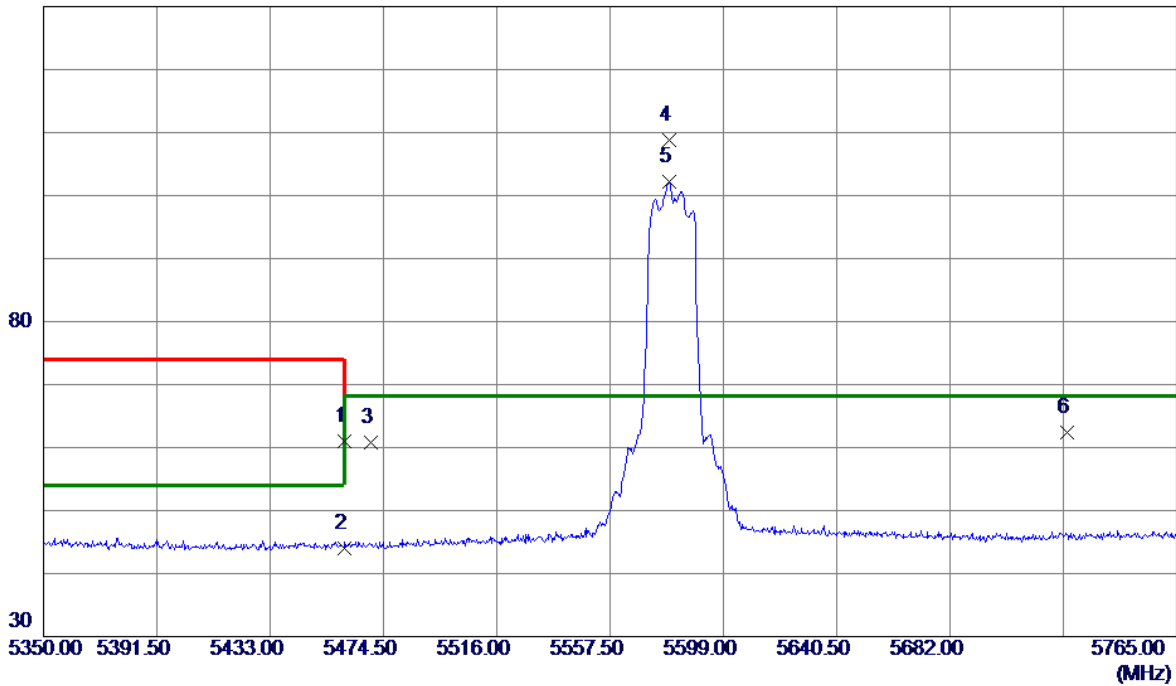


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	22.97	38.12	61.09	74.00	-12.91	Peak	
2	5460.0000	5.95	38.12	44.07	54.00	-9.93	AVG	
3	5470.0000	22.72	38.15	60.87	68.20	-7.33	Peak	
4 *	5579.0800	70.44	38.32	108.76	68.20	40.56	Peak	No limit
5	5579.0800	63.79	38.32	102.11	68.20	33.91	AVG	No limit
6	5725.0000	23.83	38.50	62.33	68.20	-5.87	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

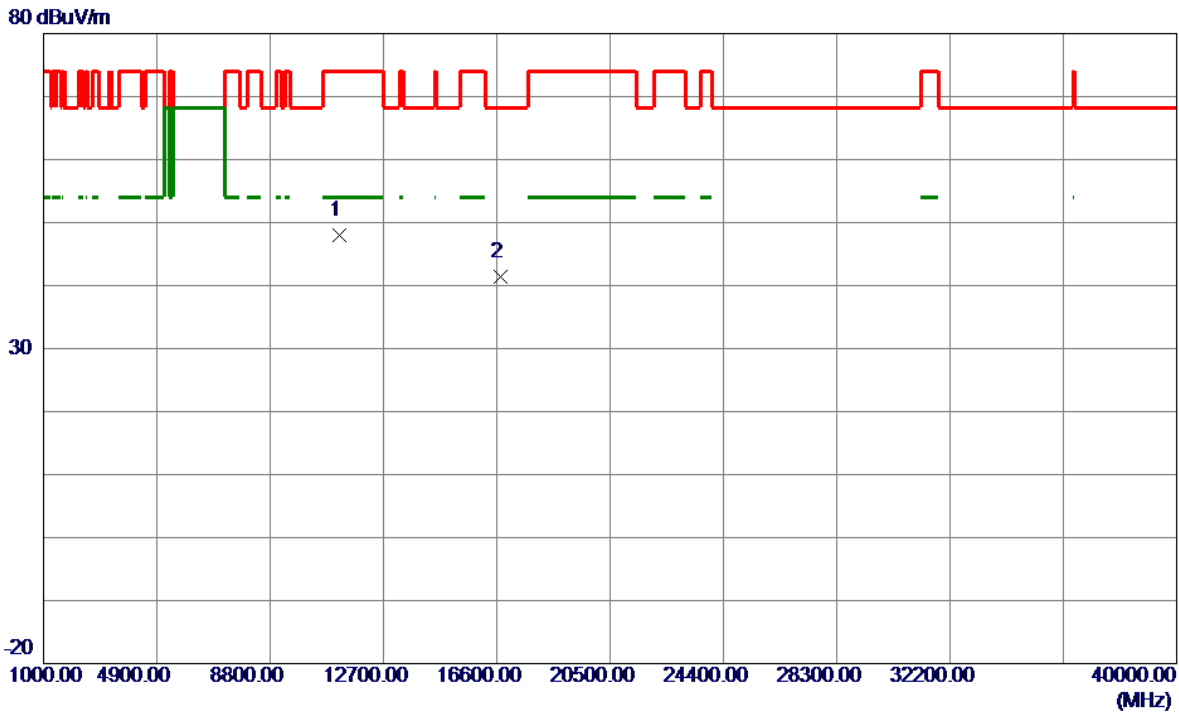


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11165.3500	56.97	-8.96	48.01	74.00	-25.99	Peak	
2	16740.0000	46.78	-5.32	41.46	68.20	-26.74	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

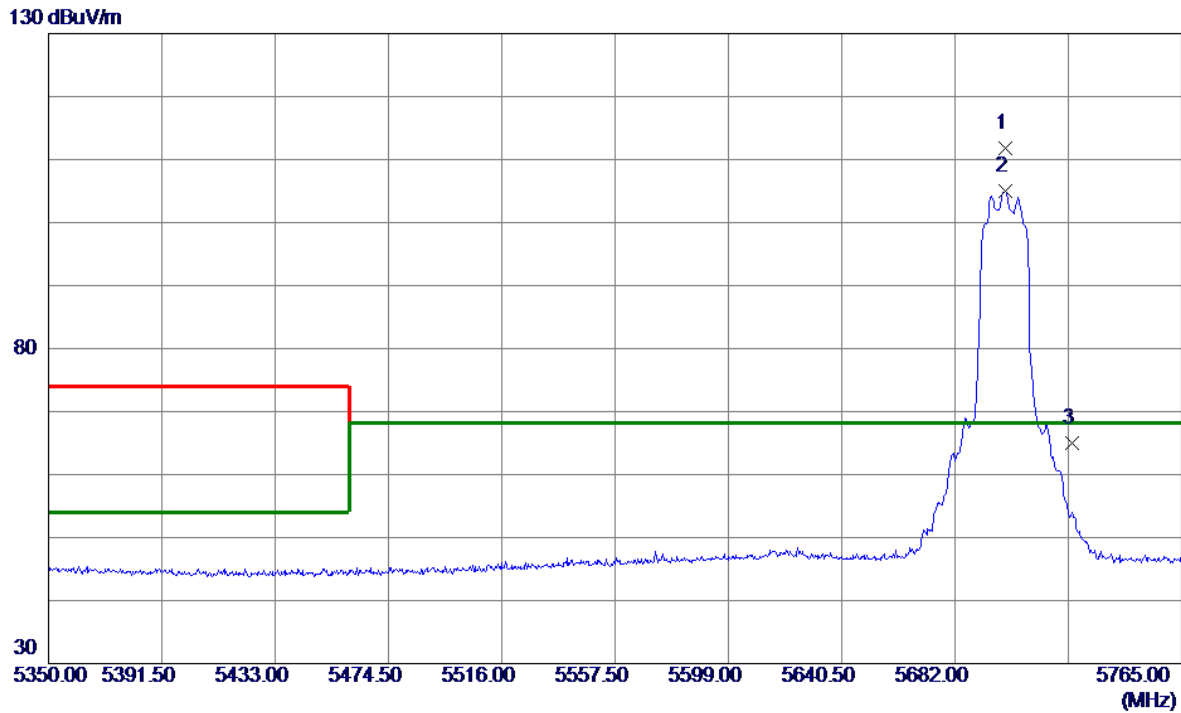


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5700.4670	73.48	38.41	111.89	68.20	43.69	Peak	No limit
2	5700.4670	66.55	38.41	104.96	68.20	36.76	AVG	No limit
3	5725.0000	26.56	38.50	65.06	68.20	-3.14	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

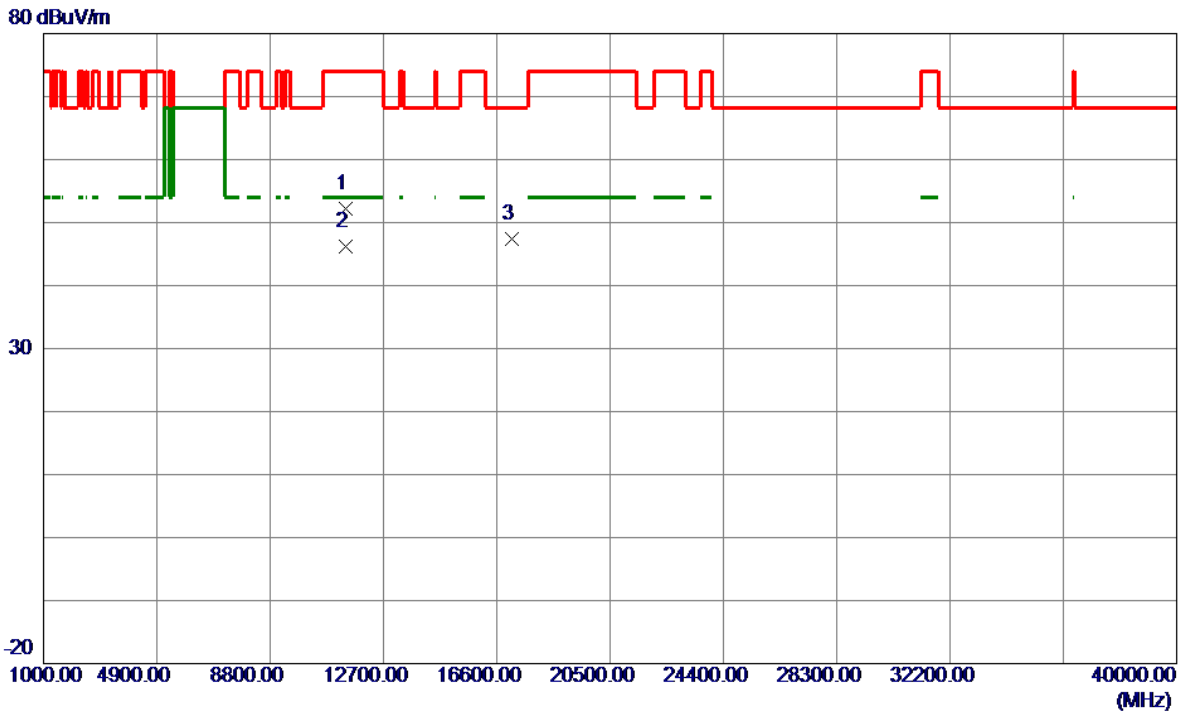


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11403.2500	60.77	-8.54	52.23	74.00	-21.77	Peak	
2 *	11403.2500	54.76	-8.54	46.22	54.00	-7.78	AVG	
3	17100.0000	51.75	-4.30	47.45	68.20	-20.75	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

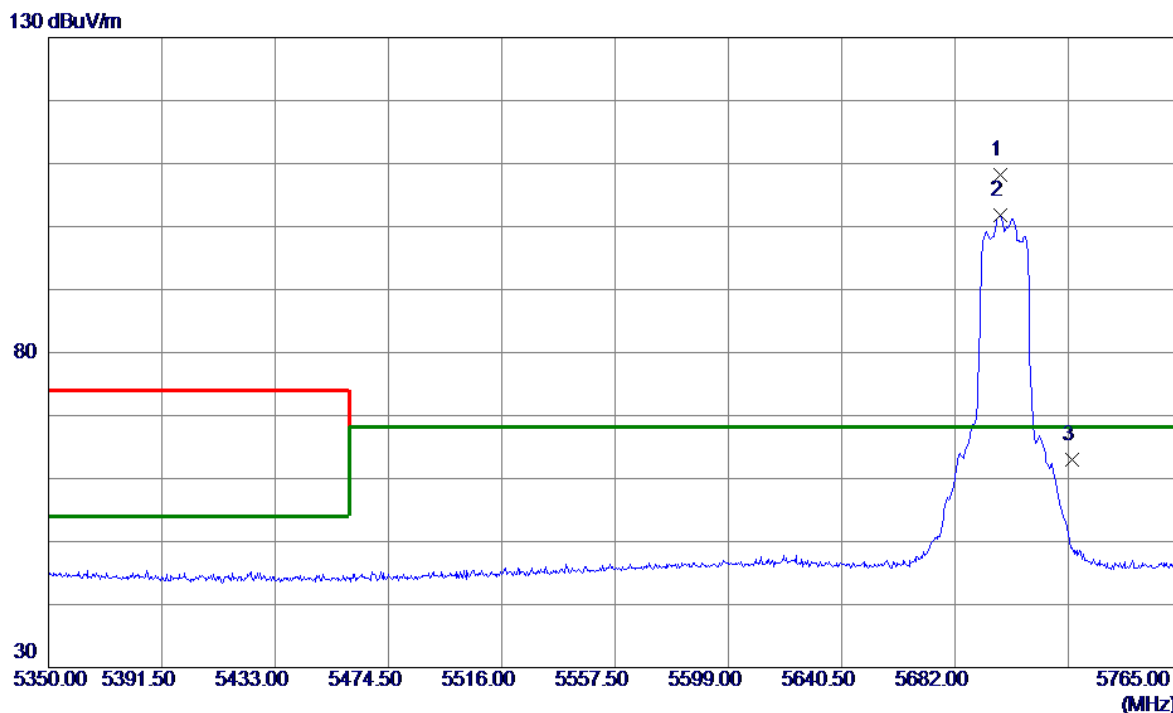


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5698.6000	69.80	38.40	108.20	68.20	40.00	Peak	No limit
2	5698.6000	63.44	38.40	101.84	68.20	33.64	AVG	No limit
3	5725.0000	24.46	38.50	62.96	68.20	-5.24	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

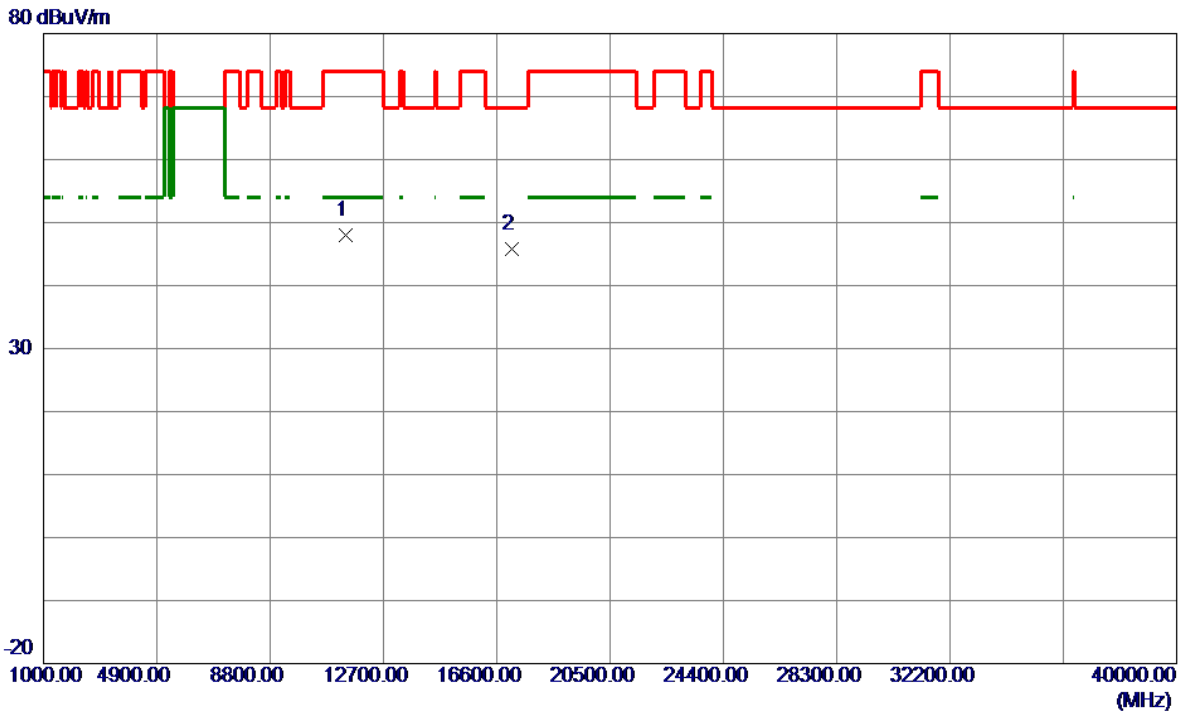


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11401.3000	56.51	-8.55	47.96	74.00	-26.04	Peak	
2 *	17100.0000	50.18	-4.30	45.88	68.20	-22.32	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

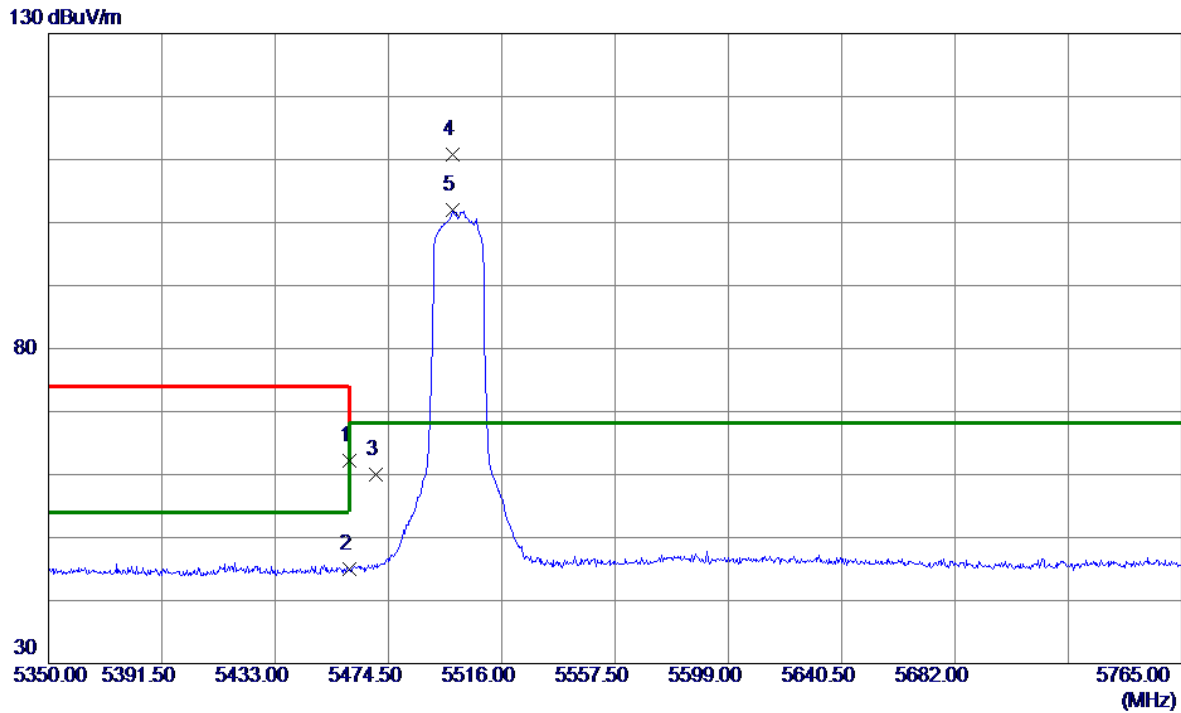


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	24.08	38.12	62.20	74.00	-11.80	Peak	
2	5460.0000	6.93	38.12	45.05	54.00	-8.95	AVG	
3	5470.0000	21.92	38.15	60.07	68.20	-8.13	Peak	
4 *	5497.9480	72.52	38.23	110.75	68.20	42.55	Peak	No limit
5	5497.9480	63.78	38.23	102.01	68.20	33.81	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

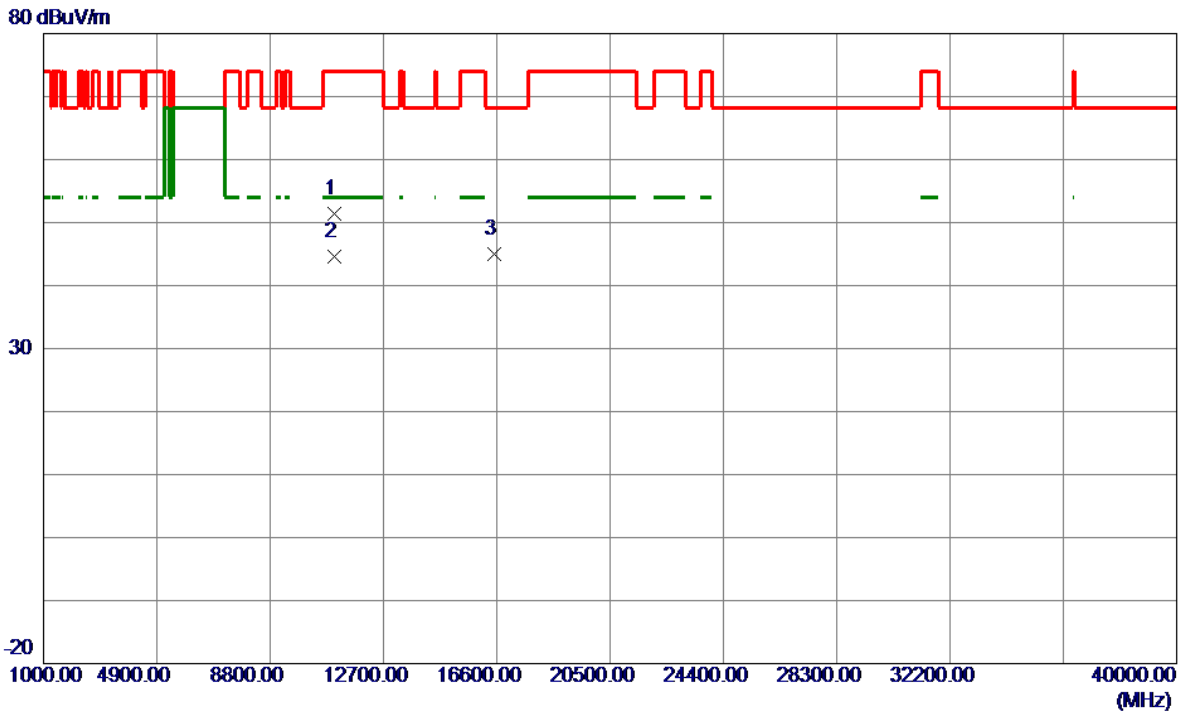


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10997.6500	60.21	-8.86	51.35	74.00	-22.65	Peak	
2 *	10997.6500	53.37	-8.86	44.51	54.00	-9.49	AVG	
3	16500.0000	50.99	-5.90	45.09	68.20	-23.11	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

130 dBuV/m

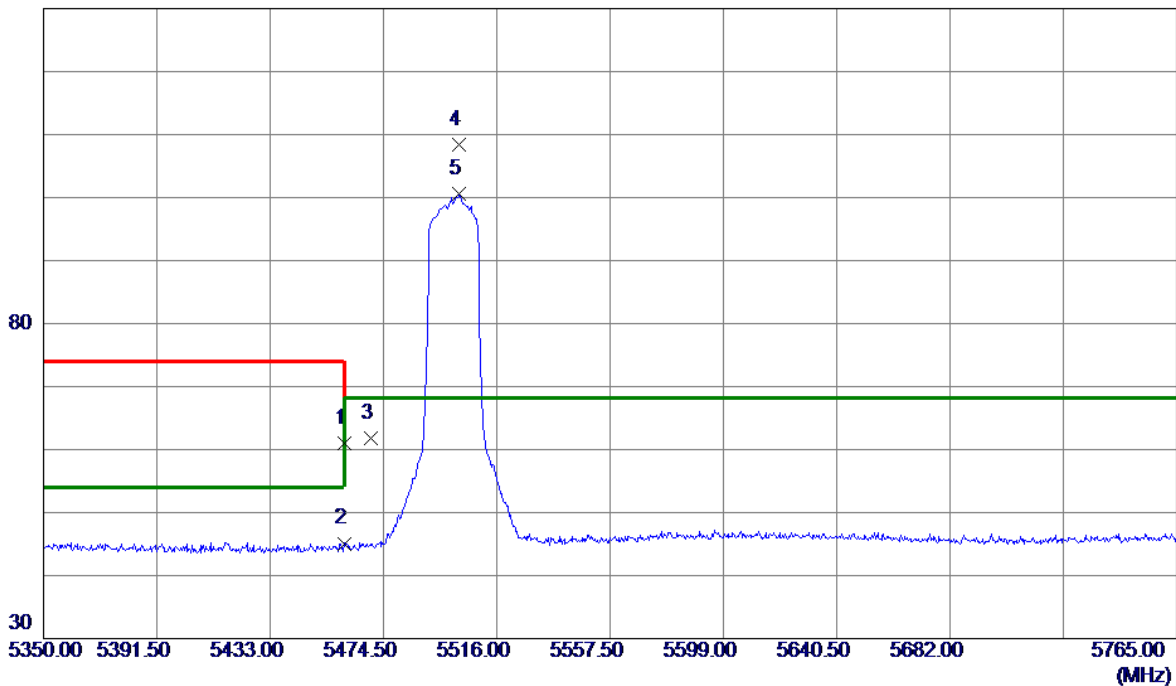


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	22.79	38.12	60.91	74.00	-13.09	Peak	
2	5460.0000	6.98	38.12	45.10	54.00	-8.90	AVG	
3	5470.0000	23.62	38.15	61.77	68.20	-6.43	Peak	
4 *	5502.3050	70.16	38.24	108.40	68.20	40.20	Peak	No limit
5	5502.3050	62.38	38.24	100.62	68.20	32.42	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

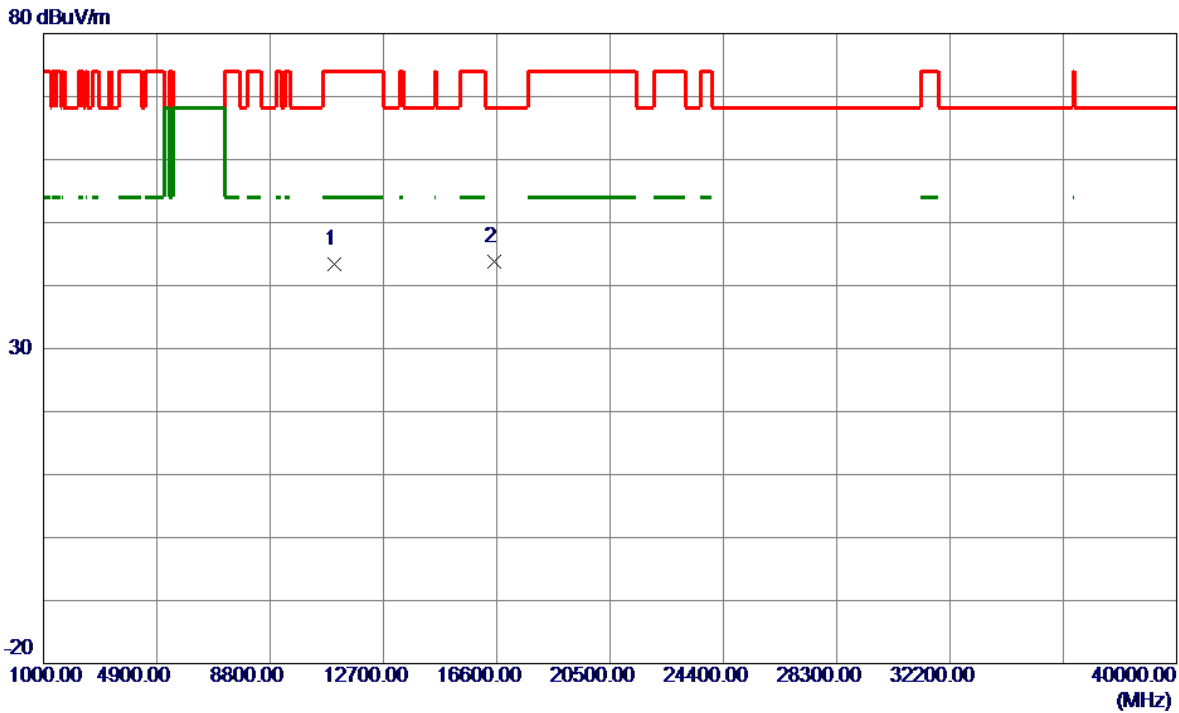


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	52.32	-8.86	43.46	74.00	-30.54	Peak	
2 *	16500.0000	49.77	-5.90	43.87	68.20	-24.33	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

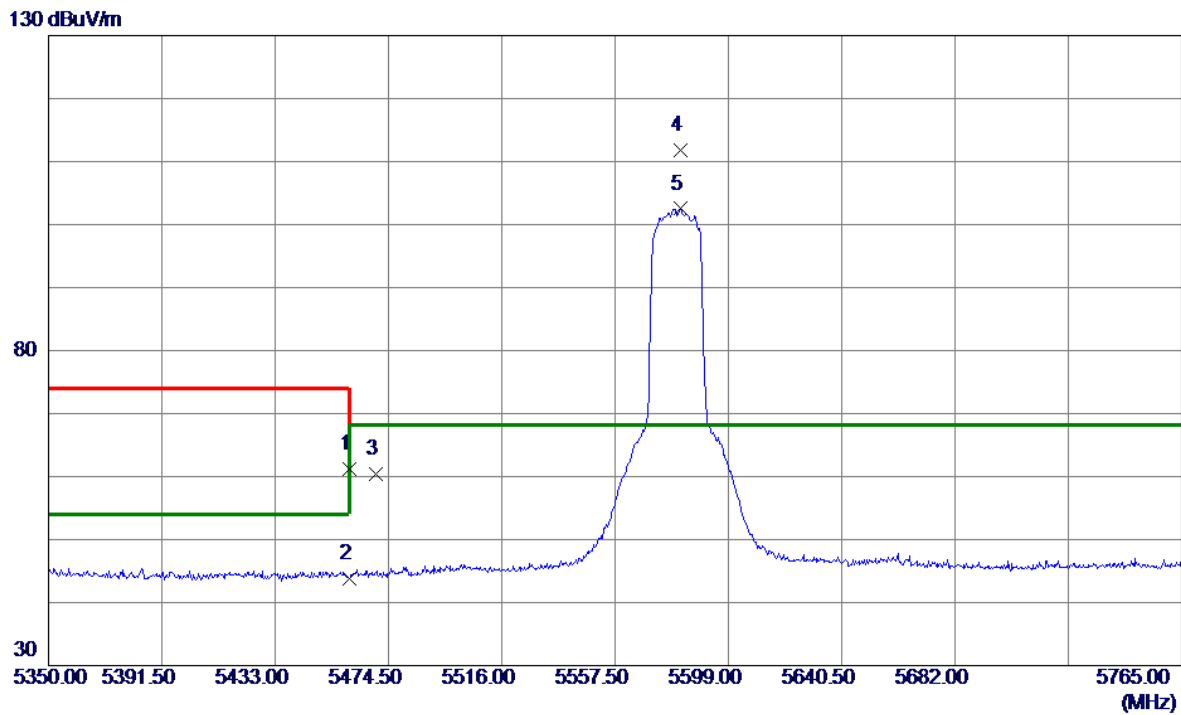


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	23.13	38.12	61.25	74.00	-12.75	Peak	
2	5460.0000	5.72	38.12	43.84	54.00	-10.16	AVG	
3	5470.0000	22.32	38.15	60.47	68.20	-7.73	Peak	
4 *	5581.5700	73.48	38.32	111.80	68.20	43.60	Peak	No limit
5	5581.5700	64.18	38.32	102.50	68.20	34.30	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

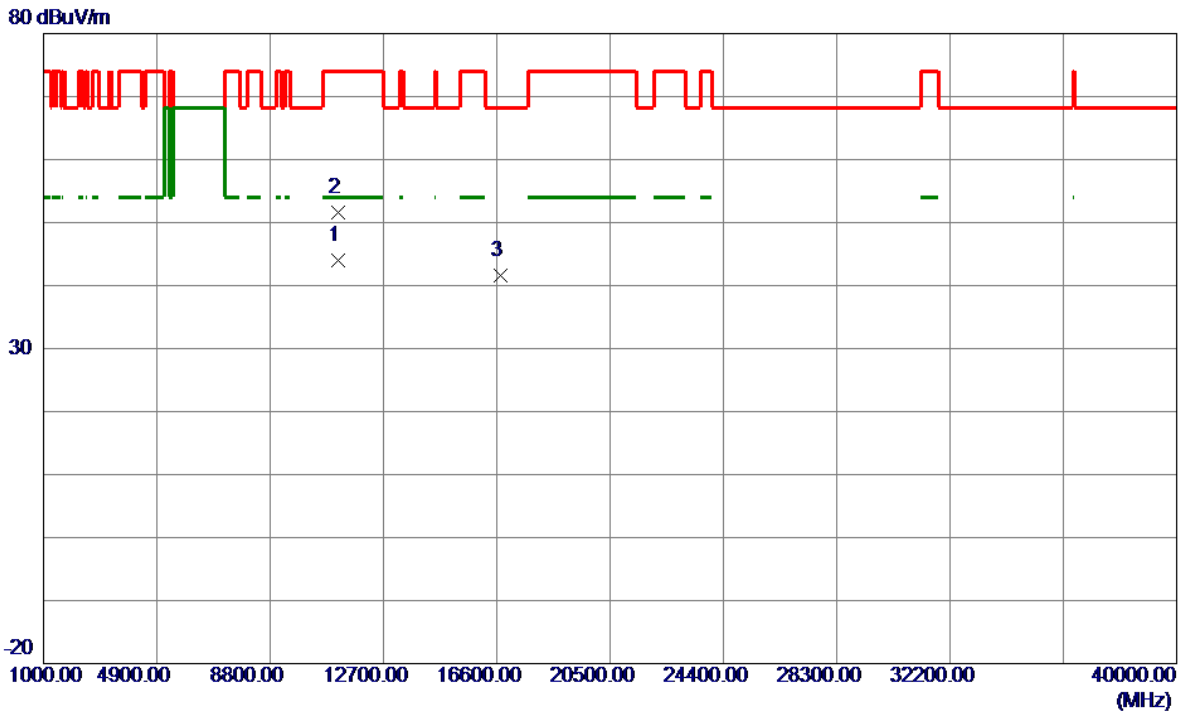


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11160.0000	52.99	-8.96	44.03	54.00	-9.97	AVG	
2	11161.4500	60.53	-8.96	51.57	74.00	-22.43	Peak	
3	16740.0000	46.96	-5.32	41.64	68.20	-26.56	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

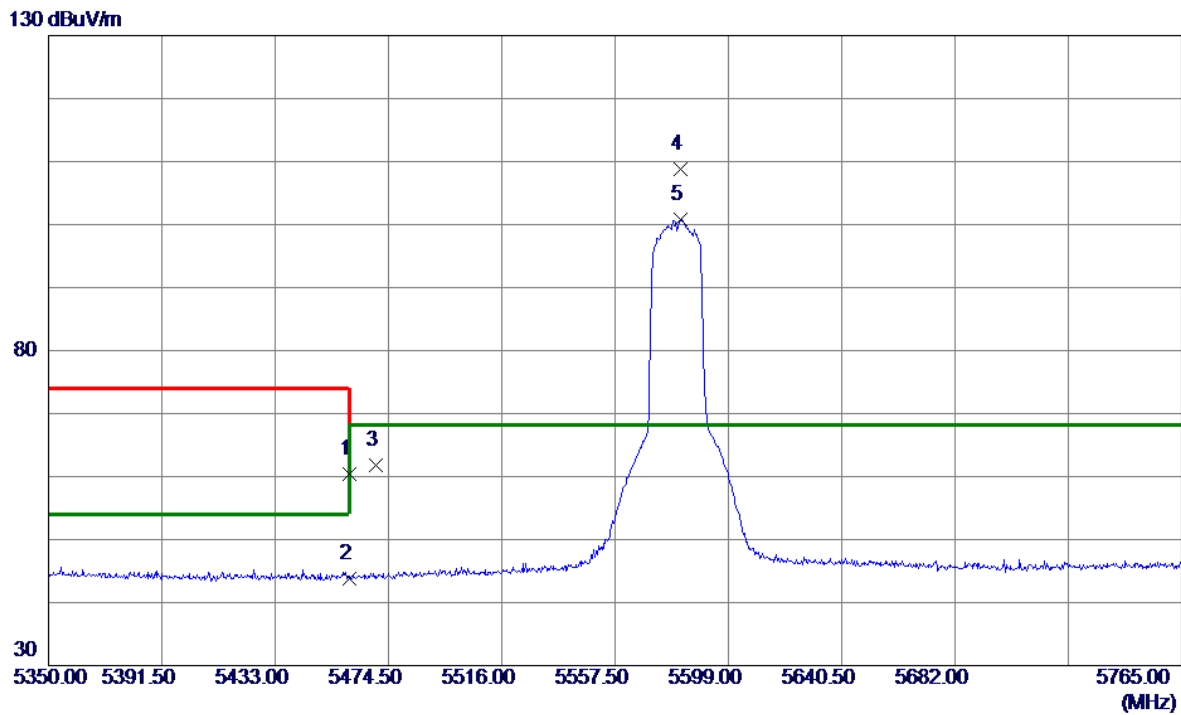


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	22.25	38.12	60.37	74.00	-13.63	Peak	
2	5460.0000	5.66	38.12	43.78	54.00	-10.22	AVG	
3	5470.0000	23.57	38.15	61.72	68.20	-6.48	Peak	
4 *	5581.5700	70.46	38.32	108.78	68.20	40.58	Peak	No limit
5	5581.5700	62.40	38.32	100.72	68.20	32.52	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

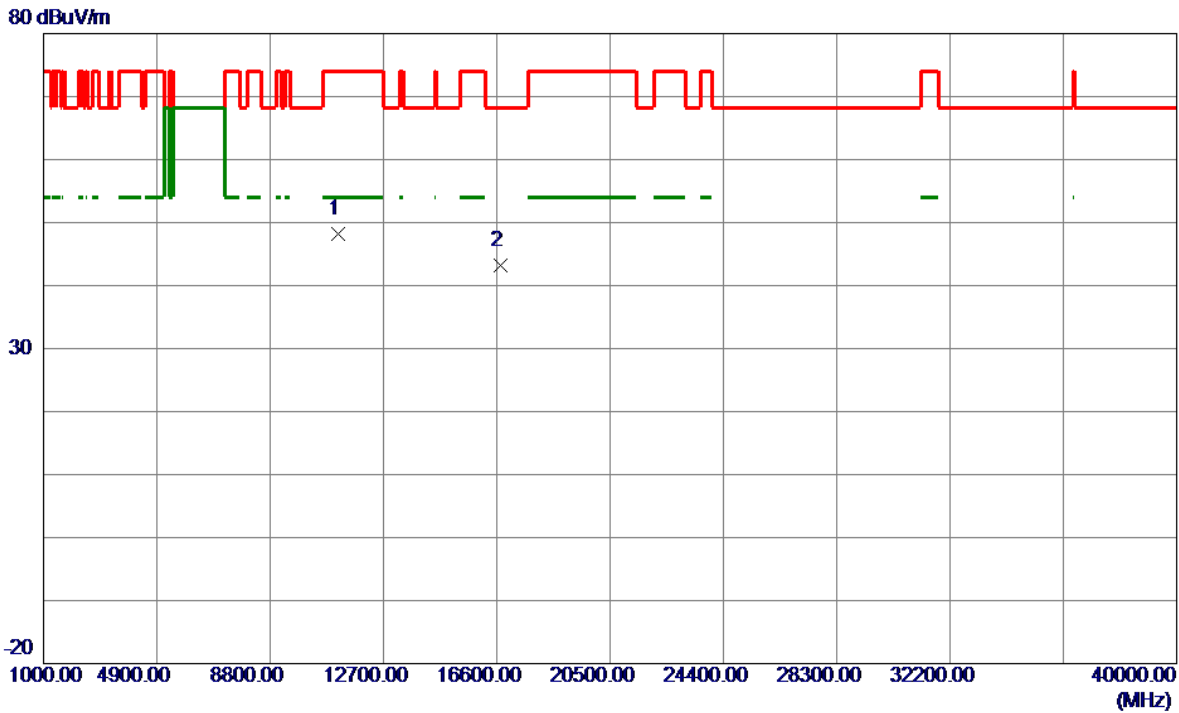


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11161.4500	57.23	-8.96	48.27	74.00	-25.73	Peak	
2 *	16740.0000	48.58	-5.32	43.26	68.20	-24.94	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

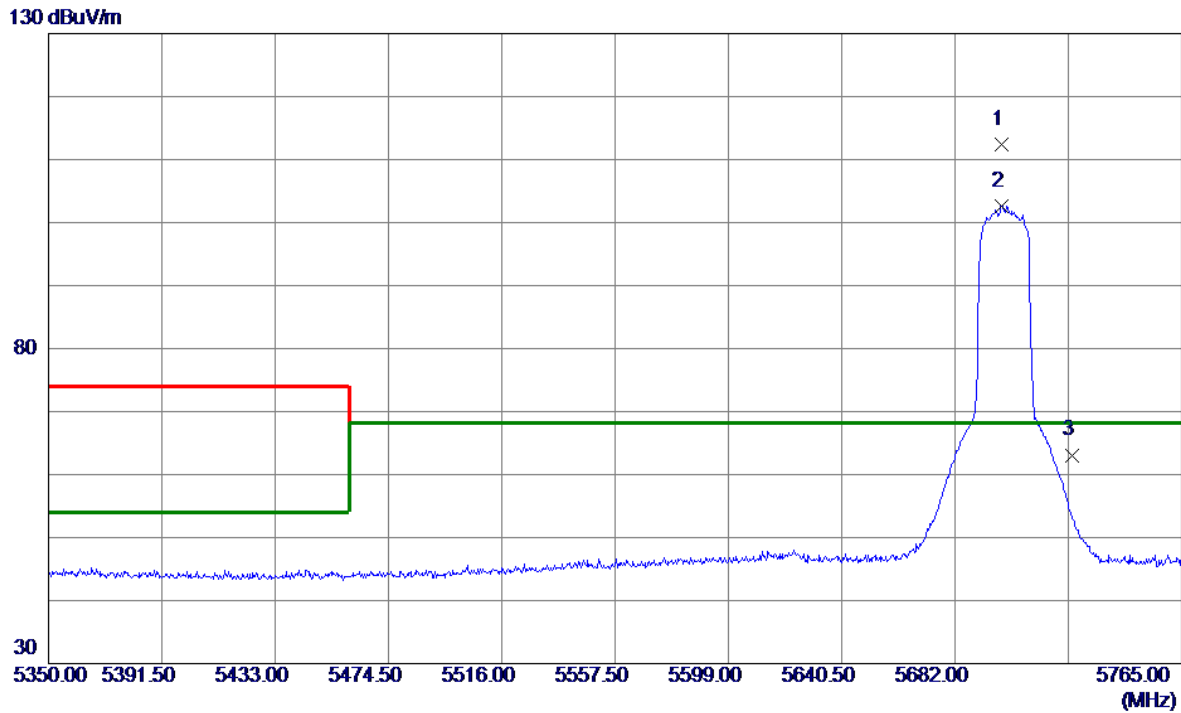


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5699.0150	73.96	38.40	112.36	68.20	44.16	Peak	No limit
2	5699.0150	64.20	38.40	102.60	68.20	34.40	AVG	No limit
3	5725.0000	24.60	38.50	63.10	68.20	-5.10	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

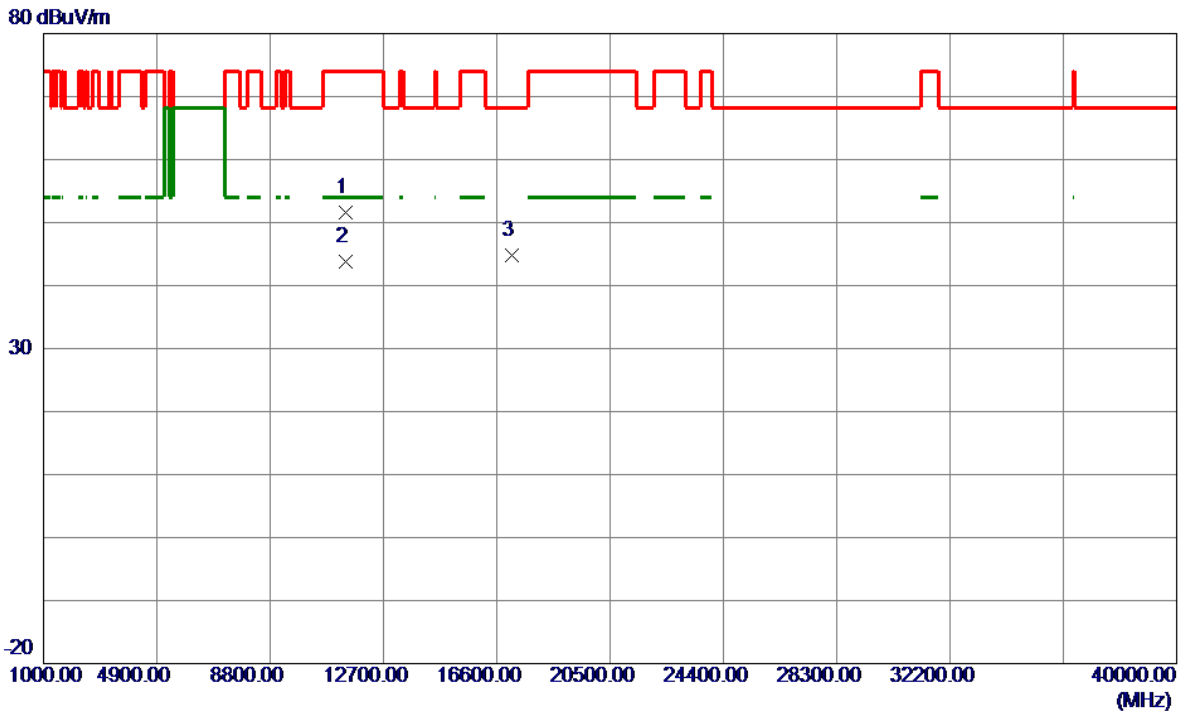


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11397.4000	60.23	-8.56	51.67	74.00	-22.33	Peak	
2 *	11397.4000	52.44	-8.56	43.88	54.00	-10.12	AVG	
3	17100.0000	49.02	-4.30	44.72	68.20	-23.48	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

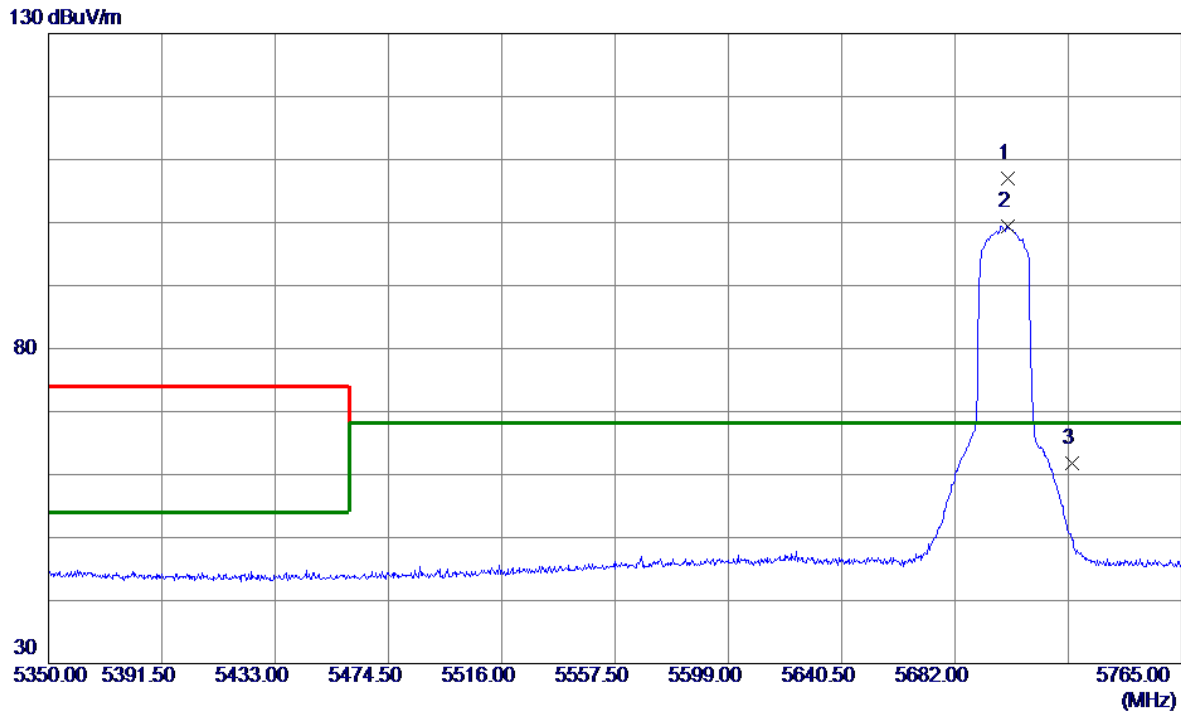


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5701.5050	68.58	38.41	106.99	68.20	38.79	Peak	No limit
2	5701.5050	61.05	38.41	99.46	68.20	31.26	AVG	No limit
3	5725.0000	23.38	38.50	61.88	68.20	-6.32	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

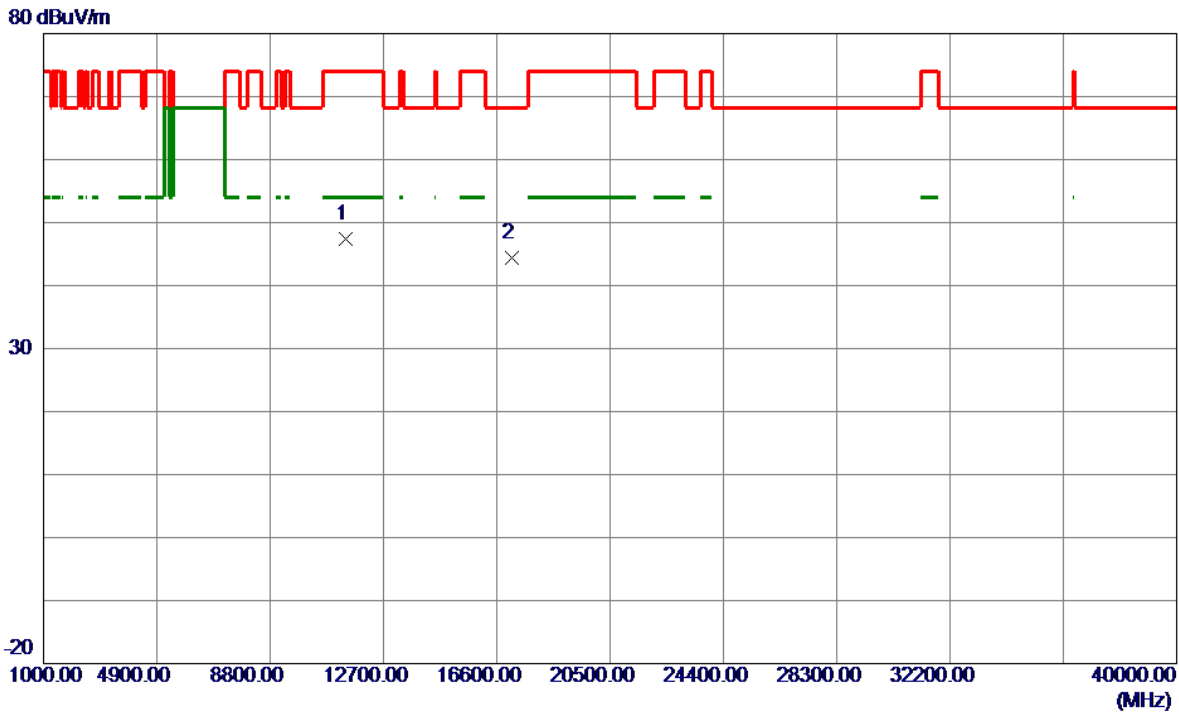


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11399.3500	55.92	-8.55	47.37	74.00	-26.63	Peak	
2 *	17100.0000	48.69	-4.30	44.39	68.20	-23.81	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

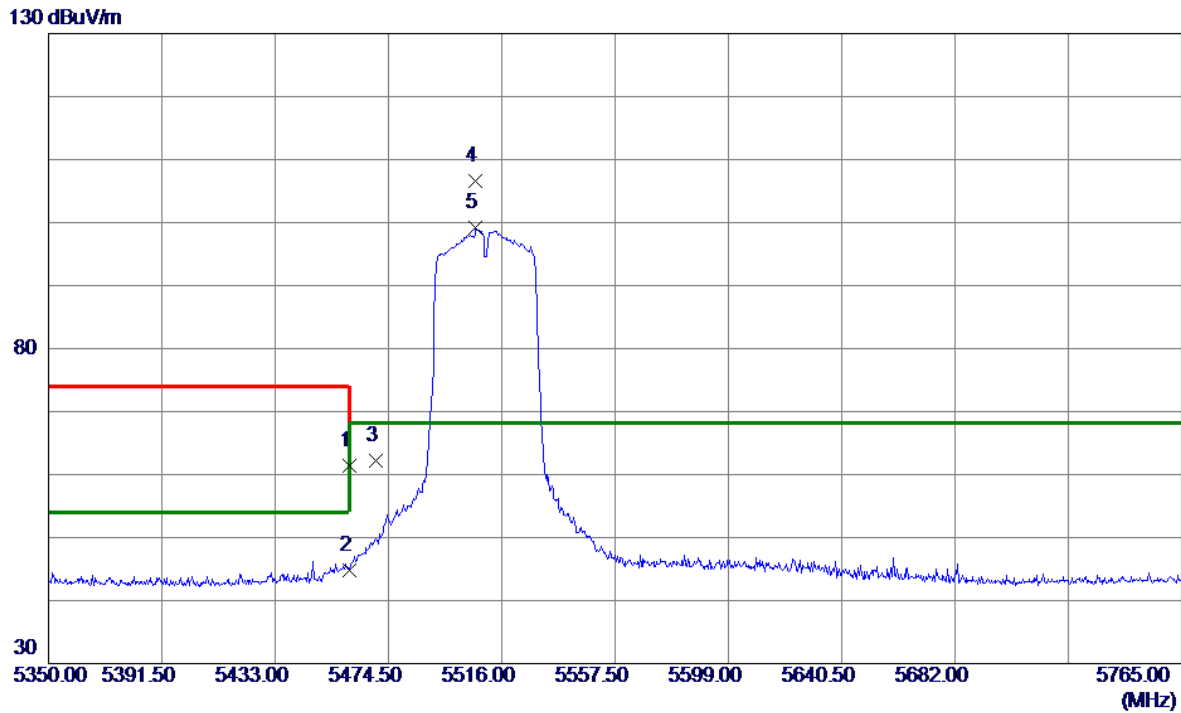


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	23.23	38.12	61.35	74.00	-12.65	Peak	
2	5460.0000	6.67	38.12	44.79	54.00	-9.21	AVG	
3	5470.0000	24.02	38.15	62.17	68.20	-6.03	Peak	
4 *	5506.4550	68.42	38.25	106.67	68.20	38.47	Peak	No limit
5	5506.4550	60.89	38.25	99.14	68.20	30.94	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

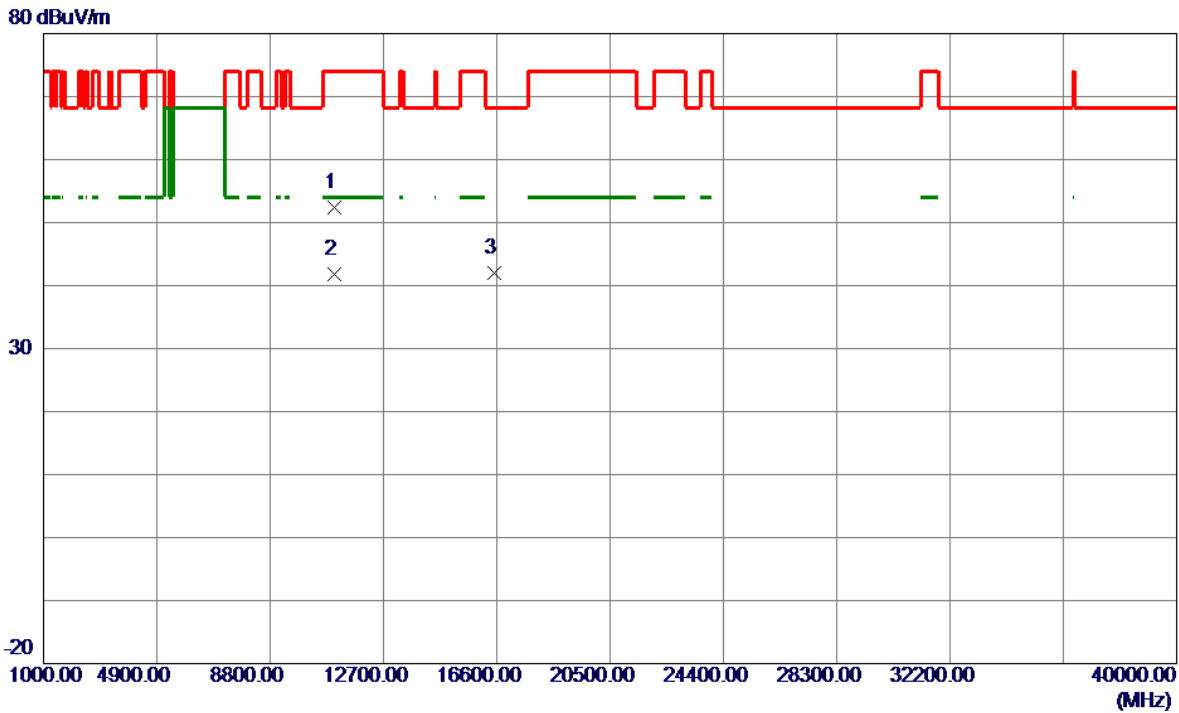


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11019.1000	61.25	-8.87	52.38	74.00	-21.62	Peak	
2 *	11019.1000	50.75	-8.87	41.88	54.00	-12.12	AVG	
3	16500.0000	47.99	-5.90	42.09	68.20	-26.11	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

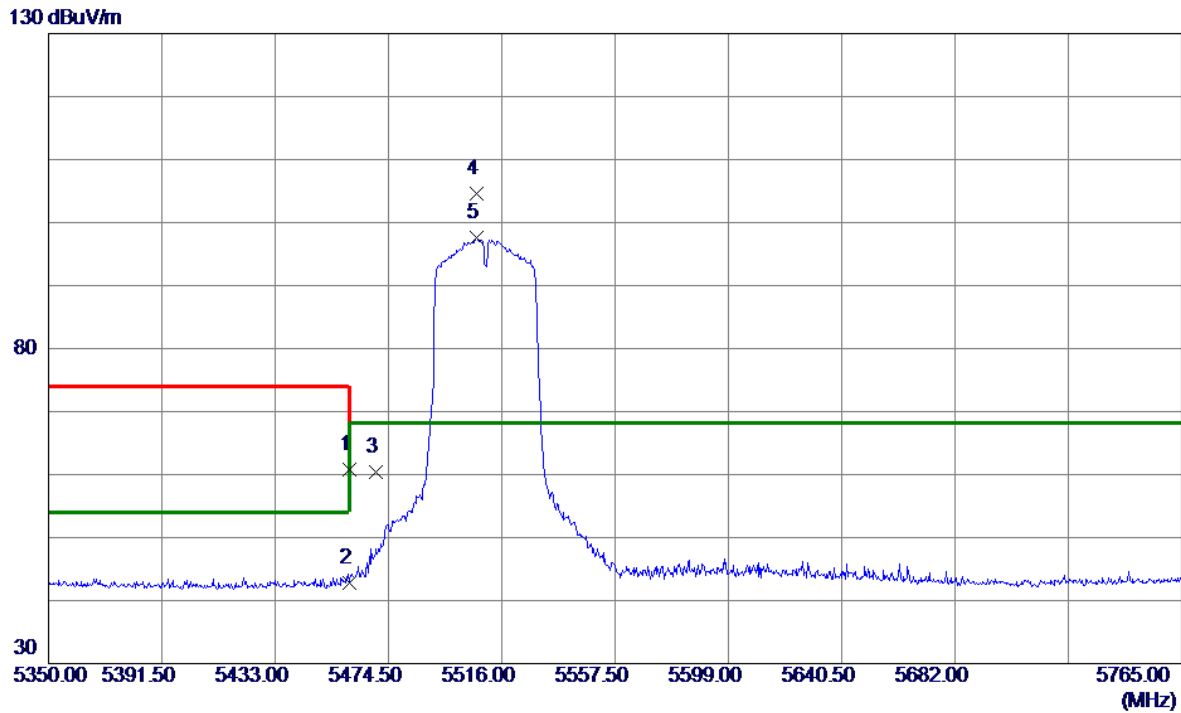


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	22.68	38.12	60.80	74.00	-13.20	Peak	
2	5460.0000	4.72	38.12	42.84	54.00	-11.16	AVG	
3	5470.0000	22.17	38.15	60.32	68.20	-7.88	Peak	
4 *	5506.6629	66.29	38.25	104.54	68.20	36.34	Peak	No limit
5	5506.6629	59.32	38.25	97.57	68.20	29.37	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

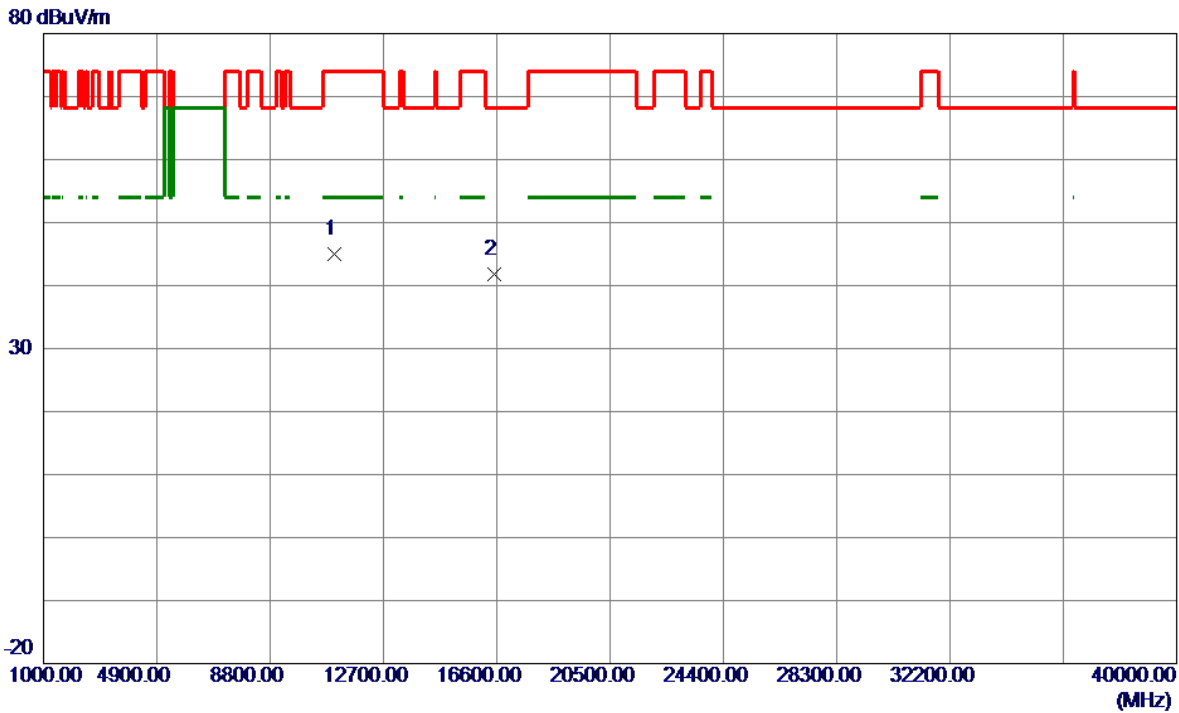


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.0000	53.86	-8.87	44.99	74.00	-29.01	Peak	
2 *	16530.0000	47.68	-5.84	41.84	68.20	-26.36	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

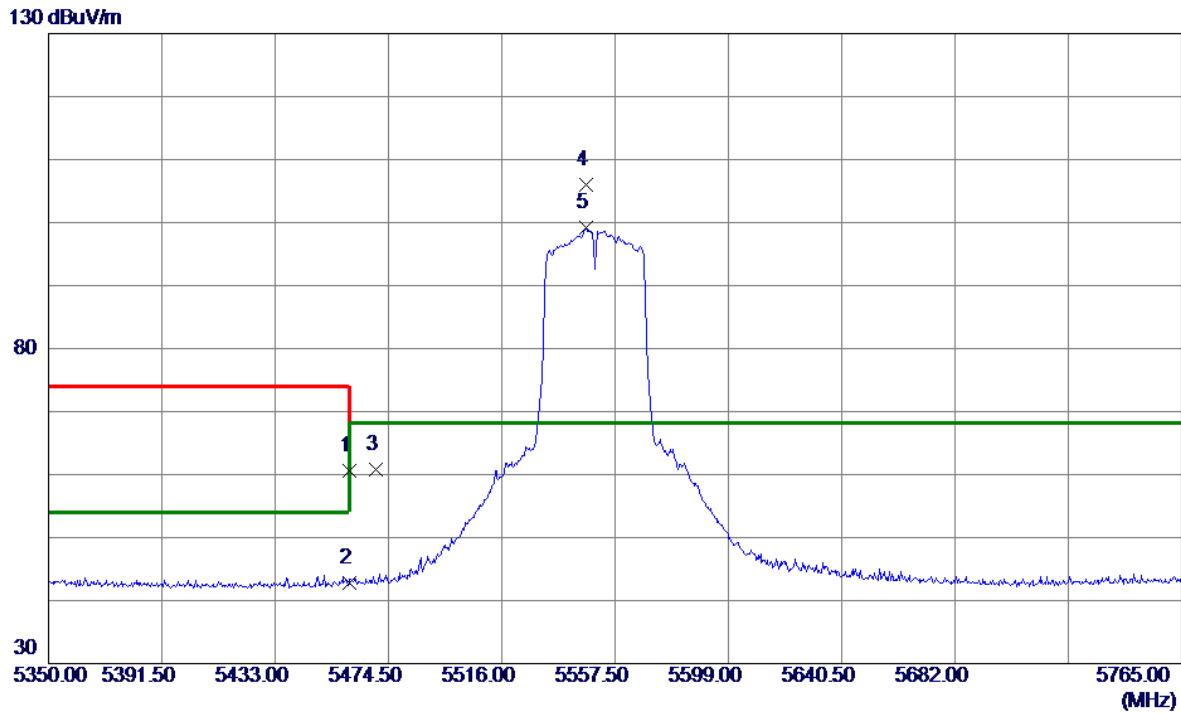


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	22.54	38.12	60.66	74.00	-13.34	Peak	
2	5460.0000	4.66	38.12	42.78	54.00	-11.22	AVG	
3	5470.0000	22.61	38.15	60.76	68.20	-7.44	Peak	
4 *	5546.7100	67.80	38.29	106.09	68.20	37.89	Peak	No limit
5	5546.7100	60.82	38.29	99.11	68.20	30.91	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

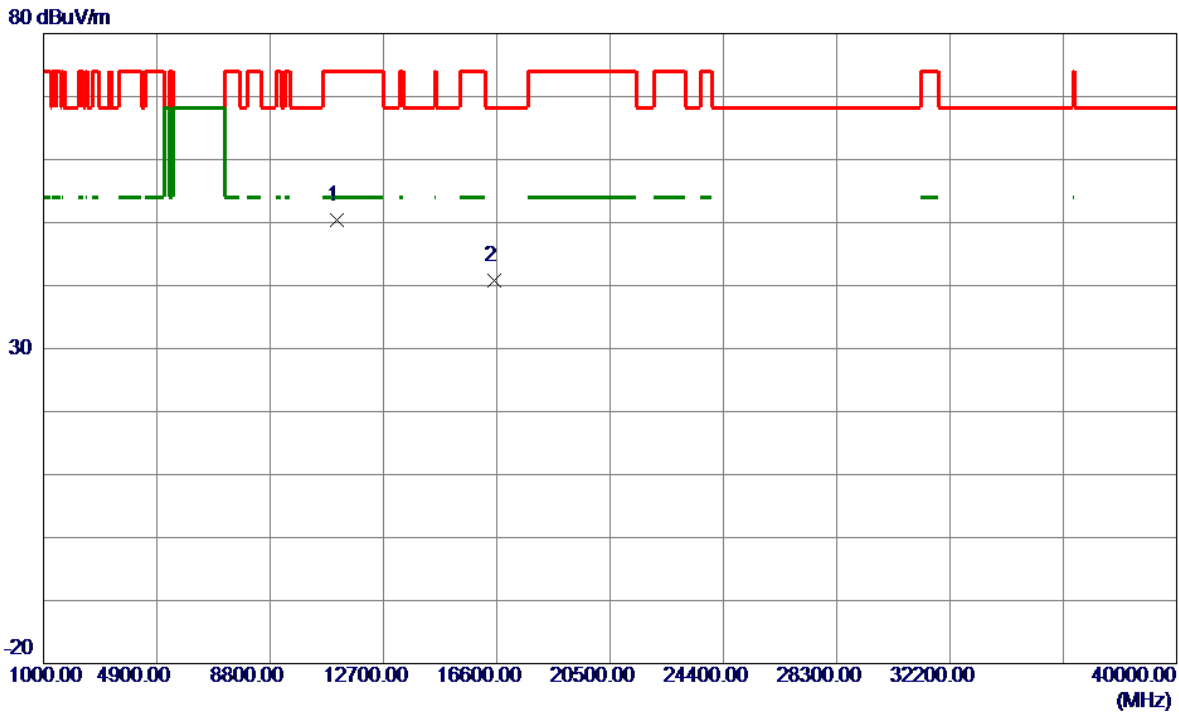


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11099.0500	59.37	-8.92	50.45	74.00	-23.55	Peak	
2	16530.0000	46.73	-5.84	40.89	68.20	-27.31	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

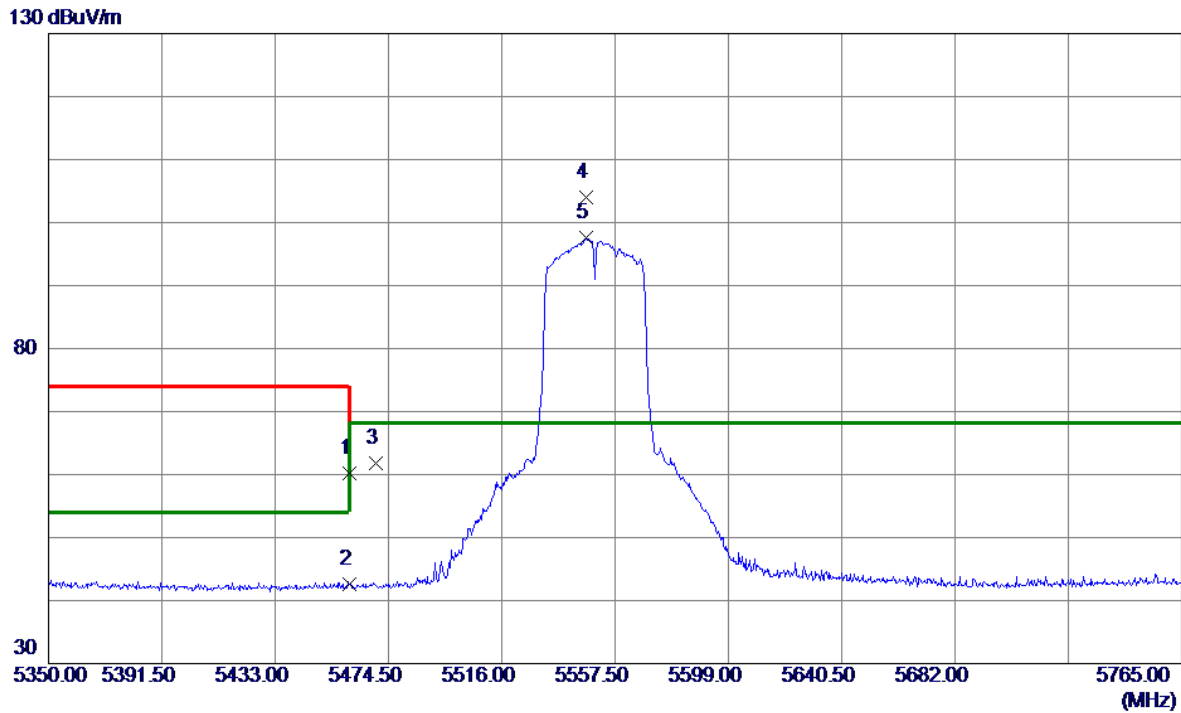


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	22.11	38.12	60.23	74.00	-13.77	Peak	
2	5460.0000	4.54	38.12	42.66	54.00	-11.34	AVG	
3	5470.0000	23.58	38.15	61.73	68.20	-6.47	Peak	
4 *	5546.9169	65.78	38.29	104.07	68.20	35.87	Peak	No limit
5	5546.9169	59.31	38.29	97.60	68.20	29.40	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

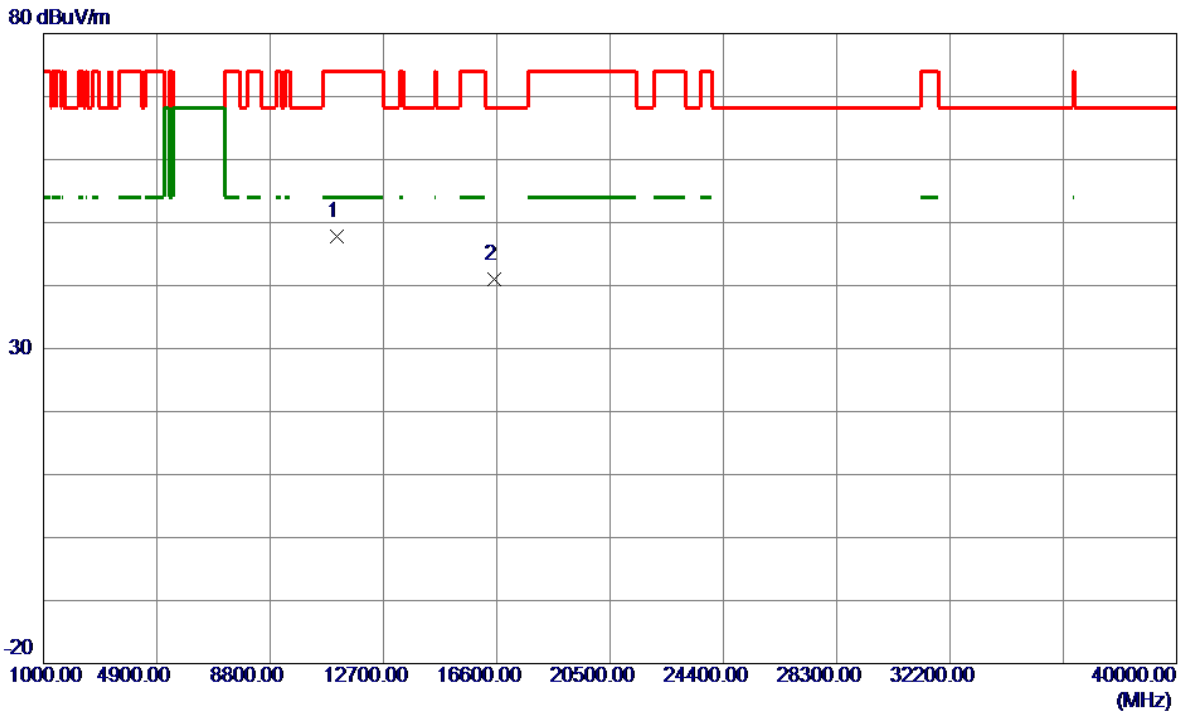


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11097.1000	56.67	-8.92	47.75	74.00	-26.25	Peak	
2	16530.0000	46.86	-5.84	41.02	68.20	-27.18	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

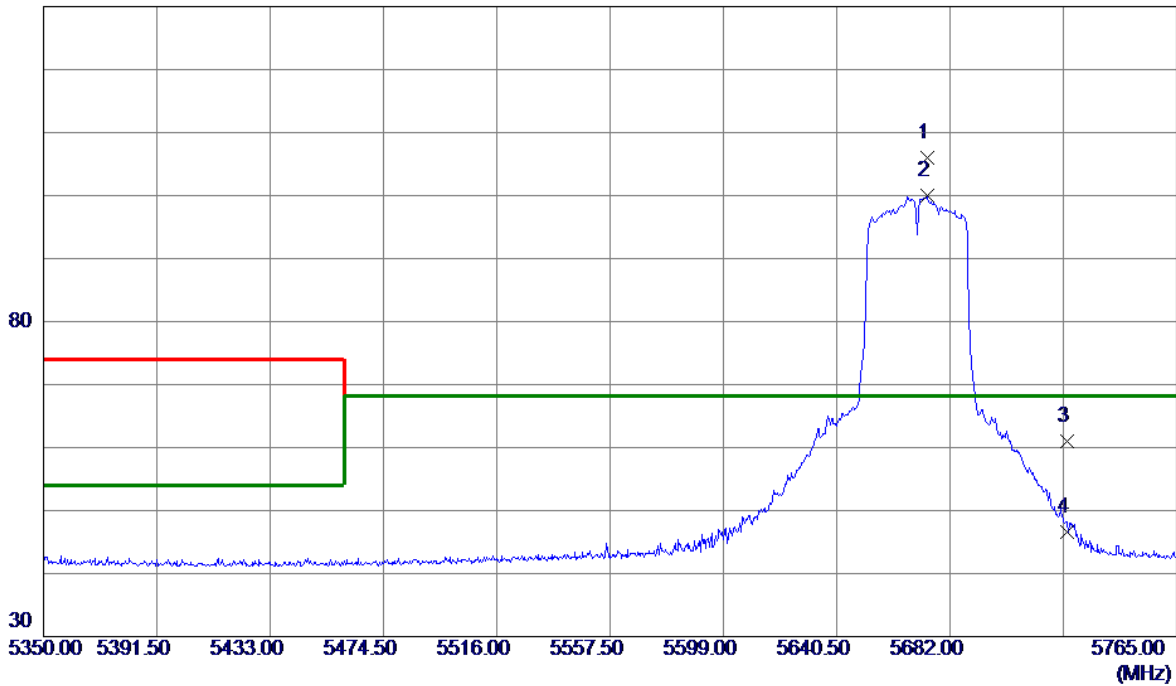


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5673.4930	67.71	38.39	106.10	68.20	37.90	Peak	No limit
2	5673.4930	61.66	38.39	100.05	68.20	31.85	AVG	No limit
3	5725.0000	22.50	38.50	61.00	68.20	-7.20	Peak	
4	5725.0000	8.09	38.50	46.59	68.20	-21.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

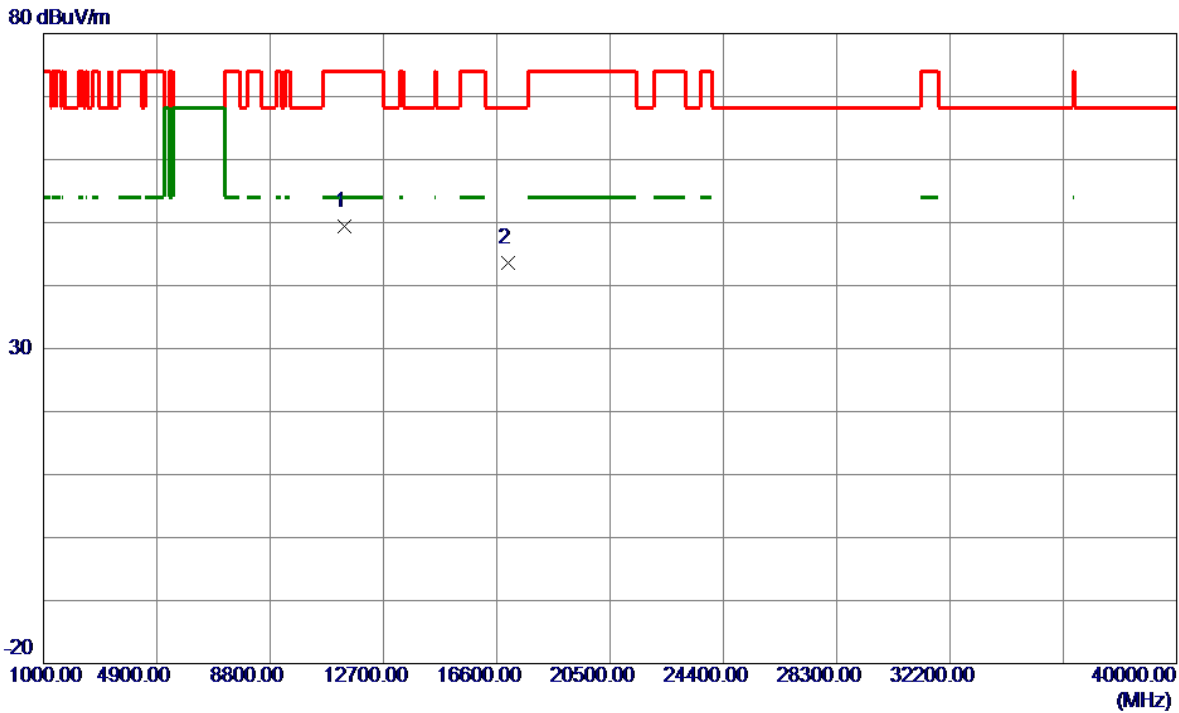


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11338.9000	58.14	-8.68	49.46	74.00	-24.54	Peak	
2	17010.0000	48.33	-4.75	43.58	68.20	-24.62	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

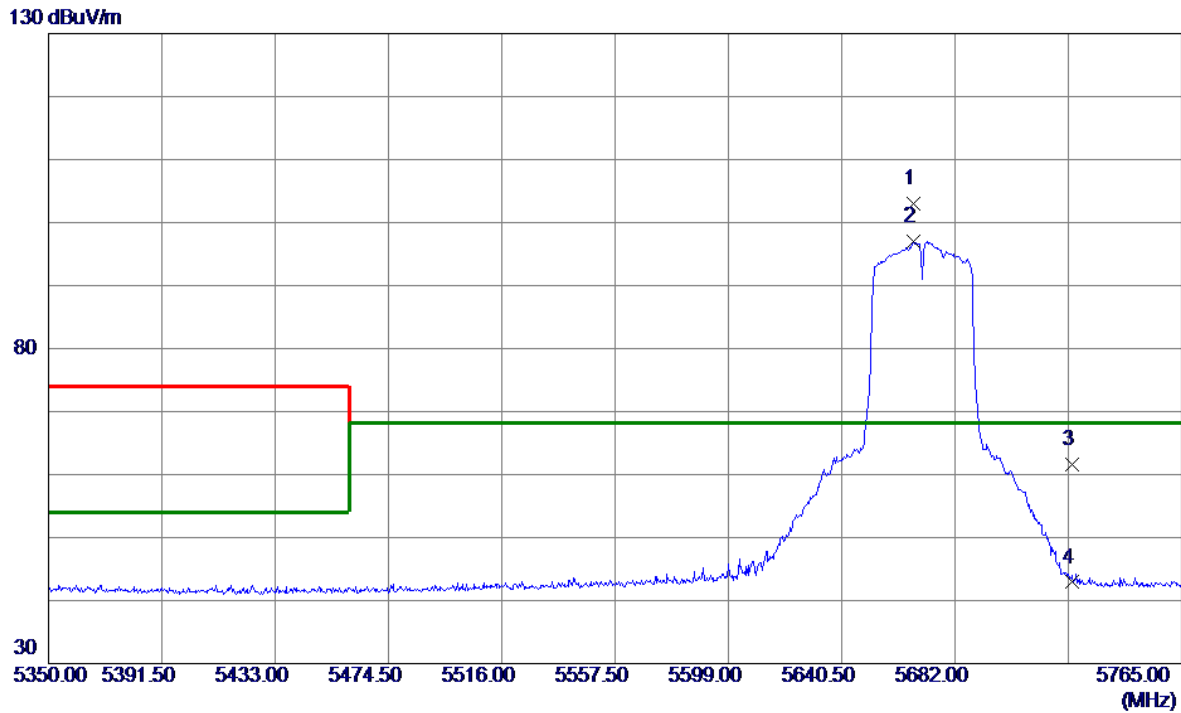


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5666.6450	64.56	38.38	102.94	68.20	34.74	Peak	No limit
2	5666.6450	58.69	38.38	97.07	68.20	28.87	AVG	No limit
3	5725.0000	23.03	38.50	61.53	68.20	-6.67	Peak	
4	5725.0000	4.40	38.50	42.90	68.20	-25.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

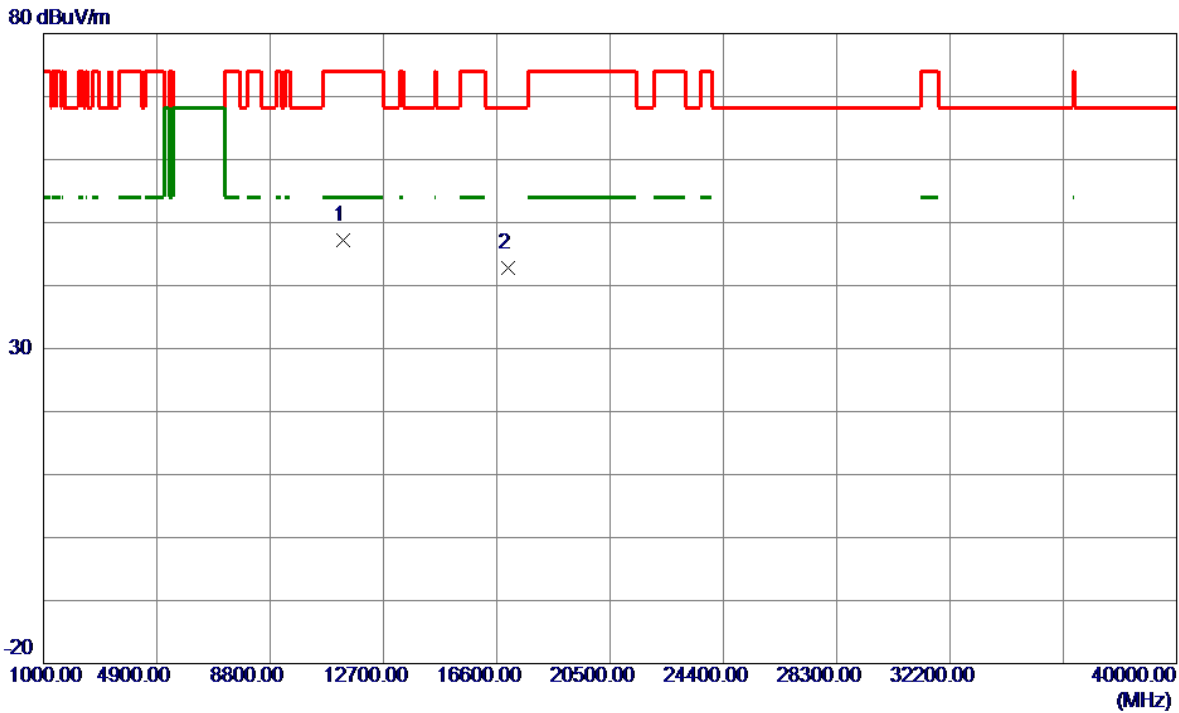


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11327.2000	55.90	-8.71	47.19	74.00	-26.81	Peak	
2 *	17010.0000	47.55	-4.75	42.80	68.20	-25.40	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

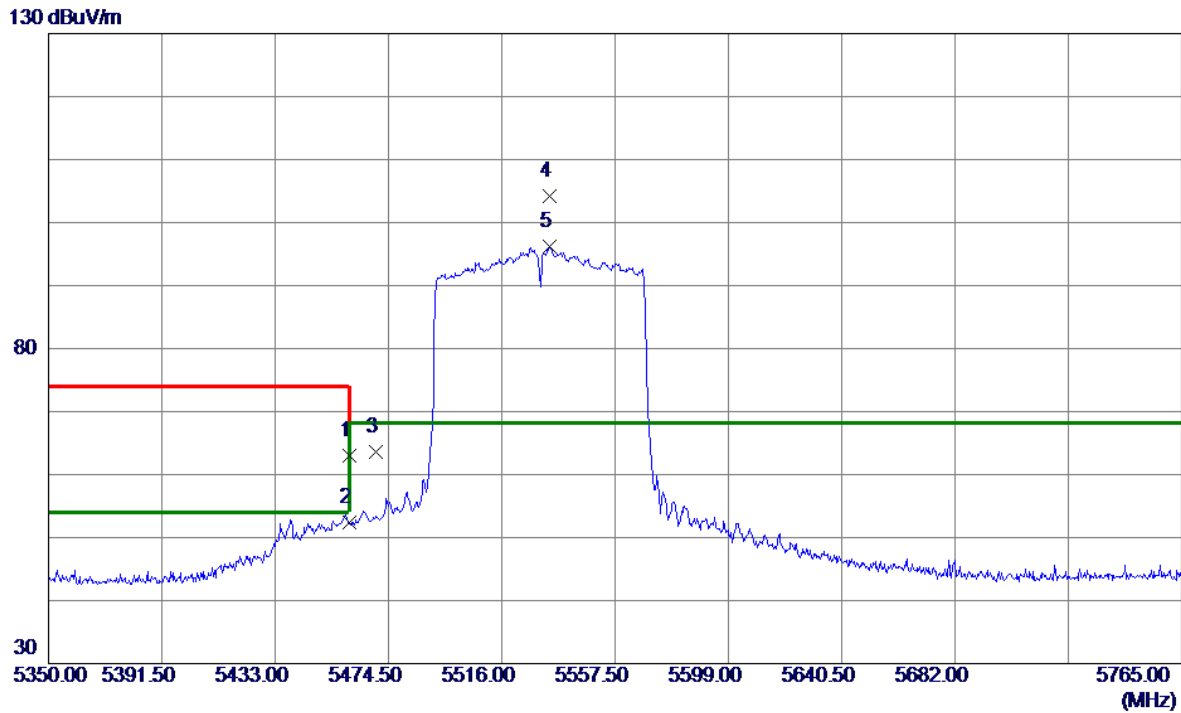


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	24.84	38.12	62.96	74.00	-11.04	Peak	
2	5460.0000	14.23	38.12	52.35	54.00	-1.65	AVG	
3	5470.0000	25.42	38.15	63.57	68.20	-4.63	Peak	
4 *	5533.6370	65.87	38.27	104.14	68.20	35.94	Peak	No limit
5	5533.6370	57.88	38.27	96.15	68.20	27.95	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

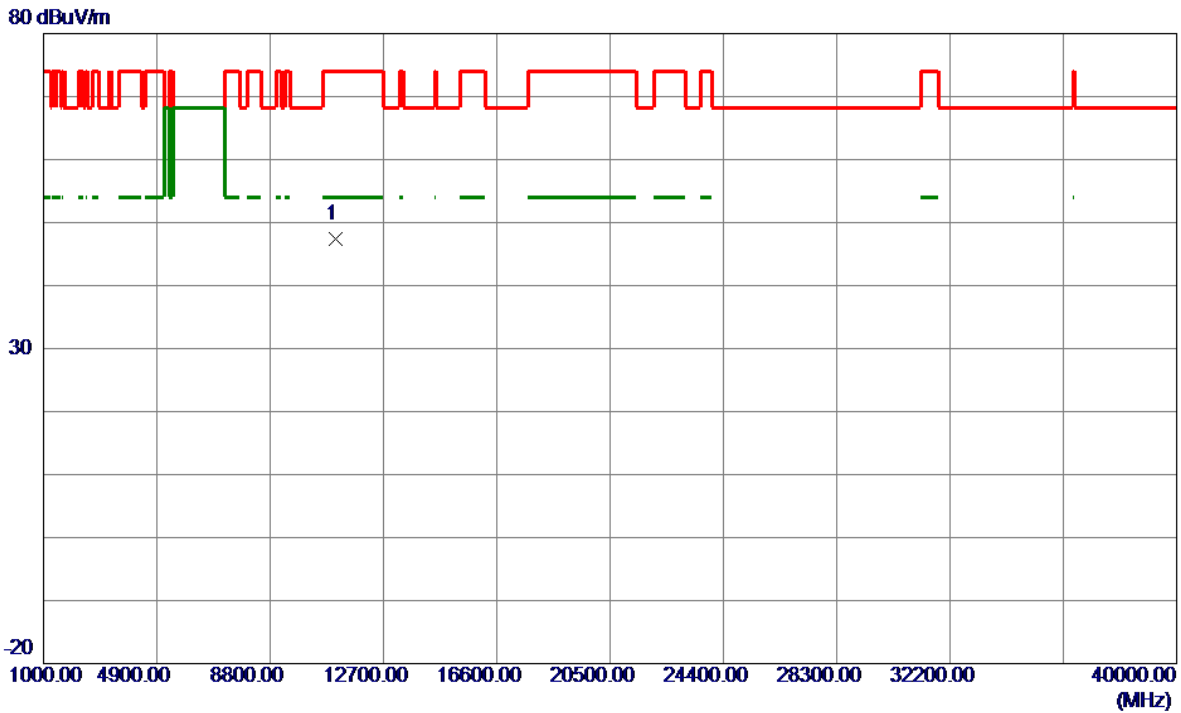


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11060.0000	56.35	-8.90	47.45	74.00	-26.55	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

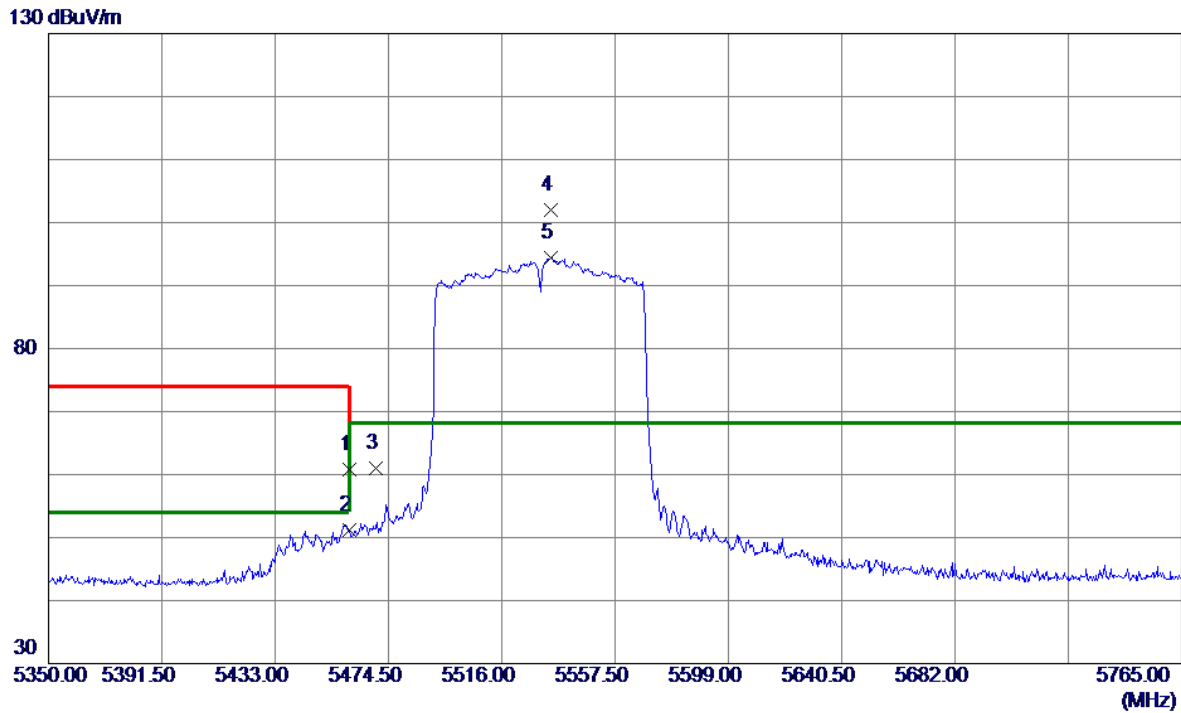


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	22.64	38.12	60.76	74.00	-13.24	Peak	
2	5460.0000	13.13	38.12	51.25	54.00	-2.75	AVG	
3	5470.0000	22.82	38.15	60.97	68.20	-7.23	Peak	
4 *	5534.0520	63.71	38.27	101.98	68.20	33.78	Peak	No limit
5	5534.0520	56.22	38.27	94.49	68.20	26.29	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

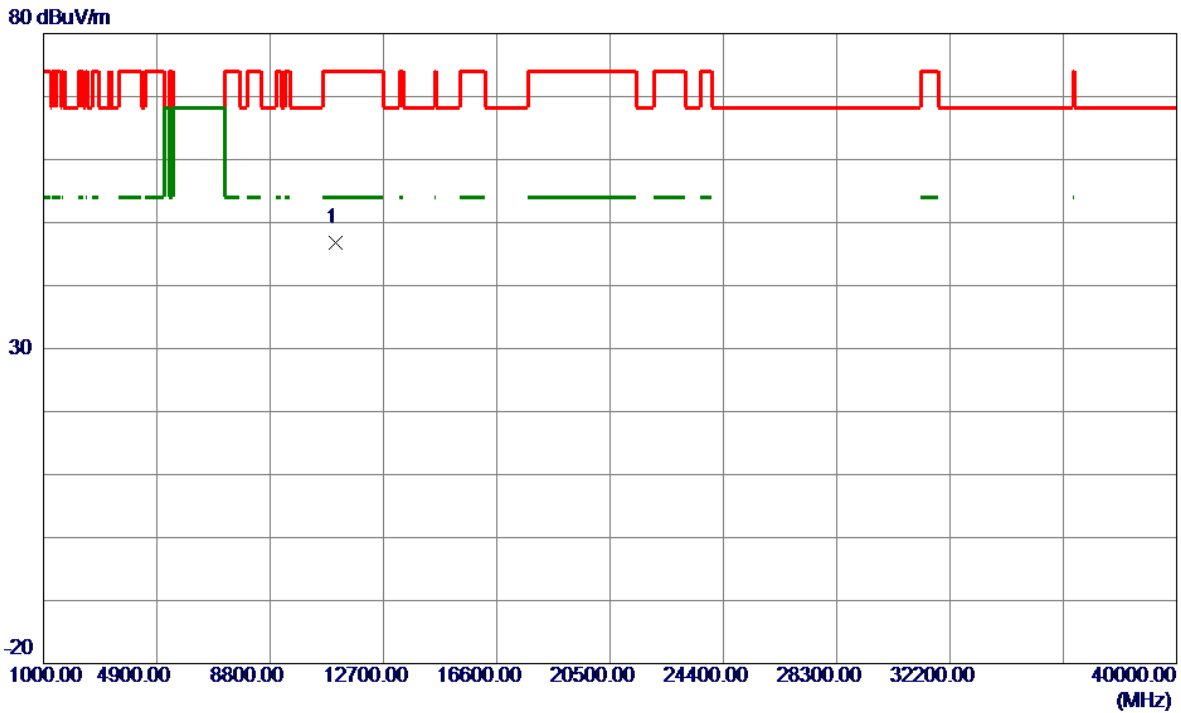


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11060.0000	55.61	-8.90	46.71	74.00	-27.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

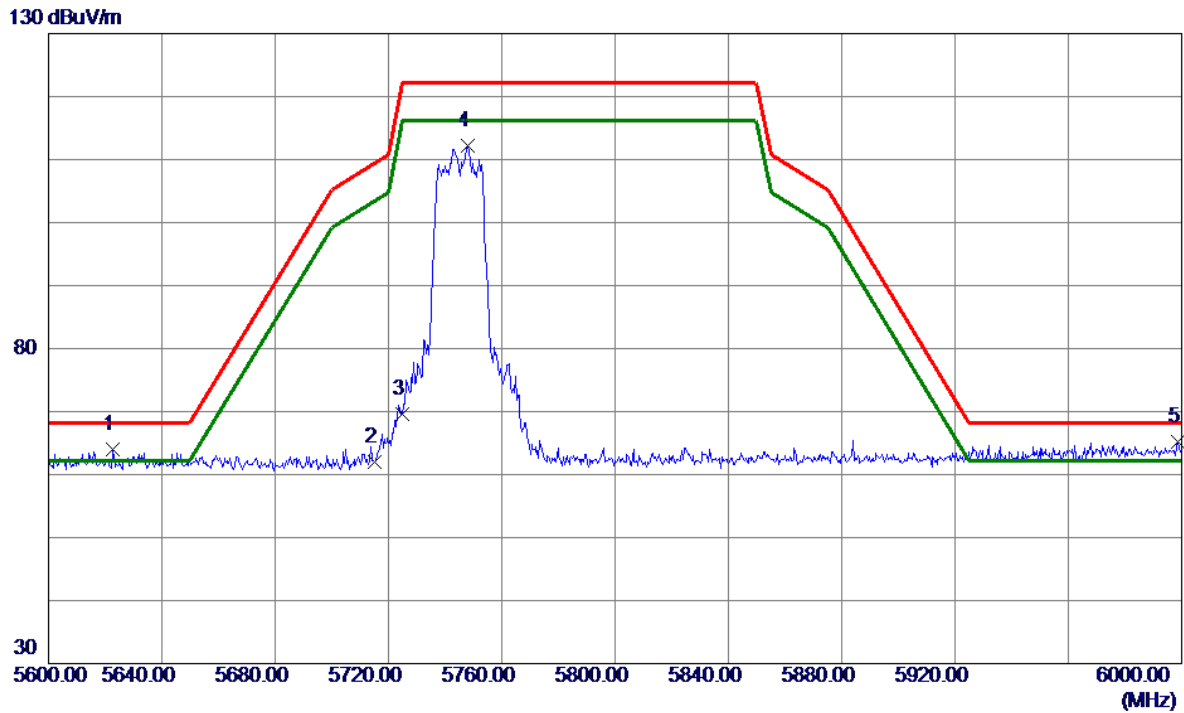


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5622.8000	25.65	38.35	64.00	68.20	-4.20	Peak	
2	5715.0000	23.47	38.46	61.93	109.40	-47.47	Peak	
3	5725.0000	31.03	38.50	69.53	122.20	-52.67	Peak	
4	5748.0000	73.70	38.58	112.28	122.20	-9.92	Peak	
5 *	5998.8000	26.00	39.25	65.25	68.20	-2.95	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

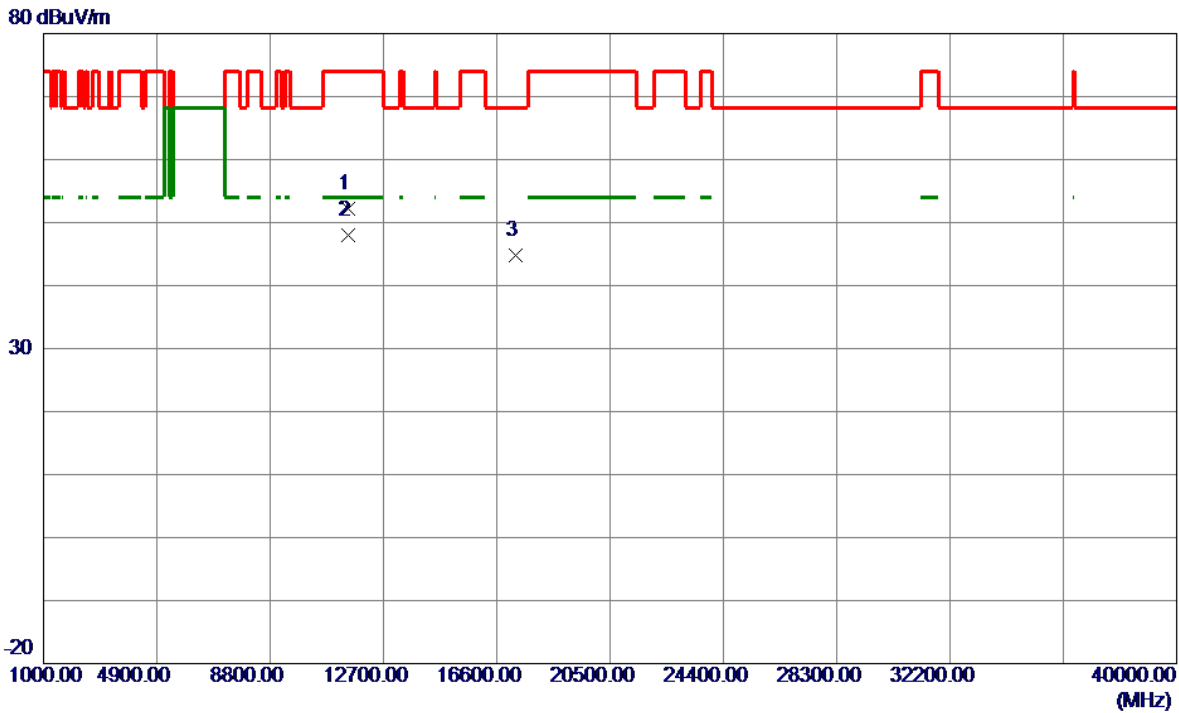


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11489.0500	60.52	-8.36	52.16	74.00	-21.84	Peak	
2 *	11489.0500	56.30	-8.36	47.94	54.00	-6.06	AVG	
3	17235.0000	48.42	-3.58	44.84	68.20	-23.36	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

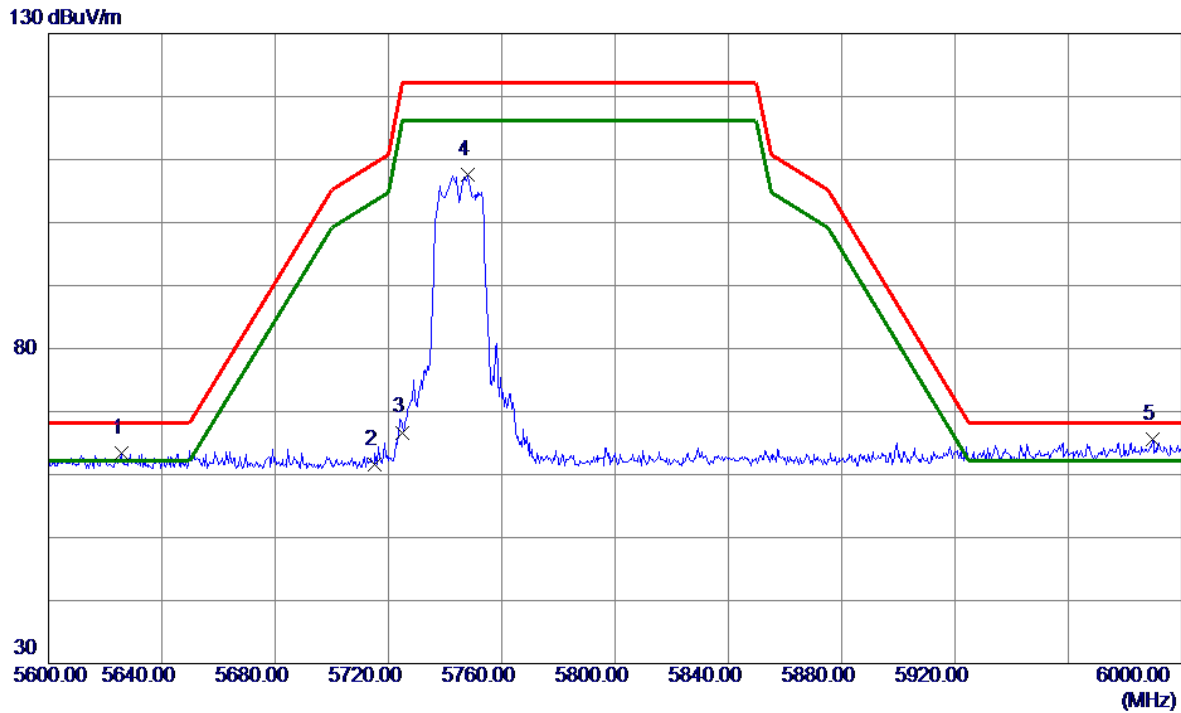


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5625.6000	25.00	38.36	63.36	68.20	-4.84	Peak	
2	5715.0000	23.21	38.46	61.67	109.40	-47.73	Peak	
3	5725.0000	28.20	38.50	66.70	122.20	-55.50	Peak	
4	5748.0000	68.97	38.58	107.55	122.20	-14.65	Peak	
5 *	5989.8000	26.34	39.23	65.57	68.20	-2.63	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

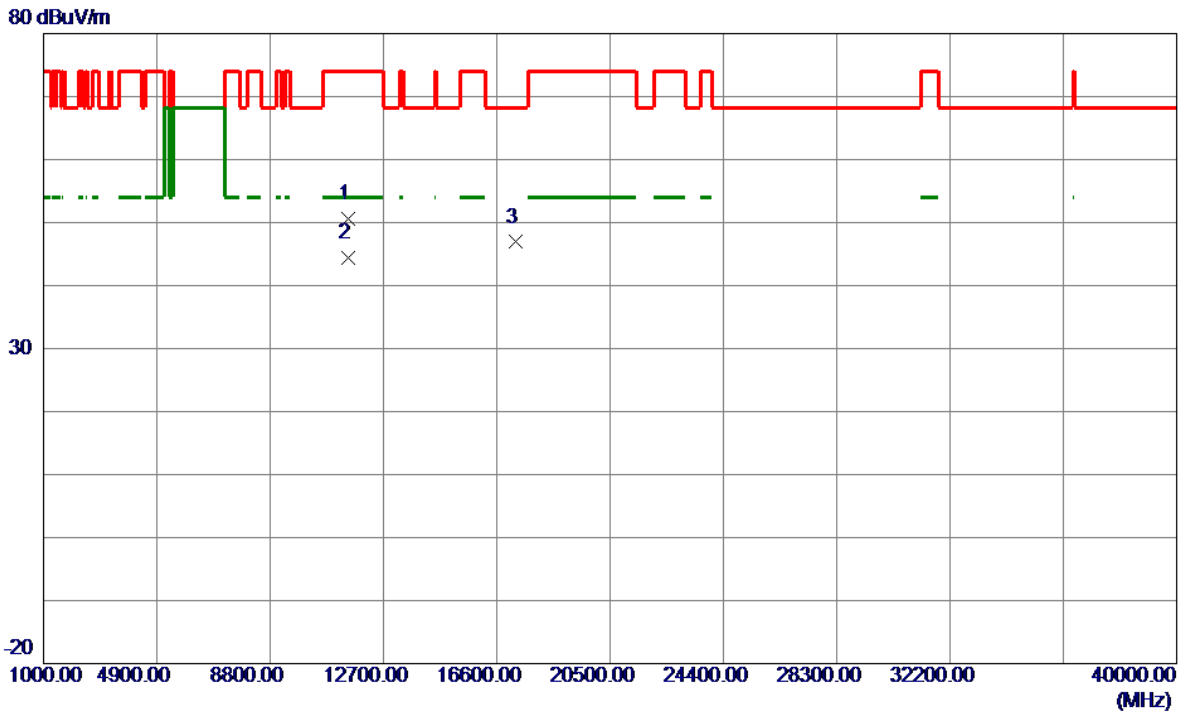


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11489.0500	58.89	-8.36	50.53	74.00	-23.47	Peak	
2 *	11489.0500	52.70	-8.36	44.34	54.00	-9.66	AVG	
3	17235.0000	50.48	-3.58	46.90	68.20	-21.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

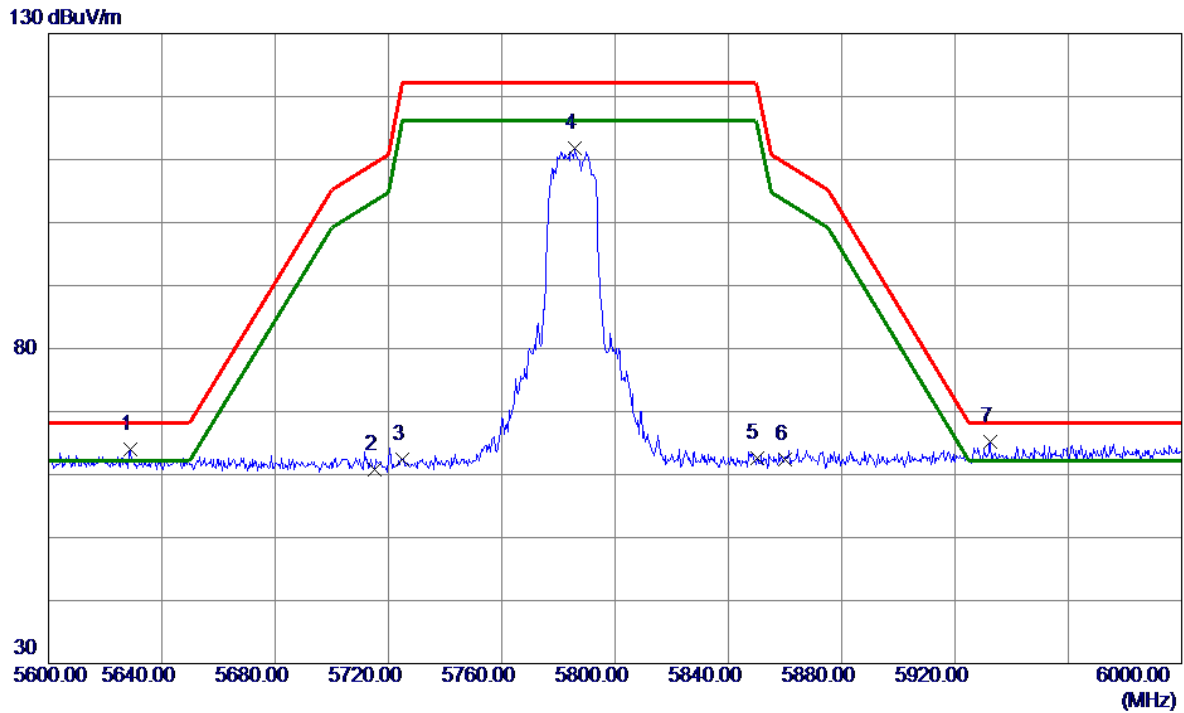


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5628.8000	25.65	38.36	64.01	68.20	-4.19	Peak	
2	5715.0000	22.35	38.46	60.81	109.40	-48.59	Peak	
3	5725.0000	23.81	38.50	62.31	122.20	-59.89	Peak	
4	5785.8000	73.16	38.73	111.89	122.20	-10.31	Peak	
5	5850.0000	23.71	38.91	62.62	122.20	-59.58	Peak	
6	5860.0000	23.51	38.94	62.45	109.40	-46.95	Peak	
7 *	5932.4000	26.00	39.11	65.11	68.20	-3.09	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

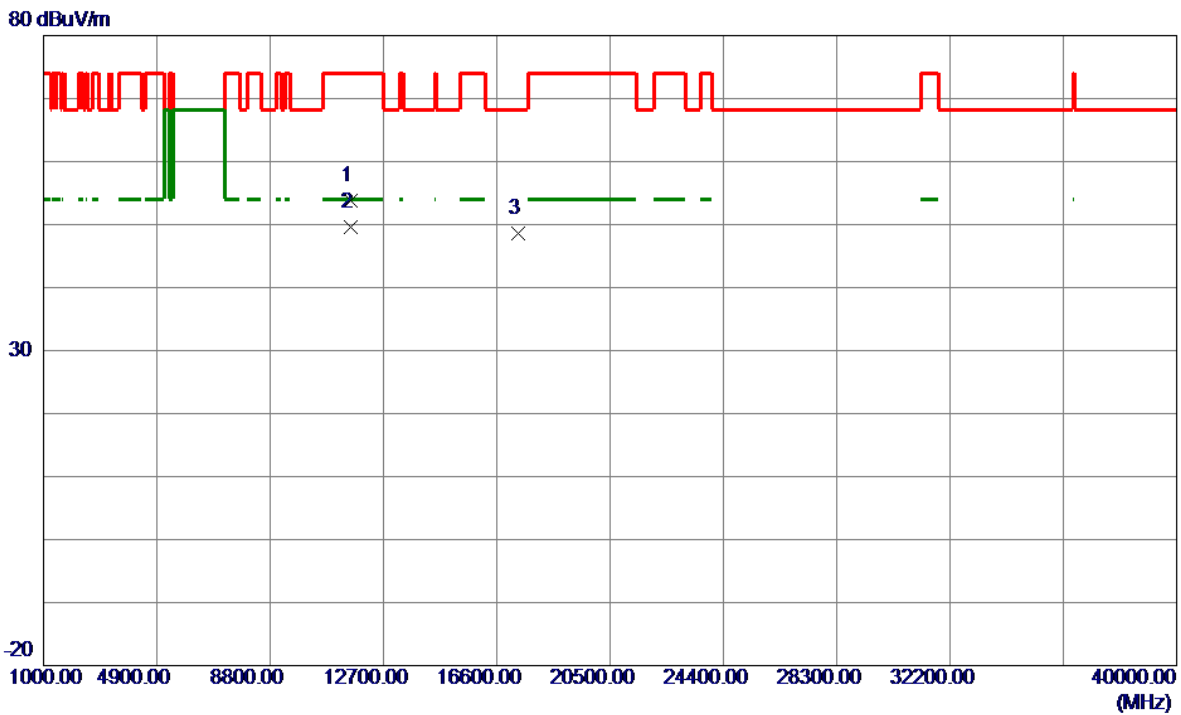


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11563.1500	61.99	-8.20	53.79	74.00	-20.21	Peak	
2 *	11563.1500	57.89	-8.20	49.69	54.00	-4.31	AVG	
3	17355.0000	51.36	-2.79	48.57	68.20	-19.63	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

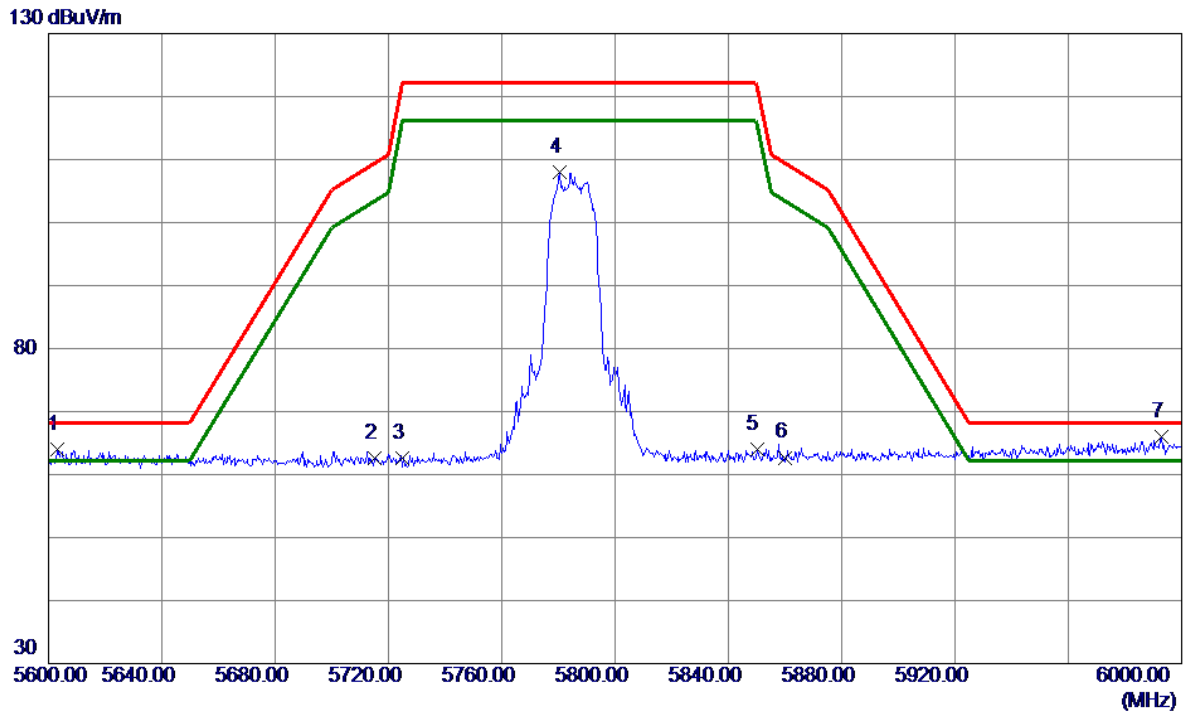


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5603.2000	25.74	38.34	64.08	68.20	-4.12	Peak	
2	5715.0000	24.13	38.46	62.59	109.40	-46.81	Peak	
3	5725.0000	24.01	38.50	62.51	122.20	-59.69	Peak	
4	5780.6000	69.32	38.71	108.03	122.20	-14.17	Peak	
5	5850.0000	25.18	38.91	64.09	122.20	-58.11	Peak	
6	5860.0000	23.76	38.94	62.70	109.40	-46.70	Peak	
7 *	5992.8000	26.82	39.24	66.06	68.20	-2.14	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

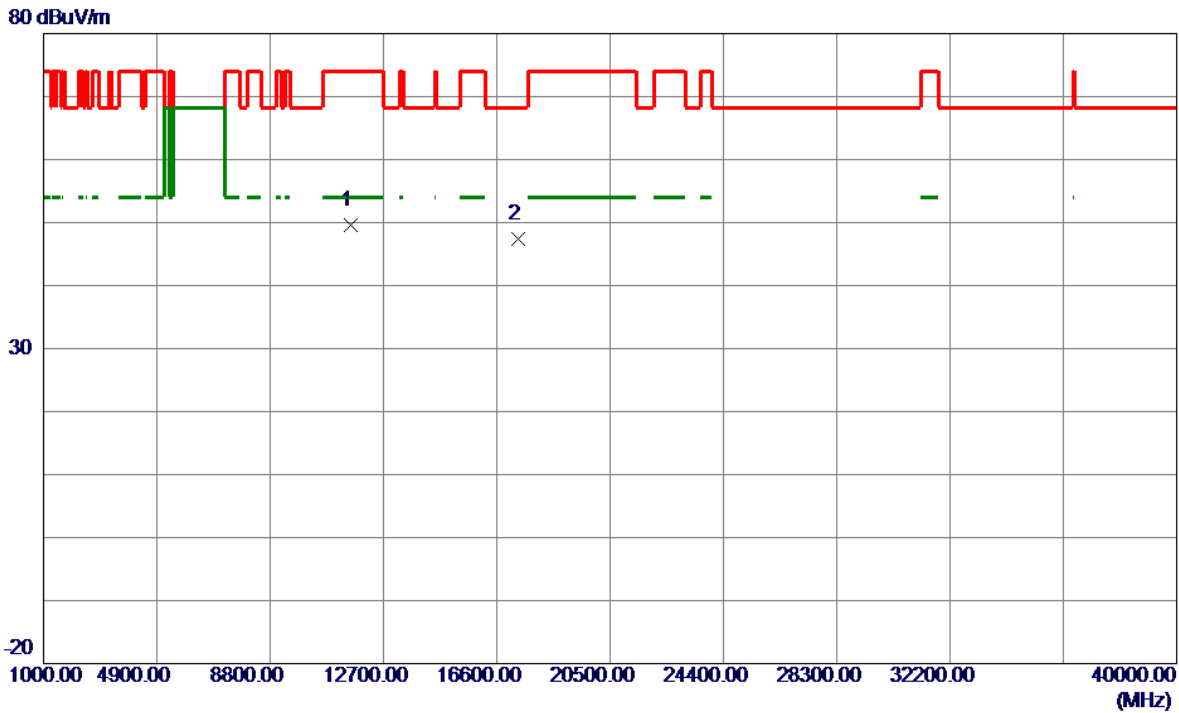


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11569.0000	57.71	-8.19	49.52	74.00	-24.48	Peak	
2 *	17355.0000	50.13	-2.79	47.34	68.20	-20.86	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

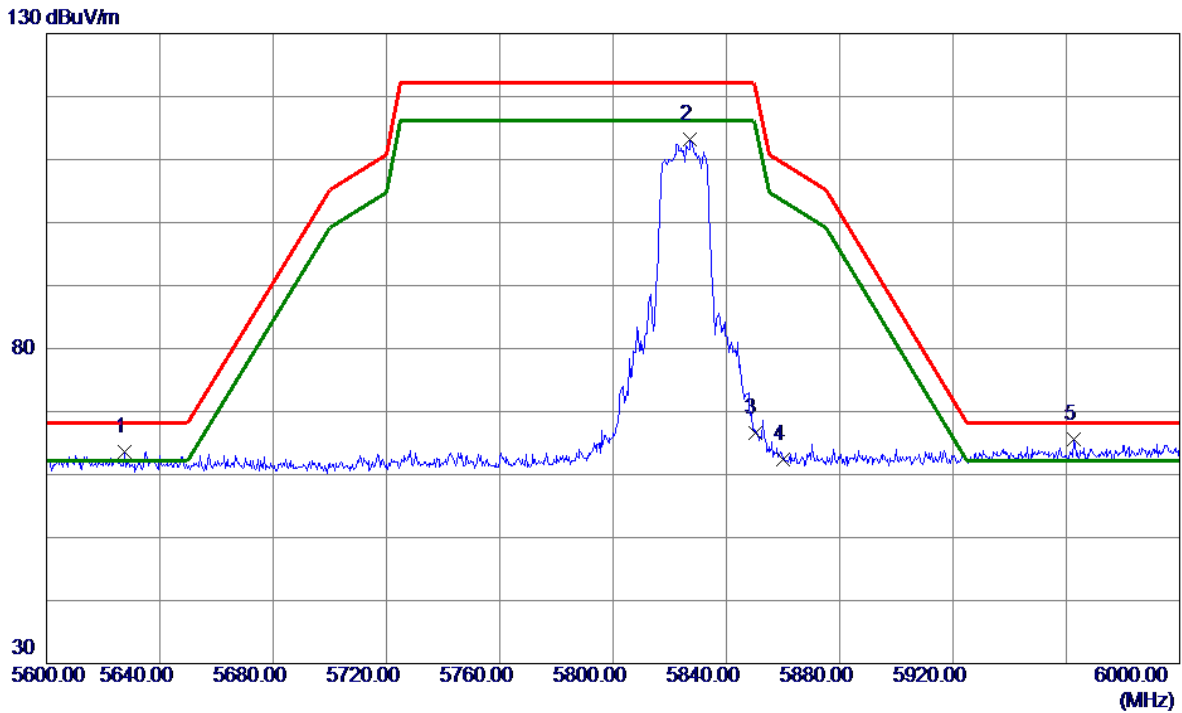


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5627.4000	25.20	38.36	63.56	68.20	-4.64	Peak	
2	5827.2000	74.34	38.85	113.19	122.20	-9.01	Peak	
3	5850.0000	27.72	38.91	66.63	122.20	-55.57	Peak	
4	5860.0000	23.53	38.94	62.47	109.40	-46.93	Peak	
5 *	5962.8000	26.37	39.18	65.55	68.20	-2.65	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

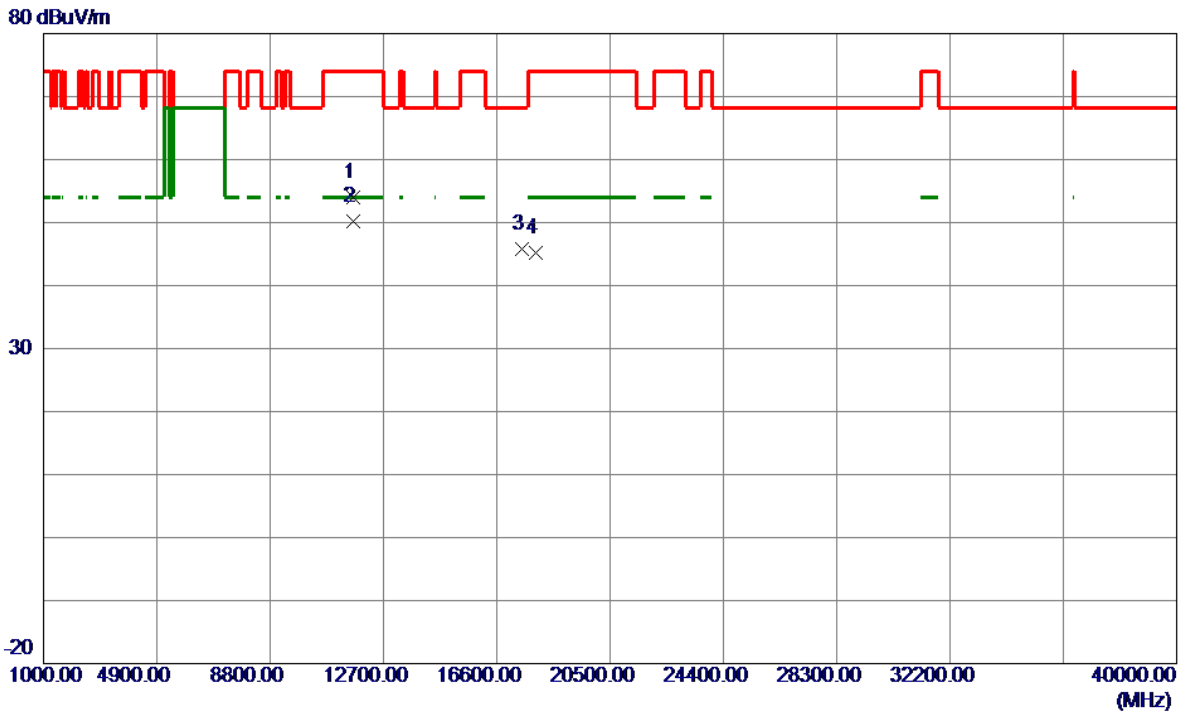


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11648.9500	62.30	-8.25	54.05	74.00	-19.95	Peak	
2 *	11648.9500	58.39	-8.25	50.14	54.00	-3.86	AVG	
3	17475.0000	48.00	-2.11	45.89	68.20	-22.31	Peak	
4	17935.7500	41.50	3.73	45.23	54.00	-8.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

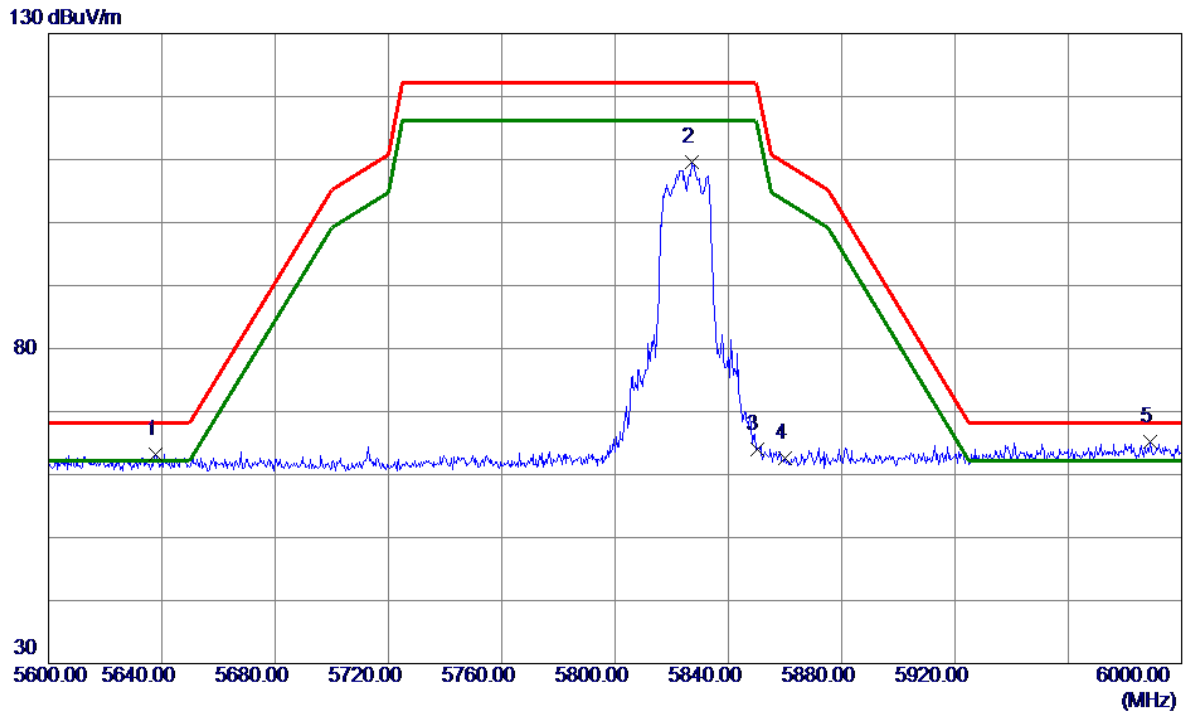


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5637.8000	24.88	38.36	63.24	68.20	-4.96	Peak	
2	5827.0000	70.80	38.85	109.65	122.20	-12.55	Peak	
3	5850.0000	25.07	38.91	63.98	122.20	-58.22	Peak	
4	5860.0000	23.65	38.94	62.59	109.40	-46.81	Peak	
5 *	5989.0000	26.01	39.23	65.24	68.20	-2.96	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

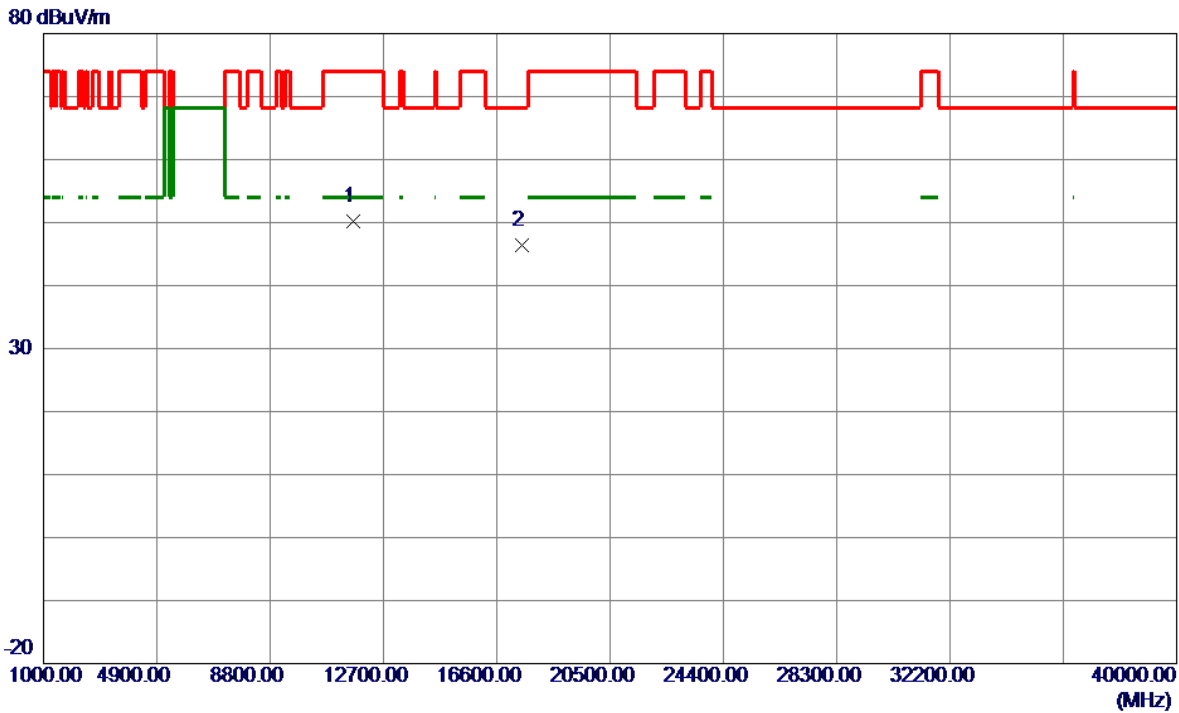


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11652.8500	58.40	-8.26	50.14	74.00	-23.86	Peak	
2 *	17475.0000	48.52	-2.11	46.41	68.20	-21.79	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

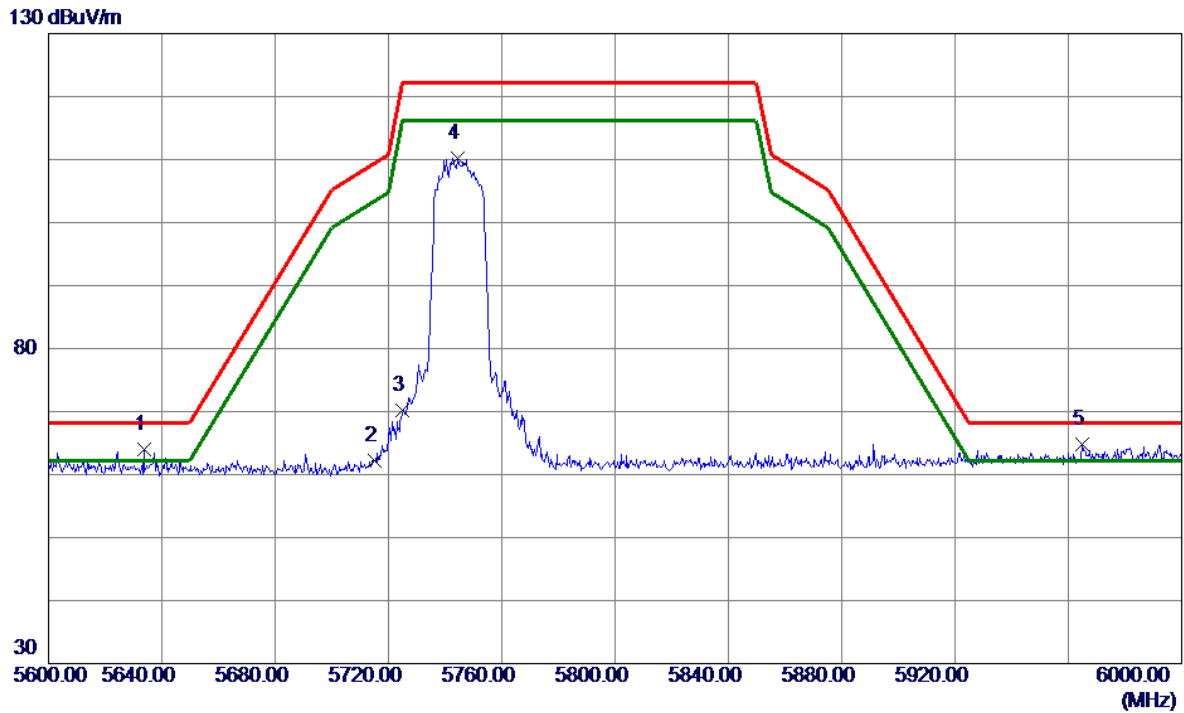


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5633.6000	25.61	38.36	63.97	68.20	-4.23	Peak	
2	5715.0000	23.76	38.46	62.22	109.40	-47.18	Peak	
3	5725.0000	31.63	38.50	70.13	122.20	-52.07	Peak	
4	5744.6000	71.70	38.57	110.27	122.20	-11.93	Peak	
5 *	5964.8000	25.60	39.18	64.78	68.20	-3.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

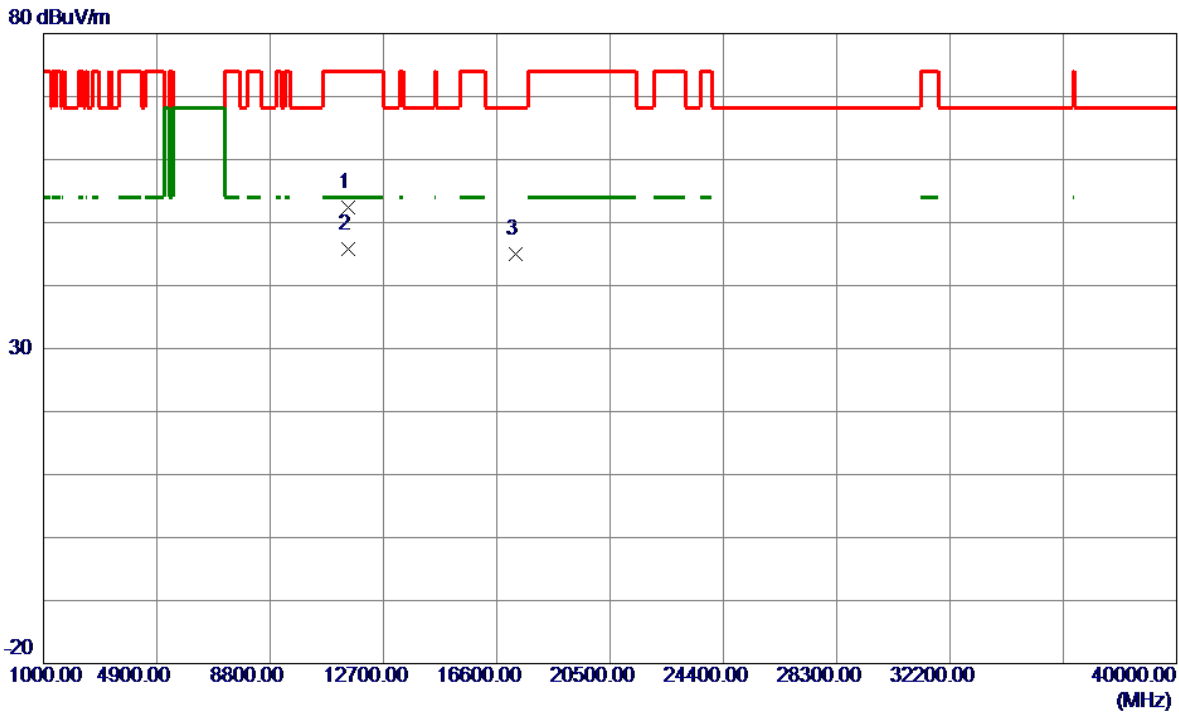


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11485.1500	60.74	-8.37	52.37	74.00	-21.63	Peak	
2 *	11485.1500	54.17	-8.37	45.80	54.00	-8.20	AVG	
3	17235.0000	48.61	-3.58	45.03	68.20	-23.17	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

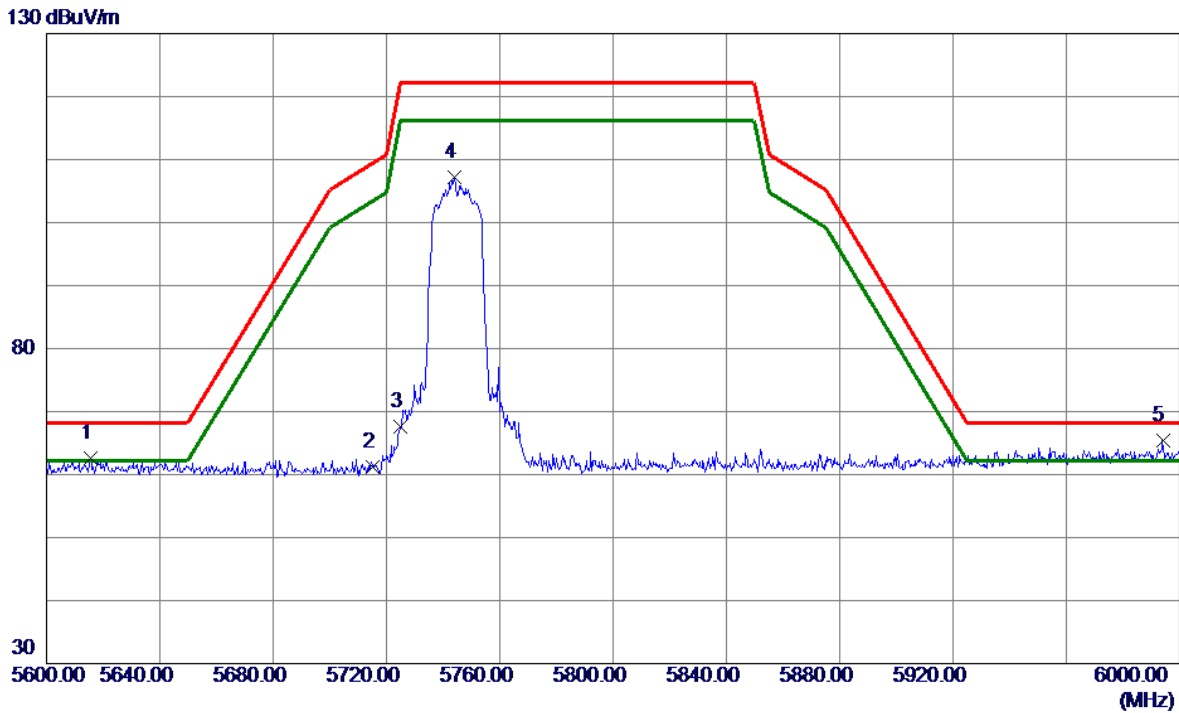


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5615.4000	24.28	38.35	62.63	68.20	-5.57	Peak	
2	5715.0000	22.75	38.46	61.21	109.40	-48.19	Peak	
3	5725.0000	29.10	38.50	67.60	122.20	-54.60	Peak	
4	5744.2000	68.64	38.57	107.21	122.20	-14.99	Peak	
5 *	5994.0000	26.10	39.24	65.34	68.20	-2.86	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

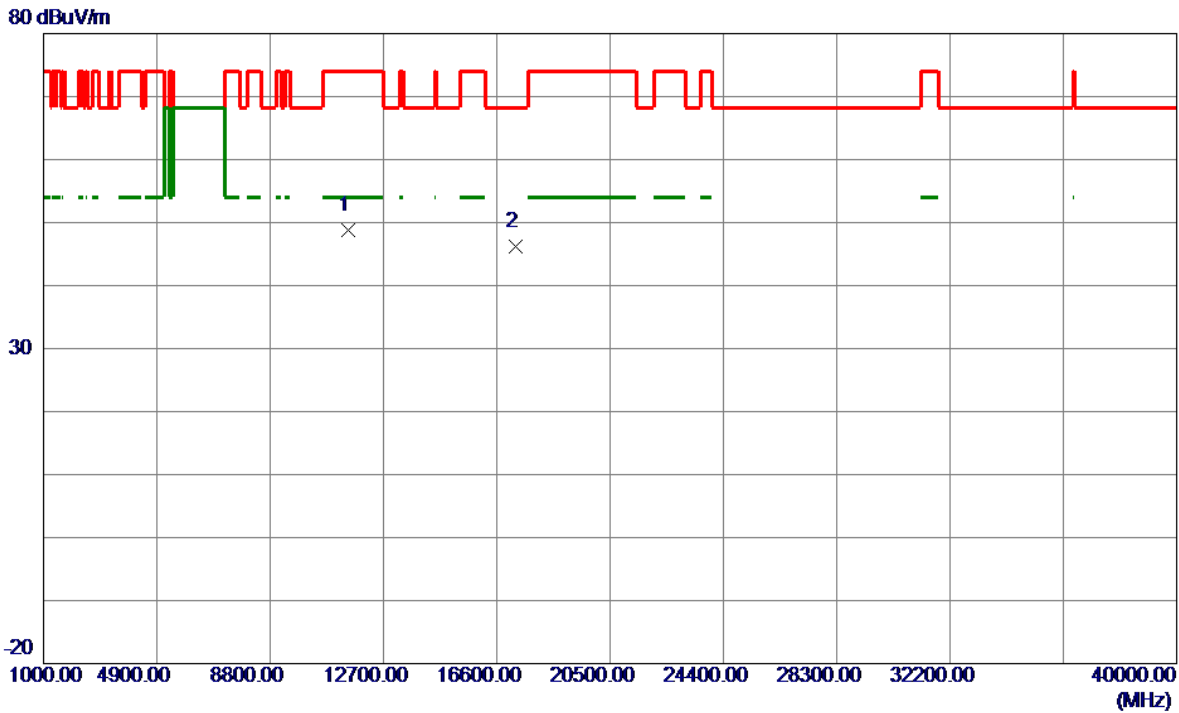


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.0000	57.13	-8.36	48.77	74.00	-25.23	Peak	
2 *	17235.0000	49.72	-3.58	46.14	68.20	-22.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

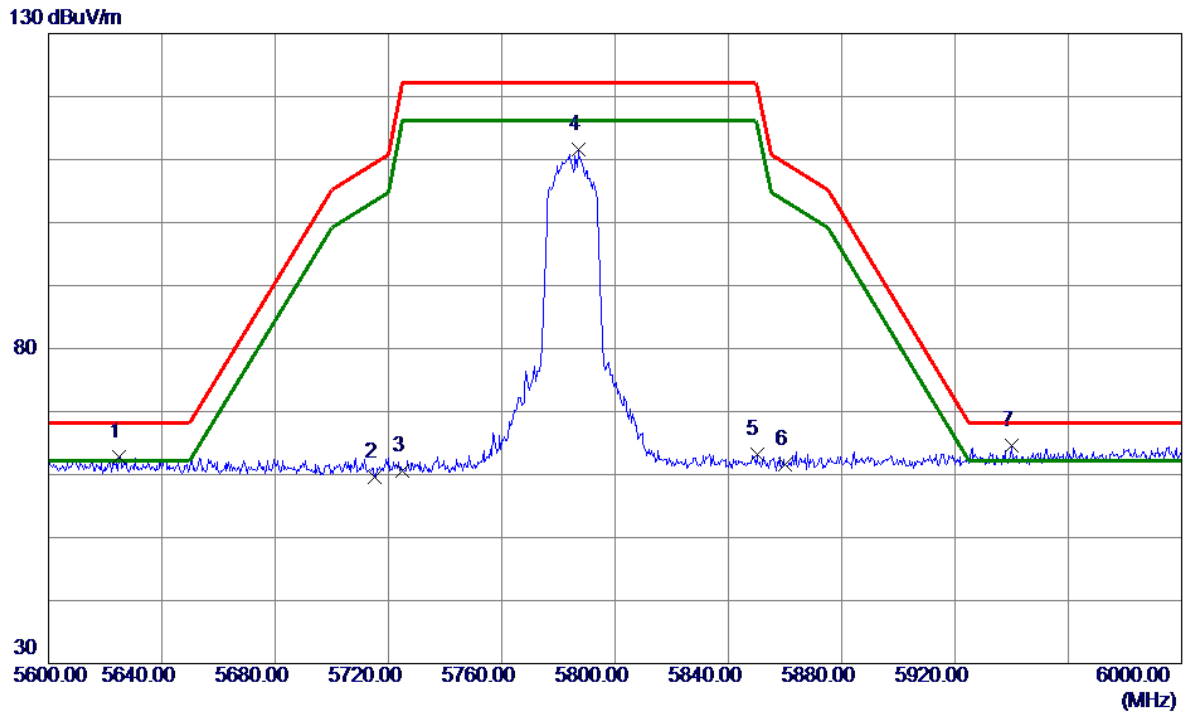


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5625.0000	24.51	38.36	62.87	68.20	-5.33	Peak	
2	5715.0000	21.19	38.46	59.65	109.40	-49.75	Peak	
3	5725.0000	22.04	38.50	60.54	122.20	-61.66	Peak	
4	5787.0000	72.80	38.73	111.53	122.20	-10.67	Peak	
5	5850.0000	24.24	38.91	63.15	122.20	-59.05	Peak	
6	5860.0000	22.63	38.94	61.57	109.40	-47.83	Peak	
7 *	5940.0000	25.54	39.13	64.67	68.20	-3.53	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

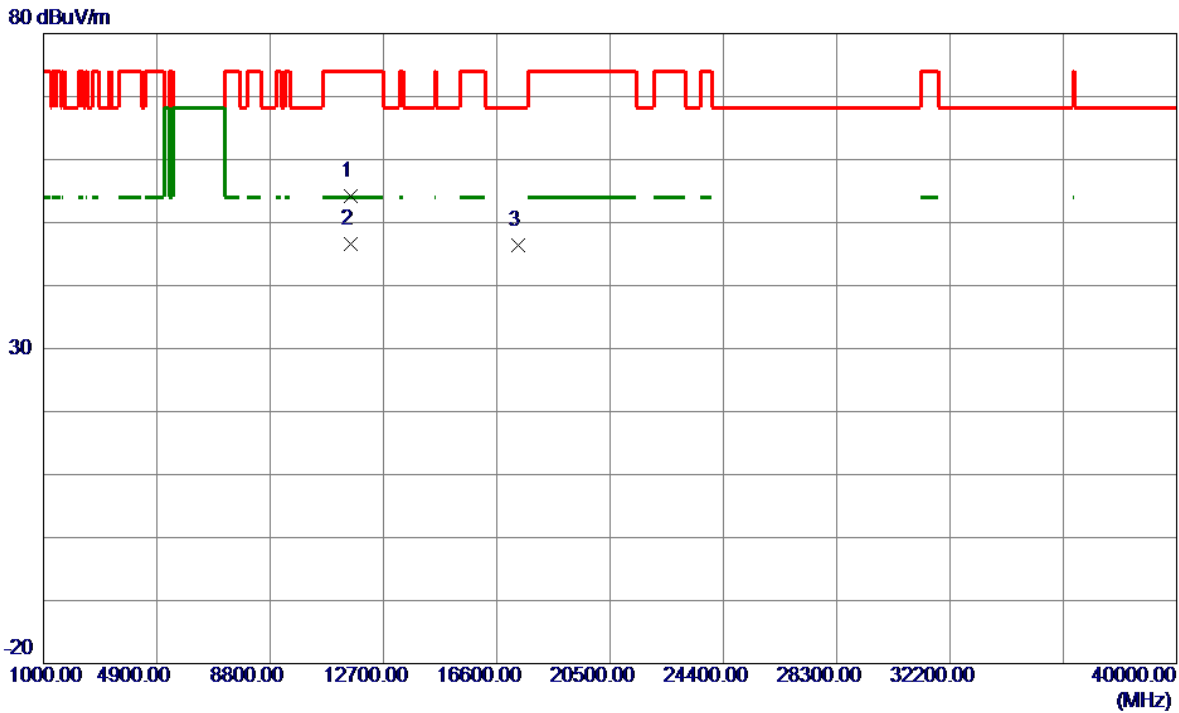


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11563.1500	62.41	-8.20	54.21	74.00	-19.79	Peak	
2 *	11563.1500	54.76	-8.20	46.56	54.00	-7.44	AVG	
3	17355.0000	49.12	-2.79	46.33	68.20	-21.87	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

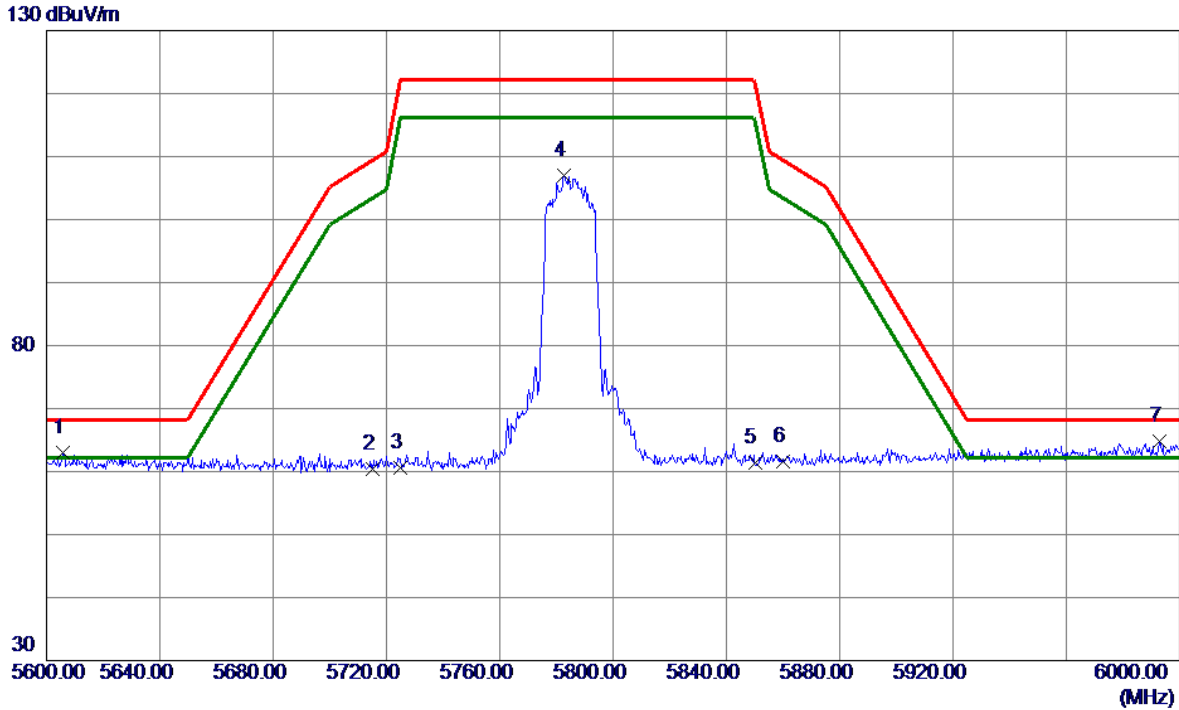


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5605.8000	24.70	38.34	63.04	68.20	-5.16	Peak	
2	5715.0000	21.95	38.46	60.41	109.40	-48.99	Peak	
3	5725.0000	22.14	38.50	60.64	122.20	-61.56	Peak	
4	5782.8000	68.24	38.72	106.96	122.20	-15.24	Peak	
5	5850.0000	22.55	38.91	61.46	122.20	-60.74	Peak	
6	5860.0000	22.75	38.94	61.69	109.40	-47.71	Peak	
7 *	5993.0000	25.65	39.24	64.89	68.20	-3.31	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

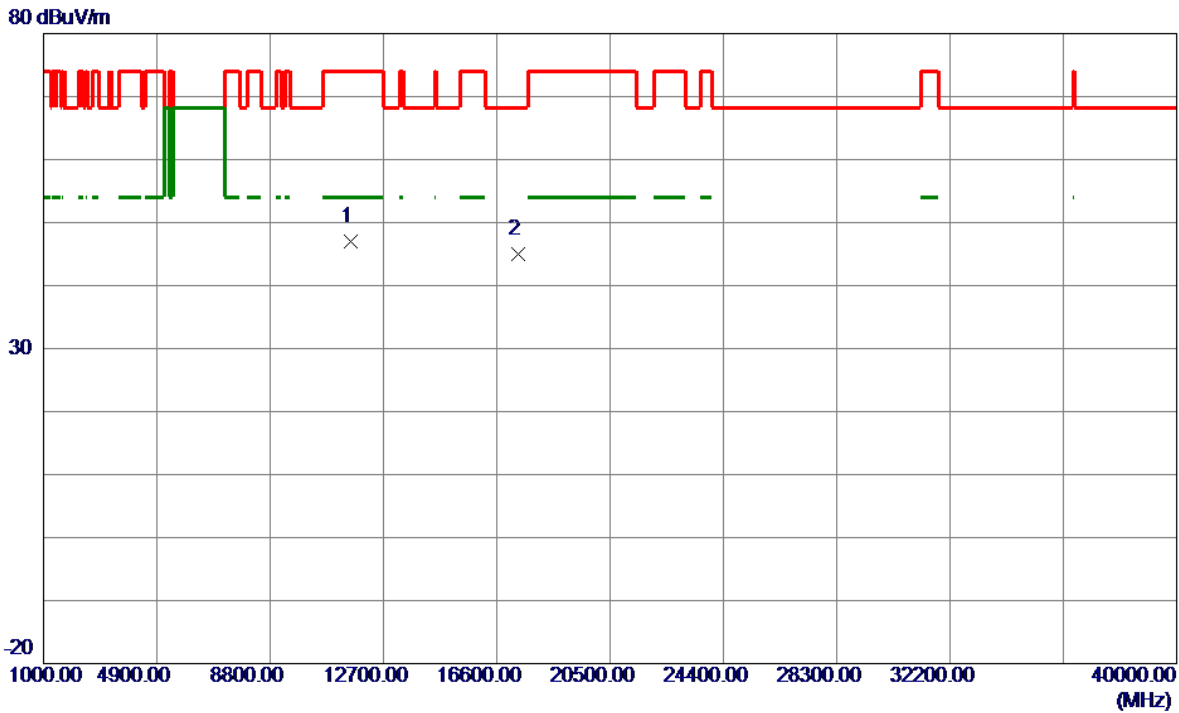


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11572.9000	55.12	-8.18	46.94	74.00	-27.06	Peak	
2 *	17355.0000	47.76	-2.79	44.97	68.20	-23.23	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

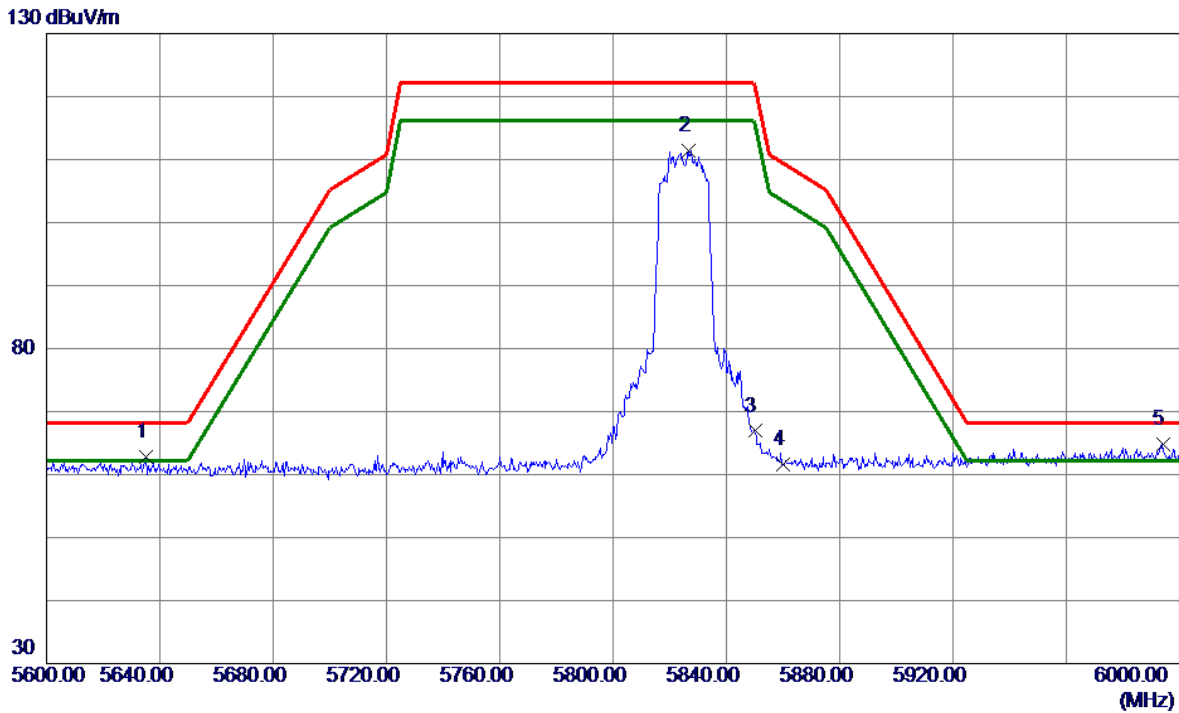


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5635.2000	24.51	38.36	62.87	68.20	-5.33	Peak	
2	5826.6000	72.63	38.85	111.48	122.20	-10.72	Peak	
3	5850.0000	27.99	38.91	66.90	122.20	-55.30	Peak	
4	5860.0000	22.71	38.94	61.65	109.40	-47.75	Peak	
5 *	5994.0000	25.65	39.24	64.89	68.20	-3.31	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

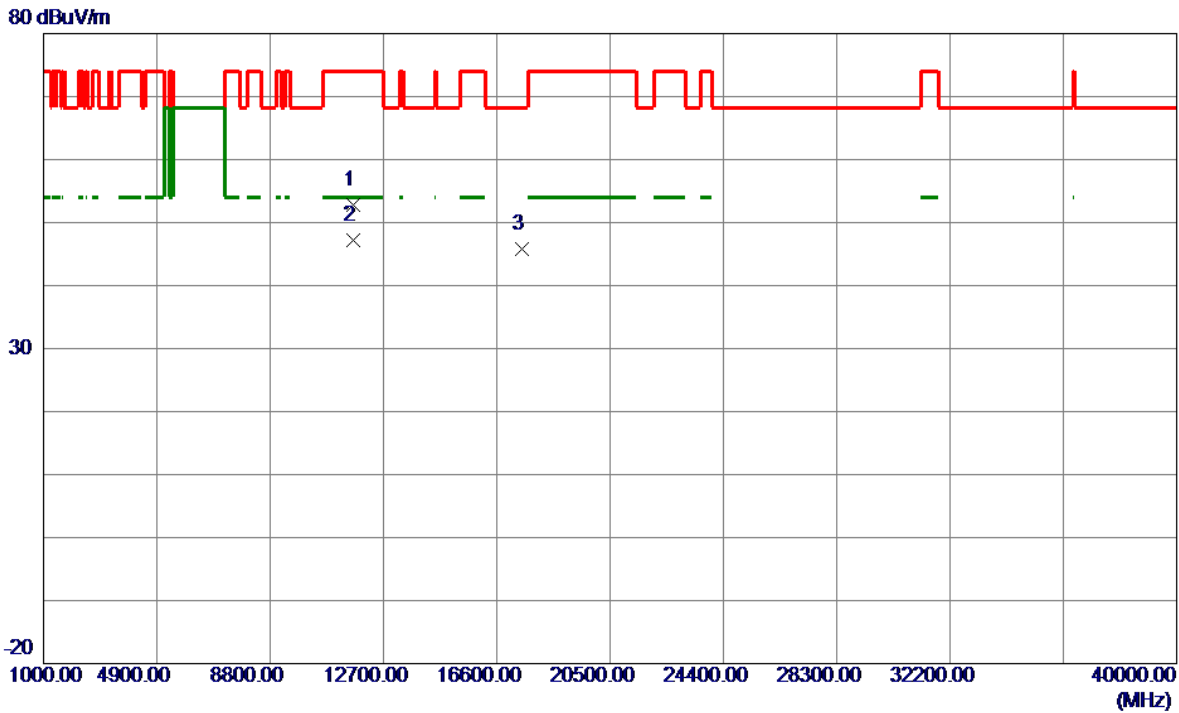


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11656.7500	61.12	-8.27	52.85	74.00	-21.15	Peak	
2 *	11656.7500	55.40	-8.27	47.13	54.00	-6.87	AVG	
3	17475.0000	47.87	-2.11	45.76	68.20	-22.44	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

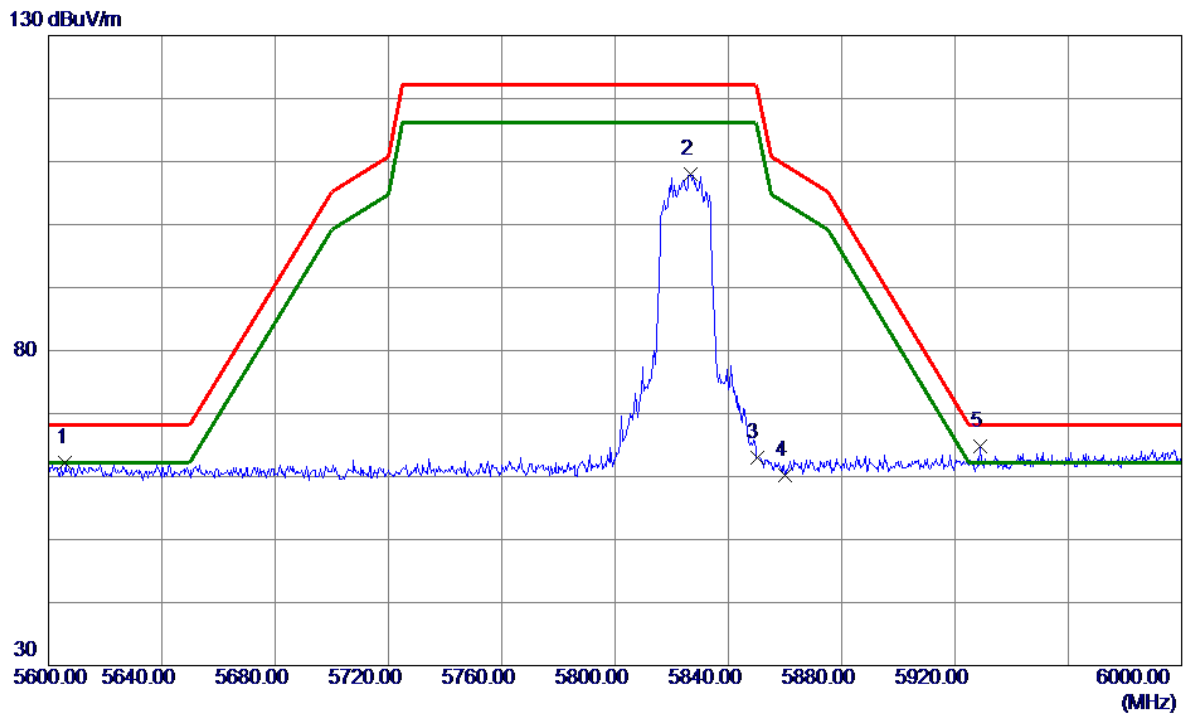


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5606.0000	23.82	38.34	62.16	68.20	-6.04	Peak	
2	5826.8000	69.08	38.85	107.93	122.20	-14.27	Peak	
3	5850.0000	24.15	38.91	63.06	122.20	-59.14	Peak	
4	5860.0000	21.35	38.94	60.29	109.40	-49.11	Peak	
5 *	5928.8000	25.70	39.11	64.81	68.20	-3.39	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

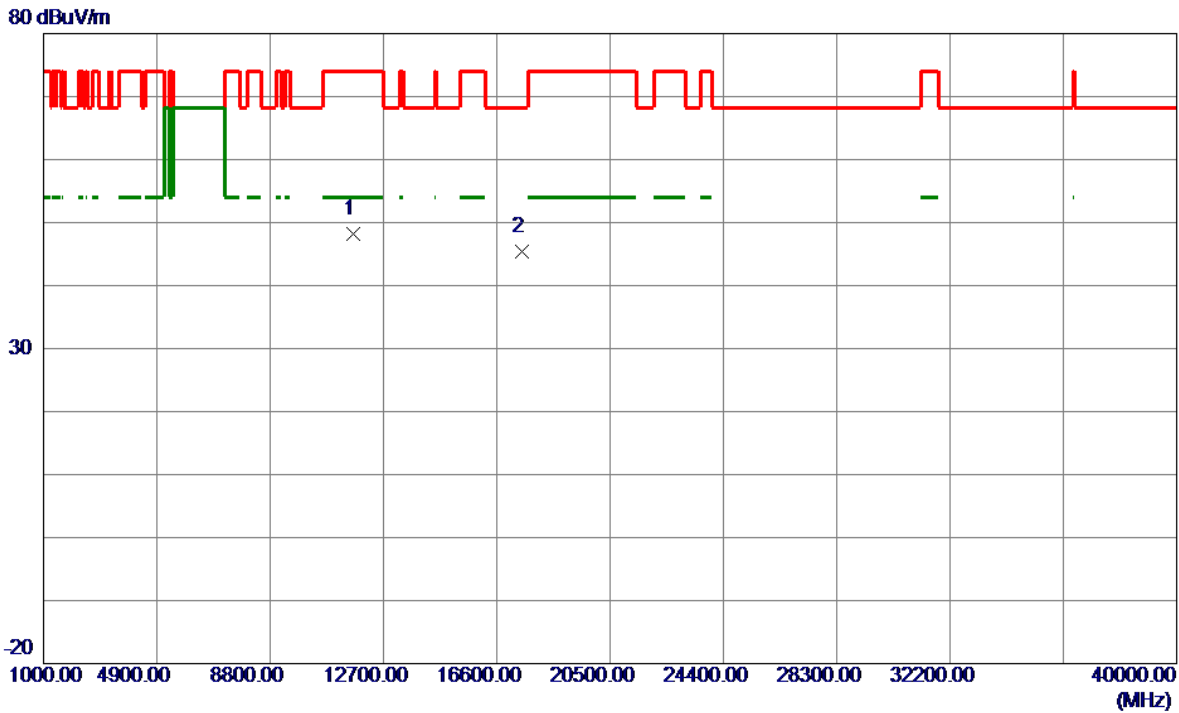


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.0000	56.44	-8.25	48.19	74.00	-25.81	Peak	
2 *	17475.0000	47.57	-2.11	45.46	68.20	-22.74	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

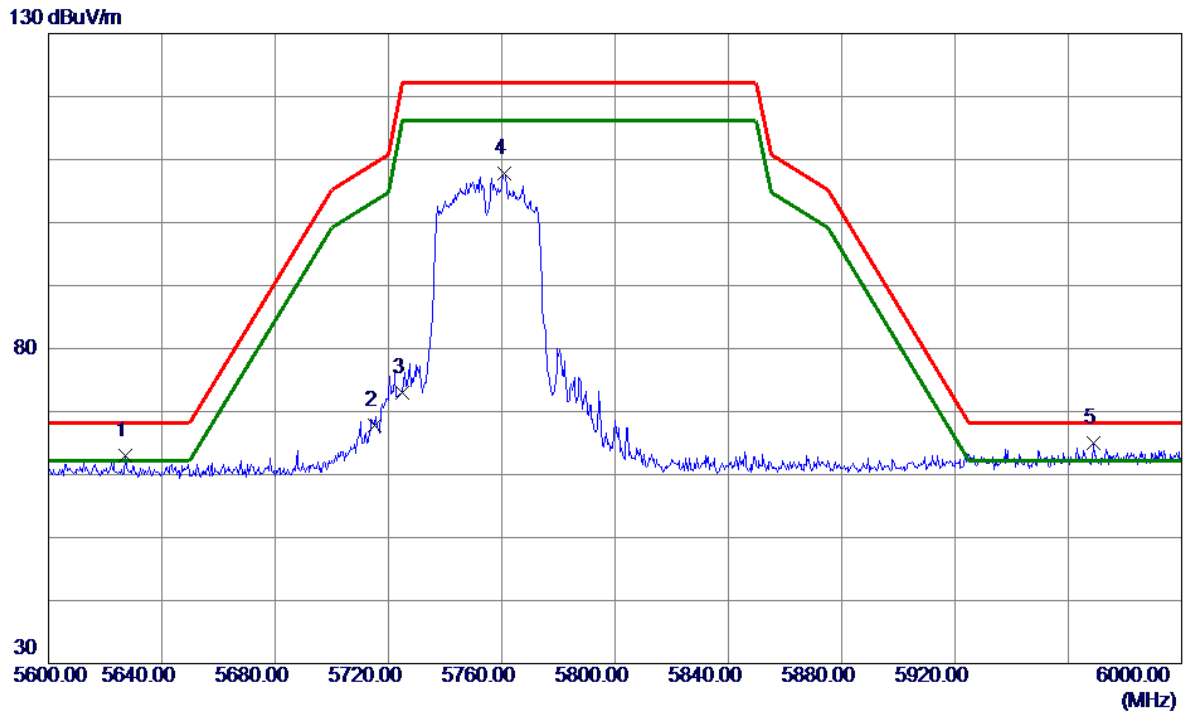


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5627.2000	24.68	38.36	63.04	68.20	-5.16	Peak	
2	5715.0000	29.42	38.46	67.88	109.40	-41.52	Peak	
3	5725.0000	34.48	38.50	72.98	122.20	-49.22	Peak	
4	5761.0000	69.10	38.63	107.73	122.20	-14.47	Peak	
5 *	5968.8000	25.75	39.19	64.94	68.20	-3.26	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

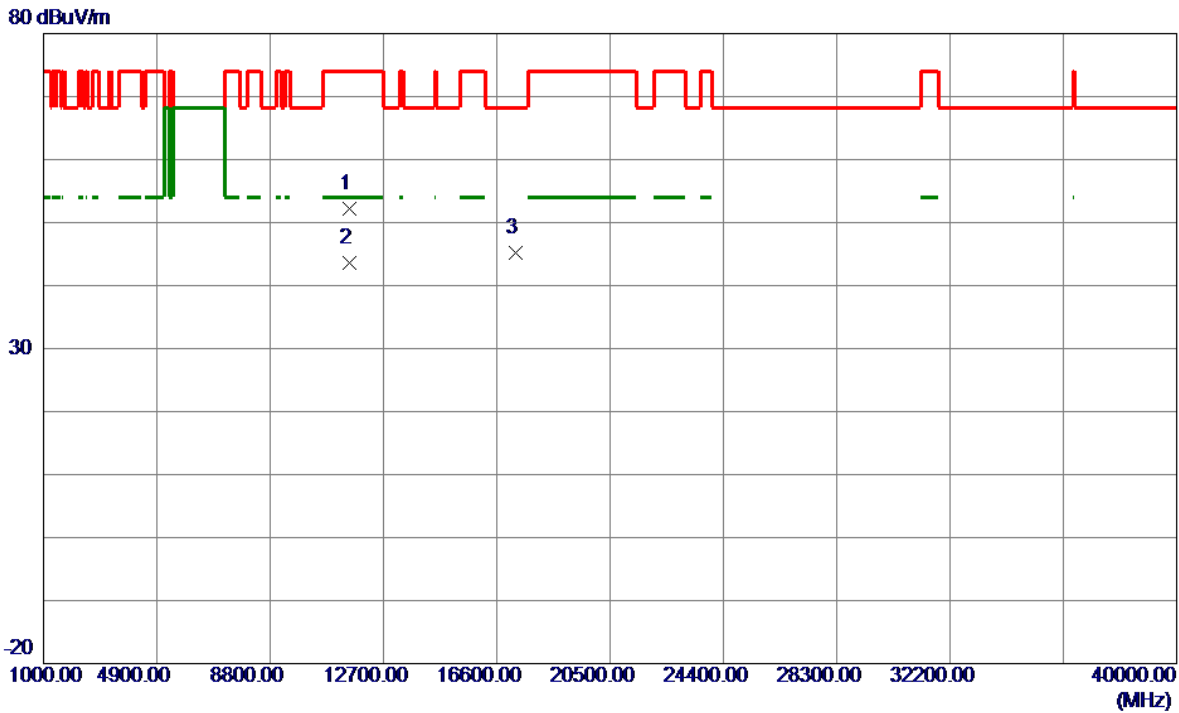


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11518.3000	60.57	-8.30	52.27	74.00	-21.73	Peak	
2 *	11518.3000	51.86	-8.30	43.56	54.00	-10.44	AVG	
3	17265.0000	48.49	-3.38	45.11	68.20	-23.09	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

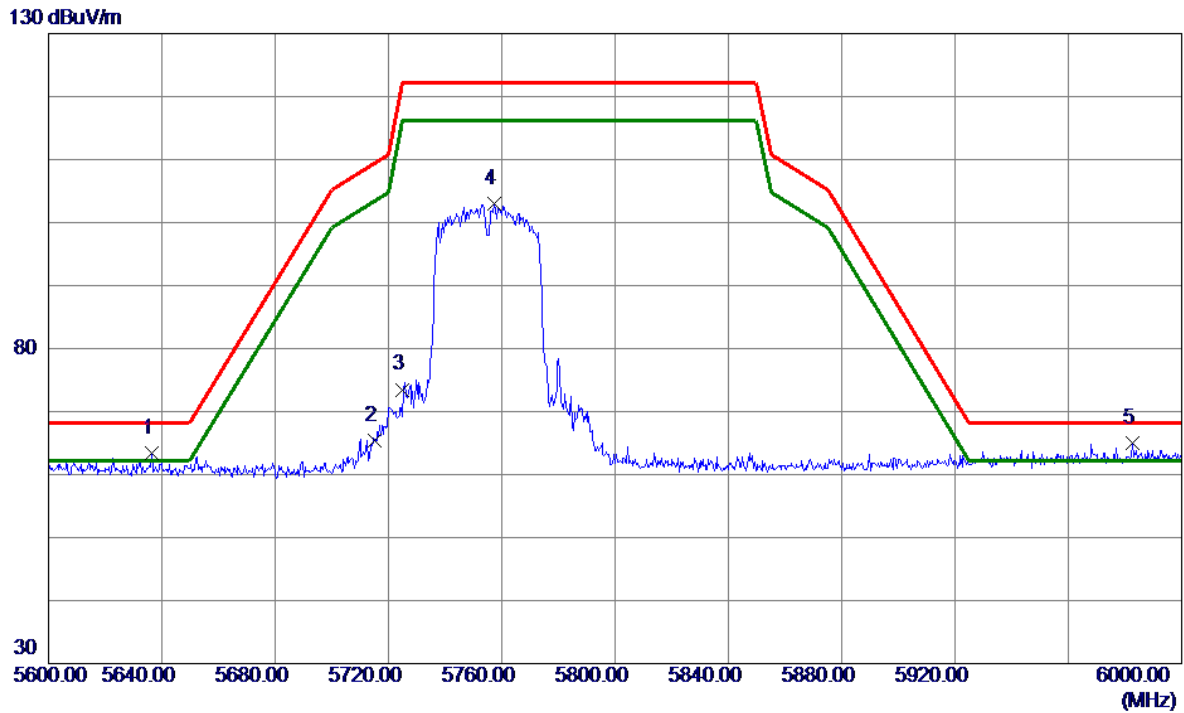


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5636.4000	25.07	38.36	63.43	68.20	-4.77	Peak	
2	5715.0000	26.86	38.46	65.32	109.40	-44.08	Peak	
3	5725.0000	35.00	38.50	73.50	122.20	-48.70	Peak	
4	5757.2000	64.40	38.62	103.02	122.20	-19.18	Peak	
5 *	5982.6000	25.77	39.22	64.99	68.20	-3.21	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

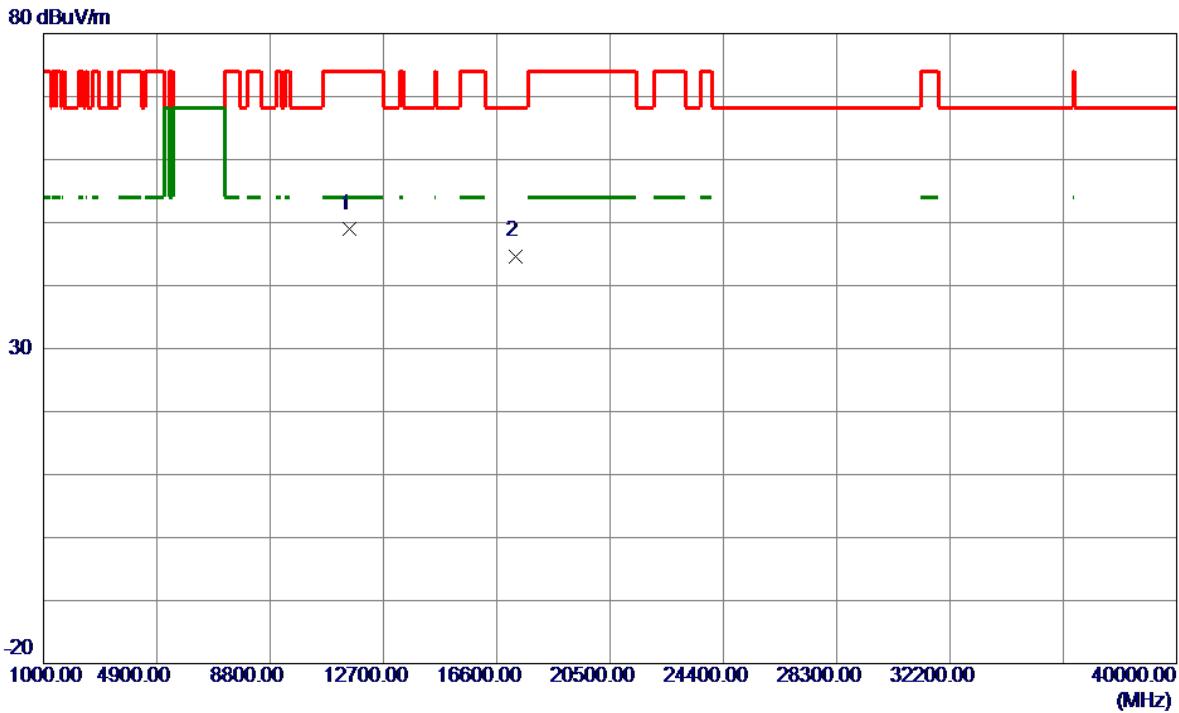


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11514.4000	57.29	-8.30	48.99	74.00	-25.01	Peak	
2 *	17265.0000	48.08	-3.38	44.70	68.20	-23.50	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

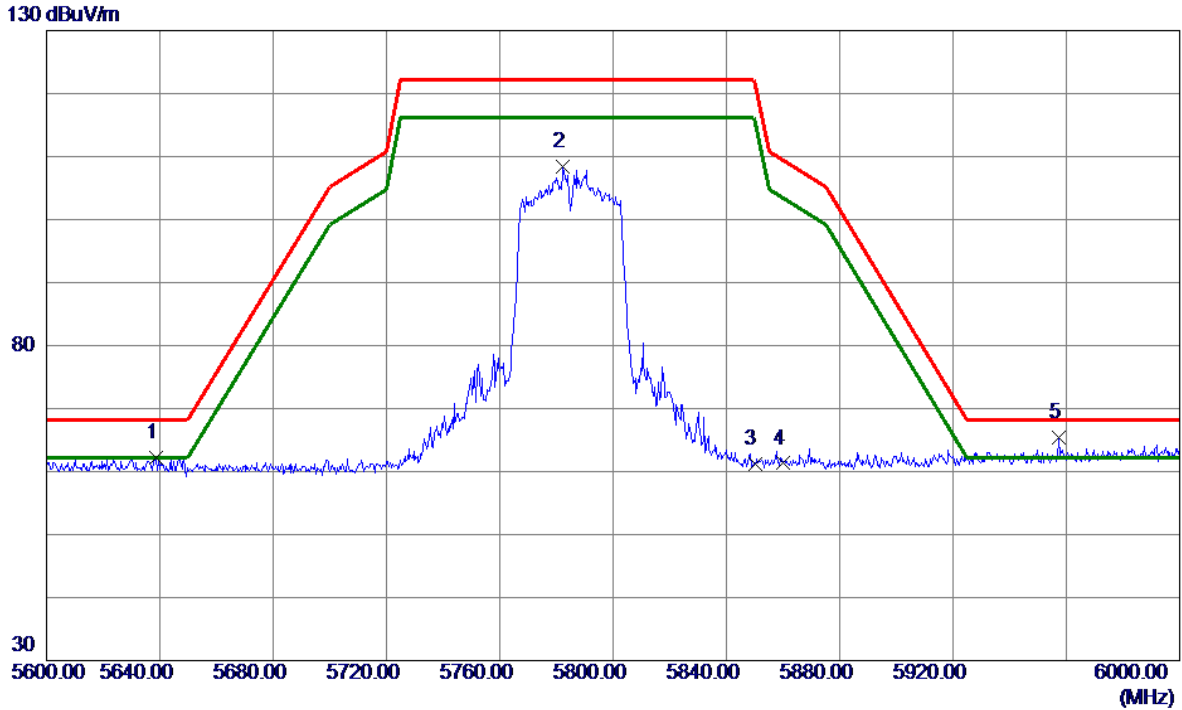


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5638.8000	23.86	38.37	62.23	68.20	-5.97	Peak	
2	5782.4000	69.67	38.71	108.38	122.20	-13.82	Peak	
3	5850.0000	22.25	38.91	61.16	122.20	-61.04	Peak	
4	5860.0000	22.36	38.94	61.30	109.40	-48.10	Peak	
5 *	5957.4000	26.28	39.16	65.44	68.20	-2.76	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

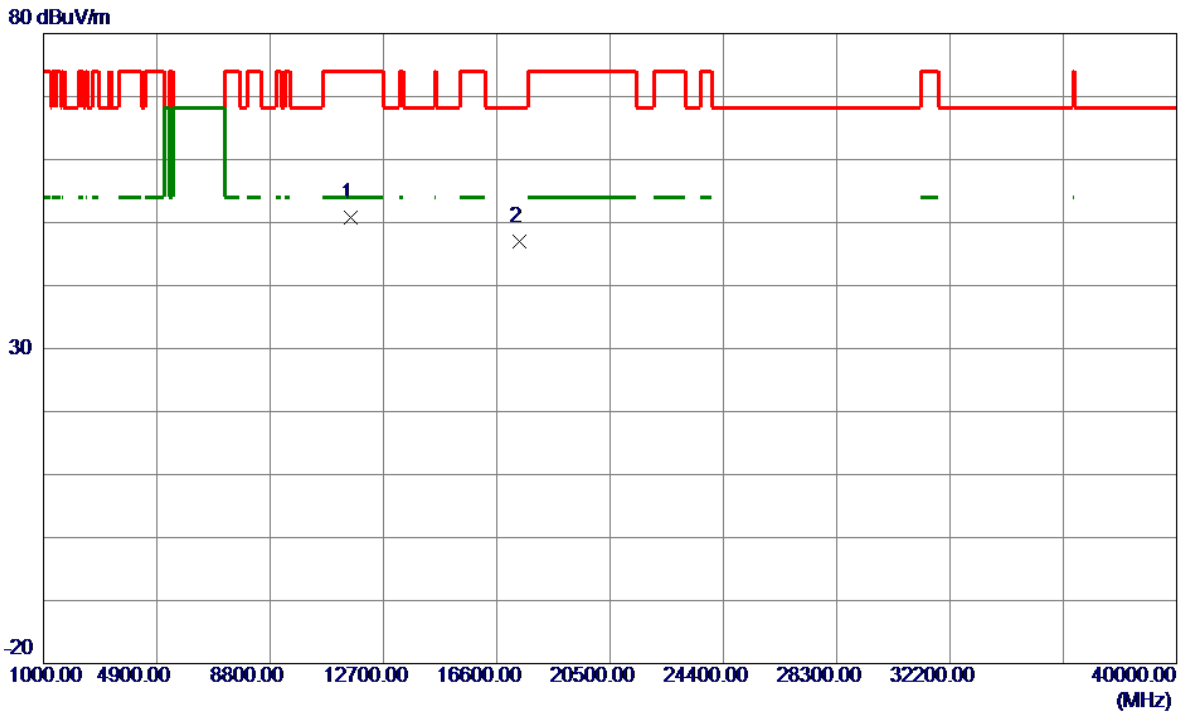


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11588.5000	58.89	-8.14	50.75	74.00	-23.25	Peak	
2 *	17385.0000	49.56	-2.59	46.97	68.20	-21.23	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

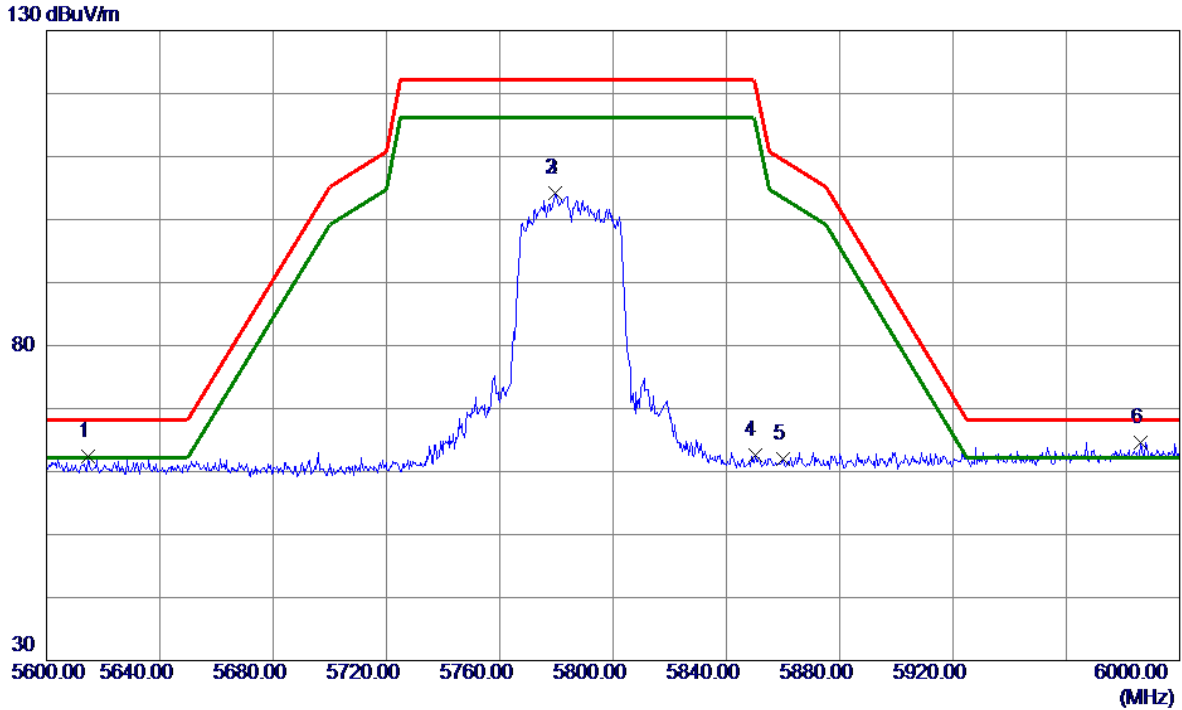


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5614.6000	24.01	38.35	62.36	68.20	-5.84	Peak	
2	5779.6000	65.41	38.70	104.11	122.20	-18.09	Peak	
3	5779.6000	65.41	38.70	104.11	122.20	-18.09	Peak	
4	5850.0000	23.72	38.91	62.63	122.20	-59.57	Peak	
5	5860.0000	22.98	38.94	61.92	109.40	-47.48	Peak	
6 *	5986.2000	25.46	39.22	64.68	68.20	-3.52	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

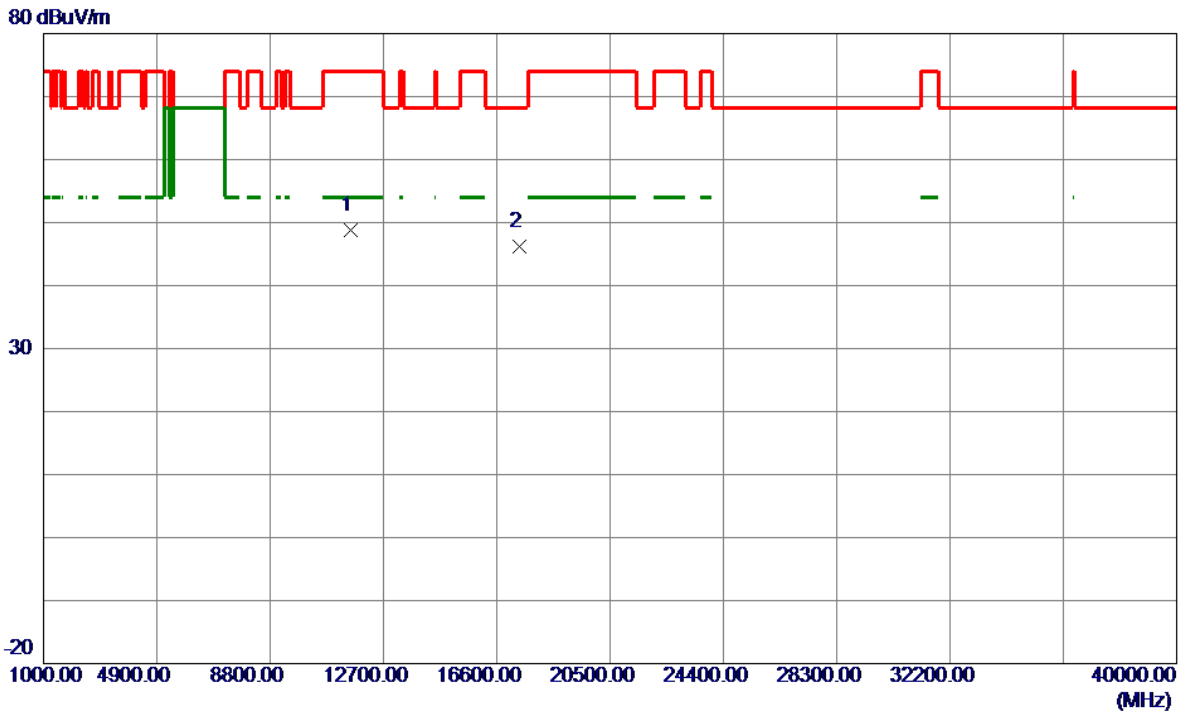


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11588.5000	57.03	-8.14	48.89	74.00	-25.11	Peak	
2 *	17385.0000	48.71	-2.59	46.12	68.20	-22.08	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

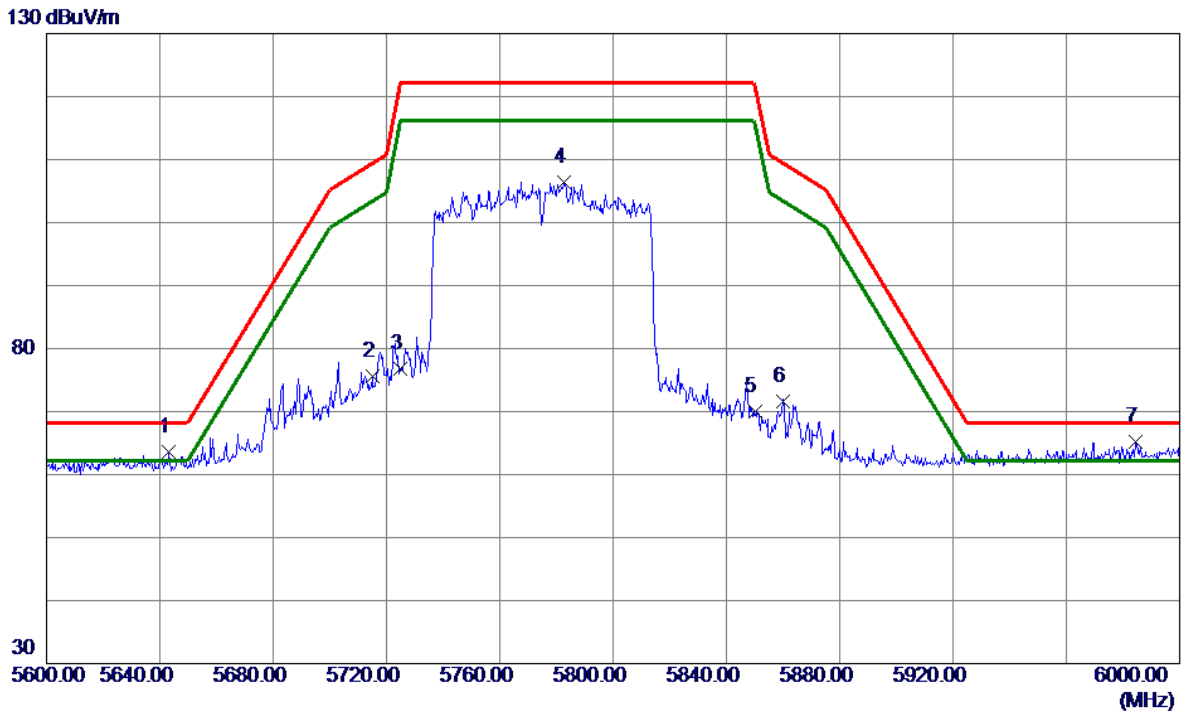


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5643.0000	25.14	38.37	63.51	68.20	-4.69	Peak	
2	5715.0000	37.08	38.46	75.54	109.40	-33.86	Peak	
3	5725.0000	38.34	38.50	76.84	122.20	-45.36	Peak	
4	5782.8000	67.65	38.72	106.37	122.20	-15.83	Peak	
5	5850.0000	31.09	38.91	70.00	122.20	-52.20	Peak	
6	5860.0000	32.71	38.94	71.65	109.40	-37.75	Peak	
7 *	5984.6000	25.91	39.22	65.13	68.20	-3.07	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

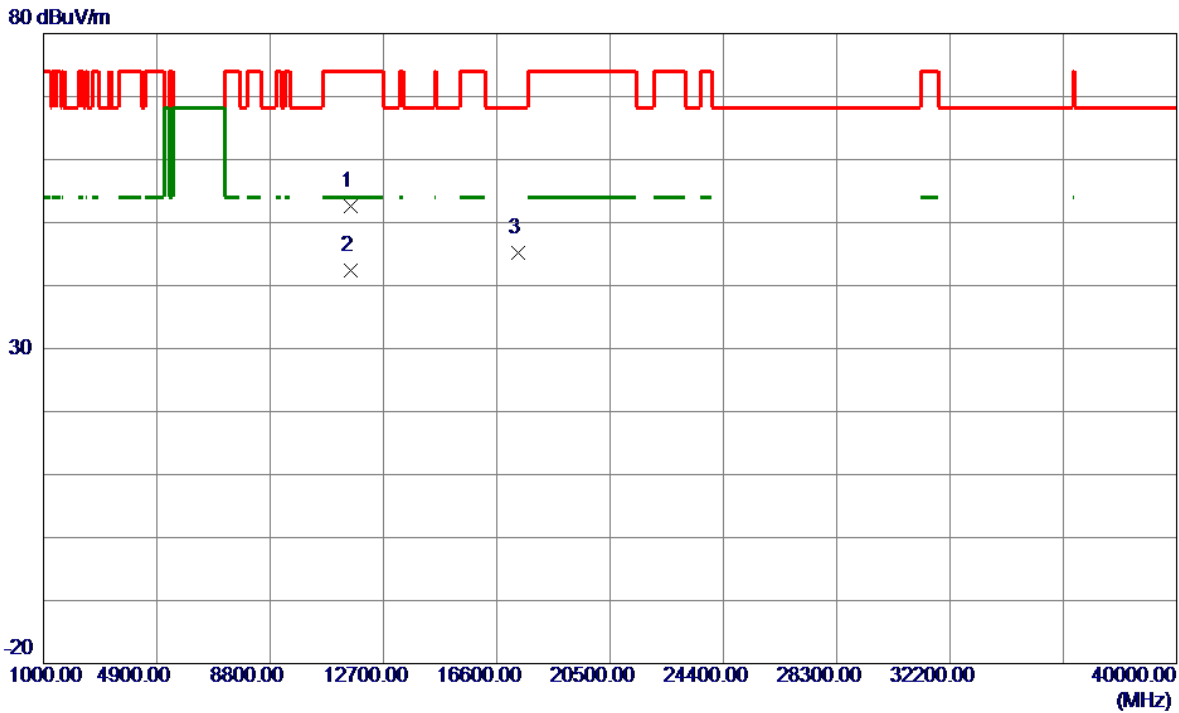


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11567.0500	60.74	-8.19	52.55	74.00	-21.45	Peak	
2 *	11568.7939	50.65	-8.19	42.46	54.00	-11.54	AVG	
3	17325.0000	48.26	-2.98	45.28	68.20	-22.92	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

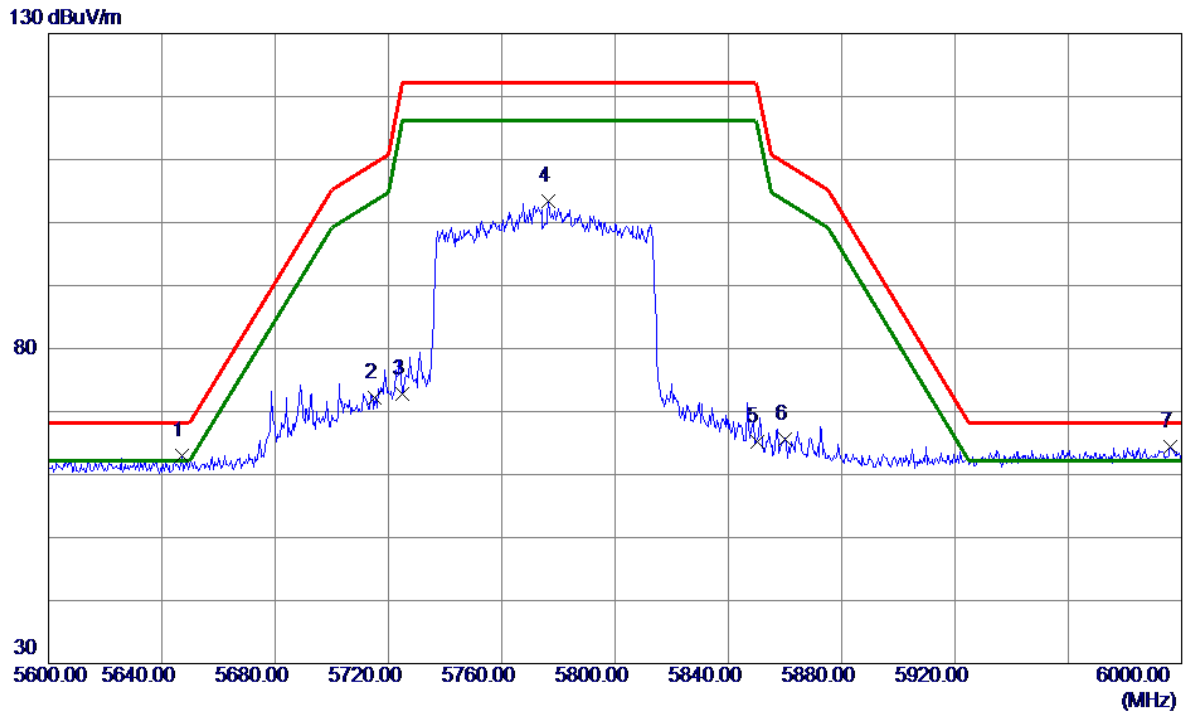


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5647.2000	24.60	38.37	62.97	68.20	-5.23	Peak	
2	5715.0000	33.67	38.46	72.13	109.40	-37.27	Peak	
3	5725.0000	34.32	38.50	72.82	122.20	-49.38	Peak	
4	5776.6000	64.80	38.69	103.49	122.20	-18.71	Peak	
5	5850.0000	26.21	38.91	65.12	122.20	-57.08	Peak	
6	5860.0000	26.62	38.94	65.56	109.40	-43.84	Peak	
7 *	5996.2000	25.11	39.24	64.35	68.20	-3.85	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

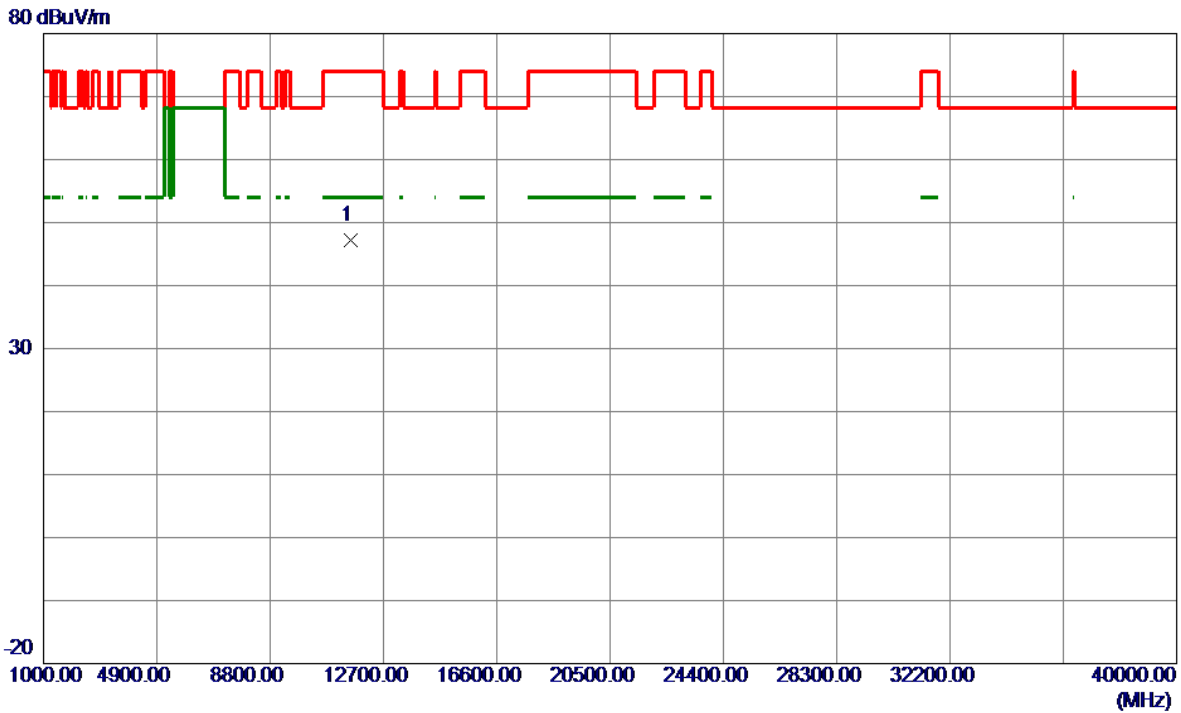


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11576.8000	55.29	-8.17	47.12	74.00	-26.88	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

MTK7663

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

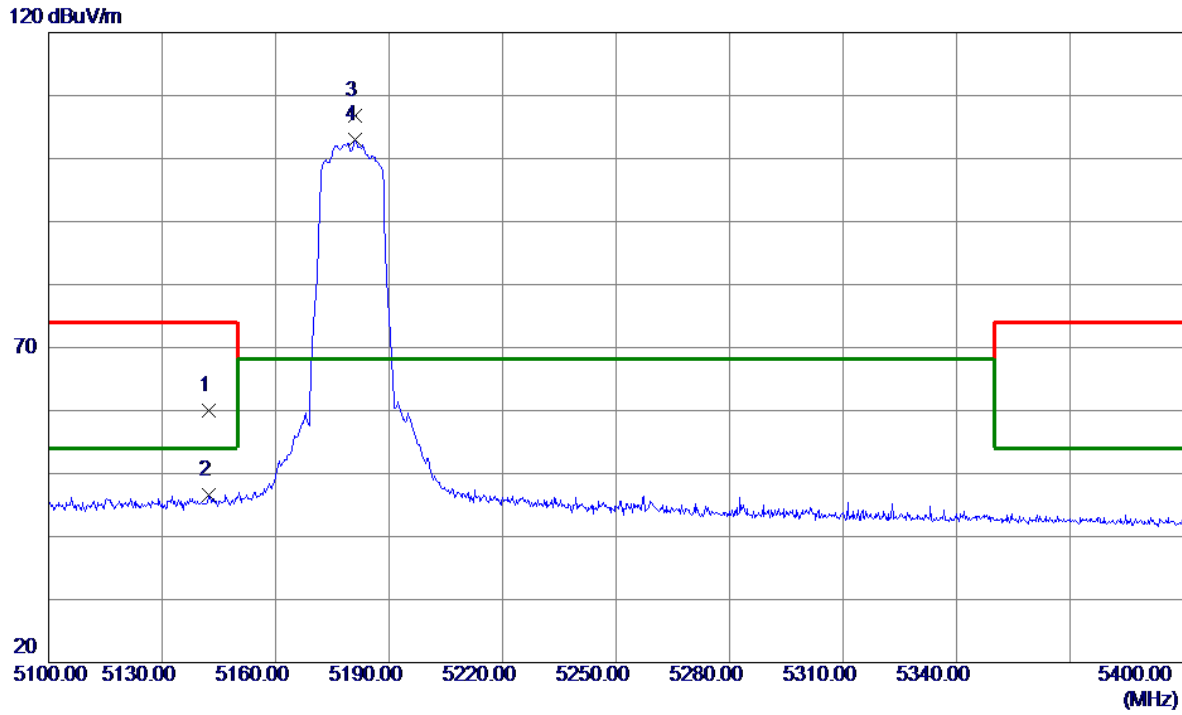


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5142.4500	22.03	37.90	59.93	74.00	-14.07	Peak	
2	5142.4500	8.72	37.90	46.62	54.00	-7.38	AVG	
3 *	5180.8500	69.06	37.75	106.81	68.20	38.61	Peak	NO Limit
4	5180.8500	65.15	37.75	102.90	68.20	34.70	AVG	NO Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

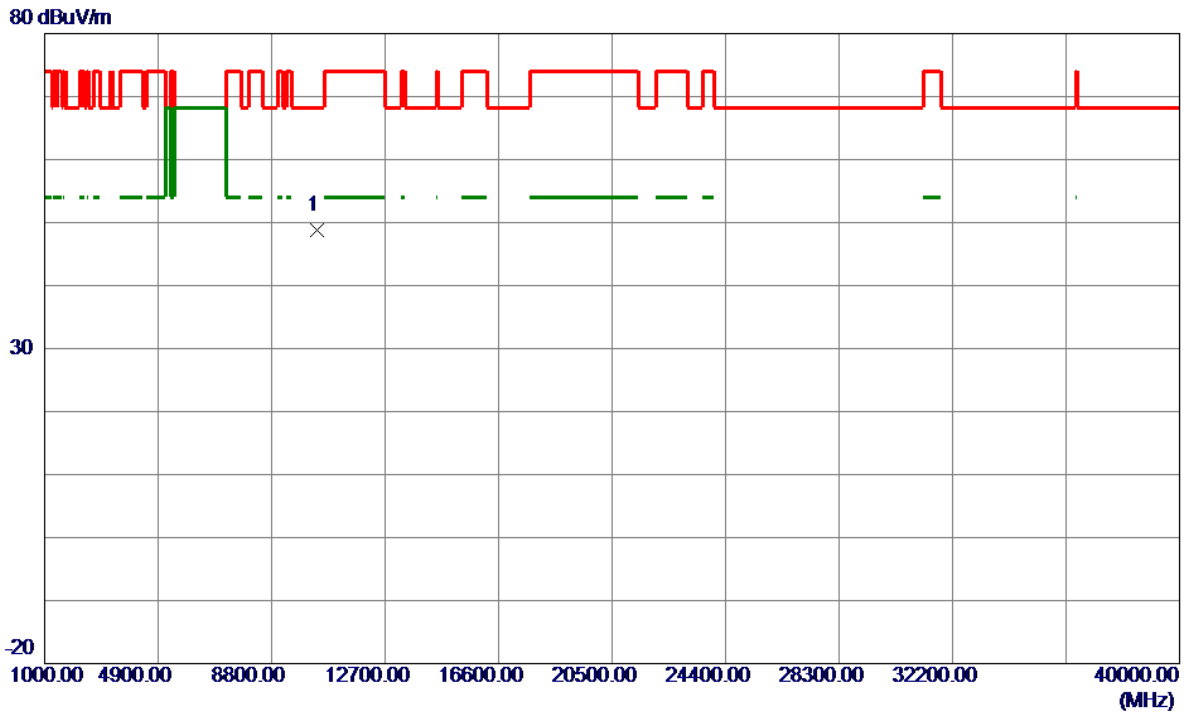


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.0000	58.55	-9.68	48.87	68.20	-19.33	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

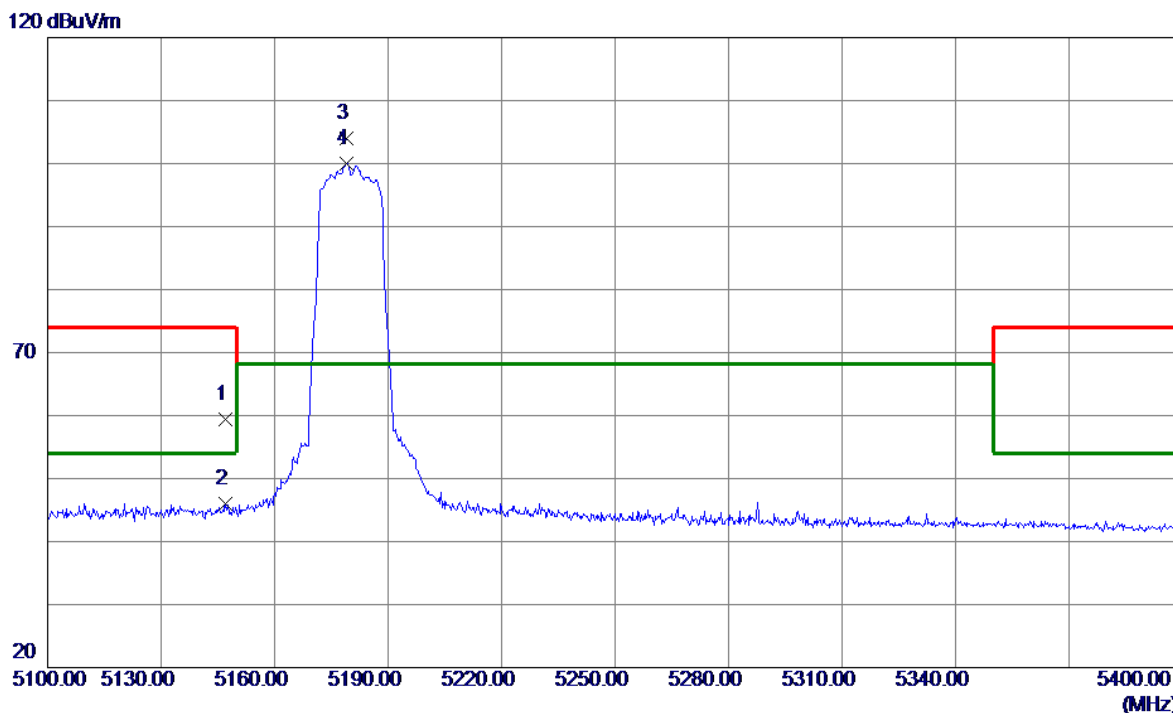


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5147.1000	21.47	37.89	59.36	74.00	-14.64	Peak	
2	5147.1000	8.17	37.89	46.06	54.00	-7.94	AVG	
3 *	5179.0500	66.31	37.76	104.07	68.20	35.87	Peak	NO Limit
4	5179.0500	62.26	37.76	100.02	68.20	31.82	AVG	NO Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

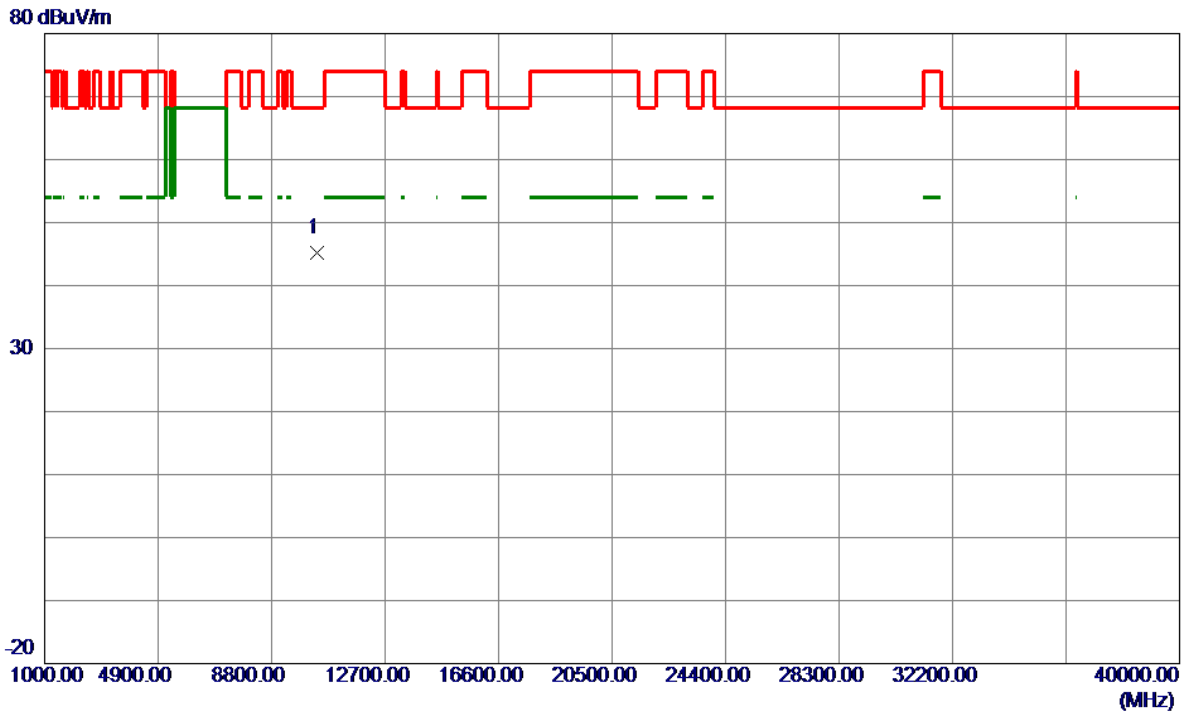


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10361.9500	54.80	-9.68	45.12	68.20	-23.08	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

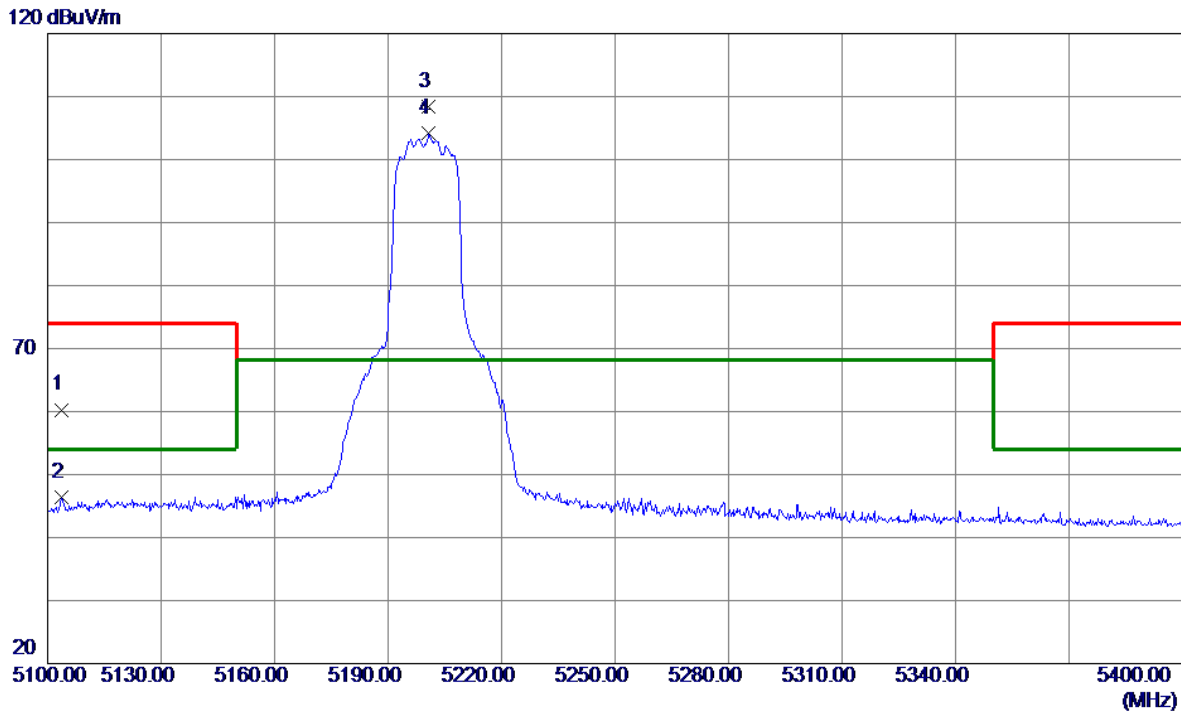


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5103.7500	22.24	38.06	60.30	74.00	-13.70	Peak	
2	5103.7500	8.40	38.06	46.46	54.00	-7.54	AVG	
3 *	5200.8000	70.66	37.68	108.34	68.20	40.14	Peak	NO Limit
4	5200.8000	66.44	37.68	104.12	68.20	35.92	AVG	NO Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

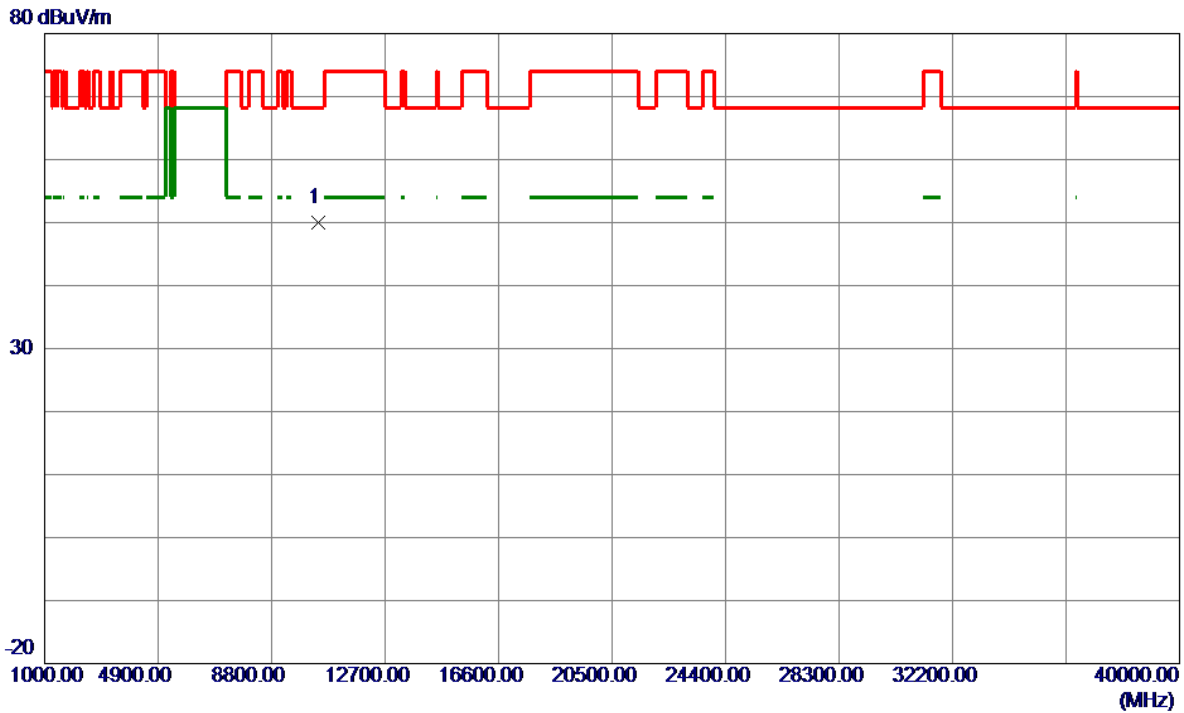


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10395.1000	59.65	-9.61	50.04	68.20	-18.16	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

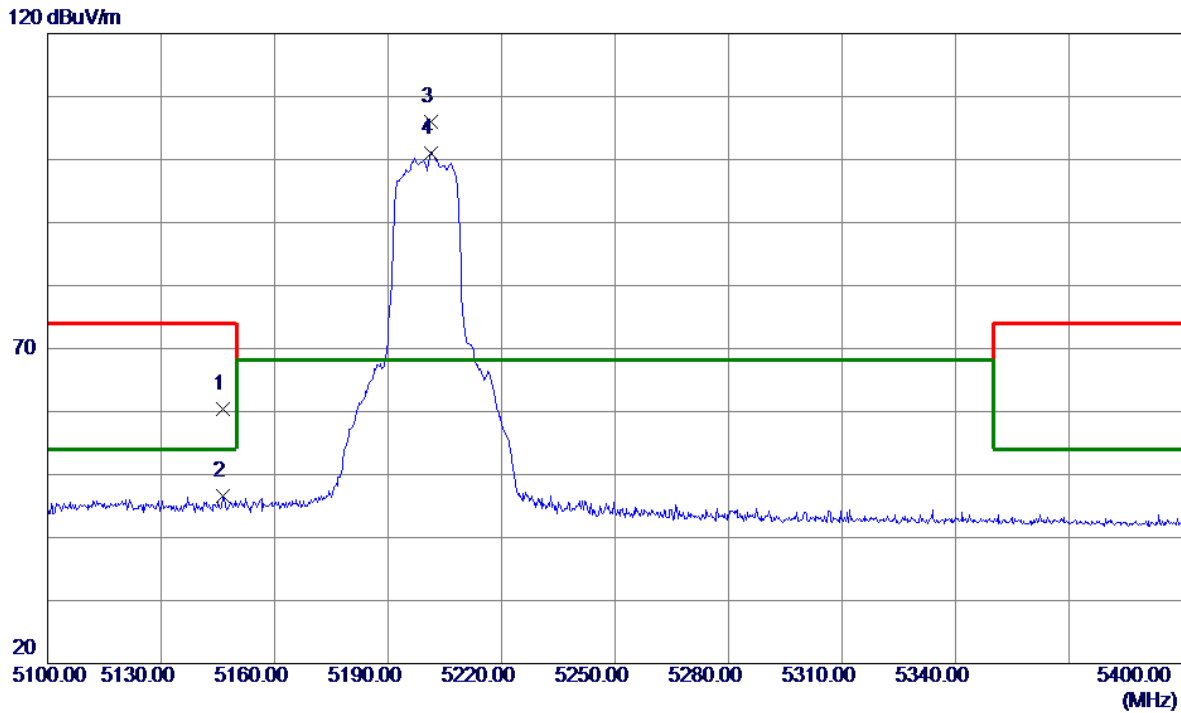


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5146.3500	22.52	37.89	60.41	74.00	-13.59	Peak	
2	5146.3500	8.73	37.89	46.62	54.00	-7.38	AVG	
3 *	5201.4000	68.23	37.68	105.91	68.20	37.71	Peak	NO Limit
4	5201.4000	63.42	37.68	101.10	68.20	32.90	AVG	NO Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

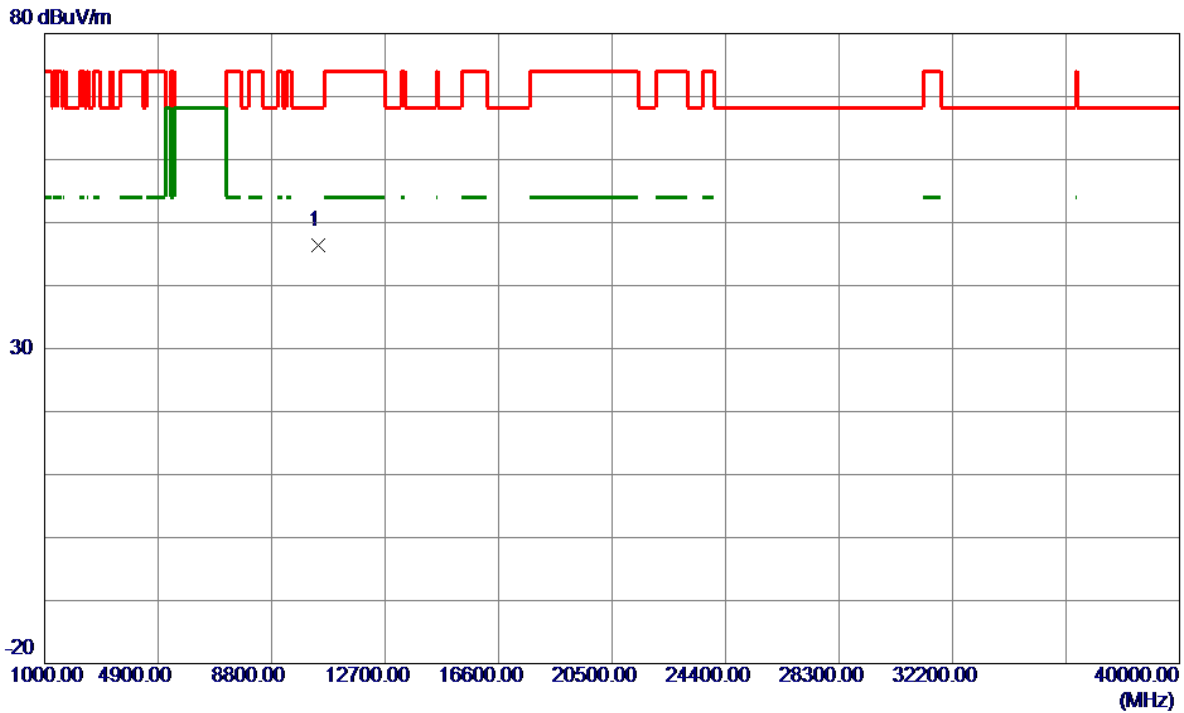


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10400.9500	55.93	-9.60	46.33	68.20	-21.87	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

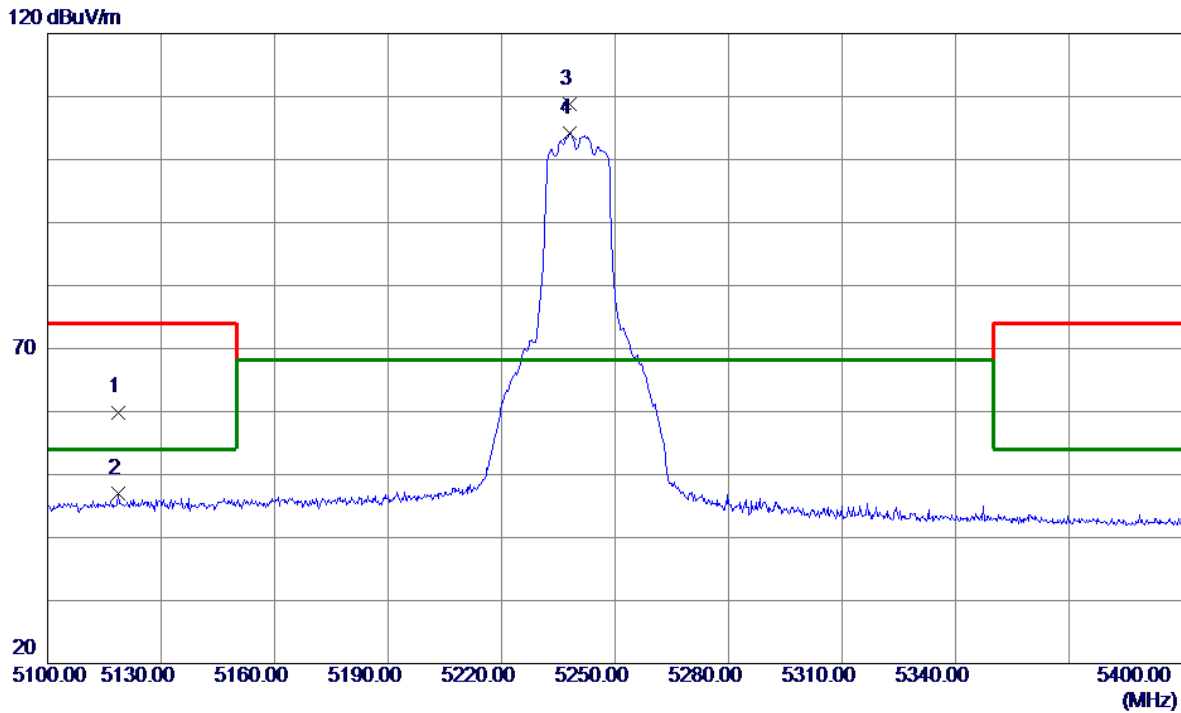


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5118.6000	21.90	38.00	59.90	74.00	-14.10	Peak	
2	5118.6000	8.97	38.00	46.97	54.00	-7.03	AVG	
3 *	5238.1500	71.24	37.62	108.86	68.20	40.66	Peak	NO Limit
4	5238.1500	66.65	37.62	104.27	68.20	36.07	AVG	NO Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

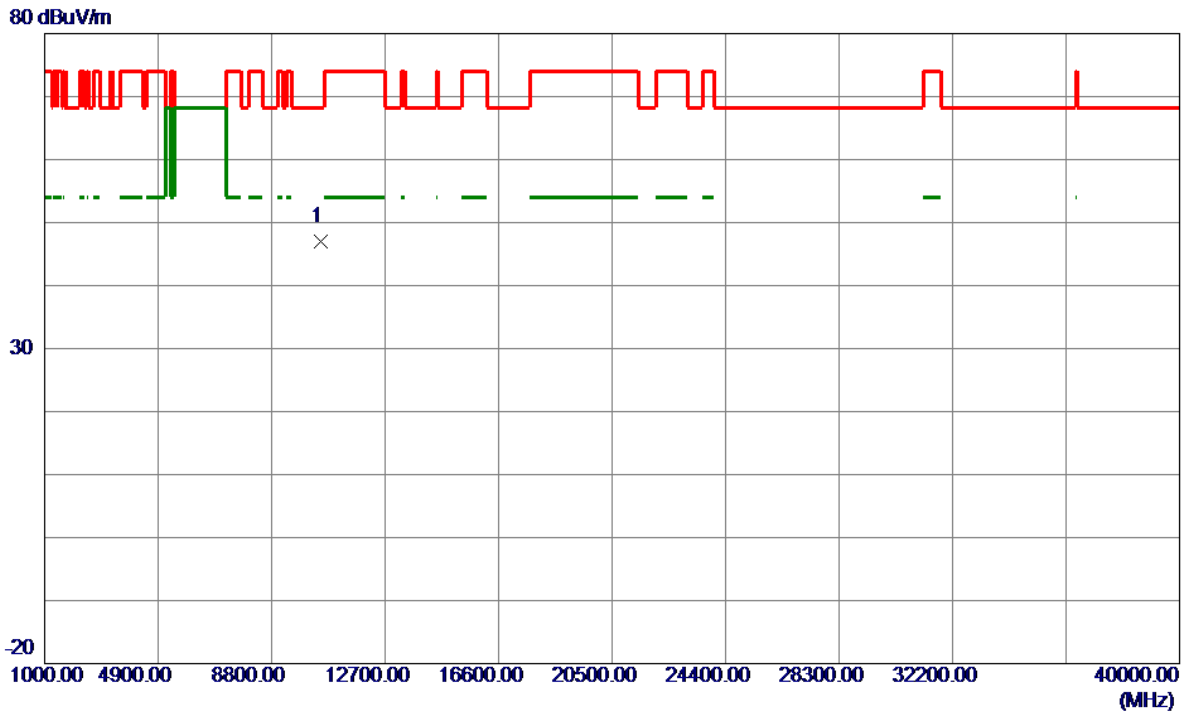


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10482.8500	56.58	-9.50	47.08	68.20	-21.12	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

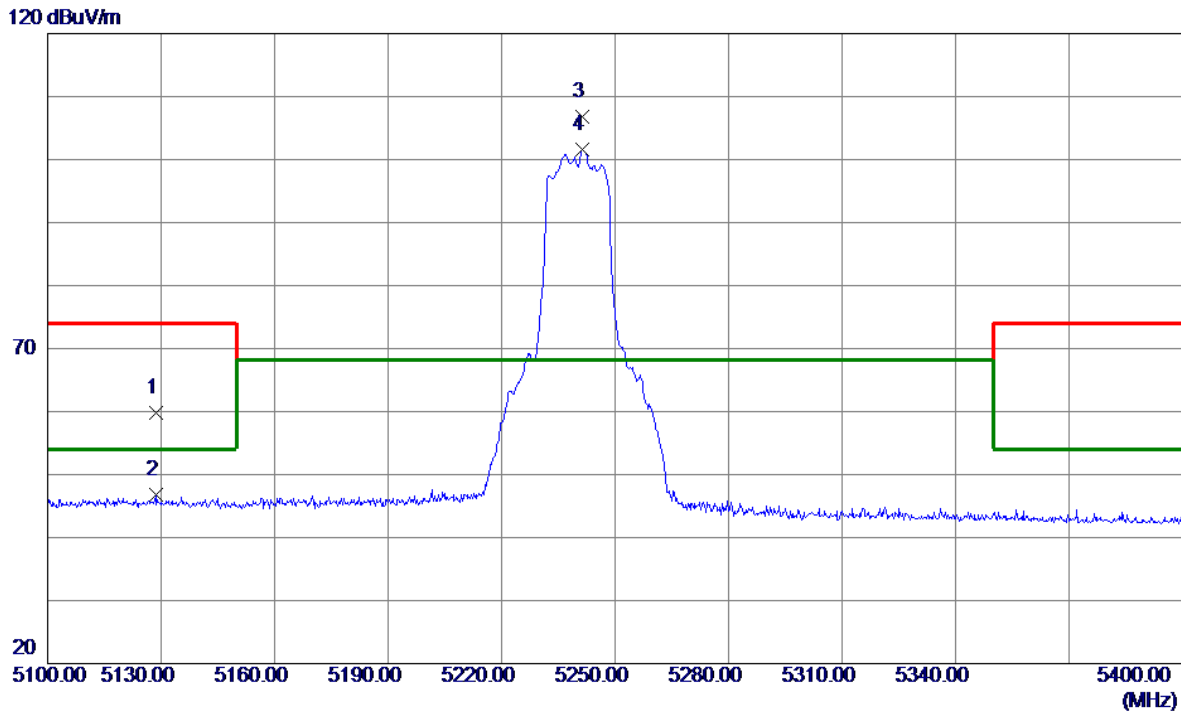


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5128.8000	21.88	37.96	59.84	74.00	-14.16	Peak	
2	5128.8000	8.75	37.96	46.71	54.00	-7.29	AVG	
3 *	5241.3000	69.17	37.62	106.79	68.20	38.59	Peak	NO Limit
4	5241.3000	63.97	37.62	101.59	68.20	33.39	AVG	NO Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

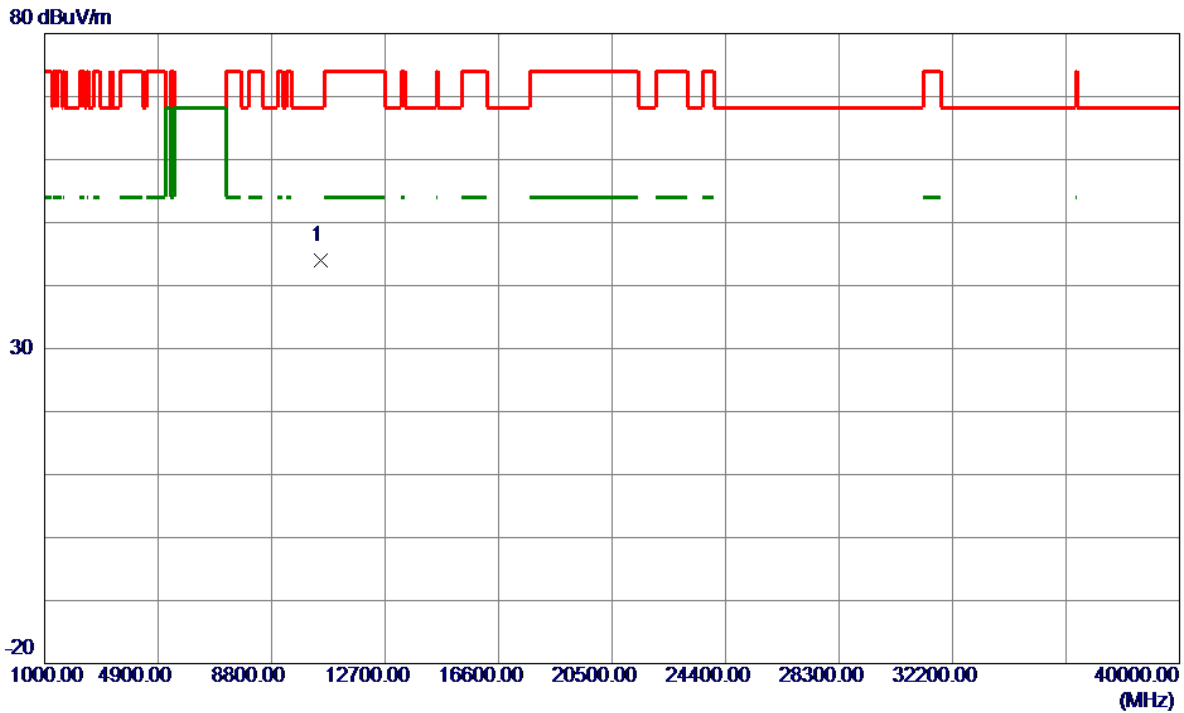


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.0000	53.54	-9.50	44.04	68.20	-24.16	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

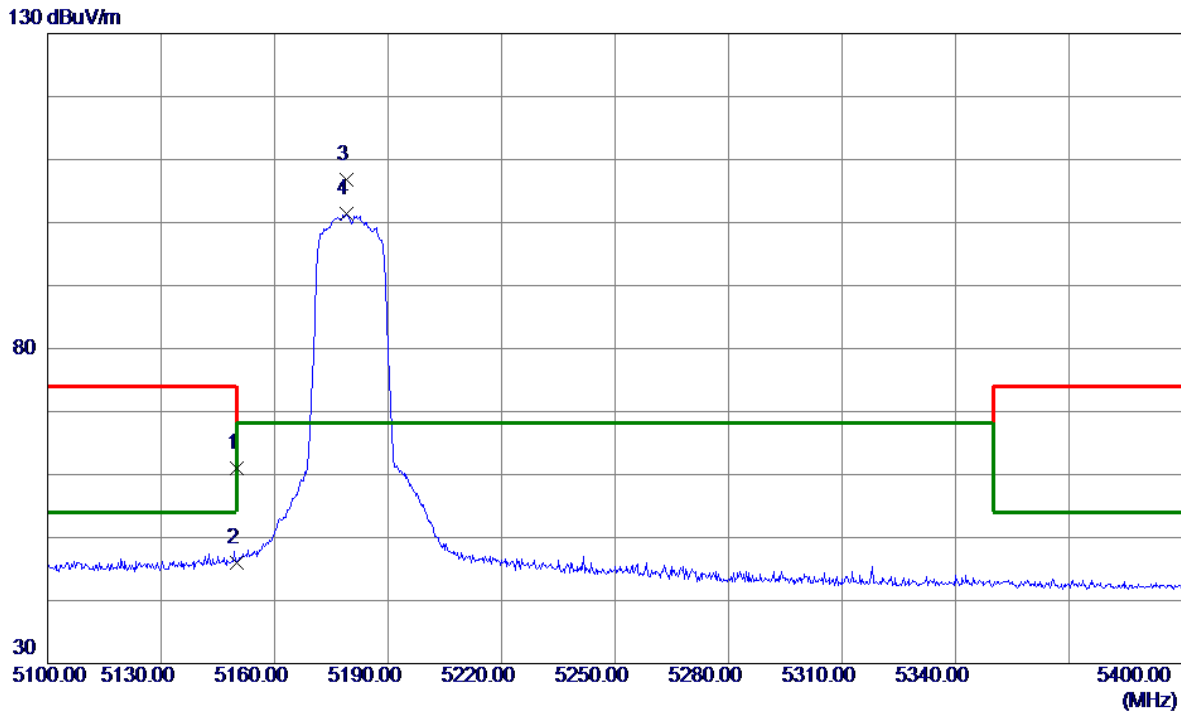


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.03	37.88	60.91	74.00	-13.09	Peak	
2	5150.0000	8.07	37.88	45.95	54.00	-8.05	AVG	
3 *	5178.9000	69.10	37.76	106.86	68.20	38.66	Peak	NO Limit
4	5178.9000	63.57	37.76	101.33	68.20	33.13	AVG	NO Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

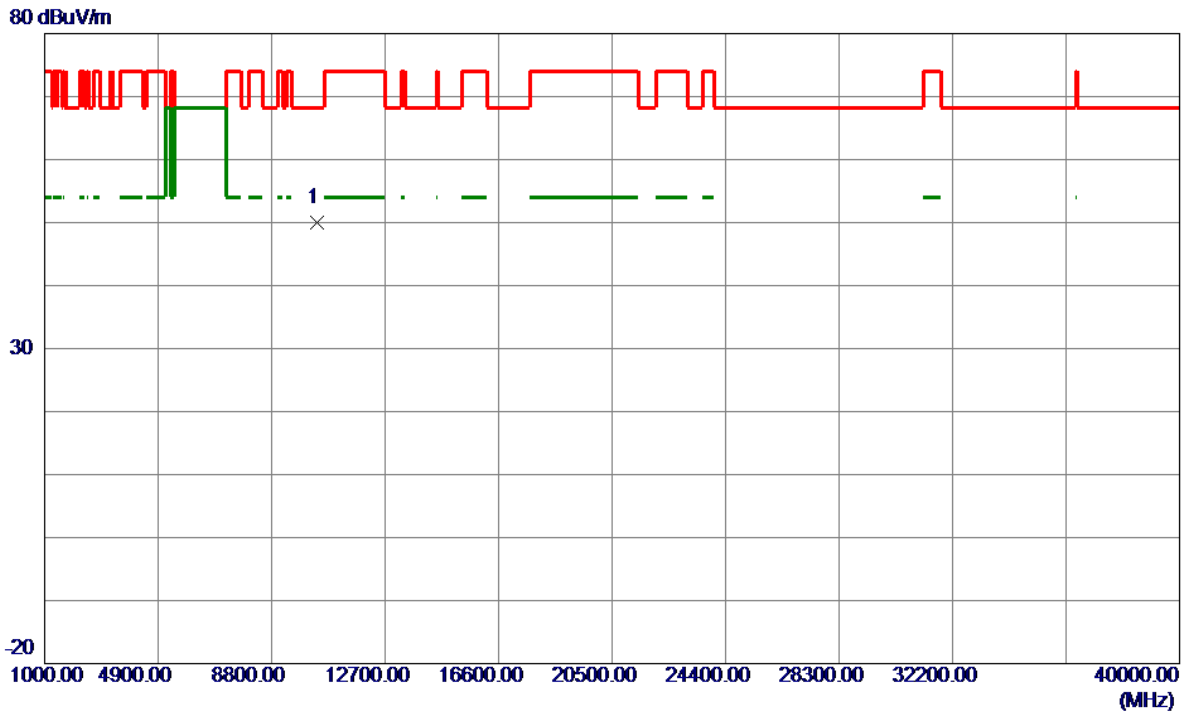


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10363.9000	59.74	-9.67	50.07	68.20	-18.13	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

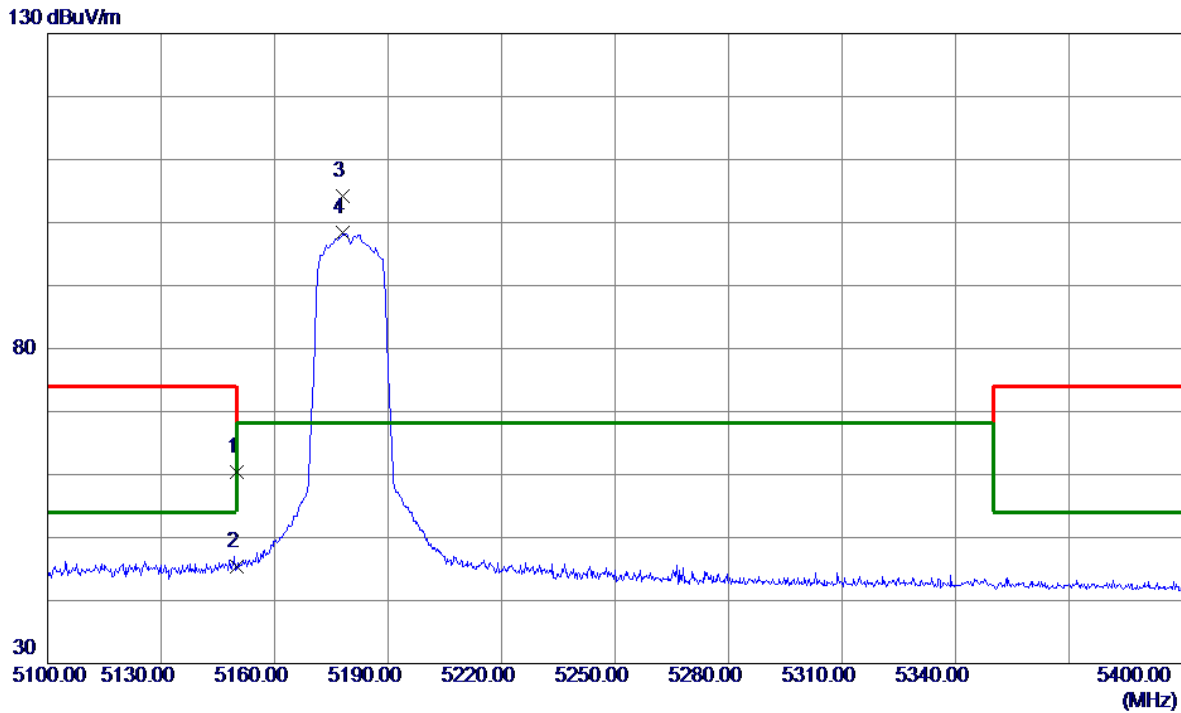


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	22.47	37.88	60.35	74.00	-13.65	Peak	
2	5150.0000	7.43	37.88	45.31	54.00	-8.69	AVG	
3 *	5178.0000	66.45	37.77	104.22	68.20	36.02	Peak	NO Limit
4	5178.0000	60.63	37.77	98.40	68.20	30.20	AVG	NO Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

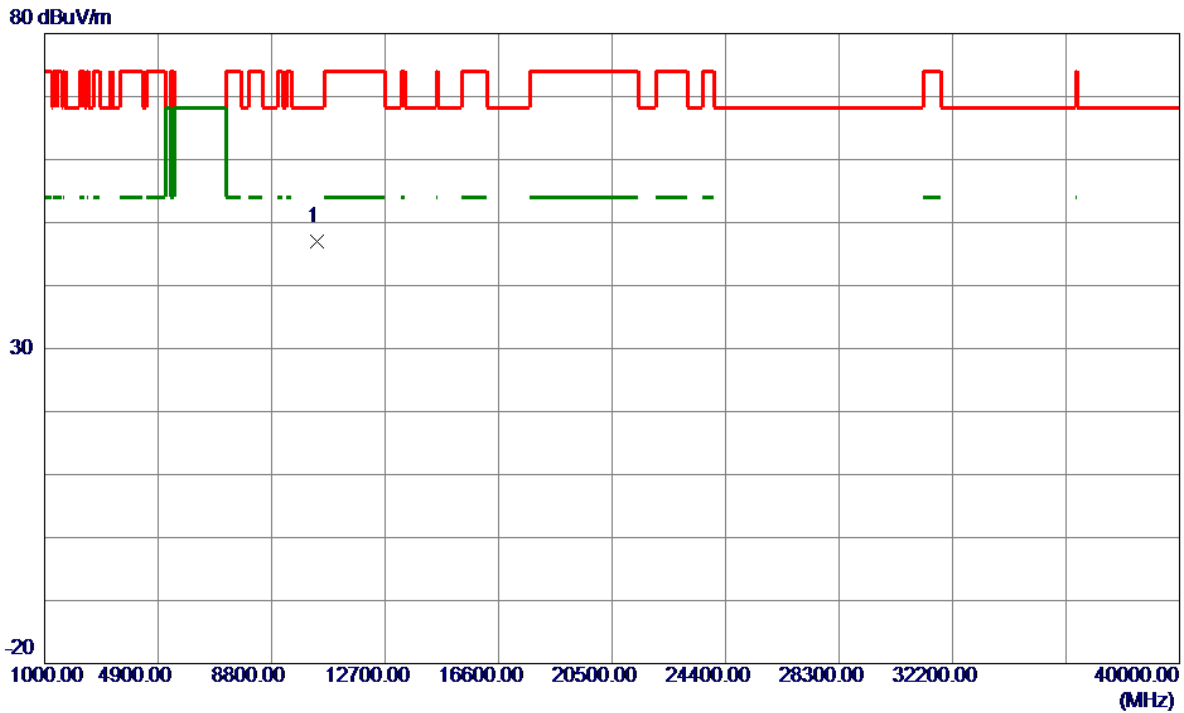


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.0000	56.71	-9.68	47.03	68.20	-21.17	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

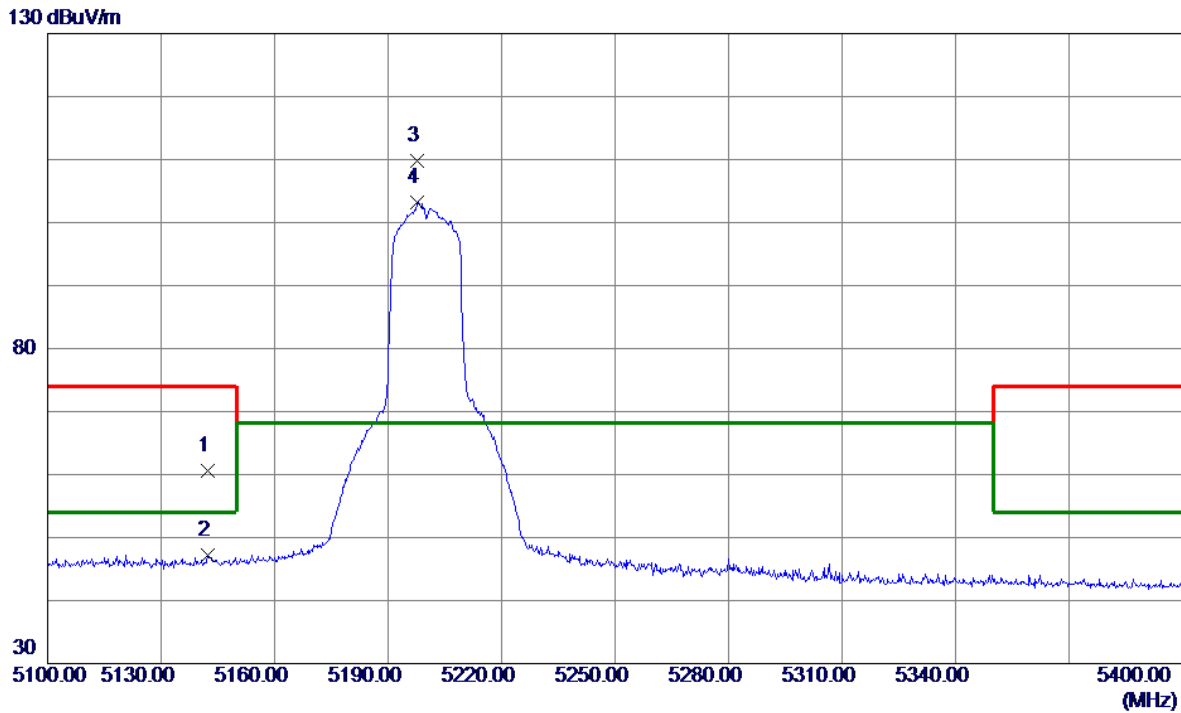


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5142.3000	22.65	37.91	60.56	74.00	-13.44	Peak	
2	5142.3000	9.24	37.91	47.15	54.00	-6.85	AVG	
3 *	5197.8000	72.15	37.69	109.84	68.20	41.64	Peak	NO Limit
4	5197.8000	65.59	37.69	103.28	68.20	35.08	AVG	NO Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

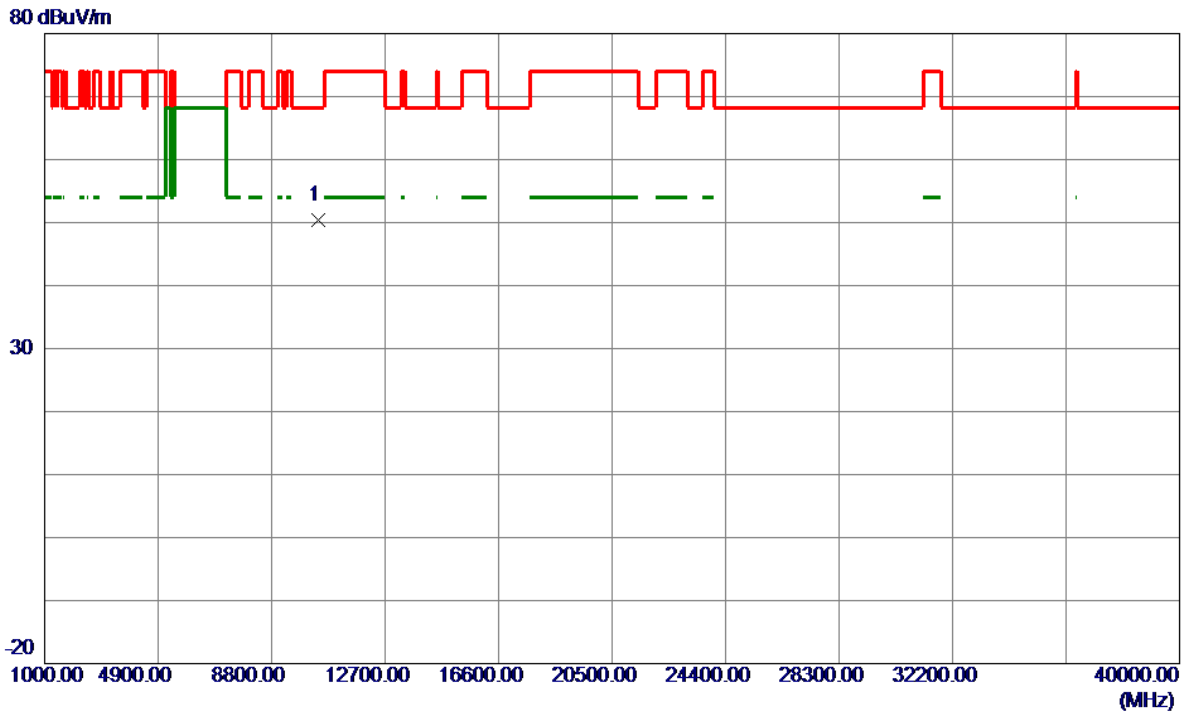


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10404.8500	59.95	-9.59	50.36	68.20	-17.84	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

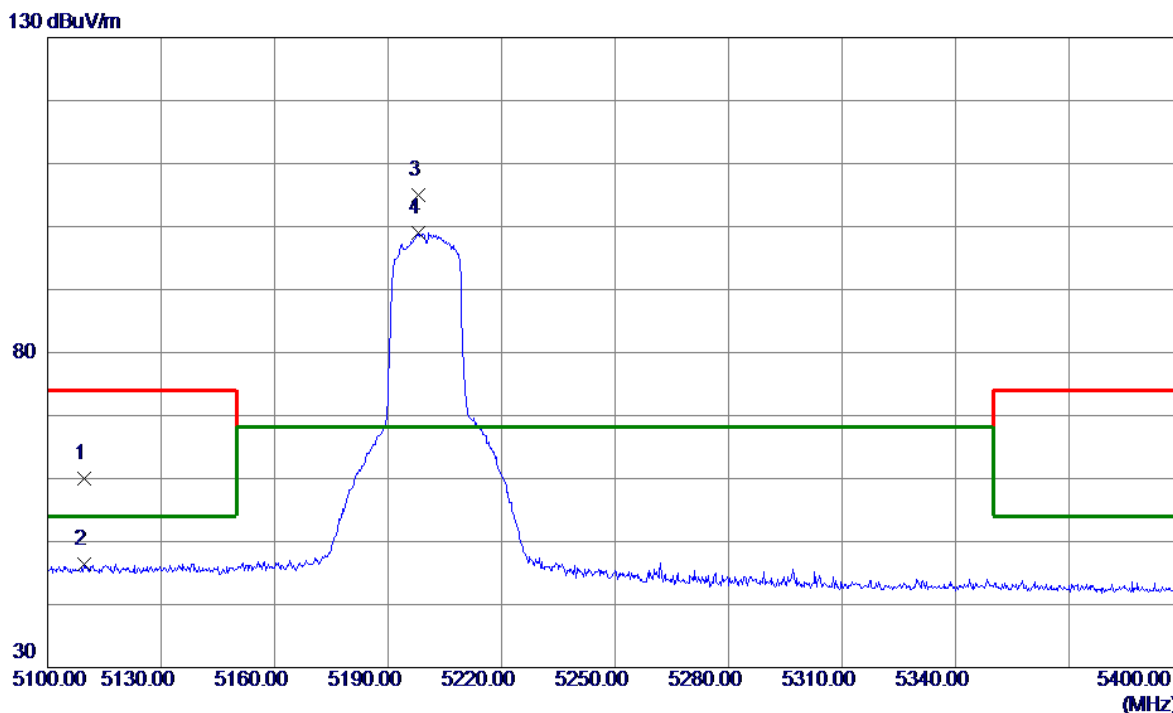


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5109.7500	21.88	38.03	59.91	74.00	-14.09	Peak	
2	5109.7500	8.40	38.03	46.43	54.00	-7.57	AVG	
3 *	5198.1000	67.22	37.69	104.91	68.20	36.71	Peak	NO Limit
4	5198.1000	61.36	37.69	99.05	68.20	30.85	AVG	NO Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

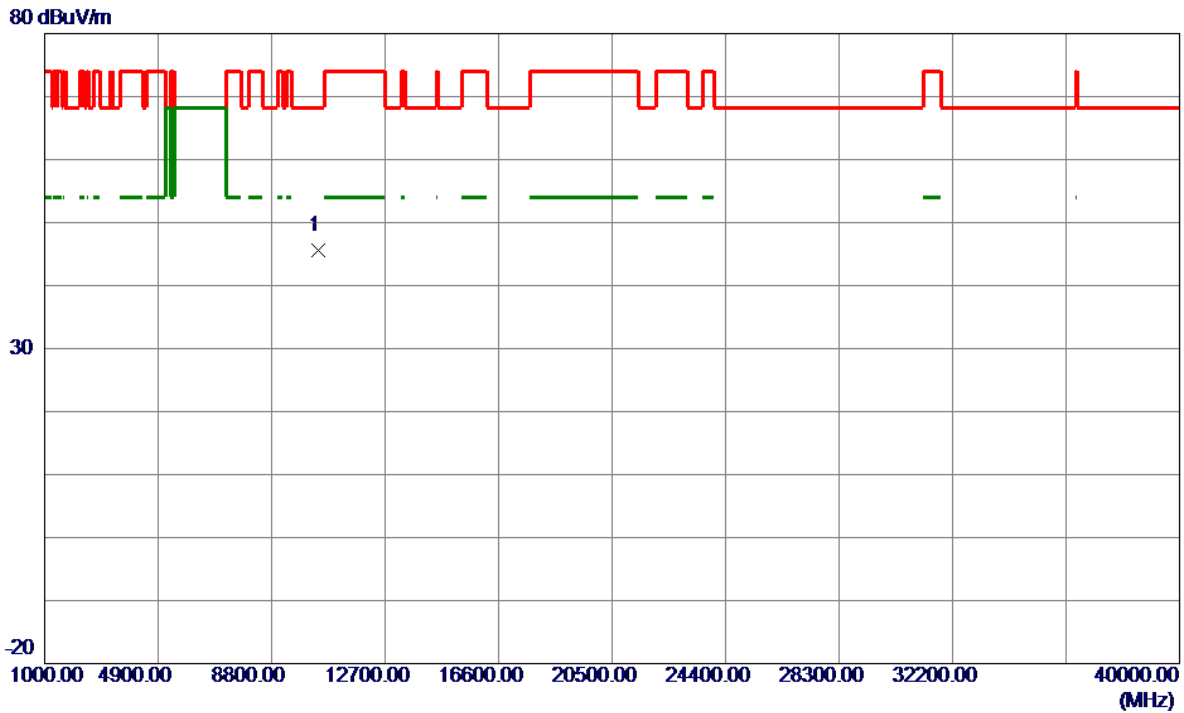


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10395.1000	55.30	-9.61	45.69	68.20	-22.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

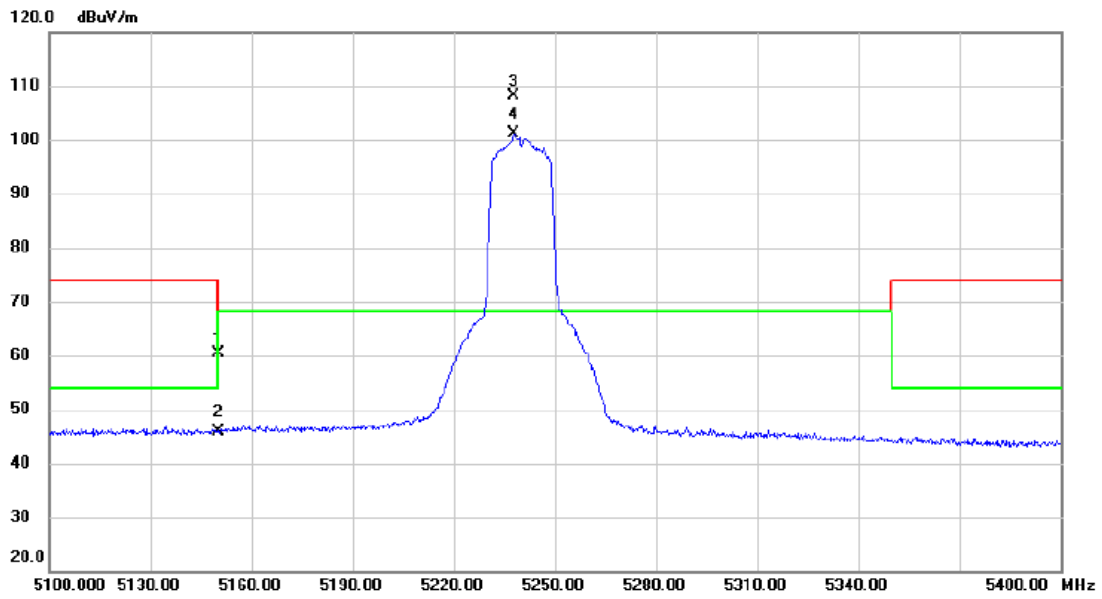


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	22.57	37.88	60.45	74.00	-13.55	peak	
2		5150.000	8.08	37.88	45.96	54.00	-8.04	AVG	
3	*	5237.850	70.49	37.63	108.12	68.20	39.92	peak	NO limit
4	X	5237.850	63.52	37.63	101.15	68.20	32.95	AVG	NO limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

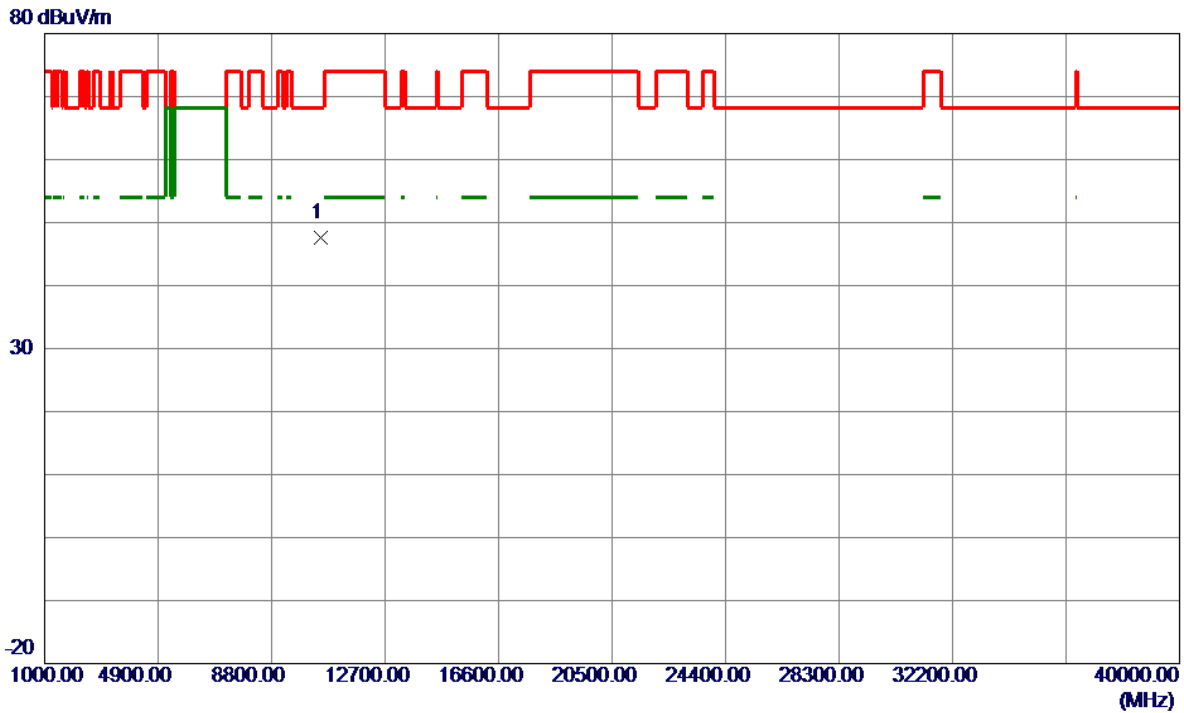


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10484.8000	57.16	-9.50	47.66	68.20	-20.54	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

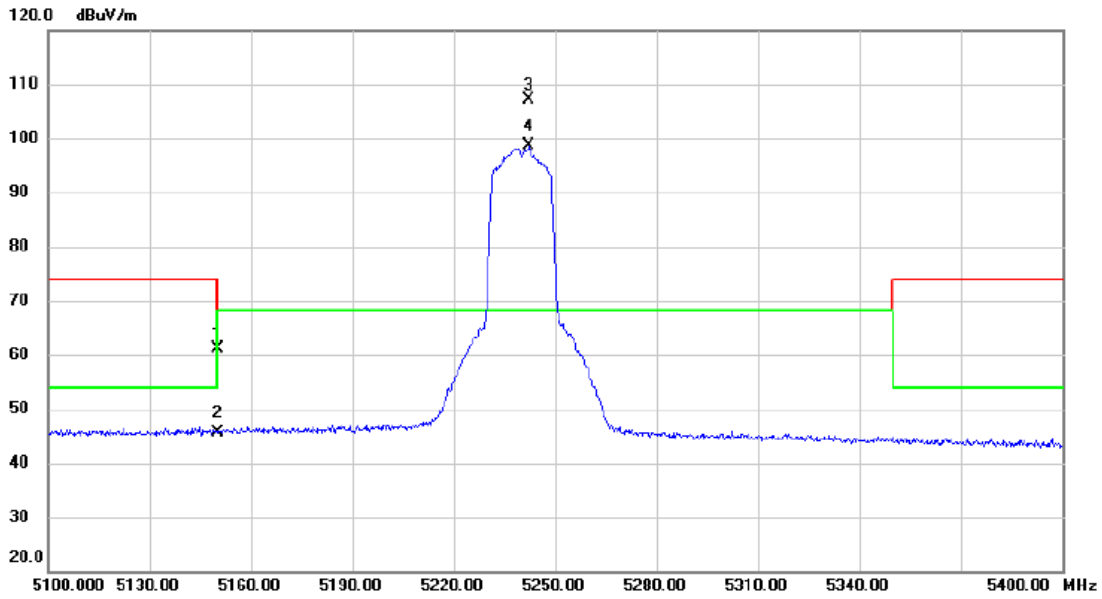


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	23.16	37.88	61.04	74.00	-12.96	peak	
2		5150.000	7.70	37.88	45.58	54.00	-8.42	AVG	
3	*	5242.350	69.47	37.62	107.09	68.20	38.89	peak	NO limit
4	X	5242.350	60.89	37.62	98.51	68.20	30.31	AVG	NO limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

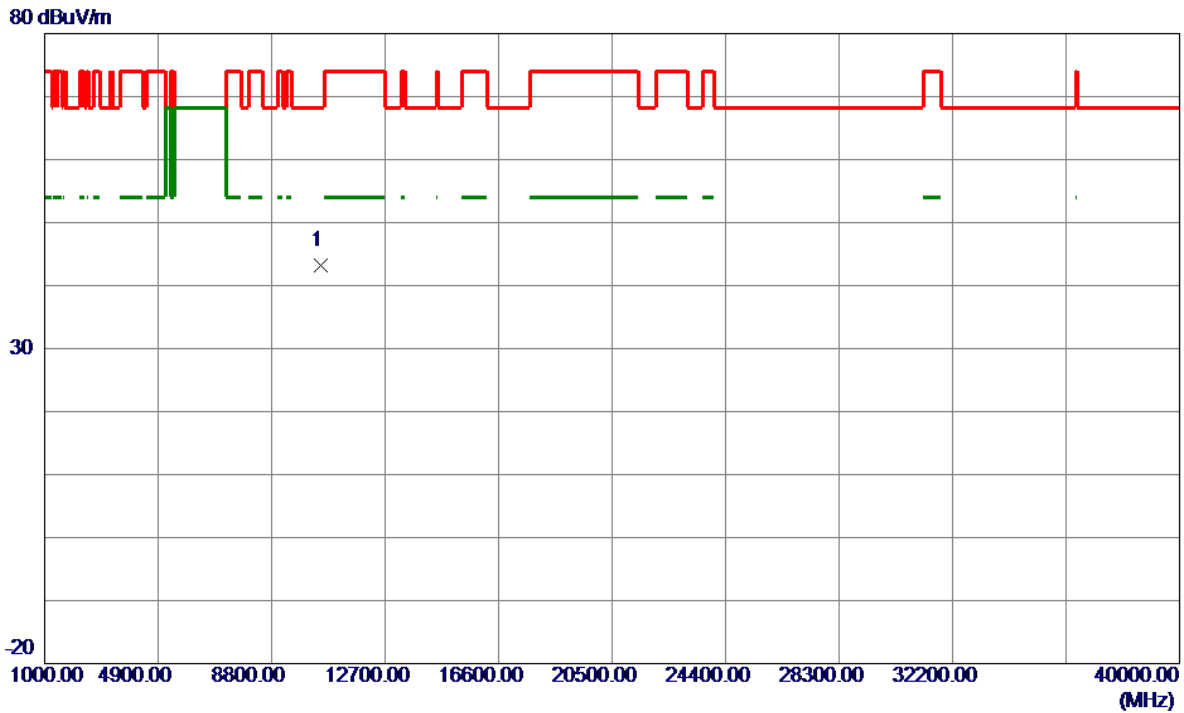


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.0000	52.61	-9.50	43.11	68.20	-25.09	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

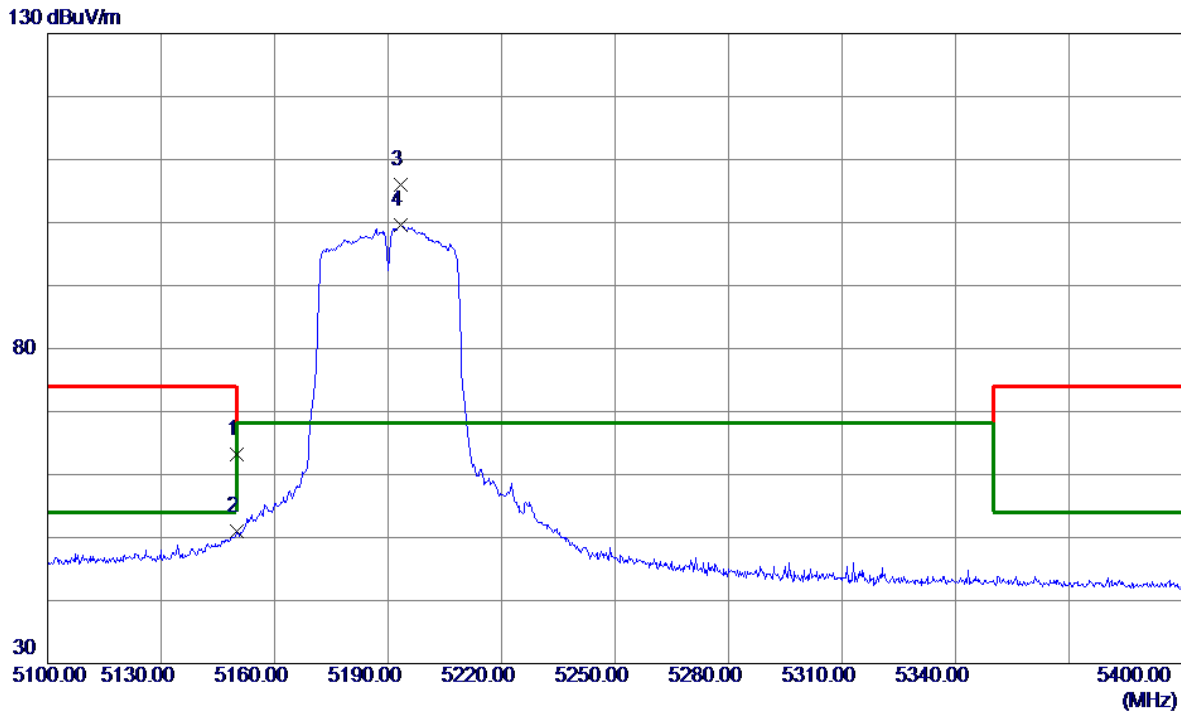


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	25.34	37.88	63.22	74.00	-10.78	Peak	
2	5150.0000	13.18	37.88	51.06	54.00	-2.94	AVG	
3 *	5193.4500	68.30	37.71	106.01	68.20	37.81	Peak	NO Limit
4	5193.4500	61.80	37.71	99.51	68.20	31.31	AVG	NO Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

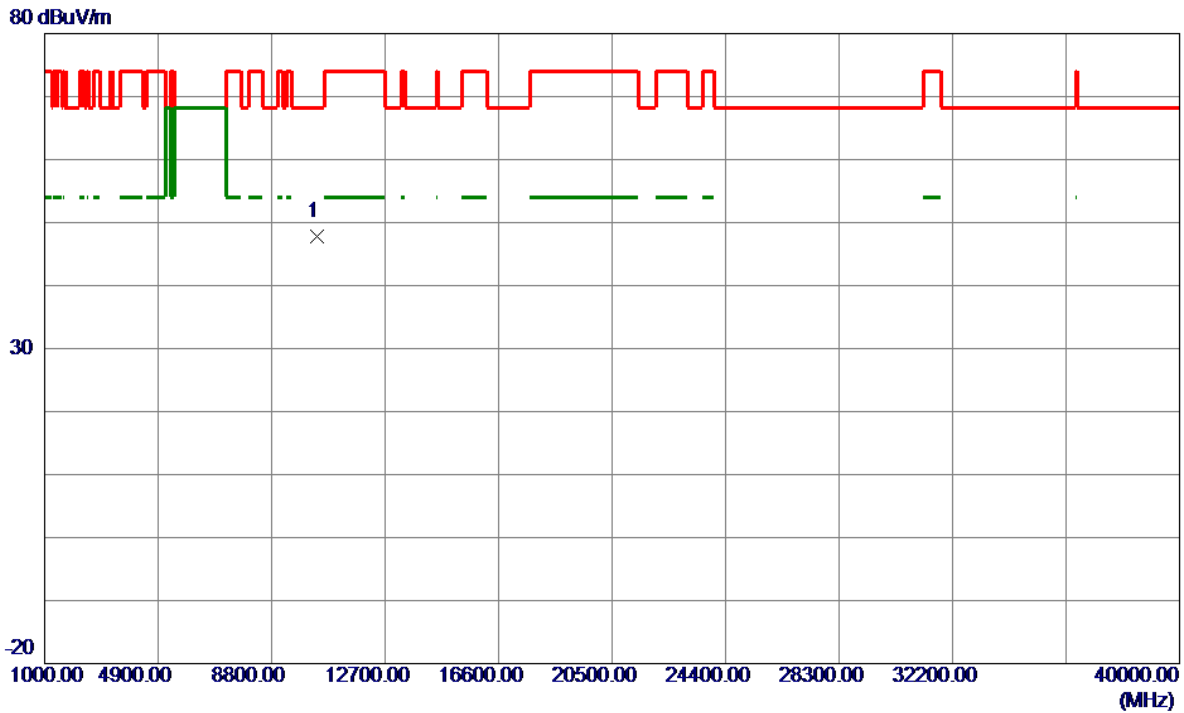


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10379.5000	57.53	-9.64	47.89	68.20	-20.31	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

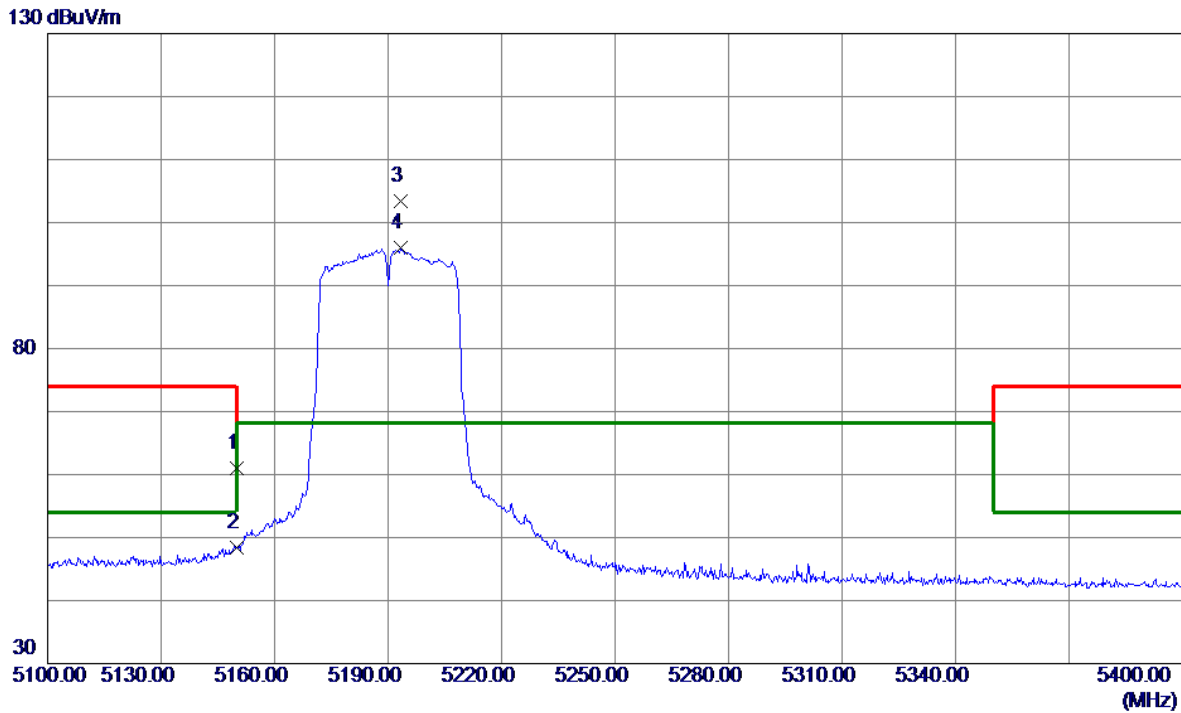


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.09	37.88	60.97	74.00	-13.03	Peak	
2	5150.0000	10.57	37.88	48.45	54.00	-5.55	AVG	
3 *	5193.4500	65.63	37.71	103.34	68.20	35.14	Peak	NO Limit
4	5193.4500	58.29	37.71	96.00	68.20	27.80	AVG	NO Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

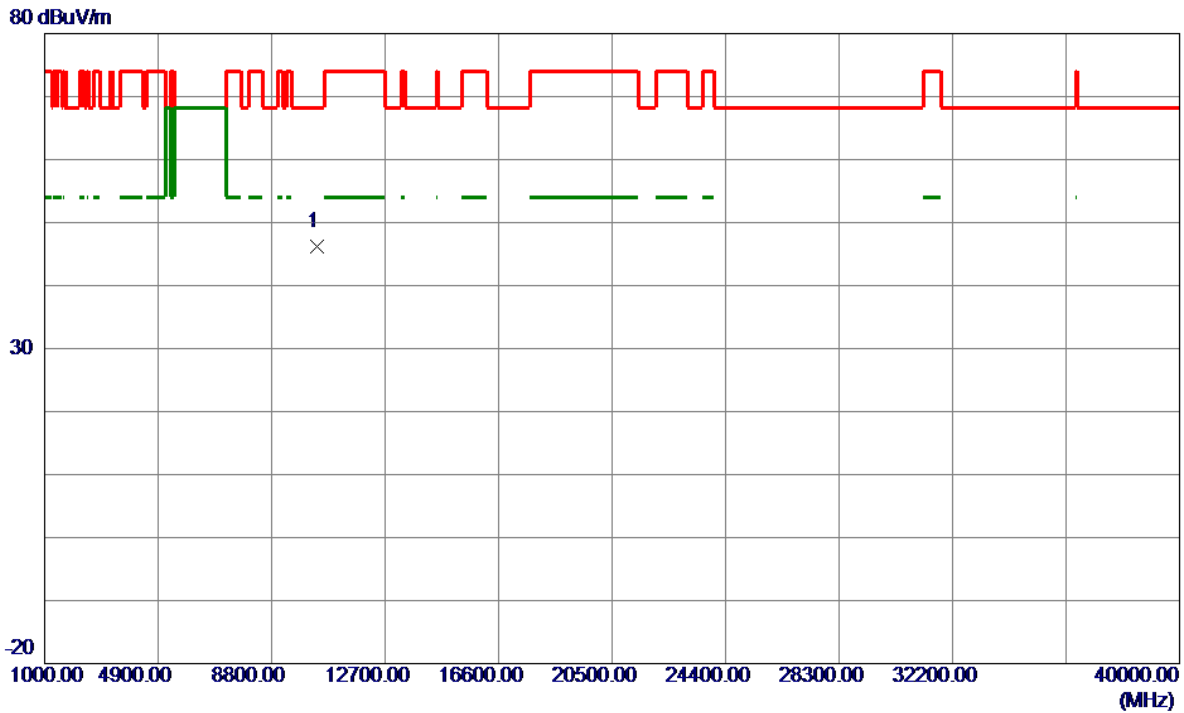


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10381.4500	55.85	-9.64	46.21	68.20	-21.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

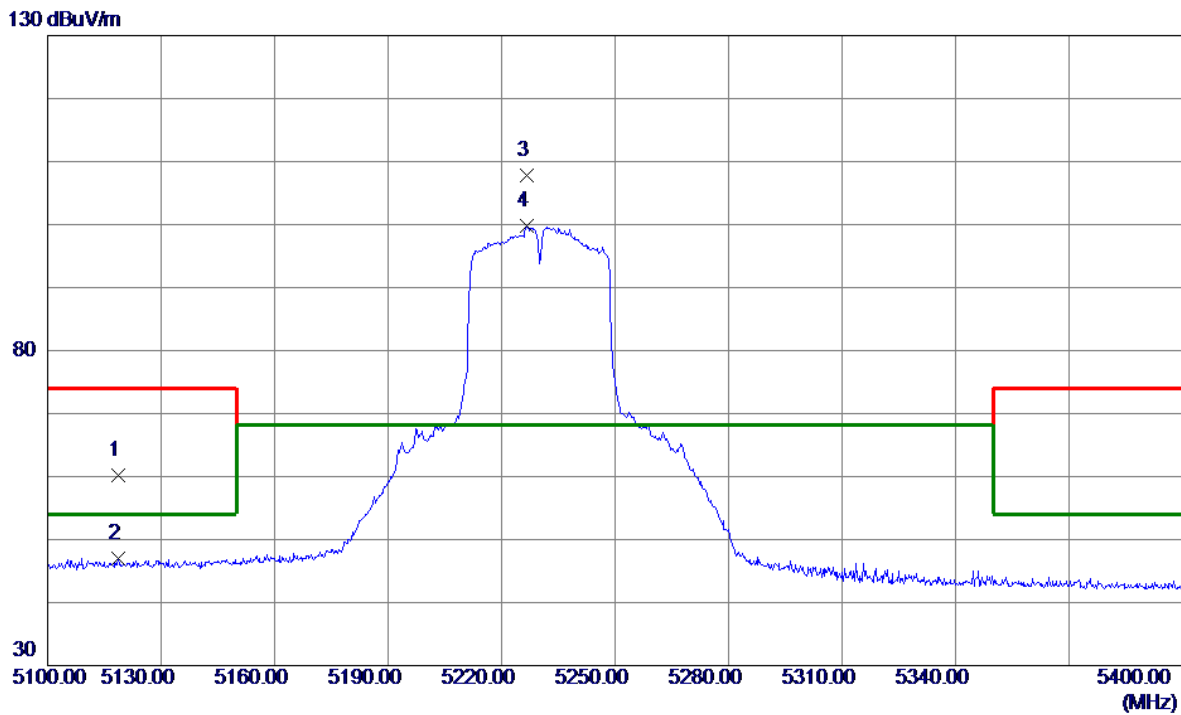


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5118.6000	22.13	38.00	60.13	74.00	-13.87	Peak	
2	5118.6000	9.07	38.00	47.07	54.00	-6.93	AVG	
3 *	5226.7500	70.19	37.64	107.83	68.20	39.63	Peak	NO Limit
4	5226.7500	62.10	37.64	99.74	68.20	31.54	AVG	NO Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

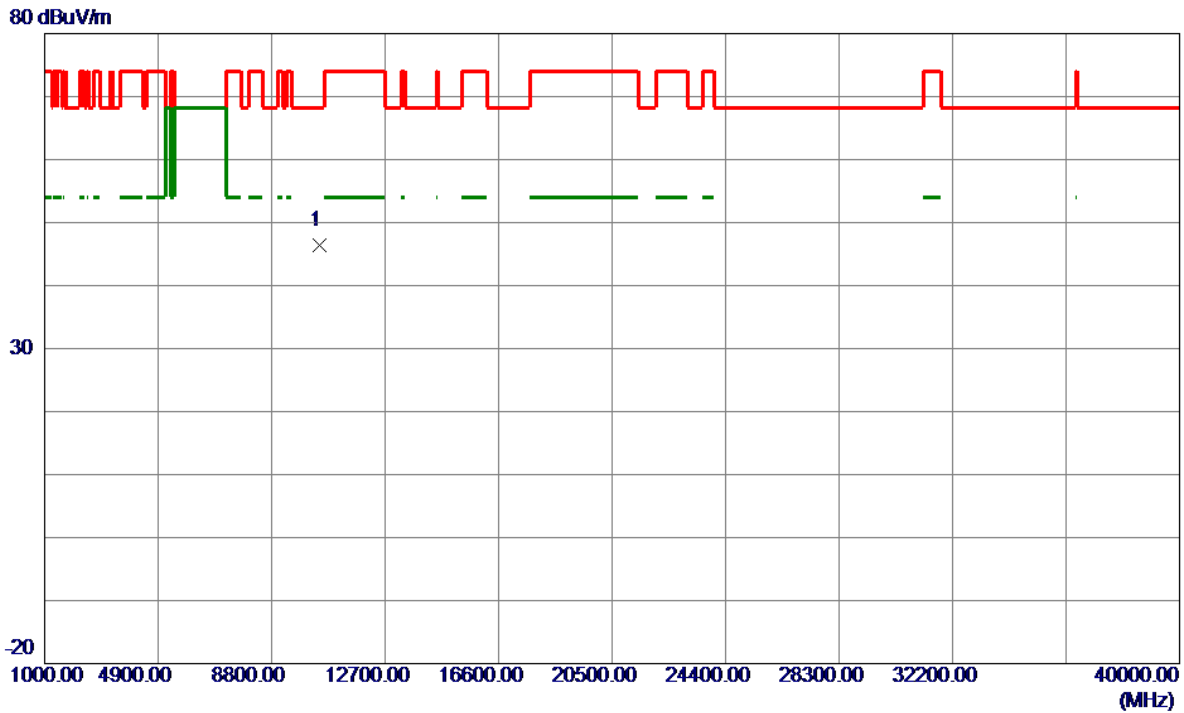


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10459.4500	55.96	-9.53	46.43	68.20	-21.77	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

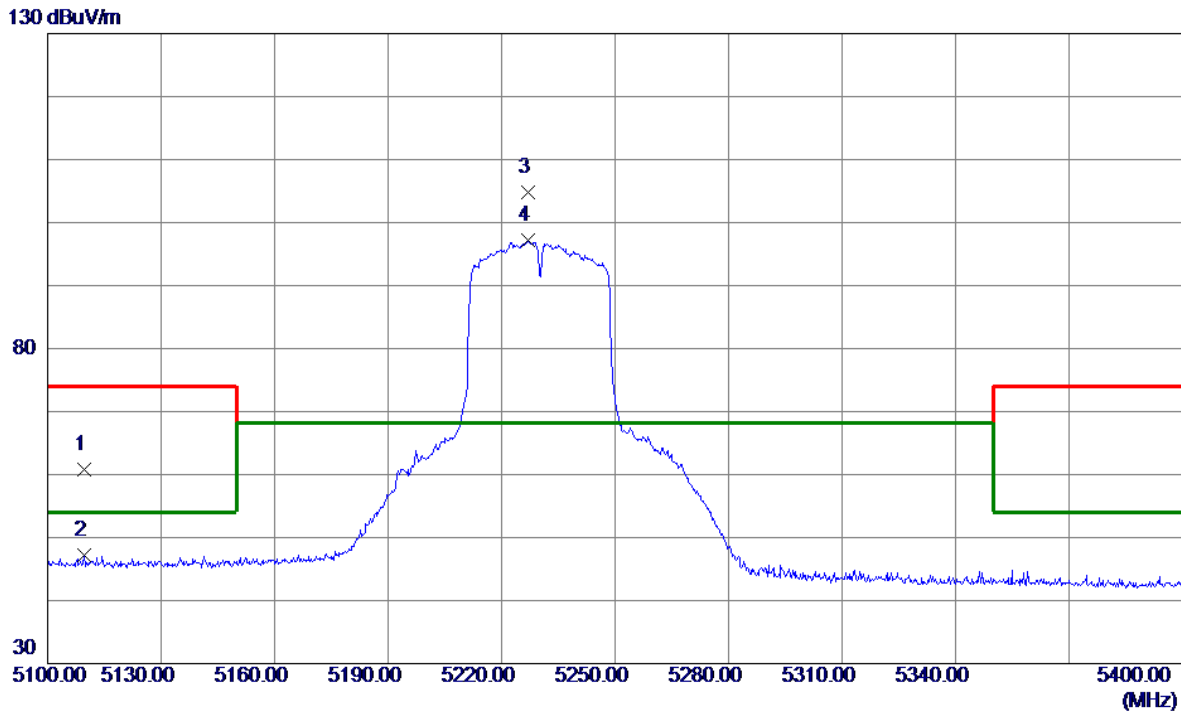


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5109.6000	22.70	38.03	60.73	74.00	-13.27	Peak	
2	5109.6000	9.08	38.03	47.11	54.00	-6.89	AVG	
3 *	5226.9000	67.13	37.64	104.77	68.20	36.57	Peak	NO Limit
4	5226.9000	59.57	37.64	97.21	68.20	29.01	AVG	NO Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

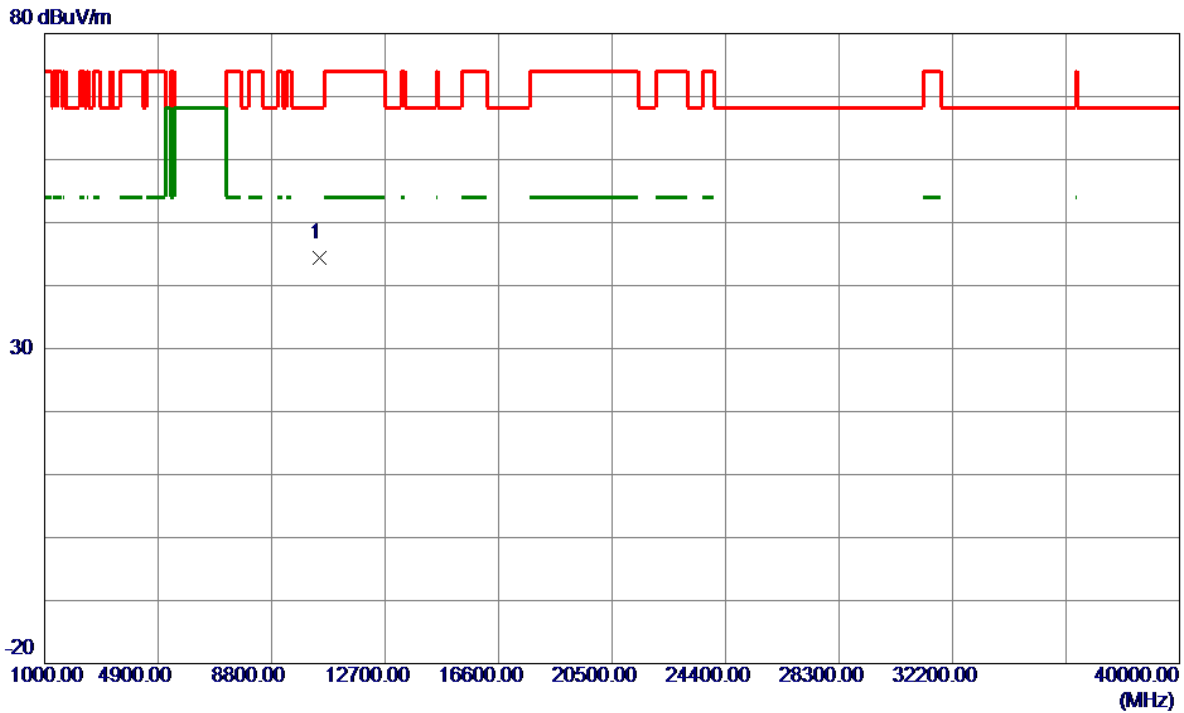


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10460.0000	53.94	-9.53	44.41	68.20	-23.79	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

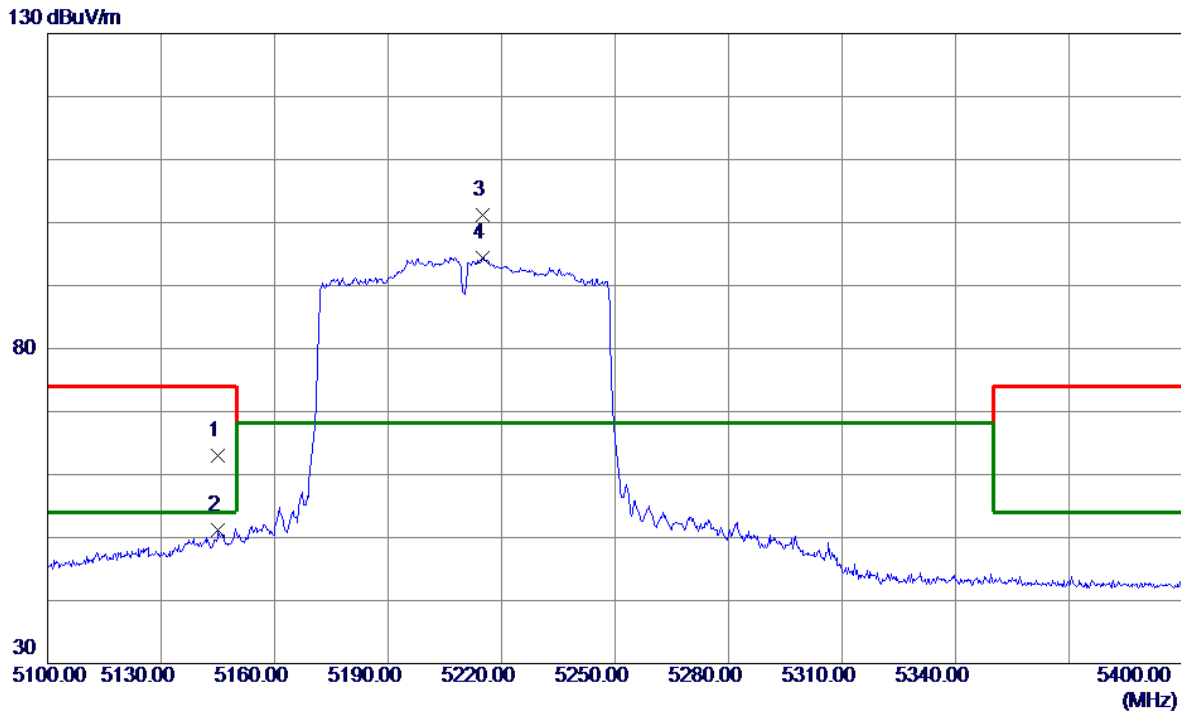


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5145.1500	25.10	37.89	62.99	74.00	-11.01	Peak	
2	5145.1500	13.34	37.89	51.23	54.00	-2.77	AVG	
3 *	5214.9000	63.58	37.66	101.24	68.20	33.04	Peak	NO Limit
4	5214.9000	56.81	37.66	94.47	68.20	26.27	AVG	NO Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

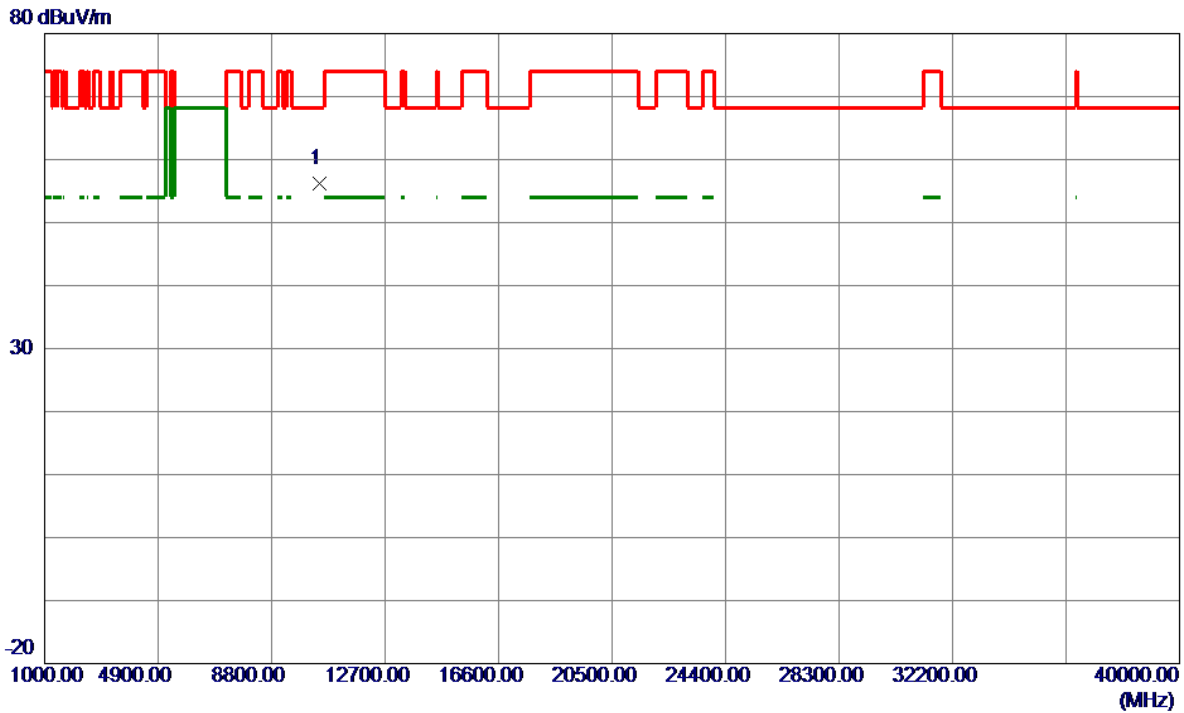


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10441.9000	65.69	-9.55	56.14	68.20	-12.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

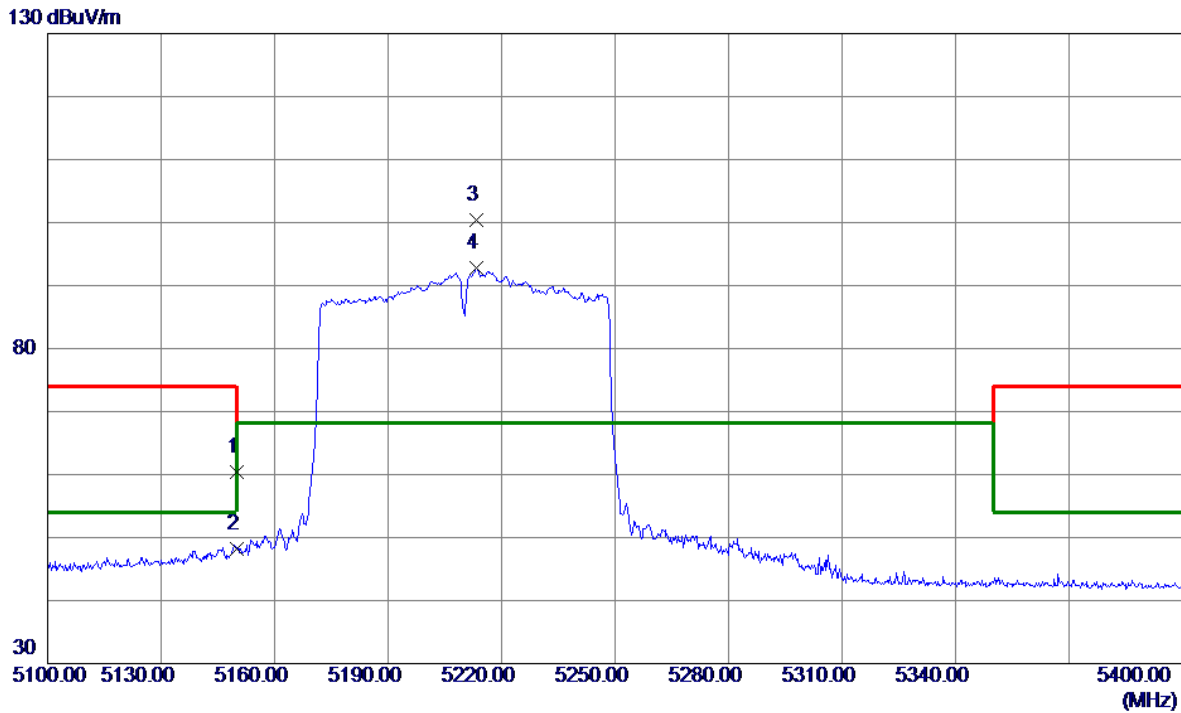


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	22.54	37.88	60.42	74.00	-13.58	Peak	
2	5150.0000	10.38	37.88	48.26	54.00	-5.74	AVG	
3 *	5213.4000	62.72	37.66	100.38	68.20	32.18	Peak	NO Limit
4	5213.4000	55.11	37.66	92.77	68.20	24.57	AVG	NO Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

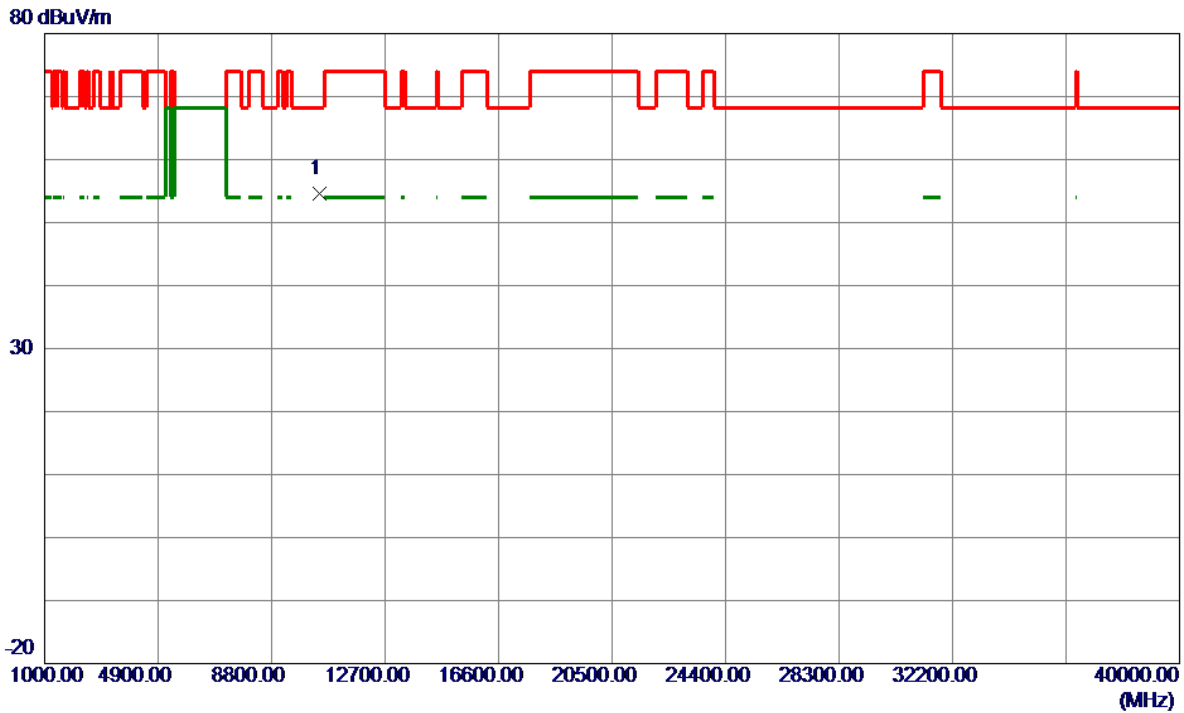


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10439.9500	64.12	-9.55	54.57	68.20	-13.63	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

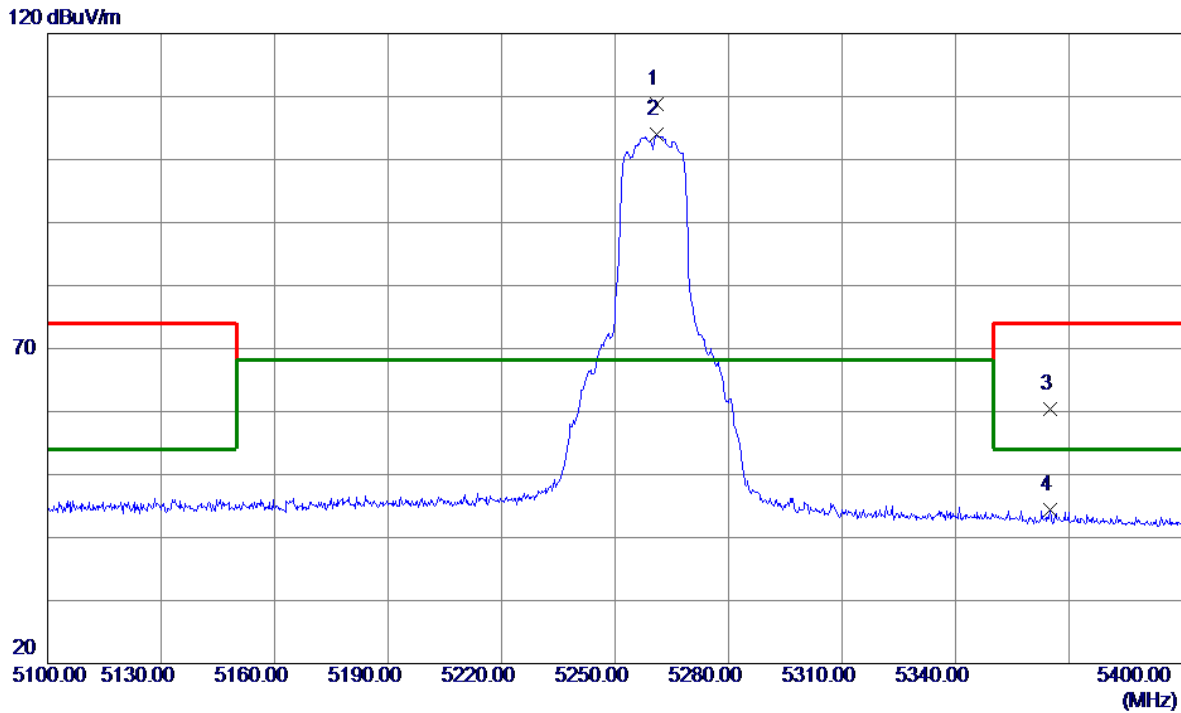


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5260.9500	71.19	37.59	108.78	68.20	40.58	Peak	NO Limit
2	5260.9500	66.37	37.59	103.96	68.20	35.76	AVG	NO Limit
3	5365.0500	22.59	37.80	60.39	74.00	-13.61	Peak	
4	5365.0500	6.69	37.80	44.49	54.00	-9.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

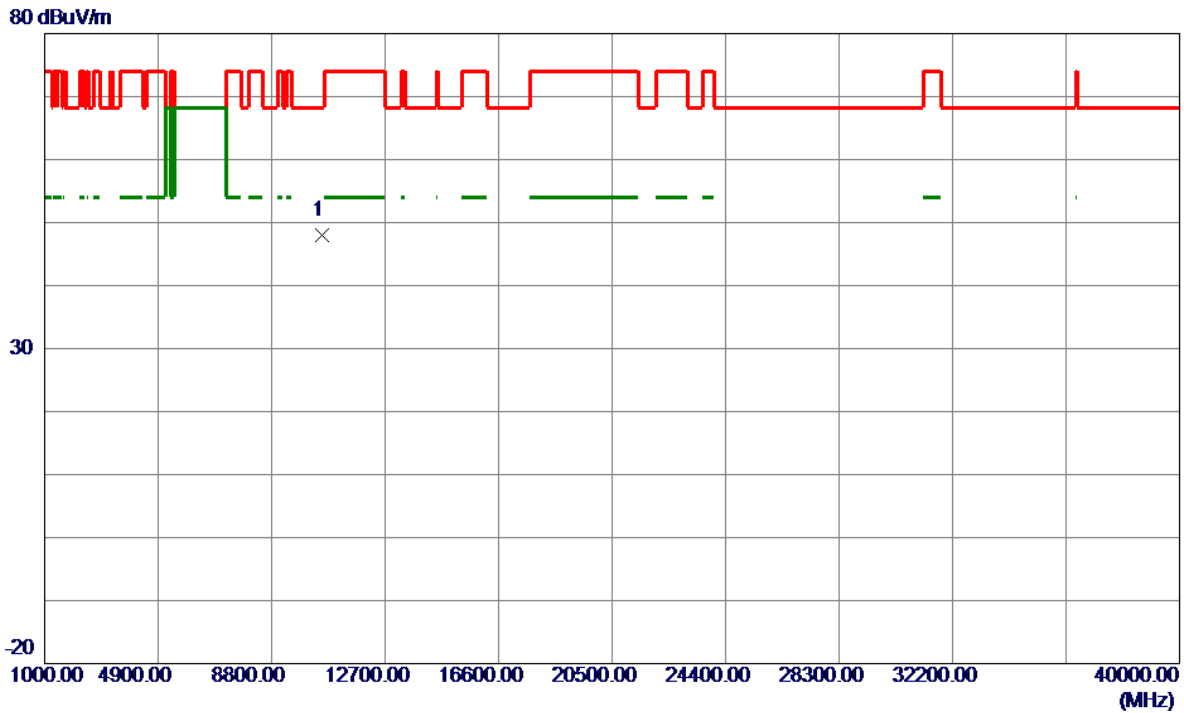


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10519.9000	57.39	-9.46	47.93	68.20	-20.27	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

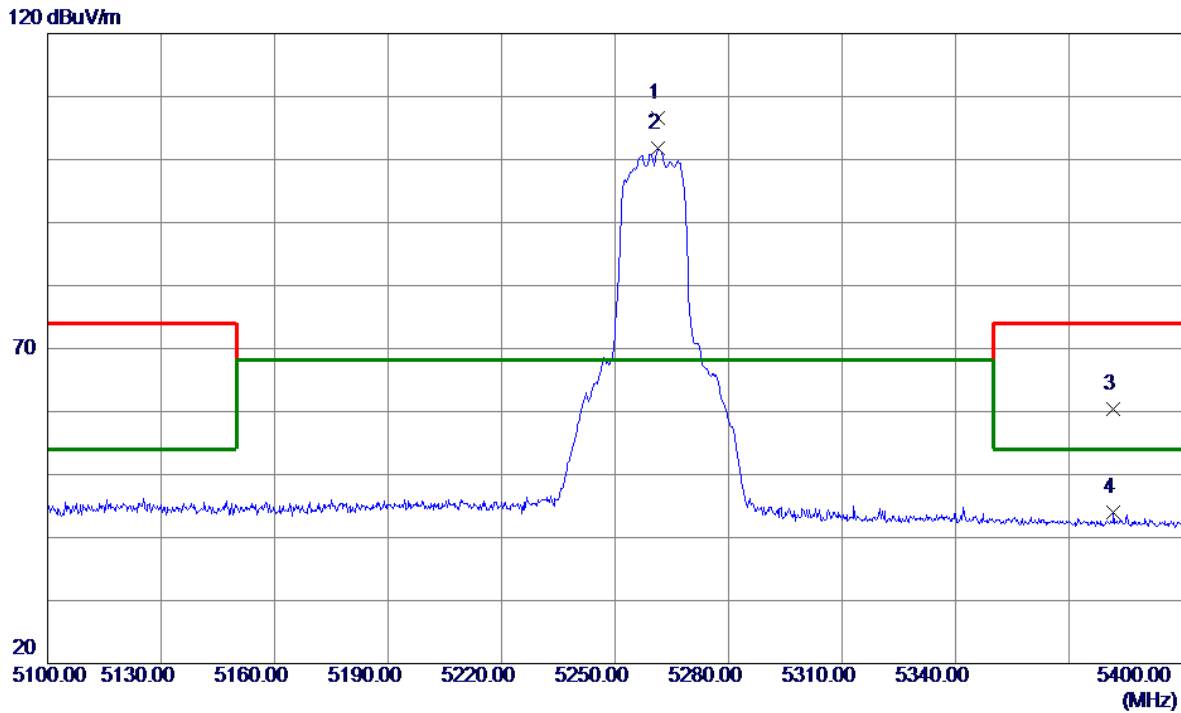


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5261.4000	68.98	37.59	106.57	68.20	38.37	Peak	NO Limit
2	5261.4000	64.25	37.59	101.84	68.20	33.64	AVG	NO Limit
3	5381.7000	22.51	37.87	60.38	74.00	-13.62	Peak	
4	5381.7000	6.05	37.87	43.92	54.00	-10.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

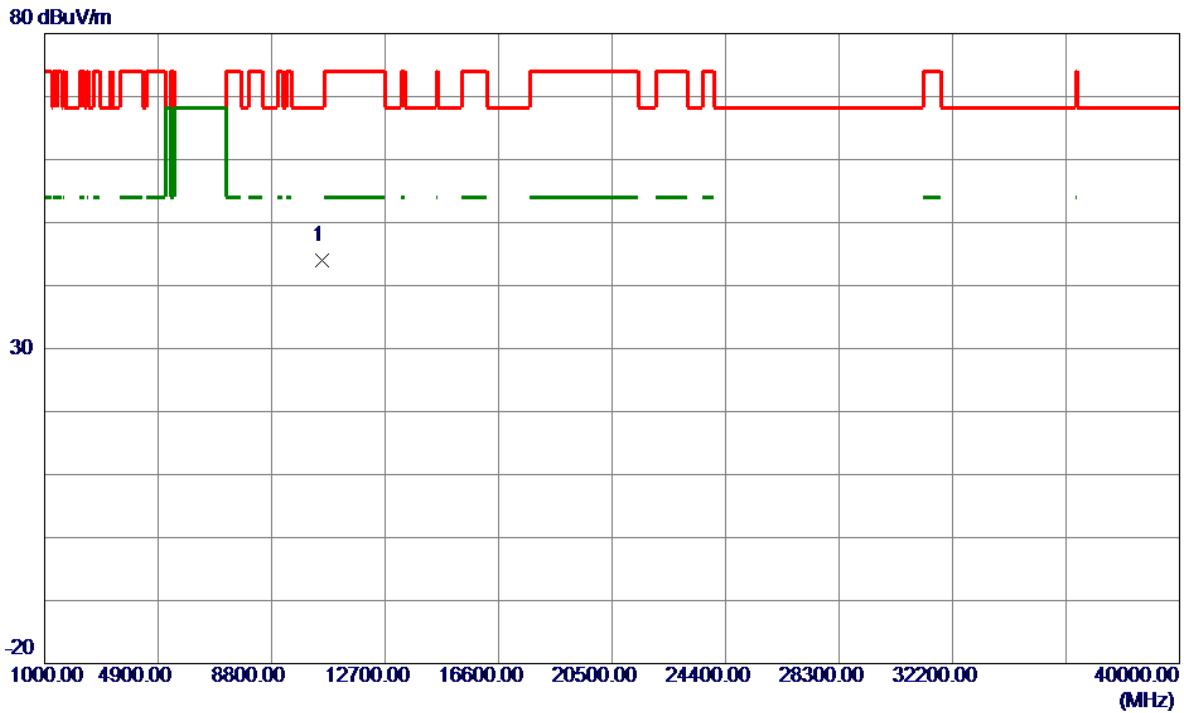


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10519.9000	53.48	-9.46	44.02	68.20	-24.18	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

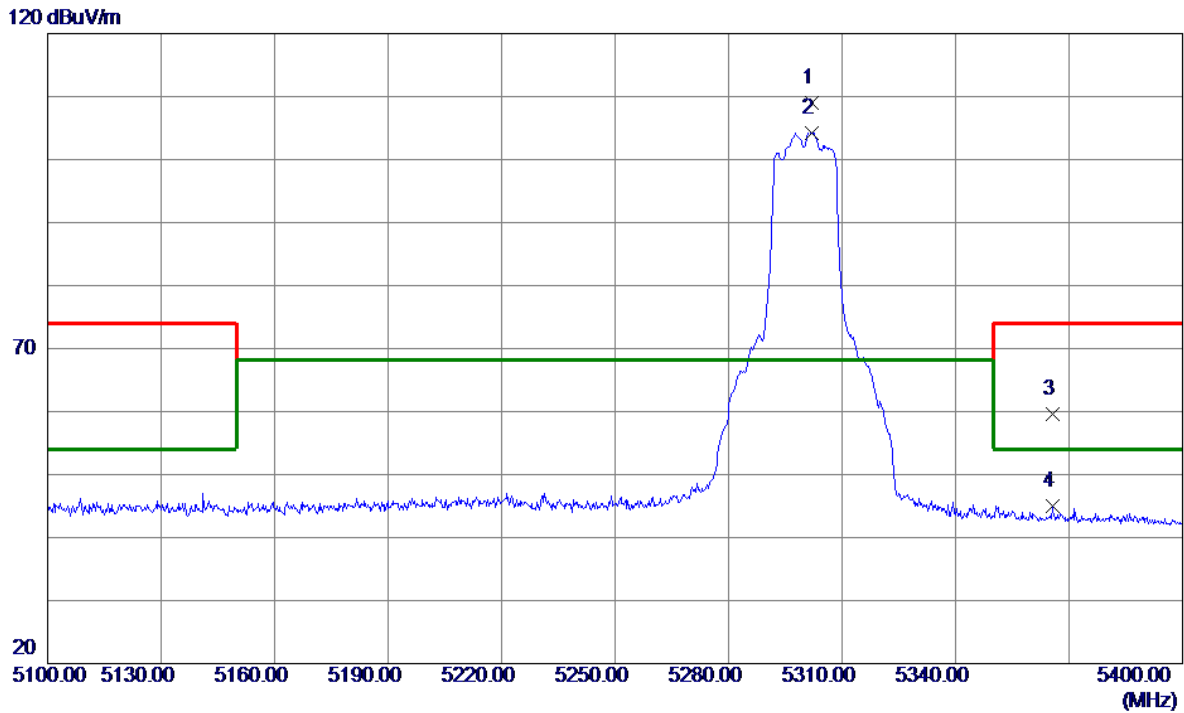


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5302.0500	71.37	37.54	108.91	68.20	40.71	Peak	NO Limit
2	5302.0500	66.71	37.54	104.25	68.20	36.05	AVG	NO Limit
3	5365.6500	21.89	37.80	59.69	74.00	-14.31	Peak	
4	5365.6500	7.18	37.80	44.98	54.00	-9.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

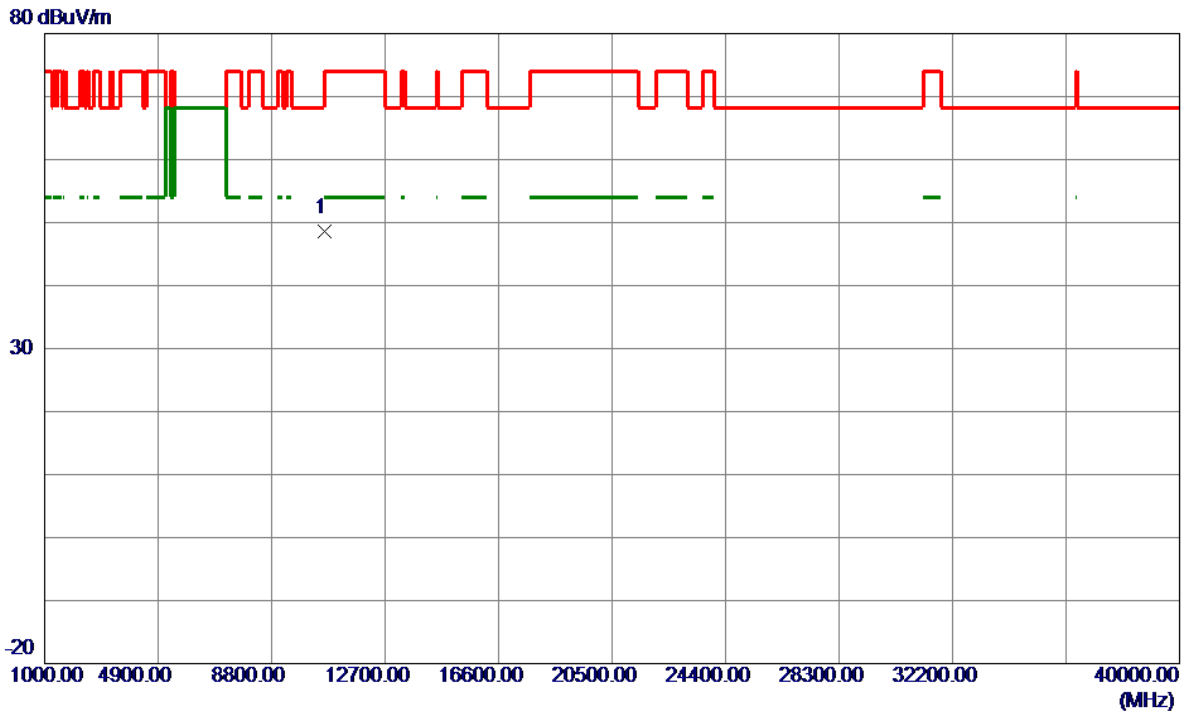


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10603.7500	57.86	-9.36	48.50	74.00	-25.50	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

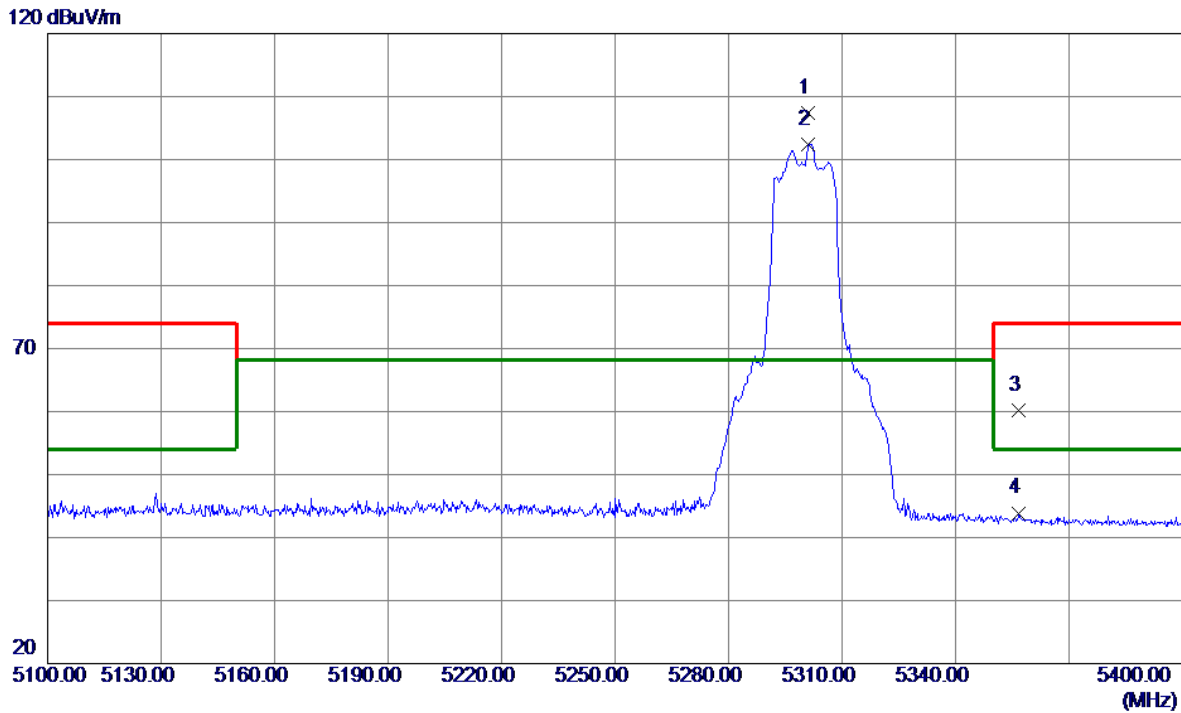


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5301.1500	69.89	37.54	107.43	68.20	39.23	Peak	NO Limit
2	5301.1500	64.86	37.54	102.40	68.20	34.20	AVG	NO Limit
3	5356.8000	22.43	37.76	60.19	74.00	-13.81	Peak	
4	5356.8000	6.14	37.76	43.90	54.00	-10.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

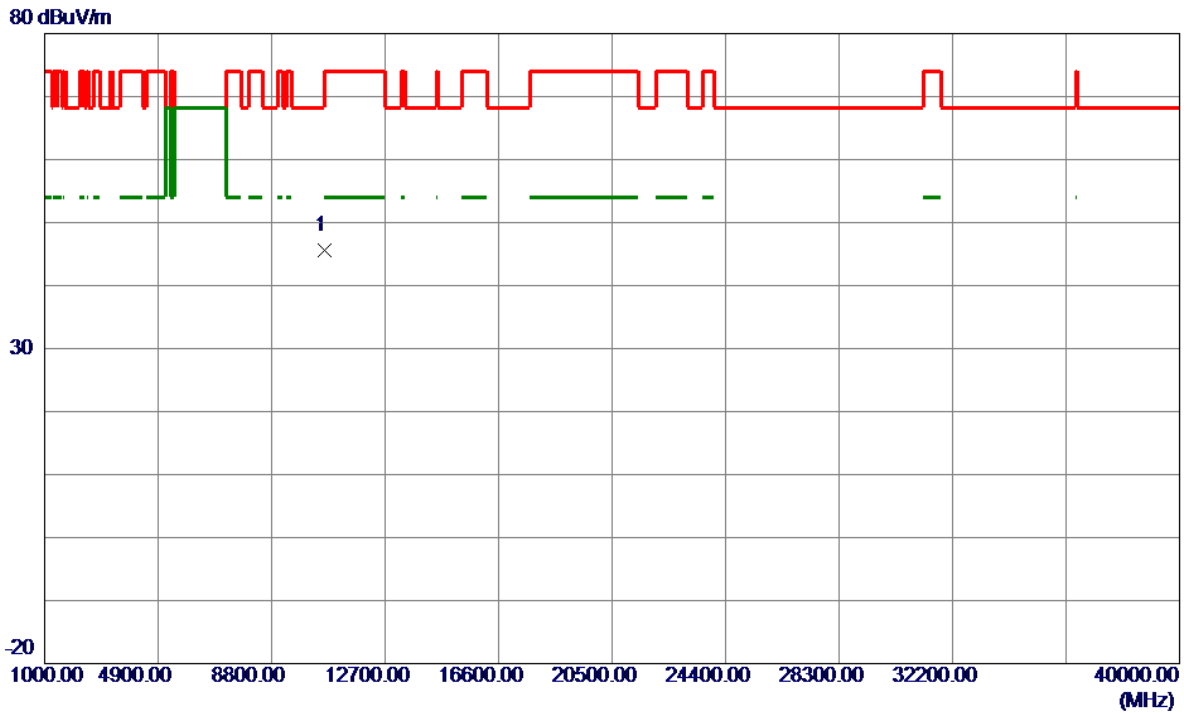

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10599.8500	54.90	-9.36	45.54	68.20	-22.66	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.