


Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Vertical

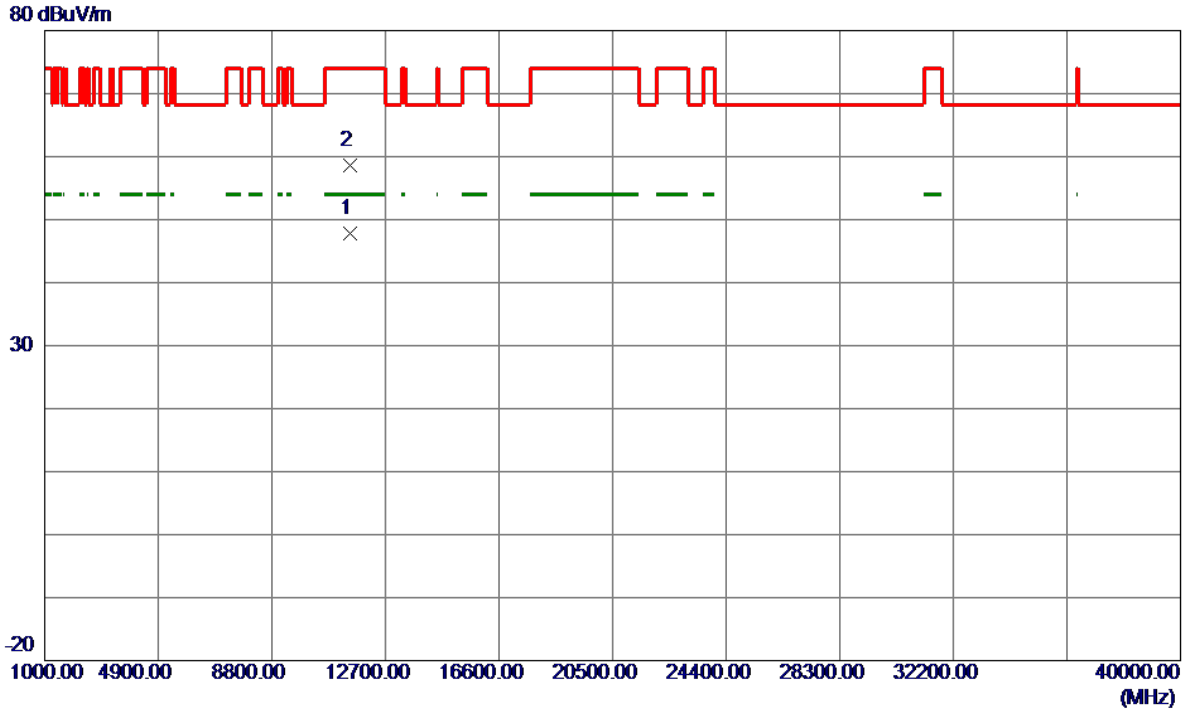

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11487.9500	30.09	17.74	47.83	54.00	-6.17	AVG	
2	11491.6500	40.83	17.76	58.59	74.00	-15.41	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Horizontal

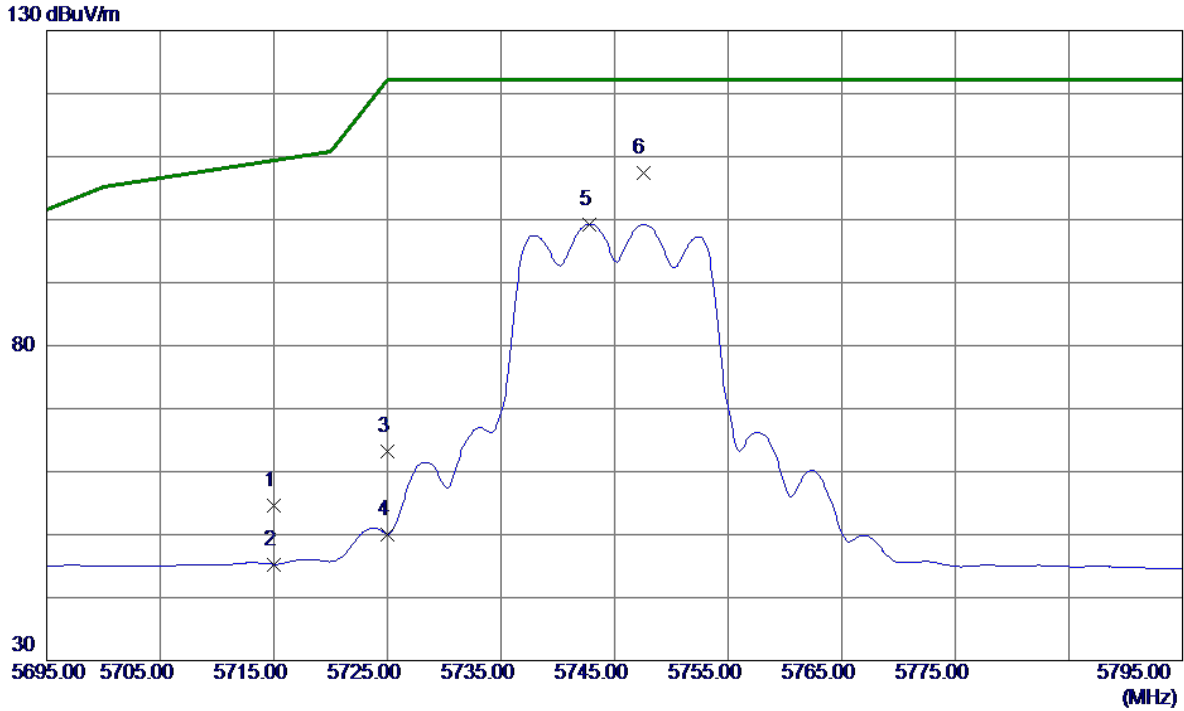

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	11.14	43.53	54.67	109.40	-54.73	Peak	
2	5715.0000	1.76	43.53	45.29	109.40	-64.11	AVG	
3	5725.0000	19.66	43.56	63.22	122.20	-58.98	Peak	
4	5725.0000	6.49	43.56	50.05	122.20	-72.15	AVG	
5	5742.8000	55.66	43.61	99.27	122.20	-22.93	AVG	
6 *	5747.5000	63.72	43.63	107.35	122.20	-14.85	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Horizontal

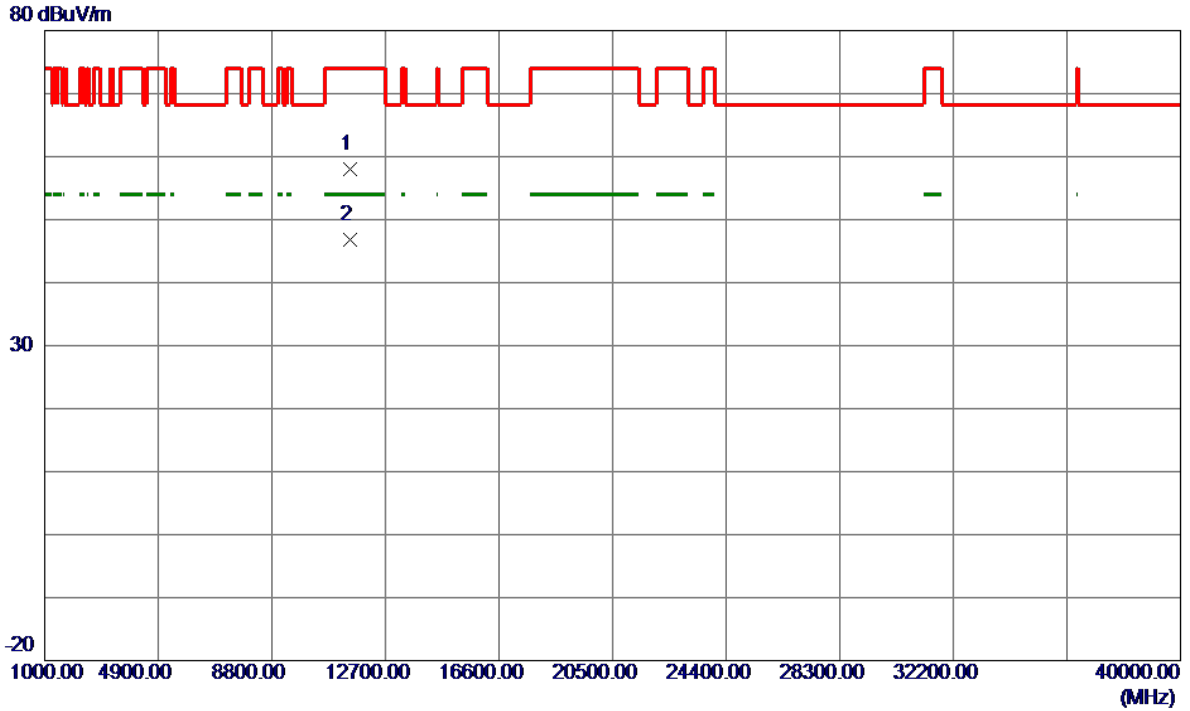

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11491.9000	40.29	17.76	58.05	74.00	-15.95	Peak	
2 *	11492.2500	29.10	17.76	46.86	54.00	-7.14	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Vertical

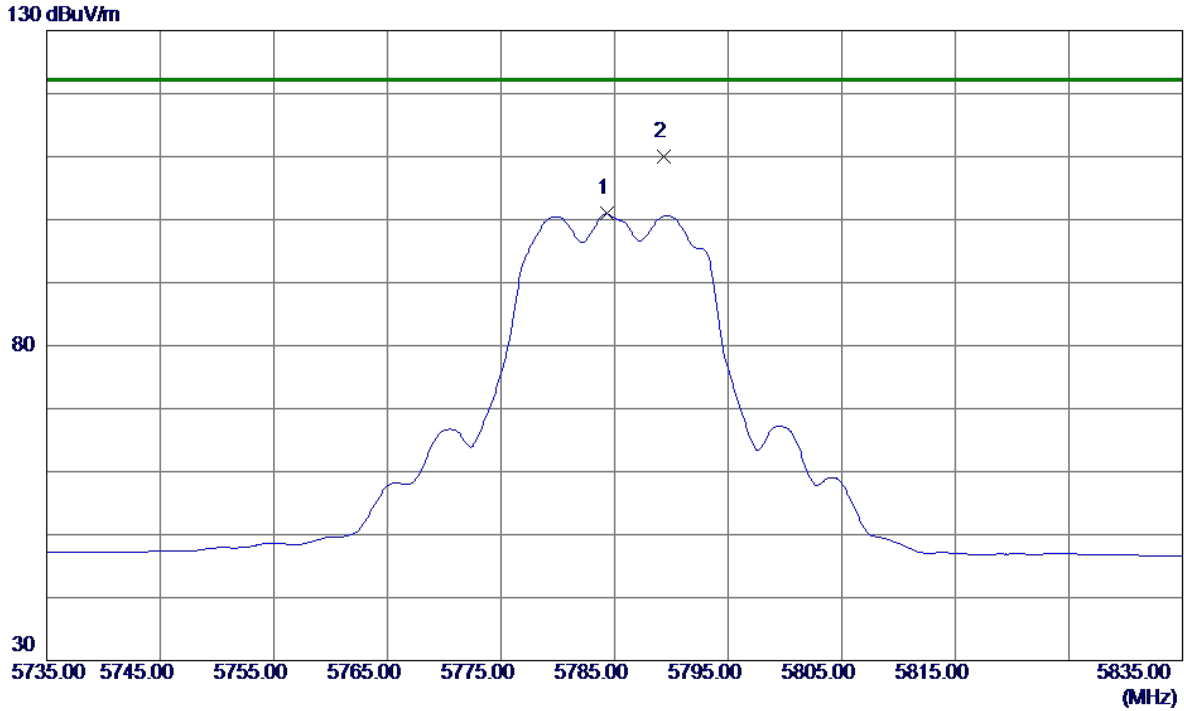

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5784.3000	57.17	43.74	100.91	122.20	-21.29	AVG	
2 *	5789.3000	66.27	43.75	110.02	122.20	-12.18	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Vertical

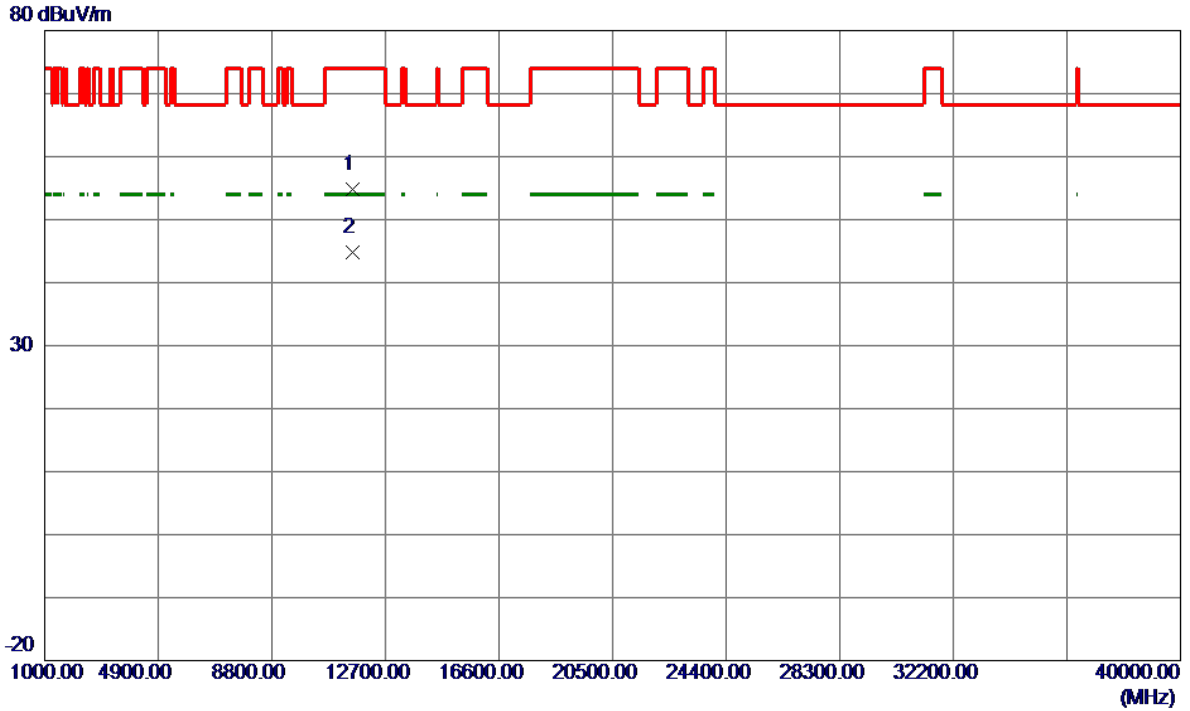

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11572.1500	37.02	17.82	54.84	74.00	-19.16	Peak	
2 *	11572.1500	26.89	17.82	44.71	54.00	-9.29	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz

Horizontal

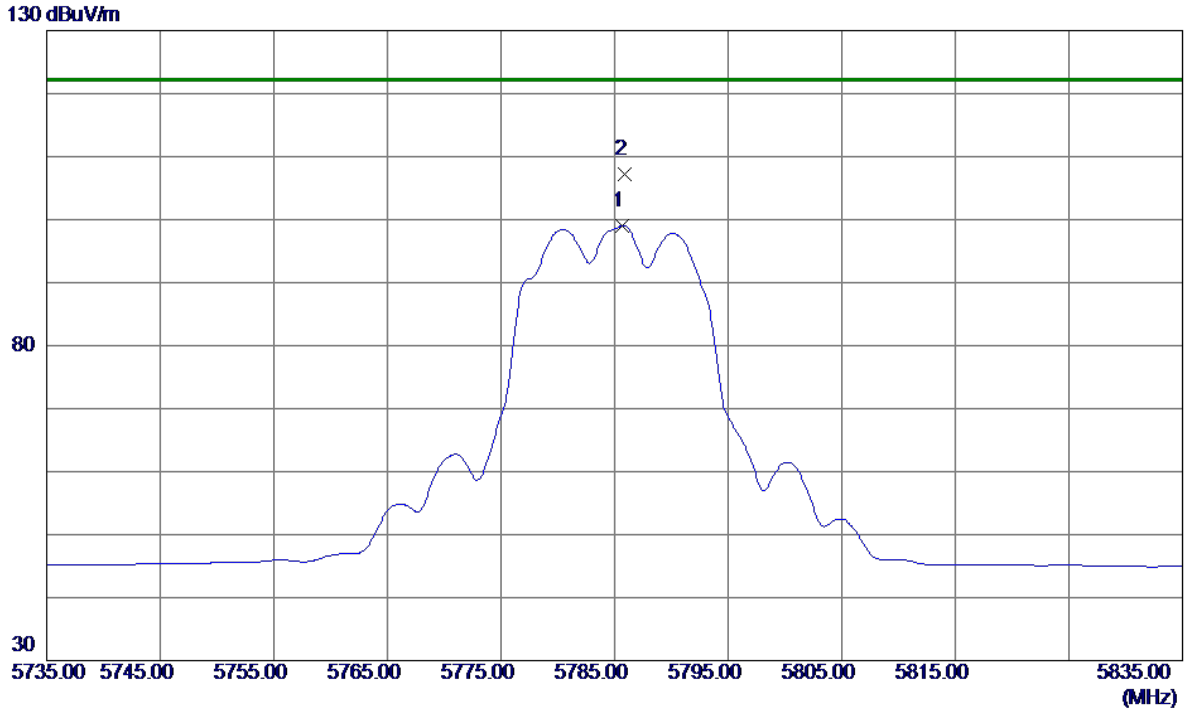

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5785.7000	55.33	43.74	99.07	122.20	-23.13	AVG	
2 *	5785.9000	63.54	43.74	107.28	122.20	-14.92	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Horizontal



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11571.6500	37.80	17.82	55.62	74.00	-18.38	Peak	
2 *	11572.0000	27.86	17.82	45.68	54.00	-8.32	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Vertical

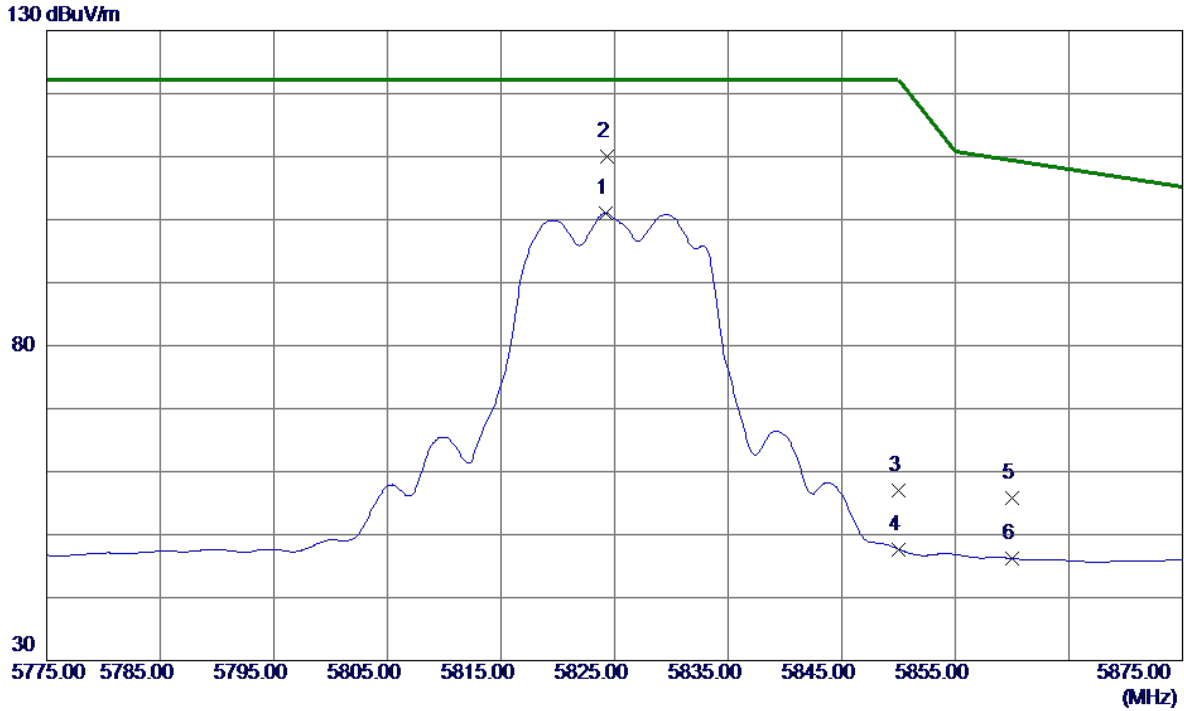

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5824.2000	57.17	43.86	101.03	122.20	-21.17	AVG	
2 *	5824.3000	66.17	43.86	110.03	122.20	-12.17	Peak	
3	5850.0000	12.97	43.94	56.91	122.20	-65.29	Peak	
4	5850.0000	3.75	43.94	47.69	122.20	-74.51	AVG	
5	5860.0000	11.85	43.97	55.82	109.40	-53.58	Peak	
6	5860.0000	2.25	43.97	46.22	109.40	-63.18	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Vertical

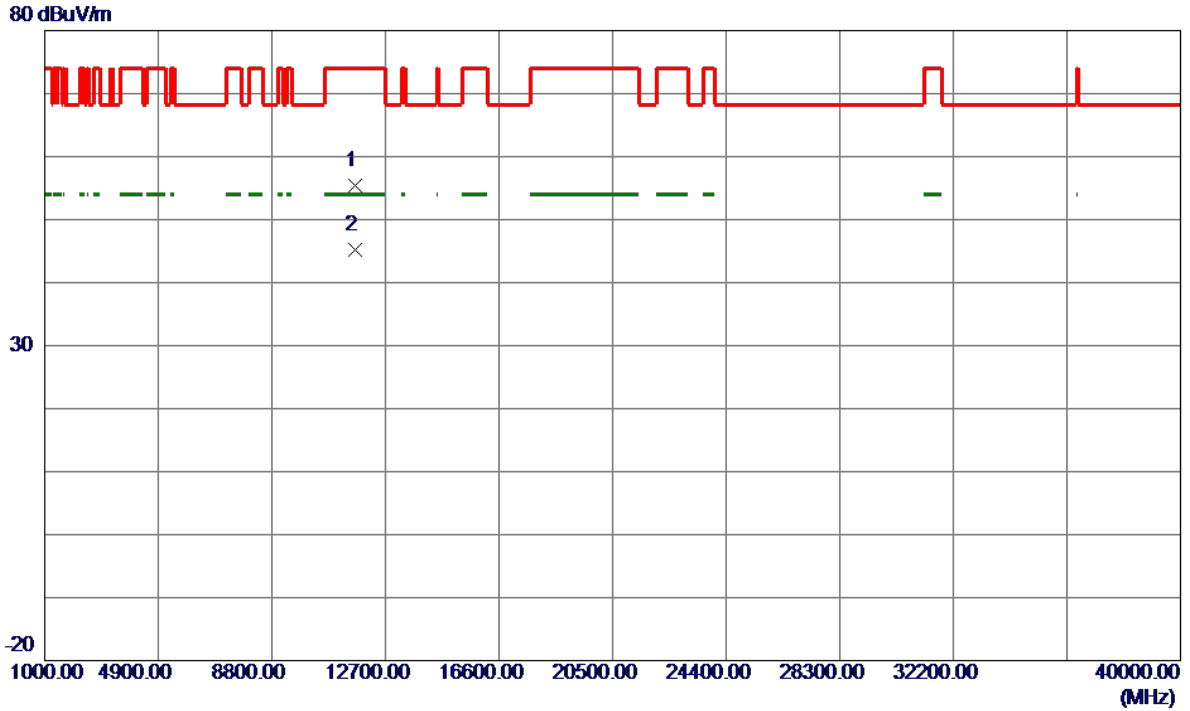

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11646.2000	37.63	17.86	55.49	74.00	-18.51	Peak	
2 *	11651.9400	27.35	17.86	45.21	54.00	-8.79	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Horizontal

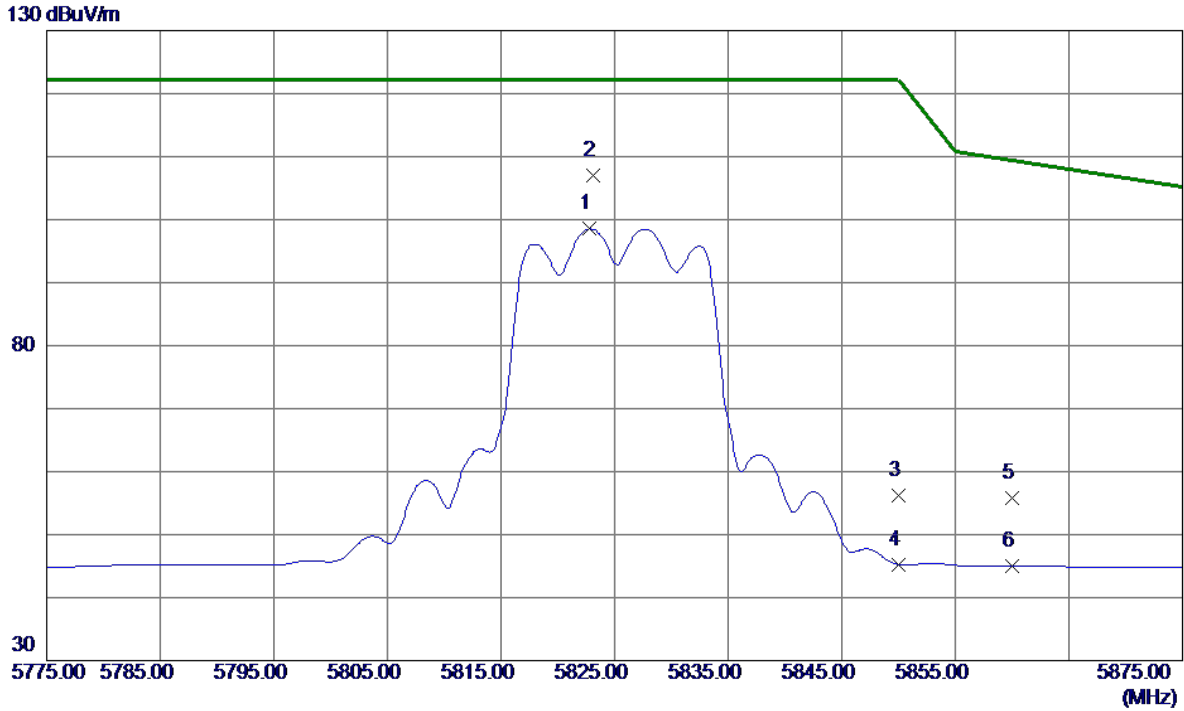

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5822.8000	54.66	43.85	98.51	122.20	-23.69	AVG	
2 *	5823.1000	63.22	43.86	107.08	122.20	-15.12	Peak	
3	5850.0000	12.27	43.94	56.21	122.20	-65.99	Peak	
4	5850.0000	1.31	43.94	45.25	122.20	-76.95	AVG	
5	5860.0000	11.75	43.97	55.72	109.40	-53.68	Peak	
6	5860.0000	0.96	43.97	44.93	109.40	-64.47	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Horizontal

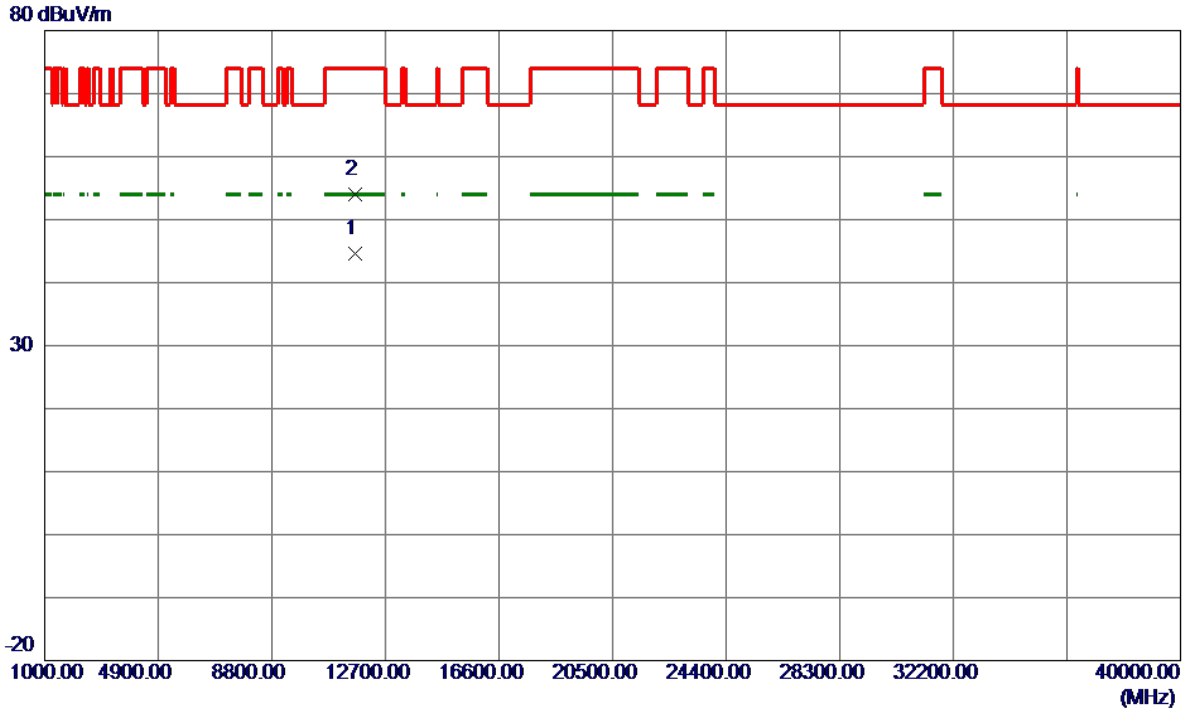

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11652.3500	26.66	17.86	44.52	54.00	-9.48	AVG	
2	11653.3000	36.06	17.86	53.92	74.00	-20.08	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Vertical

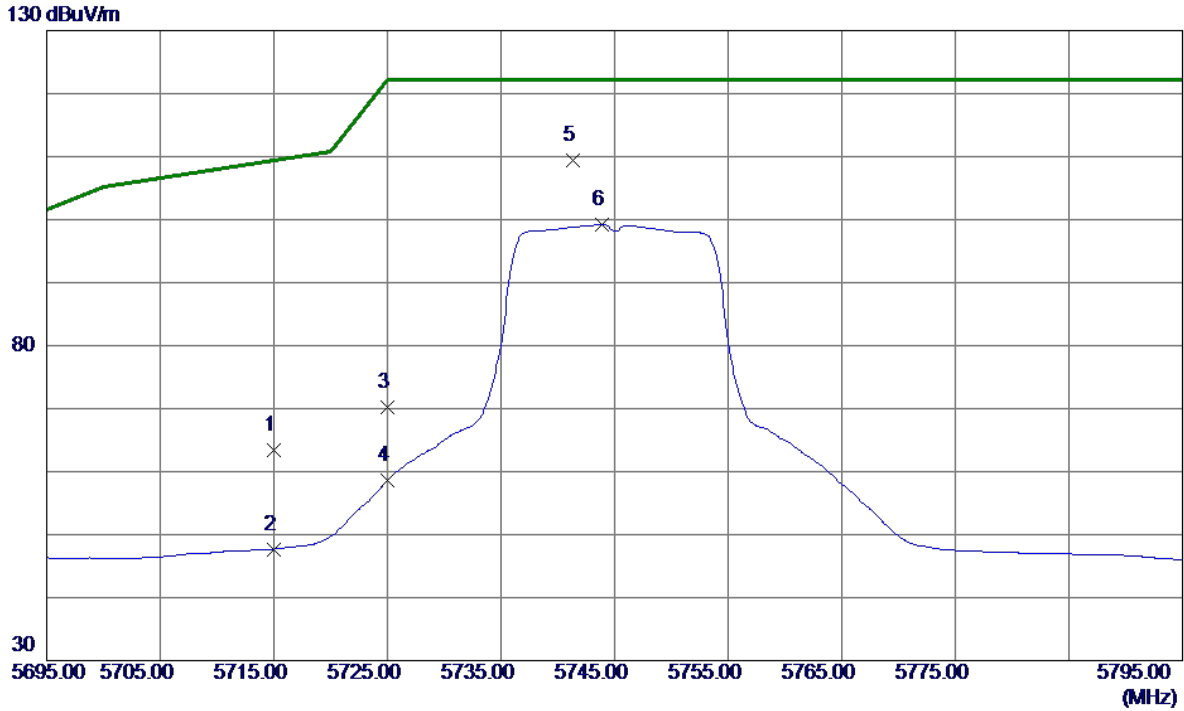

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	19.88	43.53	63.41	109.40	-45.99	Peak	
2	5715.0000	4.16	43.53	47.69	109.40	-61.71	AVG	
3	5725.0000	26.61	43.56	70.17	122.20	-52.03	Peak	
4	5725.0000	15.03	43.56	58.59	122.20	-63.61	AVG	
5 *	5741.3000	65.86	43.61	109.47	122.20	-12.73	Peak	
6	5743.9000	55.61	43.62	99.23	122.20	-22.97	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Vertical

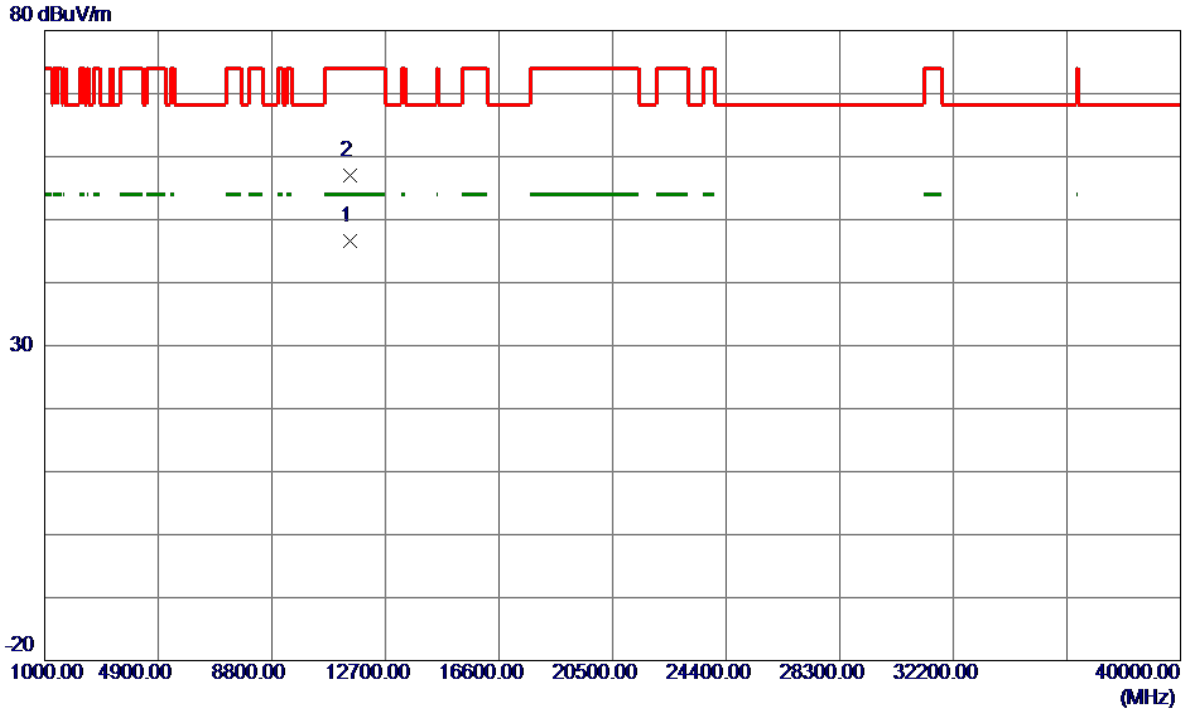

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11489.9000	28.85	17.75	46.60	54.00	-7.40	AVG	
2	11490.4000	39.17	17.75	56.92	74.00	-17.08	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Horizontal

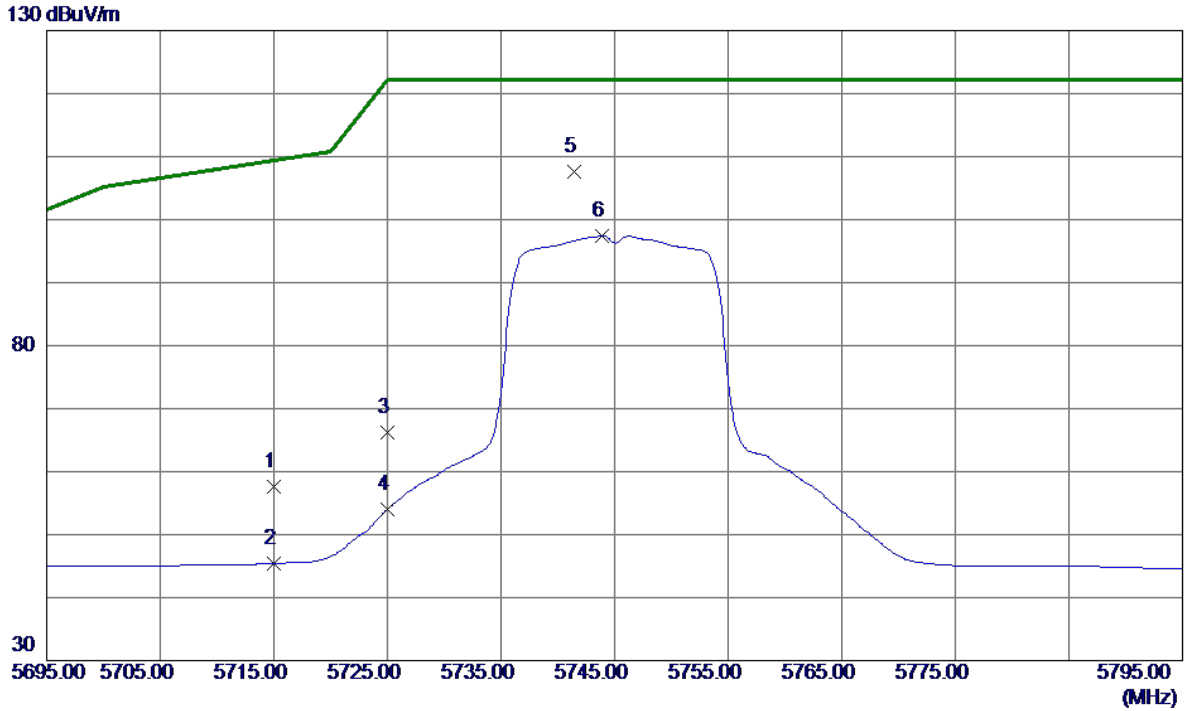

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	14.04	43.53	57.57	109.40	-51.83	Peak	
2	5715.0000	1.85	43.53	45.38	109.40	-64.02	AVG	
3	5725.0000	22.57	43.56	66.13	122.20	-56.07	Peak	
4	5725.0000	10.48	43.56	54.04	122.20	-68.16	AVG	
5 *	5741.4000	64.04	43.61	107.65	122.20	-14.55	Peak	
6	5743.9000	53.74	43.62	97.36	122.20	-24.84	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Horizontal

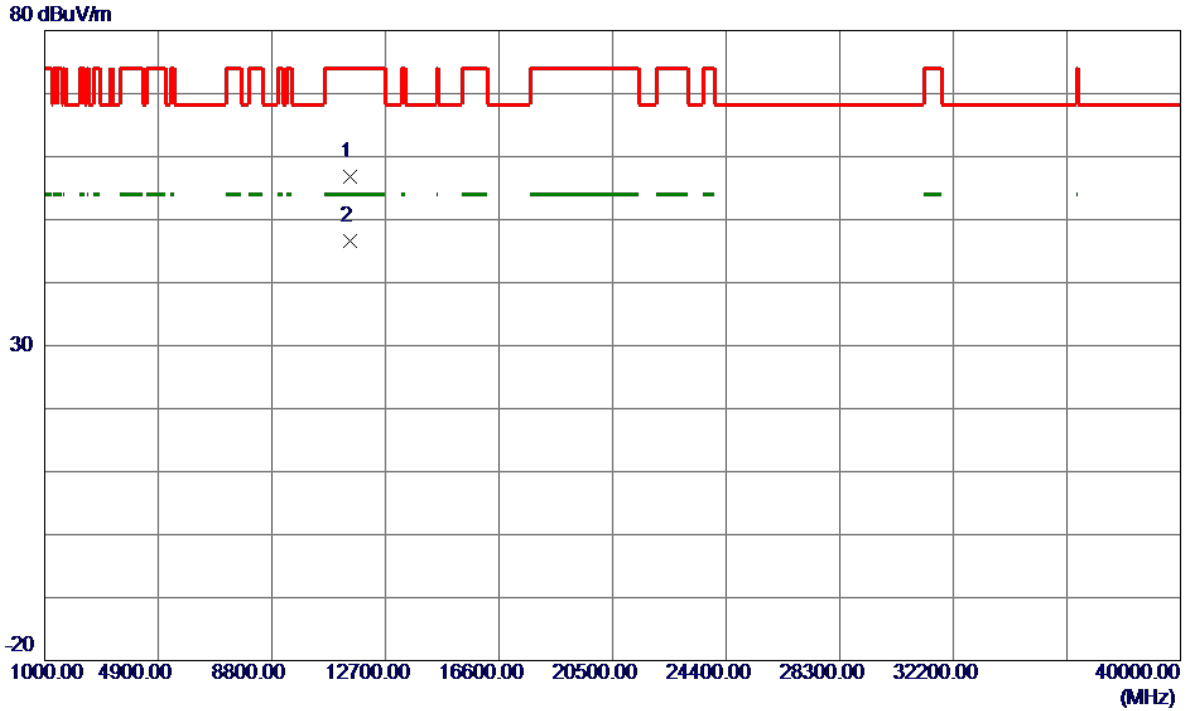

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11488.7000	39.03	17.75	56.78	74.00	-17.22	Peak	
2 *	11492.0000	28.80	17.76	46.56	54.00	-7.44	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Vertical

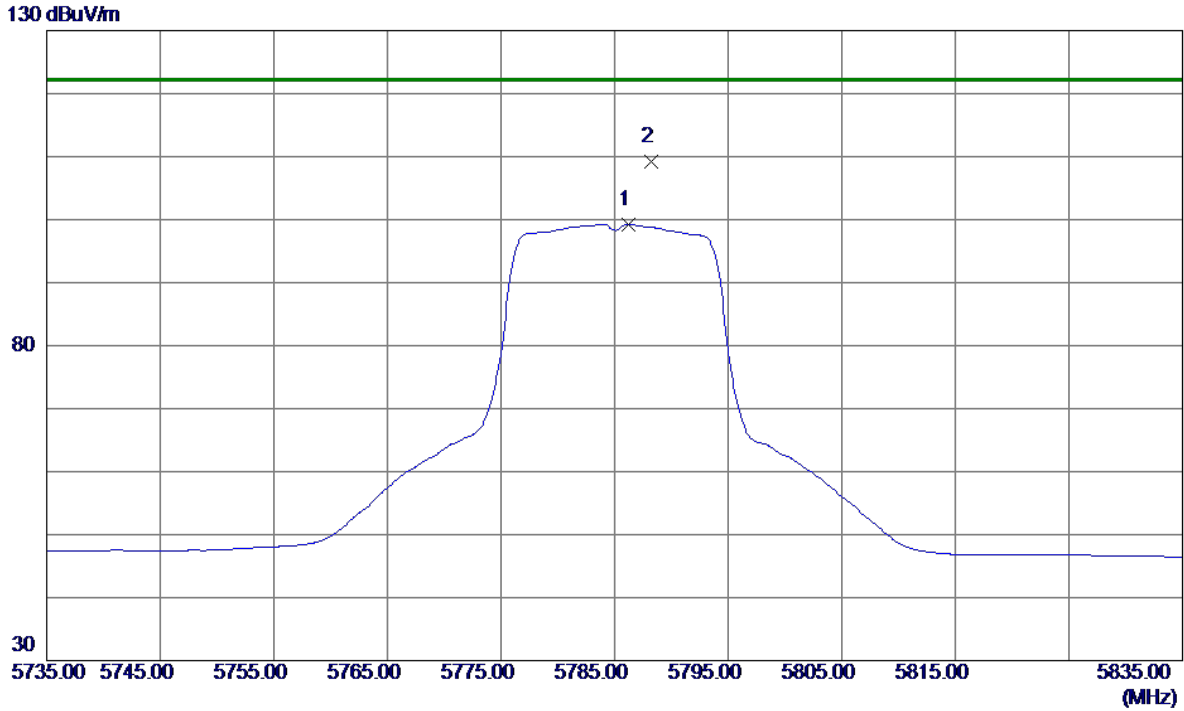

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5786.2000	55.52	43.74	99.26	122.20	-22.94	AVG	
2 *	5788.2000	65.40	43.75	109.15	122.20	-13.05	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Vertical

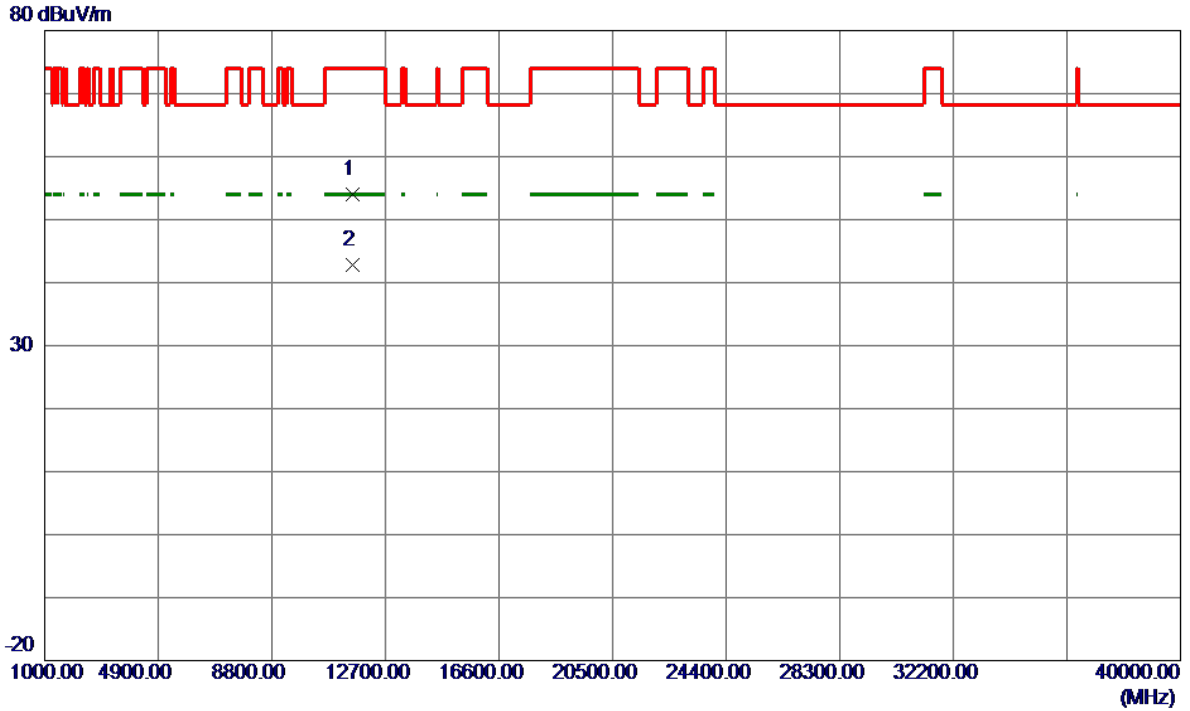

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11569.2500	36.26	17.82	54.08	74.00	-19.92	Peak	
2 *	11569.3000	24.94	17.82	42.76	54.00	-11.24	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Horizontal

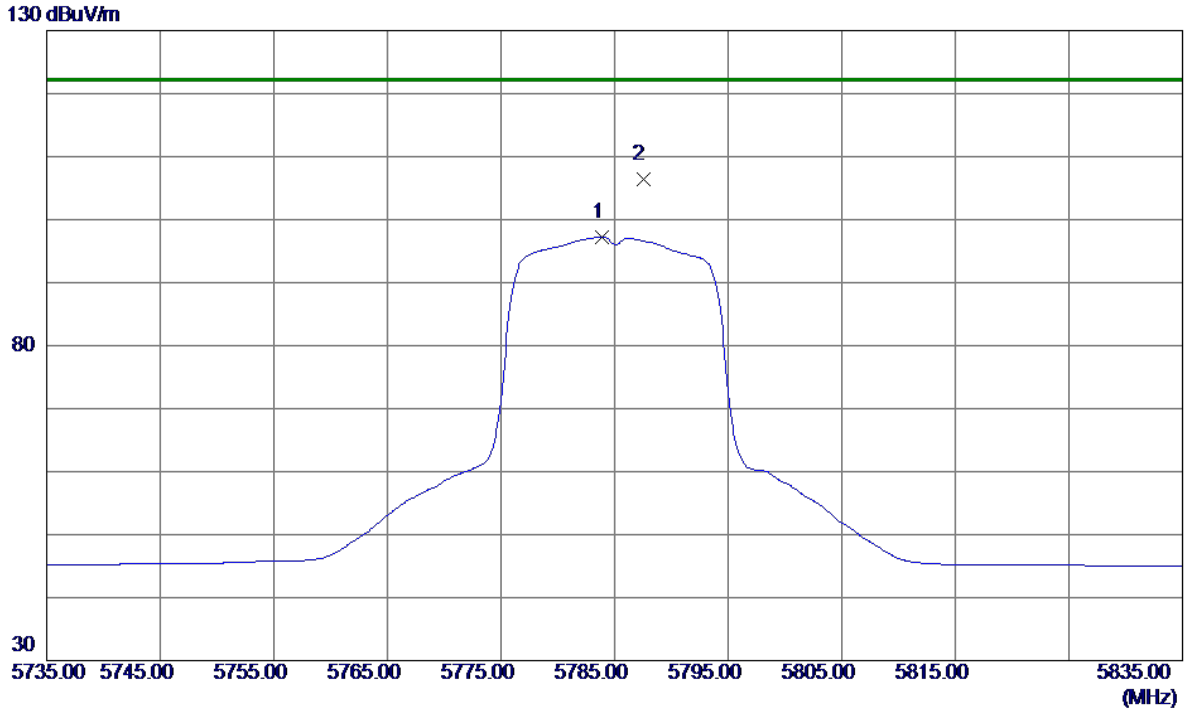

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5783.9000	53.54	43.74	97.28	122.20	-24.92	AVG	
2 *	5787.5000	62.67	43.75	106.42	122.20	-15.78	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Horizontal

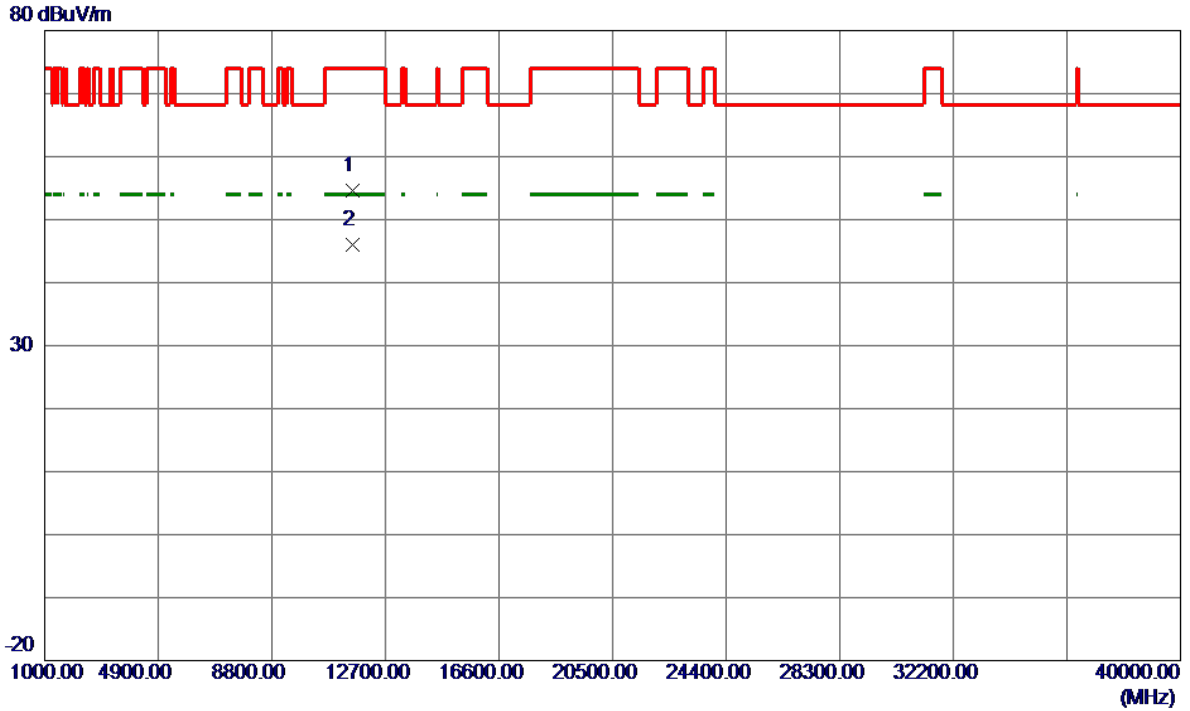

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11567.8000	36.86	17.82	54.68	74.00	-19.32	Peak	
2 *	11571.8000	28.26	17.82	46.08	54.00	-7.92	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Vertical

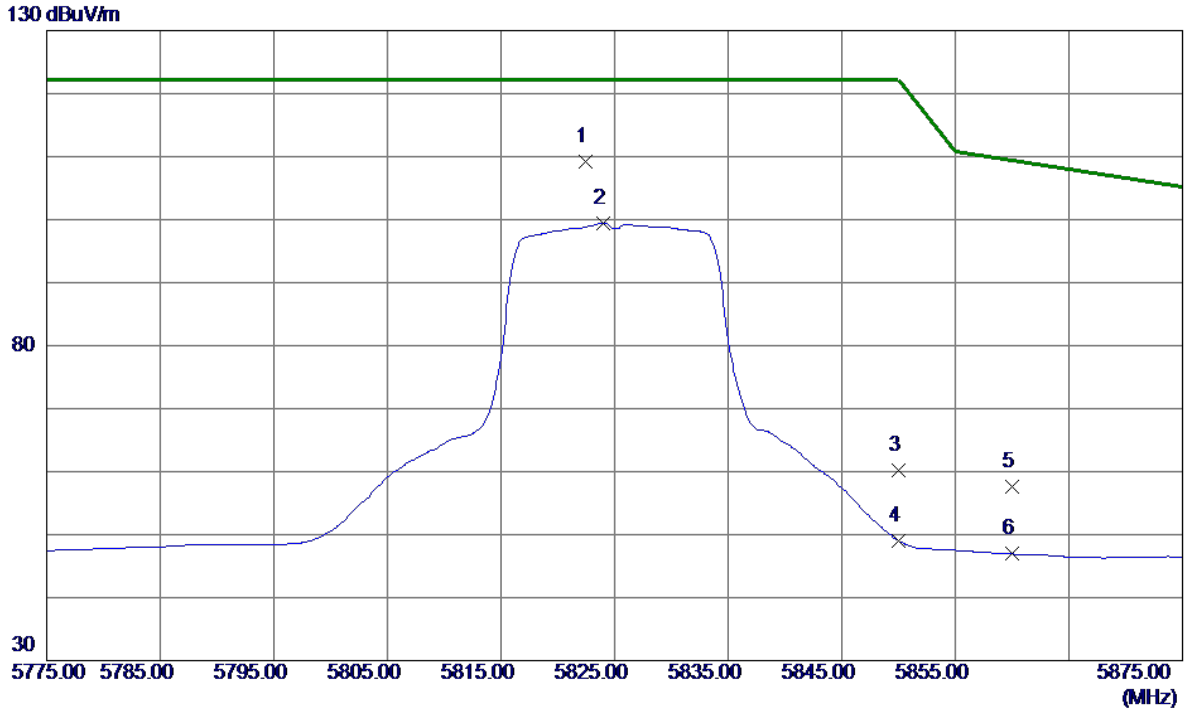

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5822.4000	65.30	43.85	109.15	122.20	-13.05	Peak	
2	5824.0000	55.57	43.86	99.43	122.20	-22.77	AVG	
3	5850.0000	16.21	43.94	60.15	122.20	-62.05	Peak	
4	5850.0000	5.04	43.94	48.98	122.20	-73.22	AVG	
5	5860.0000	13.68	43.97	57.65	109.40	-51.75	Peak	
6	5860.0000	2.95	43.97	46.92	109.40	-62.48	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Vertical

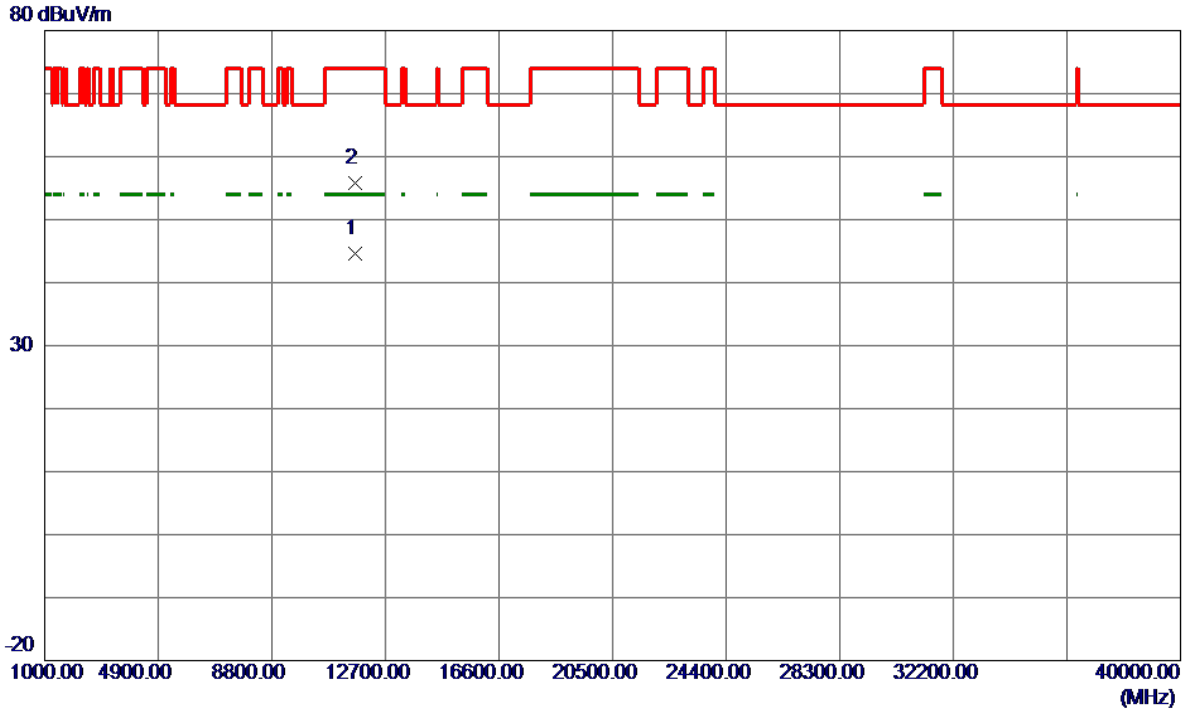

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11652.5400	26.67	17.86	44.53	54.00	-9.47	AVG	
2	11653.7800	37.94	17.86	55.80	74.00	-18.20	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Horizontal

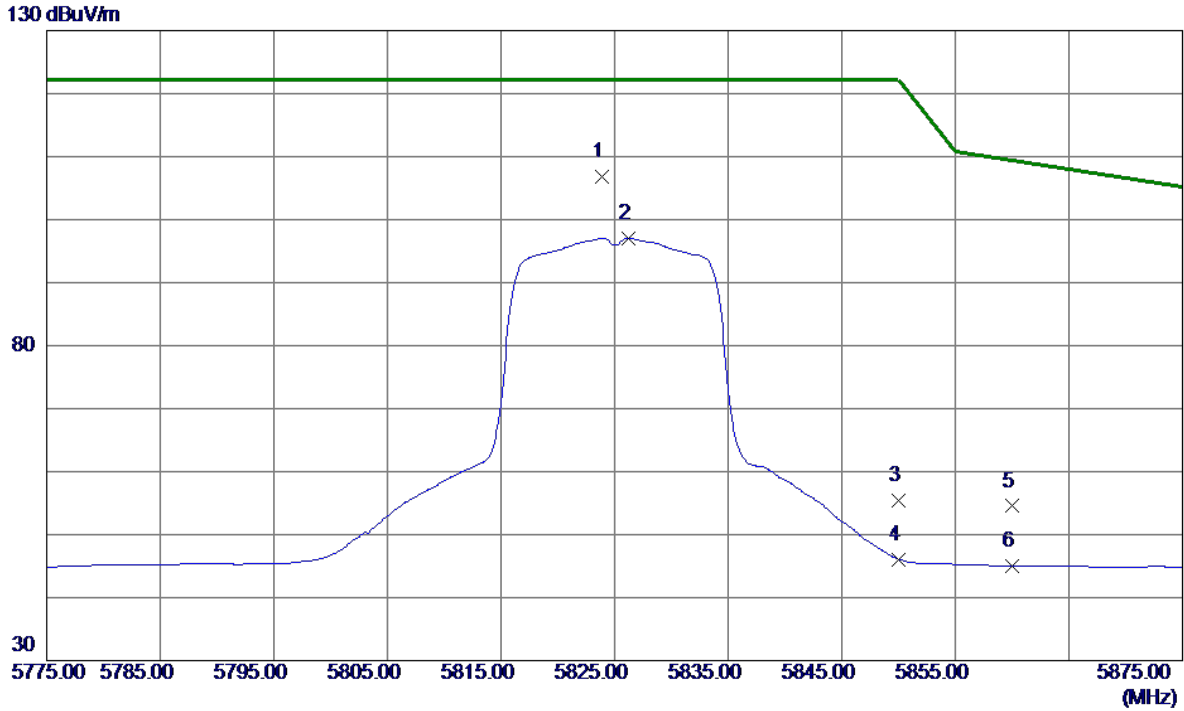

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5823.9000	62.97	43.86	106.83	122.20	-15.37	Peak	
2	5826.2000	53.15	43.87	97.02	122.20	-25.18	AVG	
3	5850.0000	11.40	43.94	55.34	122.20	-66.86	Peak	
4	5850.0000	2.14	43.94	46.08	122.20	-76.12	AVG	
5	5860.0000	10.53	43.97	54.50	109.40	-54.90	Peak	
6	5860.0000	1.04	43.97	45.01	109.40	-64.39	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Horizontal

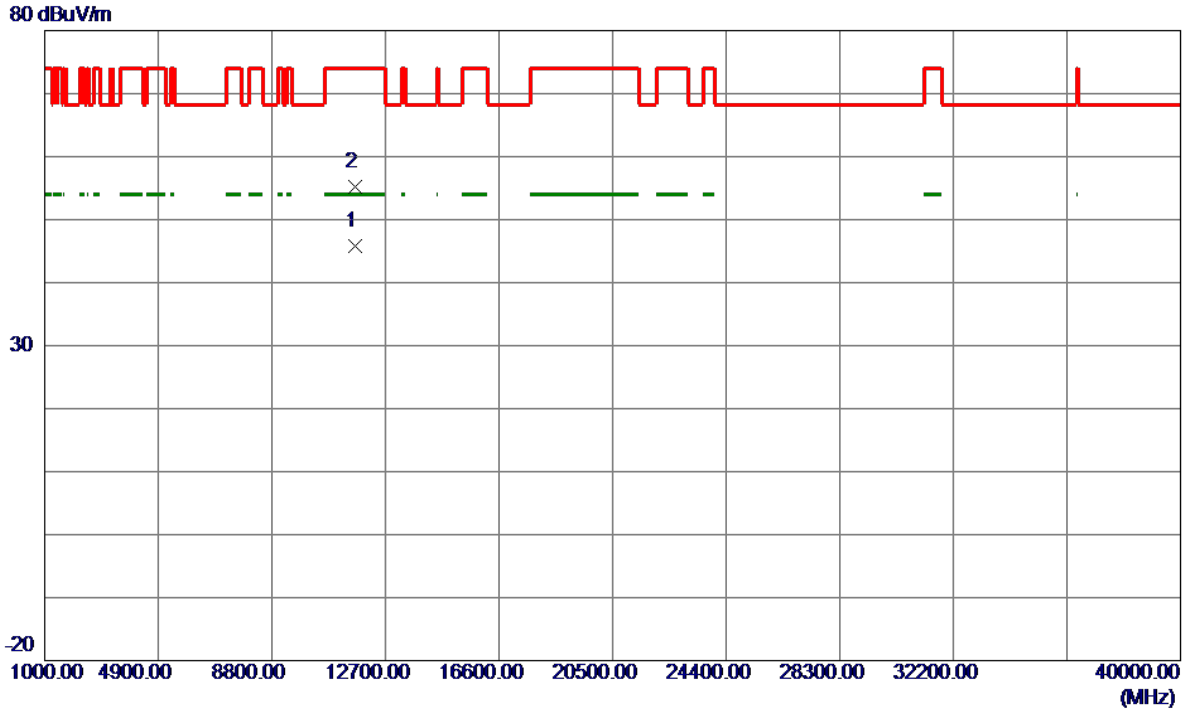

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11652.2000	27.90	17.86	45.76	54.00	-8.24	AVG	
2	11656.8000	37.30	17.86	55.16	74.00	-18.84	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Vertical

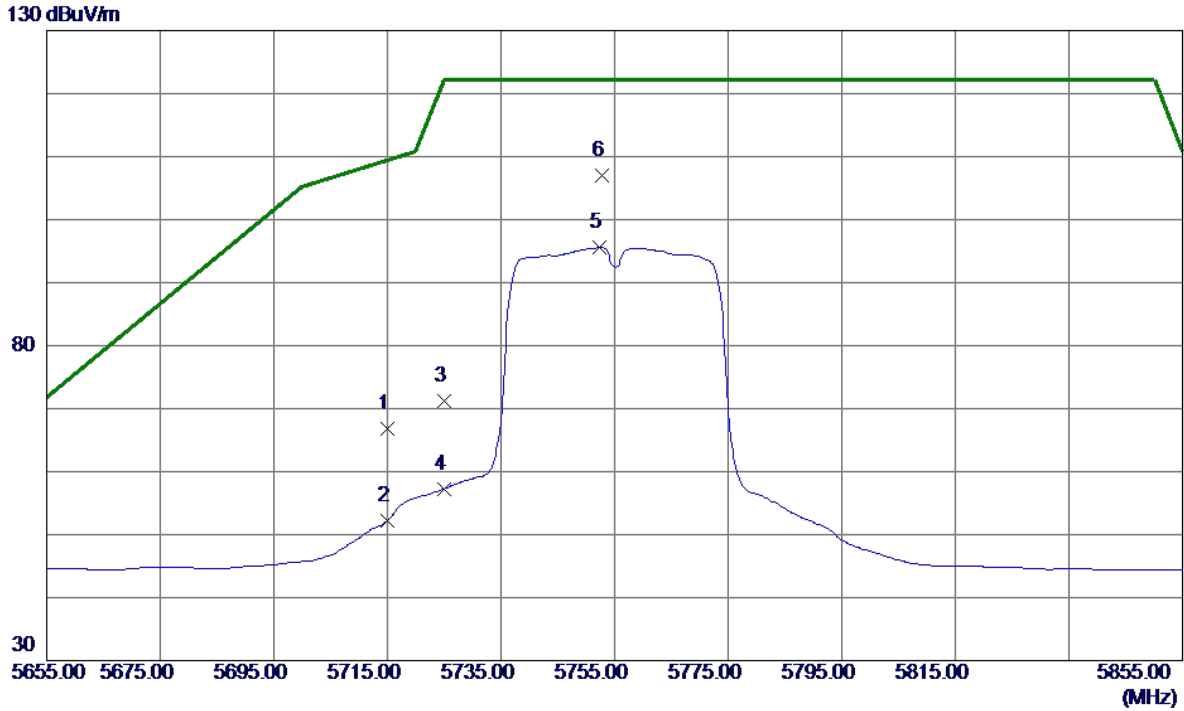

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	23.23	43.53	66.76	109.40	-42.64	Peak	
2	5715.0000	8.73	43.53	52.26	109.40	-57.14	AVG	
3	5725.0000	27.73	43.56	71.29	122.20	-50.91	Peak	
4	5725.0000	13.67	43.56	57.23	122.20	-64.97	AVG	
5	5752.4000	51.95	43.64	95.59	122.20	-26.61	AVG	
6 *	5752.8000	63.34	43.64	106.98	122.20	-15.22	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Vertical

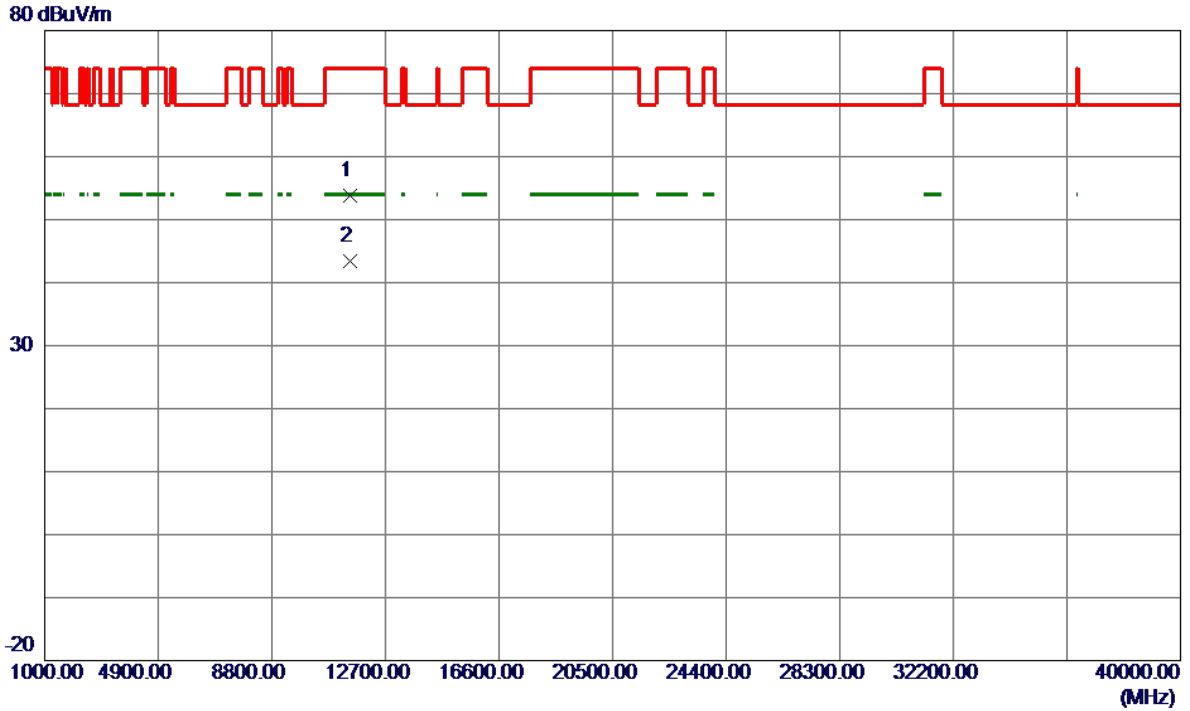

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11506.5000	35.96	17.79	53.75	74.00	-20.25	Peak	
2 *	11508.1000	25.57	17.79	43.36	54.00	-10.64	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Horizontal

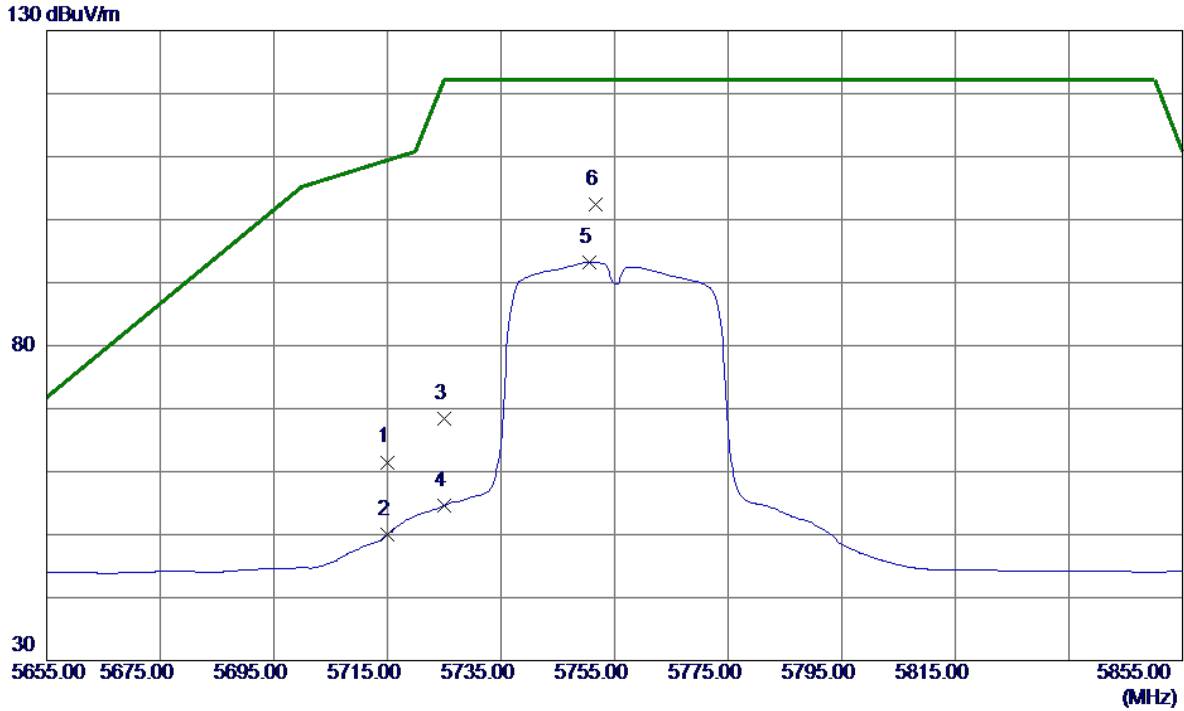

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	17.97	43.53	61.50	109.40	-47.90	Peak	
2	5715.0000	6.50	43.53	50.03	109.40	-59.37	AVG	
3	5725.0000	24.92	43.56	68.48	122.20	-53.72	Peak	
4	5725.0000	11.06	43.56	54.62	122.20	-67.58	AVG	
5	5750.6000	49.58	43.64	93.22	122.20	-28.98	AVG	
6 *	5751.6000	58.69	43.64	102.33	122.20	-19.87	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Horizontal

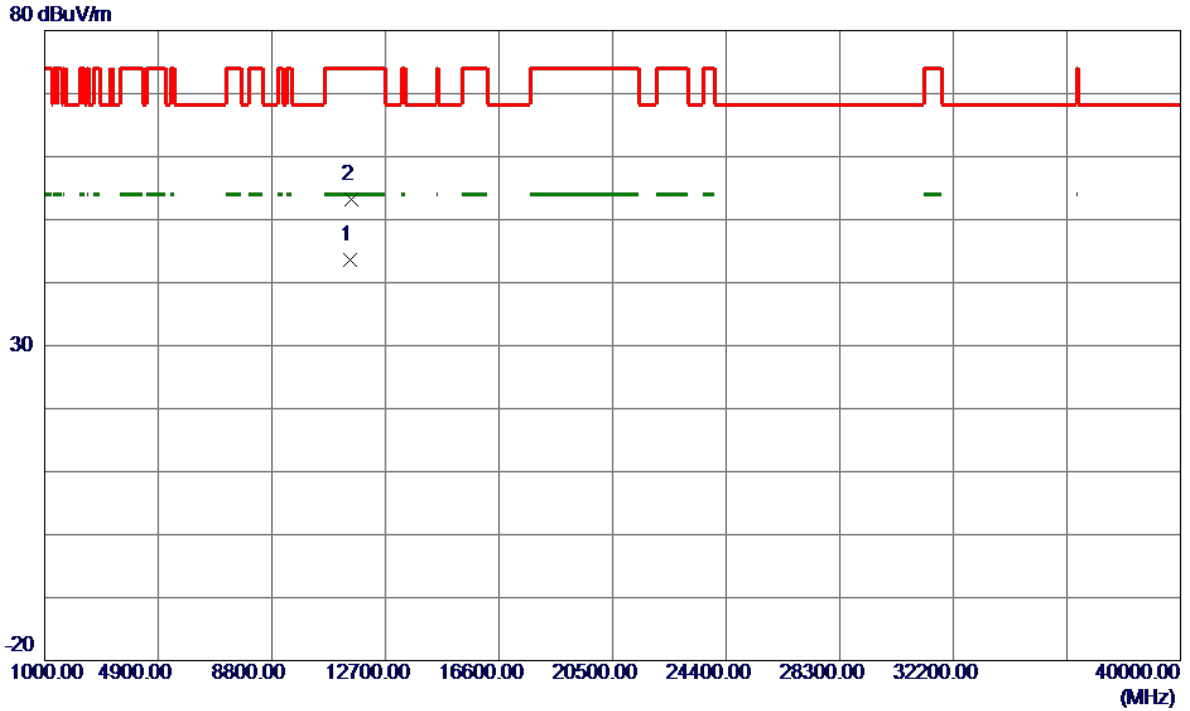

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11508.3000	25.77	17.79	43.56	54.00	-10.44	AVG	
2	11508.7000	35.37	17.79	53.16	74.00	-20.84	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

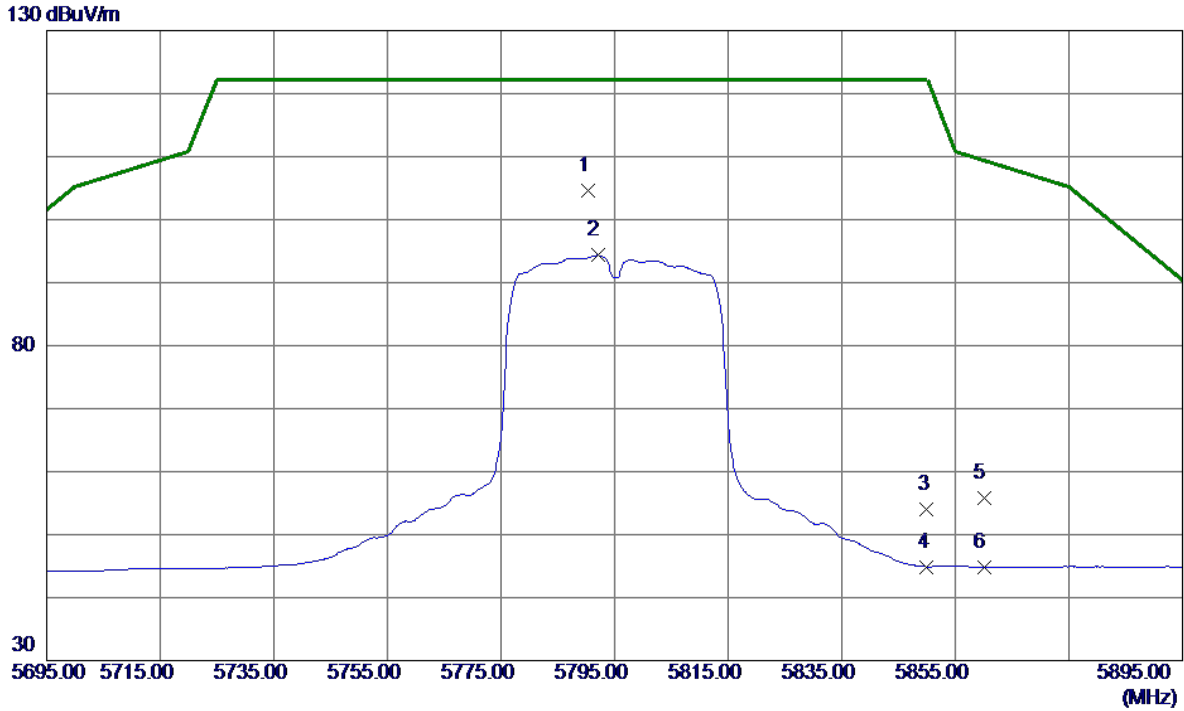

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5790.4000	60.91	43.76	104.67	122.20	-17.53	Peak	
2	5792.0000	50.56	43.76	94.32	122.20	-27.88	AVG	
3	5850.0000	10.01	43.94	53.95	122.20	-68.25	Peak	
4	5850.0000	0.94	43.94	44.88	122.20	-77.32	AVG	
5	5860.0000	11.92	43.97	55.89	109.40	-53.51	Peak	
6	5860.0000	0.81	43.97	44.78	109.40	-64.62	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

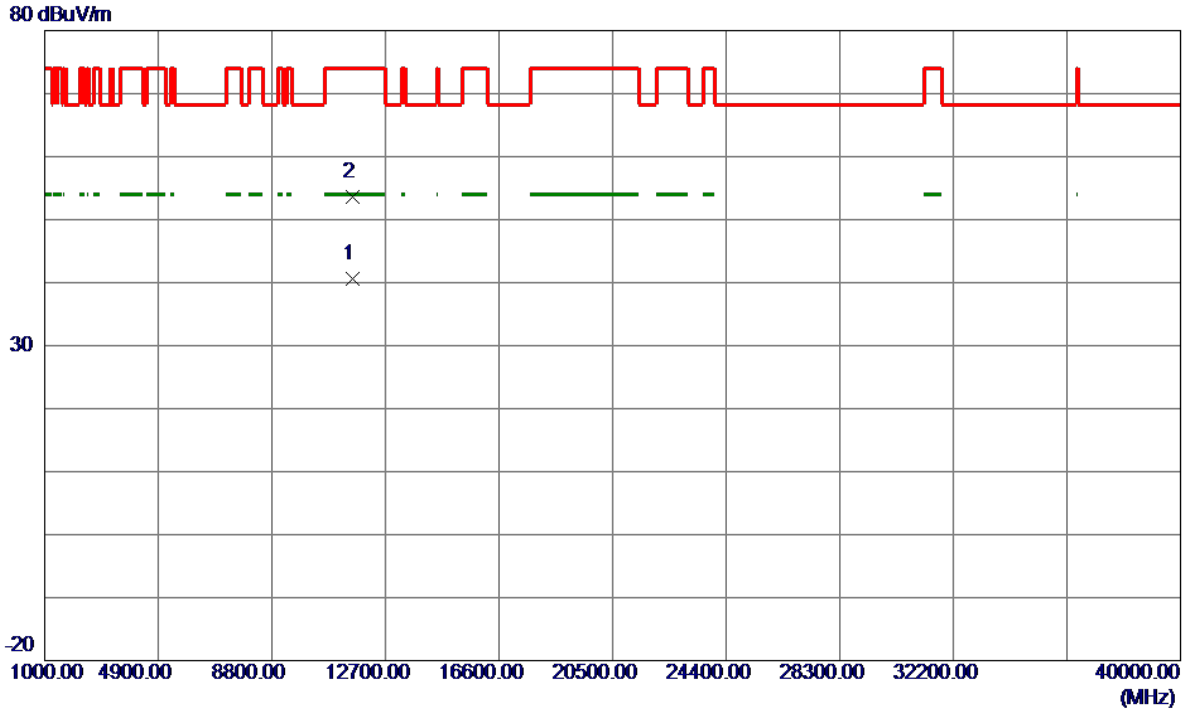

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11584.0000	22.86	17.83	40.69	54.00	-13.31	AVG	
2	11586.5000	35.81	17.83	53.64	74.00	-20.36	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Horizontal

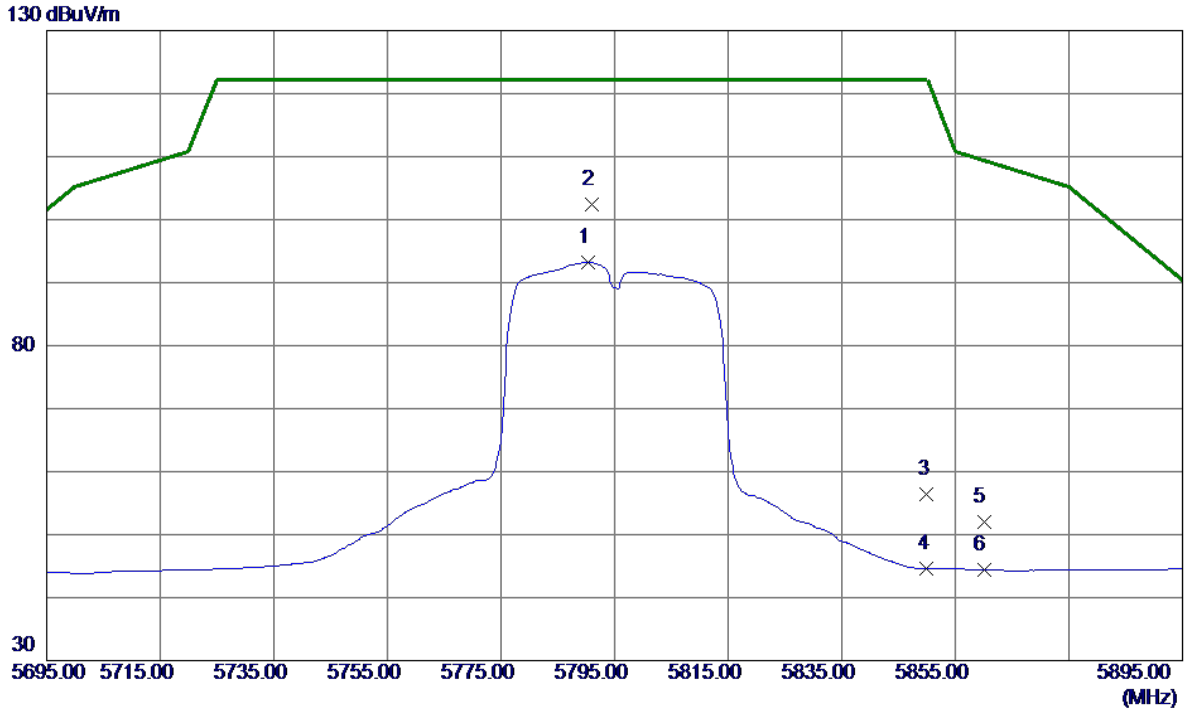

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5790.4000	49.46	43.76	93.22	122.20	-28.98	AVG	
2 *	5791.0000	58.68	43.76	102.44	122.20	-19.76	Peak	
3	5850.0000	12.38	43.94	56.32	122.20	-65.88	Peak	
4	5850.0000	0.61	43.94	44.55	122.20	-77.65	AVG	
5	5860.0000	8.06	43.97	52.03	109.40	-57.37	Peak	
6	5860.0000	0.38	43.97	44.35	109.40	-65.05	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Horizontal

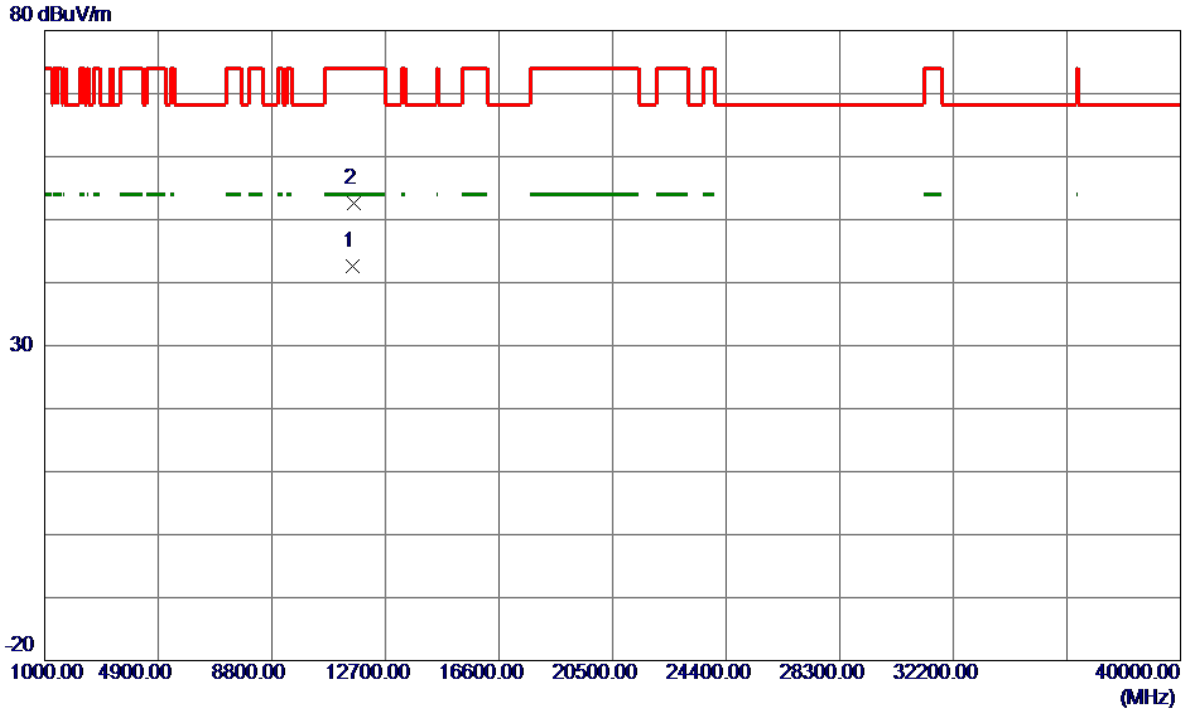

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11591.1000	24.73	17.83	42.56	54.00	-11.44	AVG	
2	11595.7000	34.79	17.83	52.62	74.00	-21.38	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Vertical

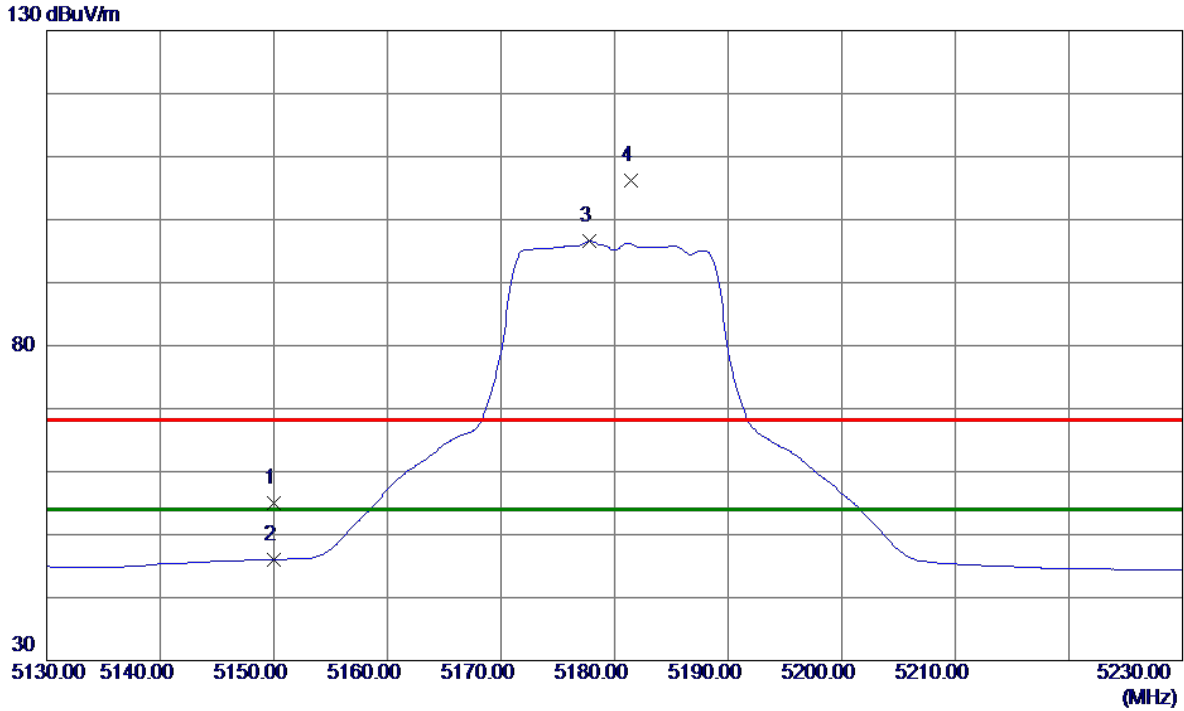

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	13.88	41.10	54.98	68.30	-13.32	Peak	
2	5150.0000	4.90	41.10	46.00	54.00	-8.00	AVG	
3 *	5177.8000	55.29	41.24	96.53	54.00	42.53	AVG	No Limit
4	5181.4000	64.87	41.26	106.13	68.30	37.83	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Vertical

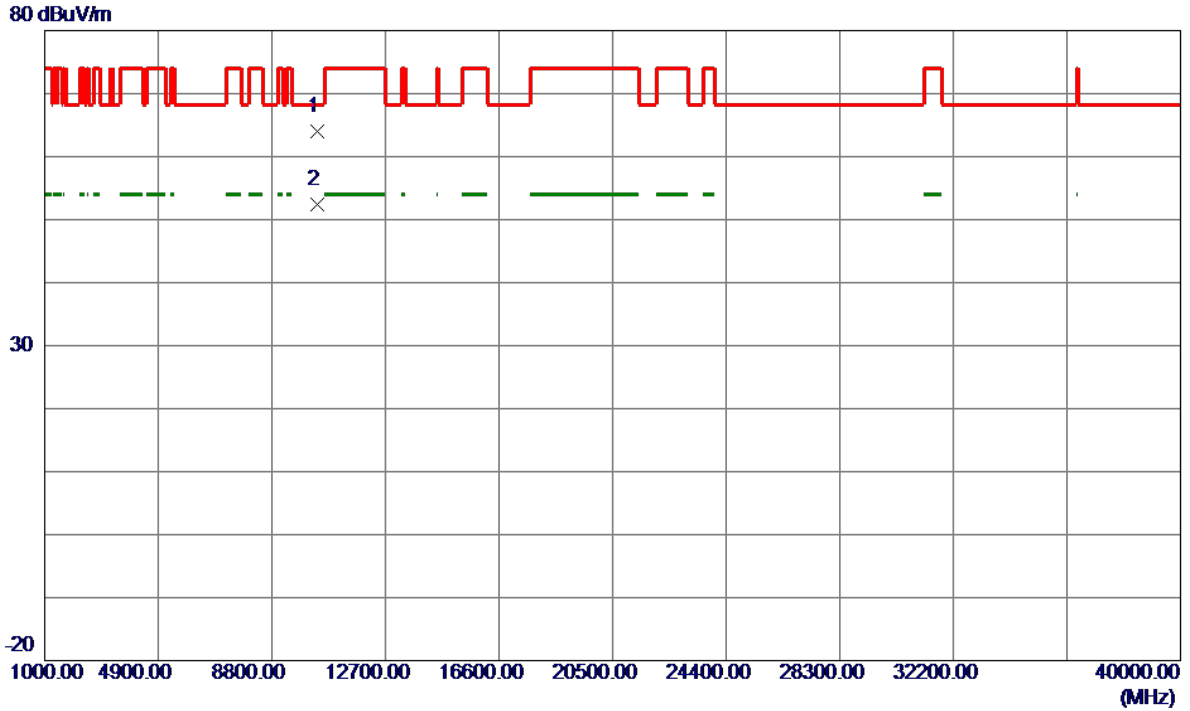

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10356.0599	47.71	16.32	64.03	68.30	-4.27	Peak	
2	10360.9600	35.98	16.33	52.31	999.00	-946.69	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Horizontal

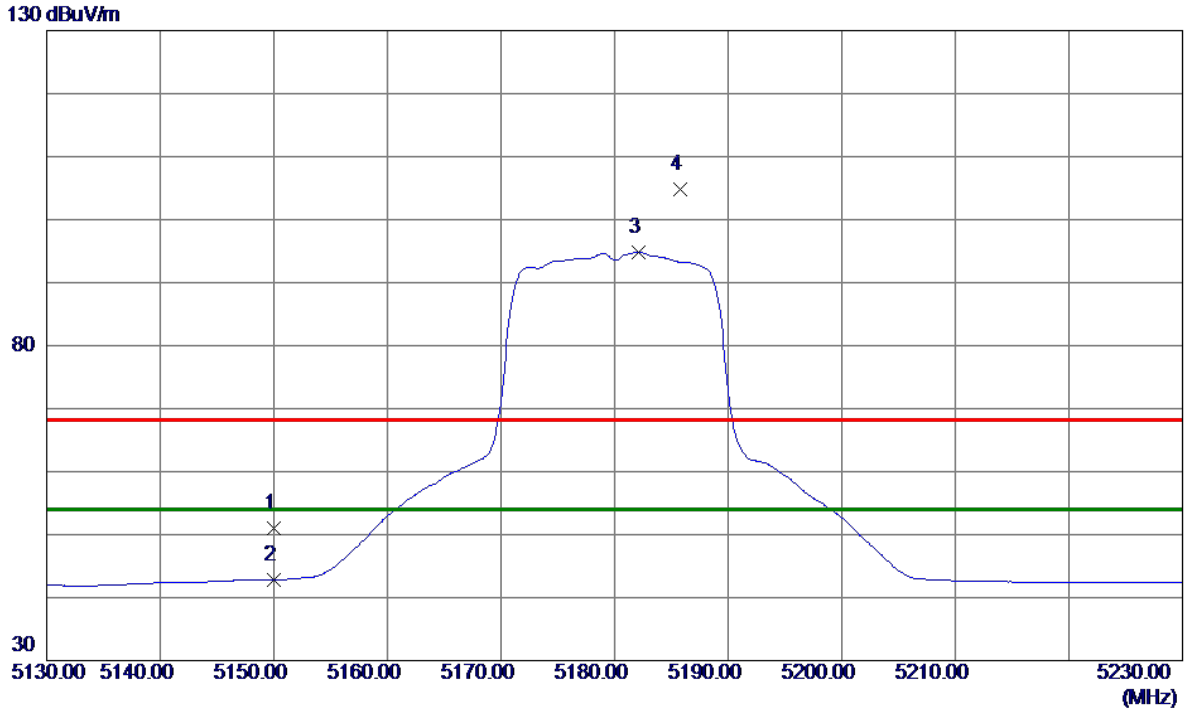

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	9.88	41.10	50.98	68.30	-17.32	Peak	
2	5150.0000	1.74	41.10	42.84	54.00	-11.16	AVG	
3 *	5182.1000	53.59	41.26	94.85	54.00	40.85	AVG	No Limit
4	5185.8000	63.44	41.28	104.72	68.30	36.42	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Horizontal

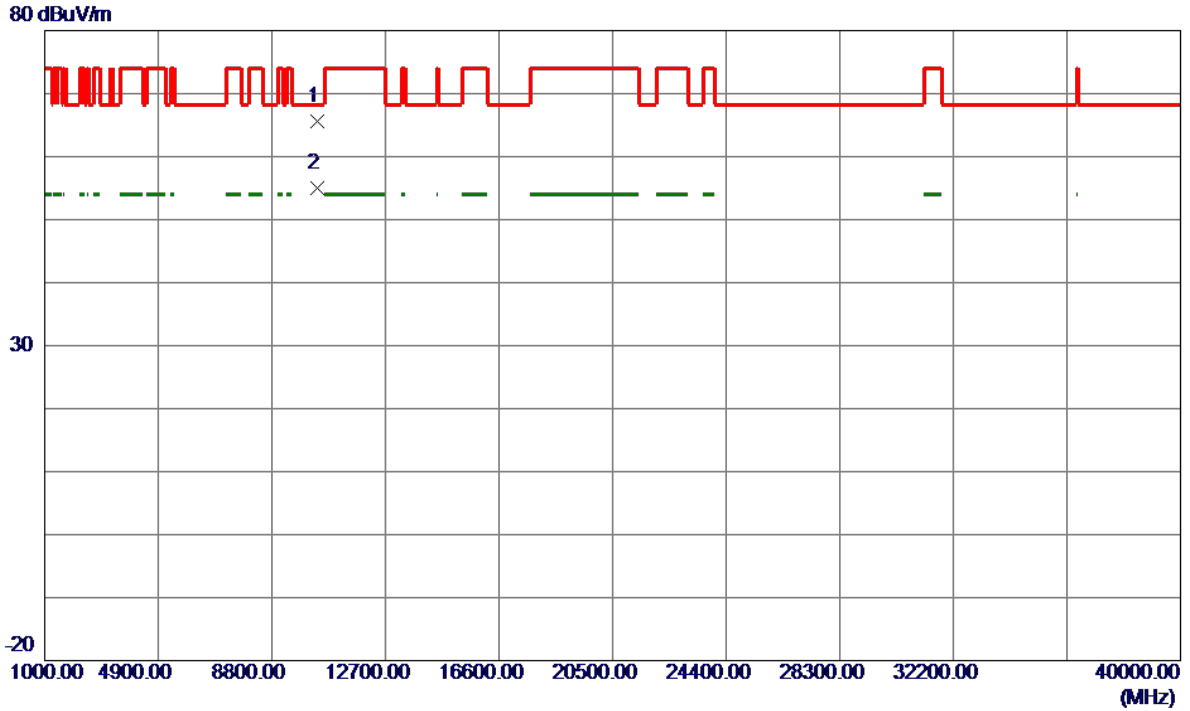

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10359.6000	49.23	16.33	65.56	68.30	-2.74	Peak	
2	10360.9000	38.70	16.33	55.03	999.00	-943.97	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz


Vertical

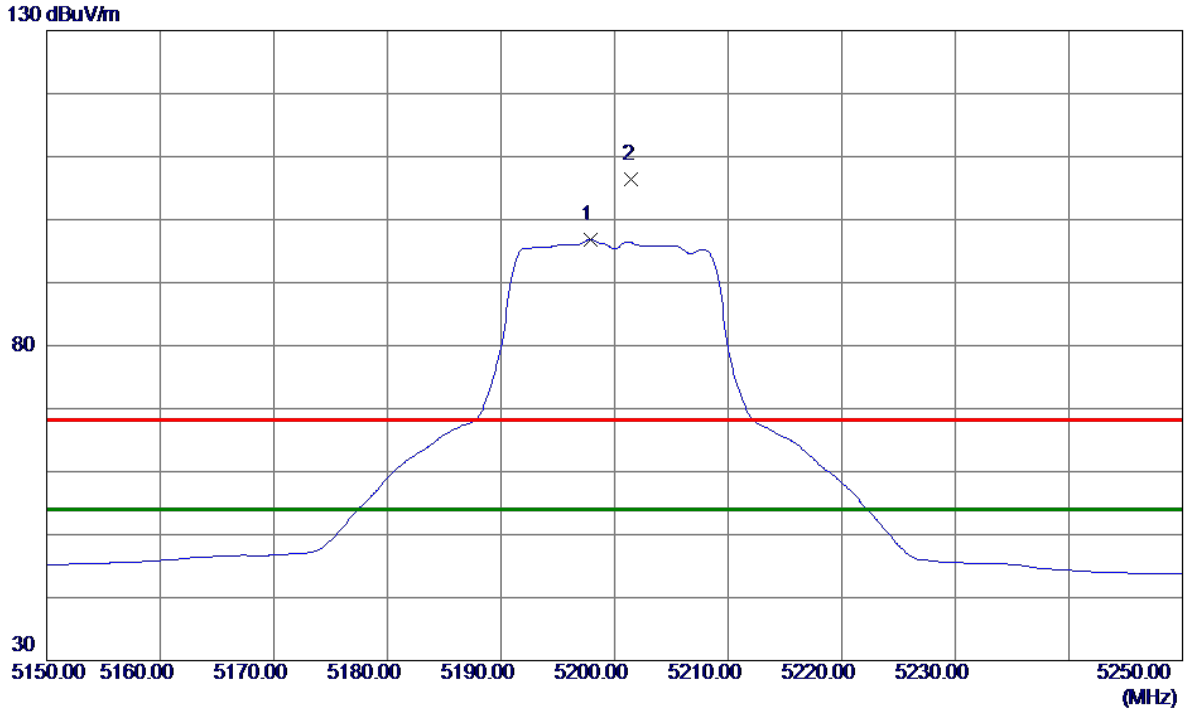

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5197.9000	55.42	41.35	96.77	54.00	42.77	AVG	No Limit
2	5201.5000	65.08	41.36	106.44	68.30	38.14	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz


Vertical

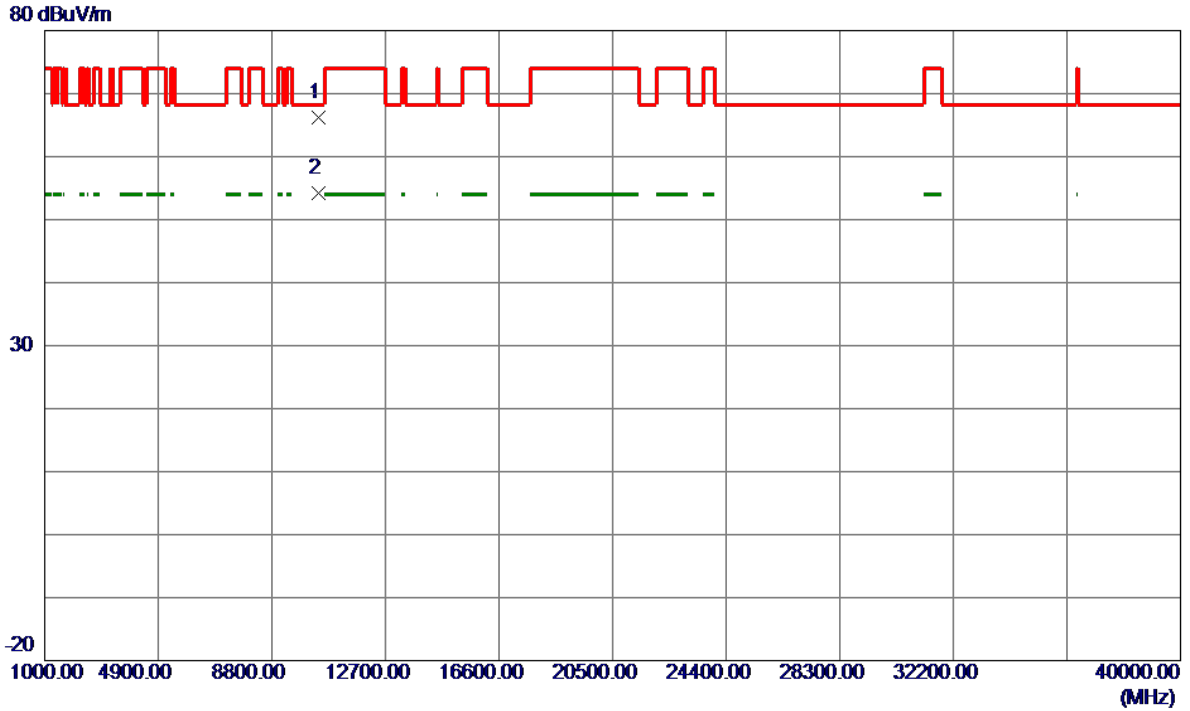

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10396.4400	49.74	16.43	66.17	68.30	-2.13	Peak	
2	10398.5199	37.74	16.43	54.17	999.00	-944.83	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz


Horizontal

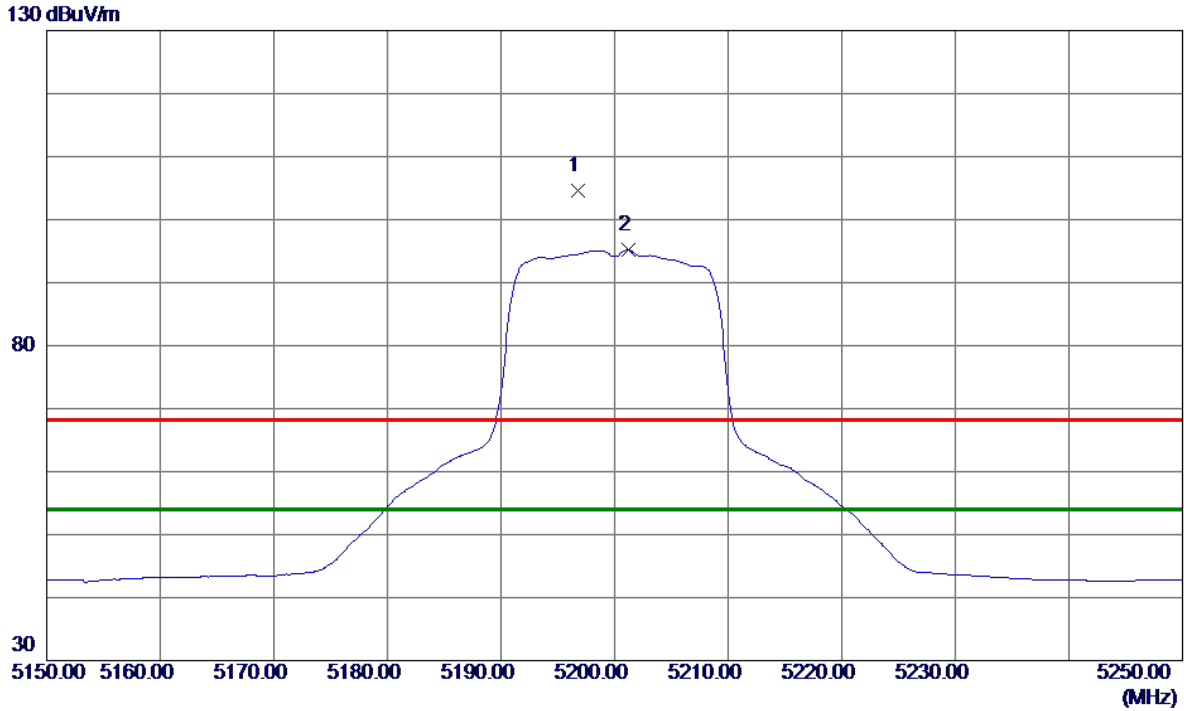

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5196.8000	63.27	41.34	104.61	68.30	36.31	Peak	No Limit
2 *	5201.2000	53.77	41.36	95.13	54.00	41.13	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz


Horizontal

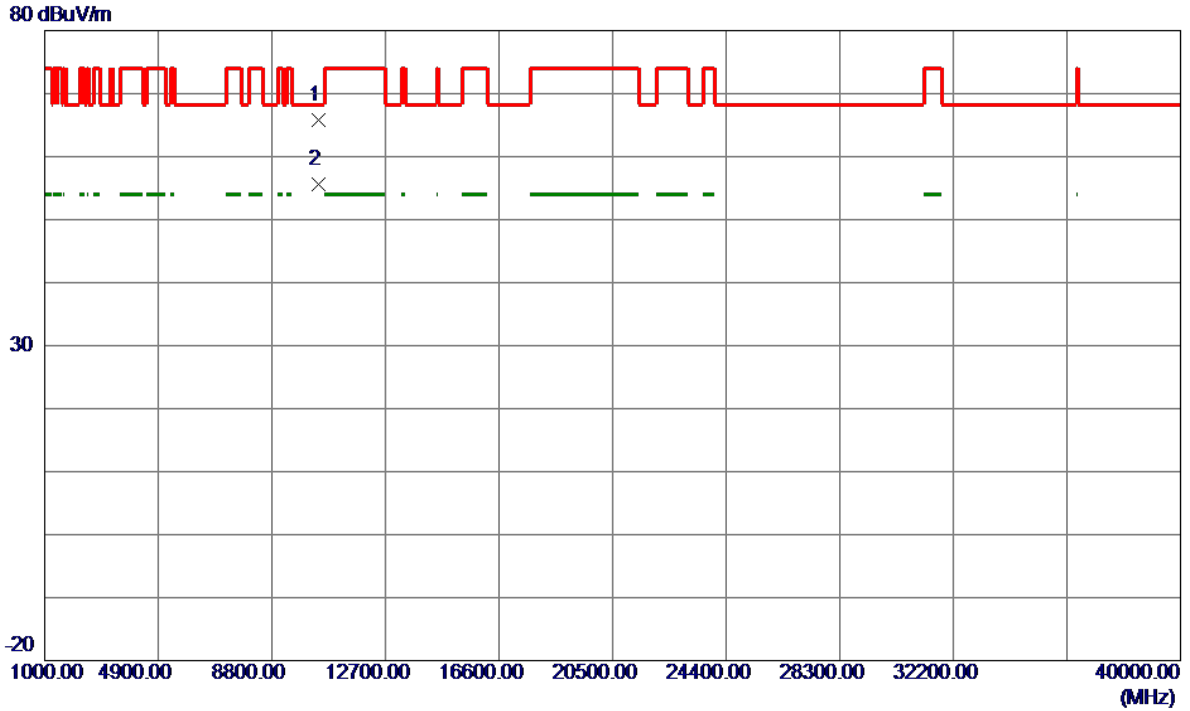

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10395.7000	49.40	16.43	65.83	68.30	-2.47	Peak	
2	10399.2000	39.14	16.44	55.58	999.00	-943.42	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Vertical

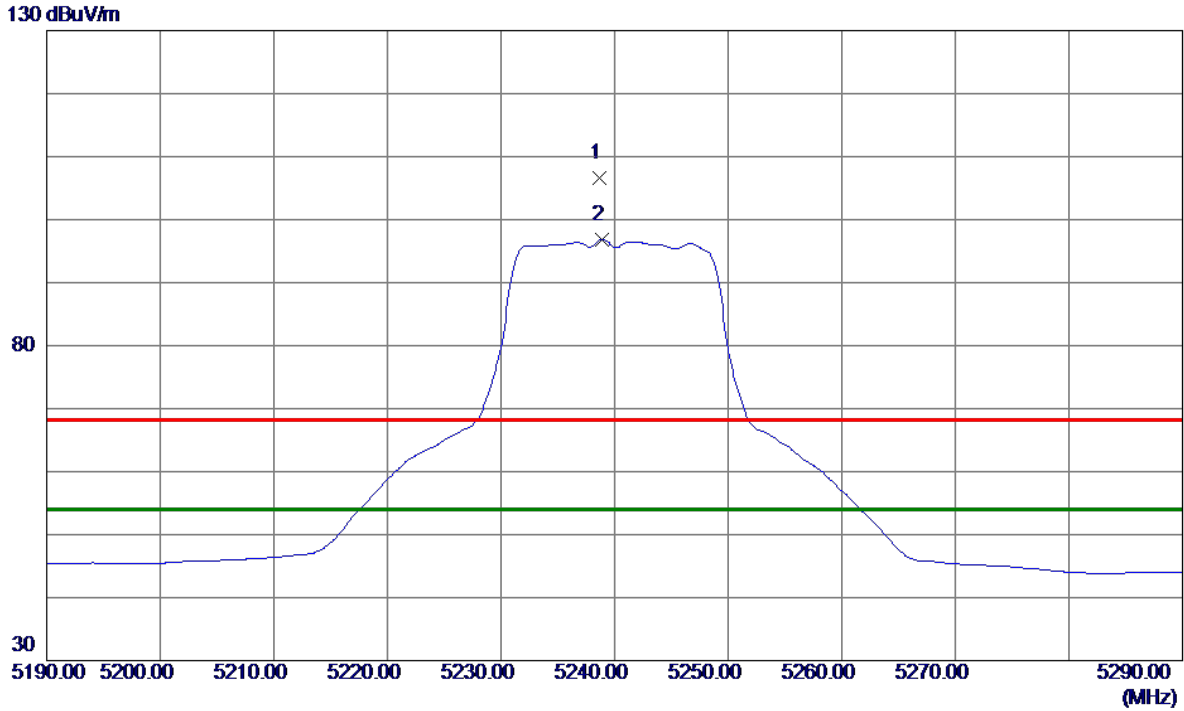

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5238.7000	65.09	41.55	106.64	68.30	38.34	Peak	No Limit
2 *	5238.9000	55.24	41.55	96.79	54.00	42.79	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Vertical

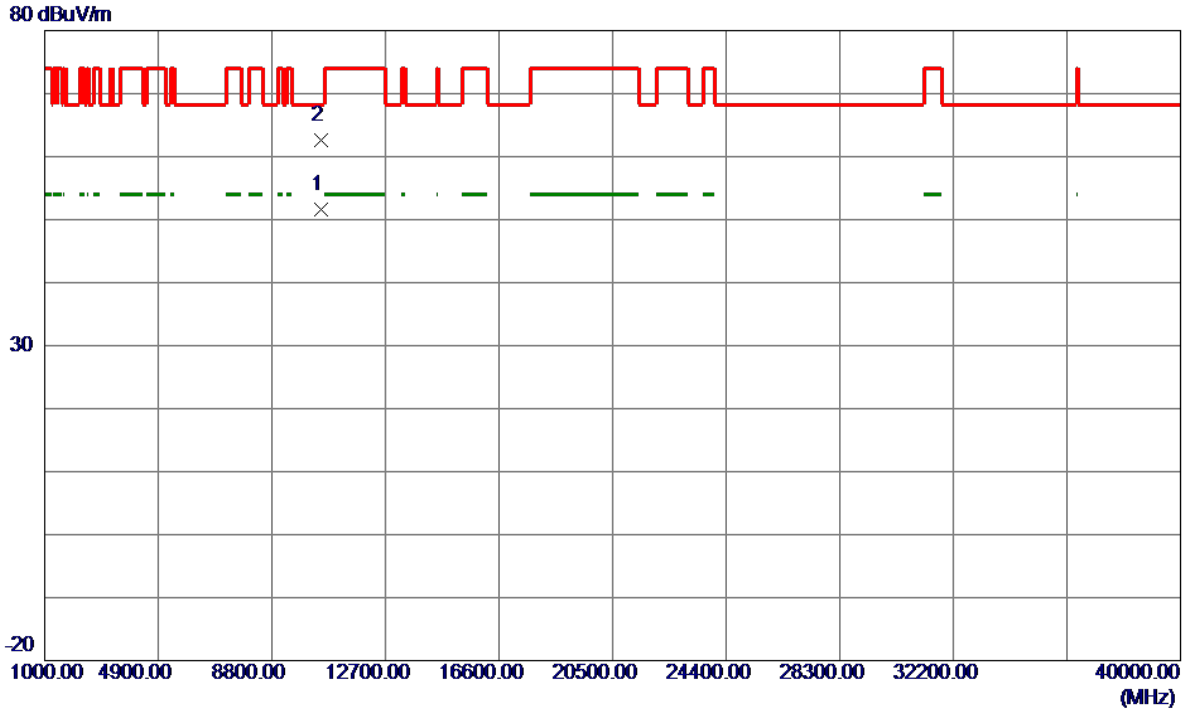

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10481.9800	34.97	16.66	51.63	999.00	-947.37	AVG	
2 *	10482.4000	46.02	16.66	62.68	68.30	-5.62	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Horizontal

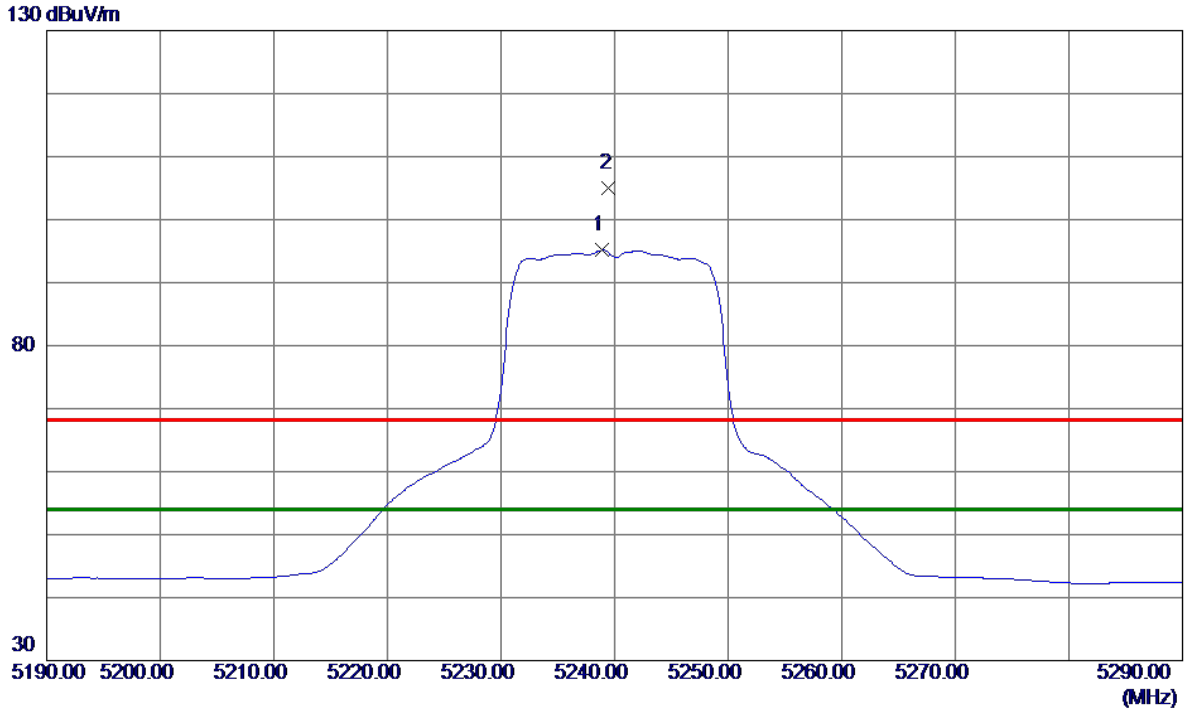

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5238.9000	53.57	41.55	95.12	54.00	41.12	AVG	No Limit
2	5239.5000	63.36	41.56	104.92	68.30	36.62	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Horizontal

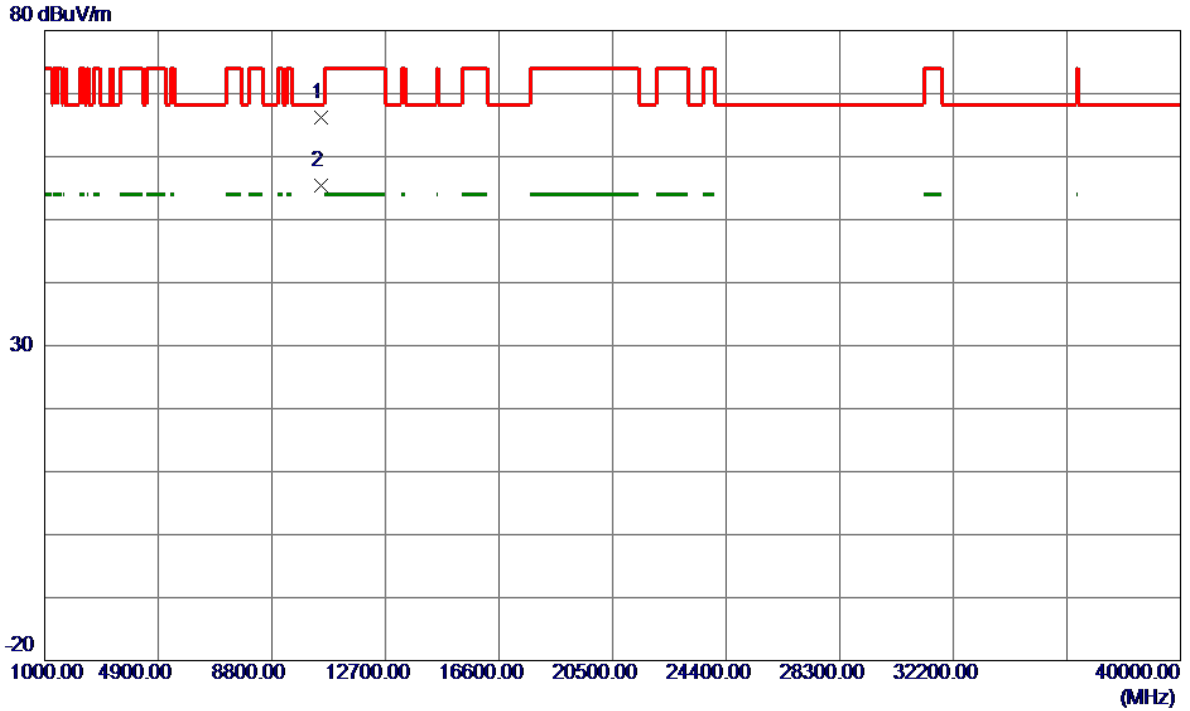

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10479.7500	49.50	16.65	66.15	68.30	-2.15	Peak	
2	10480.6000	38.72	16.65	55.37	999.00	-943.63	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Vertical

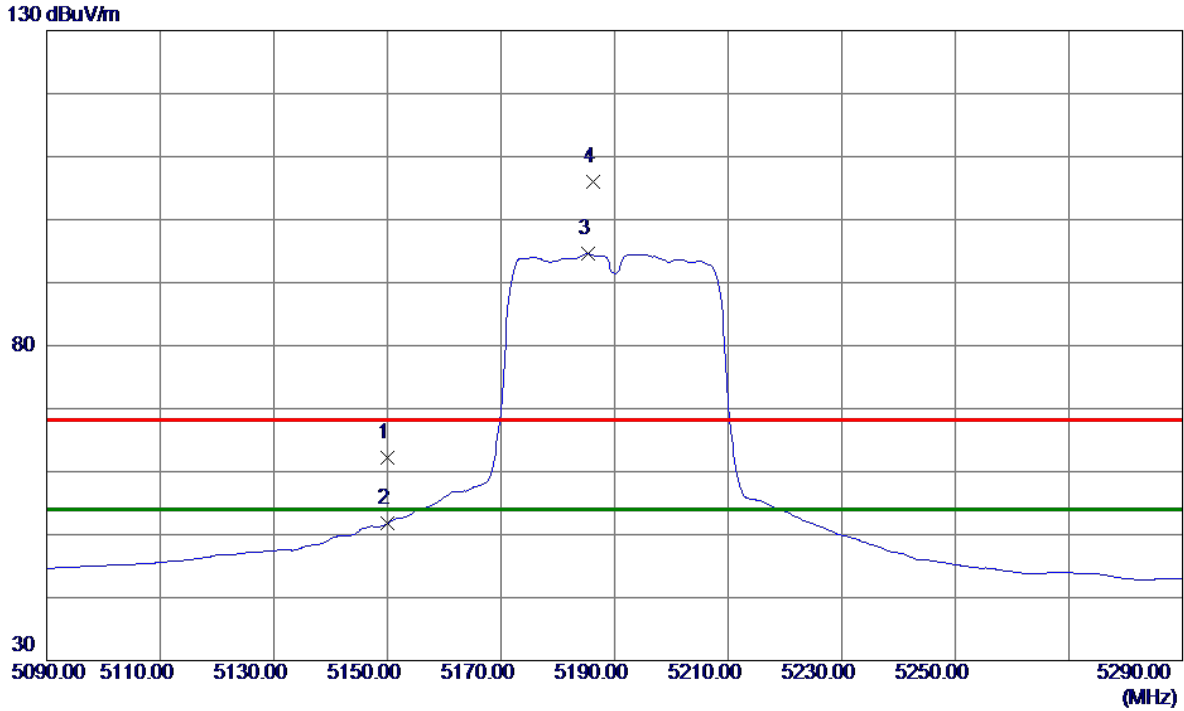

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	21.05	41.10	62.15	68.30	-6.15	Peak	
2	5150.0000	10.65	41.10	51.75	54.00	-2.25	AVG	
3 *	5185.4000	53.32	41.28	94.60	54.00	40.60	AVG	No Limit
4	5186.2000	64.64	41.29	105.93	68.30	37.63	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical

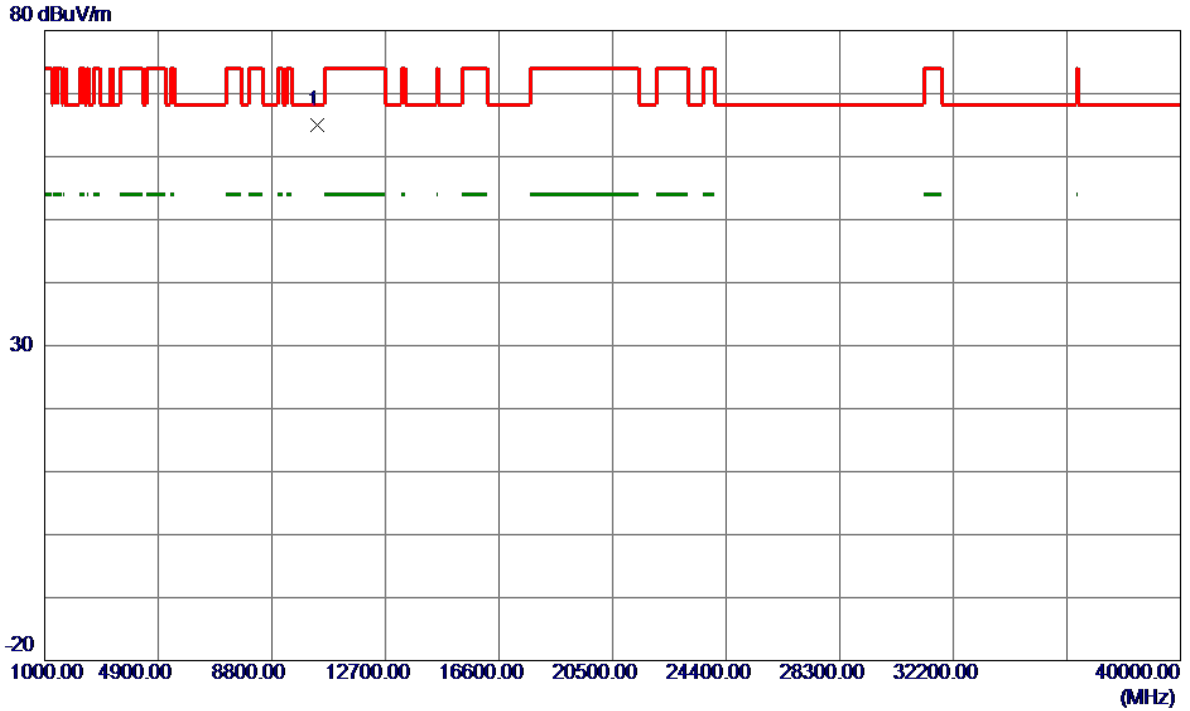


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10381.1500	48.64	16.39	65.03	68.30	-3.27	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal


130 dBuV/m

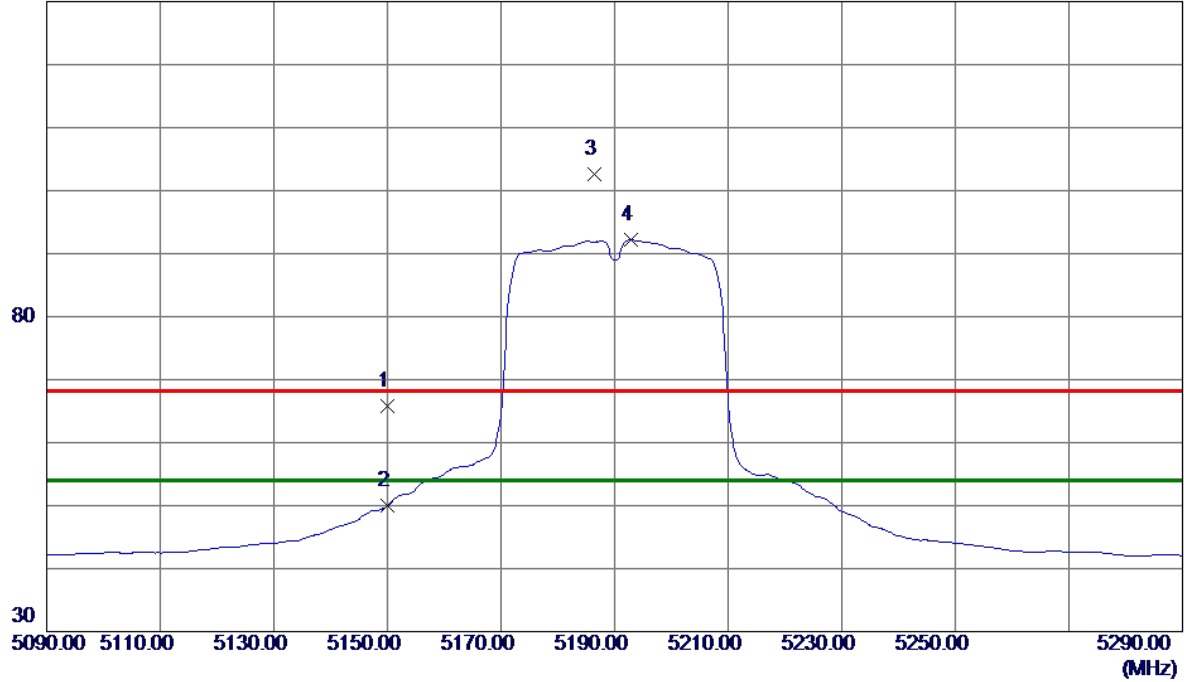

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	24.79	41.10	65.89	68.30	-2.41	Peak	
2	5150.0000	8.84	41.10	49.94	54.00	-4.06	AVG	
3	5186.4000	61.40	41.29	102.69	68.30	34.39	Peak	No Limit
4 *	5192.8000	50.89	41.32	92.21	54.00	38.21	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Horizontal

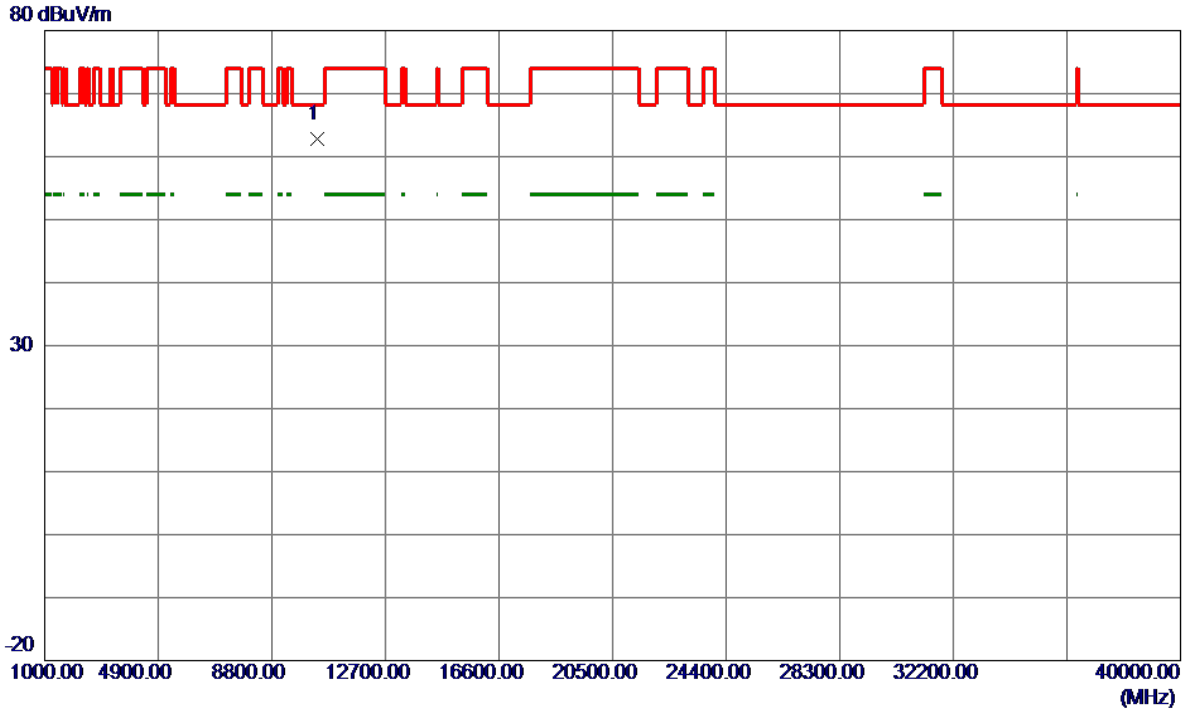

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10380.1000	46.33	16.38	62.71	68.30	-5.59	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Vertical

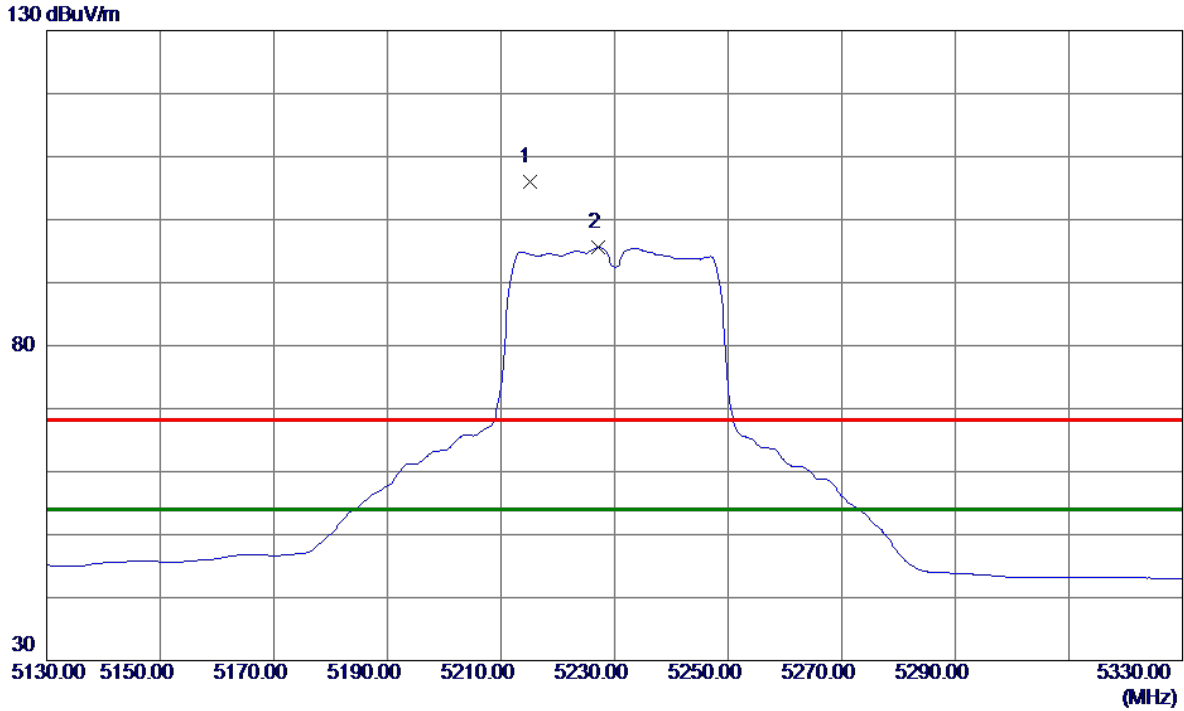

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5215.0000	64.60	41.43	106.03	68.30	37.73	Peak	No Limit
2 *	5227.2000	54.10	41.49	95.59	54.00	41.59	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Vertical

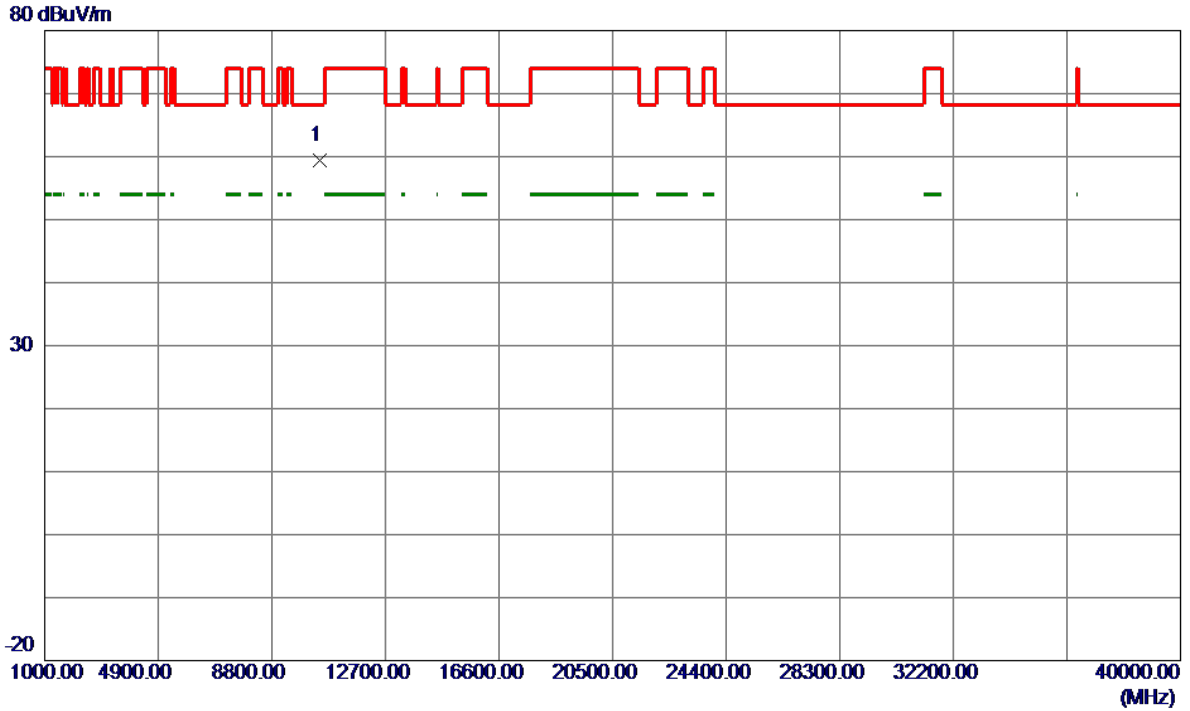

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10457.6000	42.89	16.59	59.48	68.30	-8.82	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Horizontal

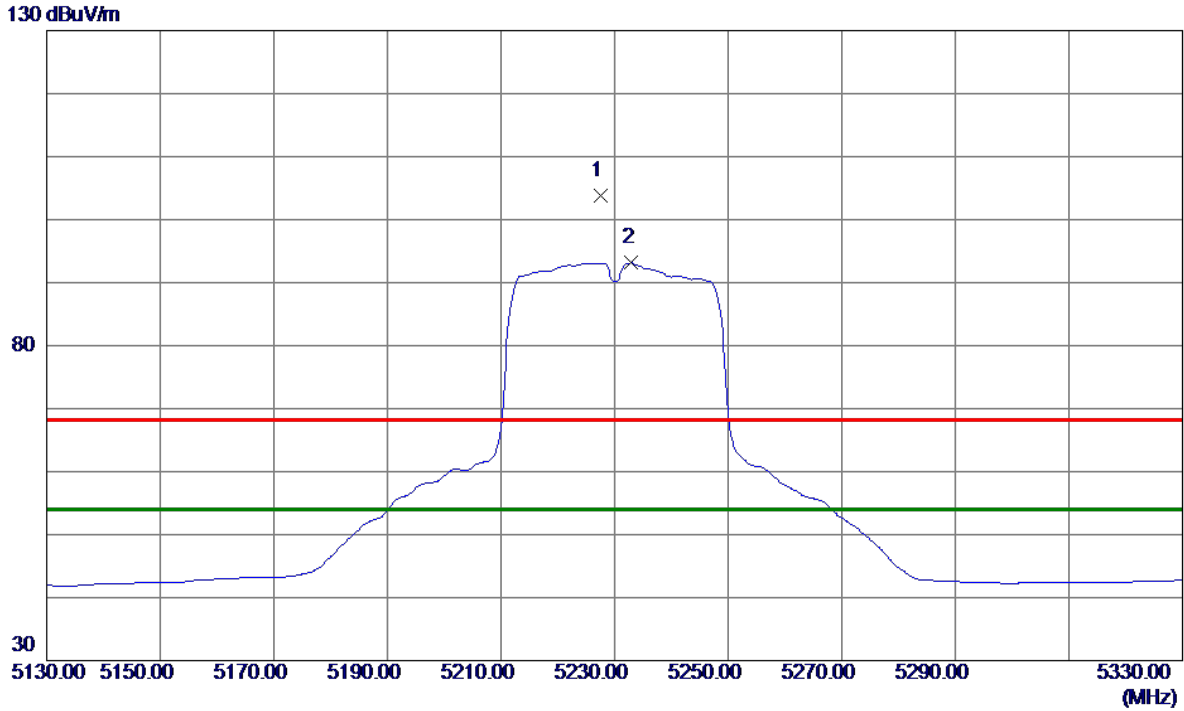

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5227.6000	62.26	41.50	103.76	68.30	35.46	Peak	No Limit
2 *	5233.0000	51.59	41.52	93.11	54.00	39.11	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Horizontal

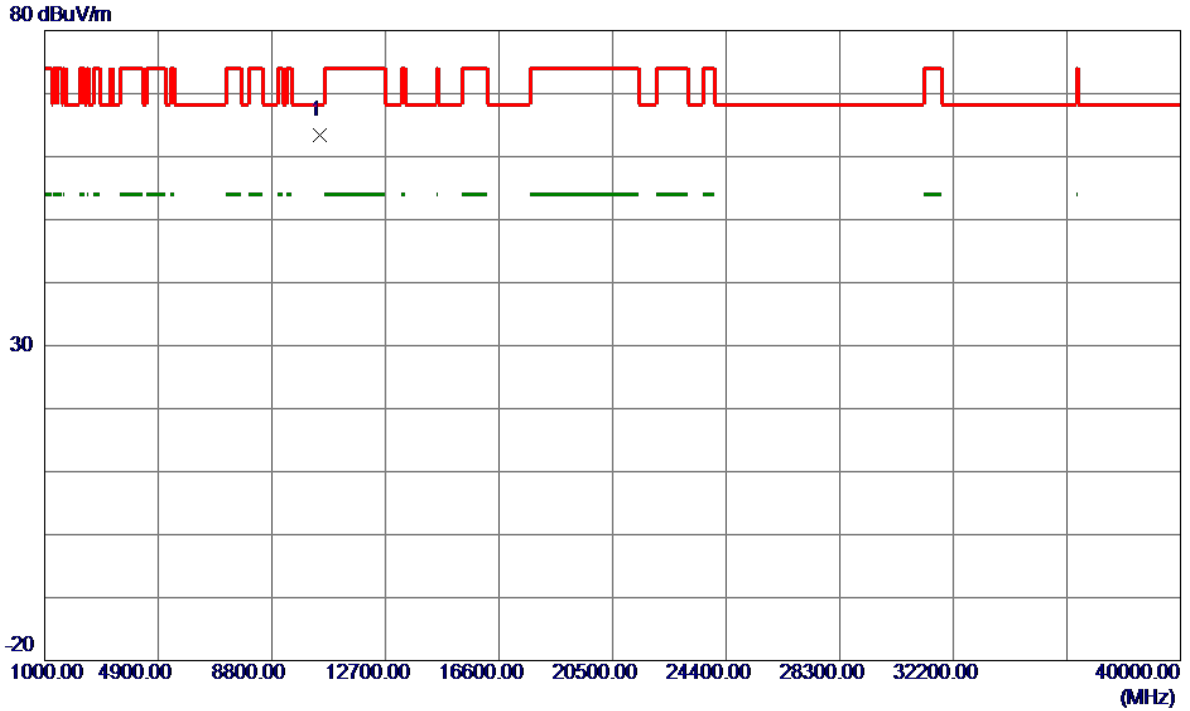

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10467.1000	46.74	16.62	63.36	68.30	-4.94	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Vertical

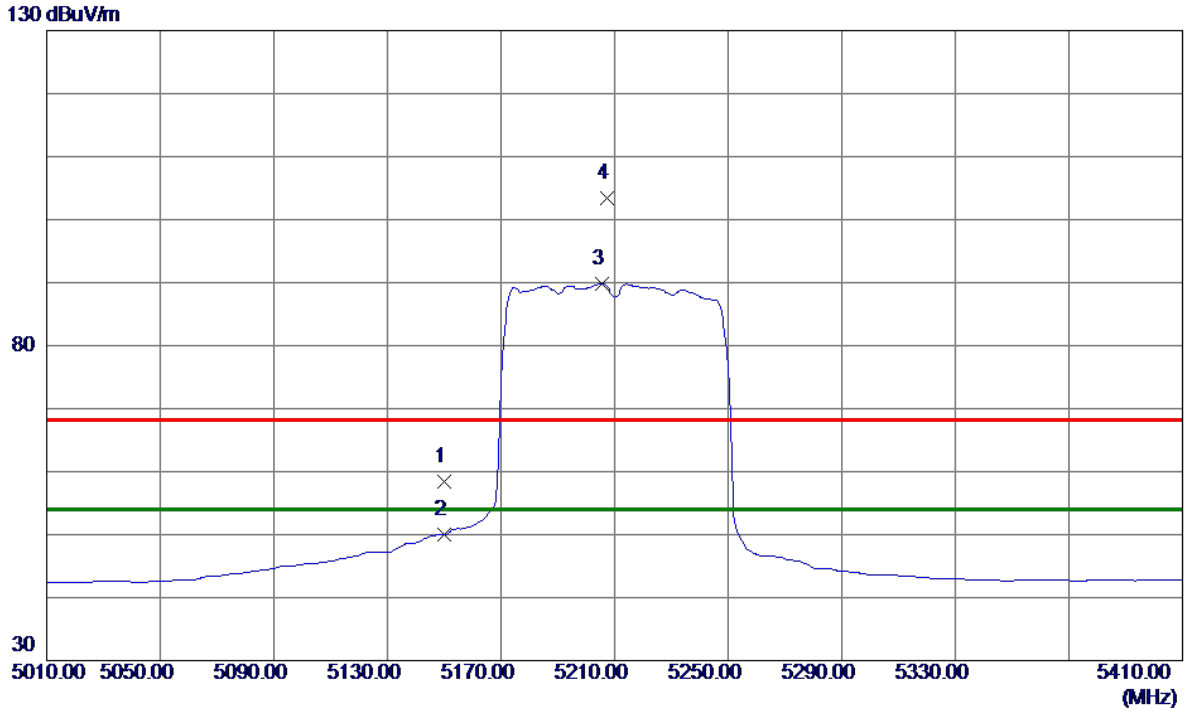

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	17.38	41.10	58.48	68.30	-9.82	Peak	
2	5150.0000	8.83	41.10	49.93	54.00	-4.07	AVG	
3 *	5205.6000	48.46	41.38	89.84	54.00	35.84	AVG	No Limit
4	5207.2000	61.93	41.39	103.32	68.30	35.02	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Vertical

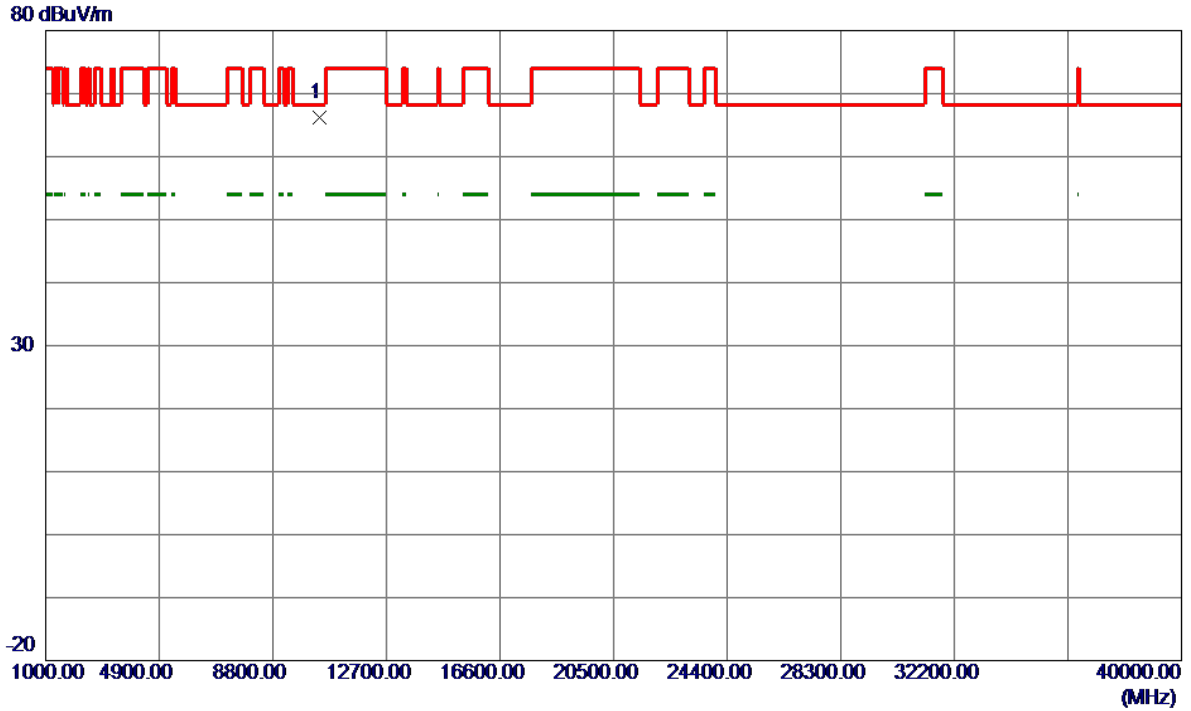

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10419.6740	49.69	16.49	66.18	68.30	-2.12	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Horizontal

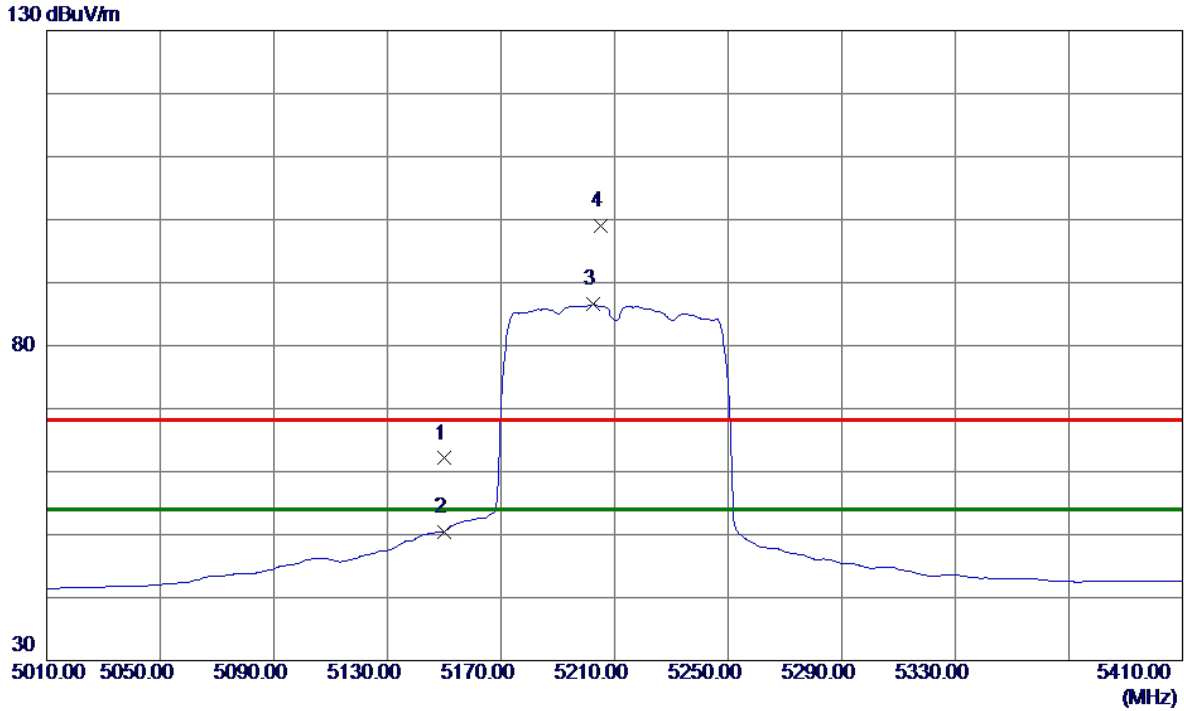

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	21.00	41.10	62.10	68.30	-6.20	Peak	
2	5150.0000	9.34	41.10	50.44	54.00	-3.56	AVG	
3 *	5202.4000	45.15	41.37	86.52	54.00	32.52	AVG	No Limit
4	5205.2000	57.70	41.38	99.08	68.30	30.78	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Horizontal

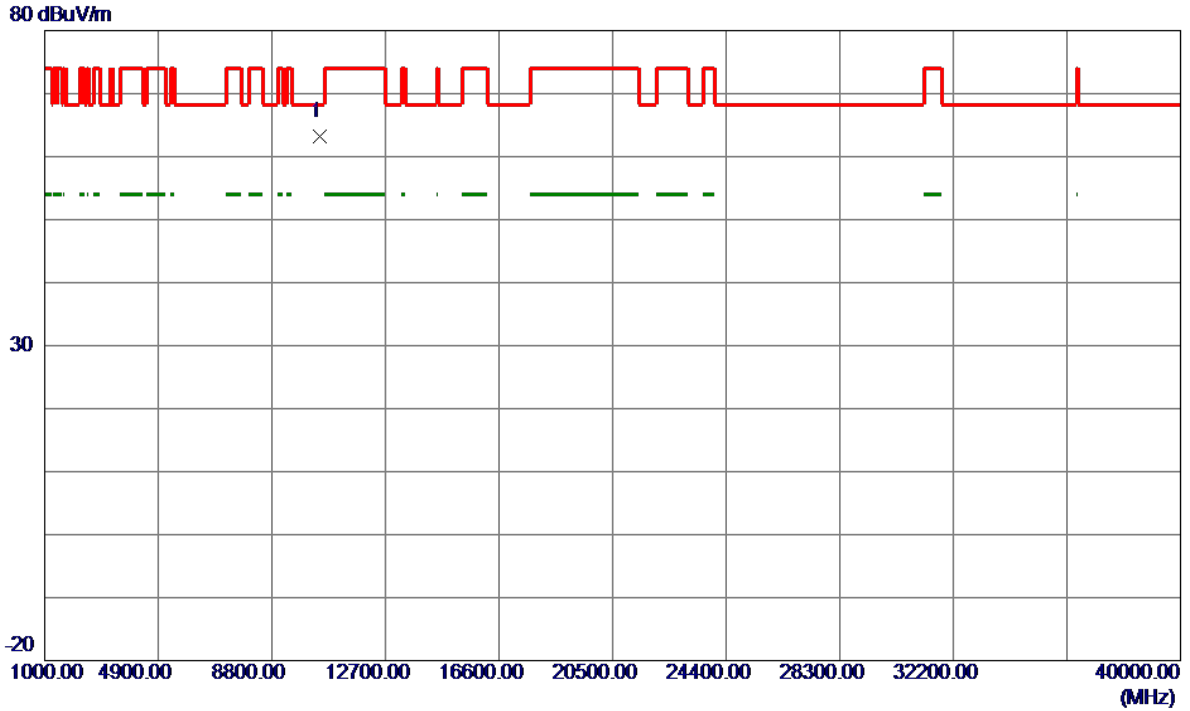

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10444.2000	46.64	16.56	63.20	68.30	-5.10	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Vertical

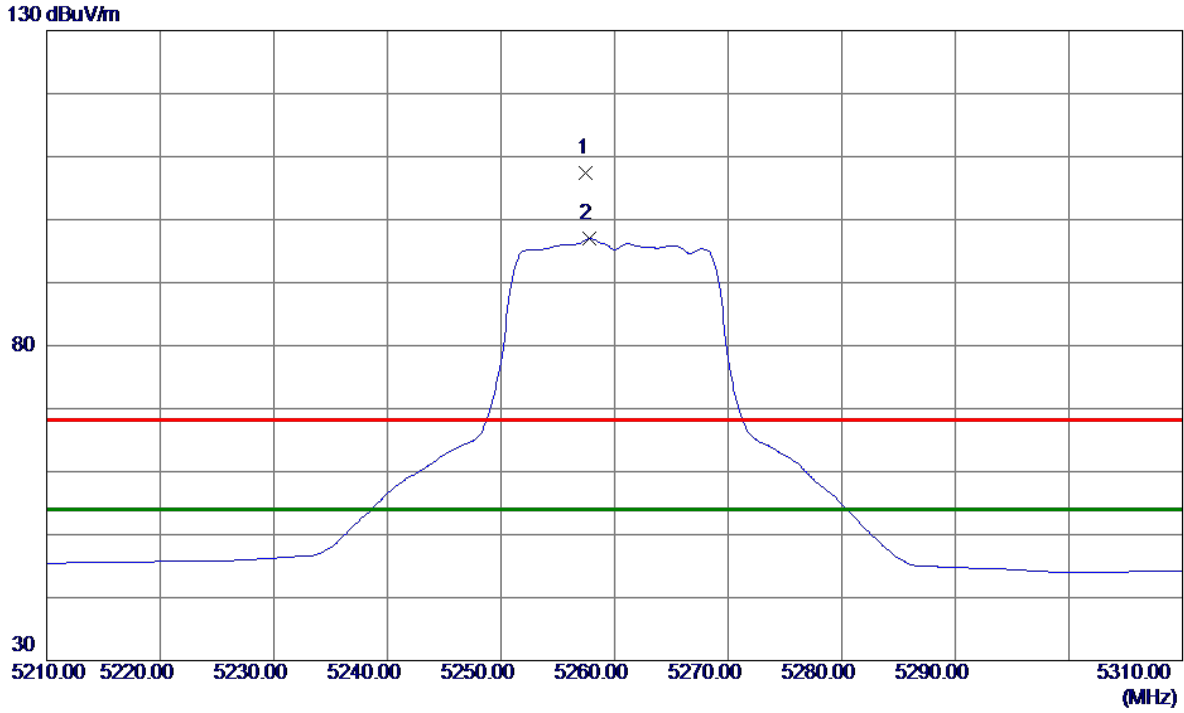

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5257.5000	65.75	41.65	107.40	68.30	39.10	Peak	No Limit
2 *	5257.8000	55.27	41.65	96.92	54.00	42.92	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Vertical

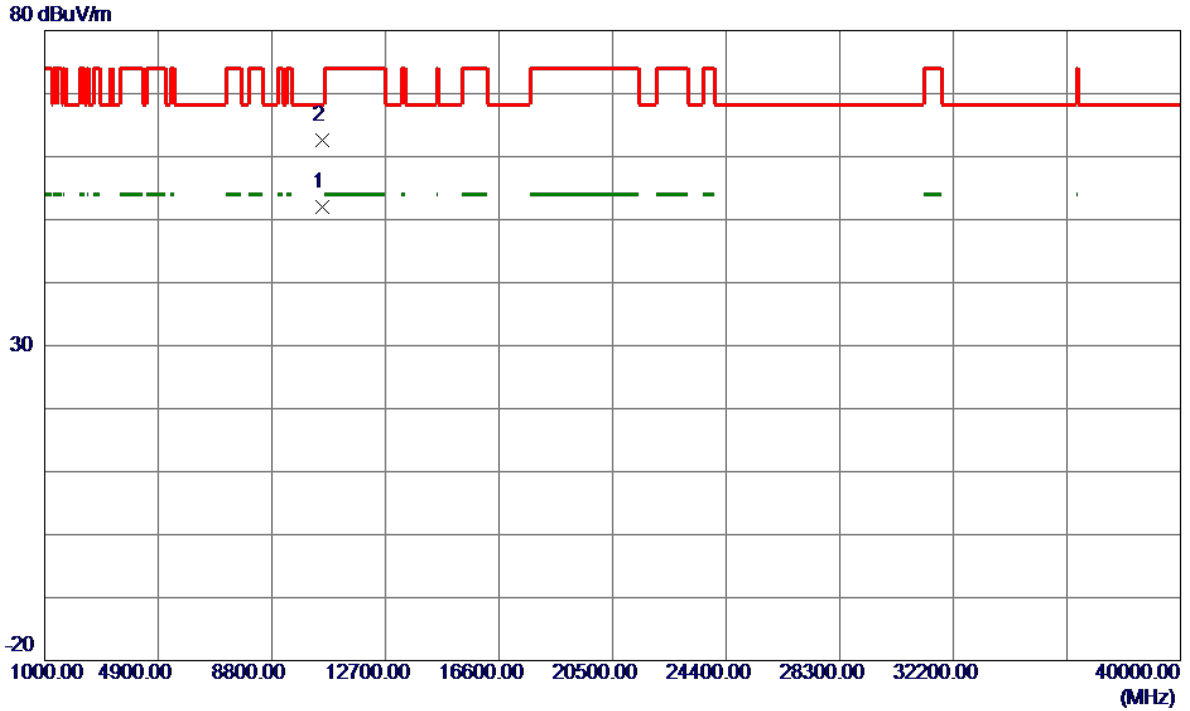

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10518.4000	35.29	16.68	51.97	999.00	-947.03	AVG	
2 *	10520.7000	45.83	16.68	62.51	68.30	-5.79	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Horizontal

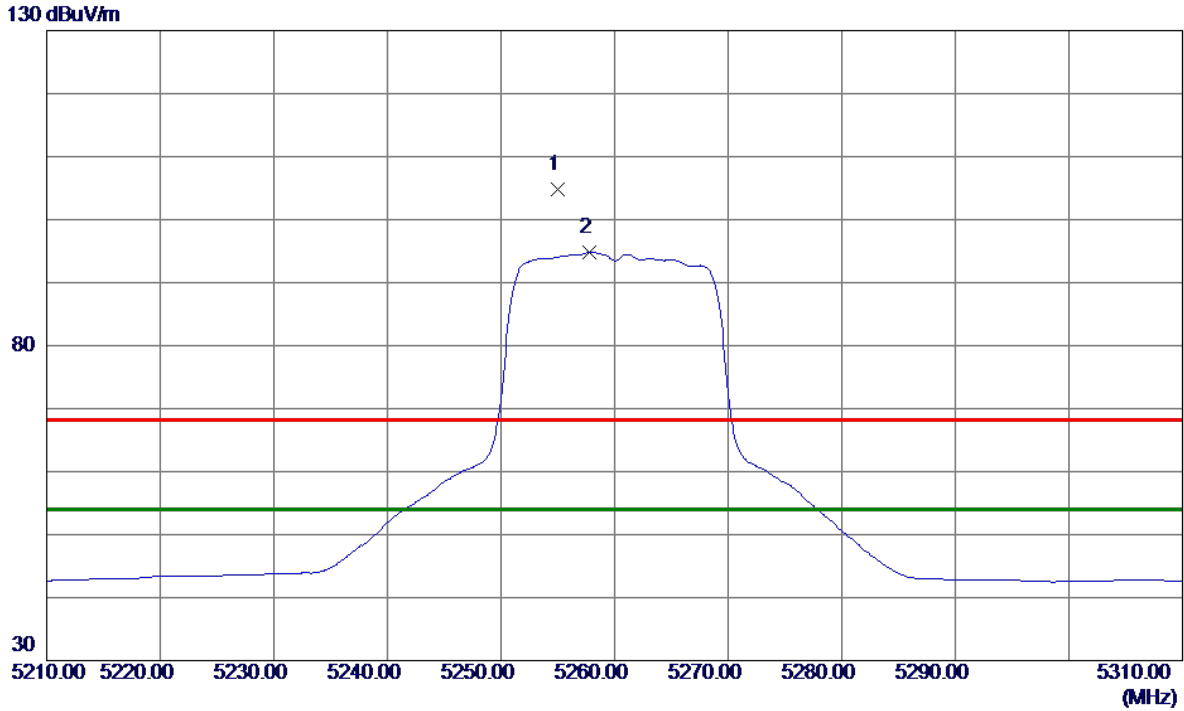

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5255.0000	63.23	41.64	104.87	68.30	36.57	Peak	No Limit
2 *	5257.8000	53.14	41.65	94.79	54.00	40.79	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Horizontal

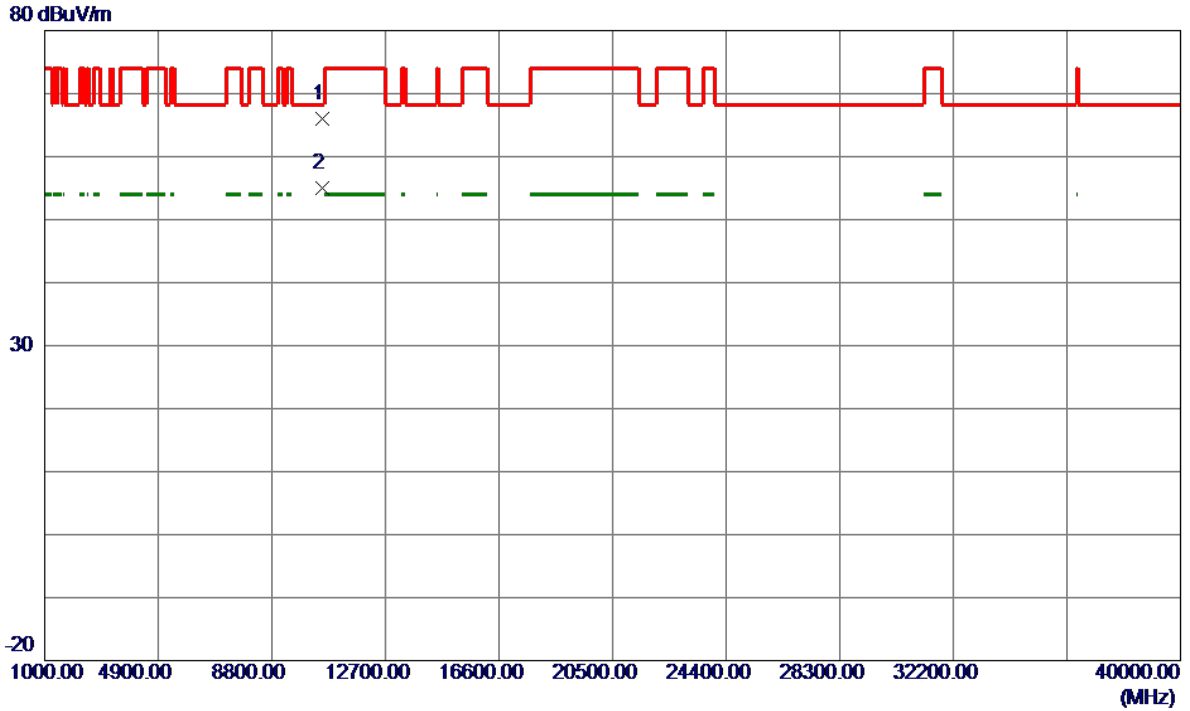

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.0500	49.23	16.68	65.91	68.30	-2.39	Peak	
2	10520.5000	38.41	16.68	55.09	999.00	-943.91	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz


Vertical

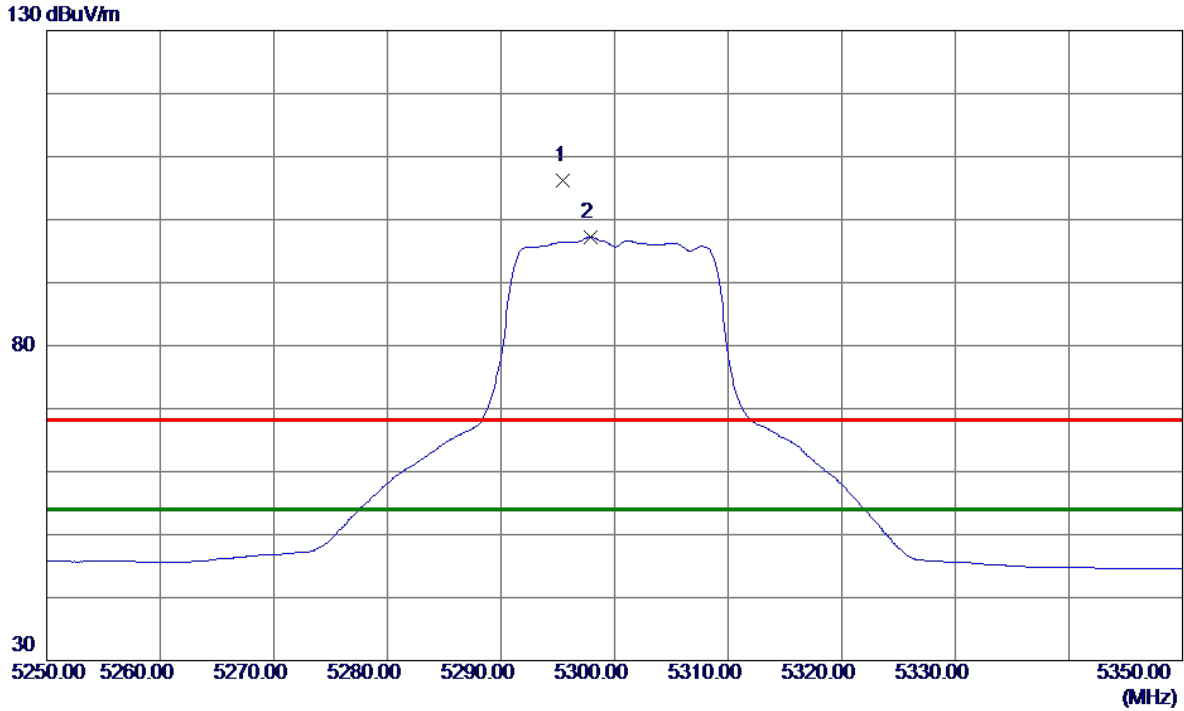

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5295.5000	64.38	41.84	106.22	68.30	37.92	Peak	No Limit
2 *	5297.9000	55.35	41.85	97.20	54.00	43.20	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz


Vertical

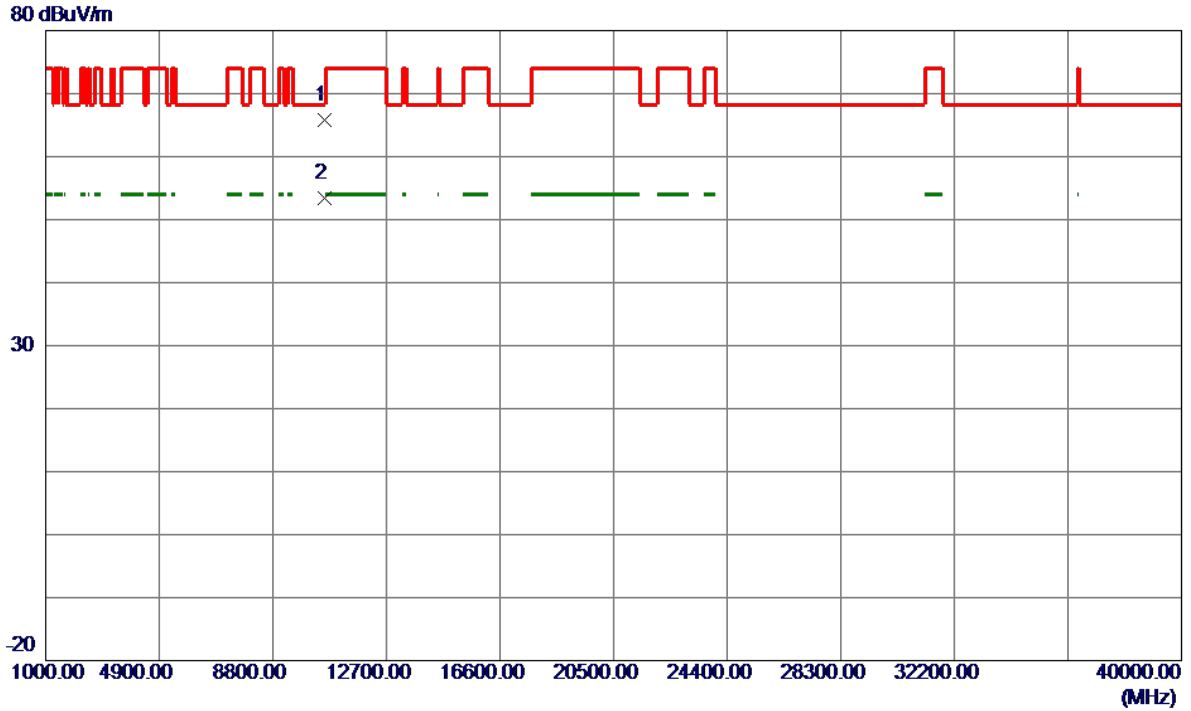

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10596.3000	49.22	16.57	65.79	68.30	-2.51	Peak	
2	10597.9000	36.76	16.57	53.33	999.00	-945.67	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz


Horizontal

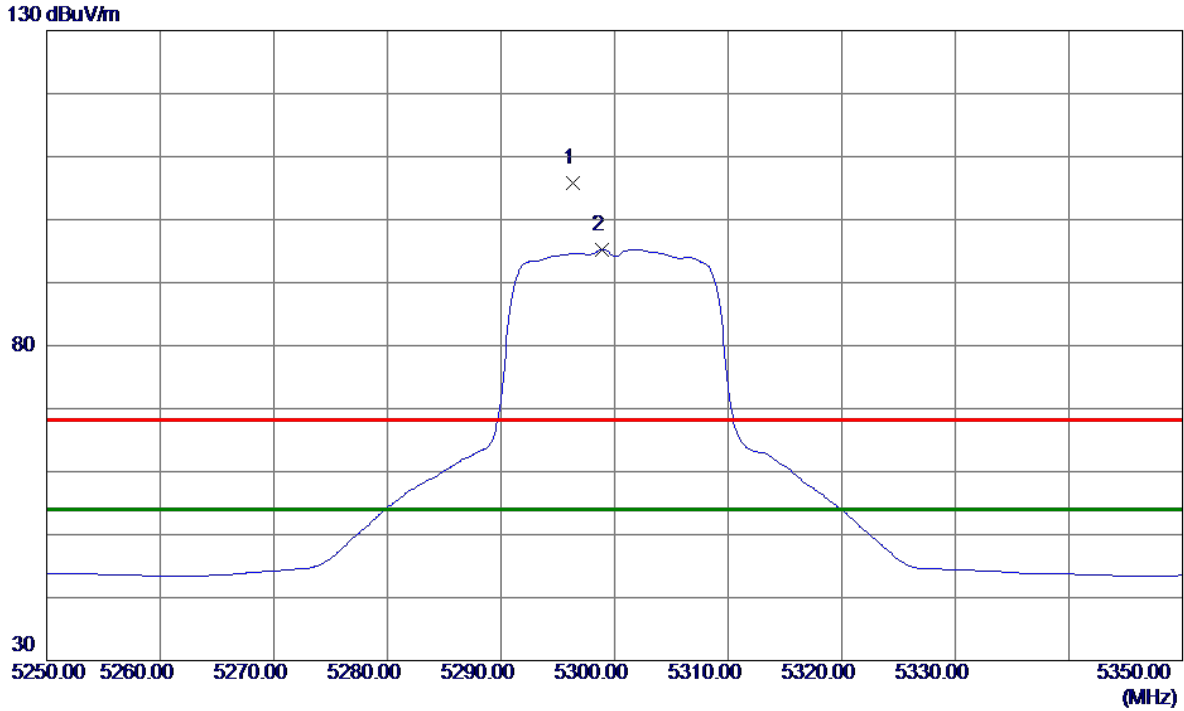

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5296.3000	64.01	41.85	105.86	68.30	37.56	Peak	No Limit
2 *	5298.9000	53.35	41.86	95.21	54.00	41.21	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

Horizontal

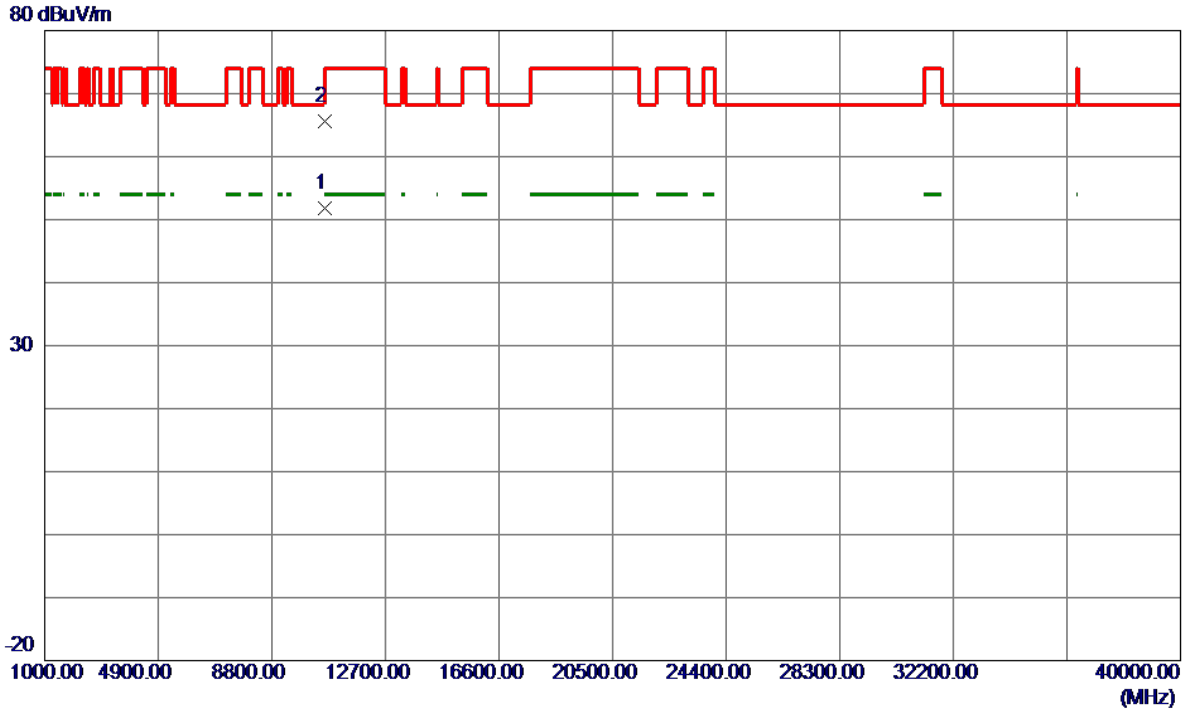


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10601.0000	35.15	16.57	51.72	54.00	-2.28	AVG	
2	10601.5000	48.97	16.57	65.54	74.00	-8.46	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Vertical


130 dBuV/m

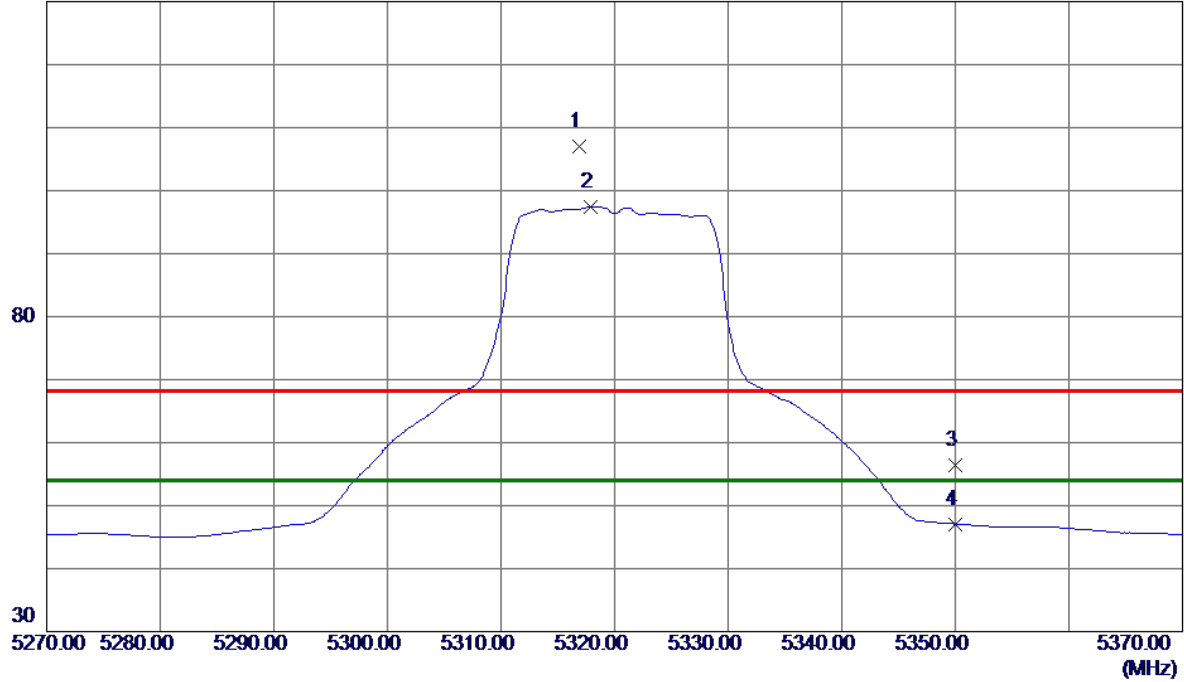

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5316.9000	64.96	41.95	106.91	68.30	38.61	Peak	No Limit
2 *	5317.9000	55.47	41.95	97.42	54.00	43.42	AVG	No Limit
3	5350.0000	14.36	42.12	56.48	68.30	-11.82	Peak	
4	5350.0000	4.96	42.12	47.08	54.00	-6.92	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Vertical

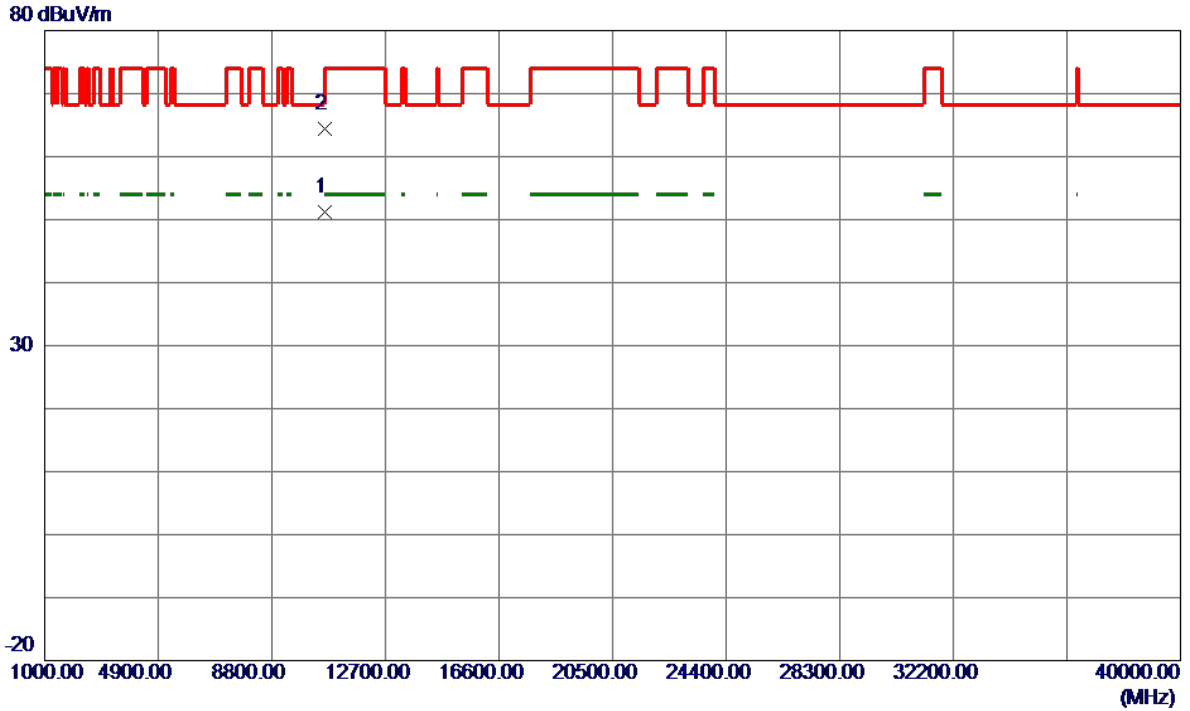

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10638.4200	34.61	16.52	51.13	54.00	-2.87	AVG	
2	10639.2000	47.83	16.52	64.35	74.00	-9.65	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Horizontal

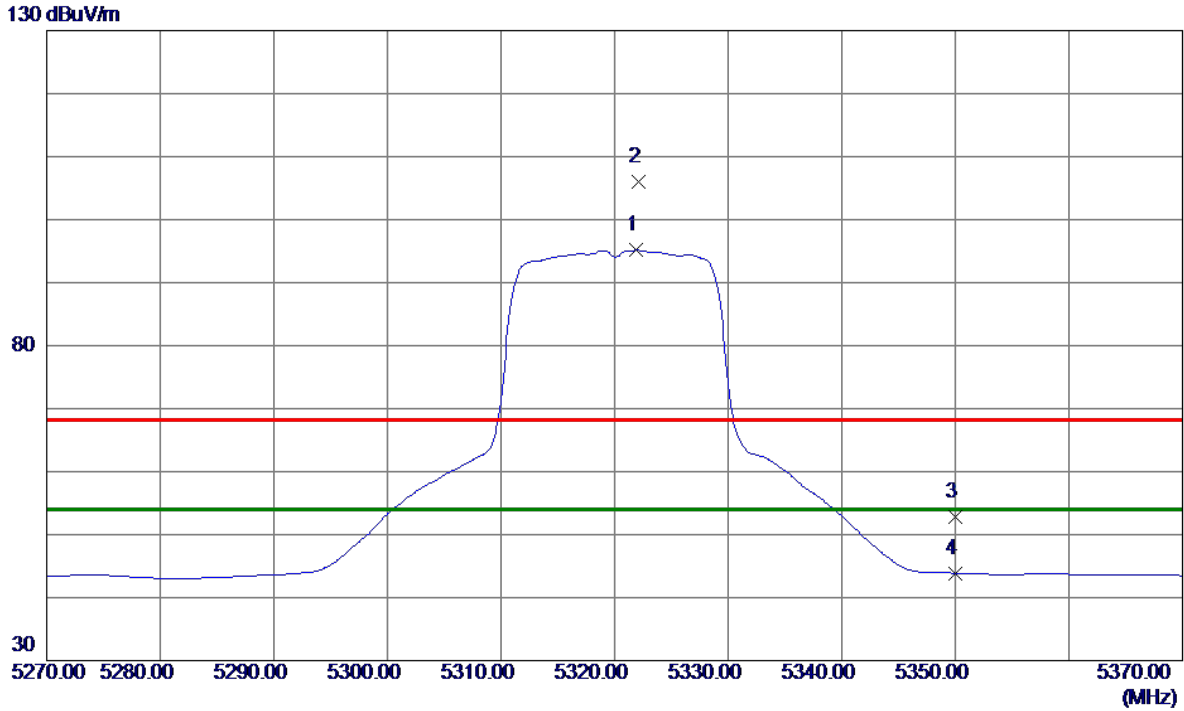

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5321.9000	53.14	41.98	95.12	54.00	41.12	AVG	No Limit
2	5322.1000	64.00	41.98	105.98	68.30	37.68	Peak	No Limit
3	5350.0000	10.68	42.12	52.80	68.30	-15.50	Peak	
4	5350.0000	1.76	42.12	43.88	54.00	-10.12	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Horizontal

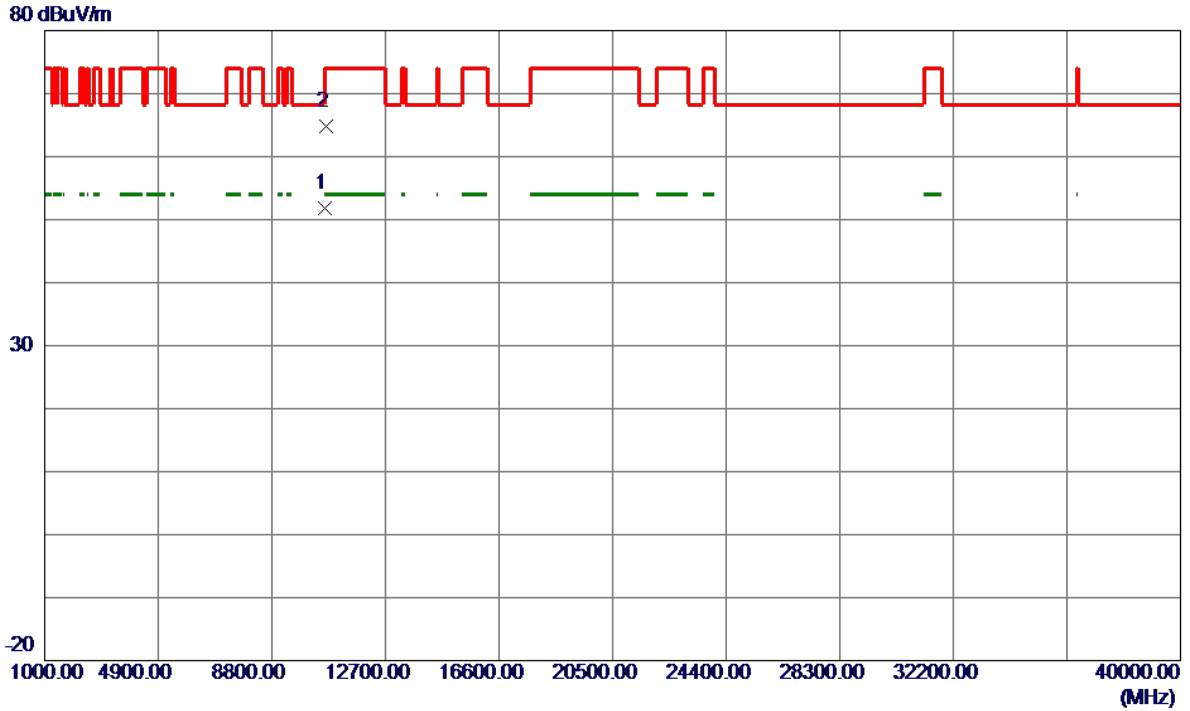

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10638.6500	35.32	16.52	51.84	54.00	-2.16	AVG	
2	10642.2000	48.30	16.51	64.81	74.00	-9.19	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


Vertical

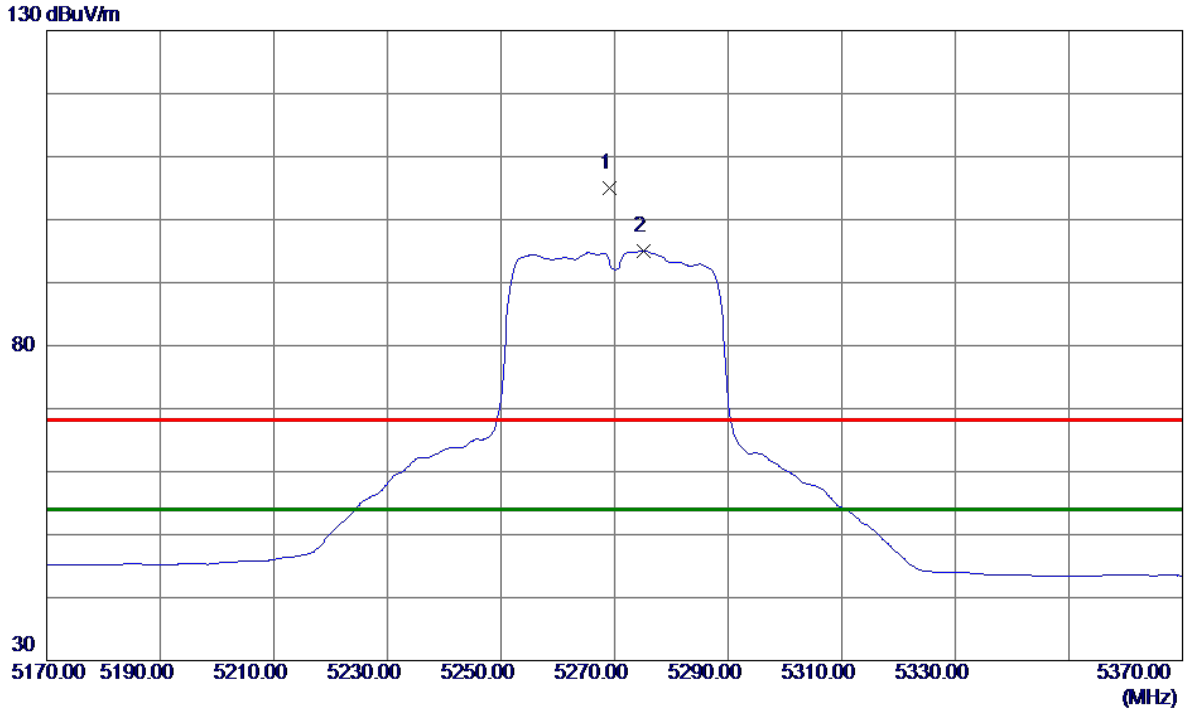

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5269.2000	63.22	41.71	104.93	68.30	36.63	Peak	No Limit
2 *	5275.2000	53.27	41.74	95.01	54.00	41.01	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


Vertical

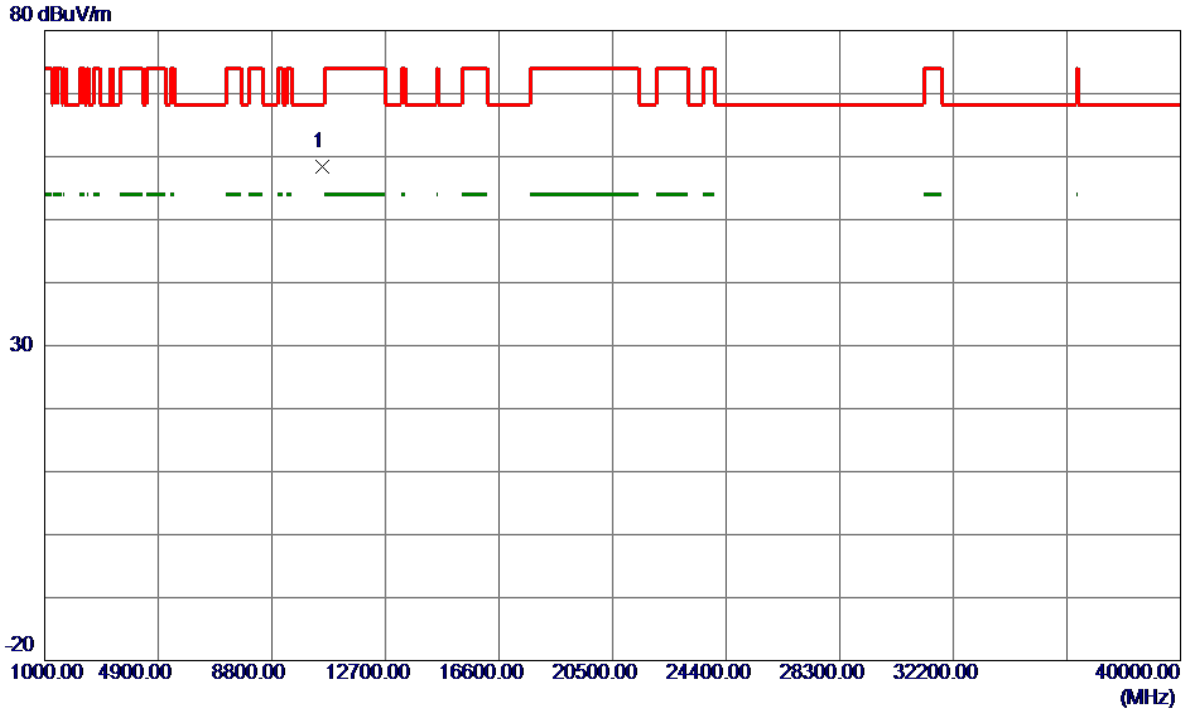

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10546.6000	41.78	16.64	58.42	68.30	-9.88	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


Horizontal

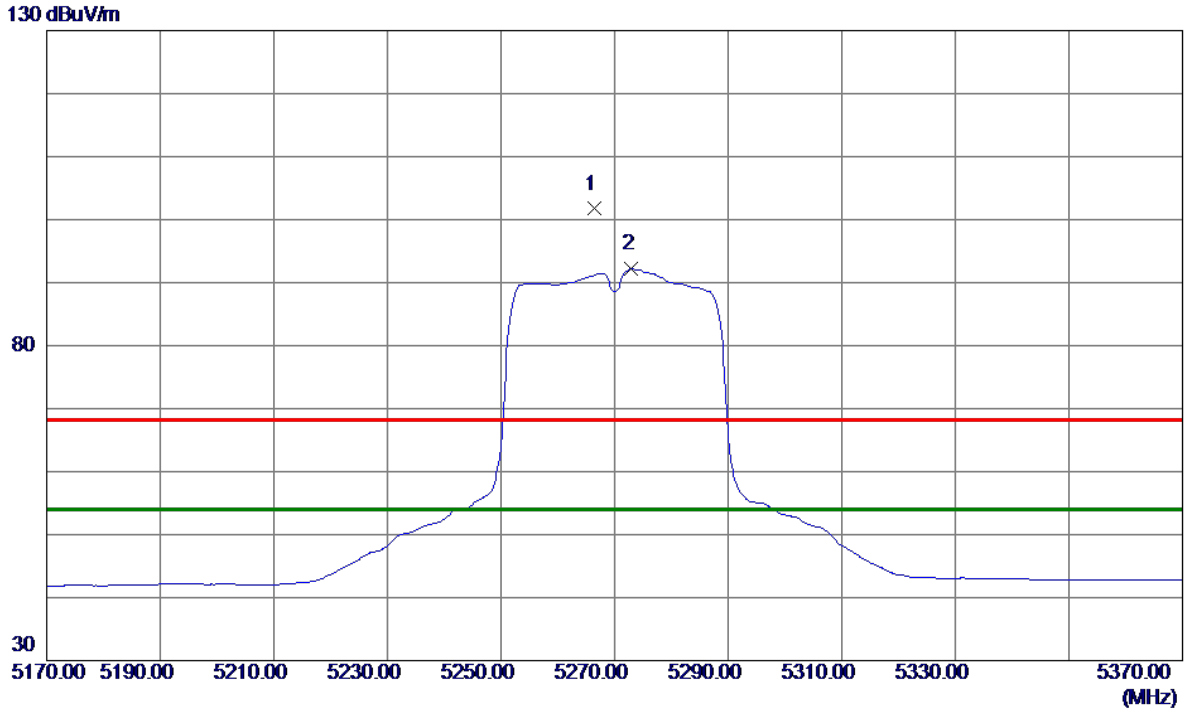

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5266.4000	60.01	41.69	101.70	68.30	33.40	Peak	No Limit
2 *	5273.0000	50.44	41.73	92.17	54.00	38.17	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Horizontal

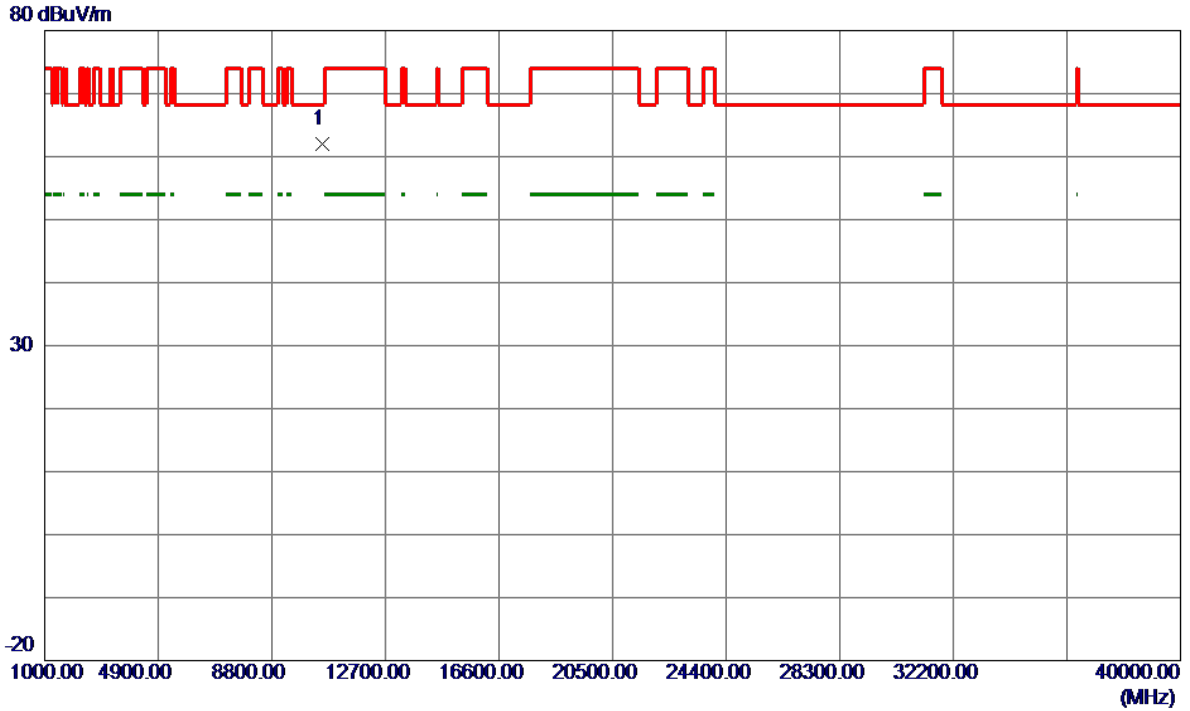


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10539.8000	45.33	16.65	61.98	68.30	-6.32	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Vertical


130 dBuV/m

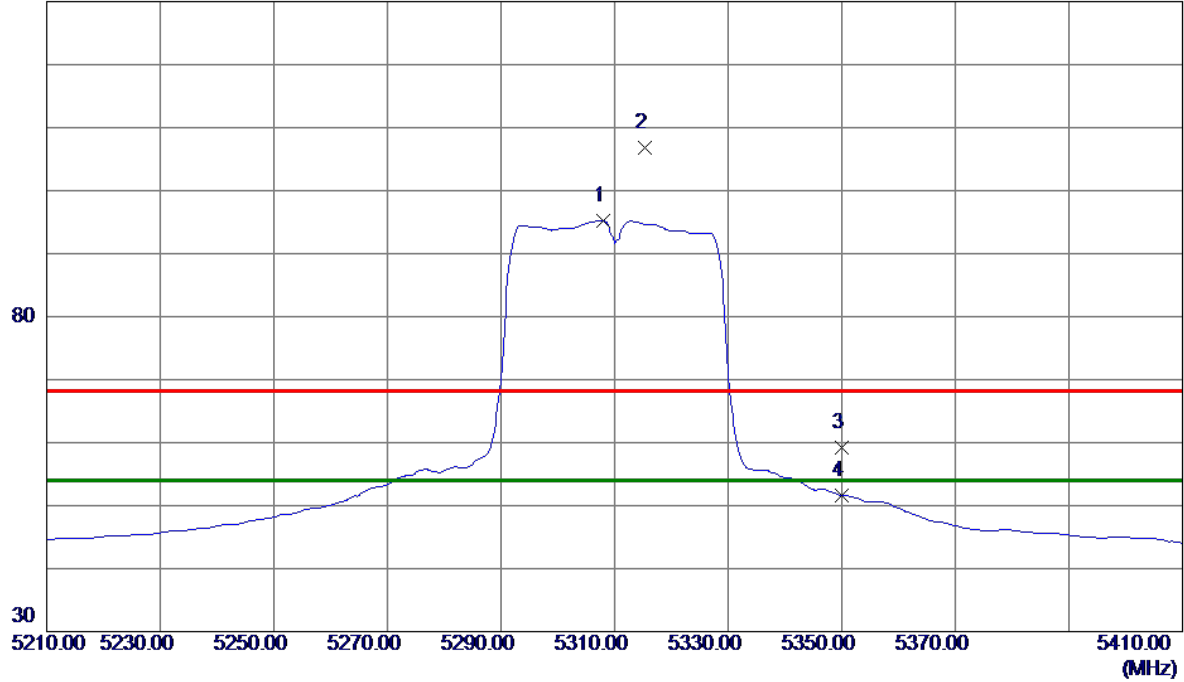

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5308.0000	53.29	41.90	95.19	54.00	41.19	AVG	No Limit
2	5315.4000	64.90	41.94	106.84	68.30	38.54	Peak	No Limit
3	5350.0000	17.07	42.12	59.19	68.30	-9.11	Peak	
4	5350.0000	9.51	42.12	51.63	54.00	-2.37	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Vertical

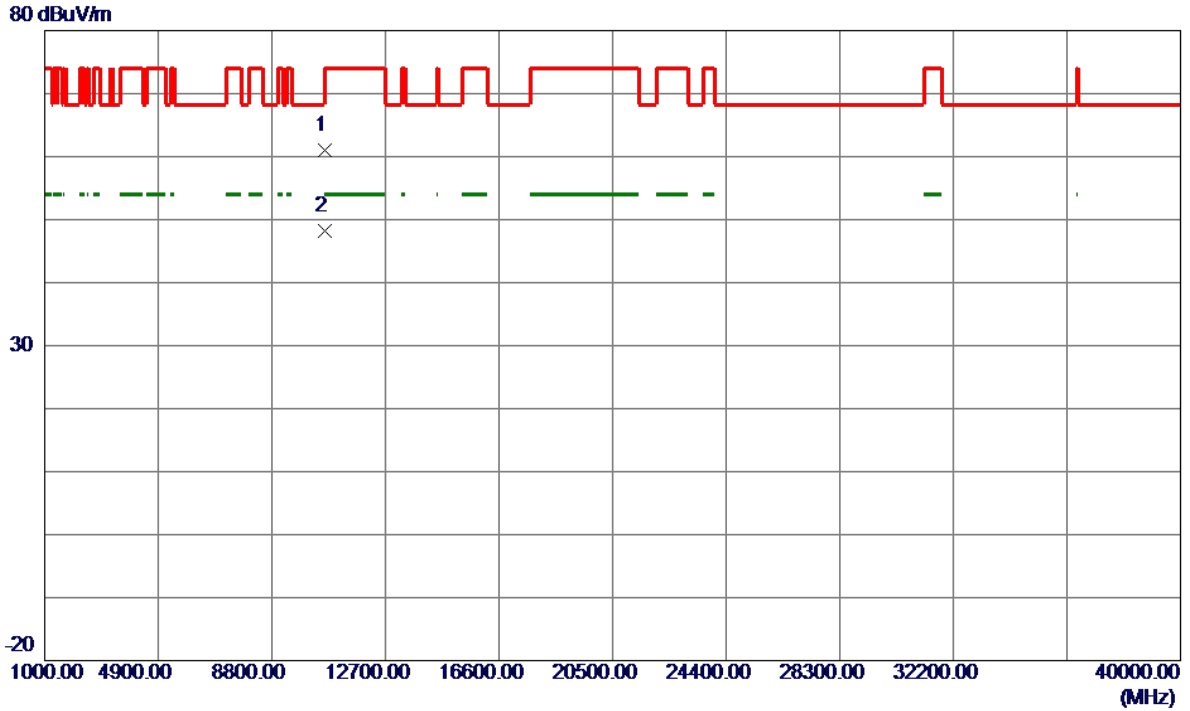


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10617.9000	44.41	16.55	60.96	74.00	-13.04	Peak	
2 *	10621.1000	31.69	16.54	48.23	54.00	-5.77	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Horizontal


130 dBuV/m

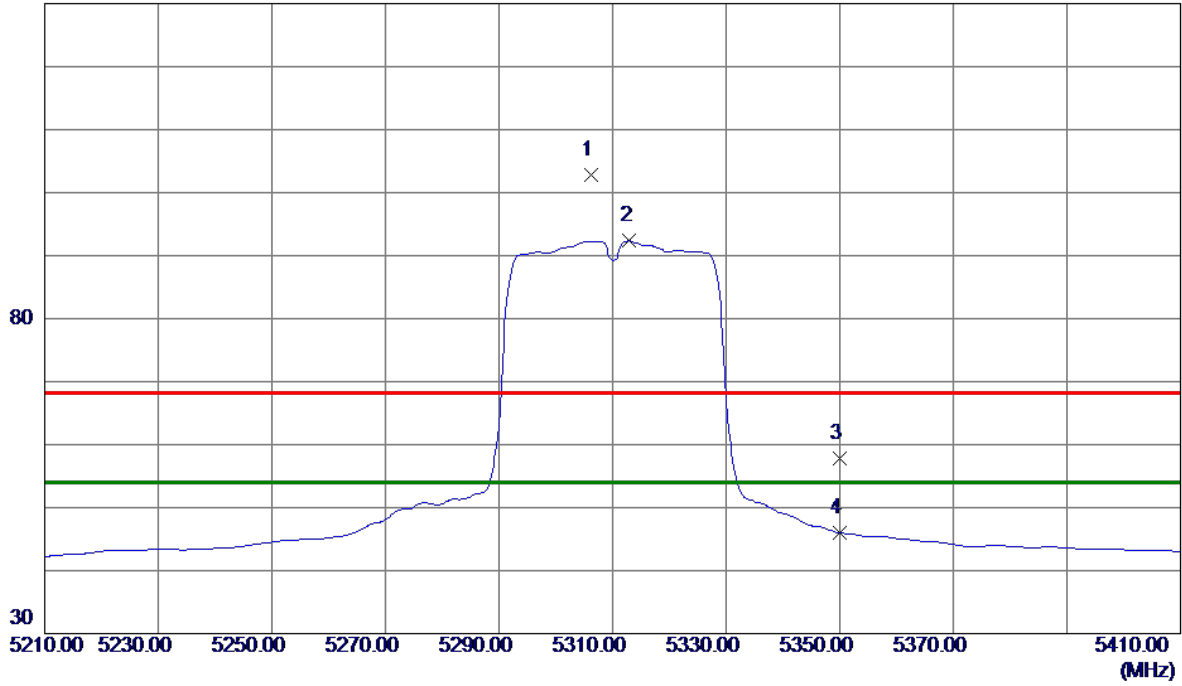

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5306.2000	60.87	41.90	102.77	68.30	34.47	Peak	No Limit
2 *	5313.0000	50.44	41.93	92.37	54.00	38.37	AVG	No Limit
3	5350.0000	15.73	42.12	57.85	68.30	-10.45	Peak	
4	5350.0000	3.87	42.12	45.99	54.00	-8.01	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz


Horizontal

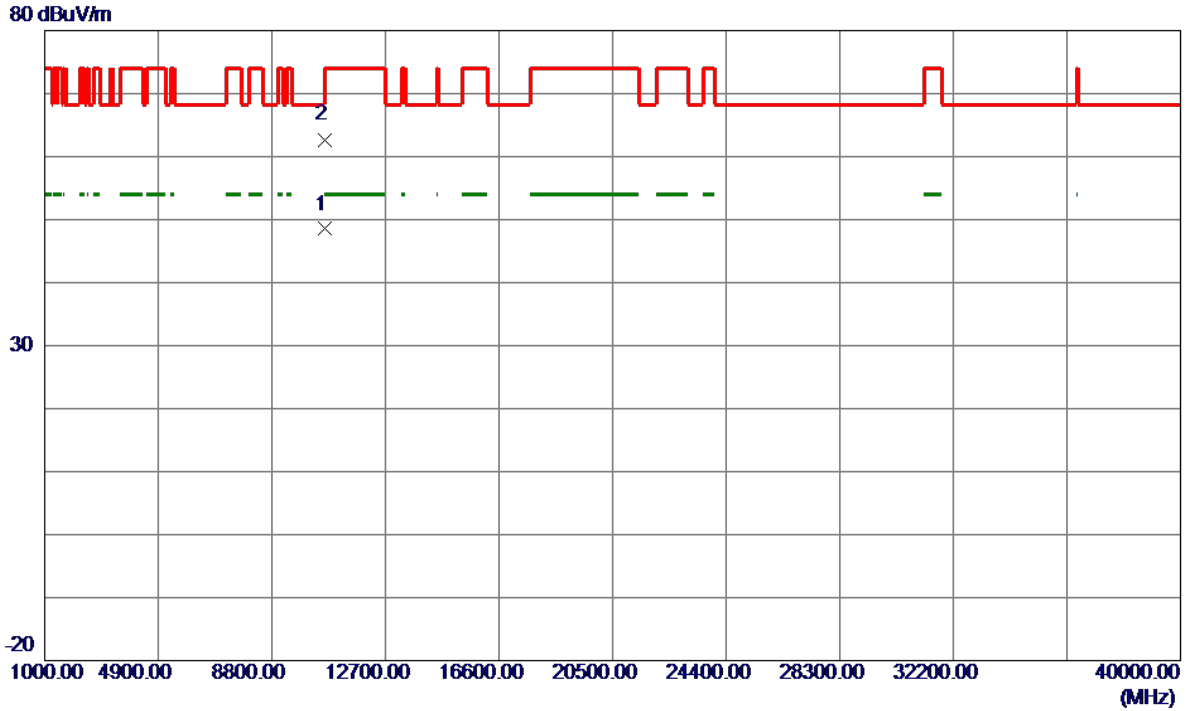

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10618.9000	31.96	16.54	48.50	54.00	-5.50	AVG	
2	10619.4000	46.16	16.54	62.70	74.00	-11.30	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Vertical

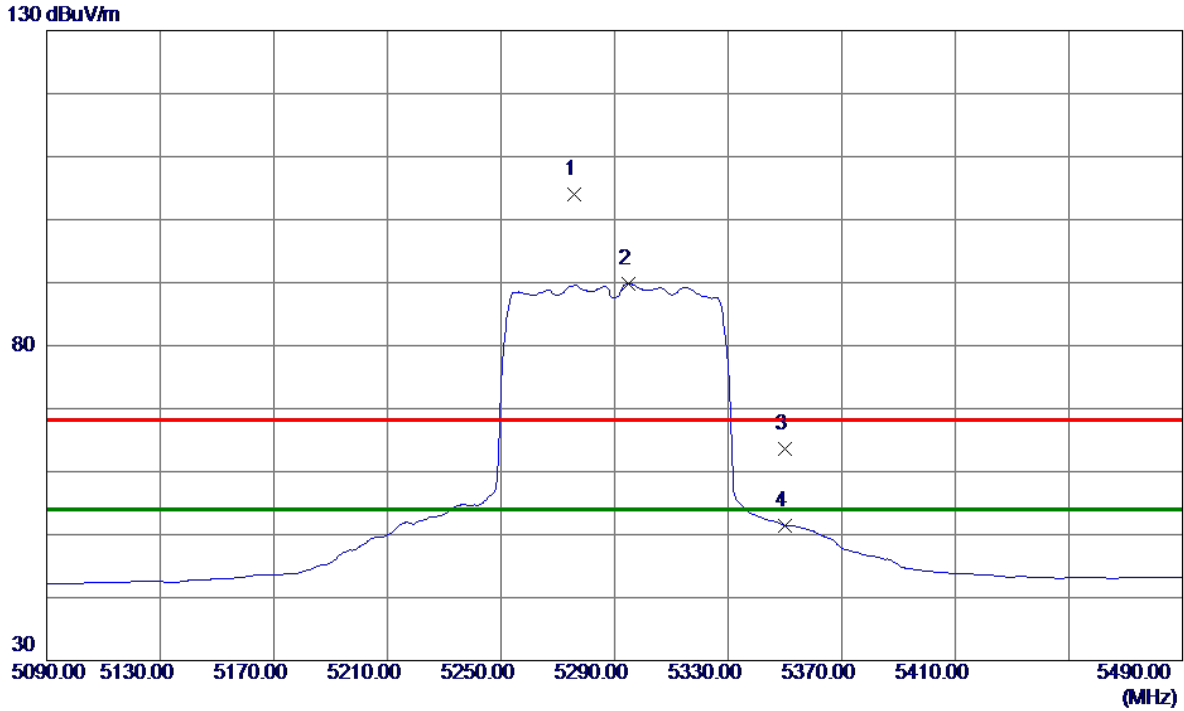

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5275.6000	62.18	41.74	103.92	68.30	35.62	Peak	No Limit
2 *	5294.8000	48.04	41.84	89.88	54.00	35.88	AVG	No Limit
3	5350.0000	21.44	42.12	63.56	68.30	-4.74	Peak	
4	5350.0000	9.28	42.12	51.40	54.00	-2.60	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Vertical

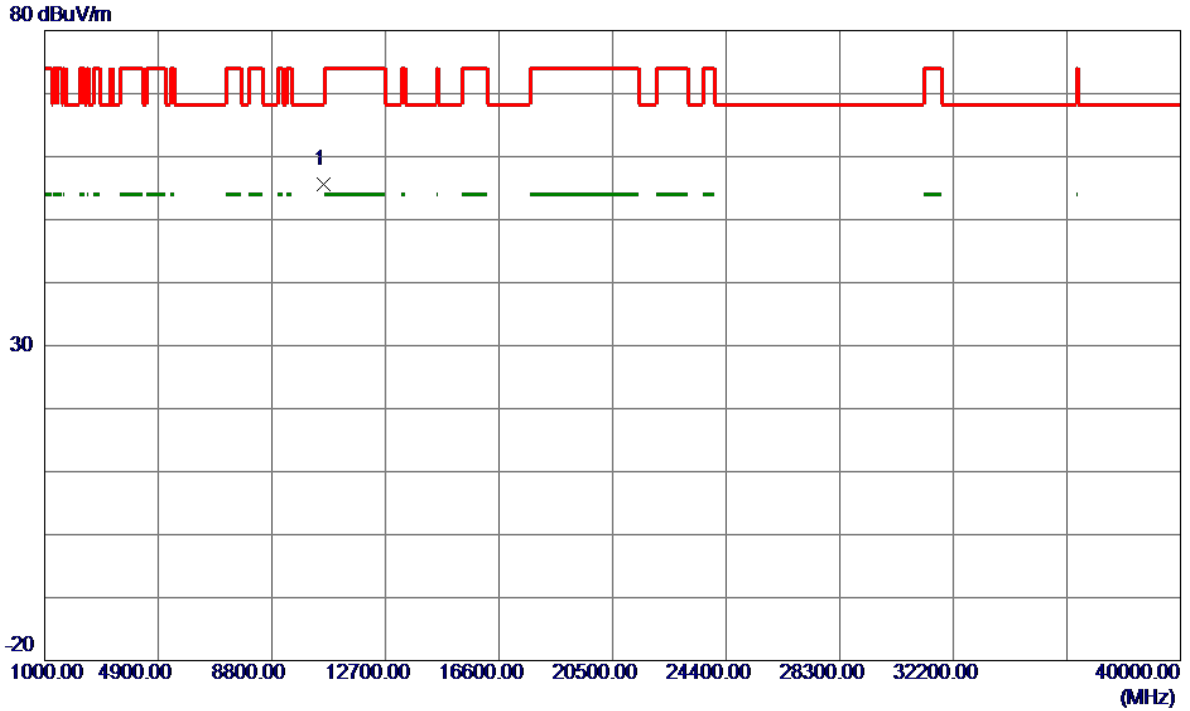

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10580.9900	39.08	16.60	55.68	68.30	-12.62	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Horizontal

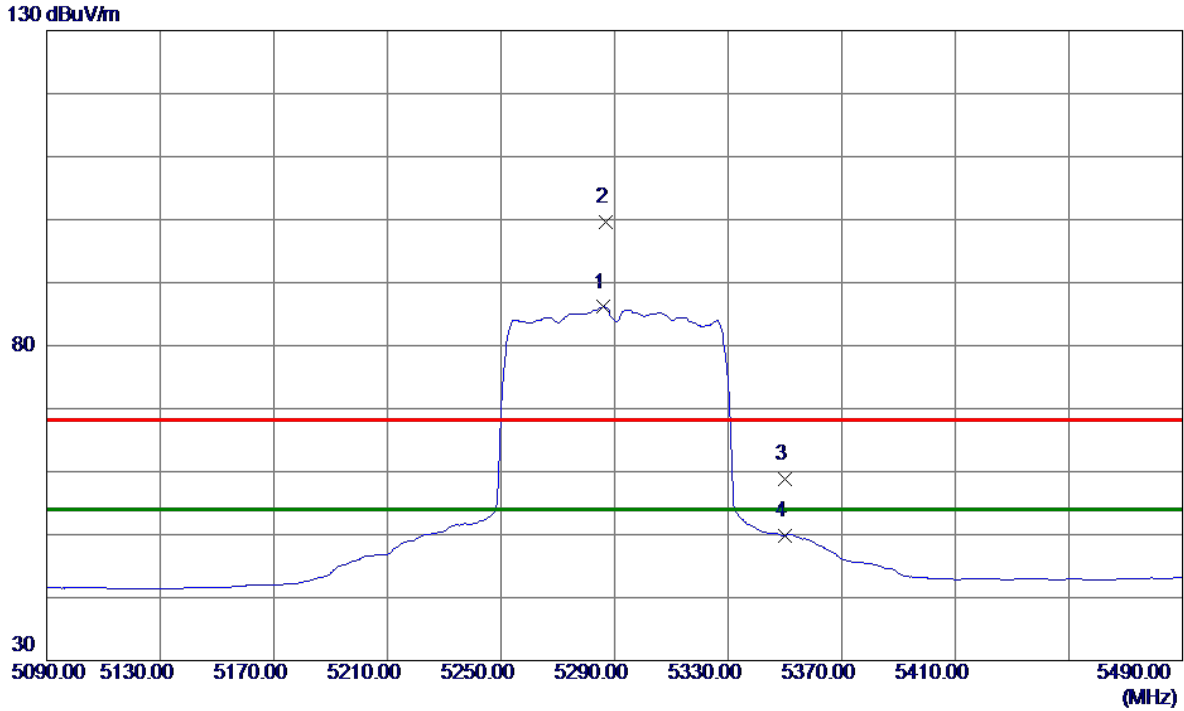

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5286.0000	44.31	41.79	86.10	54.00	32.10	AVG	No Limit
2	5286.8000	57.77	41.80	99.57	68.30	31.27	Peak	No Limit
3	5350.0000	16.65	42.12	58.77	68.30	-9.53	Peak	
4	5350.0000	7.68	42.12	49.80	54.00	-4.20	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Horizontal

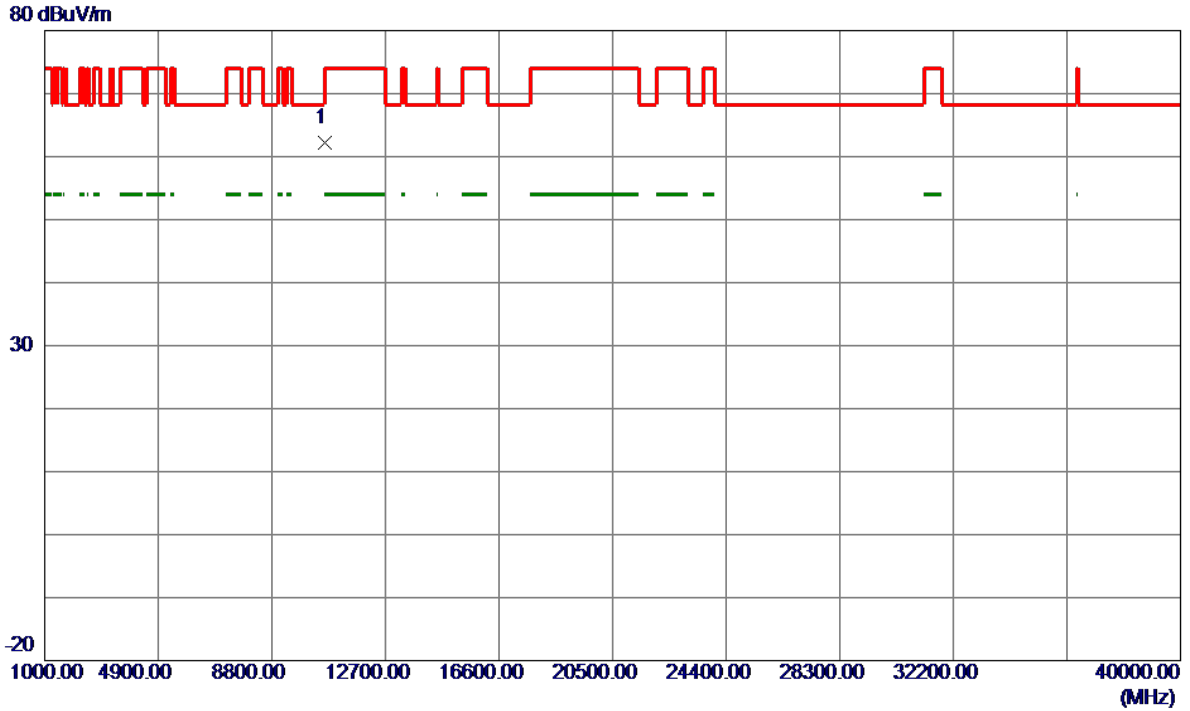

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10599.1000	45.57	16.57	62.14	68.30	-6.16	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz


Vertical

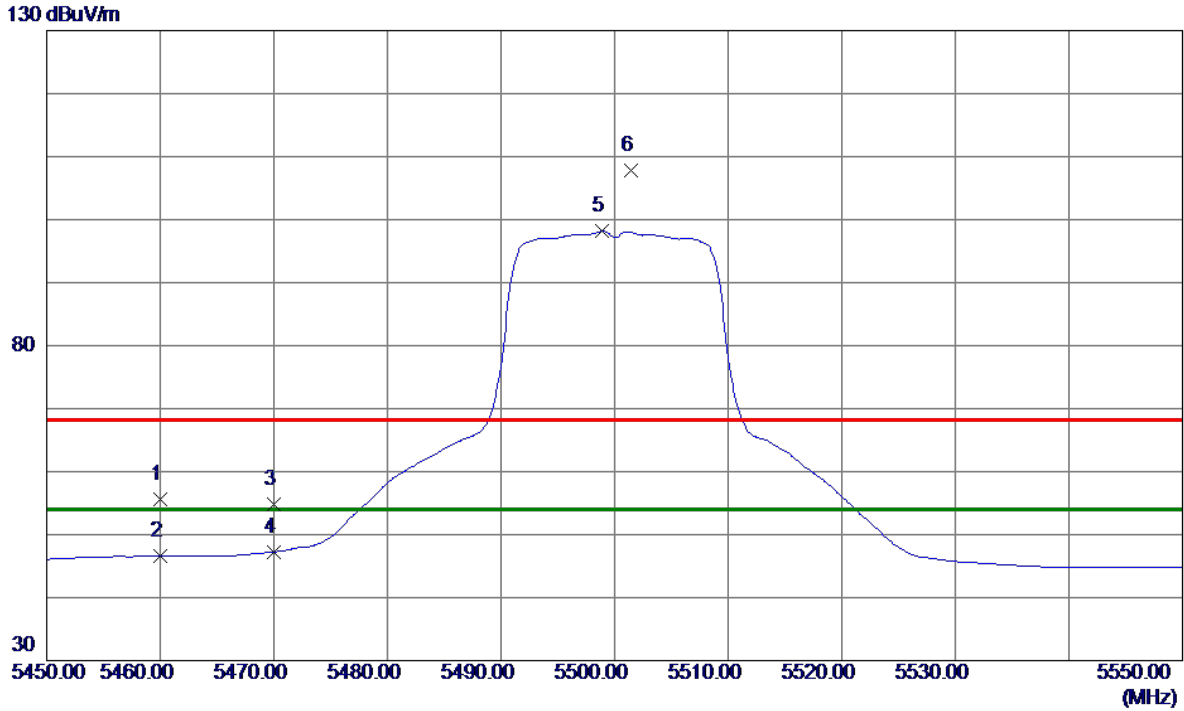

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	12.84	42.68	55.52	68.30	-12.78	Peak	
2	5460.0000	3.99	42.68	46.67	54.00	-7.33	AVG	
3	5470.0000	12.02	42.73	54.75	68.30	-13.55	Peak	
4	5470.0000	4.53	42.73	47.26	54.00	-6.74	AVG	
5 *	5498.9000	55.28	42.87	98.15	54.00	44.15	AVG	No Limit
6	5501.4000	64.83	42.88	107.71	68.30	39.41	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz


Vertical

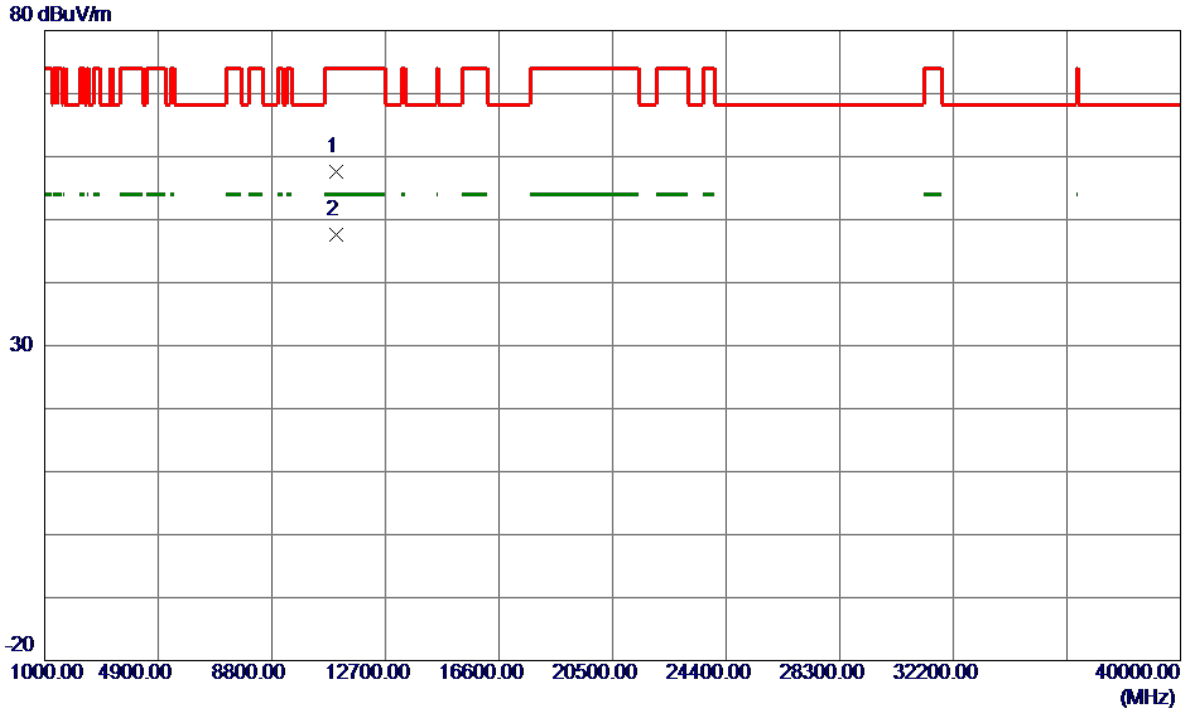

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10999.5500	41.60	16.03	57.63	74.00	-16.37	Peak	
2 *	11000.2500	31.66	16.03	47.69	54.00	-6.31	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz


Horizontal

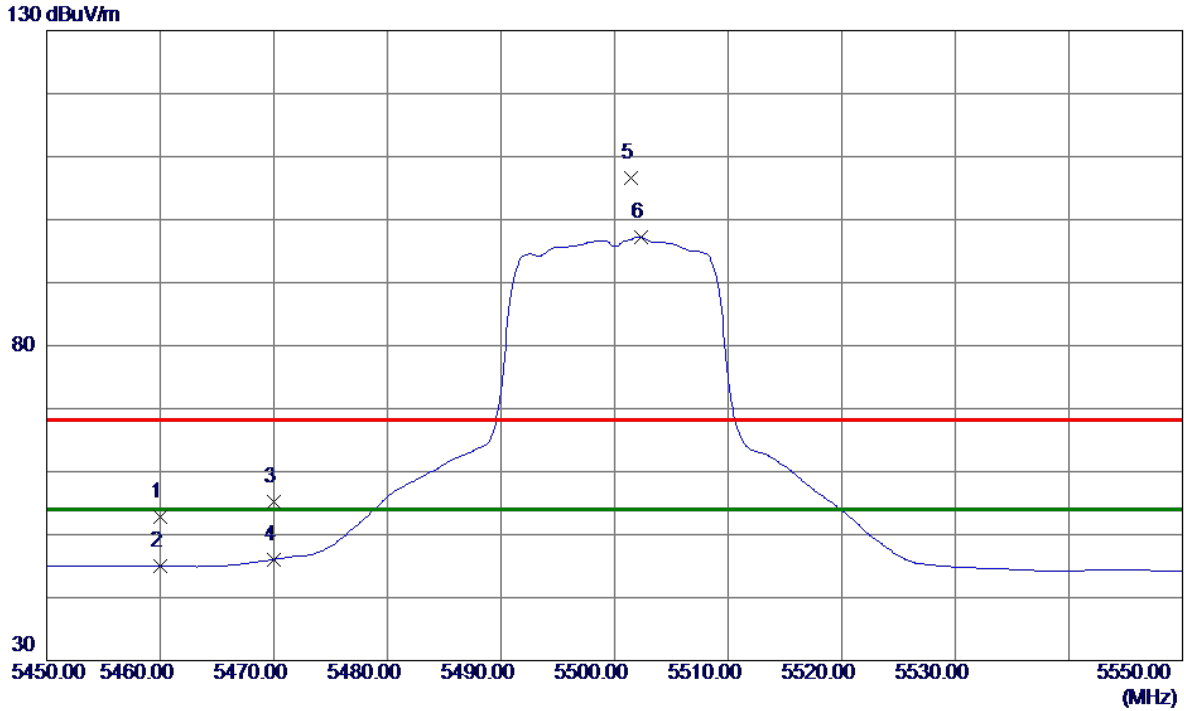

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	10.11	42.68	52.79	68.30	-15.51	Peak	
2	5460.0000	2.31	42.68	44.99	54.00	-9.01	AVG	
3	5470.0000	12.52	42.73	55.25	68.30	-13.05	Peak	
4	5470.0000	3.31	42.73	46.04	54.00	-7.96	AVG	
5	5501.4000	63.81	42.88	106.69	68.30	38.39	Peak	No Limit
6 *	5502.3000	54.32	42.89	97.21	54.00	43.21	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz


Horizontal

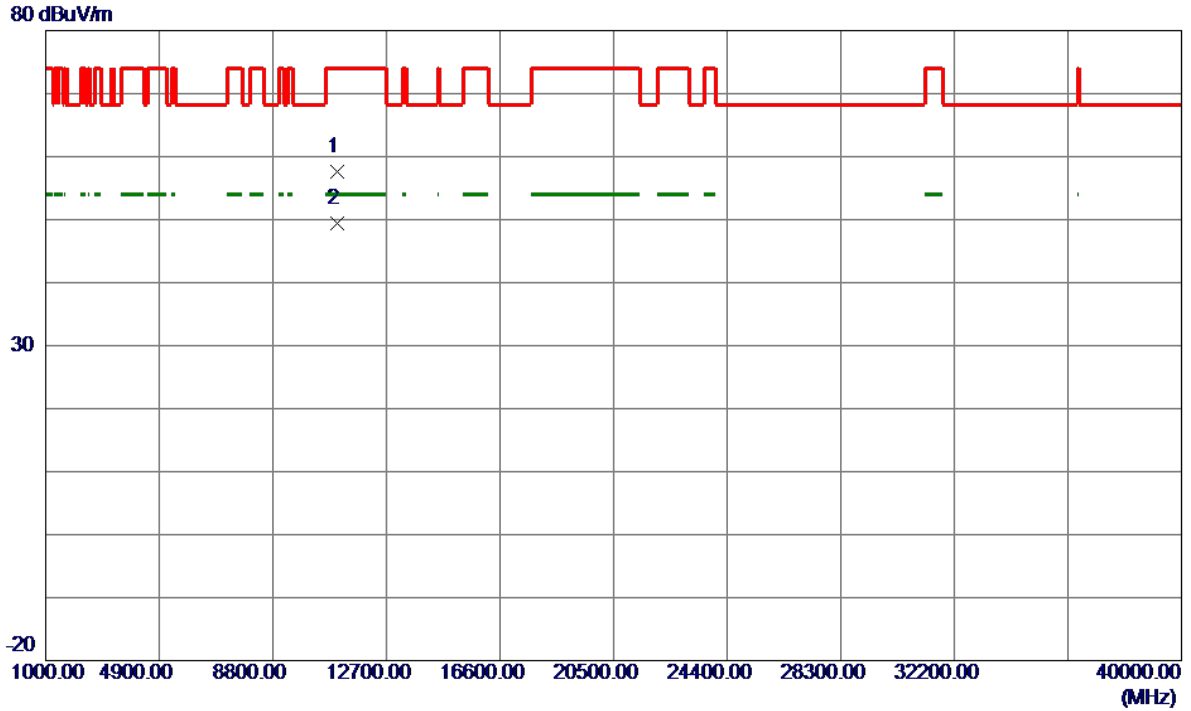

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10999.0000	41.50	16.03	57.53	74.00	-16.47	Peak	
2 *	11001.0000	33.28	16.03	49.31	54.00	-4.69	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz


Vertical

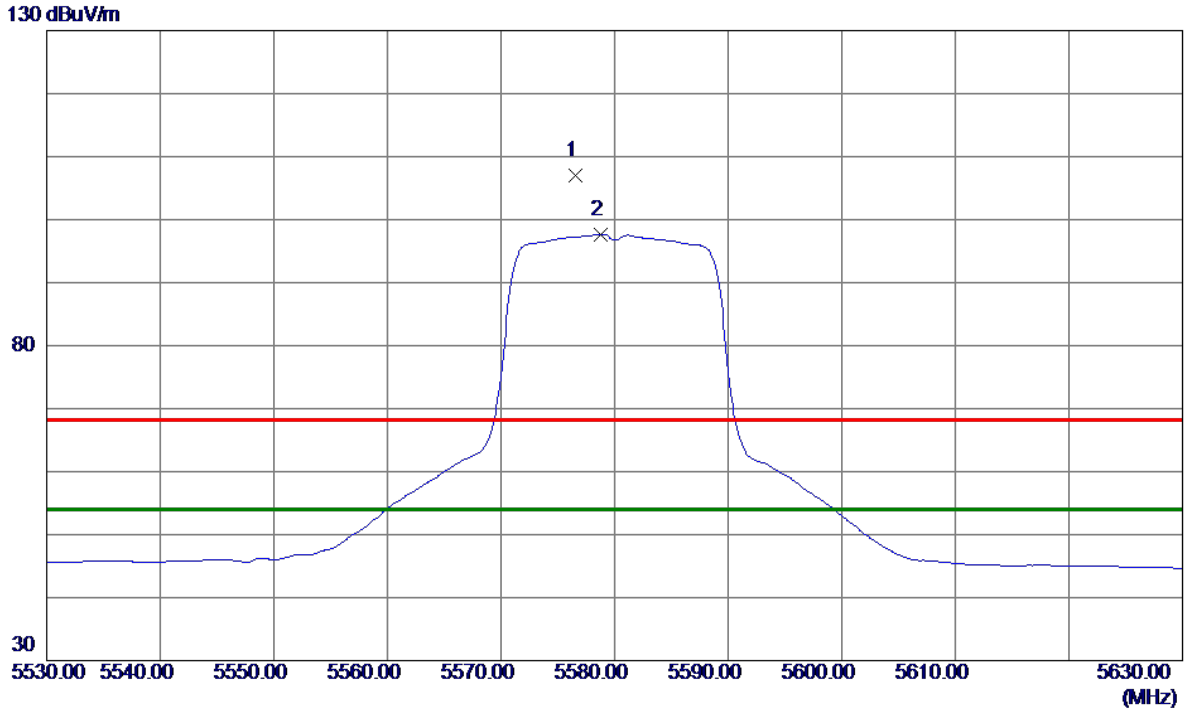

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5576.6000	63.96	43.11	107.07	68.30	38.77	Peak	No Limit
2 *	5578.8000	54.53	43.12	97.65	54.00	43.65	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz


Vertical

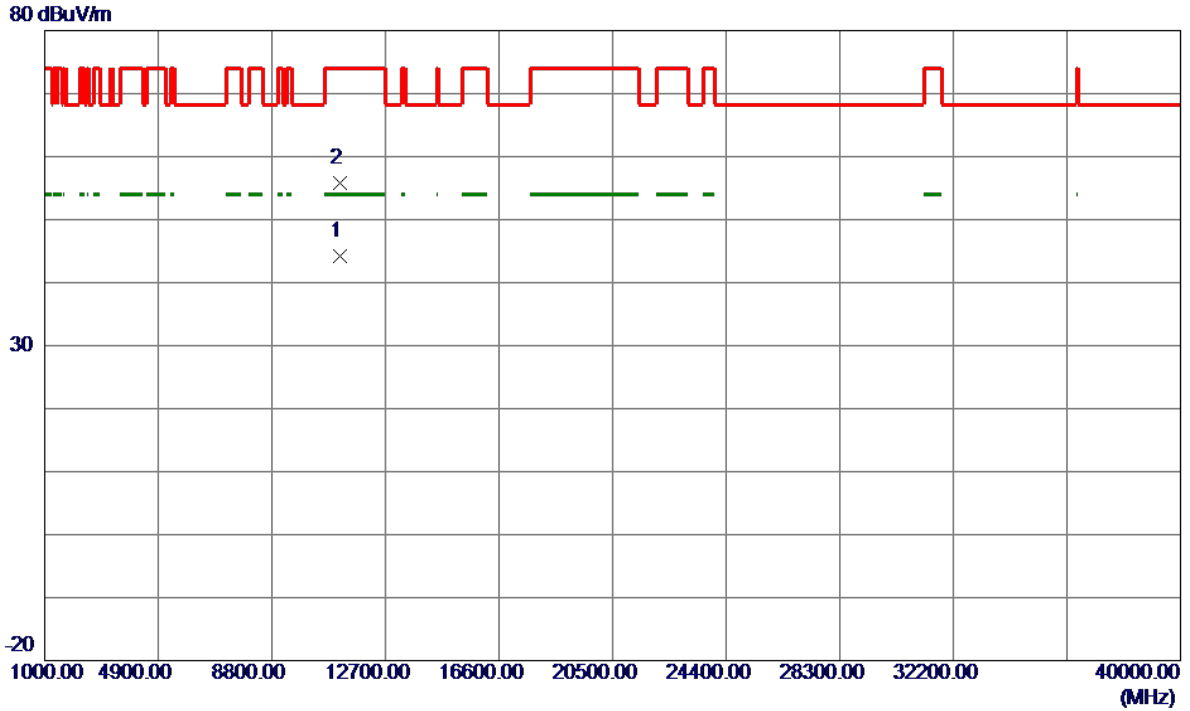

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11155.8000	27.61	16.58	44.19	54.00	-9.81	AVG	
2	11156.1000	39.22	16.58	55.80	74.00	-18.20	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz


Horizontal

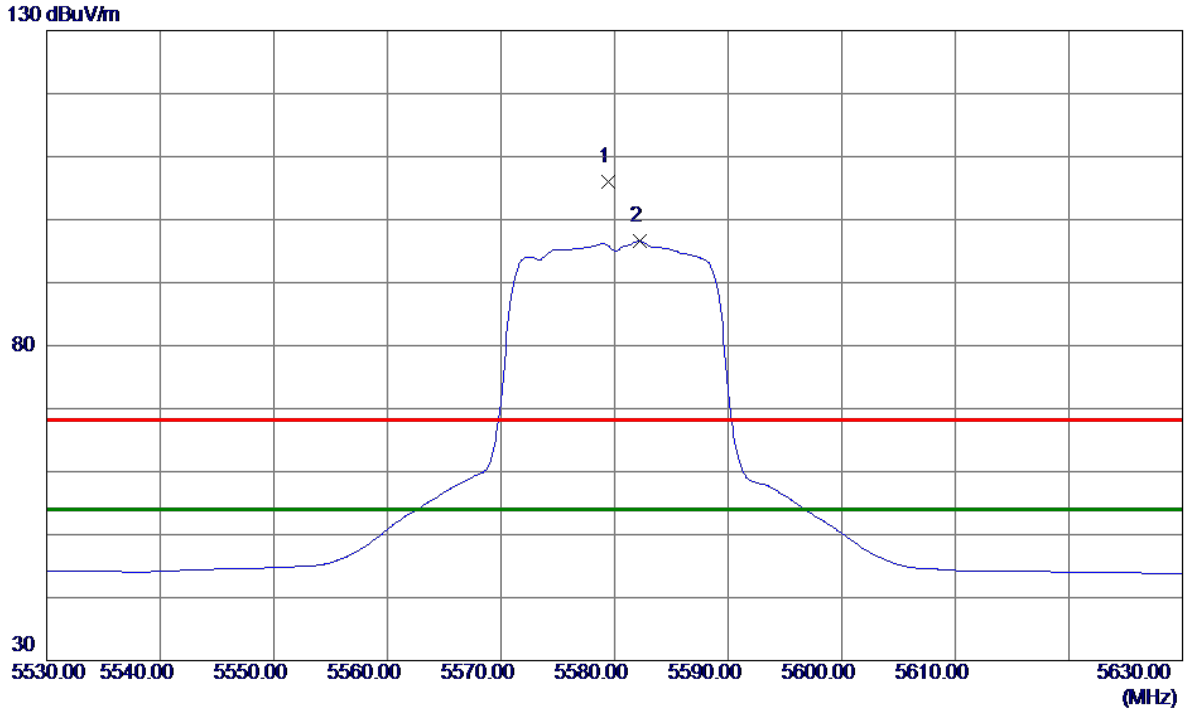

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5579.4000	62.93	43.12	106.05	68.30	37.75	Peak	No Limit
2 *	5582.2000	53.42	43.13	96.55	54.00	42.55	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

Horizontal

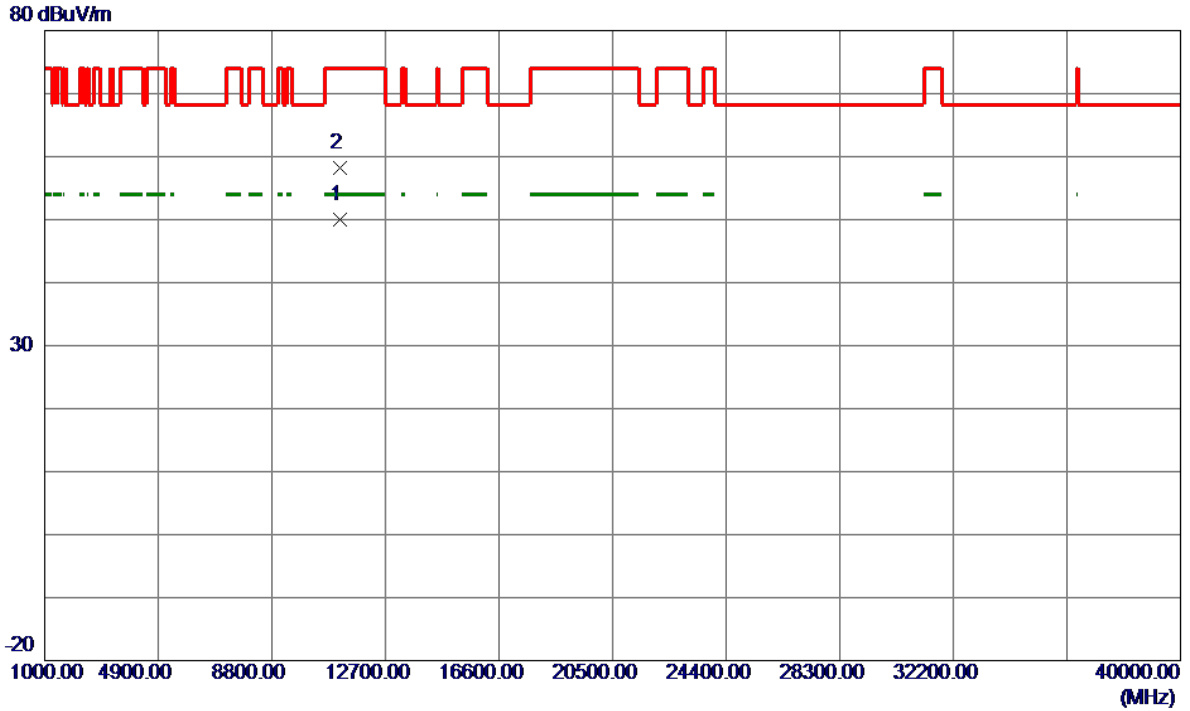


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11157.5000	33.51	16.58	50.09	54.00	-3.91	AVG	
2	11161.5000	41.61	16.60	58.21	74.00	-15.79	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Vertical


130 dBuV/m

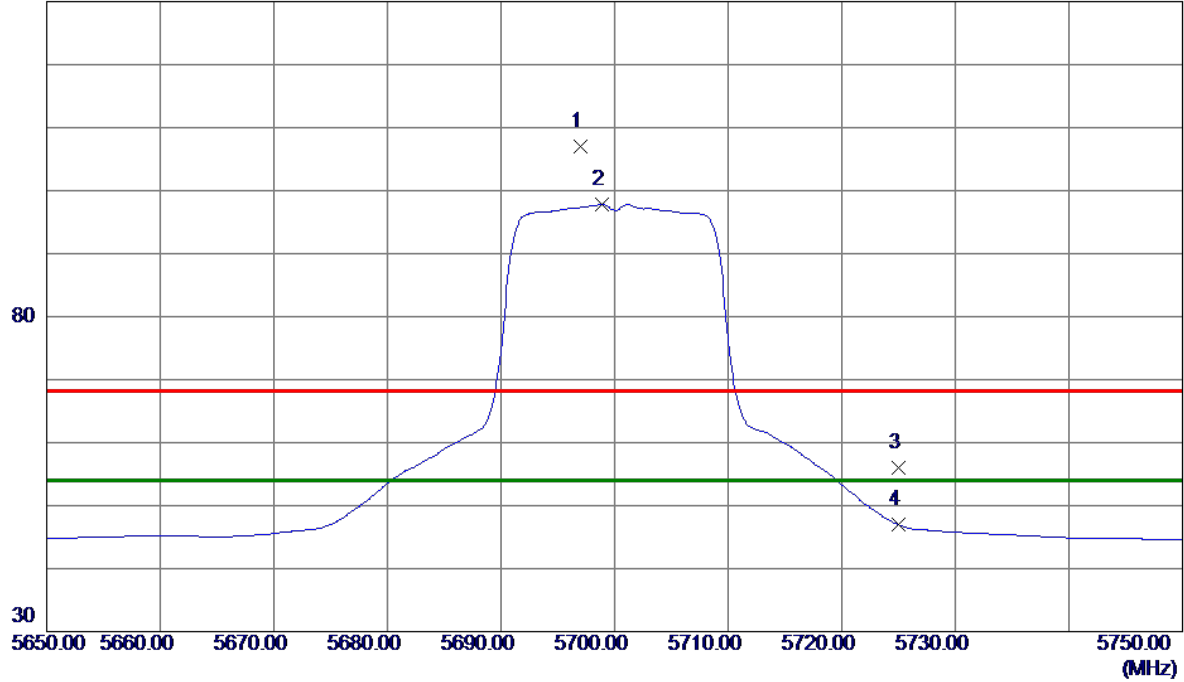

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5697.0000	63.55	43.47	107.02	68.30	38.72	Peak	No Limit
2 *	5698.9000	54.29	43.48	97.77	54.00	43.77	AVG	No Limit
3	5725.0000	12.40	43.56	55.96	68.30	-12.34	Peak	
4	5725.0000	3.38	43.56	46.94	54.00	-7.06	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz


Vertical

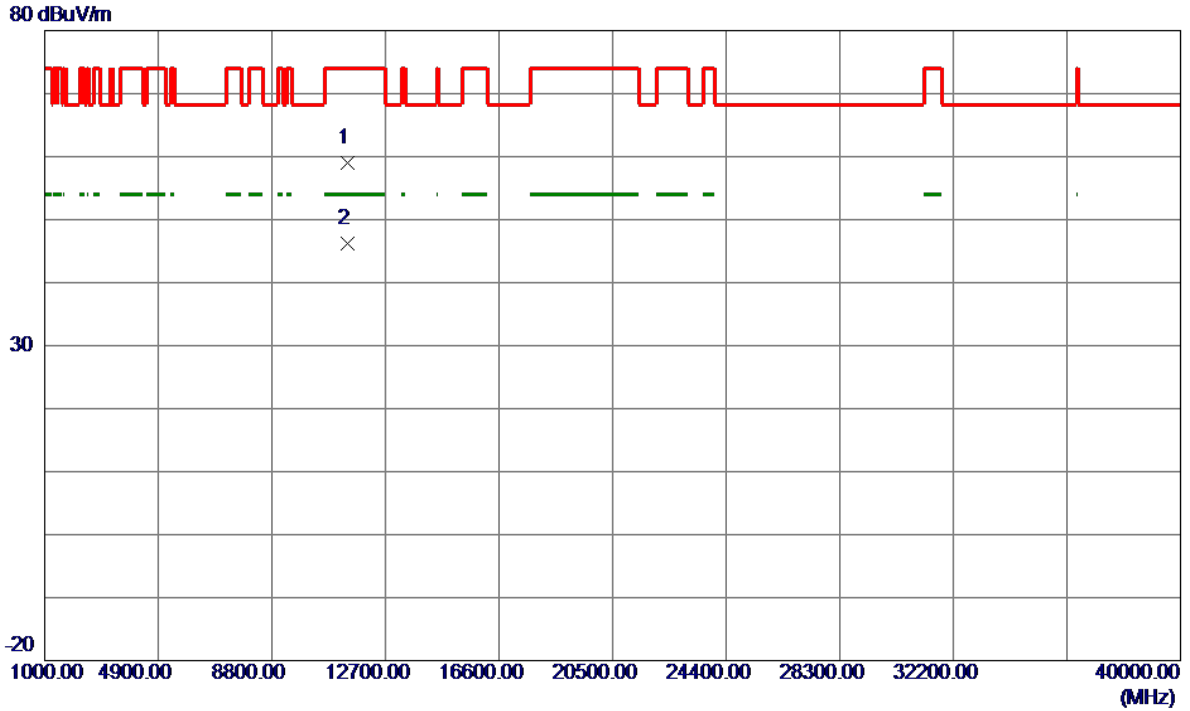

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11394.6000	41.63	17.41	59.04	74.00	-14.96	Peak	
2 *	11400.5500	28.85	17.44	46.29	54.00	-7.71	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz


Horizontal

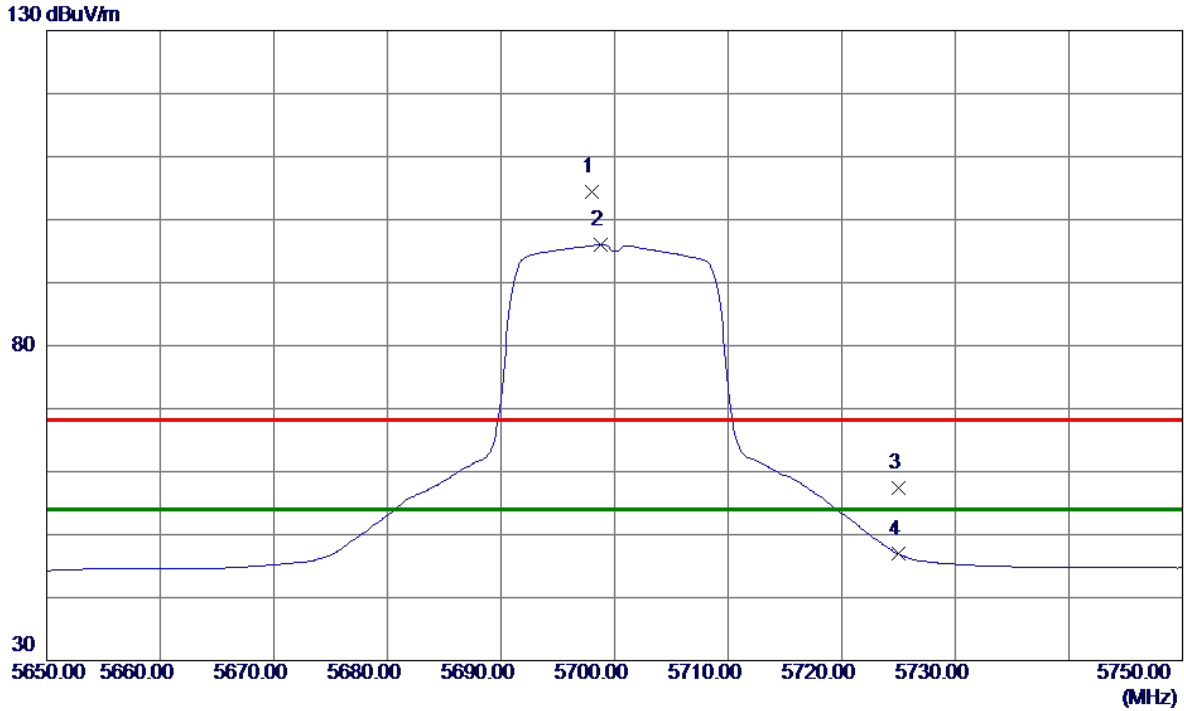

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5698.0000	60.95	43.48	104.43	68.30	36.13	Peak	No Limit
2 *	5698.8000	52.59	43.48	96.07	54.00	42.07	AVG	No Limit
3	5725.0000	13.75	43.56	57.31	68.30	-10.99	Peak	
4	5725.0000	3.34	43.56	46.90	54.00	-7.10	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Horizontal

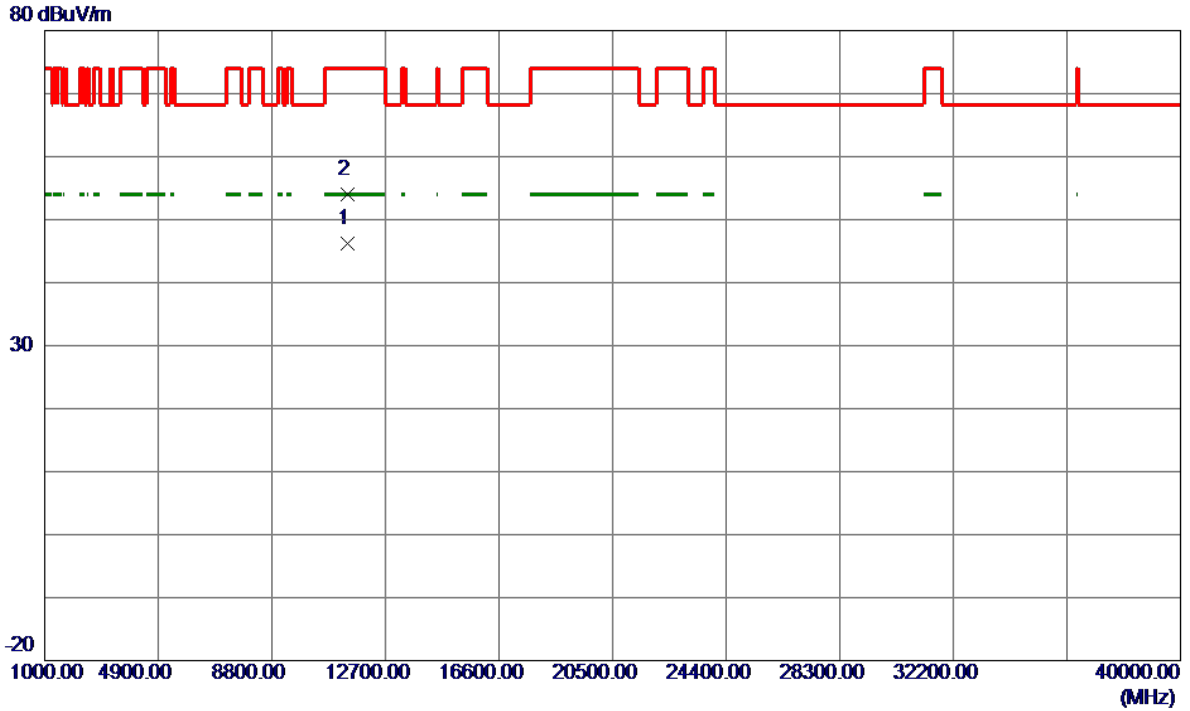


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11400.6000	28.80	17.44	46.24	54.00	-7.76	AVG	
2	11401.0000	36.62	17.44	54.06	74.00	-19.94	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Vertical


130 dBuV/m

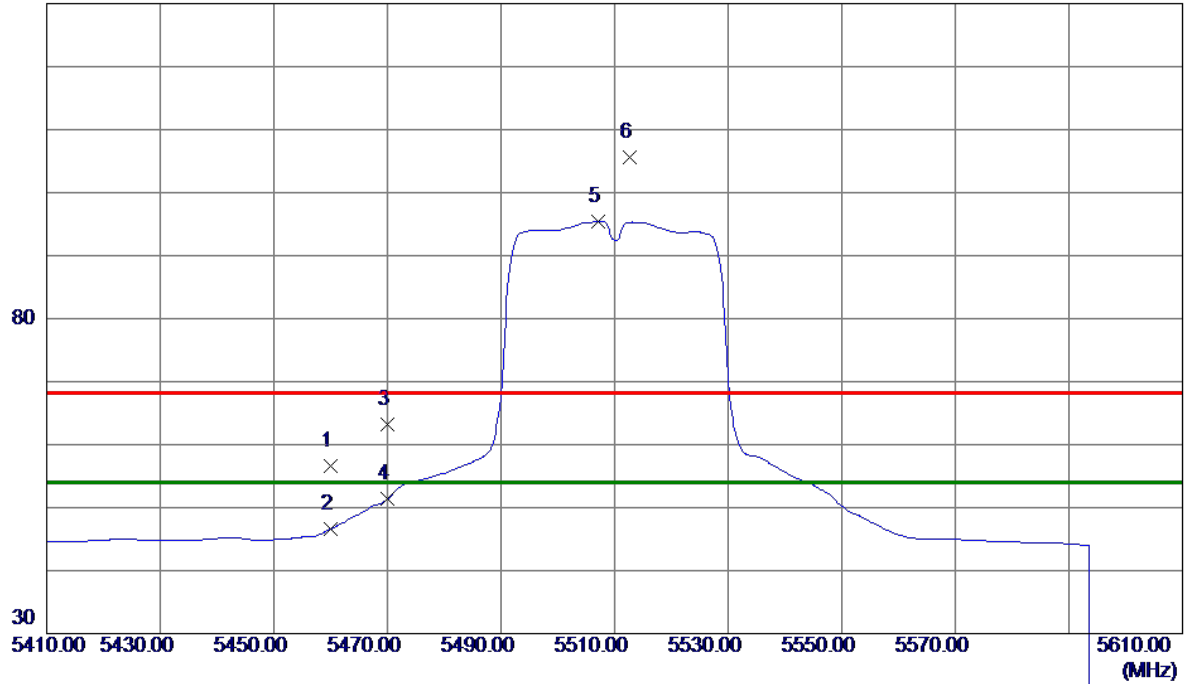

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	13.86	42.68	56.54	68.30	-11.76	Peak	
2	5460.0000	3.93	42.68	46.61	54.00	-7.39	AVG	
3	5470.0000	20.50	42.73	63.23	68.30	-5.07	Peak	
4	5470.0000	8.61	42.73	51.34	54.00	-2.66	AVG	
5 *	5507.2000	52.56	42.90	95.46	54.00	41.46	AVG	No Limit
6	5512.6000	62.63	42.92	105.55	68.30	37.25	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz


Vertical

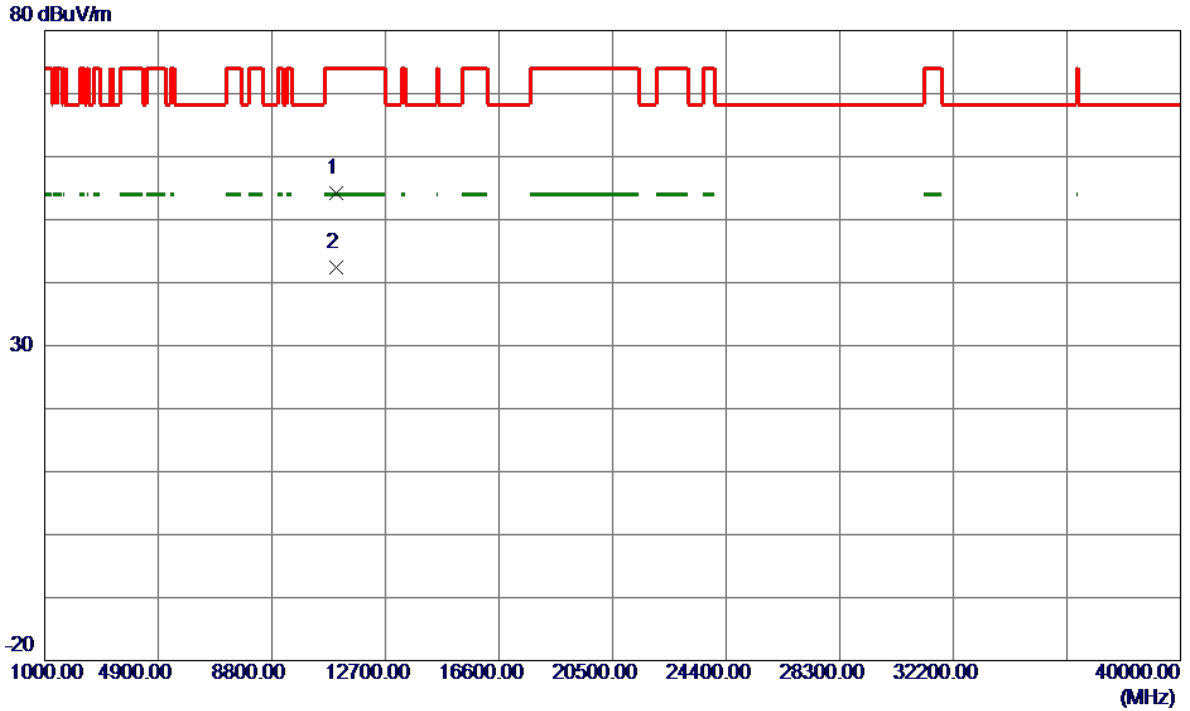

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11018.6000	38.12	16.10	54.22	74.00	-19.78	Peak	
2 *	11018.6000	26.24	16.10	42.34	54.00	-11.66	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Horizontal

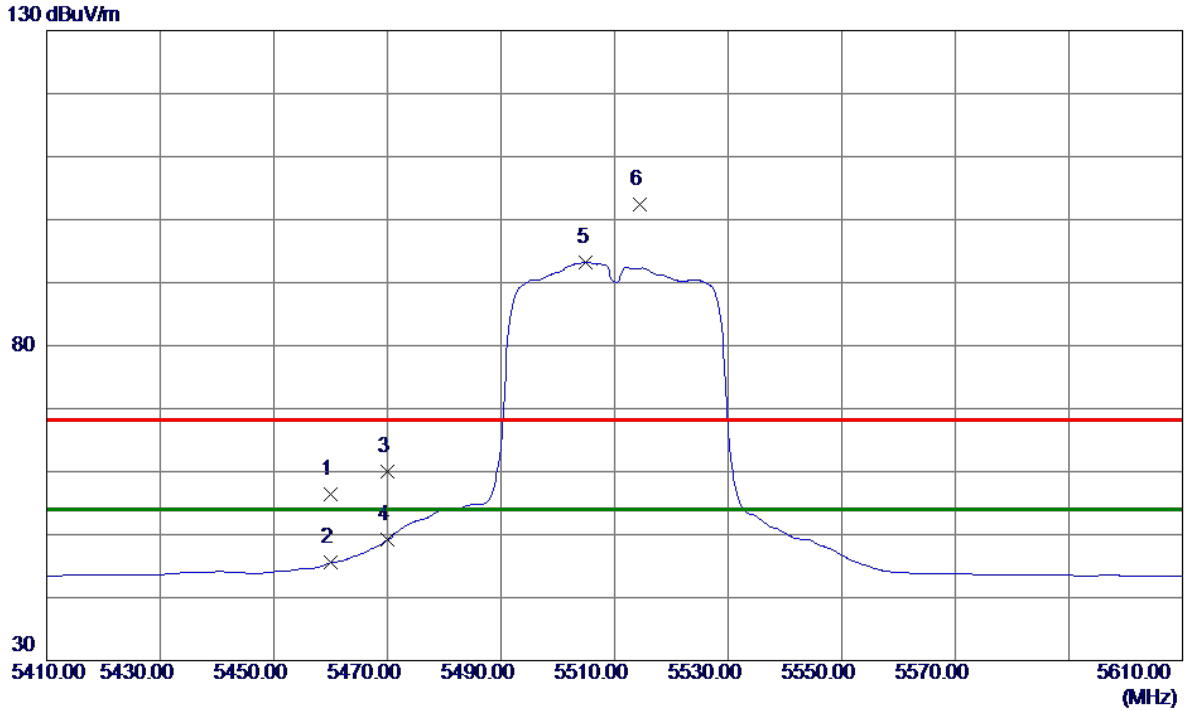

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	13.73	42.68	56.41	68.30	-11.89	Peak	
2	5460.0000	2.83	42.68	45.51	54.00	-8.49	AVG	
3	5470.0000	17.30	42.73	60.03	68.30	-8.27	Peak	
4	5470.0000	6.42	42.73	49.15	54.00	-4.85	AVG	
5 *	5505.0000	50.36	42.90	93.26	54.00	39.26	AVG	No Limit
6	5514.4000	59.39	42.92	102.31	68.30	34.01	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz


Horizontal



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11018.6000	42.44	16.10	58.54	74.00	-15.46	Peak	
2 *	11018.6000	31.88	16.10	47.98	54.00	-6.02	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Vertical

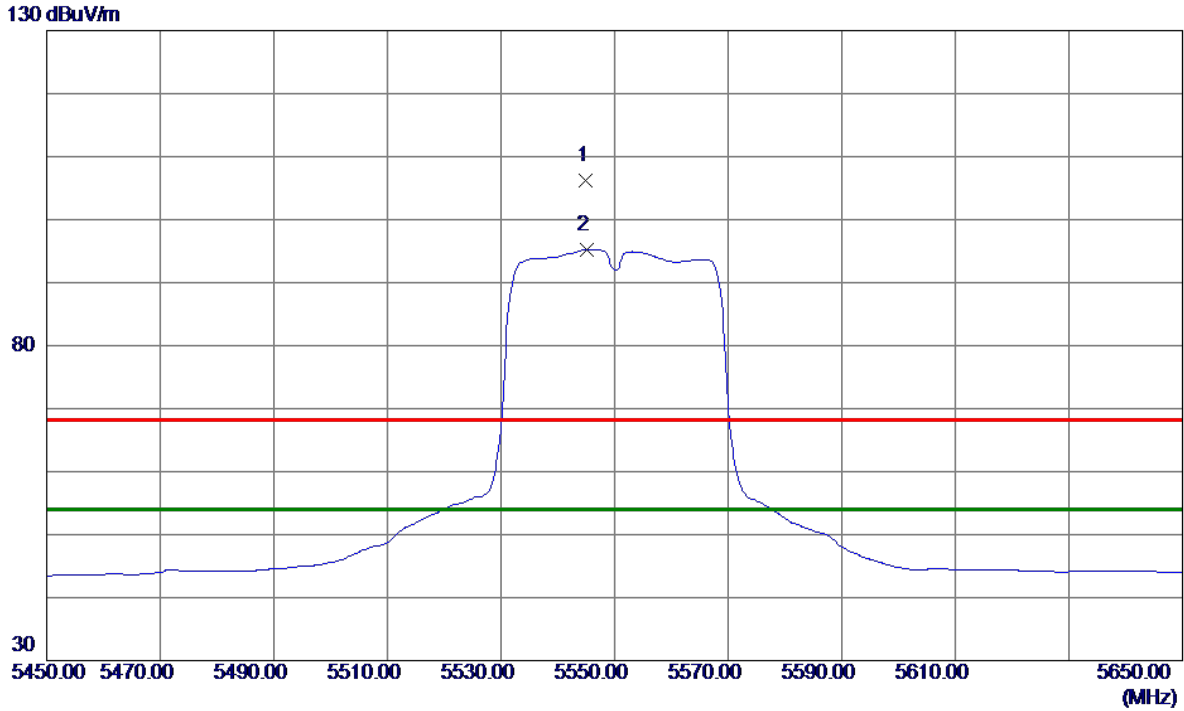

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5545.0000	63.27	43.02	106.29	68.30	37.99	Peak	No Limit
2 *	5545.2000	52.21	43.02	95.23	54.00	41.23	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Vertical

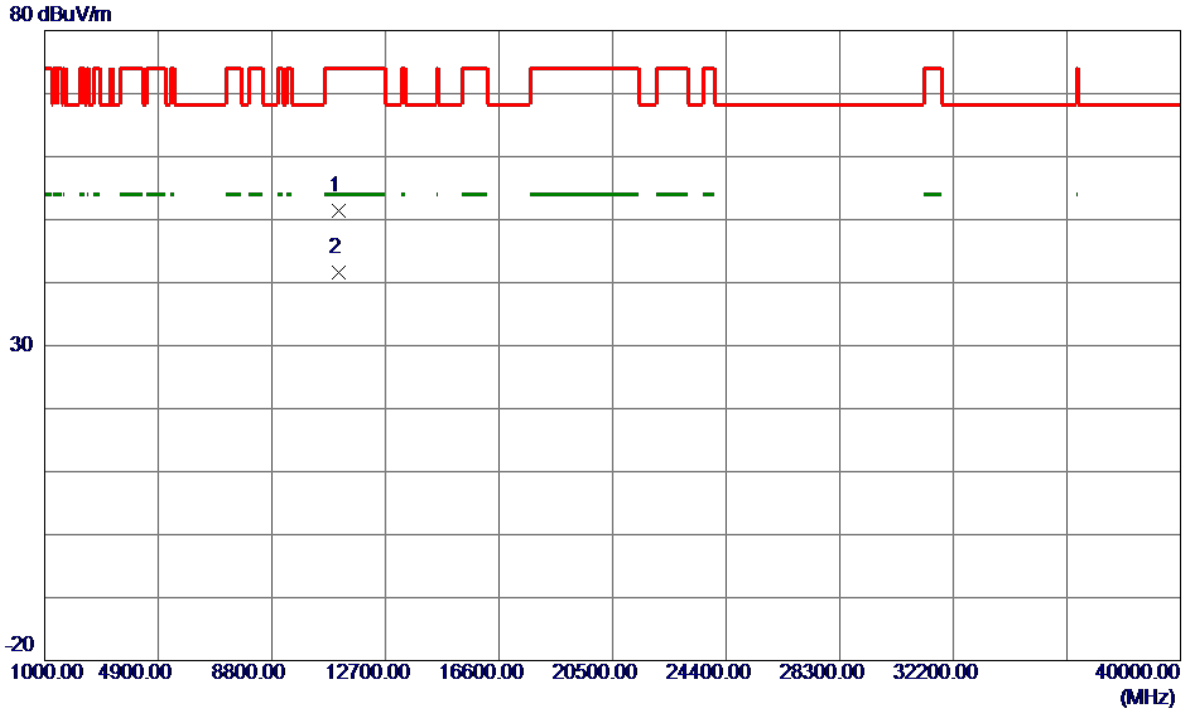

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11098.7000	35.06	16.38	51.44	74.00	-22.56	Peak	
2 *	11098.7000	25.20	16.38	41.58	54.00	-12.42	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Horizontal

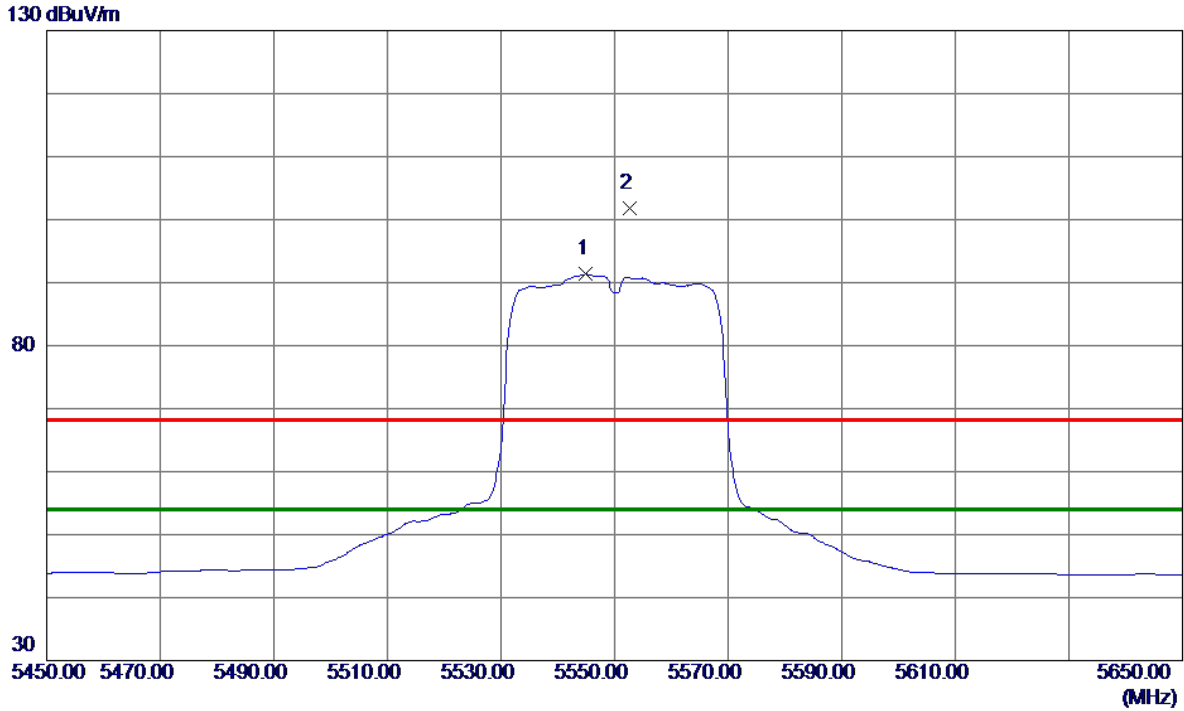

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5545.0000	48.29	43.02	91.31	54.00	37.31	AVG	No Limit
2	5552.6000	58.81	43.04	101.85	68.30	33.55	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Horizontal

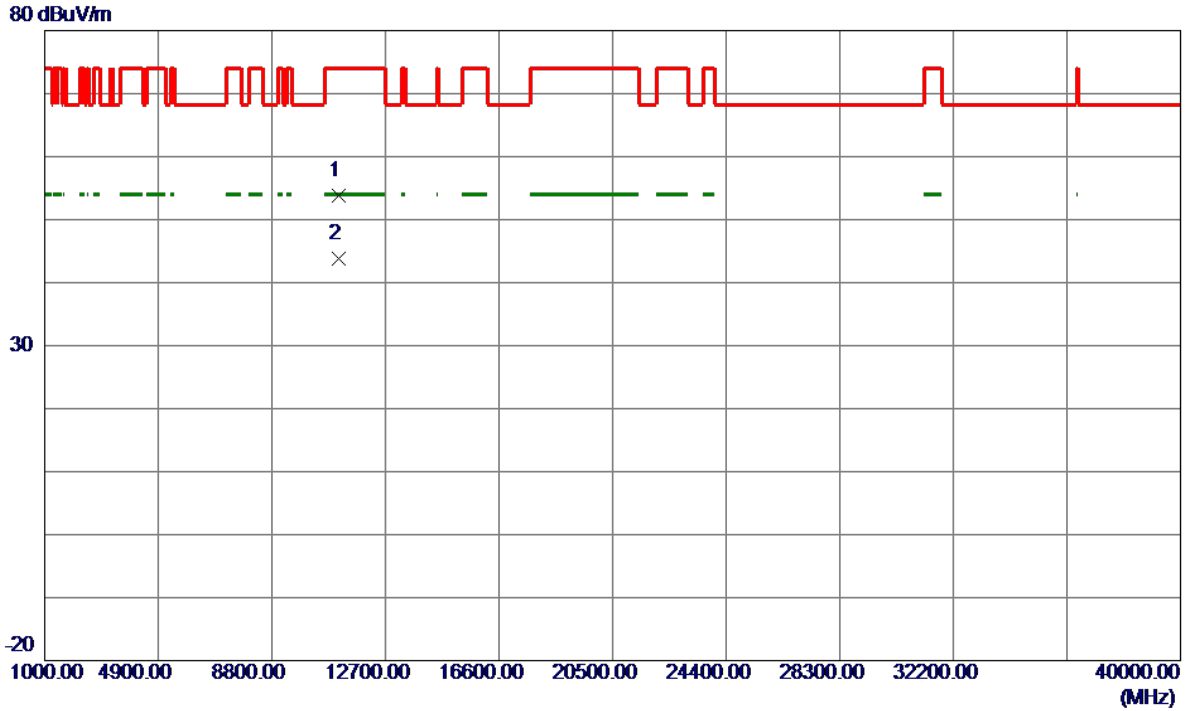

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11098.2000	37.51	16.37	53.88	74.00	-20.12	Peak	
2 *	11098.6000	27.51	16.38	43.89	54.00	-10.11	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


Vertical

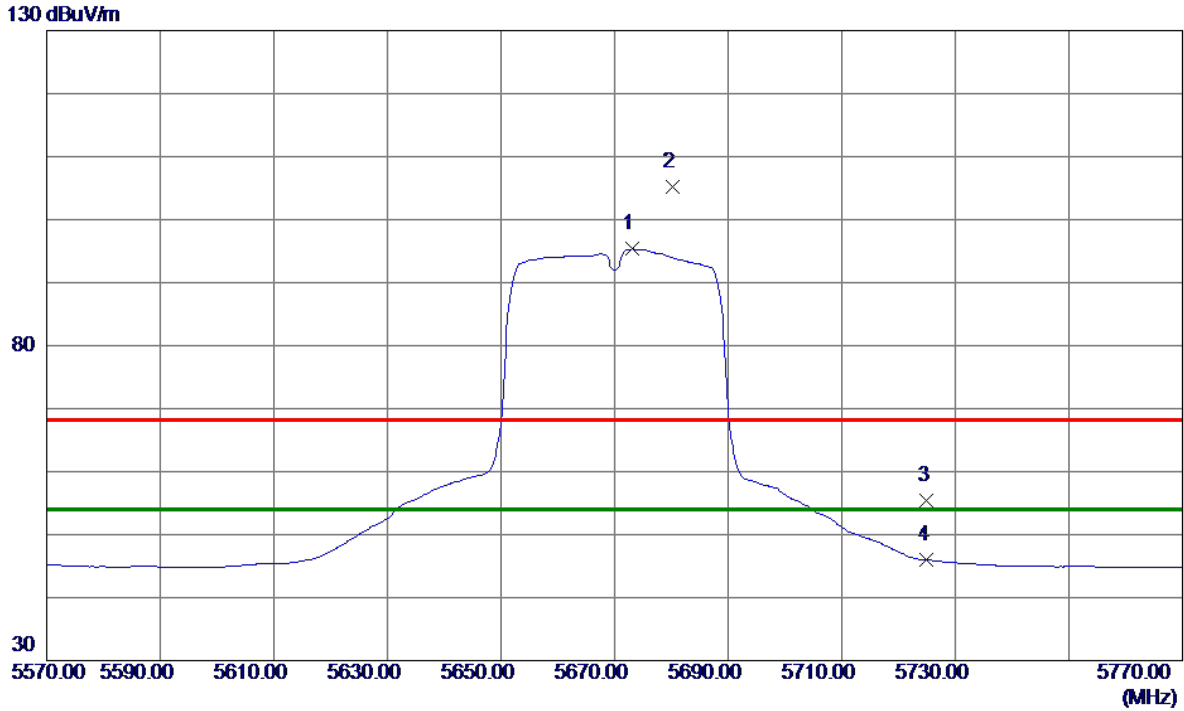

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5673.2000	51.91	43.40	95.31	54.00	41.31	AVG	No Limit
2	5680.2000	61.79	43.42	105.21	68.30	36.91	Peak	No Limit
3	5725.0000	11.89	43.56	55.45	68.30	-12.85	Peak	
4	5725.0000	2.36	43.56	45.92	54.00	-8.08	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


Vertical

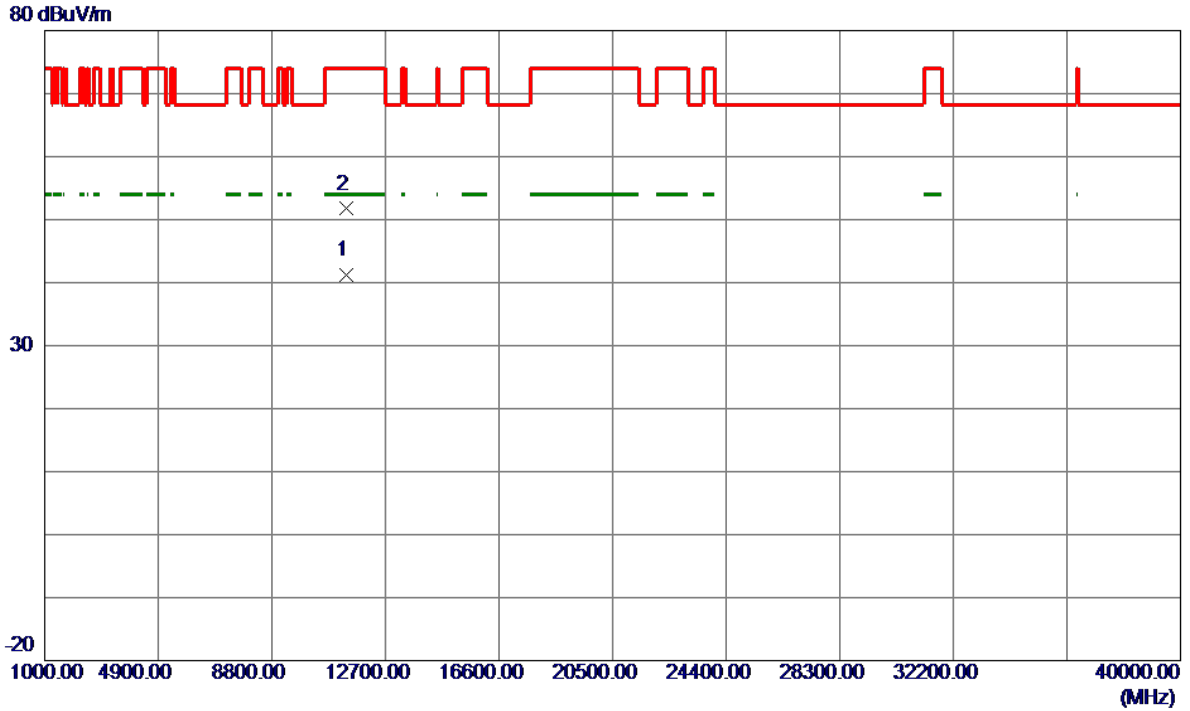

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11341.0900	23.93	17.23	41.16	54.00	-12.84	AVG	
2	11345.6900	34.46	17.24	51.70	74.00	-22.30	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


Horizontal

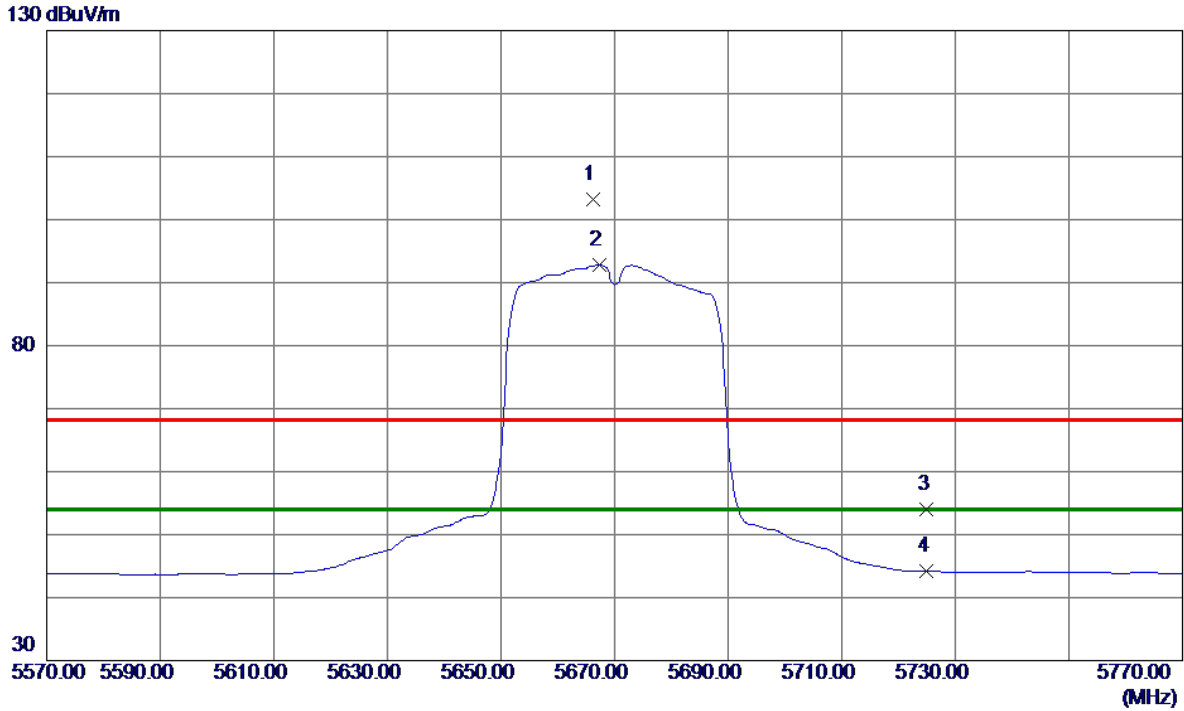

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5666.2000	59.75	43.38	103.13	68.30	34.83	Peak	No Limit
2 *	5667.4000	49.47	43.39	92.86	54.00	38.86	AVG	No Limit
3	5725.0000	10.44	43.56	54.00	68.30	-14.30	Peak	
4	5725.0000	0.57	43.56	44.13	54.00	-9.87	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


Horizontal

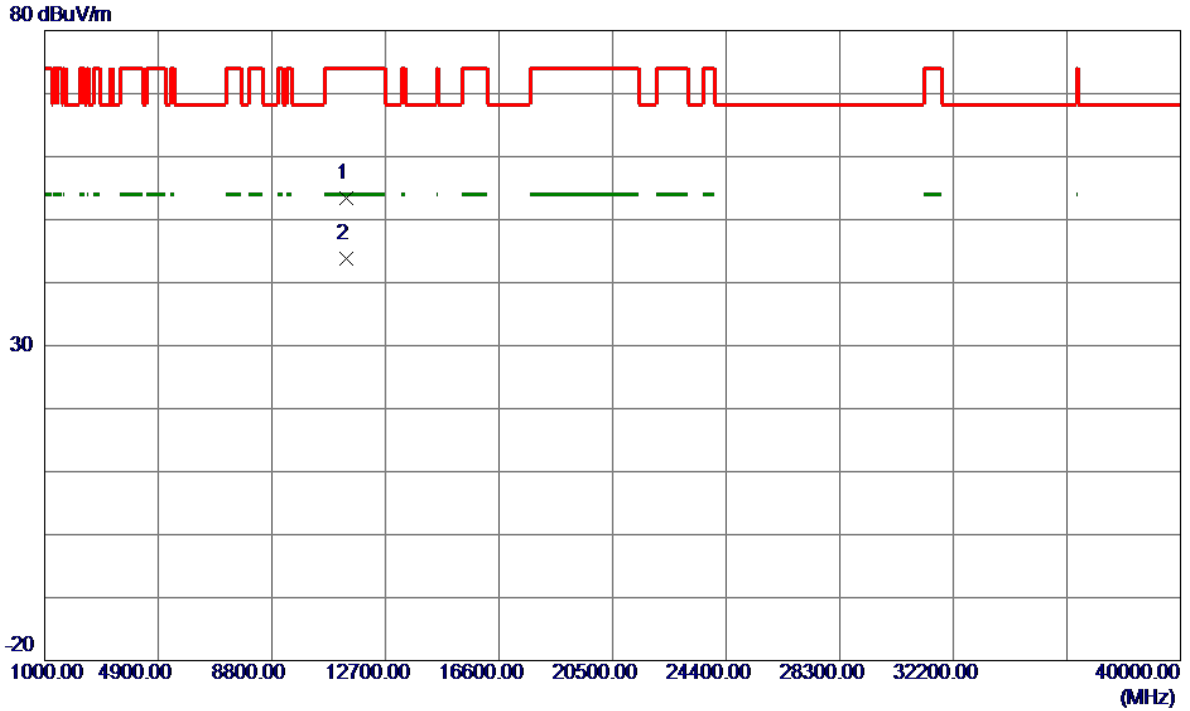

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11338.4000	36.19	17.22	53.41	74.00	-20.59	Peak	
2 *	11338.6000	26.50	17.22	43.72	54.00	-10.28	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


Vertical

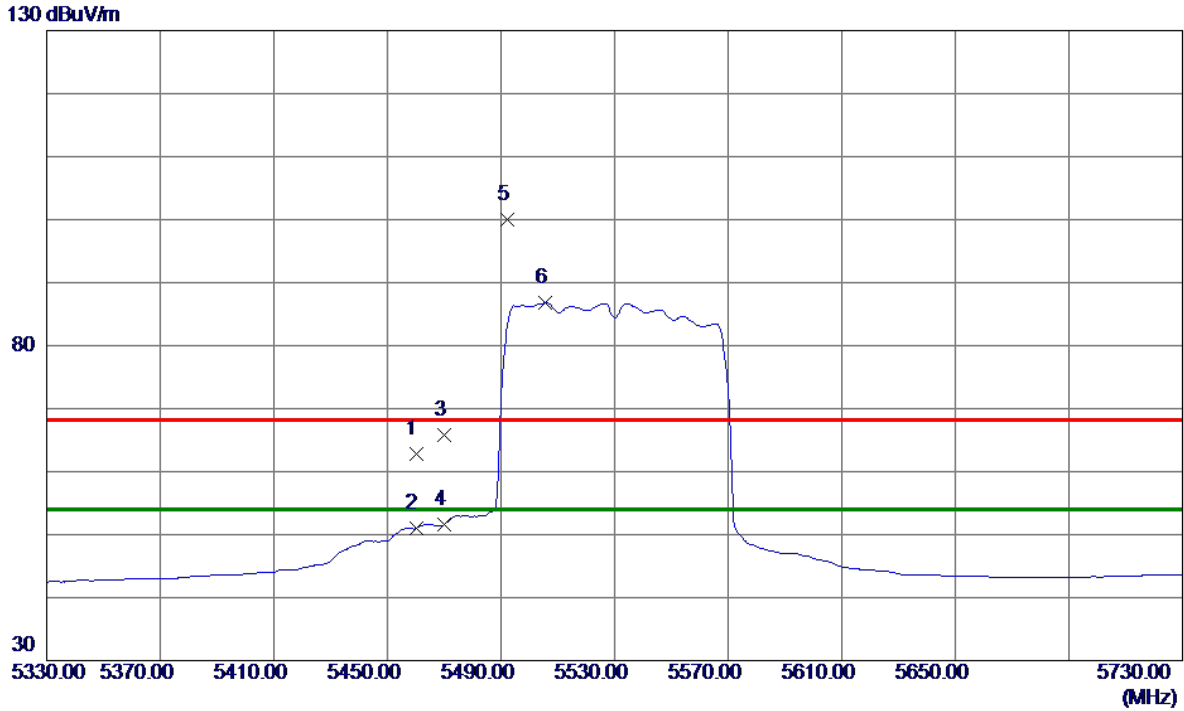

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	20.06	42.68	62.74	68.30	-5.56	Peak	
2	5460.0000	8.31	42.68	50.99	54.00	-3.01	AVG	
3	5470.0000	23.00	42.73	65.73	68.30	-2.57	Peak	
4	5470.0000	8.87	42.73	51.60	54.00	-2.40	AVG	
5	5492.4000	57.18	42.84	100.02	68.30	31.72	Peak	No Limit
6 *	5505.6000	43.86	42.90	86.76	54.00	32.76	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


Vertical

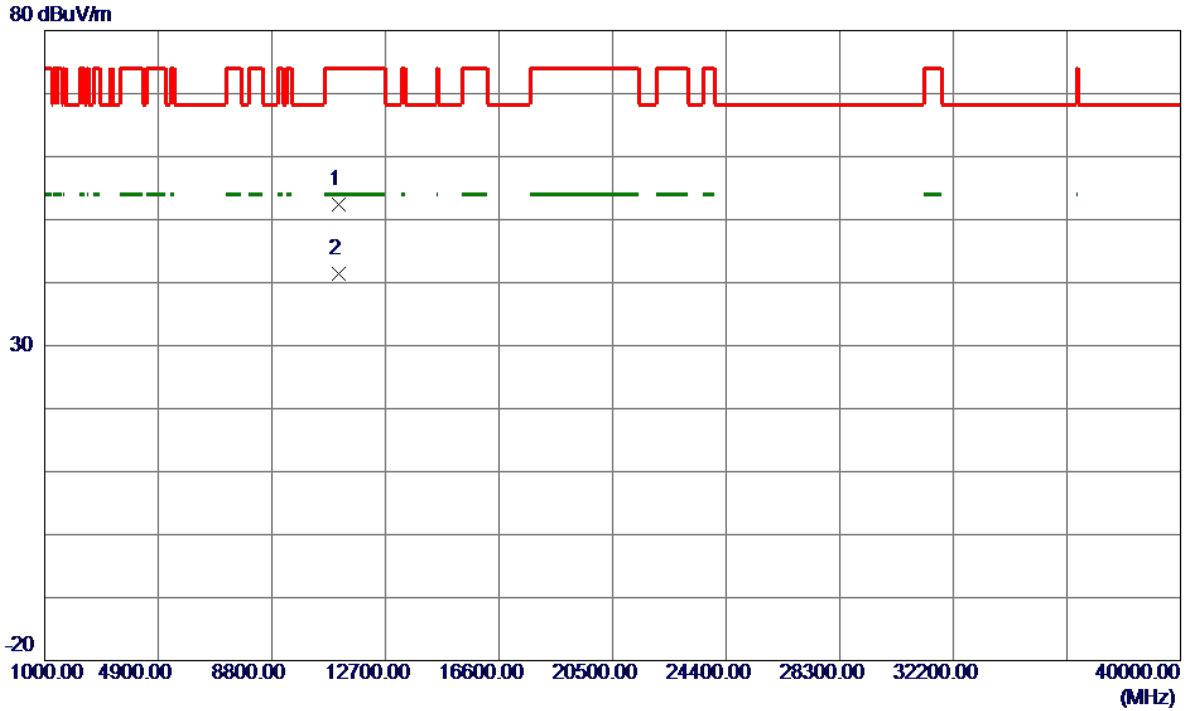

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11078.1900	36.12	16.30	52.42	74.00	-21.58	Peak	
2 *	11078.5900	25.14	16.31	41.45	54.00	-12.55	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


Horizontal

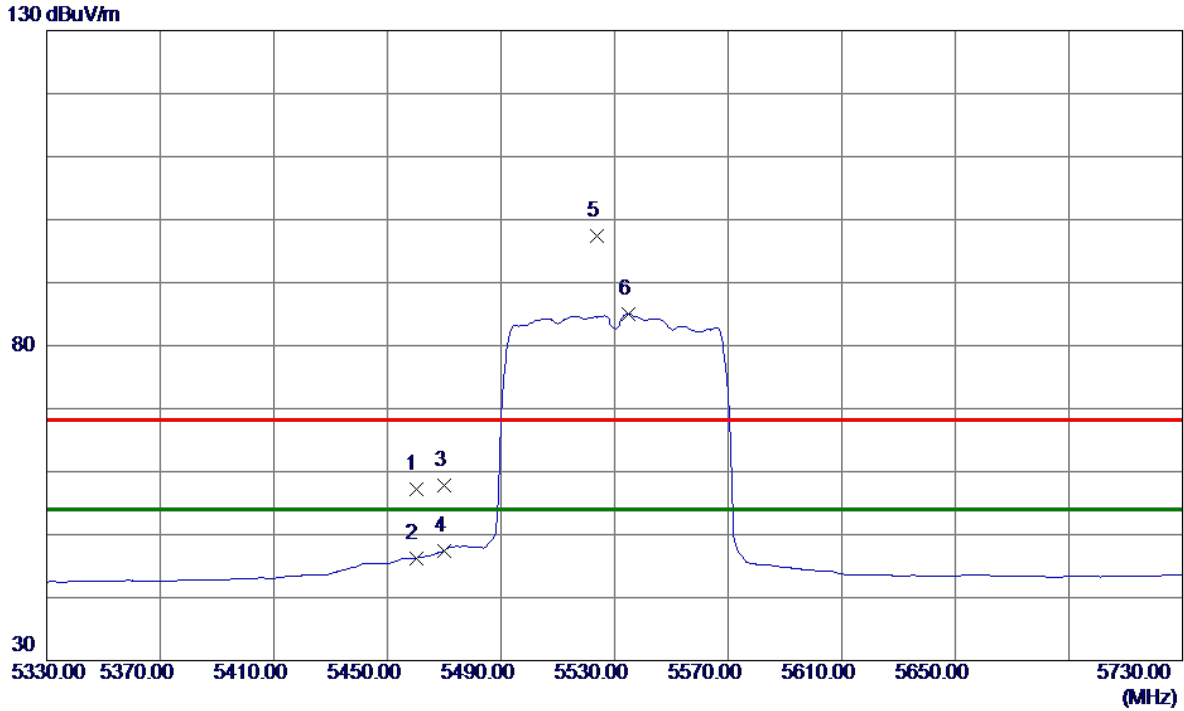

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	14.52	42.68	57.20	68.30	-11.10	Peak	
2	5460.0000	3.49	42.68	46.17	54.00	-7.83	AVG	
3	5470.0000	15.06	42.73	57.79	68.30	-10.51	Peak	
4	5470.0000	4.72	42.73	47.45	54.00	-6.55	AVG	
5	5523.6000	54.40	42.95	97.35	68.30	29.05	Peak	No Limit
6 *	5534.8000	42.00	42.99	84.99	54.00	30.99	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


Horizontal

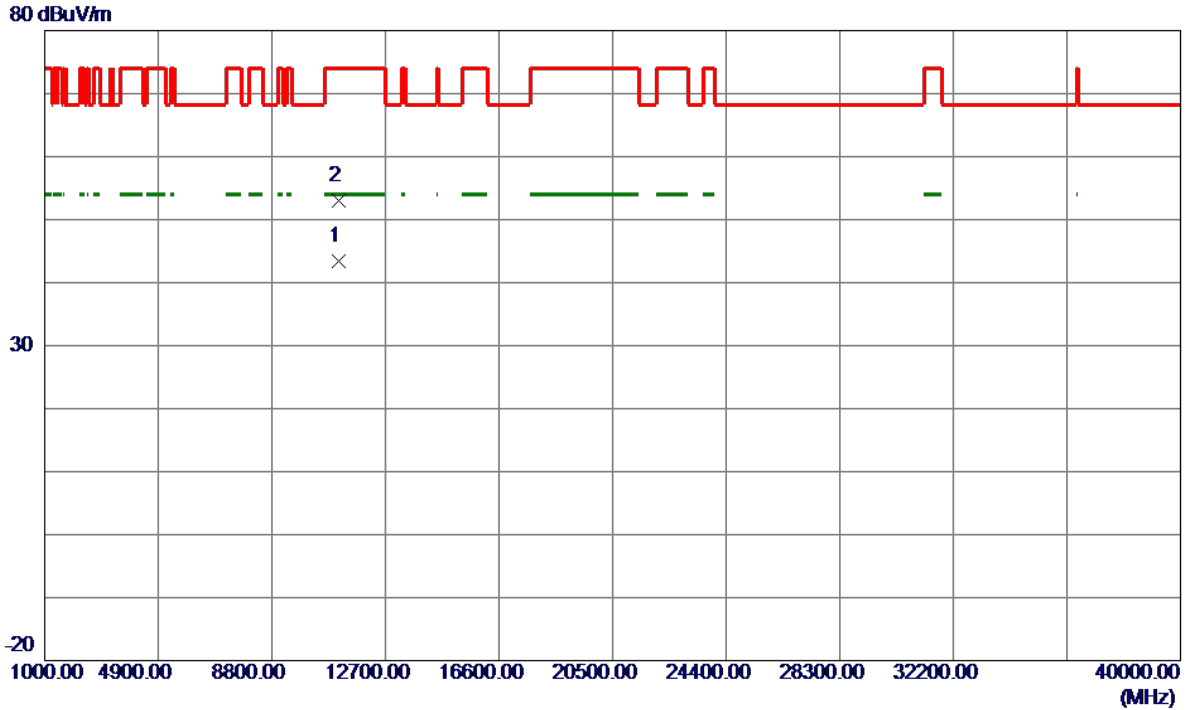

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11078.5000	27.02	16.31	43.33	54.00	-10.67	AVG	
2	11079.4000	36.68	16.31	52.99	74.00	-21.01	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


Vertical

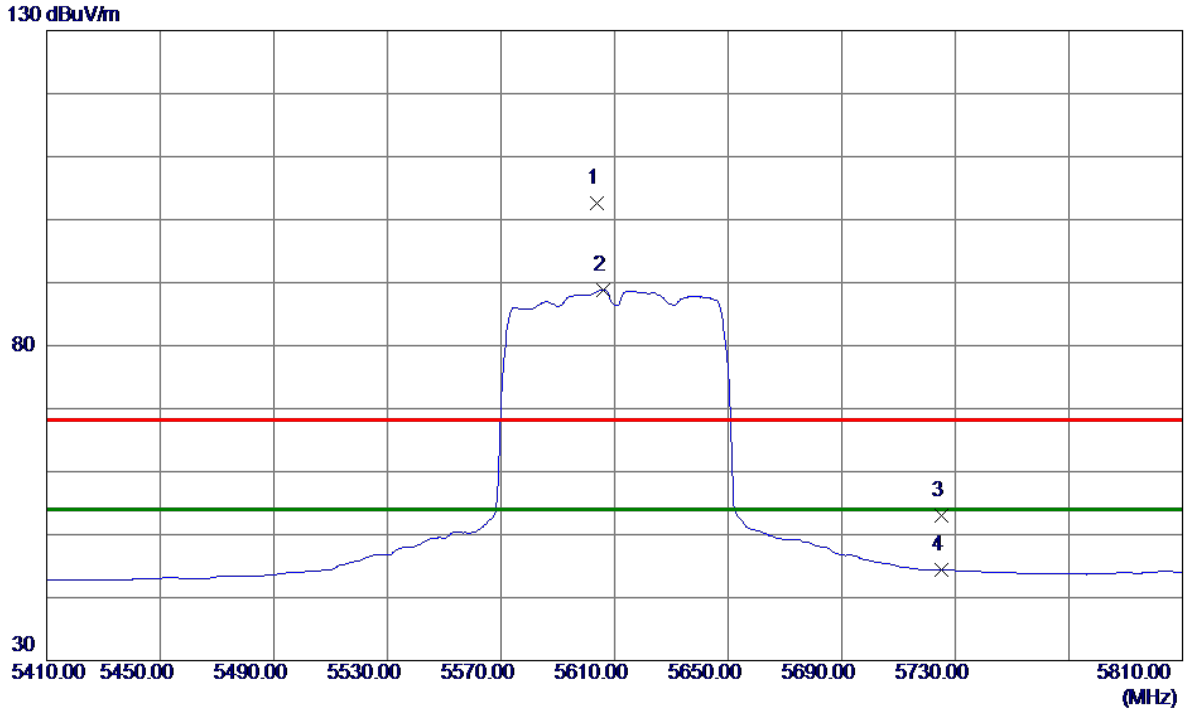

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5603.6000	59.35	43.19	102.54	68.30	34.24	Peak	No Limit
2 *	5606.0000	45.64	43.20	88.84	54.00	34.84	AVG	No Limit
3	5725.0000	9.43	43.56	52.99	68.30	-15.31	Peak	
4	5725.0000	0.79	43.56	44.35	54.00	-9.65	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


Vertical

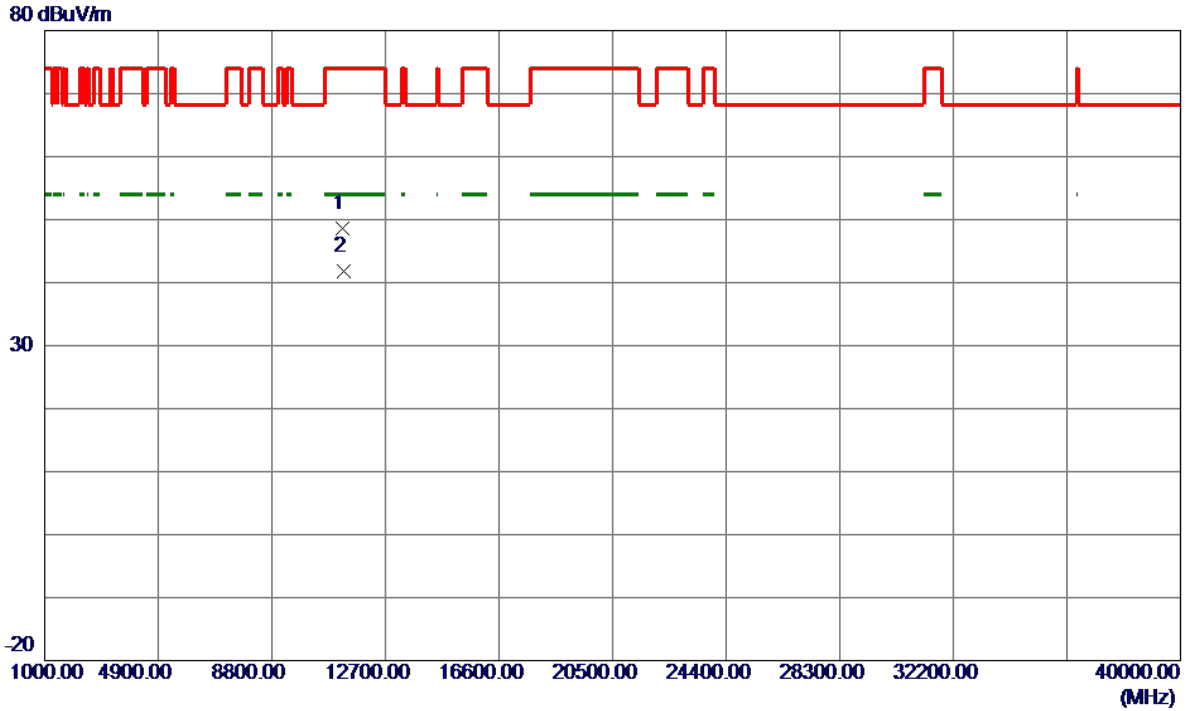

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11246.4900	31.64	16.90	48.54	74.00	-25.46	Peak	
2 *	11248.4900	24.92	16.90	41.82	54.00	-12.18	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


Horizontal

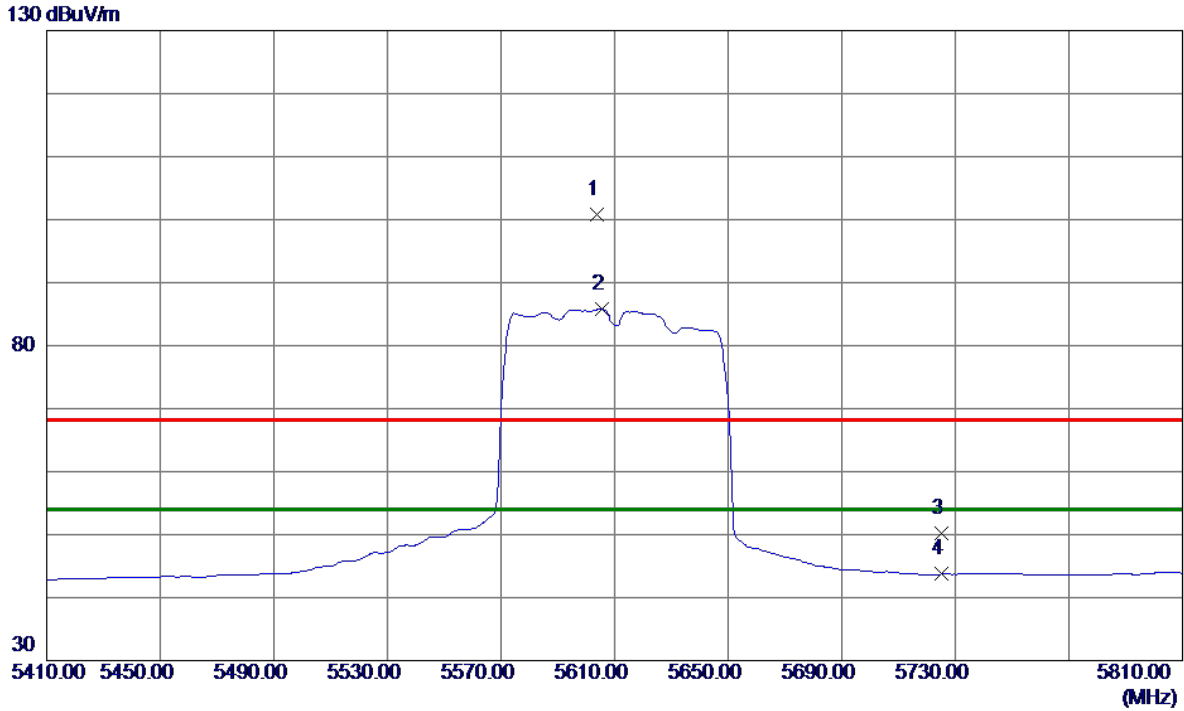

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5603.6000	57.70	43.19	100.89	68.30	32.59	Peak	No Limit
2	5605.6000	42.55	43.20	85.75	54.00	31.75	AVG	No Limit
3	5725.0000	6.73	43.56	50.29	68.30	-18.01	Peak	
4	5725.0000	0.15	43.56	43.71	54.00	-10.29	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


Horizontal

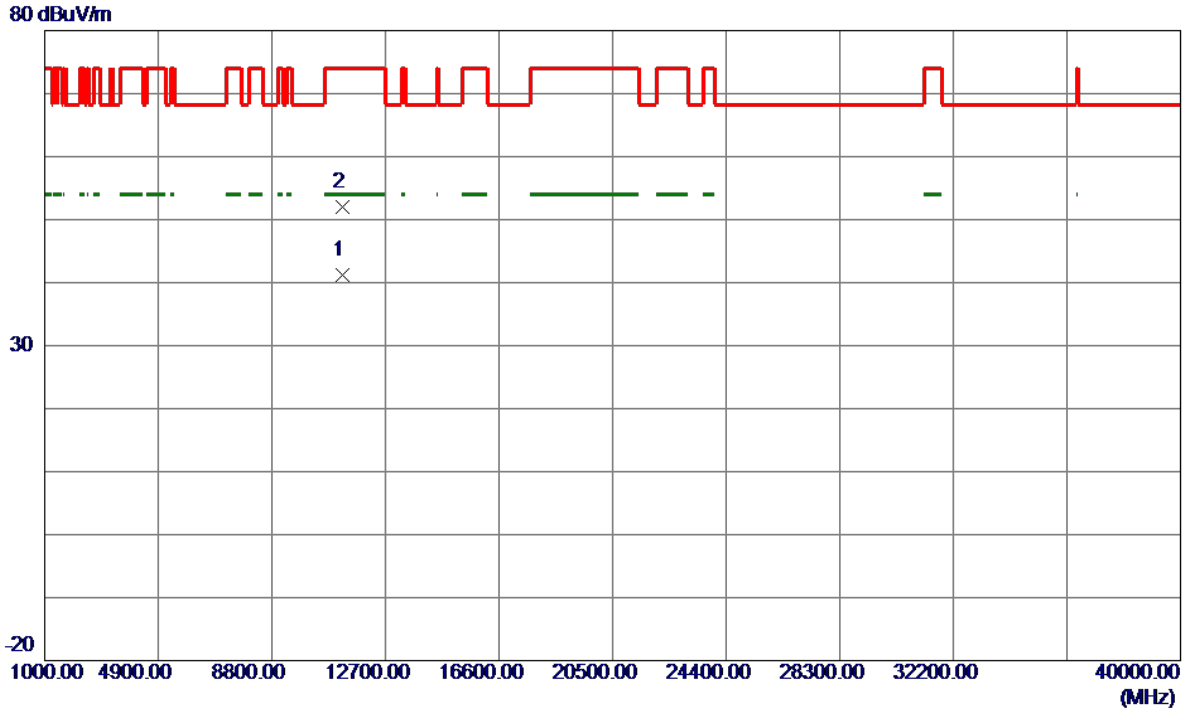

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11238.6000	24.40	16.87	41.27	54.00	-12.73	AVG	
2	11239.2000	35.05	16.87	51.92	74.00	-22.08	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Vertical

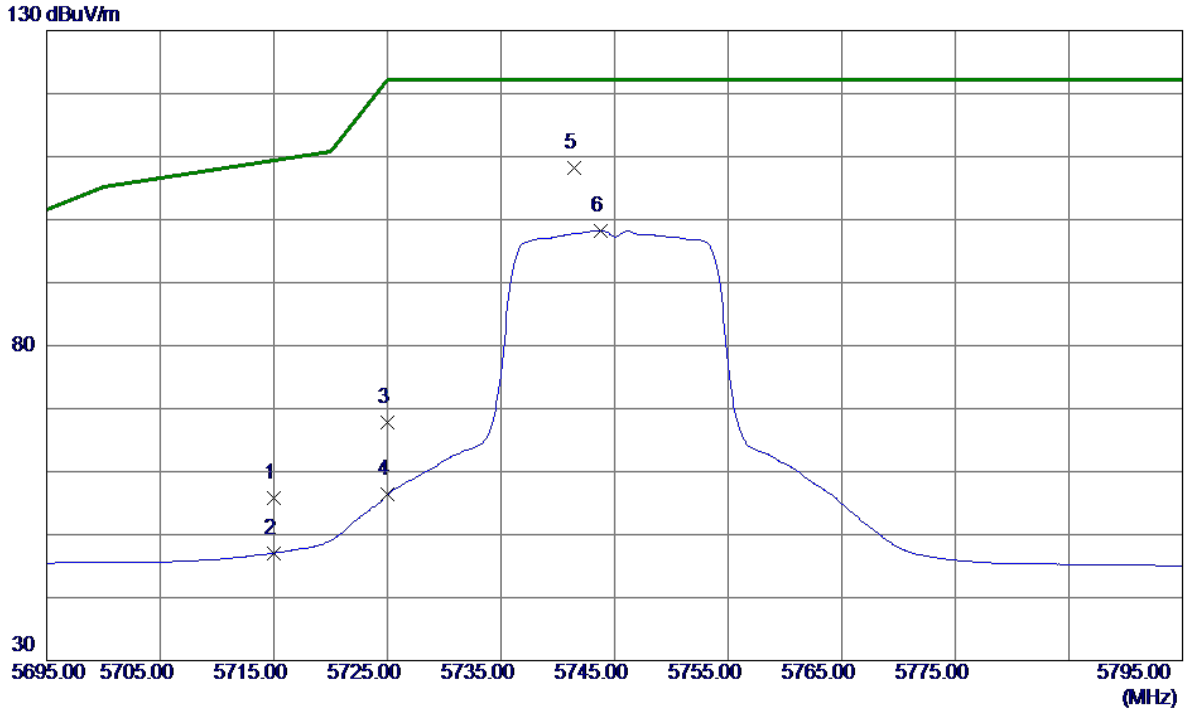

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	12.32	43.53	55.85	109.40	-53.55	Peak	
2	5715.0000	3.54	43.53	47.07	109.40	-62.33	AVG	
3	5725.0000	24.17	43.56	67.73	122.20	-54.47	Peak	
4	5725.0000	12.76	43.56	56.32	122.20	-65.88	AVG	
5 *	5741.4000	64.53	43.61	108.14	122.20	-14.06	Peak	
6	5743.8000	54.56	43.62	98.18	122.20	-24.02	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Vertical

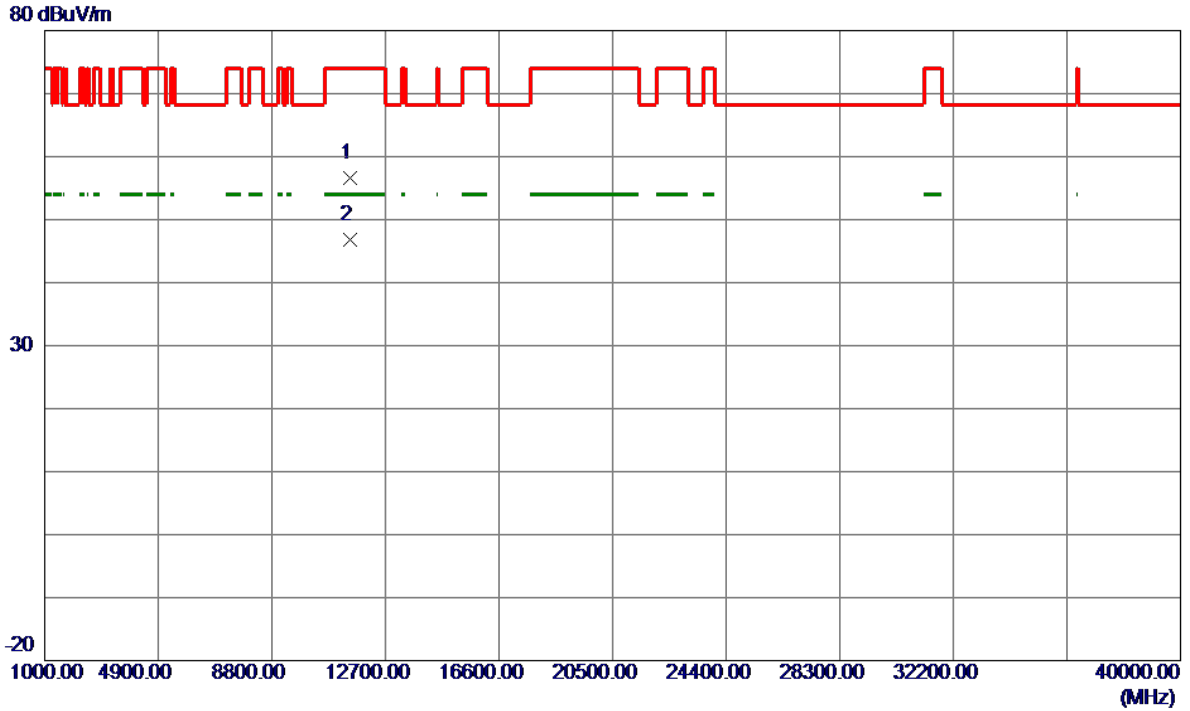

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11487.4500	38.83	17.74	56.57	74.00	-17.43	Peak	
2 *	11488.5500	29.02	17.74	46.76	54.00	-7.24	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Horizontal

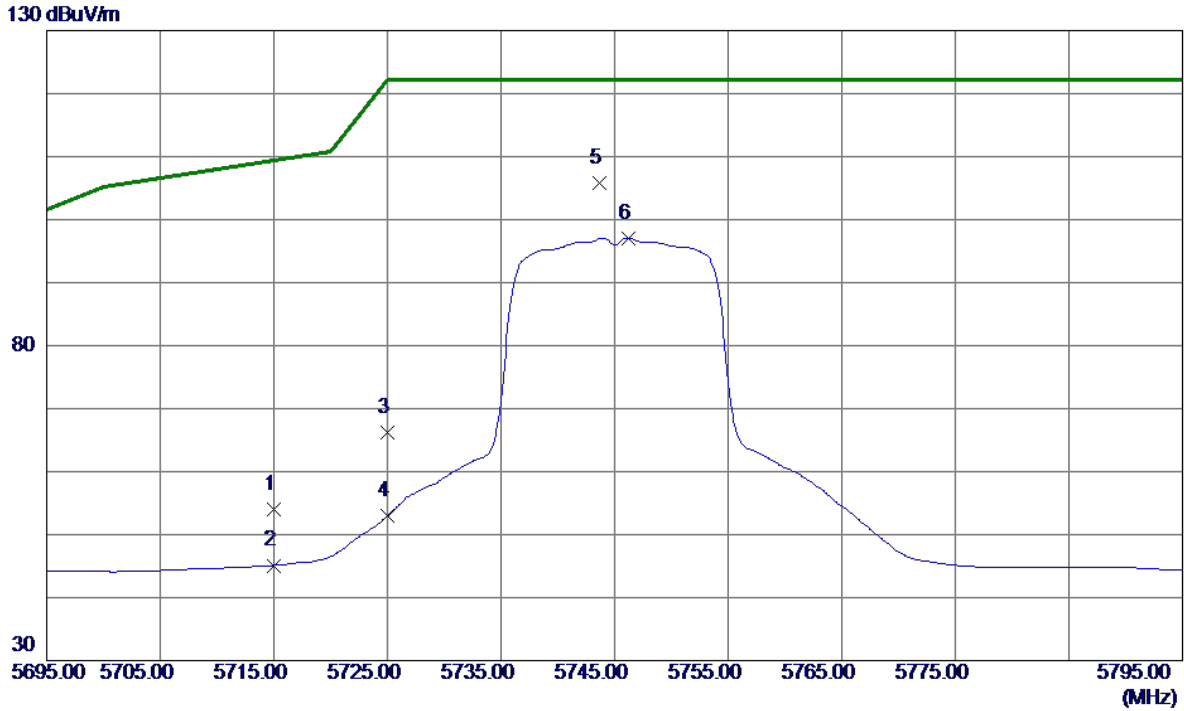

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	10.55	43.53	54.08	109.40	-55.32	Peak	
2	5715.0000	1.57	43.53	45.10	109.40	-64.30	AVG	
3	5725.0000	22.64	43.56	66.20	122.20	-56.00	Peak	
4	5725.0000	9.35	43.56	52.91	122.20	-69.29	AVG	
5 *	5743.7000	62.17	43.62	105.79	122.20	-16.41	Peak	
6	5746.2000	53.45	43.62	97.07	122.20	-25.13	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Horizontal

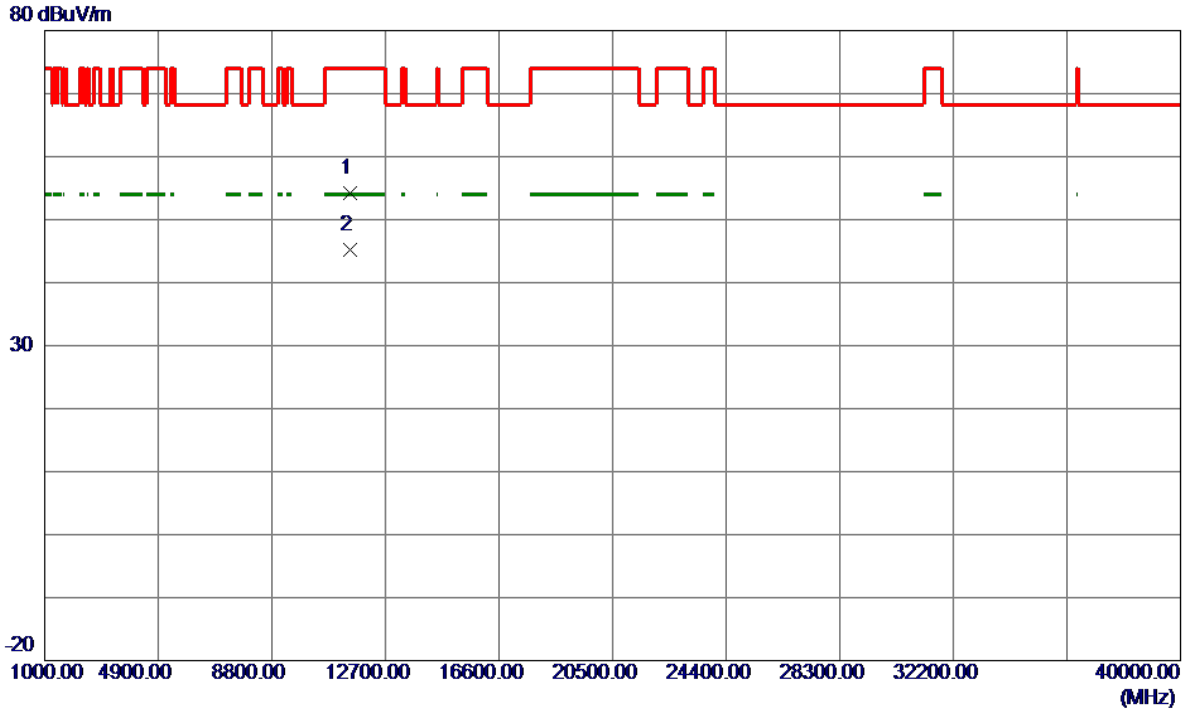

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11488.5000	36.40	17.74	54.14	74.00	-19.86	Peak	
2 *	11492.8000	27.39	17.76	45.15	54.00	-8.85	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Vertical

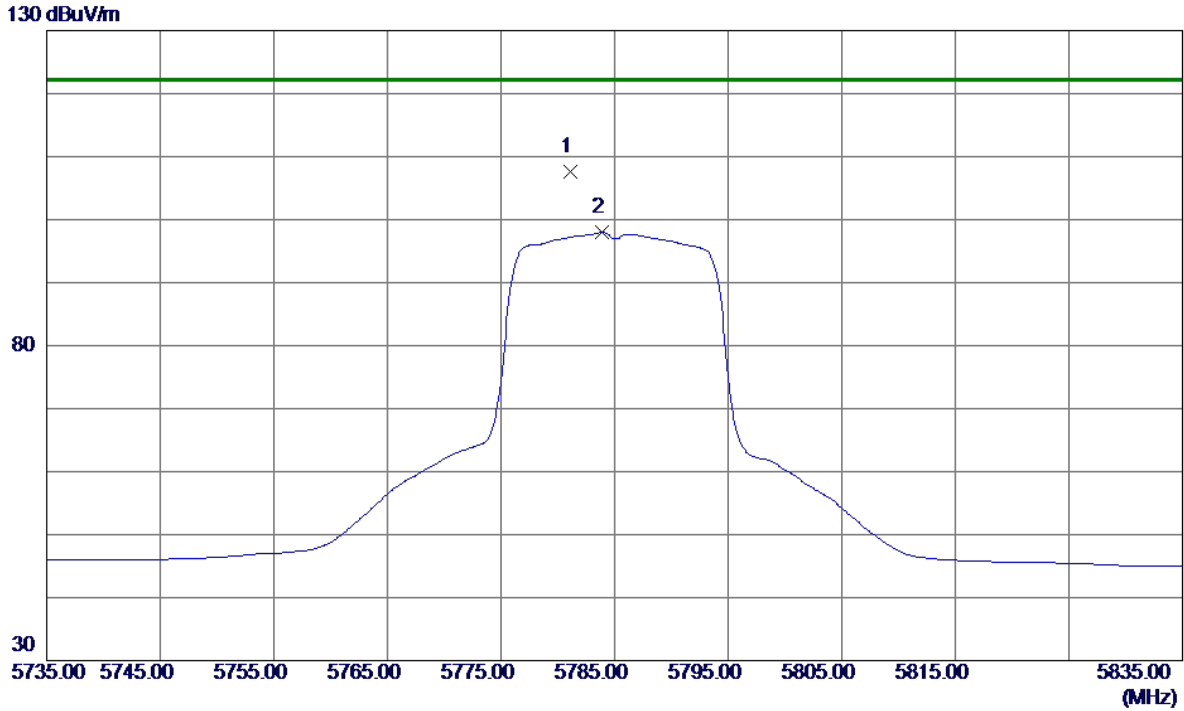

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5781.1000	63.86	43.73	107.59	122.20	-14.61	Peak	
2	5783.9000	54.20	43.74	97.94	122.20	-24.26	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Vertical

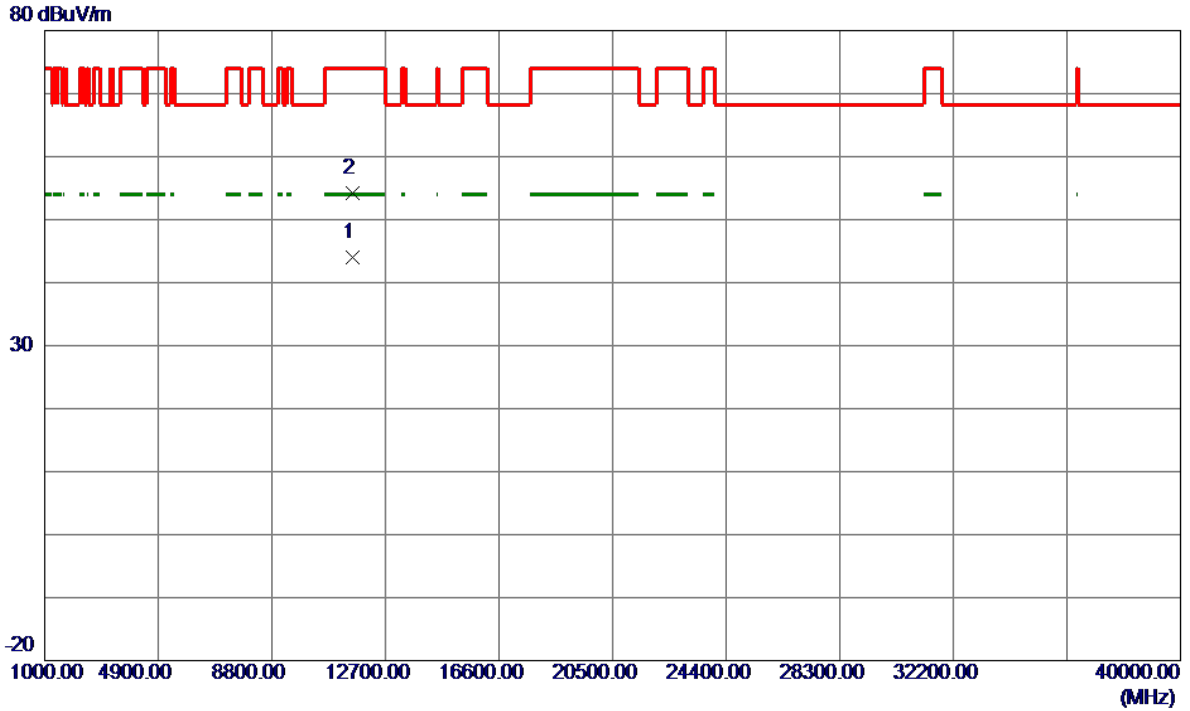

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11568.1000	26.18	17.82	44.00	54.00	-10.00	AVG	
2	11572.0000	36.47	17.82	54.29	74.00	-19.71	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Horizontal

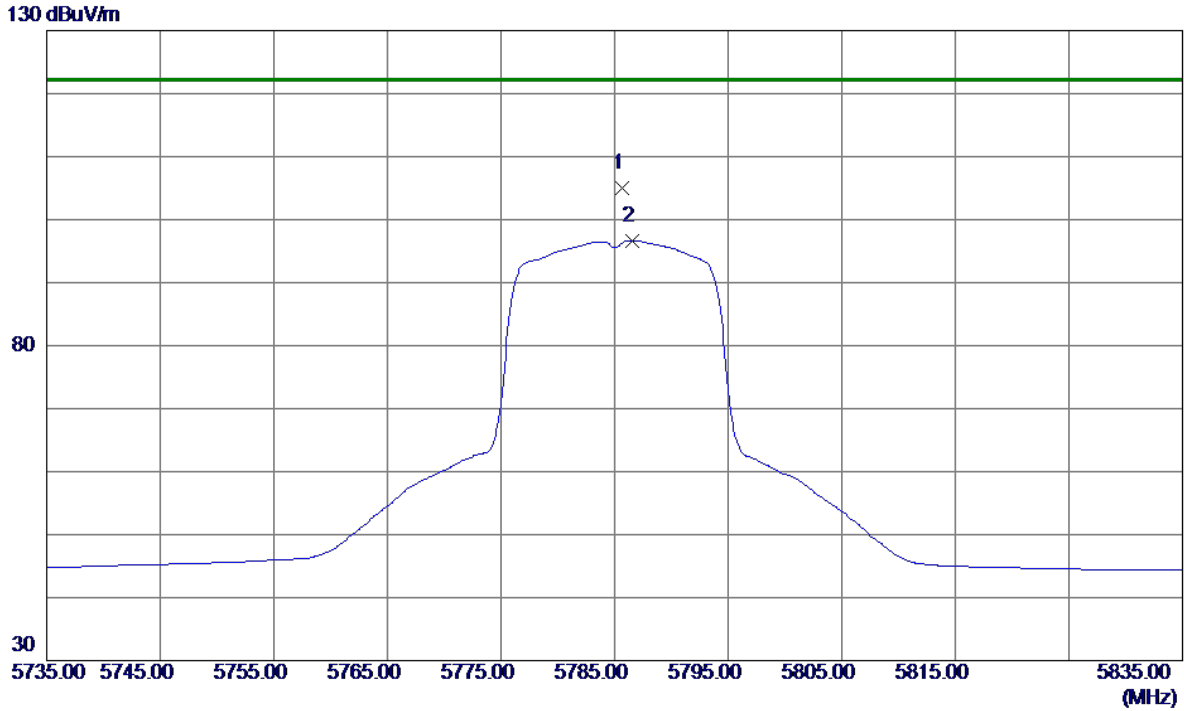

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5785.7000	61.32	43.74	105.06	122.20	-17.14	Peak	
2	5786.6000	52.90	43.75	96.65	122.20	-25.55	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Horizontal

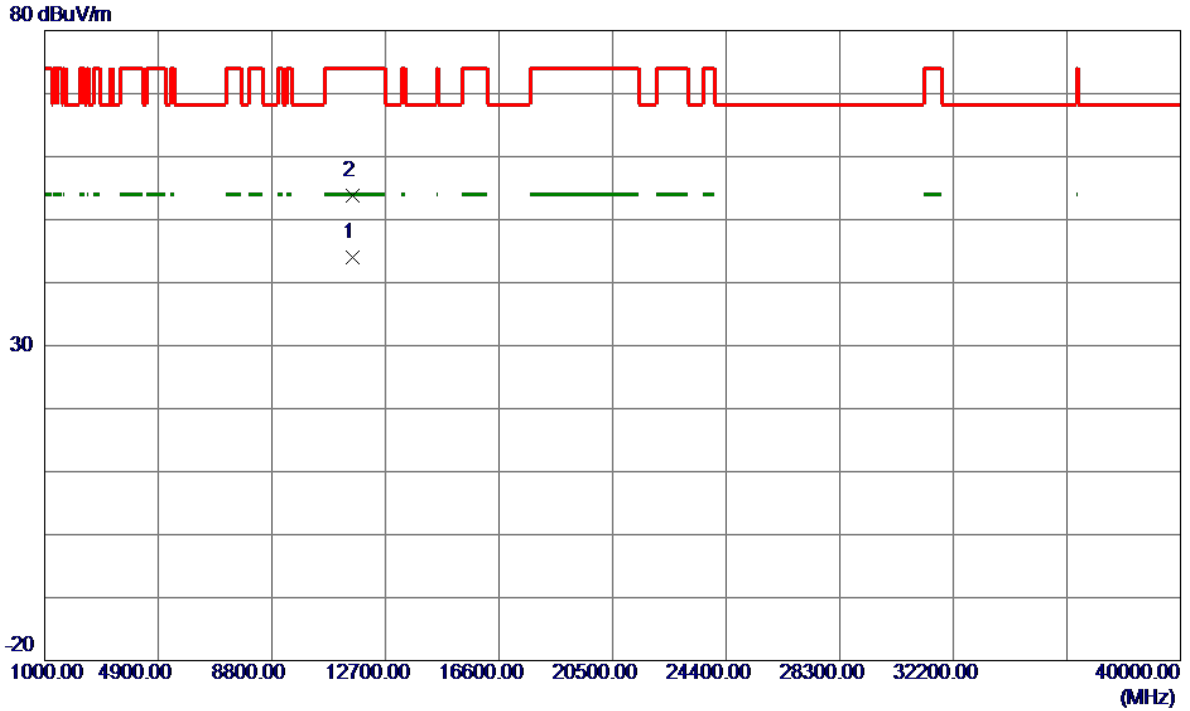

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.3000	26.24	17.82	44.06	54.00	-9.94	AVG	
2	11572.1000	35.89	17.82	53.71	74.00	-20.29	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Vertical

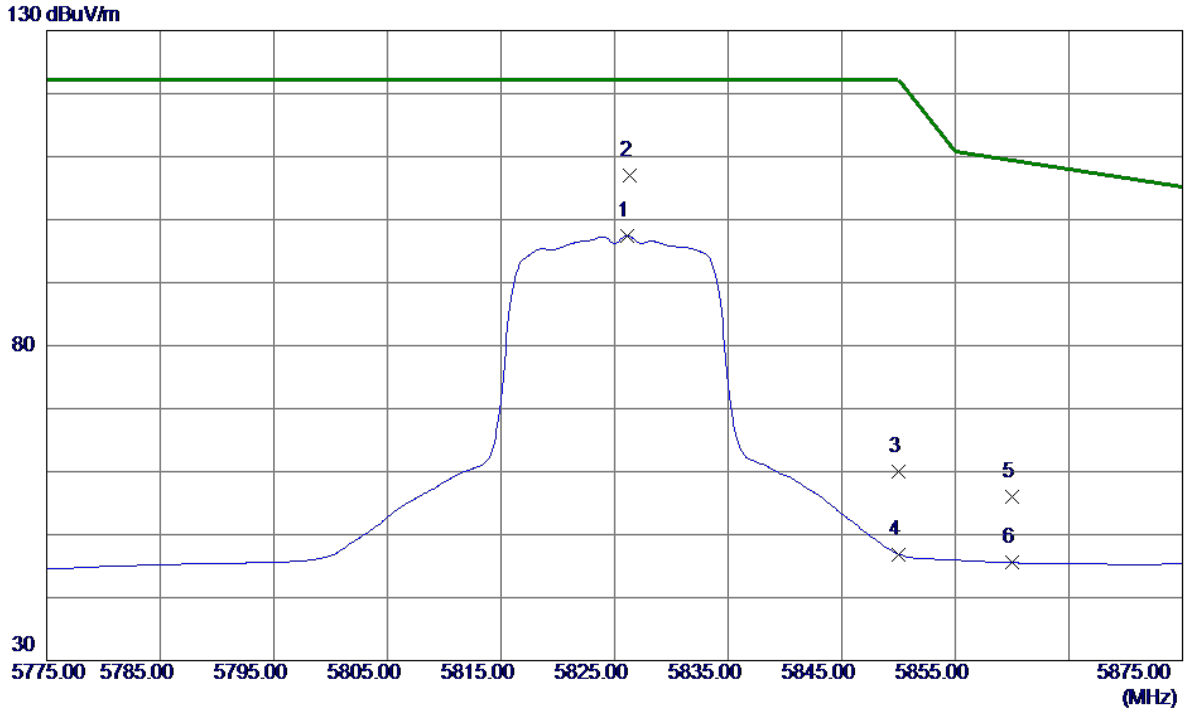

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5826.1000	53.53	43.86	97.39	122.20	-24.81	AVG	
2 *	5826.3000	63.07	43.87	106.94	122.20	-15.26	Peak	
3	5850.0000	16.07	43.94	60.01	122.20	-62.19	Peak	
4	5850.0000	2.95	43.94	46.89	122.20	-75.31	AVG	
5	5860.0000	12.04	43.97	56.01	109.40	-53.39	Peak	
6	5860.0000	1.56	43.97	45.53	109.40	-63.87	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Vertical

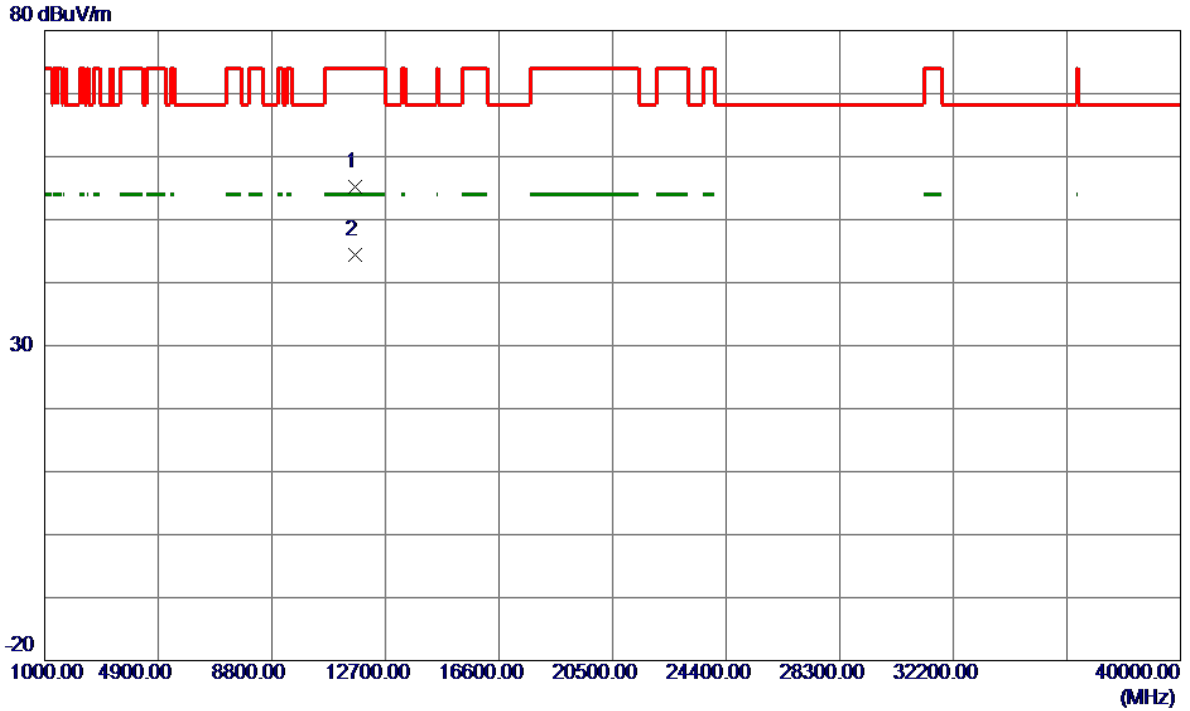

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11648.9500	37.26	17.86	55.12	74.00	-18.88	Peak	
2 *	11652.7500	26.53	17.86	44.39	54.00	-9.61	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Horizontal

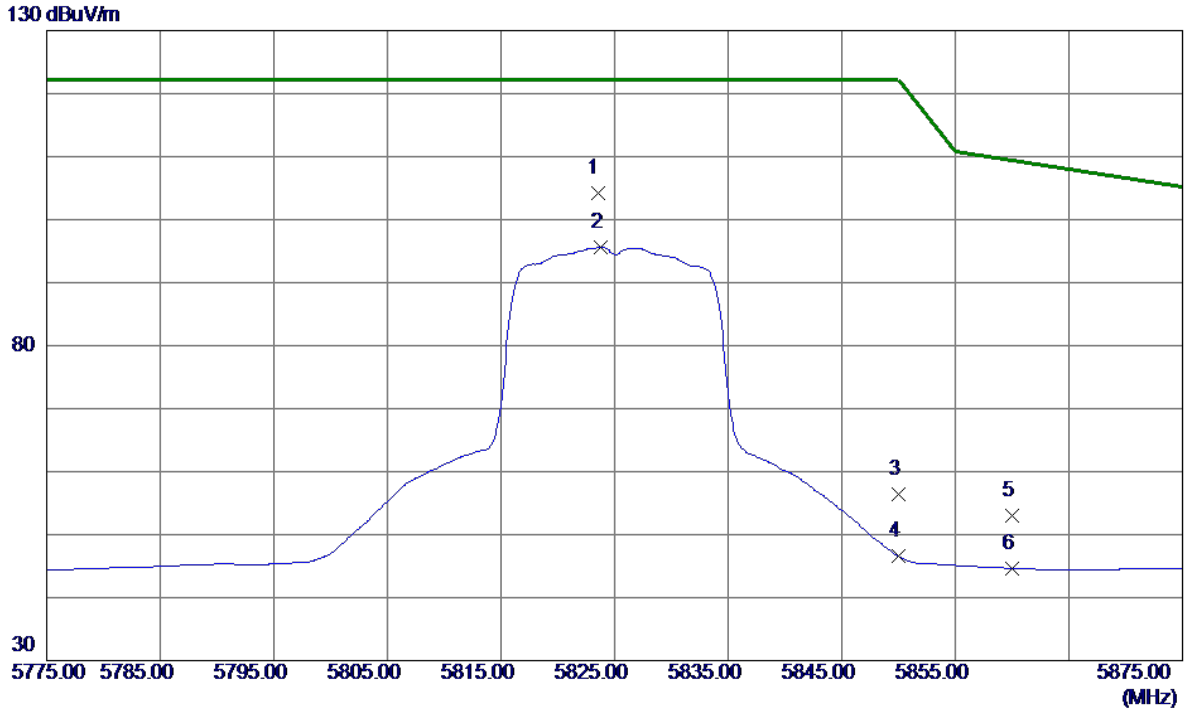

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5823.5000	60.43	43.86	104.29	122.20	-17.91	Peak	
2	5823.8000	51.69	43.86	95.55	122.20	-26.65	AVG	
3	5850.0000	12.54	43.94	56.48	122.20	-65.72	Peak	
4	5850.0000	2.59	43.94	46.53	122.20	-75.67	AVG	
5	5860.0000	9.11	43.97	53.08	109.40	-56.32	Peak	
6	5860.0000	0.66	43.97	44.63	109.40	-64.77	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Horizontal

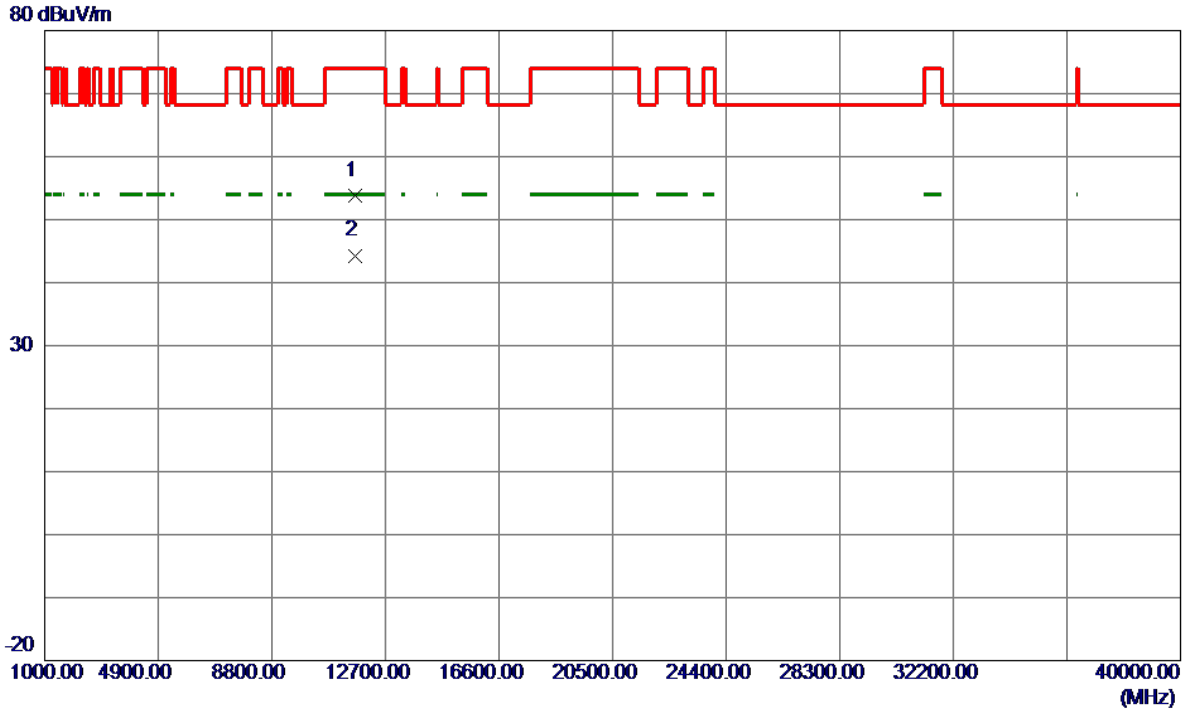

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11649.9000	35.86	17.86	53.72	74.00	-20.28	Peak	
2 *	11651.2000	26.44	17.86	44.30	54.00	-9.70	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Vertical

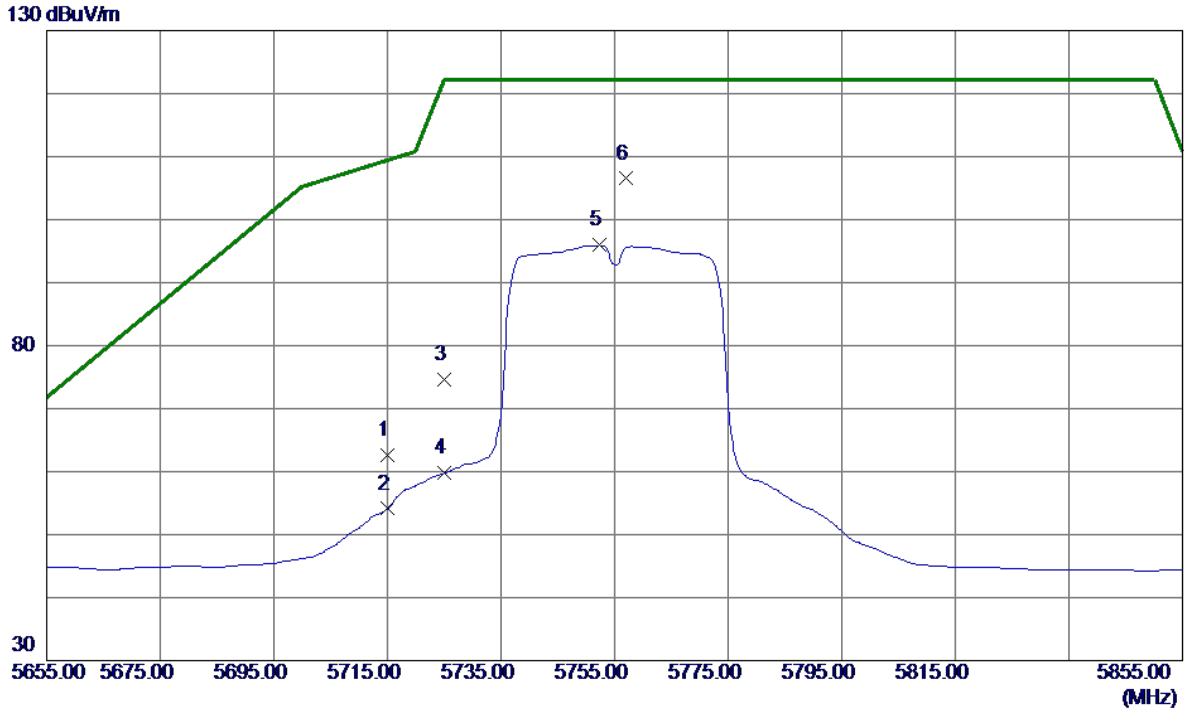

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	19.01	43.53	62.54	109.40	-46.86	Peak	
2	5715.0000	10.57	43.53	54.10	109.40	-55.30	AVG	
3	5725.0000	31.03	43.56	74.59	122.20	-47.61	Peak	
4	5725.0000	16.16	43.56	59.72	122.20	-62.48	AVG	
5	5752.4000	52.27	43.64	95.91	122.20	-26.29	AVG	
6 *	5757.0000	62.84	43.66	106.50	122.20	-15.70	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Vertical

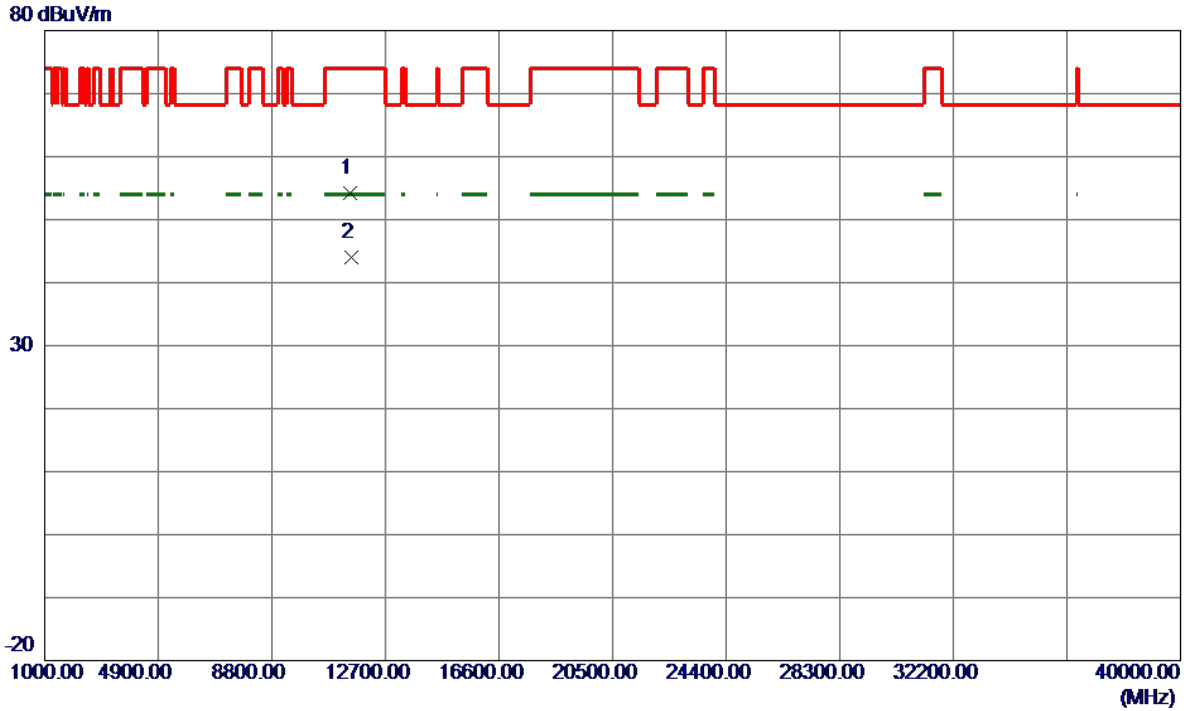

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11506.6000	36.46	17.79	54.25	74.00	-19.75	Peak	
2 *	11511.2000	26.22	17.79	44.01	54.00	-9.99	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

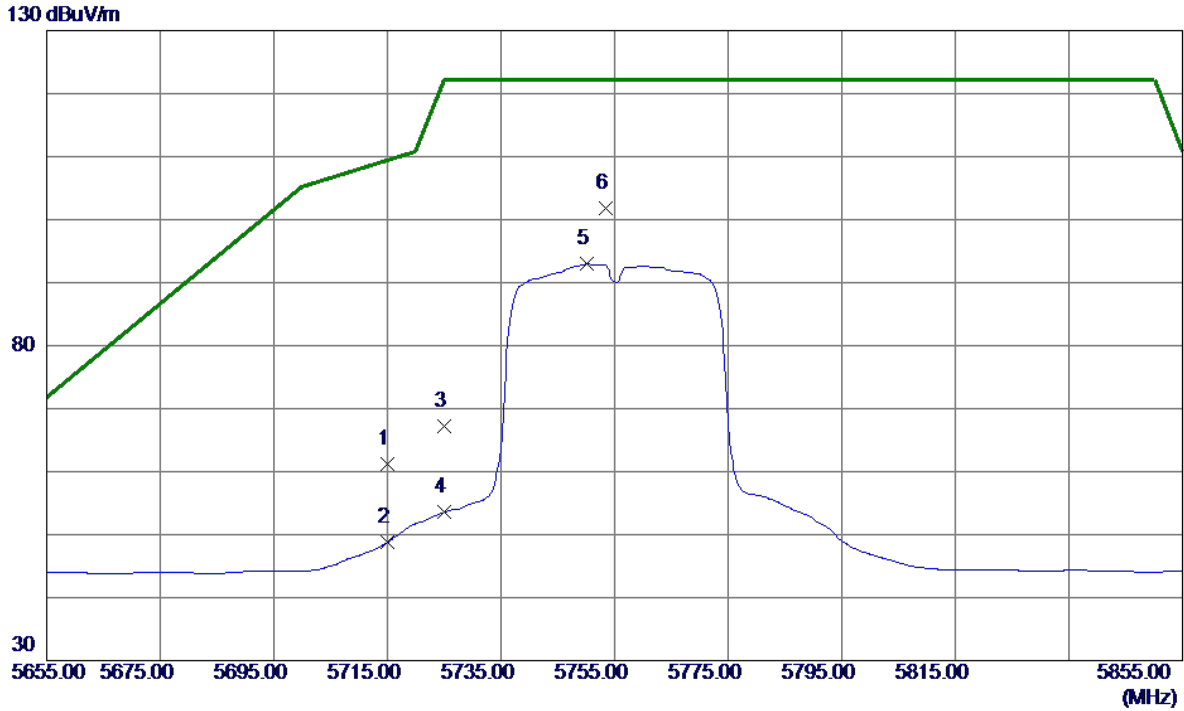

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	17.65	43.53	61.18	109.40	-48.22	Peak	
2	5715.0000	5.28	43.53	48.81	109.40	-60.59	AVG	
3	5725.0000	23.67	43.56	67.23	122.20	-54.97	Peak	
4	5725.0000	9.98	43.56	53.54	122.20	-68.66	AVG	
5	5750.2000	49.31	43.64	92.95	122.20	-29.25	AVG	
6 *	5753.4000	58.14	43.65	101.79	122.20	-20.41	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

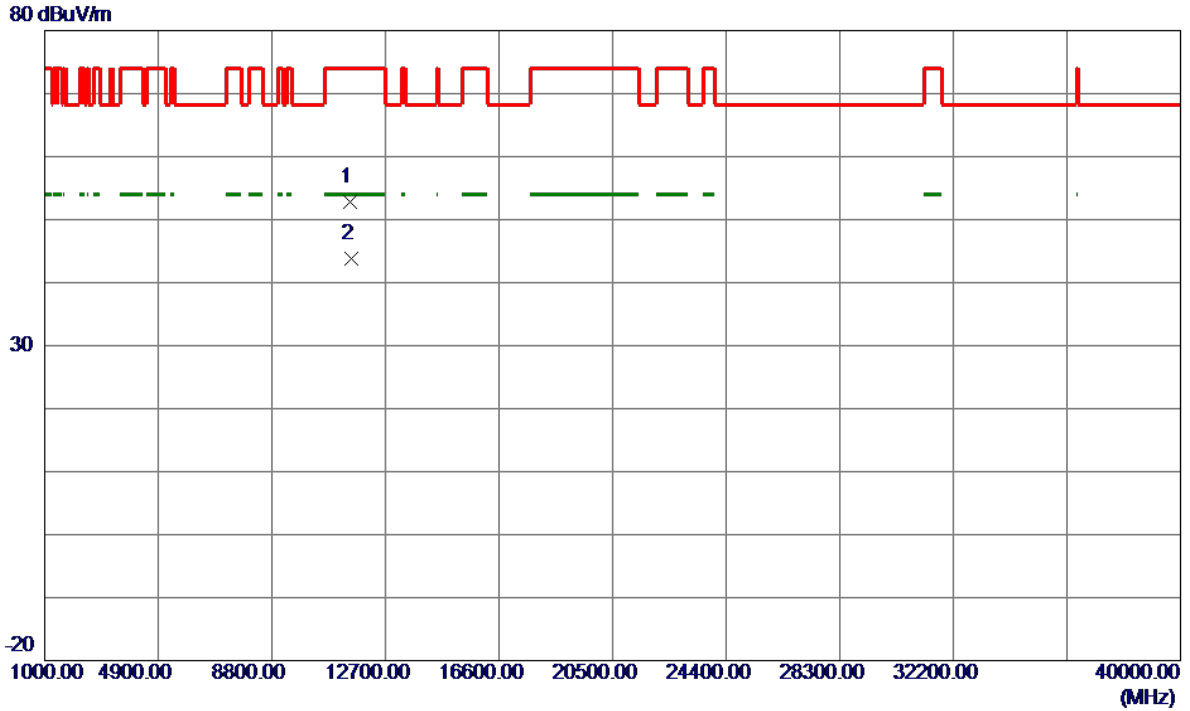

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11508.3000	35.00	17.79	52.79	74.00	-21.21	Peak	
2 *	11511.1000	25.93	17.79	43.72	54.00	-10.28	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Vertical

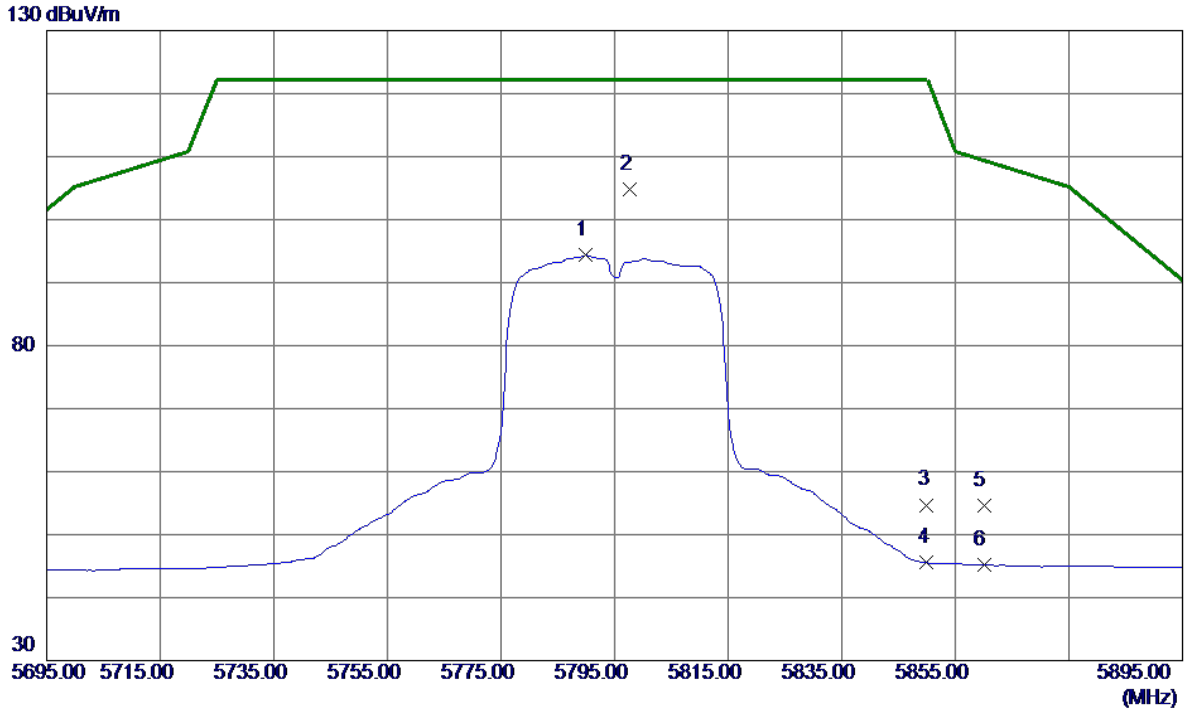

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5789.8000	50.55	43.76	94.31	122.20	-27.89	AVG	
2 *	5797.6000	61.03	43.78	104.81	122.20	-17.39	Peak	
3	5850.0000	10.76	43.94	54.70	122.20	-67.50	Peak	
4	5850.0000	1.60	43.94	45.54	122.20	-76.66	AVG	
5	5860.0000	10.68	43.97	54.65	109.40	-54.75	Peak	
6	5860.0000	1.19	43.97	45.16	109.40	-64.24	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Vertical

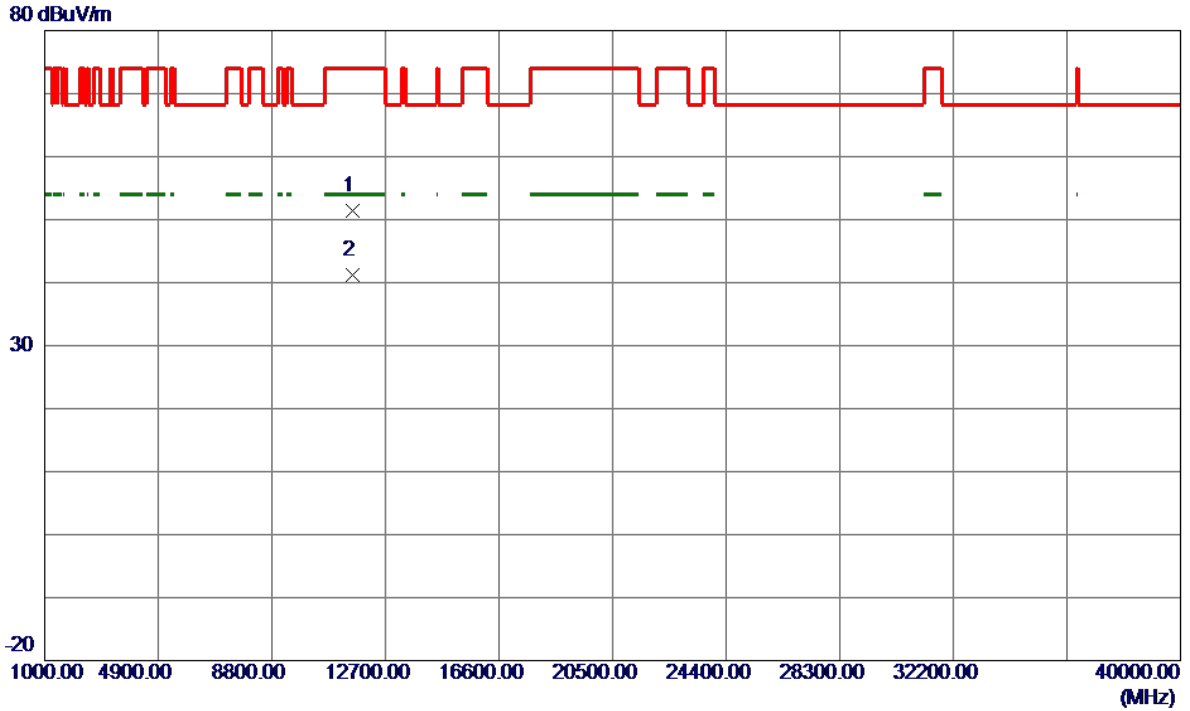

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11588.0000	33.63	17.83	51.46	74.00	-22.54	Peak	
2 *	11591.1000	23.37	17.83	41.20	54.00	-12.80	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Horizontal

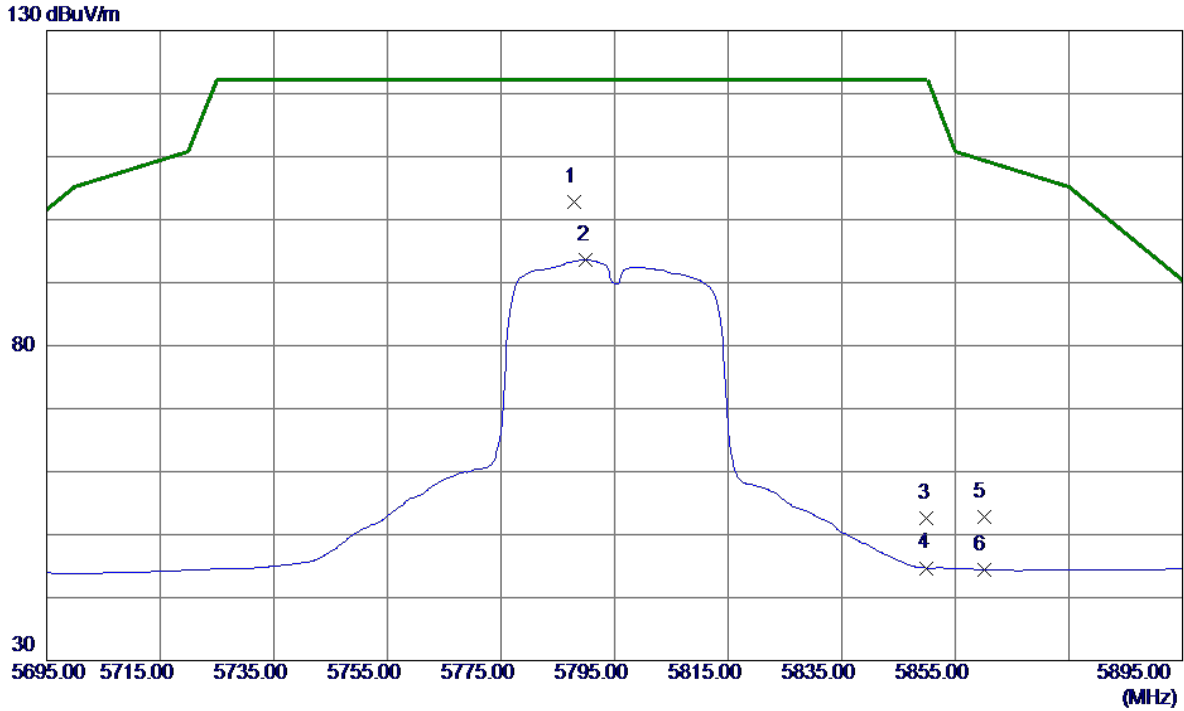

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5787.8000	59.04	43.75	102.79	122.20	-19.41	Peak	
2	5790.0000	49.91	43.76	93.67	122.20	-28.53	AVG	
3	5850.0000	8.62	43.94	52.56	122.20	-69.64	Peak	
4	5850.0000	0.76	43.94	44.70	122.20	-77.50	AVG	
5	5860.0000	8.91	43.97	52.88	109.40	-56.52	Peak	
6	5860.0000	0.46	43.97	44.43	109.40	-64.97	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Horizontal

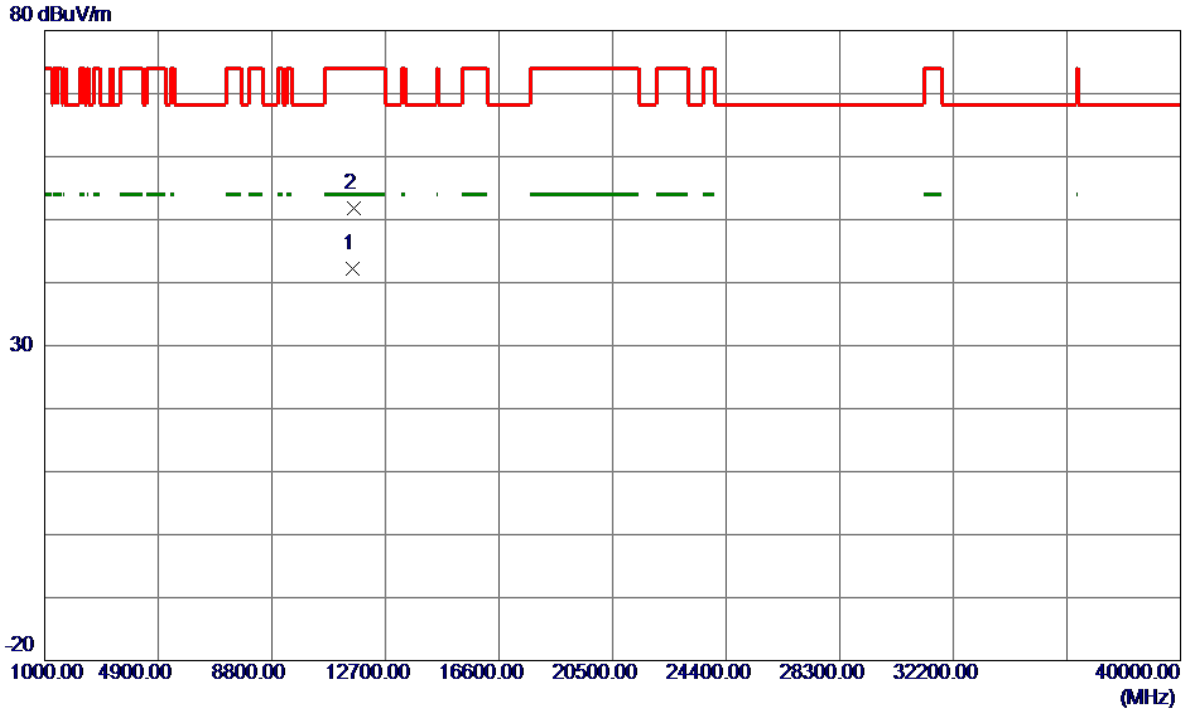

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11590.9000	24.30	17.83	42.13	54.00	-11.87	AVG	
2	11595.7000	33.91	17.83	51.74	74.00	-22.26	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

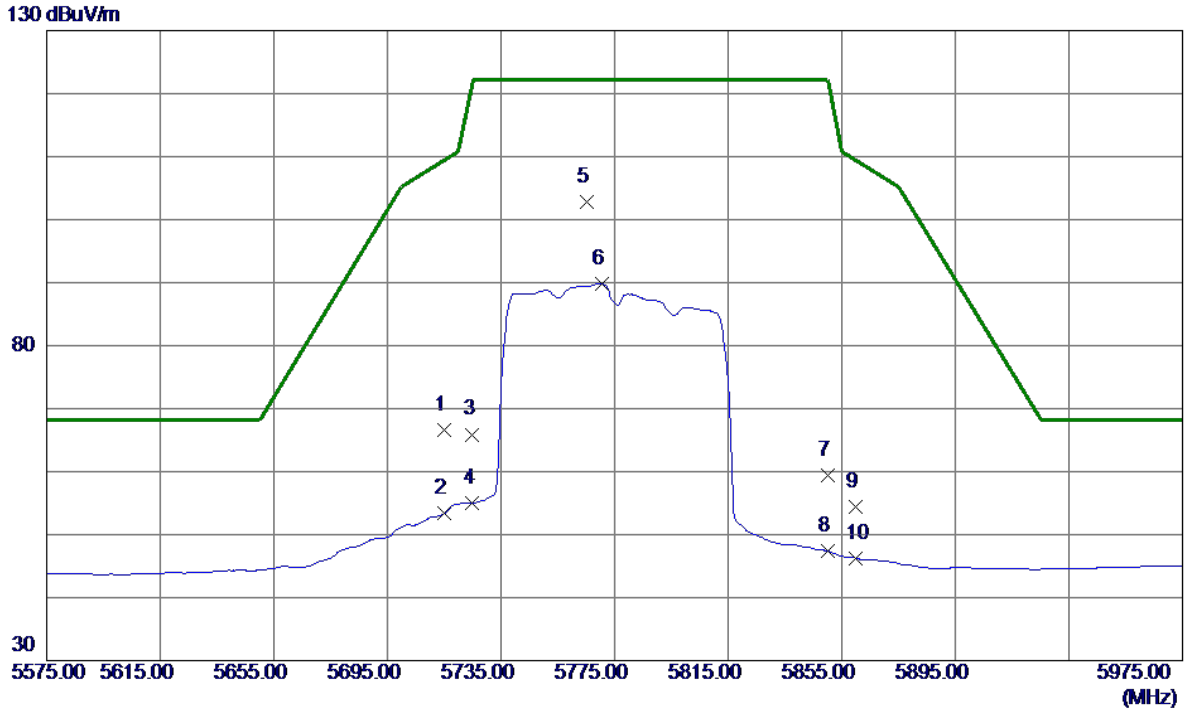

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	22.99	43.53	66.52	109.40	-42.88	Peak	
2	5715.0000	9.80	43.53	53.33	109.40	-56.07	AVG	
3	5725.0000	22.34	43.56	65.90	122.20	-56.30	Peak	
4	5725.0000	11.46	43.56	55.02	122.20	-67.18	AVG	
5 *	5765.4000	59.12	43.68	102.80	122.20	-19.40	Peak	
6	5770.6000	46.06	43.70	89.76	122.20	-32.44	AVG	
7	5850.0000	15.46	43.94	59.40	122.20	-62.80	Peak	
8	5850.0000	3.47	43.94	47.41	122.20	-74.79	AVG	
9	5860.0000	10.48	43.97	54.45	109.40	-54.95	Peak	
10	5860.0000	2.28	43.97	46.25	109.40	-63.15	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

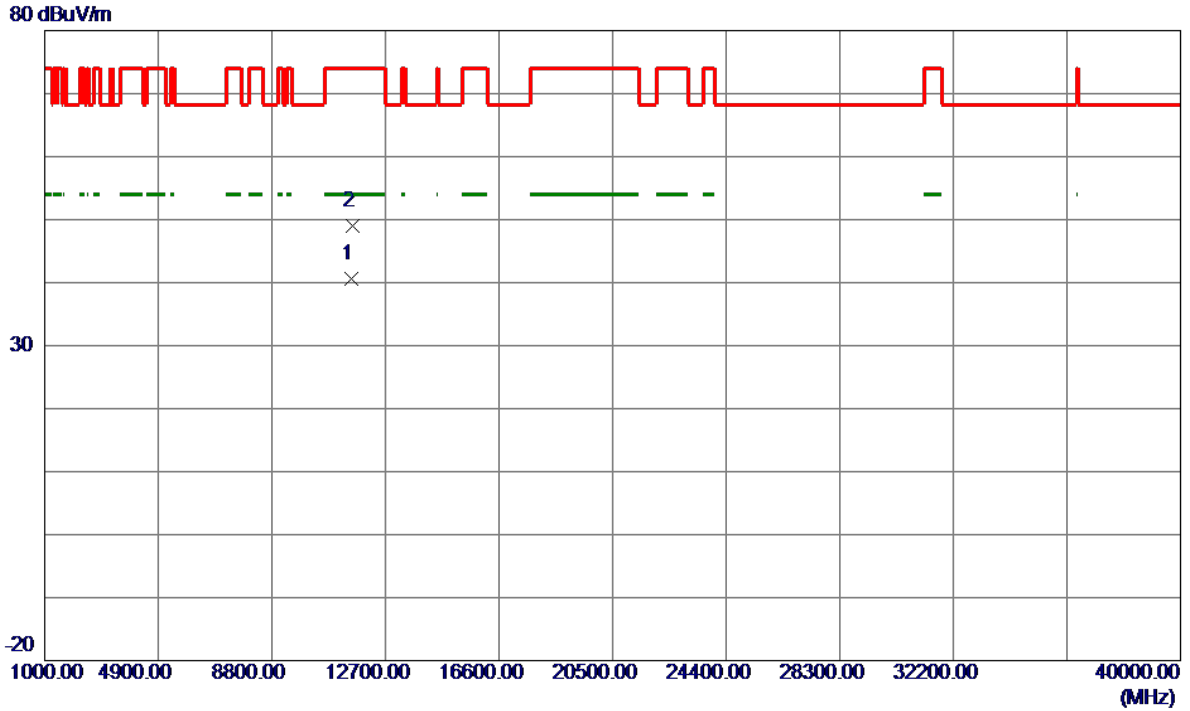

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11511.3000	22.90	17.79	40.69	54.00	-13.31	AVG	
2	11571.5000	31.10	17.82	48.92	74.00	-25.08	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Horizontal

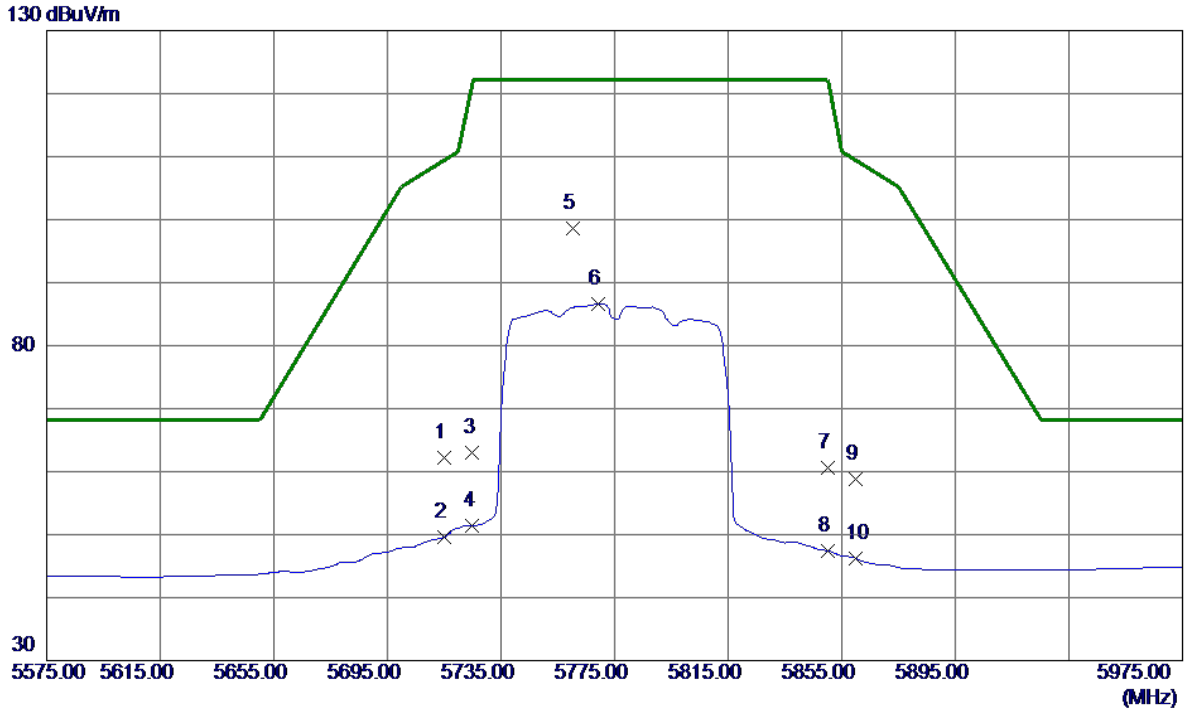

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	18.68	43.53	62.21	109.40	-47.19	Peak	
2	5715.0000	6.05	43.53	49.58	109.40	-59.82	AVG	
3	5725.0000	19.37	43.56	62.93	122.20	-59.27	Peak	
4	5725.0000	7.86	43.56	51.42	122.20	-70.78	AVG	
5 *	5760.2000	54.94	43.67	98.61	122.20	-23.59	Peak	
6	5769.4000	43.00	43.69	86.69	122.20	-35.51	AVG	
7	5850.0000	16.69	43.94	60.63	122.20	-61.57	Peak	
8	5850.0000	3.49	43.94	47.43	122.20	-74.77	AVG	
9	5860.0000	14.89	43.97	58.86	109.40	-50.54	Peak	
10	5860.0000	2.20	43.97	46.17	109.40	-63.23	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

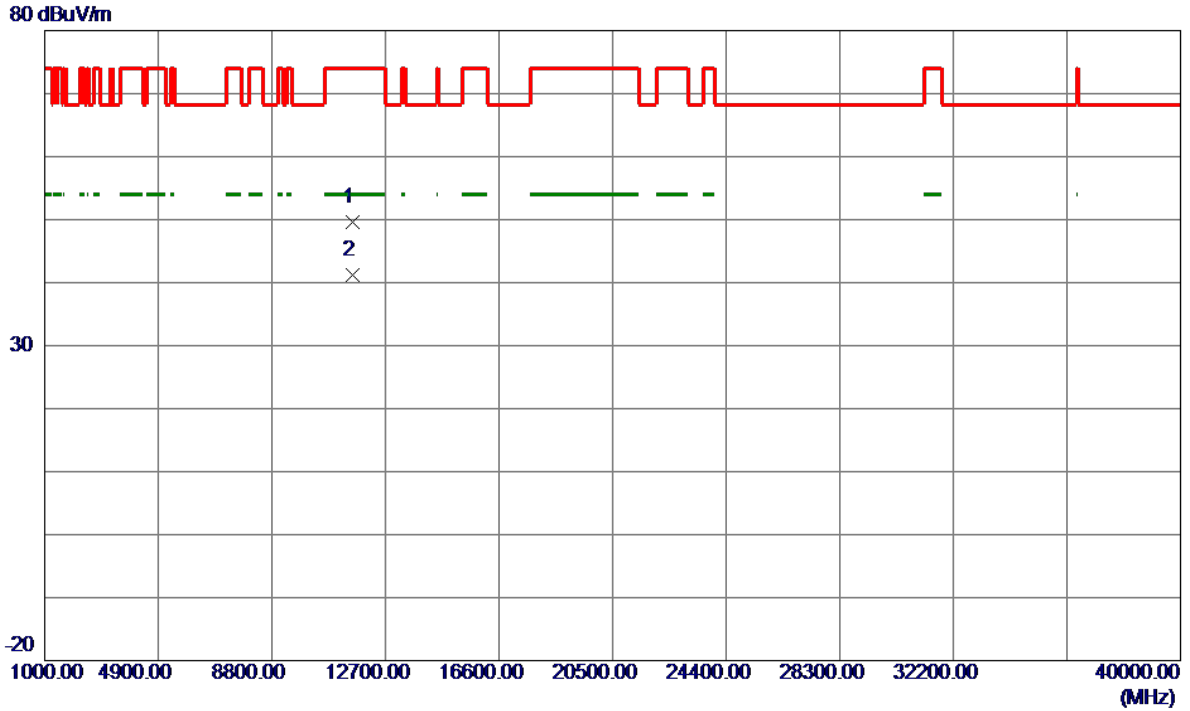

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11560.6000	31.80	17.81	49.61	74.00	-24.39	Peak	
2 *	11568.8000	23.47	17.82	41.29	54.00	-12.71	AVG	

TX A Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 1.39 msec

T_{Total} : 1.44 msec

Duty cycle: 96.53%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.15

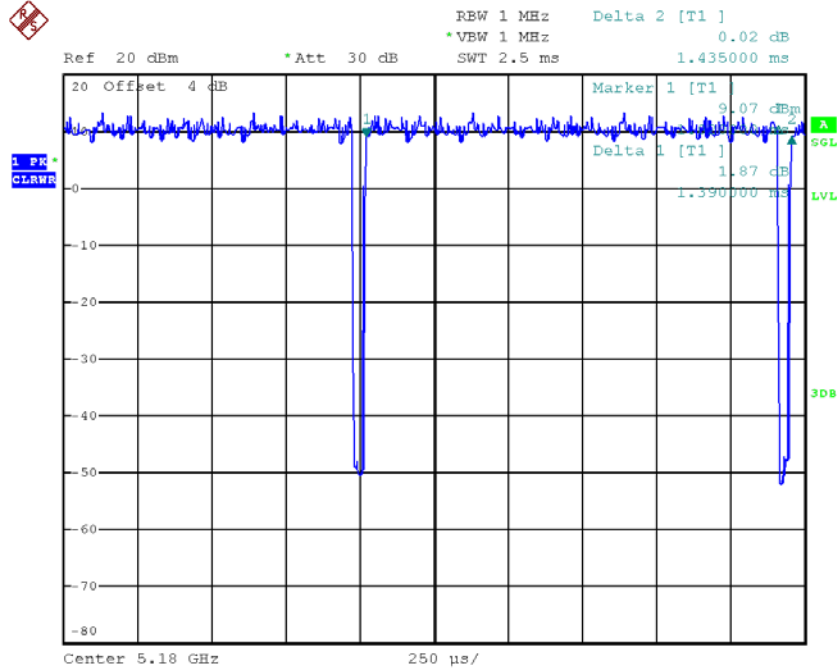

Date: 13.NOV.2017 15:21:04

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.67 msec

T_{Total} : 0.71 msec

Duty cycle: 94.37%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.25

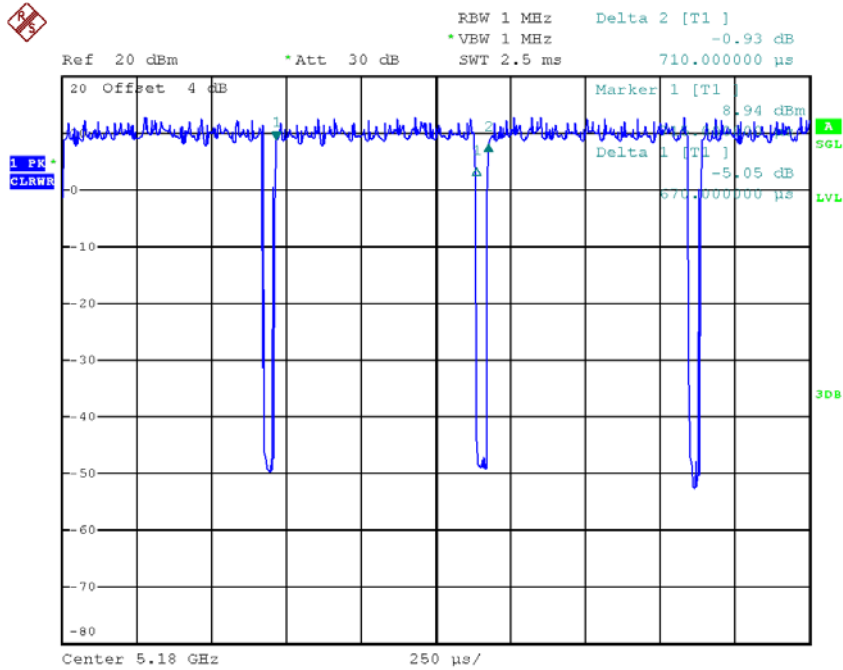

Date: 13.NOV.2017 15:21:36

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.33 msec

T_{Total} : 0.41 msec

Duty cycle: 80.49%

Duty Factor = $10 \log(1/Duty \text{ cycle})$

Duty Factor = 0.94

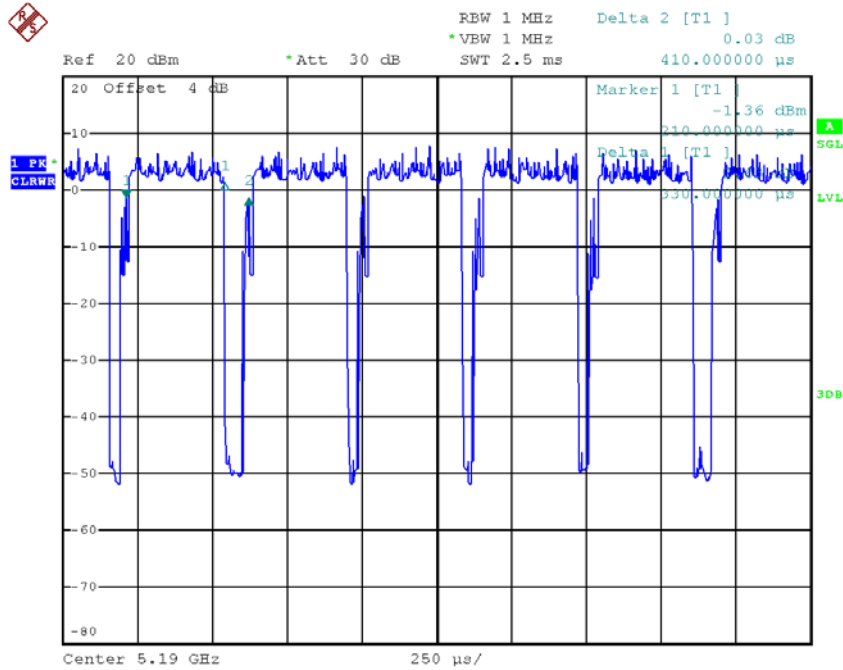

Date: 13.NOV.2017 15:22:36

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX AC20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.68 msec

T_{Total} : 0.72 msec

Duty cycle: 94.44%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.25

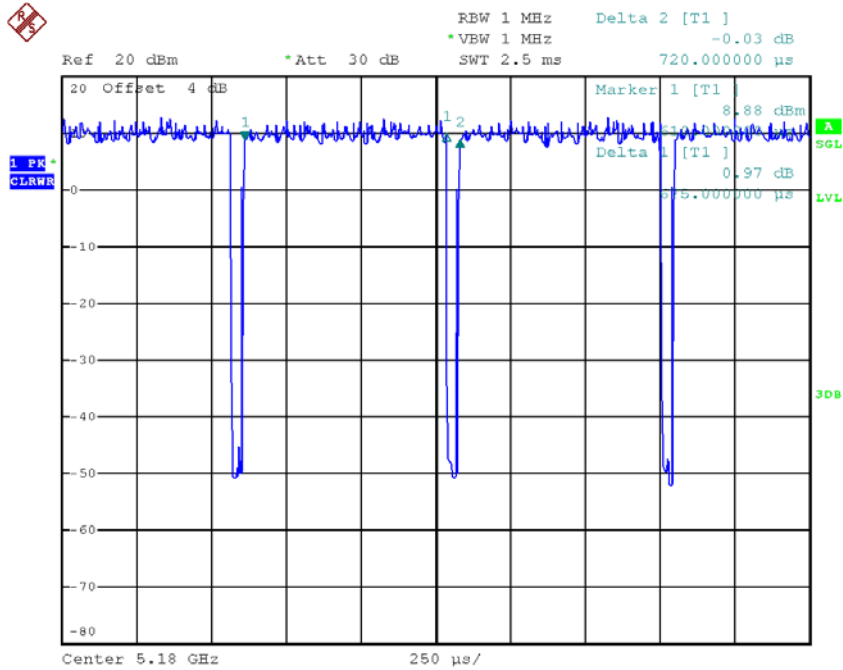

Date: 13.NOV.2017 15:22:00

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX AC40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.32 msec

T_{Total} : 0.39 msec

Duty cycle: 82.05%

Duty Factor = $10 \log(1/Duty \text{ cycle})$

Duty Factor = 0.86

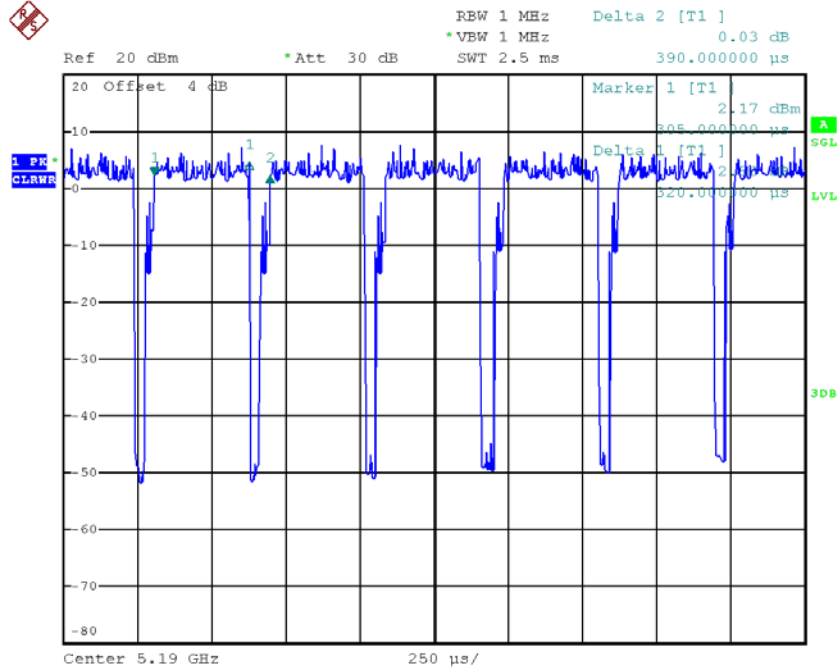

Date: 13.NOV.2017 15:23:02

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 1.32 msec

T_{Total} : 1.74 msec

Duty cycle: 75.86%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 1.20

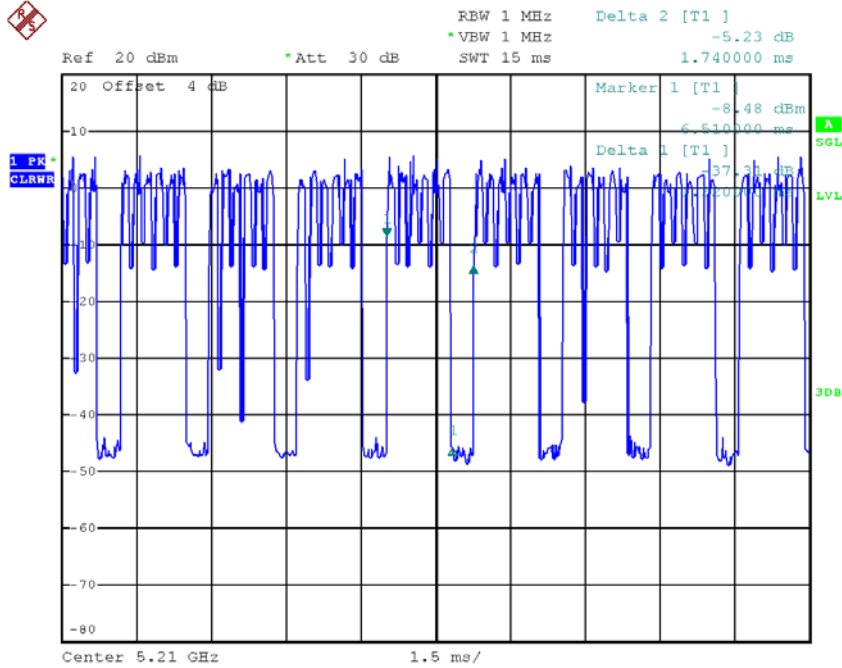

Date: 13.NOV.2017 15:27:40


Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

APPENDIX E - BANDWIDTH

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.35	16.90
CH40	5200	20.35	16.90
CH48	5240	20.35	16.90

TX CH36

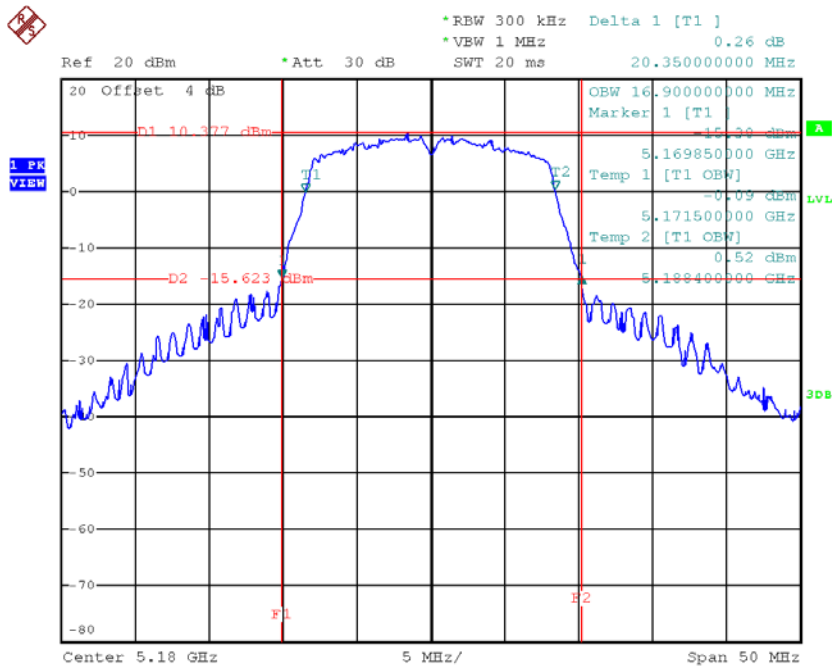


Date: 26.NOV.2017 14:38:18

TX CH40

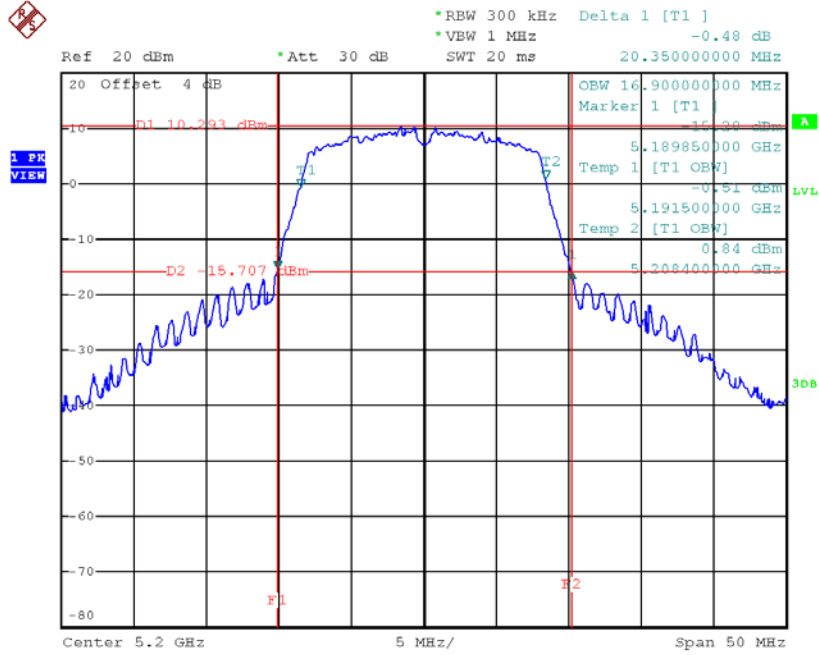

Date: 26.NOV.2017 14:39:22

TX CH48

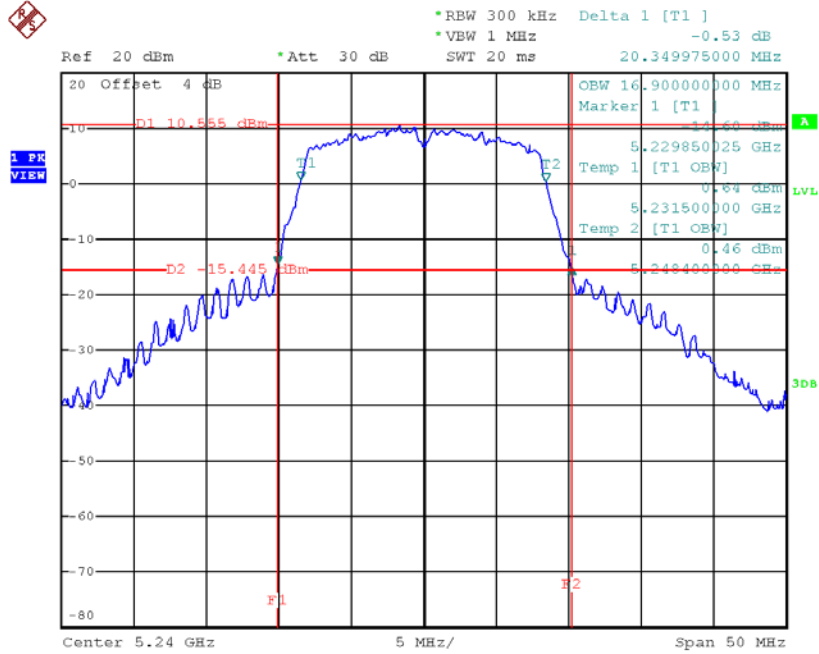


Date: 26.NOV.2017 14:40:10

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.45	17.80
CH40	5200	20.49	17.80
CH48	5240	20.45	17.80

TX CH36

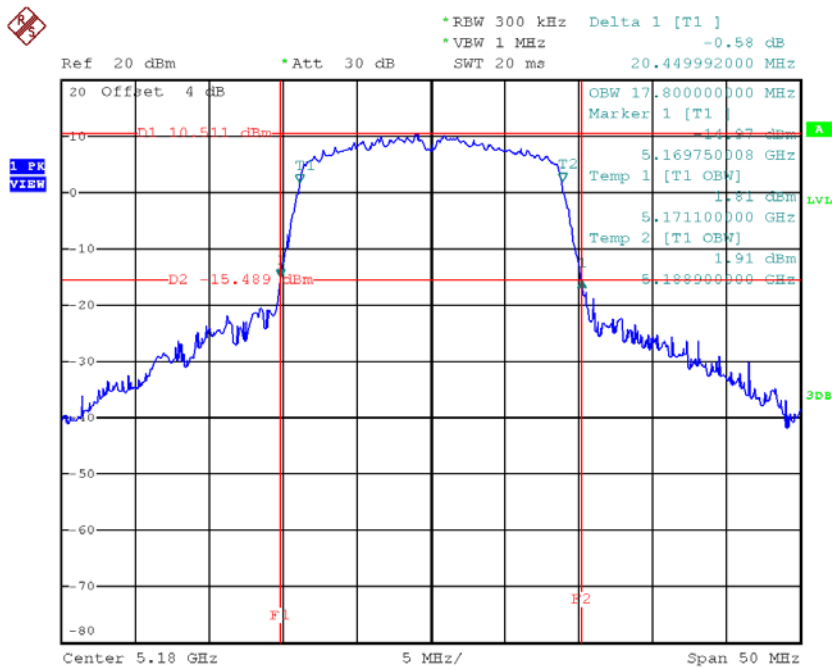


Date: 26.NOV.2017 15:06:38

TX CH40

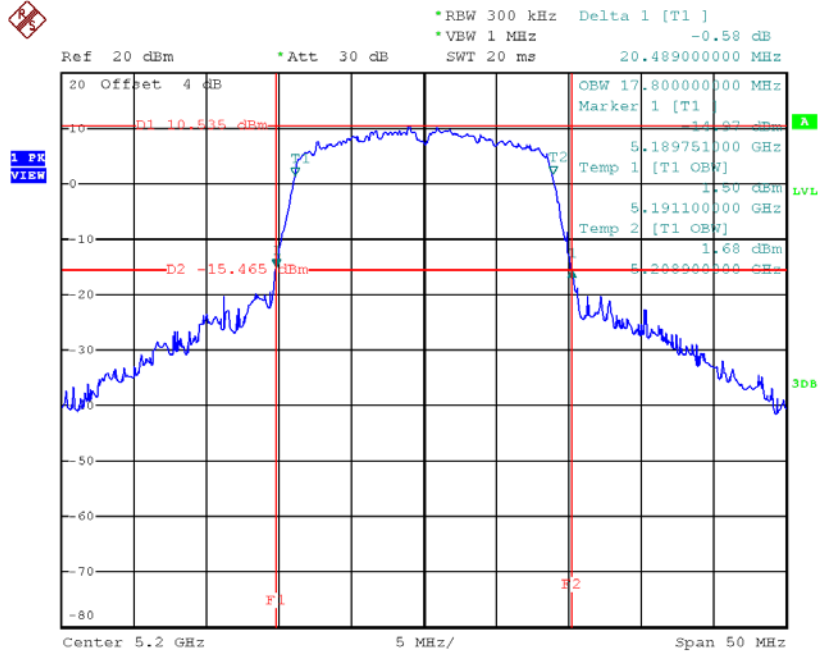

Date: 26.NOV.2017 15:07:29

TX CH48

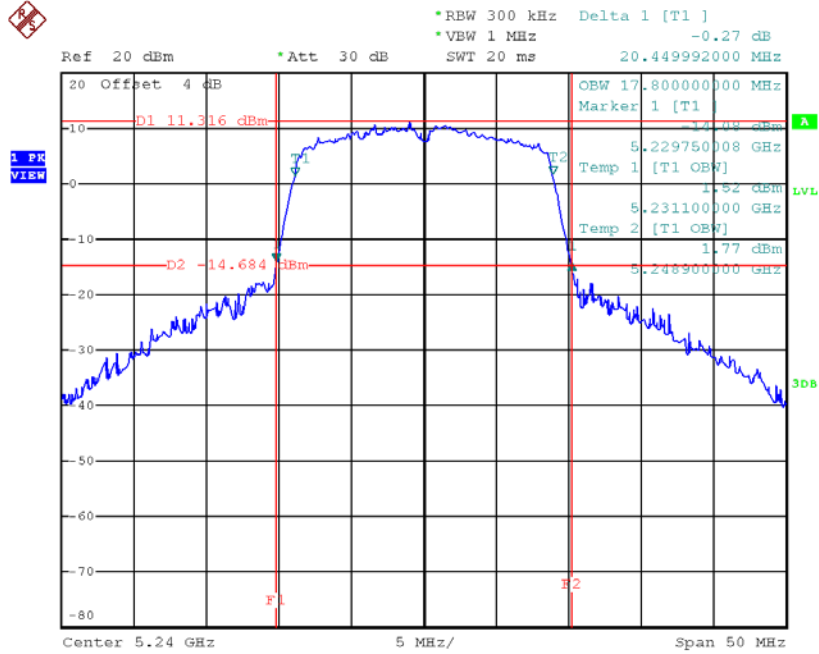


Date: 26.NOV.2017 15:08:17

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	41.90	36.80
CH46	5230	42.59	36.80

TX CH38

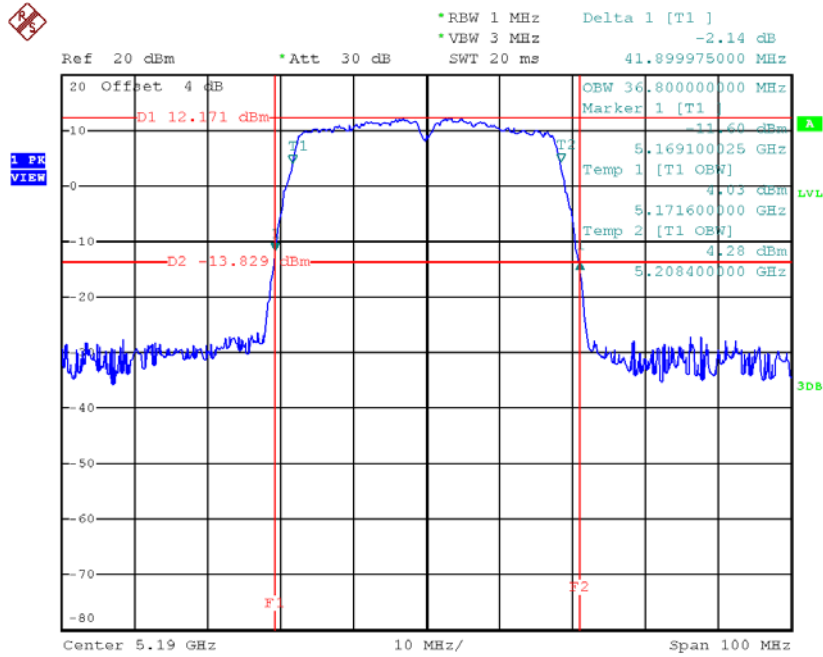

Date: 26.NOV.2017 15:58:42

TX CH46

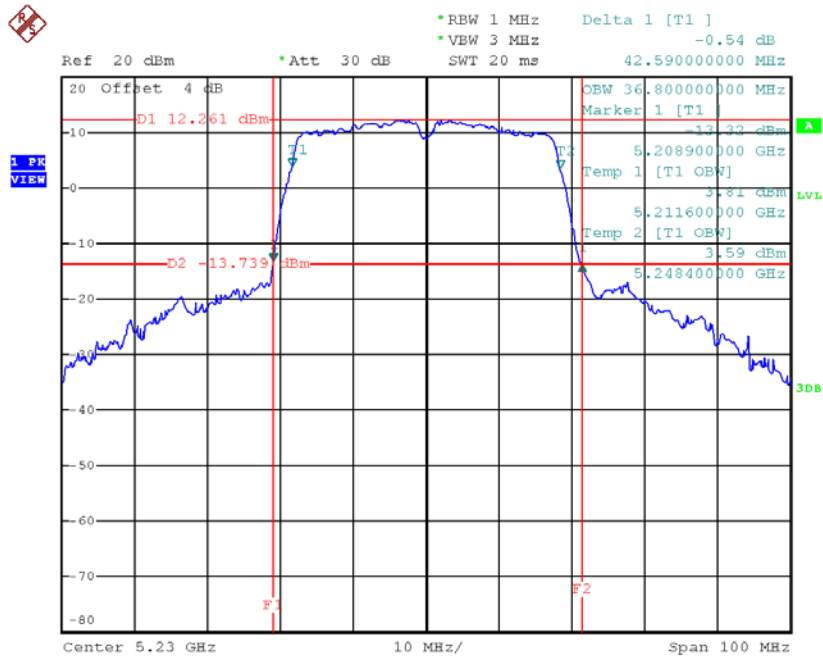


Date: 26.NOV.2017 15:59:31

Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.49	16.90
CH60	5300	20.41	16.90
CH64	5320	20.49	16.90

TX CH52

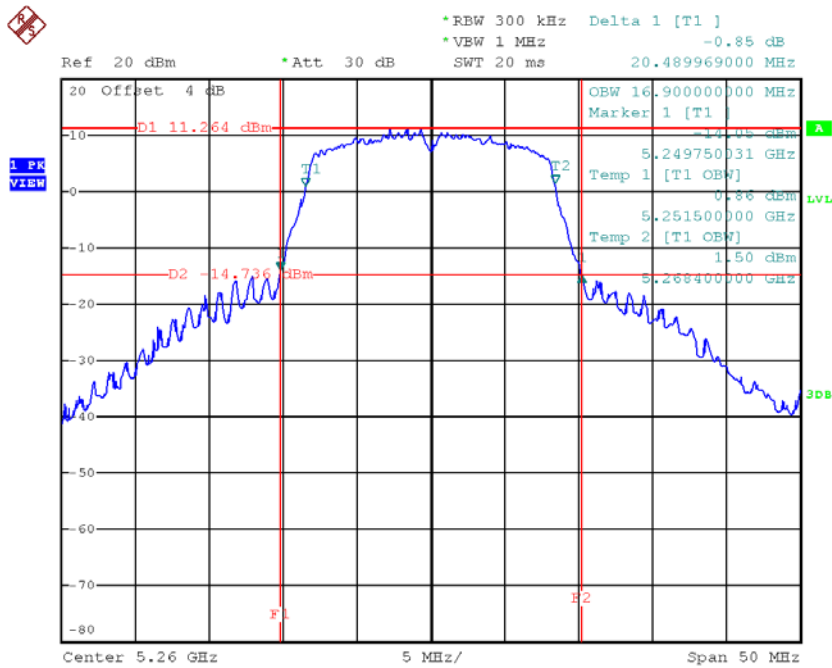


Date: 26.NOV.2017 14:42:13

TX CH60

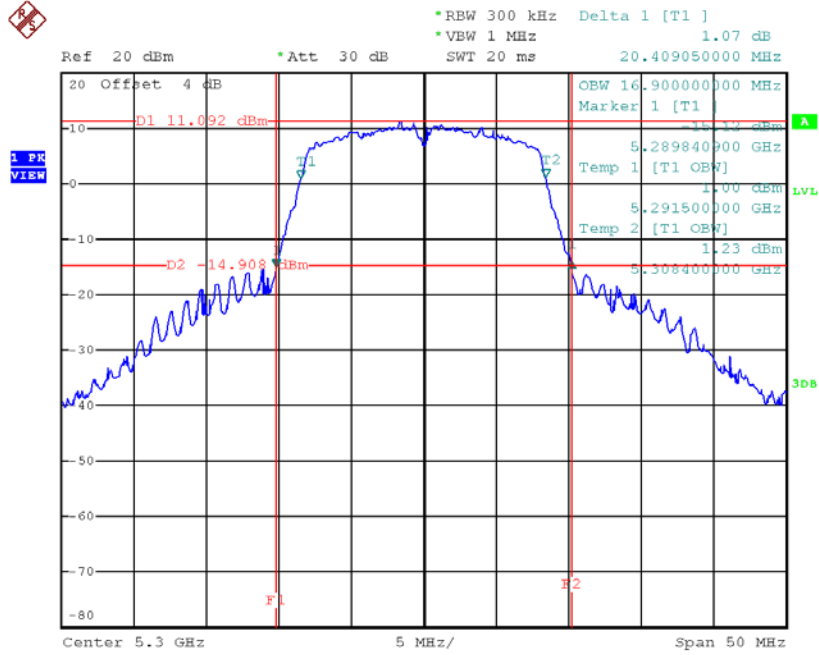

Date: 26.NOV.2017 14:43:08


TX CH64

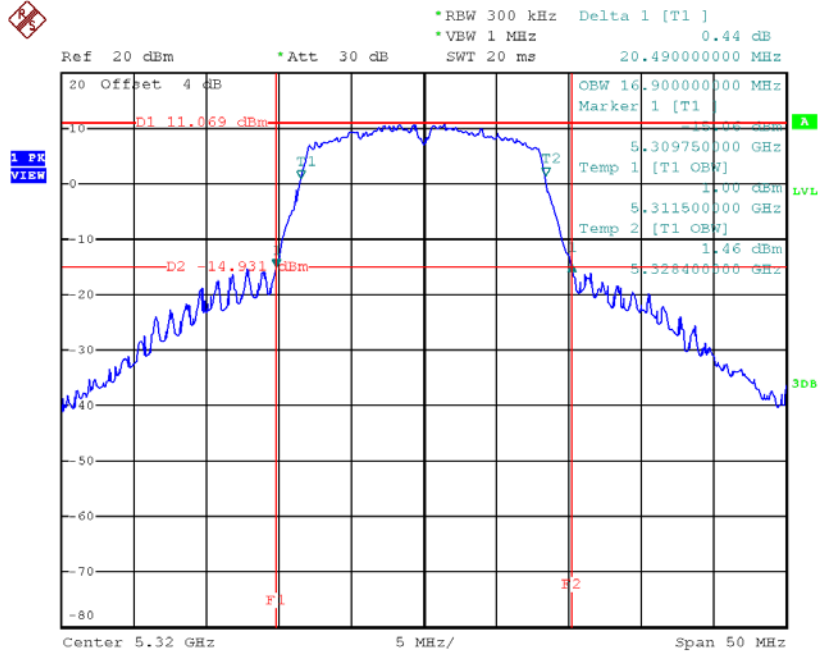

Date: 26.NOV.2017 14:44:06


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.50	17.80
CH60	5300	20.55	17.80
CH64	5320	20.45	17.80

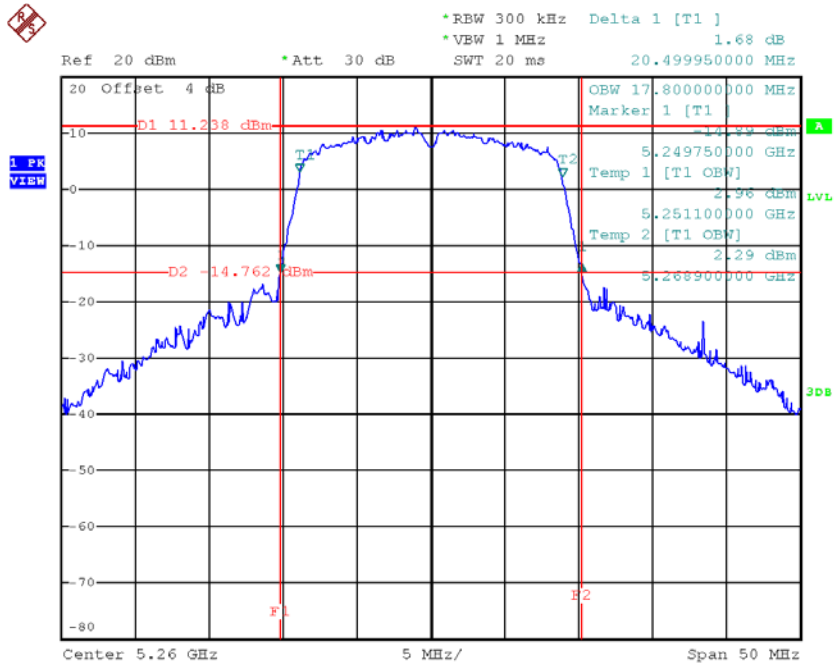TX CH52


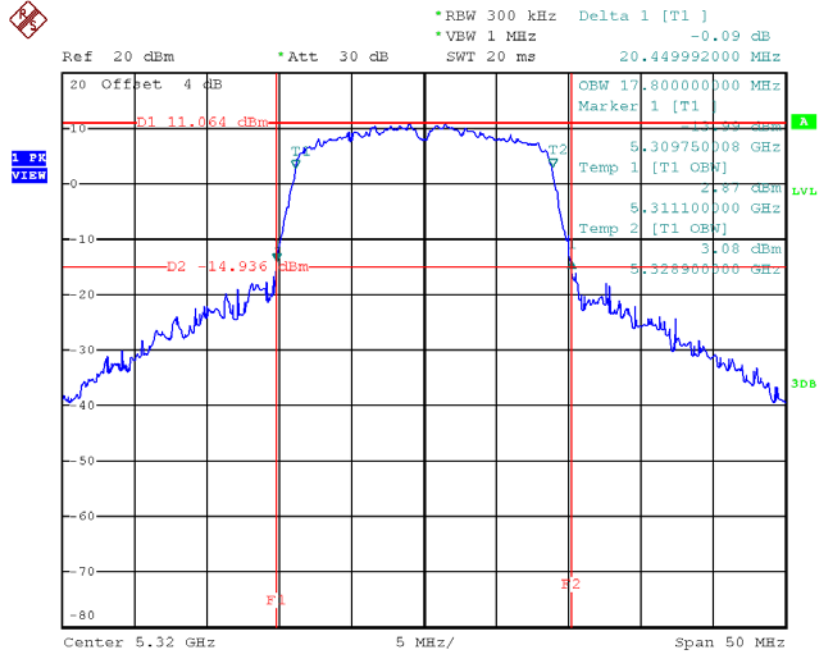
Date: 26.NOV.2017 15:09:11

TX CH60

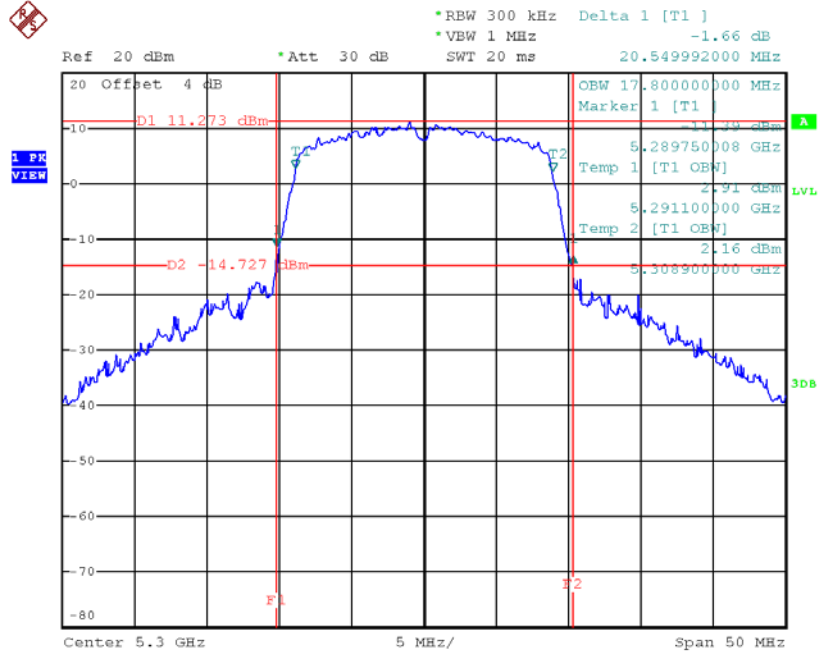

Date: 26.NOV.2017 15:09:59

TX CH64




Date: 26.NOV.2017 15:10:47

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	42.70	36.80
CH62	5310	41.91	36.80

TX CH54

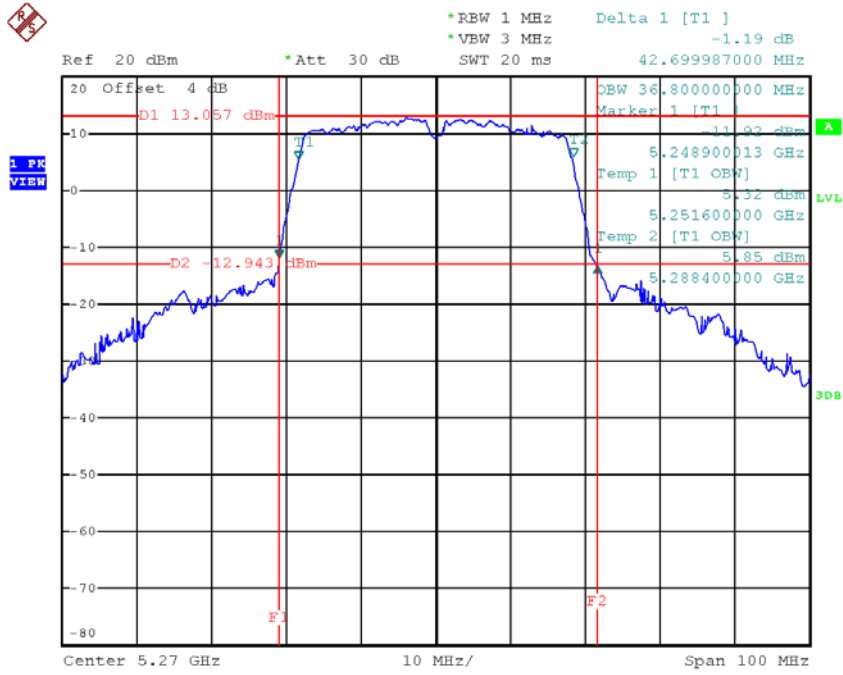

Date: 26.NOV.2017 16:00:27


TX CH62

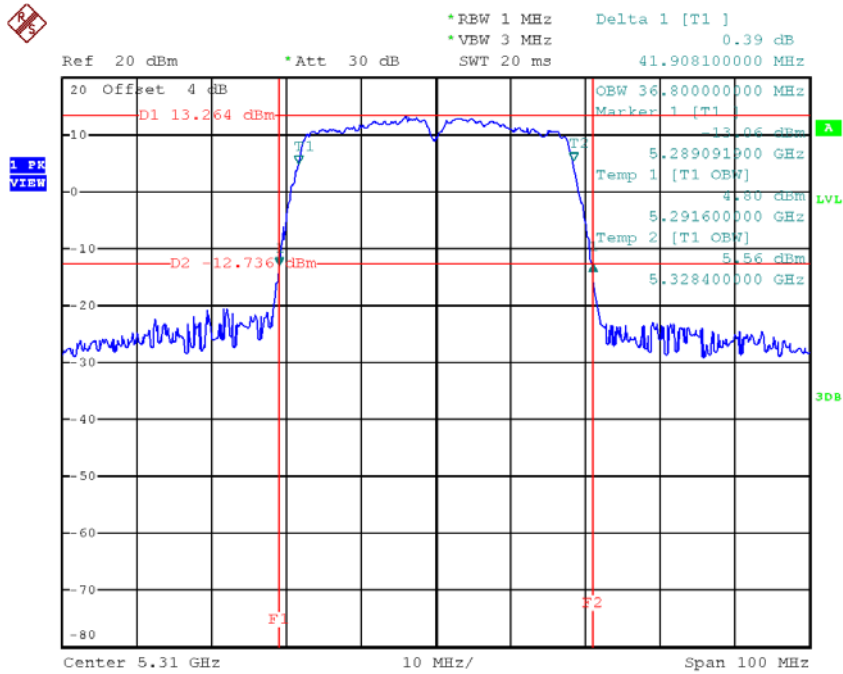

Date: 26.NOV.2017 16:01:17


Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	20.45	16.90
CH116	5580	20.45	16.90
CH140	5700	22.50	17.00

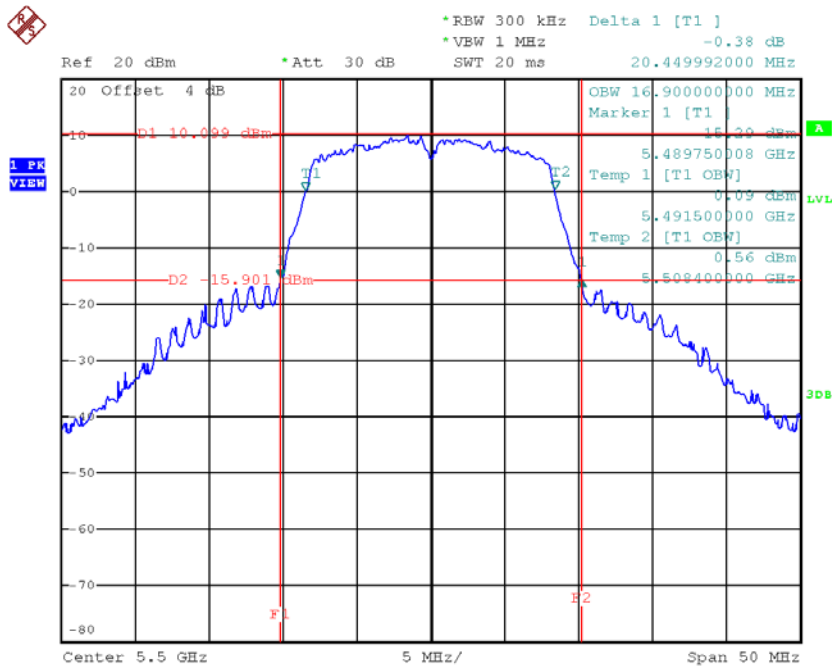TX CH100


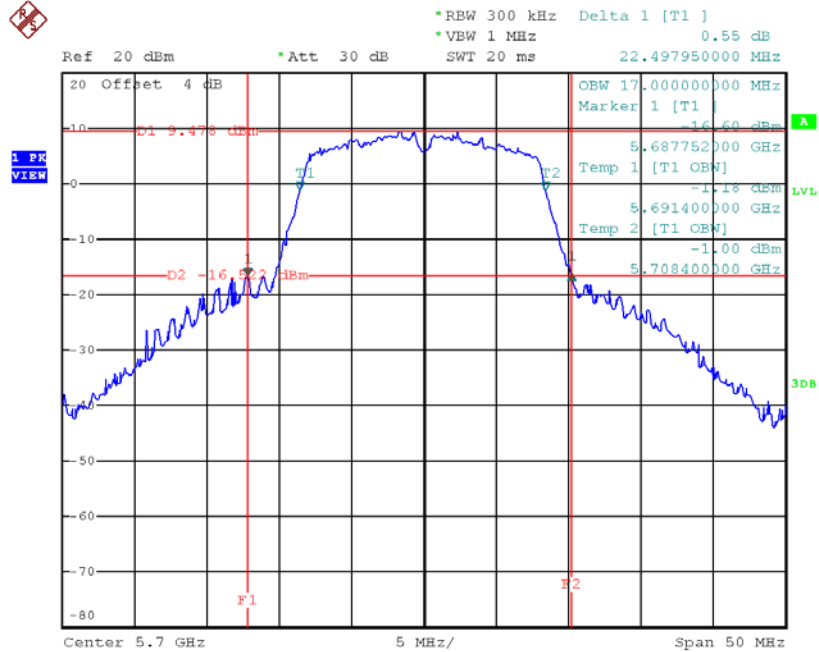
Date: 26.NOV.2017 14:46:09

TX CH116

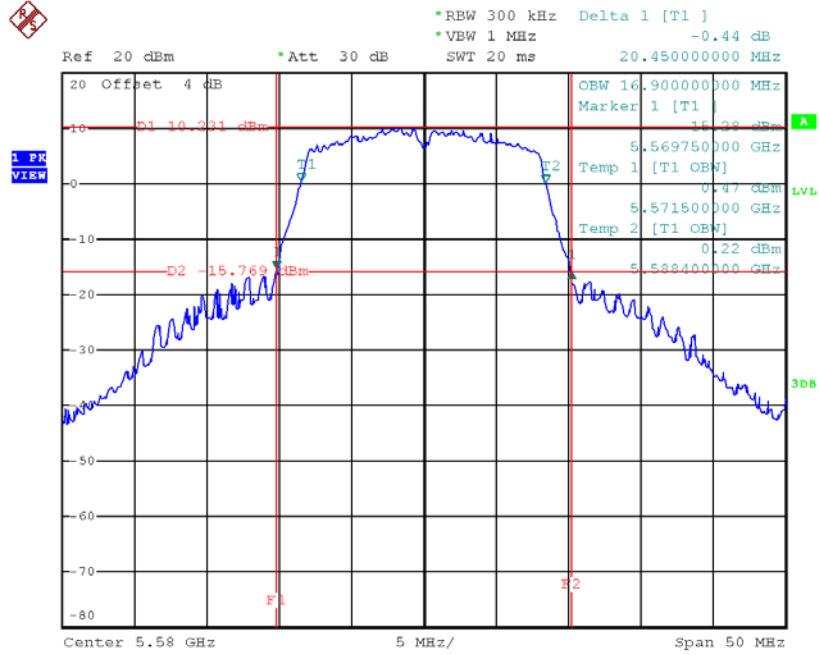

Date: 26.NOV.2017 14:46:56


TX CH140



Date: 26.NOV.2017 14:47:49


Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	20.59	17.80
CH116	5580	20.50	17.80
CH140	5700	20.36	17.80

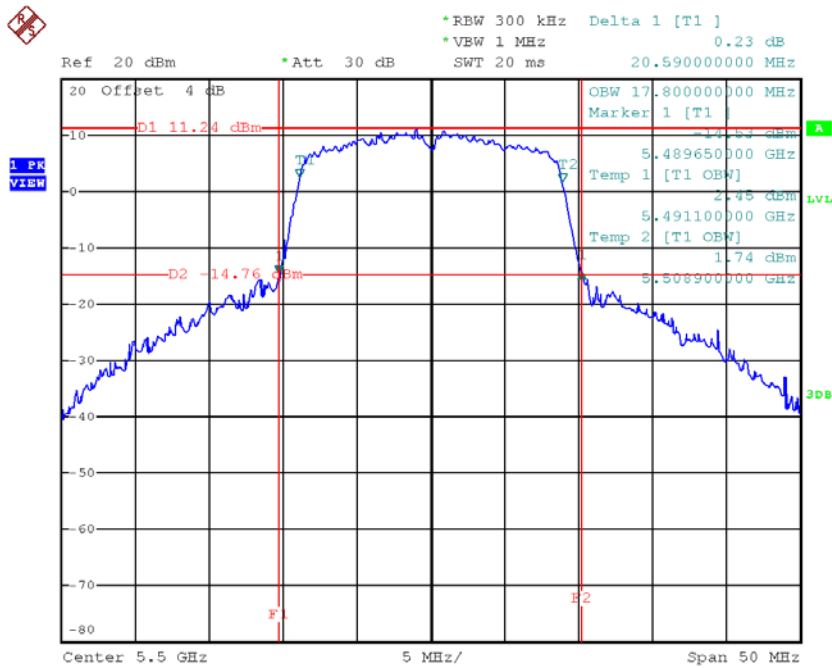TX CH100


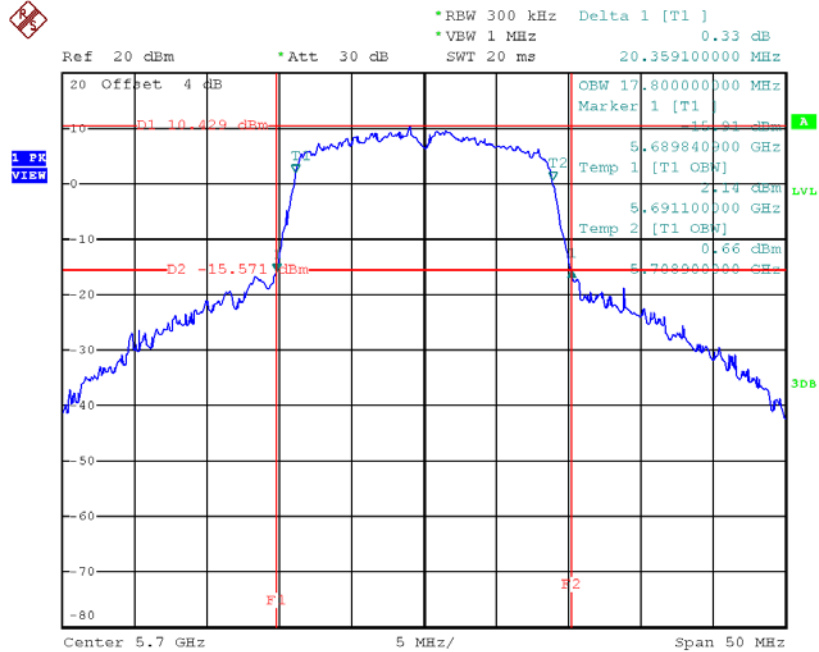
Date: 26.NOV.2017 15:12:15

TX CH116

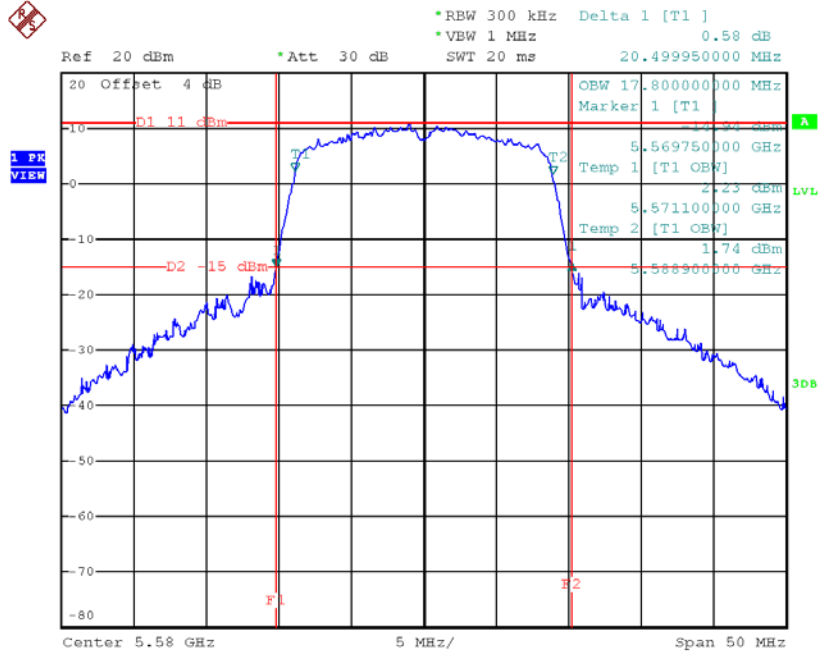

Date: 26.NOV.2017 15:13:03

TX CH140




Date: 26.NOV.2017 15:13:53

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	42.50	36.80
CH110	5550	42.60	36.80
CH134	5670	42.59	37.00

TX CH102

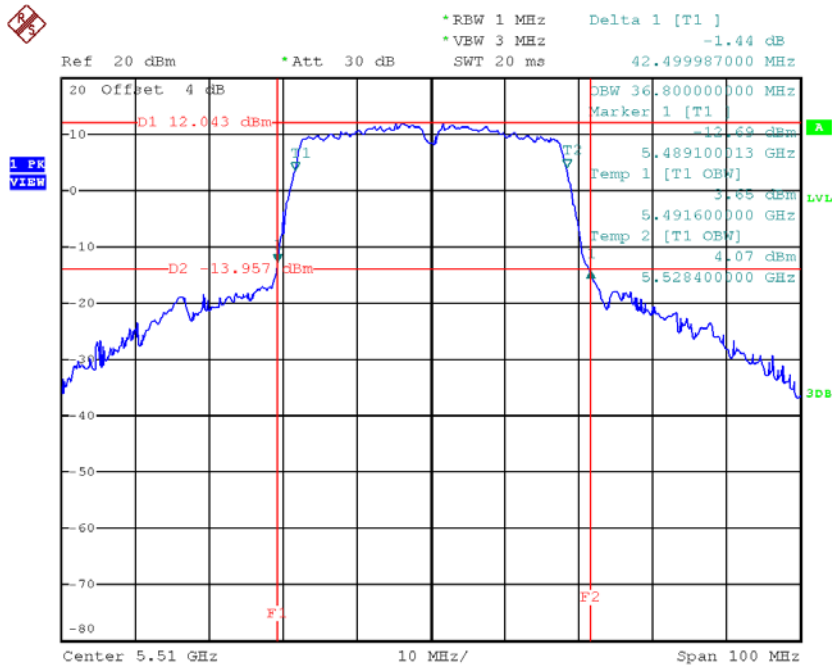


Date: 26.NOV.2017 16:02:20

TX CH110

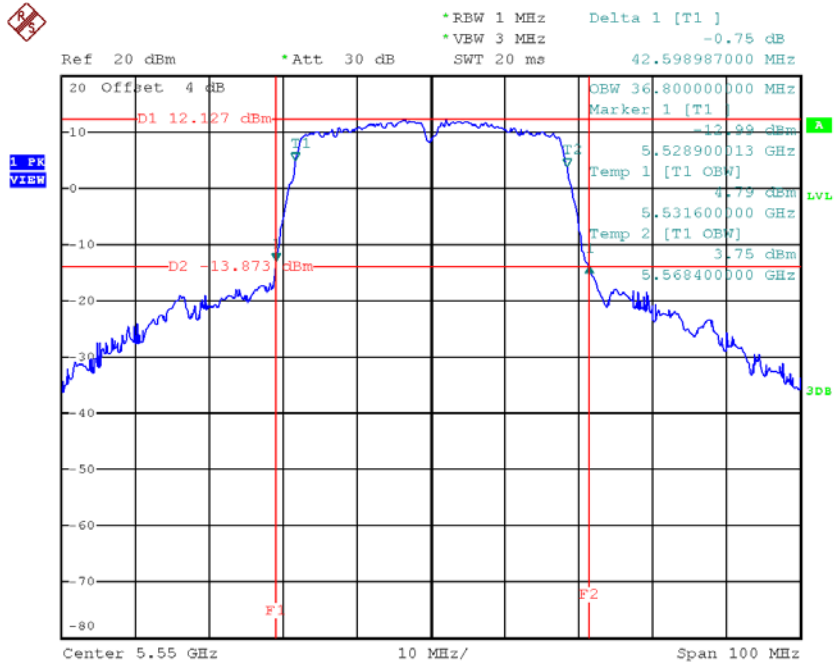

Date: 26.NOV.2017 16:03:19

TX CH134

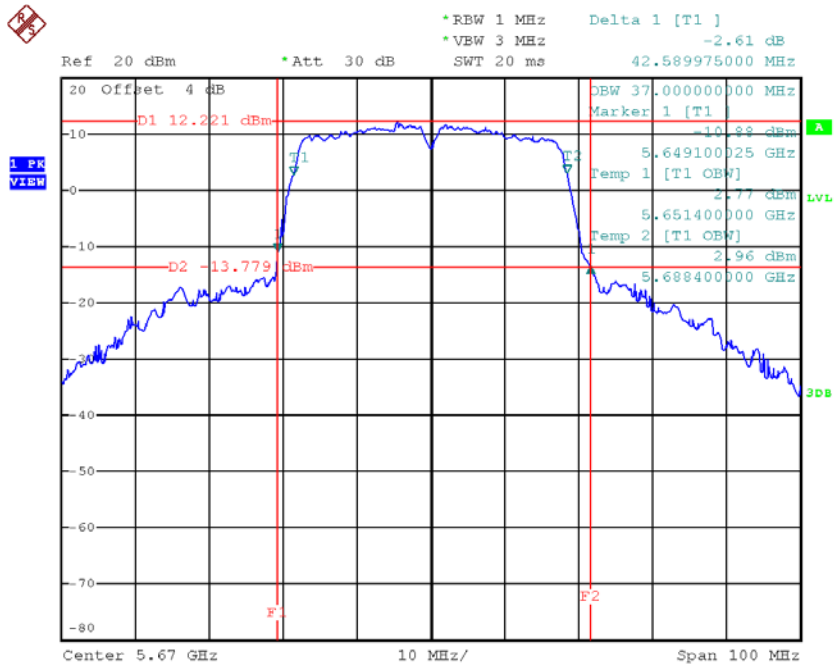

Date: 26.NOV.2017 16:04:20